2014 DONOVAN MARINE



CALL CENTERS

New Orleans
HEADQUARTERS
800.347.4464

Clearwater
800.226.4562

Ft. Lauderdale
877.936.4722

Harvey
504.361.5731

Houston
800.669.8392

Little Rock
888.562.5002

Nashville
800.288.4450

Paducah
270.442.6919

OUR DISTRIBUTION NETWORK

Annapolis
Birmingham
Charleston
Charlotte
Chicago
Clearwater
Dallas
Ft. Lauderdale/ International
Harvey
Houston
Jacksonville
Little Rock
Miami
Nashville
New Orleans
Norwich
Paducah
Pensacola

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Performance
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Miscellaneous
Commercial

Time to get your feet wet



Single Actuator Per Tab System
Lenco 15500-101 DM Order# 251908

Dual Actuator Per Tab System
Lenco 15501-101 DM Order# 252910

Features & Benefits

- Automatic pitch & roll corrections
- Automatically trims boat to the most fuel efficient position
- Takes the trim tab operation out of the hands of the operator
- Significantly reduces time to plane
- Does not adjust during turns, allowing boat to roll naturally
- Produces substantial fuel savings
- Can be installed on any boat equipped with Lenco electric actuators
- Hydraulic trim tab owners see our conversion upgrade kit to the right

Testimonials

Read what these Lenco trim tab customers had to say:

"The combination of the High Performance Trim Tabs and the Auto Glide System makes my SeaVee perform like a sports car. I wouldn't have a boat with out it."



Adam Meyerson
2010 SeaVee 29'

"I can't believe the difference, this thing is amazing!!! I cannot express how happy and content I am with this system. Only regret is it took me so long to purchase it."



Frank Nayor
2000 Contender 31'

"All of the system adjustments achieve two very important objectives. One of course is fuel economy but the more important one to us is a more stable and comfortable ride particularly in rough seas."



Bill Hayward
2013 Cruisers Yacht 48'

AUTO GLIDE™

AUTOMATIC BOAT LEVELING SYSTEM

So you've been hearing about it for a while. Well it's time to get your feet wet! Start increasing your profits by offering Lenco's Auto Glide Boat Leveling System. Whether your boating customers are experienced or beginner level, the Auto Glide will help take their mind off of trimming their boat and back to enjoying their time on the water.

YOU CAN EASILY CONVERT FROM HYDRAULIC TO LENCO ELECTRIC




Visit us at lencomarine.com 15064-001 DM Order# 252698

Auto Glide Pitch Correction



Auto Glide Roll Correction



FUEL EFFICIENT

100% COMPATIBLE

GPS TECHNOLOGY

ECO FRIENDLY

PLUG & PLAY

PRODUCT CERTIFIED

made in USA

LENCO MARINE INC.

LENCO

WE MAKE THE BEST BOATS BETTER!

4700 SE Municipal Court | Stuart, FL 34997 | **www.lencomarine.com**



$100 REBATE

THRU AUGUST 2014

Visit our rebate page **lencomarine.com/d-rebate**

DONOVAN™ MARINE

Important Information

Annapolis
451 Defense Hwy., Suite C
Annapolis, MD 21401
Phone: 1-800-347-4464
Fax: 1-800-747-5783

Birmingham
2401 Five Star Pkwy.
Bessemer, AL 35022
Phone: 1-205-426-9969
Fax: 1-205-426-9694

Charleston
7289 Spa Road, Unit B,
North Charleston, SC 29418
Phone: 1-800-226-4562
1-727-572-0192
Fax: 1-800-780-5627
1-727-573-1930

Charlotte
10409 John Price Road
Charlotte, NC 28273
Phone: 1-704-369-0914
Fax: 1-704-369-0917

Chicago
5010 W. 123rd St.
Alsip, IL 60803
Phone: 1-800-288-4450
Fax: 1-800-754-9181

Clearwater
5181 110th Ave. North, Unit B
Clearwater, FL 33760
Phone: 1-800-226-4562
1-727-572-0192
Fax: 1-800-780-5627
1-727-573-1930

Dallas
1406 I-35 W
Denton, TX 76207
Phone: 1-940-442-6242
Fax: 1-940-442-6960

Ft. Lauderdale
3199 SW 42nd. St
Ft. Lauderdale, FL 33312
Phone: 1-877-936-4722
1-954-581-2453
Fax: 1-877-936-4723
1-954-581-7368

Harvey
3200 Westbank Expwy.,
Suite B
Harvey, LA 70058
Phone: 1-504-361-5731
Fax: 1-504-361-1596

Houston
3130 Pawnee
Houston, TX 77054
Phone: 1-800-669-8392
1-713-734-4171
Fax: 1-800-747-5836

Jacksonville
6545 Trade Center Dr.
Jacksonville, FL 32254
Phone: 1-800-226-4562
Fax: 1-800-780-5627

Little Rock
6600 Murray St., Suite 1
Little Rock, AR 72209
Phone: 1-888-562-5002
1-501-562-5008
Fax: 1-501-562-5014

Miami
3590 Northwest 35th St.
Miami, FL 33142
Phone: 1-877-936-4722
Fax: 1-877-936-4723

Nashville
1890 Elm Tree Drive
Nashville, TN 37210
Phone: 1-800-288-4450
1-615-834-8262
Fax: 1-800-754-9181
1-615-333-9621

New Orleans
6316 Humphreys St.
Harahan, LA 70123
Phone: 1-800-347-4464
1-504-488-5731
Fax: 1-800-747-5783

Norwich
3 Hilltop Rd.
Norwich, CT 06360
Phone: 1-800-226-4562
Fax: 1-800-780-5627

Paducah
2401 Powell St.
Paducah, KY 42003
Phone: 1-270-442-6919
Fax: 1-270-442-6923

Pensacola
3725 North Palafox Street
Pensacola, FL 32505
Phone: 1-800-347-4464
Fax: 1-800-747-5783

International Division
3199 SW 42nd. St.
Ft. Lauderdale, FL 33312
Phone: 1-877-936-4722
1-954-581-2453
Fax: 1-877-936-4723
1-954-581-7368

For Accounts Payable & Accounts Receivable, Please Call 877.366.2366
For Returns & Service, Please Call 800.347.4464

Important Information

Sales of items in this catalog are subject to the following policies of Donovan Marine, Inc.



Freight Policy: Shipments not delivered on our own company trucks will be made F.O.B. Donovan warehouse unless other freight arrangements are made.

Special Orders: Non Donovan stock items ordered by C.O.D. accounts must be paid for in advance before the order will be placed to the factory and are not subject to cancellation. All factory charges and freight charges will be paid by the dealers. A $5.00 handling charge will be applied to all special orders.

Drop Shipments: When it is to our mutual advantage, we will try to arrange for drop shipments from the manufacturer.

Open Accounts: We are always happy to set up open accounts for qualified customers. We try to cooperate with our accounts in all ways; we expect them to treat us equally well. Please ask for a credit application if you would like an "Open Account."

Customer agrees that all sales on credit shall be on the following terms: (a) Donovan reserves the right to accept or reject any order, and previously quoted prices may be changed without notice; (b) full payment is due within thirty (30) days following date of invoice; (c) a service charge of 1% per month (12% per annum) will be added to any outstanding balance due by customer which is unpaid thirty (30) days from date of invoice; (d) payment methods accepted for open accounts are cash, check, money order, cashier's check, or wire transfer; (e) if account is referred for collection, all costs thereof are to be paid by customer, including, but not limited to, attorney's fees of 25% of all amounts and service charges due, but not less than $50.00; and (f) applicable sales tax will be added to all invoices unless current exemption certificates are provided timely in according with the jurisdiction of customer's domicile.

Claims for Shortages: Upon checking your shipped or delivered merchandise, should you discover a shortage, please contact Donovan within 10 Working Days, so the shortage may be traced and properly delivered to you.

Damaged Deliveries: If you receive a shipment that appears to be damaged, Notify the Carrier Immediately in order that they may inspect the package. Any damaged item must be inspected and returned by the Carrier. Damaged shipments which are returned without going through this process will void all claims.

Returned Merchandise: Stock merchandise is returnable only when permission has been granted by Donovan. Full credit will be allowed on mistakes that are our fault. No Merchandise Will Be Accepted for Credit Unless Returned In the Original Package and is in Resalable Condition. All returned items are subject to a handling charge. Shipping charges must be prepaid. Invoice number and date as well as your customer number must be included with all returns.

Waiver of Warranties: Donovan Marine, Inc. does not manufacture any of the items offered or shown in this catalog. Any warranties provided to Donovan Marine, Inc. by the respective manufacturers of such items will be passed on to the purchaser to the extent that such transfer is permitted by the manufacturer. **All other warranties, whether express or implied, including any implied warranties of merchantability, fitness for a particular purpose and/or any implied warranty against latent or unknown or redhibitory defects or vices of any kind, whether arising by law, custom, conduct or usage of trade are expressly waived and renounced by Donovan Marine, Inc.** Donovan Marine, Inc. shall not be liable for any injury to person or property arising out of any defects or failures in any products shown, offered or sold pursuant to this catalog and shall not be liable for any incidental, consequential or indirect damages or losses resulting from defects or failures of any products sold by Donovan Marine, Inc. Agents or employees of Donovan Marine, Inc. are not authorized to amend, modify or extend this waiver of warranty in any manner. Any oral statement or printed advertising regarding any product shown or listed in this catalog regarding any characteristic, component or quality of such product shall be considered an estimate only and shall not be relied upon as creating any type of express warranty or as forming a basis of the bargain for such product.

Back Orders: We normally back order items that are temporarily out of stock and are expected to reach us within two weeks. If you do not wish to back order items, please specify at the time of your order.

Ordering: When ordering Please Give Your Customer Identification Number and the Six Digit Item Number as Shown with Each Item. This number is highlighted in bold type and in most instances (for your reference) is followed by the manufacturer's part number and list price.

We are looking forward to a pleasant business relationship with you. If you feel you have an idea that would help us serve you better, please let us hear from you.

Donovan Marine, Inc. has made every effort to produce this catalog with current prices and up-to-date information. We hope you will forgive any omissions or clerical and typographical errors. All prices are subject to change without notice, and you will be charged the current prices in effect at the time of shipment. We will try to advise you at the placing of an order of the current pricing. We sell only to stocking marine dealers, not the consumer. Possession of this catalog does not authorize purchases.

Note: POR = Price on Request

Page Edge Color Key

- Fun & Flotation
- Anchor & Dock
- Safety
- Electronics
- Trolling Motors
- Lighting
- Electrical
- Topside Acc.
- Cockpit & Deck
- Instruments
- Steering, Controls
- Performance
- Fuel System
- Engine & Parts
- Engine Care
- Propellers
- Seating & Pedestals
- Tops & Covers
- Pumps
- Cleaning & Care
- Paint & Paint Acc.
- Hardware, Fasteners
- Trailering
- Miscellaneous
- Commercial

DONOVAN™ MARINE

E-Commerce Sign-Up Form

If filling out with pen, please PRINT in ALL CAPITAL letters.

- Easy to use
- Fast response
- Simple part number lookup
- Quick and easy checkout
- Stay logged in all day
- Highly interactive
- Current price lookup
- Up-to-the-minute on-hand inventory availability

Customer Name: _____

Customer Account Number: _____

Contact Information

Name: _____

Street _____

City _____ **State** _____ **Zip** _____

Phone Number: _____ **E-mail:** _____

E-Mail Address for Order Confirmations *(Two are recommended.)*

Primary: _____

Secondary: _____

E-Mail Options *(Check the following box(es) if you would like to receive electronic invoices and statements via email.)*

☐ **Please E-Mail Invoice, to Primary:** _____

and Secondary: _____

☐ **Please E-Mail Monthly Statement, to Primary:** _____

and Secondary: _____

Requested Security / Login Information *(Use a min. of 5 and a max. of 10 alphanumeric characters for user name and password.)*

User Name: _____

Password: _____ **Confirm Password:** _____

You Will Be Notified of User Name and Password Approval Under Separate Cover.

_____ **Name** _____ **Signature** _____ **Date**

Please fill out form in Adobe Acrobat, print, sign and fax to Shelly Creppel at: 504.486.3258

BIG inventory in more locations!

DONOVAN MARINE

CHICAGO
Distribution

NORWICH
Distribution

PADUCAH
Call Center

ANNAPOLIS
Distribution

CHARLOTTE
Distribution

LITTLE ROCK
Call Center

NASHVILLE
Call Center

DALLAS
Distribution

BIRMINGHAM
Distribution

CHARLESTON
Distribution

NEW ORLEANS
Headquarters

JACKSONVILLE
Distribution

PENSACOLA
Distribution

HOUSTON
Call Center

HARVEY
Call Center

CLEARWATER
Call Center

FT. LAUDERDALE
(International) Call Center

MIAMI
Distribution

©2014
New Orleans, LA

CALL CENTERS

New Orleans
HEADQUARTERS
800.347.4464

Clearwater
800.226.4562

Ft. Lauderdale
877.936.4722

Harvey
504.361.5731

Houston
800.669.8392

Little Rock
888.562.5002

Nashville
800.288.4450

Paducah
270.442.6919

OUR DISTRIBUTION NETWORK TO SERVE YOU BETTER

Annapolis
Birmingham
Charleston
Charlotte
Chicago
Clearwater
Dallas
Ft. Lauderdale/ International
Harvey
Houston
Jacksonville
Little Rock
Miami
Nashville
New Orleans
Norwich
Paducah
Pensacola

Cut out for quick reference.

NOW WITH 18 LOCATIONS TO SERVE YOU!


Bimini Top's & Covers by:

marpac

CARVER




High Intensity Underwater Lights:

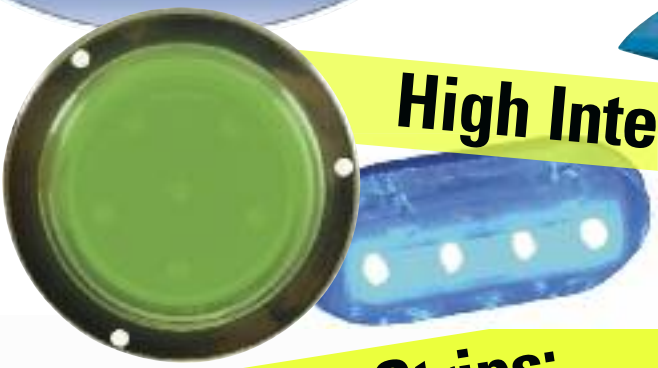

- Two Shapes:
  Oval Shape: 1.5" x 3.5".
  Round Shape: 3.5".
- Three Colors: White, Blue and Green.

Flexible Light Strips:

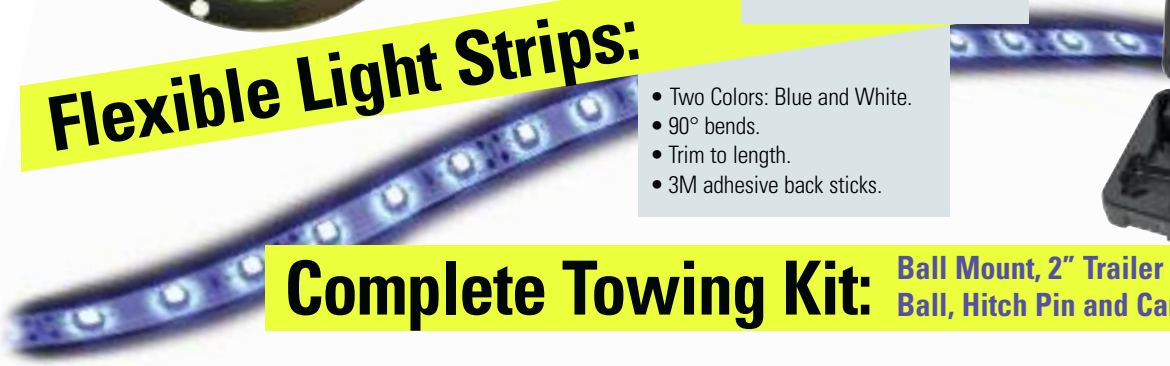

- Two Colors: Blue and White.
- 90° bends.
- Trim to length.
- 3M adhesive back sticks.



Complete Towing Kit:

Ball Mount, 2" Trailer Ball, Hitch Pin and Carrying Case.



Promotional Fender Kits:

Includes: (2) Standard Fenders with White Braided MFP Fender Whips



Fluid Xtractor & Discharge Pump:

Great Shop Item!

- 2 in 1 Pump: Extracts and discharges at the same time.
- Holds 18 Liters.

Quick View Filter Systems:

Power Inverter:





Alphabetical Index	Page No.
A	
Absorbent	
Bilge Pillow	1032
Oil Absorber	1032
Oil Boom	1032
Oil Spill Kit	1032
Sorbent Pads	1032
Abrasive	1143-1151
Absorbent, Pads/Rolls	1032
AC Delco	841
AC Master Panel	312-313
AC Motor Pump	980
Access Plates	376
Accessory Plug	306-308
Accumulator Tank	991
AC-DC Inverter	343
Acetone	1057
Actuator, Brake	1205
Actuator, Trim Tab	486, 488
Adapter	
Coax Cable	164, 166
Electric	291
Helm Mount	440
Hose	515, 950
Pigtail	350,1184-1185
Shore Power	346-349
Tie Bar	443
Adhesive	
Cleaners	1061
Removers	1061
5200, 4200	1058
Adhesives	
Caulk	1061
Cold Weld	1058
Contact	1058
Gasket	853
Marine Tex	1044
PVC	38
RTV Black	853, 1060
RTV Blue	853, 1060
Silicone	853, 1059-1061
Super Glue	1058
Weatherstrip	1060
Adjuster	
Fender	84
Hatch	391
Windshield	392
Aerator Accessories	
Controls	105
Filter	1007
Overflow Tube	1007
Spray Head	1006
Strainer	957
Aerator Pumps	1002-1004
Aerial Flare	117-119, 1236
Air Chamber Plugs	944
Air Compressor, Commercial	112, 1336

Alphabetical Index	Page No.
Air Horn	110-110, 1336
Air Pumps	33-34
Alarm Bilge	416, 969
Alarm Smoke	121
Alternators	
OMC	757
Marine Power	817-818
Mercury Outboard	669-670
Mercruiser	794-795
OMC, Volvo I/O	767-768
Yanmar	822
Aluminum	
Brightener	1028
Cleaners	1028
Polish	1027-1028
Tubing	396
Anchors	
Claw	71
Danforth	69-70
Delta	71
Folding	73
Grapnel	71
Mooring	95
Mushroom	72
Navy	72
Plow	71
River	72
Sea Storm	73
Talon	65
Anchor Accessories	
Anchormate, Worth	67
Chain	74-75
Chain Stops	68
Chock	67, 399
Controls	63
Display	70
Line	73-74
Quick Link	76
Retriever	67
Rodes	74-75
Roller	68-69
Rope	73-74
Shackles	75-76
Shade, Bimini	937
Swivels	67, 76
System	67
Talon	65-66
Talon, Cover	66
Thimbles	77
Trac	64
Winches	67
Windlass	62-63
Anodes	
Grouper	1078
Hull	1078, 1278
Inboard	855-857
Outboard	855-857

Alphabetical Index	Page No.
Pencil	1076
Rudder	1077
Shaft	1077
Antenna	
Accessories	166
AM/FM	160
Mounts	165-166
TV	164
VHF	162-164
Anti Freeze, Engine	1068
Anti-Freeze, Non Toxic	1068-1069
Anti-Fouling Paint	
Blue Water	1092-1094
Boero	1095-1096
Interlux	1119-1120
Mar Pro	1090-1091
Pettit	1108-1110
Anti-Siphon Valve	514, 574
Audiopipe	148, 151, 155
Auxiliary Bracket	473-474
Axe	1234
Bracket	1234
Axle	
Bearing	1201
Brake Line	1205
Spindle	1208
Tie Plate	1208
B	
Bags	
Ditch	114
Emergency	114
Life Preserver	54
T-Bag	55
Trash	366
Baitwell Accessories	
Aerator	1002-1007
Drain Plugs	943-944
Lights	264-265
Overflow Drain Tube	1007
Pumps	1002-1007
Strainers	957, 1007
Ball Gears, OMC	760
Ball Mounts	1196-1197
Ball Scupper	945-946
Ball Trailer Hitch	1196
Ball Valve	952-953
Ball Valve Fuel	514, 953
Barometer	1220, 1223
Bar-B-Q Grill	360-361
Barrel Bolt	384
Barrel Connector	166
Batteries	276
Battery	
8D, 8D-AGM	336
Adapter	306
Box	336
Cable	296

Alphabetical Index	Page No.
Charger	337-342
Charger Plug, Trolling Motor	346
Cleaner	1064
Clips	306
Converter	343-344
Extension Cord	306
Hold Down	337
Inverter	343
Isolators	315
Jumper	297
Lug	297
Meter	324
NC27, NC24	336
Selector Switch	324
Switch	321-326
Terminal	296
Terminal Cover	296
Tray	337
Beacons	119-120
Bearing	
Buddy	1202
Cutless	1071-1076
Grease	1203
Kits	1201
Seals	1201
Shaft, Cutless	1071-1076
Sleeve	1071-1072
Solid Flange	1073
Wheel	1201
Bell Stop, Trailer	1212-1214
Bells	114
Commercial	1337
Belt, Swim	55
Bezel, Steering	426
Big T, Steering	425
Bilge Blower	528
Bilge Flex Hose	947
Bilge Pump	
Automatic	965-967
Float Switch	967-969
Hand	960-961
Heavy Duty	970-971,1275
Non-Automatic	955-956
Panel Switch	969-970
With Float Switch	967
Bilgekote Paint	1124
Bimini Top	
Accessories	938-941
Anchor Shade	937
Boots	936
Eye Strap	940-941
Jaw Slide	938
Straps	940
Support Pole	942
Bimini Tops Complete	930-936
Binding, Wakeboard	9-10
Binoculars	1222
Blanket	
Fire	124
First Aide	124, 128
Thermal	124
Block, Rigging	75
Block Pulley	75
Blower	528
Blower Hose	529
Boarding	
Handles	396-397
Ladders	354-358
Pads	364
Step	98-100
Boat Care	
Bilge Cleaner	1023
Cleaner Wax	1011
Cleaning Kit	1010
Color Restore	1011
Deck	1022
Display, Boat Care	1015-1019, 1038
Fabric Cleaner	1023
Hull Cleaner	1028
Metal Cleaner	1028
Mildew Cleaner	1024
On-Off Hull Cleaner	1021
Plastic	1030
Polish	1008-1009
Rubbing Compound	1011
Rust	1019
Soap	1015-1017
Spyder/Bird	1019
Teak Cleaner	1028-1029
Teak Oil	1028-1029
Toon-Bright	1027
Vinyl Cleaner	1030-1031
wash	1015-1016
Wax	1008-1009
Boat Cover Accessories	
Bows & Sockets	927
Console Cover	927
Fabric Protector	928
Motor Cover	928
Repair Kit, Fastener	928
Shrink Wrap	1066-1067
Support Pole	927
Tie Down Kit	927
Waterproofing	928
Zipper Lube	928
Boat Covers	919-926
Boat Cushion	50
Boat Hook	358-359
Boat Hook Holder	374
Boat Mirror	38-39
Boat Stands	1159-1160
Bolts	
Barrel	384
Hex	1164
Jack Plate	479-480
Lag	1162
Lug	1208
Machine	1161, 1164
Motor	479-480
Pedestal	905
U-Bolts	1216
Boom Crane, Commercial	1252-1257
Booster Cable	297
Boot Stripe, Incom	1154-1155
Boots, Fire, Commercial	1235
Bottom Paint	
Blue Water	1092-1094
Boero	1095-1101
Interlux	1115-1120
Mar Pro	1082-1092
Pettit	1102-1111
Buoys, Commercial	85
Bow Chocks	399
Bow Eye	400
Bow Light	240-246
Bow Roller, Trailer	1212-1214
Bow Stop, Trailer	1212-1214
Bow Thruster	1343
Commercial	1343
Box	
Battery	336
Dock	97
Electrical	349
Electronics	100
Flare	119
FS	349
Gimbal Stereo	158
Glove	367
Packing	1069
Storage	375
Stuffing	1069-1070, 1278
Bracket, License Plate	1183
Bracket, Life Ring Buoy	57, 1235
Bracket Auxiliary Motor	473-474
Brake	
Actuator	1205
Cleaner	1205
Kit	1204-1205
Line Kit	1205
Propeller Shaft	466
Breaker	316-318
Breaker Boots	317
Breaker Panel	310-313
Brightener	
Aluminum	1027
Teak	1028-1029
Brush	
Chip	1139
Deck	1034-1036
Foam	1139
Handle and Extensions	1037

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
Kits	1038-1039, 1201
Paint	1139
Radiator	1139
Scrub	1034-1036
Steering Tube	428
Throw Away	1139
Wire	1035, 1337
Buddy Bearing	1202
Bulb	
Light	1268, 1271
Primer	505-506
Searchlight	1268, 1271
Bulkhead Fittings	447
Bulkhead Hose Kits	445
Bulkhead Strain Relief Hose	445
Bullet Connector	300
Butt Connector	298
Bumpers and Guards	1287
Bunk Board, Guide On	1192
Bunk Board Carpet	1192
Bunk Brackets	1215
Buoy	
Anchor	85
Horseshoe	57
Inflatable	79-80,85
Mooring	94
Ring	56
Bus Bars	328-329
Butane Torch	305
Butt Hinge	387-388
C	
Cabin Fan	1227
Cabin Heater	1227
Cabin Lights	266
Cable	
Battery	296
Clamp	303
Clams	77, 306
Clips	77
Connection Kits	299
Cutter	93
Duplex	295
Internet-Phone	352
Rigging, Vinyl Coated	93
Shift	799-800
Starter	296
Steering	424-426
Throttle	467-469
Ties	303
Watertight Outlet	305
Winch	1189
Wrap	303
Cable Boots, Rigging	429
Cable Cover, Rigging	429-430
Canvas, Repair	1166
Canvas Cleaner	928
Canvas Fastener	1166-1167

Alphabetical Index	Page No.
Carbon Monoxide Detector	122
Carburetor Cleaner	851
Cargo Basket Commercial	1243
Carpet, Bunk Board	1192
Carrier	
Hub	1211
Motor, Outboard	474-475
Tire, Wheel	1211
Caulking	1061
Gun	1060
Centrifugal Pump	9, 276, 751
Cetol	1122
Chain	
Anchor	75
Galvanized	74-75
Mooring	95
Safety	1189, 1197
Stops	68
Vinyl Coated	75
Chair	
Bucket	895
Captain's	895
Deck	893
Pedestal	895-898
Pilot	894
Tips	893
Champion Spark Plug	841
Charger, Plugs	346
Chargers, Battery	337-342
Charging, Clips, Alligator	306
Chart Light	308
Charting Kit	1221
Charts, GPS	209
Chock, Commercial	1328-1330
Chocks	1209
Anchor	67
Bow	399
Chromate Primer	854
Chrysler, Force Outboard Parts Index	726
Circuit Breaker	315-318
Hi-Amp	318
Push Button	317
Resettable	317
Trolling Motor	317
Circuit Breaker Panel	310-313
Clam Shell Vent	531
Clamps	
Cable	303
Cushion	303
Hold Down	393
Hose	494, 508, 948-949
Spring	374
Cleaners	
303 Protectant	1024
All Purpose	1023
Aluminum	1021
Bilge	1023

Alphabetical Index	Page No.
Bird Dropping	1019
Black Streak Remover	1020
Boat Wash	1015
Canvas	1023
Carpet & Upholstery	1023
Chrome	1027
Cleaner Wax	1011
Cleaning Kit	1010
Color Restorer	1011
Deck	1022
Display, Boat Care	1018-1019, 1038
Fabric	1023
Fast Orange	1029
Fiberglass	1030
Hand	1029
Hull	1028
Inflatable	1031
Metal Cleaner	1028
Mold and Mildew	1024
Mold and Mildew Control	1025
On-Off Hull Cleaner	1021
Oxidation Remover	1017
Parts Washer	1057
Plastic	1030
Polish	1008-1009
Rubbing Compound	1011
Rust Remover	1019
Salt Terminator	1031
Spray Wax	1008
Super Green	1017
Teak	1028-1029
Vinyl	1030-1031
Wash and Wax	1015-1016
Wax	1008-1009
Cleats	101-104, 397-399
Clips	306
Clock	1223
Cloth	
Cleaning	1042
Drying	1042
Fiberglass	1057
Polishing	1041
Tack	1142
White Rags	1142
Clutch Pumps	973
Coat, Float	1241
Coat Hook	397
Cold Weld	1058
Commercial, Starts On Page	1232
Compasses	417-421
Compound	
Bonding	1051, 1058
Finesse-IT 3M	1015
Non-Skid	1110, 1124, 1135
Rubbing	1015
Splash Zone	1045
Conditioners	

Alphabetical Index	Page No.
Fuel	533-537
Vinyl	1136
Conduit, Rigging	429
Conduit, Split	303
Connection	
Control Cable	458, 470-471
Dual Steering	428,458
Steering	427
Connector	
Anchor	75-76
Antenna	166
Bimini Top	938
Bullet	300
Butt	300
Butt Connector Kit	299
Electrical	307
Fuel	509-511
Heat Shrink, Butt	301
Heat Shrink, Quick Disc.	301
Heat Shrink, Ring	301
Quick Connect	300
Ring	301
Shore Power	349-350
Spade	299
Thru-Hull	954-955
Trolling Motor	234-235, 351
Water Hose	985
Console Cover	927
Controls	
Binnacle Mount	455, 457
Drain	1006
Dual Station	458
Engine	455-465
Kobelt	459
Searchlight	1267, 1269-1270
Side Mount	456
SeaStar Solutions	460-463
Trim and Tilt	472
ZF Mathers	464-467
Control Cable Connection Kit	458, 470-471
Control Cable Fitting	470-471
Control Cables	467-469
Control Panel	312-313
Converter, DC-DC	343-344
Cooler	362-363
Battery Powered	363
Mounting Kit	363
Oil	817
Pad	362
Cooling System Treatment	1065
Coosa Board	1049
Copper Lug	297
Cord, Shock	92
Cordsets, Adapter	350
Cordsets, Shore Power	349-350
Corrosion X	1062
Corrosion, Protection	1061-1063
Cotter Pin	1162, 1165
Coupler, Lock	1198-1199
Coupler, Trailer	1196
Courtesy Lights	260-264
Coverall, Commercial	1141
Cowl, Vent	530
Cradle, Commercial	1243
Cranes, Commercial	1252-1257
Crème Hardeners	1046
Cup Holders	364-365
Cushions	
Rafting/Fender	81
Throw	50
Cutlass Bearings	1071-1076
Cut-Off	
Switch	412,473
Wheel	1149
Cutter, Cable	93
Cylinder, Steering	
Front Mount	435-437, 441, 449
Hydraulic	448
Inboard	444
Outboard	435-437, 441, 449
Seal Kit	443
Side Mount	441
Splash Well	441
D	
Davit, Commercial	1251
Decals	1224
Decarbonizers	851
Deck	
Brush	1034-1036
Chair	893
Cleaner	1205
Fill	516-518
Hatches	375, 1292-1296
Hinge, Bimini Top	938-940
Lights	269-270
Pipes, Rope	104, 399
Plates	376
Plate Key	517
Wash	1022
Waste	999
Deck Crawler, Commercial	1238
Degreaser, Engine	851
Dehumidifier	1025
Denatured Alcohol	1057
Depth Gauge	180
Destroyer Wheel	452-453
Detector	
Bilge Water Level	416, 969
Carbon Monoxide	122
Fire	123
Multigas	123
Smoke	121
D-Icer, Commercial	1067
Diesel	
Fuel Additive	537
Fuel Conditioner	536-537
Jerry Can Yellow	500
Dip-It, Rope	92
Disc	
Adhesive	1060
Cut-Off	1149
Grinding	1149
Pads	1032
Sanding	1143-1148
Surface Conditioning	1149
Disc Brakes	1204
Display, Retail	
Anchor	70
Boat Care	1018-1019
Brushes, Poles	1036, 1038
Bungee	93
Canvas Fastener	1166-1167
Cleats, Bucket	399
Clymer, Service Manual	858
Cotter Pin	1162, 1165
Dog Safety	61
Drain Plugs	943-944
Electrical	301-302
Epoxy Resin	1044, 1046
Fastener	1166
Fender Hanger	84
Flusher, Engine	493, 842-843
Fuel Additive	533-537
Fuel Depot	513
Fuse	321
Gauge	408
Header Cards	1227
Hose Clamps	494, 508, 948-949
KeelShield	1227
Key Chain	1225
Letters	1225
Light Bulb	291, 1268, 1271
Lightstick	126
Manuals	858
Mar Pro Paint	1091
Mildew	1026
Motor Flush	492-493, 842-843
No Damp	1025-1026
Nuts, Bolts, Screw, S.S	1161-1164
Odor Control Bags	1026
Paint Brushes	1139
Peg Hooks	1227
Prop	871, 880, 885
Push-Pull Switch	296
Resin-Combo	1046
Resin-Epoxy	1044, 1050
Resin-Polyester	1050
Screws	1161, 1163-1164
Sea Safe	1019
SkegShield	490,854
Spray Paint	1135-1136

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
Sta-bil	533
Starbrite, Brush	1038
Starbrite, No Damp	1018, 1025
Starbrite, Fuel	535-536
Starbrite Oil	846, 1018
Star-Tron	535-536
Switches	332
Swobbit	1036
Terminal	302
Trailer Lights	1180
Wire	295
Dive Flags	39
Dive Ladder	356
Divers Plate	1078
Dock	
Box	97
Bumper	95-97
Cart	97
Cleats	101-104
Corner Guard	97
Edging	96-97
Ladder	100, 356
Light	98
Lines	87-88
Step	98
Wheel	97
Dog Ladder	356
Dog Toys	59-60
Doggy Life Jackets	58-59
Door	
Stop	382,392
Commercial	1296-1297
Gasket	1296
Hinge	389
Hook	383
Latch	380-381,1167
Shrink Wrap	1066
Drain	
Ball Scupper	945-946
Floor	946
Garboard	944
Drain Plug	943-944
Oil	849
Drain Tubes	945
Drawer Knob	386
Drill Pump	849
Drink Holder	364-365
Dry Pack, Cell, I-Pod, MP3	159
Dust Cap	1202
Dye Marker	1236
E	
Ear Muff, Protection	132
Ear Plugs	132
Electrical	
Box	352-353
Connector	298-302
Cover	307-308, 348
Cutter	301,305
Panel	310-313
Plug/Receptacle	350-351
Shore Power	346-351
Starter Cable	296
Tape	304
Terminal	297-302
Trolling Motor Plug	235, 353
Wire	293-296
Electric Winches	1189-1190, 1287-1289
Electronics	
Audiopipe	148, 153
Box	100
Boss	148-150
Charts	180, 209
Cobra	141-142, 146
Gimbal, Ram Products	192-194
Humminbird	167-180
Icom	137-138, 143
JBL	146, 151
Lowrance	181-192
Milennia	147
SeaWorthy	152
Simrad	209
Standard Horizon	139-140, 144-145
Uniden	140-141, 144
Weather Station	1220, 1221
Emergency Pack	114-115, 127
Engine, Flush Kit	493
Engine Cooling Pumps	971-975
Engine Oil	
2 Stroke	844-846
4 Stroke	844-846
Engine Parts - Inboard	
Marine Power	811-821
Mercruiser	769-810
OMC I/O, Volvo	744-768
Engine Parts - Outboard	
Chrysler, Force	726-734
Honda	737-741
Johnson-Evinrude, OMC	538-647
Lehr Propane O/B	742-743
Mercury Outboard	648-686
Nissan, Tohatsu	735-736
Suzuki	717-725
Yamaha	687-716
Engine Shut Down System	412-415
Engine Support, Trailering	1216-1218
Engines	
Lehr Propane O/B	742-743
Marine Power	827-833
Epirb	119-120
Epoxy	
Mar Pro	1044
MAS Products	1051-1056
Stick	1045
Epoxy Glue	1058
Evinrude	538-647
Exhaust	
Bellow	496
Elbow	496
Fittings	496
Flapper Valve	494
Hose	494
T-Bolt Hose Clamps	494
Manifold	747, 773-774, 811-812, 824-825
Muffler	495
Riser	747, 773-774, 811-812, 824-825
Vernatube	496
Extension Cable, Antenna	166
Extension Cable, Fish Finder	177, 184-191
Extinguishers, Fire	121-122
Eye	
Bolts	107
Bow	106-107, 400
Lifting	105, 400
Stern	106-107, 400
Strap	941
Swivel	107
Eyewear, Safety	132
F	
Fabric Guard 303	1023
Fairing Board	1150
Fan Cabin	1227
Fast Orange	1029
Fasteners	
Bimini Tops	938-940
Canvas	1166-1167
Detent	1167
Reclosable	1167
Faucet	984, 993, 996
Fender	
Boat	78-84
Covers	83
Cushion	81
Display	83
Dock	96
Hanger	83-84
Hull Hugger	82
Line	86-89
Low Freeboard	83
Pontoon	83
Pump	86
PWC	81
Racks	84
Strap	85
Stretch	89
Trailer	1209
Transom	81
Fenders, Inflatable	78-80
Festoon Bulb	288-290
Fiberglass	
Cloth	1057
Mat	1057

Alphabetical Index	Page No.
Manifold Wrap	495
Repair Kits	1046
Resin	1046-1047
Restorer	1011
Tubing	495
Wax	1008-1012
Fids	92
Fill, Fuel	516-518
Fillers	
Body	1046
Fiberglass	1045
Glazing Putty	1046
Gluvit	1046
Mas System	1051-1056
Filter	
Aerator	957
Fuel	519-527
Livewell	957-959
Transmission Kit	853
Fire Axe	1234
Fire Boots, Commercial	1235
Fire Blanket	124
Fire Detector	122-123
Fire Equipment, Commercial	1233-1235
Fire Extinguisher	121-122
Fire Hose, Commercial	1233
First Aid Kit	114-115, 1238
Fishfinder Humminbird	167-175
Fishfinder Lowrance	181-192
Fittings	
Bulkhead	447
Fuel	512
Hydraulic Steering	447
Pipe	950-952,1233
Rail	938-940
Thru Hull	954-955,1233
Waterproof	306
Flag Accessories	360
Flags	39, 120, 359-360
Flanged Bearing	1073-1074
Flanging Tool	945
Flare	117-119, 1236
Flashlight	129, 1235
Flat Washer	1161-1162
Flax Packing	1070
Flex Trim	303, 379
Flex Tubing	303
Float Coat	1241
Float Switch	967-968
Float, Key	1223, 1225
Float, Life	1242
Floatation Foam	1061
Floatation Jackets	56, 1241
Floodlight	267-268
Floor Drain	946
Fluids	
Extractors	849-850
Hydraulic	843
Starting	536
Steering	843
Trim and Tilt	843
Flusher, Engine	492-493, 842-843
Fog Horn	113
Fogging Oil	852
Folding Step	397
Foot Rest	916
Foot Throttle	454
Formula, 6-56	1063
Fresh Water System	989-990
Fuel	
Additive	533-537
Anti-Syphon	514
Caddy, Transport	500
Conditioner	533-537
Connector	509-511
Deck Plate Key	517
Demand Valve	505
Fill	516-518
Filter Bracket	520
Filter, Outboard	519-521, 526-527
Filter, Spin-On	519-524
Fittings	512
Fuel Line Assemblies	503-504
Funnels	527, 847
Gauge	401-409, 500-501
Hose	506-507
Jerry Can	500
Oil to Gas Ratios	845
Pick Up Tube	499
Primer Bulb	505-506
Sending Unit	502
Tank	497-498
Tank Cleaner	534-535
Tank Hold Down	499
Tank Walker	500
Turbine Diesel Filter	521-524
Valves	514, 953
Vents	515
Withdrawal Assemblies	499
Fuel Filter, Outboard	526-527
Fuel Line Assemblies	503-504
Fuel Water Separator	519-523
Funnels	527, 847
Fuse	
AGA, AGC, ATC, ATO, ANL	318-319
Block	327-328
Display	320
Holder	319
Mega	328
Panel	310
G	
Gaff	359
Galvanized Chain	74
Galvanizing, Spray	1135
Garboard, Drain Plugs	944
Garden Hose	985
Gas Additive	533-537
Gas Cap	499
Gas Funnel	527, 847
Gas Grill	360-361
Gas Fill	516-518
Gas Spring	391
Gas Tanks	497-498
Gas Tanks Vent	515
Gasket Maker	853
Gasket Sealant	853
Gate Latch	382-384
Gauge	
Accessories	409-410
Depth	180
Faria	403-406
Light Kit	410
Marpac	401-402
Murphy	411-415
Powerview	411
Senders	410, 502
Switch Gauge	412-414
Seastar	407-409
Weather	1220-1221
Wind	1220-1221
Gear Bag	54
Gear Lube	
High Viscosity	847-848
Hypoid 90	847-848
Pump	847-848
Synthetic	848
Type C	848
Gel Coat	
Coloring Agents	1049
Repair Kits	1048
Scratch Patch	1049
White	1047
Glazing Putty	1046
Gimbal, Ram Products	192-194
Glove Box	367
Gloves	
Disposable	1141
Fire Fighter	1234
Latex	1141
Nitrile, Chemical	1141
Work, Heavy Duty	1338
Glue, Epoxy	1058
Glue, Super	1058
Gluvit	1046
Goggles	132
GPS	
Charts	209
Humminbird	167-175
Lowrance	181-192
Mounts	132-194
Grapnel Anchor	71

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
Grease	
Dielectric	644
Gun	1203
Lithium	1063
Multipurpose	1063
Teflon	1064
Wheel Bearing	1203
Grill, Barbecue	360-361
Grommet	429
Ground, Shoe	166
Guard	
Bow	83
Fabric	929
Gunnel	364
Keel	1227
Guide	
Line	67
Roller	68
Trailer	1209
Gunnel, Pads	364
Guns	
Caulking	1060
Grease	1203
Heat	305
Line Throwing, Commercial	116
Rope Cutting	92
Washdown, Commercial	1338
Gypsy	63-64
H	
Hand	
Bilge Pump	960-961
Hand Cleaner	1029
Hand Pumps	850, 960-961
Handheld, VHF	143-146
Handles	
Brush	1037
Extending	1036-1037
Grab	396
Lifting	384
Mop	1036-1037, 1040
Transom	396-397
Winch, Trailer	1186-1188
Handrail	
Fittings	393-395
Tubing	396
Handwheel	
Door Comm.	1297
Hanger	
Fender	84
Hose & Wire	303
Line	86
Rod and Reel	374
Hard Hat	131
Hardeners	
Crème	1046
Epoxy	1043
Resin	1048

Alphabetical Index	Page No.
Hardware	
Bimini Tops	938-970
Boat Cover Repair Kit	928
Display	1166
Fastener Kits	1164, 1166
Propeller	886
Snap Cap	1167
Sockets & Stud	1166-1167
Stainless Steel	1161-1167
Harness, Full Body	127, 1244
Hasp, Hook	383-386
Hat Hook	397
Hatch	
Adjuster	392
Commercial	1292-1296
Deck	375
Gas	391
Gaskets	377, 379
Latches	381-382, 1167
Lift	390
Tape	377
Watertight	1292
Hawse Hole Plate	105, 399
Hay Fork Pulley	107
Header Cards	1227
Heat Gun	305, 1066
Heat Shrink	
Connector	301
Torch, Butane	305
Tubing	304
Helm	
Backmount	439
Cable Adapter	424
Hydraulic	431, 434, 439
No Feed Back	425
Rack and Pinion	426
Rotary	425
Seal Kit	440
Helmet, Firefighter	1234
Hinge	
Hinges	387-390
Non-Mortised	389
Motor Box	389
Piano	390
Hitch	
Ball	1196
Lock	1198-1199
Pin	1198
Receiver	1196
Hold Down, Fuel Tank	499
Hold Down, Strap	499
Hold Down Clamp	393
Holder	
Boat Hook	374
Dive Ladder	356, 374
Drink	364-365
Door	383

Alphabetical Index	Page No.
Fender	84
Fuse	319-320
Knife and Pliers	371
License Plate	1183
Line, Rope	85-86
Outrigger Pole	367
Pole Holder	374-375
Ring Buoy	1235
Rod and Reel	368-374
Holding Tank, Waste	999
Honda Outboard Parts	737-741
Hook	
Boat	358-359
Cabin Door	383-384
Coat	397
Fender	84
Gaff	359
Hat	397
Peg Board	1227
Rope	86
S Hook	107
Snap	1229-1231
Utility	1167
Horn	109-113, 1336-1337
Hose	
Bilge	947-948
Blower Vent	529
Clamps	494, 508, 948-949
Exhaust	494
Fire	1233
Fuel	506-507
Garden	985
Hardwall	494
Heater	948
Hydraulic	445
Livewell	948
Sanitation	999
Softwall	494
Splice	513
Washdown	985
Hose Accessories	
Adapter	951
Barbs	512
Clamps	494, 508, 948-949
Fuel	509-513
Mender	985
Nozzles	985-986
Rack	1233
Repair Kits	985
Shut Off Valves	514
Hose Clamps	494, 508, 948-949
Hot Foot Throttle	454
Hourmeter	314, 401-408, 415
Hub Kits	
Propeller	878, 881-884
Trailer	1201
Hub Trailer	1201

Alphabetical Index	Page No.
Hull Cleaner	1021
Hull Hugr, Fender	82
Hull Strainer	955-959, 1232
Hummingbird	167-175
Hummingbird Accessories	175-180
Hydraulic	
Fittings	447
Fluid	446
Tubing	446
Tubing Copper	447
Hydraulic Steering System	
Baystar	430
Hynautic Hy-Trac	449
Inboard	438
Sea Star	432-433
Uflex	430, 434
Hydraulic Steering, Acc.	
BubbleBuster	446
Cylinder Seal Kit	440, 443, 448
Fill Kit	440
Fluid	446,843
Helm Seal Kit	440, 443,448
Hose	437, 445-446
Power Assist	444
Power Purge	446
Tie Bar	437, 443-444
Hydrofoil Stabilizer	489, 491-492
I	
Ice Chest	362-363
Ice Chest Mounting Kit	363
Ice Chest Pads	362-363
Ignition Key Switch	330-331
Immersion Suite, Comm.	124, 1241
Impeller	
Jabsco	973, 978-979
Johnson Pump	972-973
Puller	971
PWC	887-889
In Line Blower	528
In Line Fuel Filter	526
Inboard, Cylinder	444
Inboard Steering	438
Indicator, Rudder	1345
Inflatable	
Life Raft	1245-1249, 1245-1249
PFD	50, 1239
Water Toys	13-27
Inflator/Deflator	33-34
Inlet	
Battery Charger	346
Shore Power	346-351
Water	986
Inline Fuse Holder	319
Instruments, Engine	401-408, 415
Intake Water Strainer	955-959, 1232
Interior Light	1263
International Code of Signal	360
Inverter	343
Isolator	
Galvanic	307
Battery	315
J	
Jack, Trailer	1193-1195
Jack Plate	
Hydraulic	475-478
Manual	476-477, 480
Jack Plate Mounting Kits	479-480
Jacket, Flotation	56
Jerry Cans	500
Jet Pump, PWC	891
Johnson, Evinrude, Parts Index	538
Junction Blocks	328-329
Jumper Cables	297
K	
Kayak	40
Kayak Paddle	132
Keel	
KeelShield	1227
Pads, Trailer	1192
Plate	400
Protector	1227
Roller	1212-1214
Key, Deck Plates	517
Key Chain	1223, 1225
Kill Lanyard	472-473
Kit, Coast Guard/Safety	108-109
Kneeboards	11-12
Knife	
Floating	128
Holder	371
Putty	1142
Rigging	367
Utility	1167
Knob	
Engine Control	457
Steering	452
L	
L.E.D. Light	
Bow	245
Courtesy	261-262
Rope/Accent	263-264
Stern	250
Underwater	265-266
Label	
Control Panel	311, 314
Drug	1225
Injury	1225
Letter	1224-1225
Number	1224-1225
Lacquer Thinner	1057
Ladder	
Boarding-Dive	354-358
Dock	100,356
Doggy	356
Gunwale Hook	357-358
Pontoon	356-358
Transom Mount	355
Ladder - Commercial	
Embarkation	1245
Pilot	1245
Lag Bolt	1162
Landing Net	359
Lantern	
Battle, Emergency	274-275
Camping	275
Signaling	120, 276
Lanyard, Kill, Safety	472-473
Latch	
Door	380-383
Draw	393
Flush	380-384
Lifting Ring	384-385
Push to Close	380-381, 386
Set	380
Slam	382
T-Handle	381, 393
Turn Latch, Windshield	382, 392, 1167
Leaning Post	100, 899
Lehr Outboard	742-743
Letter Kit	1224-1225
License Plate, Holder	1183
Life	
Boat	1242, 1250
First Aid Kit	1238
Floats	1242-1249
Jackets	54-55
Ring	56, 1237
Ring Bracket	57, 1235
Ring Buoy	56, 1237
Ring Buoy, Rope	57, 1238
Life Vest	
Adult/Child/Infant	41-51
Commercial	51-53, 1239-1240
Inflatable	50-51,1239
Pet	58-59
Standard, Yoke	51
Storage Bag	54-55
Life Raft	1245-1249
Life Raft Accessories	1238
Lift Ring	56, 384-385
Lifting Eye	105, 400
Light	
All Around	248-253, 1258-1262
All Around, Commercial	1258-1262
Anchor	258
Anchor, Commercial	1266
Barge, Commercial	1264-1266
Base	253-254
Battle Lantern	275
Batteries	276
Bi-Color	240-243

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
Bow	240-246
Bulbs	287-290
Bulb Socket	291-292
Chart	308
Clamp On	240
Clearance	1174-1178
Clip/Holder	374
Combination	240-243
Cordless	272
Courtesy	260-264
Deck	269-270
Docking	272-272
Dome	266
Drift Light, Commercial	1266
Emergency	126
Emergency, Strobe	126
Fishing	272-273
Flashlight	129, 1235
Flex L.E.D	263-264
Flood	267-268
Flood, Commercial	1265
Fluorescent	267
Gauge	402
Globes	1263
GoLight	279
Incandescent	259, 1263
Lantern	275
L.E.D Light	263-165
Lens	1258-1262
License Plate	1183
Lifebuoy	126
Livewell	264-265
Marker, Commercial	1264
Masthead	248-249, 1264
Masthead, Commercial	1264
Mounted	1258-1262
Navigation	1258-1262, 1264-1265
Panama	258, 1262
Peep, Commercial	1266
P.F.D.	125-126
Platform, Commercial	1266
Pop Up, Bow	254
Portable	1265-1266
Power Socket	307-308
Red Indicator	260
Rescue	125-126
Search	277-287, 1267-1274
Side, Deckmount	244-245, 255-258
Side Marker Trailer	1174-1178
Signal	276
Spot	272, 1267-1274
Spreader	268-270
Stern	247-253
Stick	126
Strip	261-264
Strobe	126
Strobe, commercial	1337
Survival	125-126, 273-274
Trailer	1209
Transom	247-248
T-Top	271
Tube	267
Underwater	265-266
Utility	272
Light Bulbs	289-291, 1268, 1271
Line	
Anchor	90-91
Braided	90
Bungee	89, 92
Cutting Gun	92
Dock	87-88
Fast Throw, Commercial	116
Fuel	506-507
Nylon	90
Polypropylene	91
Twisted	91
Line Holder	85-86
Line Throwing Kit	116
Link Arm, Steering	427-428
Liquid Tape	92
Livewell Accessories	
Aerator	1002-1006
Diverter Valve	1006
Lights	264-265
Overflow Drain Tube	1007
Plugs	943-944, 1007
Pluming Kit	1007
Pump	981-984, 1002-1006
Spray Head	1006
Strainer	957, 1007
Valve, Drain	1006
Water Pickup	956
Lock	
Anchor	68
Coupler	1198-1199
Hitch	1198-1199
Outboard Motor	1216
Nut	1161-1162
Pad	1216, 1229
Propeller	885
Receiver	1196
Spare Tire	1211
Tire	1211
Trolling Motor	231
Washer	1161-1162
Loops, Vented	999
Louver Vent	529-530
Lower Unit Gear oil	847-848
Lowrance	181-188
Flush Mount Kit	192
Lowrance Accessories	189-192
Lubricant	
Anti-Seize	1063
Formula 6-56	1063
Grease	1063
Motor Oil 2 Stroke	844-846
Motor Oil 4 Stroke	844-846
Silicone	1062
Snap/Zipper	928
White Lithium	1063
Lug, Battery	296-297
Lug, Nuts & Bolts	1208
M	
Macerator Pump	997
Machine Screws	1161, 1164
Manhole, Commercial	1292-1293, 1295
Manual, Repair	858
Map Fishing	209
Marine Power, Engine	827-833
Marine Power, Parts Index	811
Mask, Respirator	130-131
Matches, Waterproof	128
M.E.K	1057
Mercruiser, Parts Index	769
Mercury Outboard, Parts Index	648
Mesh, Strainer	957-958, 1007
Metal Cleaner	1027-1028
Metal Polish	1027
Metal Restorer	1027
Mildew Stain Remover	1024
Milled Fiber	1048
Mineral Sprits	1057
Minn Kota, Reference	210-216
Mirror	
Signal	127, 1238
Ski	38-39
Mixing Tub	1142
Mold Release Wax	1010
Monitor	
Battery	324
Carbon Monoxide	122
Engine	123
Energy AC/DC	314
Fire and Smoke	121, 1345
Mooring	
Anchor	95
Buoy	94
Chain	95
Line	95
Snubber	94
Motion Band	1223
Motor	
Bracket	473-474
Carrier	474-475
Cover	928
Flusher	492-493, 842-843
Lock	1198-1199
Mate, Mix Ratio	845
Oil	844-846
Paint	854
Stand	474-475

Alphabetical Index	Page No.
Steering Lock	1216
Support	1217-1218
Tiller, Accessories	430
Tilter, Garelick	475
Motorguide, Reference	214-26
Motorwell, Boot	429
Motorwell, Drain Tube	945
Mounts	
Antenna	165-166
Ball, Hitch	1196-1197
Grill	360
Helm	440
Outrigger	367
Ram	192-194
Seat Kit	900
Muffler	495
Multimeter	305
Mushroom Anchor	72
N	
Navigation Light	240-258, 1258-1262, 1264-1266
Needle Scaler	1338
Nevr-Dull	1028
NGK Spark Plug	842
Nipple, Pipe	951
Nissan, Tohatsu Outboard	735-736
No-Sand Primer	1099
Noise Filter	167
Non Mortised Hinge	389
Non Skid Compound	1124
Nose Cone	492
Nozzle	
Commercial	1234
Fire Hose	1233-1234
Hose	1233
Water	985
Numbers & Letters	1224-1225
Nut	
Bolts, Screw, S.S.	1161-1164
Lock	1198-1199
Lug	1208
Shaft	891
Well	1161
Wing	1161
Nylon Rope	74
O	
Oar	133-135
Oar, Lock, Socket	135-136
Oetiker Clamp	508
Oil	
2-Stroke	844-846
4-Stroke	844-846
Absorbent Pads	1031-1032
Additives	536
Change, Pump	531-533, 849-850
Cooler	817
Drain Kits	849
Drain Plug	849
Extracting, Pump	531-533, 849-850
Fogging	852
Gearcase	847-848
Mixing Bottle	845
OMC	845-848
Pressure Switch	410, 818
Pump Gearcase	847-848
Sender	821
Spill Kit	1032
Teak	1028-1029
Oil Absorbent Pads	1032
Oil Change Pumps	531-533, 849-850
Oil Change System	531
OMC, I/O, Parts Index	744
Organizers	366
Outrigger Poles	367
Overboard Light	126
Overflow, Drain Tube	1007
Overheat, Detector	416
Oxidation Remover	1017
Oxygenator, Baitwell	1005-1007
P	
Packing	1069-1070
Packing Box	1069-1070
Packing Puller	1070
Pad	
Absorbent	1032
Buffing	1033
Gunnel	364
Polishing	1042
Scouring	1041
Scrub	1041
Paddle	132-135
Pail	1042
Paint	
Aluma Coat	1110
Aluma Pro	1090
Awlgrip	1127-1135
Barrier Shield	1092
Bilgekote	1124
Camouflage	1092
Chromate	854
Converter	1093, 1125, 1131, 1133-1134
Dewaxer	1101, 1111, 1114
Engine, Inboard	854
Engine, Outboard	854
Epoxy Primer	1092, 1095, 1101, 1111, 1121, 1133-1134
Mar-Pro, Fishing Boat	1091
Mar-Protect	1092
Masking Film	1158
Masking Tape	1155-1156
Metal Primer	1092, 1111
Outdrive	854
Spray	854
Super-B Ablative	1090
Super-B Gold	1090
Super-B Xtra	1091
Superkote Gold	1090
Superkote Hard	1090
Thinner	1061, 1092, 1098-1099, 1113-1114, 1123-1124
Varnish	1097-1098, 1112, 1122, 1131
Vinyl	1136
Zinc Chromate	854
Paint, Antifouling	
Blue Water	1092-1094
Boero	1095-1096
Interlux	1119-1120
Mar Pro	1090-1091
Pettit	1108-1110
Paint, Top Side	
Awlcraft	1132
Awlgrip	1131-1132
Interlux	1122-1123
Mar Pro	1091-1092
Pettit	1111, 1113
Paint Accessories	
Brush Throwaway	1139
Brushes	1139
Coverall	1141
Drop Cloth	1141
Gloves	1141
Mixing Tub	1142
Razor Blade	1043
Respirator	1151-1153
Roller Cover	1139-1140
Roller Frame	1139-1140
Scraper	1141-1142
Spray Gun	1137-1138
Tack Cloth	1142
Tape	1155-1156
Tool	1142
Trays	1140
Panel	
Bilge Pump	969-970
Breaker	312-313
Fuse	310-311
Label	311, 314
Master	312-313
Meter	312-313
Switch	310-313
Pedestal	
Fixed Height	906
Mount	904-906
Pin Post	909-915
Swivel	908
Power Rise	913
Seat	896-899
Table	918
Peg Board Hook	1227
Penetrating Oil	1063
Pet Toys	59-60
Petroleum, Absorbent Pads	1032

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
PFD	
Extension Strap	53
Inflatable	50
Light	125-126
Rearm Kit	51
Phone-Com	352
Piano Hinge	390
Pigtail, Adaptor	350
Pilot Chair	894-897
Pin	
Cotter	1162, 1165
Coupler Lock	1198
Hitch	1198-1199
Quick Release, Detent	1167
Pipe	
Bushing	950
Cap	950
Deck	104, 399
Elbow	950-952, 1233
Fitting	950-952, 1233
Nipple	951, 1233
Plug	951
Tee	950, 954
Thread Tape	514
Union	950
Pitot Tube, Tubing	409
Plaques	1225
Plate	
Deck	376
Jacking	475-478
Transom Support	474
Platform, Swim	354
Plow Anchor	71
Plug	
12 Volt	307, 308
Air Chamber	944
Baitwell	943-944, 1007
Cigarette Lighter	308
Drain	943-944, 1007
Ear, Safety	132
Garboard, Drain	944
Snap-Tite	943
Trolling Motor	234-235
Turn-Tite	943
Plumbing, Commercial	1232-1233
Pneumatic Needle Scaler	1338
Pole Light	249-252
Poles	
Extension	1036, 1140
Flag	360
Holder	374
Outrigger	367
Push	358
Polishes/Waxes	1008, 1010
Polishing Pad	1008-1112
Poly Board	1049
Polyimide Foam, Commercial	1280

Alphabetical Index	Page No.
Pontoon Boat	
Furniture	903
Ladder	356-357
Portable Toilet	995
Porta-Potties	995
Post	
Offset	909
Power Rise	328
Seat	909
Power Cable	349-350
Power Inlet	346-348
Power Outlet	347-351
Power Post	328
Power Purge Jr.	446
Power Selector	345
Power Supply	345
Pressure Storage Tanks	991
Primary Wire	295-296
Primer	
No Sand	1121, 1099
Tie Coat	111
Zinc Chromate	854
Primer Bulb	505-506
Primer Bulb & Hose Kit	503-504
Propane Engine	742
Propeller	
All Propellers	859-884
Assortment	871
Commercial	891, 1339
Michigan	884-885
OMC Systematched	860
PWC	887-888
Ski	890
Solas	879-883
Stiletto	860
Trolling Motor	232-233
Propeller Accessories	
Cotter Pin	886
Hub Kits	878, 881-884
Locks	885
Nuts & Washer	886
Propeller Shaft Flange	1075
Reducing bushing	1339
Thrust Washer	886
Wrench	885
Wrench PWC	889, 891
Propeller Guard	885
Protector	
Battery Terminal	296
Hull	1227
Steering Cable	375
Wheel Bearing	1203
Pull	
Drawer	386
Hatch	385-386
Ring	384-385
Puller	

Alphabetical Index	Page No.
Fuse	320
Impeller	971
Packing	1070
Pulley	75
Pump	
AC	980
Aerator	1002-1007
Air Conditioner	992
Air, Water Toys	33-34
Baitwell	1002-1007
Bilge	962-971, 1275
Bilge, Automatic	963-966
Clutch	972-973
Drill	849
Fire, Commercial	1277
Fresh Water	989-990
Gear Oil	847-848
Hand	960-961
Impeller Chart Jabsco	974, 976-979
Jabsco, Parts & Service Kit	976-979
Livewell	981-984, 1002-1006
Macerator	997
Oil Change	531, 849-850, 976, 980
Oil Transfer	533, 849
Pro Air System	1006
PWC, Jet Pump	891
Raw Water, Engine	971-975
Sanitation	997-999
Sewage	997-999
Sump	981
Utility	981
Vane	976
Washdown	981, 984
Water Puppy	980
Push Button Switch	331
Push-Pull Switch	332
Push Pole	358
Putty, Glazing	1046
PVC Hose	948
PWC	
Impeller	887-889
Intake Grate	890
Pumps	891
Wear Ring	890
Q	
Quick Link	76
Quick Release, Trolling Motor	231
Quick Splice, Wire	300
R	
Rack	
Fender	84
Fishing Rod	371
Hose	1233
Life Ring	1235
Radar, Reflector	121
Radio, Marine	
Antenna	160

Alphabetical Index	Page No.
Satellite	146, 151, 184
External Speakers	142
VHF	137-142
VHF, Handheld	143-146
Radio, Antenna, AM/FM	160
Radio, AM/FM, CD, I-Pod	147-152
Radio Cover, Gimbal	158
Radio Speaker	154-157
Radio Speaker Wire	158
Raft, Commercial	1245-1249
Raft, Life	1245-1249
Rags	1142
Rail	
Bases	393-394
Fitting	395
Grab	396
Rub	378-379
Tubing	396
Rain Suit	1241
Ram Products	192-194
Ration, Food	1238
Raw Water Strainer	955-959, 1232
Razor Blade Plastic	1043
Re-Arm, PFD	51
Reducing Bushing	950
Reducing Hose Adapter	965
Reducing Solvent	1123
Reflective Tape	125
Reflector, Radar	121
Remover	
Adhesive	1061
Mildew	1024
Rust	1021
Stain	1019
Streak	1020
Repair, Manual	858
Rescue Boat, Commercial	1250-1251
Rescue Light	125-126
Resin	
Epoxy	1044, 1046
Polyester	1047
Resin Roller	1049
Vinylester	1046
Respirators	130-131
Rest, Foot	916
Restorer	
Color	1011
Fiberglass	1011
Metal	1027
Teak	1029
Restraint, Fall	127, 1244
Reverse Lockout, Trailer	1205
Rigging	
Boot	429
Conduit	429
Flange	429-430
Flex Sleeving	429
Hose	429
Kit	430
Knife	367
Sleeve	429
Rigging Block	107
Rigging Flange	429-430
Rim, Trailer	1209-1210
Ring Buoy	56-57, 1237
Ring Buoy Bracket	1235
Ring Buoy Release Mechanism	1237
Ring Buoy Rope W/Bag	1238
Ring Pull	385
Rocker Switch	310, 333
Rod, All Thread, Commercial	1167
Rod, Holder	368-374
Roller	
Anchor	68
Bow	1212-1214
Button, Commercial	1328, 1330
Chock, Commercial	1330
Cover, Paint	1139-1140
Foam, Paint	1139
Guide	1192, 1213-1214
Keel	1212-1214
Resin	1049
Shaft, Trailer	1214
Wobble	1212-1213
Rope	
3 Strand Nylon	90
Anchor	89-92
Dock	87-89
Fender	86
Fid	92
Gun Cutting	92
Manila	92
Nylon	91
Polypropylene	90-91
Ski	5, 10
Tow	5, 35-36
Tube	35-36
Rotary, Helm	425-426
Roving, Woven	1052, 1057
Rowlock Horn	135
Rub Rail	378
Rub Rail End Cap	378
Rub Rail Insert	378-379
Rubber Conditioner	1030
Rubbing Compound	1015-1016
Rudder Angle Indicator	416, 1345
Rudder Collar, Post	1069
Rust, Remover	1065
S	
Sacrificial Anode	855-857
Safety	
Chain	1189, 1197
Emergency Tools	127-128
Epirb	119-120
First Aid Kit	114-115, 1238
Flags	39, 120, 359-360
Flashlight	129, 273-274, 1235
Gear Bag	54, 114
Hasp	386
Lanyard	1244
Life Ring	56
Light	125-126
Throw Cushion	50
Signal, Flare	117-119, 1236
Vest	49-53, 1239-1240
Whistle	111, 113, 117, 128
Safety Kits, USCG	108-109
Salt Terminator	1031
Sand Paper	1150
Sanding Disc	1143-1148
Sanitation Device	995, 1001
Sanitation Hose	547, 999
Satellite Antenna	162
Satellite Radio	146, 151, 184
Scaling Hammer	1142
Scotch Lock, Wire	300
Scraper	1142
Screw, Stainless Steel	1161, 1163-1164
Scrub Brush	1034-1036
Scupper	945-946
Sea Anchor	73
Sea Dye Marker	116, 1236
Sea Scooter, Sea Doo	1
Seacock	952-953, 1232
Seal Kit	
Cylinder, Steering	431, 440-441, 450
Helm	440, 448, 450-451
Sealant	853, 1058-1060
Sealed Beam Bulb	290
Searchlight	277-287, 1267-1274
Bulbs	1268, 1271
Sockets	286, 291,1 268, 1273
Seat Cushion	50
Seating	
All Seating	893-918
Chairs	893-889
Clamp On	908-909
Cooler	899
Extension Poles	904-905
Flip Flop	899
Fold Down	899-902
Leaning Post	899
Lounge	903
Pedestal	896-898, 904-906
Pilot	894-895
Pontoon	903
Seat Mount	904-916
Slide	906-908
Toggle Bolt	905
Selector Switch	322-323, 325-326
Self Tapping Screws	1161, 1163

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
Sender	
Fuel	502
Oil Pressure	410, 788
Temperature	410
Sensor	
Speed	177, 409
Temperature	176-177, 184-185, 188-189, 410
Separator, Fuel/Water	519-524
Sewage Pump	999
Sewage Treatment	995
Shackles	75-76
Shaftbrake, Propeller	466
Shock Cord	92
Shore Power	
Cord	349-351
Plugs	346-351
Y Adapter	350
Shower, Transom	984
Shower Sump	990
Shrink Wrap	1066-1067
Shrink Wrap Accessories	1067
Shut Down System	412-413
Signal	
Aerial	117-119
Epirb	119-120
Flags	120, 360
Flare	116-119, 1236
Day	116, 1236
Horn	109-110, 1336
Kits	118-119, 1201
Lantern	120
Mirror	127, 1238
Smoke	117
Strobe	126
Silicone	1059-1061
Sink	993
Skeg Guard	490, 854
Skeg Replacement	491, 854
Ski	
Belt	55
Mirror	38-39
Kneeboard	11-12
Pylon	40
Rope	5
Tow Harness	36-37
Tow Rope	35-36
Vest	41-47
Wakeboard	6-9
Wakeboard Rope	10-11
Water	2-4
Skier Down Flag	39
Slam Latch	381-382
Sleeve Bearing	1071-1072
Slewing Davit, Commercial	1251
Snap Cap	1167
Snap Fastener	1166-1167
Snap Hook	1229-1231

Alphabetical Index	Page No.
Snap Lubricant	928
Snapper Pin	1198
Snap-Tite, Plug	943
Snubber, Mooring	94
Soap, Boat	1016-1017
Sockets	
Bow Light	243
Oar Lock	135-136
Power	307-308
Searchlight	1268, 1273
Stern Light	253-254
Trolling Motor	234-234
Solenoid	
Brake Lockout	1205
J/E/OMC	601, 615
Mercury	680, 685
Solvents	1092, 1099, 1101, 1123-1124, 1132
Sorbent, Pad	1032
Spare Tire Carrier	1211
Spare Tire Lock	1211
Spark Plugs	841-842
Speaker Horn	142
Speedometer Tubing	409
Spindle, Trailer Axle	1208
Spiral Wrap	303
Split Conduit Tubing	303
Spotlight	1267-1274
Spray Adhesive	1059
Spray Nine	1020
Spray Paint	854
Spray Sock	1141
Spreader Light	268-269
Speakers, Loud	409
Speaker Audio	154-157
Spring Clamps	374
Spring, Trailer	1208
Sta-Bil	533
Stabilizer	
Commercial	1343
Diesel/Gas	533-537
Hydro-Tail	489, 491-492
Trolling Motor	229
Stain Remover	1019-1020, 1024, 1065
Stand, Boat	1159-1160
Stand, Outboard	474-475
Starter	
Cable	294
Chrysler/Force	732
Honda	740
Johnson, Evinrude	617-619
Mercruiser	792-793
Mercury	682-685
OMC I/O	755-756
OMC, Outboard	617-619
Nissan, Tohatsu	736
Rope, Recoil OMC	635
Suzuki	723-724

Alphabetical Index	Page No.
Volvo	766-767
Yamaha	711-713
Yanmar	822
Starting Fluid	536
Steering Accessories	
BubbleBuster	446
Conduit/Split	429-430, 467
Connection Kits	427
Consoles	428
Helm Mount	440
Fittings	447
Hydraulic Fluid	446
Link Arm	427-428
Locks	1216
Parts	427, 440, 450
Protector Boot	428
Power Assist	444
Power Purge jr.	446
Quick Connect QC-II	424
Rigging Sleeve	429
Seal Kits	440, 443, 448
Stop	479
Tie Bars	443-444
Tiller Cable	430
Tiller Rope Pulley	430
Trim & Tilt Control	472
Tube Brush	428
Steering Components	
Bezel, Helm	426
Cable	424-425, 430
Cable Adapter	424
Cylinder, Frontmount	431, 435-436, 441
Cylinder, Sidemount	441, 449
Cylinder, Sterndrive	444
Helm, Back Mount	439
Helm, Frontmount	343, 439
Helm Capilano	448
Helm, Cable	430
Helm, Heavy Duty	450
Hose Kits	445-446
Tie Bar	437, 443
Wheel Knob	452
Wheels	452-454
Steering System	
Bay Star	430
Hynautic Hy-Trac	449
Inboard Hydraulic	438
Rack and Pinion	424
Rotary	422-423
Sea Star Hydraulic	432-433
Stick	426
Uflex Hydraulic	430, 434
Step	
Cockpit	100
Deck	100
Dock	98
Folding	397

Alphabetical Index	Page No.
Stereo	147-152
MP3 Adapter	151
Speakers	154-157
Stereo Amplifier	152-153
Stern Eye	400
Stern Light	247-253, 1258-1261
Stopper	
Anchor Chain	68
Door-Window	392
Storage	
Box	97, 99
Clip, Dive Ladder	374
Clips, Light Pole	375
Dry Bag	114
Life Vest	45, 54-55
Tank	991
T-Bag	55
Strainer	955-959, 1232
Bilge Commercial	1232
Strap	
Bimini Tops	940
Eye	941
Trailer Hold Down	1199-1200
Winch	1188
Streak Remover	1020
Stripper, Wire	305
Strobe Light	126
Stuffing Boxes, Commercial	1069, 1278
Stuffing, Driveshaft	1069
Sully Stick	94
Support Hatch	391-392
Support Plate, Transom	474
Support Windshield	392
Survival Gear	127-128
Suzuki	
Anodes, Zinc	855-857, 1076-1081
Carburetor Kits	717-718
Diagnostics	725
Filter, Fuel	718
Fuel Connector	509-511, 719-720
Impeller	720-721
Key Switch	720
Oil Filter	719, 853
Seal Kits	724-725
Starter Motor	724
Trim Motor	723
Water Pump Kits	721-722
Swager, Hand	93
Swim Belt	55
Swim Platform	354
Switch	
Battery	322-326
Bilge	415, 969-970
Contura	310, 333
Cover	330
Engine, Switchgauges	412-414
Float	967-968
Hatch	390
Horn	322
Ignition	330-331
Kill	473
Label Kit	311
Pneumatic	111, 1336
Push	331-332
Push-Pull	332
Rocker	333
Temperature	410, 412
Toggle	333-334
Trim & Tilt Control	472
Trim Tab	486-487, 489
Switch Gauges	412-414
Swivel	
Eye	76
Pedestal	906-907
Seat	908-909
Seat Mount	916
T	
T-Bag	55
Tab	
Trim, Bennett	488-489
Trim, Lenco	482-487
Trolling	481
Table	
Tables Packages	917-918
Base	918
Fish Cleaning	99
Tachometer	401-409, 415
Harness	410
Tack Cloth	1142
Tackle Box	375
Tail Light	1168-1174
Tail Light Converter	1183-1184
Tailpipe	952
Talon, Anchor	65
Talon, Bracket	65
Tank	
Accumulator	991
Cleaner	1205
Fuel	497-498
Hold Down	499
Pressure Storage	991
Storage	991
Waste Holding	999
Tape	
Electrical	304
Foam	377
Hatch	377
Liquid, Electric	304
Masking	1155-1156, 1158
Non-Skid	1157
Packing	1156
Pipe Thread	514
Plastic	1156
Rigging	93
Reflective	125
Shrink Wrap	1066
Striping	1154-1155
Teflon	514
Teak	
Brightener	1028-1029
Brush	1034
Care Kit	1028
Cleaner	1205, 1028-1029
Oil	1029
Restorer	1029
Tee, Pipe	950
Telescopic Ladder	354-355
Temperature Switch	410, 412
Temperature Sender	410-411, 754
Terminal	
Battery	296
Battery Post Cover	296
Block	329-330
Bullet	299-301
Ring	297-298
Spade	299-301
Thimble	77
Thinner	
Lacquer	1057
Paint	
1061, 1092, 1098-1099, 1113-1114, 1123-1124	
Resin	1048
Thread Locker	1165
Three Way Valve	514, 953
Throttle	
Cable	467-469
Connection Kits	458, 470-471
Control	457-465
Foot	454
Thru-Hull	
Connector	954-955, 1233
Fittings	954, 1233
Scupper	945-946
Thruster, Bow	1343
Tie-Bar, Adapter	443
Tie Down	
Boat Cover	919-926
Fuel Tank	499
Gunwale	1200
Transom	1199-1200
Tie Wrap	303
Tire, Lock	1211
Tire, Trailer	1210
Toggle Bolt	905
Toggle Boot	335
Toggle Switch	334-335
Toilet	993-995
Deodorant	1000
Tissue, Paper	993
Tools	
Circuit Tester	1184

©2014 Donovan Marine, Inc.

Alphabetical Index	Page No.
Crimping	301, 305
Fastener Installation	928
Flanging	945
Torch, Butane	305
Torque Tab	492
Tow Harness	35-38
Tow Rope	35-36
Towable	13-27
Trailer	
Adapter	1183-1184
Anchor Point Kit	1199
Axle Tie Plate Kit	1208
Ball Mount	1196-1197
Balls	1196
Bearing Buddy	1202
Bearing Kits	1201
Bolster Bracket	1215
Bow/Bell, Stop	1212-1214
Brake Actuator	1205
Brake Cleaner	1205
Brake Hub	1205
Brake Kit	1204
Bunk Bracket	1215
Bunk Carpet	1192
Bunk Slicks	1192
Chain	1189, 1197
Clearance Light	1174-1178
Coupler	1198-1199
Coupler Lock	1198
Disc Brake Kit	1204
Dust Cap	1202
Electric Jack	1194
Electrical Winch	1199-1200
Fender	1209
Grease	1203
Grease Gun	1203
Guide On Post	1191-1192
Gunwale Tie Down	1199-1200
Hitch Cable	1197
Hitch Lock	1198-1199
Hitch Pin	1198
Hub Kits	1201
Jacks	1193-1195
Jack Wheel	1194-1195
License Plate	1183
Light Back Up	1179
Light Bar	1178-1179
Light Clearance	1174-1178
Light Display	1180
Light Kits	1168-1174
Light, Side	1174-1178
Light, Tail	1168-1174
Lock N Stow	1216
Lug Nuts/Bolts	1208
Motor Support	1216-1218
Pal Nuts	1214
Panel Bracket	1215

Alphabetical Index	Page No.
Ratchet Tie Down	1200
Receiver Pin	1198
Rims Only	1209, 1210
Roller	1212-1214
Roller Shaft	1214
Seals	1201
Shackle Bolts	1215
Side Light	1174-1178
Snap Hook	1189, 1230
Solenoid, Brake	1205
Spindles	1208
Split Bracket	1215
Spring	1208
Superwinch	1190-1191
Tail Light	1168-1174
Towing Kit	1196
Transom Saver	1217-1218
Tie Down	1199-1200
Tie Plate Axle	1208
Tire & Wheels	1209-1210
Tire Carrier	1211
Tire Only	1210
Transom Tie Down	1200
U Bolts	1216
Washdown System	1192
Washer	1216
Wheel	1201
Wheel Bearing Grease	1203
Wheel Chock	1209
Wheel Lock	1211
Winch Cable	1189
Winch Handle	1186-1188
Winch Strap	1188
Winches	1186-1190
Wire Harness	1184-1185
Transducer	
Humminbird	175-177
Lowrance	189-190
Mounting Kit	192
Trolling Motor	176, 189-190
Transmission Filter Kit	853
Transom Handle	396-397
Transom Lights	247
Transom Plates	474
Transom Saver	1217-1218
Transom Wedge	474
Tray, Battery	336-334
Tray, Paint	1140
Tri-Color Light	241
Trim, Vinyl	379
Trim & Tilt	
Control	472
Fluid	843
Honda	740
Johnson, Evinrude	614-615
Mercruiser	788
Mercury	679-681

Alphabetical Index	Page No.
OMC I/O	795
Suzuki	723
Volvo	765-766
Yamaha	709-710
Trim & Tilt Bracket	481
Trim Push Lock	379
Trim Tab Accessories	
Bennett	488
Bennett Auto Tab	488-489
Lenco	486-487
Power Unit, Bennett	488
Rocker Switch	489
Trolling Motor, F/W Bow Mount	217-219
Trolling Motor, S/W Bow Mount	219-221
Trolling Motor, F/W Foot Control	221-224
Trolling Motor, S/W Foot Control	221
Trolling Motor, F/W Hand Control	224-225
Trolling Motor, S/W Hand Control	225-226
Trolling Motor, F/W Transom Mount	227
Trolling Motor, S/W Transom Mount	228
Trolling Motor Accessories	
Co-Pilot	221
Foot Switch	217-218
Extension Handle	228, 1037
Chargers	337-340
I-Pilot	220-221
I-Pilot Charging Cable	221
I-Pilot Remote	217-218
Lock	230
Micro Switch	233
Motorguide Remote	230
Mount	229, 231
Plugs, Electric	234-235, 351
Plug Onboard	235
Propeller	232-233
Pull Cord	229
Receptacle	235
Reference Chart	210-216
Remote	221
Rigging Allowance	236
Sonar Cable	229
Stabilizer	229
Trolling Tab, System	481
T-Top	937
T-Top Light	271
Tub, Mixing	1142
Tube	
Overflow	1007
Towable	13-27
Tubing	
Conduit	303, 429, 467
Copper	447
Fiberglass	495
Heat Shrink	304
Speedometer	409
Split	303
Tubing for Rail	396

Alphabetical Index	Page No.
Tug Boat Light, Commercial	258, 1262
Turnbuckles	107
Turn-Tight Plug	943
TV Antenna	164
TV Cord Set	352
U	
U-Bolt	1216
Upholstery Cleaner	1023
Utility Knife	128
Utility Light	260-261, 271-272
V	
Valve	
Air	112, 1336
Anti-Siphon	514
Ball	952-953, 1196
Check	953, 1333
Fuel	514, 953
Inflatable Toys	38
Scupper	946
Y-Valve	999
Varnish	1097-1098, 1112, 1122, 1131
Vent	
Blower Hose	529
Clam Shell	531
Cowl	530
Fuel	515
Loop	999
Louvered	529-530
Shrink Wrap	1068
Ventilation, Commercial	1331-1332, 1334-1335
Verna Tube	496
Vest	
Inflatable	50, 1239
Life	41-49
Pet	58-59
Vest, Commercial	51-53, 1239-1240
VHF	
Cobra	141-142
Handheld	143-146
Icom	137-138
Standard Horizon	139-140
Uniden	140-141
VHF, Accessories	142, 146
VHF, Antenna	162-164
VHF, Mounts	165-166
Vinyl, Cleaner	1030-1031
Vinyl Repair Kit	38
Voltage Regulator	598, 669, 729
Voltage Relay	321
W	
Wakeboard	
Bindings	9-10
Wakeboards	6-9
Rope	10-11
Warning System	416
Washdown	
Deck, Fitting	984
Fitting	986
Gun	1338
Hose	985
Kits	981-92, 1201
Pumps	980-983
Wash Mitt	1043
Washer, Stainless Steel	1161-1162
Waste Pump	998
Waste Water Treatment	996
Water Heater	990
Water Nozzle	985
Water Pressure Regulator	986
Water Pressure System	987-990
Water Pressure/Temperature Kit	410
Water Puppy Pump	980
Water Ski	2-4
Water Ski Rope	4-5
Water Toys	
Boat Inflatable	40
Floating Cooler	32, 363
Games	27
Inflator	33-35
Kayaks	40
Lounge	28-31
Repair Kit	38
Replacement Valve	38
Scooter, Sea Doo	1
Tow Ropes	35-37
Tubes	22-27
Trampolines	28
Water/Fuel Separator	519-524
Wax	1008-1112
Weatherstrip Adhesive	1061
Weather Station	1220-1221
Wedge, Transom	474
Wheel	
Bearing Grease	1203
Captain	453
Chock	1209
Destroyer	452
Dock	97
Steering	452-454
Tires	1210
Trailer	1209
Trailer Jack	1194-1195
Wheel Hub Kits	1201
Whistles	113
Winch	
Anchor	64, 67
Cable	1189
Electrical Winch	1199-1200, 1287-1289
Handle	1186-1188, 1290-1291
Manual	67, 1290-1291
Strap	1188
Trailer	1209
Winch, Commercial	1287-1291
Wind Gauge	1220-1221
Wind Sock	128
Windlasses	62-63
Accessories	63
Window, Commercial	1298
Windshield Adjuster	392
Windshield Keeper-Fastener	392
Windshield Wiper	1228-1229
Winterization	
Anti-Freeze	1068-1069
Boat Stands	1159-1160
Corrosion Protection	1061-1063
Dehumidifier	1025
D-Icer	1067
Diesel Stabilizer	537
Fogging Oil	852
Gas Stabilizer	533-536
Mildew Control	1024-1026
Shrink Wrap	1067
Shrink Wrap Accessories	1066
Shrink Wrap Tape	1066
Wiper Blade	1228-1229
Wiper Motor	1228
Wire	293-294
Radio	157
Wire Brush	1035, 1337
Wire Conduit	303
Wire Cover	303
Wire Rope Clips	77
Wire Stripper	305
Withdrawal Assembly	499
Work Baskets, Commercial	1243
Work Vest, Commercial	1239-1240
Woven Roving	1052, 1057
Wrap, Tie	302-303
Wrap, Velcro	1167
Wrench	
Fill, Cap	517
Filter	853
Propeller	885
Spanner	517
X	
Xenon Searchlight	283, 1270
Y	
Y- Adapter	350
Yacht Ensign	359
Yacht Wheel	453
Yamaha Outboard, Parts Index	687
Anodes, Zinc	855-857, 1076-1081
Carburetor Kits	691-693
Filter, Fuel, VST	694
Fuel Pump Diaphragm	694-695
Yanmar	822
Y-Valve	999
Z	
Zinc Chromate, Primer	854
Zincs	855-857, 1076-1081, 1278
Zipper Lubricant	928

©2014 Donovan Marine, Inc.

DMI No.	Page No.
003016	1340
003020	1340
003021	1340
003023	1340
003038	1340
003107	1340
003169	1340
003208	1340
003210	1340
003222	1340
003234	1340
003258	1340
003359	1340
003361	1340
003373	1340
003385	1340
003501	1340
003512	1341
003515	1341
003520	1341
003525	1341
003530	1341
003545	1341
003554	1341
003565	1341
003602	1340
003614	1340
003626	1340
003638	1340
003652	1340
003676	1340
003688	1340
003690	1340
003739	1340
003741	1340
003753	1340
003789	1340
003791	1340
003804	1340
003816	1340
003828	1340
003830	1340
003842	1340
003854	1340
003866	1340
003880	1340
003892	1340
003905	1340
003917	1340
003929	1340
003931	1340
003943	1340
003955	1340
003967	1340
003979	1340
003981	1340
004010	1340
004034	1340
004046	1340
004058	1340
004060	1340
004084	1340
004301	1341
004325	1341
004337	1341
004349	1341
004351	1341
004363	1341
004375	1341

DMI No.	Page No.
004387	1341
004399	1341
004402	1341
004414	1341
004426	1341
004438	1341
004440	1341
004452	1341
004464	1341
004476	1341
004488	1341
004490	1341
004503	1341
004515	1341
004527	1341
004539	1341
004541	1341
004553	1341
004565	1341
004577	1341
004589	1341
004591	1341
004604	1341
004616	1341
004628	1341
004630	1341
004642	1341
004666	1341
004678	1341
004945	1341
004957	1341
004965	1341
005000	1341
005214	304
005226	304
005238	1158
005514	1341
005517	1341
005519	1341
017586	1342
017598	1342
017625	1342
017637	1342
017687	1342
019340	1342
019352	1342
019364	1342
019376	1342
019388	1342
022018	1342
022020	1342
022032	1342
022044	1342
022056	1342
022068	1342
022070	1342
022082	1342
022107	1342
022119	1342
022121	1342
022133	1342
022157	1342
032160	1070
032184	1070
032273	1070
040105	1076
040117	1076
040129	1076
040131	1076

DMI No.	Page No.
040143	1076
040155	1076
040167	1076
050106	1075
050118	1075
050120	1075
050132	1075
050144	1075
050156	1075
050168	1075
091025	1342
091037	1342
091049	1342
091051	1342
091063	1342
091075	1342
091087	1342
091102	1342
091114	1342
091126	1342
091239	1342
091241	1342
091253	1342
091265	1342
091277	1342
091289	1342
091291	1342
091304	1342
091316	1342
091328	1342
091330	1342
100336	404
100492	428
100924	428
101100	1227
101991	421
101993	421
140212	189
140214	189
140215	189
140252	180
140280	188
140282	188
140517	184
140518	184
140914	192
140917	190
140918	190
140922	191
140923	188
140926	187
140932	188
140956	182
140958	182
140959	181
140961	182
140963	181
140964	182
140969	182
140974	181
140975	183
140976	182
140977	183
140978	183
140979	182
140980	184
140982	181
140989	182
140990	188

DMI No.	Page No.
140996	186
141002	187
141003	188
141004	187
141007	187
141008	190
141262	190
141263	191
141306	192
141307	191
142000	188
142005	187
142010	188
142015	187
142020	187
142025	181
142030	181
142035	187
142040	184
142045	187
142050	188
142055	188
142060	187
142065	187
142210	190
142213	190
142220	185
142225	192
142230	185
142235	191
142240	185
142250	184
142255	191
142260	192
142265	189
142270	191
142275	191
142280	184
142290	185
142295	185
142305	189
142310	185
142315	184
142320	185
142325	191
142335	190
142345	185
142350	185
142355	185
142360	185
142365	185
142370	184
142375	185
142380	185
142385	190
142390	190
142395	189
142400	185
142405	185
142410	185
142415	185
142420	185
142425	185
142430	185
142435	191
142445	185
142450	189
142455	184
142465	209

DMI No.	Page No.
142480	184
142505	190
142510	191
142520	189
142525	190
142535	190
142555	183
142560	183
142565	183
142572	191
142573	188
142575	191
143020	209
143025	209
143045	209
143050	209
143090	209
143130	182
143135	182
143140	182
143150	181
143155	181
143160	181
143170	181
143175	181
143180	182
143185	142
143190	186
143195	186
143200	186
143205	186
143210	186
143215	186
143220	186
143225	186
143230	186
143235	189
143240	189
143245	189
143250	192
143255	184
143260	184
143265	184
143270	186
143275	189
1440012	184
1440021	184
1440049	183
1440056	181
1440092	183
1440156	190
1-50003	72
1-50013	72
1-50023	72
1-50033	72
1-50103	72
150107	209
1-50112	72
1-50122	72
1-50130	72
1-50222	72
1-50232	72
1-50242	72
1-50356	69
1-50358	69
1-50360	69
1-50362	69
1-50422	69
1-50423	69

DMI No.	Page No.
1-50424	69
1-50425	69
1-50575	71
1-50601	75
1-50603	75
1-50604	75
1-50606	75
1-50704	4
1-50994	69
1-50997	69
1-51004	337
1-51006	296
1-51008	306
1-51010	306
1-51011	306
1-51012	306
1-51022	336
1-51023	336
1-51030	324
1-51034	325
1-51035	325
1-51048	303
1-51049	303
1-51050	303
1-51051	303
1-51052	303
151059	209
151065	209
1-51088	265
1-51089	265
1-51090	265
1-51094	265
1-51095	265
1-51097	265
1-51098	272
1-51114	264
1-51164	242
1-51190	270
1-51191	270
1-51193	268
1-51202	242
1-51204	242
1-51215	245
1-51216	243
1-51217	243
1-51220	243
1-51221	243
1-51236	246
1-51240	247
1-51243	251
1-51251	251
1-51253	251
1-51255	251
1-51258	252
1-51260	250
1-51261	252
1-51264	250
1-51273	254
1-51274	254
1-51278	240
1-51279	240
1-51300	335
1-51301	472
1-51302	472
1-51303	473
1-51304	332
1-51305	332
1-51306	334
1-51307	334

DMI No.	Page No.
1-51308	334
1-51309	334
1-51310	334
1-51320	334
1-51321	334
1-51330	334
1-51331	334
1-51340	333
1-51341	333
1-51342	333
1-51350	333
1-51351	333
1-51352	333
1-51353	333
1-51354	333
1-51355	333
1-51356	333
1-51357	333
1-51360	332
1-51361	332
1-51380	472
1-51381	335
1-51384	317
1-51400	311
1-51401	311
1-51404	319
1-51405	319
1-51406	326
1-51407	326
1-51412	307
1-51416	307
1-51417	307
1-51420	308
1-51421	308
1-51441	234
1-51442	234
1-51443	234
1-51444	234
1-51445	234
1-51446	234
1-51447	234
1-51448	234
1-51555	235
1-51556	235
1-51557	235
1-51558	235
1-51600	262
1-51601	262
1-51602	262
1-51603	262
1-51605	262
1-51606	262
1-51607	262
1-51608	262
1-51610	262
1-51611	262
1-51612	262
1-51613	262
1-51654	262
1-51671	264
1-51672	264
1-51677	264
1-51678	264
1-51889	264
1-51920	264
1-51921	264
1-51922	264
1-51923	264
1-51924	264

DMI No.	Page No.
1-51925	264
1-51926	264
1-51927	264
1-51928	264
1-51929	264
1-51930	264
1-51931	264
1-51932	264
1-51934	264
1-51936	264
1-51939	264
1-51942	264
1-51943	264
1-52003	365
1-52004	365
1-52012	364
1-52014	364
1-52016	364
1-52023	365
1-52040	159
1-52047	159
1-52078	372
1-52079	372
1-52100	85
1-52101	85
1-52102	85
1-52136	80
1-52137	80
1-52139	80
1-52140	80
1-52145	79
1-52146	79
1-52149	79
1-52150	79
1-52151	79
1-52152	79
1-52172	79
1-52173	79
1-52174	79
1-52177	79
1-52178	79
1-52179	79
1-52182	79
1-52183	79
1-52184	79
1-52185	79
1-52186	79
1-52187	79
1-52197	372
1-52206	370
1-52208	370
1-52212	371
1-52213	371
1-52214	371
1-52215	371
1-52224	370
1-52234	371
1-52235	371
1-52245	229
1-52253	165
1-52388	88
1-52389	88
1-52390	88
1-52391	88
1-52392	88
1-52393	88
1-52396	88
1-52404	357
1-52406	357

DMI No. to Page No. Index

DMI No.	Page No.
1-52410	354
1-52412	354
1-52414	354
1-52416	355
1-52418	355
1-52422	356
1-52426	36
1-52427	4
1-52428	35
1-52430	37
1-52432	37
1-52433	37
1-52435	35
1-52436	36
1-52440	39
1-52462	4
1-52465	12
1-52468	35
1-52481	86
1-52482	86
1-52483	86
1-52484	86
1-52485	86
1-52510	89
1-52511	89
1-52516	89
1-52517	89
1-52518	89
1-52523	89
1-52524	89
1-52525	89
1-52530	89
1-52540	10
1-52543	10
1-52558	79
1-52559	79
1-52560	79
1-52561	79
1-52562	79
1-52563	79
1-52564	79
1-52565	79
1-52612	1216
1-52648	192
1-52702	1039
1-52708	90
1-52709	90
1-52710	90
1-52714	90
1-52715	90
1-52726	90
1-52727	90
1-52729	90
1-52741	91
1-52743	91
1-52744	91
1-52746	91
1-52748	91
1-52752	91
1-52754	91
1-52768	91
1-52776	91
1-52778	91
1-52782	91
1-52784	91
1-52785	91
1-52792	88
1-52793	88
1-52805	88
1-52809	88
1-52813	88
1-52815	88
1-52819	88
1-52821	88
1-52825	88
1-52827	88
1-52849	88
1-52853	87
1-52854	87
1-52855	87
1-52857	87
1-52861	87
1-52862	87
1-52863	87
1-52865	87
1-52869	87
1-52870	87
1-52871	87
1-52873	87
1-52877	87
1-52878	87
1-52879	87
1-52881	87
1-52885	87
1-52886	87
1-52887	87
1-52889	87
1-52893	87
1-52894	87
1-52895	87
1-52897	87
1-52901	87
1-52902	87
1-52905	87
1-52919	88
1-52920	88
1-52922	88
1-52924	88
1-52925	88
1-52926	88
1-52978	90
1-52995	90
1-52996	90
1-52998	90
1-53299	493
1-53300	492
1-53302	492
1-53304	493
1-53312	86
1-53320	86
1-53323	86
1-53380	86
1-53381	86
1-53382	86
1-53400	90
1-53438	88
1-53477	90
1-53478	91
1-53479	91
1-53480	91
1-53481	91
1-53482	91
1-53483	91
1-53484	91
1-53485	91
1-54002	101
1-54032	101
1-54034	101
1-54036	102
1-54038	102
1-54040	102
1-54044	101
1-54046	101
1-54048	101
1-54050	101
1-54051	101
1-54085	363
1-54096	374
1-54102	106
1-54104	106
1-54110	941
1-54430	928
1-54506	76
1-54508	76
1-54534	76
1-54729	376
1-54730	376
1-54732	376
1-54733	376
1-54802	943
1-54804	943
1-54805	943
1-54810	943
1-54822	943
1-54824	943
1-54830	945
1-54832	945
1-54835	944
1-54836	944
1-54837	944
1-54838	944
1-54840	943
1-54842	943
1-54843	943
1-54844	943
1-54845	943
1-54847	943
1-54850	943
1-54854	943
1-54856	943
1-54858	943
1-54860	943
1-54900	909
1-54929	910
1-54930	910
1-54931	910
1-54932	911
1-54934	910
1-54936	910
1-54937	910
1-54938	906
1-54940	906
1-54942	906
1-54943	909
1-54946	908
1-55002	76
1-55004	76
1-55006	76
1-55030	76
1-55032	76
1-55034	76
1-55036	76
1-55038	76
1-55093	938
1-55112	938
1-55116	938
1-55118	938
1-55124	941
1-55126	941
1-55130	940
1-55132	940
1-55133	927
1-55142	940
1-55190	941
1-55208	452
1-56003	132
1-56006	134
1-56010	133
1-56014	133
1-56018	133
1-56022	133
1-56026	133
1-56030	134
1-56034	134
1-56075	133
1-56078	133
1-56080	133
1-56104	135
1-56106	135
1-56107	136
1-56108	135
1-56110	135
1-56201	927
1-56202	927
1-56204	942
1-56205	942
1-57004	960
1-57075	1007
1-57221	955
1-57222	955
1-57224	955
1-57240	955
1-57243	955
1-57304	965
1-57412	962
1-57418	967
1-57420	962
1-57422	965
1-57426	962
1-57430	963
1-57435	963
1-57438	267
1-57444	969
1-57473	1003
1-58112	120
1-58190	54
1-58280	110
1-58282	110
1-58300	113
1-58306	128
1-58710	902
1-58711	902
1-58712	902
1-58730	902
1-58731	902
1-58732	902
1-59002	1196
1-59008	1196
1-59029	1202
1-59030	1202
1-59031	1202
1-59032	1201
1-59033	1201
1-59034	1201
1-59038	1202
1-59040	1202
1-59061	1202
1-59062	1202
1-59073	1196
1-59080	1196
1-59091	1196
1-59100	1211
1-59101	1183
1-59102	1183
1-59103	1211
1-59104	1211
1-59105	1211
1-59106	1189
1-59108	1189
1-59110	1192
1-59111	1192
1-59118	1217
1-59120	1217
1-59185	1194
1-59202	1195
1-59204	1194
1-59206	1195
1-59210	1195
1-59229	1187
1-59230	1187
1-59235	1187
1-59298	1169
1-59299	1169
1-59300	1171
1-59301	1171
1-59302	1171
1-59303	1169
1-59304	1169
1-59305	1169
1-59306	1169
1-59307	1174
1-59308	1174
1-59309	1174
1-59310	1175
1-59311	1175
1-59312	1175
1-59313	1175
1-59318	1175
1-59319	1175
1-59320	1178
1-59321	1178
1-59322	1178
1-59323	1178
1-59332	1168
1-59333	1168
1-59334	1168
1-59336	1168
1-59342	1168
1-59344	1168
1-59350	1191
1-59351	1178
1-59352	1178
1-59361	1175
1-59362	1173
1-59372	1185
1-59376	1184
1-59377	1184
1-59378	1185
1-59379	1185
1-59380	1185
1-59383	1185
1-59384	1185
1-59385	1185
1-59386	1185
1-59390	1184
1-59391	1184
1-59394	1183
1-59395	1183
1-59396	1183
1-59397	1183
1-59400	1198
1-59401	1198
1-59402	1198
1-59404	1198
1-59416	1198
1-59418	1211
1-59467	1212
1-59500	1213
1-59502	1213
1-59504	1213
1-59506	1213
1-59507	1213
1-59508	1213
1-59509	1213
1-59510	1213
1-59512	1213
1-59514	1213
1-59516	1213
1-59518	1213
1-59520	1213
1-59522	1213
1-59523	1213
1-59524	1213
1-59525	1213
1-59528	1213
1-59562	1215
1-59570	1215
1-59571	1215
1-59572	1215
1-59574	1215
1-59604	1212
1-59608	1212
1-59610	1212
1-59612	1212
1-59614	1212
1-59616	1212
1-59618	1212
1-59620	1212
1-59622	1212
1-59624	1212
1-59628	1212
1-59802	1200
1-59815	1188
1-59816	1188
1-59818	1188
1-59819	1188
1-59827	1193
1-59952	1193
1-59955	1193
1-59957	1193
1-59960	1187
1-59961	1187
1-59962	1187
1-59963	1187
1-59964	1187
1-59965	1187
1-59966	1187
1-59967	1187
1-59968	1187
1-59969	1187
1-59970	1187
1-59971	1187
180001	809
180002	809
180004	809
180005	809
180006	716
180007	646
180008	623
180009	646
180010	686
180011	725
180012	646
180013	809
180014	686
180050	858
180051	858
180052	858
180053	858
180055	858
180060	858
180061	858
180062	858
180065	858
180066	858
180067	858
180068	858
180070	858
180071	858
180072	858
180073	858
180074	858
180075	858
180076	858
180077	858
180079	858
180080	858
180082	858
180083	858
180084	858
180085	858
180086	858
180087	858
180088	858
180089	858
180091	858
180092	858
180093	858
180094	858
180095	858
180097	858
180103	651
180110	557
180113	769
180117	556
180118	557
180126	556
180128	558
180130	560
180134	557
180137	651
180138	556
180139	651
180142	560
180148	555
180155	557
180158	771
180164	690
180182	651
180183	749
180184	826
180200	761
180244	704
180265	714
180266	715
180267	715
180296	715
180297	715
180309	824
180319	651
180333	651
180336	651
180347	772
180365	769
180369	651
180385	651
180389	769
180398	772
180404	771
180411	772
180412	559
180418	749
180430	748
180434	749
180459	723
180460	723
180461	723
180466	772
180472	825
180488	771
180491	554
180492	554
180522	647
180540	563
180549	747
180550	747
180577	802
180583	647
180587	715
180604	824
180613	775
180642	652
180645	652
180664	772
180672	775
180673	748
180679	559
180680	774
180685	772
180690	558
180691	555
180692	555
180693	555
180694	555
180695	555
180696	555
180757	689
180767	689
180779	690
180781	690
180785	690
180786	690
180808	690
180813	690
180826	713
180829	690
180844	690
180850	554
180854	726
180871	574
180872	769
180881	775

©2014 Donovan Marine, Inc.

DMI No.	Page No.
180891	772
180892	549
180897	775
180933	556
180934	650
180935	556
180941	557
180956	749
180957	558
180959	555
180963	560
180965	558
180969	559
180970	652
180975	556
180976	772
180977	559
180979	556
180983	556
180987	560
180988	650
180989	556
180993	573
180994	769
181047	234
181048	234
181049	234
181050	234
181052	234
181053	234
181054	234
181055	234
181074	746
181117	631
181143	797
181154	549
181157	741
181158	741
181160	797
181161	797
181166	797
181170	759
181171	759
181172	759
181182	797
181186	649
181194	648
181195	648
181202	559
181204	769
181205	558
181212	555
181213	772
181219	611
181222	612
181231	771
181233	826
181238	825
181239	772
181240	801
181266	773
181267	773
181268	773
181271	773
181274	773
181275	773
181277	769
181278	773
181287	622
181288	622
181345	648
181353	549
181356	759
181357	759
181358	759
181360	549
181361	549
181365	759
181366	760
181370	759
181371	759
181374	549
181376	549
181378	549
181600	762
181602	762
181711	798
181725	629
181756	687
181898	825
181901	747
181902	493
181903	493
181907	825
181908	774
181908K	774
181909	747
181921	493
181922	493
181927	824
181929	824
181930	825
181931	493
181932	825
181933	824
181934	823
181935	493
181937	774
181938	824
181939	825
181940	493
181946	493
181949	824
181950	492
181951	492
181952	491
181953	774
181954	492
181956	492
181957	773
1819581	774
181960	491
181970	492
181971	492
181972	492
181973	492
181974	774
181975	774
181976	774
181977	802
181982	824
181985	774
181986	747
181989	802
181992	493
181994	802
181997	491
181998	824
181999	491
182001	563
182002	624
182028	564
182029	565
182053	643
182054	643
182059	623
182060	564
182061	631
182062	631
182094	775
182097	798
182100	759
1821001	797
1821005	796
1821005K	797
1821006	796
182100K	797
182101	797
182103	803
182104	798
182105	804
182107	804
182108	804
182109	804
182110	804
182111	804
182114	804
182115	804
182116	804
182125	799
182126	804
182128	802
182141	804
182142	803
182144	775
182145	799
182145E	799
182146	799
182150	801
182154	801
182156	761
182157	800
182158	800
182161	801
182162	801
182166	804
182169	801
182170	801
182171	798
182172	798
182173	798
182174	798
182175	799
182176	760
182177	760
182178	760
182180	802
182183	760
182185	760
182187	630
182190	799
182190E	799
182193	802
182195	799
182201	806
182205	804
182207	629
182208	629
182209	628
182216	632
182217	762
182218	621
182219	621
182220	630
182221	623
182244	810
182245	758
182246	758
182248	800
182250	629
182251	624
182256	804
182259	804
182261	802
182286	801
182287	628
182288	626
182289	621
182290	622
182291	803
182292	806
182293	806
182299	806
182308	623
182309	622
182310	621
182315	623
182322	801
182323	799
182326	632
182339	823
182341	804
182345	803
182353	801
182354	802
182370	733
182371	714
182373	803
182374	714
182375	806
182380	715
182381	806
182382	806
182385	714
182400	804
182412	798
182413	798
182414	798
182422	803
182423	803
182424	803
182425	803
182430	769
182435	804
182436	804
182470	737
182471	737
182472	737
182473	737
182480	737
182481	737
182482	738
182501	650
182502	650
182503	650
182506	650
182508	650
182536	562
182541	753
182544	560
182545	559
182546	559
182550	558
182554	786
182555	786
182557	560
182563	738
182564	738
182582	561
182592	689
182598	758
182599	803
182600	800
182601	795
182603	800
182604	800
182613	757
182614	800
182615	800
182619	800
182623	627
182624	733
182626	733
182629	733
182631	733
182632	733
182635	733
182636	733
182638	733
182639	734
182640	734
182644	795
182646	795
182648	795
182652	795
182655	795
182656	623
182658	625
182659	626
182667	758
182671	758
182672	757
182673	757
182674	761
182694	627
1826971	734
182699	823
182724	796
182727	806
182732	806
182744	825
182745	746
182747	807
182748	807
182750	807
182751	807
182753	807
182756	807
182758	825
182764	746
182765	746
182767	761
182768	761
182771	823
182785	714
182788	714
182792	714
182794	714
182798	714
182799	714
182831	786
182844	786
182852	555
182857	561
182864	558
182865	558
182866	558
182867	559
182873	557
182876	560
182900	557
182905	557
182906	561
182907	554
182913	558
182917	754
182945	807
182949	825
182950	552
182954	553
182956	553
182958	553
182960	553
182961	552
182962	553
182963	553
182964	554
182996	758
183001	605
183002	606
183003	605
183005	607
183006	606
183007	676
183016	784
183017	783
183023	721
183030	731
183031	239
183035	721
183039	783
183040	704
183042	704
183043	607
183047	765
183049	721
183050	605
183051	606
183052	677
183053	608
183054	783
183055	606
183056	239
183057	783
183058	752
183059	607
183060	765
183062	784
183063	704
183065	704
183066	704
183067	704
183068	705
183069	705
183070	705
183071	705
183072	705
183073	705
183074	705
183081	765
183082	606
183083	606
183084	730
183085	730
183086	752
183087	783
183088	705
183089	785
183090	605
183091	605
183092	721
183094	721
183095	721
183096	721
183097	720
183098	677
183099	605
183104	606
183116	678
183118	678
183147	784
183148	706
183150	784
183151	679
183160	787
183173	705
183187	740
183202	753
183206	754
183211	609
183212	753
183214	239
183215	676
183216	784
183217	785
183237	785
183242	722
183243	722
183244	722
183245	738
183246	239
183247	239
183248	739
183249	239
183250	739
183253	722
183254	722
183255	721
183256	721
183257	722
183258	722
183259	722
183260	721
183264	722
183265	785
183267	722
183276	752
183277	823
183282	740
183283	740
183285	740
183286	753
183293	679
183306	784
183310	706
183311	706
183312	706
183313	706
183315	609
183317	785
183318	785
183319	678
183320	784
183321	799
183324	678
183327	607
183329	629
183333	706
183345	706
183346	565
183348	753
183366	606
183368	606
183370	706
183371	706
183373	707
183378	608
183382	608
183383	608
183386	753
183387	753
183389	608
183390	753
183392	609
183393	609
183395	707
183396	707
183397	707
183406	678
183414	679
183419	679
183425	707
183426	707
183427	707
183428	707
183429	707
183431	708
183432	708
183433	708
183434	708
183440	708
183446	678
183447	678
183448	678
183451	708
183454	608
183460	708
183465	708
183500	610
183506	677
183517	785
183522	706
183523	707
183540	708
183541	708
183543	610
183544	610
183545	610
183546	611
183549	679
183553	731
183554	754

DMI No.	Page No.
183555	785
183556	731
183557	610
183558	754
183559	731
183561	610
183569	679
183570	678
183574	787
183575	787
183577	787
183583	787
183599	787
183600	787
183601	787
183602	787
183606	679
183608	709
183609	709
183644	786
183646	786
183647	786
183648	786
183649	785
183650	785
183651	786
183653	754
183667	786
183669	611
183670	754
183672	679
183673	611
183674	611
183675	651
183676	823
183677	823
183701	886
183702	886
183713	886
183714	886
183715	886
183716	886
183717	886
183719	630
183720	686
183721	886
183725	760
183726	886
183732	886
183733	886
183741	886
183742	445
183781	886
183782	713
183788	886
183800	552
183801	554
183802	553
183803	553
183804	688
183805	688
183819	717
183828	689
183830	689
183831	689
183832	689
183836	553
183839	554
183841	552
183851	726
183852	726
183853	726
183854	726
183855	726
183856	726
183857	726
183858	726
183861	650
183863	650
183866	554
183871	650
183872	649
183891	689
183892	689
183894	689
183899	557
183901	548
183904	548
183905	548
183910	547
183913	547
183915	547
183931	547
183966	648
183975	548
183979	648
184059	544
184063	543
184065	544
184066	545
184068	545
184077	687
184078	687
184080	687
184088	548
184100	543
184104	542
184105	542
184107	508
184113	508
184114	543
184120	543
184161	492
184164	492
184173	492
184194	886
184209	876
184210	876
184212	876
184228	886
184230	886
184249	630
184255	630
184274	886
184302	551
184304	551
184306	551
184307	551
184319	649
184322	551
184323	551
184325	649
184326	649
184353	649
184354	649
184355	649
184359	649
184388	773
184392	773
184400	688
184402	552
184404	688
184405	688
184406	552
184411	688
184412	688
184419	688
184420	552
184421	552
184427	688
184428	551
184429	552
184444	885
184456	494
184457	494
184458	494
184505	648
184520	648
184540	509
184560	509
184632	633
184635	648
184636	648
184698	807
184911	635
184913	635
184914	635
184915	682
185002	601
185003	600
185006	601
185011	600
185110	700
185128	700
185150	729
185156	601
185163	599
185170	599
185172	599
185176	599
185179	600
185181	599
185186	729
185187	669
185192	599
185194	599
185196	599
185199	601
185205	601
185225	780
185226	602
185231	602
185241	729
185247	780
185250	751
185251	751
185260	751
185265	782
185268	782
185273	782
185277	753
185284	751
185299	782
185303	826
185352	751
185386	756
185395	782
185403	752
185431	782
185438	782
185465	782
185601	683
185603	766
185604	684
185605	683
185608	685
185610	684
185611	683
185612	619
185613	732
185617	617
185618	732
185619	619
185620	684
185621	683
185622	732
185624	618
185627	618
185628	619
185629	618
185632	619
185634	618
185635	618
185636	684
185640	619
185644	732
185646	618
185647	503
185649	684
185671	619
185673	732
185674	620
185677	732
185679	619
185697	619
185705	616
185707	669
185708	597
185729	680
185737	670
185741	668
185743	669
185744	729
185750	602
185753	591
185754	591
185755	590
185756	592
185757	591
185758	589
185759	591
185760	591
185761	593
185762	590
185765	589
185766	590
185767	589
185768	590
185770	592
185772	592
185774	590
185775	728
185778	662
185779	661
185783	592
185784	592
185785	590
185787	663
185790	728
185791	662
185794	589
185797	668
185798	668
185801	757
185803	756
185807	601
185808	615
185812	756
185813	601
185814	615
185815	793
185816	793
185817	793
185819	793
185821	701
185825	598
185827	597
185828	598
185830	598
185831	598
185832	598
185834	729
185835	730
185836	756
185854	665
185855	665
185856	665
185857	666
185860	665
185863	666
185864	666
185865	666
185870	728
185871	666
185873	728
185874	667
185875	667
185877	596
185881	728
185884	597
185885	593
185886	593
185887	593
185888	758
185890	758
185892	593
185896	66
185898	754
185899	788
185901	755
185902	755
185903	756
185910	755
185911	502
185913	792
185917	756
185919	756
185920	756
185941	504
185950	757
185951	757
185954	768
185959	768
185960	794
185965	795
185966	757
185967	795
185979	768
186011	741
186016	686
186024	1080
186033	725
186034	1080
186035	1080
186070	716
186079	1080
186089	1080
186090	716
186097	1080
186099	1080
186112	716
186114	1080
186240	1080
186241	1080
186244	1080
186258	740
186259	709
186261	757
186273	680
186275	756
186276	756
186279	732
186280	614
186281	615
186285	613
186286	731
186288	768
186293	794
186298	794
186410	711
186411	711
186413	712
186415	712
186418	736
186423	712
186424	712
186439	732
186455	670
186501	636
186503	635
186511	635
186512	635
186513	635
186522	636
186754	755
186755	755
186758	766
186759	615
186760	709
186763	680
186765	680
186767	505
186769	680
186770	766
186772	505
186773	679
186774	680
186775	731
186777	732
186778	680
186779	755
186780	615
186781	710
186782	710
186783	710
186785	723
186786	723
186787	710
186789	710
186793	740
186798	710
187002	691
187004	652
187005	652
187006	652
187010	568
187013	652
187021	652
187024	568
187026	568
187033	726
187037	727
187038	569
187042	568
187043	567
187044	573
187046	568
187047	738
187048	738
187050	738
187051	738
187052	738
187053	738
187057	727
187070	750
187075	780
187076	780
187086	750
187093	569
187094	569
187095	750
187097	780
187098	779
187100	734
187110	554
187120	734
187133	563
187137	562
187169	734
187170	563
187211	653
187212	652
187213	653
187214	653
187215	653
187216	652
187219	567
187220	568
187222	568
187223	567
187238	764
187242	750
187244	750
187246	750
187247	568
187248	568
187254	634
187268	751
187278	780
187283	780
187289	751
187290	735
187291	735
187296	573
187326	751
187330	751
187350	569
187351	569
187352	570
187353	570
187373N	779
187380	653
187381	653
187382	653
187443	598
187485	598
187510	562
187513	823
187615N	779
187633	788
187634	761
187637	694
187710	693
187711	718
187712	735
187713	693
187716	718
187718	780
187719	571
187720	737
187722	571
187735	718
187738	691
187739	692
187742	692
187743	692
187744	692
187747	692
187749	779
187750	653
187752	718
187753	717
187754	718
187755	717
187756	692
187758	589
187759	692
187765	735
187766	692
187767	692
187768	693
187769	693
187770	693
187772	693
187773	717
187780	693
187781	693
187782	693
187786	737
187787	695
187788	695
187800	570
187801	570
187804	653
187805	727
187807	654
187808	654
187809	654
187810	654
187811	654
187812	654
187813	654

©2014 Donovan Marine, Inc.

DMI No.	Page No.
187814	654
187815	654
187817	727
187818	654
187820	570
187821	570
187822	570
187823	576
187829	655
187830	572
187831	572
187833	694
187837	694
187839	694
187840	694
187841	695
187843	695
187844	780
187845	780
187846	520
187848	780
1878481	780
187852	780
187855	526
187860	780
187861	526
187862	751
187866	520
187875	810
187876	811
187879	810
187895	577
187896	576
187897	577
187901	852
187902	852
187903	718
187905	597
187906	852
187909	737
187910	852
187911	852
187913	472
187914	525
187915	852
187916	852
187936	852
187944	780
187945	780
187946	520
187953	718
187955	694
187964	853
187968	780
187979	694
1879799	694
1879809	694
187981	655
187989	571
1879905	694
1879907	693
1879950	694
1879951	694
1879952	694
1879953	694
188002EP1	506
188004EP1	572
188005EP1	572
188009EP	504
188009EP1	503
188010EP	504
188010EP1	655
188011EP	503
188012EP1	655
188013EP	504
188014EP1	572
188015EP	504
188015EP1	503
188016EP	503
188016EP1	655
188017EP	504
188017EP1	503
188024EP	504
188024EP1	655
188032EP	503
188032EP1	503
188040	656
1880404	511
1880405	511
1880409	719
1880413	695
1880414	695
1880415	695
1880418	719
1880419	719
188048	507
188050	507
188051	507
188056	574
188062	719
188063	574
188067	512
188069	511
188070	511
188071	719
188072	512
188074	512
188075	511
188076	511
188077	511
188078	719
188079	720
188082	511
188083	511
188084	656
188085	511
188087	720
188088	735
188089	735
188091	511
188092	574
188104	737
188205	796
188206	795
188212	796
188213	796
188217	796
188218	796
188219	796
188311	807
188312	807
188313	808
188339	724
188340	724
188353	565
188367	565
188373	725
188374	725
188382	795
188383	628
188384	631
188700	852
1888001	782
188803	783
188804	783
188810	783
188814	752
1888441	826
188900	730
188901	731
188903	730
188910	705
188911	704
188920	735
188921	736
188922	736
188923	736
188924	736
189079	704
189125	808
189400	844
189422	844
189423	844
1894402	844
189600	847
189602	847
189605	847
189622	848
189625	848
189651	847
1896805	848
1896902	844
189750	843
189790	809
189794	848
189801	809
189803	808
189806	808
189809	808
189817	808
189821	809
189842	808
189844	686
189847	808
189858	808
189861	808
189870	686
197907	826
1-B10063GR	923
1-B10063MR	923
1-B10139GR	923
1-B10139MR	923
1-B10181GR	923
1-B10181MR	922
1-B10182GR	923
1-B10182MR	923
1-B10183GR	923
1-B10183MR	923
1-B10184GR	923
1-B10184MR	923
1-B10184NA	923
1-B10185GR	923
1-B10185MR	923
1-B10195GR	924
1-B10195MR	924
1-B10195NA	924
1-B10197GR	923
1-B10197MR	923
1-B10197NA	923
1-B15401GR	923
1-B15401MR	923
1-B17574GR	924
1-BS341BGA	931
1-BS341BKA	931
1-BS341BLA	931
1-BS341GNA	931
1-BS341GYA	931
1-BS341MRA	931
1-BS341NA	931
1-BS341RDA	931
1-BS341WA	931
1-BS341YEL	931
1-BS342BGA	931
1-BS342BKA	931
1-BS342GNA	931
1-BS342GYA	931
1-BS342MRA	931
1-BS342NA	931
1-BS342RDA	931
1-BS342WA	931
1-BS343BGA	931
1-BS343BKA	931
1-BS343BLA	931
1-BS343GNA	931
1-BS343GYA	931
1-BS343MRA	931
1-BS343NA	931
1-BS343RDA	931
1-BS343WA	931
1-BS344BGA	931
1-BS344BKA	931
1-BS344BLA	931
1-BS344GNA	931
1-BS344GYA	931
1-BS344MRA	931
1-BS344NA	931
1-BS344RDA	931
1-BS344WA	931
1-BS345BGA	931
1-BS345BKA	931
1-BS345BLA	931
1-BS345GNA	931
1-BS345GYA	931
1-BS345MRA	931
1-BS345NA	931
1-BS345RDA	931
1-BS345WA	931
1-BS354BGA	931
1-BS354BKA	931
1-BS354BLA	931
1-BS354GNA	931
1-BS354GYA	931
1-BS354MRA	931
1-BS354NA	931
1-BS354RDA	931
1-BS354WA	931
1-BS355BGA	931
1-BS355BKA	931
1-BS355BLA	931
1-BS355GNA	931
1-BS355GYA	931
1-BS355MRA	931
1-BS355NA	931
1-BS355RDA	931
1-BS355WA	931
1-BS356BGA	931
1-BS356BKA	931
1-BS356BLA	931
1-BS356GNA	931
1-BS356GYA	931
1-BS356MRA	931
1-BS356NA	931
1-BS356RDA	931
1-BS356WA	931
1-BS357BGA	931
1-BS357BKA	931
1-BS357BLA	931
1-BS357GNA	931
1-BS357GYA	931
1-BS357MRA	931
1-BS357NA	931
1-BS357RDA	931
1-BS357WA	931
1-BX17BLK	922
1-BX17BUR	923
1-BX17GR	923
1-BX17MR	923
1-BX17NA	923
1-BX18BLK	923
1-BX18BUR	923
1-BX18CHAR	923
1-BX18GR	923
1-BX18MR	923
1-BX19BLK	923
1-BX19BLU	923
1-BX19BUR	923
1-BX19GR	923
1-BX19GRN	923
1-BX19MR	923
1-BX19RED	923
1-NBKIT	109
2000010	296
2000011	296
2000013	148
2000025	230
2000026	230
2000027	230
2000037	227
2000040	227
2000041	226
2000042	232
2000043	232
2000045	222
2000053	95
2000054	95
2000055	95
2000056	95
2000057	95
2000058	294
2000066	333
2000067	320
2000068	335
2000069	410
2000070	410
2000074	333
2000076	299
2000078	506
2000079	506
2000080	498
2000081	498
2000083	329
2000088	326
2000089	326
2000109	156
2000113	152
2000115	148
2000119	148
2000121	149
2000123	148
2000164	157
2000186	229
2000226	318
2000227	318
2000228	318
2000229	318
2000230	318
2000231	318
2000232	318
2000233	319
2000234	319
2000235	319
2000236	319
2000237	319
2000238	319
2000239	319
2000240	319
2000241	319
2000242	319
2000243	319
2000244	319
2000245	319
2000246	319
2000247	319
2000248	319
2000249	318
2000250	318
2000251	318
2000252	318
2000253	318
2000254	318
2000255	318
2000256	318
2000257	320
2000258	319
2000259	319
2000260	320
2000261	319
2000262	319
2000263	320
2000264	316
2000265	316
2000266	316
2000267	318
2000268	318
2000269	318
2000270	318
2000271	318
2000272	318
2000273	318
2000274	318
2000275	318
2000276	318
2000277	318
2000278	318
2000280	318
2000300	336
2000301	336
2000302	336
2000326	318
2000327	318
200035	1065
2000537	396
2000538	396
2000539	453
200054	125
2000542	528
2000543	528
2000553	294
2000554	294
2000555	297
2000556	297
2000557	294
2000559	294
2000560	294
2000561	294
2000562	294
2000563	294
2000564	294
2000565	294
2000566	294
2000567	294
2000568	294
2000569	294
2000570	294
2000571	294
2000572	294
2000573	294
2000574	294
2000575	294
2000576	294
2000577	294
2000578	294
2000579	294
2000580	294
2000581	294
2000583	294
2000584	296
2000585	296
2000586	296
2000587	296
2000588	296
2000589	296
2000590	297
2000591	295
2000595	229
2000596	229
2000651	1047
2000652	1047
200066	114
2000664	1048
2000676	1047
2000678	1047
2000720	300
2000721	300
2000722	299
2000723	299
2000724	299
2000725	299
2000726	299
2000730	300
2000731	300
2000732	300
2000733	300
2000734	300
2000735	300
2000736	300
2000737	300
2000738	300
2000739	300
2000740	298
2000741	298
2000744	298
2000750	298
2000751	298
2000753	298
2000757	299
2000758	299
2000759	299
2000760	299
2000761	299
2000762	299
2000763	299
2000765	299
2000766	299
2000767	299
2000768	299
2000769	299
2000770	300
2000771	300
2000772	300
2000773	300
2000774	300
2000775	300
2000777	299
2000778	299
2000779	299
2000780	299
2000781	299
2000782	300
2000783	300
2000784	300
2000785	298
2000786	298
2000787	298
2000788	298
2000790	298
2000791	298
2000792	298
2000793	298
2000794	298
2000795	303
2000796	303
2000798	298
2000799	303
2000875	525
2000876	525
2000878	525
2000879	525
2000880	525
200090	125
200093	125
2000931	390
2000932	390
2000934	390
2000935	390
2000936	390
2000999	364
2001001	364
2001002	364
2001003	364
2001004	364
2001005	364
2001015	336
2001020	336
2001025	336
2001030	336
2001035	336
2001040	336
2001045	336
2001050	336
2001055	336
2001060	336

DMI No. to Page No. Index

DMI No.	Page No.
2001065	336
2001310	489
2001317	1027
2001335	512
2001336	512
2001338	512
2001339	512
2001340	512
2001341	512
2001342	512
2001343	512
2001344	512
2001345	512
2001346	512
2001347	512
2001348	512
2001349	512
2001350	512
2001351	512
2001352	512
2001353	513
2001354	513
2001355	513
2001357	514
2001358	514
2001362	512
2001363	512
2001364	512
2001365	512
2001366	512
2001367	512
2001368	512
2001369	512
2001370	512
2001371	512
2001372	512
2001373	513
2001374	513
2001375	513
2001378	514
2001379	514
2001385	228
2001386	229
2001390	233
2001406	396
2001570	941
2001600	381
2001845	233
200245	125
200256	125
200331	126
200333	126
200334	125
200335	113
2003610	514
2003680	230
2003701	269
2003702	269
2003703	269
2003706	269
2003707	269
2003710	273
2003724	269
2003725	269
2003729	269
2003750	373
2003800	373
2003805	373
2003810	373
2003815	373
2003835	233
200410	120
200425	119
2004253	473
2004260	491
2004265	491
2004270	491
2004535	491
2004540	491
2004545	491
2004550	491
2004555	491
2004560	491
2004565	491
2004570	491
2004575	491
2004580	491
2004585	491
2004590	491
2004595	491
2004600	491
2004605	491
2004610	491
2004615	491
2004620	491
2004625	491
2004630	491
2004635	491
2004640	491
2004645	491
2004650	491
2004655	491
2004660	491
2004665	491
2004670	491
2004675	491
2004680	491
2004685	491
2004690	491
2004695	491
2004700	491
2006401	379
2006402	379
2006403	379
2006404	379
2006515	425
2006520	425
2006525	425
2006530	425
2006535	425
2006540	425
2006545	425
2006550	425
2006555	425
2006560	425
2006565	425
2006570	425
2006575	425
2006635	427
2006636	427
2006637	427
2006638	437
2006639	437
2006640	437
2006645	456
2006650	456
2006655	456
2006665	456
2006667	455
2006668	455
2006670	456
2006678	457
2006680	457
2006685	455
2006690	455
2006700	455
2006705	455
2006707	456
2006710	456
2006825	430
2006830	458
2006835	458
2006840	458
2006845	458
2006850	458
2006865	471
2006870	471
2006875	471
2006910	424
2006915	424
2006920	424
2006925	424
2006930	424
2006935	424
2006940	424
2006945	424
2006950	424
2006955	424
2006960	424
2006965	424
200701	277
2007030	446
2007105	434
2007110	434
2007115	434
2007120	434
200713	277
2007210	434
2007220	434
2007265	454
2007270	454
2007275	452
2007285	454
2007300	452
2007310	454
2007315	454
2007320	454
2007350	458
200990	119
2011100	15
2011105	15
2011120	33
2011125	17
2011130	17
2011135	17
2011140	17
2011145	22
2011150	19
2011155	19
2011160	22
2011165	22
2011175	18
2011185	32
2011190	30
2011195	30
2011200	30
2011205	18
2011210	21
2011220	17
2011230	29
2011240	28
2011255	15
2011260	21
2011265	21
2011270	18
2011280	14
2011285	31
2011290	32
2011295	28
2011305	28
2011485	388
2011486	394
2011487	394
2011499	395
2011501	516
2011509	395
2011513	516
2011514	516
2011524	395
2011526	397
2011527	397
2011530	391
2011531	391
2011532	391
2011533	391
2011534	391
2011535	391
2011536	391
2011538	391
2011540	391
2011541	391
2011543	391
2011544	391
2011546	391
2011548	391
2011555	391
2011556	391
2011558	391
2011559	391
2011560	391
2011562	391
2011563	391
2011568	941
2011569	941
2011571	246
2011573	531
2011575	531
2011577	395
2011578	395
2011579	395
2011581	394
2011582	394
2011583	394
2011584	394
2011585	393
2011586	393
2011587	393
2011588	395
2011589	388
2011590	395
2011591	387
2011594	384
2011596	381
2011597	395
2011598	395
2011599	381
2011601	381
2011602	381
2011603	381
2011610	381
2011611	381
2011618	385
2011619	385
2011620	385
2011621	387
2011623	387
2011625	388
2011626	389
2011627	389
2011630	106
2011632	106
2011637	389
2011638	389
2011639	516
2011640	516
2011651	396
2011652	396
2011653	396
2011655	452
2011657	452
2011658	452
2011659	452
201208	126
2012140	1021
2012141	1021
2012225	1013
2012229	304
201246	126
201486	119
201498	119
202313	92
202325	92
202337	92
202349	92
202504	984
202605	1160
202629	1160
202631	1160
202643	1160
202718	1160
202730	1160
202733	1160
202744	1160
202756	1160
202819	1160
203050	841
203062	841
203151	1342
203264	841
203276	841
203288	841
205010	320
205021	320
205564	317
205599	320
205600	320
205612	320
205624	320
205636	320
205642	166
205662	1067
205674	1067
205676	1067
205678	1067
205686	1067
205698	1067
205713	1067
205725	1067
205737	1067
205749	1067
205751	1067
205753	1067
205756	1067
205763	1067
205775	1067
205787	1067
205799	1067
205802	1067
205804	1067
205814	1067
205820	1067
205822	1067
205824	1067
205825	1067
205826	1067
205830	1067
205835	1067
205889	1067
205903	1067
205927	1067
206309	1069
206311	1069
206347	1069
206359	1069
206361	1069
206373	1069
207042	247
207046	247
207048	247
207051	266
207068	109
207079	247
207080	247
207086	242
207092	247
207105	246
207117	246
207250	255
207261	255
207274	255
207286	255
207298	275
207313	275
207363	289
207369	289
207375	289
207387	289
207394	271
207400	271
207407	271
207414	269
207421	244
207428	244
207435	248
207442	242
207449	248
207456	248
207463	248
207464	289
207514	289
207515	289
207516	289
207605	345
207610	345
207642	589
207666	590
207729	590
207731	591
207743	591
207755	590
207767	591
207779	591
207781	589
207793	589
207799	589
207800	591
207801	592
207802	592
207806	591
207818	591
207844	593
207856	592
207868	593
207869	591
207870	592
207882	593
207885	592
207888	592
207890	593
207894	590
207907	593
207919	592
207920	592
207921	593
207933	592
207955	589
207957	589
207960	593
207969	590
207970	590
207971	593
207972	591
207973	593
207983	590
207990	594
208025	661
208030	661
208032	661
208036	663
208047	727
208048	661
208049	661
208050	661
208060	662
208062	662
208074	662
208090	662
208098	662
208101	662
208110	662
208112	662
208113	662
208125	662
208140	727
208150	727
208160	727
208165	728
208170	728
208172	699
208173	699
208175	699
208177	699
208179	699
208181	699
208183	699
208190	699
208191	699
208195	735
208196	735
208202	758
208203	600
208210	596
208211	597
208212	596
208213	597
208214	596
208215	596
208216	596
208220	597
208225	597
208230	597
208232	596
208233	596
208235	597
208236	671
208237	667
208239	667
208240	668
208241	728
208242	667
208245	667
208247	667
208248	667
208249	668
208250	668
208252	668
208254	667
208260	668
208262	668
208270	729
208274	729
208278	671
208280	729
208281	598
208282	597
208283	598
208284	597
208290	597
208315	668
208320	700
208363	594
208365	594
208380	594
208389	599
208390	594
208392	596
208393	595
208396	595
208398	595
208399	595
208416	595
208428	594
208430	669
208431	669
208432	665
208434	665
208470	596
208471	595
208472	595
208474	595
208480	594
208482	596

©2014 Donovan Marine, Inc.

DMI No.	Page No.
208485	594
208492	665
208494	594
208496	594
208498	595
208505	665
208517	666
208529	665
208531	666
208555	666
208557	665
208578	666
208579	666
208581	667
208582	665
208583	667
208584	666
208590	666
208594	728
208596	728
208598	699
208599	700
208600	700
208605	599
208610	598
208615	598
208656	600
208670	599
208694	598
208707	598
208719	598
208725	598
208745	597
208769	598
208770	598
208771	669
208772	668
208773	668
208776	669
208779	669
208780	593
208784	603
208790	645
208808	603
208822	670
208834	670
208850	670
208860	670
208870	645
208880	644
208885	685
208888	685
208889	646
208890	644
208891	646
208892	646
208900	645
208910	646
208920	645
208930	644
208940	644
208950	645
208960	645
208970	645
208980	644
208990	646
208991	680
208992	670
209000	645
209005	602
209010	645
209015	602
209020	600
209025	602
209030	600
209035	671
209040	671
209042	671
209043	671
209050	599
209055	729
209060	600
209065	600
209070	603
209075	595
209080	603
209085	601
209090	727
209095	599
209100	602
209105	670
209110	644
209115	646
209120	700
209125	700
209130	700
209135	700
209140	700
209145	603
209150	645
209155	671
209160	646
209165	644
2100011	233
2100012	356
2100014	356
2100015	356
2100017	357
2100018	357
2100019	357
2100020	357
2100023	357
2100025	930
2100026	930
2100027	930
2100028	930
2100030	930
2100031	932
2100032	932
2100041	232
2100042	232
2100044	232
2100046	232
2100047	232
2100052	232
2100053	357
2100054	357
2100060	231
2100063	356
2100064	357
210500	267
210601	1142
210750	95
210754	95
210757	95
210761	95
210765	76
210769	76
210773	76
210778	76
210782	76
210785	76
210789	76
210792	76
210794	76
210796	76
211003	294
211005	294
211196	77
211211	77
211213	294
211215	294
211217	294
211219	294
211223	77
211235	77
211247	77
211259	77
211261	77
211273	77
211285	77
211350	1142
211362	1142
211552	305
211576	303
211588	303
211590	303
211603	303
211615	303
211627	303
211639	303
211641	303
211653	303
211665	303
211677	303
211683	294
211689	303
211691	303
211704	303
211716	303
211728	303
211808	294
211906	77
211918	77
211920	77
211932	77
211944	77
212009	77
212011	77
212023	77
212035	77
212047	77
212059	77
212566	93
212580	93
212605	93
214940	307
215067	114
215079	114
215106	114
215118	114
215144	1229
215168	1229
215740	371
215865	366
216108	360
216172	354
216261	354
216404	1192
216418	1010
216422	1011
216424	1010
216425	1021
216437	1021
216445	534
216451	1022
216463	1017
216475	1017
216487	1023
216499	1023
216540	1023
216552	1023
216603	1024
216653	1340
216682	1023
216716	1009
216728	1020
217136	348
217150	348
217174	348
217198	348
217213	348
217225	348
217249	348
217263	348
217314	349
217338	346
217352	346
217376	346
217388	346
217403	346
217415	346
217427	346
217439	346
217441	346
217489	346
217528	346
217530	346
217542	346
217566	346
217592	346
217605	346
217617	351
217631	349
217706	350
217756	350
217768	350
217819	350
217845	350
217869	350
217908	346
217910	346
217922	346
217934	346
217940	351
217941	351
217942	351
217944	306
217946	308
217947	308
217948	308
217960	351
217972	351
217984	351
217996	351
218001	351
218049	352
218215	352
218241	352
218304	346
218316	346
218405	349
218417	349
218506	348
218568	348
218600	349
218604	348
218608	349
218612	349
218616	349
218620	346
218632	350
218636	350
218640	346
218644	346
218652	346
218656	346
218660	348
218664	348
218668	349
218672	349
218676	348
218684	351
218688	351
218692	350
218696	349
218700	349
218704	349
218709	349
218712	349
218716	349
218720	350
218724	350
218728	350
218732	350
218736	350
218740	350
218744	349
218748	349
218752	349
218756	352
218761	350
218764	350
218768	350
218773	351
219250	309
219255	309
219260	309
219265	309
219270	309
219275	309
219280	311
219285	311
219290	312
219295	312
219300	312
219305	312
219310	309
219315	309
219325	312
219330	312
219335	312
219340	312
219355	314
219360	314
219365	314
219370	315
219375	315
219380	315
219385	309
219390	311
219395	311
219400	309
219405	311
219410	311
219415	308
219420	308
219425	308
219430	308
219433	260
219435	309
219446	308
219450	308
219455	309
219457	289
219460	1266
219461	309
219465	311
219469	289
219470	311
219471	289
219475	313
219476	289
219480	313
219483	410
219485	313
219490	313
219495	313
219500	313
219508	289
219520	289
219525	310
219530	311
219534	288
219558	289
219560	289
219572	266
219596	1169
219609	289
219611	289
219635	289
219659	287
219724	287
219765	287
219786	287
219800	289
219813	267
219825	1268
219837	1268
219849	1268
219851	1268
219887	1268
219899	291
219976	291
219989	1268
220020	1268
220070	291
220150	287
220311	288
220323	288
220462	290
220486	275
221111	1337
221123	1337
221135	1337
221147	1337
221159	1337
221161	1337
222656	1339
222668	1339
222670	1339
222682	1339
222694	1339
222707	1339
222719	1339
222721	1339
222722	1068
222733	1339
222740	1339
222745	1339
222757	1339
222801	1067
222812	267
222818	1184
222819	1184
222912	160
223149	260
223454	1177
223456	1177
223458	1177
223461	260
223463	1177
223465	1177
223467	1179
223468	1177
223469	1177
223471	1177
223473	1177
223475	1177
223477	1177
223479	1179
223481	1177
223482	1177
223483	1173
223484	1173
223485	260
223486	1172
223489	1172
223491	1172
223493	1172
223495	1172
223497	1169
223499	1169
223503	1170
223505	1170
223507	1178
223509	1178
223511	270
223512	270
223514	1185
223515	1185
223517	1184
223518	1184
223521	1185
223523	1170
223525	1185
223527	270
223528	270
223622	267
223623	1174
223625	1175
223630	1174
223633	1174
223637	1174
223641	1174
223644	1175
223649	1175
223651	1174
223661	1178
223663	1174
223667	1174
223671	1175
223679	1175
223702	1178
223748	1179
223750	1177
223762	1178
223782	1177
223783	1175
223784	1176
223785	1176
223788	1177
223789	1175
223791	1175
223800	1183
223803	1176
223805	1176
223811	1175
223813	1175
223821	1175
223827	1175
223842	1176
223857	261
223862	261
223870	1173
223872	1173
223874	1183
223875	1173
223881	1171
223884	1169
223887	1170
223892	1171
223897	1171
223910	1168
223912	1168
223923	1171
223932	1171
223938	1168
223975	1183
224509	359
224523	359
224524	360
224525	359
224553	97
224554	97
224555	97
224556	97
224557	1341
224562	97
224600	359
224612	359
224624	359
224648	359
224656	360
224662	359
224701	359
225272	359
225284	359
225309	359
225347	359
225359	359
225361	359

DMI No. to Page No. Index

DMI No.	Page No.
225373	359
225385	359
225386	359
225401	359
227606	166
227610	166
227618	166
227719	1068
227757	1068
227767	1068
227795	1068
227808	1068
227809	1068
227810	1066
227822	1068
227834	1068
227846	1068
227858	1068
227896	1066
227909	1066
227911	1066
227923	1066
227935	1066
227947	1066
227959	1066
227961	1066
227973	1066
227985	1066
227997	1067
228002	1067
228011	1154
228013	1154
228015	1154
228017	1154
228019	1154
228021	1154
228023	1154
228025	1154
228027	1154
228029	1154
228031	1154
228033	1154
228035	1154
228037	1154
228039	1154
228041	1154
228043	1154
228045	1154
228047	1154
228049	1154
228051	1154
228053	1154
228055	1154
228057	1154
228059	1154
228061	1154
228063	1154
228065	1154
228067	1154
228069	1154
228071	1154
228073	1154
228075	1154
228077	1154
228079	1154
228081	1154
228083	1154
228085	1154
228087	1154
228089	1154
228091	1154
228093	1154
228095	1154
228097	1154
228099	1154
228101	1154
228102	1154
228103	1066
228105	1154
228107	1154
228109	1154
228111	1154
228113	1154
228114	1154
228115	1066
228117	1154
228118	1066
228119	1154
228121	1154
228123	1154
228125	1154
228127	1154
228129	1154
228131	1154
228133	1154
228135	1154
228137	1154
228139	1154
228141	1154
228203	1157
228211	1157
228233	1157
228243	1157
228267	1157
228269	928
228270	1157
228271	377
228273	1157
228285	1157
228297	1157
228299	376
228301	377
228322	93
228324	93
228328	1157
228329	1157
228330	1157
228466	1155
228498	1155
228500	1155
228658	416
228665	416
228672	416
228684	416
228696	416
228709	416
228711	416
228723	416
228734	416
23-0801	837
23-0802	837
23-0803	837
23-0806	837
23-0807	837
23-1100	837
231528	1202
231530	1202
231531	1202
231592	1201
231605	1202
231617	1202
231629	1202
231630	1202
231631	1202
231634	1202
231643	1202
232152	1235
232153	1235
232154	1235
232570	134
232594	134
232607	134
232619	134
232621	134
232624	135
232626	135
232628	135
232630	135
232633	133
232657	133
232669	133
232671	133
232708	133
232710	133
232712	133
232714	133
232716	133
232718	133
232746	133
232835	133
232859	133
232948	133
232962	133
233229	133
23-3300	836
23-3301	838
23-3302	838
23-3303	835
23-3304	835
23-3305	838
23-3306	838
23-3307	838
23-3308	835
23-3309	836
23-3310	836
23-3600	837
23-3601	837
23-3602	838
23-3603	838
23-3604	838
23-3605	838
23-3650	838
23-3651	839
23-3652	839
23-3653	839
23-3654	839
23-3655	839
23-3656	839
23-3657	839
23-3658	840
23-3659	840
233700	120
233701	120
233705	120
233712	1261
233713	120
2350010	930
2350011	930
2350012	930
2350013	930
2350014	930
2350015	930
2350018	930
2350019	930
2350020	930
2350021	930
2350022	942
2350027	387
2350033	38
2350035	240
2350038	529
2350039	529
2350041	530
2350042	529
2350045	528
2350047	528
2350073	223
2350091	372
2350098	372
2350107	223
2350117	271
2350119	271
2350144	497
2350146	497
2350162	252
2350168	504
2350189	396
235019	240
2350191	244
2350192	244
2350194	244
2350195	244
2350202	243
2350203	252
2350205	252
2350206	252
2350207	252
2350214	391
2350216	391
2350217	391
2350218	391
2351054	386
2351059	242
235108	242
235110	528
235112	245
235113	528
235115	245
235118	245
235122	242
235151	1235
235156	243
235172	252
235184	252
235186	251
235209	251
235223	251
235235	247
235237	246
235239	246
235241	245
235242	245
235244	246
235245	246
235259	251
235300	243
235324	251
235326	252
235336	251
235337	251
235348	251
235350	251
235401	242
235413	242
235415	252
235417	252
235427	245
235437	245
235449	245
235474	252
235475	251
235487	251
235502	252
235510	248
235564	260
235568	261
235570	98
235572	98
235576	262
23-5600	840
23-5601	840
235627	240
235665	242
235677	244
235689	244
235691	250
235805	252
235806	252
23-5900	840
236059	962
236060	1003
236078	962
236079	1003
236081	1003
236090	964
236095	964
236100	964
236112	962
236162	968
236174	968
236186	965
236198	965
236201	965
236326	1003
236348	1003
236350	1003
236388	1007
23-6400	840
23-6401	836
237001	528
237013	528
237099	367
237126	946
237215	375
237354	336
237445	514
237455	514
237507	527
237607	38
237609	38
237674	372
237694	372
237695	372
237709	372
237712	372
237713	372
23-7740	835
237746	68
237748	135
23-7760	836
23-7800	839
23-7801	839
23-7802	839
23-7803	835
23-7820	835
23-7821	835
23-7822	835
23-7823	835
23-7824	836
23-7840	836
23-7841	836
23-7842	836
238142	1231
238154	1231
238166	1231
238178	1231
238217	1229
238229	1229
238231	1229
238243	1229
238267	1230
238279	1230
238281	1230
238293	1230
238306	1230
238318	1230
238320	1230
239423	107
239459	107
239461	400
239598	398
239601	398
239714	372
239726	372
239731	372
239738	372
241036	1199
242318	928
242329	928
242355	39
242367	39
242379	39
242381	39
242393	39
242406	39
242418	39
242773	1167
242797	1167
242824	1167
242836	1167
242848	1167
242874	1167
242886	1167
242901	1167
243319	1338
243333	1338
243345	1338
243357	1338
243369	1338
243410	1296
243422	1296
243434	1296
243436	1295
243446	1296
243458	1295
243460	1295
243465	1295
243466	1295
243470	1295
243484	1296
243488	1296
243493	1296
243496	1296
243498	1296
244551	54
247456	960
247470	960
247482	960
247494	960
247507	960
247533	960
247607	374
247617	1006
247619	1006
247620	1006
247622	376
247658	376
247710	376
247723	376
247735	376
247736	946
247737	946
247746	946
247748	945
247750	392
247751	392
247756	376
247762	376
247805	948
247808	948
247810	948
247818	948
247821	948
247829	949
247836	949
247842	949
248460	1059
248472	1059
248509	1059
248511	1059
248536	1234
248573	1061
248575	1061
248579	1061
248585	1061
248612	1059
248614	1059
248616	1059
248618	1059
248619	1059
248620	1059
248621	1059
248624	1059
248635	1059
248662	1059
248674	1059
248775	1046
248787	1046
248788	1046
248798	1023
248900	1045
248902	1045
249011	1233
249107	1060
251811	315
251912	484
251914	484
251920	484
251938	484
251942	484
252259	486
252261	486
252263	486
252265	486
252267	486
252269	486
252281	485
252293	484
252306	484
252318	484
252320	484
252337	484
252338	484
252339	485
252340	484
252341	484
252342	484
252344	484
252350	484
252355	484
252356	484
252368	485
252370	485
252382	485
252394	485
252396	485
252397	485
252398	485
252407	485
252419	485
252440	484
252445	484
252450	484
252455	484
252508	484
252510	484
252522	484
252534	481
252572	486
252574	486
252575	486
252576	486
252577	481
252578	487
252580	390
252582	487
252584	486
252586	486
252590	486
252592	486
252594	486
252596	486
252611	486
252623	486
252635	487
252647	487
252655	487
252659	487
252661	487
252673	487
252697	487
252698	485

©2014 Donovan Marine, Inc.

DMI No.	Page No.
252700	486
252712	487
252714	487
252716	487
252718	487
252719	487
252720	487
252721	390
252722	487
252724	487
252726	487
252727	487
252729	487
252732	486
252734	486
252748	390
252749	390
252750	390
252762	390
252774	390
252786	390
252798	390
252799	390
252803	390
252805	390
252808	486
252811	486
252814	486
252817	486
252820	486
252823	486
252826	486
252829	486
252832	486
252835	486
252838	486
252864	489
252899	488
252902	488
252910	484
252914	488
252915	488
252927	488
252939	488
252941	488
252953	488
252965	488
252977	488
252980	488
252982	488
252988	489
252991	489
253019	489
253029	488
253031	489
253044	489
253055	489
253067	489
253194	488
253207	488
253219	488
253221	488
253233	488
253245	488
253246	488
253269	488
253275	488
253411	1263
253423	1263

DMI No.	Page No.
254069	315
254071	315
254083	315
254108	315
254110	315
254122	315
254146	315
254160	315
254172	315
254184	315
254209	315
254211	315
254223	315
254235	315
254247	315
254259	315
254261	315
254273	315
254285	315
254297	315
254300	315
254312	315
254336	315
254362	315
254374	315
254398	315
254401	315
254425	315
254437	315
254487	315
254526	315
254538	315
254540	315
254564	315
254576	315
254588	315
254590	315
254615	315
254627	315
254641	315
254677	315
254691	315
254716	315
254766	315
254829	315
254893	315
254907	315
254944	315
254982	315
255100	315
255415	97
255420	937
255425	937
255430	937
255435	937
255445	922
255450	81
255455	81
255460	81
255463	81
255946	1225
255948	1225
255949	1225
255952	1225
255958	1224
255960	1224
255972	1224
255984	1224
255996	1224

DMI No.	Page No.
256001	1224
256013	1224
256025	1224
256037	1224
256049	1224
256051	1224
256063	1224
256075	1224
256087	1224
256099	1224
256102	1224
256114	1224
256328	1000
256330	1000
256443	954
256455	954
256479	954
256493	954
256506	954
256518	954
256520	954
256532	954
256557	954
256568	954
256571	954
256583	954
256595	954
256633	956
256645	956
256657	956
256669	956
256683	956
256708	956
256709	956
256710	956
256711	956
256722	957
256734	956
256735	957
256746	956
256758	956
256772	956
256784	956
256785	956
256873	955
256885	955
256900	955
257205	957
257229	957
257245	957
257267	1333
257281	1333
257293	1333
257300	1225
257305	1225
257310	1225
257315	1225
257320	1225
257325	1225
257330	1225
257332	1333
257335	1225
257340	1225
257345	1225
257350	1225
257355	1225
257356	1333
257360	1225
257365	1225

DMI No.	Page No.
257368	1333
257370	1225
257375	1225
257419	1333
257433	1333
257445	1333
257500	1224
257505	1224
257510	1224
257515	1224
257520	1224
257525	1224
257530	1224
257535	1224
257540	1224
257545	1224
257550	1224
257555	1224
257560	1224
257565	1224
257600	1225
257605	1225
257680	1043
257750	1075
257762	1075
257774	1075
257776	1075
257798	1075
257801	1075
257803	1075
257805	1075
257808	1075
257811	1075
257863	1074
257899	1074
257904	1075
257926	1075
257938	1075
257940	1075
257990	1075
258005	1075
258007	1075
258010	1075
258015	1075
258037	1075
258043	1075
258055	1075
258067	1075
258080	1075
258092	1075
258095	1075
258098	1075
258105	1075
258109	1075
258113	1075
258117	1075
258120	1075
258125	1075
258212	1075
258215	1075
258219	1075
258220	1075
258221	1075
258233	1075
258261	1075
258269	1075
258271	1075
258283	1075
258305	1074

DMI No.	Page No.
258310	1074
258315	1074
258320	1074
258325	1074
258334	1074
259715	1294
260555	517
260567	517
260719	495
260733	495
261153	1069
261177	1069
261191	1069
261204	1069
261305	1069
261343	1069
261367	1069
261379	1069
261381	1069
261393	426
261405	426
261557	1069
261583	1069
261610	1069
261646	1069
261658	1069
261660	1069
261736	274
261747	240
261759	240
261761	240
261773	240
261785	240
261812	1070
261824	1070
261836	1070
262596	903
262600	903
2626010	902
2626011	902
2626012	902
262610	903
262612	903
262613	902
262614	902
262615	902
262624	902
262686	893
262698	895
262701	895
262713	900
262725	900
263145	900
263146	900
263157	900
263169	900
263171	900
263183	900
263184	900
263210	903
263250	902
263284	900
263285	900
263286	900
263287	903
263290	900
263292	903
263293	903
263295	900

DMI No.	Page No.
263300	901
263310	901
263311	894
263315	902
263320	902
263323	894
263378	398
263397	899
263400	899
263448	899
263500	896
263501	900
263502	896
263503	896
263504	896
263505	896
263506	896
263507	897
263508	897
263509	897
263510	897
263513	900
263608	903
263610	903
263613	903
263638	903
263640	905
263647	905
264111	1234
264113	1234
264117	1234
264119	1234
264139	899
264141	899
264150	899
264165	899
264174	899
264186	899
264207	899
264212	899
264228	899
264231	899
264249	899
264255	899
264260	899
264301	908
264313	1000
264315	903
264515	903
264539	903
264604	903
264717	903
264818	903
264919	903
264933	903
265047	1069
265062	903
265073	1069
265086	1069
265087	903
265099	1069
265138	1069
265151	1069
265164	1069
265177	1069
265190	1069
265203	1069
265264	903
265288	903

DMI No.	Page No.
265365	1336
265377	1336
265389	1336
265391	1336
265404	1336
265416	1336
265428	1336
265454	1336
265466	1336
265505	1336
265531	1336
265534	1336
266002	1237
266038	1237
266052	1237
266076	1237
266090	1237
266153	1237
266165	1237
266191	1237
266216	1237
266242	1237
266305	1237
266418	1235
266420	1235
266444	1238
266456	1235
266568	903
266569	126
266686	1242
266698	1242
266701	1242
266711	1242
266725	1242
266749	1242
266963	1242
267562	91
267573	120
267763	126
267775	1236
267787	1236
267799	1236
267801	74
267840	1242
267841	1242
267842	1242
267843	1242
267845	1242
267850	1242
267851	1242
267852	1242
267941	73
267953	73
267965	73
267977	73
267989	73
268979	1079
268983	1079
268990	1079
269000	1079
269001	1079
269002	856
269003	1079
269004	1079
269005	1079
269006	1079
269007	1079
269010	1079
269022	1079

DMI No.	Page No.
269026	1079
269027	1079
269028	1079
269030	1079
269033	1079
269034	1079
269037	1079
269038	1079
269039	1079
269040	1079
269043	1079
269044	1079
269046	1077
269047	1077
269084	1079
269096	1077
269135	1077
269194	1078
269285	1078
269286	1078
269292	1078
269295	1078
269297	1078
269298	1078
269313	1077
269330	1078
269351	1077
269363	1077
269375	1077
269399	1077
269426	1077
269438	1077
269755	1078
269779	1078
269831	1076
269832	1076
269844	1076
269856	1076
269868	1076
269882	1076
269907	1081
269956	1076
269957	1076
269959	1076
269960	1076
269961	1076
269969	1076
269971	1076
269983	1076
270001	1076
270018	1076
270110	1077
271391	74
271393	74
271395	74
271397	74
272330	133
272333	133
273184	1045
273209	1265
273211	1265
273223	1265
273235	1265
273247	1265
273259	1265
273261	1265
273526	1273
273690	1273
273754	1273

DMI No. to Page No. Index

DMI No.	Page No.
273766	1273
273829	1273
273831	1273
273843	1273
273918	1273
273969	1273
273970	1273
274047	1273
274302	1273
274489	1273
274542	1273
274592	1273
274605	1273
274631	1273
274655	1273
274681	1273
274779	1273
274782	1273
274908	1273
275304	1270
275328	1270
275405	1270
275417	1270
275429	1270
275431	1270
275506	948
275518	948
275520	948
275532	948
275544	948
275556	948
275568	948
275570	948
275582	948
275594	948
275619	948
275621	948
275645	948
275671	948
275695	948
275710	948
275811	948
275823	948
275859	948
275861	948
275873	948
275885	948
275897	948
275900	948
275924	948
276003	949
276015	949
276027	949
276039	949
276041	949
276053	949
276067	949
276079	949
276089	949
276091	949
276104	949
276116	949
276128	949
276130	949
276134	949
276142	949
276146	949
276154	949
276166	949
276178	949
276180	949
276192	949
276205	949
276217	949
277684	297
277687	297
277689	297
277691	297
277693	297
277695	297
277699	297
277702	297
277714	297
277726	297
277738	297
277773	297
277775	297
277777	297
277779	297
277780	297
277790	297
277815	297
277875	296
277966	306
279313	1342
279340	1296
279345	1340
279352	1296
279358	1296
279364	1296
279370	1342
279375	1342
279377	1342
279381	1342
279504	1066
279516	1066
279528	1066
279768	1067
279782	1067
279809	1067
281105	1066
281117	1066
281118	1066
281120	1066
281206	1066
281218	1066
281307	1066
281319	1066
281650	1223
281651	1223
281660	1223
281664	1223
283008	841
283022	841
283060	841
283109	841
283123	841
283159	841
283200	841
283212	841
283224	841
283250	841
283260	841
283313	841
283325	841
283370	841
283372	841
283387	841
283390	841
283399	841
283401	841
283462	841
283464	841
283467	841
283476	841
283480	841
283481	841
283486	841
283488	841
283489	841
283490	841
283503	841
283539	841
283705	841
283717	841
283731	841
283755	841
283779	841
283781	841
283793	841
283806	841
283818	841
283820	841
283882	841
283907	841
283915	841
283919	841
283922	841
283930	841
283933	841
283934	841
283971	841
284024	841
284036	841
284037	841
284039	841
284048	841
284062	841
284163	841
284240	841
284310	841
284315	841
284442	1340
284517	1235
284518	1235
284519	1235
284529	1234
284579	325
284580	342
284582	342
284584	342
284586	342
284587	338
284588	338
284589	338
284590	337
284592	337
284594	337
284596	337
284598	337
284600	338
284601	338
284602	338
284606	342
284618	342
284620	342
284632	342
284644	342
284656	342
284658	342
284666	342
284670	342
289151	852
289175	852
289187	852
289292	11
289303	534
289315	534
289327	534
289339	534
289353	851
289404	534
289416	537
289428	537
289454	533
289466	533
289478	533
289480	533
289492	533
289505	533
289517	533
289529	533
289531	533
289543	533
289555	537
289567	537
2899053	1028
2899054	1028
2899063	1024
2899064	1024
290089	1063
290091	1063
290104	1063
290117	1063
290128	1063
290243	851
290255	1064
290267	1063
290306	1063
290344	1062
290433	1064
290445	1064
290457	1062
290522	1064
290530	851
290535	851
290540	1063
290545	1031
290546	534
290700	1061
290712	1061
290736	1065
293333	908
299001	1203
299010	1203
299012	1203
299014	1203
300513	330
300525	332
300549	307
300551	324
300560	324
300587	260
300602	260
300640	332
300652	332
300664	331
300668	330
300688	330
300690	335
300715	332
300727	331
300739	331
300741	331
300765	325
300800	335
300805	332
300810	330
300828	410
300830	410
300842	1335
300854	1335
300878	1335
300885	1342
300892	1335
300990	1335
300993	1335
301095	1335
301205	1342
301541	1335
301552	1335
301591	1335
301604	1335
301616	1335
301628	1335
301630	1335
301656	1342
302947	1008
302949	1064
302951	1008
302953	1062
302954	1062
302961	1062
303141	1234
303189	1330
303216	1293
303278	1293
303420	481
303444	481
303456	480
303500	475
303501	475
303545	481
303901	91
303949	91
303955	91
303960	475
303963	475
303965	475
303969	481
303970	475
303972	475
303973	474
303974	476
303975	474
303976	476
303977	476
303978	480
303979	476
303980	480
303981	476
304001	477
304003	477
304006	477
304010	477
304015	477
304018	477
305709	92
305766	92
305806	92
305917	92
305957	92
308010	1340
308021	1051
308207	1055
308208	1055
308220	1055
308280	1051
308283	1051
308286	1051
308301	1053
308302	1053
308303	1053
308305	1054
308306	1053
308307	1053
308308	1053
308316	1054
308326	1053
308345	1054
308350	1053
308353	1053
308359	1053
308363	1053
308365	1053
308368	1053
308371	1056
308375	1056
308381	1051
308390	1056
308392	1056
308394	1056
308396	1056
308398	1056
308402	1056
308404	1056
308405	1056
308407	1056
308411	1056
308414	1056
308420	1056
308421	1056
308423	1055
308425	1055
308429	1055
308437	1055
308445	1055
308542	1054
308543	1054
308602	1053
308604	1053
308609	1053
308611	1053
309559	1330
309561	1330
309573	1330
309586	1330
309751	1328
309763	1328
309766	1342
309787	1328
309994	1329
310007	1329
310033	1329
310045	1329
310057	1329
310083	1329
310095	1329
310108	1329
310110	1329
310122	1329
310158	1329
310209	1330
310210	1330
310220	1330
310233	1330
310252	1342
310259	1328
310261	1328
310273	1328
310297	1328
310312	1328
310348	1328
310358	1328
310401	1328
310415	1328
310514	1292
310526	1292
310538	1292
310539	1292
310540	1292
310541	1292
310564	1292
310590	1292
310603	1292
310627	1294
310653	1295
310665	1295
310716	1294
310730	1294
310855	1293
310893	1293
310906	1292
312002	1292
312025	1292
312037	1292
312051	1292
312102	1292
312114	1292
312125	1292
312140	1293
312152	1293
312164	1293
312203	1293
312227	1293
312241	1292
312253	1293
312342	1292
312354	1292
312405	1292
312417	1292
312429	1292
312431	1292
312859	1296
312861	1296
312873	1296
312885	1296
312897	1296
312900	1296
312950	952
312962	952
312974	952
312986	952
312998	952
313003	952
313128	1296
313130	1296
313180	1296
313192	1296
313205	1296
313217	1296
313229	1296
313231	1296
313255	1296
313267	1296
313279	1296
313281	1296
313293	1296
313306	1296
313318	1296
313320	1296
313510	1297
313522	1297
313700	1297
313712	1297
313748	1297
313750	1297
314411	522
314423	521
314435	522
314447	521
314450	521
314457	522
314459	522
314461	522
314465	521
314473	521
314480	524
314482	524
314484	524
314497	521
314498	521
314499	521
314500	521
314501	521
314502	521
314503	521
314505	521
314506	521
314510	527
314511	521
314513	525
314514	524
314515	521
314516	521
314518	521
314520	521
314521	521
314523	521
314524	524
314526	524
314528	524
314548	524
314560	524
314583	524
314586	524
314598	524
314613	524
314618	524
314625	524
314684	523
314685	523

©2014 Donovan Marine, Inc.

DMI No.	Page No.
314687	523
314696	523
314702	523
314703	523
314704	523
314716	524
314718	524
314721	524
314722	523
314723	523
314724	524
314726	523
314728	524
314729	524
314732	524
314733	524
314734	524
314735	524
314736	524
314738	524
314740	524
314741	524
314748	524
314750	523
314751	523
314752	523
314753	524
314754	525
314755	522
314756	522
314757	522
314758	524
314759	525
314760	525
314762	523
314764	523
314766	523
314770	524
314771	524
314775	523
314776	523
314780	523
314784	523
314786	523
314789	523
314791	523
314795	520
314803	521
314814	522
314815	522
314816	522
314817	522
314818	522
314826	522
314827	522
314828	522
314837	522
314838	522
314839	524
314840	522
314841	524
314842	522
314843	522
314850	522
314851	522
314854	522
314855	522
314857	522
314859	527
314860	527
314861	527
314862	527
314869	527
314890	526
314895	526
314902	525
315108	527
315109	527
315110	527
315122	527
315134	524
318217	1234
318229	1338
318255	1070
318267	1070
318279	1070
318281	1070
318293	1070
320789	1234
320790	1238
320800	1236
320802	1236
320806	117
321825	1221
321996	1221
322012	83
322017	491
322026	1221
322030	1220
322407	121
322417	121
322419	1223
322522	356
322611	417
323117	367
323307	358
323319	358
323357	358
323369	358
323458	1020
323460	1020
323465	1221
323467	1221
323600	1278
323602	1076
323834	1076
323838	1278
323840	1278
323841	1076
323843	1278
323844	1076
323852	1278
323864	1278
323876	1278
323903	1278
324006	1276
324018	1276
324119	1337
324121	1337
327101	917
327102	917
327103	917
327104	917
327105	917
327318	396
327319	396
327320	396
327557	529
327589	1298
327600	1297
327601	1297
327603	1297
327604	1297
327605	1297
327609	1297
327610	1297
327658	1298
327660	1298
327673	1298
327685	1298
327695	1298
327701	1298
327711	358
327713	1298
327736	358
327747	358
327759	1337
327836	1337
327862	1337
327874	1337
327898	1337
327901	1337
327925	1337
327937	1337
327949	1337
327963	1337
327975	1337
328256	1341
328268	1287
328370	1287
330780	316
330785	317
330794	460
330807	317
330819	317
330821	317
333497	1204
333499	1204
333501	1204
333503	1204
333574	1197
333613	1211
333614	530
333615	504
333620	504
333624	505
333625	1211
333628	516
333630	497
333635	497
333644	497
333645	497
333650	504
333655	504
333656	504
333660	504
333662	504
333665	504
333667	504
333670	504
333672	504
333675	504
333677	504
333680	504
333685	504
334000	102
334005	102
334008	1038
334010	1038
334122	1195
334994	894
335000	894
335001	894
335005	894
335007	894
335008	894
335009	894
335251	894
335252	894
335263	894
335275	894
335314	336
335317	336
335324	336
335326	336
335329	336
3362029	426
336203	426
3362034	426
3362035	426
3362036	426
3362038	426
3362039	426
3362054	426
336215	426
336227	426
336239	426
336241	426
336253	426
336265	426
336277	426
336281	426
336284	426
336285	426
336300	426
336301	426
336302	426
336481	528
336657	428
336660	426
336661	426
336662	426
337375	373
338093	1078
338097	1078
338106	1078
338118	1078
338120	1078
338124	1079
338128	1079
338144	1079
338156	1078
338165	1278
338167	1278
338169	1278
338257	1078
338268	1078
338269	1078
338270	1078
338271	1077
338283	1077
338295	1077
338308	1076
338310	1076
338322	1076
338346	1077
338358	1077
338360	1077
338363	1077
338461	1077
338473	1077
338485	1077
338497	1077
338500	1077
338510	1078
338548	1077
338550	1077
338562	1077
338574	1077
338575	1077
338586	1077
338598	1077
338599	1077
338613	1077
338625	1077
338637	1077
338649	1077
338651	1077
338687	1077
338699	1077
338702	1077
339514	115
339526	115
339538	115
339730	115
339819	1233
340101	273
340104	273
340113	276
340125	275
340137	276
340149	276
340151	276
340163	276
340199	273
340202	274
340214	276
340226	273
340238	273
340245	276
340247	276
340249	276
340251	276
340257	272
340261	273
340265	273
341001	358
341003	358
341004	358
341331	1214
341336	1214
341341	1214
341343	1214
341355	1214
341367	1214
341381	1214
341393	1214
341418	1214
341420	1214
341432	1214
341444	1214
341482	1214
341507	1214
341545	1214
341569	1214
342020	358
342030	358
342054	358
342066	358
342078	358
343307	891
343513	1339
343525	1339
344010	1339
344022	1339
344034	1339
344046	1339
344058	1339
345606	866
345644	866
345656	866
345682	873
345694	873
345757	866
345808	873
345861	873
345872	873
345896	873
345900	873
345909	873
345911	873
345923	873
345935	873
345947	873
345973	873
345985	867
345997	867
346002	867
346052	867
346064	867
346076	867
346088	867
346177	867
346191	867
346204	867
346216	867
346684	863
346913	863
346925	863
346951	863
346952	867
346963	867
347028	863
347030	863
347042	863
347092	863
347105	863
347117	863
347220	863
347232	863
347244	863
347282	863
347294	863
347333	863
347346	863
347368	864
347372	864
347383	864
347395	864
347408	864
347410	864
347663	864
347674	864
347686	864
347942	1287
347950	1287
348133	869
348145	869
348157	1285
348183	869
348195	869
348208	1285
348210	1285
348222	873
348234	873
348246	870
348258	873
348260	873
348272	873
348335	870
348346	1285
348359	870
348361	870
348373	870
348385	870
348397	870
348462	870
348474	870
350000	266
350010	266
350012	266
350015	266
350020	266
350022	266
350025	536
350102	459
350126	459
350140	459
350164	459
350188	459
350190	459
350203	459
350215	459
350330	875
350342	875
350567	50
350568	50
350569	50
350594	50
350607	50
350609	1239
350619	51
350621	51
350633	50
350659	1238
350670	1240
350671	1240
350672	1240
351001	405
351002	405
351003	405
351004	405
351005	403
351006	404
351008	404
351009	403
351010	404
351012	404
351014	406
3511000	501
3511005	404
3511010	404
3511015	404
3511025	404
3511030	404
3511035	404
3511045	404
3511050	404
3511055	404
3511060	404
3511065	404
3511070	180
3511075	404
3511080	404
3511085	404
3511090	404
3511095	404
3511105	501
3511110	404
3511115	404
3511120	404
3511125	404
3511130	404
3511135	404
3511140	404
3511145	404
3511150	404
3511155	404
3511160	404
3511165	404
3511170	404
3511175	404
3511180	404
3511185	404
3511195	404
3511200	501
3511205	406
3511215	406
3511220	406
3511225	406
3511230	406
3511235	406
3511240	406
3511245	406
3511250	406
3511255	406
3511260	406
3511265	406
3511270	406
3511275	406
3511280	406
3511285	501
3511290	403
3511295	403
3511300	403
3511305	403
3511310	403
3511315	403
3511320	403
3511325	403
3511330	403
3511335	403
3511340	403
3511345	180
3511350	403
3511355	403
3511360	180
3511365	403
3511370	403
3511375	403
3511380	403
3511385	501

DMI No. to Page No. Index

DMI No.	Page No.
3511390	405
3511395	405
3511400	405
3511405	405
3511410	405
3511415	405
3511420	405
3511425	405
3511430	405
3511435	405
3511440	405
3511445	180
3511450	405
3511455	405
3511460	405
3511465	405
3511470	405
3511475	405
3511485	501
3511490	405
3511495	405
3511500	405
3511505	405
3511510	405
3511515	405
3511520	405
3511525	405
3511530	405
3511535	405
3511540	405
3511550	405
3511555	405
3511560	405
3511565	405
3511570	405
3511575	405
3511580	501
3511585	406
3511590	406
3511595	406
3511600	406
3511605	406
3511610	406
3511615	406
3511620	406
3511630	406
3511645	406
3511655	501
3511670	403
3511680	403
3511685	403
3511690	403
3511695	403
3511705	403
3511710	403
3511715	403
3511720	403
3511805	404
3511810	404
3511815	404
3511820	404
3511825	404
3511830	404
3511835	404
3511845	404
3511855	404
3511860	404
3511865	404
3511870	404
3511875	404
3511880	404
3511885	404
3511890	404
3511895	406
3511900	406
3511905	406
3511910	406
3511925	406
3511930	406
3511935	403
3511940	403
3511945	403
3511950	403
3511955	403
3511975	403
3511995	405
3512000	405
3512005	405
3512010	405
3512015	405
3512020	405
3512035	405
3512045	405
3512050	405
3512055	405
3512060	405
3512065	405
3512070	405
3512085	405
3512100	406
3512105	406
3512110	406
3512115	406
3512120	406
3512125	406
3512135	406
3512140	403
3512145	403
3512150	403
3512155	403
3512160	403
3512165	403
3512175	403
3512265	410
3512290	410
3512295	410
3512300	410
3512305	410
3512325	409
3512330	409
3512750	180
351697	499
352500	977
352524	987
352574	977
352575	977
352702	987
352714	977
352726	990
352738	987
353100	987
353108	126
353109	126
353110	1002
353114	1002
353115	1002
353116	1002
353117	1002
353118	982
353122	988
353146	988
353150	982
353160	982
353172	982
353184	1005
353235	849
353266	984
353401	957
353425	999
353437	999
353451	999
353502	955
353526	955
353538	955
353540	955
353576	955
353588	955
353589	955
353590	955
353603	955
353639	955
353641	955
353653	955
353665	955
353677	955
354124	952
354136	952
354148	952
354150	952
354162	952
354201	952
354213	952
354225	952
354237	952
354249	952
354263	952
354275	952
354287	952
354299	952
354302	952
354427	952
354439	952
354453	952
354465	952
354477	952
354489	952
354491	952
354504	952
354516	952
354525	1062
354530	1062
354535	1062
354540	1062
354545	1062
354550	1062
354555	1092
354617	954
354629	954
354631	954
354679	514
354807	95
354819	95
354833	95
354845	95
354857	95
354883	95
355013	88
355330	74
355544	90
355633	90
355645	90
355649	1276
357079	1209
357113	1199
357562	1216
357571	1211
357586	1199
357627	1197
357628	1197
357629	1197
357630	1197
357632	1197
357900	885
357980	884
357992	884
358007	884
358019	884
358021	884
358033	884
358045	884
358057	884
358071	884
358083	884
358095	884
358108	884
358160	884
358172	884
358184	884
358235	884
358247	884
358259	884
358261	884
358273	884
358285	884
358297	884
358300	884
358324	884
358336	884
358348	884
358350	884
358362	884
358386	884
358398	884
358401	884
358413	884
358425	884
358437	884
358451	884
358463	884
358475	884
358502	884
358514	884
358538	884
358539	884
358704	884
358716	884
358728	884
358730	884
358742	884
358906	884
358918	884
358920	884
359059	884
359061	884
359073	884
359085	884
359354	884
359364	884
359376	884
359388	884
359403	884
359617	884
359629	884
359631	884
359962	905
359972	905
360014	916
360040	475
360052	475
360444	376
360470	376
360507	376
360593	1043
360595	1043
360597	1043
360599	1043
360602	848
360634	475
360638	474
360640	474
360658	473
360660	473
360662	474
360696	474
360723	474
360812	916
360848	908
360862	917
361042	893
361105	354
361117	354
363402	304
363426	303
363438	303
364492	306
364495	720
367525	410
367549	410
367587	410
367630	671
368034	400
368334	1077
369030	1278
369036	1278
369040	1278
369042	1278
371118	985
371207	950
371219	951
371221	951
371233	951
371245	951
371257	951
371269	951
371271	951
371283	951
371295	951
371308	951
371847	1027
371849	1020
372110	92
372122	92
372134	92
373009	958
373011	958
373023	958
373035	958
373037	958
373039	958
373041	958
373043	958
373097	958
373102	968
373112	958
373124	958
373136	958
373148	958
373364	959
373376	959
373388	959
373390	959
373403	959
373453	959
373465	959
373528	959
373530	959
373542	959
373554	959
373566	959
373578	959
373631	959
373643	959
373718	959
373720	959
373768	959
373908	959
373910	959
373922	959
373934	1232
373939	1232
373946	959
373950	1232
373951	1232
373954	959
373955	959
373959	1232
373960	959
373972	959
373984	959
373996	1067
374000	1067
374010	1067
374020	1067
374025	959
374030	1067
374040	1067
374042	1067
374050	1067
374060	1067
374065	1067
374067	1067
374071	1067
374075	959
374087	959
374099	959
374126	959
374152	1232
374166	956
374175	1067
374179	1067
374183	1067
374287	1067
374291	1067
375053	526
375103	999
375143	991
375154	991
375177	976
375181	976
375190	957
375205	957
375231	952
375242	952
375258	952
375268	952
375278	952
375281	952
375382	495
377475	387
377487	387
377502	1340
377514	1340
378490	267
378655	325
378667	325
378668	325
378679	315
378681	315
378693	315
378700	315
378706	315
378710	315
378754	266
378756	266
378758	260
378764	262
378819	265
378820	265
378821	265
378825	265
378833	265
378908	277
378909	110
379020	319
379026	319
379049	1227
379185	338
379188	339
379191	339
379194	339
379197	339
379203	338
379215	338
379277	305
379280	328
379285	328
379290	328
379295	328
379304	318
379366	326
379392	328
379404	316
379405	328
379406	335
379407	335
379408	335
379409	335
379410	335
379411	335
379455	326
379458	316
379460	316
379461	316
379462	316
379464	316
379467	333
379479	328
379480	328
379483	328
379495	328
379506	328
379518	328
379528	316
379532	316
379533	316
379534	316
379535	316
379536	316
379537	316
379539	316
379608	310
379609	310
379610	310
379633	310
379645	310
379657	310
379667	310
379668	310
379669	310
379671	314
379672	314
379673	314
379696	322
379698	322
379758	322
379759	322
379760	333
379761	322
379771	322
379772	333
379773	322
379775	322
379780	333
379782	329
379783	329
379784	329
379796	329
379809	329
379811	329
379835	329
379847	329
379859	328
379861	328
379862	329
379863	328
379864	328
379865	328
379866	329
379873	329
379885	329
379897	329
379902	329
379906	329
379912	1070
379924	1070
379936	1070
379948	1070
379950	335
379962	329
379974	329
379998	306
380004	306

©2014 Donovan Marine, Inc.

DMI No.	Page No.
380016	306
380017	326
380018	326
380042	1070
380050	328
380054	1070
380060	328
380066	1070
380070	328
380078	1070
380080	328
380082	1070
380090	328
380100	328
380106	1070
380117	1070
380129	1070
380131	1070
380143	1070
380146	1070
380159	1070
380167	495
380169	1070
380170	1070
380171	1070
380172	1070
380173	1070
380177	1070
380178	1070
380179	1070
380180	1070
380183	1070
380184	1070
380185	1070
380186	1070
380187	1070
380188	1070
380189	1070
380194	1055
380198	1055
380201	1055
380202	1055
380203	1293
380204	1055
380205	1055
380206	1340
380218	1233
380220	1233
380244	1234
380256	1234
380282	1233
380294	1233
380307	1233
380321	496
380333	1233
380341	1233
380357	1113
380369	1113
380372	1113
380395	1112
380446	1112
380458	1112
380460	1112
380472	1112
380509	1112
380511	1112
380650	1108
380651	1108
380655	1108
380656	1108
380662	1108
380663	1108
380674	1108
380675	1108
385686	1167
386017	279
386021	279
386032	279
386044	279
390962	354
390974	354
391007	358
391021	358
391033	358
391110	355
391146	354
391158	354
391247	356
391261	356
391285	358
391286	358
391289	356
391290	356
391297	355
391300	355
391324	355
391336	355
391348	355
391362	358
391386	355
391413	355
391437	357
391487	917
391603	895
391639	894
391653	893
391906	906
392009	904
392011	904
392023	904
392035	904
392047	904
392061	904
392073	904
392085	904
392097	904
392100	904
392124	904
392136	905
392148	905
392198	916
392251	907
392302	908
392376	907
394558	1339
394572	1339
394661	1339
394665	1339
394666	1339
394697	1339
394700	1339
394705	1339
394706	1339
394807	1339
394813	1339
394825	1339
394828	1339
394863	1339
394875	1339
394887	1339
394894	1339
394896	1339
394899	1339
394902	1339
394914	1339
394926	1339
394938	1339
394940	1339
396426	348
396653	348
397097	350
397174	349
397200	342
397205	342
397210	342
397215	342
397220	342
397227	342
397655	1227
397665	1227
398102	1263
398203	1263
398215	1263
399784	64
399790	64
399795	64
399914	1287
400313	1241
400325	124
401404	450
401428	450
401442	450
401543	450
401579	450
401593	450
401606	450
401620	450
401624	449
401656	450
401769	449
401822	450
401961	450
401985	450
401997	446
401999	446
402002	446
402014	446
402015	450
402019	1227
402026	450
402052	450
402141	457
402153	456
402165	457
402178	458
402216	175
402219	175
402220	175
402221	174
402221D	175
402223	174
402223D	174
402225	174
402266	178
402500	175
4025072	178
4025073	178
402554	173
402555	173
402556	173
402558	172
402570	180
402582	172
402584	172
402585	170
402588	172
402589	169
402590	172
402610	177
402711	170
402760	175
402768	176
402800	178
402802	175
402806	178
402807	178
402809	177
402810	178
402812	178
402888	175
402891	170
402892	175
402893	176
402894	176
402987	178
402999	177
403001	178
403002	177
403003	177
403004	177
403005	177
403313	173
403313D	174
403316	174
403330	173
403330D	174
403344	179
403345	179
403346	178
403347	179
403348	179
403349	179
403352	169
403356	167
403360	167
403398	169
403398D	169
403399	168
403399D	168
404000	170
404001	169
404002	170
404003	168
404004	170
404006	167
404007	167
404008	167
404011	172
404012	179
404014	179
404016	179
404020	179
404022	179
404025	180
404026	180
404027	180
404032	175
404033	175
404035	173
404036	171
404038	171
404040	171
404042	171
404044	171
404046	171
404048	170
404054	169
404058	169
404062	168
404070	168
404080	167
404157	1120
404169	1120
404171	1120
404172	303
404309	1045
404323	1045
404335	1120
404347	1120
404359	1120
404703	1120
404715	1120
404727	1120
404765	1120
404796	1121
404804	1120
404894	907
405561	1119
405562	1119
405563	1119
405564	1119
405565	1119
405566	1119
405567	1119
405569	1119
405570	1119
405571	1119
405589	1119
405604	1120
405610	1120
405620	1120
405622	1120
405627	1120
405629	1120
405653	1119
405654	1119
405655	1119
405705	1120
405729	1120
405743	1120
405770	1120
405772	1120
405773	1120
405774	1120
405776	1120
405778	1120
405863	1121
405864	1121
405870	1121
405904	1119
405907	1119
405919	1119
405921	1119
405933	1119
405945	1119
405956	1119
405966	1119
405969	1119
405972	1119
405983	1119
405995	1119
406010	1119
406011	1119
406014	1119
406016	1119
406018	1119
406019	1119
406020	1119
406024	1119
406026	1119
406035	1119
406036	1119
406040	1119
406042	1119
406048	1119
406049	1119
406050	1119
406252	1120
406264	1120
406276	1120
406290	1120
406303	1120
406319	1120
406327	1120
406339	1120
406360	1119
406370	1119
406505	1123
406517	1123
407040	1123
407052	1123
407088	1123
407103	1123
407140	1123
407280	1123
407329	1123
407343	1123
407367	1123
407406	1123
407432	1123
407456	1123
407468	1123
407583	1123
407709	1123
407711	1123
407723	1123
407735	1123
407761	1123
407800	1123
408042	1122
408080	1122
408092	1122
408219	489
408221	489
408225	489
408230	489
408235	489
408240	489
408246	489
408250	489
408408	1122
408422	1122
408424	1122
408535	1122
408546	1122
408547	1122
408561	1122
408603	1122
408612	1122
408624	1122
408838	1122
408852	1122
408876	1122
408888	1122
408890	1122
408903	1122
408915	1121
408927	1121
408941	1121
409096	1121
409097	1121
409108	1121
409118	1121
409150	1121
409152	1121
409154	1121
409157	1121
409163	1121
409165	1121
409166	1121
409171	1121
409208	1121
409210	1121
409225	1121
409309	1123
409311	1123
409323	1124
409373	1123
409397	1123
409400	1123
409450	1123
409462	1123
409474	1123
409548	1123
409549	1123
409587	1123
409638	1121
409676	1123
409753	1124
409789	1124
409790	1124
4-1030	669
4-1032	817
4-1034	740
410352	1124
4-1036	767
410364	1124
4-1038	767
4-1050	757
4-1051	818
4-1052	757
4-1053	757
4-1054	757
410542	1124
4-1055	794
4-1056	795
4-1057	794
410579	1124
4-1058	795
4-1059	794
4-1060	794
4-1062	768
4-1064	767
4-1065	767
4-1066	822
4-1067	767
4-1068	822
4-1069	768
4-1070	768
410705	1124
4-1071	768
4-1072	670
4-1074	822
410744	1120
4-1075	767
410756	1120
4-1076	670
4-1078	768
410782	1120
4-1080	768
410807	1122
4-1081	794
410819	1124
4-1082	768
4-1083	767
410833	1124
4-1102	732
4-1104	685
4-1106	619
4-1108	619
4-1110	618
4-1112	618
4-1114	618
4-1116	619
4-1117	766
4-1118	618
4-1119	682
4-1120	618
4-1121	618
4-1122	682
4-1123	683
4-1125	711
4-1130	792
4-1132	755
411325	1124
411326	1124
411327	1124
411328	1124
4-1134	756
4-1136	755
4-1138	755
4-1140	684
4-1142	683
4-1144	684
4-1146	683
4-1148	682
4-1149	683
4-1150	712
411506	1016
4-1151	822
4-1152	712
411520	1013
4-1153	822
411532	1012
4-1154	713
4-1155	822
411556	1029
4-1156	712
4-1157	822
4-1158	713
4-1159	712
4-1160	713

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

DMI No. to Page No. Index

DMI No.	Page No.
4-1161	712
4-1162	712
4-1163	713
4-1164	767
4-1165	724
4-1166	767
4-1167	724
4-1168	683
4-1170	766
4-1171	711
4-1172	766
4-1174	766
4-1175	723
4-1176	766
4-1177	723
4-1178	822
4-1179	724
4-1180	617
4-1181	793
4-1184	736
4-1200	793
412001	1119
412004	1125
412014	1125
412018	1125
412019	1125
4-1202	793
412020	1125
412022	1125
412024	1125
412026	1125
412030	1125
412034	1125
412036	1125
412037	1125
412038	1125
4-1204	615
412040	1125
412042	1125
412044	1125
412046	1125
412048	1125
412050	1125
412051	1125
412052	1125
412053	1125
412054	1125
412057	1125
412058	1125
4-1206	756
412060	1124
412061	1124
412062	1124
412063	1124
412065	1124
412066	1124
412068	1125
412074	1125
412077	1125
412078	1125
4-1208	793
412080	1125
412081	1125
412083	1125
412084	1125
412087	1125
412088	1125
4-1209	822
412091	1125
412093	1125
412094	1125
412096	1125
412097	1125
412098	1124
412099	1125
4-1210	740
412101	1338
412104	1338
412107	1338
412108	1338
412109	1338
412110	1338
412112	1338
412114	1338
412116	1338
4-1212	740
412120	1338
412128	1338
412130	1049
412142	1049
412154	1049
412166	1049
412178	1049
412180	1049
412192	1049
412356	1141
412368	1141
412370	1141
412433	277
4-1250	615
4-1252	788
4-1254	679
4-1256	731
4-1257	613
4-1258	755
4-1259	613
4-1260	615
412609	977
4-1261	615
412611	278
4-1262	709
412623	977
4-1263	710
4-1264	710
412647	977
4-1265	614
412659	977
4-1266	680
4-1267	731
4-1268	709
4-1270	765
4-1271	710
4-1272	680
4-1273	710
4-1274	765
4-1275	765
412750	977
4-1276	765
412762	977
4-1277	755
4-1278	680
4-1280	710
4-1282	755
4-1284	680
4-1286	709
4-1288	765
4-1290	765
4-1292	709
4-1294	709
4-1296	740
413043	977
413051	977
413067	977
413079	977
413081	977
413245	977
413257	977
413269	977
413395	977
413423	977
413500	977
413512	977
413550	977
413562	977
413601	977
413613	267
413637	267
413904	977
413916	977
413928	977
413966	977
414019	977
414021	977
414211	977
414235	977
414261	977
414350	977
414398	993
414401	993
414463	977
414480	987
414487	988
414490	987
414499	989
414526	989
414590	986
414603	987
414627	990
414641	991
414689	986
414701	977
414704	986
414716	986
414754	977
414780	977
414792	977
414817	977
414831	997
414906	994
414920	994
414932	994
414956	994
414970	994
414982	995
415011	994
415023	994
415035	994
415085	995
415136	999
415154	997
415162	997
415174	997
415186	979
415201	999
415237	977
415249	977
415251	977
415275	977
415287	977
415299	977
415302	1032
415326	849
415338	977
415340	977
415353	978
415364	978
415934	267
416026	977
416138	977
416176	977
416188	977
416215	977
416288	977
416467	977
416594	977
416803	977
416820	977
416912	977
416998	977
417027	977
417040	977
417053	977
417217	975
417243	975
417407	977
417422	980
417459	977
417507	977
417511	977
417675	977
417687	977
417698	977
417778	975
417802	975
417814	975
417838	977
417898	977
417902	977
417940	977
417953	977
417954	977
417964	977
417976	977
418078	977
418093	977
418106	977
418120	970
418143	977
418221	977
418233	978
418246	978
418284	978
418285	977
418295	978
418309	978
418311	978
418335	978
418347	978
418359	979
418361	979
418373	979
418384	979
418412	979
418424	979
418435	979
418448	979
418457	979
418465	979
418497	978
418500	978
418524	978
418536	978
418562	978
418574	979
418599	979
418601	977
418613	979
418625	977
418637	979
418664	978
418702	977
418725	975
418738	975
418878	977
418888	977
420033	166
4-21001	797
4-21001-5	797
4-2284	755
423119	977
423121	977
423195	977
423222	977
423234	977
423246	977
423272	977
423296	977
423309	977
423323	977
423335	977
423347	977
423359	977
423361	979
423373	977
423385	977
423397	977
423400	977
423412	977
423424	977
423436	977
423462	977
423498	977
423501	977
423513	977
423537	977
423549	977
423587	977
423640	977
423664	977
423688	977
4-2445	613
4-2450	709
4-2455	615
4-2460	709
425492	979
425517	977
425529	977
425531	977
425555	977
425567	977
425579	977
425581	977
425593	977
425606	977
425668	977
425721	989
425810	977
425825	977
425830	977
425834	977
425858	977
425860	977
425872	977
425911	977
426000	977
426005	977
426230	1071
426254	1071
426278	1071
426280	1071
426292	1071
426305	1071
426317	1071
426329	1071
426343	1071
426355	1071
426367	1071
426379	1071
426381	1071
426393	1071
426406	1071
426418	1071
426420	1071
426432	1071
426444	1071
426468	1071
426470	1071
426483	1071
426494	1071
426507	1071
426519	1071
426521	1071
426557	1071
426569	1071
426571	1071
426583	1071
426595	1071
426608	1071
426646	1071
426658	1071
426660	1071
426696	1071
426709	1071
426723	1071
426735	1071
426759	1071
426761	1071
426800	1071
426812	1071
426824	1071
427105	1071
427143	1071
427167	1071
427179	1071
427206	1071
427218	1071
427232	1071
427244	1071
427268	1071
427270	1071
427307	1071
427319	1071
427345	1071
427357	1071
427383	1071
427395	1071
427446	1071
427561	1073
427585	1073
427600	1073
427636	1073
427650	1073
427698	1073
427705	1073
427713	1073
427749	1073
427750	1073
427751	1073
427763	1073
427787	1073
427840	1342
427903	1296
427941	1296
428006	1287
428020	1287
428056	1287
428119	1287
428121	1342
428133	1342
428157	1287
428551	1287
428563	1287
428575	1287
428602	1287
428614	1287
428804	1287
428810	1069
428815	1069
428820	1069
428825	1069
429212	124
429224	124
429464	1244
429476	1243
429488	1243
4-3001B	605
4-3002B	606
4-3006B	606
4-3007-10	676
4-3007B	676
4-3017-10	676
4-3017B	783
4-3023B	721
430269	1336
430271	1336
430276	1336
430280	1336
430285	1336
430289	1336
430291	1336
430304	1336
4-3030B	731
430316	1336
430320	1041
430330	1336
430342	1336
430380	1336
4-3039-10	677
430392	1336
4-3039B	783
430402	1336
430405	1336
4-3040B	704
430417	1336
430431	1336
4-3043B	607
430443	1336
4-3047	765
430484	1336
4-3050-10	605
4-3050B	605
4-3051-10	606
4-3051B	606
4-3052B	677
4-3053B	608
4-3056-10	677
4-3056B	677
4-3057-10	677
4-3057B	783
4-3058B	752
4-3059-10	607
4-3059B	607
4-3060B	765
4-3065B	704
4-3067B	704
4-3068B	705
4-3069-10	705
4-3069B	705
4-3070-10	705
4-3070B	705
4-3071-10	705
4-3071B	705
4-3072B	705
4-3081	765
4-3087	783
4-3096	721
4-3098B	677
4-3104B	605
4-3116	678
431217	1049
431229	1046
431231	1046
431243	1046
431255	1045
431267	1045
431279	1045
431285	1063
431315	1019
431317	93
431318	845
431320	845
431321	535
431323	536
431324	536
431325	846
431326	536
431327	535
431328	535
431329	535
431330	1010
431332	1045
431356	1045
431400	1038
431405	1038
431410	1038
431420	1018
431425	1026
431430	1038
431435	1018
4-3147	784
4-3147P	784
4-3214	784

©2014 Donovan Marine, Inc.

DMI No.	Page No.
4-3214-3	784
4-3214B	784
4-3217B	785
4-3248B	239
4-3250B	239
4-3277	753
4-3306	784
4-3313	706
4-3317B	785
4-3320	784
4-3348	753
4-3370	706
4-3371	706
4-3395	707
4-3396	707
4-3396-3	707
435051	121
435052	121
435077	121
435078	121
435092	121
435093	121
435128	121
435136	121
435152	121
435153	121
435176	121
435177	121
435190	121
435191	121
435277	121
435280	121
435282	122
435285	123
435378	121
436003	119
436004	119
436105	1237
436107	116
436116	1237
436128	1237
436272	115
436274	115
436276	115
436279	119
436280	119
436281	117
436282	117
436285	117
436293	117
436294	117
436318	1236
436356	117
436358	117
436370	1236
436371	1236
436394	1238
436412	1238
436419	1238
436421	1238
436423	1237
436426	1237
436430	1237
436433	1238
436445	1238
436469	1241
436471	1238
436472	116
436475	53
436477	53
436510	1265
436522	1265
436558	1333
436560	1333
436563	1333
436565	1333
436570	1333
436575	1333
436580	1333
436585	1333
436590	1333
436595	1333
436605	1333
436612	1333
436615	1333
436618	1333
436620	1333
436625	1333
436630	1333
436635	1333
436640	1333
436710	1333
436790	1333
436810	1333
436830	1333
436832	1333
436976	1032
437010	1027
437011	1065
437035	1065
437036	1065
437037	1065
437054	1024
437056	1020
437068	1020
437079	1065
437308	1028
437311	1028
437323	1028
437335	1028
437347	1028
437408	1031
437412	1031
437421	1031
437434	1031
437447	1023
437459	1023
437501	1035
437513	1035
437563	1035
437704	985
439124	985
439148	985
439162	985
439174	985
439186	985
439719	1034
439972	1049
439984	1049
439996	1049
440051	1048
440064	1048
440074	1045
440075	1058
440470	1141
440482	1141
440483	1141
440484	1141
440485	1141
440486	1141
440488	1141
440494	1141
440496	1141
440498	1141
440604	1141
440605	1141
440606	1141
440607	1141
440608	1141
440610	1141
440611	1141
440747	1156
440759	1156
440761	1156
440773	1156
440800	1158
440812	1142
440824	1141
440836	1049
440987	459
440999	459
441004	459
441016	459
441117	459
441129	459
441131	459
441181	459
441193	459
441507	459
441508	459
441509	459
441511	459
441612	1330
441614	1330
443990	937
443992	937
443995	368
444009	368
444010	368
444012	367
444024	367
444036	367
444048	367
444050	367
444062	367
444101	368
444122	368
444140	368
444165	367
444168	367
444175	368
444186	368
444204	368
444238	269
444240	271
444243	271
444245	368
444247	368
444248	268
444251	369
444252	369
444266	368
444282	368
444283	369
444288	368
444290	374
444300	374
444302	374
444306	371
444810	369
444822	369
444846	369
444858	369
444909	374
444911	369
446216	1273
451497	848
451500	1203
451501	1203
451524	1203
451574	1203
451598	1203
451599	1203
451600	1203
451601	1203
451605	853
451714	1203
451725	1203
451726	1203
451738	1203
451740	1203
451742	1203
451744	1203
451746	1063
451776	847
451800	847
451803	847
451815	847
451822	787
451841	848
451878	847
451879	847
451890	847
451891	847
451892	846
451893	847
451894	846
451895	847
451896	846
451897	847
451898	846
451899	847
451902	846
451903	846
451904	847
451905	847
451906	847
451907	844
451908	844
451909	844
451910	843
451911	844
451912	843
451914	843
451916	843
452125	845
452158	845
452161	845
452172	845
452185	845
452190	845
452196	845
452199	1068
452200	845
452201	1068
452209	1068
452212	1068
452214	1068
452217	1068
452221	1068
452235	1068
452241	1068
452246	1069
452249	1069
452259	1068
452471	1265
452487	1265
452499	1266
452514	1265
452526	1265
452538	1265
452552	1265
452615	1265
452627	1265
452641	1265
452665	1265
452716	1265
452730	1265
452742	1265
452754	1265
452778	1265
452791	1265
452805	1265
452829	1265
452831	1265
452843	1265
452867	1265
452893	1265
452906	1265
452918	1265
452956	1265
453100	1264
453112	1264
453124	1264
453136	1264
453162	1266
453174	1266
453201	1262
453213	1262
453251	1264
453262	1265
453302	1266
453314	1266
453471	1265
453473	1265
453504	1264
453516	1264
453528	1264
453565	464
453566	465
453574	464
453578	464
453580	1264
453592	1264
453605	1266
453617	1266
453629	1266
453693	1265
453706	1265
453767	1266
453782	1265
453845	1265
453870	1265
454125	1266
454126	1265
454152	1265
454314	1266
454380	1266
454405	1266
454429	1266
454431	1266
454458	1266
454491	1266
454530	1266
454542	1266
454556	1266
454568	1266
454607	1266
454619	1266
454631	1266
454649	1266
454653	1266
454669	1264
454671	1264
454683	1264
454687	1264
454695	1264
454697	1264
454698	1264
454699	1264
454811	1265
454815	1265
454819	1265
454912	1265
454919	1265
454924	1265
454936	1265
455164	464
455176	464
455205	465
455214	464
455217	465
455219	465
455222	465
455224	464
455226	464
455228	464
455229	465
455231	464
455232	464
455234	464
455238	465
455239	464
455243	464
455249	464
455252	464
455265	464
455283	464
455302	464
455407	464
455475	465
455478	465
455484	464
455487	1341
455491	464
455495	464
455596	464
455643	464
4-5600	619
4-5601	683
4-5602	683
4-5603	766
4-5606	683
4-5611	683
4-5614	683
4-5617	617
4-5618	732
4-5620	684
4-5622	732
4-5623	617
4-5624	618
4-5627	618
4-5631	618
4-5632	619
4-5634	618
4-5636	684
4-5649	684
457526	1028
4-5801	757
4-5803	756
4-5812	756
458338	1250
458340	1250
458346	1250
458355	1250
458356	1250
4-5836	756
458390	1250
458500	1249
458504	1249
458516	1249
458528	1249
458529	1249
458530	1249
458542	1249
458554	1249
458580	1249
458592	1249
458605	1249
458617	1249
458629	1249
458631	1249
458643	1340
4-5903	756
459051	1067
459102	1067
459152	1067
4-5916	767
4-5917	756
4-5920	756
459203	1067
459253	1067
4-5929	670
459354	1067
4-5946	794
4-5954	768
4-5983	794
4-5984	768
460105	1036
460117	1036
460155	1035
460167	1035
460179	1035
460181	1037
460193	1037
460206	1037
460208	1037
460212	1037
460214	359
460218	1036
460220	1036
460222	1035
460232	1036
460234	1035
460245	1040
460246	1040
460252	1041
460255	1041
460256	1040
460258	1040
460268	1040
460270	1040
460282	1042
460307	1040
460318	1041
460321	1041
460331	1037
460332	1040
460333	359
460335	359
460337	1038
460345	1035
460348	1042
460361	1042
460362	1042
460363	1042
460364	1042
460365	1042
460367	1042
460369	1035
460370	1042
460378	1039
460379	1039
460380	1039
460381	1039
460383	1034
460408	1034
460410	1034
460421	1034
460423	1034
460439	1034
460446	1039
460475	1042
460478	1042
460483	1043
460485	1043
460491	1036
460494	1036
460496	1036
460497	1042
460509	1042
460523	1038
460662	92
460792	1025
460794	1025
460797	534
460812	537
460817	537
460820	536
460838	1026
460840	1025
460842	1025
460852	1025
460864	1025
460876	1025
460880	534
460882	534
460883	1025
460884	534
460886	536
460888	852
460889	852

DMI No. to Page No. Index

DMI No.	Page No.
460890	1026
460891	1026
460892	537
460893	1026
460894	537
460895	1025
460896	537
460901	1026
460903	1069
460912	1026
460922	1026
4610082	528
4610083	528
461150	1032
461151	1032
461152	1032
461222	98
461236	98
461246	98
461385	972
461401	972
461513	972
461777	973
461828	972
461830	982
461835	982
461840	988
461866	973
461944	972
461950	989
461951	987
461952	998
461953	988
461954	988
461955	988
461956	988
461957	993
461958	988
461960	989
461961	989
461962	989
461970	989
462000	989
462005	990
462010	990
462015	990
462020	990
462025	990
462034	972
462248	972
462250	972
462262	972
462274	972
462286	973
462298	973
462299	990
462300	990
462301	972
462302	990
462310	990
462312	990
462313	973
462320	990
462322	990
462324	990
462326	990
462328	990
462329	989
462330	998
462334	957
462340	973
462342	973
4-6261	757
4-6274	766
4-6275	756
4-6276	756
4-6279	732
4-6280	614
4-6281	615
4-6282	684
4-6283	684
4-6284	684
4-6285	613
462868	972
4-6288	768
462907	972
4-6293	794
4-6298	794
462995	973
463098	973
4-6410	711
4-6411	711
4-6412	724
4-6416	724
4-6417	724
4-6418	736
4-6420	712
4-6422	712
4-6423	712
4-6429	724
4-6432	723
4-6433	740
4-6436	684
4-6439	732
4-6440	684
4-6441	732
4-6454	669
4-6455	669
465636	1234
466640	951
466641	951
466652	951
466688	951
466689	951
466690	951
466693	951
466727	951
466739	951
466741	951
466791	951
466792	951
466804	951
466806	951
466816	951
466820	951
466830	951
466831	951
466842	951
466854	951
466866	951
466880	951
466892	951
466905	951
466917	951
466931	951
466936	951
466944	951
466993	951
467008	951
467011	951
467036	951
467042	951
467054	951
467161	950
467173	950
467185	950
467197	950
467205	950
467212	950
467214	950
467250	950
467262	950
467274	950
467286	950
467298	950
467301	950
467313	950
467315	950
467325	951
467337	951
467349	951
467351	951
467363	951
467375	951
467387	951
467389	951
467399	951
467414	950
467438	950
467440	950
467452	950
467464	950
467476	950
467478	950
467488	950
467490	950
467503	950
467515	950
467527	950
467539	950
4-6754	755
467540	950
467541	950
467542	950
467560	950
467565	950
467568	950
467573	950
467577	950
4-6758	766
467589	950
467590	950
467591	951
467604	951
4-6761	615
467616	951
467628	944
4-6763	680
467630	951
467642	951
4-6765	680
467654	951
467660	951
4-6769	680
4-6770	766
467705	950
467717	950
467729	950
467734	950
467738	950
4-6774	680
4-6775	731
467767	950
4-6777	732
467781	950
4-6779	755
467806	950
467807	950
4-6781	710
467820	950
467844	950
4-6785	723
467856	950
4-6786	723
467868	950
467870	950
4-6788	766
467882	950
4-6789	765
467894	950
467907	950
467919	950
467921	950
468024	950
468036	950
468102	742
468106	742
468108	742
468110	742
468112	742
468113	742
468114	742
468115	742
468116	742
468118	742
468119	743
468120	743
468122	743
468124	743
468126	743
468128	743
468130	743
468132	743
468140	743
468144	743
468148	743
468152	743
468164	743
468168	1078
468172	743
468176	743
468180	874
468184	874
470017	968
470029	968
470043	988
470055	968
470067	990
470070	990
470072	984
470074	984
470079	993
470081	994
470083	993
470085	993
470086	993
470087	993
470088	993
470089	993
470090	980
470091	980
470120	966
470122	966
470124	966
470126	966
470230	962
470232	962
470240	966
470241	966
470242	966
470243	966
470447	963
470449	963
470450	963
470453	981
470461	963
470462	963
470463	965
470497	963
470499	964
470500	960
470505	960
470510	960
470514	962
470524	963
470525	966
470526	966
470527	966
470528	966
470529	966
470530	966
470531	966
470532	963
470533	963
470536	963
470538	966
470548	963
470651	963
470687	963
470688	964
470689	964
470690	1004
470699	1003
470700	1004
470702	1003
470714	1003
470719	1003
470721	1004
470722	1004
470725	1004
470726	963
470729	1004
470730	990
470732	981
470734	1004
470736	1004
470738	1003
470740	1004
470742	1003
470743	1003
470744	1120
470745	1004
470746	1005
470747	849
470749	982
470750	982
470751	981
470752	1006
470754	1007
470815	1006
470827	1006
470839	1003
471351	969
471353	969
471361	969
471362	969
471363	968
471364	968
471365	968
471374	957
471390	360
472768	1342
472794	1285
472907	1081
473047	1081
473215	1285
473227	1285
473241	1285
473465	1335
473479	1335
473480	1335
473482	1335
473484	1335
473485	1335
473490	1335
473493	1335
4740171	231
4740215	229
4740216	229
474719	218
474720	218
474731	218
474732	218
474733	226
474734	218
474735	218
474738	226
474740	218
474742	226
474744	226
474750	218
474751	218
474752	218
474753	218
474755	218
474830	227
474835	227
474840	227
474845	227
474850	227
474855	227
474860	227
474865	227
474870	227
474875	227
475031	225
475032	225
475033	225
475041	225
475043	225
475070	219
475071	225
475088	217
475094	220
475104	228
475105	228
475106	228
475107	228
475108	228
475109	226
475110	226
475112	226
475114	228
475115	228
475116	226
475118	225
475119	225
475120	225
475122	225
475129	219
475131	219
475132	219
475141	220
475142	220
475144	220
475146	220
475173	220
475174	220
475176	220
475177	220
475179	227
475212	222
475214	222
475215	222
475216	224
475290	222
475291	222
475292	222
475293	222
475294	224
475296	222
475297	222
475298	222
475299	222
475323	223
475347	223
475361	223
475397	223
475410	223
475424	223
475448	223
475460	223
475462	224
475490	223
475505	224
475520	224
475590	222
475591	222
475592	222
475593	222
475594	222
475595	222
475596	222
475599	222
475601	224
475602	222
475610	222
475611	222
475612	222
475613	222
476073	217
476075	217
476078	217
476080	217
476082	217
476083	217
476084	217
476085	217
476086	217
476087	64
476089	64
476091	64
476095	64
476096	64
476209	231
476223	232
476261	232
476273	232
476285	232
476286	232
476287	232
476292	233
476297	233
476312	233
476425	232
476451	230
476566	229
476567	229
476568	229
476590	351
476595	231
476603	228
476615	228
476627	231
476630	231
476635	231
476667	231
476718	230
476720	218
476721	221
476722	219
476778	339
476790	337
476792	339
476794	337
476843	339
476867	339
476869	339
476870	339
476871	339
476872	339
476873	340
476875	340
476876	340
476877	340
476998	218
476999	231
477000	220
477010	217
477015	218
477020	220
477025	220
477026	221
477027	221
477028	220
477030	217
477031	220
477032	218
477033	220
477035	192
477038	220
477047	229

©2014 Donovan Marine, Inc.

DMI No.	Page No.
477058	65
477060	65
477068	65
477070	65
477081	65
477082	65
477083	65
477084	65
477085	66
477086	65
477090	66
477091	66
477092	66
477093	65
477100	65
477130	66
477132	66
477134	66
477135	66
477137	66
477140	66
477142	66
477144	65
477146	65
477148	65
477150	65
477152	65
477154	65
477156	65
477158	65
477160	65
477162	65
477164	65
477166	65
477168	65
478758	162
479027	162
479217	298
479229	298
479231	298
479243	298
479320	298
479368	298
479370	298
479382	298
479394	298
479407	298
479419	299
479421	299
479445	299
479457	299
479469	300
479471	300
479508	298
479510	300
479560	298
479572	298
479584	298
479596	298
479609	298
479623	299
479647	299
479659	299
479700	298
479750	298
479762	298
479774	298
479786	298
479801	298
4-7981	780
479851	298
479863	298
479875	298
479899	298
479914	297
479938	298
479964	300
479976	300
479990	301
480018	301
480020	301
480032	301
480044	301
480056	301
480068	301
480070	301
480082	304
480094	304
480107	304
480501	302
480525	302
480549	302
480563	302
480587	302
480664	302
480670	1159
480675	1159
480680	1159
480688	302
480690	302
480695	1159
480696	1159
480700	1159
480701	1159
480705	1159
480706	1159
480710	1159
480711	1159
480715	1159
480716	1159
480720	1159
480721	1159
480725	1159
480726	1159
480730	1159
480731	1159
480735	1159
480736	1159
480737	1159
480740	1159
480742	1159
480744	1159
480745	1159
480748	1159
480749	1159
480750	1159
4810038	502
4810054	498
4810056	498
4810063	498
4810064	498
4810065	498
4810070	498
4810071	498
4810074	498
4810075	498
4810076	498
4810080	516
4810081	499
4810082	499
481040	362
481045	362
481048	362
481050	362
481051	362
481052	362
481053	362
481054	362
481056	362
481059	362
481063	363
481064	363
481065	363
481948	500
481950	500
481951	500
481952	500
481953	500
481954	500
481970	500
481981	497
481984	497
482002	497
482007	497
482013	1227
482014	1227
482015	497
482016	1227
482018	1227
482019	497
482020	1227
482021	497
482022	1227
482026	1227
482028	1227
482030	1227
482034	1227
482036	1227
482052	498
482075	497
482076	497
482088	497
482115	497
482127	497
482505	499
482510	499
482515	499
482520	499
482525	499
482530	499
482535	499
482540	499
482550	499
4830036	490
4830042	490
4830044	490
4830045	490
4830047	490
4830051	490
4830052	490
4830053	490
4830054	490
4830055	490
4830056	490
4830057	490
483141	535
483299	464
483312	401
483317	464
483319	401
483329	465
483331	465
483367	464
483418	464
483420	465
483444	464
483468	464
483470	464
483482	464
483494	464
483498	465
483500	465
483501	465
483503	465
483505	465
483519	465
483521	464
483533	465
483537	465
483545	465
483557	465
483560	465
483569	465
483570	465
483608	465
483610	465
483634	465
483646	465
484004	885
484016	885
484028	885
484042	885
484066	885
484410	1242
484422	1242
484460	1237
484464	1237
484499	1243
484501	1243
484509	1243
484511	1243
484523	1238
484535	1238
484547	1237
484555	1237
484557	1237
484559	1237
484561	1237
484573	1242
484585	1242
484597	1242
484600	1242
484632	1244
484634	1243
484636	1243
484648	1243
484820	895
484840	895
484853	895
484890	895
484900	895
484965	899
484977	899
484990	368
485020	899
485498	953
485501	953
485513	953
485525	953
485537	953
485561	953
485573	953
485585	953
485638	1233
486568	428
486743	945
486755	944
486781	945
486820	943
486868	943
486870	945
486882	945
486894	945
486907	945
486945	943
486957	943
486969	943
487000	944
487024	944
487048	944
487062	944
487086	944
487199	944
487505	296
487581	1215
4-8903B	730
489132	460
489134	460
489143	460
489155	460
489167	460
489181	460
489193	460
489212	460
489220	460
489244	460
489268	460
489333	460
489509	458
489511	458
489650	457
489662	457
489749	457
489751	462
489763	462
489775	462
489787	462
489799	462
489802	462
489838	462
489840	462
489852	462
489864	462
489876	462
489888	462
489915	462
489927	462
489939	462
489941	462
489953	462
489965	462
489977	462
489989	462
489991	462
489995	462
489999	462
490007	455
490019	455
490021	462
490036	455
490042	455
490057	462
490069	462
490095	462
490111	462
490147	462
490148	462
490149	462
490150	462
490151	462
490152	462
490153	462
490154	462
490155	462
490297	456
490300	456
490312	456
490328	455
490332	455
490350	457
490401	457
490413	457
490425	455
490499	455
490526	457
490538	457
490588	457
490665	471
490678	471
490688	471
490716	471
490729	471
490751	471
490766	471
490817	471
490828	471
490855	471
490919	471
490932	471
490933	457
490983	471
490994	471
491011	471
491036	471
491047	471
491100	471
491113	471
491136	471
491150	471
491163	471
491175	471
491187	471
491198	471
491214	471
491251	471
491706	470
491720	470
491895	458
492568	468
492571	468
492584	468
492597	468
492601	468
492614	468
492627	468
492630	468
492643	468
492656	468
492669	468
492672	468
492685	468
493182	986
493185	986
493700	469
493724	469
493748	469
493992	469
494006	469
494030	469
494056	469
494067	469
494079	469
494081	469
494120	460
495150	468
495151	468
495152	468
495153	468
495158	468
495160	468
495172	468
495184	468
495196	468
495209	468
495212	468
495214	468
495216	468
495218	468
495440	467
495442	467
495444	467
495446	467
495449	467
495451	467
495463	467
495475	467
495487	467
495499	467
495502	467
495506	467
495508	468
496101	1276
496112	1276
496124	1276
496135	1276
496141	1276
496148	1273
496157	1273
496162	1276
496174	1276
496186	1277
496187	1277
496188	1277
496190	1277
496191	1277
496192	1277
496193	1277
496194	1277
496195	1277
496197	1277
496199	1277
496201	1277
496202	1276
496213	1273
496215	1276
496218	1273
496225	1273
496245	993
496247	1277
496248	1277
496249	1276
496264	1276
496287	1277
496302	1277
496315	1273
496317	1273
496338	1277
496377	120
496379	120
496386	1248
496415	1276
496427	1276
496441	1276
496504	1126
496516	1126
496517	1126
496519	1126
496522	1126
496524	1126
496605	992
496629	992
496631	992
496643	992
496655	992
496667	992
496679	992
496681	992
496719	992
496768	992
497013	1236
497025	1236
498320	840
498332	842
498356	842
498386	842
498394	842
498422	842
498430	842
498438	840
498440	842
498446	840
498447	842
498448	842
498449	842
498450	842
498455	842
498456	842
498457	842
498479	842
498480	842
498481	842
498490	842
498495	842
498496	842
498501	842
498508	842
498520	842
498522	842
498526	842
498529	842
498534	842
498536	842

DMI No. to Page No. Index

DMI No.	Page No.
498538	842
498546	842
498562	842
498570	842
498571	842
498572	842
498584	842
498588	842
498590	842
498591	842
498593	842
498595	842
498596	842
498602	842
498609	842
498611	842
498615	842
498622	842
498623	842
498641	842
498652	842
498659	842
498661	842
498669	842
498673	842
498700	842
498709	842
498712	842
498724	842
498736	842
498740	842
498748	842
498762	842
498777	842
498813	842
498825	842
498837	842
498849	842
498850	842
498855	842
498859	842
498863	842
498865	842
498866	842
498875	842
498879	842
498887	842
498902	842
498924	840
498947	842
498964	842
499005	842
499043	842
499050	842
499066	842
499079	842
499081	842
499085	842
499087	840
499089	842
499091	842
499094	842
499096	842
499098	842
499101	842
499104	842
499107	842
499144	804
499818	1223
500071	1248
500073	1248
500075	1248
500078	1248
500081	1248
5-0010	1235
5-0015	1235
5-0030	1297
5-0031	1297
5-0040	1297
5-0041	1297
5-0045	1297
5-0046	1297
5-0064	921
5-0066	921
5-0068	921
5-0070	921
5-0080	920
5-0082	920
5-0084	920
5-0086	920
5-0088	920
5-0090	920
5-0092	919
500971	1167
500972	366
500973	366
500974	366
500975	365
500976	363
500978	373
500979	373
500980	373
500981	373
500982	373
501000	364
5010021	231
501004	366
5010040	24
501005	366
5010055	233
5010056	233
5010058	231
5010059	228
501006	371
5010063	229
501007	371
5010088	221
5010090	221
5-0102	919
501036	213
501037	224
5-0104	919
501043	224
501054	224
5-0106	919
501066	224
501078	224
5-0108	919
501088	223
5-0110	919
501103	223
501107	223
501108	223
501109	223
501110	223
501112	223
501125	224
501139	223
501141	223
5-0120	920
5-0122	920
501288	227
501290	228
501291	228
5-0130	920
501300	228
501310	228
501315	228
5-0132	920
501320	228
501384	225
501388	225
5-0140	920
501415	226
5-0142	920
501420	226
5-0144	920
501460	227
501470	218
501480	227
5-0150	921
5-0152	921
5-0164	920
5-0166	920
501710	226
501713	226
501725	226
501727	226
501754	218
501757	218
501759	221
501761	221
501762	230
501764	230
501766	218
501770	224
501771	224
501772	224
501773	224
501774	24
501775	24
501776	24
501777	24
501778	225
501779	225
501780	225
501781	219
501782	219
501783	219
501784	219
501785	219
501786	219
501787	226
501788	221
501789	221
501791	221
501792	221
501793	221
501794	219
501795	219
501796	219
501797	219
501798	219
501799	219
501800	219
501801	219
501802	219
501803	219
501804	219
501805	219
501806	221
501807	221
501808	221
5-0190	921
5-0192	921
5-0194	921
5-0196	921
502028	233
502030	233
502033	233
502042	233
502054	233
502105	233
502117	233
502232	233
502307	233
502319	229
502321	221
502511	233
502515	233
502573	233
502674	1237
502686	1237
502690	1237
502695	1237
502698	1237
505012	1210
505024	1210
505036	1210
505048	1210
505062	1210
505074	1210
505086	1210
505098	1210
505125	1210
505166	1210
505192	1210
505193	1210
505194	1210
505195	1210
505202	1210
505214	1210
505240	1210
505252	1210
505264	1210
505276	1210
505288	1210
505303	1210
505308	1210
505339	1210
505341	1210
505350	1210
505355	1210
505358	1210
505360	1210
505362	1210
5-0538	1293
5-0539	1293
505400	1210
505457	1210
505606	1210
505620	1210
505632	1210
505656	1210
505670	1210
506103	1210
506139	1210
506141	1210
506228	1210
506230	1210
506242	1210
506254	1210
506266	1210
506305	1210
506329	1210
506331	1210
506333	1210
506337	1208
506338	1209
506340	1209
506342	1209
506344	1209
506347	1210
506348	1210
506349	1210
506350	1209
506351	1209
506354	1209
506367	1342
507117	1330
507129	1330
507131	1330
5-0730	1295
5-0732	1295
507942	1132
507943	1132
507944	1132
507945	1132
507946	1132
507947	1132
507948	1132
507949	1132
507950	1132
507954	1132
507955	1132
507956	1132
507957	1132
507958	1132
507959	1132
507960	1132
507961	1132
507962	1132
508032	1133
508044	1133
508056	1134
508068	1135
508070	1135
508082	1135
508094	1135
508107	1133
508119	1133
508121	1134
508133	1134
508145	1135
508157	1134
508169	1134
508183	1132
508200	1134
508222	1134
508234	1134
508250	1134
508260	1134
508272	1134
508323	1134
508335	1134
508347	1133
508359	1133
508361	1133
508373	1133
508390	1134
508391	1133
508393	1133
508395	1133
508398	1133
508405	1133
508407	1133
508408	1133
508410	1133
508412	1133
508432	1133
508440	1134
508476	1133
508478	1133
508480	1133
508482	1133
508484	1133
508486	1134
508498	1134
508501	1133
508513	1133
508525	1133
508537	1133
508628	1133
508630	1133
508632	1133
508638	1133
508640	1133
508652	1133
508664	1133
508854	1132
508866	1132
508878	1131
508880	1131
508993	1132
509008	1132
509010	1132
509034	1132
509046	1132
509096	1132
509159	1132
509161	1132
509274	1132
509286	1132
509337	1132
509349	1132
509351	1132
509363	1132
509375	1132
509387	1132
509399	1132
509402	1132
509414	1132
509426	1132
509438	1132
509476	1132
509488	1132
509490	1132
509503	1132
509515	1132
509577	1131
509589	1131
509604	1131
509628	1131
509666	1131
509692	1131
509705	1131
509731	1131
509743	1131
509755	1131
509767	1131
509779	1131
509781	1134
509793	1134
509806	1134
509820	1131
509832	1131
509844	1131
509856	1131
509868	1131
509870	1131
509882	1131
509894	1131
509919	1131
509933	1131
509957	1131
509971	1131
509995	1131
510001	1131
510013	1131
510025	1131
510037	1131
510063	1131
510075	1131
510080	1131
510099	1131
510102	1131
510114	1131
510126	1131
510138	1131
510140	1131
510152	1131
510164	1131
510176	1131
510190	1131
510203	1134
510239	1131
510253	1131
510277	1131
510291	1131
510328	1131
510330	1131
510392	1131
510417	1131
510429	1131
510431	1131
510455	1131
510479	1131
510493	1131
510518	1131
510544	1131
510556	1131
510568	1131
510570	1131
510594	1131
510607	1131
510619	1131
510621	1131
510633	1131
510645	1131
510669	1131
510671	1131
510683	1131
510695	1131
510708	1134
510722	1134
510758	1131
510800	1134
510835	1132
510847	1132
510859	1132
510873	1132
510885	1132
510900	1132
510924	1134
510936	1134
510950	1132
510974	1132
510986	1132
510998	1132
511003	1134
511015	1134
511041	1132
511077	1132
511089	1132
511110	1132
511154	1135
511217	29
511229	29
511231	29
511243	29
511249	29
511253	29
511258	129
511275	1235
511988	907
511990	906
512002	907
512004	907
512006	904
512008	904
512012	905
512014	905
512015	904
512016	914
512018	914
512020	908
512021	338
512022	338
512023	338
512030	1218
512040	906
512042	906
512144	514
512168	304
512233	531
512245	531
512257	531
512269	531
512283	531
512295	531
513982	70
513994	70
514009	70
514011	70
514023	70
514035	70
514047	70
514059	70
514061	70
514063	70
514065	70
514067	70

©2014 Donovan Marine, Inc.

DMI No. to Page No. Index

DMI No.	Page No.
514069	70
514073	70
514080	1251
514091	1251
514096	1251
514098	1251
514099	1251
514101	1251
514104	1250
514105	1251
514106	1251
514107	1250
514110	1250
514112	1250
514113	1251
514114	1251
514116	1251
514120	1251
514125	1251
514126	124
514127	124
514128	124
514129	1251
514131	1251
514134	1251
514144	1251
514151	1251
514163	1251
514166	1251
514172	1251
514175	1251
514178	1251
514181	1251
514184	1251
514189	1251
514192	1251
514213	341
514262	1250
514265	1250
514267	1251
514314	128
517215	1340
517219	1032
517221	1032
517233	1032
518891	118
518900	118
518901	118
518971	118
518972	118
518973	118
518995	119
518996	119
518997	126
518998	119
519105	119
519106	119
519112	118
519124	118
519136	1236
519148	1236
519150	119
519151	119
519225	119
519403	118
519404	118
519470	118
519471	118
519487	118
519488	118
519493	1124
520053	288
520057	288
520068	288
520090	288
520093	288
520094	288
520097	288
5-2010	935
520168	288
520194	288
5-2030	935
5-2050	935
5-2060	935
5-2070	935
5-2090	935
520906	288
5-2110	935
521141	288
521142	288
521157	288
5-2130	935
5-2140	935
5-2150	935
5-2160	935
5-2170	935
521816	288
5220042	272
5220043	277
5-2210	935
522112	288
522787	1171
522789	1171
522791	1173
522792	1173
522806	1168
522808	1168
522810	1173
522815	1168
522825	1168
522850	1176
522852	1176
522854	1176
522866	1176
522878	1176
522880	1176
522882	1174
522884	1174
522886	1178
522888	1176
522889	1176
522890	1179
522892	1174
522894	1174
522896	1174
522898	1174
522905	1172
522906	1172
522910	1171
522915	1183
522917	1169
522929	1169
522931	1172
522943	1172
522950	1172
522951	1171
522954	1169
522955	1170
522967	1170
522970	1170
522972	1170
522993	1174
523008	1174
523010	1169
523020	1169
523022	272
523035	273
523039	273
523096	270
523109	270
523112	270
523114	270
523187	272
523213	272
523225	272
523274	305
523290	306
523295	1185
523310	306
523340	290
523351	1260
523363	1260
523375	1260
523387	1260
523399	1260
523402	1260
523414	1260
523426	1260
523438	1261
523440	1261
523452	1261
523464	1261
523476	1261
523488	1261
523490	1261
523503	1262
523515	1262
523541	1262
523565	1262
523577	1262
523591	1262
5-2360	935
523628	1262
523630	1262
5-2370	935
523806	1261
523818	1261
523832	1261
523856	1261
523868	1261
523882	1261
5-2390	935
523919	1261
5-2430	935
524353	1262
524366	1262
5-2460	935
524656	1262
524668	1262
524682	1262
524707	1262
524719	1262
524771	1262
524822	1258
524834	1258
5-2490	935
5-2520	935
5-2550	935
5-2560	935
525901	1259
525913	1259
525937	1259
525951	1259
525963	1259
525975	1262
525987	1259
525999	1259
526105	1259
526154	257
526159	257
526164	248
526169	257
526174	257
526179	257
526184	257
526189	257
5-2640	935
526600	1269
526650	1269
526674	1269
526802	1267
526814	1267
526838	1267
526840	1267
526852	1267
526876	1267
526888	1267
526890	1267
5-2700	935
527108	1267
527119	1267
527121	1267
527132	1267
527196	1338
527208	1267
527211	1267
527223	1267
527234	1267
527247	1267
5-2730	935
527690	1259
5-2770	935
527703	1259
527715	1259
527727	1259
527739	1259
527828	1258
527830	1258
527842	1258
527854	1258
527880	1258
527892	1258
5-2790	935
527905	1258
5-2800	935
528125	1288
528127	1288
528135	1288
528138	1288
528149	1288
528160	1288
528161	1288
528162	1288
528163	1288
528174	1288
528176	1288
528182	1288
528184	1288
528210	1291
528220	1289
528221	1289
528250	1260
528262	1260
528274	1260
528286	1260
528289	1260
528292	1260
528298	1260
528387	1260
528399	1260
528402	1260
528414	1260
528503	1260
528515	1260
528527	290
528539	290
528806	291
528807	1261
528818	1261
528820	1261
528832	1261
529000	1258
529012	1258
529024	1258
529036	1258
529095	288
529102	288
529338	288
529340	288
529341	288
529343	288
529361	288
529362	288
529367	288
529368	288
529370	288
529371	288
529404	1261
529428	1261
529430	292
529442	292
529466	1262
529529	290
529620	1258
529644	292
529668	292
529808	1261
529810	1261
529860	1262
529872	1262
529909	1262
530015	1267
530027	1267
530053	1267
530077	1267
530089	1267
530091	1267
530104	1267
530116	1267
530128	1267
530142	1267
530154	1267
530178	1267
530229	1269
530332	1268
530344	1268
530356	1268
530421	1268
530433	1267
530445	993
530458	1267
530469	1267
530471	1267
530483	1267
531026	288
531050	288
531075	288
531496	113
5315030	380
5315033	381
5315035	381
5315036	381
5315046	398
5315047	398
5315055	517
5315060	516
5315071	518
5315073	518
5315074	518
5315076	399
5315078	250
5315081	243
5315084	252
5315085	250
5315086	250
5315087	250
5315088	250
5315089	250
5315090	250
5315093	250
5315094	250
5315098	249
5315101	518
5315105	249
5315106	249
5315112	244
5315117	244
5315123	530
5315124	289
5315131	517
5315135	530
5315151	380
5315152	380
5315155	380
531550	385
531574	1230
531585	399
531600	261
531640	250
531645	253
531649	384
531675	382
531764	383
531790	292
531916	370
531928	383
531942	383
531954	383
531957	383
531978	385
531992	370
5-3200	930
532057	393
532108	392
5-3220	930
532223	250
532247	250
5-3230	930
5-3240	930
5-3250	930
5-3252	930
5-3260	930
5-3270	930
5-3280	930
532893	1142
5-3290	930
532967	249
532983	249
532995	249
5-3300	930
533009	136
533011	136
533023	136
5-3310	930
533124	307
533148	305
533173	386
533174	386
533188	249
5-3320	930
533202	249
533249	383
533251	383
533263	383
533269	1259
533270	1259
533271	1259
533272	1259
533274	252
533280	241
533299	370
5-3330	930
533302	251
533315	243
5-3332	930
533338	388
533340	388
533345	369
533364	382
533390	241
5-3340	930
533427	384
533439	396
533453	399
5-3350	930
533554	430
533578	135
5-3360	930
533617	397
533618	385
533643	106
533679	530
533681	941
5-3370	930
533768	517
533782	517
533813	266
533845	518
533871	135
533895	245
533946	135
533960	530
5-3400	930
534037	383
534051	383
534063	383
534068	382
534087	392
5-3410	930
534102	392
534126	387
534138	387
534176	387
534188	387
5-3420	930
534203	86
534227	360
534230	264
534239	102
534277	398
534289	398
5-3430	930
5-3432	930
534330	86
534378	241
534380	241
5-3440	930
534417	530
534431	518
534467	518
5-3450	930
534506	518
5-3460	930
534608	247
534619	248
534671	518
534680	518
534683	518
534685	518
534695	260
5-3470	930
534705	252
534707	252
534708	252
534710	252
534758	250
534772	250
5-3490	930
5-3500	930
535041	114
5-3510	930
535130	518
535133	243
535142	113
5-3520	930
5-3522	930
535294	243
5-3530	930
535306	252
535332	114
5-3540	930
535418	241
535419	1260
535421	1260
535433	1260
5-3550	930
5-3560	930
535611	252
535640	1260
535641	1260
535645	1260
535646	1260

DMI No. to Page No. Index

DMI No.	Page No.
535652	1260
535697	264
535786	360
5-3580	930
535840	1260
5-3590	930
535976	290
5-3600	930
536031	1258
536067	245
5-3610	930
5-3612	930
5-3620	930
5-3630	930
536361	245
536384	243
536396	254
5-3640	930
536409	254
536411	254
536423	254
536435	254
536485	253
5-3650	930
536500	253
536512	254
536520	381
536601	389
536613	389
5-3670	930
536737	244
536776	247
536777	946
5-3680	930
536838	241
536889	266
536891	266
5-3690	930
5-3700	930
5-3702	930
5-3710	930
5-3720	930
537247	531
537261	531
5-3730	930
537360	946
537386	1234
5-3740	930
537425	529
537437	529
537451	530
537463	530
537467	530
537475	289
537487	531
5-3760	930
537603	397
5-3770	930
5-3780	930
537879	253
537881	253
5-3790	930
537918	1263
5-3792	930
537932	253
537994	394
5-3800	930
538009	394
538059	993
538061	993
5-3810	930
538390	114
538439	305
538441	370
538453	370
538629	370
538631	249
538643	249
538869	370
538883	370
538922	374
538946	958
538958	958
538960	958
538972	958
538984	958
538996	958
539001	958
539075	958
539095	958
539102	958
539114	958
539126	958
539138	958
539140	958
539291	958
539295	958
539316	958
539328	958
539377	958
539378	958
539379	958
539392	360
539405	360
539429	986
539444	986
539467	843
539481	843
539506	959
539520	959
539532	959
539535	959
539544	959
539556	959
539570	374
539582	374
539594	514
539645	514
539683	334
540131	291
540155	999
540165	999
540166	999
540179	376
540181	376
540206	376
540282	517
540307	517
540321	517
540357	517
540395	517
540408	517
540422	517
540458	986
540472	398
540484	398
540496	398
540559	277
540624	517
540725	398
540737	398
540837	383
540838	383
540864	941
540887	430
540977	380
540989	514
541020	514
541044	385
541056	927
541068	993
541082	1230
541195	397
541323	950
541335	950
541347	950
541359	950
541372	430
541513	1069
541530	1259
541626	266
541638	1259
541640	1259
541727	955
541739	290
541740	290
541753	944
541791	955
541967	400
542009	399
542010	94
542046	950
542058	950
542060	950
542072	950
542084	950
542095	1340
542097	1340
542111	391
542123	392
542135	392
542161	396
542185	384
542197	384
542301	392
542325	387
542438	517
542476	244
542480	244
542488	244
542490	385
542515	326
542527	326
542530	326
542538	326
542678	956
542680	956
542692	956
542705	956
542717	956
542770	1167
542779	530
543202	1267
543214	1267
543226	1267
543238	1269
543290	1166
543292	1167
543293	1167
543294	1167
543315	1166
543318	305
543319	303
543320	303
543321	303
543353	1166
543378	241
543517	380
543531	381
543535	384
543581	388
543593	386
543606	380
543618	380
543632	380
543640	380
543644	380
543648	380
543649	380
543657	67
543668	392
543694	247
543746	388
543769	247
543771	247
543808	384
543858	387
543947	245
543959	389
543961	386
543973	380
543985	326
543986	326
543987	326
543990	326
543997	244
544014	248
544037	392
544038	246
544040	392
544110	67
544115	241
544139	397
544141	397
544230	388
544329	386
544343	516
544355	516
544367	266
544432	245
544468	266
544469	288
544470	265
544507	249
5450130	1058
545016	1058
545028	1165
545030	1165
545042	1061
545054	1165
545078	1060
545080	1060
545092	1060
545105	1165
545129	1060
545131	1165
545143	1060
545155	1061
545167	1061
545179	1058
545193	1029
545206	1029
545218	1029
545220	1029
546929	392
546931	380
546943	382
546955	382
546967	382
547008	387
547161	389
547197	386
547298	384
547301	384
547337	383
547349	383
547363	383
547387	383
547399	383
547402	383
547426	383
547452	397
547818	508
547974	151
547975	146
547983	151
547995	147
548000	158
548113	267
548238	1222
548240	1222
550000	898
5500027	904
5500028	904
5500029	904
5500031	914
5500032	914
5500033	914
5500035	914
5500036	914
5500037	913
5500038	913
5500039	914
5500042	915
5500044	915
5500045	914
550005	893
5500050	360
5500054	911
5500056	360
5500058	911
5500059	911
5500060	915
5500062	911
5500063	911
5500064	911
5500065	911
5500066	911
5500067	911
550010	894
550015	898
550020	908
550025	908
550030	908
550035	906
550040	906
550045	907
550050	907
550060	906
550065	907
550070	907
550075	907
550080	908
550085	905
550090	905
550095	912
550100	912
550105	912
550110	912
550115	912
550125	905
550130	906
550135	906
550140	913
550145	911
550150	911
550155	911
550160	911
550165	911
550170	911
550175	911
550180	911
550185	915
550190	915
550195	915
550200	914
550205	914
550210	918
550215	915
550220	914
550225	1217
550230	1217
550235	917
550240	917
550245	360
550250	912
550255	918
550260	918
550265	918
550270	918
550275	918
550280	917
550285	917
550290	917
550295	898
550300	898
550305	898
550310	897
550315	897
550320	905
550325	912
550330	913
550335	913
550340	913
550345	913
550350	913
550355	911
550360	911
550365	918
550370	918
550375	918
550380	918
550385	918
550390	918
553203	93
553328	467
553455	93
553518	430
554050	64
554070	64
554072	64
554074	64
554076	64
554255	1189
554267	1189
554279	1189
554281	1194
554899	71
554902	71
554951	63
554988	62
554989	62
554990	62
554991	62
555106	63
555156	62
555980	63
555995	63
555998	63
556001	62
556003	62
556010	63
556012	63
556014	62
556016	62
556184	1138
556196	1138
556209	1138
556211	1137
556212	1137
556214	1138
556216	1137
556218	1137
556220	1137
556222	1137
556224	1138
556968	145
557064	145
557504	141
558408	146
558835	158
558859	158
558861	158
558873	158
558885	161
558888	152
558900	160
558913	151
558962	154
558974	154
558980	147
559029	146
559065	154
559077	154
559164	152
559186	152
559191	152
559229	151
559233	151
559235	151
559243	151
559250	147
559251	147
559253	147
559257	147
559260	154
559262	154
559264	154
559266	154
559268	147
559300	150
559301	150
559305	150
559311	150
559318	150
559325	150
559326	156
559327	152
559330	149
559332	149
559333	149
559334	148
559335	155
559336	155
559337	149
559338	148
559339	155
559340	155
559342	149
559343	155
559344	152
559345	155
559346	153
559347	153
559348	156
559349	149
559350	156
559351	149
559352	149
559353	153
559355	153
559356	153
559357	152
559358	153
559360	152
559361	159
559362	156
559364	156
559366	156
559367	158
559368	159
559369	153
559370	158
559371	156
559372	149
559377	153
559378	159
559379	160
559380	148
559381	156
559382	160
559383	160
559384	263
559385	156
559386	156
559387	157
559388	157
559390	150
559391	157
559392	263
559394	263
559399	263

©2014 Donovan Marine, Inc.

DMI No.	Page No.
559400	157
559404	157
559405	157
559407	157
559412	160
559414	160
559418	158
559422	263
559423	263
559425	263
559428	263
559430	158
559431	152
559433	263
559434	263
559452	263
559453	263
559454	263
559455	263
559463	263
559471	263
559472	263
559474	263
559476	263
559480	158
559481	158
559485	152
559487	159
559488	159
559490	160
559492	160
559499	160
559505	153
559511	159
559513	159
559517	159
559520	157
559525	148
559529	148
559530	148
559535	155
559540	155
559545	157
559550	157
559555	157
559560	157
559565	157
559568	153
559575	157
559580	157
559585	157
559590	157
559595	157
559600	157
559602	263
559603	263
559610	157
559615	157
559620	157
559625	157
559630	157
559635	157
559640	153
559645	153
559650	160
559655	160
559660	160
559665	160
559670	160
559675	160
559680	157
559685	157
559690	157
559695	157
559700	150
559705	296
559710	296
559715	272
559720	275
559725	275
559730	274
559735	274
559740	274
559745	343
559750	343
559755	343
559760	343
559765	319
559770	319
559775	319
559780	319
559785	319
559790	319
559795	345
559800	345
559805	345
559810	263
559815	263
559820	159
559825	159
559830	269
559835	269
559840	268
559845	268
559850	268
559855	268
559860	270
559865	270
559870	270
559875	269
559880	269
559885	269
559890	305
559895	273
559900	270
559905	270
559910	270
559915	270
559920	270
559925	271
559930	271
559935	263
559940	263
559945	263
559950	263
559955	263
559960	263
559965	263
559970	263
559975	263
559980	263
559985	263
559990	263
559995	263
560000	263
560005	263
560010	263
560015	263
560020	263
561781	122
561782	122
561793	122
561794	122
561856	122
561857	122
561882	122
561883	122
562125	121
562137	121
563830	994
563848	994
563930	994
563937	994
563963	994
563968	994
564054	995
564059	994
564069	994
564077	994
564117	416
564155	416
564179	994
564183	994
564187	995
564189	995
564194	995
564199	995
564268	957
564624	994
565755	1340
569105	291
569106	291
569107	291
569117	291
569206	289
569232	287
569244	287
569268	287
569304	287
569307	287
569320	287
570019	1140
570083	1140
570107	1140
570109	1140
570110	1140
570111	1140
570120	1140
570122	1140
570134	1140
570146	1140
570172	1140
570175	1140
570184	1140
570196	1140
570209	1140
570211	1139
570223	1139
570235	1139
570247	1139
570253	1139
570257	1139
570273	1139
570285	1139
570297	1139
570300	1139
570301	1139
570312	1139
570324	1139
570325	1139
570326	1139
570327	1139
570329	1139
570330	1139
570336	1139
570337	1139
570350	1139
570362	1139
570374	1139
570375	1139
570400	1140
570401	1140
570402	1139
570403	1139
570404	1139
570405	1139
570406	1139
570413	1139
570436	1139
570437	1139
570451	1139
570460	1139
570473	1140
570474	1140
570475	1140
570476	1140
570499	1140
570500	1140
570541	1142
570552	1142
570603	1142
570641	1142
570653	1142
570656	1142
570657	1142
570658	1142
570665	1141
570689	1142
570691	1142
570704	1142
570716	1142
573605	1220
573609	420
573902	417
573905	417
573907	417
573914	417
573926	417
574005	417
574017	417
574029	417
574043	417
574055	417
574081	418
574093	418
574106	418
574110	418
574118	418
574119	418
574120	418
574132	418
574144	418
574168	417
574170	419
574208	419
574209	419
574233	419
574245	419
574257	419
574308	418
574322	418
574346	418
574360	418
574396	420
574523	418
574548	419
574562	419
574563	419
574574	419
574577	419
574586	419
574590	419
574601	420
574613	420
574649	420
574651	420
574675	420
574676	420
574904	421
574942	421
575057	1035
575069	1035
575071	1140
575088	1035
576504	1208
576516	1208
576530	1208
576554	1208
576958	1214
576960	1214
577102	1215
577200	145
577860	1342
577902	1296
577907	1294
577945	1342
577948	1340
577986	1296
577988	1293
578154	1192
578166	1208
578181	1208
578192	1192
578194	1208
578200	1192
578205	1192
578206	1192
578281	1211
578283	1211
578290	1191
578293	1211
578300	1191
578306	1211
578310	1191
578320	1191
578325	1191
578366	1192
578367	1192
578368	1215
578369	1202
578370	1202
5-7900	933
5-7903	933
5-7905	933
5-7908	933
5-7911	933
5-7914	933
5-7923	933
5-7926	933
5-7931	933
5-7934	933
5-7937	933
5-7946	933
5-7949	933
579613	1197
579620	1197
580100	1222
580105	1222
580110	1222
580111	1208
580115	1222
580120	1222
580123	1208
580147	1208
580159	1208
580173	1208
5-8020	927
5-8021	927
5-8022	927
5-8051	933
5-8052	933
5-8053	933
5-8054	933
5-8055	933
5-8056	933
580577	1215
5-8061	933
5-8062	933
5-8063	933
5-8064	933
5-8065	933
5-8066	933
5-8070	933
5-8071	933
5-8072	933
5-8073	933
5-8074	933
5-8080	933
5-8082	933
5-8084	933
5-8086	933
5-8088	933
5-8090	934
5-8092	934
5-8094	934
5-8096	934
5-8098	934
5-8100	934
5-8106	934
581066	911
581067	908
581068	908
581069	908
5-8108	934
5-8112	934
5-8114	934
5-8116	934
5-8122	934
5-8124	934
5-8128	934
5-8129	934
5-8131	934
5-8143	934
581505	969
5-8155	934
5-8167	934
581707	983
581719	990
581733	1002
581745	1002
581757	1002
581769	1002
5-8179	934
5-8181	934
581810	1002
581856	1002
581858	1002
581859	1002
581860	1002
581865	1005
581872	1002
581874	1002
581875	1002
581884	1002
581896	1005
5-8193	934
5-8200	934
582000	962
582026	962
5-8203	934
582030	967
582038	967
582040	962
582042	962
582052	962
582063	910
582064	962
582065	910
582076	967
582088	1002
582090	1002
582103	1002
5-8215	934
5-8221	934
582216	966
582222	966
5-8224	934
5-8227	934
582305	966
582329	966
582333	963
582335	963
582348	965
5-8236	934
582360	965
582370	965
582379	965
582381	965
5-8239	934
582456	964
5-8248	934
582482	964
582494	964
582496	964
5-8251	934
582519	964
582521	964
582545	964
582557	964
582571	964
582575	965
582580	977
582584	964
582611	983
582646	967
582658	967
582660	967
582662	967
582696	967
582698	967
582709	970
582711	970
582713	970
582735	969
582759	969
582785	964
582800	969
582812	965
582824	965
582886	962
583155	1000
583701	1000
585957	1239
585971	1240
585983	1240
585996	1239
586000	1239
586012	1239
586013	1239
586202	1239
586208	1239
586245	50
586246	50
586247	50
586250	275
586254	275
586258	275
586262	273
586270	276
586274	276
586277	276
586282	276
586286	276
586300	274
586305	274
586309	274
586313	274
586317	274
586321	274
586325	274
586332	274
586337	274
586342	274
586346	274
586350	276
586353	38
586354	113
586358	276
586362	113
586370	125
586374	126
586378	126
586382	117
586386	117
586390	128
586391	73
586394	1229
586398	1219
586402	909
586405	132
586410	1158
586414	128

DMI No. to Page No. Index

DMI No.	Page No.
586416	85
586418	128
586422	126
586426	114
586429	114
586434	113
586438	128
586440	1219
586446	1219
586450	128
586455	38
586457	1219
586466	38
586483	39
586492	39
586497	276
586503	276
586505	276
586509	276
586513	276
586542	54
586544	54
586550	134
586555	54
586644	51
586666	51
586670	51
586682	51
586690	51
586692	51
586694	51
586696	51
586757	50
586769	50
586777	50
586783	50
586785	50
586822	50
5870014	908
5870021	910
5870022	910
5870024	910
5870027	909
5870028	909
5870032	909
5870037	915
5870047	910
5870051	909
5870053	910
5870056	909
5870058	915
5870059	909
5870062	907
5870064	40
5870067	40
5870069	40
587088	1233
587090	1233
587102	910
587103	1233
587108	1233
587110	910
587111	910
587125	40
587127	910
587150	910
587204	910
587205	910
587206	910
587207	910
587208	910
587209	910
587216	910
587217	910
587220	397
587230	910
587310	910
587312	910
587319	910
587329	910
587330	910
587355	909
587356	909
587361	915
587370	230
587375	230
587381	909
587383	909
587482	909
587494	909
587519	909
587556	910
587557	910
587558	910
587562	1216
587564	1216
587566	915
587571	909
587572	909
587595	909
587622	909
587634	909
587658	937
587660	937
587707	1217
587708	1217
587709	1217
587710	1217
587760	1217
587773	1217
587785	1217
587786	1217
587812	40
587906	910
587909	910
587963	911
587987	911
587988	915
587999	911
588006	40
588015	916
588020	916
588025	916
588030	916
588035	916
588040	916
588045	916
588050	916
588055	916
588060	916
588065	916
588515	1234
588518	1234
588523	1233
588528	1233
588535	1234
588537	1233
588539	1233
588542	1233
588547	1234
588559	1233
588561	1233
589018	46
589259	8
589260	9
589272	9
5-8930	922
5-8932	922
5-8936	922
592483	46
592508	46
5925085	47
5925090	47
5925095	44
5925125	44
5925130	44
5925145	44
5925150	44
5925165	44
5925170	44
5925185	44
5925190	44
5925215	44
5925220	44
5925260	54
5925275	54
5925370	44
5925375	3
5925390	44
5925395	44
5925400	44
5925405	44
5925410	44
5925415	44
5925420	44
5925425	44
5925430	44
5925435	44
5925440	44
5925445	44
5925510	46
5925520	46
5925525	46
5925530	46
5925540	46
5925550	46
5925555	46
5925580	50
5925590	46
5925595	46
5925600	46
5925605	46
5925610	46
593222	107
593702	48
593704	48
593706	48
593708	48
593710	48
593712	48
593714	48
593716	48
593726	45
593728	45
593730	45
593732	45
593733	45
593734	45
593738	45
593740	45
593742	45
593744	45
593746	45
593762	43
593764	43
593766	43
593768	43
593770	43
593774	43
593776	43
593778	43
593780	43
593782	43
593786	43
593788	43
593790	43
593792	43
593794	43
593812	43
593814	43
593816	43
593818	43
593822	43
593824	43
593826	43
593828	43
593832	43
593834	43
593836	43
593838	43
593852	43
593854	43
593856	43
593858	43
593860	43
593862	43
593864	43
593866	43
593870	43
593872	43
593874	43
593876	43
593878	43
593880	43
593882	43
593884	43
593938	47
593940	47
593944	47
593946	47
593950	47
593952	47
593962	59
593964	59
593966	59
593968	59
593970	59
594202	52
594204	52
594252	55
594254	55
594256	55
594258	55
594260	55
594262	55
594266	55
594268	55
594270	55
594272	55
594274	55
594276	55
594280	55
594282	55
594284	55
594286	55
594288	55
594290	55
594302	1241
594304	1241
594306	1241
594308	1241
594310	1241
594312	1241
594316	1241
594318	1241
594320	1241
594322	1241
594324	1241
594326	1241
594336	1219
594338	1219
594340	1219
594342	1219
594344	1219
594346	1219
594350	1219
594352	1219
594354	1219
594356	1219
594358	1219
594360	1219
594364	1219
594366	1219
594368	1219
594370	1219
594372	1219
594374	1219
596000	107
5960016	24
5960020	23
5960022	20
5960025	17
5960035	16
5960039	20
5960040	20
5960041	15
5960047	20
5960062	28
5960063	29
5960065	28
5960075	37
5960077	73
5960081	31
5960085	30
5960086	37
5960087	38
5960095	4
5960102	28
5960109	27
5960110	29
5960121	33
5960146	5
5960148	5
5960149	5
5960157	27
5960159	41
5960160	41
5960167	36
5960182	35
5960203	10
5960208	10
5960216	33
5960217	33
5960218	33
5960219	33
5960220	33
5960221	33
5960222	33
5960226	473
5960227	23
5960231	159
5960253	115
5960255	120
5960259	82
5960260	82
5960275	82
5960276	82
5960277	82
5960278	82
5960279	82
5960280	82
5960281	83
5960282	82
5960283	82
5960287	134
5960293	85
5960302	113
5960320	38
5960321	38
596050	107
596062	107
596304	33
596306	33
596316	34
596318	34
596320	27
596324	34
596328	33
596481	16
596493	16
596500	26
596501	24
596502	27
596504	14
596505	16
596506	21
596512	19
596513	19
596514	19
596517	25
596518	25
596519	27
596523	32
596525	29
596527	89
596529	89
596531	89
596532	24
596535	31
596536	4
596537	32
596538	32
596539	4
596540	16
596542	134
596544	40
596546	40
596548	40
596551	40
596568	22
596594	26
596622	26
596662	14
596664	14
596666	14
596670	8
596671	21
596673	5
596675	20
596677	37
596679	40
596680	40
596682	132
596684	132
596687	23
596689	35
596710	17
596712	17
596759	23
596790	35
596791	35
596793	32
596795	32
596796	40
596811	14
596823	14
596827	23
596829	20
596831	14
596833	19
596837	22
596838	21
596839	24
596882	8
596884	9
596894	8
596896	8
596898	8
596900	9
596901	8
596902	9
596903	8
596904	8
596905	11
596906	8
596907	11
596908	8
596909	11
596911	159
596912	9
596914	9
596915	159
596916	10
596917	82
596918	10
596919	82
596920	2
596921	82
596922	3
596923	82
596924	4
596925	82
596927	82
596929	82
596933	82
596935	82
596937	82
596941	82
596945	97
596967	38
597407	36
597421	36
597457	35
597471	36
597472	36
597560	36
597561	36
597563	37
597565	37
597572	36
597635	5
597659	5
597697	5
597712	5
597715	5
597724	5
597747	11
597749	11
597750	10
598409	113
598423	473
598435	473
598501	58
598502	58
598503	58
598504	58
598505	58
598506	58
598510	58
598511	58
598512	58
598513	58
598514	58
598520	58
598521	58
598522	58
598523	58
598524	58
598531	58
598540	58
598541	58
598542	58
598543	58
598544	58
598545	58
598550	60
598551	60
598553	60
598554	60
598555	59
598556	59
598557	59
598558	59
598559	59
598560	59
598561	59
598562	59
598575	60
598580	60
598585	61
598590	58
598595	58

©2014 Donovan Marine, Inc.

DMI No.	Page No.
598600	58
598605	58
598610	58
598615	356
599100	1
599105	1
599110	1
599120	1
599125	1
600136	11
601005	363
601006	38
601007	363
601008	35
601017	22
601018	34
601019	16
601020	16
601025	18
601026	34
601027	17
601028	34
601029	17
601031	37
601032	35
601033	15
601034	3
601035	16
601037	30
601039	32
601041	31
601043	30
601045	29
601047	28
601049	28
601051	31
601357	24
601371	23
601421	21
601523	26
601535	25
601547	25
601559	25
601650	18
601662	18
601672	19
601673	19
601674	18
601676	16
601679	31
601701	15
601748	22
601749	19
601750	19
601762	15
601764	15
601838	18
601842	18
602056	452
602070	452
602121	452
6-0214	1135
6-0225	1135
602652	453
602676	453
602753	452
602765	452
602789	452
602791	453
603009	858
603012	858
603040	858
603042	858
603044	858
603077	858
603081	858
603743	267
603755	267
603767	267
603779	267
603785	267
603793	267
603795	267
603800	1263
603808	1263
603815	338
603832	338
603919	537
603945	1065
603957	1065
603959	1065
604214	1065
604226	537
604228	1065
604238	537
604252	1065
604264	1065
604276	1065
604288	1065
604315	1063
604320	1205
604324	1063
604327	1064
604495	885
604501	885
604503	885
604512	885
604519	885
604822	1176
604823	1176
605000	1285
605001	1285
605014	956
605050	110
605111	110
605113	110
605139	109
605177	110
605202	110
605331	111
605343	111
605350	110
605355	110
605360	111
605600	110
605608	111
605610	110
605646	110
605658	109
606203	268
606204	268
606206	262
606207	262
606208	262
606209	262
606232	166
606244	166
606333	164
606351	164
606353	162
606509	161
606555	162
606561	163
606573	163
606624	162
606648	163
606665	162
606666	162
606677	162
606701	162
606705	162
606713	161
606737	162
606763	163
606775	163
606838	163
606840	163
606864	163
606866	164
606903	163
606939	163
607006	164
607018	164
607020	144
607022	144
607024	144
607025	144
607031	145
607032	145
607033	145
607034	144
607036	144
607038	144
607041	139
607044	162
607049	140
607061	139
607064	140
607065	140
607067	139
607068	139
607078	142
607079	140
607082	192
607083	192
607085	144
607088	139
607089	139
607090	140
607703	164
607899	164
607956	162
607981	165
607993	166
6-0800	1135
608005	1008
608010	1008
608015	1008
608020	1008
608025	1008
608030	1008
608035	1008
608040	1027
608045	1027
608050	1027
608055	1027
608060	1019
608065	1019
608070	1009
608075	1009
608080	1009
608085	1041
608090	1030
608095	1010
608100	1010
608105	1027
608110	1027
608115	1027
608120	1064
608125	1010
608130	1010
608135	1064
608140	1008
608250	165
608262	165
608286	165
608301	165
608349	165
608363	161
608438	165
608460	165
608503	165
608553	163
608812	164
609101	990
609202	990
610148	1194
610205	1188
610229	1188
610243	1188
610255	1188
610320	1188
610335	1188
610344	1188
610469	1196
610534	1194
610536	1194
6-1258	1135
615003	77
615015	77
615027	77
615039	77
615041	77
615053	77
615065	77
615089	77
615091	77
615128	77
615130	77
615142	77
615154	77
615166	77
615178	77
615421	77
615433	77
615445	77
615457	77
615469	77
615471	77
615484	77
615495	77
615525	77
615561	77
615572	77
615597	77
615608	77
615611	77
615612	77
615613	77
615621	77
615623	77
615624	77
615630	77
615631	77
615632	77
615659	77
615660	77
616005	75
616017	75
616029	75
616031	75
616043	75
616055	75
616067	75
616079	75
616081	75
616093	75
616106	75
616118	75
616120	75
616132	75
616144	75
616156	75
616168	75
616170	75
616173	75
616182	75
616194	75
616206	75
616257	75
616258	75
616260	75
616261	75
616271	75
616272	75
616283	75
616284	75
616295	75
616296	75
616308	75
616310	75
616322	75
616992	107
617007	107
617019	107
617021	107
617033	107
617045	107
617057	107
617069	107
617071	107
617083	107
617209	107
617211	107
617223	107
617235	107
617300	107
617312	107
617324	107
617336	107
617348	107
617350	107
617502	75
617514	75
617603	74
617627	74
617641	74
617665	74
617694	74
618504	107
618554	107
618580	107
620105	95
620117	95
620129	95
620131	95
620133	1081
620134	1081
620135	1081
620137	1081
620138	1081
620139	1081
620140	1081
620141	1081
620142	1081
620143	1081
620151	1081
620155	1081
620157	1081
620159	1081
620162	1080
620163	1081
620164	1080
620165	1081
620167	1081
620168	1080
620169	1081
620170	1080
620171	1081
620173	1081
620175	1081
620177	1081
620178	1080
620179	1081
620181	1081
620183	1081
620185	1081
622263	1069
622274	1069
622541	1069
623632	94
623635	379
623636	379
623637	379
623638	379
623639	379
623643	379
623644	379
624790	1016
624792	1022
624795	1192
624800	1016
624801	1019
624802	1016
624886	1011
624925	1013
624949	1013
625028	1009
625040	1012
625042	1008
625080	1008
625181	1008
625218	1008
625220	1011
625232	1012
625369	1023
625383	1016
625390	1017
625395	1031
625408	1030
625434	1030
625446	1030
625448	1030
625535	1027
625559	1024
625575	1024
625585	1019
625597	1019
625612	1022
625650	1021
625662	1023
625674	1023
625680	1019
625681	1023
625686	1023
625688	1023
625689	1016
625690	1016
625691	1016
625692	1016
625953	1028
626044	1029
626056	1029
626119	1029
626169	1029
626171	1029
626183	1029
626210	1029
626222	1029
626234	1029
626513	928
626518	928
626525	928
626549	1031
6270021	1015
6270031	1017
627159	851
627161	1063
627173	928
628151	1020
628202	304
628214	304
628290	1010
628303	1010
628353	1011
628365	1008
628370	1019
628377	1017
628379	1017
628380	1012
628381	1011
628382	1012
628385	1009
628387	1009
628390	1022
628391	1011
628404	1011
628428	1011
628430	1009
628442	1009
628454	1009
628456	1009
628466	1029
628478	1030
628480	1030
628492	1017
628517	1017
628520	1017
628531	1030
628535	1009
628543	1030
628550	1009
628553	1029
628560	1030
630497	416
630504	1238
630512	1240
630517	1239
630518	1239
630520	53
630522	1239
630524	1240
630555	1240
630562	1240
630574	1240
630586	1240
630598	1240
630600	1240
630613	1240
630625	1240
630637	1240
630648	1240
630649	1240
630654	1241
630656	1241
630663	1241
630675	1241
630687	1241
630699	1241
630703	124
630992	416
633289	443
633304	427
633306	428
633307	428
633316	428
633607	428
634003	428
634053	428
638607	1190
638633	1190
638669	1190
638695	1190
638710	1190
638746	1190
638797	1190
638835	1190
638861	1191
638900	1191
638924	1191
638962	1191
638967	1190
639065	1191
639091	1191
639116	1191
639178	1190
639306	1142
639317	1142
639320	1142
639332	1142
639344	1142
639356	1142

DMI No. to Page No. Index

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

DMI No.	Page No.
639801	67
639802	382
639804	382
639806	382
639837	261
639840	261
639849	381
639856	363
639940	305
639990	337
6400018	476
6400032	476
6400052	481
6400061	949
6400062	949
6400064	949
6400065	949
6400066	949
6400104	381
6400126	376
6400127	382
6400128	382
6400129	382
6400130	382
6400139	379
6400154	429
6400156	429
6400159	373
640018	337
6400196	480
640020	337
6400216	385
6400217	385
6400218	385
6400219	529
6400220	529
6400252	430
6400255	430
6400257	430
6400260	371
6400278	379
640036	337
640044	337
640056	337
640062	337
640064	379
640068	473
640069	473
640075	317
640082	473
640088	1007
640108	1006
640133	472
640156	472
640160	476
640162	476
640164	476
640166	476
640210	472
640222	474
640246	472
640253	499
640257	229
640258	229
640309	454
640310	454
640322	454
640335	454
640361	454
6-4050	1061
6-4055	1063
6-4060	1063
640602	480
640612	1179
640652	474
640653	474
640664	1218
6-4070	851
640703	472
640727	480
640741	476
6-4075	851
640753	480
640765	480
6-4080	928
640804	480
640806	531
640808	475
640810	475
640811	476
640814	475
640817	475
640820	481
640824	481
640842	476
640844	476
640845	475
640852	480
640880	476
640882	476
640905	428
640943	458
640945	1216
640950	429
640961	430
640970	430
640975	303
641060	391
641084	381
641085	382
641109	231
641111	192
641123	1218
641246	492
641262	493
641274	493
641301	986
641313	953
641324	492
641329	1006
641341	445
641353	492
641360	986
641375	954
641386	1007
641387	1007
641388	1007
641389	944
641390	1007
641391	944
641392	376
641393	376
641399	1007
641404	1006
641414	954
641426	1007
641427	955
641438	1006
641452	946
641464	946
641488	1006
641489	1006
641490	1005
641503	1006
641504	1006
641507	1007
641527	1007
641540	1006
641553	1006
641589	1006
641591	1006
641604	1007
641642	1007
641660	264
641678	1005
641680	1007
641692	371
641729	371
641731	370
641743	370
641745	370
641746	370
641767	429
641781	429
641793	429
641806	429
641818	467
641819	467
641832	946
641860	946
641862	946
641867	946
641868	945
641869	1007
641870	351
641882	351
641894	351
641906	429
641909	429
641912	429
641914	429
641921	429
641957	430
642024	955
642062	955
642100	472
642112	472
642192	954
642202	228
642264	365
642276	365
642277	385
642278	375
642279	375
642291	375
642293	375
642297	375
642300	375
642307	375
642309	375
642310	375
642312	271
642313	271
642314	375
642320	375
642327	375
642338	375
642340	375
642342	375
642352	429
642365	429
642368	391
642370	375
642372	374
642374	392
642389	429
642404	854
642428	854
642431	854
642480	400
642486	261
642488	261
642491	261
642494	261
642497	261
642500	261
642503	261
642506	260
642509	260
642512	260
642515	260
642518	260
642521	261
642524	261
642527	261
642530	262
642533	885
642535	262
642536	262
642539	262
642542	262
642545	266
642548	266
642551	262
642554	262
642557	262
642560	262
642563	262
642566	265
642569	265
642572	265
642575	265
642578	265
642580	428
642581	261
642584	261
642587	261
642590	261
642593	269
642596	268
642599	264
642602	264
642605	264
642608	264
642611	264
642614	264
642617	264
642620	264
642623	264
642626	264
642629	264
642632	264
642635	264
642638	264
642641	364
642644	364
642647	229
642650	229
642653	230
642656	949
645701	1239
645725	1341
645735	1341
645741	1341
645742	1251
645756	465
645757	1341
645765	1341
645768	949
645816	1338
645818	1338
645828	1338
645830	1338
645834	1338
645842	1338
646109	985
647610	468
647612	468
647614	468
647616	468
647618	468
647620	468
647622	468
647624	468
647626	468
647630	468
647783	468
647795	468
647808	468
647810	468
647822	468
647834	468
647846	468
647858	468
647860	468
647872	468
647884	468
647896	468
647909	468
648088	467
648090	467
648103	467
648115	467
648127	467
648139	467
648141	467
648165	467
648177	467
648189	467
648191	467
648521	467
648533	467
648545	467
648557	467
648569	467
648571	467
648583	467
648595	467
648608	467
648610	467
648622	467
648634	467
648636	467
648684	468
648696	468
648709	468
648711	468
648723	468
648735	468
648747	468
648759	468
648761	468
648773	468
648785	468
648797	468
648800	468
648848	469
648850	469
648862	469
648874	469
648888	469
648898	469
648901	469
648913	469
648926	469
648937	469
648948	469
648951	469
648962	469
648975	469
648989	469
648999	469
649004	469
649016	469
649029	469
649030	469
649043	469
649054	469
649067	469
649078	469
649081	469
649092	469
649093	468
649094	468
649096	468
649098	468
649101	468
649103	468
649105	468
649106	468
649109	468
649110	468
649112	468
649113	468
649116	468
649117	468
649118	468
649120	468
649122	468
649123	468
649124	468
649125	468
649126	468
649136	468
649138	468
649141	468
649145	468
649149	468
649150	468
649154	468
649157	468
649162	468
649166	468
649169	468
649173	468
649184	468
649191	468
649199	468
649220	470
649232	470
649244	470
649256	470
649371	460
649383	427
649410	427
649424	427
649434	427
649447	460
649458	427
649460	427
649478	427
649509	460
649523	427
649538	454
649547	427
649662	425
649965	425
649977	426
650724	467
650726	467
650728	467
650730	467
650732	467
650734	467
650736	467
6-5605	1135
6-5606	1135
656186	69
656198	69
656201	69
656213	69
656225	69
656237	69
656249	69
656251	69
656299	70
656302	70
656314	70
656338	70
656340	70
656352	70
656467	70
656516	70
656528	70
656530	70
656542	70
656554	70
656578	70
656579	70
656580	70
656592	70
656848	69
656849	69
656850	69
656853	69
656854	69
656872	72
656873	75
656874	72
656875	72
656876	72
656886	72
656900	1186
656960	89
656965	89
656970	89
656975	89
656980	89
656985	89
656990	89
656995	89
657000	89
657010	89
657015	89
657020	89
657025	89
657030	89
657035	89
657040	89
657045	89
657050	89
657055	72
657060	72
657063	1189
657065	72
657070	72
657080	72
657085	72
657090	72
657095	73
657100	73
657102	1204
657104	1204
657105	73
657106	1205
657107	73
657108	1205
657110	1209
657115	1209
657116	69
657119	69
657125	71
657126	1204
657130	71
657135	71
657140	71
657145	71
657150	71
657155	71
657160	71
657165	75
657175	75
657203	1205
657227	1205
657300	1205
657301	1205
657304	1205
657310	1205
657320	1205
657322	1204
657325	1204
657640	1201
657641	1201
657642	1201
657646	1201
657657	1201
657669	1201
657683	1201
657695	1201
657722	1201
657734	1201
657746	1201

©2014 Donovan Marine, Inc.

DMI No.	Page No.
658003	995
658748	1224
658750	1224
658762	1224
658774	1224
658786	1224
658801	1224
658813	1224
658825	1224
658837	1224
658849	1224
658851	1224
658863	1224
658875	1224
658887	1224
658899	1224
658914	1224
658926	1224
659273	1224
659275	1224
659277	1224
659372	1225
659373	1225
660363	1044
660375	1044
660387	1044
660399	1044
660402	1044
660414	1044
660426	1046
660427	1044
660438	1046
660476	1029
660488	1029
661333	1202
662571	289
662595	1342
662709	1229
662711	1229
662735	1229
662747	1229
662797	1228
662812	1228
662824	1228
662850	1229
662862	1229
662874	1229
662886	1229
662898	1229
662901	1229
662925	1229
665110	1173
665123	1173
666810	336
666822	336
666846	336
666860	336
666884	336
666908	336
666961	999
666973	999
667014	999
667038	999
667850	1208
667862	1208
667874	1208
667886	1208
667898	1208
667901	1208
667913	1208
667925	1208
667937	1208
667949	1208
668028	1208
668030	1208
668054	1208
668131	1208
668155	1208
668205	1208
668206	1208
668207	1208
668220	1208
6-6930	1135
6-6954	1135
6-6961	1135
6-6969	1135
6-6979	1135
6-6995	1135
6-7003	1135
6-7021	1135
6-7040	1135
6-7045	1135
672000	193
6720012	193
6720013	192
6720014	193
6720015	193
672005	193
672010	193
672012	193
672013	193
672015	193
672020	193
672025	192
672030	192
672035	193
672036	193
672040	193
672045	193
672048	193
672049	193
672050	372
672052	372
672054	372
6-7397	1044
6-7398	1050
6-7399	1050
6-7405	1057
6-7407	1057
6-7410	1047
6-7411	1047
6-7412	1047
6-7413	1047
6-7445	1057
6-7450	1057
6-7451	1057
6-7452	1057
6-7453	1057
6-7454	1057
6-7456	1057
6-7457	1057
6-7458	1057
6-7460	1057
6-7461	1057
6-7462	1057
6-7463	1057
6-7465	1057
6-7466	1057
6-7467	1057
6-7468	1057
6-7470	1057
6-7471	1057
6-7473	1057
6-7475	1048
6-7490	1042
6-7495	1042
6-7500	1048
6-7501	1048
6-7502	1048
6-7503	1048
6-7506	1046
6-7507	1046
6-7508	1046
675100	495
675112	495
675124	495
675133	495
675136	495
6-7514	1047
675148	495
6-7515	1047
675150	495
675162	495
675175	495
675189	495
675198	495
6-7520	1058
6-7521	1058
675213	1069
6-7522	1058
675225	1069
675237	1069
675249	1069
675251	1069
675255	1069
6-7530	1046
6-7531	1046
675368	496
675390	496
675398	495
6-7540	1045
675403	496
675415	496
675423	496
675427	496
675439	496
6-7544	1049
675441	496
6-7545	1049
675453	496
6-7546	1049
675465	496
6-7547	1049
675477	496
6-7548	1049
675489	496
6-7549	1049
675491	496
6-7550	1049
675504	496
6-7551	1049
675516	496
675528	496
675530	496
675542	496
675554	496
675566	496
6-7560	1061
6-7562	1061
6-7565	1061
6-7566	1061
6-7570	1048
6-7575	1048
6-7576	1048
6-7577	1044
6-7578	1044
6-7579	1044
675807	851
6-7581	1048
675843	537
675846	537
675847	535
675848	535
675849	535
6-7585	1057
675850	537
675851	535
675852	535
675853	92
675854	92
675855	92
675856	92
675857	92
675858	92
6-7586	1057
675861	537
675863	537
6-7587	1057
675870	1037
675872	1037
675874	1036
675876	1035
675878	1035
6-7588	1057
675880	1035
675882	1034
675884	1041
675886	1041
675888	1041
6-7589	1057
675890	1041
675892	1034
675898	1040
6-7590	1057
675900	359
675902	1040
675904	1039
675906	1042
675908	1043
6-7591	1057
675910	1034
675912	1034
675914	1035
675916	1035
675918	1035
6-7592	1057
675920	1035
675922	1035
675924	1037
675926	1039
675928	1039
6-7593	1057
675930	1040
675932	1043
675934	1034
675936	1034
675938	1040
6-7594	1057
675940	1041
675942	1041
675944	1041
675946	1040
675948	1040
6-7595	1057
675950	1035
675952	1035
675954	1035
675956	1037
675958	1036
675960	1036
675962	1036
675964	1039
675966	359
675968	1017
6-7600	1057
6-7601	1057
6-7603	1057
6-7604	1057
6-7605	1057
6-7606	1057
6-7608	1057
6-7610	1057
6-7611	1057
6-7612	1057
6-7613	1057
6-7620	1048
6-7621	1047
6-7622	1047
6-7623	1047
6-7625	1047
6-7626	1047
6-7627	1047
6-7630	1048
6-7632	1048
6-7634	1047
6-7637	1045
6-7638	1045
6-7640	1049
6-7641	1049
677456	451
677508	451
677520	451
677611	451
677623	416
677635	416
677672	416
677745	451
677746	462
677750	451
679413	1228
679414	1228
679415	1228
679416	1228
679417	1228
679418	1228
679419	1228
679420	1228
679421	1228
679425	1228
679451	1228
679487	1228
679499	1228
679510	1228
679515	1228
679520	1228
679656	1228
679670	1228
679675	1228
679676	1228
679683	1228
679685	1228
679687	1228
679706	1228
679709	1228
684327	1173
684444	1170
684666	1171
684678	1171
684680	1169
684743	1170
684755	1170
684763	1170
684775	1170
684809	1177
684820	1176
684832	1176
684856	1176
684868	1176
684882	1177
684894	1177
684896	1172
684922	1173
684969	1179
685051	1170
685053	1170
685098	1183
685137	1169
685163	1172
685199	1178
685203	1178
685226	1170
685315	1170
685327	1184
685330	1185
685339	1184
685342	1185
685359	1185
685366	1185
685388	1184
685389	1185
685450	1184
685529	1185
685541	1185
685550	1195
685558	1211
685565	1197
685566	1196
685569	1196
685570	1194
685573	1196
685576	1193
685580	1194
685581	1194
685585	1194
685586	1198
685590	1195
685595	1187
685600	1187
685605	1187
685610	1187
685615	1187
685616	1187
685618	1343
685620	1343
685623	1187
685630	1343
685631	1187
685635	1343
685636	1188
685640	1188
685645	1188
685650	1196
685810	891
685834	891
685858	891
685860	891
685872	891
685885	1292
685886	1292
685887	1292
685888	1292
685902	1198
685905	1197
685908	1188
685920	1194
685922	1194
685923	1195
685925	1187
685930	1187
685935	1188
685950	1180
685951	1180
686230	1263
686242	1263
686266	1263
686278	1263
686280	1263
686329	1263
686331	1263
686343	1263
686367	1263
686381	1263
686405	1340
686412	1340
686470	1263
688000	1199
688004	1199
688006	1199
688753	107
688765	107
688993	107
689002	361
689004	361
689005	361
689007	361
689008	107
689009	360
689013	361
689015	360
689017	361
689022	361
689024	361
690316	94
6-9100	854
691041	1231
692108	68
692156	355
692168	355
692170	355
692182	355
692194	357
692207	355
692210	358
694263	67
694265	67
694287	67
694300	67
694926	295
695923	295
696310	120
696320	275
696332	275
696344	275
696349	275
696351	275
696368	275
696920	166
697917	166
698007	317
698019	317
698021	464
698033	317
698046	317
698057	317
698069	317
698083	317
698108	317
698110	317
698123	317
698133	317
698136	317
698139	328
698146	341
698914	166
699188	146
699199	142
699213	142
699249	142
699255	142
699415	166
699744	314
699747	312
699750	312
699753	312
699756	312
699770	312
699782	312
699790	312
699794	313
699800	166
699820	306
699824	306
699828	306
699832	306
699840	306
699844	306
699851	314
699854	314
699857	324
699860	324
699863	314
699866	313
699869	352
699872	352
699875	352
699878	312
699881	312
699884	312
699887	313
699890	313
699893	312
699896	166

DMI No. to Page No. Index

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

DMI No.	Page No.
699899	166
699902	307
699905	307
699908	314
699911	166
699929	353
699932	353
699935	353
699938	353
699941	353
699944	353
699947	314
699953	313
699956	344
699959	344
699962	344
699965	344
699968	344
699971	344
699974	341
699977	341
6-9998	1135
699984	324
6-9999	1135
699998	324
700005	324
700016	313
700019	345
700022	345
700025	345
700027	345
700028	313
7-0003	893
700030	313
700032	345
700035	345
700038	345
700040	345
700045	313
700048	313
7-0005	893
700054	343
7-0006	893
700066	343
7-0007	995
7-0009	995
7-0010	995
7-0011	1171
700115	291
7-0012	1168
7-0013	1171
700150	321
700161	315
700164	321
700167	321
700170	321
700173	330
700176	330
700179	330
7-0018	233
700182	330
700185	340
700188	340
7-0018B	233
7-0019	233
700191	340
700194	340
7-0019B	233
7-0020	1229
700200	340
700203	321
700206	324
700209	341
700212	324
700215	330
700218	330
7-0022	1229
700221	353
700224	353
700227	353
7-0024	1229
700248	321
7-0029	940
7-0030	940
700307	340
7-0032	337
700323	340
7-0034	336
700345	341
7-0036	336
700370	341
700371	341
700372	341
700373	341
700374	341
700376	341
700379	341
700381	341
700383	341
700384	340
700387	341
7-0039	272
700396	340
700397	344
700399	344
700400	344
700401	344
700404	344
700408	344
7-0041	269
700411	344
700413	343
700416	343
7-0043	268
700434	465
7-0045	54
700450	345
7-0046	54
7-0050	249
7-0051	249
7-0052	253
7-0053	253
7-0055	243
700561	343
7-0058	241
700585	343
700587	352
700589	352
7-0059	245
700591	352
700593	352
700595	330
700597	330
700599	166
7-0060	241
700600	343
700603	345
700606	345
700609	345
700612	345
700615	345
700618	345
700621	345
700627	345
700630	345
700633	345
700636	345
700640	345
700642	345
700644	345
700646	345
700648	345
700650	345
700658	313
700660	313
700662	345
700670	324
700675	324
7-0068	1173
700681	324
7-0070	1174
7-0071	1174
7-0072	1178
7-0077	264
7-0078	264
7-0079	246
7-0080	242
7-0081	246
7-0082	268
7-0084	384
700843	233
7-0085	384
7-0089	531
7-0090	531
7-0092	529
7-0093	943
7-0093S	943
7-0094	943
7-0094S	943
7-0095	246
7-0097	1235
7-0099	374
7-0100	374
7-0101	249
7-0105	389
7-0111	246
7-0112	308
7-0113	455
7-0114	455
7-0115	455
7-0117	1227
7-0120	106
7-0122	106
7-0123	106
7-0124	106
7-0125	400
7-0126	161
7-0127	161
7-0130	166
7-0133	306
701332	91
7-0135	306
7-0137	166
7-0140	142
701404	91
7-0141	166
701417	91
7-0142	166
701426	91
701433	91
701446	91
7-0145	1196
701459	91
7-0146	1196
701463	91
7-0147	1196
701474	91
7-0148	1196
701486	91
701498	91
7-0150	1196
701501	91
7-0152	1196
701525	91
7-0153	1196
7-0154	320
701549	91
7-0157	319
7-0158	319
7-0159	320
7-0165	328
7-0167	328
7-0168	328
7-0169	398
7-0170	398
701707	91
7-0171	398
7-0172	398
701723	91
7-0173	399
701749	91
7-0176	400
701765	91
701766	1251
7-0178	394
701789	91
7-0179	394
7-0180	394
701804	91
7-0181	394
7-0182	394
7-0183	394
701842	91
7-0186	395
7-0187	393
7-0188	393
7-0189	393
7-0190	395
7-0192	395
7-0194	938
7-0195	938
7-0196	938
7-0197	938
7-0198	938
7-0199	938
7-0200	938
7-0201	938
7-0202	395
7-0203	939
702045	323
702050	323
702055	323
702060	323
702065	323
702070	323
702075	321
702080	321
702085	321
702090	321
702095	323
702100	321
702105	311
7-0211	389
702110	311
702115	311
7-0212	389
702120	311
702125	311
702130	311
702135	311
7-0214	393
702140	311
702145	321
702150	270
702155	270
7-0216	386
7-0218	386
7-0220	383
7-0221	383
7-0223	393
7-0224	393
7-0225	393
7-0232	945
7-0240	113
7-0248	452
7-0250	452
7-0253	454
7-0255	452
7-0267	76
7-0268	76
702680	91
7-0269	76
7-0270	76
7-0277	940
7-0278	1230
7-0279	1230
7-0280	1230
7-0281	1230
7-0282	1230
7-0284	1229
7-0285	1229
7-0286	1229
7-0287	1230
7-0288	1230
7-0289	1230
7-0290	1229
7-0294	938
7-0298	940
7-0302	938
7-0303	938
7-0305	514
7-0306	514
7-0307	512
7-0308	512
7-0310	514
7-0314	512
7-0315	512
7-0316	512
7-0318	513
7-0319	513
7-0320	512
7-0321	514
7-0322	944
7-0323	512
703230	984
703235	984
703240	996
703245	984
7-0325	938
703250	954
703255	954
7-0327	938
7-0329	938
7-0331	938
7-0333	938
7-0335	938
7-0338	399
7-0338B	399
7-0339	399
7-0339B	399
7-0340	399
7-0340B	399
7-0340S	399
7-0341	399
7-0341B	399
7-0341S	399
7-0342	941
7-0344	938
7-0347	938
7-0349	941
7-0351	945
7-0352	944
7-0353	944
7-0354	955
7-0356	955
7-0357	955
7-0358	955
7-0359	955
7-0359S	955
7-0360	955
7-0362	954
7-0363	955
7-0364	954
7-0365	955
7-0368	944
7-0371	142
7-0373	251
7-0374	251
7-0375	241
7-0377	251
7-0378	325
7-0380	325
7-0386	1217
7-0387	1217
7-0390	331
7-0391	331
7-0395	76
7-0396	76
7-0397	76
7-0398	76
7-0408	386
7-0409	384
7-0410	384
7-0411	386
7-0418	986
7-0419	986
7-0422	985
7-0423	985
7-0425	985
7-0430	1039
7-0434	982
7-0435	165
7-0437B	370
7-0438B	370
7-0439	1005
7-0440	983
7-0441	987
704412	37
7-0442	962
704420	37
7-0448	308
7-0451	305
7-0452	305
7-0455	389
7-0456	389
7-0457	387
7-0458	388
7-0462	334
7-0463	334
7-0464	334
7-0465	334
7-0468	335
7-0473	328
7-0474	328
7-0478	326
7-0479	331
7-0480	331
7-0481	331
7-0482	330
7-0483	331
7-0485	332
7-0487	331
7-0489	332
7-0489S	332
7-0491	332
7-0493	332
7-0495	472
7-0497	310
7-0500	389
7-0501	389
7-0502	941
7-0503	1184
7-0504	1185
7-0505	1185
7-0506	1183
7-0507	1183
7-0508S	1139
7-0509	311
7-0510	311
7-0511	311
7-0512	311
7-0513	310
7-0514	310
7-0516	310
7-0517	310
7-0518	310
7-0519	334
7-0520	326
7-0521	326
7-0522	326
7-0523	326
7-0525	1184
7-0526	1184
7-0527	1183
7-0528	334
7-0529	334
7-0530	333
7-0531	333
7-0532	326
7-0533	311
7-0534	334
7-0535	333
7-0536	333
7-0537	333
7-0538	333
7-0539	333
7-0540	333
7-0541	333
7-0542	333
7-0543	333
7-0544	333
7-0546	1227
7-0547	1227
7-0548	1227
7-0549	1227
7-0552	72
7-0553	72
7-0554	72
7-0556	72
7-0557	72
7-0558	72
7-0560	72
7-0561	72
7-0562	72
7-0563	943
7-0563S	943
7-0564	943
7-0564S	943
7-0565	943
7-0567	943
7-0569	945
7-0570	943
7-0571	943
7-0572	943
7-0573	843
7-0574	842
7-0574S	842
7-0575	364
7-0576	842
7-0576S	842
7-0577	247
7-0578	266
7-0579	843
7-0580	78
7-0581	78
7-0582	78
7-0583	78
7-0585	78
7-0586	78
7-0587	78
7-0588	78
7-0590	78
7-0591	78
7-0592	78
7-0593	78
7-0595	75
7-0596	75
7-0598	75
7-0599	75
706000	997
706005	996
7-0601	266
706010	996
706015	996
7-0602	358
706020	997
706025	998
7-0603	134
706030	960
706035	960
706045	960
706050	960

©2014 Donovan Marine, Inc.

DMI No.	Page No.
706055	996
706060	961
706065	961
706070	998
706075	998
706080	998
706085	998
706090	998
706095	961
706100	961
706105	961
706110	961
706115	998
7-0612	944
706120	961
706125	961
7-0613	944
706130	961
706135	984
7-0614	429
706140	984
706145	998
7-0615	429
706150	984
706155	984
706160	953
706165	996
7-0617	375
706170	997
706175	997
7-0618	375
706180	996
706185	997
706190	961
706195	953
7-0620	376
706200	953
706205	996
7-0621	376
706210	996
706215	996
7-0622	376
706220	984
706225	984
7-0623	376
7-0624	376
7-0625	376
7-0627	376
7-0628	376
7-0632	376
7-0633	376
7-0635	376
7-0636	376
7-0648	396
7-0651	385
7-0655	113
7-0656	113
7-0674	429
7-0675	429
7-0677	429
7-0678	428
7-0681	384
7-0685	1230
7-0686	387
7-0687	452
7-0688	452
7-0704	452
7-0705	452
7-0706	452
7-0707	452
7-0708	452
7-0709	452
7-0710	1201
7-0711	1201
7-0712	1201
7-0713	1201
7-0729	75
7-0731	75
7-0732	75
7-0733	75
7-0734	108
7-0735	108
7-0738	109
7-0739	109
7-0740	109
7-0741	109
7-0742	108
7-0744	108
7-0745	108
7-0747	108
7-0755	114
7-0780	1224
7-0782	1224
7-0786	1224
7-0787	1224
7-0788	1224
7-0789	1224
7-0790	1224
7-0791	1224
7-0792	1224
7-0793	1224
7-0794	1224
7-0795	1224
7-0796	1224
7-0797	1224
7-0798	1224
7-0799	1224
7-0800	1224
7-0801	1224
7-0802	1224
7-0803	1224
7-0821	352
7-0824	944
7-0841	242
7-0842	519
7-0843	519
7-0844	519
7-0845	519
7-0846	519
7-0847	519
7-0848	954
7-0850	954
7-0852	954
7-0855	954
7-0856	954
7-0857	954
7-0858	519
7-0859	520
7-0860	520
7-0860S	520
7-0861	247
7-0862	520
7-0863	307
7-0864	307
7-0866	308
7-0867	307
7-0868	307
7-0869	306
7-0870	520
7-0871	519
7-0873	519
7-0874	519
7-0875	526
7-0876	526
7-0878	519
7-0879	519
708799	55
7-0880	334
708801	55
708803	55
708805	55
708807	55
7-0881	334
708810	59
7-0882	334
708822	59
7-0883	334
7-0884	334
7-0885	330
7-0886	332
7-0887	335
7-0889	517
7-0890	369
7-0891	369
7-0892	516
7-0893	409
7-0894	516
7-0895	1198
7-0896	516
7-0897	369
7-0898	369
7-0899	1198
7-0900	981
7-0901	997
7-0910	509
7-0911	509
7-0912	509
7-0913	510
7-0914	510
7-0915	510
7-0918	510
7-0920	509
7-0922	509
7-0924	509
7-0925	509
7-0926	509
7-0933	510
7-0935	510
7-0937	512
7-0938	512
7-0939	512
7-0940	399
7-0941	399
7-0947	499
7-0948	499
7-0949	850
7-0950	850
7-0951	850
7-0952	1201
7-0953	1201
7-0954	1201
7-0955	1201
7-0956	1201
7-0957	1201
7-0958	1201
7-0959	1201
7-0960	364
7-0961	365
7-0962	364
7-0963	373
7-0964	371
7-0965	371
7-0966	371
7-0969	371
7-0970	387
7-0978	394
7-0979	394
7-0980	394
7-0982	394
7-0983	394
7-0986	395
7-0987	393
7-0988	393
7-0989	393
7-0992	395
7-0997	938
7-0999	938
7-1000	938
7-1002	395
7-1005	388
7-1007	387
7-1008	387
7-1009	387
7-1010	388
710132	1225
710133	1225
7-1017	397
7-1018	397
7-1020	514
7-1021	514
7-1022	514
7-1031	1031
7-1032	1031
7-1033	1031
7-1038	1139
7-1039	1139
7-1042	1139
7-1043	1139
7-1049	1139
7-1050	1139
7-1051	1139
7-1052	1139
7-1053	1139
7-1060	1139
7-1061	1139
7-1062	1139
7-1063	1139
7-1064	1139
7-1069	1137
7-1070	1090
7-1071	1090
7-1084	1020
7-1085	1020
7-1086	446
7-1087	446
7-1088	1021
7-1089	1021
7-1090	1020
7-1091	1020
7-1092	1015
7-1093	1015
7-1094	1022
7-1095	1022
7-1096	1021
7-1097	1021
7-1098	1023
7-1099	1023
7-1101	328
7-1102	328
7-1103	328
7-1111	326
7-1115	326
7-1116	326
7-1117	326
7-1120	319
7-1122	319
7-1124	317
7-1126	317
7-1128	317
7-1129	317
7-1130	317
7-1131	317
7-1132	317
7-1134	317
7-1135	333
7-1136	333
7-1137	333
7-1138	333
7-1139	333
7-1140	333
7-1144	333
7-1150	331
7-1155	331
7-1160	332
7-1165	472
7-1171	329
7-1172	317
7-1173	317
7-1174	317
7-1175	317
7-1176	329
7-1177	329
7-1200	333
7-1205	333
7-1230	333
7-1235	333
7-1270	334
7-1279	343
7-1290	334
7-1296	234
7-1298	234
7-1300	234
7-1302	234
7-1304	234
7-1306	234
7-1308	234
7-1310	234
7-1312	240
7-1313	240
7-1315	240
7-1316	240
7-1329	165
7-1330	165
7-1340	1031
7-1350	1230
7-1355	1231
7-1360	1231
7-1362	1231
7-1370	382
7-1371	382
7-1387	391
7-1388	391
7-1390	391
7-1392	391
7-1394	391
7-1396	391
7-1397	391
7-1398	391
7-1400	530
7-1425	346
7-1460	346
7-1465	346
7-1466	346
7-1470	346
7-1485	63
7-1486	63
7-1487	63
7-1488	63
7-1489	63
7-1501	67
7-1502	67
7-1503	67
7-1510	74
7-1520	74
7-1530	74
7-1534	68
7-1535	68
7-1536	4
7-1537	68
7-1538	68
7-1539	68
7-1540	68
7-1541	4
7-1543	63
7-1544	63
7-1545	62
7-1546	62
7-1550	62
7-1553	62
7-1554	62
7-1555	63
7-1556	63
7-1558	63
7-1559	63
7-1560	1212
7-1561	1212
7-1565	1212
7-1566	1212
7-1567	1212
7-1570	1212
7-1571	1212
7-1575	1212
7-1580	1212
7-1581	1212
7-1582	1212
7-1583	1212
7-1584	1193
7-1585	1193
7-1588	1195
7-1589	1186
7-1591	1186
7-1592	1186
7-1594	1186
7-1596	1186
7-1597	1186
7-1598	1193
7-1599	1193
7-1600	1186
7-1603	1216
7-1605	1216
7-1607	1216
7-1610	1186
7-1634	357
7-1635	354
7-1636	354
7-1640	516
7-1641	516
7-1642	516
7-1646	512
7-1647	512
7-1648	512
7-1649	512
7-1690	44
716970	6
716971	6
716972	6
716973	6
716974	4
716975	10
716976	10
716977	36
716978	36
716979	7
716980	7
716982	7
716984	7
716985	7
716991	25
716992	20
716993	31
7170016	12
7170022	27
7170032	55
7170033	55
7170034	55
7170035	3
7170039	3
7170047	2
7170050	32
7170051	6
7170053	6
7170057	7
7-1720	315
7-1725	315
7-1730	315
7-1731	315
7-1732	315
7-1733	315
7-1734	315
7-1735	315
7-1740	315
7-1741	315
7-1742	315
7-1744	315
7-1745	315
7-1759	1216
717610	12
7-1762	1216
717628	7
717630	7
7-1764	1216
717668	7
7-1768	1216
717708	9
7-1772	1216
717732	12
7-1774	1216
717746	12
717749	12
717750	12
7-1776	1216
717777	3
717778	2
717779	3
717780	2
717781	2
717782	2
717783	2
717784	11
717788	7
717790	7
717794	22
717796	23
717798	20
717799	26
717800	24
717805	27
717810	26
717815	17
717820	26
7-1788	1216
7-1789	1216
7-1792	1216
7-1794	1216
718000	85
718005	85
718010	85
7-1802	1216
718020	85
718025	85
718030	85
718035	85
7-1804	1216
718040	85
718045	85
718050	85
718055	85
7-1806	1216
718060	85
718065	85
718070	85
718075	85
7-1808	1216
7-1815	1215
7-1816	1215
7-1820	1215
7-1821	1215
7-1822	1215
7-1825	1215
7-1829	1215
7-1830	1215
7-1831	1215
7-1832	1215
7-1833	1215
7-1835	1214
7-1836	1214
7-1837	1214
7-1838	1214
7-1839	1214
7-1840	1214
7-1841	1214
7-1845	1189
7-1846	1189
7-1847	1189
7-1850	1197
7-1851	1197
7-1852	1189
7-1853	1208
7-1855	1208
7-1856	1216
7-1857	1216
7-1860	1201

DMI No. to Page No. Index

DMI No.	Page No.
7-1861	1201
7-1862	1201
7-1863	1201
7-1865	1199
7-1866	1199
7-1867	1198
7-1868	1198
7-1869	1196
7-1870	1213
7-1871	1213
7-1872	1213
7-1873	1213
7-1874	1213
7-1875	1213
7-1876	1213
7-1877	1213
7-1878	1213
7-1879	1213
7-1880	1213
7-1881	1213
7-1882	1213
7-1883	1213
7-1898	971
7-1899	885
7-1900	886
7-1902	886
719027	83
719039	83
7-1904	886
719041	83
719053	83
7-1906	886
719065	83
719077	83
719100	94
719110	94
719112	94
719114	94
719116	94
7-1912	886
7-1914	886
719150	94
719154	94
7-1916	886
719166	94
719178	94
7-1918	886
7-1920	886
719203	83
719205	85
719217	85
7-1922	886
719229	85
719231	85
7-1924	886
719243	85
719255	85
7-1926	886
719267	85
719272	83
7-1928	886
719280	85
719281	85
719293	85
7-1930	886
719306	85
719318	85
7-1932	886
719320	85
7-1933	886
719332	85
7-1934	886
719343	80
719344	80
719356	80
7-1936	886
719368	80
719370	80
719371	80
7-1938	886
719380	80
719382	80
719386	80
7-1939	886
719390	80
719396	80
719398	80
7-1940	886
719400	80
719401	80
719404	80
719405	80
719409	80
719410	80
719411	80
719413	80
719414	80
719415	80
719416	80
719418	80
7-1942	886
719420	80
7-1946	886
7-1948	886
7-1950	886
719500	80
719505	80
7-1951	886
7-1952	886
719522	79
719534	79
7-1954	886
719558	79
7-1956	886
719572	79
7-1958	886
719584	79
7-1960	886
719609	79
719610	79
719612	79
719613	79
719614	79
719615	79
719616	79
719617	79
7-1962	886
719630	79
719633	79
719634	79
719635	79
7-1964	886
719640	79
719642	79
7-1966	886
7-1968	886
7-1970	886
719700	79
719701	79
719702	79
719703	79
719704	79
719706	79
719707	79
7-1972	886
7-1974	886
719749	81
7-1975	886
719751	81
719752	81
719753	81
719754	81
719755	81
7-1976	886
719762	81
719763	81
7-1978	886
719786	81
719787	81
719788	81
719799	79
7-1980	401
719815	83
719816	83
7-1982	401
719820	85
719837	81
7-1984	401
719851	80
7-1986	500
719863	80
719875	80
7-1988	401
7-1990	401
719902	80
719914	80
7-1992	401
719926	80
7-1994	401
7-1998	401
720020	80
720032	80
720044	80
720056	80
720068	80
720082	80
7-2010	401
720107	81
720117	81
720119	81
720121	81
720122	81
720125	81
720133	81
7-2015	401
720169	81
7-2020	401
720232	81
720234	81
7-2025	500
720284	83
7-2030	502
720323	83
7-2035	401
7-2036	402
7-2037	402
720395	80
720396	80
7-2040	401
720400	80
720412	80
720424	80
720425	80
7-2044	401
720441	80
720444	80
720445	80
720447	80
720448	36
720449	84
720450	85
720454	83
720455	83
720456	83
720458	86
720459	86
720462	83
720466	83
7-2050	402
7-2055	402
7-2060	402
7-2065	500
7-2066	401
7-2067	401
7-2075	402
7-2080	402
7-2082	402
7-2084	402
7-2086	402
7-2088	402
7-2090	402
7-2091	402
7-2092	402
7-2093	402
7-2094	402
7-2095	402
7-2096	402
7-2097	402
7-2098	500
7-2100	1200
7-2101	1200
7-2102	1200
7-2103	1200
7-2104	1200
7-2105	1200
7-2110	1188
7-2111	1188
7-2113	1188
7-2120	1200
7-2121	1200
7-2122	1200
7-2123	1200
7-2124	1200
7-2125	1200
7-2126	1200
7-2130	1200
7-2131	1200
7-2133	1200
7-2136	1200
7-2140	1200
721402	97
721410	96
721412	96
721414	96
721416	96
721420	96
721425	96
721428	97
721430	96
721435	81
721438	97
721439	97
721440	97
721488	96
721490	96
7-2150	337
721527	96
721539	96
721542	96
721546	96
7-2155	1209
721553	81
721591	96
7-2160	1209
721654	92
721743	92
721755	92
721767	92
721770	1230
7-2195	336
7-2196	336
721969	942
7-2197	336
7-2198	336
7-2199S	337
722025	302
722028	302
7-2206	966
7-2208	966
7-2212	966
7-2214	1003
7-2216	1003
7-2218	1003
7-2228	968
7-2230	969
7-2232	850
722353	941
722365	941
7-2240	952
7-2241	952
722416	941
7-2242	952
7-2243	952
7-2244	952
7-2250	393
7-2255	393
722606	1167
722613	85
7-2265	382
7-2270	381
7-2271	381
722757	83
722769	83
722783	83
722795	83
7-2280	386
722810	96
722834	96
7-2285	386
722872	97
722884	97
7-2290B	398
722911	97
7-2292B	398
722947	97
7-2294B	398
7-2296B	398
722973	97
7-2298B	398
722997	97
723040	98
723041	98
7-2305	69
7-2306	69
7-2307	69
723076	98
7-2308	69
7-2309	69
7-2315	69
7-2316	69
7-2317	69
7-2318	69
7-2319	69
7-2320	69
7-2322	69
7-2323	69
7-2324	69
7-2330	71
7-2331	71
7-2332	71
7-2333	71
7-2334	71
7-2338	71
7-2339	71
7-2340	71
7-2341	71
7-2342	71
7-2343	71
7-2350	71
7-2351	71
7-2352	71
7-2353	71
723535	393
723536	393
723537	393
7-2355	71
723568	937
7-2357	73
723571	937
7-2359	70
7-2360	473
723610	94
7-2362	473
7-2365	473
7-2370	95
7-2372	95
7-2374	95
7-2376	95
7-2378	95
7-2380	95
7-2382	95
7-2384	95
7-2386	95
7-2388	95
7-2392	95
7-2394	95
7-2400	95
7-2402	95
7-2404	95
7-2406	95
7-2408	95
7-2410	95
7-2491	180
7-2492	180
7-2493	180
7-2494	180
7-2495	180
7-2496	180
7-2497	180
7-2498	180
7-2499	180
7-2505	1060
7-2507	1060
7-2510	1044
7-2512	1044
7-2514	1044
7-2516	1044
7-2520	1043
7-2522	1043
7-2524	1043
7-2528	1043
7-2530	1043
7-2532	1043
7-2534	1043
7-2540	1043
7-2558	1044
7-2562	1044
7-2570	1048
7-2574	1048
7-2580	1048
7-2582	1044
7-2584	1044
7-2586	1044
7-2589	1091
7-2593	1094
7-2594	1094
7-2595	1094
7-2600	1090
7-2601	1090
7-2603	1090
7-2604	1090
7-2605	1090
7-2606	1090
7-2609	1090
7-2610	1090
7-2611	1090
7-2613	1090
7-2614	1090
7-2615	1090
7-2617	1090
7-2618	1090
7-2619	1090
7-2620	1090
7-2621	1090
7-2622	1090
7-2623	1090
7-2624	1090
7-2627	1090
7-2628	1090
7-2629	1090
7-2630	1090
7-2631	1090
7-2633	1090
7-2634	1090
7-2635	1090
7-2636	1090
7-2637	1090
7-2638	1090
7-2639	1090
7-2640	1090
7-2641	1090
7-2642	1090
7-2649	1091
7-2650	1091
7-2652	1091
7-2653	1091
7-2654	1091
7-2655	1091
7-2656	1091
7-2657	1091
7-2658	1091
7-2659	1091
7-2660	1092
7-2661	1092
7-2663	1091
7-2670	1092
7-2675	1092
7-2680	1125
7-2681	1125
7-2682	1125
7-2683	1125
7-2689	1092
7-2697	1092
7-2700	1091
7270021	393
7270022	393
7270023	393
7270024	393
7270025	393
7270097	298
7270098	298
7270099	298
7-2701	1091
7270100	298
7270101	298
7270102	298
7270103	298
7270104	298
7270105	298
7270106	299
7270107	299
7270108	299
7270109	299
7270110	300
7270111	300
7270112	300
7270113	300
7270115	303
7270116	303
7270117	303
7270118	303
727012	1163
7270120	303
7-2702	1091
727025	1163
7-2703	1091
727030	1163
727033	1163
727036	1163
7-2704	1091
727040	1163
7-2705	1091
727050	1163
7-2706	1091
727062	1163
7-2707	1091
7-2708	1091
7-2709	1091
7-2710	1091
727101	1163
7-2711	1091
727114	1163

©2014 Donovan Marine, Inc.

DMI No.	Page No.
7-2712	1091
727125	1163
7-2713	1091
727137	1163
7-2714	1091
727149	1163
7-2715	1091
727151	1163
727175	1163
727184	1163
727199	1163
7-2720	1030
727214	1163
727223	1163
727238	1163
7-2724	1019
727252	1163
727264	1163
7-2727	1000
727276	1163
7-2728	1000
727288	1163
7-2729	1000
727290	1163
7-2730	993
7-2731	993
7-2732	1015
727327	1163
727339	1163
7-2734	1008
727341	1163
727353	1163
7-2736	1011
727365	1163
727377	1163
7-2738	1008
7-2740	1011
7-2745	1017
7-2749	1018
727517	1163
727529	1163
7-2753	92
727530	1163
727531	1163
727539	1163
7-2755	947
727555	1163
727567	1163
727590	1163
7-2760	947
727606	1163
727611	1163
727620	1163
727632	1163
727644	1163
727656	1163
7-2766	92
727660	1163
727670	1163
727680	1163
727694	1163
7-2770	947
727707	1163
727719	1163
727721	1163
727733	1163
727738	1163
7-2775	947
727757	1163
727769	1163
727770	1163
727783	1163
727795	1163
727800	1163
727808	1163
727820	1163
727834	1163
727846	1163
7-2785	947
727858	1163
727860	1163
727872	1163
727884	1163
7-2790	947
728014	1163
728019	1163
728024	1163
728038	1163
728045	1163
728053	1163
728064	1163
728068	1163
728070	1163
728075	1163
7-2810	506
728103	1163
728109	1163
728127	1163
728139	1163
728141	1163
728153	1163
728164	1163
728177	1163
728180	1163
728191	1163
728204	1163
728216	1163
728228	1163
728235	1163
728239	1163
728241	1163
728245	1163
7-2825	506
728258	1163
728266	1163
728278	1163
728280	1163
728285	1163
728289	1163
728329	1163
728331	1163
728343	1163
7-2835	529
728355	1163
728365	1163
728370	1163
728521	1164
728533	1164
728557	1164
728560	1164
728585	1164
728595	1164
728610	1164
728622	1164
728646	1164
728658	1164
7-2866	1093
728672	1164
7-2868	1093
728684	1164
728711	1164
7-2872	1093
728723	1164
728735	1164
7-2874	1093
728747	1164
7-2876	1093
728761	1164
729028	1164
729030	1164
729053	1164
729078	1164
729080	1164
729092	1164
729117	1164
729129	1164
729155	1164
729167	1164
729181	1164
729193	1164
729220	1164
729232	1164
729244	1164
729256	1164
729270	1164
729523	1164
729535	1164
7-2955	1163
729559	1164
729561	1164
729563	1164
7-2957	1163
7-2958	1163
729597	1164
7-2960	1163
729612	1164
729615	1164
7-2962	1163
7-2965	1163
729650	1164
7-2966	1163
729662	1164
7-2968	1163
729686	1164
729698	1164
729725	1164
729737	1164
729749	1164
7-2975	1163
729751	1164
7-2977	1163
729775	1164
7-2978	1163
7-2980	1163
7-2981	1163
7-2982	1163
7-2985	1163
7-2986	1163
7-2988	1163
730007	1164
730019	1164
7-3002	1165
730021	1164
7-3003	320
730033	1164
7-3004	301
730044	1164
730046	1164
7-3005	949
730057	1164
7-3006	290
7-3007	302
730071	1164
730083	1164
7-3009	1166
730095	1164
7-3010	320
730108	1164
730110	1164
730122	1164
7-3013	294
730134	1164
730137	1164
7-3014	1165
730146	1164
730148	1164
730158	1164
730161	1164
730173	1164
730185	1164
730197	1164
730209	1164
730211	1164
730223	1164
730247	1164
730300	1162
730312	1162
730324	1162
730336	1162
730348	1162
730350	1162
730363	1162
730401	1162
730413	1162
730425	1162
730437	1162
730449	1162
730451	1162
730464	1162
730704	1162
730742	1162
730754	1162
730805	1162
730817	1162
730829	1162
730831	1162
730843	1162
730855	1162
730868	1162
730906	1162
730918	1161
730920	1161
730932	1161
730944	1162
730956	1161
730968	1161
730970	1161
730982	1161
730994	1161
731009	1161
731011	1161
731023	1162
731035	1162
731047	1162
731048	1162
731058	1162
7-3110	298
7-3115	298
7-3120	298
731213	1162
7-3125	298
7-3130	298
731302	1162
731314	1162
731316	1162
731338	1162
7-3135	298
731364	1162
7-3140	298
731403	1162
731479	1167
731481	1167
731483	1167
731485	1167
731487	1167
731489	1167
731491	1167
7-3150	298
731500	86
731505	57
731510	365
731525	375
731530	375
731535	928
731540	928
731542	305
731545	300
7-3155	298
731550	1164
731555	1166
731560	301
731565	301
731570	301
731575	301
731580	320
731585	1164
731590	1162
731595	1164
731600	928
7-3165	298
7-3170	298
7-3175	298
7-3180	298
7-3185	298
7-3190	299
7-3195	299
7-3200	299
7-3205	299
732084	1110
7-3210	299
7-3215	299
7-3220	299
7-3225	299
7-3230	299
7-3235	300
732355	1110
732360	1110
732366	1108
732380	1108
7-3240	300
732405	1108
732417	1108
732429	1108
732431	1108
732443	1108
7-3245	300
732455	1108
732460	1108
732462	1108
732464	1108
732466	1108
732467	1109
732470	1109
732479	1109
732481	1109
732484	1109
732485	1109
732486	1109
732489	1109
732490	1109
732492	1109
732493	1109
732494	1109
7-3250	300
732500	1110
732501	1110
732502	1110
732503	1110
732504	1110
732505	1110
732506	1110
732507	1110
732510	1109
732512	1109
732514	1109
732516	1109
732532	1109
732544	1109
7-3255	300
732556	1109
732560	1109
732580	1109
732582	1109
732586	1109
732588	1109
732592	1109
732594	1109
732598	1109
7-3260	300
732600	1109
732604	1109
732606	1109
732620	1110
7-3290	301
732948	1109
732950	1109
732962	1109
732986	1109
7-3300	301
733003	1109
733013	1109
733015	1108
733027	1108
733039	1108
733041	1108
733091	1108
7-3310	301
733104	1108
733154	1108
733166	1108
733175	1108
733180	1108
733185	1108
733190	1108
733191	1108
7-3320	301
733229	1108
733231	1108
7-3325	301
733281	1108
733344	1108
7-3335	301
733356	1108
733380	1110
733385	1110
733390	1110
7-3345	301
7-3350	301
7-3355	301
733611	1108
733613	1108
733623	1108
733635	1108
733649	1108
7-3365	301
733659	1108
733661	1108
733673	1108
733697	1110
7-3370	301
7-3375	301
733762	1110
733798	1110
733801	1120
733820	1110
733823	1110
733830	1110
733833	1110
733840	1110
733843	1110
7-3385	301
733850	1110
733853	1110
7-3390	301
7-3395	301
7-3400	301
734031	1113
734043	1113
7-3405	301
734055	1113
734067	1113
734069	1114
734071	1114
734073	1114
734075	1113
734076	1113
734078	1113
734079	1113
734081	1114
734082	1114
734085	1114
734087	1114
734088	1114
734093	1113
7-3410	301
734106	1113
7-3415	301
734168	1113
7-3420	301
734219	1113
734221	1113
734245	1113
7-3425	301
734269	1113
734283	1113
734295	1113
734346	1113
734360	1113
734384	1113
734423	1113
734461	1113
734485	1113
7-3450	297
734512	1113
734524	1113
7-3455	297
734550	1113
734562	1113
734586	1113
7-3460	297
734625	1113
734640	1111
734641	1111
734643	1111
734644	1111
734646	1111
734647	1111
734649	1111
7-3465	297
734650	1111
734652	1111
734653	1111
734655	1111
734657	1111
734659	1111
734661	1111
734663	1111
734665	1111
734667	1111
734669	1111
734699	1112
7-3470	297
734702	1112
7-3475	297
734764	1112
734788	1112
7-3480	297
7-3490	297
7-3500	297
735045	1112
735046	1112
7-3510	297
735108	1111
735122	1111
735172	1111
735174	1111
735196	1111
7-3520	297
735209	1111
735235	1111
735247	1111
7-3525	297
7-3530	297
735300	1111
735312	1111
735317	1114
735319	1114
735321	1111
735324	1111
735336	1111
7-3535	297
7-3540	297

DMI No. to Page No. Index

DMI No.	Page No.
7-3545	297
7-3550	297
7-3555	297
7-3560	297
7-3565	297
7-3570	297
735722	1114
735728	1045
735734	1114
7-3575	297
735918	1113
735920	1113
735944	1113
735956	1113
736124	1114
736150	1114
736237	1114
736249	1114
736402	1142
736403	1142
736404	1112
736405	1112
7-3665	305
7-3670	305
7-3675	318
7-3680	318
7-3685	318
7-3690	318
7-3695	318
7-3700	318
737049	1114
7-3705	318
737060	1114
7-3710	318
7-3715	318
737188	1113
7-3720	318
737203	1113
737241	1113
7-3725	318
7-3730	318
7-3735	318
7-3740	318
7-3745	318
7-3750	318
7-3755	318
7-3760	318
7-3765	318
737772	1113
7-3780	319
737811	1113
7-3785	319
7-3790	320
7-3795	318
7-3800	318
738003	1112
7-3805	318
7-3810	318
7-3815	318
7-3820	318
7-3825	318
7-3830	318
7-3835	318
7-3840	318
7-3845	318
7-3855	318
7-3860	318
7-3865	318
7-3870	318
7-3875	318
7-3880	318
7-3885	318
7-3890	318
7-3895	318
7-3900	318
7-3905	290
7-3910	290
7-3915	290
7-3920	290
7-3925	509
7-3930	290
7-3936	290
7-3940	290
7-3946	290
7-3951	290
7-3955	290
7-3960	290
7-3966	290
7-3970	290
7-3975	290
7-3980	290
7-3986	290
7-3991	290
7-4000	290
7-4010	290
7-4020	290
7-4040	304
740515	390
740527	390
740539	390
7-4055	296
740565	390
740577	390
740589	390
7-4060	296
7-4065	296
7-4070	296
7-4075	296
7-4080	296
7-4085	296
7-4090	296
7-4095	296
7-4100	296
7-4105	296
7-4110	296
7-4130	294
7-4135	294
7-4145	294
7-4150	294
7-4160	294
7-4165	294
7-4170	294
7-4175	294
7-4180	294
7-4190	294
741909	396
741911	396
741935	396
741947	396
7-4195	296
741973	396
741985	396
7-4200	296
7-4205	301
7-4210	305
7-4300	294
7-4302	294
7-4304	294
7-4306	294
7-4310	294
7-4312	294
7-4314	294
7-4316	294
7-4318	294
7-4320	294
7-4322	294
7-4324	294
7-4326	294
7-4328	294
7-4334	294
7-4336	294
7-4338	294
7-4340	294
7-4344	294
7-4346	294
7-4348	294
7-4350	294
7-4351	294
7-4354	294
7-4356	294
7-4358	294
7-4359	294
7-4364	295
7-4365	295
7-4366	295
7-4367	295
7-4368	295
7-4369	295
7-4370	295
7-4371	295
7-4372	295
7-4374	295
7-4376	295
7-4380	295
7-4382	295
7-4384	295
7-4386	295
7-4390	295
7-4392	295
7-4394	295
7-4396	295
7-4398	295
7-4400	295
7-4406	296
7-4408	296
7-4410	296
7-4412	296
7-4414	296
7-4416	296
7-4417	296
7-4418	296
7-4420	296
7-4422	296
7-4424	296
7-4426	296
7-4428	296
7-4430	296
7-4432	296
7-4434	296
7-4436	296
7-4450	297
744917	165
745008	76
745010	76
745022	76
747610	379
747709	378
747723	378
748129	378
748181	378
748206	378
748270	378
748460	378
749068	379
749157	379
749200	378
749311	379
749347	379
749373	379
749400	379
7-5000	1162
7-5005	1162
7-5010	1162
7-5015	1162
7-5020	1162
750302	378
750326	378
750340	378
7-5035	1162
7-5040	1162
7-5045	1162
750530	378
750542	378
7-5055	1162
7-5060	1162
7-5065	1162
7-5070	1162
750718	378
750720	378
7-5075	1162
7-5080	1162
7-5085	1162
7-5090	1162
7-5095	1162
7-5100	1162
751001	378
751013	378
751025	378
751030	378
751037	378
751215	377
751227	377
751229	368
7-5200	1160
752003	1291
752015	1291
752018	1291
752022	1291
752027	1290
752039	1290
752041	1290
7-5205	1160
752091	1290
752093	1290
752095	1290
752097	1290
7-5210	1160
7-5215	1160
7-5220	1160
7-5225	1160
7-5230	1160
7-5245	1161
7-5250	1161
7-5255	1161
7-5260	1161
7-5261	1161
7-5265	1161
7-5270	1161
7-5275	1161
7-5280	1161
7-5284	1161
7-5285	1161
7-5290	1161
7-5295	1161
7-5300	1161
7-5305	1161
7-5310	1161
7-5315	1161
7-5320	1161
7-5325	1161
7-5330	1161
7-5335	1161
7-5340	1161
7-5345	1161
7-5350	1161
7-5355	1161
7-5365	1161
7-5370	1161
7-5375	1161
7-5380	1161
7-5385	1161
7-5387	1161
7-5390	1161
7-5395	1161
7-5400	1161
7-5405	1161
7-5407	1161
7-5410	1161
7-5415	1161
7-5420	1161
7-5425	1161
7-5430	1161
7-5435	1161
7-5440	1161
7-5445	1161
7-5447	1161
7-5450	1161
7-5455	1161
7-5460	1161
7-5465	1161
7-5470	1161
7-5475	1161
7-5480	1161
7-5485	1161
7-5490	1161
7-5495	1161
7-5500	1161
7-5505	1161
7-5510	5
7-5515	1161
7-5520	1161
7-5525	1161
7-5530	1161
7-5535	1161
7-5540	1161
7-5545	1161
7-5550	1161
7-5555	1161
7-5560	1161
7-5565	1161
7-5566	1161
7-5575	1161
7-5580	1161
7-5585	1161
7-5590	1161
7-5595	1183
7-5770	1161
759000	1094
759002	1094
759015	1094
759016	1094
759069	1092
759071	1092
759158	1141
759209	1094
759210	1094
759211	1094
759223	1094
759463	1094
759500	1092
759501	1093
759502	1094
759540	1092
759550	1125
759615	1125
759639	1125
759653	1125
759681	1092
759686	1092
759696	1092
759732	1092
759733	1092
759740	1093
759741	1092
759744	1093
759745	1092
759748	1092
759752	1092
759761	1092
759765	1092
759768	1092
759772	1092
759780	1094
759788	1094
759789	1094
759800	1094
759801	1094
759802	1094
759803	1094
759806	1094
759807	1094
759810	1094
759813	1094
759817	1094
759823	1094
759829	1094
759834	1094
759835	1094
759837	1094
759843	1094
759846	1094
759849	1094
759851	1094
759852	1094
759858	1094
759859	1094
759861	1094
759925	1092
7-5999	849
7-6000	849
7-6005	849
7-6006	849
760090	1095
760094	1095
760096	1095
760101	1099
760106	1099
760108	1099
7-6011	849
760115	1099
760119	1100
7-6012	849
760121	1100
760123	1100
760126	1100
760142	1100
760145	1100
760147	1095
760149	1095
760151	1095
760154	1095
760157	1095
760158	1097
760159	1097
760162	1100
760164	1100
760166	1101
760171	1101
760175	1095
760179	1095
760181	1095
760183	1101
760185	1096
760188	1096
760191	1096
760193	1096
760195	1098
760197	1101
7-6020	848
760202	1101
760205	1101
760215	1098
760219	1098
7-6022	845
760222	1096
760226	1096
760232	1096
760239	1096
760241	1096
760244	1096
760247	1096
760250	1096
760253	1096
760255	1096
760258	1096
760261	1096
760264	1096
760267	1096
760270	1096
760273	1096
760276	1096
760279	1097
760282	1096
760285	1096
760288	1101
760291	1097
760294	1097
760297	1097
760301	1096
760303	1097
760305	1097
760308	1097
760310	1097
760313	1097
760315	1097
760318	1097
760321	1097
760324	1096
760327	1097
760330	1097
760333	1097
760336	1097
760339	1097
760341	1097
760344	1097
760347	1097
760350	1097
760352	1097
760355	1097
760357	1097
760360	1097
760362	1097
760364	1097
760367	1097
760370	1097
760372	1097
760374	1097
760376	1097
760379	1097
760382	1097
760384	1097
760385	1098
760387	1098
760391	1098
760393	1098
760396	1098
760399	1098
760401	1099
760403	1099
760411	1099
760414	1099
760421	1099
7-6050	1167
7-6055	1167
760579	1239
7-6060	1167
7-6065	1167
7-6130	302
7-6135	302
7-6145	302
7-6155	302
7-6160	302
7-6175	1166
7-6178	1166
7-6181	1166
7-6190	1167
7-6196	1167
7-6199	1167
7-6205	1167
7-6208	1167
7-6211	1166
7-6218	92
7-6220	87
7-6223	87
7-6224	87
7-6225	87
7-6228	87
7-6229	87
7-6230	87
7-6231	87
7-6233	87
7-6234	87

©2014 Donovan Marine, Inc.

DMI No.	Page No.
7-6235	87
7-6236	87
7-6238	87
7-6239	87
7-6244	87
7-6250	87
7-6251	3
7-6253	87
7-6254	87
7-6255	87
7-6256	87
7-6257	87
7-6259	87
7-6260	87
7-6261	87
7-6263	3
7-6270	87
7-6271	87
7-6273	87
7-6274	87
7-6280	87
7-6281	87
7-6283	3
7-6284	87
7-6294	87
7-6300	87
7-6301	87
7-6303	87
7-6304	87
7-6305	87
7-6306	87
7-6316	87
7-6317	87
7-6318	87
7-6351	88
7-6352	88
7-6353	88
7-6354	88
7-6355	88
7-6356	88
7-6358	88
7-6360	88
7-6365	88
7-6366	88
7-6369	88
7-6370	88
7-6380	88
7-6381	88
7-6384	88
7-6385	88
7-6400	88
7-6401	88
7-6402	88
7-6403	88
7-6404	88
7-6405	88
7-6406	88
7-6407	2
7-6408	88
7-6410	88
7-6411	88
7-6412	88
7-6413	88
7-6415	88
7-6416	88
7-6417	88
7-6418	88
7-6421	87
7-6425	87
7-6426	87
7-6433	74
7-6434	74
7-6435	74
7-6436	74
7-6437	74
7-6438	74
7-6439	74
7-6440	73
7-6441	74
7-6442	74
7-6443	73
7-6445	73
7-6446	73
7-6470	86
7-6472	86
7-6474	86
7-6480	86
7-6482	86
7-6484	86
7-6491	90
7-6492	90
7-6493	90
7-6494	90
7-6495	90
7-6496	90
7-6497	90
7-6499	91
7-6500	91
7-6501	91
7-6506	92
7-6507	92
7-6508	92
7-6509	92
7-6510	92
7-6550	250
7-6552	250
7-6553	251
7-6555	244
7-6559	245
7-6561	247
7-6577	247
7-6595	246
7-6598	241
7-6601	263
7-6603	263
7-6609	263
7-6610	263
7-6620	265
7-6622	265
7-6624	265
7-6630	265
7-6632	265
7-6634	265
7-6702	503
7-6706	503
7-6708	503
7-6709	503
7-6718	504
7-6722	504
7-6728	504
7-6730	504
7-6732	504
7-6790	506
7-6791	506
7-6794	506
7-6795	506
7-6796	506
7-6797	506
7-6798	506
7-6799	506
7-6800	506
7680033	409
7680052	506
7680053	506
7-6801	506
768101	496
768119	496
768121	496
768133	496
768145	496
768157	496
7-6816	512
768169	496
768171	496
768183	496
768195	496
7-6820	513
768208	496
768210	496
768222	496
768234	496
768246	496
7-6825	503
768258	496
7-6829	503
7-6830	503
7-6854	519
7-6856	519
7-6858	519
7-6862	519
7-6864	519
7-6874	519
7-6876	520
7-6877	520
7-6879	519
7-6886	509
7-6888	509
7-6890	509
7-6896	509
7-6898	509
7-6910	509
769105	494
769107	494
769109	494
7-6911	509
769110	494
769111	494
769115	494
7-6912	509
769123	494
7-6913	509
769135	494
7-6914	509
769147	494
7-6924	509
7-6925	509
7-6926	509
7-6934	509
7-6936	509
7-6938	514
7-6940	514
7-6942	514
7-6944	514
7-6946	514
7-6948	514
7-6950	514
7-6952	514
7-6959	502
7-6960	502
7-6961	502
7-6965	526
7-6966	526
7-6970	504
7-6991	513
7-6992	513
7-6994	513
7-6995	513
770001	494
7-7001	363
770013	494
770025	494
770037	494
770049	494
770051	494
770063	494
770075	494
770087	494
770099	494
770102	494
770126	494
770138	494
770152	494
770176	494
770188	494
7-7020	363
770215	494
7-7022	363
770239	494
7-7024	363
770241	494
7-7026	363
7-7030	364
770304	494
770316	494
7-7032	364
770330	494
7-7034	364
770342	494
770354	494
770366	494
770378	494
770380	494
770392	494
7-7040	362
770405	494
7-7041	362
770418	494
7-7042	362
770429	494
7-7043	362
770431	494
7-7044	362
770443	494
770455	494
770479	494
770481	494
770493	494
7-7050	362
770506	494
770518	494
770520	494
770544	947
770556	947
770568	947
770607	948
770619	948
770621	948
770633	947
770645	947
770657	947
770671	947
770683	947
770708	947
770714	947
770722	947
770730	947
770734	947
770746	947
770760	948
770772	948
770784	948
770796	948
7-7080	362
770809	948
770900	948
770912	948
770924	948
770936	948
770948	948
770950	948
770962	948
770974	948
770998	947
771003	947
771015	947
771104	506
771116	506
771118	506
771130	506
771142	506
771217	506
771228	1251
771229	506
771231	506
771243	506
771246	507
771250	507
771252	507
771255	507
771332	506
771407	947
771419	947
771421	947
771433	947
771445	947
771510	1162
771522	1162
771560	948
771562	948
771563	948
771609	529
771610	529
771611	529
771623	529
771630	985
771700	985
7-7200	289
772043	467
772207	409
772222	507
772223	507
772224	507
772225	507
772229	351
772230	351
772233	117
772272	986
772299	1341
772300	414
772301	413
772302	412
772303	412
772304	412
772306	412
772308	412
772309	412
772310	412
772311	412
772312	412
772313	412
772314	412
772315	412
772316	412
772317	412
772318	412
772320	412
772321	412
772322	412
772323	412
772324	412
772325	412
772327	412
772329	413
772330	411
772331	412
772332	411
772333	413
772334	411
772335	412
772336	411
772337	412
772338	411
772340	412
772341	412
772342	411
772343	411
772344	411
772345	413
772346	411
772347	412
772348	411
772350	411
772351	411
772352	411
772354	411
772356	411
772358	411
772360	411
772362	411
772370	411
772371	411
772374	415
772375	415
772376	415
772377	415
772378	415
772379	414
772380	414
772381	414
772382	414
772383	414
772384	415
772385	414
772386	414
772388	413
772389	411
772390	413
772391	413
772394	411
772395	414
772396	413
772400	1341
772409	411
772411	411
772423	411
772428	411
772430	411
772432	411
772435	411
772447	411
772497	411
772500	411
772512	411
772560	414
772562	415
772574	415
772582	415
772586	415
772588	415
772594	415
772601	415
772613	415
772634	413
772635	413
772636	413
772637	413
772648	413
772649	1341
772650	413
772651	412
772652	413
772654	1341
772663	412
772675	412
772677	413
772679	413
772684	412
772687	412
772691	413
772714	412
772916	303
772928	303
772933	303
772942	303
7-7307	512
7-7308	512
773105	123
773110	123
773115	123
773122	123
7-7313	512
7-7314	512
773140	123
7-7315	512
773158	123
7-7316	512
773172	123
773196	123
773211	123
773214	123
773216	123
773217	123
773218	123
773219	123
773220	123
773221	123
773223	123
773225	123
773226	123
773227	1152
7-7323	512
773235	1235
773239	1235
773247	1235
773259	1235
773261	128
773273	1244
773278	1244
773297	1244
7-7337	512
7-7338	512
7-7339	512
7-7445	74
7-7446	74
7-7450	74
7-7451	74
7-7452	74
7-7453	74
7-7455	74
7-7456	74
7-7457	74
7-7461	74
776721	141
776722	141
776723	141
776725	141
776728	140
776733	145
776735	145
776739	140
776740	140
7-7710	423
7-7711	423
7-7712	423
7-7713	423
7-7714	423
7-7715	423
7-7716	423
7-7717	423
7-7718	423
7-7719	423
7-7720	423
7-7740	423
777409	414
7-7741	423
777411	414
777415	411
7-7742	423
7-7743	423
7-7744	423
7-7745	423
7-7746	423
7-7747	423
7-7748	423
7-7749	423
7-7750	423
7-7770	423
7-7771	423
7-7772	423
7-7773	423
7-7774	423
7-7775	423

DMI No. to Page No. Index

DMI No.	Page No.
7-7776	423
7-7777	423
7-7778	423
7-7779	423
7-7780	423
7-7815	901
7-7817	901
7-7819	901
7-7821	901
7-7830	900
7-7854	922
7-7856	922
7-7858	922
7-7860	922
7-7862	922
7-7864	922
7-7866	922
7-7870	922
7-7871	922
778906	140
778920	140
778932	141
778944	141
7-7920	936
7-7929	936
7-7940	936
7-7943	936
7-7952	936
7-7955	936
779998	138
779999	138
7-8000	919
780015	138
780020	138
780085	143
7-8012	921
7-8013	921
7-8019	921
7-8025	927
7-8026	927
7-8029	921
7-8080	936
7-8082	936
7-8084	936
7-8086	936
7-8087	936
7-8088	936
7-8090	936
7-8092	936
7-8094	936
7-8096	936
7-8098	936
7-8100	936
7-8102	936
7-8104	936
7-8106	936
7-8110	936
7-8112	936
7-8114	936
7-8116	936
7-8118	936
7-8120	936
7-8122	936
7-8124	936
7-8126	936
7-8128	936
7-8131	936
7-8135	936
7-8137	936
7-8140	936
7-8144	936
7-8146	936
7-8152	936
7-8154	936
7-8158	936
7-8160	936
7-8162	936
7-8170	935
7-8171	935
7-8172	935
7-8178	935
7-8186	935
7-8187	935
7-8188	935
7-8200	936
7-8203	936
7-8206	936
7-8209	936
7-8212	936
7-8218	936
7-8224	936
7-8227	936
7-8233	936
7-8239	936
7-8245	936
7-8248	936
7-8254	936
7-8257	936
7-8302	922
7-8304	922
788002	143
788004	143
788005	143
788009	143
788012	143
788013	137
788017	137
788018	137
788019	143
788020	138
788022	137
788024	137
788025	137
788030	138
788031	143
788032	138
788036	138
788038	138
788041	138
788060	137
788062	137
788099	137
788100	137
788101	143
788105	143
788111	143
788113	138
788114	138
7-8815	921
7-8817	921
7-8820	921
788200	145
788216	146
788220	146
788234	141
788235	142
788240	142
788249	142
788257	141
788258	141
788264	146
788301	273
788313	272
7-8934	922
7-8989	513
7-9001	268
7-9003	308
7-9017	308
7-9034	246
7-9035	246
7-9036	516
7-9037	516
7-9040	68
7-9041	68
7-9042	68
7-9063	452
795558	447
795659	447
795837	447
795851	447
796290	443
796346	443
796358	443
796372	443
796409	443
796485	443
797615	447
797792	446
797805	446
797906	444
797912	444
798124	432
798144	432
798162	432
798188	432
798190	432
798197	433
798198	433
798199	433
798200	433
798213	432
798225	432
799001	431
799102	431
799114	431
799126	432
799140	433
799142	433
799146	433
799148	433
799166	432
799187	432
799200	432
799222	432
799244	432
799287	433
799289	433
799290	433
799291	433
799293	433
799295	433
799300	432
799301	432
799302	432
799305	432
799306	432
799307	432
799310	432
799311	432
799312	432
799315	432
799316	432
799317	432
799354	438
799366	438
799382	438
799405	433
799604	438
799617	438
799623	438
799638	438
799643	438
799760	446
799779	446
799784	446
799811	440
799835	440
799847	440
799850	443
799852	440
799885	431
799899	431
799900	439
800000	439
8000050	42
8000055	42
8000060	42
8000065	42
8000070	42
8000075	42
8000080	42
8000085	42
8000090	42
8000095	42
8000100	42
8000105	42
8000110	42
8000115	42
800013	439
8000130	42
8000135	42
8000140	42
8000145	42
800015	439
8000150	42
8000155	42
8000160	42
8000165	42
8000170	42
8000175	42
800018	439
8000180	42
8000185	47
8000190	47
8000195	47
800020	439
8000200	47
8000205	44
8000210	44
8000215	44
8000220	44
8000225	44
8000230	44
8000235	44
8000240	44
8000245	44
8000250	44
8000255	44
800032	439
800045	439
800048	439
800050	439
800184	445
800198	445
800200	445
800210	445
800223	445
800246	445
800256	445
800261	445
800284	445
800297	445
800312	446
800323	446
800400	445
800412	445
800422	445
800435	445
800448	445
800451	445
800464	445
800477	445
800480	445
800493	445
800506	445
800519	445
800522	445
800535	445
800549	445
800575	443
800577	431
800580	431
800582	431
800587	431
800616	431
800619	431
800622	441
800639	441
800643	441
800652	441
800655	441
800676	441
800688	441
800690	441
800731	444
800735	441
800744	444
800746	441
800747	441
800749	441
800753	441
800756	441
800766	441
800780	441
800804	444
800816	444
800828	444
800866	444
800878	444
800901	447
800914	447
800956	447
800969	447
800979	447
801010	447
801034	441
801102	446
801115	446
801128	446
801220	440
801224	447
801270	447
801286	443
801298	440
801301	443
801313	443
801325	440
801387	431
801399	440
801400	440
801411	444
801426	444
801433	444
8-0144	41
801452	443
801464	443
801490	443
801503	441
801605	447
801617	447
801666	447
801678	445
801680	447
801706	447
801707	447
801717	447
801767	447
801779	448
801782	441
8020106	469
8020108	469
8020110	469
8020112	469
8020114	469
8020116	469
8020118	469
8020120	469
8020122	469
8020124	469
8020126	469
8020128	469
8020130	469
8020132	469
8020134	469
8020136	469
8020138	469
8020140	469
8020142	469
8020144	469
8020146	469
8020148	469
8020150	469
8020152	469
8020156	469
8020160	469
8020180	453
8020183	434
8020184	453
8020186	453
8020189	453
8020193	425
8020200	425
8020201	425
8020202	425
8020203	425
8020204	425
8020207	424
8020213	424
8020214	424
8020241	408
8020249	408
8020251	408
8020254	408
8020255	409
8020256	407
8020257	407
8020259	407
8020260	500
8020261	407
8020262	407
8020263	407
8020264	408
8020265	408
8020267	407
8020268	407
8020269	407
8020270	407
8020271	407
8020274	407
8020277	407
8020278	407
8020280	407
8020281	407
8020282	407
8020283	407
8020286	407
8020287	407
8020289	408
8020292	408
8020296	408
8020297	408
8020298	408
8020300	407
8020301	409
8020302	409
8020303	501
8020304	409
8020305	409
8020306	409
8020307	409
8020308	409
8020310	409
8020312	408
8020313	408
8020314	408
8020316	407
8020318	407
8020320	407
8020327	407
8020329	407
8020331	407
8020333	407
8020334	407
8020335	407
8020336	409
8020353	467
8020379	468
8020381	468
8020383	468
8020385	468
8020387	468
8020389	468
8020404	467
8020406	467
8020408	467
8020410	467
8020431	467
8020432	467
8020433	467
8020434	467
8020435	467
8020436	467
8020437	467
8020438	467
8020439	467
8020440	467
8020572	425
8020583	425
8020584	425
8020585	425
8020586	425
8020587	425
8020588	425
8020589	425
8020590	425
8020605	424
8020709	446
802125	443
8-0219	41
802240	443
802290	443
802363	443
802378	443
802384	443
802404	444
802416	443
802428	443
802430	441
802432	441
802434	441
802436	441
802450	441
802452	441
802454	441
802456	441
802458	441
802505	448
802510	439
802512	439
802517	448
8-0257	41
802606	448
802618	448
802632	448
802644	448
8-0271	41
802808	448
8-0283	41
802997	448
8030000	471
8030005	471
8030010	458
8030015	458
8030020	447
8030025	447
803014	448
8031005	437
8031010	437
8031015	437
8031020	437
8031050	469
8031055	469

©2014 Donovan Marine, Inc.

DMI No.	Page No.
8031060	469
8031065	469
8031070	469
8031075	469
8031080	469
8031085	469
8031090	469
8031095	469
8031100	469
8031105	469
8031110	469
8031115	469
8031120	469
8031125	469
8031130	469
8031135	469
8031140	469
8031145	469
8031150	469
8031155	469
8031160	469
8031165	469
8031170	469
8031175	469
8031180	469
8031185	469
8031190	444
803204	448
803230	444
803242	444
803255	444
803266	448
8033000	434
8033005	434
8033100	437
8033300	437
8033305	437
8033310	437
8033315	437
8033320	437
8033325	437
8033330	437
8033335	437
8033340	437
8033345	437
8033350	437
8033355	434
8033360	434
8033365	434
8033370	434
8033375	445
8033380	445
8033385	445
8033390	445
8033395	445
8033400	445
8033405	445
8033410	445
8033415	445
8033420	445
8033425	445
8033430	445
8033435	445
8033440	445
8033445	445
8-0435	27
804394	445
804396	445
804398	445
804400	445
804402	445
804404	445
804406	445
804408	445
804422	445
804428	445
804434	445
804436	445
804438	445
804444	445
804446	445
804448	445
804450	445
804452	445
804460	446
804462	446
804464	446
8-0513	41
8-0550	43
806313	498
806325	498
806387	498
806440	498
806503	498
806515	498
806527	498
806553	498
806565	498
806570	498
806577	498
806604	498
806616	498
806628	498
806781	498
806806	498
806844	498
8-0687	43
8-0688	43
807062	506
807075	506
807120	503
807122	850
807124	850
807125	503
807149	503
807163	503
807187	503
807226	503
8-0723	42
807240	503
807264	503
807288	503
8-0735	42
807350	506
807352	506
807354	506
807356	504
807358	504
807360	504
807362	504
807364	504
807366	504
807368	504
807370	504
807372	504
807492	510
807505	510
807517	510
807531	510
807555	510
807567	510
807579	510
807593	510
807606	510
807644	510
807656	510
807668	510
807670	510
807694	510
807707	510
807721	510
807733	510
807745	510
807757	510
807769	510
807771	510
807784	510
807795	510
807808	510
8-0790	42
8-0803	42
808317	514
808455	499
808482	501
808494	502
808569	502
808595	502
808608	502
808610	502
808622	502
8-0865	42
808658	502
808672	502
808675	502
808680	502
808685	502
808690	502
808709	502
808711	502
808715	500
808716	842
808717	843
808719	843
808720	842
808722	362
808723	502
808725	843
808735	502
808747	502
808759	502
808925	499
810588	94
810590	94
810592	94
811960	113
811988	113
812075	113
812077	113
812099	1012
812102	1012
812105	1013
812107	1013
812108	1013
812114	1013
812126	1013
812129	1013
812138	1013
812140	1008
812145	1012
812152	1008
812160	1012
812164	1028
812203	1033
812215	1033
812223	1033
812227	1033
812239	1033
812241	1033
812245	1033
812253	1033
812304	1155
812316	1155
812328	1155
812330	1155
812334	1155
812336	1155
812338	1155
812364	1158
812366	1158
812369	1158
812378	1158
812453	1153
812455	1153
812457	1153
812459	1153
812461	1153
812463	1153
812465	1153
812467	1151
812470	1153
812473	1153
812479	1151
812479S	1151
812481	1151
812481S	1151
812506	132
815108	410
815160	410
815209	410
815297	502
815499	410
815932	409
815944	409
816045	409
816642	408
816643	409
816655	409
818768	408
818774	408
818801	408
818813	408
818814	408
818825	500
818837	408
818849	408
818851	408
818863	408
818875	408
818887	408
820705	927
820729	927
820730	927
820731	942
820743	941
820767	941
820779	941
820781	941
821048	919
821113	919
821125	919
821214	919
821226	919
821303	919
821327	919
821339	919
821721	919
821733	919
821822	919
822090	921
822127	921
822141	921
822204	921
822216	921
822228	921
822230	921
822242	921
822250	921
822252	921
822254	921
822280	920
822406	919
822435	927
822440	927
822444	920
822456	920
822468	920
822569	920
822571	920
822583	920
826404	921
826416	921
828154	927
828155	934
828179	934
828270	98
828275	98
828280	56
828285	56
828290	56
828295	56
8-3000	13
8-3005	13
8-3020	13
8-3030	13
8-3040	13
8-3050	13
8-3060	13
8-3070	13
8-3130	6
8-3132	6
8-3140	11
8-3150	3
8-3152	2
8-3210	41
8-3212	41
8-3214	41
8-3220	41
8-3222	41
8-3224	41
8-3230	41
8-3232	41
8-3234	41
834689	424
834691	424
834704	424
834716	424
834728	424
834730	424
834742	424
834754	424
834766	424
834778	424
834780	424
834855	423
834867	423
834879	423
834881	423
834893	423
834906	423
834918	423
834920	423
834932	423
834944	423
834956	423
834968	423
834970	423
834985	423
834986	423
834987	423
834988	423
834989	423
834990	423
834991	423
834992	423
834993	423
834994	423
834995	423
834996	423
835101	422
835113	422
835126	422
835138	422
835147	422
835153	422
835163	422
835175	422
835187	422
835202	422
835205	423
835206	423
835207	423
835208	423
835209	423
835210	423
835211	423
835212	423
835213	423
835214	423
835504	422
835528	422
835530	422
835542	422
835554	422
835566	422
835578	422
835580	422
835592	422
835605	422
835606	422
835607	422
835608	422
835720	422
835732	422
835744	422
835756	422
835768	422
835910	424
835922	424
835934	424
835946	424
835958	424
835960	424
835972	424
835984	424
836001	424
836127	424
836139	424
836141	424
836153	424
836165	424
836200	423
836201	423
836202	423
836203	423
836204	423
836205	423
836206	423
836207	423
836208	423
836209	423
836210	422
836212	422
836214	422
836216	422
836218	422
836220	422
836222	422
836224	422
836226	422
836228	422
836230	422
836232	422
836234	422
836236	422
836238	422
836240	422
836242	422
836244	422
836246	422
836248	422
836520	426
836555	426
836582	426
836592	425
836621	425
836666	425
836671	425
836678	425
836809	426
836811	425
836847	426
836859	426
837457	425
837469	425
837471	425
837483	425
837495	425
837501	425
837510	425
837522	425
837534	425
837546	425
837560	424
837572	424
837584	424
837596	424
838032	424
838089	424
838093	424
838106	424
838118	424
838120	424
838132	424
838144	424
838156	424
838168	424
838170	424
838182	424
838194	424
838207	424
838221	424
838245	424
838269	424
838283	424
838307	424
838347	424
838409	424
838411	424
838423	424
838435	424
838447	424
838459	424
838461	424
838473	424
838485	424
838497	424
838498	424
838500	424
838505	424
838562	424
838574	424
838586	424
838598	424
838601	454
838602	424
838687	453
839007	457
839045	457
839502	472
839540	472
840002	1049
840005	1049
840010	1049
840208	1049
840303	1049
840307	1049
840505	1049
840510	1049
841000	477
841005	477
841010	477
841015	477
841020	477
841025	477
841030	477
841035	478
841040	478
841045	478
841050	478
841055	478
841060	478
841065	478

DMI No. to Page No. Index

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

DMI No.	Page No.
841070	479
841075	478
841080	478
841085	478
841100	479
841105	479
841110	478
841115	478
841120	479
841145	478
841150	479
841165	479
841170	479
841175	479
841185	479
841190	479
851015	1238
851041	1238
851053	1238
851279	1238
851940	1242
851952	1242
851964	1242
851976	1242
851988	1242
852005	128
852017	128
852029	128
852031	128
852043	128
852055	128
852067	128
852079	128
852081	128
852093	128
852106	128
852118	128
852120	128
852459	1032
852461	1032
852473	1049
852499	1045
852500	1045
852512	1045
852548	1045
852550	1045
852560	1149
852561	1149
852563	1149
852564	1149
852565	1149
852566	1149
852568	1149
852634	1145
852635	1145
852636	1145
852637	1145
852764	1145
852776	1145
852788	1145
852790	1145
852803	1145
852815	1145
852827	1145
852839	1145
852841	1145
852891	1147
852905	1147
852916	1147
852924	1145
852928	1145
852930	1145
852980	1145
852992	1145
853007	1147
853019	1147
853021	1147
853057	1147
853071	1147
853080	1149
853081	1149
853083	1149
853085	1149
853095	1149
853108	1149
853110	1148
853111	1148
853170	1143
853172	1144
853174	1144
853176	1144
853180	1143
853182	1144
853206	1143
853209	1144
853210	1144
853211	1147
853215	1147
853240	1145
853242	1145
853247	1144
853249	1145
853615	1150
853677	1145
854097	1147
854124	1150
854148	1150
854150	1150
854162	1150
854174	1150
854186	1150
854198	1150
854200	1150
854201	1150
854202	1150
854204	1150
854225	1150
854237	1150
854251	1150
854275	1150
854287	1151
854299	1151
854300	1152
854305	1141
854390	1150
854403	1150
854427	1150
854516	1150
854528	1150
854578	1150
854732	1151
854744	1150
854756	1150
854776	1149
854778	1149
854857	1149
854958	1149
854959	1149
854984	1151
854996	1151
854998	1151
854999	1151
855001	1151
855037	1151
855051	1151
855080	1151
855087	1151
855099	1151
855102	1151
855105	1149
855106	1149
855126	1156
855138	1156
855140	1156
855164	1156
855177	1156
855178	1156
855179	1156
855190	1156
855203	1156
855215	1156
855227	1156
855239	1156
855277	1158
855320	1156
855322	1156
855330	1156
855378	1156
855380	1156
855405	1156
855406	1156
855410	1068
855481	1156
855493	1156
855506	1156
855518	1156
855520	1156
855532	1156
855582	1156
855633	125
855657	1156
855772	1158
855784	1158
855850	1158
855859	1158
855873	1158
855897	1158
855899	1158
855900	1158
855901	1158
855950	1298
856003	1058
856027	1058
856041	1058
856053	1058
856091	1058
856104	1058
856116	1058
856130	1058
856135	1058
856136	1058
856140	1058
856142	1058
856144	1058
856153	1058
856154	1058
856318	1059
856332	1059
856356	1059
856370	1059
856382	1060
856533	1060
856534	1060
856535	1059
856536	1059
856537	1059
856538	1058
856541	1061
856550	1153
856558	132
856560	1152
856572	1153
856584	132
856596	132
856611	1152
856623	1152
856625	1152
856630	1153
856645	131
856649	131
856651	132
856652	132
856654	131
856655	1152
856659	1152
856724	1046
856736	1046
856748	1046
856774	1046
856801	1046
856863	1013
856875	1013
856887	1013
856890	1015
856899	1015
856901	1015
856926	1015
856952	1015
856964	1013
857035	1152
857039	1151
857041	1151
857044	1151
857046	1151
857051	1152
857053	1152
857054	1152
857055	1032
857069	1033
857071	1033
857079	1033
857081	1041
857082	1041
857083	1041
857084	1032
857085	1033
857095	1040
857096	1041
857097	1041
857098	1041
857106	1033
857118	1033
857120	1033
857133	1032
857135	1033
857156	1024
857159	1024
857168	1011
857170	1142
857175	1015
857176	1015
857182	1011
857194	1011
857233	1011
857245	1011
857257	1011
857260	1011
857269	1027
857284	1027
857295	1031
857358	1009
857373	1009
857375	1008
857376	1008
857380	1020
857386	1021
857390	1022
857396	1031
857411	1029
857415	1030
857423	304
857435	304
857447	304
857450	304
857497	865
857498	865
857500	865
857512	873
857524	873
857536	873
858007	873
858019	873
858021	873
858033	873
858034	873
858196	873
858209	873
858211	873
858223	873
858235	865
858273	873
858285	873
858862	151
858863	151
860154	862
860178	862
860191	862
860292	862
860305	862
860317	862
860329	862
860379	862
860381	862
860393	862
860406	862
860418	862
860482	862
862018	868
862032	868
862044	868
862056	868
862068	868
862070	868
862082	868
862284	868
862296	868
862309	868
862311	874
862347	868
862356	868
862361	868
862436	868
862448	868
862450	868
862462	869
862474	869
862486	869
862549	868
862551	869
862563	869
862892	875
862905	875
862917	875
862929	875
8655566	506
865599	866
865600	866
865601	866
865602	866
865603	866
865604	866
865901	890
865925	890
865930	890
865945	864
865999	866
866002	866
866003	866
866004	866
866005	866
866006	866
866015	866
866016	866
866028	866
866042	866
866066	866
866067	866
866069	866
866070	866
866071	866
866072	866
866073	866
866076	866
866077	866
866078	866
866079	866
866080	866
866081	866
866082	866
866083	866
866084	867
866092	866
866117	866
866131	867
866155	867
866157	867
866158	867
866159	867
866160	867
866161	867
866162	867
866166	867
866167	867
866179	867
866181	867
866206	867
866220	867
866244	867
866256	867
866262	867
866264	867
866266	867
866268	867
866269	867
866270	867
866282	867
866294	867
866307	867
866321	867
866339	867
866340	867
866345	867
866346	867
866347	867
866348	867
866349	867
866350	867
866351	867
866352	867
866353	867
866354	867
866357	867
866359	867
866361	867
866363	867
866365	867
866368	867
866369	867
866370	867
866371	863
866372	863
866373	863
866374	863
866375	863
866376	863
866377	863
866378	863
866379	863
866380	863
866382	863
866383	863
866384	863
866395	863
866408	863
866409	863
866411	863
866412	863
866422	863
866446	863
866460	863
866484	863
866496	863
866498	863
866499	863
866500	863
866501	863
866502	863
866505	863
866509	863
866523	863
866547	863
866550	864
866551	864
866561	864
866573	864
866597	864
866612	864
866613	864
866623	864
866624	864
866626	864
866627	864
866628	864
866629	864
866631	864
866649	864
866650	864
866674	864
866675	864
866699	864
866713	864
866714	864
866715	864
866716	864
866717	864
866718	864
866719	864
866728	869
866730	869
866736	869
866737	869
866738	869
866742	869
866743	869
866744	869
866751	869
866752	869
866754	869
866755	869
866756	869
866757	869
866758	869
866759	869
866774	869
866775	869
866776	869
866787	869
866788	869
866789	869
866790	869
866791	870
866792	870
866793	870
866794	869
866795	869
866796	870
866797	870
866802	870
866803	870
866806	870
866809	870
866813	870
866814	870
866826	870
866827	870
866828	870
866829	870
866830	870
866831	870
866833	872
866835	872
866837	872

©2014 Donovan Marine, Inc.

DMI No.	Page No.
866840	870
866864	870
866865	870
866887	870
866888	870
866889	870
866890	870
866891	870
866892	870
866893	870
866894	870
866900	870
866901	870
866902	870
866903	870
866904	870
866927	870
866928	870
866941	870
866943	870
866945	870
866947	870
866951	865
866952	865
866953	865
866964	865
866965	865
866966	865
866973	870
866977	865
866980	870
866982	870
866984	870
866986	870
866990	870
867006	865
867018	865
867020	865
867021	865
867032	865
867056	865
867070	865
867082	865
867098	865
867167	865
867169	865
867171	865
867188	865
867195	865
867208	865
867209	865
867210	865
867211	865
867212	865
867220	865
867222	865
867246	865
867260	865
867284	865
867295	865
867297	865
867298	865
867299	865
867300	865
867309	862
867310	862
867315	862
867316	862
867323	862
867329	862
867338	862
867339	862
867347	862
867349	862
867359	862
867366	862
867373	862
867407	862
867409	862
867412	862
867424	862
867436	862
867438	862
867440	862
867448	862
867450	862
867474	862
867498	862
867502	862
867504	862
867506	862
867508	862
867891	873
867892	874
867915	873
867917	874
867918	873
867931	874
868070	865
868084	865
868091	865
868116	865
868188	862
868190	862
868214	862
868227	862
868236	862
868440	867
868442	867
868450	865
868452	865
868454	865
868456	865
868458	865
868460	865
868461	865
868462	865
868463	865
868464	865
868476	865
868487	865
868488	865
868489	865
868490	865
868491	865
868492	865
868502	865
868504	865
868506	865
868540	862
868541	862
868553	862
868565	862
868568	864
869226	865
869240	865
869264	865
869267	865
869353	865
869365	865
869430	862
870204	868
870205	868
870206	868
870229	868
870230	868
870255	868
870256	868
870279	868
870280	868
870293	868
870294	868
870298	868
870320	868
870332	868
870344	868
870356	868
870368	868
870394	868
870407	868
870419	868
870421	868
870433	868
870436	868
870438	868
870445	868
870468	868
870554	868
870556	868
870558	868
870560	868
870572	869
870584	869
870623	868
870635	869
870647	869
870649	868
870650	868
870651	868
870840	869
870841	869
870852	868
870853	869
870854	869
870856	869
870930	869
870938	868
870940	869
870942	869
871153	868
871156	868
871168	868
871170	868
871173	868
871257	869
871269	869
871271	869
871280	869
871283	869
871284	869
871285	869
871286	869
871287	869
871459	868
871473	868
871497	869
871512	869
871517	869
871586	869
871601	869
871613	869
873005	872
873006	872
873008	872
873009	872
873010	872
873011	872
873012	872
873013	872
873035	872
873040	872
873042	872
873043	872
873069	872
873073	872
873085	872
873097	872
873100	872
873102	872
873106	872
873124	872
873148	872
873162	872
873186	872
873198	872
873199	872
873200	872
873201	872
873213	872
873214	872
873223	872
873225	872
873227	872
873237	872
873239	872
873275	872
873287	872
873299	872
873302	872
873314	872
873319	872
873321	872
873323	872
873333	870
873338	874
873339	874
873340	864
873352	864
873363	870
873364	864
873375	870
873376	864
873388	872
873390	872
873391	872
873403	872
873404	872
873579	872
873580	872
873582	872
873667	872
873720	872
873732	872
873868	862
873869	862
873871	862
873883	862
874303	870
874304	870
874305	870
874316	870
874317	870
874322	868
874324	868
874326	868
874328	868
875200	874
875202	874
875205	874
875206	873
875229	874
875230	873
875243	874
875249	874
875250	874
875251	874
875252	874
875253	874
875259	874
875260	874
875261	874
875262	874
875263	874
875264	874
875265	874
875266	874
875268	874
875270	874
875271	874
875274	874
875275	874
875276	874
875277	874
875282	874
875373	874
877156	874
877157	874
877158	874
877159	866
877165	874
877805	867
877817	867
877829	867
877831	867
877852	866
877854	866
877856	866
877861	866
877863	866
877865	866
878798	489
878799	880
878800	880
878801	880
878802	871
878803	871
878804	871
878805	880
878806	880
878807	880
878819	880
878821	880
878833	880
878834	880
878836	880
878837	880
878838	880
878839	880
878842	880
878843	880
878844	880
878845	880
878857	880
878869	880
878871	880
878873	880
878874	880
878875	880
878876	880
878883	880
878895	880
878908	880
878910	880
879042	879
879043	879
879044	879
879045	879
879051	879
879063	879
879075	879
879087	879
879099	879
879102	879
879114	879
879126	879
879138	879
879140	879
879151	879
879152	879
879164	879
879166	879
879175	879
879176	879
879188	879
879190	879
879203	879
879215	879
879227	879
879228	879
879230	879
879231	879
879232	879
879233	879
879234	879
879239	879
879241	879
879253	879
879254	879
879260	879
879261	879
879262	879
879263	879
879264	879
879265	879
879270	879
879271	879
879272	879
879273	879
879274	879
879861	881
879874	881
879885	881
879897	881
879900	881
879912	881
879924	881
879936	881
879948	881
879949	881
879950	881
879951	881
879952	881
879953	881
879954	881
879955	881
879956	881
879957	881
879961	881
879962	881
879974	881
879986	881
879987	881
879990	881
879994	880
879998	880
880000	880
880001	880
880002	880
880010	879
880011	879
880012	879
880020	879
880021	879
880022	879
880023	879
880024	879
880028	879
880029	879
880030	879
880031	879
880050	879
880051	879
880052	879
880053	879
880054	879
880060	879
880061	879
880062	879
880063	879
880064	879
880070	879
880071	879
880072	879
880073	879
880074	879
880075	879
880120	876
880122	876
880124	876
880128	876
880130	876
880132	876
880140	876
880142	876
880144	876
880146	876
880150	876
880152	876
880154	876
880156	876
880176	875
880179	875
880193	875
880218	875
880219	875
880220	875
880232	875
880244	875
880245	875
880246	875
880247	875
880248	875
880249	875
880253	875
880254	875
880255	875
880256	875
880257	875
880258	875
880259	875
880260	875
880261	875
880262	875
880265	875
880266	875
880267	875
880268	875
880269	875
880270	875
880271	875
880272	875
880273	875
880274	875
880275	875
880276	875
880280	875
880282	875
880283	875
880284	875
880285	875
880286	875
880288	875
880290	875
880292	875
880294	875
880296	875
880298	875
880300	875
880302	875
880304	875
880434	882
880446	882
880458	882
880460	882
880472	882
880484	882
880496	882
880509	882
880511	882
880523	882
880535	882
880547	882
880559	882
880561	882
880573	882
880585	882
880597	882
880600	882
880612	882
880624	882
880636	882
880648	882

DMI No. to Page No. Index

DMI No.	Page No.
880650	882
880662	882
880674	882
880686	882
880698	882
880701	882
880713	882
880725	882
880737	882
880749	882
880751	882
880763	882
880775	882
880787	882
880799	882
880802	882
880814	882
880826	882
880838	882
880840	882
880852	882
880864	882
880876	882
880888	882
880890	882
880903	882
880915	882
880927	882
880939	882
880941	882
880953	882
880965	882
880977	882
880989	882
880991	882
881006	882
881018	882
881020	882
881032	882
881044	882
881056	882
881068	883
881070	883
881082	883
881094	883
881107	883
881119	883
881121	883
881133	883
881145	883
881157	883
881169	883
881171	883
881183	883
881195	883
881208	883
881210	883
881222	883
881234	883
881246	883
881258	883
881260	883
881272	883
881284	883
881296	883
881309	883
881311	883
881323	883
881335	883
881347	883
881359	883
881361	883
881373	883
881385	883
881397	883
881400	883
881412	883
881424	883
881436	883
881448	883
881450	883
881462	883
881474	883
881486	883
881498	883
881501	883
881513	883
881525	883
881537	883
881549	883
881551	883
881563	883
881575	883
881587	882
881599	882
881602	882
881614	882
881626	882
881638	882
881640	882
881652	882
881664	882
881676	883
881688	883
881690	883
881703	883
881715	883
881727	883
881739	883
881741	883
881753	883
881765	883
881777	883
881789	883
881791	883
881804	883
881816	883
881830	883
881842	883
881854	883
881866	883
881878	883
881880	883
881892	883
881905	883
881917	883
881929	883
881931	883
881943	883
881955	883
881967	883
881979	883
881981	883
881993	883
882008	883
882010	883
882022	883
882034	883
882046	882
882058	882
882060	882
882072	882
882084	882
882096	882
882109	882
882111	882
882123	882
883090	890
883094	890
883098	890
883101	890
883113	890
883125	890
883151	890
883202	889
883205	889
883210	889
883214	889
883217	889
883220	889
883303	889
883315	889
883327	889
883339	889
883341	889
883353	889
883365	889
883370	890
883375	890
883404	891
883416	891
883428	891
883435	891
883445	887
883454	888
883466	888
883478	888
883480	888
883492	888
883505	888
883510	889
883520	887
883522	888
883525	887
883529	887
883531	887
883543	887
883555	887
883567	887
883570	887
883579	888
883582	888
883586	888
883590	888
883606	888
883620	887
883630	887
883635	888
883646	891
883656	888
883660	888
883668	888
883669	889
883670	889
883682	887
883707	887
883719	887
883721	887
883757	887
883769	887
883783	887
883795	887
883808	887
883822	887
883836	887
883838	887
883840	887
883846	887
883858	887
883860	887
883870	888
883906	888
883911	888
883915	888
883935	887
883947	887
883948	887
883959	887
883961	887
883964	887
883985	887
883997	887
884002	887
884004	887
884014	887
884028	887
884030	887
884040	888
884052	888
886068	1143
886070	1143
886082	1143
886094	1143
886107	1148
886121	1148
886133	1148
886311	1149
886361	1143
886385	1143
886388	1143
886397	1143
886688	1167
886690	1167
886753	1149
886760	1136
886762	1138
886763	1138
886765	1136
886767	1136
886769	1136
886789	1136
886791	1136
886795	1137
886797	1136
886798	1136
886799	1136
886800	1136
886801	1136
886804	1148
886905	1148
886929	1148
887031	1143
887033	1143
887035	1143
887036	1143
887038	1143
887039	1143
887045	1144
887047	1144
887049	1144
887050	1144
887052	1144
887053	1144
887060	1144
887062	1144
887064	1144
887066	1144
887068	1144
887070	1144
887700	1143
887703	1143
887706	1143
887709	1143
887712	1143
887715	1143
887718	1143
887721	1143
887724	1143
887727	1143
887740	1143
887743	1143
887746	1143
887749	1143
887752	1143
887755	1143
887758	1143
887761	1143
887764	1143
887820	1145
887823	1145
887826	1145
887829	1145
887832	1145
887835	1145
887838	1145
887841	1145
887850	1146
887853	1146
887856	1146
887859	1146
887862	1146
887865	1146
887868	1146
887871	1146
887880	1144
887883	1144
887886	1144
887889	1144
887900	1144
887903	1144
887906	1144
887909	1144
887920	1146
887923	1146
887926	1146
887929	1146
887932	1146
888036	1147
888071	1146
888072	1146
888073	1146
888074	1147
888075	1146
888076	1146
888077	1146
888078	1146
888079	1146
888081	1146
888083	1146
888085	1146
888086	1147
888087	1146
888089	1146
888090	1146
888091	1146
888092	1146
888093	1146
888095	1146
888098	1147
888120	1146
888122	1146
888126	1146
888127	1146
888129	1146
888131	1146
888132	1146
888202	1147
888204	1147
888206	1147
888208	1147
888252	1147
888290	1147
888292	1147
888294	1147
888303	1148
888305	1148
888307	1148
888309	1148
888315	1148
888320	1148
888327	1148
888339	1148
888355	1148
888356	1148
888357	1148
888358	1148
888359	1148
888360	1148
888361	1148
888380	1149
888389	1149
888391	1149
888393	1149
888450	1136
888451	1136
888455	1136
888457	1136
888459	1136
888461	1136
888463	1136
888465	1136
888467	1136
888469	1136
888471	1136
888473	1136
888475	1136
888477	1136
888479	1136
888481	1136
888483	1136
888485	1136
888487	1136
888489	1136
888491	1136
888493	1136
890000	814
890001	814
890003	814
890005	814
890007	815
890010	816
890012	816
890017	815
890029	815
8-9011	45
890130	815
890135	815
890139	815
890145	816
890154	815
890156	815
8-9016	45
890168	815
890170	815
890203	817
8-9023	45
8-9024	45
8-9025	45
890250	820
890252	817
890255	819
8-9026	49
890260	819
8-9027	49
890270	819
890275	816
8-9028	49
890280	816
890282	816
890285	816
8-9029	49
890290	816
890293	817
890296	817
890299	817
8-9030	49
8-9034	49
8-9035	49
8-9036	49
8-9037	49
8-9041	49
8-9043	48
8-9044	48
8-9045	48
8-9046	48
8-9051	45
8-9053	45
8-9056	45
8-9058	45
8-9064	45
8-9066	44
8-9067	47
8-9069	49
8-9070	49
8-9071	49
8-9072	49
8-9076	49
8-9079	49
8-9080	49
8-9081	49
8-9083	48
8-9084	48
8-9085	48
8-9086	48
8-9090	49
8-9091	49
8-9092	49
890932	819
890935	819
890937	819
890940	819
890943	819
890946	819
8-9095	48
890950	819
8-9096	48
8-9097	48
890980	820
890983	821
890986	820
890989	821
8-9099	48
890993	821
890996	821
890999	821
8-9100	48
891003	821
8-9101	48
891010	821
891013	816
891016	816
891020	821
891023	818
891026	818
8-9104	49
8-9105	49
8-9106	49
8-9107	49
8-9108	49
8-9110	48
8-9111	48
8-9112	48
8-9113	48
8-9114	48
8-9116	48
8-9118	48
8-9119	48
8-9120	48
8-9123	47
8-9124	47
8-9125	47
8-9127	47
8-9130	41
8-9131	41
891315	820
8-9132	41
8-9137	46
8-9138	46
8-9139	46
8-9140	46
891401	817
8-9141	46
891413	817
8-9142	46
891422	817
8-9143	46
891434	817
891436	817
8-9144	46
8-9145	46
8-9146	46
8-9147	46

©2014 Donovan Marine, Inc.

DMI No.	Page No.
8-9148	46
8-9150	45
8-9151	45
8-9152	45
8-9153	45
8-9154	45
8-9155	45
8-9164	59
8-9165	59
8-9166	59
8-9168	59
8-9169	59
8-9171	59
8-9174	46
8-9175	46
8-9176	46
8-9178	46
8-9179	46
8-9180	46
8-9181	46
8-9184	49
8-9185	49
8-9187	49
8-9201	46
8-9204	45
895501	813
895503	813
895505	813
895512	813
895515	813
895518	814
895521	814
895525	814
895528	814
895533	814
895582	820
895585	820
899020	818
899022	818
899030	818
899032	818
899035	818
899037	818
899051	820
899053	820
899055	820
899065	820
899075	812
899077	812
899080	812
899083	811
899086	812
899089	813
899090	813
899092	812
900083	495
901466	494
905011	812
905015	812
905019	813
918776	495
919172	495
920288	495
938007	494
938095	494
955003	812
957069	811
980955	1069
980967	1069

DMI No.	Page No.
990015	854
990019	854
990021	854
990022	854
990033	854
990057	854
990069	854
990083	854
990092	854
990095	854
990098	854
990099	491
995001	271
995002	271
999124	852
999138	1020
999141	1021
999143	1031
999144	1028
999162	81
999177	841
B763912K	878
B763913K	878
B763914K	878
B763915K	878
B763918K	878
B763919K	878
B763922K	878
B763923K	878
B763936K	878
B763937K	878
B763938K	878
B763939K	878
B763942K	878
B763943K	878
B763946K	878
B763947K	878
B763948K	878
B763949K	878
B763959K	878
B763960K	878
B763961K	878
B763962K	878
B763963K	878
B765181K	878
B765182K	878
B765183K	878
B765184K	878
B765185K	878
B765186K	878
B765187K	878
B765188K	878
B765189K	878
B765543	572
B765545	623
B765547	576
B765549	589
B765550	632
B765551	602
B765552	574
B765553	571
B765554	562
B765555	569
B765557	602
B765559	610
B765560	576
B765561	569
B765562	589
B765563	612

DMI No.	Page No.
B765564	852
B765565	602
B765566	562
B765567	573
B765568	852
B765569	612
B765570	626
B765571	636
B765573	571
B765574	567
B765575	757
B765576	852
B765577	574
B765578	764
B765579	612
B765580	610
B765581	600
B765582	753
B765583	626
B765585	610
B765586	852
B765587	637
B765589	747
B765590	746
B765591	570
B765592	635
B765593	632
B765594	600
B765595	571
B765597	569
B765598	576
B765599	576
B765600	577
B765601	637
B765602	749
B765603	607
B765604	754
B765605	561
B765606	637
B765609	576
B765610	610
B765611	571
B765613	613
B765614	616
B765615	577
B765616	628
B765617	626
B765618	564
B765619	574
B765620	611
B765621	599
B765622	561
B765623	753
B765624	759
B765625	610
B765626	747
B765627	638
B765628	564
B765629	764
B765630	567
B765631	613
B765632	559
B765633	571
B765634	623
B765635	573
B765636	613
B765637	569
B765638	623
B765639	637

DMI No.	Page No.
B765640	624
B765643	574
B765654	574
B765655	574
B765716	846
B765717	846
B765718	845
B765719	845
B765720	845
B765721	844
B765722	844
B765723	848
B765724	848
B765725	848
B765726	848
B765727	852
B765728	534
B765730	848
B765731	843
B765732	647
B765733	647
B765735	647
B765739	1062
B765740	851
B765741	852
B765742	852
B765743	851
B765744	1062
B765745	1062
B765746	1020
B765748	1020
B765749	574
B765752	863
B765753	863
B765754	863
B765755	863
B765756	863
B765757	863
B765758	863
B765759	863
B765760	863
B765761	863
B765762	863
B765763	863
B765764	863
B765765	863
B765766	863
B765767	863
B765768	863
B765769	863
B765770	863
B765771	864
B765772	864
B765773	864
B765774	864
B765775	864
B765776	877
B765777	877
B765778	877
B765779	877
B765780	877
B765781	877
B765782	877
B765783	877
B765784	877
B765785	878
B765786	878
B765787	878
B765788	878

DMI No.	Page No.
B765789	878
B765790	878
B765791	878
B765792	878
B765794	878
B765795	862
B765796	862
B765797	862
B765798	862
B765799	862
B765800	862
B765801	862
B765802	862
B765803	862
B765804	862
B765805	862
B765806	862
B765807	862
B765808	877
B765809	877
B765810	877
B765811	877
B765812	877
B765813	877
B765814	877
B765815	877
B765816	877
B765817	877
B765818	877
B765819	877
B765820	877
B765821	877
B765822	877
B765823	877
B765824	877
B765825	877
B765826	877
B765827	877
B765828	877
B765829	877
B765830	877
B765831	877
B765832	640
B765990	590
B766151	846
B766152	845
B766214	647
B766215	647
B766400	616
B766401	633
B766402	576
B766403	576
B766404	574
B766405	574
B766408	616
B766409	630
B766410	640
B766411	611
B766412	634
B766416	629
B766417	573
B766418	573
B766419	567
B766420	569
B766421	569
B766422	560
B766423	561
B766424	635
B766425	613

DMI No.	Page No.
B766426	620
B766427	633
B766428	620
B766429	634
B766430	612
B766431	605
B766432	607
B766433	605
B766435	605
B766436	625
B766437	541
B766438	616
B766439	616
B766440	570
B766442	574
B766444	633
B766446	616
B766447	574
B766449	634
B766451	636
B766452	565
B766453	636
B766454	637
B766455	763
B766456	640
B766457	563
B766458	574
B766459	574
B766460	629
B766461	569
B766463	573
B766464	634
B766465	573
B766466	620
B766467	628
B766468	625
B766469	639
B766470	637
B766471	637
B766472	574
B766473	565
B766474	613
B766475	633
B766476	633
B766477	631
B766481	634
B766482	634
B766483	613
B766484	613
B766485	607
B766486	617
B766488	572
B766489	572
B766490	572
B766491	572
B766492	572
B766493	572
B766494	572
B766495	641
B766496	641
B766497	641
B766498	641
B766499	642
B766500	642
B766501	642
B766502	642
B766503	644
B766504	642
B766505	642

DMI No.	Page No.
B766506	642
B766507	642
B766508	642
B766509	642
B766510	643
B766511	643
B766512	643
B766513	643
B766514	643
B766515	641
B766516	641
B766517	641
B766519	643
B766520	643
B766521	643
B766522	643
B766523	643
B766524	644
B766525	644
B777260	610
B777342	561
B777346	574
B777351	638
B777352	574
B777353	637
B777357	549
B777358	549
B777359	549
B777362	549
B777366	549
B777379	553
B777380	563
B777381	564
B777382	559
B777383	559
B777384	554
B777385	559
B777386	560
B777387	563
B777388	557
B777389	553
B777390	553
B777391	558
B777392	554
B777393	557
B777394	557
B777395	553
B777396	558
B777397	552
B777398	552
B777401	553
B777405	552
B777406	559
B777408	553
B777409	558
B777411	560
B777412	555
B777413	553
B777414	557
B777416	558
B777417	560
B777420	554
B777421	551
B777422	560
B777423	551
B777424	552
B777426	558
B777428	553
B777429	558


DMI No.	Page No.
B777430	554
B777433	554
B777434	560
B777437	558
B777440	559
B777449	551
B777454	551
B777455	552
B777457	551
B777458	556
B777460	551
B777461	553
B777466	551
B777469	551
B777481	635
B777482	635
B777483	635
B777484	636
B777485	635
B777486	636
B777487	635
B777488	635
B777489	635
B777491	632
B777492	622
B777493	621
B777494	622
B777495	621
B777496	630
B777497	622
B777498	623
B777499	621
B777500	621
B777501	629
B777502	628
B777503	628
B777504	629
B777505	762
B777506	622
B777507	624
B777508	630
B777509	626
B777510	629
B777511	632
B777512	632
B777516	632
B777517	639
B777518	563
B777519	563
B777520	563
B777521	631
B777522	563
B777523	747
B777524	637
B777525	565
B777526	562
B777527	564
B777530	560
B777531	623
B777532	562
B777538	565
B777541	564
B777551	627
B777552	627
B777553	631
B777554	631
B777558	628
B777559	625
B777562	626

DMI No. to Page No. Index

DMI No.	Page No.
B777568	623
B777578	624
B777602	630
B777603	630
B777604	630
B777625	589
B777626	593
B777627	591
B777628	590
B777629	589
B777630	592
B777631	592
B777632	593
B777633	591
B777634	592
B777635	593
B777636	590
B777637	593
B777638	593
B777639	591
B777640	591
B777641	590
B777642	592
B777643	593
B777644	591
B777645	593
B777649	589
B777650	590
B777652	589
B777653	592
B777656	589
B777657	595
B777658	596
B777659	599
B777660	599
B777661	600
B777662	597
B777663	599
B777664	599
B777665	599
B777666	599
B777667	599
B777669	599
B777670	597
B777671	598
B777672	598
B777674	598
B777675	597
B777676	597
B777677	601
B777678	601
B777679	600
B777680	601
B777681	601
B777683	600
B777685	600
B777686	601
B777687	617
B777688	618
B777689	618
B777690	619
B777691	618
B777692	618
B777693	619
B777694	619
B777695	619
B777696	618
B777697	617
B777698	615
B777699	615
B777700	601
B777701	602
B777702	616
B777703	601
B777704	619
B777705	619
B777707	619
B777709	620
B777710	619
B777713	571
B777714	572
B777715	572
B777717	568
B777718	568
B777719	568
B777720	568
B777721	567
B777722	567
B777723	568
B777724	568
B777725	567
B777726	568
B777727	568
B777728	568
B777735	570
B777737	554
B777738	637
B777741	574
B777743	573
B777744	560
B777747	557
B777748	561
B777749	557
B777750	569
B777751	557
B777753	570
B777754	576
B777755	561
B777756	569
B777758	556
B777760	570
B777761	561
B777764	570
B777771	570
B777774	570
B777779	569
B777780	570
B777783	574
B777785	615
B777787	638
B777800	609
B777801	607
B777802	609
B777803	608
B777804	608
B777805	608
B777806	608
B777807	609
B777808	608
B777809	608
B777810	609
B777811	607
B777812	608
B777813	609
B777814	607
B777816	607
B777817	605
B777818	606
B777819	605
B777820	608
B777821	620
B777822	605
B777823	607
B777824	606
B777825	606
B777826	752
B777827	606
B777828	606
B777829	606
B777830	607
B777831	605
B777833	605
B777834	606
B777835	606
B777837	610
B777839	549
B777842	612
B777843	629
B777844	560
B777851	559
B777875	562
B777878	565
B777894	559
B777896	565
B777897	563
B777899	562
B777904	563
B777906	754
B777914	748
B777936	628
B777947	558
B777991	633
B777992	886
B777994	886
B777995	886
B777996	886
B778002	886
B778004	752
B778010	750
B778011	750
B778012	750
B778014	756
B778015	758
B778016	758
B778017	755
B778018	754
B778021	756
B778025	601
B778026	755
B778028	751
B778033	764
B778034	747
B778037	747
B778038	757
B778039	752
B778040	758
B778041	764
B778042	754
B778043	757
B778045	748
B778046	757
B778047	746
B778048	760
B778049	760
B778051	760
B778052	760
B778055	748
B778056	754
B778057	746
B778059	758
B778060	748
B778061	753
B778063	764
B778066	746
B778067	746
B778068	758
B778071	753
B778072	746
B778073	760
B778085	746
B778087	749
B778088	758
B778091	748
B778095	748
B778102	749
B778105	749
B778108	764
B778117	759
B778118	750
B778121	749
B778122	751
B778127	749
B778130	758
B778131	751
B778146	751
B778147	751
B778151	749
B778152	567
B778153	562
B778154	554
B778155	763
B778156	624
B778157	577
B778158	577
B778159	626
B778161	577
B778162	571
B778163	626
B778164	625
B778165	624
B778166	607
B778167	635
B778168	624
B778169	632
B778170	630
B778171	574
B778172	624
B778173	640
B778174	634
B778175	764
B778176	631
B778178	751
B778179	639
B778180	611
B778181	573
B778182	620
B778183	746
B778184	752
B778185	636
B778186	638
B778187	558
B778188	754
B778189	629
B778190	625
B778191	633
B778192	640
B778193	639
B778195	553
B778196	626
B778197	620
B778198	625
B778199	611
B778200	611
B778202	758
B778204	548
B778205	562
B778206	554
B778207	634
B778209	601
B778210	613
B778211	620
B778213	548
B778214	764
B778216	557
B778217	543
B778218	616
B778219	612
B778220	556
B778221	764
B778222	636
B778223	565
B778225	605
B778226	616
B778227	748
B778228	571
B778229	633
B778230	638
B778231	631
B778232	590
B778233	596
B778234	751
B778235	559
B778236	609
B778237	625
B778238	761
B778240	633
B778241	609
B778242	613
B778243	613
B778244	590
B778245	751
B778246	633
B778247	615
B778248	590
B778249	752
B778250	567
B778251	613
B778252	634
B778253	612
B778254	589
B778255	631
B778256	764
B778257	749
B778258	763
B778259	574
B778260	746
B778261	610
B778262	601
B778263	592
B778264	609
B778265	619
B778266	615
B778267	625
B778268	554
B778269	631
B778270	636
B778271	763
B778272	602
B778273	632
B778274	608
B778275	639
B778276	570
B778277	748
B778278	752
B778279	541
B778280	754
B778281	620
B778282	567
B778283	626
B778284	615
B778285	761
B778286	548
B778287	577
B778288	616
B778289	563
B778290	639
B778291	565
B778292	562
B778293	764
B778294	629
B778296	605
B778297	560
B778300	749
B778301	567
B778302	558
B778303	636
B778306	606
B778308	612
B778309	763
B778310	638
B778311	561
B778312	546
B778313	763
B778315	631
B778316	623
B778317	608
B778318	638
B778319	638
B778321	543
B778322	636
B778323	576
B778324	638
B778325	634
B778326	555
B778327	625
B778328	547
B778329	626
B778330	598
B778331	639
B778332	611
B778333	547
B778334	598
B778335	639
B778336	561
B778337	764
B778338	564
B778339	564
B778341	574
B778342	573
B778343	628
B778344	547
B778345	760
B778346	762
B778347	547
B778348	543
B778350	632
B778351	758
B778352	543
B778353	597
B778354	629
B778356	548
B778357	760
B778358	564
B778359	622
B778360	564
B778361	631
B778362	544
B778363	544
B778364	564
B778365	639
B778366	541
B778367	628
B778368	761
B778369	552
B778371	761
B778372	627
B778373	628
B778374	639
B778375	543
B778376	548
B778377	611
B778378	544
B778379	622
B778380	546
B778381	544
B778382	548
B778383	610
B778384	596
B778385	548
B778386	630
B778387	628
B778388	544
B778389	542
B778390	610
B778391	597
B778392	762
B778393	761
B778394	544
B778395	632
B778396	763
B778397	597
B778398	547
B778399	763
B778400	624
B778401	546
B778403	627
B778404	623
B778405	627
B778406	627
B778407	551
B778408	640
B778409	542
B778410	638
B778411	549
B778412	754
B778413	546
B778414	542
B778415	624
B778416	561
B778417	541
B778418	627
B778419	547
B778420	622
B778421	548
B778423	762
B778424	624
B778425	616
B778426	542
B778427	762
B778428	542
B778429	762
B778430	640
B778431	596
B778432	629
B778433	547
B778435	546
B778436	763
B778437	612
B778438	596
B778439	547
B778440	543
B778441	762
B778442	542
B778443	547
B778444	542
B778445	545
B778446	548
B778447	542
B778448	596
B778449	545
B778450	609
B778451	622
B778452	547
B778453	630
B778454	546
B778455	624
B778456	548
B778457	627
B778459	596
B778460	596
B778461	622
B778462	542
B778463	627
B778465	630
B778466	546
B778467	562
B778468	542
B778470	544
B778471	543
B778474	762
B778475	545
B778476	543
B778477	544
B778479	597
B778481	542
B778484	617
B778485	545
B778489	545
B778490	763
B778492	545
B778493	545
B778495	545
B778496	542
B778499	542
B778500	544
B778502	543
B778505	546
B778506	545
B778509	546
B778512	545
B778513	542
B778516	544

©2014 Donovan Marine, Inc.

DMI No.	Page No.
B778517	546
B778519	542
B99999L	841
B99999W	871
B99999X	871
B99999Y	871
B99999Z	871
M12104	814
M30090	811
M30091	811
M30114	811
M30127	812
M30188	812
M30265	811
M30431	811
M30556	813
M81010	833
M82012	833
M82151	833
M82199	833
M82290	833
M94017	833
M94029	833
M96023	833
MP1303	828
MP1404	828
MP1808	828
MP1810	828
MP2880	828
MP2886	828
MP2894	828
MPE30CF	828
MPE30CR	828
MPE43CF	828
MPE43CR	828
MPE43MF	830
MPE43MR	830
MPE57MCF	830
MPE57MCR	830
MPE57MMF	830
MPE57MMR	830
MPE57V1CF	830
MPE57V1CR	830
MPE57V1MF	830
MPE57V1MR	830
MPE57V2CF	830
MPE57V2CR	830
MPE57V2MF	830
MPE57V2MR	830
MPE60MF	830
MPS30CF	832
MPS30CR	832
MPS43CF	832
MPS43CR	832
MPS43MF	832
MPS43MR	832
MPS57CF	833
MPS57CR	832
MPS57MF	833
MPS57MR	833
MPSR57CR	833
MPSR57MF	833
MPSR57MR	833

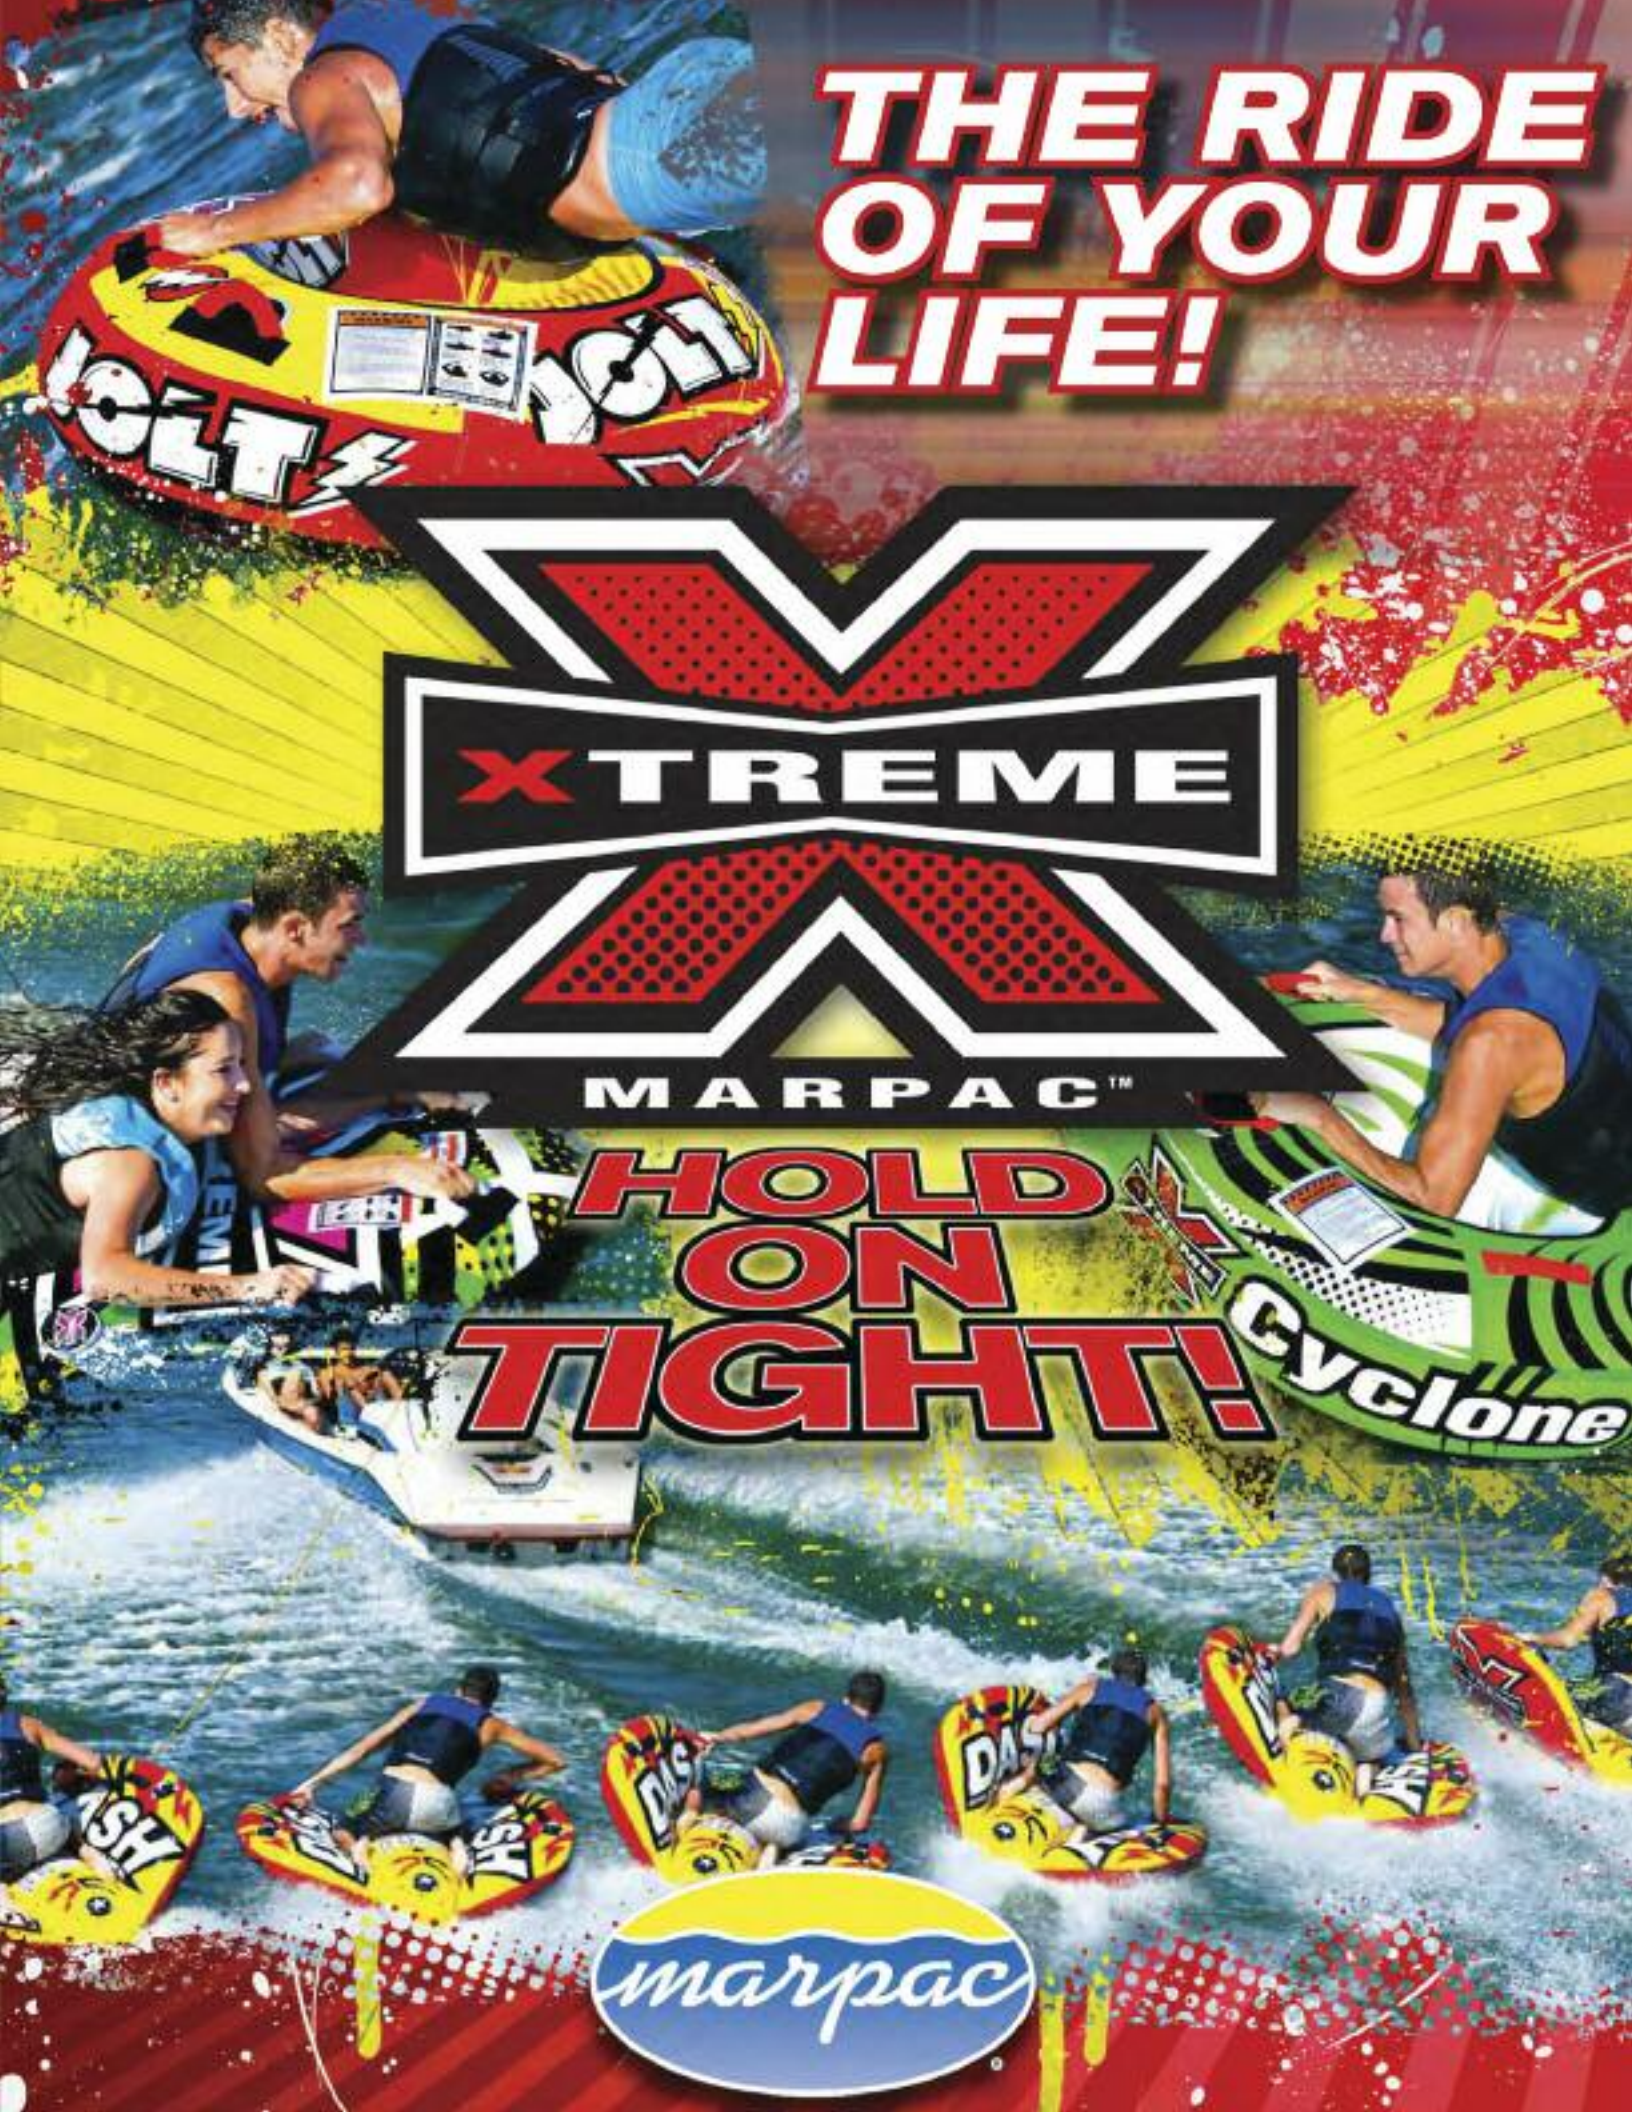
THE RIDE OF YOUR LIFE!
XTREME
MARPAC™
HOLD ON TIGHT!
Cyclone
marpac

Sea-Doo® Seascooter™ Rs3



- Among the fastest and most lightweight recreational seascooters.
- Speed up to 3.10 mph (5 km/h) Depth rated to 98' (30 m).
- Runs up to 60 minutes.
- Energy efficient Lithium-ion powered.
- Automatic neutral-buoyancy adjustment system.
- Revolutionary plug-in charging system.
- For professional divers and snorkelers.
- Weight 19 lbs (9 kg).
- Rechargeable 22.2 V / 4 Ah Lithium-ion battery included.

Order No.	Mfg. No. / Description	Price
599100	(SD15003) Seascooter Rs3	$849.98 H

Sea-Doo® Seascooter™ GTI



- A big performer in a tiny package delivers thrust for a speed of up to 2.5 mph / 4km/h.
- Light enough to carry in one hand making beach dives a reality and snorkeling a dream.
- With waterproof circuitry, maintenance is a cinch!
- Weight just 18 lbs / 8.2kg including battery.
- Run up to 2 hours with normal use.
- Waterproof construction prevents accidental flooding.
- Adjustable buoyancy.

Order No.	Mfg. No. / Description	Price
599110	(SD5540) Seascooter GTI	$425.98 G

Sea-Doo® Seascooter™ Dolphin



- Packs thrust for a speed of up to 2 mph / 3.2km/h in a very compact, lightweight design.
- With safety features including protective grilles, auto shut-off, dual trigger control and positive. buoyancy, the Dolphin is a must for every child, or child at heart.
- Extremely compact design, weighing a lightweight 12 lbs / 5.4kg.
- Run up to 1.5 hours with normal use.
- Fully waterproof construction.

Order No.	Mfg. No. / Description	Price
599125	(SD5542) Seascooter Dolphin	$210.98 G

Sea-Doo® Seascooter™ VS Supercharged Plus



- Push the diving experience to a new level of excitement.
- This ultimate dive propulsion vehicle was rated No.1 overall by Diving Science and Technology (DSAT).
- Delivers two levels of thrust.
- Variable speed control Speed up to 3 mph / 4.8km/h.
- Run up to 1.5 hours with normal use.
- Weight just 18 lbs / 8.2kg including battery.
- Waterproof construction prevents accidental flooding.
- Adjustable buoyancy.
- Reinforced nose cone that protects the unit during transport and in rough environments Impact resistant heavy duty rubber hull protection.

Order No.	Mfg. No. / Description	Price
599105	(SD6545P) Seascooter VS Supercharged Plus	$639.98 H

Sea-Doo® Seascooter™ Aqua Ranger



- Tweaked speed and performance that will propel through the water in style whilst scuba or snorkeling.
- Entry level seascooter take into the water at any occasion.
- Chasing fish at a cruising speed of up to 2.5mph / 4km/h.
- Extremely compact design.
- Weight just 11.5 lbs / 5.2kg including battery.
- Safety features including safety grille, positive buoyancy, auto shut-off, and dual trigger operation.
- Rated to 30ft / 10m.
- Run up to 1 hour with normal use.
- Fully waterproof construction.

Order No.	Mfg. No. / Description	Price
599120	(SD95001) Seascooter Aqua Ranger	$259.98 H



Marpac Xtreme Adult Combo Skis with Slide Bindings



- Traditional Adult combos with good surface area and round nose for easy starts.
- Universal fit slide bindings are easy for the rider to get in, and adjust while in the water.
- Includes slalom toe.
- 168 cm.
- Riders over 120 lbs.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
8-3152	(XT4513)	$150.98 F

World Industries "Grim" Water Ski Combo



- The 67" rim molded water skis are designed to accommodate many different skill levels.
- Wide tails and tunnel shaped bottoms provide the ultimate balance of performance, control, stability and smooth tracking turns.
- The composite construction and fiberglass reinforced nylon fins ensure years of service.
- Dual density slide-type adjustable bindings fit sizes 5 to 12.

Order No.	Mfg. No. / Description	Price
596920	(WIS-1) Grim Water Ski Combo	$181.98 F

Hydroslide Water Ski Combo



- Slide bindings for a universal fit.
- Includes slalom toe.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
717778	(HS809) Wide Track Ski Combo	$188.98 F

Hydroslide Hoppers Wake Skis



- 103 cm (L) x 22 cm (W).
- U.S. Patent # D557,365.
- Twin Tip Design.
- Includes Lace Up Bindings.

Order No.	Mfg. No. / Description	Price
717782	(HS2172)	$194.98 G

Body Glove CRS Adult Combo Skis



- Skis have a textured, concave bottom the helps skis track straight.
- Drop thru fins eliminate rudder drag.
- 67" long.
- For use by skiers over 125 lbs.
- Made in USA.

Order No.	Mfg. No. / Description	Price
717781	(BG511)	$192.98 F

Body Glove Contour Adult Wide-Body Combos



- The wide nose gives extra lift for easy starts, while the parabolic side cut allows for smooth carving turns and easy deepwater starts.
- 64" long.
- For use by skiers over 125 lbs.
- Made in USA.

Order No.	Mfg. No. / Description	Price
717783	(BG811)	$216.98 F

Hydroslide Wide Track Skis



- Wide body for easy starts, and easy turning.
- Universal fit slide bindings are easy for the rider to get in, and adjust while in the water.
- 164 cm.
- Designed for riders over 120 lbs.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
7170047	(HS813)	$187.98 F

Hydroslide Hoppers Wake Skis



- 103 cm (L) x 22 cm (W).
- U.S. Patent # D557,365.
- Twin Tip Design.
- Grabber Ski Bindings Included.

Order No.	Mfg. No. / Description	Price
717780	(HS218)	$172.98 G

©2014 Donovan Marine, Inc.

Marpac Xtreme Trainer Water Skis



- Training Water Skis with removable training crossbar which distributes tension equally to the skier and the skis to improve balance.
- Rigid cross bar keeps ski tips in perfect alignment for the trainee.
- 46" long wide-body design is perfect for all children 50-90 lbs.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
8-3150	(XT1453)	$135.98 F

Body Glove Grom Water Ski Training System



- Ski designed to actually train a child to ski.
- Included horizontal stabilizer bar holds skis in the proper position, letting the rider concentrate on just getting up.
- Unique two point towing system pulls evenly on skis and skiers arms, reducing the strain on the rider, while still giving them the feel of skiing.
- Removable crossbar.
- Includes tow rope.
- 46" long.
- For use by skiers 50-90 lbs.
- Made in USA.

Order No.	Mfg. No. / Description	Price
717777	(BG912)	$148.98 F

Hydroslide Kids Rim Wide Track Trainers



- These Water Skis will make it easy to train them young, and train them right!
- Training Water Skis with removable training crossbar which distributes tension equally to the skier and the skis to improve balance.
- Rigid cross bar keeps ski tips in perfect alignment for the trainee 46" long wide-body design is perfect for all children 50-90 lbs.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
7170035	(HS1453)	$137.98 F

World Industries "Mad Scientist" Trainer Skis



- These skis feature an extra wide profile, parabolic side cut, tapered tail and comfortable adjustable bindings.
- The stabilizer bar keeps the 47" long skis steady while the student is learning to ski.
- Fiberglass reinforced nylon rubbers increase stability and tracking.
- They're designed for skiers under 100 lbs.
- The adjustable bindings fit child size 12 to adult size 5.

Order No.	Mfg. No. / Description	Price
596922	(WIST-1) Mad Scientist Trainer Skis	$97.98 F

Body Glove Zenith Shaped Intermediate Skis



- The absolute best combo pair available for the junior skier in your family.
- The wide nose gives extra lift for easy starts, while the parabolic side cut allows for smooth carving turns.
- Velcro binding system with plush EVA inner is comfortable and easy to use.
- 54" long.
- For use by skiers 80-125 lbs.
- Made in USA.

Order No.	Mfg. No. / Description	Price
717779	(BG311)	$183.98 F

Hydroslide Wide Track Jr. Combos with Slide Bindings



- Wide design and increased surface area make this the perfect set of Jr. recreational combos.
- Included trainer bar keeps skis parallel for quick learning.
- Universal fit slide bindings are easy for the rider to get in, and adjust while in the water.
- Includes slalom toe that your Jr. rider can take it to the next level when they are ready.
- 138 cm.
- Designed for riders 80-120 lbs.
- Made in USA.

Order No.	Mfg. No. / Description	Price
7170039	(HS3813)	$169.98 F

Airhead U-Ski



- Kids have fun and ski with confidence from the get-go with Airhead's U-Ski U-shaped Trainer.
- Really easy for kids to get up on and very sturdy, even at idle speeds.
- Like a cross between a sled and trainer skis, made of durable bamboo.

Order No.	Mfg. No. / Description	Price
596924	(AHUS-1) U-Ski	$125.98 F

Airhead Big EZ Ski



- EZ Ski is a revolutionary inflatable water ski hybrid with integrated wooden water ski trainers and ski bindings.
- EZ SKI is engineered for stability while towing (10 mph maximum), so your child will feel very secure.
- Children board the EZ SKI right from the swim step or stern of your boat, no swimming required.
- Children sit comfortably on the inflated seat for start-ups until they're ready to stand up and ski at their own pace.
- This awesome trainer teaches basic skiing fundamentals including proper stance, handle position, balance and weight transfer for turning.
- Patented.
- The United States governing body for the sport of water skiing has selected the EZ-Ski trainer to be the Official Youth Water Ski Trainer of USA Waterski.
- 1 Rider, 120 lbs. weight capacity.
- Dimensions: 54" L x 34" W x 13" H.

Order No.	Mfg. No. / Description	Price
5960095	(AHEZ-200)	$199.98 F

Airhead EZ Ski Inflatable Single Rider Towable Water Ski Hybrid



- EZ Ski is a revolutionary inflatable water ski hybrid with integrated wooden water ski trainers and ski bindings.
- EZ SKI is engineered for stability while towing (10 mph maximum), so your child will feel very secure.
- Children board the EZ SKI right from the swim step or stern of your boat, no swimming required.
- Children sit comfortably on the inflated seat for start-ups until they're ready to stand up and ski at their own pace.
- This awesome trainer teaches basic skiing fundamentals including proper stance, handle position, balance and weight transfer for turning.
- Patented.
- 1 Rider, 70 lbs. weight capacity.
- Dimensions: 46" L x 34" W x 13" H.

Order No.	Mfg. No. / Description	Price
596536	(AHEZ-100)	$179.98 Q

Airhead EZ Wake Trainer Inflatable Towable Body Board



- EZ Wake Trainer is engineered for stability while towing (10 mph maximum), so your child will feel very secure.
- Children board the stable EZ Wake Trainer right from the swim step or stern of your boat, no swimming required.
- This awesome trainer teaches basic wakeboarding, kneeboarding, wakesurfing and wakeskating fundamentals including proper stance, handle position, balance and weight transfer for turning.
- The EZ Wake Trainer body board is easily removable for more advanced body boarding behind the boat, or take it to the beach and ride the waves!
- Patents pending.
- 1 Rider, 70 lbs. weight capacity.
- 46" L x 31" W x 13" H.
- Body Board size: 39".

Order No.	Mfg. No. / Description	Price
596539	(AHEZ-300)	$179.98 R

Boater Sports Competition Ski Rope



- Competition ski rope is a 75' long slalom/jump line made of 12-strand 1/4" braided poly.
- 12-color take-up sections.
- Yellow/black handle.
- 1,600 lb. break strength.
- Handle logo with cord keeper.
- Meets ASWA regulations.

Order No.	Mfg. No.	Price
1-52462	(52462)	$35.90 L

Boater Sports Basic Ski Rope



- Basic ski rope has 1/4" 16-strand PP with 2" Velcro wrap and customer sewn in label.
- 1,319 Lb break strength.
- 75' Length.
- Floating handle.
- Meets ASWA regulations.

Order No.	Mfg. No.	Price
1-52427	(52427)	$24.65 L

Body Glove 10-Section Tow Rope



- 10 Section low stretch ski line has all the traditional slalom take offs to let you run the course like a pro.
- Fiberglass reinforced 12" handle is covered is soft, stamped EVA to keep you comfortable from the first buoy to the last.

Order No.	Mfg. No.	Price
716974	(BG600)	$30.98 F

©2014 Donovan Marine, Inc.

Airhead Promotional Water Ski Rope



- This 1 section ski rope has an aluminum floating handle and molded end caps for safety and comfort.
- The 12" EVA grip provides a great handhold.
- The 16-strand 75' long rope is UV-treated and pre-stretched.
- A Rope Keeper is included.

Order No.	Mfg. No.	Price
596673	(AHSR-1EVA)	$17.98 Q

Airhead Water Ski Rope



- This 1 section ski rope has an aluminum floating handle and molded end caps for safety and comfort.
- The 16-strand 75' long rope is UV-treated and pre-stretched.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597635	(AHSR-1)	$19.98 G

Airhead EZ Up Slalom Training Rope



- The 12" floating handle has a textured TPR grip, aluminum core and molded end caps and finger guards.
- The 75' long, 16-strand rope is UV-treated and has a 1,500 lb. tensile strength.
- For added durability, the EZ Up bridle is completely covered with flexible vinyl.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597659	(AHSR-2)	$32.98 G

Airhead 3 Section Radius Handle Ski Rope



- The 17 degree, 13" radius aluminum core handle offers a more natural grip.
- Eye-catching "amoeba" patterned EVA wraps the handle and provides a great grip.
- The 3/8", 16-strand, UV treated mainline has 3 sections for skiing, wakeboarding or kneeboarding at 75, 60 or 45 feet.
- Full length finger guards help create a comfortable split finger grip.
- The encased crossover yoke protects the rope from high abrasion wear areas.
- A Rope Keeper is included for tangle free storage.

Order No.	Mfg. No.	Price
5960146	(AHSR-3)	$30.98 I

Airhead Performance Water Ski Rope



- This 75' long rope has 4 sections (75", 60", 50", 40") for all riding styles.
- The 12" aluminum core handle has a performance "Tractor" grip and full length molded finger protectors.
- UV-treated 16-strand 1,600 lb. tensile strength rope.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597697	(AHSR-4)	$31.98 G

Airhead 1 Section Ski Rope



- Engineered to provide superior quality and strength at an unbeatable price, this 5/16" x 75' 16-strand ski rope delivers 1,500 pound break strength.
- The 12" floating handle has an aluminum core and a textured TPR grip that lessens fatigue for the grasping hand.
- 4" end caps protect your fingers and help create a comfortable split finger grip.
- A Rope Keeper is included for tangle free storage.

Order No.	Mfg. No.	Price
5960148	(AHSR-5)	$20.98 I

Airhead Double Handle Ski Rope



- Double handle ski ropes have been popular for learning how to slalom for decades.
- Some experienced skiers also enjoy a double handle pull.
- This is the highest quality double handle ski rope ever made.
- The TPR tractor grip and 4" finger guards provide a comfortable and precise hold.
- You can't miss the rope during deep water starts with this bright yellow and red color scheme.
- 39" deep V, 75' long, 1 section.

Order No.	Mfg. No.	Price
5960149	(AHSR-6)	$30.98 I

Airhead Water Ski Rope



- 17 degree, 13" radius aluminum core handle with TPR Diamond Grip.
- There are 8 color-coded sections and take-up loops.
- Full length finger guards help create a comfortable split finger grip.
- UV-treated, 3/8", 16-strand, 1,600 lb. tensile strength rope.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597712	(AHSR-8)	$32.98 G

Airhead Water Ski Rope



- A high quality 1 section ski rope for skiing, wakeboarding and kneeboarding.
- The 12" aluminum core handle has a performance "Tractor" grip and molded finger protectors.
- UV-treated 16-strand rope.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597724	(AHSR-75)	$23.98 G

Airhead Water Ski Rope

- The 12" aluminum core handle is wrapped with textured high density EVA for a great grip.
- The 75 ft. long 16-strand rope and handle float.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597715	(AHSR-9)	$29.98 G



Marpac Xtreme Wakeboard with Camo Binding



- Wide stable 4-point design with continuous rocker accommodates riders over 125 lbs.
- 139 cm.
- Camo bindings fit most adult shoe sizes.
- Made in USA.

Order No.	Mfg. No. / Description	Price
8-3132	(WB1012XT) Includes: Camo Binding	$273.98 F

Body Glove Splat Wakeboard



- The shorter, round deck is perfect for all levels of riders up to 125 lbs.
- The lightweight, stiff construction gives and wide stable design has great "pop" off the wake.
- 2 removable fins allow the rider to customize their ride from tight and true, to loose and fun.
- The Jr. Chaser bindings have a high wrap heel with a lace up center and Velcro ankle for a snug, yet comfortable fit.
- 122 cm L x 39 cm W.
- Made in USA.

Order No.	Mfg. No. / Description	Price
716970	(BG612)	$216.98 F

Body Glove 42" Wakeboard



- 107 cm L x 41 cm W.
- Rocker 4.45 cm.
- EVA soft grip tops.

Order No.	Mfg. No. / Description	Price
716972	(BG2013)	$96.98 F

Hydroslide Matrix Wakeboard with Camo Binding



- You cannot possibly know how fun the Matrix is to ride until you have experienced it.
- Wide 4-point design.
- Camo bindings provide excellent ankle support.
- Designed with continuous rocker.
- Accommodates riders over 125 lbs.
- 139 cm.
- Made in USA.

Order No.	Mfg. No. / Description	Price
7170051	(WB1012) Includes: Camo Binding	$231.98 F

Marpac Xtreme Switch 142 Wakeboard with Chaser Binding



- Includes Chaser bindings to make this board easy to learn on & fun to ride.
- 2-point adjustable Chaser bindings fit most Adult shoe sizes.
- Quad channel bottom with two fin design make this board stable and easy to get up on, while still leaving room to learn new tricks.
- 142 cm.
- Made in USA.

Order No.	Mfg. No. / Description	Price
8-3130	(WB712XT) Includes: Chaser Binding	$207.98 F

Body Glove Antix Wakeboard



- 139 cm board is built with thicker profile, and an added channel for more grip pop to support the same weight as a longer board.
- Features crescent tail that allows the rider to release off the wake with ease and maintain soft landings.
- Brandon bindings, which are lycra lined and fit most adult shoe sizes.

Order No.	Mfg. No. / Description	Price
716971	(BG5020)	$386.98 F

Body Glove Wakesurfer



- Body Glove's wake surfer provides toes-on-your-nose stability in a wide profile, compression-molded board.
- With a construction similar to your favorite wakeboard, the wake surfer features a lighter resin that can be used by any weight rider.
- Designed for riders looking for a freshwater surf experience, even on small boat wakes.
- The stable deck on the Body Glove wake surfer has EVA traction that runs tip to tail, keeping your stance strong and you in control.
- Fins included.

Order No.	Mfg. No. / Description	Price
716973	(BG1200)	$393.98 F

Hydroslide Helix Wakeboard with Brandon Binding



- Progressive edge is sharper towards the tip and tail, and rounded in the middle to allow for hard cutting, but smooth surface tricks.
- 4 fin designs allow each rider to customize the board for their style of riding; keep all the fins on for tight turns and remove them to loosen up the rider.
- Brandon bindings have excellent support and provide a custom fit.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
7170053	(WB1412) Includes: Brandon Binding	$286.98 F

©2014 Donovan Marine, Inc.

Hydroslide "Matrix" Wakeboard Kits



- Wide stable design with continuous rocker accommodates
- Beginner to pro, riders over 125 lbs.
- Built with polyurethane cores and covered with PBT tops & bottoms.
- Modified twin tip design.
- Camo bindings have adjustable ankle support for a great fit.
- 136 cm.
- Made in USA.

Order No.	Mfg. No. / Description		Price
716979	(WB1019)	Includes: Camo Binding	$228.98 F
716984	(WBB-106K)	Includes: Hold-Um Binding	$236.98 F
716985	(WBB-106K2)	Includes: Deluxe Chaser Binding	$75.98 F

Hydroslide "Backdraft" Wakeboard Kit



- From beginner to pro.
- All boards are built with polyurethane cores and covered with PBT tops and bottoms.

Order No.	Mfg. No. / Description		Price
716980	(WBB-16K1)	Includes: Deluxe Chaser Binding	$75.98 F

Hydroslide Body Glove "Vibe" Wakeboard Kit



- Carbon reinforced deck for an ultra light board that is stiff and strong.
- 4-point tip and tail design for minimum slip and deep carving turns.
- Deluxe fins allows a customized ride from tight and true, to loose and fun.
- 139 cm.
- Made in USA.

Order No.	Mfg. No. / Description		Price
717788	(BG4009)	Includes: Brandon Binding	$316.98 F

Hydroslide "Carbon 12" Wakeboard



- From beginner to pro.
- Carbon reinforced bat tail design, stiff enough to take anything you throw at it.
- All boards are built with polyurethane cores and covered with PBT tops and bottoms.
- Order bindings separately.
- 139 cm.
- Made in USA.

Order No.	Mfg. No. / Description		Price
717668	(WBB1416)		$188.98 F

Hydroslide Backbeat Wakeboard with Grabber Binding



- With it's hip graphics, and sharp design, the Backbeat really makes a statement, even before you hit the water.
- Universal fit Grabber Bindings give good ride control, and are easy to take on and off while in the water.
- Quad channel bottom with two fin design make this board stable and easy to get up on, while still leaving room to learn new tricks.
- 140 cm.
- Made in USA.

Order No.	Mfg. No. / Description		Price
7170057	(WB812)	Includes: Grabber Binding	$191.98 F

Hydroslide "Carbon 12" Wakeboard Kit



- From beginner to pro.
- All boards are built with polyurethane cores and covered with PBT tops and bottoms.

Order No.	Mfg. No. / Description		Price
716982	(WBB-146K)	Includes: Ultimate Binding	$192.98 F

Hydroslide Body Glove "Concepte" Wakeboard Kit



- Accommodates rider over 125 lbs.
- Modified twin tip designs.
- Made in USA.

Order No.	Mfg. No. / Description		Price
717790	(BG709)	Includes: Deluxe Chaser Binding	$229.98 F

Hydroslide Free Standing Wakeboard Display



- Allows a single wakeboard with bindings to be displayed standing upright.

Order No.	Mfg. No.	Price
717628	(40335H)	$11.98 F

Hydroslide Free Standing Kneeboard Display



- Display single kneeboard standing vertically.

Order No.	Mfg. No.	Price
717630	(40336H)	$11.98 F

Airhead "Kahuna" Wakeboard



- Designed for intermediate to expert riders weighing 150 lbs. and up.
- The 6 fin dual thruster setup provides ultimate in hold and tracking.
- The removable center fins provide tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
596908	(AHW-5)	$162.98 G

Airhead "Apocalypse" Wakeboard



- Designed for intermediate to expert riders weighing 90 - 170 lbs.
- The 6 fin dual thruster setup provides the ultimate in hold and tracking.
- The removable center fins provide tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
596906	(AHW-4010)	$188.98 G

Airhead "Inside Out" Wakeboard and Kits



- Designed for intermediate to expert riders weighing 150 lbs. and up.
- The 6 fin dual thruster setup provides ultimate in hold and tracking.
- The removable center fins provide tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- The continuous rocker is fast and forgiving with smooth pop.
- Bindings size: Men's size 8 - 10.

Order No.	Mfg. No. / Description		Price
596670	(AHS-900)	No Bindings	$199.98 F
596896	(AHW-50210)	Includes: Boss Bindings	$349.98 G
596898	(AHW-5029)	Includes: Primo Bindings	$299.98 E

Airhead "Booyah" Wakeboard Kit



- Delivers smooth transitions through turns and a consistent pop off the wake.
- 143 cm free-ride wakeboard is designed to help riders of all levels excel at the sport.
- Designed for riders over 170 lbs.
- Two removable fiberglass reinforced nylon fins provide excellent tracking.

Order No.	Mfg. No. / Description	Price
596882	(AHW-2019) Includes: Primo Bindings	$313.98 G

Airhead "Bonehead II" Wakeboard



- Bonehead II is 124 cm long, perfect for youth riders up to 130 lbs.
- It's a lightweight twin tip free-ride wakeboard designed to help youth riders of all levels improve their skills.
- The RIM core has a PBT top with sublimated graphics.
- Two removable fiberglass reinforced nylon fins provide excellent tracking and carving.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
596904	(AHW-1010)	$168.98 G

Airhead "24/7 Carbon" Wakeboard



- 141 cm.
- 24/7 is designed for intermediate to expert riders weighing 150 lbs. and up.
- The 6 fin dual thruster setup provides ultimate hold and tracking.
- The removable center fins provide tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
589259	(AHW-8)	$207.98 G

Airhead "Shockwave Carbon" Wakeboard Kits



- Quick response carbon fiber reinforced wakeboard
- Designed for intermediate to expert riders weighing 150 lbs. and up.
- The 6 fin dual thruster setup provides ultimate hold and tracking.
- The removable center fins provide tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- The continuous rocker is fast and forgiving with smooth pop.
- Bindings size: Men's size 8 - 10.

Order No.	Mfg. No. / Description		Price
596901	(AHW-80110)	Includes: Boss Bindings	$373.98 G
596903	(AHW-8019)	Includes: Primo Bindings	$369.98 G

Airhead "Fluid" Wakeboard Kit



- Designed for intermediate to expert riders weighing 90-170 lbs.
- The 6 fin dual thruster setup provides ultimate in hold and tracking.
- The removable center fins provide tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- Bindings size: Men's size 8 - 10.

Order No.	Mfg. No. / Description	Price
596894	(AHW-4029) Includes: Primo Bindings	$328.98 G

©2014 Donovan Marine, Inc.

Airhead "Radical" Wakeboard



- Delivers smooth transitions through turns and a consistent pop off the wake.
- The floaty nature of this 143cm free-ride wakeboard is designed to help riders of all levels excel at the sport.
- The rounded end profile and beveled perimeter provide a forgiving and consistent release off the wake.
- Designed for riders over 150 lbs.
- Two removable fiberglass reinforced nylon fins provide excellent tracking.

Order No.	Mfg. No. / Description	Price
596884	(AHW-3020)	$219.98 G

World Industries "Devil's Crest" Wakeboard



- Our top of the line 141 cm wakeboard
- The removable center fins provide tracking.
- 6 Fin dual thruster setup provides the ultimate in hold and tracking.
- The side fins are curved and angle outwards at 11 degrees to provide extra edge hold and a loose feel in neutral.
- It's a great board for intermediate to expert riders weighing 150 lbs. and up.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
596902	(WIW-5010)	$168.98 G

Hydroslide Chaser Binding



- Universal fit adult binding with lace up toes and a Velcro cinch strap for ankle support.
- Soft EVA inner.
- Designed for use on wakeboard with 8" space holes.

Order No.	Mfg. No. / Description	Price
717708	(B-81)	$88.98 F

Airhead Grab Youth Binding



- Beginners through experts will enjoy the one cinch adjustability that this front entry lace-up binding provides.
- The power strap provides additional lower leg support for more power in turns.
- Fits all wakeboards.
- Fits kid's size 13 to men's size 8.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
596912	(AHB-5)	$84.98 G

World Industries "Battle" Wakeboard



- Designed for youth riders of all levels weighing up to 130 lbs.
- This 124 cm lightweight twin tip free-ride wakeboard will help riders excel at the sport.
- It's RIM molded with a PU core, fiberglass reinforcement and PBT top.
- Two removable fiberglass reinforced nylon fins provide excellent tracking and carving.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
589260	(WIW-1)	$174.98 G

World Industries "Checks" Wakeboard



- Designed for riders up to 170 lbs., who is looking for smooth transition through turns and a consistent pop off the wake.
- The rounded end profile and beveled perimeter provide a forgiving and consistent release off the wake.
- Riders of all levels will enjoy the floaty nature of this 135 cm free-ride wakeboard.
- 2 removable fiberglass reinforced nylon fins provide excellent tracking.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
589272	(WIW-2)	$189.98 G

World Industries "Stick-O-Rama" Wakeboard



- Designed for riders up to 170 lbs.
- The rounded end profile and beveled perimeter provide a forgiving and consistent release off the wake.
- Riders of all levels will enjoy the floaty nature of this 135 cm free-ride wakeboard.
- 2 removable fiberglass reinforced nylon fins provide excellent tracking.
- Order bindings separately.

Order No.	Mfg. No. / Description	Price
596900	(WIW-2010)	$159.98 G

Airhead Grind Adult Binding



- A versatile option for a wide range of foot sizes and riding abilities.
- You'll love the one cinch adjustability of the front entry lace-up design.
- It's a great binding for the whole family, fitting men's size 8 - 12.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
596914	(AHB-6)	$88.98 G

Airhead Clutch Binding

AIRHEAD



- A great fit without pressure points is guaranteed by the upper and lower double cinch lace-up system, 5 independent lace eyelets and adjustable toe strap.
- The orthotic footbed offers a perfect combination of support and cushion.
- The mounting area is reinforced with aluminum plates for durability.
- Fits men's size 8 - 12.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
596916	(AHB-4)	$128.98 G

Airhead Assault Binding

AIRHEAD



- Includes an adjustable tow strap, heavy duty lace eyelets and a power strap.
- The upper and lower double cinch lace-up system ensures a great fit.
- The wakeboard mounting holes are reinforced with aluminum plates for durability.
- Fits men's size 10 - 15.5.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
596918	(AHB-7)	$132.98 Q

Boater Sports Wakeboard Rope



- Designed for smaller hands.
- 15" handle with EVA grip in Pink/Black.
- 3-section polyethylene, 3/8" x 65' mainline.
- White/pink rope.
- 1,800 lb. break strength.
- Handle with logo on both sides and rope keeper.

Order No.	Mfg. No.	Price
1-52540	(52540)	$39.99 L

Body Glove Wakesurf Rope



- Adjustable wakesurf rope puts your rider right in the sweet spot behind your boat.
- T-handle and knotted design allow for good grip, and easy starts.
- Only for use with inboard boats and while observing all warnings.

Order No.	Mfg. No.	Price
716975	(BG1208)	$28.98 F

Body Glove Deluxe Wakeboard Rope



- Premium low stretch aquatic activity rope.
- Embroidered ultra soft cloth handle.
- Trick handle.
- UV resistant.
- 5 Section, 75'.

Order No.	Mfg. No.	Price
716976	(BG1012)	$52.98 F

Boater Sports Wakeboard Rope



- Tractor grip handle in gray/black.
- 3-section, 12-strand braided poly in gray/black/white.
- 3/8" x 65'.
- Static line provides less stretch with more strength.
- 1,800 lb. break strength.
- Foam wrapped with logo and rope keeper.

Order No.	Mfg. No.	Price
1-52543	(52543)	$44.99 L

Airhead Wakeboard Rope

AIRHEAD



- The 15" double-density EVA Phat Griphandle provides a superior grip for optimum performance, and has a high strength aluminum core, 4" finger protectors and foam floats.
- 6" TPR covered aluminum handle.
- The low-stretch 16-strand 30-filament rope has 4 sections with takeoff loops (70", 60", 50", 40") for all riding styles.

Order No.	Mfg. No.	Price
597750	(AHWR-2)	$44.98 G

Airhead Wakeboard Rope

AIRHEAD



- This wakeboard rope has a head turning 15" Squid patterned EVA-wrapped grip with a floating aluminum core.
- The 5/16", 16-strand, UV treated low stretch buoyant rope has 3 sections for wakeboarding at 45, 55 or 65 feet (45, 10, 10).
- Full length finger guards help create a comfortable split finger grip.
- A Rope Keeper is included for tangle free storage.

Order No.	Mfg. No.	Price
5960208	(AHWR-3)	$30.98 I

Airhead Wakeboard Rope with Phat Grip™

AIRHEAD



- The 15" double-density EVA PHAT GRIP handle is machined to provide a superior grip for optimum performance.
- It has a high strength aluminum core, 4" finger protectors and foam floats.
- The 6" TPR covered aluminum handle provides extra leverage and pull for spins and inverted tricks.
- The bridle is fully encased in flexible vinyl for protection against abrasion and wear.
- The low stretch 16-strand 30-filament rope floats and has a 5 ft. handle bridle and three 10 foot take-offs (5, 35, 10, 10, 10) for all riding styles.
- A Rope Keeper is included for tangle-free storage.

Order No.	Mfg. No.	Price
5960203	(AHWR-1)	$43.98 I

Airhead Wakeboard Rope

AIRHEAD



- 2,000 lb. break strength.
- The 5 section mainline is 70 ft. with four 5 ft. takeoffs.
- The 15" wide EVA grip is attached to a 5 ft. bridle, equipped with 2 foam floats and full length PVC tubing for added durability.

Order No.	Mfg. No.	Price
597748	(AHWR-4)	$83.98 G

©2014 Donovan Marine, Inc.

Airhead Wakeboard Rope



- The 70 ft. wakeboard rope has 3 takeoffs in the mainline and a 5 ft. handle bridle (5, 50, 5, 5, 5).
- The 15" wide EVA grip is eye catching, provides a great grip.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No.	Price
597749	(AHWR-6)	$38.98 G

Airhead Spectra Fusion Wakeboard Rope



- A braided poly-E Fusion jacket protects the Spectra core.
- The line is stiff and rigid, resists kinking and twisting, floats and has a 2,000 lb. break strength.
- The 70 foot wakeboard rope has 3 take-offs in the mainline and a 5 foot handle bridle (5, 50, 5, 5, 5).
- 15" wide EVA grip.
- Rope keeper included for tangle-free storage.

Order No.	Mfg. No.	Price
597747	(AHWR-5)	$76.98 G

Airhead Bling Spectra Wakeboard Rope



- Shiny and reflective material is braided together with top quality polypropylene.
- This 75 foot wakeboard rope has 4 take-off sections, 5ft, 5ft, 10ft and 10ft., resulting in rope lengths of 75 ft., 70 ft., 65 ft., 55 ft. and 45 ft.
- The handle has an aluminum core, a 15" EVA squid grip and full finger protectors.

Order No.	Mfg. No.	Price
596905	(AHWR-11BL)	$39.98 H

Airhead Bling Spectra Wakeboard Rope



- Shiny and reflective material is braided together with top quality Poly E over a Spectra core.
- This 75 foot wakeboard ropes have 4 take-off sections, 5ft, 5ft, 10ft and 10ft., resulting in rope lengths of 75 ft., 70 ft., 65 ft., 55 ft. and 45 ft.
- The spectra core gives this tiny rope a phenomenal 2,000 lb. break strength and no stretch.
- The handle has an aluminum core, a 15" EVA grip and full finger protectors.

Order No.	Mfg. No.	Price
596907	(AHWR-12BL)	$73.98 G

SportsStuff 6 K Tow Rope - 60' Long



- 6,100 lb. break strength.
- Heavy duty rope is for towing any tube with up to 6 riders.

Order No.	Mfg. No.	Price
600136	(57-1542)	$26.98 G

Airhead Bling Spectra Wakeboard Rope



- Shiny and reflective material is braided together with top quality Poly E over a Spectra core.
- This 75 foot wakeboard ropes have 4 take-off sections, 5ft, 5ft, 10ft and 10ft., resulting in rope lengths of 75 ft., 70 ft., 65 ft., 55 ft. and 45 ft.
- The spectra core gives this tiny rope a phenomenal 2,000 lb. break strength and no stretch.
- The handle has an aluminum core, a 15" EVA grip and full finger protectors.

Order No.	Mfg. No.	Price
596909	(AHWR-13BL)	$73.98 G

Marpac Xtreme "Berzerk" Kneeboard



- Features a parabolic shape for maximum lift off the wake, and smooth transitions during any trick.
- Dual retractable fins allow maximum cutting power when down, and maximum trick potential when retracted.
- Fins may be adjusted between sets, but not while the board is in motion.
- Contoured EVA pad with 3 padded Shock Strap.
- Patented Hydrohook allows any rider to get up the first time.
- Spring loaded hook retracts when not in use so there is nothing protruding to cut or bruise yourself on.
- Made in USA.

Order No.	Mfg. No. / Description	Price
8-3140	(2152XT)	$176.98 F

Airhead "Magma" Kneeboard



- You'll love the easy rail to rail transitions, consistent arc though turns and effortless spins!
- MAGMA is great for all riding levels and has massive rocker and beveled edges for sharp turns without getting hung up during surface tricks.
- The deep knee wells provide ultimate comfort and control.
- The unique bottom features reduce water tension for a light, responsive feel.
- AIRHEAD's EZ UP HOOK provides effortless starts every time, and easier access to the rope handle.

Order No.	Mfg. No. / Description	Price
289292	(AHKB-2)	$147.98 G

Body Glove "Manta" Kneeboard



- Molded pad for maximum control.
- 3" Padded strap.
- A Patent Pending Hydrohook allows any rider to get up the first time.
- Patented thin profile.
- Made in USA.

Order No.	Mfg. No. / Description	Price
717784	(BG1809)	$145.98 F

Hydroslide "Havoc" Kneeboard



- Patented ultra thin profile design and deep knee wells for ultimate control.
- Patented Hydrohook helps get every rider get up the first time, every time.
- Progressive edge is round in the mid section and sharp at each end allowing the board to cut hard, but not get hung during surface tricks.
- Water tension relief design on bottom gives the board a light, responsive feel.
- Includes: Shock strap.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
717746	(2114)	$163.98 F

Hydroslide "Razorback" Kneeboard



- The parabolic Razorback kneeboard from Hydroslide has it all!
- 3 padded Shock strap, Patented Thin-Profile design, shift on the fly retractable fins, deep padded kneewells, and the Patented Hydrohook.
- Whether you have the fins down for slalom like control, or the fins up for surface 360s, this board does it all.
- Includes Hydrohook pops up when in use, and then automatically retracts so there is nothing to bang, bruise, or cut yourself on.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
717749	(2162)	$216.98 F

Hydroslide "Powerboard Magna" Kneeboard



- The Powerboard Magna from Hydroslide is the perfect training device to introduce your kids to kneeboarding.
- Patented Power Eye towing system allows riders under 120 lbs. to kneel, crouch, or stand on the board; the handle moves with them!
- Board has deep knee wells for easy control, but no kneeboard strap to complicate the learning process.
- Designed for riders up to 120 lbs.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
717750	(SS173)	$120.98 F

Hydroslide "Revolution" Kneeboard



- A classic spoon shape that gives it a smooth, easy ride, without sacrificing any "pop" off the wake.
- EVA pad with deep knee wells, couple with a 3" padded belt gives the rider superb control during every trick and maneuver.
- A patented thin profile design.
- A Patent Pending Hydrohook allows any rider to get up the first time.
- Made in USA.

Order No.	Mfg. No. / Description	Price
717732	(2103)	$146.98 G

Hydroslide "Phantom" Kneeboard



- This parabolic shaped thin-profile kneeboard gives the rider an experience hotter than the boards graphics.
- Deep knee wells and a 3" padded strap keep the rider in control and ready for the biggest maneuvers.
- Patented Hydrohook allows the first time rider to get up quickly and easily, and then retracts flush with the deck while when not in use.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
7170016	(2212)	$165.98 F

Boater Sports Kneeboard Tow Rope



- 55' 5-section rope made of 12-strand, 1/4" poly with 5 color-coded sections and take-up loops.
- First section disconnects.
- 1,600 lb. break strength.
- Handle with yellow logo.

Order No.	Mfg. No. / Description	Price
1-52465	(52465)	$35.95 H

Hydroslide Kneeboard Tow Rope with Extra Handle



- Finally, a kneeboard rope that will not tear up your favorite board!
- Soft eva foam covers the "V" created from the handle to the mainline to protect the nose of your kneeboard when getting up.
- Specifically designed for use with the Hydrohook.
- 12" soft, stamped EVA handle.

Order No.	Mfg. No. / Description	Price
717610	(PS906)	$28.98 F

©2014 Donovan Marine, Inc.

Marpac Xtreme Jolt Towables



- **42".**
- 1 Rider Maximum Capacity.
- Partial Nylon Cover with Drain Vent.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3000	Jolt Towable	$79.98 G
8-3005	Jolt Towable with 12 volt Pump and 1K Rope	$109.98 G

Marpac Xtreme Cyclone Towable



- **48".**
- 1 Rider Maximum Capacity.
- Partial Nylon Cover with Drain Vent.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3020	Cyclone Towable	$89.98 G

Marpac Xtreme Surge Deck Tube



- **58".**
- 2 Rider Maximum Capacity.
- Full Nylon Cover with Drain Vent.
- Low Profile Fast Classic Design Deck Tub.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3030	Surge Deck Tube	$139.98 G

Marpac Xtreme Pulse Deck Tube



- **60".**
- 1 to 2 Rider Maximum Capacity.
- Full Nylon Cover with Drain Vent.
- D Shape Fast Tapered Classic Deck Tube Design.
- EVA Foam Body Pad.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3040	Pulse Deck Tube	$144.98 G

Marpac Xtreme Double Trouble Cockpit Tube



- **69" x 69".**
- 1-2 Rider Capacity.
- Partial Nylon Cover with Drain Vent.
- Deep cockpit seating with headrests.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3050	Double Trouble Cockpit Tube	$249.98 G

Marpac Xtreme Quake Deck Tube



- **75" x 62".**
- 1 to 3 Rider Capacity.
- Full Nylon Cover with Drain Vent.
- D Shape Fast Tapered Classic Deck Tube Design.
- EVA Foam Body Pad.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3060	Quake Deck Tube	$229.98 G

Marpac Xtreme Dash Salom Deluxe Deck Tube



- **60" x 54".**
- 1 to 2 Rider Capacity.
- Full Nylon Cover with Drain Vent.
- Pivot Wing Construction for Easy Slalom Steering.
- Double Webbing Foam Handles with Knuckle Guards.
- Reinforced Tow System.
- Heavy-Gauge Bladder.
- Fast Valve.

Order No.	Description	Price
8-3070	Dash Salom Deluxe Deck Tube	$198.98 G

Airhead Jumbo Hot Dog Towable



- **12.5' L x 44" W.**
- For 1-5 riders.
- 5 deluxe nylon-wrapped handles.
- Neoprene knuckle guards and seat pads.
- Three 30-gauge vinyl air chambers fully encased by double stitched 1,000-denier nylon cover.
- Equipped with a heavy duty Kwik-Connect and Multi-Valve.

Order No.	Mfg. No. / Description	Price
596823	(HD-5)	$279.98 E

Airhead Hot Dog Towable



- **8.5' L x 44" W.**
- For 1-3 riders.
- 3 neoprene seat pads.
- Deluxe nylon-wrapped handles with neoprene knuckle guards.
- Three 30-gauge vinyl air chambers fully encased by double-stitched 840-denier nylon cover.
- Equipped with a heavy duty Kwik-Connect and Multi-Valve.

Order No.	Mfg. No. / Description	Price
596811	(HD-3)	$174.98 E

Airhead Mega Rock Star Towable



- **82" x 82"** (deflated).
- This towable is a real blast for 1 to 6 riders!
- With a slight turn of the boat, the inside wing teeters towards the wake as the outside wing rises high above the water!
- It also doubles as a super fun rocking swim platform.
- The durable double-stitched 840 denier nylon cover and rugged 30 gauge PVC inner bladder ensure long service.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596666	(AHRS-6)	$419.99 E

Airhead Rock Star Towable



- **81" x 78"** (deflated).
- For 3 riders.
- It doubles as a super fun rocking swim platform.
- The durable double-stitched 840-denier nylon cover and rugged 30-gauge PVC inner bladder ensure long service.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596831	(AHRS-3)	$249.98 E

WOW Dragon Boat Towable



- **122" L x 62" W.**
- 3 person towable.
- Bold new graphics design.
- Heavy duty PVC bladder.
- Tuff shell full nylon cover with zipper.
- Wide pontoons for improved stability.
- Separated cockpit riding positions with high backrest for improved safety.
- 6 Double webbing foam handles with knuckle guards.
- Zippered valve covers.
- 11" 4K EZ tow connector included free.
- Speed valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
2011280	(13-1060)	$429.98 F

Airhead Wake Surf Towables



- Riders ride inline
- The comfortable wrap-around backrests give great support.
- Neoprene seat pads and knuckle guards provide comfort and control.
- The durable double-stitched 840 denier nylon cover completely encases the 30 gauge K80 PVC bladder.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.
- Doubles as a kayak, just grab a paddle or 2!

Order No.	Mfg. No. / Description	Price
596662	(AHWS-2) Wake Surf 2, 90" x 46" (Deflated), For 2 Riders	$154.98 F
596664	(AHWS-3) Wake Surf 3, 122" x 47" (Deflated), For 3 Riders	$199.98 F

Airhead U-Tube Towable



- **61" x 60"** (deflated).
- U-Tube is an innovative 1-2 rider towable with 2 different tow points.
- Pull it from the end and it rocks side to side, adding a new dimension to your tubing excitement.
- Pull it from the bottom and 2 can rider chariot style!
- Two oversized neoprene panels provide comfort.
- Six deluxe handles with neoprene knuckle guards give you lots of gripping options.
- The durable 30 gauge PVC bladder is fully covered by rugged 840 denier nylon.

Order No.	Mfg. No. / Description	Price
596504	(AHUT-1)	$147.98 F

©2014 Donovan Marine, Inc.

SportsStuff U Slalom Towables



- These U-shaped action tubes have fantastic steering action thanks to the VEER Tow System and strategically placed Tiger Tooth Fins.
- The unique Rocker Bottom design allows riders to maneuver the tube by simply shifting their weight to the right or left in the direction they want to go.
- A heavy duty full nylon cover and feature a heavy duty K80 PVC bladder.
- Multiple double webbing foam handles with knuckle guards are mounted on the front.
- Flat foam handles line the perimeter for easy access while steering.
- Inflate the U-SLALOMs in record time with the patented Speed Safety Valve and use the handy aluminum Quick Connect tow point to easily attach and detach your tow rope in a hurry.

Order No.	Mfg. No. / Description	Price
5960041	(53-1955) U Slalom 1, 49" x 49" (Deflated), For 1 Rider	$199.98 H
601762	(53-1965) U Slalom 2, 60" x 58" (Deflated), For 2 Riders	$299.98 F
601764	(53-1975) U Slalom 3, 74" x 72" (Deflated), For 3 Riders	$449.99 F

WOW Big Bazooka Towable



- **74" x 70".**
- 1-4 Rider deck tube with optional steering capability.
- 10 double webbing handles.
- Patent pending Flex-Wing system allows for easy steering.
- No fragile fins or fancy tow points necessary.
- Lay, sit, kneel, stand, and do barrel rolls.
- Tuff shell full nylon cover with zipper.
- Heavy duty PVC bladder.
- Double webbing foam handles with knuckle guards.
- Full size EVA foam pads.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.
- 11" thick 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011255	(13-1010)	$299.98 F

SportsStuff Rampage Half Pipe Rampage Towable



- **69" x 70"** (deflated).
- For 2 riders.
- P.U. fabric coating.
- Heavy-gauge PVC bladder.
- Double-webbing foam handles with knuckle pads.
- Double-stitched nylon full cover with zipper.
- Speed safety valve.
- Self-bailing drain vent.
- Reinforced tow systems.

Order No.	Mfg. No. / Description	Price
601701	(53-2155)	$319.99 E

WOW Yankee Limo Towable



- **92" x 78".**
- Tuff shell full nylon cover with zipper.
- Double webbing foam handles with knuckle guards.
- EVA foam pads.
- Heavy gauge PVC bladder.
- Speed valve for fast inflation and deflation.
- High back rest for relaxing when lounging.
- Ride up to 5 people.
- Multiple riding positions.
- Huge 24 pack zippered cooler.
- Great floating island for river or lake.
- 2 cup holders for beverages when lounging.
- 11" thick 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011105	(11-1010)	$459.98 H

WOW Yankee Coupe Towable



- **76" x 54".**
- Tuff shell full nylon cover with zipper.
- Double webbing foam handles with knuckle guards.
- EVA foam pads.
- Heavy gauge PVC bladder.
- Speed valve for fast inflation and deflation.
- High back rest for relaxing when lounging.
- Ride 2 people chariot style or 1 person jockey style.
- Large 12 pack zippered cooler.
- From towable to floating lounge by flipping out the 2 flip lounge foot rests and experience ultimate comfort at the river, lake or pool.
- 2 cup holders for beverages when lounging.
- 11" thick 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011100	(11-1000)	$249.98 H

SportsStuff Half Pipe Frantic Towable



- **80" x 112"** (deflated).
- For 3 riders.
- This half-pipe shaped towable gives the tube a more exciting reaction to steep wakes.
- P.U. fabric coating.
- EVA foam body pads.
- Double-stitched full nylon cover with zipper.
- Double webbing foam handles with knuckle pads.
- Speed safety valve for fast inflation and deflation.
- 45° angle sides for stability.
- Reinforced tow system.
- Self-bailing drain vent.
- Heavy gauge PVC bladder.

Order No.	Mfg. No. / Description	Price
601033	(53-2160)	$319.98 F

SportsStuff Tube Slalom Trolley Towable



- **86" x 40"** (deflated).
- VEER towing system.
- Heavy gauge PVC bladder.
- In-line 1-3 rider controllable towable.
- Heavy duty full nylon cover with zipper.
- Aluminum quick connect tow point.
- Multiple grab handles with knuckle guards.
- Speed safety valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
601035	(53-2180)	$299.98 R

SportsStuff Whacky Whopper Towable



- **94" x 70"** (deflated).
- For 3 riders.
- Plenty of handles to hold onto.
- Soft knee and elbow pads are strategically positioned for peak performance.
- Rugged double-stitched 840 denier nylon cover
- Speed Safety Valve and heavy-duty aluminum Quick Connect.
- 30 gauge vinyl bladder.

Order No.	Mfg. No. / Description	Price
601676	(53-5153)	$400.00 F

Airhead Hexsanity Towable



- **85" x 77"** (deflated).
- For 2 riders.
- Hexagon shape provides a wild ride, yet it's very stable and comfortable.
- Wrap-around backrests.
- 2 molded drink holders in the center.
- Four foam filled tubular nylon handles with neoprene knuckle guards provide firm and comfortable hand holds.
- Two patented Speed Safety Valves.
- Tough 30-gauge PVC bladder, fully covered with an 840-denier double-stitched nylon cover.
- Equipped with two heavy duty Kwik-Connect for easy and secure hook-ups.

Order No.	Mfg. No. / Description	Price
596540	(AHHX-2)	$365.98 F

Airhead Fusion Towable



- **71" x 87"** (deflated).
- Two inflatable fins are strategically placed to help riders stay on the tube.
- The durable 30-gauge PVC bladder is fully covered by rugged 840-denier nylon.

Order No.	Mfg. No. / Description	Price
596505	(AHFN-1)	$239.98 F

SportsStuff Mixmaster Towables



- VEER towing system.
- Rocker bottom design.
- Tiger tooth spinning/steering fins.
- Unique shape custom geometric construction.
- Heavy duty full nylon cover with zipper.
- Aluminum quick connect tow point with swivel.
- EVA foam padded floor.
- Multiple grab handles with knuckle guards.
- Speed safety valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
601019	(53-1265) Mixmaster 1, 62" x 38" (Deflated), For 1 Rider	$208.00 F
601020	(53-1275) Mixmaster 2, 92" x 38" (Deflated), For 2 Riders	$293.33 F

SportsStuff Super Cube Towable



- **76" x 76"** (deflated).
- For 4 riders.
- The amazing Super Cube has a unique square construction.
- Super Cube barely touches the water while towing, thanks to the Rocker Bottom's dragless design.
- Lots of double webbing foam handles with knuckle guards enable various riding positions.
- The air cushioned floor in combination with EVA foam seating pads deliver extra comfort to keep you coming back.
- This state-of-the-art towable is ready for action featuring a heavy-duty full nylon cover with self bailing drain vents, and the Quick Connect tow point to make attaching and detaching your tow rope a snap.

Order No.	Mfg. No. / Description	Price
5960035	(53-1890)	$209.98 F

Airhead Matrix Towables



- The deluxe handles have neoprene knuckle guards.
- Two oversized neoprene pads are strategically located to protect knees and elbows.
- The durable 30-gauge RF welded PVC bladder is completely wrapped in double-stitched 840-denier nylon.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596481	(AHMX-V2) Matrix V2, 74" x 64" (Deflated), For 2 Riders	$239.99 F
596493	(AHMX-V3) Matrix V3, 84" x 72" (Deflated), For 3 Riders	$249.98 F

©2014 Donovan Marine, Inc.

SportsStuff Grandstand Towables



- Heavy duty full nylon cover with zipper.
- Exclusive dragless nose design.
- Heavy gauge PVC bladders.
- Dual steering leashes for maximum control.
- Patented aluminum quick connect tow system.
- Custom sure grip handles.
- EVA foam knee and knuckle guards.
- Patented speed safety valve for fast inflation and deflation.
- Self bailing drain vents.

Order No.	Mfg. No. / Description	Price
601027	(53-1850) Grandstand 1, 82" x 65" (Inflated), 88" x 71" (Deflated), For 1 Rider	$299.98 F
601029	(53-1860) Grandstand 2, 98" x 82" (Inflated), 104" x 88" (Deflated), For 2 Riders	$449.98 E

Body Glove Disco Comfort Top Towable



- **64".**
- Designed with comfort in mind.
- The edge to edge comfort top covered surface provides a soft, comfortable riding area.
- Embossed Hydroglide finish on the PVC bottom moves through the water with less drag.
- These tubes will hold up through the most extreme riding conditions because of their heavy duty 30 gauge PVC construction, the one piece, high frequency welded quick connect, and 4 sewn, foam filled nylon handles.

Order No.	Mfg. No. / Description	Price
717815	(BGCT64)	$117.98 F

SportsStuff Bandwagon 2+2 Towable



- **120" x 73"** (deflated).
- For 4 riders.
- The one-of-a-kind Bandwagons feature a dragless nose design for effortless towing that eliminates nose diving at startup.
- The innovative seating arrangement allows you to sit forward, backward, kneeling, or lying down for the style of ride you're craving.
- The Bandwagons feature state-of-the-art high-back recumbent mesh seating, EVA foam floor pads, and foam seat bumpers to keep you in place.
- The heavy duty full nylon cover is equipped with a multitude of double webbing foam handles with knuckle guards.
- Speed Safety Valves make inflation and deflation as simple as possible.
- The patented aluminum Quick Connect tow system will get you on the water fast!

Order No.	Mfg. No. / Description	Price
5960025	(53-1620)	$449.98 E

WOW Thriller Towables



- Tuff shell full nylon cover with zipper.
- Heavy gauge PVC bladder.
- Double webbing foam handles with knuckle guards.
- EVA foam pad.
- Reinforced towing system.
- Speed valve for fast inflation and deflation.
- Zippered valve cover.
- Custom designer graphics.
- Tapered construction higher in the front than back to prevent submarining and give the rider wild wake action

Order No.	Mfg. No. / Description	Price
2011125	(11-1060) Thriller, 50" x 58" (Inflated), 54" x 54" (Deflated), For 1 Rider	$99.98 F
2011130	(11-1070) Big Thriller, 60" x 56" (Inflated), 66" x 62" (Deflated), For 1-2 Riders	$129.98 Q
2011135	(11-1080) Super Thriller, 75" x 62" (Inflated), 80" x 68" (Deflated), For 1-3 Riders	$199.98 Q
2011140	(11-1090) Giant Thriller, 90" x 66" (Inflated), 98" x 72" (Deflated), For 1-4 Riders	$239.98 F

Airhead G-Force Towables



- D-shape deck tube.
- Topside stabilizer fins.
- Double-stitched full nylon cover.
- Deluxe nylon handles with neoprene knuckle guards.
- Heavy gauge PVC bladder with RF welded seams.
- Kwik-Connect tow point for fast hook-ups.
- Boston Valve for convenient inflating and deflating.

Order No.	Mfg. No. / Description	Price
596710	(AHGF-1) G-Force, 72" (Deflated), For 1 Rider	$169.98 F
596712	(AHGF-2) G-Force 2, 64" x 60" (Deflated), For 2 Riders	$152.98 F

WOW Syco Towable



- **104" x 70"** (inflated).
- Patented flex-wing system allows for easy steering.
- No fragile fins or fancy tow points necessary.
- Lay, sit, kneel, stand and do barrel rolls.
- Center tower allows 1-3 riders to stand up while riding.
- Tuff shell full nylon cover with zipper.
- Heavy duty PVC bladder.
- Double webbing foam handles with knuckle guards.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.
- 11" 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011220	(12-1060)	$379.98 F

SportsStuff Tube Poparazzi Towable



- **77" x 80"** (deflated).
- For 3 riders.
- High winged shape with rocker bottom allows you to carve into the wake.
- Heavy duty full nylon cover with zipper.
- High rise tower on rear deck.
- Speed safety valve for fast inflation and deflation.
- Aluminum quick connect tow system.
- Multiple double webbing sure grip handles.
- EVA foam knee and knuckle guards.
- Self bailing drain vents.

Order No.	Mfg. No. / Description	Price
601025	(53-1750)	$432.98 E

SportsStuff Mable Towables



- P.U. fabric coating.
- Heavy gauge PVC bladder.
- Backrests.
- Single chamber inflation.
- Double-webbing foam handles with knuckle pads.
- Double-stitched nylon full cover with zipper.
- Speed safety valve.
- Self-bailing drain vent.
- Foam seat/knee pads.
- Dual tow points.
- Reinforced tow systems.

Order No.	Mfg. No. / Description	Price
601650	(53-2213) Big Mable, 69" x 66" (Deflated), For 2 Riders	$269.98 E
601662	(53-2223) Super Mable, 79" x 78" (Deflated), For 3 Riders	$324.98 E
601674	(53-2218) Great Big Mable, 93" x 85" (Deflated), For 4 Riders	$519.99 E

WOW Lugz Towable



- **74" x 66"** (inflated).
- 2 person towable with optional steering capability.
- Bold new graphics design.
- U-shaped body for more action on the water
- Tuff shell full nylon cover with zipper.
- Heavy duty PVC bladder.
- 12 Double webbing foam handles with knuckle guards.
- Full size EVA foam pads.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.
- 11" 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011270	(13-1040)	$379.98 F

WOW XO Treme Towable



- **84" x 70" x 64"** (inflated).
- Tuff shell full nylon cover with zipper.
- Heavy duty PVC bladder.
- EVA foam pads.
- Double webbing foam handles with knuckle guards.
- Unique patented oval design allows for less drag and a faster ride.
- High profile and high visibility in the water.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.
- 11" 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011205	(12-1030)	$449.98 F

WOW Super Bubba Towable



- **75" x 73"** (inflated).
- Front and back tow points.
- Ride it chariot style with back tow point.
- Tuff shell full nylon cover with zipper.
- EVA foam seat/knee pads.
- Heavy gauge PVC bladder.
- Double webbing foam handles with knuckle guards.
- High back rest riser with side walls for secure comfortable riding.
- Great for lounging experience ultimate comfort at the river, lake or beach.
- Speed valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
2011175	(11-1160)	$349.98 F

SportsStuff Chariot Warbird Towables



- Heavy gauge PVC bladders.
- High-back recumbent seating.
- Double webbing foam handles.
- Heavy duty full nylon cover with zipper.
- Aluminum quick connect tow system.
- Front and rear tow points for multiple riding positions.
- Wide wing span construction allows for tight turns and stability on the whips.
- EVA foam knee and knuckle guards.
- Patented speed safety valve for fast inflation and deflation.
- Self bailing drain vents.

Order No.	Mfg. No. / Description	Price
601838	(53-1780) Chariot Warbird 2, 80" x 96" (Deflated), For 2 Riders	$449.99 F
601842	(53-1790) Chariot Warbird 3, 82" x 118" (Deflated), For 3 Riders	$419.04 F

©2014 Donovan Marine, Inc.

WOW Wild Bunch Towable



- **100" x 66"** (inflated), **108" x 72"** (deflated).
- Tuff shell full nylon cover with zipper.
- Heavy duty PVC bladder.
- Double webbing foam handles with knuckle guards.
- Deep cockpit construction with high headrest for secure and extreme riding.
- Reinforced tow system.
- Speed valve for fast inflation and deflation.
- Oversized heavy duty construction to prevent submarining and give the rider secure wild wake action.
- Great for kids yet wild for the extreme riders.

Order No.	Mfg. No. / Description	Price
2011155	(11-1120)	$399.98 Q

SportsStuff Speedzone Towables





- P.U. fabric coating.
- Heavy gauge PVC bladder.
- Air cushioned inflatable floor.
- Recessed cockpits with backrests.
- Double-webbing foam handles with knuckle pads.
- Double-stitched nylon partial cover.
- Multi-speed valve.
- Self-bailing drain vent.
- Reinforced tow system.

Order No.	Mfg. No. / Description	Price
601749	(53-1931) Speedzone 2, 88" x 84" (Deflated), For 2 Riders	$299.98 E
601750	(53-1940) Speedzone 3, 108" (Deflated), For 3 Riders	$399.98 D

Airhead Storm II Towable



- **86" x 75"** (deflated).
- For 2 riders.
- Storm's wide wingspan and thick front profile allow it to glide effortlessly across big wakes.
- A neoprene seat pad is provided for each rider.
- Nylon wrapped handles with neoprene knuckle guards ensure a great grip.
- The durable 30-gauge RF welded PVC bladder is completely wrapped in double-stitched 840-denier nylon.

Order No.	Mfg. No. / Description	Price
596833	(AHST-2)	$249.98 E

WOW Wild Ride Towable



- **76" x 64"** (inflated), **80" x 68"** (deflated).
- Tuff shell full nylon cover with zipper.
- Heavy gauge PVC bladder.
- Double webbing foam handles with knuckle guards.
- Deep cockpit construction with high headrest for secure and extreme riding.
- Reinforced tow system.
- Speed valve for fast inflation and deflation.
- Oversized heavy duty construction to prevent submarining and give the rider secure wild wake action.
- Great for kids yet wild for the extreme riders.

Order No.	Mfg. No. / Description	Price
2011150	(11-1110)	$299.98 Q

SportsStuff Rockin Mable Towables



- Convex bottom surface that provides super fun rockin' action!
- 30 gauge vinyl bladder
- Big wrap around backrest
- Slide effortlessly side-to-side: more fun at slow speeds.
- Soft knee/seat pads.
- Double-webbing foam handles with knuckle pads.
- Dual tow points.
- Aluminum Quick Connects for easy hook-ups.
- Double-stitched 840 denier nylon cover
- 2 Speed Safety Valves

Order No.	Mfg. No. / Description	Price
601672	(53-2262) Rockin Mable, 66" x 62" (Deflated), For 2 Riders	$349.99 F
601673	(53-2263) Rockin Super Mable, 80" x 62" (Deflated), For 3 Riders	$449.99 F

Airhead Viper Towables





- Durable 30-gauge bladders are completely encased in durable double-stitched nylon, there is no exposed PVC.
- The striped nylon wrap handles have neoprene knuckle guards for comfort.
- An EVA "Indy Cap" covers the Boston Valve.

Order No.	Mfg. No. / Description	Price
596512	(AHVI-F1) Viper 1, 74" x 59" (Deflated), For 1 Rider	$199.99 E
596513	(AHVI-F2) Viper 2, 74" x 73" (Deflated), For 2 Riders	$223.98 E
596514	(AHVI-F3) Viper 3, 98" x 74" (Deflated), For 3 Riders	$319.98 E

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Body Glove Go Kart CT Towable



- This two person ride in cockpit tube offers a new twist on an old design.
- The edge to edge comfort top covered surface provides a soft, comfortable riding area.
- Performance is important as well; the embossed "Hydroglide" finish on the PVC bottom moves through the water with less drag.
- Features heavy duty 30 gauge PVC construction, the one piece, high frequency welded quick connect, and 4 soft foam filled Nylon handles.
- Designed for 2 riders.

Order No.	Mfg. No. / Description	Price
716992	(BGCT77)	$216.98 F

SportsStuff Sidekick 2 Towable



- **81" x 69"** (deflated).
- For 2 riders.
- Featuring deep and spacious cockpits for maximum stability, air cushioned floors for comfort, and multiple double webbing foam handles with knuckle pads to protect your hands when you're holding on tight.
- The unique aerodynamic construction gives the Sidekick's lightning speed.
- The aluminum Quick Connect tow point makes attaching and detaching your tow rope quick and easy, to keep you on the water longer.
- Patented Speed Safety Valves allow the fastest inflation and deflation possible.
- A heavy duty full nylon cover with self bailing drain vents is standard on these luxurious towables.

Order No.	Mfg. No. / Description	Price
5960047	(53-2172)	$249.98 H

Body Glove Sling Duo Towable



- **80"** Wide dual donut tube.
- For 2 riders.
- 24 Gauge PVC/420 D nylon.
- Patent pending suspended seating system.

Order No.	Mfg. No. / Description	Price
717798	(BG5628)	$209.98 F

Airhead Transformer Towables





- 2 rider transforms from a deck tube to a cockpit tube in seconds.
- 3 rider transforms from a deck-deck-deck, cockpit-deck-cockpit or cockpit-deck-deck tube in seconds.
- The inflated floors and deluxe handles with neoprene knuckle guards will help them feel safe and secure.
- Rugged 840-denier nylon and 30-gauge vinyl.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596829	(AHTF-2) Transformer, 70" x 75" (Deflated), For 2 Riders	$229.98 E
596675	(AHTF-3) Transformer 3, 112" x 92" (Deflated), For 3 Riders	$359.98 F

SportsStuff Crazy 8 Towable



- **83" x 54"** (deflated), **75" x 48"** (inflated).
- For 2 riders.
- Dual tow points allow sitting in-line or side-by-side for 2 totally different riding experiences.
- The unique figure-eight design features a heavy duty double-stitched partial nylon cover and heavy-duty K80 PVC bladder that's built to last.
- There are double webbing foam handles with knuckle guards everywhere to accommodate various riding positions.
- The patented Speed Safety Valve will get your tube inflated and on the water in no time.

Order No.	Mfg. No. / Description	Price
5960022	(53-1450)	$136.98 E

SportsStuff LuLu Towables



- P.U. fabric coating.
- Heavy gauge PVC bladder.
- Air cushioned inflatable floor.
- Recessed cockpits with backrests.
- Double-webbing foam handles with knuckle pads.
- Double-stitched nylon partial cover.
- Multi-speed valve.
- Self-bailing drain vent.
- Reinforced tow system.

Order No.	Mfg. No. / Description	Price
5960039	(53-1951) LuLu 1, 59" x 39" (Deflated), 54" x 39" (Inflated), for 1 Rider	$179.98 I
5960040	(53-1952) LuLu 2, 85" x 58" (Deflated). 85" x 57" (Inflated), for 1-2 Riders	$179.98 G

©2014 Donovan Marine, Inc.

SportsStuff Sidekick Towable



- **53" x 53".**
- VEER towing system.
- Special formula PVC.
- Strategically placed tiger tooth steering fins.
- Aluminum quick connect tow point.
- Heavy duty molded PVC handles.
- Heavy duty stainless steel D-ring
- Speed safety valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
601421	(53-1510)	$109.98 G

WOW Tri Pod Towable



- **75" x 75"** (inflated).
- 3 towables for the price of 1!
- 2 towables (a cockpit tube and a deck tube) that can be used at the same time.
- Patent pending Flex Wing System and Drop Speed Bottom allows for steering capability.
- Heavy duty PVC bladder.
- Drop Speed Bottom give you a fast ride.
- Tuff shell full nylon cover with zipper.
- Double webbing foam handles with knuckle guards.
- EVA foam pads.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.
- 11" 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011260	(13-1020)	$299.98 F

Airhead Slash II Towable



- **58" x 48"** (deflated).
- For 2 riders.
- Easy to re-board with the open back design
- 30-Guage PVC bladder and is fully covered with double stitched 840-denier nylon, making it torsionally rigid to respond to rider's commands.
- It's equipped with a Kwik-Connect, Boston valve, and 4 nylon-wrapped handles with neoprene knuckle guards.

Order No.	Mfg. No. / Description	Price
596671	(AHSL-32)	$189.99 H

WOW Bazooka Towable



- **60" x 54"** (inflated).
- 1-2 riders.
- Tuff shell full nylon cover with zipper.
- Heavy duty PVC bladder.
- Patented flex-wing system allows for easy steering.
- No fragile fins or fancy tow points necessary.
- Lay, sit, kneel, stand, and do barrel rolls.
- 2 tow points for beginners and experts.
- Double webbing foam handles with knuckle guards.
- EVA foam pads.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.
- 11" 4K EZ tow connector included.

Order No.	Mfg. No. / Description	Price
2011210	(12-1040)	$179.98 F

WOW Drifter Towable



- **55" x 45"** (inflated).
- 1 person towable with optional steering capability.
- Low center of gravity on the water.
- Patent pending Flex-Wing system.
- Steerable without the fancy fins or fragile tow points.
- Heavy duty PVC bladder.
- Full size EVA foam pads.
- Tuff shell full nylon cover with zipper.
- 4 Double webbing foam handles with knuckle guards.
- Zippered valve covers.
- Speed valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
2011265	(13-1030)	$139.98 F

Airhead Mach 2 Towable



- **69" x 69"** (deflated).
- For 2 riders.
- Inflated floors provide a comfortable seat.
- Four deluxe handles with neoprene knuckle guards provide a secure and comfortable grip.
- Heavy gauge PVC bladder and durable double-stitched nylon cover.
- Speed Safety Valve for easy inflating and deflating.

Order No.	Mfg. No. / Description	Price
596838	(AHM2-2) Mach 2 Towable	$169.98 E

Airhead Rip Towable



- **50" x 48"** (deflated).
- For 1 rider.
- Fully covered with rugged 840-denier double-stitched nylon cover.
- Equipped with a Kwik-Connect, Airhead Multi-Valve and 4 deluxe nylon-covered handles with neoprene knuckle guards.

Order No.	Mfg. No. / Description	Price
596506	(AHRI-22) Rip Towable	$124.98 E

Airhead Mach 1 Towable



- **68" x 50"** (deflated).
- For 1 rider.
- Comfort is guaranteed by the inflated floor and deluxe handles with neoprene knuckle guards.
- The heavy gauge PVC bladder and durable double-stitched nylon cover ensure years of service.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596837	(AHM1-1)	$112.98 E

SportsStuff Speedzone 1 Towable



- **58"** (deflated).
- For 1 rider.
- P.U. fabric coating.
- Heavy gauge PVC bladder.
- Air cushioned inflatable floor.
- Recessed cockpits with backrests.
- Double-webbing foam handles with knuckle pads.
- Double-stitched nylon partial cover.
- Multi speed valve.
- Self-bailing drain vent.
- Reinforced tow system.

Order No.	Mfg. No. / Description	Price
601748	(53-1920)	$169.99 F

WOW Ace Towable



- **50" x 48"** (inflated), **54" x 50"** (deflated).
- For 1 rider.
- Tuff shell partial nylon cover.
- Heavy gauge PVC bladder.
- Zippered valve cover.
- Flat foam handles.
- Drain vent.
- Double webbing foam handles with knuckle guards.
- Reinforced towing system.
- Speed valve for fast inflation and deflation.
- Custom designer graphics.
- Heavy duty arrow shape construction for stability and more control for the rider.

Order No.	Mfg. No. / Description	Price
2011160	(11-1130)	$79.98 Q

Airhead Slide Towable



- **56"** (deflated).
- For 1 rider.
- 4 deluxe nylon-wrapped handles and neoprene knuckle guards.
- The heavy duty virgin vinyl inner tube is electronically welded and equipped with a Boston Valve for quick inflating and deflating.

Order No.	Mfg. No. / Description	Price
596568	(AHSL-12)	$71.98 F

WOW Wild One Towable



- **54" x 48"** (inflated), **60" x 52"** (deflated).
- For 1 rider.
- Tuff shell partial nylon cover with zipper.
- Heavy gauge PVC bladder.
- Double webbing foam handles with knuckle guards.
- Reinforced towing system.
- Deep cockpit construction with high headrest for secure and extreme riding.
- Speed valve for fast inflation and deflation.
- Oversized heavy duty construction to prevent submarining and give the rider secure wild wake action.
- Great for kids yet wild for the extreme riders.

Order No.	Mfg. No. / Description	Price
2011145	(11-1100)	$149.98 Q

WOW Big Boy Towable



- **69" x 69"** (inflated), **79.5" x 78"** (deflated).
- For 4 riders.
- Tuff shell partial nylon cover.
- Heavy gauge PVC bladder.
- Zippered valve cover.
- Air cushioned floor for comfort riding.
- Double webbing foam handles with knuckle guards.
- Reinforced towing system.
- Speed valve for fast inflation and deflation.
- Custom designer graphics.
- Heavy duty arrow shape construction for stability and more control for the rider.

Order No.	Mfg. No. / Description	Price
2011165	(11-1140)	$149.98 F

SportsStuff Outlaw Towable



- **53" x 58"** (deflated).
- For 1 rider.
- Triangular.
- Partially covered tube.
- Equipped with heavy duty foam handles intended to increase comfort on this wild ride!

Order No.	Mfg. No. / Description	Price
601017	(53-1126)	$71.98 F

Body Glove Sling Arrowhead Towable



- **56"** Triangle tube.
- For 1 rider.
- 24 Gauge PVC/420 D nylon.
- Patent pending suspended seating system.

Order No.	Mfg. No. / Description	Price
717794	(BG5338)	$128.98 F

©2014 Donovan Marine, Inc.

Airhead Tremor Towable



- **89" x 89"** (deflated).
- For 4 riders.
- Unique wrap-around horseshoe shape
- Tough 30-gauge PVC bladder, fully covered with an 840-denier double-stitched nylon cover.
- Heavy-duty Kwik-Connect for easy and secure hook-ups.
- Eight foam filled tubular nylon handles with neoprene knuckle guards are strategically positioned for peak performance.
- Speed Safety Valves provide the ultimate in inflation & deflation convenience.

Order No.	Mfg. No. / Description	Price
596687	(AHTM-4)	$399.98 F

SportsStuff Big Bertha Towable



- **74"** (deflated).
- For 4 riders.
- Heavy duty partial nylon cover.
- Heavy gauge PVC bladder with air cushioned inflated floor.
- Non-slip cushioned handles with foam padded knuckle guards.
- Quick Connect tow system.
- Speed safety valve.

Order No.	Mfg. No. / Description	Price
601371	(53-1329)	$139.98 E

SportsStuff Rascal Towable



- **63"** (deflated), **56"** (inflated).
- For 1 rider.
- This Classic round donut-style MY-T tube comes equipped with double webbing foam handles with knuckle guards to protect your hands when the going gets tough.
- Featuring a heavy duty partial nylon cover and Speed Safety Valve that will save you time inflating and deflating the tube.
- There's a reinforced towing system that's built to last and a handy tow tope holster for stowing your tow rope when you're not using it.

Order No.	Mfg. No. / Description	Price
5960020	(53-1320)	$107.98 E

Airhead UFO Towable



- **86"** (deflated).
- Multi-reinforced tow strap has 2 heavy duty stainless steel swivels and attaches to the stainless steel stow ring at the center of the bottom.
- 30-gauge PVC bladder.
- Double-stitched 840-denier nylon cover with 2 Boston valves.
- 8 mesh drain vents.

Order No.	Mfg. No. / Description	Price
596759	(AHUFO-1)	$342.98 F

Airhead Big Shot Towable



- **76"** (deflated).
- For 4 riders.
- Big Shot has 8 deluxe handles with neoprene knuckle guards.
- A heavy duty Kwik-Connect makes rope connections a breeze.
- The rugged 30-gauge virgin PVC bladder and double-stitched nylon cover with a self draining floor vent to ensure years of enjoyment.
- You'll really appreciate the AIRHEAD Multi-Valve for the ultimate in inflating and deflating convenience.

Order No.	Mfg. No. / Description	Price
5960227	(BS-1T)	$134.98 E

Airhead Mega Boost Towable



- **68"** (inflated).
- For 4 riders.
- Equipped with 8 deluxe handles with neoprene knuckle guards and an inflated floor for a comfortable ride.
- The reinforced double-stitched nylon cover and stout 30-gauge bladder ensure long service.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596827	(AHMB-1)	$179.98 F

Body Glove Sling Mono Towable



- **56"** Donut tube.
- For 1 rider.
- 24 Gauge PVC/420 D nylon.
- Patent pending suspended seating system.

Order No.	Mfg. No. / Description	Price
717796	(BG5618)	$128.98 F

Airhead Blast Towable



- **54"** (deflated).
- For 1 rider.
- The 4 neoprene knuckle guards and deluxe nylon covered handles provide a sure and comfortable grip.
- The heavy duty virgin PVC bladder has electronically welded seams and a Boston valve for quick inflating and deflating.
- Blast has a double stitched nylon cover, reinforced internal tow harness and a self-draining floor vent.

Order No.	Mfg. No. / Description	Price
596532	(AHBL-12)	$59.98 E

Hydroslide Glide Towable



- **54".**
- Green and Grey donut towable.
- One piece, high frequency welded Quick Connect.
- Embossed Hydroglide finish on PVC moves through the water with less drag.
- 2 injection molded rubber handles.
- Large seating surface.

Order No.	Mfg. No. / Description	Price
717800	(CT54)	$64.98 F

World Industries Spike Towable



- **54"** round towable.
- For 1 rider.
- 4 deluxe handles with neoprene knuckle guards.
- Heavy duty virgin PVC bladder has electronically welded seams.
- Double-stitched nylon cover, reinforced internal tow harness and a self-draining floor vent.
- Equipped with a Boston valve for quick inflating and deflating.

Order No.	Mfg. No. / Description	Price
596501	(WIT-1)	$89.98 G

SportsStuff Sportstube Towable



- **54"** (deflated), **48"** (inflated).
- For 1 rider.
- The classic Sportstube features the patented Speed Safety Valve for fast inflation and deflation, heavy duty molded PVC handles so you can get a grip, and a heavy-duty molded tow system.
- The Sportstube's heavy duty K80 PVC construction with air cushioned floor makes it easy to ride in the prone or seated position and offers hot action on whips & turns.

Order No.	Mfg. No. / Description	Price
5960016	(53-1116)	$50.98 F

SportsStuff Zip Ski Towable



- **44"**
- P.U. fabric coating.
- Heavy-gauge PVC bladder.
- Two chambers.
- Air cushioned inflatable floor.
- Double-stitched nylon partial cover.
- Tow rope holster.
- Speed valve.
- Self-bailing drain vent.
- Reinforced tow system.
- Double-webbing foam handles with knuckle pads.

Order No.	Mfg. No. / Description	Price
601357	(53-1313)	$67.98 E

Airhead Outrigger Towable



- **89.5" x 76"** (deflated).
- For 3 riders.
- Two oversized topside neoprene panels protect elbows and knees.
- The 2 inflated fins on the perimeter really help riders stay on top.
- Six deluxe handles with neoprene knuckle guards provide a great grip.
- The heavy duty Kwik-Connect and Boston valve provide quick and easy rope hook-ups, inflating and deflating.

Order No.	Mfg. No. / Description	Price
596839	(AHOU-3)	$259.98 E

©2014 Donovan Marine, Inc.

SportsStuff Wet N' Wild Flyer Towable



- **96"** (deflated).
- For 4 riders.
- Double-webbing foam.
- Handles with knuckle pads.
- Double-stitched nylon, full covered zipper.
- Lots of handles allow for various riding positions.
- Soft foam pads keeps the riders' knees comfortable.
- Tow rope holster.
- Heavy gauge PVC bladder.

Order No.	Mfg. No. / Description	Price
601559	(53-1671)	$379.99 E

SportsStuff Frequent Flyer Towable



- **80"** (deflated).
- For 3 riders.
- P.U. fabric coating.
- Heavy gauge PVC bladder.
- Multi valve.
- Self-bailing drain vent.
- EVA foam body pad.
- Reinforced tow system.
- Double-stitched nylon full cover with zipper.
- Tow rope holster.
- Bunches of handles for various grips and rider positions.
- Double-webbing foam handles with knuckle pads.

Order No.	Mfg. No. / Description	Price
601547	(53-1661)	$202.98 E

Body Glove Overdrive Towable



- **72"**.
- Massive expanse of neoprene across the middle insures that up to three riders can enjoy this tube for hours comfortably.
- 6 soft EVA foam handles with neoprene knuckle guards let each rider decide how they want to experience the ride.
- Includes quick connect.

Order No.	Mfg. No. / Description	Price
716991	(BG7212)	$183.98 F

Airhead Mega Slice Towable



- **100"** (deflated).
- For 4 riders.
- Exclusive tapered profile.
- 3 boarding straps to grab onto.
- 8 deluxe handles with neoprene knuckle guards provide a great grip.
- An Indy Cap covers the Boston Valve.

Order No.	Mfg. No. / Description	Price
596517	(AHSSL-4)	$259.98 E

Airhead Revolution Towable



- **80"** (deflated).
- For 2 riders.
- Spinning towable.
- Strategically placed inflatable topside divider fin and 2 leg holding fins keeps riders from getting thrown off by centrifugal force.
- Thread the tow rope through the No Spin Strap and enjoy a mild ride.

Order No.	Mfg. No. / Description	Price
596660	(AHRE-2)	$299.98 F

Airhead Super Slice Towable



- **70"** (deflated).
- For 3 riders.
- Low profile deck tube.
- Oversized topside neoprene body panel and 6 deluxe handles with neoprene knuckle guards.
- The 30-gauge virgin PVC bladder is fully encased by a rugged double-stitched nylon cover.
- Equipped with a heavy duty Kwik-Connect and Multi-Valve.

Order No.	Mfg. No. / Description	Price
596518	(AHSSL-1)	$159.98 E

SportsStuff Stunt Flyer Towable



- **70"** (deflated).
- For 2 riders.
- P.U. fabric coating.
- Heavy gauge PVC bladder.
- Large flat deck.
- Tow rope holster.
- Multi valve.
- Self-bailing drain vent.
- EVA foam body pad.
- Reinforced tow system.
- Double-stitched nylon full cover with zipper.
- Double-webbing foam handles with knuckle pads (many handles for various rider positions).

Order No.	Mfg. No. / Description	Price
601535	(53-1651)	$210.99 E

Body Glove Boogie Towable



- **66".**
- For 2 riders.
- Round towable with raised edge-raised edges keep towable more stable during whips and turns.
- Edge to edge comfort top covered surface provides a soft, comfortable riding area.
- Embossed Hydroglide finish on PVC bottom moves through the water with less drag.
- One piece, high frequency welded Quick Connect.
- 4 sewn, foam filled nylon handles.
- Large flat seating surface, can be ridden laying down on sitting on.
- Heavy duty 30 gauge PVC construction.
- Patent pending.

Order No.	Mfg. No. / Description	Price
717820	(BGCT668)	$148.98 F

Body Glove Sling Torque Towable



- **60"** Deck tube.
- For 2 riders.
- 28 Gauge PVC/420 D nylon.
- Neoprene pads for comfort.

Order No.	Mfg. No. / Description	Price
717799	(BG6067)	$131.98 F

Airhead Hot Shot Towable

AIRHEAD



- **57"** (deflated).
- PVC bladder completely covered with a double-stitched nylon cover.
- 4 deluxe handles with neoprene knuckle guards.
- Boston Valve.

Order No.	Mfg. No. / Description	Price
596594	(AHHS-1)	$99.98 E

Body Glove Retro Towable



- **60".**
- For 2 riders.
- Yellow and Blue comfort top deck towable.
- Tapered deck makes getting back on the towable much easier.
- Heavy duty 30 gauge PVC construction.
- Edge to edge comfort top covered surface provides a soft, comfortable riding area.
- Embossed Hydroglide finish on PVC bottom moves through the water with less drag.
- One piece, high frequency welded Quick Connect.
- 4 sewn, foam filled nylon handles.
- Patent pending.

Order No.	Mfg. No. / Description	Price
717810	(BGCT60)	$113.98 F

SportsStuff Air Force Towable

SPORTSSTUFF



- **60"** (deflated).
- For 1 rider.
- P.U. fabric coating.
- Heavy gauge PVC bladder.
- EVA foam body pad.
- Reinforced tow system.
- Tow rope holster.
- Speed valve.
- Double-stitched nylon full cover with zipper.
- Comfortable riding positions and challenging rides puts this tube among the elite.
- Double-webbing foam handles with knuckle pads.
- Self-bailing drain vent.

Order No.	Mfg. No. / Description	Price
601523	(53-1646)	$128.98 F

Airhead Slice Towable

AIRHEAD



- **58"** (deflated).
- For 2 riders.
- Low profile towable.
- Peak performance is guaranteed with topside neoprene panel, 4 nylon-wrapped handles and neoprene knuckle guards.

Order No.	Mfg. No. / Description	Price
596622	(AHSL-4W)	$109.98 E

World Industries Breakout Towable



- **57"** round deck tube.
- The rugged PVC bladder is completely covered with a double-stitched nylon cover.
- 4 deluxe handles with neoprene knuckle guards.
- Equipped with a Boston valve for quick inflating and deflating.

Order No.	Mfg. No. / Description	Price
596500	(WIT-2)	$87.98 G

©2014 Donovan Marine, Inc.

Hydroslide Rotor Deck Towable



- **55".**
- Deck Shaped Towable
- Edge to edge comfort top covered surface provides a soft, comfortable riding area.
- Embossed Hydroglide finish on PVC bottom moves through the water with less drag.
- One piece, high frequency welded Quick Connect.
- 2 Injection molded run.

Order No.	Mfg. No. / Description	Price
717805	(CT55)	$87.98 F

Airhead Strike Towable with Free Aqua-Zooka



- **54"** round towable.
- For 1 rider.
- Includes 4 nylon wrapped handles and neoprene knuckle guards.
- The RF welded PVC bladder is fully encased by a durable double stitched nylon cover.
- Strike is equipped with a Boston Valve for easy inflation and deflation, covered by a neoprene flap.

Order No.	Mfg. No. / Description	Price
596519	(AHST-23)	$99.99 H

Airhead Rebel Tube Kit with Tow Rope



- **54"** (deflated).
- For 1 rider.
- Deck tube with 4 deluxe handles and neoprene knuckle guards.
- 12 volt pump is included and will inflate Rebel quickly and effectively.
- A color-matched 16 strand tube tow rope is also included.

Order No.	Mfg. No. / Description	Price
596502	(AHRE-12)	$109.98 E

Airhead Strike Towable



- **54"** (deflated).
- For 1 rider.
- Fully covered deck tube.
- Round towable with 4 nylon wrapped handles and neoprene knuckle guards.
- The RF welded PVC bladder is fully encased by a durable double-stitched nylon cover.
- Equipped with a Boston valve for easy inflation and deflation, covered flap for safety.

Order No.	Mfg. No. / Description	Price
5960157	(AHST-22)	$71.98 E

Hydroslide Big Disk Towable



- **41.5".**
- Plenty of surface area makes getting up easy.
- Beveled edge design allows for flawless surface tricks.
- A great way to learn behind the back handle passes & other Watersports skills.
- Soft grip EVA top is gentle on feet, yet still provides a firm grip.

Order No.	Mfg. No. / Description	Price
7170022	(BD2009)	$114.98 F

Airhead Lob the Blob



- Everyone loves playing an exciting game of cornhole with their friends.
- Now you can bring the action to the water with LOB THE BLOB!
- This instant classic floating game will test your skill and luck at sinking the Blobs in the 10" hole.
- It's constructed of heavy gauge PVC with the Speed Safety Valve for fast and easy inflation and deflation.
- There are grommets on all four corners for tethering on land.
- Play Lob the Blob at your backyard barbecue or take to it to the lake for a game in the sun while you stay cool in the water.
- 37" x 26" playing surface.
- Includes: 4 green blobs, 4 blue blobs and 1 target.

Order No.	Mfg. No. / Description	Price
5960109	(AHLB-1)	$43.98 H

Airhead Pongo Bongo



- There's no better place to play on a hot day than in the water!
- Pongo Bongo is a floating inflatable game table equipped with 12 cup holders on each side.
- Kids love carnival games and will play PONGO BONGO for hours.
- Durable thick gauge vinyl construction.
- Hang it from a ceiling in your game room or tether it to a moored boat or dock with the 4 molded rope holders welded to the sides.
- When you're done playing, turn it over and use it as a pool float or air mattress.
- Ping pong balls included!

Order No.	Mfg. No. / Description	Price
596320	(AHPB-1) Pongo Bongo	$67.98 H

SportsStuff PVC Trampolines



- Higher profile, larger diameter, larger bouncing surface, and a new all elastic webbing frame system will make for higher bounce and a higher level of fun!
- Inflation is easy with its single chamber design.
- The attachable boarding platform makes it a cinch to climb on board from the water!
- Heavy gauge PVC bladder.
- Molded handles.
- Inflatable boarding system.
- Sea anchor.

Order No.	Mfg. No. / Description	Price
601047	(58-1015) Inflated Diameter: 10', Inflated Height: 30"	$410.98 E
601049	(58-1035) Inflated Diameter: 12', Inflated Height: 36"	$569.98 E

WOW Aqua Treadmill





- **80" x 80" x 65"** (inflated).
- 1-3 person human powered vehicle for the water.
- 48" high center cockpit.
- Steerable.
- 8 drainage ports.
- Grommet with 10 foot of rope for tying off.
- Cushioned cockpit makes a great covered lounge.
- High profile and bright colors for easy visibility in the water.

Order No.	Mfg. No. / Description	Price
2011295	(13-2030)	$399.98 H

SportsStuff Pool & Beach 6Up Lounge



- **122"** (deflated).
- Sit back and enjoy maximum relaxation for up to 6 people.
- With tons of molded PVC cup holders all around, an included anchor bag and comfort mesh seating for you to chill out.
- Featuring speed safety valves, air cushioned head and backrests, contoured arm rests and a grommet system to attach a floating cooler.

Order No.	Mfg. No. / Description	Price
5960065	(54-1985)	$255.98 F

SportsStuff Nuclear Globe






- Have a blast in the Nuclear Globe and walk across the water!
- The unique cup-like construction on the outer surface grips and paddles through the water as you spin the globe.
- Features 6P K80 PVC construction with patented Speed Safety Valves for fast and easy inflation, and two entry/exit portholes.
- Molded handles on the interior and exterior allow for easy entries and exits.
- Tying the "ultimate inflatable ball" to pool ladders, docks, or boats is easy with the integrated molded rope holder.

Order No.	Mfg. No. / Description	Price
5960062	(54-1917)	$306.98 F

WOW Tube A Rama





- Bright Red, White and Green graphic design.
- Anchor Bag and tie rope included.
- Includes: 6 seats - 3 with mesh, 3 without mesh, large built-In cooler and 6 recessed cup holders.

Order No.	Mfg. No. / Description	Price
2011305	(13-2050) Diameter 10', For Up to 6 People	$269.98 H

- Includes: 8 seats - 4 with mesh, 4 without mesh, 2 large built-In cooler and 8 recessed cup holders.

Order No.	Mfg. No. / Description	Price
2011240	(13-2040) Diameter 12', For Up to 10 People	$349.98 F

Airhead Gang Plank



- Walk on water with the amazing Airhead Gang Plank!
- Up to 6 people can walk the plank, or better yet, relax, and play on the inflatable mat all day long.
- The innovative design features a zippered connection system so you can link as many together as you want, for the ultimate party on the water!
- Constructed of tough 30 gauge PVC with 4 grommets to tether it to the lake bottom, your boat, dock or the shore.
- Featuring a reversible color scheme, the regal white side or opposite royal blue side will surely match your lake house or pool.

Order No.	Mfg. No. / Description	Price
5960102	(AHGP-6)	$199.98 Q

©2014 Donovan Marine, Inc.

Airhead Lazy Lagoon



- **102"** diameter (deflated).
- Kick back and relax with all your friends on the Lazy Lagoon inflatable island.
- The unique round seating configuration features a central swim opening in the middle to dip your toes in when it's time to cool off.
- The air cushioned wrap around backrest provides comfortable support and the 2 boarding handles make it simple to climb onboard from the water.
- There are 3 grommets around the perimeter to tie on a floating cooler, anchor to the bottom, or tether the island to a dock or shore.
- Inflate in no time with patented Speed Safety Valves and get lazy at the pool, lake or beach this summer.

Order No.	Mfg. No. / Description	Price
5960110	(AHLL-1)	$199.98 R

SportsStuff Cabana Islander



- **108" x 82"** (deflated), **102" x 76"** (inflated).
- Relax on the Cabana Islander, a one-of-a-kind island for up to 6 people to enjoy.
- Constructed of heavy duty K80 PVC with a detachable wind-resistant nylon cabana top to keep you in the shade.
- Speed Safety Valves deliver the fastest inflation and deflation possible and the anchor system will keep you from floating away.
- Also includes a center swim porthole, boarding platform for easy access, and a floating 16 quart cooler that can be tethered to the island.
- 16 quart cooler includes zippered lid, cup holders, rope grommet, and molded handle.

Order No.	Mfg. No. / Description	Price
5960063	(54-1920A)	$375.98 D

SportsStuff Fiesta Island



- **11.5' x 11.5'**
- Party in the water, party off the water!
- There's room for 8 with cup holders all around and a comfortable mesh bottom surface.
- 16 Quart Floating Inflatable Cooler Included
- Contoured Back and Arm Rests
- Heavy-Duty PVC Comfort Mesh Seating
- Built-in Molded Cup Holders
- Molded PVC Boarding Handles
- Grommet System to attach to a floating cooler
- PVC Anchor Bag
- Patented Speed Safety Valve for Fast Inflation and Deflation

Order No.	Mfg. No. / Description	Price
601045	(54-2010)	$446.98 E

Airhead Cool Island



- **107" x 88"**
- Four drink holders and a sundry holder, perfect for storing suntan lotion, are conveniently located between the wet and dry areas.
- The boarding platform makes it easy to climb on top from deep water.
- There are 3 handles welded to the sides for carrying.
- Two tie down points are strategically welded to the sides for anchoring.
- Designed for up to 6 people.

Order No.	Mfg. No. / Description	Price
596525	(AHCI-1)	$199.98 E

WOW Aqua Table





- Floating, portable picnic table for 2-4 people.
- Huge central cooler with drainage port.
- Cup holder on each seat.
- Grab handles on each seat for easy mounting.
- Great for any body of water.
- Also can be used on land.
- Tuff shell full nylon covered pontoons with zipper.
- Heavy duty PVC bladder.
- Secure zippered valve cover.
- Speed valve for fast inflation and deflation.
- Great for pool, beach, lake and river tubing.

Order No.	Mfg. No. / Description	Price
2011230	(12-2000)	$329.98 F

WOW Hideaway Lounge



- **66" x 42"** (inflated).
- Heavy gauge PVC construction.
- High back backrest with deep ergonomic seating with floating flip lounge footrest for ultimate comfort and relaxation.
- Ergonomic armrest and headrest.
- Water vent for cool comfort seating.
- Huge Hideaway backrest zippered storage gear pocket.
- Speed valve for fast inflation and deflation.
- 2 on board built in molded cup holders.
- Great for pool, beach, lake and river tubing.

Order No.	Mfg. No. / Description	Price
2011190	(11-2010)	$49.98 F

WOW River Rover Lounge



- **49" x 44"** (inflated).
- Tuff shell full nylon cover with zipper.
- Heavy gauge PVC bladder.
- Large headrest storage locker.
- Lounge with headrest and floating flip out footrest.
- Water vent for cool comfort seating.
- Zippered valve cover.
- Speed valve for fast inflation and deflation.
- 2 on board zippered beverage coolers/storage compartments with 2 cup holders.

Order No.	Mfg. No. / Description	Price
2011195	(11-2020)	$99.98 Q

WOW First Class Lounge



- **52" x 46"** (inflated).
- Tuff shell full nylon cover with zipper.
- Heavy gauge PVC bladder.
- Tote handle for easy transport.
- High backrest with deep cockpit seating with floating flip lounge footrest.
- Water vent for cool comfort seating.
- Ergonomic armrest and headrest for relaxation.
- Secure zippered valve cover.
- Speed valve for fast inflation and deflation.
- 2 on board zippered beverage coolers/storage compartments with built in custom cup holders.

Order No.	Mfg. No. / Description	Price
2011200	(11-2030)	$99.98 F

Airhead Bimini Lounger II



- **38" x 60"** (deflated with leg rest extended).
- Relax on the water in comfort with Airhead's newly improved Bimini Lounger II.
- There are only 3 air chambers to inflate, not 6 or 7 like the other brands!
- Float with your legs dangling in the water, or stretch them out on the folding inflatable leg rest.
- There's a cup holder for your cool drink and a zippered storage compartment for sun tan lotion and other necessities.
- The inflatable backrest ensures unparalleled comfort.
- Durable nylon construction with a heavy gauge PVC bladder inside.

Order No.	Mfg. No. / Description	Price
5960085	(AHBL-3)	$83.98 H

SportsStuff Siesta Lounge



- **68" x 40".**
- Take a snooze, and find a place in the sun on the Siesta Lounge.
- Very portable for relaxing wherever wanted.
- Heavy gauge PVC bladder.
- Durable full nylon cover.
- Inflatable backrest.
- Zippered storage compartments.
- Dual molded cup holders.
- Folding, inflatable footrest.
- Handles for easy transportation.

Order No.	Mfg. No. / Description	Price
601037	(54-1602)	$109.98 R

SportsStuff Tube Pool & Beach Cabana



- **80" x 54".**
- LP1 double action hand pump included.
- Double stitched full nylon cover with zipper.
- Flat webbing handles for easy transport.
- Detachable, adjustable cabana shade with air vents.
- Patented speed safety valve for fast inflation and deflation.
- Padded valve cover.
- Single chamber heavy gauge PVC bladder.
- Ergonomic backrest with contoured padding.

Order No.	Mfg. No. / Description	Price
601043	(54-1900)	$246.98 E

©2014 Donovan Marine, Inc.


Body Glove Dual Lounger



- Over 40 square feet of comfort top are provides a large lounging area for you and a friend!
- The Bodyglove Dual Lounger features has a high back which provides an ultra comfortable relaxing position.
- Two built in drink holders for your favorite beverages.
- Injection molded handles on both sides make transport to your favorite pool or enclosed waterway a breeze.
- Designed for 2 people.

Order No.	Mfg. No. / Description	Price
716993	(BGCT88)	$227.98 F

WOW Pool Float



- **75" x 31"** (inflated).
- 1 person float great for your favorite body of water.
- 3 chambers.
- Built-in pillow and body hugging side chambers.
- Open coil construction.

Order No.	Mfg. No. / Description	Price
2011285	(13-2010)	$18.98 F

Airhead EZ Breeze Duo



- **84" x 47"**.
- 2 person.
- Mesh seat is offset allowing for easier boarding from the water and a very comfortable backrest.
- Molded drink holder and a rope holder for tethering to a moored boat, dock or your friend's EZ Breeze.
- Rugged RF welded 20 gauge K80 PVC construction.
- Speed Safety Valve for quick and easy inflating and deflating.

Order No.	Mfg. No. / Description	Price
596535	(AHEB-2)	$61.98 E

SportsStuff Noodler 2



- **54" x 71"** (inflated).
- Cool off, kick back and enjoy the comfort mesh seating while basking in the sun.
- Heavy gauge PVC U-shape construction.
- Contoured inflatable arm and backrests.
- Comfort mesh seating.
- Great for pools, beaches, lakes and calm rivers.
- Use as a lounge or flip it over for a floating belly board.
- Molded cup holder for easy access to your favorite beverage.
- Patented speed safety valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
601041	(54-1852)	$37.98 F

Airhead Aruba Lounge



- **66" x 37"** (deflated).
- A comfortable pool and lake lounge with a mesh panel between pillows at each end.
- Lie down and stay cool suspended in the water by the comfortable mesh panel.
- Your drink will be close at hand in the molded drink holder.
- Tether Aruba Lounge to your boat or tie 2 Aruba Lounge's together using the side mounted rope anchor.
- Durable vinyl construction with RF welded seams.

Order No.	Mfg. No. / Description	Price
5960081	(AHAL-1)	$30.98 H

SportsStuff Banana Beach Lounge



- Heavy gauge PVC bladder.
- Sleek ergonomic backrest.
- Molded rope holder.
- Convenient cupholder.
- Unique "banana" design.
- Heavy gauge PVC construction.
- Speed Safety Valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
601679	(54-1660)	$69.98 G

SportsStuff Pool 'n Beach 2 Up Lounge



- 2 person designer lounge is built for comfort, with 2 mesh seats and air filled headrests.
- Integrated connectors link 2 or more together.
- 2 molded drink holders and a rope holder for tethering in lakes.
- Thick, durable 20 gauge K80 construction ensures long service.
- Speed safety valve for fast and easy inflating and deflating.

Order No.	Mfg. No. / Description	Price
601051	(54-1982)	$59.98 G

SportsStuff Noodler 1



- **32" x 42"** (inflated).
- Enjoy the mesh seating and built in cup holder while floating in the water and taking in the sun.
- Heavy gauge PVC U-shape construction.
- Contoured inflatable arm and backrests.
- Comfort mesh seating.
- Use as a lounge or flip it over for a floating belly board.
- Great for pools, beaches, lakes and calm rivers.
- Molded cup holder for easy access to your favorite beverage.
- Patented speed safety valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
601039	(54-1851)	$25.98 F

WOW Big Banana Lounge



- **58" x 42"** (inflated).
- 1 person lounge.
- Extended foot rest.
- 3 chambers.
- Speed valves for fast inflation and deflation.
- Heavy duty PVC.

Order No.	Mfg. No. / Description	Price
2011290	(13-2020)	$59.98 Q

Airhead Aqua Oasis



- The insulated leak-proof nylon cooler lifts up from the inflatable vinyl base and has an adjustable shoulder strap.
- It keeps 24 cans ice cold for hours.
- The 6 drink holders in the floating base are marked with numbers.
- A molded plastic rope connector is welded to the side.

Order No.	Mfg. No. / Description	Price
596523	(AHAO-1)	$32.98 E

WOW Float Fridge 30 Pack Cooler



- Heavy gauge PVC construction.
- Thick sidewalls and double-layered padded bottom to keep your beverages cold.
- EZ zippered lid allows access to 30 pack cooler capacity.
- 4 molded beverage cup holders.
- Tote handles for easy transport.
- Speed valve for fast inflation and deflation.

Order No.	Mfg. No. / Description	Price
2011185	(11-2000)	$49.98 F

Airhead U-Lounges



- **44" x 32".**
- Connect 2, 3, 4 or more U-Lounge's together.
- Comfortable mesh seat.
- Keep a cool drink close at hand in the molded cup holder.
- Quality built from heavy gauge PVC.

Order No.	Mfg. No. / Description	Price
596793	(AHUL-1P) Yellow and Red	$25.98 G
596795	(AHUL-2P) Zebra	$25.98 G

Airhead Fiji Float



- **48" x 43".**
- Comfortable mesh seat.
- Molded drink holder.
- Tether it to your boat or tie 2 or more Fiji Float's together using the side mounted rope anchors.
- Durable vinyl construction with RF welded seams.

Order No.	Mfg. No. / Description	Price
596537	(AHFF-1)	$21.98 R

Airhead Hoopla



- **42".**
- Heavy gauge PVC.
- Great for fun in pools, lakes and rivers.

Order No.	Mfg. No. / Description	Price
596538	(AHHO-1)	$11.98 R

Hydroslide Aqua Saddle



- Soft, easy to clean vinyl coating.
- Great for pool or lake.
- Use as float or cushion.
- 28.5" wide.
- Yellow.

Order No.	Mfg. No. / Description	Price
7170050	(V004S)	$41.98 H

©2014 Donovan Marine, Inc.

WOW Waterproof Speakers with MP3 Container



- Waterproof sound ready system.
- Includes: 2 Speakers and water tight hook up for MP3, iPod and iPhone.

Order No.	Mfg. No. / Description	Price
2011120	(11-1040)	$99.98 H

Airhead Air Daddy™



- A universal adapter tapered to fit all valves found on inflatables, including all sizes of stem valves and Boston Valves, Halkey- Roberts and Leafield Valves.
- The screw-on tip creates a high pressure stream of air, perfect for workshops and garages.
- Both the needle valve and high pressure tip stow securely in the handle.

Order No.	Mfg. No. / Description	Price
596328	(AHAD-1)	$6.98 G

Airhead 120 Volt Hi-Pressure Air Pump



- Peak pressure is 2.5 psi, plenty of pressure to get high end inflatable boats, rafts and reinforced backyard items nice and firm.
- A Pressure Release Valve is included to limit pressure to 1.4 psi for preventing over-inflating towables, pool toys, etc.
- The accordion-style hose locks onto the pump, eliminating annoying disconnections.
- Four universal valve fittings fit all popular valves and lock onto the hose.
- You'll love the screw-on Boston Valve adapter.
- For added convenience, there's a carry handle and a 10 ft. long power cord.
- Draws 6.1 amps/730 watts. Volume is 460 liters/minute.

Order No.	Mfg. No. / Description	Price
5960121	(AHP-120HP)	$52.98 I

Airhead 120 Volt Air Pump



- This 120 volt canister style air pump inflates and deflates towables, pools, air mattresses and beach toys.
- Three universal valve fittings fit all popular valves.
- For added convenience, there's a carry handle and a 10 ft. long power cord.
- Volume: 300 liters/minute.
- Draws 1.45 amps.

Order No.	Mfg. No. / Description	Price
596304	(AHP-120)	$33.98 Q

Airhead Aqua-Zooka



- Soak your friends with Aqua-Zooka!
- This easy to operate, quick filling water bazooka is constructed of high-impact thermoplastics, and will last for seasons of fun.
- Simply dip Aqua Zooka into the water and pull back on the handle to siphon water up into the barrel.
- You're ready to fire, with a range of up to 60 feet!
- Aqua Zooka's are equipped with comfortable EVA handles so that you won't lose your grip, even with wet hands in the heat of battle!
- The EVA handles also ensure that Aqua Zooka will float on top of the water.
- Doubles as a bilge pump or household siphon!

Order No.	Mfg. No. / Description	Price
5960216	(AZ-12) Length 12"	$8.98 H
5960217	(AZ-18) Length 18"	$12.98 H
5960221	(AZ-24) Length 24"	$14.98 H
5960222	(AZ-32) Length 32"	$15.98 H

Airhead Aqua-Zooka Display



- Kids can't possibly miss this display!
- This could be the most successful display you've ever put in your store!
- It's easy to refill with four replaceable bins holding a total of (48) 18" water guns.
- They retail at an impulse price point, so watch them fly out of the store!
- Sets up in under 5 minutes.
- Dimensions: 60" H x 13.5" W x 19" D.

Order No.	Mfg. No. / Description	Price
5960218	(AZ-18D)	$385.98 D
5960219	(AZ-18DISP)	$465.98 D
5960220	(AZ-18R) Refill, (2) 12 ea. Replaceable Bins/Case	$219.98 D

Airhead 120 Volt Super Pump



- 120 volt air pump.
- Peak pressure is nearly 3.0 psi.
- Seven universal adapters are provided to fit all valves commonly used on boats, kayaks, towables and other inflatables.
- A pressure release valve limits pressure to 1.4 psi
- The adapters lock onto the 36" long heavy duty reinforced hose.
- The accordion-style hose locks onto the pump.
- You'll love the convenience of the screw-on Boston Valve adapter.
- Carry handle and a 10 ft. long power cord.
- Draws 7.1 amps/917 watts. Volume: 480 liters/minute.

Order No.	Mfg. No. / Description	Price
596306	(AHP-120S)	$79.98 R

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Sportsstuff 3.0 PSI Pump



- This 110-volt pump will inflate or deflate your inflatable in a hurry.
- It comes with an assortment of nozzles to adapt to your needs and has a high-volume, low-pressure output to get the job done quickly.

Order No.	Mfg. No. / Description	Price
601026	(57-1508)	$63.98 G

Airhead 12 volt Air Pump



- This high-volume 12 volt portable air pump inflates and deflates towables, boats, pools, mattresses and beach toys.
- The universal valve fittings fit all popular valves.
- For added convenience, the cigarette lighter plug is equipped with a 10 ft. long power cord.
- Volume is 380 liters/minute.
- Maximum pressure: .71 psi.
- Draws 11.8 amps/145 watts.

Order No.	Mfg. No. / Description	Price
596316	(AHP-12H)	$20.98 R

Airhead Rechargeable 12 volt Air Pump



- This convenient and versatile 12 volt air pump comes equipped with a 120 volt AC charger and a 12 volt charger that plugs into cigarette lighters.
- It's equipped with 3 adapters to fit valves on towables, pool toys, airbeds and other inflatables.
- It will inflate or deflate continuously for 15 minutes on a charge.
- Peak air pressure is .64 psi.
- Volume is 260 liters/minute.
- Draws 11.3 amps/75 watts.

Order No.	Mfg. No. / Description	Price
596324	(AHP-12R)	$37.98 R

Sportsstuff 2.5 PSI Pump



- This 110-volt pump will inflate or deflate your inflatable in a hurry.
- It comes with an assortment of nozzles to adapt to your needs and has a high-volume, low-pressure output to get the job done quickly.

Order No.	Mfg. No. / Description	Price
601028	(57-1509)	$50.98 G

Airhead 12 volt High Pressure Pump



- 12 volt High Pressure Air Pump with pressure release valve.
- Adapters are provided for all popular valves including stem, Boston, Leafield, Bravo, Hulkey Roberts and more.
- A removable pressure release valve limits the output to 1.4 psi.
- Hook it up to your car, truck or boat battery with the alligator clips connected to a 10 foot power cord.
- Volume is 410 liters/minute.
- Maximum pressure: 2.5 psi.
- Draws 28 amps /340 watts.

Order No.	Mfg. No. / Description	Price
596318	(AHP-12HP)	$69.98 R

Sportsstuff LP1 Hand Pump



- This lightweight plastic pump is designed to inflate/deflate inflatables with less effort due to its continuous stream of output on both the up and down strokes.
- This pump easily doubles as a handy bilge and can also deflate.
- Besides using to fill an item completely, we also recommend using this pump to top off your items after inflated with a 12v electric pump.
- It is also handy to keep on the boat for topping off your tubes while on the water.
- 2.0 Liters Per Stroke Output.

Order No.	Mfg. No. / Description	Price
601018	(57-1004)	$19.98 G

©2014 Donovan Marine, Inc.


Boater Sports Economy Inflatables Tow Rope



- Yellow/Blue polypropylene inflatable tow rope.
- 7/16" x 50' + 10' with float.
- 2" Velcro keeper wrap with customer sewn-in label.
- 2,104 lb. break strength.
- For 1 rider.

Order No.	Mfg. No. / Description	Price
1-52428	(52428)	$22.25 M

Boater Sports Deluxe Inflatables Tow Rope



- Basic tow rope.
- 5/8" x 60'.
- 8" knot splice at both ends.
- 4,150 lb. break strength.
- Includes Velcro keeper wrap.
- For 2-4 riders.

Order No.	Mfg. No. / Description	Price
1-52468	(52468)	$28.65 L

Boater Sports Quick Release Connector



- 5,000 lb. break strength quick release connector.
- Yellow/blue polypropylene rope with high-impact nylon hook.

Order No.	Mfg. No. / Description	Price
1-52435	(52435)	$11.35 H

Sportsstuff 2k Tow Rope



- 60 Feet 2,375 lb. break strength.
- This rope is perfect for towing all Sportsstuff 1 and 2 rider tubes.
- Features a molded plastic caddy for easy storage.
- Minimum stretch design.

Order No.	Mfg. No. / Description	Price
601032	(57-1522)	$17.98 G

Sportsstuff 4k Tow Rope



- 60 Feet 4,100 lb. break strength.
- This heavy duty rope is perfect for towing any tube with up to 4 riders.
- Features a molded plastic caddy for easy storage.
- Minimum stretch design.

Order No.	Mfg. No. / Description	Price
601034	(57-1532)	$21.98 G

SportsStuff 4k Quick Connector



- Makes it easy to attach and detach tow ropes to towables.
- Simply attach the connector to the towable's tow strap instead of having to thread a long tow rope through the strap.
- 4,100 lb. break strength.
- Patented aluminum quick connect tow point.
- 12" Length.
- Minimum stretch design.

Order No.	Mfg. No. / Description	Price
601008	(57-1655)	$11.98 F

Airhead 2 Section 2 Riders Tube Tow Rope



- This tube tow rope has 2 sections, giving you the option to tow the tube either 50 or 60 feet behind the boat depending on wake and water conditions.
- The pre-stretched UV-resistant 7/16" diameter 16-strand rope exceeds the 2,375 pound break strength required by the WSIA for 2-rider tubes.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No. / Description	Price
5960182	(AHTR-22)	$18.98 H

Airhead 1 Section 4 Riders Tube Tow Rope



- This heavy duty 16-strand 9/16" x 60 ft. tube tow rope is rated at 4,150 pounds tensile strength.
- Engineered to pull the big 3 and 4 rider tubes.
- It has a unique Rasta color scheme with a 6" loop spliced at each end.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No. / Description	Price
597457	(AHTR-4000)	$25.98 H

Airhead Bling Tube Tow Ropes


596790


596689


596791

- These ropes will give you swagger!
- AIRHEAD's BLING Series ropes add another dimension to towing, as they sparkle in the sun and glow in twilight!
- The extravagant look compliments the luxury of high end boats, adds a little class to lesser boats and makes you look like a watersports pro!
- BLING series ropes are one of a kind, shiny and reflective material is braided together with top quality polypropylene.
- These tube tow ropes are 60 ft. long with a loop at each end.
- A "totally blinged-out" rope keeper is included.

Order No.	Mfg. No. / Description	Price
596689	(AHTR-12BL) 2,375 lb. Tensile Strength, For up to 2 Rider Towables	$22.98 F
596790	(AHTR-14BL) 4,100 lb. Tensile Strength, For up to 4 Rider Towables	$29.98 G
596791	(AHTR-16BL) 6,000 lb. Tensile Strength, For up to 6 Rider Towables	$39.98 G

Airhead 2 Section 4 Riders Tube Tow Rope



- This tube tow rope has 2 sections.
- The pre-stretched UV-resistant 5/8" diameter 16-strand rope exceeds the 4,150 pound break strength required by the WSIA for 4 rider tubes.
- A Rope Keeper is included for convenient storage.


Order No.	Mfg. No. / Description	Price
597472	(AHTR-42)	$23.98 G

Body Glove Tube Tow Ropes



Order No.	Mfg. No. / Description	Price
716977	(BG28) 2 Person Tube with Spool	$21.98 F
716978	(BG48) 4 Person Tube with Spool	$28.98 F


Airhead Heavy Duty Tow Harness - 4 Riders



- This 5,000 lb. tensile strength tow harness is perfect for pulling skiers, wake boarders and the big 5 rider towables.
- Clips onto boat with attached 5,000 lb. tensile strength hooks and attach your ski or tube rope to the heavy duty Kwik-Connect.
- The 6" float ensures that the Kwik-Connect floats, away from your propeller.
- 12' long to fit larger boats and pontoons.
- Yellow/Red.

Order No.	Mfg. No. / Description	Price
597572	(AHTH-2)	$20.98 G

Airhead Heavy Duty Tow Harness



- Equipped with oversized extra heavy duty hooks.
- Engineered to tow skiers, wake boarders and up to 4 rider towables, simply clip it onto your stern eyes and attach your ski or tube rope to the heavy duty Kwik-Connect.
- The 6" float ensures that the Kwik-Connect floats, away from your propeller.
- Yellow/Black.

Order No.	Mfg. No. / Description	Price
597561	(AHTH-8HD)	$31.98 G

Airhead Deluxe 2 Riders Tube Tow Rope



- This 3/8" 16-strand braided tow rope is rated at 2,375 pounds tensile strength.
- There's a 6" loop spliced at each end.
- Designed for 1 and 2 rider tubes.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No. / Description	Price
597421	(AHTR-60)	$18.98 H

Airhead Bungee Tube Tow Rope



- This 9/16" x 50 ft. tube rope has a 3/8" diameter bungee cord spliced inside.
- It's rated at 4,150 pounds tensile strength, conforming to WSIA recommendations for 1-4 rider tubes.
- A Rope Keeper is included for convenient storage.

Order No.	Mfg. No. / Description	Price
597471	(AHTRB-50)	$41.98 H

Airhead Tow Harness - 1 Rider



- It creates a tow attachment point at the center of your boat, behind your outboard or stern drive.
- This tow harness is perfect for pulling a skier, wake boarder, knee boarder or 1 or 2-rider tubes.
- A 6" float keeps the attachment loop floating on top, away from your propeller.
- 12' long to fit larger boats and pontoons.
- Yellow/Red.

Order No.	Mfg. No. / Description	Price
597560	(AHTH-1)	$10.98 Q

Airhead 1 Section 1 Rider Tube Tow Rope



- 1,500 lb. tensile strength, meets WSIA recommendations for 1-rider towables.
- 50' long with 6" loop at each end.
- Rope Keeper included.
- Yellow.
- 1 section, 1 rider.

Order No.	Mfg. No. / Description	Price
597407	(AHTR-50)	$12.98 H

Boater Sports Rope Harnesses



- 4,100 lb. break strength.
- Comes with two heavy-duty wide-opening transom hooks and high-impact, nylon one-piece quick release.
- Handle with white logo.

Order No.	Mfg. No. / Description	Price
1-52426	(52426) Length 12'	$27.25 L
1-52436	(52436) Length 16'	$28.40 L

Airhead Self Centering Tow Harness - 2 Riders



- This 3,000 lb. tensile strength tow harness is perfect for pulling skiers, wake boarders and up to 2 rider towables.
- A stainless steel pulley glides along the length of the rope to provide the optimum pull at all times.
- Simply clip it onto your boat with the 5,000 lb. tensile strength hooks provided, and attach your ski or tube rope to the heavy duty Kwik-Connect.
- The 6" float ensures that the Kwik-Connect floats, away from your propeller.
- It's 12' long to fit pontoon and larger boats.
- The hooks are rust resistant zinc galvanized carbon structural steel.
- Hook opening width 1/2".
- Yellow/Black.

Order No.	Mfg. No. / Description	Price
5960167	(AHTH-3)	$30.98 I

©2014 Donovan Marine, Inc.

Airhead Self Centering Cable Tow Harness



- We combined the popular self-centering feature of our top selling rope tow harness with a durable cable.
- Heavy duty 5,000 lb. hooks connect the tow harness to your boat.
- The extra long 14 ft. cable fits most larger boats.
- As the stainless steel pulley glides along the cable, it keeps the tow point centered for the optimum pull at all times.
- Tow rope hook-ups are easy with the heavy duty Kwik-Connect.
- Designed for water skiing, wakeboarding, kneeboarding and 1 or 2 rider towables.
- 3,000 lb. tensile strength.

Order No.	Mfg. No. / Description	Price
596677	(AHTH-9)	$35.98 R

Boater Sports Coated Steel Cable Tow Harnesses



- Vinyl covered steel cable with center-pull tow pulley.

Order No.	Mfg. No. / Description	Price
1-52430	(52420) Length 8'	$24.10 L
1-52432	(52432) Length 12'	$27.55 L

Boater Sports Poly Rope Tow Harness



- Braided polypropylene rope tow harness with center-pull tow pulley.

Order No.	Mfg. No. / Description	Price
1-52433	(52433) Length 12'	$25.25 L

Airhead Tow Demon



- Airhead's Tow Demons are new higher strength versions of a classic and very popular water sports tow harness.
- The high-impact molded plastic float/pulley system allows for easy attachment of ski ropes, wakeboard ropes and tube ropes.
- Connect Tow Demon quickly and easily to boats with the 2 large corrosion-resistant snap hooks.
- Available in vinyl-jacketed steel cable and floating rope versions.
- Recommended for recreational water skiing, wakeboarding, kneeboarding and towing 1 rider tubes.
- Snap hook opening width 7/16".

Order No.	Mfg. No. / Description	Price
597563	(AHTH-6) 8' Cable	$18.98 G
597565	(AHTH-7) 12' Cable	$19.98 G
704412	(AHTH-4) 8' Rope	$17.98 H

SportsStuff Tube 4K Booster Ball



- This custom tow rope with inflatable buoy in the middle boosts a towable's performance in many ways.
- Primarily by keeping the tow rope out of the water the majority of the time while towing.
- Enhances performance of all Doables and most regular towables.
- Heavy gauge PVC bladder.
- 840 Denier full nylon cover with zipper.
- Tough 2" webbing.
- Exclusive patented speed safety valve.
- 60 Foot overall length (including Booster Ball).
- Double stitching and reinforced stress points.
- Self bailing drain vent.
- 4k Tow Rope 4,100 lb. break strength.
- Designed for 1 to 4 person towables.

Order No.	Mfg. No. / Description	Price
601031	(53-2030) Inflated: 38" x 28"	$115.98 R

Airhead Soft Float



- These durable ultrasonically welded plastic floats are great for pools, ski ropes, anchor lines, marker buoys and crab traps.
- Size: 5" long x 3" diameter with a 1/2" hole in the center.

Order No.	Mfg. No. / Description	Price
704420	(F-5R)	$3.47 F

Airhead BOB



- What about BOB?
- BOB is an advanced 4 rider tow rope with inflatable buoy in the middle that will boost your towable's performance to a whole new level.
- It keeps the rope out of the water while towing which reduces drag, rope spray, and submarining.
- This 60 foot long advanced towing system (including ball) has a 4,100 pound break strength.
- BOB features a heavy-duty full nylon cover, self bailing drain vent, and patented Speed Safety Valve for fast and easy inflation and deflation.

Order No.	Mfg. No. / Description	Price
5960086	(AHBOB-1)	$95.98 F

SportsStuff Watersports Glove



- These fingerless towable gloves with padded palm patches allow riders to achieve a secure grip, while helping to alleviate muscle fatigue, blisters, and callouses.
- The lightweight neoprene construction is soft and flexible.
- Stylin' and comfortable, with bright red piping.
- One size fits most.

Order No.	Mfg. No. / Description	Price
5960075	(60-3000)	$19.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Airhead Tube Keeper™

AIRHEAD





- It saves essential passenger space and prevents serious injuries by securing towables to your boat's stern.
- Simply attach the straps around the tube's handles.
- Then attach with either the giant 3-1/4" suction cups or loop the stretch cords around a cleat or rail.
- The 2" wide adjustable straps are easy to tighten for a secure hold.

Order No.	Mfg. No. / Description	Price
586466	(TB-101)	$16.98 G

Airhead Multi-Valve

AIRHEAD



- Inflate with Speed and Flexibility.
- Airhead Multi-Valve consists of 2 Boston valves with different thread patterns on the bottom and a Shrader valve with cap.
- One of the Boston valves is sure to fit the thread pattern of your inflatable, no matter what brand.
- The Boston Valves have a square base, which is much easier to turn than a round base, especially with wet hands.
- Use the Shrader valve to inflate your inflatables at a gas station or with an air compressor.
- Alternatively, screw off the Shrader valve and inflate the Boston valve with an Airhead air pump.
- All components are bright red and green, so they're easy to find.

Order No.	Mfg. No. / Description	Price
586353	(AHMV-1)	$7.98 G

Attwood Wide View Ski Mirror

attwood



- For installation on windshields 1/2" to 1" thick (or thinner with customer's own spacer).
- Molded plastic frame, polished convex mirror and adjustable base.
- Includes allen wrench.
- Dimensions: 11-3/4" W x 4" H.

Order No.	Mfg. No. / Description	Price
237609	(13065-4)	$36.98 H

Kwik Tek Wrap It Up

Kwik Tek






- We've all struggled with organizing extension cords, hoses and wires.
- People with boat slips and RVs know the challenges of managing utility cords.
- You'll find 100s of uses for these 12 long hook and loop wraps.
- Use them at home, in the garage, on the job, camping, boating and fishing, just about anywhere.
- The hook and loop fasteners are sewn to durable 12 x 1 webbing and reinforced with a bar tack at each end.
- A cord is sewn onto WRAP IT UP!
- For hanging items from peg hooks.

Order No.	Mfg. No. / Description	Price
596967	(WR-123BK) 3 Per Pack, Black	$4.29 G
5960321	(WR-123) 3 Per Pack, Assorted Colors	$4.08 H
5960320	(WR-12100) 100 Per Counter Top Shelf Display, Assorted Colors, Each UPC'ed	$126.98 H

Airhead Boston Valve

AIRHEAD



- Always Carry a Spare!
- This pack of Boston Valves included two valves that will fit all Airhead Boston Valve Equipped Inflatables.
- The square bases are much easier to turn than round bases, especially with wet hands.
- Bright red coloring makes these valves easy to find.

Order No.	Mfg. No. / Description	Price
5960087	(AHBV-2)	$5.98 H

Attwood Perma-Plate® Ski Mirror

attwood



- Universal mount installs on deck or windshield.
- Adjustable.
- Dimensions: 7-5/16" W x 2-1/2" H.
- Maximum windshield thickness: 3/4".

Order No.	Mfg. No. / Description	Price
237607	(9083-7)	$31.98 H

Airhead Vinyl Repair Kit

AIRHEAD



- Are you rough on your inflatables? Better keep a repair kit handy!
- This kit includes: A 1-ounce tube of the best commercial grade vinyl cement available and (4) 2" round vinyl patches.
- Blister packed.

Order No.	Mfg. No. / Description	Price
586455	(AHRK-1)	$5.98 G

SportsStuff Tube PVC Adhesive

SPORTSSTUFF



- Repairs and Seals PVC Products (Not to be used on Fabric or Nylon covers).
- Compact for easy storage and transportation.
- Fix your product in 2 hours or less!

Order No.	Mfg. No. / Description	Price
601006	(10-1001)	$5.98 F

Attwood Chrome Ski Mirror

attwood



- Universal mount installs on dash or windshield.
- Shatterproof, 180° convex mirror eliminates blind spots.
- Mirror is compact and lightweight zamak.
- Economical chrome-plate finish.
- Mirror adjusts to any position up-and-down or side-to-side, then secures in desired location.
- Note: In some states and provinces, ski mirror of a certain size/dimension, and/or and onboard observer may be required. Check local requirements.

Order No.	Mfg. No. / Description	Price
2350033	(13055-4)	$28.98 H

©2014 Donovan Marine, Inc.

CIPA Comp Boat Mirror



- 7" x 14" mirror.
- With square bracket.
- Bracket can be mounted to dash or windshield.

Order No.	Mfg. No. / Description	Price
242355	(M1B875)	$155.98 R

CIPA Eclipse Boat Mirror



- 4" x 11" multi-lens mirror with one stationary and two adjustable lenses.
- Ball and socket tension knob to keep the mirror where you position it.
- Bracket will mount to both rectangular or rounded windshield frames from 3/8" to 1-1/4".

Order No.	Mfg. No. / Description	Price
242393	(M2002) Black	$68.98 R

CIPA Comp II Boat Mirror



- 4" x 11" convex universal mirror.
- Permanent or temporary mounting above or below the windshield frame.
- Black.

Order No.	Mfg. No. / Description	Price
242381	(11080)	$65.98 R

CIPA PWC Sport II Mirror



- 3-1/2" x 6-1/4" convex safety glass.
- Fits LH or RH sides.
- White.

Order No.	Mfg. No. / Description	Price
242418	(11121)	$36.98 R

CIPA Boating Safety Mirror



- 4-1/4" x 8" universal, mounts above or below windshield frame.
- Fits windshields 5/8" to 1" thick.
- Fully adjustable with anti-scratch quick-mount bracket.

Order No.	Mfg. No. / Description	Price
242379	(11140)	$32.98 R

CIPA Suction Cup Mirror



- 4" x 8" fully adjustable mirror.
- No holes to drill, no tools required, no scratching.
- Attaches to any clean, non-porous surface - dash, console or windshield mount.

Order No.	Mfg. No. / Description	Price
242367	(11050)	$21.98 F

Boater Sports Skier Down Flag



- 2' x 2' Ski flag made of 420 Denier nylon.
- Mounted on a 24" pole.
- Suction cup included.

Order No.	Mfg. No. / Description	Price
1-52440	(52440)	$6.99 H

Kwik Tek Dive Flag



- Three grommets and a sleeve for poles provide lots of attachment options.
- A vinyl-coated stiffener keeps the flag open and visible in still conditions.
- Dimensions: 20" x 24".

Order No.	Mfg. No. / Description	Price
586483	(F-2024)	$9.98 F

CIPA Economy Boat Mirror



- 3" x 8" convex mirror with quick-mount system.
- Universal mounts above or below windshield, or to dash.
- Black.

Order No.	Mfg. No. / Description	Price
242406	(11119)	$14.98 F

Kwik Tek Skier Down Flag



- The bright orange 420-denier nylon skier down flag is mounted to a 24" pole.
- Attaches to windshields or boat and personal watercraft finishes with Kwik Tek's giant 3-1/4" suction cup.
- Required in AZ, CA, CO, ID, MO, NE, NM, OR, TX, UT and WA.

Order No.	Mfg. No. / Description	Price
586492	(SAF-1)	$8.98 G

Swivl-Eze Fixed Height Ski Pylons



- Stainless steel.
- Post height: 29", post diameter: 1-1/2", post base: 3/4" pin base.
- Arm diameter: 1", arm length: 33"-56", arm base: Rem. clev. pin.

Order No.	Mfg. No. / Description	Price
587812	(903-008-T-S)	$339.98 F

- Aluminum.
- Post height: 34", post diameter: 1-3/4", post base: 1-3/4" base.
- Arm diameter: 1", arm length: 33"-56", arm base: Rem. clev. pin.

Order No.	Mfg. No. / Description	Price
5870069	(99340)	$299.98 E

- Hardware kit for Ski Pylons.

Order No.	Mfg. No. / Description	Price
587125	(SP-930) Hardware Kit	$71.98 F

Airhead Baja Kayak



- **110" x 41".**
- Designed for paddling in ocean surf or on calm lake waters.
- Unique cockpit design, ergonomic backrest and recessed foot braces.
- Molded paddle holders.
- Removable storage net up front.
- Insulated recessed cooler in the rear that comfortably holds 6 drinks and ice.
- Carry handles are conveniently located fore and aft.
- Constructed of rugged K80 PVC, with a tracking fin.
- 2 patented Speed Safety Valves for quick and easy inflating and deflating.

Order No.	Mfg. No. / Description	Price
596680	(AHTK-6)	$129.98 F

Airhead Performance Travel Kayak



- 2 person, **12'.**
- Lightweight, compact, portable.
- Highly visible orange for safety.
- Designed for lakes and moderate white water.
- Low drag/superior tracking with 4 bottom fins.
- Inflatable seats with adjustable support backrest & mesh pocket.
- All 3 air chambers are completely enclosed by rugged 840-denier nylon with UV and water-resistant coatings.
- Durable tri-laminate reinforcements on the bottom for a lifetime of use.
- Neoprene elbow guards for comfort.
- Easy to inflate and deflate (3 Boston valves with nylon covers).

Order No.	Mfg. No. / Description	Price
596796	(AHTK-2)	$499.98 F

Swivl-Eze Adjustable Height Ski Pylons





- Stainless steel.
- Post height: 34"-58", post diameter: 2", post base: 6" diameter SS.
- Arm diameter: 1", arm length: 33"-56", arm base: Rem. clev. pin.

Order No.	Mfg. No. / Description	Price
5870064	(923-009-ADJ)	$395.98 F

- Stainless steel.
- Post height: 28"-52", post diameter: 1", post base: Nylon flush mount.
- Arm diameter: 1", arm length: 33"-56", arm base: Nylon flush mount.

Order No.	Mfg. No. / Description	Price
588006	(96008)	$322.98 F

- Stainless steel.
- Post height: 35"-52", post diameter: 1", post base: Nylon flush mount.
- Arm diameter: 1", arm length: 33"-56", arm base: Nylon flush mount.

Order No.	Mfg. No. / Description	Price
5870067	(96009)	$356.98 F

Airhead Recreational Travel Kayak



- 2 person, 10' 3", 2 seats.
- Semi-rigid heavy gauge PVC construction.
- Lightweight, compact , portable.
- Spray covers fore and aft.
- Designed for lakes and moderate white water.
- 2 oversized valves for quick inflating and deflating.
- Tubular I-beam floor for superior comfort, buoyancy and tracking.
- Movable/removable inflatable seats provide great back support.
- Drain hole with plug.

Order No.	Mfg. No. / Description	Price
596679	(AHTK-5)	$146.98 F

Airhead Angler Bay Inflatable Boats



- 2 rod holders, multiple molded drink holders,4 drain plugs, a battery storage bag and a ditty bag.
- Lightweight, portable and ideal for lakes & slow moving streams.
- Equipped with wrap-around grab lines, swiveling oar locks, trolling motor transom mounts and side mounted oar holders.
- Constructed of heavy duty vinyl with electronically welded seams.
- Comfort features include an inflatable floor and a movable seat.
- Patented Speed Safety Valves for quick inflating and deflating.

Order No.	Mfg. No. / Description		Price
596544	(AHIBF-03) 3 Person, 96" x 54"	24 gauge	$144.98 G
596546	(AHIBF-04) 4 Person, 109" x 56"	30 gauge	$206.98 G
596548	(AHIBF-06) 6 Person, 140" x 66.5"	32 gauge	$289.98 G
596551	(AHIBT-1) Transom Motor Mount		$99.98 G

©2014 Donovan Marine, Inc.

Airhead NA PALI Stand Up Paddleboard and Stand Up Paddleboard Paddle

AIRHEAD





- Airhead's inflatable SUP measures 10 ft. 6 in.
- The extra rugged drop stitch construction allows a much higher air pressure than other inflatable technologies.
- Thousands of tiny threads connect the top and bottom layers.
- Consequently, it can hold 15 pounds of air pressure, more than double the working pressure of other technologies.
- When you're out on the water, Na Pali is rigid and will perform like a fiberglass board.
- A large anti-skid EVA pad provides secure footing.
- Strap your gear to the 4 D-rings up front.
- Three removable fins ensure straight tracking and precise maneuvering.
- Feel like sitting down? Install the seat in seconds and paddle kayak style.
- For convenience and portability, a backpack with mesh panels is included for stowing and carrying the SUP and all accessories.
- Accessories included: Backpack with mesh panels, adjustable seat, high pressure hand pump, anemometer, valve wrench.
- Airhead Adjustable SUP Paddle sold separately.

Order No.	Mfg. No. / Description	Price
5960159	(AHSUP-1)	$799.98 E

- Airhead's lightweight 3-section SUP paddle is the perfect companion to our Na Pali stand up paddleboard.
- This is truly a one-size-fits-all paddle.
- The length is easily adjustable from 160 to 210 cm.
- The paddle weighs less than 2 lbs. 3 oz.
- The shaft is 100% fiberglass, the "duck foot" shape blade is designed for maximum paddling efficiency and is fiberglass reinforced ABS.

Order No.	Mfg. No. / Description	Price
5960160	(AHSUP-P1)	$91.98 G

Marpac Xtreme V-Flex Back Sport Vests



- Xtreme V-Flex Back provides comfort and flexes with your every move.
- Neo fabric provides the most comfortable and flexible jacket for any use.
- Xtreme design makes for a better fitting vest with more range of motion.
- Neo construction is PE foam for lightweight and durable flotation.
- Coast Guard Approved Type III life jacket.

Order No.	Size	Color	Price
8-3210	Small/Medium	Red	$50.98 E
8-3212	Large/X Large	Red	$50.98 E
8-3214	XX Large/XXX Large	Red	$50.98 E
8-3220	Small/Medium	Yellow	$50.98 E
8-3222	Large/X Large	Yellow	$50.98 E
8-3224	XX Large/XXX Large	Yellow	$50.98 E
8-3230	Small/Medium	Black	$50.98 E
8-3232	Large/X Large	Black	$50.98 E
8-3234	XX Large/XXX Large	Black	$50.98 E

Revere Sportster Vests

REVERE



- 100 MPH speed rated sports PFD.
- Neoprene comfort collar.
- Reflective tape.
- Four breathable zipper storage pockets.
- Two adjustable body belts.
- Center zipper.

Order No.	Mfg. No. / Size	Color	Price
8-9130	(23630NAV08) X Large	Navy Blue	$78.98 G
8-9131	(23640NAV10) XX Large	Navy Blue	$78.98 G
8-9132	(23650NAV12) XXX Large	Navy Blue	$78.98 G

Tighten Up 2-Belt Neoprene Ski Vests



- Premium quality design and fit.
- Features: 2mm neoprene fabric outer, two 1-1/2" belts with set and pull tab, short waisted design, individually sized, PVC foam construction, D-ring kill switch attachment, Made in USA, USCG Approved Type III.

Order No.	Size	Color	Price
8-0144	32" - 36" Chest	Royal/Ash/Black	$58.98 F
8-0219	Child, 30 - 50 lbs	Yellow/Black	$37.98 G
8-0257	32" - 36" Chest	Yellow/Black	$58.98 G
8-0271	40" - 44" Chest	Yellow/Black	$58.98 G
8-0283	44" - 48" Chest	Yellow/Black	$58.98 G

Tighten Up Neoprene Ski Vest



- Premium quality design and fit.
- 2mm neoprene fabric outer.
- PVC foam construction.
- D-ring kill switch attachment.
- Made in USA.
- USCG Approved Type III.

Order No.	Size	Color	Price
8-0513	Small/Medium	Black/Silver	$69.98 F

Tighten Up Competition Neoprene/Nylon Ski Vests



- Individually sized and form fitting design.
- Features: Four 1-1/2" wide belts for a secure fit, grey shoulder and side panels are made of neoprene, interior panels made of nylon, all PVC foam, USCG Approved Type III.

Order No.	Size	Color	Price
8-0865	28" - 32" Chest	Black/Yellow/Grey	$45.98 F

FuzionX Mens Segmented Neoprene Vests



- Segmented panels for maximum flexibility.
- Full body belt/buckle design.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000065	(HD8201-S) Small	Red/Grey/Black	$59.98 G
8000060	(HD8201-M) Medium	Red/Grey/Black	$59.98 G
8000055	(HD8201-L) Large	Red/Grey/Black	$59.98 G
8000070	(HD8201-XL) X Large	Red/Grey/Black	$59.98 G
8000050	(HD8201-2XL) XX Large	Red/Grey/Black	$59.98 G

FuzionX Mens Neoprene Ski Vests



- Zipper front with nylon buckles.
- PVC foam construction.
- Full body belt/buckle design.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000160	(HD8204-XS-Y) X Small	Yellow/Grey/Black	$59.98 H
8000140	(HD8204-S-Y) Small	Yellow/Grey/Black	$59.98 H
8000130	(HD8204-M-Y) Medium	Yellow/Grey/Black	$59.98 H
8000120	(HD8204-L-Y) Large	Yellow/Grey/Black	$59.98 H
8000150	(HD8204-XL-Y) X Large	Yellow/Grey/Black	$59.98 H
8000100	(HD8204-2XL-Y) XX Large	Yellow/Grey/Black	$59.98 H
8000110	(HD8204-3XL-Y) XXX Large	Yellow/Grey/Black	$59.98 H
8000155	(HD8204-XS-R) X Small	Red/Grey/Black	$59.98 H
8000135	(HD8204-S-R) Small	Red/Grey/Black	$59.98 H
8000125	(HD8204-M-R) Medium	Red/Grey/Black	$59.98 H
8000115	(HD8204-L-R) Large	Red/Grey/Black	$59.98 H
8000145	(HD8204-XL-R) X Large	Red/Grey/Black	$59.98 H
8000095	(HD8204-2XL-R) XX Large	Red/Grey/Black	$59.98 H
8000105	(HD8204-3XL-R) XXX Large	Red/Grey/Black	$59.98 H

Tighten Up 4-Belt Neoprene/Nylon Ski Vests



- Individually sized and form fitting design.
- Features: Four 1-1/2" wide belts for a secure fit, black shoulder and side panels are made of neoprene, interior panels made of nylon, all PVC foam, USCG Approved Type III.

Order No.	Size	Color	Price
8-0723	28" - 32" Chest	Blue/Black/Yellow	$44.98 F
8-0735	32" - 36" Chest	Blue/Black/Yellow	$44.98 F
8-0790	28" - 32" Chest	Red/Black/Yellow	$45.98 F
8-0803	32" - 36" Chest	Red/Black/Yellow	$45.98 F

FuzionX Ladies Segmented Neoprene Vests



- Segmented panels for maximum flexibility.
- Full body belt/buckle design.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000085	(HD8203-S) Small	Pink/Grey/Black	$55.98 F
8000080	(HD8203-M) Medium	Pink/Grey/Black	$55.98 F
8000075	(HD8203-L) Large	Pink/Grey/Black	$55.98 F
8000090	(HD8203-XL) X Large	Pink/Grey/Black	$55.98 F

FuzionX Ladies Neoprene Vests



- Zipper front with nylon buckles.
- PVC foam construction.
- Full body belt/buckle design.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000175	(HD8206-S) Small	Grey/Pink	$54.98 H
8000170	(HD8206-M) Medium	Grey/Pink	$54.98 H
8000165	(HD8206-L) Large	Grey/Pink	$54.98 H
8000180	(HD8206-XL) X Large	Grey/Pink	$54.98 H

©2014 Donovan Marine, Inc.

Omega Extreme Sport Neoprene Vests

OMEGA



- Type III.
- USCG Approved.
- High performance neoprene jacket for all types of watersports.
- 1.5 mm thick premium neoprene (Inner and Outer layer).
- Full body neoprene for maximum comfort and protection.
- 2 body belts with 1 adjustable belts and YKK buckle and zipper.
- Deep armhole for superior range of motion.
- Super strong stitching for maximum durability.
- Infant size fits infants less than 30 lbs.

Order No.	Mfg. No. / Size	Color	Price
593852	(40501-INF) Infant	Blue	$73.98 G
593854	(40501-CLD) Child	Blue	$73.98 G
593856	(40501-YTH) Youth	Blue	$73.98 G
593858	(40501-S) Small	Blue	$77.98 G
593860	(40501-M) Medium	Blue	$77.98 G
593862	(40501-L) Large	Blue	$77.98 G
593864	(40501-XL) X Large	Blue	$77.98 G
593866	(40501-2X) XX Large	Blue	$77.98 G
593870	(40502-INF) Infant	Red	$73.98 G
593872	(40502-CLD) Child	Red	$73.98 G
593874	(40502-YTH) Youth	Red	$73.98 G
593876	(40502-S) Small	Red	$77.98 G
593878	(40502-M) Medium	Red	$77.98 G
593880	(40502-L) Large	Red	$77.98 G
593882	(40502-XL) X Large	Red	$77.98 G
593884	(40502-2X) XX Large	Red	$77.98 G

Omega Multi-Sport Vests

OMEGA



- USCG Approved.
- Type III.
- Designed for comfort, this watersports vest is light weight without sacrificing performance and durability.
- Soft feel 150 denier polyester fabric.
- 1 Adjustable belts and chest strap for a snug fit and complete mobility.
- Popular bright colors for increased visibility.
- Infant vest fits infants 0 - 50 lbs.
- Infant/Child/Youth vests have closed sides.

Order No.	Mfg. No. / Size	Color	Price
593762	(40301-INF) Infant	Blue	$23.98 G
593764	(40301-CLD) Child	Blue	$23.98 G
593766	(40301-YTH) Youth	Blue	$23.98 G
593768	(40301-UNV) Universal Adult	Blue	$25.98 G
593770	(40301-OS) Oversized Adult	Blue	$25.98 G
593774	(40302-INF) Infant	Red	$23.98 G
593776	(40302-CLD) Child	Red	$23.98 G
593778	(40302-YTH) Youth	Red	$23.98 G
593780	(40302-UNV) Universal Adult	Red	$25.98 G
593782	(40302-OS) Oversized Adult	Red	$25.98 G
593786	(40303-INF) Infant	Yellow	$23.98 G
593788	(40303-CLD) Child	Yellow	$23.98 G
593790	(40303-YTH) Youth	Yellow	$23.98 G
593792	(40303-UNV) Universal Adult	Yellow	$25.98 G
593794	(40303-OS) Oversized Adult	Yellow	$25.98 G

Omega Extreme Sport Vests

OMEGA



- Adult Type III.
- USCG Approved.
- Stylish performance watersports vest with features that set it apart.
- Increased durability and soft foam allows for maximum mobility without sacrificing performance.
- 200 denier polyester.
- All sizes feature closed sides.
- 1 adjustable belts, chest strap and D-ring.
- Perfect for skiing, wakeboarding, boating, fishing or just cruising across the water.

Order No.	Mfg. No. / Size	Color	Price
593812	(40401-XS) X Small	Blue	$34.98 G
593814	(40401-S/M) Small/Medium	Blue	$34.98 G
593816	(40401-L/XL) Large/X Large	Blue	$34.98 G
593818	(40401-2X/3X) XX Large/XXX Large	Blue	$34.98 G
593822	(40402-XS) X Small	Red	$34.98 G
593824	(40402-S/M) Small/Medium	Red	$34.98 G
593826	(40402-L/XL) Large/X Large	Red	$34.98 G
593828	(40402-2X/3X) XX Large/XXX Large	Red	$34.98 G
593832	(40403-XS) X Small	Yellow	$34.98 G
593834	(40403-S/M) Small/Medium	Yellow	$34.98 G
593836	(40403-L/XL) Large/X Large	Yellow	$34.98 G
593838	(40403-2X/3X) XX Large/XXX Large	Yellow	$34.98 G

Tighten Up 3-Belt General Purpose Vests



- Economic Type III PFD.
- Two adjustable body belts and an adjustable chest strap.
- Open sided design.
- Soft PE foam.

Order No.	Size	Color	Price
8-0687	30" - 52" Chest	Green/Black	$19.98 G
8-0688	30" - 52" Chest	Green/Black (4 Pack)	$85.98 G

Tighten Up 3-Belt General Purpose Vest



- Specifically designed for the general boating family who is looking for comfort, style and safety in an affordable vest.
- Features: 200 denier nylon oxford fabric outer, all PE foam construction, USCG Approved.

Order No.	Size	Color	Price
8-0550	Infant, Less than 30 lbs.	Fire Red/Blue	$18.98 G

Tighten Up 4-Belt Competition Ski Vest



- Individually sized for a true fit.
- Features: four 1-1/2" wide belts for secure comfort, longer, tapered body fit and oversized arm openings, all PVC foam, USCG Approved Type III.

Order No.	Size	Color	Price
7-1690	32" - 36" Chest	Blue/Black/White	$38.98 G

FuzionX Mens Nylon Ski Vests





- 200 Denier nylon oxford outer.
- Individual sizes for men.
- 4-belt/buckle design.
- Quick release buckle.

Order No.	Mfg. No. / Size	Color	Price
8000230	(HD8215-XS) X Small	Red/Grey	$36.98 H
8000220	(HD8215-S) Small	Red/Grey	$36.98 H
8000215	(HD8215-M) Medium	Red/Grey	$36.98 H
8000210	(HD8215-L) Large	Red/Grey	$36.98 H
8000225	(HD8215-XL) X Large	Red/Grey	$36.98 H
8000235	(HD8215-XXL) XX Large	Red/Grey	$36.98 H
8000205	(HD8215-3XL) XXX Large	Red/Grey	$36.98 H

FuzionX GP Life Vests





- 200 Denier nylon oxford shell.
- All PE foam construction.
- USCG Approved.
- Infant/Child come with crotch strap.
- Infant features pop-up pillow for extra head support.

Order No.	Mfg. No. / Size	Color	Price
5925220	(3600-9431) Infant, 0 - 50 lbs.	Yellow	$23.98 H
5925130	(3332-9431) Child, 30 - 50 lbs.	Yellow	$20.98 H
5925150	(3352-9431) Youth, 50 - 90 lbs.	Yellow	$21.98 H
5925170	(3570-9431) 30" - 52" Chest	Yellow	$22.98 H
5925190	(3580-9431) 40" - 60" Chest	Yellow	$22.98 H
5925215	(3600-9430) Infant, 0 - 50 lbs.	Red	$23.98 H
5925125	(3332-9430) Child, 30 - 50 lbs.	Red	$20.98 H
5925145	(3352-9430) Youth, 50 - 90 lbs.	Red	$21.98 H
5925165	(3570-9430) 30" - 52" Chest	Red	$22.98 H
5925185	(3580-9430) 40" - 60" Chest	Red	$22.98 H

FuzionX 4-Belt Ski Vests





- 200 Denier nylon oxford shell.
- All PE foam construction.
- USCG Approved.
- 4-Belt with quick release design.

Order No.	Mfg. No. / Size	Color	Price
5925095	(2600-9434) Infant	Yellow/Black	$23.98 H
5925370	(4601-9434) Child	Yellow/Black	$22.98 I
5925390	(4602-9434) Youth	Yellow/Black	$24.98 H
5925400	(4770-9434) Adult, X Small	Yellow/Black	$30.98 H
5925410	(4771-9434) Adult, Small/Medium	Yellow/Black	$30.98 H
5925420	(4772-9434) Adult, Large/X Large	Yellow/Black	$30.98 H
5925430	(4773-9434) Adult, XX Large	Yellow/Black	$31.98 H
5925440	(4774-9434) Adult, XXX Large	Yellow/Black	$30.98 H
5925100	(2600-9435) Infant	Red/Black	$23.98 H
5925375	(4601-9435) Child	Red/Black	$22.98 I
5925395	(4602-9435) Youth	Red/Black	$24.98 H
5925405	(4770-9435) Adult, X Small	Red/Black	$30.98 H
5925415	(4771-9435) Adult, Small/Medium	Red/Black	$30.98 H
5925425	(4772-9435) Adult, Large/X Large	Red/Black	$31.98 H
5925435	(4773-9435) Adult, XX Large	Red/Black	$31.98 H
5925445	(4774-9435) Adult, XXX Large	Red/Black	$30.98 H

FuzionX Ladies Nylon Ski Vests





- Heavy duty nylon outer shell.
- PVC/PE foam construction.
- Individually sized for women.
- Quick release buckles.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000255	(HD8217-XS) X Small	Purple/Black	$35.98 H
8000250	(HD8217-S) Small	Purple/Black	$35.98 H
8000245	(HD8217-M) Medium	Purple/Black	$35.98 J
8000240	(HD8217-L) Large	Purple/Black	$35.98 H

Revere General Purpose Lifejacket



- Type III PFD.
- Open sides.
- Two adjustable body belts.

Order No.	Mfg. No. / Size	Color	Price
8-9066	(23700FBLAU) 30" - 52" Chest	Hunter Green	$19.98 G

©2014 Donovan Marine, Inc.

Omega All Purpose Vests

OMEGA



- USCG Approved.
- Type III.
- Provides comfort and safety for all types of water activities.
- 150 denier polyester construction with adjustable belts for a secure fit.
- Lightweight and durable foam fits snug and won't limit your mobility.
- Open-sided styling for adjustability.
- Large armholes for greater mobility.
- Infant vest has closed sides to eliminate possible strap chafing.
- Infant vest includes a leg strap, heads up pillow, and grab strap for quick retrieval (Fits infants less than 50 lbs.). Type II.
- Child vest features a leg strap for added safety (Fits children 30-50 lbs.). Type III.
- Youth vest fits 50 - 90 lbs. Type III.

Order No.	Mfg. No. / Size	Color	Price
593726	(40201-INF) Infant	Blue	$20.98 G
593728	(40201-CLD) Child	Blue	$20.98 G
593730	(40201-YTH) Youth	Blue	$20.98 G
593732	(40201-UNV) Universal Adult	Blue	$23.98 G
593734	(40201-OS) Oversize Adult	Blue	$23.98 G
593738	(40202-INF) Infant	Red	$20.98 G
593740	(40202-CLD) Child	Red	$20.98 G
593742	(40202-YTH) Youth	Red	$20.98 G
593744	(40202-UNV) Universal Adult	Red	$23.98 G
593746	(40202-OS) Oversize Adult	Red	$23.98 G

Omega 4 Pack All Purpose Vests

OMEGA



- Storage bag with four blue All Purpose Vests.
- Keeps your vests in one place and provides convenient storage.
- Contains four adult universal sized Type III USCG Approved Life Jackets.
- Convenient strap for carrying ease.

Order No.	Mfg. No. / Description	Price
593733	(40201-UNVPK) Blue, 4 Pack	$107.98 G

Revere General Purpose Vest

REVERE



- Zippered front.
- Open sides.
- Type III PDF.

Order No.	Mfg. No. / Size	Color	Price
8-9204	(23-C700-AU) Small/Medium	Red	$20.98 G

Revere WavePro Adult PFD

REVERE



- Two adjustable body belts and one chest strap.
- Closed sides.
- Soft PE foam.
- Type III.

Order No.	Mfg. No. / Size	Color	Price
8-9011	(23615GGR03) Small	Green/Gray	$25.98 G
8-9016	(23625OGR07) Large/X Large	Orange/Gray	$25.98 G
8-9024	(232340BBLXS) X Small	Blue/Black	$25.98 G
8-9023	(232340BBLSM) Small/Medium	Blue/Black	$25.98 G
8-9025	(232340RDBLSM) Small	Red/Black	$25.98 G

Revere Adult Economy PFD

REVERE



- Two adjustable body belts and one chest strap.
- Open sides.
- Soft PE foam.
- Type III.

Order No.	Mfg. No. / Size	Color	Price
8-9051	(23775EGRAU) Universal	Teal	$19.98 G
8-9056	(23778EGRAM) X Large	Teal	$19.98 G
8-9053	(23775EYLAU) Universal	Yellow	$19.98 G
8-9058	(23778EYLAM) X Large	Yellow	$19.98 G
8-9064	(23747FGBAU) Universal	Green	$19.98 G

Revere Roscoe Paddling Vests

REVERE



- Angled zip closure with secureable pull tab is easy to put on.
- Adjustable shoulder straps for a perfect fit.
- Belt buckle secures jacket in place when submerged.
- Closed elastic sides for comfort and secure fit.
- Two side adjustment tabs.
- Two gusseted storage pockets.
- Beveled PVC foam with 200 denier nylon outer fabric.
- Lash tab.

Order No.	Mfg. No. / Size	Color	Price
8-9150	(23995RDB03) Small/Medium	Red/Black	$53.98 G
8-9153	(23996RDB07) Large/X Large	Red/Black	$53.98 G
8-9151	(23995YLB03) Small/Medium	Yellow/Black	$53.98 G
8-9154	(23996YLB07) Large/X Large	Yellow/Black	$53.98 G
8-9152	(23995BBUSM) Small/Medium	Blue/Black	$53.98 G
8-9155	(23996BBULX) Large/X Large	Blue/Black	$53.98 G

Revere River Pro Paddling Vests

REVERE



- Sturdy 500 Denier Cordura Fabric.
- Eco-friendly NBR foam.
- Adjustable shoulder straps.
- Two front gusseted pockets with buckles.
- Mesh sides for comfort.
- Hang loop for easy storage.

Order No.	Mfg. No. / Size	Color	Price
8-9137	(237510YLB00) X Small	Yellow	$84.98 G
8-9138	(237510YLB03) Small/Medium	Yellow	$84.98 G
8-9139	(237510YLB07) Large/X Large	Yellow	$84.98 G
8-9140	(237510YLB10) XX Large	Yellow	$84.98 G
8-9141	(237510RDB00) X Small	Red	$84.98 G
8-9142	(237510RDB03) Small/Medium	Red	$84.98 G
8-9143	(237510RDB07) Large/X Large	Red	$84.98 G
8-9144	(237510RDB10) XX Large	Red	$84.98 G
8-9145	(237510ORB00) X Small	Orange	$84.98 G
8-9146	(237510ORB03) Small/Medium	Orange	$84.98 G
8-9147	(237510ORB07) Large/X Large	Orange	$84.98 G
8-9148	(237510ORB10) XX Large	Orange	$84.98 G

Revere Kayak Vest

REVERE



- Two belt with leg strap.
- Type III.

Order No.	Mfg. No. / Size	Color	Price
8-9201	(23-790RBL-SM) Child	Red/Black	$23.98 G

Kent ONYX Full Throttle Fishing Vests

Kent



- Comfortable, high performance angling vest.
- Soft, fiber-fill collar lined w/fleece, reduces neck irritation & provides added protection from wind & cold.
- Generously sized, triple-layer storage pockets, lined w/fleece for warmth,with attached hook & loop security flap.
- Comfortable & durable flotation foam.
- D-ring attachment.
- Reflective material on front & back provides nighttime visibility.
- Type III.

Order No.	Mfg. No. / Size	Color	Price
5925510	(7673-9349) Medium, 36" - 40"	Blue/Black	$62.98 M
5925520	(7674-9349) Large, 40" - 44"	Blue/Black	$62.98 R
5925530	(7675-9349) X Large, 44" - 48"	Blue/Black	$62.98 R
5925540	(7676-9349) XX Large, 48" - 52"	Blue/Black	$65.98 H
589018	(7673-9348) Medium, 36" - 40"	Red/Black	$74.98 G
592483	(7674-9348) Large, 40" - 44"	Red/Black	$74.98 G
5925525	(7675-9348) X Large, 44" - 48"	Red/Black	$62.98 R
592508	(7676-9348) XX Large, 48" - 52"	Red/Black	$82.98 G
5925550	(7677-9348) XXX Large, 52" - 56"	Red/Black	$65.98 H
5925555	(7678-9348) XXXX Large, 56" - 60"	Blue/Black	$65.98 H

Revere Cutback 260 Premium Whitewater Lifejackets

REVERE



- Sturdy 500 Denier Cordura fabric.
- 11 points of adjustment.
- Extra long hang loop.
- Double tacked shoulders and headrest for extra tensile strength.
- Large, highly visible headrest.
- Dark fabric and materials hide stains at very high contact-to-skin area.

Order No.	Mfg. No. / Size	Color	Price
8-9174	(25260BORAU) Adult	Blue/Orange	$129.98 G
8-9175	(25260BRDAU) Adult	Blue/Red	$129.98 G
8-9176	(25260RIOAU) Adult	Rios Tropical	$129.98 G

Revere River Pro Economy Whitewater Lifejackets

REVERE



- Steadfast Economy Type V Whitewater Jacket.
- Sturdy 500 Denier Cordura fabric.
- Three adjustment belts.
- Sturdy Type V buckles.
- Shoulder reflective tape.
- Black interior to hide wear.
- PE Foam.

Order No.	Mfg. No. / Size	Color	Price
8-9180	(25211OBUY) Youth	Orange/Blue	$89.98 G
8-9178	(25210OBUAU) Adult	Orange/Blue	$89.98 G
8-9179	(25210OORAU) Adult	Orange	$89.98 G
8-9181	(25215OBUXL) X Large	Orange	$89.98 G

Kent Advantage Max-4 Camo Vests

Kent



- A comfortable angling vest providing fit and function.
- Mesh shoulders and back for maximum air flow to keep you cool and comfortable.
- Adjustable belts for secure fit, and to keep vest from riding up or shifting.
- Large armholes provide unlimited freedom of movement.
- D-ring attachment.
- USCG Approved Type III Life Jacket / Personal Flotation Device (PFD).

Order No.	Mfg. No. / Size	Color	Price
5925590	(9374-9346) Large, 40" - 44"	Camo	$38.98 F
5925595	(9375-9346) X Large, 44" - 48"	Camo	$38.98 F
5925600	(9376-9346) XX Large, 48" - 52"	Camo	$38.98 F
5925605	(9377-9346) XXX Large, 52" - 56"	Camo	$38.98 F
5925610	(9378-9346) XXXX Large, 56" - 60"	Camo	$38.98 F

©2014 Donovan Marine, Inc.

Omega Angler Type III Fishing Vests

OMEGA



- For the fisherman looking for style, comfort and value .
- Roomy pocket to keep fishing necessities close at hand.
- Lightweight, durable foam contours to your body and won't hinder your mobility.
- D-ring attachment for small accessories.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
593938	(40605-UNV) Universal Adult	Green	$28.98 G
593940	(40605-OS) Oversize Adult	Green	$28.98 G
593944	(40606-UNV) Universal Adult	Tan	$28.98 G
593946	(40606-OS) Oversize Adult	Tan	$28.98 G

Revere Anglers Vests

REVERE



- Mesh shoulders and back for comfort.
- Two gusseted drainable pockets and sham allow for ample storage of lures and other accessories.
- Four side adjustment tabs.
- Two lash tabs and D-ring.

Order No.	Mfg. No. / Size	Color	Price
8-9123	(232210FBLSM) Small/Medium	Hunter Green	$58.98 G
8-9124	(232210FBLLX) Large/X Large	Hunter Green	$58.98 G
8-9125	(232210FBL23) XX Large/XXX Large	Hunter Green	$58.98 G

FuzionX Child/Youth Neoprene Vests



- PE foam construction.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000200	(HD8208-Y) Child	Yellow/Grey/Black	$34.98 H
8000190	(HD8207-Y) Youth	Yellow/Grey/Black	$41.98 H

FuzionX Child/Youth Neoprene Vests



- PE foam construction.
- USCG Approved.

Order No.	Mfg. No. / Size	Color	Price
8000195	(HD8208-R) Child	Red/Grey/Black	$34.98 H
8000185	(HD8207-R) Youth	Red/Grey/Black	$41.98 H

Omega Camouflage Fishing Vests

OMEGA



- USCG Approved.
- For the fisherman looking for style, comfort and value.
- Roomy pocket to keep fishing necessities close at hand.
- Lightweight, durable foam contours to your body and wont hinder your mobility.
- D-ring attachment for small accessories.

Order No.	Mfg. No. / Size	Price
593950	(40607-UNV) Adult	$38.98 G
593952	(40607-OS) Adult Oversize	$38.98 G

Revere Huntsman's Life Vest

REVERE



- Type III.
- Buoyancy 15.5 pounds/ 70 newtons.
- Two gusseted storage pockets.
- Deep neckline and large armholes for comfort.
- Four side adjustable tabs.
- Center zipper D-ring.

Order No.	Mfg. No. / Size	Color	Price
8-9127	(23801TBLSM) Small/Medium	Tan	$25.98 G

Revere Sportsman General Purpose Vest

REVERE



- Two adjustable body belts.
- Open sides.
- Type III PFD.

Order No.	Mfg. No. / Size	Color	Price
8-9067	(237000FGBL) 30" - 52" Chest	Hunter Green	$19.98 G

FuzionX "Baby Safe" Vests



- For infants up to 30 lbs.
- 200 Denier Nylon Oxford Shell.
- Elasticized fabric crotch for snug & comfortable fit.
- Grab strap for easy recovery.

Order No.	Mfg. No. / Size	Color	Price
5925085	(1600-9432) Infant	Bubblegum	$20.98 H
5925090	(1600-9433) Infant	Royal Blue	$20.98 H

Omega Character Vests - Infant and Child

OMEGA



- Type III.
- USCG Approved.
- Infant vest fits: Infants less than 50 lbs.
- Child vest fits: 30 - 50 lb. children.
- Bright, colorful characters your child would love to wear.
- Adjustable belts, chest strap, and leg strap to keep vest from riding up or shifting.
- Lightweight, durable foam for comfort movement and mobility.
- Made of soft, lightweight 150 denier polyester fabric.

Order No.	Mfg. No. / Description	Price
593702	(40220-INF) Infant Vest - Floral	$26.98 G
593704	(40220-CLD) Child Vest - Floral	$26.98 G
593706	(40221-INF) Infant Vest - Sea Friends	$26.98 G
593708	(40221-CLD) Child Vest - Sea Friends	$26.98 G
593710	(40222-INF) Infant Vest - Pirate	$26.98 G
593712	(40222-CLD) Child Vest - Pirate	$26.98 G
593714	(40223-INF) Infant Vest - Captain Omega	$26.98 G
593716	(40223-CLD) Child Vest - Captain Omega	$26.98 G

Revere KidMax™ for Infants

REVERE



- One adjustable body belt and one chest strap with zipper.
- Flotation collar with grab strap.
- Adjustable leg strap.
- Closed sides.
- Soft PVC foam.
- Type II.
- Infant: 0 - 50 lbs.

Order No.	Mfg. No. / Description		Price
8-9099	(22411SRBIF) Boy	Red/Blue Striped	$23.98 G
8-9100	(22411SYRIF) Boy	Yellow/Red Striped	$23.98 G
8-9101	(22411LFBIF) Boy	Blue with Tropic Leaves	$23.98 G
8-9116	(22411HUTIF) Girl	Teal with Tropic Leaves	$23.98 G
8-9117	(22411DDPIF) Girl	Dark Pink with Polka Dots	$23.98 G
8-9118	(22411PLKIF) Girl	Light Pink Plaid	$23.98 G
8-9119	(22411DPKIF) Girl	Light Pink with Polka Dots	$23.98 G
8-9120	(22411PLPIF) Girl	Dark Pink Plaid	$23.98 G

Revere WavePro Infant PFD

REVERE



- One adjustable body belt and one chest strap.
- Closed sides.
- Soft PE foam.
- Flotation collar with grab strap.
- Adjustable leg strap.
- Infant: 0 - 50 lbs.
- Type II.

Order No.	Mfg. No. / Description	Price
8-9043	(224111BGRIF) Blue/Gray	$18.98 G
8-9044	(224111GGRIF) Green/Gray	$18.98 G
8-9045	(224111OGRIF) Orange/Gray	$18.98 G
8-9046	(224111YGRIF) Yellow/Gray	$18.98 G

Revere Economy Infant PFD

REVERE



- One adjustable body belt and one chest strap.
- Closed sides.
- Soft PE foam.
- Flotation collar with grab strap.
- Adjustable leg strap.
- Infant: 0 - 50 lbs.
- Type II.

Order No.	Mfg. No. / Description	Price
8-9083	(22411EBLIF) Blue	$18.98 G
8-9084	(22411EGRIF) Teal	$18.98 G
8-9085	(22411ERDIF) Red	$18.98 G
8-9086	(22411EYLIF) Yellow	$18.98 G

Revere KidMax™ for Children

REVERE



- One adjustable body belt and one chest strap with zipper.
- Flotation collar with grab strap.
- Adjustable leg strap.
- Closed sides.
- Soft PVC foam.
- Type II.
- Child: 30 - 50 lbs.

Order No.	Mfg. No. / Description	Price
8-9095	(22418SRBC) Boy	Red/Blue Striped	$23.98 G
8-9096	(22418SYRC) Boy	Yellow/Red Striped	$23.98 G
8-9097	(22418LFBC) Boy	Blue with Tropic Leaves	$23.98 G
8-9110	(22418HUTC) Girl	Teal with Tropic Leaves	$23.98 G
8-9111	(22418DDPC) Girl	Dark Pink with Polka Dots	$23.98 G
8-9112	(22418PLKC) Girl	Light Pink Plaid	$23.98 G
8-9113	(22418DPKC) Girl	Light Pink with Polka Dots	$23.98 G
8-9114	(22418PLPC) Girl	Dark Pink Plaid	$23.98 G

©2014 Donovan Marine, Inc.

Revere WavePro Youth PFD



- Two adjustable body belts.
- Soft PE foam.
- Open sides.
- Youth: 50 - 90 lbs.
- Type III.

Order No.	Mfg. No. / Description	Price
8-9027	(234071BGRY) Blue/Gray	$18.98 G
8-9028	(234071GGRY) Green/Gray	$18.98 G
8-9029	(234071OGRY) Orange/Gray	$18.98 G
8-9030	(234071YGRY) Yellow/Gray	$18.98 G
8-9026	(23-407-XXL-Y) Yellow/Black	$24.98 G

Revere WavePro Child PFD



- One adjustable body belt and one chest strap with zipper.
- Closed sides.
- Soft PE foam.
- Flotation collar with grab strap.
- Adjustable leg strap.
- Child: 30 - 50 lbs.
- Type II.

Order No.	Mfg. No. / Description	Price
8-9034	(224181BGRC) Blue/Gray	$18.98 G
8-9035	(224181GGRC) Green/Gray	$18.98 G
8-9036	(224181OGRC) Orange/Gray	$18.98 G
8-9037	(224181YGRC) Yellow/Gray	$18.98 G
8-9041	(2321024244C) Blue/Black/White	$18.98 G

Revere KidMax™ for Youth Girls



- Two adjustable body belts.
- Open sides.
- Soft PVC foam.
- Type III.
- Youth: 50 - 90 lbs.

Order No.	Mfg. No. / Description	Price
8-9104	(23407HUTY) Teal with Tropic Leaves	$21.98 G
8-9105	(23407DDPY) Dark Pink with Polka Dots	$21.98 G
8-9106	(23407PLKY) Light Pink Plaid	$21.98 G
8-9107	(23407DPKY) Light Pink Polka Dot	$21.98 G
8-9108	(23407PLPY) Dark Pink Plaid	$21.98 G

Revere Economy Child PFD



- One adjustable body belt and one chest strap with zipper.
- Closed sides.
- Soft PE foam.
- Flotation collar with grab strap.
- Adjustable leg strap.
- Type II.
- Child: 30 - 50 lbs.

Order No.	Mfg. No. / Description	Price
8-9079	(22418EBLC) Blue	$18.98 G
8-9080	(22418EGRC) Teal	$18.98 G
8-9081	(22418ERDC) Red	$18.98 G
8-9076	(23408OYLC) Orange/Yellow	$18.98 G

Revere Economy Youth PFD



- Two adjustable body belts.
- Open sides.
- Soft PE foam.
- Type III.
- Youth: 50 - 90 lbs.

Order No.	Mfg. No. / Description	Price
8-9069	(23407EBLY) Blue	$18.98 G
8-9070	(23407EGRY) Teal	$18.98 G
8-9072	(23407EYLY) Yellow	$18.98 G
8-9071	(23407ERDY) Red	$18.98 G

Revere KidMax™ for Youth Boys



- Two adjustable body belts.
- Open sides.
- Soft PVC foam.
- Type III.
- Youth: 50 - 90 lbs.

Order No.	Mfg. No. / Description	Price
8-9090	(23407SRBY) Red/Blue Striped	$21.98 G
8-9091	(23407SYRY) Yellow/Red Striped	$21.98 G
8-9092	(23407LFBY) Blue with Tropic Leaves	$21.98 G

Revere Starbaby Life Vests



- 2 Adjustment straps.
- Open sides.
- Soft PE foam.

Order No.	Mfg. No. / Description	Color	Price
8-9187	(22418STBC) Child 30 - 50 lbs.	Blue	$23.98 G
8-9184	(23407STBY) Youth 50 - 90 lbs.	Blue	$21.98 G
8-9185	(23407STGY) Youth 50 - 90 lbs.	Green	$21.98 G

Omega Throwable Foam Cushions



- Type IV - USCG Approved.
- 7 colors available.
- Make sure your boat is legal with this U.S. Coast Guard approved throwable flotation cushion.
- Convenient webbing grab straps for aid in throwing during rescue and double as convenient carry handles.
- Functional and comfortable PE foam.
- Strong, durable outer shell withstands abrasions.

Order No.	Mfg. No. / Description	Price
586757	(40101) Blue	$13.98 G
586769	(40102) Red	$13.98 G
586783	(40103) Yellow	$13.98 G
586777	(40104) White	$13.98 G
586785	(40105) Green	$13.98 G
586822	(40107) Camo, Mossy Oak	$22.98 G

Mustang Survival M.I.T. 22 Inflatable PFD



- Proving good designs never go out of style, we're bringing back a tried-and-true favorite - the first inflatable PFD ever designed by Mustang.
- Lighter, simpler and all-around better, this little PFD packs a lot of benefits into its stylish figure.
- Using M.I.T. Membrane Inflatable Technology - this inflatable PFD is 20% lighter than competitors' products.
- Utilizing an innovative membrane, the inflation cell takes up very little space when uninflated, but quickly stretches to fit the CO2 when activated to provide more flotation than most foam vests.

Order No.	Mfg. No. / Description	Price
350567	(MD2010BL) Manual Royal Blue	$146.98 F

Mustang Survival M.I.T. 100 Inflatable PFDs



- A premium product at an affordable price
- Designed with style.
- Easy to wear and easy to use inflatable PFD.
- Membrane Inflatable Technology inside to reduce product weight and create a lighter and more flexible fit.

Order No.	Mfg. No. / Description	Price
350568	(MD2016BLUE) Blue	$202.98 E
350569	(MD2016GRN) Green	$202.98 E

Kwik Tek Camo Boat Cushion



- Constructed with a heavy-duty fabric cover over multiple layers of buoyant foam.
- Equipped with two polyethylene straps.
- Approved type IV throwable device.

Order No.	Mfg. No. / Description	Price
5925580	(8082-0345) Camo	$17.98 E

Revere SportMax Inflatable PFD



- Type III Inflatable.
- Designed for persons of weights greater than 80 lbs. and chest sizes between 30" - 52".
- 22 lbs. of buoyancy.
- 400 Denier nylon cover.
- Chamber: Urethane Coated 210 Denier nylon.
- Nylon closure.
- 1" wide webbing and 1" buckle.
- Halkey-Roberts 1F Automatic Inflation (auto models).
- Corporal 3F Manual Inflation (manual models).
- Co2: 25gram Co2 cylinder.
- Clear status window.
- Back-up oral inflator.
- Includes rescue whistle and lanyard.
- 625 cubic inch inflated volume.
- Rearm kits available for all models.
- Weighs only 1 lb.

Order No.	Mfg. No. / Description	Price
586238	(561245001DR) Red	$144.98 G

Revere Re-Arm Kits

Order No.	Mfg. No. / Description	Price
586245	(45-RAKA) Fits ComfortMax Inflatable PFD	$35.98 F
586246	(45-61236-101) Fits SportMax Vest, Automatic	$26.98 F
586247	(45-61116-101) Fits SportMax Vest, Manual	$26.98 F

Mustang Deluxe Inflatable PFDs



- 35 lb. of buoyancy when inflated.
- Safety inspection window - window allows user to easily inspect inflator status.
- Lightweight design for high mobility and allows PFD to be easily worn over a shirt or jacket.
- Durable nylon construction.
- Comfortable neoprene collar eliminates neck irritation.

Order No.	Mfg. No.	Description	Price
350594	(MD3085)	Manual Activation, Navy/Carbon	$248.98 F
350607	(MD3087)	Automatic Activation, Navy/Carbon	$304.98 F
350633	(MA7202)	Re-Arm Kit for 350607	$44.98 E

©2014 Donovan Marine, Inc.

Mustang Manual Inflatable Re-Arm Kit



- The Manual Inflatable Re-Arm Kit contains everything necessary to re-arm your Mustang Manual Inflatables after deployment.
- For model numbers: MD116, MD3000, MD3003, MD3004, MD3020, MD3025 and MD3091.

Order No.	Mfg. No. / Description	Price
350619	(MA7170) Re-Arm Kit	$27.98 E

Mustang Automatic Inflatable Re-Arm Kit



- The Automatic Inflatable Re-Arm Kit contains everything necessary to re-arm your Mustang Automatic Inflatables after deployment.
- The automatic inflator bobbin on all automatic PFDs should be replaced on a regular basis.
- For model numbers: MD3001, MD3002, MD3017, MD3019, MD3031 and MD3032.

Order No.	Mfg. No. / Description	Price
350621	(MA7270) Re-Arm Kit	$37.98 E

Omega Standard Yoke Vests



- Essential for your everyday boating needs and every canoe livery operation.
- Standard boxed yoke unit hangs for easy drying.
- USCG Approved Type II PFD.
- Color: Yellow.

Order No.	Mfg. No. / Description		Price
586696	(40003-CLD) Infant/Child	0 - 50 lbs.	$9.98 G
586694	(40003-YTH) Youth	50 - 90 lbs.	$9.98 G
586692	(40003-UNV) Adult	Over 90 lbs.	$9.98 G
586690	(40003-OS) Adult X Large	Over 90 lbs.	$9.98 G

Safegard Standard Yoke Vests



- Essential for your everyday boating needs and every canoe livery operation.
- Standard boxed yoke unit hangs for easy drying.
- USCG Approved Type II PFD.
- Color: Orange.

Order No.	Mfg. No. / Description		Price
586644	(AK-1XL) Adult Magnum	Over 90 lbs.	$9.98 G
586666	(AK-1) Adult	Over 90 lbs.	$9.98 G
586670	(MK-1) Youth	50 - 90 lbs.	$9.98 G
586682	(SK-1) Child	Under 50 lbs.	$9.98 G

Survitec Mesh Industrial Vests



- Lightweight and durable mesh on the upper half and body contoured fabric covered foam panels on lower half.
- Design allows for ease of movement.
- Includes: A durable YKK #10 zipper, reflective tape stripping, (2) side adjustments, (2) front gusseted pockets, (2) lash tabs and D-ring for gear attachment.
- USCG Approved Type III Flotation Vest, CFR 160.064 compliant.

Order No.	Mfg. No. / Description	Price
585971	(2210) Large/X Large, 40" - 50" Chest	$61.98 F
585983	(2210) XX Large/XXX Large, 50" - 60" Chest	$61.98 F

Omega Sup Safe



- Designed to Satisfy US Coast Guard personal flotation device requirements for Stand Up Paddleboards, Kayaks, and Canoes.
- Includes a US Coast Guard Type II PFD.
- Attaches to the board with included suction cups.
- Bag can be used as a backpack and includes extra-large storage pocket.
- Includes a safety whistle.

Order No.	Mfg. No. / Description	Price
586550	(50040)	$32.98 G

Stearns Work Zone Gear™ Life Vests



- Designed with soft, lightweight mesh on the upper half of the vest.
- Tough nylon oxford outer shell.
- Two encircling body straps with zipper front.
- Two pockets with hook and loop closure.
- Lightweight durable Crosstech floatation foam.
- D-rings for attaching gear.
- Features 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630562	(I424-ORG-03-000) Medium	$66.98 F
630574	(I424-ORG-04-000) Large	$66.98 F
630586	(I424-ORG-05-000) X Large	$66.98 F
630598	(I424-ORG-06-000) XX Large	$66.98 F
630600	(I424-ORG-07-000) XXX Large	$66.98 F

Mustang Survival Industrial Mesh Vest



- Designed with large arm holes for broad mobility and mesh shoulders for cooling and comfort.
- The large front pocket with Velcro closure is great for storing supplies and materials, and the 32 square inches of SOLAS reflective tape across the front and back of the vest offers high visibility.
- Strength rated to 50 mph.

Order No.	Mfg. No. / Description	Color	Price
350670	(MV1254) Small/Medium	Orange	$80.98 F
350671	(MV1254) Large/X Large	Orange	$80.98 F
350672	(MV1254) XX Large/XXX Large	Orange	$80.98 F

Survitec Type I Commercial Vest

SURVITEC SURVIVAL PRODUCTS



- Reversible design allows for long life and metal hardware is strongest in the industry.
- CFR 160.055 compliant.
- Weather resistant 200 denier polyester shell withstands UV deterioration better than nylon.
- Heavy duty stainless steel hardware.
- Light loop and whistle attachment over shoulder.
- 126 square inches of SOLAS-grade reflective tape.
- PE foam provides 24 pound buoyancy.
- Adult, Over 90 lbs.

Order No.	Mfg. No.	Price
585996	(198RT)	$76.98 I

Stearns Work Master™ Life Vest



- Soft, comfortable closed-cell foam and encircling body belt with snag resistant buckle for quick adjustment.
- Now with belt tunnel to reduce snag hazard.
- Hinged back panel.
- Heavy duty nylon shell.
- Marine mesh inner lining for breathability.
- Flotation collar for added protection.
- 62 sq. in. of 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- 17-1/2 lbs. of buoyancy.
- USCG Approved Type III/V Work Vest.

Order No.	Mfg. No. / Description	Price
630512	(2000004520) Adult, Chest Size 30" - 52"	$88.98 F

Stearns Deck Hand II™ Life Vest



- Heavy duty flotation vest.
- 10 flotation panels for a contoured fit.
- Has rustproof Vislon zipper and heavy duty encircling body belt.
- Chest pocket with Velcro closure.
- Side adjustments.
- Tough nylon outer shell with marine mesh inner lining.
- 62 sq. in. of 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630524	(I416-ORG-03-000) Medium	$65.98 F

Omega General Purpose Industrial Vests

OMEGA



- 200 Denier polyester shell resists oil and UV deterioration.
- Large armholes and open sides for maximum comfort.
- Two 1 encircling body belts and one 1 chest strap.
- Retroreflective material on front and back.
- 15.5 lb. buoyancy.
- Type III USCG Approved.

Order No.	Mfg. No. / Description	Price
594202	(41000-UNV) Universal Adult	$38.98 F
594204	(41000-OS) Universal Oversize Adult	$38.98 F

Stearns The Versatile™ Life Vests



- Tough nylon shell with seven piece foam design for all-day comfort.
- Four roomy pockets with full hook and loop closures and a rustproof Vislon zipper.
- Multiple foam inserts for exceptional flexibility and freedom.
- Quick-adjust side tabs for secure fit.
- Features 3M Scotchlite Reflective Material SOLAS - grade 6755 for high visibility eyelets for attaching lights, badge, etc.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type IIII.

Order No.	Mfg. No. / Description	Price
630613	(I465-ORG-03-000) Medium	$105.98 F
630625	(I465-ORG-04-000) Large	$105.98 F
630637	(I465-ORG-05-000) X Large	$105.98 F
630649	(I465-ORG-06-000) XX Large	$105.98 F
630648	(I465-ORG-07-000) XXX Large	$109.98 F

Stearns First Mate™ Life Vest



- Four-pocket style flotation vest.
- Constructed of soft comfortable flotation foam for all-day wear.
- Adjustable side tabs for a quick contoured fit.
- Hook and loop closure on pockets.
- Sturdy D-rings.
- Strong Vislon zipper.
- Features 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630555	(I422-ORG-08-000) XXXX Large	$100.98 F

Survitec Type I Commercial Vests

SURVITEC SURVIVAL PRODUCTS



- Yoke-style flotation device.
- 22 lb. of buoyancy.
- 110 square inches of SOLAS-grade reflective tape.
- Reversible design for quick donning.
- Stackable for easy storage.
- Light loop and whistle attachment.
- USCG Approved Type I.

Order No.	Mfg. No. / Description	Price
586012	(160RT) Adult, Over 90 lbs.	$67.98 I
586013	(161RT) Child, Under 90 lbs.	$67.98 I
586000	(160RT-4PK) Adult, Over 90 lbs., 4-Pack	$158.98 F

Stearns I160 SOLAS Adult Vest



- Provides a minimum of 34 lbs. of buoyancy.
- Heavy duty hardware with an attached SOLAS whistle.
- Light storage pocket.
- Lifting loop.
- Buddy line.
- Complies with LSA Code 2003 Ed, MSC. 200(80) & tMED.
- Made in China.

Order No.	Mfg. No.	Price
630522	(20000011239)	$94.98 F

©2014 Donovan Marine, Inc.

Stearns Extension Straps for I160 SOLAS Adult Vest



- For use with I160 SOLAS Adult Vest.

Order No.	Mfg. No.	Price
436475	(3000001128) For 60" - 69" Chest Size	$16.98 F
436477	(3000001441) For Oversize Adults	$16.98 F

Survitec Type V Work Vest

SURVITEC SURVIVAL PRODUCTS



- Durable 200 denier polyester covering resists UV deterioration draws heat and sweat away from worker.
- SOLAS-grade reflective tape.
- Two encircling belts with snag-resistant buckles.
- USCG Approved Type V provides 17-1/2 lbs. flotation buoyancy, CFR 160.053 compliant.
- Universal sized work vest approved for chest ranges 32" to 54".

Order No.	Mfg. No.	Price
586202	(290EFRT)	$70.98 I

Stearns Force II™ Life Vest



- Rugged work vest for all-around industrial use.
- Aquafoam flotation foam retains buoyancy even when punctured.
- Delrin snap hooks and D-rings.
- Coated with strong, durable, easy to clean PVC.
- Opening on back to accommodate most brands of fall protection harnesses.
- Two encircling belts with snag resistant buckles.
- Uses 3M Scotchlite Reflective Material SOLAS - grade 3150-A PS with adhesive backing on panels.
- Self-extinguishing under ASTM1692-74.
- 17-1/2 lbs. of buoyancy.
- USCG Approved Type V.

Order No.	Mfg. No.	Price
630517	(I223ORG-00-000)	$57.98 F

Stearns Pockets for Force II™ Life Vest



- Set of two removable pockets to fit most models of vinyl dip work vests.
- Made from tough 600D polyester with reflective tape.
- Front pocket made to hold a knife, snacks, etc.
- Large back pockets to accommodate radio and battery equipment, etc.

Order No.	Mfg. No. / Description	Price
630518	(I223PKT-00-000)	$36.98 F

Stearns Solas Type I Child Life Vest



- I150ORG Child USCG/SOLAS approved.
- Weight: 33 lbs. to 95 lbs.
- Heavy-duty hardware with an attached SOLAS whistle.
- Light attachment.
- Lifting Loop.
- Buddy Line.
- Meets 2010 SOLAS requirements.
- Complies with LSA Code 2003 Ed, MSC, 200(80) and MED.
- Color: International Orange (ORG).

Order No.	Mfg. No.	Price
630520	(2000008503)	$81.98 F

Imperial Deluxe Ferry Boat PFD

IMPERIAL



- USCG/SOLAS Type I PFD designed to turn an unconscious person face-up.
- Foldable and stackage for easy storage.
- Ideal for cruise ships.
- Minimum 39 lbs of buoyancy.
- Fitted with a buddy line and a whistle.
- USCG and USCG SOLAS

Order No.	Mfg. No. / Description	Price
586208	(230RT)	$90.98 F

Survitec Vinyl Dip Work Vest

SURVITEC SURVIVAL PRODUCTS



- Rugged and durable vinyl-dipped work vest.
- Flotation foam retains buoyancy even when punctured.
- Acrylic layer sealant over PVC coating resists deterioration.
- 17-1/2 lbs. of buoyancy.
- Large opening on back panel accommodates most brands of fall protection harnesses.
- Two encircling belts with snag resistant buckles.
- Arnacell flotation foam.
- USCG Approved Type V Work Vest for 32" to 54" chest size range, CFR 160.053 compliant and CFR 1926.106 (OSHA) compliant.

Order No.	Mfg. No.	Price
585957	(280RT) Adult	$54.98 F

Taylortec Welding Ready Work Vest



- USCG approval no. 160.053/95/0.
- 17.5 lbs minimum buoyancy (78 newtons).
- This vest uses flame resistant webbing, thread, fabric and stainless steel hardware.
- Up to size 6XL, reflective tape, and custom silk screen stenciling.

Order No.	Mfg. No. / Description	Price
645701	(WV-9-C)	$66.98 I

Mustang Survival Inflatable Work Vest



- Approvals: USCG Type V / Work Vest USCG Type II.
- Provides 35 lb of buoyancy when inflated.
- 1F auto hydrostatic inflator technology protects against inadvertent inflation.
- 5-year maintenance-free inflator with status indicator window.
- Durable PU-coated nylon shell offers improved puncture and abrasion resistance.
- Custom-molded inflator cover reduces wear and protects inflator cap.
- SecureZip closure features recessed zipper to protect teeth from oil, grease and other contaminants.
- Retro-reflective SOLAS Tape on front & back outer shell.
- Strobe light holder, safety whistle and additional SOLAS reflective tape visible when inflated.
- Includes back-up oral inflation tube.
- Universal Adult [16 yrs + / 80 lb +] with chest size 30" - 52".

Order No.	Mfg. No. / Description	Price
350609	(MD3188)	$391.98 F

Boater Sports Safety Bag



- Rugged construction safety bag.
- Measures 24" x 12" x 13".
- Vented 600D polyester.
- Two end handles and oversized zipper top.

Order No.	Description	Price
1-58190	(58190)	$18.95 H

Omega All Purpose Life Jacket Storage Bag



- Replacement for the bag included with the Omega 40201-UNVPK Storage Bag with Four Type III All Purpose Universal Life Vests.
- Keeps your vests in one place and provides convenient storage.
- Storage bag only, no life jackets included.
- Convenient strap for carrying ease.

Order No.	Mfg. No. / Description	Price
586544	(42202) Blue	$21.98 G

Kent Type II Foam Life Jacket



- Basic flotation for the boating enthusiast.
- Designed specifically to provide maximum buoyancy and turn an unconscious person face up in calm water.
- Less bulky and more affordable than Type I offshore life jackets.

Order No.	Mfg. No. / Size	Price
5925275	(4250-00) Youth, 50 to 90 bs.	$9.98 F
5925260	(4207-19) 4 Adult Vests with Bag	$44.98 F

Marpac Safety Gear Bag



- Rugged vinyl material.
- Noncorrosive zipper.
- Top and side carry handles.
- Extra sturdy seams.
- Dimensions: 26" L x 12" W x 17" H.

Order No.	Description	Price
7-0045	Safety Gear Bag	$17.98 G

Marpac Life Jacket Storage Bag



- Holds up to 5 Type II Life Jackets.
- Mesh top for better airflow, improved drying.
- Easy to clean with just soap and water.
- Convenient carry handles on each side.
- Made with rugged vinyl material and non-corrosive zippers.
- Dimensions: 21" L x 13" W x 16" H.

Order No.	Description	Price
7-0046	Life Jacket Storage Bag	$12.98 G

Omega Storage Bag with 4 Adult Type II Lift Jackets



- Keeps your vests in one place and provides convenient storage.
- Stored in a clear bag for easy viewing.
- Contains four adult universal sized Type II USCG Approved life jackets.
- Convenient strap for carrying ease.

Order No.	Mfg. No. / Description	Price
586555	(40000-UNVPK)	$57.98 G

Omega Clear Storage Bag



- Fits 4 pack adult universal sized Type II USCG Approved life jackets.
- Storage bag keeps your vests in one place and provides convenient storage.
- Stored in a clear bag for easy viewing.
- Convenient strap for carrying ease

Order No.	Mfg. No. / Description	Price
586542	(42013) Clear Storage Bag	$15.98 G

Life Jacket Boxes



Order No.	Mfg. No. / Description	Price
760579	(102-2) Large,Orange	$888.98 F
244551	(25MAN) 25 Man	$950.98 B

©2014 Donovan Marine, Inc.

Kwik T-BAG™ T-Top and Bimini Top Storage Packs





Life Jackets Not Included

- Easily mount to most T-Tops, bimini tops and pontoon tops.
- Designed to hold Type II life jackets.
- Manufactured from durable 600-denier UV and water-resistant polyester pack cloth.
- Features: Main compartment has a nylon zipper, 2 zippered compartments, three mesh pockets, a stretch cord zigzagging across the bottom.

Order No.	Mfg. No. / Description	Price
587658	(PFD-T4) Holds 4 Jackets, 25" W x 20" D x 6" H	$53.98 G
587660	(PFD-T6) Holds 6 Jackets, 37" W x 20" D x 6" H	$60.98 G

Omega Bomber Float Jacket



- Short-waisted jacket for easy maneuverability.
- Elastic at waist for warmth.
- Waterproof nylon prevents leaks and keeps wearer dry.
- Neoprene adjustable cuffs.
- Detachable hood.
- Reflective material for visibility.
- 5 exterior pockets.

Order No.	Mfg. No. / Description	Color	Price
594252	(41700-S) Small	Orange	$263.98 F
594254	(41700-M) Medium	Orange	$263.98 F
594256	(41700-L) Large	Orange	$263.98 F
594258	(41700-XL) X Large	Orange	$263.98 F
594260	(41700-2X) XX Large	Orange	$263.98 F
594262	(41700-3X) XXX Large	Orange	$263.98 F
594266	(41701-S) Small	Blue	$263.98 F
594268	(41701-M) Medium	Blue	$263.98 F
594270	(41701-L) Large	Blue	$263.98 F
594272	(41701-XL) X Large	Blue	$263.98 F
594274	(41701-2X) XX Large	Blue	$263.98 F
594276	(41701-3X) XXX Large	Blue	$263.98 F
594280	(41703-S) Small	Yellow	$263.98 F
594282	(41703-M) Medium	Yellow	$263.98 F
594284	(41703-L) Large	Yellow	$263.98 F
594286	(41703-XL) X Large	Yellow	$263.98 F
594288	(41703-2X) XX Large	Yellow	$263.98 F
594290	(41703-3X) XXX Large	Yellow	$263.98 F

TRC Swim Belts



- Great for times when you want some buoyancy without wearing a vest.
- Excellent as a swim assist or to wear while doing water aerobics.
- **This is NOT a Coast Guard Approved flotation device.**

Order No.	Mfg. No. / Description		Price
708799	(2022512) Yellow	Small, 20" - 26"	$50.98 F
708801	(2023012) Yellow	Medium, 26" - 32"	$52.98 F
708803	(2023512) Yellow	Large, 32" - 38"	$53.98 F
708805	(2024012) Yellow	X Large, 38" - 44"	$54.98 F
708807	(2014512) Yellow	XX Large, 44" - 48"	$70.98 F

Stearns Flotation Jacket



- Features: Concealed hood, storm cuffs and sealed seams to keep out wind and water.
- Comfortable Suisse Aire foam for flotation and insulation.
- Two way zipper with storm flap handwarmer and cargo pockets.
- Mid thigh for foul weather protection.
- Available in sizes: Small to XXX Large.
- Color: International Orange, Navy, Orange/Navy.
- USCG Approved Type III.

Special Order - Allow 2 Weeks for Delivery

Stearns Bomber Style Flotation Jacket



- Cut waist-length for freedom of movement.
- Soft Suisse Aire foam with a coated nylon shell.
- Four pockets, sleeve utility pocket and inside chest pocket.
- Rib knit waistband and wrist bands.
- Internal adjustable belt.
- SOLAS grade reflective tape.
- USCG Approved Type III.

Special Order - Allow 2 Weeks for Delivery

Omega Float Coat



- Long jacket for warmth and dryness.
- Waterproof polyester prevents leaks and keeps wearer dry.
- Neoprene adjustable cuffs.
- Detachable hood.
- Reflexive material for visibility.
- 2 exterior pockets.
- Type III USCG Approved.

Order No.	Mfg. No. / Description	Color	Price
594302	(41800-S) Small	Orange	$298.98 F
594304	(41800-M) Medium	Orange	$298.98 F
594306	(41800-L) Large	Orange	$298.98 F
594308	(41800-XL) X Large	Orange	$298.98 F
594310	(41800-2X) XX Large	Orange	$298.98 F
594312	(41800-3X) XXX Large	Orange	$298.98 F
594316	(41803-S) Small	Yellow	$298.98 F
594318	(41803-M) Medium	Yellow	$298.98 F
594320	(41803-L) Large	Yellow	$298.98 F
594322	(41803-XL) X Large	Yellow	$298.98 F
594324	(41803-2X) XX Large	Yellow	$298.98 F
594326	(41803-3X) XXX Large	Yellow	$298.98 F

Nash Sports Watersports Belts



- Traditional vinyl dipped soft foam float belt.
- Strong web strap with adjustable buckle.
- Not USCG approved.

Order No.	Mfg. No. / Description		Price
7170032	(DV200) Yellow	Medium, Up to 36" Waist	$31.98 H
7170033	(DV300) Yellow	Large, Up to 42" Waist	$31.98 H
7170034	(DV400) Yellow	X Large, Up to 48" Waist	$31.98 H

Jim-Buoy Life Ring Buoys

CAL-JUNE



- Nylon vinyl skin.
- Urethane foam core.
- USCG Approved.

White Life Ring Buoys with beckets

Order No.	Mfg. No. / Description	Price
266002	(JB-19) Diameter 19"	$77.98 H
266038	(JBW-20) Diameter 20"	$85.98 H
266052	(JBW-24) Diameter 24"	$94.98 H
266076	(JBW-30) Diameter 30"	$109.98 H

Orange Life Ring Buoys without beckets

Order No.	Mfg. No. / Description	Price
266090	(JBO-X-20) Diameter 20"	$87.98 H
266153	(JBO-X-24) Diameter 24"	$90.98 H
266165	(JBO-X-30) Diameter 30"	$108.98 H

Orange Life Ring Buoys with retro-reflective tape

Order No.	Mfg. No. / Description	Price
266191	(JBO-X-24T) Diameter 24"	$116.98 H
266216	(JBO-X-30T) Diameter 30"	$123.98 H
266305	(JBSO-30T) Diameter 30", SOLAS Approved	$100.98 H

Datrex Life Ring Buoys

DATREX



- Molded from high impact linear low-density polyethylene.
- The encircling rope is replaceable.

Liferingbuoy

- 24" orange buoy with retro-reflective tape for installation on commercial fishing vessels, yachts and other boats that are not required to carry the 30" buoys.
- USCG and Canadian Coast Guard Approved.

Order No.	Mfg. No.	Price
436423	(DX0240RD)	$106.98 I

Deckbuoy

- 30" orange buoy with retro-reflective tape.
- Used onboard commercial vessels, offshore installations and larger yachts.
- USCG, Canadian Coast Guard and BV/MED Approved.

Order No.	Mfg. No.	Price
436426	(DX0325D)	$107.98 I

Bridgebuoy

- 30" orange buoy with retro-reflective tape.
- For use with MOB-signals and a quick release ring buoy bracket.
- USCG, Canadian Coast Guard and BV/MED Approved.

Order No.	Mfg. No.	Price
436430	(DX0340D)	$125.98 I

Billy Pugh Life Ring Buoy



- Molded of high impact polyethylene.
- The color will not dent or peel.
- Rigged with black polypropylene rope terminated with hand splice.
- USCG Approved throwable device for all vessels.
- USCG Approval #160.050/120/1.
- Polyurethane foam buoyant material provides a minimum buoyant force of 32 lbs.
- SOLAS Approved with tape.

Order No.	Mfg. No.	Price
484460	(A-301T)	$87.50 D

Billy Pugh Rescue Ring



- Flexible flotation device that closes around victim when pulled.

Order No.	Mfg. No.	Price
484464	(RR-30) 30" Diameter	$679.00 B

Taylor Made Vinyl Coated Foam Life Rings



- Inspected and tested in accordance with U.S. Coast Guard regulations.
- All rings contain unicellular polyurethane foam for buoyancy.
- Floating polypropylene grab lines contain UV stabilizers to ensure sunlight resistance.
- Sewn-in beckets to secure grab line.
- White with white rope.

Order No.	Mfg. No. / Description	Price
828280	(360) Diameter 20", Minimum Buoyancy: 16.5 lbs.	$74.98 G
828285	(361) Diameter 24", Minimum Buoyancy: 16.5 lbs.	$94.98 G

- Orange with white rope.

Order No.	Mfg. No. / Description	Price
828290	(363) Diameter 20", Minimum Buoyancy: 16.5 lbs.	$74.98 G
828295	(364) Diameter 24", Minimum Buoyancy: 16.5 lbs.	$94.98 G

©2014 Donovan Marine, Inc.

Jim-Buoy Hard Shell Ring Buoy



- Orange, rock-hard, cross linked polyethylene outer shell.
- Molded-in rope holes for easy rope replacement.
- Black 3/8" polypropylene rope UV resistant.
- SOLAS and USCG Approvals #160.050/155/0 and #160.150/11/0.
- Diameter 30".

Order No.	Mfg. No.	Price
266242	(HSO-30)	$97.98 H

Marpac Life Ring Brackets



- Heavy duty, commercial grade.
- Fits ring buoys 30" in diameter.
- Designed for commercial duty with heavy duty welds.
- Pre-drilled holes for simplified mounting.

Order No.	Description	Price
5-0010	Aluminum	$88.98 G
5-0015	Stainless Steel	$129.98 G

Marpac Ring Buoy Bracket



- Stainless steel.
- Predrilled.
- Width 3/4".

Order No.	Price
7-0097	$13.98 G

Billy Pugh Ring Buoy Release Mechanism (Cages Only)



- Galvanized metal.
- Meets USCG requirements 46 CFR 94-43-10(c) 33.40-5, 75.43-10, 108.515.
- Dimensions: 36" x 31" x 10-1/2".
- Sold 2 cages per set.

Order No.	Mfg. No.	Price
484547	(RBRM-1)	$2,287.00 B

Stearns Ring Buoy Rope with Bag



- Length 90'.

Order No.	Mfg. No.	Price
630504	(I023ORG-00-000)	$59.98 F

Jim-Buoy Horseshoe Buoy



- USCG Approved.
- Standard model.
- A tough, yellow vinyl coated nylon cover with heavy duty zipper over closed-cell plastic core.
- Will not rot or mildew.
- Stainless steel hardware throughout.
- Bracket not included.

Order No.	Mfg. No.	Price
266444	(920) Horseshoe Buoy	$108.98 E

Handi-Man Horseshoe Life Preserver Holder



- Attaches to boat's rail.
- Constructed of stainless steel for long life in the marine environment.
- Dimensions: 14" H x 6-1/2" W x 14" L.

Order No.	Mfg. No. / Description	Price
731505	(960009)	$89.98 I

Jim-Buoy Life Ring Racks - Commercial Quality



- Features heavy duty, welded stainless steel construction throughout for a lifetime of maintenance-free use.
- Pre-drilled holes for stanchion and life line mounting, as well as cabin wall installations.
- Stainless steel U-bolts and nuts for stanchion and life line mounting. (Not included.)

Order No.	Mfg. No. / Description	Price
266418	(1123-24) Diameter 24"	$92.98 F
266420	(1123-30) Diameter 30"	$121.98 F
266456	(1123-X) Sold 4 U-bolts Per Card	$10.98 G

Billy Pugh Containerized Fast Throw Lines



- Keeps rope from tangling on deployment.
- Maintains the strength of the rope as the rope is protected from UV degradation inside the PVC container.

Order No.	Mfg. No. / Description	Price
484555	(CFTL-1) 1/4" Poly Pro x 100'	$129.00 B
484557	(CFTL-2) 1/4" Poly Pro x 150'	$146.00 B
484559	(CFTL-3) 3/8" Poly Pro x 100'	$203.00 B
484561	(CFTL-4) 3/8" Poly Pro x 150'	$233.00 B

Paws Aboard Blue/Yellow Designer Neoprene Doggy Life Jackets



- Reflective strips for maximum visibility.
- Handle on top for quick and easy grabbing.
- Adjustable nylon straps.
- Quick-release buckles.
- Heavy-duty yet more comfortable Velcro® fastening system around the belly and neck to keep securely fastened.

Order No.	Mfg. No. / Description		Price
598590	(BY1100) XX Small	2 - 6 lbs.	$25.98 H
598595	(BY1200) X Small	7 - 15 lbs.	$26.98 H
598600	(BY1300) Small	15 - 20 lbs.	$30.98 H
598605	(BY1400) Medium	20 - 50 lbs.	$32.98 H
598610	(BY1500) Large	50 - 90 lbs.	$38.98 H

Paws Aboard Blue Polka Dot Doggy Life Jackets



- Reflective strips for maximum visibility.
- Handle on top for quick and easy grabbing.
- Adjustable nylon straps.
- Quick-release buckles.
- Heavy-duty yet more comfortable Velcro® fastening system around the belly and neck to keep securely fastened.

Order No.	Mfg. No. / Description		Price
598510	(BP1100) XX Small	2 - 6 lbs.	$21.98 H
598511	(BP1200) X Small	7 - 15 lbs.	$23.98 H
598512	(BP1300) Small	15 - 20 lbs.	$25.98 H
598513	(BP1400) Medium	20 - 50 lbs.	$29.98 H
598514	(BP1500) Large	50 - 90 lbs.	$31.98 H

Nautical Doggy Life Jacket



- Reflective strips for maximum visibility.
- Handle on top for quick and easy grabbing.
- Adjustable nylon straps.
- Quick-release buckles.
- Heavy-duty yet more comfortable Velcro® fastening system around the belly and neck to keep securely fastened.

Order No.	Mfg. No. / Description		Price
598531	(N1200) X Small	7 - 15 lbs.	$23.98 H

Paws Aboard Pink Polka Dot Doggy Life Jackets



- Reflective strips for maximum visibility.
- Handle on top for quick and easy grabbing.
- Adjustable nylon straps.
- Quick-release buckles.
- Heavy-duty yet more comfortable Velcro® fastening system around the belly and neck to keep securely fastened.

Order No.	Mfg. No. / Description		Price
598520	(PP1100) XX Small	2 - 6 lbs.	$21.98 H
598521	(PP1200) X Small	7 - 15 lbs.	$23.98 H
598522	(PP1300) Small	15 - 20 lbs.	$25.98 H
598523	(PP1400) Medium	20 - 50 lbs.	$29.98 H
598524	(PP1500) Large	50 - 90 lbs.	$31.98 H

Paws Aboard Safety Neon Yellow Doggy Life Jackets



- Reflective strips for maximum visibility.
- Handle on top for quick and easy grabbing.
- Adjustable nylon straps.
- Quick-release buckles.
- Heavy-duty yet more comfortable Velcro® fastening system around the belly and neck to keep securely fastened.

Order No.	Mfg. No. / Description		Price
598501	(1100) XX Small	2 - 6 lbs.	$21.98 H
598502	(1200) X Small	7 - 15 lbs.	$23.98 H
598503	(1300) Small	15 - 20 lbs.	$25.98 H
598504	(1400) Medium	20 - 50 lbs.	$29.98 H
598505	(1500) Large	50 - 90 lbs.	$31.98 H
598506	(1600) X Large	90+ lbs.	$32.98 H

Paws Aboard Neoprene Doggy Life Jackets



- Reflective strips for maximum visibility
- Handle on top for quick and easy grabbing
- Adjustable nylon straps
- Quick-release buckles
- Heavy-duty yet more comfortable Velcro® fastening system around the belly and neck to keep securely fastened

Order No.	Mfg. No. / Description		Price
598540	(R1100) XX Small	2 - 6 lbs.	$25.98 H
598541	(R1200) X Small	7 - 15 lbs.	$26.98 H
598542	(R1300) Small	15 - 20 lbs.	$29.98 H
598543	(R1400) Medium	20 - 50 lbs.	$32.98 H
598544	(R1500) Large	50 - 90 lbs.	$37.98 H
598545	(R1600) X Large	90+ lbs.	$43.98 H

©2014 Donovan Marine, Inc.

Omega Pet Vests



- This flotation device is designed to provide swimming endurance for your pet and security while in the water.
- Durable polyester fabric to resist punctures and tears.
- Three adjustable body belts and quick release buckles.
- Handlers strap for easy retrieval.

Order No.	Mfg. No. / Description		Price
593962	(40902-S) Small	Red	$17.98 G
593964	(40902-M) Medium	Red	$17.98 G
593966	(40902-L) Large	Red	$17.98 G
593968	(40902-XL) X Large	Red	$17.98 G
593970	(40902-2X) XX Large	Red	$17.98 G

Revere Dog Life Jackets





- Adjustable belts for secure lift.
- Durable and lightweight flotation foam.
- Loop strap for owner/handler.

Order No.	Mfg. No. / Description		Price
8-9164	(69-DJ20-C) Medium, 10 - 20 lbs.	Camo	$8.98 G
8-9165	(69-DJ20-Y) Medium, 10 - 20 lbs.	Yellow	$8.98 G
8-9166	(69-DJ30-C) Large, 20 - 40 lbs.	Camo	$8.98 G
8-9168	(69-DJ40-C) X Large, 40 - 80 lbs.	Camo	$8.98 G
8-9169	(69-DJ40-Y) X Large, 40 - 80 lbs.	Yellow	$8.98 G
8-9171	(69-DJ50-Y) XX Large, 80 - 100 lbs.	Yellow	$8.98 G

Paws Aboard Dogsavers Sticks



- Dogsavers are made from super-durable synthetic rubber for heavy duty chomping and interactive play.
- Comes in assorted colors.

Order No.	Mfg. No. / Description	Price
598561	(33044F) Small, 6"	$6.98 H
598562	(33046F) Medium, 12"	$10.98 H

TRC Super Soft® Doggie Safety Vests



- Made of soft Ensolite vinyl-coated foam with adjustable buckles for best fit.
- All dogs can swim, but they tire easily and a Doggie Vest adds to their safety and endurance.
- White.

Order No.	Mfg. No. / Description		Price
708810	(2513004) Medium	15" - 19"	$34.98 G
708822	(2513504) Large	19" - 23"	$36.98 G

Paws Aboard Dogsavers Flyers



- Dogsavers are made from super-durable synthetic rubber for heavy duty chomping and interactive play.
- Comes in assorted colors.

Order No.	Mfg. No. / Description	Price
598557	(33028F) Small, 6"	$6.98 H
598558	(33030F) Large, 9"	$13.98 H

Paws Aboard Dogsavers Retrievers



- Dogsavers are made from super-durable synthetic rubber for heavy duty chomping and interactive play.
- Comes in assorted colors.

Order No.	Mfg. No. / Description	Price
598559	(33038F) Small, 7"	$7.98 H
598560	(33040F) Large, 11"	$18.98 H

Paws Aboard Dogsavers Bones



- Dogsavers are made from super-durable synthetic rubber for heavy duty chomping and interactive play.
- Comes in assorted colors.

Order No.	Mfg. No. / Description	Price
598555	(33020F) Small, 4-1/2"	$6.98 H
598556	(33022F) Medium, 7-1/4"	$13.98 H

Paws Aboard Life Ring Toy - 11 x 11 x 3



- Design allows your dog to close their mouth while swimming to avoid choking.
- Quality made products using durable materials.
- Red/Blue.

Order No.	Mfg. No.	Price
598552	(2400)	$20.98 H

Paws Aboard Red Paw and Blue Bone Print Flags





- Grab some attention with our bright eye-catching flags!
- Can be used in a variety of settings including boats, flag poles and home or car windows!
- Available in two separate styles/colors, each flag measures 20" x 11.5".

Order No.	Mfg. No. / Description	Price
598553	(4100) Red/White	$10.98 H
598554	(4200) Blue/White	$10.98 H

Paws Aboard In & Out Display



Display Contains:

Part #	Description	Size	Color	Qty.
1100	Doggy Life Jacket	XXS 2-6 lbs.	Yellow	2
1200	Doggy Life Jacket	XS 7-15 lbs.	Yellow	2
1300	Doggy Life Jacket	S 15-20 lbs.	Yellow	2
1400	Doggy Life Jacket	M 20-50 lbs.	Yellow	2
1500	Doggy Life Jacket	L 50-90 lbs.	Yellow	2
PP1100	Doggy Life Jacket	XXS 2-6 lbs.	Pink Polka Dot	2
PP1200	Doggy Life Jacket	XS 7-15 lbs.	Pink Polka Dot	2
PP1300	Doggy Life Jacket	S 15-20 lbs.	Pink Polka Dot	2
PP1400	Doggy Life Jacket	M 20-50 lbs.	Pink Polka Dot	2
PP1500	Doggy Life Jacket	L 50-90 lbs.	Pink Polka Dot	2
R1100	Neoprene Jacket	XXS 2-6 lbs.	Red	2
R1200	Neoprene Jacket	XS 7-15 lbs.	Red	2
R1300	Neoprene Jacket	S 15-20 lbs.	Red	2
R1400	Neoprene Jacket	M 20-50 lbs.	Red	2
R1500	Neoprene Jacket	L 50-90 lbs.	Red	2
8400	Display Only	22" x 18" x 60"	Blue/Yellow	1

Order No.	Mfg. No. / Description	Price
598580	(8500B)	$755.98 H

Paws Aboard Monkey Fist Rope Toy



- Design allows your dog to close their mouth while swimming to avoid choking.
- Quality made products using durable materials.
- Blue/White.

Order No.	Mfg. No.	Price
598550	(2200)	$13.98 H

Paws Aboard Training Dummy Toy



- Design allows your dog to close their mouth while swimming to avoid choking.
- Quality made products using durable materials.
- Red/Navy Blue.

Order No.	Mfg. No.	Price
598551	(2300)	$18.98 H

Paws Aboard In & Out Display



Display Contains:

Part #	Description	Size	Color	Qty.
1100	Doggy Life Jacket	XXS 2-6 lbs.	Yellow	2
1200	Doggy Life Jacket	XS 7-15 lbs.	Yellow	2
1300	Doggy Life Jacket	S 15-20 lbs.	Yellow	2
1400	Doggy Life Jacket	M 20-50 lbs.	Yellow	2
1500	Doggy Life Jacket	L 50-90 lbs.	Yellow	2
PP1100	Doggy Life Jacket	XXS 2-6 lbs.	Pink Polka Dot	2
PP1200	Doggy Life Jacket	XS 7-15 lbs.	Pink Polka Dot	2
PP1300	Doggy Life Jacket	S 15-20 lbs.	Pink Polka Dot	2
PP1400	Doggy Life Jacket	M 20-50 lbs.	Pink Polka Dot	2
PP1500	Doggy Life Jacket	L 50-90 lbs.	Pink Polka Dot	2
8400	Display Only	22" x 18" x 60"	Blue/Yellow	1

Order No.	Mfg. No. / Description	Price
598575	(8500A)	$538.98 H

©2014 Donovan Marine, Inc.

Paws Aboard In & Out Display



Display Contains:

Part #	Description	Size	Color	Qty.
1100	Doggy Life Jacket	XXS 2-6 lbs.	Yellow	2
1200	Doggy Life Jacket	XS 7-15 lbs.	Yellow	2
1300	Doggy Life Jacket	S 15-20 lbs.	Yellow	2
1400	Doggy Life Jacket	M 20-50 lbs.	Yellow	2
1500	Doggy Life Jacket	L 50-90 lbs.	Yellow	2
PP1100	Doggy Life Jacket	XXS 2-6 lbs.	Pink Polka Dot	2
PP1200	Doggy Life Jacket	XS 7-15 lbs.	Pink Polka Dot	2
PP1300	Doggy Life Jacket	S 15-20 lbs.	Pink Polka Dot	2
PP1400	Doggy Life Jacket	M 20-50 lbs.	Pink Polka Dot	2
PP1500	Doggy Life Jacket	L 50-90 lbs.	Pink Polka Dot	2
R1100	Neoprene Jacket	XXS 2-6 lbs.	Red	2
R1200	Neoprene Jacket	XS 7-15 lbs.	Red	2
R1300	Neoprene Jacket	S 15-20 lbs.	Red	2
R1400	Neoprene Jacket	M 20-50 lbs.	Red	2
R1500	Neoprene Jacket	L 50-90 lbs.	Red	2
3000	Water Ski Rope Leash	4.5' Cord	Blue/Yellow	3
2200	Monkey Fist Rope Toy	20" x 4" x 4"	Blue/White	3
2400	Life Ring Toy	11" x 11" x 3"	Red/Blue	2
4100	Paw Print Flag	12" x 18"	Red	3
4200	Bone Flag	12" x 18"	Blue	3
4300	Pirate Flag	12" x 18"	Black/Red	3
33038F	DOGSAVERS Retriever	Small 7"	Assorted	3
33040F	DOGSAVERS Retriever	Large 11"	Assorted	3
T1202	Rubber Frisbee	Small 6"	Yellow	3
T1201	Rubber Frisbee	Large 9"	Yellow	3
T1234	Rubber Ball w/Rope	Small 3"	Yellow	3
T1233	Rubber Ball w/Rope	Large 4"	Yellow	3
T1236	Slinger Toy	Small 4"	Yellow	3
T1235	Slinger Toy	Large 5"	Yellow	3
S10024	Floating Lighthouse	10"	Red/Blue	3
S10026	Floating Anchor	10"	Red/Blue	3
S11265	Floating Ring	10"	Blue/Yellow	3
8400	Display Only	22" x 18" x 60"	Blue/Yellow	1

Order No.	Mfg. No. / Description	Price
598585	(8500C)	$1,367.98 H

Maxwell HRC Series Horizontal Windlasses

MAXWELL



- Above deck design, encapsulating the motor and drive in an IP66 rated watertight case.
- High-pressure die cast, marine-grade, alloy case is chromate passivated & polyester powder coated.
- Simple "bolt down" installation ensures effortless and rapid on-deck installation and set up.
- Integrated composite nylon, through deck hawse pipe.
- High speed, jam free retrieval of rope and chain controlled from a remote panel mounted Up/Down switch.
- Emergency freefall function in the event of onboard power failure.

- Motor power: 400W.
- Maximum pulling power: 600 lbs.
- 1/4", 6mm - 7mm chain, 1/2", 12mm rope.

Order No.	Mfg. No.	Price
556001	(HRC-6)	$899.98 F

- Motor power: 600W.
- Maximum pulling power: 900 lbs.
- 1/4" - 5/16", 6mm - 8mm chain, 1/2" - 9/16", 12mm - 14mm rope.

Order No.	Mfg. No.	Price
556003	(HRC-8)	$969.98 E

Lewmar Pro 700/1000 Windlasses

LEWMAR



- 100% 316 stainless steel housing.
- For boats up to 38 ft.
- Maximum line speed/min.: 105 ft.
- Fast line speed.
- Automatic Freefall
- Worm motor gearbox for reliability.
- Dual direction solenoid inside unit.
- Rope-chain gypsy.
- Dynamic DIY install kit includes: Windlass, base gasket seal, fast mounting studs, installation wrench, toggle switch and circuit breaker.
- Manual recovery option.
- 5 year warranty.

- Motor power: 500W.
- Typical working load: 175 lbs.
- Maximum pulling power: 700 lbs.
- Use with 1/4" G4 or BBB, 7mm DIN 766 chain, 12mm 3-strand and 8-plait rope.

Order No.	Mfg. No.	Price
554988	(6656011107-310)	$949.98 C

- Motor power: 700W.
- Typical working load: 250 lbs.
- Maximum pulling power: 1,000 lbs.
- Use with 5/16" G4 chain, 9/16" - 5/8" 3-strand and 8-plait rope.

Order No.	Mfg. No.	Price
554990	(66657011108-311)	$999.98 C

Maxwell HRC Series Horizontal Windlass Kits

MAXWELL







- Kit includes: HRC Series horizontal windlass, 7-2339 #16.5 Grabber Anchor and 7-6455 160' Twisted Anchor Rode.

Order No.	Mfg. No. / Description	Price
556014	(HRC) Standard Kit	$926.98 F

- Kit includes: HRC Series horizontal windlass, 7-2330 #14 EZ Launch Anchor and 7-6450 8 Plait Anchor Rode.

Order No.	Mfg. No. / Description	Price
556016	(HRC) Deluxe Kit	$904.98 F

Lewmar Pro-Fish 700/1000 Windlasses

LEWMAR



- 100% 316 stainless steel housing.
- For boats up to 38 ft.
- Maximum line speed/min.: 105 ft.
- Fast line speed.
- Dynamic DIY install kit includes: Windlass, base gasket seal, fast mounting studs, installation wrench, toggle switch and circuit breaker.
- Manual recovery option.
- 5 year warranty.

- Motor power: 500W.
- Typical working load: 175 lbs.
- Maximum pulling power: 700 lbs.
- Use with 1/4" G4 or BBB, 7mm DIN 766 chain, 1/2" 3-strand and 8-plait rope.

Order No.	Mfg. No.	Price
554989	(6656211107-310)	$949.98 C

- Motor power: 700W.
- Typical working load: 250 lbs.
- Maximum pulling power: 1,000 lbs.
- Use with 5/16" G4 chain, 9/16" - 5/8" 3-strand and 8-plait rope.

Order No.	Mfg. No.	Price
554991	(6656411108-311)	$1,099.98 C

Marpac Horizontal Windlasses



- Developed with up-to-date technology and ideals, with efficient spur gears instead of traditional worm gears which can reduce of up to 30% - 50% motor power consumption.
- The stainless steel gypsy takes both rope and chain and the electric brake on the gypsy can terminate the anchor fall at any time, as well as hold it.
- A heat radiating system helps prevent motor overheating.

Order No.	Description	Price
7-1550	For Boats Up to 30' (H30 Free Fall)	$649.98 G
7-1553	For Boats Up to 35' (H35 Free Fall)	$799.98 G
7-1554	For Boats Up to 40' (H40 Free Fall)	$830.98 G

Marpac Small Boat Windlasses



- Compact, easy operating and easy to install.
- Durable stainless steel gypsy runs both rope and chain smoothly.
- For boats up to 20'.

Order No.	Description	Price
7-1545	Power Out (H20)	$365.98 F
7-1546	Free Fall (H20FF)	$398.98 F

Lewmar Wireless Control System

LEWMAR



- Simple to install in new installations & retro-fit.
- Compatible with all windlasses operated by a contactor.
- Watertight key-fob transmitter unit.
- Control from multiple transmitter units.

Order No.	Mfg. No. / Description	Price
555156	(68000844)	$339.98 E

©2014 Donovan Marine, Inc.

Marpac Vertical Windlasses



- The gearbox, heavy duty DC motor and base have been designed into one unit, with no separate parts, for easy installation.
- The brake can hold the stainless steel gypsy when not operating.
- Emergency retrieval hand bar included.

Polished stainless steel deck unit and gypsy.

Order No.	Description	Price
7-1488	Boats Up to 30'	$852.98 F
7-1489	Boats Up to 35'	$955.98 F

Aluminum alloy with chrome plating.

Order No.	Description	Price
7-1543	Boats Up to 30' (V30)	$594.98 F
7-1544	Boats Up to 35' (V35)	$722.98 F

Marpac Windlasses Accessories



Order No.	Description	Price
7-1555	Foot Switch	$32.98 F
7-1558	Up/Down Switch, Direct Control	$49.98 F
7-1559	Up/Down Switch, For Use with Foot Switch or Remote Control Box	$22.98 F
7-1556	Remote Control Box	$74.98 F

Marpac Foot Control Kit

- Includes: (2) 7-1555 - Foot switches and (1) 7-1556 - Remote control box.

Order No.	Description	Price
7-1485	Foot Control Kit	$155.98 F

Marpac 2nd Station Kit

- Includes: (2) 7-1559 - Up/down switches and (1) 7-1556 - Remote control box.

Order No.	Description	Price
7-1486	2nd Station Kit	$119.98 F

Combination Kit for Foot Switch and 2nd Station

- Includes: (2) 7-1555 - Foot switches, (2) 7-1559 - Up/down switches and (1) 7-1556 - Remote control box.

Order No.	Description	Price
7-1487	Combination Kit	$184.98 F

Maxwell RC6 Series Vertical Windlass

MAXWELL



- Utilises 6mm/7mm (1/4") chain spliced to 12mm (1/2") three strand or 8-plait rope.
- The revolutionary, and patented, new "Wave Design" chainwheel is able to accommodate a wide range of chain pitch differences, within the specified chain size diameters.
- The in-line, vertical gearbox and motor means quick and easy installation by either the boat yard or the DIY aftermarket customer.

Order No.	Mfg. No. / Description	Price
555995	(RC6)	$949.98 E

Maxwell RC6 Series Vertical Windlass Kits

MAXWELL



- Kit includes: RC6 Series vertical windlass, 7-2339 #16.5 Grabber Anchor and 7-6455 160' Twisted Anchor Rode.

Order No.	Mfg. No. / Description	Price
556010	(RC6) Standard Kit	$979.98 F

- Kit includes: RC6 Series vertical windlass, 7-2330 #14 EZ Launch Anchor and 7-6450 8 Plait Anchor Rode.

Order No.	Mfg. No. / Description	Price
556012	(RC6) Deluxe Kit	$955.98 F

Lewmar V700 Vertical Windlass

LEWMAR



- 100% 316 stainless steel housing.
- For boats up to 35 ft.
- IP67 Rated (Waterproof to 1 meter).
- Fall Safe anchor lock.
- Fast line speed.
- Manual recovery option.
- Use with 1/4" G4 or BBB, 7mm DIN 766 chain, 1/2" 3-strand and 8-plait rope.
- Kit includes: Contactor and circuit breaker.
- 5 year warranty.

Order No.	Mfg. No. / Description	Price
555106	(6670011107-301)	$768.98 C

Maxwell RC8 Series Vertical Windlass

MAXWELL



- Manufactured from marine grade 316 stainless steel.
- Unique spacer tube design allows installation through virtually any deck thickness.
- Full disassembly capability of top works utilising handle provided, a screw driver and an Allen key.
- Works just as effectively with all-chain rodes.
- Huge, through deck hawse pipe throat ensures easy entry of the rope/chain rode into and out of the anchor locker.
- Cone type clutch/brake mechanism permits manual, 'freefall' anchoring.
- Easily activated manual override using the emergency crank handle provided.

Order No.	Mfg. No. / Description	Price
555998	(RC8)	$1,599.98 E

Lewmar ProSport 550 Vertical Windlass

LEWMAR



- Powerful motor providing superior line speed.
- For boats up to 28 ft.
- Low power consumption/ current draw.
- Dual direction power operation.
- Manual freefall.
- Maximum pulling power: 550 lbs.
- Convenient above-deck installation.
- Use with 1/4" G4 or BBB, 7mm DIN 766 chain, 12mm 3-strand and 8-plait rope.
- 3 year warranty.

Order No.	Mfg. No. / Description	Price
554951	(6656811197-303)	$623.98 C

Quick Crystal Vertical Windlass without Drum

Quick



- Chromed plated bronze base.
- Rope and chain on a single gypsy.
- Manual free-fall system.
- Supports 1/4" HT chain and 1/2" rope.
- For boats from 20' to 39'.
- Maximum pull: 1,367 lb.
- Motor power: 500W.
- Maximum working load: 441 lb.
- Maximum chain speed: 81 feet/per minute.
- Includes: A control panel, a reversible solenoid, a 40 amp circuit breaker, a clutch handle and an owner's manual.
- 12 volt.

Order No.	Mfg. No. / Description	Price
555980	(C 600-7)	$1,033.98 E

Minn Kota DeckHand™ 25 Electric Anchor Winches



- 25 lbs. anchor capacity.
- Pre-spooled with 60 feet of 800 lbs. test nylon rope.
- Davit can be mounted at base of DeckHand or in remote position on boat deck.
- Stow and deploy switch integrated into base of the unit.
- Includes remote mountable anchor davit.
- Auto-drift feature automatically stops the motor when the anchor touches bottom.
- 12 volt battery operation.

Order No.	Mfg. No. / Description	Price
476091	(1810125)	$209.98 E
476095	(1810126) Includes: 12' Corded Remote	$259.98 E

Trac Fisherman 25 Electric Anchor Winch



- Power up/down with anti-reverse internal clutch to prevent free-spooling.
- 65 fpm no-load rope retrieval speed.
- Separate davit. 100' of .20" pre-wound braided anchor rope.
- Auto-resetting circuit breaker.
- Sealed membrane UP/DOWN switch.
- 14-ga. marine grade battery wire.
- Anchor safety chain.
- 2-Year Mfg. Warranty.

Order No.	Mfg. No. / Description	Price
554050	(T10108)	$156.98 G

Trac Pontoon 35 Electric Anchor Winch



- For boats up to 24 ft.
- Anchor safety chain.
- 3-position switch.
- Separate or integrated roller davit.
- Automatic resetting circuit breaker.
- Heavy-gauge battery wire.
- Maximum anchor capacity: 35 lbs.
- 100' of 3/16" pre-wound nylon anchor rope.

Order No.	Mfg. No. / Description	Price
554070	(T10109)	$176.98 G

Trac Anchor Winch Switch Kit



- Pre-made, 16' of cables, sealed switch and bezel everything needed to install an auxiliary control switch at the boats helm.
- Installed at the helm or wherever chosen, provides a second option for control of the electric anchor winch.
- The switch on the winch cover will continue to operate as well.

Order No.	Mfg. No. / Description	Price
554074	(T10115) Switch Kit	$31.98 G

DeckHand™ Pontoon Electric Anchor Winch



- For pontoons, this DeckHand gives you control of the winch from the helm as well as flexibility to remove the winch from the boat to clear the deck.
- Includes: Standard 476089 DeckHand 40 anchor winch, MKA-16-02 Quick release bracket, corded remote accessory and MKR-12 quick connect plug.
- 12 volt battery operation.

Order No.	Mfg. No. / Description	Price
476096	(1810141)	$359.98 E

Minn Kota DeckHand™ 40 Electric Anchor Winch



- 40 lbs. anchor capacity.
- Pre-spooled with 100 feet of 800 lbs. test nylon rope.
- Universal davit can be mounted at base of DeckHand or in remote position on boat deck; stows anchor horizontally to eliminate anchor swing.
- Stow and deploy switch integrated into base of the unit.
- Mounting hole platform is compatible with other DeckHand models and MKA-16-02 Quick release bracket.
- Anchor shackle allows for quick changes between anchors.
- 12 volt battery operation.

Order No.	Mfg. No. / Description	Price
476089	(1810140)	$289.98 E
476087	(1810150) Remote Switch with a 25' Cord	$39.98 E

Trac Big Water 45 Electric Anchor Winch



- For boats up to 24 ft.
- Anchor safety chain.
- 3-position switch.
- Separate or integrated roller davit.
- Automatic resetting circuit breaker.
- Heavy-gauge battery wire.
- Maximum anchor capacity: 45 lbs.
- 100' of 3/16" pre-wound nylon anchor rope.

Order No.	Mfg. No. / Description	Price
554072	(T10110)	$199.98 G

Trac Wireless Remote Kit



- Wireless control allows push-button anchor operation from any location.
- Wireless remote clips into a handy storage bracket that can be mounted at your helm or any convenient location.
- The wireless remote kit works with all TRAC anchor winches.

Order No.	Mfg. No. / Description	Price
554076	(T10116) Remote Kit	$52.98 G

©2014 Donovan Marine, Inc.

Minn Kota Talon Shallow Water Anchors



- Electrical/mechanical wrap-drum design/non-hydraulic system.
- Auto up/down feature.
- Rough water mode.
- Built-in wave absorption.
- LED depth indicator.
- Quick-release bracket for easy removal.
- Vertical height and transom angle (30°) adjustment for installation flexibility.
- Deployment notification alarm at engine startup.
- Standard wireless remotes (2 remotes).

Order No.	Mfg. No. / Description	Price
477058	(1810260) 6' Silver/Black Model	$1,432.98 F
477060	(1810265) 6' Silver/White Model	$1,432.98 F
477068	(1810280) 8' Silver/Black Model	$1,585.98 F
477070	(1810285) 8' Silver/White Model	$1,585.98 F
477150	(1810400) 10' Red Model	$1,913.98 F
477152	(1810401) 10' Blue Model	$1,913.98 F
477154	(1810402) 10' Black Model	$1,913.98 F
477156	(1810403) 10' Silver/Black Model	$1,913.98 F
477158	(1810404) 10' Silver/White Model	$1,913.98 F
477160	(1810410) 12' Red Model	$2,068.98 F
477162	(1810411) 12' Blue Model	$2,068.98 F
477164	(1810412) 12' Black Model	$2,068.98 F
477166	(1810413) 12' Silver/Black Model	$2,068.98 F
477168	(1810414) 12' Silver/White Model	$2,068.98 F

Minn Kota Talon Spacer Block Kit



- Used as a spacer between side jack plate mount so engine does not interfere with Talon.
- For T-H Marine 4" and 8" Atlas JP.
- Dimensions: 8" x 2" x 13".

Order No.	Mfg. No. / Description	Price
477083	(1810210) Spacer Block Kit	$77.98 R

Minn Kota Extension Bracket



- 5".
- For use with non "L" brackets only.

Order No.	Mfg. No. / Description	Price
477084	(1810215) Extension Bracket	$75.98 S

Minn Kota Talon Mounting Brackets



- Talon & Humminbird 360 Side-Mounted Jack Plate.
- Port or starboard.
- Setback: Variable.

Order No.	Mfg. No. / Description	Price
477144	(1810300)	$229.98 B

- Talon & Humminbird 360 Sandwich Style Bracket.
- Port.
- Setback: Variable.

Order No.	Mfg. No. / Description	Price
477146	(1810302)	$269.98 B

- Talon & Humminbird 360 Sandwich Style Bracket.
- Starboard.
- Setback: Variable.

Order No.	Mfg. No. / Description	Price
477148	(1810303)	$269.98 B

Minn Kota Talon Mounting Bracket



- 5" Extension bracket - provides additional clearance for larger outboard engines; for use with standard adapter brackets only (non "L" bracket style).

Order No.	Mfg. No. / Description	Price
477093	(1810270) 3SL, 3" Setback, Starboard Mount	$379.98 S

Minn Kota Talon Mounting Brackets



- Side mount to jack plate.
- These brackets mount Talon to the side of your jack plate.
- Dimensions: 22-1/4" x 4-3/4" x 14-1/4".

Order No.	Mfg. No. / Description	Price
477081	(1810208) J6S, 6" Setback, Starboard Mount	$219.98 S
477082	(1810209) J6P, 6" Setback, Port Mount	$219.98 S
477100	(1810277) J9PL, 9" Setback, Port Mount	$249.98 S

Minn Kota Talon Riser Bracket



- 6".
- For direct mount installations only.

Order No.	Mfg. No. / Description	Price
477086	(1810220) Riser Bracket	$59.98 C

Minn Kota Talon Adapter Bracket Lock



- Secures Talon J mounted adapter brackets to the jack plate.
- Free-spinning collar protects against gripping tools & costly theft.
- Unique cut key for unparalleled protection.
- Through hardened stainless steel construction.
- For complete protection of your Talon, use of this Security Adapter Bracket Lock also requires the use of the Security Lock Kit (1810241).

Order No.	Mfg. No. / Description	Price
477130	(1810242) Talon Adapter Bracket Lock	$49.98 C

Minn Kota Talon Covers



- Protects Talon from road hazards while trailering.
- Custom fit with Velcro strap for adjustability.
- All-weather, corrosion-resistant zipper.
- UV resistant black vinyl.
- Not intended for use while on the water.
- Color: Black.

Order No.	Mfg. No. / Description	Price
477134	(1810233) 6'	$69.98 E
477135	(1810235) 8'	$79.98 E

Minn Kota Quick Release Handle Kit



- Allows for tool-free removal and vertical height adjustment.
- Dimensions: 8" x 9" x 6-3/8".

Order No.	Mfg. No. / Description	Price
477085	(1810230) Quick Release Handle Kit	$99.98 C

Minn Kota Talon Remote Accessory



- Wireless remote for use with Talon Shallow Water Anchor.
- Program up to ten remotes.
- Waterproof and floats.
- Includes battery and lanyard.
- Dimensions: 7-1/4" x 7" x 5".

Order No.	Mfg. No. / Description	Price
477091	(1810250) Talon Remote Accessory	$59.98 C

Minn Kota Talon Wireless Foot Switch



- Control up to two Talons, independently or simultaneously
- Easily raise and lower the spike.
- Waterproof switch uses an LED display
- Easy-access battery compartment.

Order No.	Mfg. No. / Description	Price
477140	(1810256) Talon Wireless Foot Switch	$149.98 S

Minn Kota Talon Security Lock



- Free-spinning collar protects against gripping tools and costly theft.
- Unique cut keys for unparalleled protection.
- Through hardened stainless steel construction.
- For complete protection of your Talon, "J" mounted Talon adapter brackets also require the use of the Security Adapter Bracket Lock.
- Includes:(1) 3/8-16 locking nut, (1) 5/16-24 locking nut, (1) locking nut key socket

Order No.	Mfg. No. / Description	Price
477132	(1810241) Talon Security Lock	$69.98 D

Minn Kota Talon Tilt Bracket



- Easy-tilt action accommodates for low clearance areas and boat storage.
- Marine-grade, anodized aluminum construction for strength and durability.
- Adjustable deck support provides stability while tilting.
- Requires use of a Talon Adapter Bracket - not intended for use with Talon direct-mounted to hull of boat.
- Designed for temporary clearance - not intended for transport (on water or trailering).
- Stainless steel hardware included.

Order No.	Mfg. No. / Description	Price
477137	(1810221) Talon Tilt Bracket	$230.98 D

Minn Kota Quick Disconnect Power Plug



- Heavy duty connector with screw-lock design for 6 to 12 gauge wire.
- Waterproof design.
- Dimensions: 7-1/4" x 7" x 5".

Order No.	Mfg. No. / Description	Price
477090	(1810240) Quick Disconnect Power Plug	$79.98 D

Minn Kota Dual Talon Remote



- Wireless remote for independent control of (2) Talon Shallow Water Anchors.
- Program up to (10) remotes.
- Waterproof and floats.
- Includes battery and lanyard.
- Dimensions: 7-1/4" x 7" x 5".

Order No.	Mfg. No. / Description	Price
477092	(1810251) Dual Talon Remote	$99.98 D

Minn Kota Talon and Humminbird 360 Dual Mount Extension Plate




- Allows mounting of a Talon and a Humminbird 360° on the same bracket.
- Only compatible with new Universal Modular Adapter Brackets.

Order No.	Mfg. No. / Description	Price
477142	(1810237)	$89.98 B

©2014 Donovan Marine, Inc.

Worth Anchormate® II Anchor System



- Heavy gauge steel with electrostatic powder coated paint finish.
- Self-lubricating nylon rollers.
- Designed for heavier anchors on larger boats.
- Features the same ease and safety in anchoring as the original Anchormate.
- Features a patented bow fixture which has a unique pivot arm that eases the anchor up and over the front roller.
- Line capacity: 150' of 3/16" nylon braided rope.

Order No.	Mfg. No. / Description	Price
694287	(27536)	$204.98 I

Worth Anchormate® Anchor System



- Heavy gauge steel with electrostatic powder coated paint finish.
- Self-lubricating nylon rollers.
- When reeling in, if the hand slips, the anchor and handle stops right there.
- When not in use, the line stores neatly on the reel and the anchor is held securely in the bow fixture.
- Line capacity: 100' of 3/16" nylon braided rope.

Order No.	Mfg. No. / Description	Price
694263	(15036)	$152.98 I

Perko Fig. 903 Anchor Chocks



- Burnished chrome plated bronze.
- This design is more streamlined, easier to install.
- Consists of four parts (illustrated).
- Head of shank is held fast by slotted casting and thumbscrew.
- Uses #10 fasteners.


Fits Fortress: FX7-FX16, Danforth: H500, H960, H1500, S160, S300, S600, S920, S1300, VSB160, VSB13000, VSB1900, T570, T1200, T1800, T2500, T3000, D375, D750, D1150 and D1650.

Order No.	Mfg. No. / Description	Price
543657	(903 DP1 BUR)	$143.98 R

Fits Fortress: FX23-FX55. Danforth: H1800, H3100, H3600, D2000, D2500, S1600, S2000, S3000, VSB2500, VSB3600, T4000, T6000 and T7000.

Order No.	Mfg. No. / Description	Price
544110	(903 DP2 BUR)	$140.98 R


Worth Anchormate® ST Anchor System



- Heavy gauge polished stainless steel.
- Self-lubricating nylon rollers.
- Offers complete corrosion protection from salt water and air.
- All metal parts are fabricated from stainless steel to eliminate any possibility of rust or corrosion.
- Operates in the same manner as its counterpart, the Anchormate II.
- Features a patented bow fixture which has a unique pivot arm that eases the anchor up and over the front roller for the added safety of horizontal storage.
- Line capacity: 150' of 3/16" nylon braided rope.

Order No.	Mfg. No. / Description	Price
694300	(38500)	$305.98 I

Worth Swivel Pulley/Line Guides



- Can be used in virtually any installation.
- For use with up to 1/4" anchor line.
- Made of stainless steel with nylon sheaves.
- Includes: (1) Swivel pulley and (2) line guides in the set.
- Fasteners (screws, bolts, etc.) NOT included.

Order No.	Mfg. No. / Description	Price
694265	(15100)	$16.98 I

T-H Marine Anchor Master™



- The ultimate anchor retriever.
- Allows a boater to easily and safely retrieve the anchor.
- Eliminates all the hard work pulling up an anchor.
- Utilizes all stainless steel hardware for a durable, noncorrosive system.

Order No.	Mfg. No. / Description	Price
639801	(AR-1)	$93.98 G

Marpac Anchor Connectors with Swivel



- Stainless steel.
- With an anchor connector swivel attached to the anchor it is impossible for the chain to get twisted.
- The oval shaped joint allows perfect sliding of the anchor through the roller with no risk of damaging any components.
- Breaking load 5,500 lbs.

Order No.	Mfg. No. / Description	Price
7-1501	1/4" - 5/16"	$25.98 G
7-1502	3/8" - 1/2"	$39.98 G

- Deluxe swivel with double knuckle design.

Order No.	Mfg. No. / Description	Price
7-1503	1/4" - 5/16"	$39.98 G

Windline Anchor Roller



- For boats 28' to 48' with anchor platform or bow planks and pivoting fluke anchor.
- Handles line up to 1-1/2" diameter and chain up to 1/2".
- Mounts in or under slot to hold anchor under bow plank.
- Overall length 3".

Order No.	Mfg. No. / Description	Price
692108	(AR-5)	$94.98 F

Marpac Small Anchor Roller



- Electro polished stainless steel.
- Dimensions: 15-1/4" L x 2-1/16" W.
- 1-3/4" x 2-1/2" roller.
- 1" line - 3/8" chain.
- Similar to Windline URM-2.

Order No.	Description	Price
7-1537		$79.98 G
7-9040	Replacement Roller	$17.98 G

Marpac Self-Launching Anchor Roller



- Electro grade stainless steel.
- Works great with Bruce or Delta style anchors.
- Nylon roller.
- 15" long x 2" mounting width.

Order No.	Description	Price
7-1534		$181.98 G
7-9040	Replacement Roller	$17.98 G

Marpac Medium Anchor Roller



- Electro polished stainless steel.
- For boats up to 35'.
- Dimensions: 18" L x 3-1/2" W.
- 3" x 3" roller.
- Similar to Windline URM-4.

Order No.	Description	Price
7-1538		$166.98 G
7-9041	Replacement Roller	$35.98 G


Marpac Anchor Roller



- Electro polished stainless steel.
- Dimensions: 11" L x 2" W.
- 2" x 2" roller.
- Similar to Windline AR-3.

Order No.	Description	Price
7-1535		$69.98 G
7-9040	Replacement Roller	$17.98 G

Attwood Lift 'n Lock™ Anchor Control



- Economical zinc plate anchor lift.
- Nylon pulley system.
- Anchor lift and pulley system supports an anchor up to 20 lbs. with 1/4" to 7/16" diameter line (Sold separately).
- Steel sheave controls anchor from any position.

Order No.	Mfg. No. / Description	Price
237746	(13700-7)	$8.98 H

Marpac Narrow Anchor Roller



- Electro polished stainless steel.
- For boats up to 35'.
- Dimensions: 19-7/8" L x 3-1/8" W.
- 2-1/2" x 2-3/4" roller.
- Similar to Windline CR-1.

Order No.	Description	Price
7-1539		$146.98 G
7-9042	Replacement Roller	$28.98 G

Marpac Anchor Roller with Nylon Roller



- Stainless steel.
- Dimensions: 8-3/4" L x 2-5/8" W.
- 2" x 2" roller.
- Similar to Windline AR-7.

Order No.	Description	Price
7-1536		$59.98 G

Boater Sports Anchor Locking Control



- Retrieve your mushroom or river anchor without getting up.
- Zinc plated for superior corrosion resistance.
- For use with up to 20 lb. anchors.
- Nylon wheel.
- Diameter: 1/4" - 7/16".
- Length 5-1/2"
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-50704	(50704)	$8.99 H

Marpac Anchor Chain Stopper



- Cast stainless steel.
- Base dimensions: 2-3/4" x 3-1/8", height 2-7/16".
- Chain size: 1/4" - 3/8".
- Similar to Windline CS-1.

Order No.	Mfg. No. / Description	Price
7-1540		$54.98 F

Marpac Anchor Chain Retainer



- Electro polished stainless steel.
- Firmly holds chain up to 3/8".
- Working load 700 lbs.

Order No.	Mfg. No. / Description	Price
7-1541		$42.98 G

©2014 Donovan Marine, Inc.

Greenfield PVC Coated Slip Ring Mechanical Anchors



- Made of solid steel, is self-releasing, lightweight, easy to store and coated in heavy mar resistant plastisol, which protects boat finishes.
- **Please Note: Anchor is shown in Green.**

Order No.	Mfg. No. / Description			Price
656853	(669-6-RD)	5 lb.	Red	$51.98 Q
657116	(669-6-B)	5 lb.	Black	$51.98 Q
656854	(669-6-W)	5 lb.	White	$51.98 Q
656848	(669-11-R)	8 lb.	Blue	$68.98 Q
656849	(669-11-RD)	8 lb.	Red	$68.98 Q
656850	(669-11-W)	8 lb.	White	$68.98 Q
657119	(669-11-B)	8 lb.	Black	$68.98 Q

Boater Sports Slip-Ring Anchors - Galvanized



- Corrosion resistant galvanized steel construction.
- Provides excellent holding power in all bottom conditions.
- Sliding slip ring allows for easy anchor retrieval.
- Individually labeled.

Order No.	Mfg. No. / Description		Price
1-50356	(50356) Size #7	For Boats: 16' to 19'	$19.50 H
1-50358	(50358) Size #10	For Boats: 20' to 24'	$23.55 H
1-50360	(50360) Size #13	For Boats: 25' to 28'	$31.45 H
1-50362	(50358) Size #15	For Boats: 29' to 30'	$31.69 H

Boater Sports Fluke Anchors - Galvanized



- Penetrating fluke style anchors holds firmly in sand, mud, gravel and grassy bottoms.
- Excellent weight to holding power ratios compared to cast anchors.

Order No.	Mfg. No. / Description		Price
1-50422	(50422) Size #8	9 lb.	$34.65 H
1-50423	(50423) Size #13	14 lb.	$52.65 H
1-50424	(50424) Size #18	17 lb.	$64.99 H
1-50425	(50425) Size #22	25 lb.	$96.69 H

Boater Sports Anchor Kits



- Anchor kits include everything you need to correctly and safely anchor your boat.
- Contains one slip-ring galvanized anchor, two anchor shackles, one anchor rope and a galvanized anchor chain.

Order No.	Mfg. No. / Description	Price
1-50997	(50997) Anchor #7 - 5 lb., Shackles 5/16", Rope 3/8" x 50', Chain 1/4" x 4'	$68.95 H
1-50994	(50994) Anchor #10 - 6 lb., Shackles 5/16", Rope 3/8" x 100', Chain 1/4" x 4'	$99.99 R

Poseidon Slip Ring Anchors



- Hot dipped galvanized finish.
- Slip Ring design allows easy retrieval in snagging conditions.

Order No.	Description	Price
7-2305	Size #5, For Boats: 10' to 15'	$13.98 F
7-2306	Size #7, For Boats: 16' to 19'	$14.98 F
7-2307	Size #10, For Boats: 20' to 24'	$18.98 F
7-2308	Size #13, For Boats: 25' to 28'	$23.98 F
7-2309	Size #15, For Boats: 29' to 30'	$29.98 F


Poseidon Rapid Set™ Anchors



- Hot dipped galvanized finish.
- Wide flukes grab fast and hold tight.
- Can be stored in most fluke type anchor storage devices.
- Sits flat, easy to store and secure.

Order No.	Description	Price
7-2315	Size #2.5, For Boats: Up to 12'	$10.98 G
7-2316	Size #4, For Boats: 13' to 16'	$18.98 G
7-2317	Size #8, For Boats: 17' to 24'	$23.98 G
7-2318	Size #13, For Boats: 25' to 30'	$38.98 G
7-2319	Size #18, For Boats: 31' to 34'	$45.98 G
7-2320	Size #22, For Boats: 35' to 38'	$59.98 G
7-2322	Size #40, For Boats: 39' to 43'	$99.98 G
7-2323	Size #65, For Boats: 44' to 53'	$212.98 G
7-2324	Size #85, For Boats: 54' to 60'	$272.98 G

Danforth Standard Anchors



- It has the traditional good holding power which has always been associated with Danforth Standard Anchors.
- The shank is made of high strength steel.
- The steel flukes are strong and wide.
- Each anchor has a hot dipped galvanized coating for long lasting protection.
- Note: Holding power data is based on bottoms of medium consistency.

Order No.	Mfg. No.	Description	Price
656186	(94011)	5 lbs., Holding Power: 300 lbs.	$35.98 Q
656198	(94012)	9 lbs., Holding Power: 600 lbs.	$28.98 Q
656201	(94013)	14 lbs., Holding Power: 920 lbs.	$54.98 Q
656213	(94014)	16 lbs., Holding Power: 1,300 lbs.	$136.98 Q
656225	(94015)	25 lbs., Holding Power: 1,600 lbs.	$170.98 Q
656237	(94016)	43 lbs., Holding Power: 2,000 lbs.	$307.98 Q
656249	(94017)	70 lbs., Holding Power: 3,000 lbs.	$524.98 Q
656251	(94018)	100 lbs., Holding Power: 3,500 lbs.	$734.98 Q

Tie Down Super Hooker Anchors



- Hot dipped galvanized finish.
- These anchors have strong, wide flukes that penetrate quickly and firmly for maximum holding power.
- The fully welded crown configuration provides the right angles for ultimate holding power and secure penetration.
- Stows flat and can be used with most fluke type anchor storage systems.

Order No.	Mfg. No.	Description	Price
656516	(95030)	Size #2.5, Holding Power: 130 lbs.	$19.98 I
656528	(95035)	Size #4, Holding Power: 240 lbs.	$28.98 I
656530	(95040)	Size #8, Holding Power: 480 lbs.	$31.98 I
656542	(95045)	Size #13, Holding Power: 740 lbs.	$58.98 I
656554	(95050)	Size #18, Holding Power: 1,050 lbs.	$67.98 I
656566	(95055)	Size #22, Holding Power: 1,300 lbs.	$89.98 I
656578	(95060)	Size #40, Holding Power: 1,600 lbs.	$225.98 I
656579	(95065)	Size #65, Holding Power: 2,400 lbs.	$416.98 I
656580	(95070)	Size #85, Holding Power: 2,800 lbs.	$584.98 I

Tie Down Quick Set Anchor Kit



- Kit includes: 656465 (95016) #10 anchor, 1 coil of 3/8 x 100 nylon anchor line with thimble, 1 coil of 1/4 x 4' galvanized anchor chain and two 5/16 shackles.

Order No.	Mfg. No. / Description	Price
656467	(95090) Quick Set Anchor Kit	$92.98 I

Poseidon Anchor Display Rack



- Holds up to 14 anchors
- Easy to assembled
- Black powder coated finish

Order No.	Description	Price
7-2359	Display Rack	$129.98 G

Tie Down Hooker Anchor Display Stand



- Displays 14 anchors.
- Easy assembly.
- Small foot print, consumer information, PVC header card and black powder coat finish.
- Dimensions: 30" deep x 51" wide x 69" tall with header card.

Order No.	Mfg. No. / Description	Price
656592	(94099)	$189.98 B

Guardian Marine Anchors



- Precision-machined from an aluminum alloy that is as strong as steel, but only half the weight.
- Less machining steps than Fortress with 32° angle only and non-anodized finish.
- Easy to manage weight.
- Rustproof.
- An affordable alternative to heavy steel anchors.
- Disassembles for easy storage.

Order No.	Mfg. No.	Description	Price
514061	(G-5)	2.5 lbs., For Boats: 12' to 16'	$63.98 E
514063	(G-7)	4 lbs., For Boats: 17' to 22'	$82.98 E
514065	(G-11)	6 lbs., For Boats: 23' to 27'	$111.98 E
514067	(G-16)	7 lbs., For Boats: 28' to 33'	$161.98 E
514069	(G-23)	13 lbs., For Boats: 34' to 41'	$251.98 E
514073	(G-37)	18 lbs., For Boats: 42' to 47'	$403.98 E

Danforth Hi-Tensile Anchors



- Our toughest, most durable anchors and features very high holding power.
- The flukes are fabricated for additional strength and then beveled to allow quick, deep bottom penetration.
- Shanks made from drop forged steel.
- Hot dipped galvanized coating.
- Note: Holding power data is based on bottoms of medium consistency.

Order No.	Mfg. No.	Description	Price
656299	(94020)	12 lbs., Holding Power: 1,800 lbs.	$295.98 Q
656302	(94021)	20 lbs., Holding Power: 2,500 lbs.	$414.98 Q
656314	(94022)	35 lbs., Holding Power: 3,800 lbs.	$662.98 Q
656338	(94024)	90 lbs., Holding Power: 6,300 lbs.	$1,719.98 Q
656340	(94025)	150 lbs., Holding Power: 7,000 lbs.	$3,696.98 Q
656352	(94026)	190 lbs., Holding Power: 7,700 lbs.	$4,118.98 Q

Fortress Marine Anchors



- Precision-machined from an aluminum alloy that is as strong as steel, but only half the weight.
- Rustproof.
- Will set faster and penetrate deeper into common sea bottoms for incredible holding power.
- Disassembles for easy storage.
- Adjustable 32° to 45° fluke angle.
- Exclusive and patented feature which dramatically increases holding power in problem soft mud bottoms.
- Tough anodized finish.
- Corrosion resistant.

Order No.	Mfg. No.	Description	Price
513982	(FX-7)	4 lbs., For Boats: 16' to 27'	$153.98 E
513994	(FX-11)	7 lbs., For Boats: 28' to 32'	$204.98 E
514009	(FX-16)	10 lbs., For Boats: 33' to 38'	$299.98 E
514011	(FX-23)	15 lbs., For Boats: 39' to 45'	$473.98 E
514023	(FX-37)	21 lbs., For Boats: 46' to 51'	$695.98 E
514035	(FX-55)	32 lbs., For Boats: 52' to 58'	$1,018.98 E
514047	(FX-85)	47 lbs., For Boats: 59' to 68'	$1,583.98 E
514059	(FX-125)	69 lbs., For Boats: 69' to 150'	$2,319.98 E

©2014 Donovan Marine, Inc.

Greenfield American Yachting Series Anchors - Vinyl Coated



- Traditional fluke - type design.
- Recommended in most conditions and for medium to heavy duty.

Order No.	Mfg. No. / Description			Price
657125	(GPI-8-B)	7 lb.	Black	$98.98 Q
657130	(GPI-13-B)	12 lb.	Black	$131.98 Q
657135	(GPI-17-B)	16 lb.	Black	$161.98 Q
657140	(GPI-21-B)	20 lb.	Black	$197.98 Q
657145	(GPI-27-B)	25 lb.	Black	$221.98 Q

Poseidon EZ Launch™ Anchors



- Self-launching design.
- Can be used with a trip line for easy retrieval when snagged.
- Designed for greater stability and holding power.
- Use with any universal chain and rope-end fittings.

Order No.	Description	Price
7-2330	Size #14	$84.98 G
7-2331	Size #22	$105.98 G
7-2332	Size #35	$156.98 G
7-2333	Size #44	$212.98 G
7-2334	Size #55	$290.98 G

Lewmar Delta Anchors

LEWMAR



- Maintains precise geometry at high loads.
- Easy retrieval in case of snags.
- Absolute stability & high holding power.
- High grade manganese steel provides maximum tensile and shear strength.
- High stability ballasting for correct seabed orientation & optimum penetration.
- Accommodates all universal chain and rope-end fittings.

Order No.	Mfg. No. / Description	Price
554899	(0057406) 14#, For 1/4" or 6 - 7 mm Chain	$133.98 E
554902	(0057410) 22#, For 5/16" or 8 mm Chain	$195.98 E

Greenfield Richter Anchors



- The ultimate high performance anchor.
- The weight of a river anchor.
- The penetration of a grapnel anchor.
- The easy retrieval of a slip-ring anchor.

Order No.	Mfg. No. / Description			Price
657150	(614-B) 13-14 lb.		Black	$114.98 Q
657155	(618-B) 17-18 lb.		Black	$129.98 Q
657160	(625-B) 24-25 lb.		Black	$156.98 Q

Claw Anchor - Galvanized Steel Shank and Stock



- Galvanized gray iron head.
- Height 18", width 14".

Order No.	Description	Price
7-2355	Size #12	$84.98 G

Boater Sports Cast Fluke Claw Style Anchor



- With the dependability of a fluke anchor, designed with new materials.
- The fluke style anchor has superior grabbing ability in almost any bottom condition.
- Constructed of a cast iron fluke with a steel shaft, this anchor will last for years to come.
- Resets quickly by changing pulling direction and breaks free easily with vertical pulling.

Order No.	Mfg. No. / Description		Price
1-50575	(50575) Size #8	11 lb.	$39.25 G

Poseidon Grapnel™ Anchors



- Hot dipped galvanized finish.
- Heavy duty prongs.
- Welded ring for trip line, making recovery easier.

Order No.	Description	Price
7-2350	Size 5	$33.98 G
7-2351	Size 8	$51.98 G
7-2352	Size 12	$76.98 G
7-2353	Size 18	$93.98 G

Poseidon Grabber™ Anchors



- Similar in design to the anchors used by oil rigs in the North Sea.
- Very effective under a wide variety of sea bed, tide and wind combinations.
- Works well with most bow rollers for easy storage.
- Sets and re-sets fast and easily.

Order No.	Description	Price
7-2338	Size #11, For Boats: Up to 23'	$42.98 G
7-2339	Size #16.5, For Boats: Up to 30'	$54.98 G
7-2340	Size #22, For Boats: Up to 34'	$71.98 G
7-2341	Size #33, For Boats: Up to 40'	$115.98 G
7-2342	Size #44, For Boats: Up to 46'	$142.98 G
7-2343	Size #66, For Boats: Up to 56'	$237.98 G

Poseidon Navy™ Anchors



- Black vinyl coated.
- Ideal for rivers and lakes having gravel and stone bottoms.
- Really digs in and holds the minute it strikes bottom!

Order No.	Description	Price
7-0552	10 lbs.	$24.98 F
7-0553	15 lbs.	$29.98 F
7-0554	20 lbs.	$39.98 F

Greenfield Navy Anchors - Vinyl Coated



- Cast Iron with mar resistant black vinyl coating.
- Excellent holding power-to weight ratio.
- Individually labeled.

Order No.	Mfg. No. / Description			Price
657055	(910-B)	9-10 lb.	Black	$46.98 Q
657060	(915-B)	14-15 lb.	Black	$55.98 Q
657065	(920-B)	19-20 lb.	Black	$69.98 Q
656886	(920-RD)	19-20 lb.	Red	$69.98 Q
657070	(925-B)	27-28 lb.	Black	$101.98 Q

Boater Sports Mushroom Anchors - Vinyl Coated



- Cast iron with mar resistant black vinyl coating.
- Designed for use in rivers and lakes.
- Excellent holding power in mud or weedy bottoms.
- Individually labeled.

Order No.	Mfg. No. / Description			Price
1-50003	(50003) 8 lb.		Black	$22.40 H
1-50013	(50013) 10 lb.		Black	$27.98 H
1-50023	(50023) 15 lb.		Black	$40.85 H
1-50033	(50033) 20 lb.		Black	$56.79 H

Poseidon River™ Anchors



- Black vinyl coated.
- Great for pontoon and bass boats.
- Specially designed anchor that is ideal for anchoring on sand, weed, gravel or stone bottoms.
- Recommended for strong current areas.

Order No.	Description	Price
7-0560	12 lbs.	$24.98 F
7-0561	16 lbs.	$29.98 F
7-0562	18 lbs.	$41.98 F

Boater Sports Navy Anchors - Vinyl Coated



- Cast Iron with mar resistant black vinyl coating.
- Combines Fluke principle with bulk and weight to provide boaters with excellent holding power-to-weight ratio.
- Individually labeled.

Order No.	Mfg. No. / Description		Price
1-50222	(50222) 10 lb.	Black	$27.69 H
1-50232	(50232) 15 lb.	Black	$41.95 H
1-50242	(50242) 20 lb.	Black	$55.20 H

Poseidon Mushroom™ Anchors



- Black vinyl coated.
- Ideal for rivers and lakes having gravel and stone bottoms.

Order No.	Mfg. No. / Description	Price
7-0556	8 lbs.	$15.98 F
7-0557	10 lbs.	$19.98 F
7-0558	15 lbs.	$29.98 F

Greenfield Mushroom Anchors - Vinyl Coated



- Cast iron with mar resistant black vinyl coating.
- Designed for use in rivers and lakes.
- Excellent holding power in mud or weedy bottoms.

Order No.	Mfg. No. / Description			Price
657080	(508-B)	7-8 lb.	Black	$35.98 Q
657085	(510-B)	7-10 lb.	Black	$38.98 Q
656872	(510-R)	7-10 lb.	Blue	$38.98 Q
656874	(510-RD)	7-10 lb.	Red	$38.98 Q
657090	(515-B)	14-15 lb.	Black	$49.98 Q
656875	(515-R)	14-15 lb.	Blue	$49.98 Q
656876	(515-RD)	14-15 lb.	Red	$49.98 Q

Boater Sports River Anchors - Vinyl Coated



- Cast iron with mar resistant black vinyl coating.
- Designed for use in rivers and lakes.
- Excellent holding power in mud or weedy bottoms.
- Individually labeled.

Order No.	Mfg. No. / Description		Price
1-50103	(50103) 12 lb.	Black	$33.99 H
1-50112	(50112) 15 lb.	Black	$41.45 H
1-50122	(50122) 20 lb.	Black	$55.20 H
1-50130	(50130) 30 lb.	Black	$79.99 R

©2014 Donovan Marine, Inc.

Greenfield River Anchors - Vinyl Coated



- Cast iron with mar resistant black vinyl coating.
- Designed for use in rivers and lakes.
- Excellent holding power in mud or weedy bottoms.

Order No.	Mfg. No. / Description			Price
657095	(514-B)	13-14 lb.	Black	$53.98 Q
657100	(516-B)	15-16 lb.	Black	$59.98 Q
657105	(520-B)	19-20 lb.	Blue	$73.98 Q
657107	(530-B)	29-30 lb.	Black	$103.98 Q


Kwik Tek PWC Sand Anchor & Buoy



- Ideal for anchoring PWCs in shallow water to keep the impeller off the beach.
- Fill this super durable tri-laminate anchor bag with up to 35 pounds of rocks or sand.
- A buoy marks the anchor's location.
- Tie-ups are easy with the 6-foot long rope and the oversized finish-friendly acetyl snap hook.

Order No.	Mfg. No. / Description	Price
5960077	(A-1)	$19.98 H

Jim-Buoy Storm Sea Anchors



- Vinyl coated nylon trolling sea anchor with 1" polypropylene shroud liens, except 267941 (925).
- Easily collapsible for storage.
- Not for storm use.
- 267941 (925) for use with Horseshoe Buoy.

Order No.	Mfg. No. / Description	Price
267941	(925) Diameter 10"	$24.98 H
267953	(926) Diameter 18"	$72.98 H
267965	(927) Diameter 24"	$76.98 H
267977	(928) Diameter 30"	$115.98 H

Marpac Braided Polypropylene Rope with Hook



Order No.	Description	Price
7-6445	1/4" x 50'	$7.98 G
7-6446	3/8" x 75'	$12.98 G

Marpac Solid Braid Nylon Anchor Line with Hook



- Use as a replacement for Anchormate reels.
- 3/16" x 150'.

Order No.	Description	Price
7-6440	Anchor Line	$17.98 G

Poseidon Grab N' Go™ Folding Anchor Kit



- Folding anchor system for small boats, personal watercraft, canoes, kayaks and inflatables.
- Entire kit fits in an area less than 11" x 5" x 3", including most PWC storage areas.
- 3 lb. coated four fluke grapnel anchor grips mud, sand, gravel and rock bottoms solidly.
- 25' of floating anchor line with stainless steel snap hook for fast deployment.
- Protective padded storage bag dampens noise vibrations.

Order No.	Description	Price
7-2357	Grab N' Go	$35.98 G

Kwik Twek Grapnel Folding Anchor



- The 3-1/3 lb. 4-fluke folding anchor will hold in mud, sand, gravel and rock.
- It's designed for boats, sailboats, personal watercraft, inflatable boats, canoes and float tubes.
- Coated anchor to protect finishes; Padded, durable, nylon storage case for added protection and to dampen noise while stowing; Fits under most boat seats, in PWC storage compartments or in PWC storage canisters; 25' long marine-grade rope with in-line buoy spliced in; Heavy duty stainless steel snap hook.

Order No.	Mfg. No. / Description	Price
586391	(A-2) Folding Anchor	$39.98 G

Jim-Buoy Storm Sea Anchor



- Diameter 36".
- Length 72".
- USCG approval #160.019/15/0.
- Manufactured from vinyl covered heavy nylon.
- Unmatched strength and durability.
- Will not rot or mildew.
- Stainless steel/galvanized fittings, nylon webbing.

Order No.	Mfg. No. / Description	Price
267989	(929)	$441.98 H

Marpac Gold Braid Nylon Anchor Line



- Two 100% nylon ropes combined into one double braided strong line
- Superior strength & flexibility
- Unlikely to kink, hockle or rotate under load
- Resistant to oil, rot & mildew
- Excellent UV protection

Order No.	Description	Price
7-6443		$109.98 G

New England Ropes Anchor Lines



- Made with finest quality marine-grade nylon.
- 3-strand anchor lines feature tension-set, 4-stage construction rope.
- Professionally spliced eye and thimble.
- Heat sealed and whipped bitter end.

Order No.	Mfg. No. / Description	Price
355330	(60601200200) 3/8" x 200'	$83.98 Q

Cal-June Industrial Rope Float



- Rope Hole: 1-1/4"
- Rock Hard Shell with 100% closed-cell, solid foam core.
- White.

Order No.	Mfg. No. / Description	Price
267801	(4401RF) Size: 15"	$141.98 R

Marpac Premier 8 Plait Nylon Rope Anchor Rodes



- Extra-strong factory spliced chain to rope
- Swivel (Included!) reduces chain twisting
- 8 Plait nylon rope: Eliminates ALL hockling and kinking, Reduces risk of jamming the windlass gypsy, Resists stiffening with age, 50% more line fits in locker than standard 3-strand rope
- High test, hot-dipped, galvanized G4 chain minimizes corrosion
- Excellent for use with most windlasses


High Test Stainless Steel Chain

Order No.	Description	Price
7-7445	15' x ¼" Chain, 200' x ½" Rope	$714.98 G
7-7446	15' x 5/16" Chain, 200' x 5/8" Rope	$952.98 G

Galvanized G4 Chain

Order No.	Description	Price
7-7450	10' x ¼" Chain, 150' x ½" Rope	$238.98 G
7-7451	15' x ¼" Chain, 200' x ½" Rope	$305.98 G
7-7452	15' x 5/16" Chain, 200' x 5/8" Rope	$419.98 G
7-7453	15' x ¼" Chain, 300' x ½" Rope	$419.98 G

Marpac Stainless Steel Anchor Chain



- Marine grade 316 stainless steel with oversize end links.
- Includes: two marine grade stainless steel anchor shackles.

Order No.	Description	Price
7-1510	1/4", Length 4'	$41.98 G
7-1520	5/16", Length 5'	$74.98 G
7-1530	3/8", Length 6'	$123.98 G


Marpac Twisted Nylon Anchor Lines



- Highly resistant to rot, abrasion, oil, grease, gasoline and marine growth
- Spliced in thimble makes attaching anchor/chain easier
- Can be stowed wet without damage to the fibers
- 4 stage construction for better abrasion resistance
- Superior strength & flexibility
- Excellent UV protection

Order No.	Description	Price
7-6433	3/8" x 50'	$18.98 G
7-6434	3/8" x 100'	$27.98 G
7-6435	3/8" x 150'	$39.98 G
7-6436	1/2" x 100'	$54.98 G
7-6437	1/2" x 150'	$73.98 G
7-6438	1/2" x 200'	$104.98 G
7-6439	1/2" x 250'	$131.98 G
7-6441	5/8" x 250'	$251.98 G
7-6442	5/8" x 300'	$288.98 G

Marpac 3 Strand Nylon/Galvanized Anchor Rodes



- Smooth transition from rope to chain with a tapered back factory splice
- 3-strand nylon rope, windlass grade
- Specially treated to remain flexible even with constant exposure to sun and salt water
- High test, hot dipped, galvanized G4 chain minimizes corrosion
- Swivel (Included!) reduces chain twisting

Order No.	Description	Price
7-7455	10' x ¼" Chain, 150' x ½" Rope	$203.98 G
7-7456	15' x ¼" Chain, 200' x ½" Rope	$263.98 G
7-7457	15' x 1/4" Chain, 300' x 1/2" Rope	$343.98 G
7-7461	15' x 5/16" Chain, 200' x 9/16" Rope	$333.98 G

Proof - Coil Galvanized Chain



Order No.	Description	Price
617603	3/16" x 800'	$602.98 C
617627	1/4" x 400'	$448.98 C
617641	5/16" x 275'	$469.98 C
617665	3/8" x 200'	$496.98 C
617694	1/2" x 200', Medium Link	$813.98 C

Proof Coil Galvanized Chain - Pail




- Hot dipped galvanized proof coil welded chain.
- Sold in 5 gallon buckets.
- **Special handling may apply.**

Order No.	Description	Price
271391	3/16", Length 250'	$303.98 Q
271393	1/4", Length 141'	$264.98 Q
271395	5/16", Length 92'	$261.98 Q
271397	3/8", Length 63'	$262.98 Q

©2014 Donovan Marine, Inc.

Marpac Galvanized Anchor Chain



- Hot dipped galvanized with elongated end links.

Order No.	Description	Price
7-0729	3/16", Length 4'	$7.98 G
7-0731	5/16", Length 5'	$17.98 G
7-0732	1/4", Length 4'	$12.98 G
7-0733	3/8", Length 6'	$32.98 G

Marpac Vinyl Coated Anchor Chain



- Vinyl coated, hot dipped galvanized.

Order No.	Description	Price
7-0595	3/16", Length 4'	$12.98 F
7-0596	1/4", Length 4'	$16.98 F
7-0598	5/16", Length 5'	$29.98 G
7-0599	3/8", Length 6'	$39.98 G

Greenfield Vinyl Coated Anchor Chain

Please Note: Anchor Chain is shown in Blue.



- Vinyl coated, hot dipped galvanized.
- Over-sized end links for easy shackle attachment.
- Black.

Order No.	Mfg. No. / Description	Price
656873	(2115-B) 1/4" x 4'	$21.98 Q
657165	(2114-B) 3/16" x 4'	$24.98 Q
657175	(2116-B) 5/16" x 5'	$35.98 Q

Galvanized Shackles - Load Rated



Order No.	Description	Price
616257	1/4", Sold 25 Per Box	$29.98 I
616258	1/4", 1/2 Ton	$1.98 I
616260	5/16", Sold 25 Per Box	$34.98 I
616261	5/16", 3/4 Ton	$1.98 I
616271	3/8", Sold 20 Per Box	$39.98 I
616272	3/8", 1 Ton	$1.98 I
616283	7/16", Sold 20 Per Box	$48.98 I
616284	7/16", 1-1/2 Ton	$2.98 I
616295	1/2", Sold 20 Per Box	$62.98 I
616296	1/2", 2 Ton	$3.98 I
616308	5/8", Sold 10 Per Box	$61.98 I
617502	5/8", 3-1/4 Ton	$6.98 I
616310	3/4", Sold 10 Per Box	$93.98 I
617514	3/4", 4-3/4 Ton	$9.98 I
616322	1", Each	$15.98 I

Boater Sports Galvanized Anchor Chain



- Complete your anchor system.
- Corrosion resistant hot dipped galvanized anchor chain.
- Oversized rings on both ends.
- Clam pack.

Order No.	Mfg. No. / Description		Price
1-50604	(50604) Diameter 1/4"	Length 4'	$12.69 H
1-50606	(50606) Diameter 5/16"	Length 6'	$22.65 H

Boater Sports Coated Galvanized Anchor Chains



- Complete your anchor system.
- Powder coated hot dipped galvanized anchor chain.
- Clam pack.

Order No.	Mfg. No. / Description		Price
1-50601	(50601) Diameter 1/4"	Length 4'	$17.75 H
1-50603	(50603) Diameter 5/16"	Length 6'	$34.65 H

Screw Pin Anchor Shackles



- Hot dipped galvanized steel.
- Imported.

Order No.	Description	Price
616017	1/8", Sold Each	$0.98 I
616005	1/8", Sold 100 Per Pack	$48.98 I
616031	3/16", Sold Each	$0.98 I
616029	3/16", Sold 100 Per Pack	$48.98 I
616055	1/4", Sold Each	$0.98 I
616043	1/4", Sold 100 Per Pack	$56.98 I
616079	5/16", Sold Each	$0.98 I
616067	5/16", Sold 100 Per Pack	$69.98 I
616093	3/8", Sold Each	$1.98 I
616081	3/8", Sold 100 Per Pack	$118.98 I
616118	7/16", Sold Each	$1.98 I
616106	7/16", Sold 100 Per Pack	$186.98 I
616132	1/2", Sold Each	$2.98 I
616120	1/2", Sold 100 Per Pack	$238.98 I
616156	5/8", Sold Each	$3.98 I
616144	5/8", Sold 50 Per Pack	$196.98 I
616170	3/4", Sold Each	$6.98 I
616168	3/4", Sold 20 Per Pack	$121.98 I
616173	7/8", Sold Each	$9.98 I
616182	1", Sold Each	$13.98 I
616194	1-1/4", Sold Each	$27.98 I
616206	1-1/2", Sold Each	$51.98 I

Poseidon Screw Pin Anchor Shackles



- Hot dipped galvanized steel.

Order No.	Description		Price
7-0395	1/4"	Sold 2 Per Card	$2.59 G
7-0396	5/16"	Sold 2 Per Card	$3.59 G
7-0397	3/8"	Sold 2 Per Card	$4.98 G
7-0398	1/2"	Sold 1 Per Card	$3.98 G

Screw Pin Anchor Shackles



- Manufactured by Campbell, Made in USA.
- Drop-forged carbon steel.
- Galvanized to ASTM A-153 specification.
- Meets or exceeds all requirements of ASME B30.26.
- Working load limit permanently shown on every shackle.

Order No.	Mfg. No. / Description	Price
210765	(5410535) 5/16"	$7.98 G
210769	(5410635) 3/8"	$9.98 G
210773	(5410735) 7/16"	$10.98 G
210778	(5410835) 1/2"	$13.98 G
210782	(5411035) 5/8"	$21.98 G
210785	(5411235) 3/4"	$31.98 G

Standard Stainless Steel Wire Rope Shackles



- Cast 316 stainless steel.
- Sold in bulk.

Order No.	Mfg. No. / Description	Price
745008	(3752) 1/4"	$6.98 G
745010	(3753) 5/16"	$9.98 G
745022	(3754) 3/8"	$13.98 G

Boater Sports Quick Links - Plated Steel



- Plated steel.
- Precision cast.
- Use for anchor chains.
- Slide blister pack.

Order No.	Mfg. No. / Description		Price
1-54534	(54534) 5/16"	690 lbs.	$1.99 H
1-54536	(54536) 3/8"	840 lbs.	$2.99 H

Boater Sports Hot Dipped Galvanized Anchor Shackles



- Heavy duty hot dipped galvanized anchor shackles.
- With holed end screw pin.
- Slide blister pack.

Order No.	Mfg. No. / Description		Price
1-55030	(55030) 1/4"	Curved	$1.15 H
1-55032	(55032) 5/16"	Curved	$1.70 H
1-55034	(55034) 3/8"	Curved	$2.19 H
1-55036	(55036) 7/16"	Curved	$2.75 H
1-55038	(55038) 5/8"	Curved	$4.40 H

Poseidon Screw Pin Anchor Shackles



- Stainless steel.
- Sold one per card.

Order No.	Description	Price
7-0267	1/4"	$8.98 G
7-0268	5/16"	$10.98 G
7-0269	3/8"	$14.98 G
7-0270	1/2"	$24.98 G

Boater Sports Stainless Steel Shackles



- Beautifully polished 316 stainless steel anchor shackles with holed end screw pin.
- Slide blister pack.

Order No.	Mfg. No. / Description		Price
1-55002	(55002) 5/16"	Straight	$4.99 H
1-55004	(55004) 3/8"	Straight	$8.49 H
1-55006	(55006) 5/16"	Curved	$5.90 H

Boater Sports Quick Links - Stainless Steel



- Stainless steel.
- Precision cast.
- Use for anchor chains.
- Slide blister pack.

Order No.	Mfg. No. / Description		Price
1-54506	(54506) 5/16"	690 lbs.	$6.95 H
1-54508	(54508) 3/8"	840 lbs.	$11.95 H

Eye and Eye Swivels



- Drop-forged carbon steel.
- Galvanized to ASTM A-153 specification.
- Design factor: 5 to 1.
- Meets Federal Specification RR-C-271 Type VII, Class 2.

Order No.	Mfg. No. / Description	Price
210789	(3630635) 3/8"	$29.98 G
210792	(3630835) 1/2"	$38.98 G
210794	(3631035) 5/8"	$57.98 G
210796	(3631235) 3/4"	$74.98 G

©2014 Donovan Marine, Inc.

Standard Rope Thimbles



- Hot dipped galvanized steel.
- Imported.

Order No.	Description	Price
615433	3/16", Sold Each	$0.98 I
615421	3/16", Sold 100 Per Pack	$17.98 I
615457	1/4", Sold Each	$0.98 I
615445	1/4", Sold 100 Per Pack	$32.98 I
615471	5/16", Sold Each	$0.98 I
615469	5/16", Sold 100 Per Pack	$27.98 I
615495	3/8", Sold Each	$0.98 I
615484	3/8", Sold 100 Per Pack	$30.98 I
615535	1/2", Sold Each	$0.98 I
615525	1/2", Sold 100 Per Pack	$52.98 I
615572	5/8", Sold Each	$1.98 I
615561	5/8", Sold 50 Per Pack	$56.98 I
615597	3/4", Sold Each	$1.98 I
615611	1", Sold Each	$3.98 I

Standard Stainless Steel Wire Rope Thimbles



Order No.	Mfg. No. / Description	Price
212009	(SO123-0003) 1/8"	$1.98 G
212011	(SO123-0005) 3/16"	$2.98 G
212023	(SO123-0007) 1/4"	$1.98 G
212035	(SO123-0008) 5/16"	$2.98 G
212047	(SO123-0010) 3/8"	$2.98 G
212059	(SO123-0013) 1/2"	$3.98 G

Copper Duplex Oval Sleeves - Zinc Plated

See Page 93 for Hand Swagers.



Order No.	Mfg. No. / Description	Price
211211	(SL2-2P) 1/16", Use Hand Swager 212566 (1-SC)	$2.20 R
211223	(SL2-3P) 3/32", Use Hand Swager 212566 (1-SC)	$3.08 R
211235	(SL2-4P) 1/8", Use Hand Swager 212566 (1-SC)	$4.12 R
211247	(SL2-5P) 5/32", Use Hand Swager 212566 (1-SC)	$4.10 R
211259	(SL2-6P) 3/16", Use Hand Swager 212566 (1-SC)	$5.98 R
211261	(SL2-7P) 7/32", Use Hand Swager (0-7/32)	$6.98 I
211273	(SL2-8P) 1/4", Use Hand Swager 212580 (0-1/4)	$6.98 R
211285	(SL2-10P) 5/16", Use Hand Swager (0-5/16)	$12.98 I

Aluminum Duplex Oval Sleeve

211196	(SL1-6) 3/16", Use Hand Swager 212566 (1-SC)	$2.64 R

Galvanized Thimbles Type III - Heavy Duty



Order No.	Description	Price
615608	1/4", Sold 100 Per Box	$69.98 I
615621	1/4", Sold Each	$0.98 I
615612	5/16", Sold 100 Per Box	$72.98 I
615613	5/16", Sold Each	$0.98 I
615623	3/8", Sold 100 Per Box	$82.98 I
615624	3/8", Sold Each	$0.98 I
615631	7/16", Sold 100 Per Box	$82.98 I
615630	7/16", Sold Each	$0.98 I
615647	1/2", Sold 100 Per Box	$164.98 C
615632	1/2", Sold Each	$1.98 I
615659	5/8", Sold 50 Per Box	$118.98 I
615660	5/8", Sold Each	$2.98 I

Stainless Steel Thimbles



- Stainless steel - natural finish.
- Fits cable diameters from 1/16" to 1/4" to meet the most demanding marine requirements.
- Meets all Military Specification.


Order No.	Mfg. No. / Description	Price
211906	(AN100-C3) To Fit Cable Diameter 1/16"	$2.18 G
211918	(AN100-C4) To Fit Cable Diameter 1/8"	$2.18 G
211920	(AN100-C5) To Fit Cable Diameter 5/32"	$2.18 G
211932	(AN100-C6) To Fit Cable Diameter 3/16"	$2.12 G
211944	(AN100-C8) To Fit Cable Diameter 1/4"	$3.32 G

Imported Galvanized Wire Rope Clips



Order No.	Description	Price
615015	1/8", Sold Each	$0.98 I
615003	1/8", Sold 100 Per Pack	$19.98 I
615039	3/16", Sold Each	$0.98 I
615027	3/16", Sold 100 Per Pack	$19.98 I
615053	1/4", Sold Each	$0.98 I
615041	1/4", Sold 100 Per Pack	$34.98 I
615077	5/16", Sold Each	$0.98 I
615065	5/16", Sold 100 Per Pack	$41.98 I
615091	3/8", Sold Each	$0.98 I
615089	3/8", Sold 50 Per Pack	$33.98 I
615130	1/2", Sold Each	$0.98 I
615128	1/2", Sold 50 Per Pack	$45.98 I
615154	5/8", Sold Each	$1.98 I
615142	5/8", Sold 50 Per Pack	$75.98 I
615166	3/4", Sold Each	$1.98 I
615178	1", Sold Each	$4.98 I

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

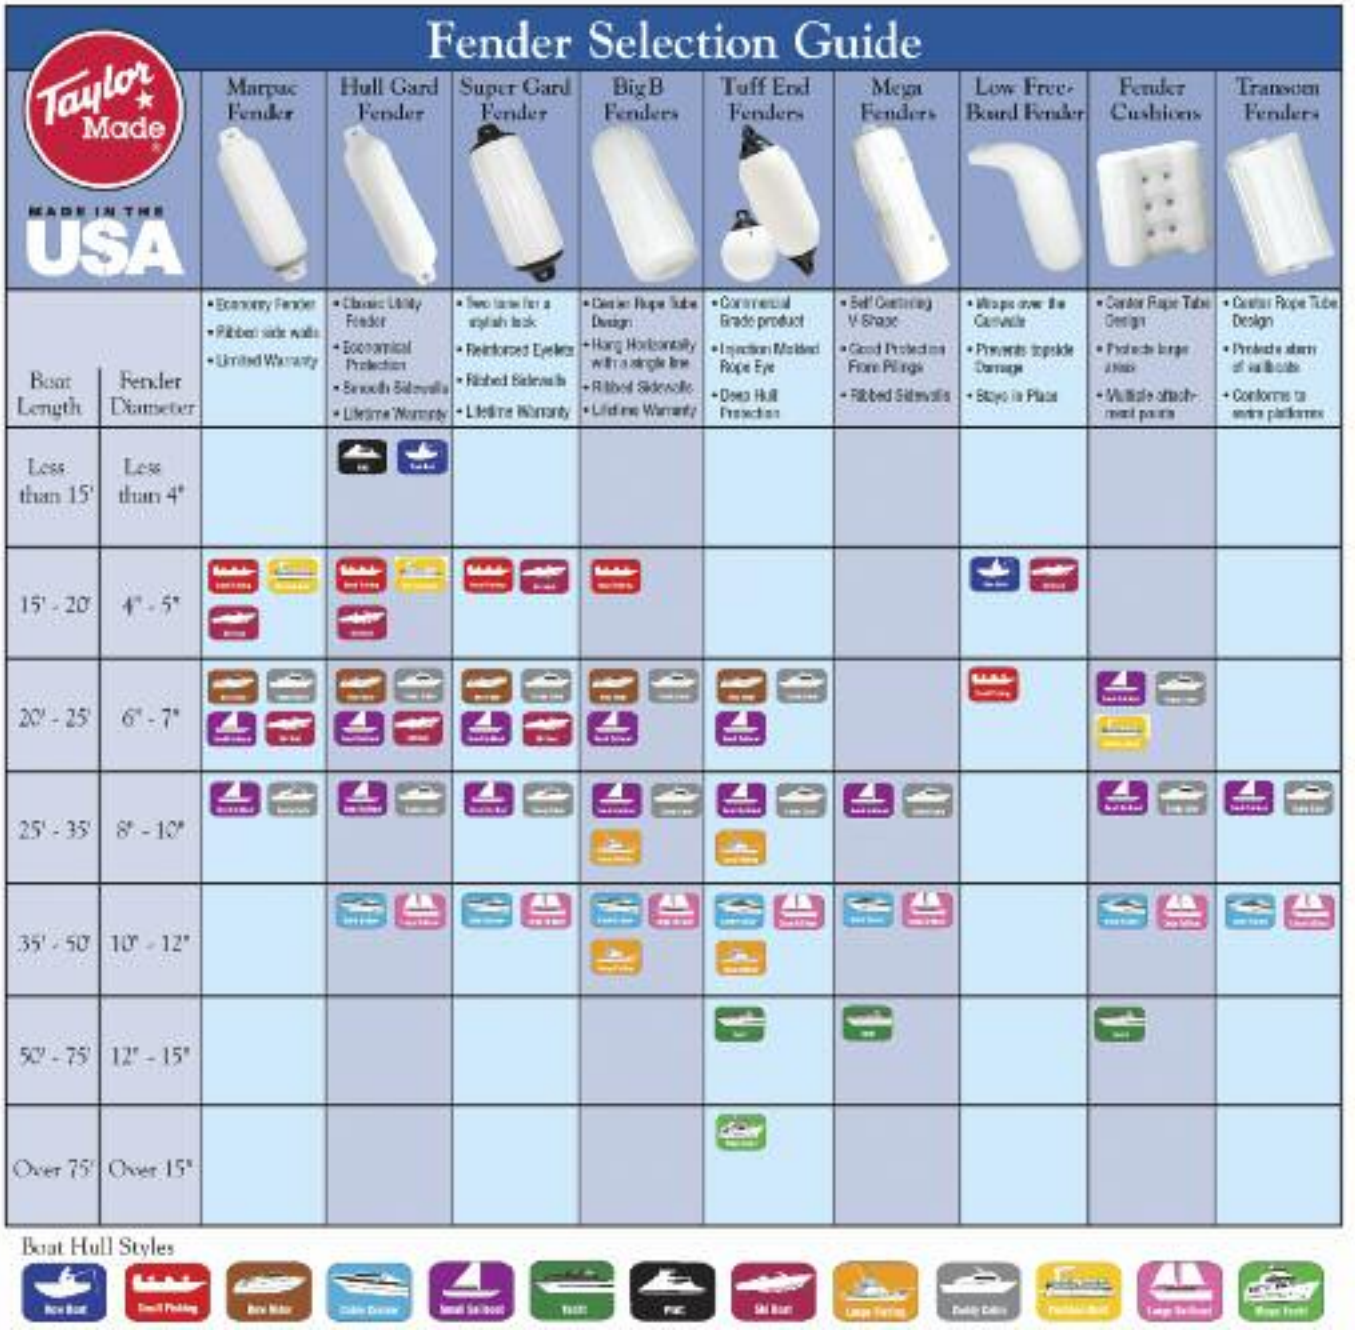

Tough Guy Inflatable Vinyl Fenders



- The affordable alternative.
- Constructed of marine grade vinyl.
- Molded in ribs.
- Inflation valve.

Order No.	Description	Price
7-0580	4" x 16", White	$11.98 G
7-0585	4" x 16", Blue	$11.98 G
7-0590	4" x 16", Black	$11.98 G
7-0581	5" x 18", White	$12.98 G
7-0586	5" x 18", Blue	$12.98 G
7-0591	5" x 18", Black	$12.98 G
7-0582	6" x 22", White	$16.98 G
7-0587	6" x 22", Blue	$16.98 G
7-0592	6" x 22", Black	$16.98 G
7-0583	8" x 26", White	$28.98 G
7-0588	8" x 26", Blue	$28.98 G
7-0593	8" x 26", Black	$28.98 G

©2014 Donovan Marine, Inc.

Boater Sports Standard Fenders



- These newly designed "super-soft" fenders.
- Non-abrasive and can be tied to cleats or rails to put protection exactly where you need it.
- Made of high quality vinyl.
- Ribbed on all sides for strength and durability.
- Reinforced rope holes for added strength.

Order No.	Mfg. No. / Description		Price
1-52172	(52172) 4.5" x 16"	Blue	$10.69 L
1-52173	(52173) 4.5" x 16"	White	$10.69 L
1-52174	(52174) 4.5" x 16"	Black	$10.69 L
1-52177	(52177) 5.5" x 20"	Blue	$14.79 I
1-52178	(52178) 5.5" x 20"	White	$14.79 I
1-52179	(52179) 5.5" x 20"	Black	$14.79 I
1-52558	(52558) 5.5" x 20"	Red	$15.85 K
1-52559	(52559) 5.5" x 20"	Navy	$15.85 K
1-52560	(52560) 5.5" x 20"	Green	$15.85 K
1-52561	(52561) 5.5" x 20"	Tan	$15.85 K
1-52182	(52182) 6.5" x 23"	Blue	$16.95 I
1-52183	(52183) 6.5" x 23"	White	$16.95 I
1-52184	(52184) 6.5" x 23"	Black	$16.95 I
1-52562	(52562) 6.5" x 23"	Red	$17.99 K
1-52563	(52563) 6.5" x 23"	Navy	$17.99 K
1-52564	(52564) 6.5" x 23"	Green	$17.99 K
1-52565	(52565) 6.5" x 23"	Tan	$17.99 K
1-52185	(52185) 8.5" x 27"	Blue	$31.99 J
1-52186	(52186) 8.5" x 27"	White	$31.99 J
1-52187	(52187) 8.5" x 27"	Black	$31.99 J

Boater Sports Promotional Fender Kits



- Inflatable fender kit includes two standard fenders.
- 3/8" x 60" white braided MFP fender whips included.
- Black kits include black fender whips.
- Display packaged.

Order No.	Mfg. No. / Description		Price
1-52145	(52145) 5.5" x 20"	Tan	$33.79 J
1-52146	(52146) 6.5" x 23"	Tan	$39.69 J
1-52149	(52149) 5.5" x 20"	White	$33.79 J
1-52150	(52150) 6.5" x 23"	White	$39.69 J
1-52151	(52151) 5.5" x 20"	Black	$33.79 J
1-52152	(52152) 6.5" x 23"	Black	$39.69 J

Taylor Made Super Gard™ Inflatable Vinyl Fenders



- Made from the highest quality marine grade vinyl, Super Gards feature a high gloss finish and double molded black ends for extra strength where you need it the most.
- Seamless one-piece construction with ribbed sides minimizes roll, and a molded-in valve ensures easy inflation and long life.

Order No.	Mfg. No. / Description	For Boats	Color	Price
719522	(950520) 5-1/2" x 20"	15' to 20'	White	$26.98 G
719572	(951520) 5-1/2" x 20"	15' to 20'	Blue	$25.98 G
719612	(953520) 5-1/2" x 20"	15' to 20'	Cranberry	$25.98 G
719615	(954520) 5-1/2" x 20"	15' to 20'	Hunter Green	$25.98 G
719634	(960520) 5-1/2" x 20"	15' to 20'	Sand	$25.98 G
719630	(957520) 5-1/2" x 20"	15' to 20'	Navy	$25.98 G
719534	(950622) 6-1/2" x 22"	20' to 25'	White	$41.98 G
719584	(951622) 6-1/2" x 22"	20' to 25'	Blue	$41.98 G
719613	(953622) 6-1/2" x 22"	20' to 25'	Cranberry	$41.98 G
719614	(952622) 6-1/2" x 22"	20' to 25'	Black	$42.98 G
719617	(954622) 6-1/2" x 22"	20' to 25'	Hunter Green	$41.98 G
719635	(960622) 6-1/2" x 22"	20' to 25'	Sand	$41.98 G
719633	(957622) 6-1/2" x 22"	20' to 25'	Navy	$41.98 G
719546	(950824) 8-1/2" x 26"	25' to 35'	White	$70.98 G
719609	(951824) 8-1/2" x 26"	25' to 35'	Blue	$70.98 G
719616	(952824) 8-1/2" x 26"	25' to 35'	Black	$73.98 G
719640	(957824) 8-1/2" x 26"	25' to 35'	Navy	$70.98 G
719558	(950128) 10-1/2" x 30"	35' to 50'	White	$101.98 G
719610	(952128) 10-1/2" x 30"	35' to 50'	Black	$103.98 G
719642	(957128) 10-1/2" x 30"	35' to 50'	Navy	$101.98 G

Taylor Made Tuff End™ Inflatable Vinyl Fenders



- For heavy duty marine applications.
- Features seamless construction.
- Designed to perform under the most demanding conditions.
- Constructed from the same flexible, resilient vinyl as our Super Gard, Big B and Hull Gard fenders, the end in each Tuff End is injection molded for extra strength and reliability.
- White.

Order No.	Mfg. No. / Description		Price
719700	(1182) 6" x 25"	For Boats Up to 30'	$48.98 G
719701	(1185) 8" x 27"	For Boats 25' to 40'	$79.98 G
719702	(1188) 10" x 30"	For Boats 40' to 50'	$103.98 G
719703	(1191) 12" x 35"	For Boats 50' to 60'	$142.98 G
719704	(1192) 15" x 41"	For Boats 60' to 70'	$190.98 G
719799	(1193) 19" x 50"	For Boats 70' to 80'	$424.98 G
719706	(1194) 24" x 57"	For Boats 80' to 100'	$497.98 G
719707	(1195) 32" x 77"	For Boats Over 100'	$780.98 G

Taylor Made Hull Gard® Inflatable Vinyl Fenders



- Features a unique oval design that prevents the fender from rolling out of position.
- Combines unsurpassed softness and superior strength to provide boaters with the maximum protection available from a utility fender.
- Inflation valves adjust the level of firmness to satisfy all applications.

Order No.	Mfg. No. / Description		For Boats	Color	Price
719343	(1021)	3-1/2" x 13"	Up' to 10'	White	$12.98 G
719380	(41020)	3-1/2" x 13"	Up' to 10'	Blue	$13.98 G
719344	(1021)	4-1/2" x 16"	10' to 15'	White	$16.98 G
719382	(41021)	4-1/2" x 16"	10' to 15'	Blue	$13.98 G
719413	(31722)	5-1/2" x 20"	15' to 20'	Black	$19.98 G
719356	(1022)	5-1/2" x 20"	15' to 20'	White	$19.98 G
719386	(41022)	5-1/2" x 20"	15' to 20'	Blue	$19.98 G
719400	(531022)	5-1/2" x 20"	15' to 20'	Cranberry	$19.98 G
719404	(541022)	5-1/2" x 20"	15' to 25'	Hunter Green	$19.98 G
719409	(571022)	5-1/2" x 20"	15' to 20'	Navy Blue	$19.98 G
719500	(601022)	5-1/2" x 20"	15' to 20'	Sand	$18.98 G
719414	(31723)	6-1/2" x 23"	20' to 25'	Black	$31.98 G
719368	(1023)	6-1/2" x 23"	20' to 25'	White	$29.98 G
719390	(41023)	6-1/2" x 23"	20' to 25'	Blue	$29.98 G
719401	(531023)	6-1/2" x 23"	20' to 25'	Cranberry	$29.98 G
719405	(541023)	6-1/2" x 23"	20' to 25'	Hunter Green	$31.98 G
719410	(571023)	6-1/2" x 23"	20' to 25'	Navy Blue	$29.98 G
719505	(601023)	6-1/2" x 23"	20' to 25'	Sand	$29.98 G
719415	(71028)	8-1/2" x 27"	25' to 35'	Black	$55.98 G
719370	(1028)	8-1/2" x 27"	25' to 35'	White	$55.98 G
719396	(41028)	8-1/2" x 27"	25' to 35'	Blue	$55.98 G
719411	(571028)	8-1/2" x 27"	25' to 35'	Navy Blue	$55.98 G
719416	(71024)	10-1/2" x 30"	35' to 50'	Black	$78.98 G
719371	(1024)	10-1/2" x 30"	35' to 50'	White	$80.98 G
719398	(41024)	10-1/2" x 30"	35' to 50'	Blue	$78.98 G

Boater Sports Hole-Thru Middle Fenders





- These newly designed "super-soft" fenders are non-abrasive and can be tied to cleats or rails to put protection exactly where you need it.
- Made of high quality vinyl.
- Ribbed on all sides for strength and durability.
- Reinforced rope holes for added strength.

Order No.	Mfg. No. / Description		Price
1-52136	(52136) 8.5" x 20"	White	$39.99 J
1-52137	(52137) 8.5" x 20"	Black	$39.99 J
1-52139	(52139) 10" x 26.5"	White	$55.95 K
1-52140	(52140) 10" x 26.5"	Black	$55.95 K

Taylor Made Big B™ Inflatable Vinyl Fenders



- Incorporates a center rope tube that allows end-to-end line passage.
- It can be hung vertically or horizontally with a single line.
- Horizontal hanging is useful protection against pilings, awkward docking situations and tidal change areas.
- Features seamless construction, with molded ribs to minimize roll.
- Made from the highest quality marine grade vinyl with a high gloss finish.

Order No.	Mfg. No. / Description				Price
720400	(1025)	6" x 15"	For Boats: 20' to 25'	White	$41.98 G
720444	(71025)	6" x 15"	For Boats: 20' to 25'	Black	$43.98 G
719418	(571025)	6" x 15"	For Boats: 20' to 25'	Navy	$42.98 G
720412	(1026)	8" x 20"	For Boats: 25' to 35'	White	$57.98 G
720441	(41026)	8" x 20"	For Boats: 25' to 35'	Blue	$57.98 G
720445	(71026)	8" x 20"	For Boats: 25' to 35'	Black	$57.98 G
720395	(571026)	8" x 20"	For Boats: 25' to 35'	Navy	$57.98 G
720424	(1032)	10" x 26"	For Boats: 35' to 50'	White	$98.98 G
720442	(41032)	10" x 26"	For Boats: 35' to 50'	Blue	$98.98 G
720447	(71032)	10" x 26"	For Boats: 35' to 50'	Black	$98.98 G
720396	(571032)	10" x 26"	For Boats: 35' to 50'	Navy	$98.98 G
720425	(1034)	12" x 34"	For Boats: 50' to 60'	White	$145.98 G
719420	(571034)	12" x 34"	For Boats: 50' to 60'	Navy Blue	$145.98 G
720448	(71034)	12" x 34"	For Boats: 50' to 60'	Black	$141.98 G

Polyform G Series Fenders



- Even wall thickness for maximum strength and durability.
- Molded-in ribs for strength and abrasion resistance.
- Reinforced ropeholds.
- Designed for use by trailered boats and in permanent protected moorings.
- Unique Polyform valve for years of service.

Order No.	Mfg. No. / Description		Price
720020	(G-2) 4.5" x 15.5"	White	$14.98 G
719851	(G-3) 5.5" x 19"	Black	$17.98 G
719902	(G-3) 5.5" x 19"	Blue	$17.98 G
720032	(G-3) 5.5" x 19"	White	$17.98 G
720082	(G-3) 5.5" x 19"	Teal	$14.98 G
719863	(G-4) 6.5" x 21.9"	Black	$26.98 G
719914	(G-4) 6.5" x 21.9"	Blue	$26.98 G
720044	(G-4) 6.5" x 21.9"	White	$26.98 G
719875	(G-5) 8.8" x 26.8"	Black	$48.98 G
719926	(G-5) 8.8" x 26.8"	Blue	$48.98 G
720056	(G-5) 8.8" x 26.8"	White	$48.98 G
720068	(G-6) 11" x 30"	White	$67.98 G

©2014 Donovan Marine, Inc.

Polyform HTM Series Fenders



- Molded-in ribs for strength and abrasion resistance.
- Reinforced tube ends.
- Even wall thickness for maximum strength and durability.
- Designed for medium-duty use in both permanent protected and unprotected moorings.
- Unique Polyform valve for years of service.

Order No.	Mfg. No. / Description	Price
720107	(HTM-1) 6.3" x 15.5", White	$41.98 G
999162	(HTM-2) 8.5" x 20.5", Sand	$36.98 G
720117	(HTM-2) 8.5" x 20.5", Black	$54.98 G
720119	(HTM-2) 8.5" x 20.5", White	$54.98 G
720169	(HTM-2) 8.5" x 20.5", Blue	$54.98 G
720122	(HTM-3) 10.5" x 27", Black	$95.98 G
720121	(HTM-3) 10.5" x 27", White	$95.98 G
720125	(HTM-3) 10.5" x 27", Blue	$95.98 G
720234	(HTM-4) 13.5" x 34.8", Black	$142.98 G
720133	(HTM-4) 13.5" x 34.8", White	$142.98 G
720232	(HTM-4) 13.5" x 34.8", Blue	$142.98 G

Polyform F Series Fenders



- Even wall thickness for maximum strength and durability.
- Polyform's unique vinyl valve system.
- Multiple ribbed reinforced ropeholds.
- Twin-eye design for vertical or horizontal use.
- White.

Order No.	Mfg. No. / Description	Price
719749	(F-1) 6" x 24"	$45.98 G
719751	(F-02) 7.5" x 26"	$52.98 G
719752	(F-2) 8.2" x 25"	$61.98 G
719753	(F-3) 8.2" x 30"	$83.98 G
719754	(F-4) 8.5" x 40.5"	$108.98 G
719755	(F-5) 11" x 30"	$110.98 G
719762	(F-6) 11" x 42"	$148.98 G
719763	(F-7) 15" x 41"	$216.98 G
719786	(F-8) 15" x 58"	$354.98 G
719787	(F-10) 18" x 50"	$404.98 G
719788	(F-11) 21.2" x 57.5"	$480.98 G

Taylor Made PWC Fender



- Designed to custom fit the profiles of most PWCs.
- The fender bottom is shaped to "hook" under the bond flange for quick attachment.
- Flex areas on the fender provide a "hinge" action that allows the fender to conform to the shape of the watercraft.
- Features an inflation valve for air pressure adjustment and includes a suction cup and securing line.

Order No.	Mfg. No. / Description	Price
719837	(1069) White	$36.98 G

Taylor Made Freedom Fenders





- Rotationally molded from heavy gauge PVC, freedom fenders feature a needle valve for easy inflation.
- The patented V shape stays on pilings no matter which way the boat moves.
- The recessed line holders allow them to fit standard fender racks.
- Hang them vertically or horizontally for the ultimate in versatility whether docking on pilings, floating docks or mooring!

Order No.	Mfg. No. / Description				Price
255450	(FF2685B)	8.5" x 26"	For Boats: 25' - 35'	Black	$116.98 G
255455	(FF2685W)	8.5" x 26"	For Boats: 25' - 35'	White	$116.98 G
255460	(FF3212B)	12" x 32"	For Boats: 35' - 65'	Black	$143.98 G
255463	(FF3212W)	12" x 32"	For Boats: 35' - 65'	White	$143.98 G

Taylor Made Fender Cushions™



- The only fender specifically designed for maximum protection when rafting or tying up against solid walls.
- Six molded tubes provide crush resistance, and the exclusive channel design lends itself to "hugging" the boat.
- Made from tough marine grade vinyl and feature an inflation valve for air pressure adjustment.
- May be hung vertically or horizontally.

Order No.	Mfg. No. / Description	Price
721553	(46090) Length 15", Width 15", Diameter 6-1/2"	$117.98 G
721435	(46095) Length 20", Width 20", Diameter 7-5/8"	$190.98 G

Taylor Made Transom Fender



- Uniquely shaped to fit the stern of a sailboat or the edge of most swim platforms up to 4" thick.
- An integral 3/4" diameter tube allows securing line to pass from end to end while a contoured shape helps 'grip' the fendering location.
- Made from soft, flexible vinyl.
- Rubber football inflation valve to adjust the level of firmness to satisfy all applications.
- Dimensions: 10" x 22".

Order No.	Mfg. No. / Description	Price
719820	(56090)	$129.98 G

Hull Hugr Contour Fenders





- Traditional round fenders tend to roll up, leaving your boat unprotected.
- They're also bulky to stow.
- Boats with step-down gunwales are especially vulnerable to damage from docks.
- HULL HUGR Contour Fenders stay put and stow conveniently under boat seats.
- They hinge to wrap around the gunwale and hull, following the contours of the boat.
- All HULL HUGRs are constructed of a durable marine grade tri-laminate cover, with closed cell foam inside.
- There's a tough polycarbonate grommet at each end for hanging from cleats.

Order No.	Mfg. No. / Description			Price
596917	(HH-1C)	24" L x 6" W x 2-1/2" D	Blue	$13.98 H
596919	(HH-1CB)	24" L x 6" W x 2-1/2" D	Black	$13.98 H
596921	(HH-1CW	24" L x 6" W x 2-1/2" D	White	$13.98 H
596931	(HH-30C)	30" L x 6" W x 4" D	Blue	$24.98 G
596933	(HH-30CB)	30" L x 6" W x 4" D	Black	$24.98 G
596935	(HH-30CW)	30" L x 6" W x 4" D	White	$24.98 G

Hull Hugr Flat Fenders



- The Hull Hugr Flat Fender is 26" long x 6" wide x 2-1/2" thick.
- Constructed of durable marine grade trilaminate with a polycarbonate grommet at each end.
- Hang them vertically or horizontally.
- Great for mounting to docks and posts.

Order No.	Mfg. No. / Description	Price
5960259	(HH-1) Blue	$13.98 H
5960260	(HH-1B) Black	$13.98 H

Hull Hugr Displays



- The Hull Hugr floor display comes stocked with an assortment of our most popular styles in a variety of colors.
- Contents: (4) HH-1C, (4) HH-1CW, (4) HH-1CB, (4) HH-1, (4) HH-1W and (4) HH-1B.

Order No.	Mfg. No. / Description	Price
5960275	(HH Display) Straight	$274.98 D
5960276	(HH Display) Contour	$274.98 D

Hull Hugr Folding Fenders



- Hull Hugr protects boats better than 6 traditional fenders.
- The ingenious patented design enables you to fold it up to a very compact size.
- Hull Hugr is constructed of UV and puncture resistant marine grade vinyl/ polyester tri-laminate.
- Six blocks of durable closed-cell foam are sealed inside.
- There are 3 sizes to fit every boat, dock, and slip.
- Great for tying or screwing to docks.
- Traditional round fenders roll up.

- 7-1/2' long x 15" tall, (6) 12" x 6" x 2" foam bumpers, folds to only 15" x 15" x 4".
- For low profile boats, including jet boats, ski boats, bass boats and sailboats.

Order No.	Mfg. No. / Description	Price
5960282	(HH-S) Blue	$45.98 G
5960283	(HH-SW) White	$45.98 H

- 7-1/2' long x 22" tall, (6) 20" x 6" x 2" foam bumpers, folds to only 22" x 22" x 4".
- For medium profile boats, pontoons, deck boats, houseboats, sailboats and cruisers up to 30 ft.

Order No.	Mfg. No. / Description	Price
5960279	(HH-M) Blue	$64.98 G
5960280	(HH-MW) White	$64.98 G

- 9' long x 26" tall, (6) 24" x 6" x 2-1/2" foam bumpers, folds to only 26" x 18" x 6".
- For higher profile boats including cruisers, performance boats, pontoons, deck boats, sailing yachts and houseboats.

Order No.	Mfg. No. / Description	Price
5960277	(HH-L) Blue	$84.98 H
5960278	(HH-LW) White	$84.98 G

Hull Hugr Modular Flat EVA Fenders



- These HULL HUGR Fenders are easy to stow and will not puncture or absorb water.
- The flat design prevents from them from rolling or riding up.
- Link 2 or more together with the hook and loop straps provided.
- Manufactured from 3 layer dual density EVA.
- They're great for rafting 2 boats together and very popular for sailboats and runabouts.
- Hook & Loop Strap and Fender Line included

Order No.	Mfg. No. / Description			Price
596923	(HH-20BL)	20" L x 8" W x 2" D	Blue	$21.98 H
596925	(HH-20GR)	20" L x 8" W x 2" D	Gray	$20.98 F
596927	(HH-24BL)	24" L x 12" W x 3" D	Blue	$49.98 G
596929	(HH-24GR)	24" L x 12" W x 3" D	Gray	$49.98 G
596937	(HH-36BL)	36" L x 12" W x 3" D	Blue	$64.98 F
596941	(HH-36GR)	36" L x 12" W x 3" D	Gray	$64.98 F

©2014 Donovan Marine, Inc.

Hull Hugr PWC Fender





- World's Best PWC Fender!
- Engineered specifically for PWCs, it hinges in the center to better protect PWC bodies from docks.
- The block anchors the fender strap perfectly and will not damage the body.
- 2 fenders recommend per PWC.
- Fits all PWCs.

Order No.	Mfg. No. / Description	Price
5960281	(HH-P1B) Black	$20.98 H

Taylor Made Pontoon Fenders







722769



722757

- Comes in two shapes for both radius style or 90° pontoon corners.
- They mount over the original factory installed aluminum corner section to provide air-cushioning impact protection when docking.
- Each corner section is molded from a special gray PVC formulated to match the aluminum color of the boat and secures with stainless steel fasteners.
- 3" W x 12" L.

Order No.	Mfg. No. / Description	Price
722783	(31033) 90° Corner Fender	$30.98 G
722795	(31034) Radius Corner Fender	$30.98 G

- Designed to fit snugly between the pontoon and the deck of the boat, protecting both from rafting boats, docks or other objects.

Order No.	Mfg. No. / Description	Price
722757	(31030) Pontoon Fender	$44.98 G

- Secures to the fence or railing and is designed to prevent contact to the delicate aluminum fencing.
- 9" W x 36" L.

Order No.	Mfg. No. / Description	Price
722769	(31032) Pontoon Fence Saver	$59.98 G

Taylor Made Pontoon Rail Fenders



r• A fender adjuster designed specifically for the 1" square tube rails of Pontoon Boats.
- The mounting structure clamps securely to square tubing yet can be repositioned quickly and easily.
- Constructed from durable ABS plastic this fender adjuster allows for simple height adjustment for lines up to 3/8".

Order No.	Mfg. No. / Description	Price
719270	(1139)	$22.98 G
719272	(11391) Countertop Merchandiser, 36 Pieces	$109.98 G

Taylor Made Low Freeboard Fenders



- Shaped to protect the gunwales and rubrail.
- Can be tied over the cleat to position it higher on the boat.
- Made from specially formulated tough marine grade vinyl and features an inflation valve for air pressure adjustment.

Order No.	Mfg. No. / Description	Price
719815	(31005) Diameter 5", Length 14", White	$27.98 G
719816	(31007) Diameter 7", Length 23", White	$59.98 G

Taylor Made Fender Display

Display includes:

Qty.	DMI #	Description
1	719204	Fender Center
6	719382	Big B 4-1/2" x 16" Blue Fenders
2	719396	Big B 8-1/2" x 27" Blue Fenders
6	719344	Hull Gard 4-1/2" x 16" White Fenders
4	719386	Hull Gard 5-1/2" x 20" Blue Fenders
4	719356	Hull Gard 5-1/2" x 20" White Fenders
4	719522	Hull Gard 5-1/2" x 20" White Fenders
2	719534	Hull Gard 6-1/2" x 22" White Fenders
4	719390	Hull Gard 6-1/2" x 23" Blue Fenders
4	719368	Hull Gard 6-1/2" x 23" White Fenders
2	719546	Hull Gard 8-1/2" x 26" White Fenders
2	719370	Hull Gard 8-1/2" x 27" White Fenders
4	719572	Super Gard 5-1/2" x 20" Blue Fenders
2	719584	Super Gard 6-1/2" x 22"' Blue Fenders
2	719609	Super Gard 8-1/2" x 26" Blue Fenders

Order No.	Mfg. No. / Description	Price
719203	(FC01)	$1,429.98 G

Taylor Made Premium Fender Covers



- Knit from heavy weight, high tenacity solution dyed nylon yarn that stands up to sunlight, abrasion and harsh environments.
- The fabric is a circular knit construction to eliminate lateral seams and has a high degree of elasticity to maintain its shape and ensure a nice tight fit to your fender.
- The covers are secured, both top and bottom, with an adjustable, high strength polypropylene rope that keeps the cover in place yet allows for easy removal for cleaning.

Fits Hull Gard: 6-1/2" x 23", Super Gard: 5-1/2" x 20" and Big B: 6" x 15".

Order No.	Mfg. No. / Description	Price
719053	(9079) Black	$28.98 G

Fits Hull Gard: 8-1/2" x 27", Super Gard: 8-1/2" x 26" and Big B: 8" x 20".

719027	(9076) Navy	$34.98 G
719065	(9080) Black	$34.98 G

Fits Hull Gard: 10-1/2" x 30", Super Gard: 10-1/2" x 30" and Big B: 10" x 26".

719039	(9077) Navy	$36.98 G
719077	(9081) Black	$36.98 G

Fits Big B: 12" x 34".

719041	(9078) Navy	$41.98 G

Davis Instruments Fender Tender II



- Use this Davis accessory to clip your fenders to rails, lifelines, side wing windows or cleats.
- Easy on, easy off , easy to adjust - no knots!
- Fender Tender II™ simplifies the handling and relocation of boat fenders.
- "Railing Lock" firmly grasps rails from 7/8" to 1" diameter.
- "Lifeline Lock" serration grabs line, providing added safety.
- Use 1/4" to 3/8" diameter nylon line.
- Made of tough, sun-resistant plastic for many years of use.
- Helps tidy up your boat.
- Don't dock without it!
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
322012	(393) The Original!	$11.98 E

Taylor Made Rail Fender Hanger



- Made from injection molded, high impact and UV resistant nylon.
- This unique design makes it easy to adjust fender heights and locks in place with a jam cleat.
- Uses 1/4" to 1/2" line.
- Fits up to 1" rails.

Order No.	Mfg. No. / Description	Price
720455	(1105)	$8.98 G

Accon Fender Hangers





- Marine grade 316 stainless steel construction.
- Eliminates the need for repetitive tying and untying.
- Surface mount, no cut-outs are necessary.
- The hinge snaps into the base and stays attached to the fender when separated.
- Fastens to deck with two #10 screws.

Order No.	Mfg. No. / Description	Price
Special Order	(401-R-.5) Diameter 1/2"	Call for Price
Special Order	(401-R-.5-P) Diameter 1/2", Post Only	Call for Price
Special Order	(401-R-1) Diameter 1"	Call for Price
Special Order	(401-R-1-P) Diameter 1", Post Only	Call for Price

Taylor Made Tidy-Ups™ Fender Adjuster



- These fender adjusters simply snap over your lifelines or railing and are ready to use.
- Holds line up to 5/8" in diameter.
- For standard size rail.
- White vinyl.

Order No.	Mfg. No. / Description	Price
720449	(1015) Tidy Ups	$17.98 G

Taylor Made No Knot™ Fender Hanger



- This heavy duty marine nylon fender hanger keeps your fender in place with a simple system.
- Just attach the rope over the rail, and weave it through the gripper teeth.
- Your boat is safe and fender protected with-out using knots.

Order No.	Mfg. No. / Description	Price
720454	(1105)	$9.98 G

Taylor Made Big B™ CRT Fender Hanger





- Countertop display, contains (36) 1085 Big B Fender Hangers.
- Injection molded reinforced nylon for strength.
- Vented to prevent water accumulating in fender tube.
- Professional "finished" look.
- Fits 3/8" diameter rope.

Order No.	Mfg. No. / Description	Price
720456	(11085) Fender Hanger Display	$121.98 G

Taylor Made Fender Racks - Stainless Steel



- Holds any style fender.
- Cross reinforced for extra strength.
- High gloss #316 stainless steel.
- Completely preassembled!
- Tightens to accommodate any angle.
- Folds flat for easy storage.
- Moveable "J" hooks mount on 7/8" rail and stanchion system.
- For 2 fenders.

Order No.	Mfg. No. / Description	Price
720462	(2009) Fender Diameter: 7" to 9"	$192.98 G
720466	(2011) Fender Diameter: 9" to 11"	$227.98 G

Polyform True-Fit Fender Holder


720323



- Because of its modular design, you can mix or match sizes or add on as your needs change.
- Diameter 9".
- Fits: F-2, F-3, G-5, HTM-2 and NF-5 Fenders.
- Note: Requires use of connectors 720323 (TFR-402) or TFR-403.

Order No.	Mfg. No. / Description	Price
720284	(TFR-230)	$66.98 G
720323	(TFR-402) Swivel Connector, 7/8" - 1" Rails	$20.98 G

©2014 Donovan Marine, Inc.

Taylor Made Tuff End™ Inflatable Vinyl Buoys



- Features heavy duty seamless construction to meet the punishing demands of the commercial marine industry.
- Made from injection molded vinyl tested to 2000 psi tensile strength.
- Features large line holes that will accept standard shackles.
- The curved design hole prevents chafing.

Order No.	Mfg. No. / Description	Price
719205	(61140) Diameter 9", Orange	$33.98 G
719217	(61143) Diameter 12", Orange	$40.98 G
719229	(61146) Diameter 15", Orange	$56.98 G
719231	(61149) Diameter 18", Orange	$75.98 G
719243	(61152) Diameter 21", Orange	$115.98 G
719255	(61155) Diameter 27", Orange	$175.98 G
719267	(601157) Diameter 34", Orange	$382.98 G
719280	(1140) Diameter 9", White	$33.98 G
719281	(1143) Diameter 12", White	$40.98 G
719293	(1146) Diameter 15", White	$56.98 G
719306	(1149) Diameter 18", White	$77.98 G
719318	(1152) Diameter 21", White	$118.98 G
719320	(1155) Diameter 27", White	$175.98 G
719332	(1157) Diameter 34", White	$382.98 G

Boater Sports Adjustable Fender Holders



- Adjustable 4" to 22" strap.
- Easily attach or detach with quick release buckle.

Order No.	Mfg. No. / Description	Price
1-52100	(52100) White	$2.65 K
1-52101	(52101) Blue	$2.49 I
1-52102	(52102) Black	$2.49 I

Taylor Made Quick Knot™ Fender Hanger



- This easy to use fender hanger allows the quick placement of fenders anywhere there is something to tie off to, without having to tie a knot.
- The rope is threaded through the quick knot's heavy duty molded nylon system, hanging the fender quickly and securely.

Order No.	Mfg. No. / Description	Price
720450	(1098)	$18.98 G

Taylor Made Traditional Stainless Steel Fender Lock



- These low profile fender lock bases make hanging fenders fast and easy.
- Accepts rope sizes up to 1/4".
- Stainless steel.

Order No.	Mfg. No. / Description	Price
720457	(1010) One Lock and Peg	$7.98 G

Polyform A Series Buoys



- Even wall thickness for maximum strength and durability.
- Polyform's unique vinyl valve system.
- Redesigned ropehold for A-1 through A-7 for improved strength and durability.
- Dual valve inflation/deflation system for sizes A-5, A-6 and A-7.

Order No.	Mfg. No. / Description	Price
718000	(A-0) 8" x 11.5", Red	$31.98 G
718005	(A-0) 8" x 11.5", White	$31.98 G
718010	(A-1) 11" x 15", Red	$39.98 G
718015	(A-1) 11" x 15", White	$39.98 G
718020	(A-2) 14.5" x 19.5", Red	$55.98 G
718025	(A-2) 14.5" x 19.5", White	$55.98 G
718030	(A-3) 17" x 23", Red	$73.98 G
718035	(A-3) 17" x 23", White	$73.98 G
718040	(A-4) 20.5" x 27", Red	$106.98 G
718045	(A-4) 20.5" x 27", White	$106.98 G
718050	(A-5) 27" x 36", Red	$194.98 G
718055	(A-5) 27" x 36", White	$194.98 G
718060	(A-6) 34" x 44", Red	$383.98 G
718065	(A-6) 34" x 44", White	$383.98 G
718070	(A-7) 39" x 54", Red	$639.98 G
718075	(A-7) 39" x 54", White	$639.98 G

Taylor Made Tidy-Ups™ Line Holder



- UV resistant vinyl strap securely holds rope, cords, etc.
- Standard rail.

Order No.	Mfg. No. / Description	Price
722613	(1101)	$8.98 G

Kwik Tek Suction Cup Fender Strap



- Giant 3-1/4" suction cups attach to gelcoat or windshields.
- Perfect for most boats and personal watercraft where cleats never seem to be where you need them.
- Durable 1" wide straps adjust up to 24" long.
- Sold 2 per package.

Order No.	Mfg. No. / Description	Price
586416	(SF-1C)	$9.98 G

Kwik Tek No-Slip Fender Strap



- No more tying and untying knots!
- Attach boat fenders to rails and cleats quickly and securely with these fender straps.
- The NO-SLIP pads sewn to the underside of the straps minimize sliding along rails.
- Easily adjust the length in seconds from 6 in. to 40 in. to fit most boats and docking situations.
- 2 per package.

Order No.	Mfg. No. / Description	Price
5960293	(SF-2) White	$8.98 H

Perko Fig. 1309 Snap Type Fender Hook



- Chrome plated zinc alloy.
- Plate dimensions: 1-9/16" x 1-3/8".
- Maximum rope size 1/4".
- Uses #6 fasteners.
- Sold 2 per display pack.

Order No.	Mfg. No. / Description	Price
534330	(1309 DP0 CHR)	$18.98 R

Perko Fig. 1299 Fender Lock



- Chrome plated zinc alloy.
- Eye ID 3/8", flange OD 1-1/2".
- Uses #8 fasteners.
- The eye is to be permanently attached to the fender line.
- Sold each per display pack.

Order No.	Mfg. No. / Description	Price
534203	(1299 DP0 CHR)	$19.98 R

Marpac Braided MFP Fender Lines



- Floats.
- Multifilament polypropylene double braid construction.
- Can be stored wet, will not shrink.
- Resistant to abrasion, mildew, oil and rot.
- Excellent UV protection.
- Superior strength and flexibility.

Order No.	Description	Price
7-6470	1/4" x 48", White, Sold 4 Per Pack	$7.98 G
7-6472	1/4" x 48", Black, Sold 4 Per Pack	$7.98 G
7-6474	1/4" x 48", Blue, Sold 4 Per Pack	$7.98 G
7-6480	3/8" x 72", White, Sold 2 Per Pack	$7.98 G
7-6482	3/8" x 72", Black, Sold 2 Per Pack	$7.98 G
7-6484	3/8" x 72", Blue, Sold 2 Per Pack	$7.98 G


Boater Sports Nylon Fender Whips



- 100% nylon braided fender whips.
- 5" splice, whipped at splice and at bitter end.
- Sold in pairs.

Order No.	Mfg. No. / Description		Price
1-53312	(53312) 1/4" x 72"	White	$5.45 H
1-53320	(53320) 1/4" x 60"	Blue	$5.45 H
1-53323	(53323) 1/4" x 60"	Black	$5.45 H

Handi-Man Four Prong Line Holder



- Designed to bolt into place.
- Stainless steel construction.
- 12 packs per box.

Order No.	Mfg. No. / Description	Price
731500	(960012) 5Hx3Wx16	$103.98 I

Taylor Made Hand Pump with Hose Adapter





- Compact hand pump for filling fenders, rafts, etc.

Order No.	Mfg. No. / Description	Price
720458	(1005)	$15.98 G
720459	(31010) Pack of 3 Inflation Needles	$6.98 G

Boater Sports Fender Lines/Whips - MFP



- These 5' long, 3/8" solid braid, multi-filament polypropylene fender whips will not kink.
- Mildew and rot resistant.
- Pre-spliced and professionally finished, these fender whips are made to last.
- Secure your fender without hard-to-untie knots.
- Color matched to our MFP Floating Docklines.
- Clam pack.

Order No.	Mfg. No. / Description		Price
1-52481	(52481) 3/8" x 60"	White	$5.25 K
1-52482	(52482) 3/8" x 60"	Black	$5.25 K
1-52483	(52483) 3/8" x 60"	Blue	$5.25 K
1-52484	(52484) 3/8" x 60"	Navy	$5.25 K
1-52485	(52485) 3/8" x 60"	Hunter Green	$5.25 K

Boater Sports Fender Loops



- 3 pack hollow braided polypropylene double 4" loop fender lines.
- Ready to use out of the pack.

Order No.	Mfg. No. / Description		Price
1-53382	(53382) 14"	White	$3.25 H
1-53381	(53381) 16"	White	$3.99 H
1-53380	(53380) 18"	White	$4.25 H

©2014 Donovan Marine, Inc.

Marpac Double Braided Fender Lines

- Solid braid nylon fender lines.
- Use the 3/8" lines for fenders 6" and smaller and the 1/2" lines for fenders 8" and larger.



Order No.	Description	Price
7-6421	3/8" x 36", Blue, Sold 4 Per Pack	$9.98 G
7-6425	3/8" x 36", Blue, Sold 4 Per Pack	$9.98 G
7-6426	3/8" x 36", Hunter Green, Sold 4 Per Pack	$9.98 G

Marpac Premier Double Braided Nylon Docklines



- Nylon double braid offers predictable controlled elongation and UV protection.
- Resists abrasion, oil, rot and mildew.
- Fully spliceable.
- Designed to provide maximum strength, flexibility and color retention.

Order No.	Mfg. No. / Description	Price
7-6230	3/8" x 15' Blue	$7.98 H
7-6280	3/8" x 15' Red	$7.98 H
7-6220	3/8" x 15' Black	$7.98 H
7-6270	3/8" x 15' Navy	$7.98 H
7-6260	3/8" x 15' Hunter	$7.98 H
7-6300	3/8" x 15' White	$7.98 H
7-6250	3/8" x 15' Gold	$7.98 H
7-6231	3/8" x 20' Blue	$9.98 H
7-6281	3/8" x 20' Red	$9.98 H
7-6221	3/8" x 20' Black	$9.98 H
7-6271	3/8" x 20' Navy	$9.98 H
7-6261	3/8" x 20' Hunter	$9.98 H
7-6301	3/8" x 20' White	$9.98 H
7-6251	3/8" x 20' Gold	$9.98 H
7-6233	1/2" x 15' Blue	$12.98 H
7-6283	1/2" x 15' Red	$12.98 H
7-6223	1/2" x 15' Black	$12.98 H
7-6273	1/2" x 15' Navy	$12.98 H
7-6263	1/2" x 15' Hunter	$12.98 H
7-6303	1/2" x 15' White	$12.98 H
7-6253	1/2" x 15' Gold	$12.98 H
7-6234	1/2" x 20' Blue	$16.98 H
7-6284	1/2" x 20' Red	$16.98 H
7-6224	1/2" x 20' Black	$16.98 H

Order No.	Mfg. No. / Description	Price
7-6294	1/2" x 20' Teal	$24.98 H
7-6274	1/2" x 20' Navy	$16.98 H
7-6244	1/2" x 20' Burgundy	$24.98 H
7-6264	1/2" x 20' Hunter	$16.98 H
7-6304	1/2" x 20' White	$16.98 H
7-6254	1/2" x 20' Gold	$16.98 H
7-6235	1/2" x 25' Blue	$19.98 H
7-6225	1/2" x 25' Black	$19.98 H
7-6305	1/2" x 25' White	$19.98 H
7-6255	1/2" x 25' Gold	$19.98 H
7-6236	1/2" x 30' Blue	$29.98 H
7-6226	1/2" x 30' Black	$29.98 H
7-6306	1/2" x 30' White	$23.98 H
7-6256	1/2" x 30' Gold	$23.98 H
7-6238	5/8" x 25' Blue	$30.98 H
7-6228	5/8" x 25' Black	$24.98 H
7-6257	5/8" x 25' Gold	$34.98 H
7-6239	5/8" x 35' Blue	$41.98 H
7-6229	5/8" x 35' Black	$31.98 H
7-6259	5/8" x 35' Gold	$41.98 H
7-6316	3/4" x 30' Black	$68.98 H
7-6317	3/4" x 35' Black	$74.98 H
7-6318	3/4" x 40' Black	$96.98 H

Boater Sports Double Braided Docklines - Nylon

- Pre-spliced Double Braid 100% Nylon Docklines.
- Manufactured from premium quality marine- stabilized high tenacity nylon.
- Nylon's high resistance to abrasion, chafing, oil, rot, and mildew.
- Superior UV resistance make it an excellent choice for docklines.
- Using only the highest quality nylon ensures that the rope will remain soft and reduce stretching even after getting wet.
- Lines are finished with professional yacht whippings at the 12" eye splice and bitter end.
- Clam pack.



Order No.	Mfg. No. / Description		Price
1-52853	(52853) 3/8" x 15'	White	$9.95 L
1-52854	(52854) 3/8" x 15'	Gold and White	$9.95 L
1-52855	(52855) 3/8" x 15'	Blue	$9.95 L
1-52857	(52857) 3/8" x 15'	Black	$9.95 L
1-52861	(52861) 3/8" x 20'	White	$11.95 H
1-52862	(52862) 3/8" x 20'	Gold and White	$11.95 H
1-52863	(52863) 3/8" x 20'	Blue	$11.95 H
1-52865	(52865) 3/8" x 20'	Black	$11.95 H
1-52869	(52869) 3/8" x 25'	White	$13.95 M
1-52870	(52870) 3/8" x 25'	Gold and White	$13.95 H
1-52871	(52871) 3/8" x 25'	Blue	$13.95 H
1-52873	(52873) 3/8" x 25'	Black	$13.95 H
1-52877	(52877) 1/2" x 15'	White	$15.95 H
1-52878	(52878) 1/2" x 15'	Gold and White	$15.95 H

Order No.	Mfg. No. / Description		Price
1-52879	(52879) 1/2" x 15'	Blue	$15.95 H
1-52881	(52881) 1/2" x 15'	Black	$15.95 H
1-52885	(52885) 1/2" x 20'	White	$19.95 H
1-52886	(52886) 1/2" x 20'	Gold and White	$19.95 H
1-52887	(52887) 1/2" x 20'	Blue	$19.95 H
1-52889	(52889) 1/2" x 20'	Black	$19.95 H
1-52893	(52893) 1/2" x 25'	White	$23.95 N
1-52894	(52894) 1/2" x 25'	Gold and White	$23.95 H
1-52895	(52895) 1/2" x 25'	Blue	$23.95 H
1-52897	(52897) 1/2" x 25'	Black	$23.95 H
1-52901	(52901) 5/8" x 25'	White	$36.95 H
1-52902	(52902) 5/8" x 25'	Gold and White	$36.95 H
1-52903	(52903) 5/8" x 25'	Blue	$36.95 H
1-52905	(52905) 5/8" x 25'	Black	$36.95 H

Marpac Braided MFP Docklines



- Absorbs shock loads.
- Can be stored wet.
- Secure grip.
- Floats.
- Specially designed for trailered boats to 20'.

Order No.	Mfg. No. / Description	Price
7-6400	3/8" x 15', Blue	$5.98 G
7-6401	3/8" x 15', Red	$5.98 G
7-6402	3/8" x 15', Teal	$8.98 G
7-6403	3/8" x 15', Black	$5.98 G
7-6404	3/8" x 15', White	$5.98 G
7-6405	3/8" x 20', White	$6.98 G
7-6410	3/8" x 20', Blue	$6.98 G
7-6415	3/8" x 20', Black	$7.98 G
7-6406	1/2" x 15', White	$6.98 G
7-6411	1/2" x 15', Blue	$6.98 G
7-6416	1/2" x 15', Black	$6.98 G
7-6407	1/2" x 20', White	$8.98 G
7-6412	1/2" x 20', Blue	$8.98 G
7-6417	1/2" x 20', Black	$8.98 G
7-6408	1/2" x 25', White	$8.98 G
7-6413	1/2" x 25', Blue	$8.98 G
7-6418	1/2" x 25', Black	$8.98 G

Marpac Twisted Nylon Mooring and Docklines



- 100% nylon with 10" spliced eye in one end.
- Highly resistant to rot, abrasion, oil, grease, gasoline and marine growth.
- Can be stowed wet without damage to the fibers.

Order No.	Mfg. No. / Description	Price
7-6351	3/8" x 15', White	$4.98 H
7-6365	3/8" x 15', Blue	$6.98 G
7-6380	3/8" x 15', Black	$6.98 G
7-6352	3/8" x 20', White	$6.98 I
7-6366	3/8" x 20', Blue	$7.98 G
7-6381	3/8" x 20', Black	$7.98 G
7-6353	3/8" x 25', White	$8.98 I
7-6354	1/2" x 15', White	$8.98 I
7-6355	1/2" x 20', White	$11.98 I
7-6369	1/2" x 20', Blue	$14.98 G
7-6384	1/2" x 20', Black	$14.98 G
7-6356	1/2" x 25', White	$14.98 I
7-6370	1/2" x 25', Blue	$16.98 G
7-6385	1/2" x 25', Black	$16.98 G
7-6358	5/8" x 25', White	$21.98 I
7-6360	5/8" x 35', White	$29.98 I

New England Ropes Docklines



- Marine grade nylon.
- 12" Professionally spliced eye.
- Heat sealed and whipped bitter end.

Order No.	Mfg. No. / Description	Price
355013	(60501200020) 3/8" x 20' T	$14.98 Q

Boater Sports Solid Braid Docklines - MFP



- MFP Floating Docklines provide light weight, low stretch and good strength.
- Reinforced stitched webbing holds the 12" cleat loop.
- Available in a wide range of brill.

Order No.	Mfg. No. / Description		Price
1-52920	(52920) 3/8" x 15'	Navy	$6.99 K
1-52922	(52922) 3/8" x 15'	Red	$6.99 K
1-52924	(52924) 3/8" x 15'	Black	$6.75 I
1-52925	(52925) 3/8" x 15'	White	$6.75 I
1-52926	(52926) 3/8" x 15'	Burgundy	$6.99 K
1-52919	(52919) 3/8" x 15'	Hunter Green	$6.99 K
1-52388	(52388) 1/2" x 20'	Navy	$10.75 H
1-52389	(52389) 1/2" x 20'	Royal Blue	$10.65 H
1-52390	(52390) 1/2" x 20'	Red	$10.65 H
1-52391	(52391) 1/2" x 20'	Black	$10.65 H
1-52392	(52392) 1/2" x 20'	White	$10.65 H
1-52393	(52393) 1/2" x 20'	Burgundy	$10.50 N
1-52396	(52396) 1/2" x 20'	Hunter Green	$10.65 H

Boater Sports 3-Strand Twisted Docklines - Nylon



- Get the high stretch needed to absorb the shock loads caused by harbor surges and boat wakes.
- Three-Strand Twisted Nylon Docklines are manufactured using a 4-stage construction.
- 100% premium nylon fiber.
- Extremely well balanced line for maximum strength, increased flexibility.
- Professionally spliced 12" cleat loop with six full tucks and heat sealed ends.
- Clam pack.

Order No.	Mfg. No. / Description		Price
1-52792	(52792) 3/8" x 10'	Black	$6.15 H
1-52793	(52793) 3/8" x 10'	White	$6.15 H
1-52805	(52805) 3/8" x 15'	Black	$8.95 H
1-52809	(52809) 3/8" x 15'	White	$8.95 H
1-52813	(52813) 3/8" x 20'	Black	$10.99 H
1-52815	(52815) 3/8" x 20'	White	$10.99 H
1-52819	(52819) 3/8" x 25'	Black	$12.90 H
1-52821	(52821) 3/8" x 25'	White	$12.90 H
1-52825	(52825) 1/2" x 15'	Black	$13.95 H
1-52827	(52827) 1/2" x 15'	White	$13.95 H
1-52849	(52849) 5/8" x 25'	White	$29.95 H
1-53438	(53438) 5/8" x 25'	Black	$29.95 H

©2014 Donovan Marine, Inc.

Greenfield Stretch 'N Slide Docklines



- The 4' Stretch 'N Slide dock line stretches to 8'.
- 7 individual loops, so you'll always have the perfect length for easy tie up.
- Secures your boat to the dock in seconds.

Order No.	Mfg. No. / Description	Price
656960	(SNS-B) Black	$20.98 F

Greenfield Mini Anchor Buddy Mooring Lines for PWC



- Rope-covered bungee cord stretches from 7' to 21'.
- Easy, safe and convenient.

Order No.	Mfg. No. / Description	Price
656980	(MB-B) Black	$29.98 F
656985	(MB-RB) Royal Blue	$29.98 F
656990	(MB-RD) Red	$29.98 F

Greenfield Dock Buddy Stretch Docklines



- Great for short-term use.
- Shock-absorbing docklines that stretch.
- Construction features a bungee cord covered by bunched hollow braid polypropylene ski rope.
- Soft foam sleeves are easy to grip.
- Sliding PVC tubes at ends enable eye adjustment.
- If dropped in the water, they float.

Order No.	Mfg. No. / Description		Price
657010	(DB4-B) 4'-7'	Black	$16.98 F
657015	(DB4-RB) 4'-7'	Royal Blue	$16.98 F
657020	(DB4-RD) 4'-7'	Red	$16.98 F
657025	(DB5-B) 5'-8'	Black	$17.98 F
657030	(DB5-RB) 5'-8'	Royal Blue	$17.98 F
657035	(DB5-RD) 5'-8'	Red	$17.98 F
657040	(DB6-B) 6'-9'	Black	$19.98 F
657045	(DB6-RB) 6'-9'	Royal Blue	$19.98 F
657050	(DB6-RD) 6'-9'	Red	$19.98 F

Boater Sports Stretch Docklines - Polypropylene



- Absorb shock to boats, cleats and docks.
- High quality.
- Hollow braid polypropylene construction.
- Safe working load: 339 lbs.
- Clam pack

Order No.	Mfg. No. / Description		Price
1-52510	(52510) 3/8" x 4'-5'	Black	$10.95 M
1-52511	(52511) 3/8" x 4'-5'	Blue	$10.95 M
1-52516	(52516) 3/8" x 4'-5'	White	$10.95 M
1-52517	(52517) 3/8" x 5'-7'	Black	$12.35 N
1-52518	(52518) 3/8" x 5'-7'	Blue	$12.35 N
1-52523	(52523) 3/8" x 5'-7'	White	$12.35 N
1-52524	(52524) 3/8" x 7'-10'	Black	$13.80 M
1-52525	(52525) 3/8" x 7'-10'	Blue	$13.80 M
1-52530	(52530) 3/8" x 7'-10'	White	$13.80 M

Airhead Bungee Docklines



- Absorb shock to boats, cleats, docks, pylons and other hardware.
- The bungee cord is hidden inside the rope and acts as a built-in snubber.
- Two foam floats protect boat from chafing.
- There's a sliding adjustment at both ends for quick docking.
- Recommended for docking boats and PWC's up to 4,000 pounds.
- Tensile strength is 2,150 pounds.

Order No.	Mfg. No. / Description	Price
596527	(AHDL-4) 4'	$9.98 Q
596529	(AHDL-5) 5'	$11.98 Q
596531	(AHDL-6) 6'	$12.98 Q

Greenfield Anchor Buddy Mooring Lines



- Rope-covered bungee cord stretches from 14' to 50'.
- Easy, safe and convenient.

Order No.	Mfg. No. / Description	Price
656965	(AB4000-B) Black	$44.98 F
656970	(AB4000-RB) Royal Blue	$44.98 F
656975	(AB4000-RD) Red	$44.98 F

Greenfield Shallow-Water Anchor Buddy Mooring Lines



- Rope-covered bungee cord stretches from 7' to 21'.
- Easy, safe and convenient.

Order No.	Mfg. No. / Description	Price
656995	(SWAB-B) Black	$37.98 F
657000	(SWAB-RB) Royal Blue	$37.98 F

Boater Sports Hollow Braid Anchor Lines - Polypropylene



- Because of its light weight, polypropylene floats.
- Hollow braided poly can be easily spliced.

Order No.	Mfg. No. / Description		Price
1-52995	(52995) 1/4" x 50'	Yellow	$6.85 H
1-52996	(52995) 1/4" x 100'	Yellow	$9.99 H
1-53477	(53477) 3/8" x 100'	Yellow	$15.65 H

Boater Sports 3-Strand Anchor Lines - Nylon



- Nylon is the strongest of all ropes in common use.
- When stretched it has a "memory" for returning to its original length.
- For this reason it is best for absorbing shock loads.
- Nylon lasts 4-5 times longer than natural fibers.
- Has good abrasion resistance and is not damaged by oil or most chemicals.
- Nylon also has good resistance to ultraviolet deterioration from sunlight.

Order No.	Mfg. No. / Description		Price
1-53400	(53400) 5/16" x 50'	White	$18.99 H
1-52708	(52708) 3/8" x 50'	White	$21.35 H
1-52709	(52709) 3/8" x 100'	White	$43.99 H
1-52710	(52710) 3/8" x 150'	White	$64.55 H
1-52714	(52714) 1/2" x 100'	White	$74.25 H
1-52715	(52715) 1/2" x 150'	White	$113.75 H

Solid Braid Nylon Rope



- A better general purpose rope that absorbs shock loads due to excellent elasticity.
- Flexibility allows great handling and knot retention.
- A strong performer in use and in price.

Order No.	Mfg. No. / Description		Price
7-6491	1/8" x 500'	Working Load: 400 lbs.	$37.98 G
7-6492	5/32" x 500'	Working Load: 600 lbs.	$47.98 G
7-6493	3/16" x 500'	Working Load: 800 lbs.	$42.98 G
7-6494	1/4" x 500'	Working Load: 1,250 lbs.	$46.98 G
7-6495	5/16" x 500'	Working Load: 1,400 lbs.	$67.98 G
7-6496	3/8" x 500'	Working Load: 2,500 lbs.	$146.98 G
7-6497	1/2" x 500'		$230.98 G

Boater Sports Solid Braid Anchor Lines - Nylon



- Solid braid nylon line does not flatten out under a load.
- Its high elasticity allows it to absorb sudden shock loads.
- Very resistant to rot, mildew, abrasion, oil, gasoline, marine growth and most chemicals.
- This makes nylon an excellent line for anchor, mooring, dock & utility lines.

Order No.	Mfg. No. / Description		Price
1-52978	(52978) 3/16" x 100'	White	$14.45 H
1-52998	(52998) 3/8" x 50'	White	$24.65 H

Boater Sports Double Braid Anchor Lines - Nylon



- Top-of-the-line gold and white, double braid, nylon anchor line.
- The strongest, most dependable line available.
- Will not twist or buckle under strain.
- It is also easy on the hands and does not harden.
- Professionally whipped and spliced nylon anchor thimble.
- Resistant to rot, mildew, abrasion, oil, and grease.
- Low elongation.

Order No.	Mfg. No. / Description		Price
1-52726	(52726) 3/8" x 100'	Gold/White	$53.97 H
1-52727	(52727) 3/8" x 150'	Gold/White	$79.95 H
1-52729	(52729) 1/2" x 150'	Gold/White	$132.40 H

New England Ropes 3-Strand Premium Nylon Line



- Flexible, long wearing and easy to handle.
- Very good abrasion resistance.
- Easily spliced.
- Medium lay.

Order No.	Mfg. No. / Description		Price
355544	(70502400600) 3/4" x 600'	White	$988.98 Q

New England Ropes Sta-Set® Running Rigging



- Premium grade double braided polyester rope.
- Ideally suited for sheets and control lines on a wide range of cruising boats.
- Supple/flexible/durable.
- Easily spliced.

Order No.	Mfg. No. / Description		Price
355633	(21001400600) 7/16" x 600'	White	$721.98 Q
355645	(21001600600) 1/2" x 600'	White	$789.98 Q

©2014 Donovan Marine, Inc.

Boater Sports Bulk Cordage Spools



- These lines are constructed of high quality, marine grade material.
- UV stabilized for the harsh marine environments.

Order No.	Mfg. No. / Description			Price
1-52741	(52741) Double Braid Nylon	5/8" x 600'	Gold/White	$599.00 G
1-52743	(52743) Double Braid Nylon	3/4" x 600'	Gold/White	$755.00 G
1-52744	(52744) 3-Strand Twisted Nylon	1/4" x 600'	White	$107.50 H
1-52746	(52746) 3-Strand Twisted Nylon	5/16" x 600'	White	$139.75 H
1-52748	(52748) 3-Strand Twisted Nylon	3/8" x 600'	White	$169.00 H
1-52752	(52752) 3-Strand Twisted Nylon	1/2" x 600'	White	$312.00 G
1-52754	(52754) 3-Strand Twisted Nylon	5/8" x 600'	White	$449.00 H
1-52768	(52768) Hollow Braid Polypropylene	1/4" x 250'	Yellow	$18.95 H
1-52776	(52776) Hollow Braid Polypropylene	3/8" x 250'	Yellow	$25.95 H
1-52778	(52778) Hollow Braid Polypropylene	1/2" x 250'	Yellow	$39.95 H
1-52782	(52782) Twisted Polypropylene	1/4" x 250'	Yellow	$25.95 G
1-52784	(52784) Twisted Polypropylene	3/8" x 250'	Yellow	$36.95 H
1-52785	(52785) Twisted Polypropylene	1/2" x 250'	Yellow	$75.95 H
1-53478	(53478) Solid Braid Polyester	1/8" x 1,000'	White	$39.95 H
1-53479	(53479) Solid Braid Polyester	3/16" x 1,000'	White	$69.95 H
1-53480	(53480) Solid Braid Polyester	1/4" x 1,000'	White	$129.00 H
1-53481	(53481) Solid Braid Polyester	5/16" x 1,000'	White	$169.00 H
1-53482	(53482) Solid Braid Polyester	3/8" x 250'	White	$69.00 H
1-53483	(53483) Solid Braid Polyester	3/8" x 500'	White	$139.00 H
1-53484	(53484) Solid Braid Polyester	1/2" x 250'	White	$139.00 H
1-53485	(53485) Solid Braid Polyester	1/2" x 500'	White	$279.00 G

Twisted Polypropylene Rope



- A first class, 3-strand twisted, 100% monofilament polypropylene rope.
- Has good strain and stretch efficiency.
- It may be stored wet without damage to the fibers and has great resistance to rot, mildew, acids, oil, grease and most chemicals.

Yellow

Order No.	Description	Price
701707	Dia. 1/4", Length 600', Working Load 113 lbs.	$32.98 G
702680	3/16" x 1,500'	$49.98 F
701723	Dia. 5/16", Length 600', Working Load 171 lbs.	$42.98 G
701749	Dia. 3/8", Length 600', Working Load 244 lbs.	$65.98 G
701765	Dia. 1/2", Length 600', Working Load 420 lbs.	$135.98 G
701789	Dia. 5/8", Length 600', Working Load 700 lbs.	$185.98 G
701804	Dia. 3/4", Length 600', Working Load 1,090 lbs.	$279.98 G
701842	Dia. 1", Length 600', Working Load 1,800 lbs.	$426.98 G

Yellow/Black

Order No.	Description	Price
304472	Dia. 2", Length 600'	$1,104.98 G

Black

Order No.	Description	Price
303901	Dia. 1/4", Length 600'	$25.98 G
303949	Dia. 3/8", Length 600'	$62.98 I
303955	Dia. 7/8", Length 600'	$329.98 B

Twisted Nylon Rope



- Excellent for anchor lines, mooring and dock lines because this fiber absorbs sudden shock loads that could snap ropes made of other fibers or cause damage to boat fittings.
- 4-stage nylon has excellent resistance to abrasion.
- Rot resistant and not damaged by oil, grease, gasoline, mildew, marine growth or most chemicals.
- Can be stowed wet.
- 3-strand twisted nylon is spliceable.

Order No.	Description		Price
701404	Diameter 1/4"	Length 600'	$64.98 G
701417	Diameter 5/16"	Length 600'	$107.98 G
701426	Diameter 3/8"	Length 600'	$151.98 G
701433	Diameter 7/16"	Length 600'	$215.98 G
701446	Diameter 1/2"	Length 600'	$279.98 G
701459	Diameter 5/8"	Length 600'	$451.98 G
701463	Diameter 3/4"	Length 300'	$329.98 G
701474	Diameter 3/4"	Length 600'	$599.98 G
701486	Diameter 7/8"	Length 600'	$914.98 G
701498	Diameter 1"	Length 300'	$557.98 G
701501	Diameter 1"	Length 600'	$1,115.98 G
701525	(NTR20600-01) Diameter 1-1/4", Length 600'		$1,291.98 G
701549	(NTR24600-01) Diameter 1-1/2", Length 600'		$1,776.98 G

Diamond Braid Polypropylene Rope



- 8-strand diamond braid polypropylene.
- Used for anchor lines, dock lines, tie down rope and countless marine and other applications.
- It is resistant to rot and abrasion and is not damaged by mildew, marine growth, oil, grease, gasoline or most chemicals.
- Floats on the surface of water.

Yellow

Order No.	Description	Price
701332	Dia. 3/8", Length 500, Working Load 200 lbs.	$53.98 G

Black

Order No.	Description	Price
267562	Dia. 3/8", Length 1,000, Working Load 200 lbs.	$106.98 G

Marpac Solid Braid MFP Rope



- Multifilament polypropylene double braid construction.
- Resistant to abrasion, mildew, oil and rot.
- Can be stored wet, will not shrink.
- Superior strength and flexibility.
- UV stabilized.
- Floats.

Order No.	Mfg. No. / Description			Price
7-6499	Diameter 3/8"	Length 1,000'	Black	$199.98 G
7-6500	Diameter 7/16"	Length 500'	Black	$142.98 G
7-6501	Diameter 5/8"	Length 200'	Black	$131.98 G

Marpac Braided Nylon Rope



- 1/4" x 50'
- For general tying and all purpose use.
- It is flexible, yet strong and can be easily knotted.

Order No.	Description	Price
7-6218	Braided Nylon Rope	$11.98 G

Gator Supply Poly Dac Rope



Order No.	Mfg. No. / Description	Price
305917	(PD-84) 2"x600	$1,879.98 G
305957	(2" X 600) 2"x600	$1,664.98 B

Marpac Electric Cutting Gun



- Cuts and seals the ends of synthetic ropes in one fast movement.
- Runs on 120 volts.
- Comes with a 5' cord.

Order No.	Description	Price
7-2753	Cutting Gun	$52.98 G
7-2766	Cutting Gun Blade Only	$10.98 G

Marpac Heavy Duty Shock Cord



- Heavy duty cover with multi-strand elastic core
- High elastic recovery
- Resistant to acid & weather
- Can be used for tie downs or snubbing

Order No.	Description	Price
7-6506	3/16" x 100'	$28.98 G
7-6507	1/4" x 100'	$32.98 G
7-6508	5/16" x 100'	$56.98 G
7-6509	3/8" x 100'	$73.98 G
7-6510	1/2" x 100'	$141.98 G

Taylor Made Shock Cord



- Heavy duty, nylon covered cords.
- Super strong with rubber core.

Order No.	Mfg. No. / Description	Price
721654	(941300) 5/16" x 300'	$114.98 G

Pacific Manila Rope

- An economy priced natural hemp fiber.
- 3-strand rope meets federal spec TR605 Type M.

Order No.	Description	Price
372110	1/4" x 600'	$25.98 B
372122	3/8" x 600'	$50.98 B
372134	1/2" x 600'	$78.98 B

Diamond Braid Polydac Rope



Order No.	Mfg. No. / Description	Price
305709	Dia. 3/8", Length 600'	$179.98 G
305766	Dia. 1/2", Length 600'	$349.98 G
305806	Dia. 5/8", Length 600'	$475.98 G

Star Brite Dip-It Whip-It



- The quick and easy way to finish rope ends.
- Prevents unraveling.
- Forms a permanent, flexible coating.
- Excellent for manila, nylon and poly ropes.
- Whips any thickness rope end.
- 4 oz.
- White.

Order No.	Mfg. No. / Description	Price
460662	(84904B)	$10.98 G

Star Brite Universal Bungee Cords with Plastic Coated Hook Ends



- Natural rubber core covered with polyethylene braid is rot proof, UV resistant and long wearing plastic coated steel hooks.
- Sold 2 pieces per display pack.

Order No.	Mfg. No. / Description	Price
675853	(68148) 3/8" x 48"	$4.98 G
675854	(68136) 3/8" x 36"	$5.98 G
675855	(68124) 3/8" x 24"	$5.98 G
675856	(68116) 3/8" x 16"	$4.07 G
675857	(68024) 5/16" x 24"	$4.11 G
675858	(68016) 5/16" x 16"	$3.07 G

Sea Dog Shock Cord Hooks - Stainless Steel



- High tensile spring stainless steel clips.
- Marine chrome plated.
- Easy to attach with clinching rings.
- Sold 2 hooks and 2 clinching rings per skin packed card.

Order No.	Mfg. No. / Description	Price
721743	(657060-1) 1/4"	$3.82 Q
721755	(657080-1) 5/16"	$5.98 Q
721767	(657100-1) 3/8"	$6.98 Q

Wood Hand Fids



Order No.	Mfg. No. / Description	Price
202313	(250-40) 12" x 1-3/4"	$33.98 E
202325	(250-70) 18" x 2"	$49.98 E
202337	(250-90) 20" x 2-1/4"	$55.98 E
202349	(250-100) 24" x 3"	$94.98 E

©2014 Donovan Marine, Inc.


Star Brite Bungee Pegboard Display



Display contains 6 each:
Stainless bungee 5/16" x 16" #65016
Stainless bungee 5/16" x 24" #65024
Stainless bungee 5/16" x 36" #65036
Mini Stainless bungee 5/32" x 10" #65310
Adjust-A-Hook & Click 5/16" x 24" #66024
Adjust-A-Hook & Click 5/16" x 48" #66048
Bungee with Click Lock Ends 5/16" x 48" #66248
Universal Bungee 5/16" x 36" #68036
Bungee w/Adjust-A-Hook Ends 5/16" x 48" #66448

Order No.	Mfg. No. / Description	Price
431317	(064001) Bungee Display	$369.98 G

7 x 19 Aircraft Quality Cable - Running Rigging



- Preformed stainless steel aircraft cable.
- Corrosion resistant steel.
- Very flexible.
- Used when flexibility and fatique are concerns.
- Aircraft controls, running rigging on sailboats, exercise equipment,winches and garage doors are all common applications.
- Sold in 250' length.

Order No.	Mfg. No. / Description	Price
553328	(SC12579) Diameter 1/8"	$445.98 H

Locoloc® Hand Swagers



- No. 1-SC. Multi-compression hand swager with cable cutter.
- Swages 1/16, 3/32, 1/8, 5/32 and 3/16 oval and stop sleeves, plus 7/32 stop sleeves.
- Can cut up to 7/32 cable.
- Features over-center leverage, which transmits a powerful snap-action to the final thrust of the jaws.
- Easy adjustment.

Order No.	Mfg. No. / Description	Price
212566	(1-SC)	$397.98 F

- Single cavity hand cable swaging tool.
- Designed for swaging copper and aluminum 1/4" oval sleeve and 1/4", 5/16" and 3/8" stop sleeves.

Order No.	Mfg. No. / Description	Price
212580	(0-1/4)	$468.98 F

Incom Self-Adhesive Rigging Tape



- Protects against chafing and sharp edges while providing extraordinary safety for sails, lines and rope ends.
- Extra strength for securing turn buckles.
- Self adhesive
- Waterproof
- No sticky residue
- Linerless
- Weatherproof

Order No.	Mfg. No. / Description	Price
228322	(RE3947) 3/4" x 108'	$7.98 H

7 x 7 Vinyl Coated Cable



- Preformed stainless steel aircraft cable.
- Corrosion resistant steel.
- Moderately flexible.
- For use where extreme flexibility is not necessary.
- Jacket type: White vinyl - soft, flexible multi-purpose plastic.
- Sold in 250' length.
- Diameter 3/16", cable OD - 5/16"

Order No.	Mfg. No. / Description	Price
553455	(SC1887702)	$703.98 H

7 x 7 Aircraft Quality Cable - General Purpose



- Preformed stainless steel aircraft cable.
- Corrosion resistant steel.
- Moderately flexible.
- Commonly used in aircraft and automotive controls, it performs highly in a wide range of mechanical applications.
- Sold in 250' length.
- Diameter 1/16"

Order No.	Mfg. No. / Description	Price
553203	(SC06377)	$151.98 H

Felco Cable Cutter



- Plastic coated handles afford a firm, comfortable grip.
- These cable cutters, with unique triangular jaws, never leave a frayed end.
- Has a capacity of 5/32" diameter or smaller on stainless steel cable.
- A thumb catch locks the cable cutter when not in use.
- Length 8".

Order No.	Mfg. No. / Description	Price
212605	(C7) Cable Cutter	$99.98 F

Incom Anti-Chafing Tape



- Vinyl Coated Anti-Chafing Tape
- Protects your lines from chafing or breaking at the dock or on the boat.
- Ideal for protecting dock lines, mooring lines, rigging, etc.
- Developed to withstand salt water.
- 12 mils thick, yet soft and pliable.
- Will not crack.

Order No.	Mfg. No. / Description	Price
228324	(RE3949) 1"X25'	$6.98 H

Mooring Snubber



- Gives safety stretch to mooring lines, absorbs shock of wind and waves.
- Tough neoprene withstands sun, salt and water.
- Length 22".

Order No.	Mfg. No. / Description	Price
623632	Snubber	$38.98 I

Perko Fig. 759 Dock Line Spring



- Galvanized spring steel.
- A very strong compression spring for dock and mooring lines.
- It cushions the strain and contributes greatly to the life of your lines.
- Overall length 10", spring diameter 1-1/2".
- For 1/2" rope.
- Compression 4-1/2".

Order No.	Mfg. No. / Description	Price
542010	(759 001 ZNC)	$34.98 Q

Taylor Made Mast Buoys



- Perfect as a pick-up buoy.
- Sealed PVC float.
- Ideal for all diving applications.
- Vinyl coated metal weight offers superior scratch protection for your boat.
- PVC coated fiberglass mast - No more fiberglass silvers!

Order No.	Mfg. No. / Description	Price
719154	(22105) Mast Length 48"	$49.98 G
719166	(22106) Mast Length 74"	$53.98 G
719178	(22126) Mast Length 96"	$57.98 G

Taylor Made Traditional Sur-Moor™ Mooring Buoy



- Hot dipped galvanized steel.
- Blue stripe is reflective for nighttime visibility.

Order No.	Mfg. No. / Description	Price
719100	(22170) Diameter 12", Circum. 38", Buoyancy 30 lbs	$135.98 G

Taylor Made Sur-Moor™ T3C™ Mooring Buoys



- These have a seamless and tough, one-piece polyethylene shell.
- Hard skin shells feature ultraviolet light absorbers for long-term life under the sun.
- Filled with closed cell foam to positively displace water.
- Tube-through-the-center design with blue reflective striping.

Order No.	Mfg. No. / Description	Price
719110	(46371) Dia. 15", Circum. 47", Buoyancy 60 lbs.	$146.98 H
719112	(46372) Dia. 18", Circum. 57", Buoyancy 100 lbs.	$184.98 H
719114	(46374) Dia. 24", Circum. 75", Buoyancy 240 lbs.	$327.98 G
719116	(46375) Dia. 30", Circum. 95", Buoyancy 460 lbs.	$633.98 G

Taylor Made Rubber Mooring Snubbers



- Made from super elastic isoprene natural rubber.
- Prevents mooring line breakage along with compensating for sudden jolting and excess stretching of lines beyond parting strength.
- Locks lines safely and securely.
- Self-locking internal system eliminates chafing.

Order No.	Mfg. No. / Description	Price
810592	(307) Fit Line Size 3/8"	$48.98 G
810590	(308) Fit Line Size 5/8"	$61.98 G
810588	(309) Fit Line Size 3/4"	$81.98 G

Taylor Made Sully Stick™ Winter Stick



- A long tapered buoy used in place of a standard round mooring buoy during the winter months.
- A molded in eyelet at the top for easy retrieval.
- The base eyelet is reinforced with a galvanized metal bushing to attach a rope and connect to the anchor chain.
- The shape of the Sully stick helps it escape ice entrapment better than a round buoy.
- Diameter 6" (Widest Point).
- Length 80".
- Approx. Buoyancy: 40 lbs.

Order No.	Mfg. No. / Description	Price
723610	(22140) Sully Stick	$92.98 G

Taylor Made Sur-Moor™ Shackle Buoy



- The rope nest design has a built in cup shape at the top of the buoy that allows the anchor shackle to nest below the buoy surface.
- This recessed area helps shield the shackle from contacting the boat hull while making a convenient nesting place for the pennant line when the boat departs from the mooring.
- The hard skin polyethylene shell is UV protected to resist the weathering effects of sunlight and is foam filled to positively displace water.
- Tube-through-the-center design with blue reflective striping.
- Mooring clevis not included.

Order No.	Mfg. No. / Description	Price
719150	(46818) Dia. 18", Tube Dia. 2-1/2", Buoyancy 100 lbs.	$185.98 G

Galvanized Heavy Steel Ring



- 3/8" - 2-1/2" ID.

Order No.	Mfg. No. / Description	Price
690316	(192625)	$7.98 I

©2014 Donovan Marine, Inc.

New England Ropes Mooring Pendants



- 100% high tenacity 3-strand nylon is long-wearing and abrasion resistant with excellent elongation properties.
- Galvanized heavy duty thimble on buoy end.
- Professionally spliced soft eye on boat end.
- Optional Cordura chafe guard available.

Order No.	Mfg. No. / Description	Price
354807	(629K02000012) 5/8", Length 12'	$62.98 Q
354819	(629K02000015) 5/8", Length 15'	$72.98 Q
354833	(629K02400012) 3/4", Length 12'	$76.98 Q
354845	(629K02400015) 3/4", Length 15'	$87.98 Q
354857	(629K02500020) 3/4", Length 20'	$98.98 Q
354883	(629K03200020) 1", Length 20'	$123.98 Q

Marpac Mushroom Mooring Anchors



- Designed for permanent mooring
- Extra thick shaft and eye for maximum durability
- Heavy cast iron coated with red primer coating
- Shaft design includes large eyes for shackle hook-up

Anchors Shipped F.O.B. from Norwich, Connecticut ONLY!

Order No.	Description	Price
7-2370	25#	$38.98 I
7-2372	50#	$73.98 I
7-2374	75#	$110.98 I
7-2376	100#	$145.98 I
7-2378	150#	$218.98 I
7-2380	200#	$291.98 I
7-2382	250#	$365.98 I
7-2384	300#	$438.98 I
7-2386	400#	$583.98 I
7-2388	500#	$784.98 I
7-2392	800#	$1,167.98 I
7-2394	1,000#	$1,459.98 I
7-2396	1,500#	$2,189.98 I

Small Edge Guard



- White vinyl dock protection especially formulated for softness and durability.
- Install easily with screws or nails.

Order No.	Mfg. No. / Description		Price
2000055	(92393) 2" W x 3" W x 8' L	White	$28.98 M
2000056	(92393-B) 2" W x 3" W x 8' L	Black	$28.98 M

Mooring Chain - Hot Galvanized



- Excellent low-carbon steel chain, .39 in. diameter.
- Made with a longer link design for mooring applications.
- Longer link allows the use of a shackle anywhere in the length of chain.
- Greater working load limit than proof coil.
- Proof tested.

Order No.	Mfg. No. / Description	Price
210750	(0129332) 3/8", 400' Per Drum	$2,335.98 G
210754	(0129432) 1/2", 200' Per Drum	$1,907.98 G
210757	(0129532) 5/8", 150' Per Drum	$2,189.98 G
210761	(0129632) 3/4", 100' Per Drum	$2,363.98 G

Hot Dipped Mooring Chain

Order No.	Mfg. No. / Description	Price
620105	(CHG430375MCX) 3/8" x 200', WLL*: 4,050 lbs.	$1,377.98 H
620117	(HG305MCX200) 1/2" x 200', WLL*: 6,900 lbs.	$2,067.98 H
620129	(CHG430625MCX) 5/8" x 164', WLL*: 9,750 lbs.	$2,411.98 H
620131	(CHG43075MCX) 3/4" x 100', WLL*: 11,000 lbs.	$2,898.98 H

* Never exceed working load limit.

Marpac Pyramid Style Mooring Anchors



- Rapid set design for permanent use in fresh or saltwater
- Extra thick short shaft and eye for maximum durability
- Short shaft allows usage in shallow water and reduces chain wrap
- Primer coated heavy cast iron

Anchors Shipped F.O.B. from Norwich, Connecticut ONLY!

Order No.	Description	Price
7-2400	50#	$104.98 I
7-2402	100#	$209.98 I
7-2404	200#	$419.98 I
7-2406	300#	$629.98 I
7-2408	400#	$839.98 I
7-2410	500#	$1,049.98 I

Medium Edge Guard



- Economical way to protect your investment.
- Longer attachment lip (1") makes installation a snap.

Order No.	Mfg. No. / Description		Price
2000057	(92400) 2" W x 3-1/4" W x 8' L	White	$31.98 T
2000058	(92400-B) 2" W x 3-1/4" W x 8' L	Black	$31.98 T

Large Edge Guard



- Economical way to protect your investment.
- Longer attachment lip (1") makes installation a snap.

Order No.	Mfg. No. / Description		Price
2000053	(92323) 2-3/8"" W x 3-5/8" W x 8' L	White	$40.98 L
2000054	(92323-B) 2-3/8" W x 3-5/8" W x 8' L	Black	$40.98 T

Taylor Made Dock Pro™ Vinyl Dock Bumpers



- Protects the side and top of the dock with 1-1/4" cushion above dock level.
- Made from the same tough marine grade vinyl as our fenders.
- Solid flaps attach easily to any dock.
- Superior cushioning protects boats and docks from each other.
- Color is permanently molded into the vinyl and will not transfer to the hull.

Order No.	Mfg. No. / Description	Price
721527	(46081) Corner Mount, 10" x 10"	$16.98 G
721539	(46082) Straight Mount, 18"	$19.98 G

Taylor Made Dock Pro™ Vinyl Dock Edging



- 37"L x 4.5"W x 6"H
- Taylor Made now offers the ultimate in versatile, durable docking protection!
- Dock Pro heavy-duty vinyl bumpers are ideal for rough conditions, and can take a beating.
- Made from U.V. resistant, marine-grade vinyl, they provide excellent protection for your boat and dock.
- Straight piece can be mounted horizontally, or the curved back panel allows for vertical mounting on pilings.
- Corner piece provides superior impact protection on dock corners.
- Both bumpers have inflation valves for easy adjustment to desired firmness.
- Pre-drilled for easy, permanent mounting with plated fasteners.

Order No.	Mfg. No. / Description	Price
722810	(45500) Dock Bumpers	$115.98 G

Taylor Made Post Bumpers



- Post bumpers are great protection for pipe supported type docks.
- Protects the boat from contact with the metal dock pipe and hardware at dock level.
- Easily slides over 1-1/2" dock pipe and rests securely against the dock.
- Molded from marine grade vinyl with an inflation valve to adjust firmness.
- Bumper measures 7" diameter x 17" long.

Order No.	Mfg. No. / Description	Price
721410	(45600) White	$32.98 G
721412	(45607) Navy Blue	$32.98 G
721414	(45652) Black	$32.98 G
721416	(45660) Sand	$32.98 G

Taylor Made Corner Guard



- Made from the same great rubber material as our dock extrusion.
- Use with our dock strips for complete protection.

Order No.	Mfg. No. / Description	Price
721625	(96009) Dimensions: 3-1/2" x 6"	$49.98 G

Dock Pro™ Heavy Duty Vinyl Dock Bumper



- Made from U.V. resistant, marine grade vinyl, they provide excellent protection for your boat and dock.
- Provides superior impact protection on dock corners.
- Have inflation valve for easy adjustment to desired firmness.
- Pre-drilled for easy, permanent mounting with plated fasteners.
- Corner Mount, 13.5" L x 6" W x 10.5" H.

Order No.	Mfg. No. / Description	Price
722834	(45510) Dock Bumper	$101.98 G

Taylor Made Heavy Duty Rubber Dock Extrusion



- These thick, pliable, abrasion-resistant rubber strips can be nailed along the edges of docks and pilings.
- Premium rubber material will not mar your boat, but is great for absorbing shock and protecting your hull.

Order No.	Mfg. No. / Description	Price
721591	(96001) 3-1/2" W x 6' L	$73.98 G

Taylor Made Dock Pro™ Large Side Gard



- Traditional vinyl profiles are solidly molded from vinyl especially formulated for softness and durability.
- Each piece installs easily to the edges of docks, piers or floats with screws or nails.
- 10' Straight.

Order No.	Mfg. No. / Description	Price
721490	(46080)	$49.98 G

Taylor Made Dock Cushion



- White polyethylene foam provides superior cushioning from impact.
- UV protected foam material is maintenance free and non-marring.
- Designed for both horizontal and vertical applications, they are pre-drilled and permanently mount with plated fasteners.
- Dimensions: 4" x 6" x 49".

Order No.	Mfg. No. / Description	Price
721488	(46077) Dock Cushion	$62.98 G

Taylor Made 90° Vinyl Corner Bumper



- Made from the same tough PVC as our dock extrusions.
- 90° corner (outside) will protect your boat from this critical point.
- Inside structural ribs provide the impact resistance you need.
- The 90° cut fits flush with the Large Commercial P-Shape.
- Inside dimensions cover 6" each side.

Order No.	Mfg. No. / Description	Price
721430	(46015) White	$18.98 G

Taylor Made Dock Pro™ Commercial Grade Profiles



- Commercial grade profiles have heavier wall sections to provide greater protection.
- Made from the same quality marine grade resins and with the same double molding process as our existing products.
- 10' Straight.

Order No.	Mfg. No. / Description	Price
721542	(46030) Side Gard, 3-1/2" H x 1-3/8" W	$44.98 G
721425	(46013) Side Gard, 3-1/2" H x 1-3/8" W, Retail	$46.98 G
721546	(46032) P-Shape Gard, 3-5/8" H x 2-3/8" W	$36.98 G
721420	(46012) P-Shape Gard, 3-1/8" H x 2" W	$39.98 G

©2014 Donovan Marine, Inc.

Hull Hugr Dock Corner Bumper



- These dock corner bumpers measure 10" x 10" x 4" x 2 1/2".
- They're manufactured from UV-resistant and tear-proof vinyl/ polyester tri-laminate, filled with high-density closed-cell polyethylene foam.
- There are 4 corrosion-proof polycarbonate grommets, 1 in each corner, for mounting to docks.
- White.

Order No.	Mfg. No. / Description	Price
596945	(HHB-C1W)	$12.98 H

Taylor Made Dock Pro™ Vinyl Dock Edging







- New double molded vinyl dock edging is molded twice then molecularly bonded for extra durability and protection.
- A tough inner core is surrounded with our soft white vinyl for extra cushion against tough docks.
- Each piece installs easily to the edges of dock piers or floats with screws or nails.

C-Shape Gard

Order No.	Mfg. No. / Description	Price
721428	(46070) 8' Straight	$27.98 G

Medium Edge Gard

721438	(46062) 10' Straight	$35.98 G
721439	(46098) 25' Coil	$79.98 G

Small Edge Gard

721440	(46067) 10' Straight	$20.98 G

Taylor Made Dock Pro™ Dock Cart



- Curved handle design reduces bending-over, making the Dock Pro dock cart easier to handle than conventional carts, while the unique angled tub feature provides better leg clearance for maneuvering.
- Features a spacious 7 cu. ft. heavy wall roto-molded poly-tub that will not rust or rot.
- Zinc coated corrosion resistant hardware used throughout.
- Plastic rim wheels with roller bearings will stand up to the harshest marine environment.
- Weight capacity: 300 lbs.
- 20" Pneumatic wheels.

Order No.	Mfg. No. / Description	Price
224562	(1070) Dock Pro Dock Cart	$339.98 G

Taylor Made Chafe Guard



- Superior abrasion resistance.
- Prevent wear and tear on your mooring and dock lines.
- Polyester textile, not vinyl, PVC or rubber.
- Easily fits through chocks, will not split or rot in the sun.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
722997	(CG58.18) Fits 3/8" - 5/8", Length 18"	$19.98 G

Taylor Made Dock and Post Bumpers





- Will not deteriorate in the sun or mar your boat.
- Polyester textile cover and closed-cell foam inner cushion, not vinyl, PVC or rubber.
- Cleans easily with liquid soap and a brush.
- Flexible tab system allows standard "Top-of-Dock" or unique "Fold-Over" mounting which conceals the top row fasteners.
- Flexible enough to mount on curves or around corners.

Small Double Dock and Post Bumper

Order No.	Mfg. No. / Description	Price
722911	(DDB2.30) 5-1/2" W x 1-1/4" D x 3' L	$50.98 G

Medium Double Dock and Post Bumper

722947	(DDB3.60) 8-1/4" W x 1-3/4" D x 6' L	$59.98 G

Large Dock and Post Bumper

722973	(DB4.60) 5-1/2" W x 2-1/4" D x 6' L	$83.98 G

Taylor Made Stow 'n Go™ Dock Boxes



- These fiberglass dock boxes are built tough with a UV gelcoat finish and the stainless steel lockable latch and hardware.
- Incorporate gas shock lifts.
- These shocks help to free your lid open on rocking docks and in higher wind areas and allows for a slower, more controlled closing.
- Constructed with a smooth interior finish which helps prevent splinters in your hands when storing or retrieving your boating accessories.

Order No.	Mfg. No. / Description	Price
224554	(83550) 20" H x 40" W x 19" D	$545.98 D
224556	(83562) 24" H x 54" W x 22" D	$666.98 D
224555	(83552) 24" H x 72" W x 23" D	$755.98 D
255415	(83553) 27" H x 46" W x 26" D	$594.98 D
224553	(83554) 27" H x 72" W x 26" D	$945.98 D

Taylor Made Dock Pro™ Inflatable Dock Wheels



- Smooth rolling wheels offers substantial dock cushioning and feature molded-in valves to adjust the level of firmness.
- Heavy duty hot dipped galvanized hardware mounts securely to the dock.
- 12" and 18" wheels use a large 2" diameter axle housing for maximum strength.
- Corner mount.

Order No.	Mfg. No. / Description	Price
721402	(1078) Wheel Size: 9"	$98.98 G
722872	(1072) Wheel Size: 12"	$199.98 G
722884	(1081) Wheel Size: 18"	$203.98 G

True Grip Traction Tape and Cleat



- Constructed of a durable 46-grit mineral abrasive compound for excellent longevity in both indoor and outdoor applications.
- We employ the use of a solvent based acrylic adhesive system to allow for adhesion over a wide variety of surfaces.
- Water and chemical resistance.
- Black.

Order No.	Mfg. No. / Description	Price
461222	(SG7004CB) 4" x 60', Traction Tape	$60.98 F
461236	(SG7006CB) 6" x 60', Traction Tape	$96.98 F
461246	(SG7126CBS) 6" x 24", Traction Cleat	$4.33 F

Attwood L.E.D. Docking Lights



- Compared to its 55-watt halogen competition, the Attwood Surface Mount LED Docking Light draws a fraction of the power while producing a brighter output.
- The Attwood product also transmits light in a much broader pattern as opposed to a narrow beam generated by today's competitors.
- Simply put, Attwood's docking light performs like a true "docking light" instead of a narrow-beam headlight.
- Power draw and performance are important, but what about assembly? At 1.2" thick, the lights are designed to be mounted directly to the surface of the hull.
- With only a small hole for wiring and three (3) screws for attachment, Attwood's surface mount design makes installation quick and uncomplicated.
- This new LED Docking Light allows for fewer hull cuts and minimal intrusion while producing results that are reliable and attractive.
- Backed by a 10-year warranty, Attwood's LED Docking Light is designed and tested for extreme conditions.
- Attwood used only the highest grade Stainless Steel and aluminum components to ensure the product is resistant to corrosion.
- The rubber gasket provided creates a barrier that protects your hull from water entry, ensures the light is watertight and keeps all electrical

Order No.	Mfg. No. / Description	Price
235570	(6522SS1)	$146.98 F
235572	(6522SS7) Clamshell Packaging	$146.98 F

Taylor Made StepSafe™ Dock Steps



- Molded in durable U.V. resistant polyethylene.
- On the top of each step, a StepSafe non-slip pad is adhered for additional slip protection while boarding.
- 1-1/2" wide flange provides adequate mounting surface for docks.
- Cleans easily with liquid soap and water.
- Additional hand rails are available for two and three step models, sold separately.

Order No.	Mfg. No. / Description	Price
723040	(47200) Double Tread Step	$169.98 G
723041	(47300) Triple Tread Step	$239.98 G
723076	(47301) Triple Tread Hand Railing	$99.98 G

Taylor Made Solar Powered Dock Light



- Solar powered light charges during the daylight hours and automatically turns on at dusk to alert boaters of hazards.
- Easily attaches to buoys, docks, moorings, or anything else that needs night time identification.
- Unit is constructed with a tough, waterproof (not submersible) plastic housing to keep the light working in all conditions.

Order No.	Mfg. No. / Description	Price
828275	(46109) Solar Powered Dock Light	$48.98 G

Taylor Made L.E.D. Stick-On Pushlight



- This small LED light is powered by three AAA batteries (included) and has an adhesive backing so it can be placed anywhere.
- Just push the lens to turn the light on and off.
- Three super bright LEDs run for days on three batteries.
- 10 Pack Table Top Display

Order No.	Mfg. No. / Description	Price
828270	(LSPWD) Pushlight	$100.98 G

©2014 Donovan Marine, Inc.

FIBERGLASS MARINE PRODUCTS

TOUGH GUY by marpac

Built to Last!

- Quality fiberglass construction
- All stainless steel corrosion proof hardware
- UV resistant white gel-coat for long lasting durability

Dock & Deck Boxes

- Sleek rounded edges, domed lid
- 5" Stainless steel louvered vents on both ends
- Gas shocks for easy opening-will not slam down
- Gel coated edges
- 2 Stainless steel lockable latches
- 5 Year warranty



Standard

Model No.	Size	Model No.	Size
RWDB50	50"L x 29"W x 33"H	RWDB70	70"L x 29"W x 33"H
RWDB60	60"L x 29"W x 33"H	RWDB80	80"L x 29"W x 33"H



Low Standard

Model No.	Size	Model No.	Size
RWDB50LP	50"L x 22"W x 24"H	RWDB70LP	70"L x 22"W x 24"H
RWDB60LP	60"L x 22"W x 24"H	RWDB80LP	80"L x 22"W x 24"H

FISH CLEANING TABLES



Deluxe Fish Cleaning Station

Model No. **RW50FCSDC**

- Fiberglass cabinet
- White (Custom colors available)
- 54" x 25" top fillet surface



Pedestal Fish Cleaning Station

Model No. **RWFCS01-PED**

- Water outlet & aluminim hose holder
- Powder coated finish
- Knife and plier holder
- 40"L x 23"W x 36"H



2 & 4 Legged Fillet Tables

- Great for Homes, Parks and Marinas

Model No.	Size
FCS04-2	50"W x 23"D x 38"H
FCS04-4	50"W x 23"D x 38"H
FCS05-4	68"W x 24"D x 38"H
FCS07-4	96"W x 24"D x 38"H



2 & 4 Leg Fish Cleaning Stations

- Stainless steel hardware
- All Aluminim Frame

Model No.	Size
SLFCS40-4	40"W x 23"D x 38"H
SLFCS50-4	50"W x 23"D x 38"H
SLFCS40-2	40"W x 23"D x 38"H
SLFCS50-2	50"W x 23"D x 38"H



UPS Pedestal Table

Model No. **SLFCS40-1**
40"L x 23"W x 37"H

DONOVAN MARINE

Some products are oversize or over weight and may require extra shipping costs. See your Donovan Rep for current pricing & shipping quotes.

FIBERGLASS MARINE PRODUCTS

TOUGH GUY by marpac®

Built to Last!

- Quality fiberglass construction
- All stainless steel corrosion proof hardware
- UV resistant white gel-coat for long lasting durability

Electrical Boxes

- 1/4" Solid fiberglass (Body)
- Gas shock holds door securely open
- Stellar lockable latches
- Acrylic door
- 5 Year warranty



Model No.	Size
RWEB24B	24"L x 16"D x 10"H
RWEB28B	28"L x 16"D x 11-1/2"H
RWEB30B	30"L x 16"D x 11"H
RWEB34B	34"L x 16"D x 11"H

Economy Leaning Posts

- White powder coated finish
- All aluminim welded frame
- Marine grade vinyl upholstery
- Cooler storage area under seat (holds up to 90 qt. cooler)
- 36"H x 38"W / 18"x3" mounting plates

Standard



Model No. **SLLP01**

With 4 Welded on Rod Holders



Model No. **SLLP02**

Cockpit Boarding Stairs



2 Step

Model No. **CMS02**
- 23-1/2"L x 25-1/2"D x 20"H



3 Step

Model No. **CMS03**
- 26"L x 36"D x 30"H



Deluxe with Livewell

Model No. **CMDLPLW**
- With 40 Gallon Livewell
- Perfect for boats 22'-28'
- Storage Under Seat
- 38"L x 36"D x 30"H (Does Not Include Flange)



Lift Ladders

- Marine grade aluminim
- Controlled access
- Powder coating available
- Available in 5 sizes: 4, 5, 6, 7 or 8 Steps

Step Boxes

- Built-in non-skid surface
- Sleek rounded edges
- Euro style chrome brass handles



Model No. **RWSB03**
- Stainless steel hinge
- Soft rubber trimmed edge
- Custom color available
- With storage
- 22"W x 17-1/2"D x 12-3/4"H



Model No. **RWSB02**
- With storage
- 22"W x 17-1/2"D x 14"H



Model No. **RWSB01**
- 22"W x 18"D x 13"H

Center Consoles

- Large rounded corners



Model No.	Size	For Boats
RWCC01	21"W x 16"D x 25"H	13' - 16'
RWCC02	23"W x 22"D x 31"H	15' - 18'
RWCC03	31"W x 31"D x 37"H	18' - 24'
RWCC04	38"W x 38"D x 53"H	24' - 28'

Some products are oversize or over weight and may require extra shipping costs. See your Donovan Rep for current pricing & shipping quotes.

Marpac Deluxe Pull Up Cleats



- A drill with a 1/2" bit and a 1" (for 7-1017) or 1-1/8" (for 7-1018) hole saw or drill bit is all that's needed for installation.
- Closed position only 1/2" above deck.
- Water resistant O-ring included.
- Uses standard 3/8" studs.
- Wider finger grip for ease of use.
- Starboard installation templates available.
- Eliminates standing water on base.

Order No.	Description	Price
7-1017	Length 4", Slim Line Design	$59.98 G
7-1018	Length 6", Wide Base Design	$69.98 G

Marpac Galvanized Standard Dock Cleats



- Hot dipped galvanized gray iron.
- Measured from tip to tip.

Order No.	Length	Price
7-2290B	Length 4"	$2.49 I
7-2292B	Length 6"	$2.98 I
7-2294B	Length 8"	$5.98 I
7-2296B	Length 10"	$8.98 I
7-2298B	Length 12"	$14.98 I

Marpac Hollow Base Cleats - Yacht Design



- Polished stainless steel.
- Fastens with 1/4" screws.

Order No.	Description	Price
7-0169	Length 4"	$9.98 G
7-0170	Length 6"	$13.98 G
7-0171	Length 8"	$20.98 G
7-0172	Length 10"	$32.98 G

Perko Fig. 530 Aluminum Open Base Cleats



- Heavy duty aluminum.

Order No.	Mfg. No. / Description	Price
540472	(530 008 ALU) Length 8"	$42.98 Q
540484	(530 010 ALU) Length 10"	$64.98 Q
540496	(530 012 ALU) Length 12"	$107.98 Q

Sea Dog Chrome Zamak Hollow Base Cleats



- Attractive chrome finish.
- Each model predrilled with four holes.
- Standard pack 6.

Order No.	Mfg. No. / Description	Price
239598	(044104-1) Length 4-1/2"	$5.98 Q
239601	(044106-1) Length 6"	$13.98 Q

Boater Sports Stainless Steel Cleat



- Heavy duty 316 polished solid stainless cast cleat.

Order No.	Mfg. No. / Description	Price
1-54002	(54002) Length 6"	$19.95 H

Stainless Steel Open Base Cleat



- Polished 316 stainless steel.
- Predrilled with four holes.
- Base dimensions: 1-3/8" W x 4" L.
- Overall length 14-7/8".
- Overall height 3-15/16".

Order No.	Mfg. No. / Description	Price
263378	(70COBS1500)	$237.98 Q

Boater Sports Open Base Cleats



- Traditional styled chrome plated zamak cleats.
- Open base.
- #8 fasteners required.

Order No.	Mfg. No. / Description	Price
1-54032	(54032) Length 4.5"	$5.90 H
1-54034	(54034) Length 6"	$8.95 H

Perko Fig. 545 Aluminum Plain Finished Cleats



- Pressure cast aluminum.

Order No.	Mfg. No. / Description	Price
540725	(545 DP6 ALU) Length 6", Closed Base	$17.98 R
540737	(545 DP8 ALU) Length 8", Open Base	$24.98 R

Boater Sports Galvanized Steel Dock Cleats



- Cast iron galvanized cleats.
- Great for docks.

Order No.	Mfg. No. / Description	Price
1-54044	(54044) Length 4"	$0.99 H
1-54046	(54046) Length 6"	$1.39 H
1-54048	(54048) Length 8"	$4.85 H
1-54050	(54050) Length 10"	$6.99 H
1-54051	(54051) Length 12"	$11.65 H

Marpac High Impact Nylon Cleats



- Durable high impact black nylon yacht cleats.

Order No.	Length	Head Screws	Package	Price
7-0340	4-1/2"	#10 Oval Machine	2 Per Card	$4.02 G
7-0340B	4-1/2"	#10 Oval Machine	Bulk, Sold Each	$2.98 I
7-0340S	4-1/2"	#10 Oval Machine	Bucket of 24	$27.98 G
7-0341	6"	1/4" Oval Machine	2 Per Card	$4.21 G
7-0341B	6"	1/4" Oval Machine	Bulk, Sold Each	$2.98 I
7-0341S	6"	1/4" Oval Machine	Bucket of 24	$35.98 G
7-0338	8"	1/4" Oval Machine	2 Per Card	$6.98 G
7-0338B	8"	1/4" Oval Machine	Bulk, Sold Each	$4.97 I
7-0339	10"	5/16" Oval Machine	2 Per Card	$9.98 G
7-0339B	10"	5/16" Oval Machine	Bulk, Sold Each	$7.98 I

Perko Fig. 1306 Chromalex® Open Base Cleats



- Chrome plated zinc alloy with black polymer base.

Order No.	Mfg. No. / Description	Price
534277	(1306 DP1 CHR) Length 4-1/2", Sold Per Pair	$24.98 R
534289	(1306 DP2 CHR) Length 6", Sold Each	$23.98 R

Perko Fig. 1305 Chromalex® Closed Base Cleat



- Chrome plated zinc alloy with black polymer base.
- Length 4-1/2".

Order No.	Mfg. No. / Description	Price
534239	(1305 DP1 CHR)	$24.98 Q

Accon Pull-Up Cleats



- Made of marine grade 316 stainless steel.
- Each cleat is supplied with a waterproofing cup.

Order No.	Mfg. No. / Description	Price
Special Order	(205-12) 12"	Call for Price
Special Order	(205-12-S) 12", Stud Mount	Call for Price
Special Order	(115-15) 15"	Call for Price
Special Order	(115-15-S) 15", Visible Screw Holes	Call for Price
Special Order	(115-15-C) 15", Stud Mount	Call for Price

Accon Pull-Up Cleats



Order No.	Mfg. No. / Description	Price
Special Order	(460-4) Length 4-1/2"	Call for Price
Special Order	(460-6) Length 6"	Call for Price
Special Order	(460-8) Length 8"	Call for Price

Boater Sports Galvanized Steel Dock Cleats



- Open base nylon cleat.
- Good for boats or docks.
- 2 mounting holes.

Order No.	Mfg. No. / Description	Price
1-54036	(54036) Length 4.5"	$2.45 H
1-54038	(54038) Length 6"	$3.45 H
1-54040	(54040) Length 8"	$3.30 H

Marpac Lifting Eye with Cleat



- Polished 316 stainless steel.
- Threaded for 5/8" - rod.

Order No.	Description	Price
7-0176	5/8"	$48.98 G

Attwood Neat Cleats



- 7/8" rod of solid enhanced #316 Stainless Steel alloy
- Friction springs holds the cleat
- Over 500,000 in use World Wide
- Backed by a Lifetime Warranty against corrosion
- Has a neat, continuous contour to prevent snags and stubbed toes
- Just drill twice with an appropriate hole saw.
- The receptacle outlet is sized for standard 1/4" pilot tubing (not included) so you can use parts from existing inventory.

Order No.	Mfg. No. / Description	Price
334000	(66515-7) Length 4-1/2"	$59.98 G
334005	(66517-7) Length 6"	$67.98 Q

Accon Wide-Line Cleats



- Sleek, low profile appearance.
- Large flange helps cover rough cut-out area.
- Made of marine grade 316 stainless steel.
- Mounts from the bottom via welded stainless steel threaded studs.

Order No.	Mfg. No. / Description	Price
Special Order	(305-4) Length 4-1/2"	Call for Price
Special Order	(305-6) Length 6"	Call for Price
Special Order	(305-8) Length 8"	Call for Price
Special Order	(305-10) Length 10"	Call for Price
Special Order	(305-4C) Waterproofing Cup for 305-4	Call for Price
Special Order	(305-6C) Waterproofing Cup for 305-6	Call for Price
Special Order	(305-8C) Waterproofing Cup for 305-8	Call for Price
Special Order	(305-10C) Waterproofing Cup for 305-10	Call for Price

©2014 Donovan Marine, Inc.

Accon Pop-Up® Cleats

Accon Marine



- Cleat pops up at the touch of a button - simply push it back down when it is no longer needed and it locks in the flush position.
- In the up position, Pop-Up Cleats function exactly like conventional cleats.
- Made of marine grade 316 stainless steel.
- Each cleat is shipped with a backing plate which also serves as the cut-out template.
- Screws are not included.

Order No.	Mfg. No. / Description	Price
Special Order	(202-4) Length 4-1/2"	Call for Price
Special Order	(202-6) Length 6"	Call for Price
Special Order	(202-6-S) Length 6", Stud Mount	Call for Price
Special Order	(202-8) Length 8"	Call for Price
Special Order	(202-8-S) Length 8", Stud Mount	Call for Price
Special Order	(202-10) Length 10"	Call for Price
Special Order	(202-4C) Waterproofing Cup for 202-4	Call for Price
Special Order	(202-6C) Waterproofing Cup for 202-6	Call for Price
Special Order	(202-8C) Waterproofing Cup for 202-8	Call for Price
Special Order	(202-10C) Waterproofing Cup for 202-10	Call for Price
Special Order	(202-4-TMP) Top-Mount Backing Plate for 202-4	Call for Price
Special Order	(202-6-TMP) Top-Mount Backing Plate for 202-6	Call for Price
Special Order	(202-8-TMP) Top-Mount Backing Plate for 202-8	Call for Price
Special Order	(202-10-TMP) Top-Mount Backing Plate for 202-10	Call for Price
Special Order	(600) Brass Through Hull Fitting	Call for Price
Special Order	(601) Plastic Through Hull Fitting	Call for Price
Special Order	(602) Stainless Steel Through Hull Fitting	Call for Price

Accon Folding Cleats

Accon Marine



333-4

332-6

- Mounts on the surface of the boat.
- No cut-outs or hole saws required.
- These cleats lock down when not needed, and spring up when release button is pushed in.
- Release slide for 333 cleat is located on the top of the cleat.
- Release button for 332 is located on the side of the cleat.
- No drain receptacles required.
- They do not leak into the boat.
- The most simple installation of any retractable cleat in the industry.
- Constructed of marine grade 316 cleat SS and brightly polished.

Order No.	Mfg. No. / Description	Price
Special Order	(333-3.5) 3-1/2" with Visible Screw Holes	Call for Price
Special Order	(334-3.5) 3-1/2" No Visible Screw Holes	Call for Price
Special Order	(333-4) 4-1/2" with Visible Screw Holes	Call for Price
Special Order	(334-4) 4-1/2" No Visible Screw Holes	Call for Price
Special Order	(332-6) 6" with Visible Screw Holes	Call for Price
Special Order	(332-6-S) 6" No Visible Screw Holes	Call for Price
Special Order	(332-8) 8" with Visible Screw Holes	Call for Price
Special Order	(332-8-S) 8" No Visible Screw Holes	Call for Price

Accon Pull-Up Cleats

Order No.	Mfg. No. / Description	Price
Special Order	(209-4) Length 4-1/2"	Call for Price
Special Order	(209-4-CA) Length 4-1/2", with Lifting Hardware	Call for Price
Special Order	(209-4-LH) Lifting Hardware for 4-1/2"	Call for Price
Special Order	(209-6) Length 6"	Call for Price
Special Order	(209-6-CA) Length 6", with Lifting Hardware	Call for Price
Special Order	(209-6-LH) Lifting Hardware for 6"	Call for Price
Special Order	(209-8) Length 8"	Call for Price
Special Order	(209-8-CA) Length 8", with Lifting Hardware	Call for Price
Special Order	(209-8-LH) Lifting Hardware for 8"	Call for Price
Special Order	(209-10) Length 10"	Call for Price
Special Order	(209-10-CA) Length 10", with Lifting Hardware	Call for Price
Special Order	(209-10-LH) Lifting Hardware for 10"	Call for Price
Special Order	(209-10-S) Length 10", Stud Mount	Call for Price
Special Order	(209-10-S-CA) Length 10", with Lifting Hardware, Stud Mount	Call for Price
Special Order	(209-4-TMP) Top-Mount Backing Plate for 209-4	Call for Price
Special Order	(209-6-TMP) Top-Mount Backing Plate for 209-6	Call for Price
Special Order	(209-8-TMP) Top-Mount Backing Plate for 209-8	Call for Price
Special Order	(209-10-TMP) Top-Mount Backing Plate for 209-10	Call for Price

Accon Marine



- Sealed base eliminates the need for a waterproofing cup, water can be drained through a fitting at the bottom of the unit.
- Can be converted to a lifting cleat by inserting a connecting rod in the base of the unit and attaching the rod to the bow eye.
- Made of marine grade 316 stainless steel.
- Each cleat is shipped with a backing plate that also serves as the cut-out template.
- Screws are not included.

Accon Slim-Line™ Cleats

Accon Marine



- Sleek, narrow design allows for installation where other flush-mounted cleats won't fit.
- Made of marine grade 316 stainless steel.
- Easy to pull up, the recess in the base allows the cleat to be grasped quickly and easily.
- Each cleat is shipped with a backing plate which also serves as the cut-out template.

Order No.	Mfg. No. / Description	Price
Special Order	(304-4) Length 4-1/2"	Call for Price
Special Order	(304-6) Length 6"	Call for Price
Special Order	(304-8) Length 8"	Call for Price
Special Order	(304-10) Length 10"	Call for Price
Special Order	(304-10) Waterproofing Cup for 304-4	Call for Price
Special Order	(304-6C) Waterproofing Cup for 304-6	Call for Price
Special Order	(304-8C) Waterproofing Cup for 304-8	Call for Price
Special Order	(304-10C) Waterproofing Cup for 304-10	Call for Price

Perko Fig. 757 Rope Deck Pipe

PERKO



- Chrome plated zinc alloy.
- Maximum rope size: 1".
- Flange OD 3-3/8".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
542009	(757 DP0 CHR)	$33.98 R

Perko Fig. 1057 Rope Deck Pipe

PERKO



- High impact black polymer.
- UV stabilized, fiber reinforced.
- Hinged, snap-down cover.
- Maximum rope size: 7/8".
- Flange OD 3-3/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
531585	(1057 DP0 BLK)	$21.98 R

Accon Pop-Up® L.E.D. Lights

Accon Marine



- Keeps deck free of protruding lights.
- Made of marine grade 316 stainless steel.
- Folds down flush when not in use.
- USCG approved 2 nautical mile.
- Fastens with three #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(210-M) Bow Light	Call for Price
Special Order	(210-M-S) Bow Light, Stud Mount	Call for Price
Special Order	(210-M-C) Waterproofing Cup for 210-M	Call for Price
Special Order	(211-M) Bow Light, 204 Style	Call for Price
Special Order	(211-M-C) Waterproofing Cup for 211-M	Call for Price

Accon Lifting Cleat

Accon Marine



- All stainless steel parts.
- Cleat and base are 316, lifting hardware is 304.
- The sling is a solid casting for increased strength.
- Fastens to deck with four #10 screws (not included).
- Standard rod length is 12".
- The maximum working load is 4,000 lbs. in the direction of the axis of the threaded rod shank only.
- Test results available upon request.
- A cut-out template is supplied.

Order No.	Mfg. No. / Description	Price
Special Order	(203-6-CA) Complete Assembly	Call for Price
Special Order	(203-6-CB) Lift Cleat with Base	Call for Price
Special Order	(209-6-R) Rod, 12"	Call for Price
Special Order	(209-6-R-18) Rod, 18"	Call for Price
Special Order	(209-6-R-24) Rod, 24"	Call for Price
Special Order	(203-S) Sling	Call for Price
Special Order	(203-CBL) Cross Bar for Sling	Call for Price
Special Order	(203-BE) Bow Eye	Call for Price

Marpac Rope Deck Pipe

MARPAC



- Cast stainless steel.

Order No.	Description	Price
7-0941	Rope Deck Pipe	$82.98 G

Accon Pop-Up® Lights

Accon Marine



204-M





206-M

- Keeps deck free of protruding lights.
- Made of marine grade 316 stainless steel.
- Folds down flush when not in use.
- USCG approved 1 nautical mile.
- Each light is shipped with a backing plate which also serves as a cut-out template.
- Fastens with three #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(204-M) Bow Light	Call for Price
Special Order	(205-M) Port Light	Call for Price
Special Order	(206-M) Starboard Light	Call for Price
Special Order	(207-M) Side Light	Call for Price
Special Order	(204-M-C) Waterproofing Cup for 204-M	Call for Price
Special Order	(204-RGL) Repl. Lens for 204-M	Call for Price
Special Order	(204-B) Repl. Bulb	Call for Price
Special Order	(204-SOCKET) Repl. Socket	Call for Price
Special Order	(204-RK) Repair Kit	Call for Price

©2014 Donovan Marine, Inc.

Accon Extra Large Round Lifting Eye

Accon Marine



- All stainless steel parts; eye and base are 316, lifting hardware is 304.
- The sling is a solid casting for increased strength.
- Parts may be purchased separately.
- 3-1/4" diameter hole required.
- Fastens to deck with four 1/4" screws.

Order No.	Mfg. No. / Description	Price
Special Order	(203-EA-XL) Complete Assembly	Call for Price
Special Order	(203-XL) Lift Eye with Base	Call for Price
Special Order	(203-BE) Bow Eye	Call for Price

Accon Oval Lifting Eye

Accon Marine



- Small compact unit.
- Unit can be drained or sealed water tight.
- Hub pivots two ways to overcome a slight misalignment at installation.
- All stainless steel parts; eye and base are 316, lifting hardware is 304.
- The sling is a solid casting for increased strength.
- Requires less clearance under deck than our lifting cleats.
- Fastens to deck with four #10 screws.

Order No.	Mfg. No. / Description	Price
Special Order	(201-EA) Complete Assembly	Call for Price
Special Order	(201-LE) Lift Eye with Base	Call for Price
Special Order	(201-LER) Rod	Call for Price
Special Order	(203-S) Sling	Call for Price
Special Order	(203-CBL) Cross Bar for Sling	Call for Price
Special Order	(203-BE) Bow Eye	Call for Price

Accon Folding Chocks

Accon Marine





- Folds down when not in use.
- Marine grade 316 stainless steel.
- Surface mount - no cut-out required.

Order No.	Mfg. No. / Description	Price
Special Order	(502-4) 4-1/2"	Call for Price
Special Order	(502-6) 6"	Call for Price

Perko Fig. 752 Oval Hawse Hole Plate

PERKO



- Chrome plated bronze.
- Eliminate deck and rope chaffing when cleats are mounted on a vertical surface inside cockpits.
- Outside dimensions: 4-1/4" x 6".
- Inside dimensions: 2-1/8" x 4-1/8".
- Spigot length 1-1/4".
- Uses 1/4" fasteners.

Order No.	Mfg. No. / Description	Price
541967	(752 000 CHR)	$149.98 Q

Accon Round Lifting Eye

Accon Marine



- All stainless steel parts.
- Eye and base are 316, lifting hardware is 304.
- The sling is a solid casting for increased strength.
- 2-3/8" hole required.
- Fastens to deck with four #10 screws (not included).
- Standard rod length is 12".
- The maximum working load is 4,000 lbs. in the direction of the axis of the threaded rod shank only.
- Test results available upon request.

Order No.	Mfg. No. / Description	Price
Special Order	(203-EA) Complete Assembly	Call for Price
Special Order	(203-LE) Lift Eye with Base	Call for Price
Special Order	(203-LER) Rod	Call for Price
Special Order	(203-S) Sling	Call for Price
Special Order	(203-CBR) Cross Bar for Sling	Call for Price
Special Order	(203-BE) Bow Eye	Call for Price

Accon Lifting Eye Accessories

Accon Marine



Order No.	Mfg. No. / Description	Price
Special Order	(201-DP) Drain Plug	Call for Price
Special Order	(201-DF) Drain Fitting	Call for Price
Special Order	(209-PA) Pivot Attachment	Call for Price

EPCO Lifting Eye



- Polished 316 stainless steel.
- Tapped for 5/8" connecting rods.
- Large 1-1/2" inside diameter eye.
- Lifting eye with o-ring.

Order No.	Mfg. No. / Description	Price
368034	(552) Lifting Eye	$84.98 Q

Accon Pop-Up® Chocks

Accon Marine





- Chock easily pulls up for use.
- Simply press it down when not needed to keep deck clutter free.
- Made of marine grade 316 stainless steel.
- Fastens to deck with two #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(500) 4-1/2", Set of Port & Starboard Chocks	Call for Price
Special Order	(500-6) 6", Set of Port & Starboard Chocks	Call for Price
Special Order	(501) 4-1/2", Straight Stern Chock	Call for Price
Special Order	(501-6) 6", Straight Stern Chock	Call for Price
Special Order	(500-DF) Drain Fitting	Call for Price
Special Order	(500-DP) Drain Plug	Call for Price

Marpac Bow Chock



- Polished 316 stainless steel.
- Uses #10 fasteners.

Order No.	Mfg. No. / Description	Price
7-0173	4-1/2"	$28.98 G

Perko Fig. 1223 Skene Bow Chock



- Chrome plated zinc alloy.
- Maximum rope size: 1/2".
- Overall length 3-1/2".
- Width 7/8".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
533453	(1223 DP0 CHR)	$13.98 R

Marpac Stern Eyes



- Stainless steel with corrosion resistant super-glo finish.
- Furnished with stainless steel nuts and plates.

Order No.	Mfg. No. / Description	Price
7-0124	3/8" x 3"	$8.98 G
7-0123	1/2" x 3-7/16"	$12.98 G

Perko Fig. 1235 Double Shank Bow Eye

Note: Not designed to bear the weight of the vessel and therefore should not be used for lifting.



- Chrome plated zinc alloy eye.
- Zinc alloy plated steel U-bolt, nuts and washers.
- Has one continuous U-bolt cast inside of eye.
- Shank OD 5/16".
- Length 3".
- Eye ID 1".
- Safe working load 2,000 lbs.

Order No.	Mfg. No. / Description	Price
533643	(1235 DP0 CHR)	$21.98 R

Attwood Single Shank Bow Eye



- Die cast zamak eye with chrome finish and plated steel shank.
- Cadmium plated nuts and washers included.
- Inside eye diameter: 1".
- Maximum straight axis pull weight: 2,500 lbs.
- Not for side loading or transom mounting.
- Do not use for lifting.
- 1/2" stud.

Order No.	Mfg. No. / Description	Price
239461	(3457-3) Shank Bow Eye	$21.98 H

Marpac Straight Chock



- Stainless steel.

Order No.	Mfg. No. / Description	Price
7-0940	5"	$27.98 G

Marpac Adjustable Keel Plate



- Stainless steel.
- Shank dimensions: 3/8" x 3".
- Uses 5/8" threaded rod.

Order No.	Mfg. No. / Description	Price
7-0125	3/8" x 3"	$39.98 G

Marpac Bow Eyes



- Stainless steel.
- Furnished with stainless steel nuts and plates.

Order No.	Mfg. No. / Description	Price
7-0122	3/8" x 3"	$9.98 G
7-0120	1/2" x 3-7/16"	$11.98 G

Boater Sports Stainless Steel Bow/Stern Eyes



- 316 stainless steel.
- For use on the bow or stern.
- Stainless steel finishing plates.
- Washers and nuts included.

Order No.	Mfg. No. / Description	Price
1-54102	(54102) 3/8" x 4-7/8"	$10.80 H
1-54104	(54104) 1/2" x 5-1/4"	$19.95 H

White Cap U-Bolt Bow Eyes



- Constructed of 304 stainless steel.
- Display packaged.

Order No.	Mfg. No. / Description	Price
2011630	(S-5020P) 3/8" Stock, 1" ID, 2-1/2" Threads	$12.98 H
2011632	(S-5022P) 3/8" Stock, 1" ID, 3-7/16" Threads	$14.98 H

©2014 Donovan Marine, Inc.

Sea Dog Single Shank Bow Eyes



- Die cast chrome zinc head with galvanized shaft.
- Maximum straight axis pull weight: 2,500 lbs.

Order No.	Mfg. No. / Description	Price
239459	(079133-1) 3-1/16", 3/8" Stud	$6.98 Q
239423	(079135-1) 4-5/8", 3/8" Stud	$6.98 Q

Galvanized Steel Jaw and Jaw Turnbuckles



Order No.	Description	Price
617033	1/4" Dia. x 4" Adj., Sold Each	$4.98 I
617300	1/4" Dia. x 4" Adj., Sold 10 Per Pack	$46.98 I
617045	5/16" Dia. x 4-1/2" Adj., Sold Each	$5.98 I
617312	5/16" Dia. x 4-1/2" Adj., Sold 10 Per Pack	$52.98 I
617057	3/8" Dia. x 6" Adj., Sold Each	$6.98 I
617324	3/8" Dia. x 6" Adj., Sold 10 Per Pack	$64.98 I
617069	1/2" Dia. x 6" Adj., Sold Each	$9.98 I
617336	1/2" Dia. x 6" Adj., Sold 5 Per Pack	$46.98 I
617071	1/2" Dia. x 9" Adj., Sold Each	$14.98 I
617348	1/2" Dia. x 9" Adj., Sold 5 Per Pack	$73.98 I
617083	1/2" Dia. x 12" Adj., Sold Each	$15.98 I
617350	1/2" Dia. x 12" Adj., Sold 5 Per Pack	$78.98 I

Imported Galvanized Steel Eye and Eye Swivels



Order No.	Mfg. No. / Description	Price
616992	1/4", Sold Each	$2.98 I
617209	1/4", Sold 25 Per Pack	$66.98 I
617007	5/16", Sold Each	$3.98 I
617211	5/16", Sold 25 Per Pack	$78.98 I
617019	3/8", Sold Each	$4.98 I
617223	3/8", Sold 25 Per Pack	$121.98 I
617021	1/2", Sold Each	$7.98 I
617235	1/2", Sold 25 Per Pack	$178.98 I

Sea Dog Galvanized Steel "S" Hooks



Order No.	Mfg. No. / Description	Price
688993	(197153) Diameter 5/16", Overall Length 2-1/2"	$1.96 I
689008	(197164) Diameter 3/8", Overall Length 3-1/16"	$3.47 I

Galvanized Nut Eye Bolts



- Galvanized weldless drop forged steel.

Order No.	Mfg. No. / Description	Price
688753	(080832) Dia. 3/8", Overall 2-1/2" L, Eye ID 3/4", SWL #750	$6.98 I
688765	(080834) Dia. 3/8", Overall 4-1/2" L, Eye ID 3/4", SWL #750	$6.98 I

Schaefer Ball Bearing Blocks





- Ball bearing block with aluminum cheeks.
- Delrin sheave maintains strength and low-friction.
- For boats to 34'.

Single Sheave

Order No.	Mfg. No. / Description	Price
596000	(706-05) 5-1/32" L x 2-1/2" W x 1-3/32" T	$115.98 I

Double Sheave with Becket

Order No.	Mfg. No. / Description	Price
596050	(706-35) 7-3/32" L x 2-1/2" W x 2" T	$262.98 I

Triple Sheave

Order No.	Mfg. No. / Description	Price
596062	(706-94) 5-1/32" L x 2-1/2" W x 2-29/32" T	$282.98 I

Schaefer Single Block with Swivel Shackle



- Stainless steel with delrin sheave.
- Allows for clear, clean leads.
- For boats to 20'.
- 3-1/2" L x 1-3/16" W x 19/32" T.

Order No.	Mfg. No. / Description	Price
593222	(02-05)	$63.98 I

Imported Hay Fork Pulley



- Galvanized.
- Bronze bushing and grease fitting.
- Swivel eye.
- Wire application.
- Safe work load limit: 1 ton.
- Sheave size: 4".

Order No.	Description	Price
618554	Pulley	$32.98 I

Imported Try Net Block



- Hot dip galvanized.
- Ductile cast iron sheave and housing plate.
- Ball bearing with Alemite lubrication.
- Forged steel round swivel eye.
- Safe work load limit: 5 ton.
- Diameter 6"
- Note: Not for use with wire rope.

Order No.	Description	Price
618504	Net Block	$88.98 I

Imported Rigging Block



- Yarding style.
- Safe work load limit: 2,000 lbs.
- Block size: 3".
- Wire size: 3/8".

Order No.	Description	Price
618580	Rigging Block	$20.98 I

Marpac Pre-Packaged USCG Compliance and Safety Kits



The "Runabout"

Special Handling May Apply

- Kit Includes:
  - (4) 1 4-flare kit.
  - (1) White Boat Cushion.
  - (1) Coast Guard Booklet.
  - (1) 1/4" Galvanized Anchor Shackle.
  - (4) Adult (Over 90 lb.) Life Vests.
  - (1) Signal Horn.
  - (1) #10 Slip Ring Anchor.
  - (1) 5BC White Fire Extinguisher without Gauge.
  - (2) 3/8" x 15' White, Twisted Nylon Mooring/Docklines.
  - (1) 3/8" x 100' Twisted Nylon Anchor Line.

Order No.	Description	Price
7-0742	Runabout Safety Kit	$213.98 H



The "Small Boater"

Special Handling May Apply

- Kit Includes:
  - (4) 1 4-flare kit.
  - (1) White Boat Cushion.
  - (1) Signal Horn.
  - (1) #10 Slip Ring Anchor.
  - (4) Adult (Over 90 lb.) Life Vests.
  - (1) Gear Bag.
  - (1) Coast Guard Booklet.
  - (2) 1/4" Galvanized Anchor Shackles.
  - (1) 5BC White Fire Extinguisher without Gauge.
  - (2) 3/8" x 20' White, Twisted Nylon Mooring/Docklines.
  - (1) 3/8" x 100' Twisted Nylon Anchor Line.

Order No.	Description	Price
7-0744	Small Boater Safety Kit	$245.98 H



The "Mid-Range Deluxe Boater"

Special Handling May Apply

- Kit Includes:
  - (3) 12 Gauge Red Aerial Flares.
  - (4) Adult (Over 90 lb.) Life Vests.
  - (1) Gear Bag.
  - (1) Coast Guard Booklet.
  - (1) 12 Gauge Flare Gun.
  - (1) White Boat Cushion.
  - (1) Signal Horn.
  - (1) Rapid Set #8 Anchor.
  - (1) 10BC White Fire Extinguisher with Gauge.
  - (2) 3/8" x 20' White, Twisted Nylon Mooring/Docklines.
  - (1) 3/8" x 150' Twisted Nylon Anchor Line.
  - (1) 1/4" x 4' White Vinyl Coated Anchor Chain.
  - (2) 5/16" Galvanized Anchor Shackles.

Order No.	Description	Price
7-0745	Mid-Range Deluxe Boater Safety Kit	$324.98 H



The "Deluxe Yachtors"

Special Handling May Apply

- Kit Includes:
  - (1) Weekender First Aid Kit.
  - (6) Adult (Over 90 lb.) Life Vests.
  - (1) Gear Bag.
  - (1) Orange Police Style Whistle.
  - (1) Rapid Set #13 Anchor.
  - (1) Coastal Alert/Locate Flare Kit.
  - (1) White Boat Cushion.
  - (1) Signal Horn.
  - (1) Coast Guard Booklet.
  - (2) 3/8" Galvanized Anchor Shackles.
  - (2) 10BC White Fire Extinguisher with Gauge.
  - (2) 1/2" x 25" White, Twisted Nylon Mooring/Docklines
  - (1) 1/2" x 150' Twisted Nylon Anchor Line.
  - (1) 5/16" x 5' White Vinyl Coated Anchor Chain.

Order No.	Description	Price
7-0747	Deluxe Yachtors Safety Kit	$544.98 H



Fresh Water Kit #1

UPSable

- Kit Includes:
  - (1) 5BC White Fire Extinguisher with Gauge.
  - (4) Adult (Over 90 lb.) Life Vests.
  - (1) Gear Bag.
  - (1) Telescoping Paddle.
  - (1) White Boat Cushion.
  - (1) Signal Horn.

Order No.	Description	Price
7-0734	Fresh Water Kit #1 Safety Kit	$162.98 G



Fresh Water Kit #2

UPSable

- Kit Includes:
  - (1) 5BC White Fire Extinguisher with Gauge.
  - (4) Adult (Over 90 lb.) Life Vests.
  - (1) Gear Bag.
  - (1) Telescoping Paddle.
  - (1) White Boat Cushion.
  - (1) Orange Police Style Whistle.

Order No.	Description	Price
7-0735	Fresh Water Kit #2 Safety Kit	$126.98 G

Note: All USCG Compliance & Safety Kits Contents are Subject to Change Without Notice.

©2014 Donovan Marine, Inc.

Marpac Pre-Packaged USCG Compliance and Safety Kits – UPS Able



The "Budget Boater" Non-Haz-Mat Kit

- Kit Includes:
  (4) Adult (Over 90 lb.) Life Vests.
  (1) Signal Horn.
  (1) #10 Slip Ring Anchor.
  (2) 3/8" x 15' White, Twisted Nylon Mooring/Docklines.
  (1) 3/8" x 100' Twisted Nylon Anchor Line.
  (1) White Boat Cushion.
  (1) Coast Guard Booklet.
  (1) 1/4" Galvanized Anchor Shackle.

Order No.	Description	Price
7-0738	Budget Boater Non-Haz-Mat Kit	$144.98 I



The "Small Boater" Non-Haz-Mat Kit

- Kit Includes:
  (4) Adult (Over 90 lb.) Life Vests.
  (1) Signal Horn.
  (1) #10 Slip Ring Anchor.
  (1) Gear Bag.
  (2) 3/8" x 20' White, Twisted Nylon Mooring/Docklines.
  (1) 3/8" x 100' Twisted Nylon Anchor Line.
  (1) White Boat Cushion.
  (1) Coast Guard Booklet.
  (2) 1/4" Galvanized Anchor Shackle.

Order No.	Description	Price
7-0739	Small Boater Non-Haz-Mat Kit	$164.98 I



The "Mid-Range Deluxe Boater" Non-Haz-Mat Kit

- Kit Includes:
  (4) Adult (Over 90 lb.) Life Vests.
  (1) Gear Bag.
  (1) Coast Guard Booklet.
  (2) 5/16" Galvanized Anchor Shackles.
  (2) 3/8" x 20' White, Twisted Nylon Mooring/Docklines.
  (1) 3/8" x 150' Twisted Nylon Anchor Line.
  (1) 1/4" x 4' White Vinyl Coated Anchor Chain.
  (1) White Boat Cushion.
  (1) Signal Horn.
  (1) Rapid Set #8 Anchor.

Order No.	Description	Price
7-0740	Mid-Range Deluxe Boater Non-Haz-Mat Kit	$193.98 I



The "Deluxe Yachtors" Non-Haz-Mat Kit

- Kit Includes:
  (1) Weekender First Aid Kit.
  (1) White Boat Cushion.
  (1) Signal Horn.
  (1) Coast Guard Booklet.
  (2) 3/8" Galvanized Anchor Shackles.
  (2) 1/2" x 25' White, Twisted Nylon Mooring/Docklines.
  (1) 1/2" x 150' Twisted Nylon Anchor Line.
  (1) 5/16" x 5' White Vinyl Coated Anchor Chain.
  (6) Adult (Over 90 lb.) Life Vests.
  (1) Gear Bag.
  (1) Orange Police Style Whistle.
  (1) Rapid Set #13 Anchor.

Order No.	Description	Price
7-0741	Deluxe Yachtors Non-Haz-Mat Kit	$339.98 I

Note: All USCG Compliance & Safety Kits Contents are Subject to Change Without Notice.

Boater Sports New Boat Owners Kit



- All of the essential elements for your first time out on the boat.
- Kit includes:
  (2) 52149 - Fender Pack
  (4) 4207-19 - Type II Life Vests
  (1) 52709 - 3/8" x 100' Anchor Line
  (1) 8078-02 - White Throw Cushion
  (4) 52925 - Dock Lines
  (1) 50358 - Slip Ring Anchor
  (1) 55034 - 3/8" Anchor Shackle
  (1) 58300 - Orange Safety Whistle
- Minimum Order of 16 Units (1 Pallet).

Order No.	Mfg. No. / Description	Price
1-NBKIT	(NBKIT)	$250.00 H

Aqua Signal Electronic Hidden Horn



- White polycarbonate housing.
- Designed for vessels under 12 meters.
- Recessed mount.
- Installs in a standard 2-1/4" cut-out.
- Dimensions: 4.33" L x 2.64" W x 1.73" D.
- Includes: Mounting hardware and gasket.

Order No.	Mfg. No. / Description	Price
207068	(84401-7) 12 volt	$39.98 F

FIAMM Hidden Horn



- Mounts from outside the boat.
- Includes: Horn, water resistant liner and stainless steel grill.
- Draws 6 amps.

Order No.	Mfg. No. / Description	Price
605139	(5190512) 12 volt	$28.98 G

AFI Drop-In Hidden Horn with Grills



- Comes with both white ASA and black ABS screw-in grills.
- Easy installation: 2-3/4" dia. hole x 1" deep.
- Draws 4 amps.

Order No.	Mfg. No. / Description	Price
605658	(10080) 12 volt	$53.98 Q

AFI MiniBlast™ Compact Electric Horn



- Long lasting, non-corrosive ASA white plastic cover.
- Sealed sound unit with stainless steel diaphragm.
- Fundamental frequency: 440±20 Hz.
- Dimensions: 4-3/8" L x 3-3/8" W x 2" H.
- Draws 3 amps.

Order No.	Mfg. No. / Description	Price
605610	(10099) 12 volt	$28.98 G

Boater Sports Stainless Steel Horn



- Stainless steel housing.
- Excellent for external applications.
- Comes complete with mounting pad and wiring harness.
- Meets USCG regulations.

Order No.	Mfg. No. / Description	Price
1-58280	(58280) 12 volt	$35.25 H

FIAMM Above Deck Mini Horn - Single



- A sleek mini compact horn w/stainless steel motor cover.
- Includes mounting pad and wire harness.
- Dimensions: 3-1/2" L x 3-1/4" W x 2-5/16" H.
- Draws 4 amps.

Order No.	Mfg. No. / Description	Price
605111	(74300-13) 12 volt	$23.98 G

Boater Sports Trumpet Horn



- All stainless steel. Trumpet bell boat horn.
- Easy hook up to boat's 12 volt system.
- Mounting pads included.

Order No.	Mfg. No. / Description	Price
1-58282	(58282) Single, 16" x 4-1/4" x 5"	$79.95 Q

FIAMM Toronado Horns with Compress Kit



605355



605350

- The ultimate in contemporary styling incorporating the very finest quality components.
- Combination of heavy chrome plated brass and stainless steel for outstanding protection from saltwater.
- All models are tuned for an extra loud and crisp sound.
- This has an unusually low air requirement that guarantees dependability and long life.
- Compressor, mounting pad and hardware installation included.
- Made in the USA.
- 12 volt.
- 120 dB @ 1M.

Order No.	Mfg. No. / Description	Price
605350	(63220-14) Single	$214.98 G
605355	(63230-14) Twin	$306.98 G

AFI Mini Compact Electric Horn



- Type 304 stainless steel cover, diaphragm and mounting bracket.
- Totally sealed sound unit.
- Fundamental frequency: 440±20 Hz.
- Dimensions: 3" L x 3-1/4" W x 1-3/4" H.
- Draws 3 amps.

Order No.	Mfg. No. / Description	Price
605646	(10035) 12 volt	$30.98 Q

AFI Mini Compact Twin Electric Horn



- Type 304 stainless steel covers, diaphragms and mounting bracket.
- Fundamental frequency: 490±20/440±20 Hz.
- Dimensions: 3" L x 8" W x 1-3/4" H.
- Draws 6 amps.

Order No.	Mfg. No. / Description	Price
378909	(10001) 12 volt	$56.98 E

FIAMM Above Deck Mini Horns - Dual



- A sleek mini compact dual horn with stainless steel cover and diaphragm.
- For use in extreme weather exposure locations and limited space applications.
- Draws 8 amps.
- 12 volt.
- 7-3/4" L x 3-3/8" W x 2-3/8" H.

Order No.	Mfg. No. / Description	Price
605113	(74310-23) Clamshell	$55.98 G
605600	(74310-11) Bulk	$46.98 G

FIAMM Compact Electric Trumpet Horn



- Compact, lightweight and powerful.
- Includes universal mounting bracket.
- Dimensions: 3-7/8" L x 3-3/4" W x 3-1/2" H.
- Draws 5 amps.

Order No.	Mfg. No. / Description	Price
605050	(7227522) 12 volt	$10.98 G

FIAMM Airtone Electric Horns



605202

605177

- All exterior stainless steel construction for maximum weather ability.
- Stainless steel motor cover and stylish stainless pedestal mounting.
- Includes a projector support for extra ruggedness.
- Length 15-1/2", height 4-3/4".
- Single draws 4 amps, twin draws 8 amps.
- 12 volt.

Order No.	Mfg. No. / Description	Price
605177	(7549014) Single, Width 3-1/2"	$86.98 G
605202	(7551014) Twin, Width 7-1/2"	$153.98 G

©2014 Donovan Marine, Inc.

FIAMM Fultone Stainless Steel Horn with 24 volt Compressor Kit

FIAMM



- The twin air horn is the result of a unique sound chamber design which provides increased sound intensity from low pressure air sources.
- The sleek self-mount styling features dual stainless steel projectors and an anodized aluminum motor housing.
- 12 volt.
- 120 dB @ 1M.

Order No.	Mfg. No. / Description	Price
605360	(62350-12)	$189.98 G

Kahlenberg Zero Series Air Horns

Kahlenberg



- Brass finish.
- All horn castings are of accurately machined bronze, while horn projectors are spun brass.
- Fundamental frequency: 322 Hz.
- Sound pressure level over 122.9 dB.
- Designed for use on vessels less than 20 meters in length.

Order No.	Mfg. No. / Description	Price
430402	(S-OA) Length 17"	$431.98 I
430405	(SV-OA) Length 20"	$431.98 I
430417	(PO26-64) Bracket	$74.98 I

Kahlenberg Model S Heavy Duty Marine Air Horns

Kahlenberg



- Manufactured of cast bronze and spun brass.
- Regular, without valve.
- Fundamental frequency: 266 Hz.
- Sound pressure level over 132 dB.
- Designed for use on vessels less than 75 meters in length.

Order No.	Mfg. No. / Description	Price
430431	(S1) Diaphragm 5"	$792.98 C
430443	(S2) Diaphragm 6-3/8"	$1,023.98 C

Kahlenberg Push Button Switch

Kahlenberg



- Cast bronze waterproof.
- Suitable for At Will Control of solenoid operated whistle valves wherever electrical whistle control is used.
- Tapped one way for 1/2" conduit connection.

Order No.	Mfg. No. / Description	Price
430280	(M-132) 3 Contact	$304.98 B

Kahlenberg At Will Manual Control Switch

Kahlenberg



- Push button.
- Console mount, interior.
- Maximum: 500 volts @ 2 amps.
- Type: Momentary N.O. poles circuit: SPST, 10A rated contacts.

Order No.	Mfg. No. / Description	Price
430285	(WPB-19220)	$90.98 B

FIAMM Fultone II Air Horns

FIAMM



- Twin air horn is the result of a unique sound chamber design which provides increased sound intensity from low pressure air sources.
- Stainless steel trumpets with an anodized aluminum base and covers.
- Length 16", height 4-1/8", width 7-1/2".
- Includes: Compressor, 8' tubing, horn button and 10' of wiring.

Order No.	Mfg. No. / Description	Price
605331	(6233014) 12 volt	$180.98 G
605343	(6234012) 24 volt	$190.98 G
605608	(0821022) 12 volt Compressor Only	$60.98 G

Kahlenberg Model D Heavy Duty Marine Air Horns

Kahlenberg



- Manufactured of cast bronze and spun brass.
- Fundamental frequency: 266 Hz and 212 Hz.
- Sound pressure level over 132 dB.
- Designed for use on vessels less than 75 meters in length.
- Diaphragm 6-3/8".

Order No.	Mfg. No. / Description	Price
430380	(D2) Regular, without Valve	$1,930.98 C
430392	(D2-CVL) Manual/Electric Comb. Valve, Air Strainer and Whistle Light	$3,590.98 C

Kahlenberg Auto Console Whistle

Kahlenberg



Order No.	Mfg. No. / Description	Price
203151	(15601)	$1,149.98 C

Kahlenberg Whistle Control

Kahlenberg



- Fully enclosed, flush mount electronic device which provides for the automatic control of the ship's whistle.
- Besides serving as a fog signal timer for sounding codes in restricted visibility, it performs maneuvering codes, danger code, general alarm and incorporates an "at-will" push button.
- Start/stop automatic function.

Order No.	Mfg. No. / Description	Price
430484	(M-511C) 110 volt	$1,918.98 B

Kahlenberg Pneumatic Switch

Kahlenberg

Order No.	Mfg. No. / Description	Price
430289	(V-100)	$167.98 C

Kahlenberg Manual Electric Valve



Order No.	Mfg. No. / Description	Price
430271	(V-150AL) 3/8" NPT	$481.98 C

Kahlenberg Electric Solenoid Valves



Order No.	Mfg. No. / Description	Price
430269	(V-150B) 3/8" NPT, 110V	$339.98 C
430276	(V-151B) 1/2" NPT, 110V	$339.98 C

Buell Self-Powered Horn



- Brass with heavy chrome plate for saltwater use.
- Delivers deep-toned signal from 22" band instrument bell.
- Operating handle may be rigged for remote control with line from cabin or cockpit.
- A stand-by signal in power failures.

Order No.	Mfg. No. / Description	Price
265531	(5400) Length 22"	$515.98 G

Buell Manual Air Valve



- Brass body.

Order No.	Mfg. No. / Description	Price
265454	(2040) 1/8" NPT	$54.98 F

Buell Electric Solenoid Valve



- For remote control of air horns.
- 1/4" NPT ports and molded coil.
- Intermittent duty - not rated for continuous duty.

Order No.	Mfg. No. / Description	Price
265466	(42076) 12 volt	$74.98 F

Buell Horn Duplex Bracket



- Combine Buell single note horns with a horn bracket to produce a distinctive, powerful signal - a beautifully blended musical chord.
- Brass construction with chrome finish.
- A mounting kit consisting of gaskets, stainless steel mounting screws, lockwashers and tube fitting is included.

Order No.	Mfg. No. / Description	Price
265428	(1085)	$87.98 F

Kahlenberg Manual Valves



Order No.	Mfg. No. / Description	Price
430291	(V-11) 1/4" NPT	$163.98 C
430304	(V-12) 3/8" NPT	$185.98 C
430316	(V-13) 1/2" NPT	$205.98 C

Kahlenberg Spare Diaphragms

Order No.	Mfg. No. / Description	Price
430330	(P28-5) 5"	$48.98 C
430342	(P28-6) 6-3/8"	$61.98 C

Buell Strombos Air Horns





- Low pressure single note air horns with tremendous power... operates on 50- 150 PSI.
- They are constructed entirely of brass and bronze with hand spun brass bells and a stainless steel diaphragm.
- Heavily chrome plated for saltwater use.

Order No.	Mfg. No. / Description	Price
265365	(1061) Length 10"	$288.98 I
265377	(1062) Length 12"	$292.98 I
265389	(1063) Length 15"	$295.98 I
265391	(1064) Length 18"	$298.98 I

Buell Accessories for Buell Strombos Air Horns

Order No.	Mfg. No. / Description	Price
265404	(1068) Gasket	$1.98 F
265416	(1069) Diaphragm	$4.98 F

Buell Air Tank



- Made of steel, welded construction with a gray paint finish.
- Includes: Fitted steel straps and brass tubing fittings for easy mounting.
- Capacity: 3 Gallons.

Order No.	Mfg. No. / Description	Price
265505	(2242) 6" x 25"	$143.98 Q

Buell Air Compressor - Moderate Duty



- Oil-less air compressor mount in any position and have no outside moving parts.
- The automatic pressure switch maintains air pressure levels.
- 125 PSI, 18 amps, 1.1 CFM.
- Dimensions: 8.5" L x 4" W x 7" H.

Order No.	Mfg. No. / Description	Price
265534	(5440) 12 volt	$648.98 G

©2014 Donovan Marine, Inc.

Marpac Push Button Signal Horn



- 8 oz.
- Marine safety essential.
- Chrome plated plastic horn.
- Can be heard up to 1 mile away.
- Meets every signaling need.

Order No.	Description	Price
7-0655	Complete Kit	$17.98 G
7-0656	Refill Canister	$13.98 G

Falcon SuperSound Signal Horn



- 100% ozone-safe-non flammable.
- Removable horn for easy storage.

Meets USCG recommendations for boats up to 65' (20 meters).

Order No.	Mfg. No. / Description	Price
811988	(PBSHN) 8 oz.	$21.98 F
812075	(PBSHNR) Refill Canister	$17.98 F

Meets USCG recommendations for boats up to 39' (12 meters).

Order No.	Mfg. No. / Description	Price
812077	(PBNJC) 3.5 oz.	$13.98 F

Falcon SuperSound Signal Horn



- Palm-size convenience with unlimited uses.
- 100% ozone-safe non flammable.
- Compact - only 4-1/2" tall.
- Stainless steel, non-corrosive diaphragm.
- Guaranteed unbreakable.
- Meets USCG recommendations for boats up to 39' (12 meters).

Order No.	Mfg. No. / Description	Price
811960	(SH3)	$12.98 Q

Perko Fig. 162 Fog Horn



- Aluminum with white baked enamel finish.
- Nylon mouthpiece.
- This product conforms to A.B.Y.C. Standard A-23 in Accordance with the '72 COLREGS and U.S. Inland Rules for use on vessels under 5 meters (16.4 ft.) in length.

Order No.	Mfg. No. / Description	Price
535142	(162 DP0 WHT) 12-1/2"	$29.98 R

Marpac Police Style Whistle



- International Orange plastic.
- Includes: Ring for lanyard.

Order No.	Description	Price
7-0240	2-3/8"	$1.95 F

Perko Fig. 349 "Ball Type" Whistle



- Length 2-1/4", width 3/4".
- This product conforms to A.B.Y.C. Standard A-23 in Accordance with the '72 COLREGS and U.S. Inland Rules for use on vessels under 5 meters (16.4 ft.) in length.

Order No.	Mfg. No. / Description	Price
531496	(349 DP) Orange	$4.36 H

Boater Sports Pea-less Safety Whistle



- Pea-less whistle.
- Orange ABS plastic.
- Lanyard.
- Meets USCG specifications.

Order No.	Mfg. No. / Description	Price
1-58300	(58300)	$1.99 H

Datrex Whistle



- Orange whistle with lanyard.
- Accepted by USCG/SOLAS and EC for lifejackets, lifeboats and immersion suits.

Order No.	Mfg. No. / Description	Price
200335	(BH0276M)	$3.98 Q

eGear Jetscream™ Whistles



- A pealess, all-weather JetScream whistle.

Order No.	Mfg. No. / Description	Price
586362	(20-300-06-M) Yellow	$7.98 Q

- 40 of the BEST whistles available.
- Assorted colors.

Order No.	Mfg. No. / Description	Price
586354	(203000041A40) Bulk	$311.98 H

Jet Logic Safety Whistles on Floating Lanyard



- A high pitch pealess whistle is a good choice.
- Clip it onto your life jacket or safety lanyard.

Order No.	Mfg. No. / Description	Price
598409	(W-1) Purple/Yellow	$4.98 F
5960302	(W-2) Red/Black	$5.98 H

eGear Marine Whistles



- Basic, economical whistles for any voyage.
- 80 Count.
- Orange.

Order No.	Mfg. No. / Description	Price
586434	(26310019A80)	$154.98 H

Perko Fig. 158 Fog Bell



- Plain bronze.
- Heavy weight.
- Fixed mounting.
- Bottom diameter 12", overall height 12".
- Uses 1/4" fasteners.
- This bell is for use on vessels of any length.
- This bell has been reviewed by the USCG and comply with CG 169regulations for sound signal appliances as required by Annex III, Paragraph 2 of the '72 COLREGS.

Order No.	Mfg. No. / Description	Price
535041	(158 012 PLB)	$3,825.98 I

Perko Fig. 420 Fog Bell



- Polished cast bronze.
- Medium weight.
- Removable.
- Bottom diameter 6", overall height 5".
- Uses #8 fasteners.
- This bell is for use on vessels under 20 meters (65.6 ft.) in length.
- This bell has been reviewed by the USCG and comply with CG 169 regulations for sound signal appliances as required by Annex III, Paragraph 2 of the '72 COLREGS.

Order No.	Mfg. No. / Description	Price
538390	(420 006 POL)	$636.98 Q

Perko Fig. 150 Fog Bell



- Polished cast bronze.
- Heavy weight.
- Removable.
- Bottom diameter 8", overall height 8".
- Uses 1/4" fasteners.
- This bell is for use on vessels under 20 meters (65.6 ft.) in length.
- This bell has been reviewed by the USCG and comply with CG 169 regulations for sound signal appliances as required by Annex III, Paragraph 2 of the '72 COLREGS.

Order No.	Mfg. No. / Description	Price
534811	(150 008 POL)	$1,676.98 I

Perko Fig. 179 Fog Bell



- Plain wrought brass.
- Light weight.
- Fixed mounting.
- Bottom diameter 12", overall height 8".
- Uses #12 fasteners.
- This bell is for use on vessels of any length.
- This bell has been reviewed by the USCG and comply with CG 169 regulations for sound signal appliances as required by Annex III, Paragraph 2 of the '72 COLREGS.

Order No.	Mfg. No. / Description	Price
535332	(179 012 PLB)	$702.98 G

Marpac Ship's Bells





- These are the highest quality cast solid brass bells.
- Complete with bracket.

Order No.	Description	Price
215079	Diameter 6", Chrome	$38.98 G
215118	Diameter 8", Chrome	$81.98 G
215067	Diameter 6", Polished Brass	$42.98 G
215106	Diameter 8", Polished Brass	$70.98 G

Marpac Boating Emergency Pack



- Constructed of durable nylon fabric.
- Consists of 3 distinct compartments.
- High visibility orange.
- Designed to float.
- Mold and mildew resistant.
- Includes: rescue rope in bag, thermal blanket, CG approved floating distress flag, SS multi-tool with pouch, 20 ft. multi-purpose rope, stainless steel lock-back knife with pouch, floating waterproof key holder, weather resistant flashlight, batteries included, 3 in 1 compass/whistle/match case.

Order No.	Description	Price
7-0755	Emergency Pack	$39.98 Q

ACR RapidDitch™ Express Bag



- Buoyant abandon ship survival gear bag.
- Large capacity holds your essential gear for abandon ship situations.
- Bag mounts to bulkhead via soft bracket (included) or stows in easy access location.
- Four snap-hook tethers keep product in place.
- Closed cell "life jacket" foam construction.
- Internal pockets, elastic daisy chain organizer.
- Water resistant, rugged fabric 600 Denier Polyester with large self-repairing zippers.
- Built in Tether Strap for Bag to allow hands free use in water.
- External pocket allows for instant access to EPIRB.

Order No.	Mfg. No. / Description	Price
200066	(2273) Express Bag	$59.98 C

eGear Marine Kit 200



- From emergency food bars and aseptic water rations to paracord bracelets and signaling devices, this line provides all the survival essentials.

Order No.	Mfg. No. / Description	Price
586429	(26-120-02) Yellow	$39.98 Q

eGear Marine Kit 100



- From emergency food bars and aseptic water rations to paracord bracelets and signaling devices, this line provides all the survival essentials.

Order No.	Mfg. No. / Description	Price
586426	(26-120-01) Yellow	$19.98 Q

©2014 Donovan Marine, Inc.

Revere Runabout Kit



Contains:
(10) Adhesive strips
(1) X-large adhesive strips
(1) Knuckle bandages
(1) Fingertip bandages
(2) 3 gauge pads
(1) Adhesive tape
(6) First-aid/burn cream
(6) Antiseptic wipes
(3) Sting relief wipes
(6) Aspirin and
(1) First aid instructions.

- Dimensions: 3-3/4 x 5 x 2.

Order No.	Mfg. No. / Description	Price
339514	(80-956) Runabout Kit	$15.98 G

Orion Runabout First Aid Kit



- Contains: (10) Adhesive strips, (1) X-large adhesive strips, (1) Knuckle bandages, (1) Fingertip bandages, (2) 3" gauze pads, (1) Adhesive tape, (6) First Aid/Burn cream, (6) Antiseptic wipes, (3) Sting relief wipes, (6) Aspirin and (1) First aid instructions.

Order No.	Mfg. No. / Description	Price
436274	(962) Runabout First Aid Kit	$13.98 G

Orion Fish 'N Ski First Aid Kit



- Contains: (20) Adhesive strips, (2) X-large adhesive strips, (2) Knuckle bandages, (2) Fingertip bandages, (2) 3" gauze pads, (1) 2" gauze bandage, (1) Adhesive tape, (6) First Aid/Burn cream, (10) Antiseptic wipes, (3) Sting relief wipes, (12) Aspirin, (12) Motion sickness tablets and (1) First aid instructions.

Order No.	Mfg. No. / Description	Price
436276	(963) Fish 'N Ski First Aid Kit	$22.98 G

Orion Coastal First Aid Kit



- Packed in double zipper, PVC coated nylon bags with room to add additional safety products.
- Contains: (10) Adhesive strips, (2) X-large adhesive strips, (2) Knuckle bandages, (2) Fingertip bandages, (4) Butterfly closures, (2) Gauze pads, 3", (4) Gauze pads, 4", Adhesive tape, Gauze bandage, Sterile, 4", w. clips, (1) Triangular bandage (40", non-sterile), (2) First Aid/Burn cream, (20) Antiseptic wipes, (2) Triple antibiotic packet, (6) Antiseptic towelettes, Sting relief wipes, (4) X/S Non-Aspirin (gen. X/S Tylenol), (4) Motion sickness tablets, (6) Latex exam gloves, (1) Elastic bandage, 4" and (1) Instant cold pack.

Order No.	Mfg. No. / Description	Price
436272	(840) Coastal First Aid Kit	$41.98 F

Airhead Waterproof First Aid Kit



- You'll always know where to find your First Aid Kit, and the contents will be clean and dry.
- Easily mounts to boats, personal watercraft, cars, trucks, RV's, cabinets, toolboxes or almost anywhere with self-adhesive hook & loop.
- The heavy-duty nylon bag is specially coated and has a waterproof zipper to ensure that your first aid supplies stay dry.
- Doctor-selected contents for a day trip on the water.
- Contents (may vary): (6) Fabric Bandages, (1) 2" x 3" TEFLA Pad, (1) Knuckle Bandage, (1) 3" x 3" Sterile Gauze Pad, (3) Antiseptic Towelettes, (5) yds. Adhesive Tape, (2) Povidone-Iodine Betadine, (2) 4" x 4" Non-Sterile Gauze, (1) Single Edge Razor Blade, (1) Sunscreen, (1) Splinter Grabber, (1) 2" x 3" Moleskin, (2) 2-packs Acetaminophen, (1) pair Latex Gloves, (5) yds. Conforming Gauze, (1) Sting Relief Pad, (1) Triple Antibiotic and (1) Instructions.

Order No.	Mfg. No. / Description	Price
5960253	(FAK-2)	$20.98 H

Orion Sportfisher First Aid Kit



- Contains: (50) Adhesive strips, (5) X-large adhesive strips, (5) Knuckle bandages, (5) Fingertip bandages, (8) 3" gauze pads, (4) 4" gauze pads, (2) 2" gauze bandage, (1) 4" gauze bandage, (1) Large wound pad, (1) Adhesive tape, (2) Eye pads, (1) Eye flush, (6) First Aid/Burn cream, (30) Antiseptic wipes, (6) Sting relief wipes, (3) Sunscreen packets, (10) Aspirin, (12) Motion sickness tablets, (1) CPR mask, (1 pr.) Latex gloves, (1) Rescue blanket, (1) Triangular bandage, (1) Cold pack, (1) Scissors, (1) Forceps, (1) First aid instructions and (2) Latex exam gloves.

Order No.	Mfg. No. / Description	Price
339538	(844) Sportfisher First Aid Kit	$88.98 G

Orion Life Boat First Aid Kit for Commercial Vessels



- Packed in waterproof, impact resistant polypropylene case.
- This kit has been exposed to saltwater for 24 hours and submerged to ensure the case integrity, in the most severe conditions.
- The contents are individually boxed and packed in waterproof bags.
- Meets the USCG requirement 46 CFR 160.41 for contents and construction.
- Contains: 14 items and 189 pieces.

Order No.	Mfg. No. / Description	Price
339730	(811) Life Boat First Aid Kit	$139.98 G

Orion Weekender First Aid Kit



- Includes: A wall-mountable, waterproof plastic storage case for your vessel.
- Contains: (50) Adhesive strips, (5) X-large adhesive strips, (5) Knuckle bandages, (5) Fingertip bandages, (5) 3" gauze pads, (1) 4" gauze bandage, (1) Adhesive tape, (2) Eye pads, (6) First Aid/Burn cream, (30) Antiseptic wipes, (6) Sting relief wipes, (3) Sunscreen packets, (10) Aspirin, (12) Motion sickness tablets, (1) Scissors, (1) Forceps, (1) First aid instructions and (2) Latex exam gloves.

Order No.	Mfg. No. / Description	Price
339526	(964) Weekender First Aid Kit	$50.98 G

Please Note: Some products on this page can not be shipped via UPS

Special Handling May Apply

Bridger Line Throwing Gun



- It is a custom made 45/70 caliber gun capable of throwing a line from 300' to 750' or more.
- Kit includes: Wooden box with solid brass hardware, (10) solid brass projectiles, (4) 600' nylon shot lines, (1) Aero metal line canister, (3) rewinding spindles, (25) blank cartridges - heavy load, (1) can gun oil, (1) cleaning rod, (1) cleaning brush, (1) package patches and (1) set plastic instructions.
- USCG Approval #160.031/6/3.
- Dimensions: 34" L X 12" W X 8" H.

Order No.	Mfg. No. / Description	Price
502674	Line Throwing Gun	$2,404.98 B
502686	45/70 Blank Cartridges	$96.98 C
502690	Brass Projectile	$21.98 C
502695	Cleaning Patches, 40 Per Pack	$4.06 C
502698	(SL600T) 600' Nylon Shot Line	$68.98 B

Rescue Quoit Heaving Line



Order No.	Mfg. No. / Description	Price
436472	(BOAT0010)	$55.98 C

Datrex Sea Dye Marker

DATREX

UPSable



- Dye weight: 3.5 oz.
- Minimum solubility: 85%.
- Dimensions of pack: 5" x 6-1/8".
- Sea dye marker meeting the MIL standard 17980D.

Order No.	Mfg. No. / Description	Price
436318	(DX1517M) Yellow/Green	$30.98 I

Datrex IKAROS Red Parachute Rockets

DATREX



- For long range distress signalling on ships, lifeboats and life rafts.
- 350 meters flare ejection altitude, 30,000 candela, 40 seconds burning time.
- Meets SOLAS requirements.
- USCG Approvals #160.036/12/0 and #160.136/2/0.
- Comes packed in watertight flare box.

Order No.	Mfg. No. / Description	Price
320800	Complete Kit with 12 Flares	$989.98 I
320802	Complete Kit with 6 Flares	$421.98 I

Revere Para Red Rocket

REVERE



- Long range parachute distress signal.
- For day and night use.
- Burns for 40 seconds at 30,000 candela at a height of 984 ft.
- Visible up to 30 miles.
- Approved to latest USCG and SOLAS specifications.

Order No.	Mfg. No. / Description	Price
497025	(50570)	$84.98 I

Datrex IKAROS Line - Complete Linethrower

DATREX








- Range 300 metres in calm weather.
- Line: .16", white, floating, 517 lbs. line strength.
- USCG requires (2) Buoyant Heads 436128 (CI3463P) per vessel.
- For use as pilot line for cables and ropes in rescue operations at sea.
- Use between vessels, from ship to shore or for rescuing people.
- A robust construction consisting of waterproof plastic container, incorporating an integral handle and trigger mechanism, with a solid fuel rocket and 300 m of line.
- Global Approvals: USCG, CA-DOT, BV/MED/SOLAS.

Order No.	Mfg. No. / Description	Price
436105	(CI3461P) Four Pack	$699.98 F
436107	(CI3461SNG) Single	$794.98 F
436116	(CI3462P) Replacement Rocket with Integral Igniter	$346.98 F
436128	(CI3463P) Buoyant Head	$120.98 F

Jim-Buoy Day Mark Signals - Black

CAL-JUNE

UPSable



- All units manufactured from heavy duty vinyl coated nylon fabric with stainless steel or galvanized framing.
- Fully collapsible when stored.
- Simplicity of design offers rapid and rigid display when required.

Order No.	Mfg. No. / Description	Price
267775	(1900) Ball Shape, Diameter 24"	$113.98 F
267787	(1901) Cone Shape, Diameter 24" x 24"	$67.98 H
267799	(1902) Diamond Shape, Diameter 24" x 48"	$101.98 R

Datrex Polar Mk4 Hand-Held Red Flares

DATREX



- For short range distress signalling on ships, lifeboats and life rafts.
- 15,000 candela.
- USCG Approved.
- Meets SOLAS requirements.

Order No.	Mfg. No. / Description	Price
436370	Sold 6 Per Case (NH341501/1)	$26.98 I
436371	Sold Each (NH341501/1)	$56.98 I

Revere Red Hand Flare

REVERE



- Burns for 60 seconds at a minimum of 15,000 candela.
- Designed to withstand the toughest of marine environments, hand-held flares are long range distress signals.
- Encased in a steel tube for safety to eliminate damage from burning ashes.
- Fitted with an integral pull, twist and strike firing mechanism.

Order No.	Mfg. No. / Description	Price
497013	(52800)	$26.98 I

©2014 Donovan Marine, Inc.

Please Note: Some products on this page can not be shipped via UPS

Special Handling May Apply

Orion Commercial Vessel Signal Kit

ORION



- Contains: (3) Parachute flares, (6) Red handheld flares, (3) Floating orange smoke signal, (1) Heavy duty, waterproof, dry box - high visibility orange polypropylene is corrosion resistant and floats.
- Meets USCG Regulations for Ocean Vessels travel-ing in the ocean more than 50 miles from coastline.

Order No.	Mfg. No. / Description	Price
519148	(821)	$498.98 E

Orion Alert/Locate Signal Kit

ORION



- Contains: (3) Parachute flares, (6) Red handheld flares, (3) Orange smoke signals and (1) Heavy duty, waterproof, dry box - high visibility orange polypropylene is corrosion resistant.
- Meets USCG Regulations for Ocean Vessels traveling 3 - 50 miles from coastline or Great Lakes Vessels traveling more than 3 miles from coastline.

Order No.	Mfg. No. / Description	Price
519136	(820)	$325.98 F

eGear JetScream Whistle™ + StarFlash® Signal Mirror Combination

eGear



- The pealess, all-weather JetScream whistle and the corrosion-tested 2x3 Starflash Signal Mirror, conveniently attached with lanyard.

Order No.	Mfg. No. / Description	Price
586386	(2061130006M)	$20.98 Q

eGear StarFlash® Signal Mirror

eGear



- Unbreakable, scratch resistant, and floats.
- Allows you to aim the signal flash with pinpoint accuracy.
- This targeting system removes the guesswork and chance associated with other signal devices to ensure that you will be seen and be found.

Order No.	Mfg. No. / Description	Price
586382	(20-1WG0611-M)	$13.98 Q

Watertight Flare Box



- Water resistant O-ring seal.
- Five section lid compartment.
- Full size lift out tray.
- Large comfortable handle.
- Thick sidewall construction.
- Double padlock tabs.
- Dimensions: 15" L x 8.8" W x 9.4" H.

Order No.	Mfg. No. / Description	Price
772233	(SPUD1-35) Orange	$25.98 F

Datrex Ammo Can

DATREX



- 30 Caliber ammo can.
- For transport and storage of distress signals.
- Painted weather-tight steel container.

Order No.	Mfg. No. / Description	Price
320806	(CI3569P)	$73.98 I

Datrex IKAROS Manoverboard Smoke Marker

DATREX



- Produces dense orange smoke for more than 15 minutes.
- Once installed, it is automatically activated when separated from its bracket.
- Comes complete with bracket.
- USCG Approvals #160.057/6/0 and #160.157/2/0.
- Meets SOLAS 74/83 requirements.

Order No.	Mfg. No. / Description	Price
436356	(CI3452P)	$776.98 I

Datrex 4 Minute Buoyant Orange Smoke Signals

DATREX



- Approved for use in lifeboats and life rafts.
- Dimensions: 3.54" x 6.69".
- Weight: 1.32 lbs.
- USCG Approvals #160.022/12/0 and #160.122/2/0.
- Meets SOLAS 74/83 requirements.

Order No.	Mfg. No. / Description	Price
436293	(NH342121/1) Sold 3 Per Case	$83.98 I
436294	(NH342121/1) Sold Each	$123.98 I

Datrex IKAROS Manoverboard Combined Smoke and Light

DATREX



- Produces dense orange smoke for more than 15 minutes.
- Two lights operating at 2 hours at 2 candela.
- Once installed, it is automatically activated when separated from its bracket.
- Maintenance free, lithium batteries.
- Comes complete with bracket.
- Meets SOLAS 74/83 requirements.

Order No.	Mfg. No. / Description	Price
436358	(CI3451P)	$1,105.98 I

Orion Handheld Orange Smoke Flare

ORION



- Orange Smoke is the most dynamic, effective Coast Guard approved daytime signal on the market.
- Each signal produces a large dense cloud and is perfect for boaters everywhere.
- 3 Handheld Orange Smoke Signals.
- Burn Time: Up to 1 minute each (3 minutes total).
- U.S. Coast Guard Approved for daytime use only.

Order No.	Mfg. No. / Description	Price
436281	(913) Single Flare, Sold Case of 6	$29.98 G
436282	(913SNGL) Single Flare	$38.98 G
436285	(958) 3 Per Pack	$68.98 F

Please Note: Some products on this page can not be shipped via UPS

Special Handling May Apply

Orion Skyblazer II Red Aerial Signal Pack



- Altitude: Up to 450 feet.
- Average burn time: Up to 6.9 seconds.
- Average candlepower: Up to 16,000 candela.
- USCG Approved as a day or nighttime signal.
- Includes: (4) Skyblazer II Self-Contained Red Meteors.
- Packed with an International Orange zippered mesh storage bag.

Order No.	Mfg. No. / Description	Price
519403	(859) 4 Pack, Sold Case of 4	$51.98 G
519404	(859) 4 Pack	$57.98 F

Orion Coastal Alerter Plus



- Contains aerial, visual and sound signals.
- When combined with handheld flares make the perfect kit for Coastal boaters.
- 12-Gauge Safety Launcher: Corrosion resistant with lifetime warranty and bandolier that can hold up to 6 High Performance Signals.
- (6) 12-Gauge High Performance Red Aerial Signals: U. S. Coast Guard Approved Day or Nighttime Signal, Altitude up to 500 feet, Brightness: Up to 16,000 candela, Burn Time: Up to 7 seconds each and EXCEEDS US Coast Guard minimum requirements.
- (1) SOLAS Approved Whistle w/Lanyard - 116db at 1 meter.
- (1) Signal Mirror: Non-corrosive material and Includes view finder and lanyard
- Neoprene Storage Case: Floats. highly visible international orange and protects signals during storage.

Order No.	Mfg. No. / Description	Price
518973	(572)	$87.98 F

Orion 12-Gauge HP (High Performance) Red Aerial Signal Pack



- New signal burns longer, goes higher and brighter than the standard 12-Gauge signal.
- Altitude: Up to 500 feet.
- Average burn time: Up to 7 seconds.
- Average candlepower: Up to 16,000 candela.
- USCG Approved as a day or nighttime signal.
- Includes: (4) 12-Gauge High Performance Red Aerial Signals.

Order No.	Mfg. No. / Description	Price
518891	(539) 4 Pack	$44.98 G
519124	(539) 4 Pack, Sold Case of 6	$34.98 F

Orion 12-Gauge HP (High Performance) Alert/Locate PLUS



- Includes: 12-Gauge Safety Launcher with bandolier that can hold up to 6 High Performance Signals, (4) 12-Gauge High Performance Red Aerial Signals, (4) Handheld Red Signal Flares, (2) Handheld Orange Smoke Signals and storage case with heavy duty plastic construction.
- Single Kit, Sold Case of 2.

Order No.	Mfg. No. / Description	Price
519112	(544)	$153.98 F

Orion Coastal Alert/Locate Marine Signal Kit



- Includes: (2) Red Handheld Signals, (2) Skyblazer Self-Contained Red Meteors, (1) Signaling mirror with lanyard, (1) Whistle with lanyard and International Orange mesh storage bag with zipper and clip.

Order No.	Mfg. No. / Description	Price
519488	(856) Single Kit, Sold Case of 6	$66.98 F
519487	(952) Single Kit	$78.98 F

Orion 12-Gauge HP (High Performance) Alerter Basic Signal Kit



- Includes: 12-Gauge safety launcher with bandolier that can hold up to 6 High Performance Signals and (4) 12-Gauge High Performance Red Aerial Signals.

Order No.	Mfg. No. / Description	Price
519470	(584) Single Kit, Sold Case of 4	$67.98 F
519471	(584) Single Kit	$77.98 F

Orion 12-Gauge HP (High Performance) Alerter Plus



- Contains aerial, visual and sound signals.
- Includes: 12-Gauge Safety Launcher with bandolier that can hold up to 6 High Performance Signals, (6) 12-Gauge High Performance Red Aerial Signals, (1) Signal mirror, (2) SOLAS Approved whistles with lanyard, 1 oz. fluorescent dye marker and storage case.

Order No.	Mfg. No. / Description	Price
518971	(535) Single Kit, Sold Case of 4	$94.98 F
518972	(535) Single Kit	$115.98 F

Orion 12-Gauge HP (High Performance) Alert/Locate PLUS



- Includes: 12-Gauge Safety Launcher with bandolier that can hold up to 6 High Performance Signals, (4) 12-Gauge High Performance Red Aerial Signals, (4) Handheld Red Signal Flares, (2) Handheld Orange Smoke Signal, (1) International Orange Volare Foam Floating, Zippered Storage Bag, (1) Medication Module - Aspirin, non-Aspirin, motion sickness, etc. and (1) General First Aid Module - Bandages, Ointments, Gauze, etc.

Order No.	Mfg. No. / Description	Price
518900	(549) Single Kit, Sold Case of 2	$149.98 F
518901	(549) Single Kit	$214.98 G

©2014 Donovan Marine, Inc.

Please Note: Some products on this page can not be shipped via UPS

Special Handling May Apply

Orion 25mm HP Red Aerial Signal Pack



- New design will fit all existing Orion 25mm launchers in the market.
- Altitude: Up to 375 feet.
- Average burn time: Up to 7 seconds.
- Average candlepower: Up to 33,000 candela.
- USCG Approved as a day or nighttime signal.
- Includes: 25mm HP Red Aerial Signals.

Order No.	Mfg. No. / Description	Price
519150	(589) 4 Pack, Sold Case of 12	$70.98 F
519151	(589) 4 Pack	$72.98 F

Orion Handheld Red Signal Flares



- Average burn time: Nearly 3 minutes.
- Average brightness: 700 candela.
- USCG Approved for day and night use.

Order No.	Mfg. No. / Description	Price
436003	(865) 4 Pack, Sold Case of 4	$33.98 F
436004	(865) 4 Pack	$52.98 G

Orion 25mm HP Alert/Locate PLUS Signaling Kit



- Includes: 25mm Launcher with bandolier that can hold up to 6 25mm Signals, (4) 25mm High Performance Red Aerial Signals, (4) Handheld Red Signal Flares, (2) Handheld Orange Smoke Signals, (1) signal mirror, (1) SOLAS and USCG Approved whistle, (1) USCG Approved distress flag and storage case.

Order No.	Mfg. No. / Description	Price
519105	(511) Single Kit, Sold Case of 2	$259.98 E
519106	(511SNGL) Single Kit	$283.98 E

Orion Handheld Red Signal Flares



- Our handheld signals are safe, easy to use and waterproof, with built-in protective handle. USCG approved for day and night use.

Order No.	Mfg. No. / Description	Price
436279	(901) Single Flare, Sold Case of 6	$16.98 G
436280	(901SNGL) Single Flare	$23.98 G

Orion 25mm Launcher with Bandolier



- Includes: 25mm launcher with bandolier.

Order No.	Mfg. No. / Description	Price
519225	(583)	$146.98 F
518998	(995) Canister Mounting Bracket	$12.98 G

Orion Locator Plus Marine Signal Kit



- Includes: (4) Handheld Red Signal Flares, SOLAS Approved safety whistle with lanyard, USCG Approved distress flag and waterproof, floatable storage case.
- USCG Approved for day and night use.

Order No.	Mfg. No. / Description	Price
518995	(534) Single Kit, Sold Case of 4	$61.98 F
518996	(534) Single Kit	$76.98 F

ACR Replacement Antenna for Satellite2 406™ EPIRB

Order No.	Mfg. No. / Description	Price
200990	(9368) Replacement Antenna	$114.98 F


ACR Optical GPS Interface Cable for Satellite3 406™ EPIRB



- This connects the Satellite3 406 to your vessel's GPS receiver to continuously update and store precise position data.
- GPS positioning provides SAR notification typically within 2 - 15 minutes.

Order No.	Mfg. No. / Description	Price
201498	(9388.1)	$126.98 F

ACR Satellite3 406™ EPIRB - Category 1

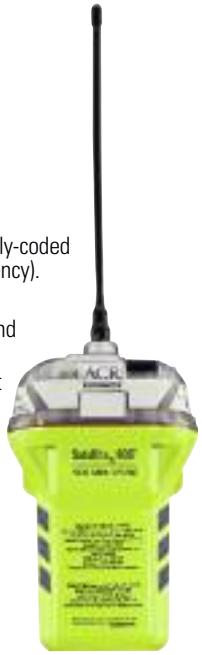

- Transmits on 406 MHz with your registered, digitally-coded distress signal and 121.5 MHz (SAR homing frequency).
- Automatic activation with hydrostatic release.
- Full functional self-test including battery voltage and internal circuitry.
- Bright LED strobe conserves battery power without sacrificing intensity.
- Single, three position switch for easy test and operation.
- Lanyard coiled on recessed spool for non-tangling deployment.
- Marine tough design for years of useful service.
- Waterproof to 33 ft.
- Operational life: 48 hours minimum at -4° F.
- Dimensions (no antenna): 7" x 4.2" x 3.6".
- Made in the USA.

Order No.	Mfg. No. / Description	Price
200425	(2874) RLB-38	$629.98 B
201486	(9490) HydroFix Hydrostatic Release Unit	$109.98 C

Revere SmartFind™ EPIRBs

REVERE



- GMDSS compliant.
- Non-hazardous battery for safe and easy transportation.
- High brightness LED flashing locator lights.
- Comprehensive diagnostic and self-test facilities.
- Automatic float free bracket.
- Waterproof to 32.8 ft.
- Frequency: 406.028 MHz +/-3kHz.
- Operational life: 48 hours minimum at -4° F.
- 5 year warranty, 5 year battery life.

Order No.	Mfg. No. / Description	Price
496379	(1082800-004)	$599.98 C

Revere Fastfind 210 406 MHz Personal Locator Beacon with GPS

REVERE



- As small as an average mobile phone.
- Works anywhere on earth.
- No subscription fees required.
- Built-in GPS.
- Unique flashing SOS feature.
- Built-in operational indicator lights.
- Global alert to Cospas-Sarsat satellites.
- Frequency: 406.037 MHz.
- 121.5 MHz homing frequency.
- Positional accuracy to within 100 feet.
- Waterproof to 32 feet.
- FCC approved.

Order No.	Mfg. No. / Description	Price
496377	(210PLB) 406 MHz	$499.98 C

Britmar MKV Signaling Lantern



- Fulfils the requirements of the SOLAS (1997) Regulations.
- The 5" handheld signaling light can be used on all vessels.
- Aluminum, lightweight construction and is fully waterproofed.
- Semi-Gloss black stoved enamel paint finish.
- Handle mounted switch to operate the lantern.
- Please note: Battery and bulb not included.

Order No.	Mfg. No. / Description	Price
233700	(A4023) Lantern with Wood Carrying Case	$2,340.98 D
233705	(C02681-00) 3 Pin Socket and Cap	$69.98 D
233701	(202640) Aldis Battery in Battery Box	$826.98 C
233712	(108006) Spare Bulb, 12 volt, 60 watts	$45.98 D
233713	(108008) Spare Bulb, 24 volt, 60 watts	$45.98 D

Boater Sports Distress Flag



- Distress flag measures 3' x 3'.
- Meets USCG requirements for daytime distress signal.

Order No.	Mfg. No. / Description	Price
1-58112	(58112)	$4.95 H

GME MT403 Series 406 MHz EPIRB



- Zero warm-up digital technology.
- High reliability solid state strobe.
- Rugged, lightweight, compact design.
- Easy, built-in self-test facility with audible alert confirms correct operation.
- Non-hazardous batteries for restriction free transport.
- Enclosed in a UV resistant float free housing that automatically deploys and activates the EPIRB when submersed to a depth of 6.6 ft - 13 ft.
- Antenna releases automatically when the unit is removed from the quick-release bracket or housing.
- 121.5 MHz homer.

Order No.	Mfg. No. / Description	Price
696310	(MT-403FF)	$728.98 E

ACR Pathfinder™ 3 SART Survival Craft Radar Transponder



- Enhances radar returns with 12 intense blips, whereby the first blip represents the SART.
- Unit transmits through the 9.2 - 9.5 GHz band marine radar when interrogated by radar.
- Vessel mounting bracket and collapsible pole stowed inside SART.
- Exclusive ACR Test mode for visual/audible feedback.
- High impact polystyrene case designed to withstand rugged environments.
- Compact 12-1/2" x 3" unit easily packs into life-raft.
- 33' lanyard for security.
- Waterproof to 33'.
- Requires lithium battery (5-year replacement life).
- Worldwide certification; complies with IMO/GMDSS, FCC Approved, MED.
- Operational life: 96 hours in stand-by mode; in excess of 8 hours in operational mode.

Order No.	Mfg. No. / Description	Price
200410	(2714)	$1,199.98 E

Jim-Buoy S.O.S. Flag

CAL-JUNE



- Durable plastic.
- Comes in zip-lock storage bag.
- S.O.S. flag has full USCG Approval.
- **Made in the USA**

Order No.	Mfg. No. / Description	Price
267573	(1851) SOS Flag	$7.98 Q

Airhead Distress Flag

AIRHEAD



- The square and circle pattern on this 36" x 36" Distress Flag has been proven to be quite effective in daytime aerial searches.
- Made from orange plastic with grommets in each corner.
- It's required by law in many areas, and recommended for all boats.

Order No.	Mfg. No. / Description	Price
5960255	(FD-36)	$7.98 R

©2014 Donovan Marine, Inc.

Davis Emergency Radar Reflector



- It is a compact, lightweight and economical unit that disassembles and stows flat for storage.
- When needed, it pops open to 11-1/2" diameter and installs in seconds.
- Its three perpendicular planes reflect radar from all directions.
- Made of special plastic-metal foil laminate.
- Resists corrosion and peeling.

Order No.	Mfg. No. / Description	Price
322407	(151) Radar Reflector	$33.98 R

Davis Standard Echomaster™ Radar Reflector



- Comes in a plastic case and folds flat for easy storage and is made of stamped aluminum sheets with locking corner rivets.
- Can be assembled around a backstay or wire rigging.
- Mounting holes in corner latches make sturdy attachment points for suspending from a bridle.
- Non-anodized marine grade aluminum plates.

Order No.	Mfg. No. / Description	Price
322417	(152) Radar Reflector	$79.98 R

Kidde Smoke Alarm



- Battery operated (9v battery included).
- Flashing LED.
- Test button.
- Low battery indicator.
- Mounting hardware included.

Order No.	Mfg. No. / Description	Price
435378	(0915E) Smoke Alarm	$15.98 I

Kidde ProLine Fire Extinguishers - Multipurpose Dry Chemical



- Suitable for use on Class A (trash, wood and paper), Class B (liquids and gases) and Class C (energized electrical equipment) fires.
- Fitted with a pressure gauge that provides at-a-glance status.
- A tough impact resistant metal valve, handle and lever.
- Supplied with wall hanger.

Special Handling May Apply

Lightweight aluminum cylinder - powder coated.

Order No.	Mfg. No. / Description	Price
435051	(466112) 3-A, 40-B:C, 5#, Sold Case of 4	$103.98 I
435052	(466112) 3-A, 40-B:C, 5#, Sold Each	$113.98 I

Impact resistant steel cylinder - powder coated.

Order No.	Mfg. No. / Description	Price
435077	(466204) 4-A, 60-B:C, 10#	$115.98 H
435092	(466206) 10-A, 80-B:C, 20#	$219.98 I

Fire extinguisher brackets.
USCG Approved only when equipped with bracket.

Order No.	Mfg. No. / Description	Price
435128	(366242) For Use with 435077	$66.98 R
435136	(292474) For Use with 435092	$82.98 I

Fire extinguisher kits. Includes: Fire extinguisher and bracket.

Order No.	Mfg. No. / Description	Price
435078	4-A, 60-B:C, 10#	$198.98 I
435093	6-A, 80-B:C, 18#	$310.98 I

Kidde ProLine Fire Extinguishers - Carbon Dioxide



435280



435152

- Suitable for use on Class B (liquids and gases) and Class C (energized electrical equipment) fires.
- Environmentally safe and ideal for protecting delicate electronic equipment as the clean agent leaves no residue.
- Powder coated cylinder for corrosion protection.
- A tough impact resistant metal valve, handle and lever.
- Supplied with wall hanger.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
435152	(466180) 5-B:C, 5#	$269.98 I
435176	(466181) 10-B:C, 10#	$403.98 I
435190	(46100) 10-B:C, 15#	$449.98 Q

Fire extinguisher running board brackets.
USCG Approved only when equipped with bracket.

Order No.	Mfg. No. / Description	Price
435280	(270191) For Use with 435152	$51.98 I
435277	(290511) For Use with 435176 and 435190	$80.98 I

Fire extinguisher kits. Includes: Fire extinguisher and bracket.

Order No.	Mfg. No. / Description	Price
435153	5-B:C, 5#	$343.98 I
435177	10-B:C, 10#	$480.98 I
435191	10-B:C, 15#	$573.98 I

Dry Chemical Wheeled Extinguishers



- D.O.T. Approved cylinders with chrome plated brass valve assemblies.
- Highly visible pressure indicating gauge.
- Cylinders and carriages are shot blasted, primed and powder coated to withstand 240 hour salt spray testing.
- All booster hoses are 1/2" diameter and 25 ft. long.
- All units are equipped with all weather semipneumatic 12.3" diameter, 3.5" wide tires that allows for easy moveability.
- Agent capacity: 50 lbs.
- Discharge range: 25' - 35'.
- Manufactured to ANSI/UL 299 and ANSI/UL 711 standards.

Order No.	Mfg. No. / Description	Price
562125	(30010) ABC, Discharge Time: 35 Sec.	$1,838.98 F
562137	(30030) Purple K, Discharge Time: 34 Sec.	$1,602.98 F

Special Handling May Apply

Kidde Mariner Line Fire Extinguishers



561781 561793 561856 561882

- The Mariner Line of dry chemical models covers most hazards associated with watercraft.
- Powder coated cylinder for corrosion protection.
- Includes: Retention brackets and meet USCG Approvals.
- Suitable for use on Class B (liquids and gases) and Class C (energized electrical equipment) fires.
- Fitted with a "one touch" pressure check device to ensure reliable performance.
- Discharge range: 10 to 14 feet.
- Discharge time: 8 to 10 seconds.

Order No.	Mfg. No. / Description	Price
561781	(466636) 5-B:C, 2#, Sold Case of 6	$20.98 F
561782	(466636) 5-B:C, 2#, Sold Each	$30.98 H

- Suitable for use on Class B (liquids and gases) and Class C (energized electrical equipment) fires.
- Fitted with a pressure gauge that provides at-a-glance status.
- Discharge range: 6 to 8 feet.
- Discharge time: 8 to 12 seconds.

Order No.	Mfg. No. / Description	Price
561856	(466628) 10-B:C, 2.9#, Sold Case of 6	$24.98 F
561857	(466628) 10-B:C, 2.9#, Sold Each	$39.98 H

- Suitable for use on Class A (trash, wood and paper), Class B (liquids and gases) and Class C (energized electrical equipment) fires.
- Fitted with a pressure gauge that provides at-a-glance status.
- Discharge range: 6 to 8 feet.
- Discharge time: 8 to 12 seconds.

Order No.	Mfg. No. / Description	Price
561882	(466627) 1-A, 10-B:C, 2.5#, Sold Case of 6	$36.98 F
561883	(466627) 1-A, 10-B:C, 2.5#, Sold Each	$53.98 H

- Suitable for use on Class B (liquids and gases) and Class C (energized electrical equipment) fires.
- Fitted with a pressure gauge that provides at-a-glance status.
- Discharge range: 4 to 6 feet.
- Discharge time: 8 to 12 seconds.

Order No.	Mfg. No. / Description	Price
561793	(466635) 5-B:C, 2#, Sold Case of 6	$22.98 F
561794	(466635) 5-B:C, 2#, Sold Each	$32.98 H

Sea-Fire Carbon Monoxide Detector



- Use the PN 124856 carbon monoxide detector for single sites when generator shutdown is NOT desired.
- Features a state-of-the-art self cleaning sensor.
- Current draw: 60 mA average. Alarm dB: 85 dB at 10 feet.
- Dimensions: 5.5" L x 3.0" W x 1.75" D.
- UL 2034 Listed for Marine use. 12 volt.

Order No.	Mfg. No. / Description	Price
435282	(12959)	$184.98 F

Sea-Fire Discharge Cable Kits for MA2 Series Manual/Auto



- Positive backup via a mechanical pull cable.
- Primary activation-heat response is automatic at 175° F (79° C).
- Diesel powered craft must also install the Automatic Engine Shutdown System.
- Systems available with FE-241 or FM-200.
- Manual cables must be installed in order to retain USCG and FM approval.
- Systems from 25 cu. ft. to 1,500 cu. ft. available by special order.
- Includes: All hardware for installation.

Order No.	Mfg. No. / Description
Special Order	(E-4209-06) Cable Length: 6'
Special Order	(E-4209-08) Cable Length: 8'
Special Order	(E-4209-10) Cable Length: 10'
Special Order	(E-4209-12) Cable Length: 12'
Special Order	(E-4209-14) Cable Length: 14'
Special Order	(E-4209-16) Cable Length: 16'
Special Order	(E-4209-18) Cable Length: 18'
Special Order	(E-4209-20) Cable Length: 20'
Special Order	(E-4209-22) Cable Length: 22'
Special Order	(E-4209-24) Cable Length: 24'
Special Order	(E-4209-26) Cable Length: 26'
Special Order	(E-4209-28) Cable Length: 28'
Special Order	(E-4209-30) Cable Length: 30'

Sea-Fire MA2 Series Manual/Auto Discharge Systems

Special Order Only

	Dia.	Height	Agent Wt.	Ship Wt.	Model #
75 cu. ft.	4.3"	11.9"	2.5 lbs.	9 lbs.	(MA2-075)
100 cu. ft.	4.3"	14.5"	3.4 lbs.	12 lbs.	(MA2-100)
125 cu. ft.	4.3"	14.5"	4.2 lbs.	13 lbs.	(MA2-125)
150 cu. ft.	5.1"	13.1"	5.1 lbs.	15 lbs.	(MA2-150)
175 cu. ft.	5.1"	15.5"	5.9 lbs.	16 lbs.	(MA2-175)
200 cu. ft.	5.1"	15.5"	6.8 lbs.	17 lbs.	(MA2-200)
225 cu. ft.	6.4"	14.7"	7.6 lbs.	26 lbs.	(MA2-225)
250 cu. ft.	6.4"	14.7"	8.5 lbs.	26 lbs.	(MA2-250)
275 cu. ft.	6.4"	14.7"	9.3 lbs.	27 lbs.	(MA2-275)
300 cu. ft.	7.2"	15.1"	10.1 lbs.	32 lbs.	(MA2-300)
325 cu. ft.	7.2"	15.1"	11 lbs.	33 lbs.	(MA2-325)
350 cu. ft.	7.2"	15.1"	11.8 lbs.	34 lbs.	(MA2-350)
375 cu. ft.	7.2"	17.8"	12.7 lbs.	36 lbs.	(MA2-375)
400 cu. ft.	7.2"	17.8"	13.5 lbs.	37 lbs.	(MA2-400)
450 cu. ft.	7.2"	17.8"	15.2 lbs.	38 lbs.	(MA2-450)
500 cu. ft.	7.2"	24.7"	16.9 lbs.	47 lbs.	(MA2-500)
550 cu. ft.	7.2"	24.7"	18.6 lbs.	49 lbs.	(MA2-550)
600 cu. ft.	7.2"	24.7"	20.3 lbs.	50 lbs.	(MA2-600)
650 cu. ft.	7.2"	24.7"	22 lbs.	52 lbs.	(MA2-650)
700 cu. ft.	10"	21.6"	23.7 lbs.	64 lbs.	(MA2-700)
750 cu. ft.	10"	21.6"	25.4 lbs.	65 lbs.	(MA2-750)
800 cu. ft.	10"	21.6"	27 lbs.	67 lbs.	(MA2-800)
850 cu. ft.	10"	21.6"	28.7 lbs.	69 lbs.	(MA2-850)
900 cu. ft.	10"	21.6"	30.4 lbs.	70 lbs.	(MA2-900)
950 cu. ft.	10"	21.6"	32.1 lbs.	72 lbs.	(MA2-950)
1000 cu. ft.	10"	21.6"	33.8 lbs.	74 lbs.	(MA2-1000)
1050 cu. ft.	10"	21.6"	35.5 lbs.	75 lbs.	(MA2-1050)
1100 cu. ft.	10"	21.6"	37.2 lbs.	77 lbs.	(MA2-1100)
1150 cu. ft.	10"	21.6"	38.9 lbs.	79 lbs.	(MA2-1150)
1200 cu. ft.	10"	27.7"	40.6 lbs.	86 lbs.	(MA2-1200)
1250 cu. ft.	10"	27.7"	42.3 lbs.	87 lbs.	(MA2-1250)
1300 cu. ft.	10"	27.7"	60.8 lbs.	106 lbs.	(MA2-1300)
1350 cu. ft.	10"	27.7"	63.2 lbs.	108 lbs.	(MA2-1350)
1400 cu. ft.	10"	27.7"	65.5 lbs.	111 lbs.	(MA2-1400)
1450 cu. ft.	10"	27.7"	67.9 lbs.	113 lbs.	(MA2-1400)
1500 cu. ft.	10"	27.7"	70.2 lbs.	115 lbs.	(MA2-1400)

©2014 Donovan Marine, Inc.

Fireboy Automatic Engine Shutdown Systems

FIREBOY - XINTEX



- Fireboy respond automatically when a system discharges.
- Provide shutdown capability for up to eight engines.
- 5000 and 8000 Models are available with a 15 sec. time delay for GM diesels.
- All can be special ordered to operate on 24 or 32V DC.
- Standard voltage is 12 volts. (Required for diesel engines).

Order No.	Mfg. No. / Description
Special Order	(ES-3000-01) 3 Circuit Engine Shutdown Round
Special Order	(ES-5000-01) 5 Circuit Engine Shutdown Round
Special Order	(ES-8000-01) 8 Circuit Engine Shutdown Round

MSA Model R Calibration Gas Cylinders

MSA

Special Handling May Apply



- Used for calibrating MSA gas measuring instruments.
- Non-reactive gases, steel cylinder, 19 liters, 300 psig.
- Dimensions: 10-3/4" x 2-3/4".
- Weight 1 lb. 7 oz.

Order No.	Mfg. No. / Description	Price
773158	(459945) 2.0% Methane	$93.98 B
773172	(459945) 2.5% Methane	$93.98 B
773196	(460345) 8% Butane, 13.8% CO2	$93.98 B
773211	(468249) 100% Nitrogen	$93.98 B

MSA Explosimeter® Combustible Gas Indicator

MSA



- Detects and measures concentrations of combustible gases or vapors in the air.
- Can be used in the immediate environment or for remote sampling of confined spaces.
- UL approval is for Class 1, Group D, Divisions 1 and 2; and Class 1, Groups A, B and C, Division 2, Division 1 excluded, hazardous atmospheres.

Order No.	Mfg. No. / Description	Price
773110	(89220)	$2,069.98 C
773122	(11955) 10' Sampling Line for Explosimeter	$82.98 C

MSA ALTAIR® Pro Single-Gas Detector - Oxygen Remote (O2-R)

MSA



- Tough rubberized housing.
- One-button operation.
- Accurately measures the gas concentration or percent oxygen.
- Event-logging and data-logging.
- Excellent impact resistance.
- Great RFI performance.
- Displays information on a large, clear, backlit LCD.
- Adjustable alarm set points are offered for LOW, HIGH, TWA and STEL.
- Alarms are indicated by flashing LEDs, an audible alarm, and an internal vibrating alarm.
- Replaceable battery and sensor.
- This O2 sensor is attached remotely at the end of a ten-foot cable, rather than inside the instrument's casing.
- This design allows the user to lower the sensor into a remote location and monitor the O2 level from ten feet away.

Order No.	Mfg. No. / Description	Price
773140	(10076733)	$809.98 B

Sea-Fire Engine Shutdown System

SEA-FIRE



- Automatically shutdown engines and powered ventilation upon discharge of the fire extinguishing system.
- Requires a panel mounted display with visual and audible alarm, discharge lights and an override switch for engine restart and control.

Order No.	Mfg. No. / Description	Price
435285	(131-200) 12 Volt, 3 Circuit	$339.98 F

MSA Model RP Calibration Gas Cylinder

MSA

Special Handling May Apply



- Gas fill: Combination.
- Used for calibrating MSA gas measuring instruments.
- Reactive gases, aluminum cylinder, 58 liters, 500 psig.
- Gas mixture: 1.45% methane, 300 ppm carbon monoxide, 15% oxygen, 10 ppm hydrogen sulfide.

Order No.	Mfg. No. / Description	Price
773223	(804770) 13-3/4" x 3", 1 lb. 11 oz.	$473.98 C

MSA University Pump Probe for ALTAIR® 4X Multigas Detector

MSA



Order No.	Mfg. No. / Description	Price
773105	(10046528) Multigas Detector	$488.98 C

MSA Model R Calibration Check Kit with 1.5 LPM Regulator

MSA



- Consist of a regulating valve which includes a cylinder pressure gauge, an adapter hose with sampling line connection, sensor adapters (where applicable), instructions and a case fitted with room for two calibration check gas cylinders.

Order No.	Mfg. No. / Description	Price
773115	(476609)	$346.98 C

MSA Detector Tubes

MSA



- Can be used with an assortment of MSA detector tubes to spot-test the atmosphere for a wide variety of toxic substances.

Call for Prices and Availability for Other Options

Order No.	Mfg. No. / Description	Price
773214	(487333) Carbon Dioxide, CO2 - 0.1%	$112.98 E
773216	(487335) Carbon Monoxide, CO - 0.3%	$112.98 E
773217	(487338) Sulfur Dioxide, SO2 - 1%	$125.98 E
773218	(804589) Ethyl Mercaptan - 0.5%	$125.98 E
773219	(804132) Bromobenzene, Aromatic HC	$131.98 E
773220	(487335) Hydrogen Sulfide, H2S - 100%	$112.98 E
773221	(487339) Hydrogen Sulfide, H2S - 1%	$112.98 E
773225	(803947) Toluene, Tol. - 5%	$125.98 E
773226	(655837) Benzene, C6H6 - 0.5%	$144.98 E

Junkin Fire Blanket and Bag



- 100% processed wool - treated with fire-resistant chemical.
- Machine washable.
- Conforms to Federal Flammable Fabrics Act CS-191-53.
- Includes: Vinyl coated nylon bag.

Order No.	Mfg. No. / Description	Price
429212	(JSA-1003) 62" x 84"	$109.98 C

Junkin First Aid Blanket



- This warm utility blanket is machine washable.
- Excellent for indoor and outdoor general utility purposes.
- Made of 70% wool - 30% man-made fibers.

Order No.	Mfg. No. / Description	Price
429224	(JSA-502) 62" x 82"	$43.98 C

Imperial Immersion Suits



- Donovan offers a full service station.
  To pressure test and inspect suits. Suits must be in serviceable condition at all times. The pressure test can reveal leaks that can not be seen with the naked eye. A well maintained suit increases your chance of survival, lasts longer and saves you time and money. An experienced service technician can find seemingly minor defects that can cause major problems.
- The High Rider Ring.
  It is made of neoprene and attached by zippers making it easy for you to replace yourself. Most other suits have air bladders (high rider rings) that must be brought into a certified station to be replaced.
- Features:
  - Three fingered mitt to keep your fingers warmer
  - Two zipper tab pulls on zipper
  - Wide legs to allow quick donning
  - Toe valves that purge water very fast
  - Face seal is soft and flexible
  - Back straps keep the ring in place
  - Suits are true to size
  - Sturdy carrying bag with two handles

Order No.	Mfg. No. / Description	Price
400313	(80-1409-J) Jumbo	$387.98 C
400325	(80-1409-A-3) Adult	$405.98 C

U.S.C.G. Approved - International Approval Chart/Model Numbers

Ship's Registry	Approval	Adult	Jumbo	Intermed.	Child
U.S.A.	U.S.C.G. #160.171/2/0	1409-A			
U.S.A.	U.S.C.G. #160.171/3/0		1409-J		
U.S.A.	U.S.C.G. #160.171/21/0			1409-0	
U.S.A.	U.S.C.G. #160.171/4/0				1409-C

Features Included: High-rider ring and storage bag.

Size	Height Range M	Weight Range FT/IN	KG	LBS
Adult	1.5 to 1.9	5' 4" to 6' 3"	50 to 150	110 to 330
Intermediate	1.47 to 1.77	4' 10" to 5' 10"	Up to 81	Up to 180
Jumbo	Over 1.9	Over 6' 3"	Over 150	Over 300
Child	Up to 1.5	Up to 59"	Up to 50	Up to 110

Stearns Thermal Protective Aid



- Designed for hypothermia protection during prolonged exposure in life rafts or lifeboats.
- Waterproof polymer coated fabric has very low thermal conductivity to reduce heat loss in cold, wet conditions.
- Attached sleeves.
- 62 sq in of reflective material, taped seams for strength, extra-large sizing to fit over all clothing.
- USCG approved, complies with SOLAS 74/83.

Order No.	Mfg. No. / Description	Price
436469	(ITP10RG-00-000)	$96.98 F

Stearns PVC Rainsuits



- Heavy duty .30 mm PVC/Polyester reinforced elbows and knees.
- Snap front, corduroy lined collar, vented back and underarm air vents.
- Dual-entry pockets pants have elasticized waist, snap fly and snap cuffs.

Order No.	Mfg. No. / Description		Price
514126	(8265XL) X Large	Yellow	$26.98 F
514127	(8265XXL) XX Large	Yellow	$26.98 F
514128	(8265XXXL) XXX Large	Yellow	$26.98 F

Stearns Nylon Rainsuit



- Durable, lightweight PVC on nylon.
- Electronically welded seams with reinforced stitching at stress points.
- Jacket has zippered front with snap storm.
- Two pockets.
- Pants have elastic waistband and adjustable cuffs.

Order No.	Mfg. No. / Description	Price
630703	(8155-3XL) XXX Large, Yellow	$61.98 F

©2014 Donovan Marine, Inc.

3M Scotchlite™ Reflective Material



- Intended for reflectorizing SOLAS life support equipment such as life vests, jackets and rafts.
- Silver, flexible reflective material with an aggressive pressure sensitive adhesive.
- It conforms to Marine Equipment Directive 96/98/EC and IMO Resolution A.658(16) Annex 2.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
855633	(88619) 2" x 50'	$349.98 H

eGear Solas-Grade Retro Reflective Tape



- 2 x 4 Strips, Pack of 8.

Order No.	Mfg. No. / Description	Price
586370	(95305005CRD)	$9.98 Q

Datrex Alcares Alkaline Powdered Lifejacket Light



- Significantly exceeds the requirements on brightness and duration.
- Clip fits almost any lifejacket, up to 2" webbing.
- Water-activated LED flashing survival light with manual deactivation function.
- Rounded edges to maintain integrity of inflatable lifejackets.
- Very compact, thinnest design available with 360" bubble light dome.
- 5 years shelf-life.
- Polycarbonate case.
- Approved according to SOLAS, MED, USCG, TC, AMSA, RS.
- Size: 3.5" x 1.7" x .6".
- Weight: 2.3 oz.
- Non-Hazmat, non lithium, alkaline battery - Safest Storage, non hazardous disposal.

Order No.	Mfg. No. / Description	Price
200334	(AL1000ALKAM)	$22.98 E

ACR C-Light™ Life Preserver Emergency Signaling Light



- Waterproof and corrosion resistant case.
- Slim lightweight design fits easily in a pocket, hangs discreetly when attached to life vest or jacket.
- Intense incandescent light visible for up to two miles.
- Comes with a C-Clip adapter for life jackets, as well as steel clip and Velcro strap for mounting flexibility.
- Operational life: More than 8 hrs. @ 30° F (-1° C).
- Dimensions: 5.6" x 1.3".
- Operates on (2) "AA" Alkaline or 1.5 lithium batteries.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
200093	(3354) Signal Light	$11.98 E

ACR Res-Q™ Reflective Tape



- Self-adhesive retro-reflective tape.
- Millions of microscopic glass beads provide high visibility aiding both day and night rescue.
- Applies to virtually any surface making it ideal for life jackets, rafts, survival suits and work vests.
- Four 4" x 4" sheets per card provides 64 sq. in. of reflective surface.
- USCG Approval #164.018/4/0 and complies with SOLAS 74/83.

Order No.	Mfg. No. / Description	Price
200054	(2215) Res-Q	$23.98 D

ACR HemiLight™ 2 Survivor Light



- Water-activated LED flashing survival light with manual deactivation switch.
- Highly visible flashing LED light.
- Attachment loops accommodate up to 2" wide webbing.
- Operational life: Exceeds 8 hrs @ 30° F (-1° C).
- Dimensions: 2.75" x 1.47" x 1.37".
- Operates on non-hazardous lithium battery.
- Meets USCG and SOLAS requirements.

Order No.	Mfg. No. / Description	Price
200245	(3768)	$30.98 E

ACR L8-3 Personal Rescue Light



- Lamp and lens combo produces brilliant light visible for over one mile.
- Operates in fresh or salt water.
- Standard sensor lead length 18".
- Battery life: Replace at 5 years.
- 5-year storage life.
- Operational life: Exceeds 8 hrs.
- Dimensions: 3.1" x 1.8" x 1.6".
- USCG Approved.

Order No.	Mfg. No. / Description	Price
200256	(3720.0180)	$23.98 E

Fulton PFD Light



- Orange body, attaches to lifevest.
- 3 year use life.
- Operates on (1) "D" Alkaline battery.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
200090	(102-B) PFD Light	$14.98 I

Revere SEE-ME™ Dual-Activation LED Strobe for PFDs

REVERE

UPSable



- 45 lumens / 5 candela.
- Operates up to 120 hours.
- Waterproof and weatherproof.
- Lasts 15 times longer and burns 6 times brighter than USCG requirements.
- Uses 2 AA alkaline or lithium batteries.
- Virtually unbreakable microprocessor -controlled, RoHS compliant electronics.
- Dual Activation and Manual models available.
- Visible up to 3 miles away.
- Includes: Hook and loop attachment (water activated version includes PFD clip).

Order No.	Mfg. No. / Description	Price
586378	(85-4075A-CRD) Yellow	$29.98 Q

Cyalume PML Personal Light Marker

Cyalume



- Can be clipped on a life jacket, strap or clothing and contains a green ChemLight that is manually activated by squeezing the handle.
- When the protective sleeve is removed, 360° of steady light is revealed and will last 8 hours.
- Visible up to 1 nautical mile and up to 3 by air.
- The Dual PML has two ChemLights that are both activated when the handles are squeezed for use in warm or cold water with 8 hours of light.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
266569	(9-80770) PML	$18.98 I

Forespar Floating Strobe Light

FORESPAR



- This rugged water light produces brilliant strobe flashes automatically when thrown overboard and is visible for miles at sea.
- Unit will flash at the USCG required rate for over 52 hours and will still flash at least every 2 seconds after 7 days of continuous operation.
- A stainless steel mounting bracket is included.
- Operates on (1) 6 volt Alkaline Lantern battery. Not included.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
353108	(205102)	$206.98 I
353109	(205113) Stainless Steel Mounting Bracket	$49.98 I

Viking Lifebuoy Light

VIKING



- Designed to deliver, as a minimum standard, the 2cd output specification and 2 hour duration required by IMO SOLAS regulations.
- LED technology.
- Five year life, no maintenance or replacement batteries are required.
- Compact size and easy fitting.
- 76 meter drop height.
- USCG, SOLAS/MED Approved.

Order No.	Mfg. No. / Description	Price
200331	(1036722)	$138.98 F

Revere SEE-ME™ Select Dual -Activation/Dual Mode LED Light & Strobe for PFDs

REVERE

UPSable



- Waterproof to 200 ft.
- 2 LED lights that burn at up to 28 candela each, over 35 times as bright as required by the U.S. Coast Guard
- In steady light mode, the lights burn for 24 hours on one set of batteries
- In strobing mode, the lights burn for 27 hours on one set of batteries
- Batteries not included
- USCG Approved, SOLAS Compliant
- Comes with a hook-and-loop strap and lanyard

Order No.	Mfg. No. / Description	Price
586374	(8551071RCRD) Yellow	$79.98 Q

eGear Light Sticks

eGear



Order No.	Mfg. No. / Description	Price
586422	(263104LSA50) 50 Count, Assorted Colors	$49.98 H

Orion Lightstick Displayer

ORION



- The 902 Lightstick Displayer contains (24) 6" Green Lightsticks.
- Each stick produces up to 12 hours of light.
- Each stick is foil wrapped with UPC Code.
- 4 Color display carton, self contained, opens up to become a counter/shelf display.

Order No.	Mfg. No. / Description	Price
518997	(902) Retail Counter Display with (24) 6" Green Lightsticks	$2.56 G

ACR SM-2 Automatic Crew-Overboard Marker Light

ACR



- Automatically lights itself and activates when in the water.
- High intensity Xenon strobe gives 360° visibility.
- Brighter light in all directions.
- Upgraded polycarbonate blend case, improved impact rating; UV, temperature and chemical resistant.
- Floats upright in all conditions.
- Dimensions: 13.8" x 4.8".
- Operates on (1) 6 volt Alkaline Lantern battery.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
200333	(3940.1)	$119.98 B
201208	(9021.1) Top Cap and Pole Strobe Assembly	$142.98 F
201246	(9438.1) Bulkhead Bracket	$44.98 F

Jim-Buoy Man-Overboard Light

CAL-JUNE



- Made from injection molded plastic.
- When thrown overboard, the light automatically commences to flash a bright flashing strobe light visible for miles.
- Extensively tested to withstand 90 foot drops into the ocean.
- Operates on (4) "D" Alkaline batteries. Not included.
- Includes: Stainless steel mounting rack.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
267763	(1820/1821)	$268.98 F

©2014 Donovan Marine, Inc.

MSA FP Diamond™ Shock-Absorbing Lanyard



- Teflon-coated, durable polyester sheath for increased abrasion and UV resistance.
- Single leg configuration.
- Highly visible deployment tag.
- Keeps fall arrest forces below 900 lbs.
- Comfortable, lightweight pouchless design.
- OSHA and ANSI Approved.
- CSA Certified.

Order No.	Mfg. No. / Description	Price
773297	(10023932) Length 6'	$72.98 C

MSA FP Pro™ Harness



- Provides comfortable protection due to its super lightweight features and durable webbing.
- Vest styles with back D-ring.
- Color-contrasting thigh and torso straps simplify donning.
- Bright red polyester webbing for high visibility.
- OSHA and ANSI Approved. CSA Certified.

Order No.	Mfg. No. / Description	Price
773273	(415947)	$83.98 C

MSA EVOTECH™ Full-Body Harness



- Leg strap design keeps leg straps in place.
- Variable width sub-pelvic webbing provides 50% more surface area.
- Dual-color webbing - red pattern on outside, black on inside.
- Web management system provides means of storing excess webbing.
- Qwik-Fit buckle hardware on chest and leg straps.
- Single-hand torso adjustment buckles simplify harness adjustment.
- 3-position back D-ring allows users to determine optimal lanyard connection position.
- RFID enabled - RFID chip provides easy means of tracking and inspecting product.
- Web finials prevent fraying on web ends.
- NanoSphere coating on webbing repels dirt, grease, moisture, etc.
- Reflective piping integrated into harness webbing increases visibility in low-light environments.
- OSHA and ANSI Approved.

Order No.	Mfg. No. / Description	Price
773278	(AEVVVVOA1112212) Full Body Harness	$181.98 C

Datrex Emergency Drinking Water - Overwrap



- Purified water for immediate use.
- 1.5 liter overwrap package.
- 12 liters per case.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
436412	(DX100EW)	$10.98 C

Orion Life Raft First Aid Kit



- Designed to fit inflatable life rafts.
- Packed in a waterproof, reusable pouch.
- All the contents are individually boxed and sealed in waterproof bags.
- Contains: 14 items, 108 pieces.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436421	(50-180)	$68.98 G

Datrex Jackknife with Can Opener and Lanyard



- For use in lifeboats and life rafts.
- USCG Approved.
- Includes lanyard.

Order No.	Mfg. No. / Description	Price
320790	(DX1510M)	$28.98 F

Datrex H20R Hydrostatic Release Unit for Life Rafts



- Designed for life rafts from 6 up to 150 persons.
- Release depth: 1.5 - 4.0 metres.
- Two year disposable.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
436471	(HA2000H)	$148.98 C

Datrex Anti-Seasickness Tablets



- For use in lifeboats and life rafts.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436394	(DX1500M)	$3.40 C

Datrex Food Ration



- High energy value/ready to eat.
- Non thirst provoking.
- All natural ingredients. No preservatives.
- Superior coconut flavor.
- 5 year shelf life.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
436419	(DX2400F)	$11.98 C

Datrex Signal Mirror



- For use in lifeboats and life rafts.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436445	(DX1502M)	$19.98 C

Datrex Fishing Kit



- For use in lifeboats and life rafts.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436433	(DX1514M)	$46.98 C

Datrex Bailer with Lanyard



- For use in lifeboats and life rafts.

Order No.	Mfg. No. / Description	Price
851015	(BN0088M)	$13.98 C

Ocenco EEBD with Bracket



- It is a self-contained, compressed oxygen, emergency escape breathing device.
- Instantly provides breathable air, independent of the surrounding atmosphere, to a person escaping from toxic gas or an oxygen deficient atmosphere.
- Can be belt worn or stored in a wall bracket.

Order No.	Mfg. No. / Description	Price
773261	(M-20.2)	$896.98 D

eGear Floating Knife



- Dull, round edge to prevent accidental punctures.
- 48 in. nylon lanyard, attached.
- Weighs 1.6 oz.
- Yellow.

Order No.	Mfg. No. / Description	Price
586418	(80-KNIFE-CRD)	$9.98 Q

eGear Waterproof Matchboxes

- Keeps matches and other small items safe and dry.
- 40 Count.
- Orange.

Order No.	Mfg. No. / Description	Price
586438	(26310009A40)	$79.98 H

Billy Pugh Wind Sock




- International orange nylon.
- Dimensions: 18" diameter x 60" L x 9" diameter.

Order No.	Mfg. No. / Description	Price
484523	(WS-18)	$115.00 B
484535	(WS-18B) Bracket	$106.00 B

Cord 1.5m Ext Ship-Batty

Order No.	Mfg. No. / Description	Price
514314	(20053)	$141.98 F

Boater Sports 5 in 1 Survival Tool



- Includes whistle, compass, signal mirror, dry storage and match striker.
- With lanyard.
- Could even be used as a key float!

Order No.	Mfg. No. / Description	Price
1-58306	(58306)	$2.35 H

eGear 5-IN-1 Survival Tool

- Compass, whistle, waterproof matchbox, flint, and signal mirror in one.
- Orange.

Order No.	Mfg. No. / Description	Price
586390	(2631051A24)	$95.98 H

eGear Survival Card Tool



- Stainless steel multi-tool
- Liquid-filled compass
- Magnifier
- Can & bottle opener
- Screwdrivers/wrench
- Striker Knife edge
- 3.25 in. x 2.25 in. x .5 in.
- Weight: 1.6 oz.

Order No.	Mfg. No. / Description	Price
586450	(26190780334) Blue	$9.98 Q

Survival Instructions

Order No.	Mfg. No. / Description	Price
851053	(DRZ2447)	$6.98 C

Life Saving Signal Card

Order No.	Mfg. No. / Description	Price
851041	(DCA01020)	$12.98 C

"Davit Launched Instructions" Label - Vinyl

Order No.	Mfg. No. / Description	Price
851279	(DRZ6221)	$32.98 B

Kent H. Landsberg LRA Kits

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
852005	(1) 6 Person Coastal / Ocean	$209.98 B
852017	4 Man Coastal LRA Kit	$194.98 B
852029	(1) 4 Man Ocean LRA Kit	$196.98 B
852031	6 Man A PK	$266.98 B
852043	8 Man A PK	$266.98 B
852055	10 Man A PK	$278.98 B
852067	12 Man A PK	$278.98 B
852079	16 Man A PK	$278.98 B
852081	20 Man A PK	$301.98 B
852093	25 Man A PK	$325.98 B
852106	25 Man B PK	$301.98 B
852118	DL LRA Kit	$328.98 B
852120	IBA LRA Kit	$286.98 B

eGear Emergency Blanket



- Compact, lightweight and waterproof.
- Can be used for heat deflection, wind & rain barrier, or a rescue signal.
- Opens up to 55 in. x 87 in.
- Conserves up to 90% of body heat.
- Easily spotted from a distance.
- Pegable bag.

Order No.	Mfg. No. / Description	Price
586414	(26-310-011)	$1.98 Q

©2014 Donovan Marine, Inc.

Pelican MityLite™ Flashlight



- A hi-intensity Xenon lamp that produces a powerful, bright beam.
- Submersible and comes with a twist-on shroud.
- Length 4.09".
- Operates on (2) "AAA" Alkaline batteries (included).
- Approved non-incentive, FM, CSA, CENELEC and AUS.
- Yellow.

Order No.	Mfg. No. / Description	Price
511217	(1900C)	$21.98 Q
511229	(1904) Lamp Module	$8.98 Q

Pelican KingLite™ Flashlight



- Heavy duty, high-powered spotlight.
- Unbreakable ABS resin with a polycarbonate lens and thermoplastic rubber shroud.
- It uses a unique dual filament Xenon lamp that produces a bright beam.
- Two reflectors are included: A modified spot and a laser spot.
- A back-up lamp is stored behind the reflector for emergencies.
- Features: Dual direction switch, locking slide, a pistol grip/lantern handle and a shock absorbing internal battery module.
- Operates on (8) "D" Alkaline batteries (not included).
- Approved non-incentive, FM and CSA.

Order No.	Mfg. No. / Description	Price
511253	(4000B) Length 9.37"	$156.98 Q

Pelican Nemo™ Flashlight



- Unbreakable ABS body with thermoplastic overmolded accents and polycarbonate lens.
- It uses a clever magnetic switch that operates outside of the body to prevent leaking.
- A 3 surface compression fit O-ring makes the Nemo completely watertight.
- Designed with negative buoyancy, a lead ballast is not necessary.
- A spare Xenon lamp is included and stored underneath the reflector.
- Operates on (4) "C" Alkaline batteries (not included).

Order No.	Mfg. No. / Description	Price
511258	(4300) Submersible to 500 feet	$104.98 Q

Pelican SabreLite™ Flashlight



- ABS resin body.
- Incredibly bright Xenon lamp produces a powerful collimated white beam.
- O-ring sealed with a twist-on shroud and comes with a polarity battery guard tray.
- Submersible.
- Length 7.79".
- Operates on (3) "C" Alkaline batteries (not included).
- Approved non-incentive, FM, CSA, MSHA, AUS and UL.
- Yellow.

Order No.	Mfg. No. / Description	Price
511231	(2000C)	$56.98 Q
511243	(2004) Lamp Module	$19.98 Q

Pelican SabreLite™ Recoil™ L.E.D. Flashlight



- Rugged, lightweight ABS resin body.
- Recoil LED Technology produces a white collimated beam that's as bright as an incandescent light and provides 10,000 hours of lamp life and extended battery burn time.
- Submersible and comes with a twist-on shroud.
- Operates on (3) "C" Alkaline batteries (not included).
- Yellow.

Order No.	Mfg. No. / Description	Price
511249	(2010C) Length 8.11"	$96.98 Q

Pelican Big Ed™ 3700 Flashlight



- The unbreakable ABS body resists chemicals, water, and corrosion.
- Rubber side grips prevent slipping and the push button switch on the side is easy to operate.
- For hands-free use, a heavy duty stainless steel clip is built in.
- Uses a hi-intensity Xenon lamp.
- A back-up emergency lamp is housed behind the reflector.
- Uses (4) C Cell Batteries (Not included).

Order No.	Mfg. No. / Description	Price
511275	(3700) 3700 Flashlight	$179.98 Q

3M Dual Cartridge Respirator Assemblies


856625



- NIOSH approved: OV/P95 for use against certain airborne organic vapors and particles.
- Recommended for paint spray, organic vapor or pesticide applications.
- Do not use for asbestos or sandblasting.
- Maintenance free, disposable.

Order No.	Mfg. No. / Description	Price
856611	(66069) Medium	$41.98 H
856623	(66070) Large	$41.98 H
856625	(07194) Particulate Filter, Sold 10 Per Box	$33.98 H

3M 6000 Series Half Facepiece Respirators - Reusable


854984




854299


854287


854996


857037


857041

- Facepiece is made from soft, lightweight thermoplastic elastomer.
- A standard head harness.
- Use against a variety of gases, vapors and particulate hazards according to NIOSH approvals.
- Comes with reclosable storage bag.

Order No.	Mfg. No. / Description	Price
857044	(07025) 6200 - Medium	$22.98 H
857046	(07026) 6300 - Large	$21.98 H
854287	(54358) Particulate Filter, Sold 2 Per Pack	$7.98 H
854299	(07000) Particulate Filter, Sold 2 Per Pack	$10.98 H
854984	(46464) Particulate Filter, Sold 10 Per Pack	$29.98 H
854996	(17668) Filter Retainer, Sold 20 Per Pack	$72.98 H
857041	(21674) Organic Vapor Cartridge	$20.98 H
857039	(07047) Organic Vapor/Acid Gas Cartridge	$21.98 H

MSA Ultra-Twin Full Facepiece Respirator



- Has an inturned lip around the edge for a secure, comfortable seal against the face, a large chin cup for easy positioning, five suspension headstraps and roller buckles that hold the facepiece in place while minimizing hair entanglement.
- The wide polycarbonate lens resists scratching and chemical attack and is held in place by a two-piece lens ring which is color-coded to indicate the size of the facepiece.
- Includes: A speaking diaphragm for clear, short-range communications, a nosecup to reduce lens fogging and uses the full line of Comfo cartridges and filters.
- Silicone.
- NIOSH Certified.

Order No.	Mfg. No. / Description	Price
773227	(480259) Medium	$308.98 E

3M 7500 Series Half Facepiece Respirators - Reusable


854300



- This large half facepiece was designed with the wearer in mind.
- Its soft sealing surface, along with a uniquely designed, 3M Cool Flow Exhalation Valve, enhances wearer comfort and face fit.
- Dual-mode head harness.
- Durable and heat-resistant.

Order No.	Mfg. No. / Description	Price
857051	(7503) Large	$51.98 H
854300	(07184) Particulate Filter, Sold 2 Per Pack	$16.98 H

3M 6000 Series Full Facepiece Respirators - Reusable


857031


857035



- Lightweight design with silicone face seal enhances comfort and improves durability.
- Wide field of vision helps wearers feel safe.
- Use against a variety of gases, vapors and particulate hazards according to NIOSH approvals.

Order No.	Mfg. No. / Description	Price
857053	(54146) 6800 - Medium	$256.98 H
857054	(54159) 6900 - Large	$256.98 H
856655	(52634) Faceshield Cover	$77.98 H
857035	(37004) 6894 - Nose Cup Assembly	$56.98 H

SAS Bandit™ Halfmask Respirators





- Made from soft blue thermoplastic elastomer (TPE).
- Face piece is supple form fitting and can be worn for hours.
- Headstrap designed for less tension for secure fit.
- Cartridges designed for better vision and balance.
- NIOSH approved.

Order No.	Mfg. No. / Description	Price
812479	(8661-92) Medium, Dual	$21.98 G
812479S	(8661-92) Medium, 12 Pack	$316.98 G
812481	(8661-93) Large, Dual	$22.98 G
812481S	(8661-93) Large, 12 Pack	$317.98 G

- At least 95% efficient against non-oil particulate aerosols.
- Time use restrictions may apply.
- Do not exceed maximum-use concentrations established by regulatory standards.
- Box of 5 pairs.

Order No.	Mfg. No. / Description	Price
812467	(8661-20) SAS Bandit™ N95 Pre-Filter	$13.98 G

©2014 Donovan Marine, Inc.

3M Respirator Cleaning Wipes



- For use with the 3M 5000 Series, 6000 Series and 7000 Series Half and Full Facepiece Respirators.
- Individually packed 8" x 10" towelettes are alcohol.
- Conveniently packaged in a dispenser style box that can be wall mounted for easy access.

Order No.	Mfg. No. / Description	Price
856659	(07065) Sold 100 Per Box	$91.98 H

3M 8247, R95 Particulate Respirator



- NIOSH Approved.
- Designed to help provide comfortable protection against certain oil and non-oil based particles including those present with nuisance levels of organic vapors, such as solvents, degreasers, and resins.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.
- Carbon filter media provides relief against odors, vapors and other gaseous contaminants for greater wearer comfort.

Order No.	Mfg. No. / Description	Price
856572	(54358) 20 Per Bag	$122.98 H

3M 8210, N95 Particulate Respirator



- NIOSH Approved.
- Disposable.
- Welded strap attachment, soft nose foam and adjustable noseclip to help provide a custom fit and secure seal.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.

Order No.	Mfg. No. / Description	Price
856630	(46457) 20 Per Bag	$34.98 H

SAS N95 Particulate Respirator



- Inner foam provides a custom seal.
- Dual head strap for optimum fit.
- NIOSH approved.

Order No.	Mfg. No. / Description	Price
812455	(8610) 20 Masks	$17.98 G

SAS Hard Hat



- Superior fit and comfort.
- Swivelling pivot head strap.
- Lightweight.
- 6-point nylon suspension.

Order No.	Mfg. No. / Description	Price
856645	(7160-45) White	$25.98 I

3M 8212, N95 Particulate Respirator



- Designed for welding, torch cutting, soldering, brazing and working with molten metals.
- Cool Flow Exhalation Valve, cake-resistant filter media, a comfortable form faceseal and fully adjustable straps.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.
- Unique filter media incorporating protective layers designed to be flame resistant as demonstrated per ASTM D2859-96.
- NIOSH Approved.

Order No.	Mfg. No. / Description	Price
856560	(54141) Sold 10 Per Box	$113.98 H

3M 8511, N95 Particulate Respirator



- NIOSH Approved.
- Cool Flow Exhalation Valve and M-noseclip.
- Designed to help provide protection against certain non-oil based particles.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.

Order No.	Mfg. No. / Description	Price
856550	(54343) 10 Per Bag	$33.98 H

SAS N95 Valved Particulate Respirator



- NIOSH approved.
- Exhalation valve for extra comfort.
- Inner foam provides a custom seal.
- Dual head strap for optimum fit.

Order No.	Mfg. No. / Description	Price
812457	(8611) 10 Masks	$18.98 G

3M Face Shield Kit



- Uses replaceable polycarbonate material for clearer vision.
- The cam-lock feature holds the face shield in place.
- It uses a slide adjustment for easy sizing.

Order No.	Mfg. No. / Description	Price
856649	(85649) 1631	$29.98 H
856654	(82759) 1632, Replacement Visor	$11.98 H

3M Safety Goggles



- Anti-splash, vented.
- Impact resistant polycarbonate lens.
- Elastic headstrap.
- 99.9% UV Protection.

Order No.	Mfg. No. / Description	Price
856558	(5101)	$6.98 H

SAS Hornets Eyewear



- Clear lens, black frame with poly bag.
- Impact polycarbonate lenses.
- 99.9% UV Protection.
- Fits over most glasses.

Order No.	Mfg. No. / Description	Price
856651	(5270)	$5.98 I

3M General Purpose Ear Muff



- Durable, lightweight, easy-to-use general purpose ear muffs feature multi-position ear cups mounted on a wide, forked headband for comfort and a secure fit.
- Roomy, durable ear cups help provide a reliable fit.
- Soft sealing cushions provide a consistent ear cup seal.
- Recommended for moderately high noise situations.

Order No.	Mfg. No. / Description	Price
856584	(31025)	$20.98 H

Boater Sports Kayak Paddle



- Lightweight and durable.
- Foam grip and adjustable drip guards makes this the most comfortable kayak paddle ever.
- 3-Way articulation angle adjustment.
- Release attachment at center for easy storage.

Order No.	Mfg. No. / Description	Price
1-56003	(56003) Length 8'	$41.85 H

Airhead Kayak Paddle



- 7' Paddle, 2 sections for convenient stowing.
- You can easily adjust the blade angle for standard or offset paddling.
- The lightweight and durable aluminum shaft has drip rings and foam hand grips for comfort and to ensure that the paddle will float if dropped.
- The large ABS blades are curved for greater paddling efficiency.

Order No.	Mfg. No. / Description	Price
596682	(AHTK-P2)	$39.98 Q

SAS NSX Eyewear



- High-impact polycarbonate lenses.
- Lightweight wrap-around lens.
- Scratch-resistant lenses.
- 99.9% UV protection.
- Anti-fog coating on lenses.
- Single lens design.

Order No.	Mfg. No. / Description	Price
856652	(5344)	$8.98 I

SAS NSX Eyewear



- Clear lens, black temple with poly bag.
- High-impact polycarbonate lenses.
- Lightweight wrap-around lens.
- Scratch-resistant lenses.
- 99.9% UV Protection.
- Anti-fog coating on lenses.
- Single lens design.

Order No.	Mfg. No. / Description	Price
812506	(5340)	$5.98 G

3M Ear Plugs



- Soft, disposable, comfortable ear plugs that conform to the unique shape of each ear for excellent hearing protection and comfort.
- Tapered to comfortably fit the ear canal.
- Bright orange color for visibility.

Order No.	Mfg. No. / Description	Price
856596	(29008) 200 Pairs	$45.98 H

Airhead Kayak Paddle



- The 3 section aluminum and plastic paddle is 86" long.
- Break it down for compact storage (stows in a 6" x 22" x 3" space).

Order No.	Mfg. No. / Description	Price
586405	(AHTK-P1)	$21.98 G

Airhead Kayak Paddle



- 86" Paddle, 4 sections for compact storage.
- The blades are asymmetrical to equalize the force on both sides of the blade when paddling, which in turn results in less twisting of the paddle.
- The high impact plastic blades are lightweight and reinforced with fiberglass for added durability.
- Blade angles are adjustable with a simple release of the spring loaded pin and a twist of the lightweight anodized aluminum shaft.

Order No.	Mfg. No. / Description	Price
596684	(AHTK-P3)	$41.98 Q

©2014 Donovan Marine, Inc.

Boater Sports Wooden Paddles



- New Zealand Pinewood wooden paddle.

Order No.	Mfg. No. / Description	Price
1-56075	(56075) Length 3'	$14.95 H
1-56078	(56078) Length 4'	$19.99 H
1-56080	(56080) Length 5'	$28.95 H

Caviness BP Series Wooden Paddles



- An economical wooden boat paddle.
- Oval shaft and palm grip.
- Approximate blade width: 6".
- Shaft dimensions: 1-1/4" W x 1" D (Oval).

Order No.	Mfg. No. / Description	Price
232633	(BP30) Length 3'	$17.98 F
232657	(BP40) Length 4'	$22.98 F
232669	(BP45) Length 4-1/2'	$27.98 F
232671	(BP50) Length 5'	$26.98 F
232708	(BP60) Length 6'	$35.98 F

Caviness SP Series Synthetic Paddles



- The SP Synthetic Paddle has a comfortable palm grip, fully plastic clad aluminum shaft and fully aluminum reinforced high impact plastic blade.
- Standard box 12.

Order No.	Mfg. No. / Description	Price
232835	(SP40) Length 4', Beige	$32.98 G
232746	(SP40) Length 4', Olive Green	$32.98 G
232859	(SP50) Length 5', Beige	$37.98 G

Caviness JP Series Synthetic Paddle



- Because of its size and takedown feature, it is perfect for stowing under the seat of most personal watercraft vehicles.
- Has an aluminum reinforced high-impact plastic blade and a super strong aluminum shaft fully clad with 1/16" of black plastic.
- Palm grip.
- Approximate blade dimensions: 6-1/8" x 14".
- Shaft dimensions: 1-1/8" (Takedown).

Order No.	Mfg. No. / Description	Price
233229	(JP30) 34-1/2" (20" Unassembled)	$27.98 E

Caviness Economy Wooden Paddles



- An economical wooden boat paddle.
- Palm grip.
- Approximate blade width: 6".
- Shaft dimensions: 1-1/4" W x 1" D (Oval).

Order No.	Mfg. No. / Description	Price
232710	(SGR30) Length 3'	$16.98 G
232712	(SGR35) Length 3-1/2'	$18.98 G
232714	(SGR40) Length 4'	$13.98 G
232716	(SGR45) Length 4-1/2'	$15.98 G
232718	(SGR50) Length 5'	$15.98 G

Boater Sports Aluminum Paddles



- Corrosion resistant aluminum shaft boat paddles with high impact handle and molded blade.

Order No.	Mfg. No. / Description	Price
1-56010	(56010) Length 3'	$10.95 H
1-56014	(56014) Length 4'	$13.29 H
1-56018	(56018) Length 4-1/3'	$14.25 H
1-56022	(56022) Length 5'	$15.15 H
1-56026	(56026) Length 5-1/2'	$15.99 H

Caviness 400 Series Synthetic Paddles



- The shaft is made of super strong, lightweight, silver anodized aluminum that extends fully into the high-impact plastic blade's length for internal reinforcement.
- Each shaft is partially clad around normal hand position with a full 1/16" wall of plastic for extra comfort and better grip.
- Approximate blade dimensions: 8" x 22".
- Palm grip.

Order No.	Mfg. No. / Description	Price
232948	(440B-P) Length 4', Black	$23.98 G
232962	(450B-P) Length 5', Black	$26.98 G

Caviness Neon Orange Synthetic Paddles



- The aluminum shaft is fully clad in plastic and is color matched to our aluminum reinforced high-impact plastic blade.
- Palm grip.
- Approximate blade dimensions: 6-1/8" x 22".
- Shaft dimensions: 1-1/8".

Order No.	Mfg. No. / Description	Price
272330	(SP40) Length 4', Neon Orange	$28.98 F
272333	(SP50) Length 5', Neon Orange	$31.98 F

Marpac Collapsable Paddle



- This lightweight paddle adjusts easily to variable lengths with a simple twist.
- A section of the aluminum shaft disappears inside the blade to allow for compact storage under boat seats or in PWC storage compartments.
- The corrosion resistant aluminum shaft, high-impact molded blade and boat hook handle, and hassle-free locking device ensure years of service.
- The bright orange blade is great for signaling in emergencies.
- For low profile boats and PWCs.

Order No.	Description	Price
7-0603	Adjustable length: 20" - 45"	$15.98 G

Omega AK1 Paddle Board Kit

OMEGA



Order No.	Mfg. No. / Description	Price
586550	(50040) Paddle Board Kit	$32.98 G

Airhead White Oars, Pair

AIRHEAD



- These inexpensive oars are designed for use with inflatable boats
- The 2 section aluminum shafts are durable and lightweight.
- The 15 in. high impact plastic blades and grips are designed for maximum rowing efficiency and comfort.
- Length 53".
- 1 pair per package.

Order No.	Mfg. No. / Description	Price
596542	(AHIB-53)	$26.98 F

Caviness BW Series Wooden Oars

CAVINESS



- Select wood, great balance and excellent workmanship.
- Varnish finish.
- Approximate blade dimensions: 5" x 21" (6').
- Shaft dimensions: 1-3/8" at grip, 1-3/8" at throat.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
232594	(BW50) Length 5'	$90.98 F
232607	(BW60) Length 6'	$105.98 F
232619	(BW70) Length 7'	$126.98 F
232621	(BW80) Length 8'	$178.98 F

Boater Sports Telescopic Paddle



- Sturdy and compact telescoping paddle.
- Aluminum shaft adjusts from 22" to 44".
- Twist to lock and unlock.
- High impact molded blades.
- Easy to grip "T" handle.

Order No.	Mfg. No. / Description	Price
1-56006	(56006)	$17.65 H

Jet Logic Telescoping Paddle



- These lightweight paddles adjust easily to variable lengths with a simple twist.
- A section of the aluminum shaft disappears inside the blade for the ultimate in compact storage under boat seats or in PWC storage compartments.
- The corrosion-resistant aluminum shaft, high-impact molded blade, boat hook handle and hassle-free locking device ensure years of service.
- The bright orange blade is great for signaling in emergencies.
- 20 - 45" long, for low profile boats and PWCs, nylon carrying case included.

Order No.	Mfg. No. / Description	Price
5960287	(P-2)	$22.98 H

Boater Sports Aluminum Oars



- Lightweight and durable.
- Will not warp.
- Corrosion resistant aluminum shaft and high impact, cupped, molded blade.
- 1-1/4" shaft.

Order No.	Mfg. No. / Description	Price
1-56030	(56030) Length 5'	$23.65 H
1-56034	(56034) Length 6'	$25.99 H

Caviness JO400 Series Synthetic Oar

CAVINESS



- Features a red Power Grip, a super strong, silver anodized aluminum shaft, Twist 'N Lock coupling and a fully aluminum reinforced high impact plastic blade.
- Approximate blade dimensions: 5-1/2" x 24".
- Shaft dimensions: 1-3/8" (Takedown).
- Sold per pair.

Order No.	Mfg. No. / Description	Price
232570	(0460) Length 6'	$120.98 G

©2014 Donovan Marine, Inc.

Caviness BWL-SU Series Wooden Oars



- Red Caviness power grip.
- Varnish finish.
- Lightweight and economical.
- Blade dimensions: 21" x 5" (6').
- Shaft diameter: 1-1/2".
- To Estimate Oar Length: Take half (1/2) the distance between the oar locks and multiply by 3, then add 6 inches.
- Made in USA.

Order No.	Mfg. No. / Description	Price
232624	(BWLSU50) Length 5'	$117.98 G
232626	(BWLSU60) Length 6'	$138.98 G
232628	(BWLSU70) Length 7'	$164.98 G
232630	(BWLSU80) Length 8'	$234.98 G

Perko Fig. 1267 Round Type Rowlock Horn



- Chrome plated zinc.
- Shank OD 1/2".
- Shank length 1-3/4".
- Horn ID 2".
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
533946	(1267 DP0 CHR)	$21.98 R

Boater Sports Oarlock Horn - Chrome Zamak



- Chrome plated oarlock horns with pins.
- 1/2" Shank.
- For Wooden Oars ONLY!

Order No.	Mfg. No. / Description	Price
1-56106	(56106)	$10.85 H

Perko Fig. 1262 Ribbed Type Rowlock Horn



- Chrome plated zinc.
- Shank OD 1/2".
- Shank length 1-3/4".
- Between horns 1-3/4".
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
533871	(1262 DP0 CHR)	$19.98 R

Boater Sports Heavy Duty Oarlock Horn - Clamp-On



- Heavy duty clamp-on oarlocks.
- 1-5/16" to 2-1/8" diameter oar shafts.
- 1/2" shank.

Order No.	Mfg. No. / Description	Price
1-56104	(56104)	$17.90 H

Boater Sports Oarlock Horn - Clamp-On



- Clamp on oarlocks.
- 1-5/16" to 2-1/8" diameter oar shafts.
- 1/2" shank.

Order No.	Mfg. No. / Description	Price
1-56110	(56110)	$7.25 H

Attwood Clamp-On Oarlock



- Zinc plated steel resists rust.
- Oarlock fastens securely to oar with one adjustable bolt, no drilling required.
- Shank: 1/2" diameter x 2".
- Sold per pair.

Order No.	Mfg. No. / Description	Price
237748	(9146-3)	$15.98 Q

Perko Fig. 1227 North River Type Rowlock Horn



- Chrome plated zinc.
- Shank OD 1/2".
- Shank length 1-3/4".
- Between horns 1-3/4".
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
533578	(1227 DP0 CHR)	$23.98 R

Boater Sports Oarlock Sockets



- Chrome plated oarlock sockets.
- 1/2" shank.

Order No.	Mfg. No. / Description	Price
1-56108	(56108)	$14.69 H

Perko Fig. 1187 Side Mount Rowlock Socket



- Chrome plated zinc.
- Black plastic bearings.
- Length 4", depth 1-1/4".
- Uses #10 fasteners.
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
533023	(1187 DPO CHR)	$24.98 R

Perko Fig. 1185 Top Mount Rowlock Socket



- Chrome plated zinc.
- Black plastic bearings.
- Length 2-7/8", width 1-1/8", depth 1-1/8".
- Uses #10 fasteners.
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
533009	(1185 DPO CHR)	$19.98 R

Perko Fig. 1186 Edge Mount Rowlock Socket



- Chrome plated zinc.
- Black plastic bearings.
- Length 4", width 7/8", depth 1-1/8".
- Uses #10 fasteners.
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
533011	(1186 DPO CHR)	$27.98 R

Boater Sports Oarlock Bushings



- One pair of nylon injection molded oarlock bushings.
- 5/8" outside diameter - 1/2" inside diameter.

Order No.	Mfg. No. / Description	Price
1-56107	(56107)	$2.10 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

ICOM IC-M604 VHF Marine Transceiver - Gray



- IPX-7 Submersible Waterproof.
- Built in Class D DSC.
- Favorite Channel Button that allows you to put your most used channels at a touch of a button.
- Plug and play speaker mic allows for easy installation from the back of the radio, or front.
- 2-way 30W Hailer, RX repeater and Fog Horn.
- Force 5 audio with 5 watts of audio for loud and clear reception even in noisy conditions.
- NMEA input/output for GPS receiver connection (Position Send, Position Request, and Group Call data all shown on the display).
- Huge backlit LCD display is easy to see in bright sun, or in the dark of night.
- Dual AND Tri watch, plus multiple scan modes including ICOMs exclusive tag scan which is the easiest to use in the industry.
- External speaker connection.
- Built in intercom when used in conjunction with the, COMMANDMIC II or COMMANDMIC III.
- Up to 2 COMMANDMIC IIIs with full radio integration.

Order No.	Mfg. No. / Description	Price
788099	(M604A-42) Gray - 8-21/32" W x 4-11/32" H x 4-5/16" D	$752.98 C

ICOM IC-M504 VHF Marine Transceiver - Black





- Built-in ITU Class D DSC.
- IPX8 Submersible plus (1.5m depth for 30 minutes).
- 25 Watt hailer/RX speaker and auto foghorn.
- Large LCD with dot-matrix characters.
- Position request and position report.
- Dual/tri-watch function for monitoring Ch. 16 and/or call channel.
- Instant access to Ch. 16 and call channel.
- Up to two Commandmic III's can be connected - full control and intercom capability.

Order No.	Mfg. No. / Description	Price
788017	(M504A-71) Black	$399.98 C
788013	(HM-157B) Commandmic II, Black	$161.98 C
788022	(MB-75) Flush Mount Kit, Stainless Steel	$40.98 C

ICOM CommandMic III for IC-M504 and IC-M604 Transceivers



- Provides a full 2nd station to radio.
- Comes with a 20' extension cable however up to 3 more can be added in length.
- Acts as an on-board intercom to radio.
- Has DSC button on back of mic for quick access in emergency situations.

Order No.	Mfg. No. / Description	Price
788060	(HM162B) Black	$278.98 E
788062	(HM162SW) White	$278.98 E

ICOM IC-M604 VHF Marine Transceiver - Black



- Built-in ITU Class D DSC.
- Submersible construction (1m depth for 30 minutes).
- 30 Watt 2-way hailer capability.
- Large LCD with dot-matrix characters.
- Position request and position report.
- When connecting to an external GPS receiver, the GPS information indication function shows course and speed data as well as position, date and time on the display.
- Front and rear panel microphone connection.
- Favorite channel function.
- RX speaker function.
- Dual/tri-watch function for monitoring Ch. 16 and/or call channel.
- Up to two Commandmic III's can be connected - full control and intercom capability.



Order No.	Mfg. No. / Description	Price
788100	(M604A-41) Black	$680.98 C
788013	(HM-157B) Commandmic II, Black	$161.98 C
788022	(MB-75) Flush Mount Kit, Stainless Steel	$40.98 C

ICOM IC-M504 VHF Marine Transceiver - Gray



- IPX8 submersible PLUS.
- Large LCD with dot-matrix characters.
- ITU Class D DSC.
- Position request and position report.
- Superior receiver performance.
- Excellent audio output power.
- 25W hailer/RX speaker and auto foghorn.
- Dual/tri-water function for monitoring Ch. 16 and/or call channel.
- Instant access to Ch. 16 and call channel.
- 7 levels adjustable backlit display and keypad.
- Convenient TAG scanning function with simple add/delete.

Order No.	Mfg. No. / Description	Price
788018	(M504A-63) Gray - 6-1/2" W x 4-11/32" H x 4-27/32" D	$399.98 C

ICOM IC-M504 VHF Marine Transceivers with Rear Microphone



- With this version, the microphone connector is drawn from the rear panel and a 6.1m (20ft) microphone extension cable is supplied to allow you clean and neat panel installation.

Order No.	Mfg. No. / Description	Price
788024	(M504A-71) Black - Rear Microphone	$625.98 F
788025	(M504A-73) Gray - Rear Microphone	$625.98 F

ICOM MXA-5000-01 AIS Receiver Only



- Icom's MXA-5000 AIS (Automatic Identification System) receiver will pick up real-time transmissions from vessels that use an AIS transporter. Such transponders are now required for SOLAS vessels by SOLAS regulations.The AIS transponder sends accurate navigation information such as:
- Static information – vessel call sign, name MMSI number, dimensions and type.
- Voyage-related information – draft, cargo type, destination and estimated time of arrival.
- Dynamic information – time in universal time, coordinated, latitude/longitude position, course over ground, speed over ground, heading, rate of turn and navigational status.
- Receives Class A and Class B Transmitted Signals.

Order No.	Mfg. No. / Description	Price
788032	(MXA5000-01)	$324.98 C

ICOM IC-M412 VHF Marine Transceivers



- Built-in Class D DSC.
- Submersible construction (1m depth for 30 minutes).
- MA-500TR AIS transponder compatible.
- Large LCD and simple operation.
- Common GPS/NAV interface.
- AquaQuake draining function.
- Weather channel receive with alert function.
- Favorite channel function.
- Dualwatch and Tri-watch functions.

Order No.	Mfg. No. / Description	Price
780015	(M412-11) Black	$228.98 C
780020	(M412-12) White	$228.98 C
788020	(MB-69) Flush Mount Kit	$42.98 C

ICOM IC-M412 VHF Marine Transceiver Packages



- Package includes: ICOM (M412) VHF marine transceiver, Marpac 7-0127 premier VHF antenna and Shakespeare 744917 (4187) stainless steel rachet mount.

Order No.	Mfg. No. / Description	Price
779999	White	$315.98 C
779998	Black	$315.98 C

ICOM IC-M424 VHF Marine Transceivers



- Superior performance in a compact package.
- New soft-key user interface.
- Class D DSC.
- Built-in PA.
- IPX7 Submersible rating.
- Compatible with new CommandMic IV (HM195).
- MA-500TR AIS compatible.
- AquaQuake.

Order No.	Mfg. No. / Description	Price
788036	(M424 01) Black	$351.98 C
788038	(M424 02) White	$351.98 C

ICOM MB-132-Stainless Steel Flush Mount Kit for IC-M424 Transceivers

Order No.	Mfg. No. / Description	Price
788041	(MB132) Flush Mount Kit	$42.98 E

ICOM CommandMic IV™ Complete Remote-Control Option



- 4th Generation Command and Control
- New soft-key user interface
- IPX7 Submersible rating
- Superior audio performance
- Total control of all communications and DSC functions

Order No.	Mfg. No. / Description	Price
788113	(HM195B) Black	$322.98 E
788114	(HM195SW) White	$322.98 E

ICOM MA-500TR Class B AIS Stand Alone Transponder with Display



- A Class B AIS transponder for Non-SOLAS vessels such as pleasure craft, work-boat and small vessels.
- Your vessels information will automatically be transmitted at fixed intervals or under base station control.
- The MA-500TR receives dual AIS channels (Ch. 87B and Ch. 88B) simultaneously and receives both Class A and Class B AIS information.
- Transmitted information by MA-500TR is:
  - MMSI code
  - Call sign
  - GPS antenna position
  - SOG (Speed over ground)
  - UTC date and time
  - PA (Position Accuracy)
  - Vessel name
  - Type of ship
  - Ship's position
  - COG (Course over ground)
  - GPS antenna type

Order No.	Mfg. No. / Description	Price
788030	(MA500TR KIT)	$1,136.98 C

©2014 Donovan Marine, Inc.

Standard Horizon Eclipse DSC+ VHF Marine Radios



- Affordable ultra compact Class D fixed mount VHF radio.
- Replaces older Eclipse+ and Eclipse DSC Models.
- Full dot matrix display.
- User customizable soft keys for easy menu operation.
- 16/9, H/L and channel up/down keys on the mic.
- DSC Distress, Individual, Group, All Ships, Position Request, and DSC Test Call.
- Auto DSC channel change selection.
- Submersible IPX7 (3.3 feet or 1 meter for 30 minutes) front panel.
- Time and GPS position information shown on display when GPS connected.
- Programmable Scan, Priority Scan, and Dual Watch.
- NOAA Weather Channels with Alert.
- All USA, International and Canadian Marine Channels.
- NMEA 0183 Input and Output.
- Meets ITU-R M493-13 Class D DSC (Digital Selective Calling).
- Overall Dimension: 2.4"H x 6.1"W x 6.7"D.
- Flush Mount Cutout: 2.0"H x 5.2"W.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607040	(GX1200B) Black	$149.98 C
607041	(GX1200W) White	$149.98 C

Standard Horizon Quantum GX5500S Class D DSC VHF Marine Radio



- Bluetooth capable headset.
- Class D DSC.
- 25 Watt transmit power.
- Commercial grade 80dB receiver.
- Features a large alpha numeric keypad.
- 30 Watt PA, FOG, Bells and Whistles with listen back.
- Submersible JIS-7/IPX7 (3.3 feet for 30 minutes).
- Noise canceling speaker mic with channel selection and 16/9 key.
- Independent Channel 70 receiver built-in for continuous DSC watch.
- LAT/LON, SOG and COG shown on display when connected to GPS.
- Versatile user-programmable scanning, priority scan and Dual Watch.
- One-button access to Channel 16 and 9.
- Capable of connecting to RAM3 or VH-310 second station optional remote access mic.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607061	(GX5500S) Black	$459.98 C
607079	(MMB-84) Flush Mounting Bracket	$19.98 E

Standard Horizon The Explorer GPS VHF Marine Radios



- Integrated 12 Channel WAAS GPS receiver.
- GPS antenna built-in to the front panel allows reception when bracket or flush mounted.
- Ultra thin and compact rear case design (3.5" depth).
- Meets ITU-R M493-13 Class D DSC (Digital Selective Calling).
- Navigation to a DSC Distress Call with compass page.
- DSC test call and Auto DSC channel change selection.
- Automatically poll the GPS position of up to 4 ships using DSC.
- Enter, Save, and Navigation to waypoint with Compass page.
- GPS Compass display.
- Navigation (LAT/LON, Time, SOG, and COG) information shown on display.
- Submersible JIS-8 1.5M (4.92Ft) for 30 minutes.
- Noise canceling microphone with channel UP/DOWN, 16/9 and H/L keys.
- NOAA weather channel selection with alert.
- Programmable Scan, Priority Scan, and Dual Watch.
- Preset Key stores up to 10 favorite channels, with scan function.
- Oversized display with customizable channel names.
- NMEA 0183 Input and Output of GPS information to other devices.
- Programmable soft keys.
- Capable of connecting to a Second Station RAM3 Remote Access Microphone.
- Intercom between radio and Second Station RAM3 Remote Access Microphone.
- Die-cast chassis.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607088	(GX1700B) Black	$237.98 C
607089	(GX1700W) White	$237.98 C

Standard Horizon Explorer Class D DSC VHF Marine Radios



- Class D DSC.
- DSC test call.
- Auto DSC channel change selection.
- GPS Compass display.
- Submersible JIS-8 1.5M (4.92 feet for 30 minutes).
- Noise canceling speaker mic with channel selection, 16/9 key and H/L keys.
- Navigation (LAT/LON, SOG, and COG) information shown on display.
- Programmable scan, priority scan and Dual Watch.
- Capable of connecting an optional RAM3 second station remote microphone.
- Automatically poll the GPS position of up to 4 ships using DSC.
- NOAA weather channel selection with alert.
- GPS repeating of position, SOG, COG and time.
- Enter, Save and Navigate to waypoints with Compass page.
- Navigate to a DSC Distress Call with compass page.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607067	(GX1600B) Black	$171.98 C
607068	(GX1600W) White	$171.98 C

Standard Horizon Matrix Class D DSC VHF Marine Radios



- Class D DSC.
- Commercial grade 80dB receiver.
- One-button access to Channel 16 and 9.
- 30 Watt PA/loud hailer with preprogrammed fog signals.
- Submersible JIS-7/IPX7 (3.3 feet for 30 min.)
- Noise canceling speaker mic with channel selection and 16/9 key
- Independent Channel 70 receiver built-in for continuous DSC watch
- LAT/LON, SOG and COG shown on display when connected to GPS.
- Versatile user-programmable scanning, priority scan and Dual Watch.
- Capable of connecting an optional RAM3 second station remote microphone.
- 3 year waterproof warranty.
- AIS (Automatic Identification System) receiver or transponder. When connected to an optional AIS receiver or transponder: AIS target display: MMSI, Call Sign, Ship Name, BRG, DST, SOG & COG. Contact AIS Ship with DSC. CPA (Closest Point of Approach) Alarm.
- When connected to an optional GPS: Enter, Save and Navigate to waypoints with Compass page. Navigate to a DSC Distress Call.

Order No.	Mfg. No. / Description	Price
607064	(GX2000B) Black	$243.98 C
607065	(GX2000W) White	$243.98 C
607079	(MMB-84) Flush Mounting Bracket	$19.98 E

Uniden Solara D UM380 VHF Marine Radios



- Class D VHF marine radio.
- DSC position send and request.
- Large full dot matrix display, LCD contrast control.
- Backlit LCD and keys.
- JIS7 submersible.
- NOAA emergency weather alert including S.A.M.E. memory channel scan.
- Triple/dual watch.
- Compact case depth.

Order No.	Mfg. No. / Description	Price
776739	(UM380) Black	$129.98 D
776740	(UM380) White	$129.98 D

Standard Horizon Second Station Remote Control Microphone



- Remotely control all Radio, DSC, PA/Fog functions of connected Matrix and Quantum radios.
- Speaker microphone with noise cancelling clear voice technology.
- Backward compatible to RAM+ (CMP25).
- Submersible (3.3 feet for 30 minutes).
- Comes with 23' of routing cable.
- 3 year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607090	(CMP30B) Black	$117.98 C

Standard Horizon VHF Marine Radio Package



- Package includes: 607052 (GX1000SW) Eclipse VHF DSC marine radio, Marpac 7-0127 Premier VHF antenna and Shakespeare 744917 (4187) stainless steel rachet mount.

Order No.	Mfg. No. / Description	Price
607049	Eclipse Radio Package - White	$237.98 C

Uniden UM380 VHF Marine Radio Packages



- Package includes: Uniden Solara DSC VHF marine radio, Marpac 7-0126 VHF antenna and Marpac 7-0435 nylon ratchet mount.

Order No.	Mfg. No. / Description	Price
778906	Black	$198.98 E
778920	White	$198.98 E

Uniden UM380 VHF Marine Radio Package



- Package includes: Uniden Solara DSC VHF marine radio, Shakespeare 606573 (5244) low profile VHF antenna and Marpac 7-1329 nylon rail mount.

Order No.	Mfg. No. / Description	Price
776728	UM380 Radio Package - White	$194.98 E

©2014 Donovan Marine, Inc.

Uniden Oceanus D UM415 VHF Marine Radios

Uniden



- All USA/International/Canadian Imarine channels.
- 1 Watt/25 Watt transmit power.
- DSC (digital selective calling).
- DSC position send and request.
- JIS7 submersible.
- Quik Command one-touch Ch 16/9 key on mic.
- S.A.M.E. emergency/weather alert.
- Channel names.
- LCD display and dimmer.
- Triple watch plus.
- Memory scan.
- 3 Year waterproof protection warranty.

Order No.	Mfg. No. / Description	Price
776721	(UM415) Black	$139.98 D
776725	(UM415) White	$139.98 D

Uniden Oceanus VHF Marine Radio Package

Uniden



- Package includes: Uniden Oceanus DSC VHF Marine Radio, Marpac VHF Antenna (7-0127) and Stainless Steel Ratchet Mount (744917)
- Stainless steel ferrule fits standard 1-1/4" thread bases.
- Extended brass center element provides extra durability & long life.
- Sturdy fiberglass construction with a smooth white finish.
- One section, 8' long, 6 db gain, PF259 connector included.
- Versatile 4-way ratchet design for deck or side mounting.
- Special cable slot eliminates removal of most factory-installed connectors.
- Standard 1"-14 male thread.

Order No.	Mfg. No. / Description	Price
776722	(OCEANUS-PKG1) White	$249.98 E

Cobra Class D DSC VHF Marine Radios

Cobra



- The latest in Class-D Digital Selective Calling (DSC) Technology.
- Noise canceling speaker-mic with controls.
- Large LCD screen.
- Submersible to JIS7 Standards.
- All NOAA Weather Channels.

Order No.	Mfg. No. / Description	Price
788257	(MRF75-D) White	$177.98 D
788258	(MRF75B-D) Black	$177.98 D

Uniden Oceanus VHF Marine Radio Package

Uniden



- Package includes: M304-01 VHF Marine Transceiver (White), Shakespeare 606561 (5240-R) Low Profile Antenna and Marpac 7-1330 Stainless Steel Rachet Rail Mount.

Order No.	Mfg. No. / Description	Price
776723	(OCEANUS-PKG2) White	$279.98 E

Uniden Oceanus VHF Marine Radio Package

Uniden



- Package includes: Uniden Oceanus DSC VHF Marine Radio, Shakespeare 5101 Centennial Antenna (606701) and Stainless Steel Ratchet Mount (744917)

Order No.	Mfg. No. / Description	Price
778932	(OCEANUSPKGBL) Black	$250.98 E
778944	(OCEANUSPKGBL2) White	$250.98 E

Uniden Flush Mount Kit

Uniden



- Compatible with the following models: UM415, UM415BK, UM380, UM380BK, UM425, UM525, UM625, Oceanus, Oceanus-BK and Polaris-BK.

Order No.	Mfg. No. / Description	Price
557504	(FMB321)	$14.98 G

Cobra Class D DSC VHF Marine Radio

Cobra



- Latest in Class D Digital Selective Calling (DSC) Technology.
- 1 or 25 watts of power output.
- Weather alert.
- Dual watch.
- Submersible.
- Instant Channel 16/9.
- Noise cancelling microphone with controls.
- Scan.
- DSC call log.
- GPS capability.
- All 10 NOAA/Weather Channels.
- USA, Canada and International Channels.

Order No.	Mfg. No. / Description	Price
788234	(MRF45-D) White	$125.98 C

Cobra Class D DSC VHF Marine Radios



- Latest in Class D Digital Selective Calling (DSC) Technology.
- 1 or 25 watts of power output.
- All 10 NOAA/Weather Channels.
- Weather alert.
- Noise cancelling microphone with controls.
- Instant Channel 16/9.
- USA, Canada and International Channels.
- Standard bracket, flush mount hardware and GPS cable.
- Dual watch.
- Submersible.
- Scan.

Order No.	Mfg. No. / Description	Price
788240	(MRF55-D) White	$129.98 D
788249	(MRF55B-D) Black	$129.98 D

Lowrance Link-5 DSC VHF Fixed-Mount Marine Radio



- Class D compliant with dedicated DSC transceiver.
- Selectable 25 watts transmit power / 1 watt low power mode.
- Highest quality easy grip rubber fist microphone with speaker.
- XL Channel 16/9 key and rotary knob.
- Quick "favorites" channel access.
- Dedicated volume and Squelch knob.
- NOAA weather alerts.
- 5-year Advantage Program.

Order No.	Mfg. No. / Description	Price
143185	(10788-001) Link-5 DSC VHF Fixed-Mount Marine Radio	$179.98 B

Deck Horns/Hailers



- Clear, distortion free, waterproof deck horns.
- High impact plastic with hook-up wire provided.
- 8 Ohm.
- Assembled with stainless steel hardware.
- White.

Order No.	Mfg. No. / Description	Price
699199	(SPC-5P) 8 Watts Nominal, 12 Watts Peak	$14.98 E
699213	(PA-30/20) 30 Watts Nominal, 20 Watts Peak	$50.98 E
699249	(PA-40/30) 40 Watts Nominal, 30 Watts Peak	$78.98 E
699255	(PA-60/40) 60 Watts Nominal, 40 Watts Peak	$228.98 D

Cobra DSC VHF Marine Radio Package





- Full function DSC capability.
- 1 or 25 watts of power output.
- Weather alert.
- Dual watch.
- Submersible.
- Instant Channel 16/9.
- Noise cancelling microphone with controls.
- All 10 NOAA/Weather Channels.
- Scan.
- DSC call log.
- USA, Canada & International Channels.
- GPS capability.

Order No.	Mfg. No. / Description	Price
788235	(F45D-PKG) White	$186.98 C

Marpac External Speaker



- 6 watt, water-resistant white speaker.
- Housing-cycolac case.
- Compatible with all VHF Radios.
- Includes: Cable, plug, stainless mounting brackets & hardware.

Order No.	Description	Price
7-0371	External Speaker	$28.98 G

Marpac Microphone Clip



- Sold 2 per card.

Order No.	Description	Price
7-0140	Stainless Steel Microphone Clip, 1-7/8" x 1"	$3.71 G

Standard Horizon Loud Hailer



- 30W PA output.
- Dual zone output forward, aft or all.
- Noise canceling microphone.
- Easy push button control.
- Loud speaker audio.
- 2 Intercom Station capable with the MLS-300i intercom speaker.
- 3 year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607078	(VLH-3000) Black	$274.98 C

©2014 Donovan Marine, Inc.

ICOM IC-M24 Handheld VHF Marine Radio



- Submersible construction equivalent to IPX7 (1m depth for 30 minutes).
- Dual/Tri-watch functions.
- 4-step battery life indicator
- Weather channel with weather alert (USA version).
- One-touch access to Ch. 16.
- Auto scan function.
- Tag scan and Favorite channel functions.
- LED light turns on automatically when the radio hits the water. Whether the radio is turned on or off.

Order No.	Mfg. No. / Description	Price
780085	(M24-01)	$159.98 C

ICOM IC-M88 Handheld VHF Marine Radio





- Tough construction, superior waterproofing.
- Li-Ion battery for extra long battery life.
- 22 Programmable channels for land use.
- Auto WX scan and WX Alert function.
- Simple Up/Down switches for operating channel selection.
- Instant access to Ch 16 or Ch 9.
- Simple add/delete TAG scanning operation.
- 5 Watt output power.
- 2-step power saver.
- 4 level battery life indicator.
- The self check function checks internal temperature, connected battery voltage and water intrusion.

Order No.	Mfg. No. / Description	Price
788004	(M88-01)	$319.98 C
788005	(M88-11) Intrinsically Safe FCC Approved	$399.98 C
788019	(HM-138) Speaker/Microphone	$148.98 C
788031	(BP-227) Battery, Li-Ion	$129.98 C

ICOM Accessories for IC-M72 Handheld VHF Marine Radio



Order No.	Mfg. No. / Description	Price
788012	(HM-125) Speaker/Mic	$99.98 C
788101	(BP-245) Battery Pack	$93.98 C

ICOM IC-M73 Handheld VHF Marine Radio



- Material: Aluminum chassis.
- Controls: Volume knob, backlit buttons.
- Scanning Modes: Priority, Tag, Dual-and Tri-watch.
- Weather Alert: Yes.
- Transmit Power: 6/3/1 Watt.
- Battery Type: Lithium-ion.
- Battery Life: 18 hours typical.
- Receiver Performance: Sensitivity: 0.25µV; Rejection: 70db.
- Waterproof Rating: IPX8.
- Dimensions: 2-1/8" W x 5" H x 1-3/16" D.
- Weight: 9 oz.
- Included Equipment: Battery charger, AC adapter, cigarette lighter cable, belt clip and hand strap.
- Warranty: Three-year waterproof.

Order No.	Mfg. No. / Description	Price
788006	(M73-01) Black	$218.98 C
788105	(BP-227) Li-Ion Battery for Extra Long Battery Life	$114.98 C

ICOM IC-M92D Handheld VHF Marine Radio



- Advanced Class D DSC VHF Handheld.
- Float n Flash Technology.
- Active noise cancelling on incoming/outgoing calls.
- Li-Ion battery: 1500mAh (up to 8-10 hours).
- Dot matrix display with compass & 48 channel GPS.
- 12 Volt adapter included an Icom first.
- AquaQuake.

Order No.	Mfg. No. / Description	Price
788009	(M92D 01)	$324.98 C

ICOM IC-M36 Handheld VHF Marine Radio





- Floats if dropped overboard.
- "LOUD" button gives full volume immediately.
- Noise cancelling microphone.
- Automatic volume adjustment.
- Waterproof construction equivalent to IPX7.
- Dual/Tri-watch functions.
- 4-step battery life indicator.
- Weather channel with weather alert.
- 6 Watt output power.
- Auto scan function.
- Instant access to Ch 16 or Ch 9.

Order No.	Mfg. No. / Description	Price
788002	(M36-01)	$208.98 C
788111	(HM-165) Speaker/Microphone	$89.98 C

Standard Horizon Floating Handheld VHF Marine Radios



- Floating.
- Submersible IPX7 (3.3 feet or 1 meter for 30 minutes).
- Slim, form fitting case design.
- More than 7.5 hours of battery life.
- E2O (Easy To Operate) menu system.
- Selectable 2.5 and 1 Watt transmit power output.
- Supplied with a 700 mAh Ni-MH battery, 110 VAC chargers and a charging cradle.
- Huge channel display.
- All USA, International and Canadian Marine Channels.
- Programmable Scan, Priority Scan and Dual Watch.
- NOAA Weather channels and Weather Alert.
- Key lock.
- Squelch level on display.
- Battery life indicator.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607034	(HX100) 2.5 Watts	$103.98 C
607036	(HX150) 5.0 Watts	$103.98 C

Standard Horizon Handheld VHF Marine Radio



- Submersible JIS-7/IPX7 (3.3' for 30 min.)
- More than 13 hours of battery life.
- Selectable 5 & 1 Watt transmit power output
- Huge channel display.
- All USA/International and Canadian Marine Channels.
- Programmable / Priority Scan, & Dual Watch.
- NOAA Weather channels & Alert.
- Key lock.
- Squelch level on display.
- Low battery indicator.
- Preset key (10 favorite channels)
- Supplied with a 1650 mAh Lithium-ion battery, 110 VAC & 12 VDC chargers and a cradle.

Order No.	Mfg. No. / Description	Price
607020	(HX280S) Handheld VHF Radio	$115.98 C

Standard Horizon Handheld Floating VHF Radio



- Submersible JIS-8 / IPX7 (3.3 feet for 30 minutes).
- Slim form fitting case.
- Selectable 5 and 1 Watt transmit power output.
- Supplied with a Li-ion battery, AC and DC chargers and a charging cradle.
- Glow-In-the-Dark strip.
- Huge channel display.
- Optional speaker microphone or headset capable.
- All USA, International and Canadian Marine Channels.
- Programmable Scan, Priority Scan and Dual Watch.
- NOAA Weather channels and Weather Alert.
- Key lock.
- Squelch level on display.
- Low battery indicator.
- Preset key used to recall up to 10 favorite channels.
- Optional FBA-40 Alkaline battery tray available.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607022	(HX290) Handheld Floating VHF Radio	$131.98 C

Standard Horizon Floating Handheld VHF Marine Radio



- Floating.
- Submersible IPX8 - 1.5 meters or 4.92 feet for 30 minutes.
- 5 Watt transmit power.
- Unique USB charging system.
- E2O (Easy To Operate) menu system.
- Volume & squech indication on the display.
- Water activated LED light.
- Preset Key (Maximum 10 channels).
- Preset channel scan function.
- 600 mW loud internal speaker audio.
- NOAA Weather channels.
- Programmable Scan, Priority Scan, Dual watch and Tri Watch.
- Supplied with 1560 mAh 3.7V Li-Ion Battery, AC USB Plug and charging cable.

Order No.	Mfg. No. / Description	Price
607038	(HX300)	$155.98 C

Standard Horizon Handheld VHF Marine Radios



- Submersible JIS-7/IPX7 (3.3 feet for 30 minutes).
- Selectable 5/2.5/1 Watt transmit power output.
- Oversized channel display.
- 40 Programmable Land Mobile Channels with CTCSS and DCS signaling.
- Programmable channel names.
- NOAA Weather channels and Weather Alert.
- Low battery indicator.
- All USA/International and Canadian Marine Channels.
- Voice Scrambler capable.
- Supplied with 1400 mAh Ni-MH battery, alkaline battery tray, 110 VAC and 12 VDC chargers and a cradle.
- Programmable Scan, Priority Scan and Dual Watch.
- Preset key used to recall up to 8 favorite channels.
- SOS Strobe light.

Order No.	Mfg. No. / Description	Price
607024	(HX370S)	$159.98 C
607025	(HX370SAS) Intrinsically Safe (I.S.) Version	$325.98 C
607085	(CMP460) Submersible Speaker/Mic	$74.98 E

©2014 Donovan Marine, Inc.

Standard Horizon Handheld VHF Marine Radio with LMR Channels



- Submersible IPX8/1.5M (4.92 feet for 30 minutes).
- Noise cancelling microphone.
- Selectable 5 or 1 Watt transmit power output.
- 40 Programmable Land Mobile Channels 134 MHz to 174 MHz with CTCSS and DCS signaling.
- Programmable channel names.
- NOAA Weather channels and Weather Alert.
- Low battery indicator.
- Built in Voice Scrambler for private communications.
- Programmable Scan, Priority Scan and Dual Watch.
- All USA, International and Canadian Marine Channels.
- Preset key used to recall up to 10 favorite channels.
- Key lock.
- Supplied with 2400mAh Li-Ion battery, 110 VAC and 12 VDC 3-hour quick chargers.

Order No.	Mfg. No. / Description	Price
607031	(HX400) Handheld VHF Radio with LMR Channels	$219.98 C

Standard Horizon Floating Handheld VHF Marine Radio with GPS



- Floating - submersible JIS-7/IPX7 (3.3 feet for 30 minutes).
- Built-in 12 Channel GPS Receiver.
- Luminescent glow in the dark gasket.
- 6 Watt transmit power.
- Easy to read large LCD with channel, volume, squelch indication and battery life indicator.
- DSC functions include: Distress call with position, All ships, Urgency, Safety, Individual call, Position Request, Position Report and Group Call.
- Programmable Scan, Priority Scan and Dual Watch.
- Programmable channel names.
- Preset key used to recall up to 10 favorite channels.
- Water activated SOS strobe light.
- NOAA Weather channels and Weather Alert.
- Supplied with a 1150 mAh rechargeable Lithium-ion battery, 110 VAC and 12 VDC chargers.

Order No.	Mfg. No. / Description	Price
607033	(HX851)	$259.98 C

Cobra Handheld VHF Marine Radio



- Waterproof (to JIS4 standards).
- Dual watch.
- 3 watt.
- USA, Canada and International Channels.
- All NOAA Weather Channels with weather alert.
- All-Hazards Emergency receiver.
- Battery saver circuitry.
- Noise canceling microphone with controls.
- Instant Channel 16/9.
- Includes: A removable spring loaded belt clip, lanyard and DC cigarette lighter charger.

Order No.	Mfg. No. / Description	Price
788200	(HH125) Handheld VHF Radio	$48.98 C

Standard Horizon Floating Handheld VHF Marine Radio with GPS



- Built-in Parallel 12 Channel GPS Receiver.
- Floating.
- Submersible JIS-7 / IPX7 (3.3 feet for 30 minutes).
- 6 Watt Transmit power.
- Large easy to ready LCD with Full dot matrix display (132 x 64 dot).
- DSC (SC-101) functions.
- Volume & Squelch indication on display.
- NMEA output on cradle of DSC, DSE, GLL, RMC, GSA, GSV and GGA.
- All USA/International and Canadian Marine Channels.
- NOAA Weather Channels with Alert.
- SOS Strobe light.
- 1150 mAh Rechargeable Lithium-ion battery.
- 120VAC and 12VDC chargers included.
- 3 Year waterproof warranty.

Order No.	Mfg. No. / Description	Price
607032	(HX850S)	$269.98 C

Uniden Atlantis 250 Handheld VHF Marine Radios





- All USA/International and Canadian Marine Channels.
- 1W/5W switchable.
- Backlit LCD display and keypad.
- Memory channel scan.
- Weather alert.
- Instant Channel 16/9/Triple watch.
- JIS4/CFR46 Waterproof level.
- Flexible rubber antenna.
- NiMH and Alkaline battery capability.
- AC & DC power cords.
- 3 year warranty.

Order No.	Mfg. No. / Description	Price
776733	(Atlantis 250G) White/Gray	$105.98 E
776735	(Atlantis 250BK) Black	$105.98 E
577200	(HHSPM) Speaker/Microphone	$60.98 E
557064	(BBTY0571001) Battery Pack for 776733	$46.98 E

Uniden Speaker/Mic for Handheld VHF Marine Radios



- For use with HH978XL, HH980 and HH955 Handheld VHF Marine Radios.

Order No.	Mfg. No. / Description	Price
556968	(SPMG)	$66.98 E

Cobra Floating Handheld VHF Marine Radio with Bluetooth



- Bluetooth Wireless Technology - industrys only radio that can answer your phone.
- Rewind-Say-Again- replay missed VHF calls.
- Floating never lose your radio.
- Floating design and orange core makes retrieving radio easy if dropped overboard.
- 6 Watt VHF-select between 1, 3 and 6 Watts for short and long range communication.
- Ultra-Compact Design-ergonomic and compact design.
- All NOAA weather channels-instant access to national all hazards and weather information.
- Noise-Canceling Microphone.
- BURP-vibrates water out of the speaker.
- Rated Submersible- meets JIS7 (IPX7) standards; submersible for 30 minutes in one meter deep water.
- Battery with Charge Contacts.
- Illuminated Function Keys.
- Large, Illuminated LCD Display.
- 3 year warranty.
- Includes rechargeable battery, locking desktop charger, spring loaded belt clip and alkaline battery tray for use as a spare battery backup. (Uses 5 high quality alkaline batteries.)

Order No.	Mfg. No. / Description	Price
788220	(MRHH500FLTBT)	$168.98 C

Cobra Handheld Remote Speaker/Microphone



- Compact design.
- Screw-in audio connector.
- Rotating spring loaded clip.
- Earpiece output jack.

Order No.	Mfg. No. / Description	Price
788264	(CM330-001)	$35.98 D

JBL AM/FM/CD Receiver



- Power output: 180 watts (4 x 45).
- ESP (Electronic Shock Protection).
- Single line output terminal.
- Random/repeat play.
- European tuning.
- Fixed face.
- Positive display.
- Wired/wireless remote ready.
- Intro scan.
- Installation size: 7-1/8" W x 2-1/8" H x 6-3/4" D.
- Overall size: 7-5/16" W x 2-1/4" H x 7-3/4" D.

Order No.	Mfg. No. / Description	Price
559029	(MR-145S) Silver	$151.98 E

Cobra Floating Handheld VHF Marine Radio



- Floating never lose your radio.
- Floating design and orange core makes retrieving radio easy if dropped overboard.
- 6 Watt VHF-select between 1, 3 and 6 Watts for short and long range communication.
- Ultra-Compact Design-ergonomic and compact design.
- All NOAA weather channels-instant access to national all hazards and weather information.
- Noise-Canceling Microphone.
- BURP-vibrates water out of the speaker.
- Rated Submersible- meets JIS7 (IPX7) standards; submersible for 30 minutes in one meter deep water.
- Battery with Charge Contacts.
- Illuminated Function Keys.
- Large, Illuminated LCD Display.
- 3 year warranty.
- Includes rechargeable battery, locking desktop charger, spring loaded belt clip and alkaline battery tray for use as a spare battery backup. (Uses 5 high quality alkaline batteries.)

Order No.	Mfg. No. / Description	Price
788216	(MRHH350FLT)	$98.98 C

Newmar Waterproof Handheld VHF Marine Radio Cover



- Made of super-tough, UV resistant PVC.
- Even total immersion will not harm the radio.
- These covers are certified waterproof to a depth of 33 ft.
- Transparent design allows easy reading of digital displays.
- Sound is virtually unimpeded and RF transmission is unaffected.
- A quick release clip allows easy insertion and removal of the radio and a handy lanyard provides extra security when hands are wet.

Order No.	Mfg. No. / Description	Price
699188	(AQ-20L/R) Handheld Radio Cover	$56.98 D

JBL REM-30 Remote



- Full-Featured Wired Remote for use with JBL Receivers
- Weatherproof
- 2-9/16 round shape that fits into the center of a steering wheel
- Silicone rubber membranes
- Sealed tack switches
- Installation size: 2-1/4 or 2

Order No.	Mfg. No. / Description	Price
558408	(JBLREM30) Remote	$46.98 Q

Poly-Planar AM/FM iPod Satellite Stereo



- Output Power: 45W x 4CH.
- Adjustable backlight on display.
- Selectable powered sub channel output.
- Built-in IR receiver (front) and IR input (back) - unit will interface with Poly-Planar IR Speakers.
- Multiple Inputs available (Auxiliary Input, USB Input, Front SD Card Input).
- Cutout Dimension: 7-1/8" X 2-1/8". Deep Clearance: 7-5/16".
- Overall Dimension: 7-11/16" X 3-3/16" X 8-7/8".

Order No.	Mfg. No. / Description	Price
547975	(MRD80i) Satellite Stereo	$389.98 I

©2014 Donovan Marine, Inc.

Milennia AM/FM Receiver with iPod USB Port Kit



- Power output: 160 watts (4 x 40).
- Rotary encoder.
- Bass/treble, balance controls.
- Electronic volume.
- Random/repeat play.
- Built in USB/SD Card & Auxiliary Inputs will recharge an IPOD or MP3 Player when plugged in.
- One set of RCA outputs built into the stereo.
- Includes: (2) SEA-5581B - Black 40 watt speakers.

Order No.	Mfg. No. / Description	Price
547995	(MIL-MPK5D) Receiver Kit	$132.98 Q

Infinity AM/FM Bluetooth® Multimedia Receiver



- Bluetooth Audio Streaming.
- 4 x 50 watts.
- Solid aluminum chassis.
- Aux-in.
- Portable-media ready.
- USB input.
- ASTM 117 Salt fog.
- 1 pair of RCA outputs.
- IP66 waterproof face.
- Comes with flush-face mounting kit.
- Charging through USB port.
- RF remote/wired remote ready (remotes sold separately).

Order No.	Mfg. No. / Description	Price
558980	(INFPRV250) 6" W x 4" H x 2-1/2" D	$273.98 Q

Milennia Portable Media Receiver



- 4 x 40 watts.
- Solid aluminum chassis.
- Aux-in.
- Portable media ready.
- USB.
- ASTM 117 Salt fog.
- IP-66.
- Installation depth: 1-5/8" not including wires.
- Installation cut out: 3".
- Outside dimensions: 3-1/2".

Order No.	Mfg. No. / Description	Price
559250	(MILPRV16) Portable Media Receiver	$112.98 G

Milennia PRV 16 Stereo Kit including 6 Milennia Speakers



- PRV 16 Gauge Style Stereo (AM/FM and Multi-Media ready receiver) with set of 2, 150 watt, 6-1/2" coaxial marine speakers.

Order No.	Mfg. No. / Description	Price
559251	(MILPRV16KIT) PRV 15 Stereo Kit	$160.98 G

Milennia PRV15 Stereo Gauge Style



- AM/FM Multi Media Receiver 4 x 40 Watts Aux In Portable.
- Media Ready USB Input.
- IP 66 Waterproof Face.
- 3 Hole Cutout.

Order No.	Mfg. No. / Description	Price
559253	(MILPRV15BLIS) Stereo Gauge Style	$112.98 G

Milennia AM/FM/USB Bluetooth Receiver



- Bluetooth Audio streaming.
- 45w x 4.
- AM/FM.
- 2 Aux-inputs.
- USB input.
- All weather face plate.
- UV stable.

Order No.	Mfg. No. / Description	Price
559257	(MILPRV21) Bluetooth Receiver	$184.98 G

Milennia AM/FM Multimedia System





- Contains: (1) MIL PRV21 AM/FM Multimedia Receiver & (2) MIL SPK652BB Speakers.
- Bluetooth Audio Streaming.
- 4 x 45 watts.
- AM/FM.
- Aux input x 2.
- USB Input.
- All-Weather Faceplate.
- UV Stable Speaker.
- Integral grill, all plastic.
- 6-1/2" Marine Coaxial.
- 150 watts.

Order No.	Mfg. No. / Description	Price
559268	(MILMPK21) Stereo System	$288.98 G

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Audiopipe Marine AM/FM Player



- Front/rear RCA output.
- Aux input.
- Optional remote control input.
- Wireless Smartphone connection to stream your music.
- Max. power: 25 watts x 4.

Order No.	Mfg. No. / Description	Price
559525	(APSW-425BTU)	$138.98 E

Jensen AM/FM/USB Compact Waterproof Stereo



- IPX6 waterproof design.
- AM/FM.
- Full four channel output.
- USB input allows for playback of MP3/WMA files from compatible flash drives.
- Auxiliary input (RCA).
- Compact, self-contained design.
- Line out audio (RCA).
- Simple user interface.
- Large, daylight readable LCD display.
- Audio tone, balance and fader controls.
- Zero current memory draw.
- Conformal-coated circuit boards.
- Blue backlit controls (LED illumination).
- Segmented LED display.
- UV-resistant finishes/materials.
- Corrosion-resistant materials.

Order No.	Mfg. No. / Description	Price
2000013	(MS30)	$139.98 Q

Boss Marine MP3 Compatible CD Receiver



- AM/FM.
- Full Detachable Front Panel.
- Front AUX-Input.
- USB/SD Card Slot.
- Wireless Remote.
- 60w x 4.

Order No.	Mfg. No. / Description	Price
559338	(MR1470UW) White	$159.98 F
2000123	(MR1470US) Silver	$170.98 H

Audiopipe Marine Stereo Head Unit



- AM/FM/LW-MPX PLL Tuning Radio.
- 24 Preset Station.
- Single CD player w/CD-R, CD-RW, MP3 compatible.
- Mechanical Slide Down Datachable Panel.
- 4 x 40 watts max. Power Output.
- Loudness Control.
- iPod®/iPhone® compatible.
- Front USB & AUX IN.
- 2 Pair RCA output.

Order No.	Mfg. No. / Description	Price
559530	(APSW2500IU) Stereo Head Unit	$195.98 E

Boss Marine MP3/CD/AM/FM Receiver



- Marine MP3/CD/ AM/FM Receiver.
- Front Aux-In.
- Full Detachable Front Panel.
- 60w x 4.

Order No.	Mfg. No. / Description	Price
559334	(MR1440U) White	$148.98 F

Boss MP3 Compatible CD AM/FM Receiver



- In-Dash Single-DIN Marine MP3-Compatible CD AM/FM Receiver.
- Front Panel USB and SD Memory Card Ports.
- Front Aux Input (Fully Marinized 650UA).

Order No.	Mfg. No. / Description	Price
2000119	(MR1440W) White	$139.98 F

Boss MR1420W White AM/FM CD Stereo



- Marine MP3/CD/ AM/FM Receiver.
- Front Aux-In.
- Full Detachable Front Panel.
- 60w x 4.

Order No.	Mfg. No. / Description	Price
559380	(MR1420W) White	$149.98 R

Boss Marine MP3 Receiver



- MP3 Compatible Digital Media Receiver.
- Front Aux In.
- AM/FM RDS, USB and SD Card Ports.
- Wireless Remote.
- 60w x 4.

Order No.	Mfg. No. / Description	Price
559529	(MR1315WUA) White	$139.98 Q
2000115	(MR1315BUA) Black	$141.98 H

©2014 Donovan Marine, Inc.

Boss MP3 Compatible CD AM/FM Receiver



- Marine MP3 Compatible CD Receiver, AM/FM.
- Full Detachable Front Panel.
- Front AUX-Input.
- Wireless Remote, 60w X 4.

Order No.	Mfg. No. / Description	Price
2000121	(MR1465W) White	$139.98 F

Boss CD/MP3 Marine Stereo Receiver



- IPX 6 Rated.
- 1-1/2 DIN Marine MP3/CD/AM/FM/RDS Receiver.
- Front Aux-In.
- Wireless Remote Control.
- Fits DIN opening.
- 80w X 4 (White) RF Remote - Capable Rear USB Cable Included.
- Zero Drain Battery Saver Feature.

Order No.	Mfg. No. / Description	Price
559351	(MR2180UA) White	$289.98 F

Boss Marine MP3/CD Receiver



- Marine MP3/CD/AM/FM/RDS Receiver.
- Front Aux-In.
- Full Detachable Front Panel.
- Wired Remote with Display.
- 60w x 4.
- Rear USB Cable included.
- Zero drain battery saver feature.

Order No.	Mfg. No. / Description	Price
559342	(MR1630UA) White	$214.98 F

Boss Marine CD/MP3 Stereo Receiver



- Marine MP3/CD/AM/ FM/RDS Receiver.
- Weatherband.
- Front Aux-In.
- Full Detachable Front Panel.
- Wired Remote with display.
- 60w X 4 Rear USB Cable included.
- Zero Drain Battery Saver Feature.

Order No.	Mfg. No. / Description	Price
559349	(MR1650UA) White	$239.98 G

Boss CD/MP3 Marine Stereo Receiver



- Marine MP3 Compatible CD Receiver.
- AM/FM.
- Front Aux-In.
- Detachable Front Panel.
- USB/SD Card Slot.

Order No.	Mfg. No. / Description	Price
559352	(MR637UW) 60W X 4	$153.98 G

Boss Solid State MP3 Receiver



- MP3 Compatible Solid State AM/FM Receiver.
- USB/SD Card Slot.
- Front Aux-In.
- Wireless Remote.
- 50W X 4.

Order No.	Mfg. No. / Description	Price
559332	(MR1306UA) White	$94.98 E

Boss Solid State MP3 Receiver



- MP3 Compatible Solid State AM/FM Receiver.
- USB/SD Card Slot.
- Front Aux-In.
- Wireless Remote.
- Bluetooth.
- 50W X 4.

Order No.	Mfg. No. / Description	Price
559333	(MR1308UAB) White	$125.98 E

Boss CD/AM/FM Stereo Receiver



- Front AUX-Input with full detachable front panel.
- Chassis Mounting: Single DIN.
- Monitor Display Format: Active Black Mask Display.
- PLL Synthesized AM/FM Tuner.
- AM Stations: 6, FM Stations: 18 (24 Preset).
- Switchable Radio Regions: USA, EUROPE, ASIA.
- Compatible with iPod and other MP3 Players.
- 5 Volt Preamp Output.
- Dimensions: 2" H x 6.63" L x 7.25" W.

Order No.	Mfg. No. / Description	Price
559330	(MR1400W) 60w x 4, White	$148.98 G

Boss Marine Solid State MP3 Receiver – Internal iPod Docking Station



- Buttonless Touch Sensitive Panel.
- Full Detachable Front Panel.
- USB/SD Card Slot.
- Front Aux-In.
- AM/FM/RDS.
- Wireless Remote.
- 80w X 4.

Order No.	Mfg. No. / Description	Price
559337	(MR1580DI) White	$179.98 F

Boss RF Waterproof Floatable Wireless Remote



- RF Waterproof Floatable Wireless Remote works with selected Boss marine receivers.

Order No.	Mfg. No. / Description	Price
559372	(MRF90) Floatable Remote	$87.98 F

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Boss Receiver and Speaker Package



- Marine Stereo Package Includes: MR1470UW Receiver, (2) MR60W Speakers, MRC5 Splash Cover and MRANT10 Antenna.

Order No.	Mfg. No. / Description	Price
559390	(MCK1470.6W) Receiver and Speaker Package	$189.98 F

Boss CD/MP3 Compatible Receiver and Speaker Package



- Marine Stereo Package Includes: MR637U Receiver, (4) MR6W Speakers and MRANT10 Antenna.

Order No.	Mfg. No. / Description	Price
559318	(MCK637W.64) Receiver and Speaker Package	$199.98 F

Boss CD/MP3 Compatible Receiver and Speaker Package



- Marine Stereo Package Includes: MR1440U Receiver, (2) MR6W Speakers and MRANT10 Antenna.

Order No.	Mfg. No. / Description	Price
559325	(MCK1440W.6) Receiver and Speaker Package	$183.98 F

Boss Receiver and Speaker Package



- Marine Stereo Package Includes: MR1308UAB Receiver - Bluetooth, (2) MR6W Speakers, MRANT10 Antenna and Wireless Remote Control.

Order No.	Mfg. No. / Description	Price
559301	(MCK1308WB.6) Receiver and Speaker Package	$149.98 E

Boss MP3 Compatible Digital Media Receiver Package



- Marine Stereo Package Includes: MR1306UA Receiver, (2) MR6W Speakers, MRANT10 Antenna and Wireless Remote Control.

Order No.	Mfg. No. / Description	Price
559300	(MCK1306W.6) Receiver and Speaker Package	$118.98 E

Boss MP3 Compatible Marine Digital Media Stereo Package



- Marine Stereo Package Includes: MR1315WUA Receiver, (2) MR6W Speakers and MRANT10 Antenna.

Order No.	Mfg. No. / Description	Price
559305	(MCK1315W.60) Receiver and Speaker Package	$154.98 F

Boss CD/MP3 Receiver and Speaker Package



- Marine Stereo Package Includes: MR637U Receiver, (2) MR6W Speakers and MRANT10 Antenna.

Order No.	Mfg. No. / Description	Price
559311	(MCK637W.6) Receiver and Speaker Package	$169.98 F

Audiopipe Jet Ski Radio Kit



- 2x4 Coaxial 2-Way Marine Speaker + 2 Channels Amplifiers.
- 200 Watts Power (P.M.P.O.).
- 100 Watts Power (R.M.S.).
- Rubber Surround Piano Black IMPP Cone Titanium Dome Diaphragm.
- High Performance Tweeter Mounting.
- Frequency Response: 45-20KHz Sensitivity: 90 dB.
- Depth: 56mm (2).
- Impedance: 4 Ohms.
- 15 Oz Magnet.

Order No.	Mfg. No. / Description	Price
559700	(APSW-250JS) Jet Ski Radio Kit	$290.98 F

©2014 Donovan Marine, Inc.

JBL Black Box Technology

- The black box system reduces the potential problem of water intrusion in a marine stereo by including a waterproof faceplate as well as a separate box that functions as the "brain" of the unit that can be placed anywhere.
- This box allows the user to put it in an area that is protected from water.
- The black box chassis is a corrosion proof, molded poly chassis.
- Rather than including a CD player as standard equipment with these units, they feature media options so that users can bring along an MP3 player or a variety of other types of portable media such as USB, cell phones and iPods.

JBL Bluetooth® Black Box System



- Bluetooth Audio Streaming.
- 4 x 50 watts.
- AM/FM tuner/Aux-in/E-prom.
- 3 pair RCA outputs including subwoofer.
- U.S. and European tuning.
- USB input and control.
- Built in RF remote receiver (transmitter, MILRF9, is purchased separately).
- Implements RS485 communication protocol x 2 ports.
- Includes gloss black J559235 (JBL MC20BL) remote control.
- Dimension of box (excluding mounting feet): 6-1/2" W x 1-1/4" H x 6-1/2" L.

Order No.	Mfg. No. / Description	Price
559243	(JBL MBB-2020)	$363.98 G

JBL Remote Control with Display



- Can be used as additional remote with 559243 (JBL MBB-2020).
- Remote can be flush mounted or surface mounted. Surface mount requires part MC19ADPT1.
- One-line display.
- Backlit silicone rubber membranes.
- Implements RS485 communication protocol.

Order No.	Mfg. No. / Description	Price
559235	(JBL MC20BL) 6-1/2" W x 3-3/4" H x 1" D	$99.98 G

JBL Mini Plug



- Plugs into the back of most JBL, Milennia and SeaWorthy radios.
- Can be used to plug in: iPod/MP3 Players, laptop computers, VHF radios, and satellite radios.
- Has 72" cord.

Order No.	Mfg. No. / Description	Price
547974	(SEAMINI2) Mini Plug	$21.98 I

JBL Remote Extension

- For use with REM35.

Order No.	Mfg. No. / Description	Price
858862	(JBLREX15-13) Length 15', 13 pin	$25.98 G
858863	(JBLREX25-13) Length 25', 13 pin	$35.98 G

JBL Digital Display Controllers



559229



559233

- Meets or exceeds IPX-65.
- iPod controller.
- Unique two-line display.
- Backlit silicone rubber membranes.
- Displays Sirius text: Artist, Song, Channel Name and Category info.
- Can adjust bass, treble, fader and balance by using the select button.
- Overall size: 6-3/4" W x 4" H.
- Can be used with Black Box Systems or selected JBL CD receivers.

Order No.	Mfg. No. / Description	Price
559229	(MC-19S) Silver	$89.98 F
559233	(MC-19BK) Black	$89.98 F

Milennia iPod, AMP and Speaker Kit



- Takes input from most iPOD or MP3 players.
- Great for limited space applications.
- Kit includes: Milennia AMP (MIL-MA100), Seaworthy 558772 (SEA-5582B) black 75 watts speakers and 547974 (SEAMINI2) mini plug.
- Milennia AMP (MIL-MA100) - Fully marinized circuit boards to keep salt and corrosion away from the critical circuit path, onboard high low filter, great for adding another pair of speakers, 45 watts, 20W RMS.

Order No.	Mfg. No. / Description	Price
547983	(MIL-MA100DPK)	$135.98 Q

JBL Mini Plug with USB and 72" Cord



- Auxiliary input with USB to play through the stereo system.
- Can be used to plug in MP3 players, lap-top computers, VHF radios, satellite radios & more!
- Installation depth: 1-9/16", cutout diameter: 1-5/16".

Order No.	Mfg. No. / Description	Price
558913	(SEAUSBMINI) Mini Plug	$23.98 Q

SeaWorthy Stereo Package with Aux Input

SeaWorthy



- Contains: (1) SEA 100 Marine Multimedia Receiver and (4) SEA 5632- 6-1/2" Round Coaxial Speakers.
- 4 x 40 watts output, AM/FM.
- Front auxiliary input.
- Integral grill.
- All plastic.
- Front USB and front SDSPEAKER.
- 10-oz coaxial with 1" tweeter.
- 100 watts per channel.
- Overall size: 6-1/2" W x 6-1/2" H x 3-1/8" D.
- Installation size: 5-1/4" W x 5-1/4" H x 2-3/8" D.

Order No.	Mfg. No. / Description	Price
558888	(SEASHIP100)	$138.98 G

JBL Amplifiers



- Fully "marinized" circuit boards to ensure flawless power delivery.
- With onboard 12dB electronic crossovers provide tuning options for systems of any size and a variable bass-boost circuit provides additional bass tuning.
- 160 Watts at 2 ohms, 60W RMS x 2 channels at 4 ohms, less than or equal to 1% THD + N.
- Overall size: 9" L x 10-1/4" W x 2-3/16" H.

Order No.	Mfg. No. / Description	Price
559186	(MA6002) 2 Channel x 60 watts	$169.98 E
559191	(MA6004) 4 Channel x 60 watts	$199.98 E

Boss MOSFET 4-Channel Power Amplifier



- Marine MOSFET 4-Channel Power Amplifier.
- Built-In PA System, Microphone.
- 1,200 Watts.

Order No.	Mfg. No. / Description	Price
2000113	(MR1200PA)	$318.98 F

Boss Marine Power Amplifiers



- Line and Speaker Inputs.
- Variable Gain Controls.
- Power LED.
- Max Power: 100 Watts x 4 Channels.
- RMS Power: 50 Watts x 4 Channels.

Order No.	Mfg. No. / Description	Price
559360	(MR404) 4 Channel, 9-7/8" W x 2-3/4" H x 7-3/4" L	$99.98 R

- Max Power: 100 Watts x 2 Channels.
- RMS Power: 50 Watts x 2 Channels.

Order No.	Mfg. No. / Description	Price
559357	(MR202) 2 Channel, 9-7/8" W x 2-3/4" H x 6" L	$68.98 G

Audiopipe 8" ATV Off Road Amplified System



- Loaded with two APSW-8502BK Speakers.
- 350 Watts Power (P.M.P.O.).
- 175 Watts Power (R.M.S.).
- Frequency Response: 45-25 KHz.
- Sensitivity: 90 dB.
- Titanium dome diaphragm high performance tweeter.
- Rubber Surround IMPP Cone.
- 22 Oz Magnet.
- Water Resistant.

Order No.	Mfg. No. / Description	Price
559485	(ATVP-3000) ATV Amp System, 12 volt	$405.98 F

Boss Marine Off Road Marine Sound System



- 6.5" Marine Speakers.
- 1.5" Water Proof Tweeters.
- Internal Amp.
- 3.5 mm input jack.
- 450 Watts.

Order No.	Mfg. No. / Description	Price
559431	(ATV20) Off Road Sound System	$251.98 F

Pioneer 4-Channel Amplifier



- 600 watts maximum power.
- Continuous power bridged (4 ohm): 150W x 2.
- Frequency response: 10Hz ~ 50kHz.
- Continuous power (4 ohm): 60W x 4.
- Continuous power (2 ohm): 75W x 4.
- Signal-to-noise ratio: 95dB.
- Load impedance capability: 2~8 Ohm (Stereo); 4~8 Ohm (Bridged).
- Dimensions: 11-13/16" x 2-3/8" x 13-1/8".

Order No.	Mfg. No. / Description	Price
559164	(GM-6300F) Amplifier	$289.98 E

Boss MOSFET 4-Channel Power Amplifier



- Marine MOSFET 4 Channel Power Amplifier.
- 1,000 Watts.

Order No.	Mfg. No. / Description	Price
559327	(MR1000)	$212.98 F

Boss MOSFET 2-Channel Power Amplifier



- Marine MOSFET 2 Channel Power Amplifier.
- 800 Watts.

Order No.	Mfg. No. / Description	Price
559344	(MR800)	$148.98 F

©2014 Donovan Marine, Inc.

Audiopipe 4 Channel Mini Marine Amplifier



- 1000 Watts.
- 4 Channel MOSFET Marine Amplifier.
- Frequency Response: 5Hz - 30 KHz.
- Input Level: 0.2 - 6V.
- 4x50W @ 4 Ohm, 4x80W @ 2 Ohm, 2x150W @ 4 Ohm.

Order No.	Mfg. No. / Description	Price
559355	(APMR-4050MIN)	$179.98 E

Audiopipe 2 Channel Mini Marine Amplifier



- 1000 Watts.
- 2 Channel MOSFET Marine Amplifier.
- Frequency Response: 5Hz - 30 KHz.
- Input Level: 0.2 - 5V.
- 2x75W @ 4 Ohm, 2x110W @ 2 Ohm.

Order No.	Mfg. No. / Description	Price
559356	(APMR-2075MIN)	$130.98 D

Audiopipe 1 Channel Mono Mini Marine Amplifier



- 600 Watts.
- 1 Channel MOSFET Marine Amplifier.
- Frequency Response: 8Hz - 180 KHz.
- Input Level: 0.2 - 5V.
- 230W @ 4 Ohm, 400W @ 2 Ohm, 550W @ 1 Ohm

Order No.	Mfg. No. / Description	Price
559353	(APMR-1200MIN)	$209.98 E

Audiopipe 4 Channel Marine Amplifier



- Built-in variable high pass & low pass crossover.
- RCA Line Input/Output Jacks.
- Electronic Protection Circuitry to Protect The Amplifier from Short Circuit, DC Offset & Thermal Overload.
- Remote Sub-Woofer Volume Control.
- 2.2" H x 6.9" W x 15" L.
- Frequency Response: 20Hz - 20kHz.
- Signal to Noise Ratio: 95dB.
- Channel Separation: >65dB.
- Speaker Impedance: 2O To 4O.
- Input Sensitivity: 0.25V - 5V.
- Crossover Frequency: 55Hz - 5.5KHz 12dB Stereo.
- Bass Boost: 0-18dB @ 45Hz Stereo 4 Ch - 75W x 4 @ 4O Stereo 4 Ch - 150W x 4 @ 2O Bridge 2 Ch - 300W x 2 @ 4O.

Order No.	Mfg. No. / Description	Price
559358	(APMR-1504)	$195.98 E

Audiopipe 2 Channel Marine Amplifier



- Built-in variable high pass & low pass crossover.
- RCA Line Input/Output Jacks.
- Electronic protection circuitry to protect the amplifier from short circuit, DC offset & thermal overload.
- Remote Sub-Woofer Volume Control.
- 2.2" H x 6.9" W x 10.2" L.
- Frequency Response: 20Hz - 20kHz.
- Signal to Noise Ratio: 100dB.
- Channel Separation: >75dB.
- Speaker Impedance: 2O To 4O.
- Input Sensitivity: 0.25V - 5V.
- Crossover Frequency: 55Hz - 5.5KHz 12dB Stereo.
- Bass Boost: 0-18dB @ 45Hz.
- Output Power (RMS): Stereo 2 Ch.
- 100W x 2 @ 4O Stereo 2 Ch.
- 150W x 2 @ 2O Bridge 1 Ch.
- 300W x 1 @ 4O.

Order No.	Mfg. No. / Description	Price
559346	(APMR-2002)	$179.98 C

Audiopipe 1 Channel Mono Mini Marine Amplifier



- 1000 Watts.
- 1 Channel MOSFET Marine Amplifier.
- Frequency Response: 8Hz - 180 KHz.
- Input Level: 0.2 - 5V.
- 300W @ 4 Ohm, 600W @ 2 Ohm, 1000W @ 1 Ohm.

Order No.	Mfg. No. / Description	Price
559347	(APMR-1300MIN)	$274.98 E

Audiopipe Multi-Audio Amplifier



- This unit accepts 3 RCA inputs from a head unit "Front, Rear, and Subwoofer" and provides 3 amplified outputs for each input 3 front outputs, 3 rear outputs, 3 subwoofer outputs.
- Multi-Audio Amplifier.
- Input Impedance: 47 KOhoms.
- Input Sensitivity: 260mV.
- S/N Ratio: > 95dB.
- Output Level (10KHz): > 1V(1KHz).
- Output Impedance: 1 KOhms.
- Channel Resolution: > 60dB.
- Frequency Response: 20-2000Hz.
- Output Gain: 12 dB.

Order No.	Mfg. No. / Description	Price
559505	(SPLIT-3003)	$24.98 E

Audiopipe Amplifier



- Channels - 4 Channel Power (P.M.P.O)
- 1200 Watts Power (R.M.S) - 4x80W@ 4 Ohm4x115W@ 2 Ohm 2x230W Frequency Resp.
- 10Hz - 30 kHz Input Level - 0.2V - 6VTHD <0.05%

Order No.	Mfg. No. / Description	Price
559568	(APMR-4080MIN) Amplifier	$168.98 E

Audiopipe Flush Mount Connectors

Order No.	Mfg. No. / Description	Price
559640	(IPCVRUSBMF6) USB	$10.98 C
559645	(IPCVR35M35F6) 3.5 mm	$10.98 E

Audiopipe Power Kits



- 17' 2 RCA Plugs to 2 RCA Plugs with Signal Wire.
- Marine Grade Ring Terminal White Color.
- Marine Grade Ring Terminal Black Color.
- Black Spade Terminals: Black & White Color.
- Butt Splices 2 Pcs.
- 10 Assorted Cable Ties.
- 3' Split Loom Tubing.

- 17' 4 AWG White Primary Wire.
- 3' 4 AWG Black Primary Wire.
- 80 Amp AGU Fuse.
- 25' 16 AWG White Speaker Wire.
- AGU Fuse Holder.

Order No.	Mfg. No. / Description	Price
559369	(PKIP-2100) 2100 Watt	$71.98 F

- 17' 8 AWG White Primary Wire.
- 3' 8 AWG Black Primary Wire.
- 60 Amp AGU Fuse.
- 25' 18 AWG White Speaker Wire.
- 8 AWG Fuse Holder.

Order No.	Mfg. No. / Description	Price
559377	(PKIP-1500) 1500 Watt	$53.98 F

Infinity Marine Speakers - 6" x 9"



- 300 watts handling power.
- Sensitivity: 96dB.
- Rubber surrounds.
- UV & water resistant construction.
- Installation size: 5-9/16" x 8-9/16".
- Frequency response: 36-20,000 Hz.
- Polypropylene woofer cone.
- Integrated grille assembly.
- Mounting depth 3-1/16".
- Sold per pair display pack.

Order No.	Mfg. No. / Description	Price
558974	(INF6912M) Speakers	$283.98 Q

Infinity Marine Speakers - 6-1/2"



- 225 watts handling power.
- Frequency response: 50-20,000 Hz.
- Polypropylene woofer cone.
- Integrated grille assembly.
- Installation size: 5-1/16".
- Sensitivity: 92dB.
- Rubber surrounds.
- UV & water resistant construction.
- Mounting depth 2-5/8".
- Chrome

Order No.	Mfg. No. / Description	Price
558962	(INF612M) 6-1/2" Speakers	$199.98 E

JBL Marine Speakers - 6-1/2"



- Power handling: 30 watts RMS, 105 watts Peak.
- Sensitivity: 90 dB.
- Frequency response: 55Hz - 18kHz.
- Polypropylene woofer cone.
- Polypropylene dome tweeter.
- Integrated grille assembly.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
559077	(JBLMSMS6100) 6-1/2" Speakers - White	$99.98 G

JBL Marine Speakers - 6-1/2"



- Sensitivity: 91 dB.
- Frequency response: 55Hz - 20kHz.
- Polypropylene woofer cone.
- Polypropylene dome tweeter.
- Integrated grille assembly.
- UV and water resistant construction.
- Sold per pair.
- Power handling: 60 watts RMS, 180 watts Peak.

Order No.	Mfg. No. / Description	Price
559065	(JBLMSMS6200) 6-1/2" Speakers - White	$139.98 F

Milennia 5" Outdoor Speaker



- 5" Coaxial Marine.
- 100 watts.
- UV protected.
- Installation size: 4-1/4".
- Overall size: 5-3/4".

Order No.	Mfg. No. / Description	Price
559260	(MILSPK552B) Black	$59.98 G
559262	(MILSPK552W) White	$59.98 G

Milennia 6-1/2" Coaxial Marine Speaker



- 20-mm tweeter.
- All molded waterproof.
- UV protected.
- Installation size: 5-1/4" W x 5-1/4" H x 2-1/2" D.
- Overall size: 7-1/8" W x 7-1/8" H x 3-1/4" D.

Order No.	Mfg. No. / Description	Price
559264	(MILSPK652B) Black	$68.98 G
559266	(MILSPK652W) White	$68.98 G

©2014 Donovan Marine, Inc.

Audiopipe 6.5" Coaxial 2-Way Marine Speaker



- 200 Watts Power (P.M.P.O.).
- 100 Watts Power (R.M.S.).
- Frequency Response: 45-20 Khz.
- Sensitivity: 90 dB.
- Rubber Surround Piano Black IMPP Cone.
- Titanium Dome Diaphragm High Performance Tweeter.
- Mounting depth: 2-3/4".
- 15 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559335	(APSW-6002) White	$73.98 D

Audiopipe 8" Coaxial 2-Way Marine Speaker



- 350 Watts Power (P.M.P.O.).
- 175 Watts Power (R.M.S.).
- Frequency Response: 45-25 Khz.
- Sensitivity: 90 dB.
- Rubber Surround Piano Black IMPP Cone.
- Titanium Dome Diaphragm High Performance Tweeter.
- Mounting depth: 3-1/2".
- 22 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559339	(APSW-8002) White	$113.98 C

Audiopipe 6" x 9" Coaxial 2-Way Marine Speaker



- 300 Watts Power (P.M.P.O.).
- 150 Watts Power (R.M.S.).
- Frequency Response: 40-20 Khz.
- Sensitivity: 93 dB.
- Rubber Surround Piano Black IMPP Cone.
- Titanium Dome Diaphragm High Performance Tweeter.
- Mounting depth: 3-5/8".
- 20 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559343	(APSW-6902) White	$108.98 C

Audiopipe Mega Marine Tweeter



- Maximum power: 300 watts.
- RMS power: 150 watts.
- Magnet structure: 20 oz.
- Impedance: 4 ohm.
- Input sensitivity: 99 dB.
- Frequency response: 2K - 25K.
- 3-3/4".

Order No.	Mfg. No. / Description	Price
559535	(APSW-3725) White	$53.98 E

Audiopipe 6.5" Coaxial 2-Way Marine / ATV Speaker



- 200 Watts Power (P.M.P.O.).
- 100 Watts Power (R.M.S.).
- Frequency Response: 45-20 KHz.
- Sensitivity: 90 dB.
- Rubber Surround Piano Black IMPP Cone.
- Titanium Dome Diaphragm High Performance Tweeter.
- Mounting depth: 2-3/4".
- 15 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559336	(APSW-6502BK) Black	$139.98 D

Audiopipe 8" Coaxial 2-Way Marine Speaker / ATV Speaker



- 350 Watts Power (P.M.P.O.).
- 175 Watts Power (R.M.S.).
- Frequency Response: 45-25 KHz.
- Sensitivity: 90 dB.
- Rubber Surround Piano Black IMPP Cone.
- Titanium Dome Diaphragm High Performance Tweeter.
- Mounting depth: 3-1/2".
- 22 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559340	(APSW-8502BK) Black	$191.98 C

Audiopipe 10" Subwoofer Marine Speaker



- 500 Watts Power (P.M.P.O.).
- 250 Watts Power (R.M.S.).
- Frequency Response: 28-1,500 Hz.
- Sensitivity: 88 dB.
- Rubber Surround Piano Black IMPP Cone.
- White ABS Basket.
- Mounting depth: 4.6".
- 30 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559345	(APSW-1001) White	$112.98 C

Audiopipe 4" Coaxial 2-Way Marine Speaker



- 4" Coaxial 2-Way Marine Speaker.
- 100 Watts Power (P.M.P.O.).
- 50 Watts Power (R.M.S.).
- Frequency Response: 45-20 Khz.
- Sensitivity: 90 dB.
- Rubber Surround Diaphragm High Performance Tweeter.
- Mounting depth: 2-3/4".
- 15 oz. Magnet.

Order No.	Mfg. No. / Description	Price
559540	(APSW-4032) White	$85.98 E

Boss Marine Speaker



- Audiophile Quality High Performance Marine 7.5" Speaker.
- 400 Watts (Sold as Pair).

Order No.	Mfg. No. / Description	Price
559348	(MR752C)	$93.98 E

Boss 6-1/2" 2-Way Coaxial Marine Speakers



- 6-1/2" 2-Way Coaxial Marine Speaker.
- 200 Watts.

Order No.	Mfg. No. / Description	Price
559381	(MR60W) White	$49.98 R
589383	(MR60B) Black	$48.98 R

Boss 6.5" Dual Cone Marine Speakers



- 6.5" Dual Cone Marine Speaker.
- 180W peak power, 90W RMS (Sold in pairs).

Order No.	Mfg. No. / Description	Price
559364	(MR6B) Black	$39.98 Q
559366	(MR6W) White	$39.98 Q

Boss 2-Way Coaxial Marine Speaker



- Size: 6" x 9" in.
- Frequency Response: 60 Hz to 20 Hz.
- Total Power: 400 Watts.
- SPL (1 Watt / 1 Meter): 92 dB.
- Voice Coil Material: Aluminum.
- Basket Structure: Plastic.
- Cone Material: Poly Injection.
- Number of Magnets: 1.
- Number of Tweeters: 1.
- Tweeter 1, Size: 1"; Material: Mylar Done.
- Dimensions: 4" x 10.62" x 7.87".
- Quantity in the Box: 2.

Order No.	Mfg. No. / Description	Price
559326	(MR690) 350 Watts 6" x 9" (White)	$80.98 F

Boss Marine Speaker



- Audiophile Quality High Performance Marine 6" x 9" Speaker.
- 400 Watts (Sold as Pair).

Order No.	Mfg. No. / Description	Price
559371	(MR695) White	$119.98 F

Boss 5-1/4" 2-Way Coaxial Marine Speakers



- 5-1/4" 2-Way Coaxial Marine Speaker.
- 150 Watts.

Order No.	Mfg. No. / Description	Price
559385	(MR50W) White	$35.98 R
559386	(MR50B) Black	$35.98 R

Boss 6.5" Marine Speaker Package with 3 Grills



- 2-Way Marine Speaker with 3 Grills in the package.
- White Grill, Black Grill and Silver Grill included in package.

Order No.	Mfg. No. / Description	Price
559362	(MR65G3) 6.5"	$119.98 Q

Boss Quality High Performance Marine 6.5" Speaker



- Audiophile Quality High Performance Marine.
- 6.5" Speaker.
- 350 Watts.

Order No.	Mfg. No. / Description	Price
559350	(MR652C)	$91.98 G

Boss Marine Subwoofer



- Audiophile Quality High Performance Marine.
- 10" Subwoofer.
- 600 Watts.

Order No.	Mfg. No. / Description	Price
2000109	(MR100)	$61.98 F

©2014 Donovan Marine, Inc.

Boss Marine Box Speaker



- 200 Watts (Sold as Pair).

Order No.	Mfg. No. / Description	Price
559405	(MR30) White	$94.98 E

Boss Marine Tower Speaker



- 1,000 Watts Marine Wake Tower Speaker System.
- 8" Midbass + 5-1/4" Speaker + 1" Bullet Tweeter.

Order No.	Mfg. No. / Description	Price
2000164	(ROCKER)	$950.98 F

Boss 8" 2-Way Marine Wake Tower Speakers



- 8" 2-Way Marine Wake Tower Speaker.
- 700 Watts.

Order No.	Mfg. No. / Description	Price
559387	(MRWT8B) Black	$299.98 G
559388	(MRWT8C) Chrome	$299.98 F
559391	(MRWT8W) White	$299.98 F

Audiopipe Speaker Wire



Order No.	Mfg. No. / Description	Price
559545	(CABLE 10-25') 10 Gauge, 25' Roll	$14.98 E
559550	(CABLE 10-50') 10 Gauge, 50' Roll	$29.98 E
559555	(CBLE 10-100') 10 Gauge, 100' Roll	$57.98 C
559560	(CABLE 12-25') 12 Gauge, 25' Roll	$6.98 E
559565	(CABLE 12-50') 12 Gauge, 50' Roll	$13.98 E
559575	(CABLE 14-25') 14 Gauge, 25' Roll	$9.98 C
559580	(CABLE 14-50') 14 Gauge, 50' Roll	$8.98 E
559585	(CBLE 14-100') 14 Gauge, 100' Roll	$16.98 E
559590	(CBLE 14-500') 14 Gauge, 500' Roll	$77.98 E
559595	(CABLE 16-25') 16 Gauge, 25' Roll	$2.35 E
559600	(CABLE 16-50') 16 Gauge, 50' Roll	$17.98 C
559610	(CABLE16-500) 16 Gauge, 500' Roll	$74.98 E
559615	(CBLE16-1000) 16 Gauge, 1,000' Roll	$117.98 E
559620	(CABLE 18-25') 18 Gauge, 25' Roll	$2.50 E
559625	(CABLE 18-50') 18 Gauge, 50' Roll	$17.98 E
559630	(CABLE18-100') 18 Gauge, 100' Roll	$8.98 E
559635	(CBLE18-1000') 18 Gauge, 1,000' Roll	$112.98 E

Boss Marine Box Speaker



- 100 Watts (Sold as Pair).

Order No.	Mfg. No. / Description	Price
559407	(MR12) White	$84.98 E

Boss Marine Wake Tower Speaker



- Marine Wake Tower Speaker.
- 6" x 9" 4-Way.
- 550 Watts (Sold as Single).

Order No.	Mfg. No. / Description	Price
559400	(MRWT69) Black	$139.98 E

Boss Marine Wake Tower Speaker



- 6-1/2" 2-Way.
- 500 Watts.
- Sold as Single.

Order No.	Mfg. No. / Description	Price
559404	(MRWT6W) White	$210.98 F

Audiopipe Flexible Speaker Wire



Order No.	Mfg. No. / Description	Price
559520	(12-100') 12 Gauge, 100' Roll	$34.98 E

Audiopipe Tinned Copper Speaker Wire



- 100% Oxygen Free Marine Grade, Tinned Cooper, Fine Strand Speaker Wire.
- Flexible PVC Jacket Makes it ideal for Marine Speaker System Installation.
- Audiopipe Flexible PVC Tin Copper Plated OFC wire.

Order No.	Mfg. No. / Description	Price
559680	(MSC-12-25TC) 12 Gauge, 25' Roll	$24.98 F
559685	(MSC-12-250TC) 12 Gauge , 250' Roll	$249.98 F
559690	(MSC-16-25TC) 16 Gauge, 25' Roll	$12.98 F
559695	(MSC-16-500TC) 16 Gauge, 500' Roll	$224.98 F

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Boss New Splash Guard



- New universal marine splash guard with spring loaded cover.

Order No.	Mfg. No. / Description	Price
559367	(MRC10) Splash Guard	$27.98 Q

SeaWorthy Radio Covers



- Auto-opening flush mount.
- Lexan cover.
- Fits shaftless radio.
- Removable trim ring.

Order No.	Mfg. No. / Description	Price
558861	(SEARTR-5200B) Black, 9-5/8" W x 4-1/2" H	$39.98 Q
558873	(SEARTR-5200W) White, 9-5/8" W x 4-1/2" H	$39.98 Q

Boss Marine Universal Marine Radio Housing



- Radio Source Not Included.

Order No.	Mfg. No. / Description	Price
559430	(MRH7) Universal Marine Radio Housing	$65.98 R

JBL Mounting Trim



- Made specifically for the MC-19, perfect for replacing and covering an existing din style opening.
- Complete with USB and Mini plug.
- Same size as popular SEARTR-5200 radio cover.

Order No.	Mfg. No. / Description	Price
548000	(MC19ADPT-2) Mounting Trim	$35.98 Q

Boss Universal Radio Covers



Order No.	Mfg. No. / Description	Price
559370	(MRC5B) Black	$18.98 F
559418	(MRC5) White	$19.98 G

SeaWorthy Radio Covers



- Manual opening flush mount.
- Lexan cover.
- Fits shaftless radio.

Order No.	Mfg. No. / Description	Price
558835	(SEARTR-600B) Black, 9-1/8" W x 4-1/16" H	$22.98 Q

Audiopipe Radio Covers



- Keep your audio marine radio player protected from wind and surf.
- Compatible with dual shaft, DIN and removable DIN size receivers.
- Fully sealed waterproof cover.
- Poly-carbonate tinted front panel; UV-stabilized ABS plastic housing.
- Includes stainless steel, rust-proof mounting hardware.

Order No.	Mfg. No. / Description	Price
559480	(PMC-3007BK) Black	$24.98 F
559481	(PMC-3000) White	$24.98 F

SeaWorthy Under Panel Mount Radio Housing



- Universal shafted or shaftless.
- 9-15/16" W x 9-1/4" D x 3-1/2" H.
- Black.

Order No.	Mfg. No. / Description	Price
558859	(SEAHOS) Radio Housing	$16.98 Q

©2014 Donovan Marine, Inc.

Boater Sports Waterproof Pouches





- See-through, waterproof pouches for camera or phone.

Order No.	Mfg. No. / Description	Price
1-52040	(52040) 4.4" x 6.5"	$4.85 H
1-52047	(52047) 3.5" x 7.1"	$5.25 H

Audiopipe I-PMC Weatherproof Multimedia Cover



- The I-PMC weatherproof multimedia cover offers a safe docking station on your water vessel or off road vehicle.
- This cover is made to keep you at ease and know that your multimedia device is safe and will not get wet.
- The I-PMC weatherproof cover is small and compact making it very easy to install in the smallest consoles.
- Four foam pads included for different kinds of players: - Model P for Telephones - Model N for Small Players - Model C for Classic Players - Model T for Photo Type Players.

Order No.	Mfg. No. / Description	Price
559361	(I-PMC) White	$55.98 F
559368	(I-PMC) Black	$55.98 F

Dry Pak Waterproof MP3 Case



- Waterproof Earbuds Included.
- Perfect for active lifestyles.
- Designed to protect iPODs and other MP3 players from the elements.
- View and operate MP3 players through the case with ease.
- Armband, lanyard and spring clip included.
- Durable TPU construction.
- Integrated female jack RF welded at the bottom.
- For beach, pool, boating, snorkeling and more.
- Maximum circumference: 6".

Order No.	Mfg. No. / Description	Price
596915	(DP-MP31) MP3 Case	$39.98 G

Audiopipe Circuit Breaker



- Platinum plated Terminals.
- Water Resistant.
- High Heat/High Temp Resistant.
- 12 volt.
- 100 Amp Manual Reset Circuit Breaker.

Order No.	Mfg. No. / Description	Price
559511	(CB-100A) 100 Amp	$35.98 E
559513	(CB-150A) 150 Amp	$35.98 E
559517	(CB-200A) 200 Amp	$35.98 E

Audiopipe I-PMC Weatherproof Multimedia Cover



- The I-PMC weatherproof multimedia cover offers a safe docking station on your water vessel or off road vehicle.
- This cover is made to keep you at ease and know that your multimedia device is safe and will not get wet.
- The I-PMC weatherproof cover is small and compact making it very easy to install in the smallest consoles.

Order No.	Mfg. No. / Description	Price
559820	(I-PMC-T WHT) White	$44.98 F
559825	(I-PMC-T BLK) Black	$44.98 F

Dry Pak Cell Phone Cases





- Clear TPU front, blue TPU back, padded and lined.
- Adjustable neck lanyard & anodized aluminum spring hook.
- Yellow sealing clip for high visibility.
- For beach, pool, boating, snorkeling and more.
- 4" wide x 6" long.
- Maximum circumference: 7-1/4".

Order No.	Mfg. No. / Description	Price
596911	(DP-46W)	$14.99 E
5960231	(DP-46)	$15.98 I

Audiopipe 3 Position AGU Fuse Block



- Black Finish Screws.
- Accepts Three AGU Fuses.
- One 3-Way 4 Gauge Input and Three 8 Gauge Outputs.
- Inner Steps Ensure Perfect Recessed Fit of 4 and 8 Gauge Power Cable into Block.
- Water Resistant.
- Black Base Precision Machined.

Order No.	Mfg. No. / Description	Price
559378	(IP-3438) Fuse Block	$17.98 F

Audiopipe Power Distribution Block



- Distributes Positive and Negative Cable Connections.
- With Super Bright LED.
- 24 Kt. Gold Finish Screws.
- Accepts One 0 or 4 Gauge Input and Two 4 or 8 Gauge Outputs.
- Platinum Base is Precision Machined.
- Clear Blue Bottom Housing Adds Eye Candy Effect.

Order No.	Mfg. No. / Description	Price
559487	(AFC-P1414) AFC Type Fuse	$62.98 E
559488	(PDC-P1414) AGU Type Fuse	$62.98 E

Audiopipe Stereo Plugs



- Length 6'.

Order No.	Mfg. No. / Description	Price
559379	(IP-3535-6) 3.5mm to 3.5mm	$2.98 F
559382	(IP-2535-6) 3.5mm to 2.5mm	$2.98 F

Audiopipe RCA Cables



- Conveniently connects equipment such as marine head units to amplifiers or audio processors.
- UV protected white PVC jacket is flexible and makes our cables easy to route through tight spaces, twisted-pair arrangement for outstanding sound transfer and superior noise rejection.

Order No.	Mfg. No. / Description	Price
559660	(IP-2RCA-3) 3' MARINE RCA	$6.98 F
559665	(IP-2RCA-6) 6' MARINE RCA	$9.98 F
559670	(IP-2RCA-12) 12' MARINE RCA	$20.98 F
559675	(IP-2RCA-25) 25' MARINE RCA	$28.98 F

Audiopipe AM/FM Marine Antenna



- Application: AM/FM.
- Antenna in white ABS case: 32 cm(L) x 3.2cm (W).
- Coaxial Cable 75 Ohms: Length 150 cm.
- RCA male Plug: Chrome Plated Brass.

Order No.	Mfg. No. / Description	Price
559492	(APMR-300ANT) 59"	$14.98 E

Audiopipe AM/FM Marine Antenna



- Application: AM/FM.
- Frequency: 550-1600kHz, 88-108 mHz.
- Length: 40" (1016mm).
- Motorola Type Connector Attached.

Order No.	Mfg. No. / Description	Price
559499	(APMR-100ANT) 40"	$3.23 E

Audiopipe iPod Connection to RCA Cable



- Ipod connection to RCA cable with video connection adapter.
- Also includes a power and ground to charge your iPod.

Order No.	Mfg. No. / Description	Price
559490	(IRC-AV WHITE)	$8.98 E

Audiopipe 3.5mm Stereo Plug to RCA Plug



- Length 6'.

Order No.	Mfg. No. / Description	Price
559383	(IP-35-6)	$2.98 F

Audiopipe RCA Splitter



- Conveniently connects equipment such as marine head units to amplifiers or audio processors.
- UV protected white PVC Jacket is flexible and makes our cables easy to route through tight spaces, twisted-pair arrangement for outstanding sound transfer and superior noise rejection.

Order No.	Mfg. No. / Description	Price
559650	(IP-YF2M-06) Female to Male	$4.32 E
559655	(IP-YM2F-06) Male to Female	$4.32 E

Boss Marine Rubber Ducky Type Marine Antenna



Order No.	Mfg. No. / Description	Price
559412	(MRANT12W) White	$7.98 Q

Boss Dipole Hide-Way Antenna



Order No.	Mfg. No. / Description	Price
559414	(MRANT10)	$2.95 G

SeaWorthy Rubber AM/FM Antennas



- 16-1/2" with 54" cable.
- 180° swivel base.

Order No.	Mfg. No. / Description	Price
222912	(SEAURB3SW) White	$11.98 I
558900	(SEAURB3S) Black	$12.98 Q

©2014 Donovan Marine, Inc.

Shakespeare Electrical Data Chart for Antennas – All Shakespeare Antennas are Vertically Polarized

SeaWatch Marine TV Antennas

DMI #	MFG #	Frequency Range	Gain	Reception Pattern	Noise Figures (VHF/UHF)	Impedance	Downlead Conn.	Power Supply	Weight	Dimensions
606351	2020-G	50-890 mHz	20 dB (Avg.)	omnidirectional	3.2 dB	75 ohms	"F" type	12V DC/110V AC	3 lbs.	14" dia. x 2" H
606333	2030-G	50-890 mHz	20 dB (Avg.)	omnidirectional	5.6 dB	75 ohms	"F" type	12V DC/110V AC	11 lbs.	21" dia. x 1.75" H

For VHF Marine Antennas

DMI #	MFG #	Frequency	Bandwidth	SWR Nominally	Impedance	Gain	Max Input	D.C.	Termination
606648	396-1	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	3 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.
606763	399-1	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	100 watts	Yes	15' RG-58 Cable & PL-259 Conn.
606775	399-1M	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	100 watts	Yes	15' RG-58 Cable & PL-259 Conn.
606624	420	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	3 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.
606666	5206-C	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.
606665	5206-N	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.
606677	5206-BL-C	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.
606561	5240-R	VHF Marine Band	7MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	3 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.
606509	5911	VHF Marine Band	N/A	*	50 ohms	Unity	25 watts	Yes	12' RG-58 Cable & PL-259 Conn.
606701	5101	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	50 watts	Yes	15' RG-58 Cable & PL-259 Conn.

For High Performance Marine Antennas

DMI #	MFG #	Frequency	Bandwidth	SWR Nominally	Impedance	Gain	Max Input	D.C.	Termination
608779	528-VW	VHF Marine Band	8MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	4.5 dB	100 watts	No	15' RG-8/X Cable w/mini & PL-259 Conn.
608781	529-VW	VHF Marine Band	8MHz within 2.0:1 VSWR	1.2:1 at 156.8 MHz	50 ohms	6 dB	100 watts	Yes	20' RG-8/X Cable w/mini & PL-259 Conn.
607006	5225-XT	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	100 watts	Yes	20' RG-8/X Cable & PL-259 Conn.
607018	5226-XT	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	100 watts	Yes	20' RG-8/X Cable & PL-259 Conn.
607044	5230	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	8 dB	200 watts	Yes	20' RG-8/X Cable & PL-259 Conn.
606939	5400-XT	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	3 dB	50 watts	No	20' RG-8/X Cable & PL-259 Conn.

For Single Side Band Marine Antennas

DMI #	MFG #	Frequency	Bandwidth	SWR Nominally	Impedance	Gain	Max Input	D.C.	Termination
607703	390	2-30 MHz with Tuner	Resonant Freq. 10.8 MHz	N/A	N/A	N/A	1,000 watts	N/A	Side Feed Termination Band
606866	393	2-30 MHz with Tuner	Resonant Freq. 10.8 MHz	N/A	N/A	N/A	1,000 watts	N/A	Side Feed Termination Band

For Commercial VHF Marine Antennas

DMI #	MFG #	Frequency	Bandwidth	SWR Nominally	Impedance	Gain	Max Input	D.C.	Termination
606903	476	VHF Marine Band	10 MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	10 dB**	350 watts	Yes	SO-239 Connector at the Base
606838	4018	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	9 dB	50 watts	No	20' RG-58 Cable & PL-259 Conn.
606840	4018-M	VHF Marine Band	3MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	9 dB	50 watts	No	20' RG-58 Cable & PL-259 Conn.
606864	5208-R	VHF Marine Band	5MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	9 dB	50 watts	No	15' RG-58 Cable & PL-259 Conn.

For VHF Sailboat Antennas

DMI #	MFG #	Frequency	Bandwidth	SWR Nominally	Impedance	Gain	Max Input	D.C.	Termination
606555	5215	VHF Marine Band	7MHz within 2.0:1 VSWR	1.5:1 at 156.8 MHz	50 ohms	6 dB	50 watts	No	SO-239 Connector

For AIS Marine Antennas

DMI #	MFG #	Frequency	Bandwidth	SWR Nominally	Impedance	Gain	Max Input	D.C.	Termination
608793	876-SW	AIS Marine Band	6MHz within 1.5:1 VSWR	1.2:1 at 159 MHz	50 ohms	4.5 dB	100 watts	Yes	SO-239 at Base (No Cable)

* **Adequate across marine band. Precise SWR depends upon antenna location on boat.**
** **Gain (omnidirectional): 10 dB as compared to typical 1/4-wave installation; 5.5 dB as compared to EIA specification RS329.**

Shakespeare AM/FM/VHF Marine Band Separator



- Eliminate the need for separate AM/FM antenna and operate AM/FM and VHF radios at the same time without interfering with VHF radio performance.
- Includes: 10' RG-62 AM/FM cable, 3' RG-58 VHF cable and connector installed.

Order No.	Mfg. No. / Description	Price
608363	(4357-S) Separator	$87.98 Q

SeaWorthy Dipole Antenna



- 17-5/8" antenna with plug.
- 24-1/2' wire extension.
- White.

Order No.	Mfg. No. / Description	Price
558885	(SEAANT) Dipole Antenna	$5.98 Q

Marpac Premier VHF Antenna



- Sturdy fiberglass construction with a smooth white finish, the antenna is one section, 8' long with 6 db gain.
- Stainless steel ferrule fits standard 1"-14 thread bases.
- An extended brass center element provides extra durability and long life.
- PL259 connector included.

Order No.	Description	Price
7-0127	VHF Antenna	$64.98 G

Shakespeare Centennial Style 5102 VHF Antenna



- Center-fed collinear phased 5/8 wave.
- Mounting Type. Use a 744917 (4187) ratchet mount (self-supporting). Note: Mount not included.
- Length 8'.

Order No.	Mfg. No. / Description	Price
606713	(5102) VHF Antenna	$115.98 Q

Marpac VHF Antenna



- Economical and lightweight white fiberglass.
- One 8' section.
- 6 db gain.
- End fed.
- Chrome plated brass ferrule.
- PL259 connector included.

Order No.	Description	Price
7-0126	VHF Antenna	$49.98 G

5911 Stowaway™ Emergency VHF Flex Antenna



- Loaded 1/4 wave.
- Comes packed in a 12" weather resistant, plastic tube with velcro strips for stowing away.
- Includes: 12' RG-58 VHF cable, a PL-259 connector and rubber suction cup for fast, easy mounting to any smooth horizontal surface.
- Overall length 10".
- One section.

Order No.	Mfg. No. / Description	Price
606509	(5911) Emergency Antenna	$72.98 Q

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Shakespeare 4350 AM/FM Antenna



- 3' AM/FM stereo antenna.
- White fiberglass with permanently sealed coil.
- A polycarbonate lift and lay mount with stainless steel hardware is included.
- Overall length 39".
- One section which lays down to 4".
- Frequency: (AM) 550-1, 600 KHz, (FM) 88-108 MHz.
- Impedance: 93 ohms.
- Polarization: Vertical.
- Includes: 15' RG-62 AM/FM cable and Motorola type plug.

Order No.	Mfg. No. / Description	Price
607956	(4350) AM/FM Antenna	$89.98 Q

Metz Manta-6 VHF Marine Antenna





- Stainless steel 17-7ph whip, housing and mounting bracket.
- Nickel plated brass whip post.
- UV resistant cap.
- SWR less than 1.2:1.
- Power output up to 250 watts.
- Frequency range 156-163 MHz.
- Overall length 34".
- No ground plane needed.
- Includes: SO-239 connector and stainless steel bracket.

Order No.	Mfg. No. / Description	Price
479027	(206) Antenna	$78.98 M
478758	(309) Antenna with Magnetic Mount, 5" Diameter Base	$99.98 G

Shakespeare Style 5206 VHF Sailboat Antennas



- Overall length: 8'.
- One section.
- Twin to 5205 CB Marine Antenna.
- End-fed with matching stub.
- An economical and lightweight, self-supporting antenna.
- White Shakespeare Fiberglass with brass and copper elements.
- Mounting Type. Use a 744917 (4187) ratchet mount or 608460 (410-R) mounting kit and a 608250 (4008-4) 4' extension to form 12' antenna or a 608262 (4008) 8' extension to form 16' antenna (not self-supporting). Note: Mounts and supports not included.

Order No.	Mfg. No. / Description	Price
606665	(5206-N) White with Nylon Base	$50.98 Q
606666	(5206-C) White with Chrome Plated Brass Base	$53.98 Q
606677	(5206-BL-C) Black with Chrome Plated Brass Base	$61.98 Q

Shakespeare Centennial Style 5120 AM/FM Antenna



- 8' AM/FM stereo antenna.
- Chrome plated brass ferrule with standard 1"-14 thread.
- One section.
- Suggested mount: Style 366-H or 366-BH Ratchet mount.
- Frequency: 550-1600 KHz, 88-108 MHz.
- Impedance: 93 ohms.
- Polarization: Vertical.
- Radiation pattern: Omnidirectional.
- Includes: 15' RG-62 AM/FM cable and Motorola type plug.

Order No.	Mfg. No. / Description	Price
606737	(5120) AM/FM Antenna	$82.98 Q


Shakespeare Style 420 Skipper™ VHF Antenna



- Center-fed 1/2 wave coaxial sleeve antenna.
- The antenna has an integral polycarbonate Lift 'n Lay mount for deck mounting and comes with a leveling plate and installation hardware.
- White Shakespeare Fiberglass with brass and copper elements.
- Polycarbonate ferrule and mount.
- Includes: 15' RG-58 cable and a PL-259 connector.
- Overall length: 5'.
- One section, lays down 4".

Order No.	Mfg. No. / Description	Price
606624	(420) VHF Antenna	$133.98 Q

Shakespeare Centennial Style 5101 VHF Antenna



- End-fed with matching stub.
- White Shakespeare Fiberglass with brass and copper elements.
- Chrome plated brass ferrule with 1"-14 threads.
- Overall length: 8'.
- One section.
- Mounting Type. Use a 744917 (4187) ratchet mount or 608460 (410-R) mounting kit and a 608250 (4008-4) 4' extension to form 12' antenna or a 608262 (4008) 8' extension to form 16' antenna (not self-supporting). Note: Mounts and supports not included.

Order No.	Mfg. No. / Description	Price
606701	(5101)	$61.98 Q
606705	(5101-B) 25 Pack	$1,424.98 Q

Shakespeare Galaxy Style Sirius Satellite Radio Antenna



- 3.5" diameter by 1.35" high.
- No separate power cable required.
- Single cable design for newer receivers.
- Style SRS-1 Adapter available for older, dual input, Sirius receivers.
- Attaches to surface up to 1" thick via a 9/16" diameter threaded shaft, or use the included SM-31 Pedestal Mounting Kit.
- Receiver and Sirius Satellite Radio service subscription required.

Order No.	Mfg. No. / Description	Price
606353	(SRA-40) Satellite Antenna	$108.98 Q

Style 5215 Squatty Body® VHF Sailboat Antenna



- End-fed 1/2 wave stainless steel whip.
- Sealed, tin-plated copper wire coil.
- SO-239 connector.
- Stainless steel L-shaped bracket supplied mounting.
- Not supplied with cable or connector.
- Overall length: 36".
- One section.

Order No.	Mfg. No. / Description	Price
606555	(5215) Sailboat Antenna	$77.98 Q

Shakespeare 5230 Galaxy Series VHF Antenna



- 5/8 wave over 1/2 wave dipole.
- Includes: 20' RG-8/X cable and a PL-259 connector.
- Galaxy white finish with brass and copper elements.
- Stainless steel ferrule with 1"-14 threads.
- Overall length: 14'.
- Two sections: Base 94", Tip 74".
- Mounting Type: Use 608460 (410-R) mounting kit. Not included.

Order No.	Mfg. No. / Description	Price
607044	(5230) Galaxy VHF Antenna	$401.98 F

©2014 Donovan Marine, Inc.

Style 5244 High Quality 36" VHF Antenna



- Low profile, end-fed 1/2 wave.
- Stainless steel whip.
- 3dB gain.
- The perfect choice for center console fishing boats or any vessel where compact size is most important.
- Includes: 15' RG-58 VHF cable and a PL-259 connector.
- Overall length: 36".
- One section.

Order No.	Mfg. No. / Description	Price
606573	(5244) VHF Antenna	$48.98 Q

Style 5240-R Low Profile VHF Antenna



- Low profile end-fed 1/2 wave stainless steel whip.
- Sealed, tin-plated copper wire coil.
- Chrome plated brass ferrule with 1"-14 threads.
- A ratchet mount or rail mount with a center hole is required for passage of the supplied 15' coax cable which exits from the bottom center of the ferrule.
- Recommended mounts are: 744917 (4187) ratchet mount, (4190) rail mount. Note: Mounts not included.
- Overall length: 36". One section.

Order No.	Mfg. No. / Description	Price
606561	(5240-R) Low Profile Antenna	$83.98 Q


Shakespeare Style 399-1M VHF Marine Antenna



- Same as 606763 (399-1), the 399-1M has a special aluminum sleeve for mast mounting.
- An SO-239 connector at the base and 1-1/4" U-bolts are supplied.
- The 399-1M can be strapped to a larger mast using steel banding.

Order No.	Mfg. No. / Description	Price
606775	(399-1M) VHF Antenna	$257.98 Q


Shakespeare Style 396-1 VHF Marine Antenna



- Center-fed 1/2 wave coaxial sleeve.
- Outstanding, basic 3 dB antenna designed to reduce signal fading in rough seas.
- White Shakespeare Fiberglass with brass and copper elements.
- Chrome plated brass ferrule with 1"-14 threads.
- Overall length: 5'.
- One section.
- Mounting Type. Use a 744917 (4187) ratchet mount (self-supporting). Note: Mount not included.

Order No.	Mfg. No. / Description	Price
606648	(396-1) VHF Antenna	$142.98 Q

Shakespeare Style 399-1 VHF Marine Antenna



- Collinear phased 5/8-wave with two coaxial chokes to suppress cable radiation.
- White Shakespeare Fiberglass with brass and copper elements.
- Chrome plated brass ferrule with 1"-14 threads.
- Overall length: 9.5'.
- Two sections: Base 75", Tip 39".
- Mounting Type. Use a 608460 (410-R) mounting kit for deck or side mounting. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
606763	(399-1) VHF Antenna	$247.98 Q

Shakespeare 5400-XT Little Giant™ VHF Antenna



- Center-fed 1/2 wave coaxial sleeve.
- It's at home on T-tops, Hard-tops and other positions aloft, where its small size can deliver maximum range.
- Includes: 20' RG-8/X cable and a PL-259 connector.
- Galaxy white finish with brass and copper elements.
- Stainless steel ferrule with 1"-14 threads.
- Overall length: 4'.
- One section.
- Mounting Type: Use a 744917 (4187) ratchet mount. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
606939	(5400-XT) Little Giant Antenna	$154.98 F

Shakespeare Style 476 Commercial VHF Marine Antenna



- Phased 1/2-wave elements in a collinear array with a broadband matching section, and a coaxial choking sleeve.
- For heavy duty seagoing applications, such as workboats, tugs, tidal well service boats, etc.
- Excellent choice for land-based stations.
- Tapered Shakespeare Fiberglass with brass and copper internal elements.
- Overall length: 21'.
- One section.
- Mounting Type. 2-3/4" diameter x 26" long aluminum sleeve may be strapped directly to a mast or used with 608553 (483) clamp set mounting brackets. Note: Mounts not included.

Order No.	Mfg. No. / Description	Price
606903	(476) Commercial VHF Antenna	$772.98 E



- For Shakespeare 606903 (476) Commercial VHF Marine Antenna.
- Galvanized metal construction.

Order No.	Mfg. No. / Description	Price
608553	(483) Mast Clamp Kit	$154.98 Q

Shakespeare Style 5208-R Ocean Twin Commercial VHF Marine Antenna



- Phased 1/2-wave elements in a collinear array with choking stub to suppress cable radiation and a band spread matching sleeve.
- White Shakespeare Fiberglass with brass and copper elements.
- Chrome plated brass ferrule with 1"-14 threads.
- Overall length: 23'.
- Two sections: Base 162", Tip 114".
- Mounting Type. Use 608460 (410-R) mounting kit for deck or side mounting. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
606864	(5208-R) Twin Commercial VHF	$411.98 F

Shakespeare Style 4018-M Commercial VHF Marine Antenna



- Same as 606838 (4018), the 4018-M has an aluminum sleeve for attaching to a mast.
- An SO-239 connector at the base and 1-3/4" U-bolts are supplied.
- The 4018-M can be strapped to a larger mast using steel banding.
- It is used primarily for land-based stations and on commercial vessels.

Order No.	Mfg. No. / Description	Price
606840	(4018-M) Commercial VHF Antenna	$391.98 E

Shakespeare Style 4018 Commercial VHF Marine Antenna



- Phased 1/2-wave elements in a collinear array with a coaxial choking sleeve to suppress cable radiation.
- This long-distance VHF antenna is rigid enough to stay erect in rough seas, yet exceptionally lightweight.
- White Shakespeare Fiberglass with brass and copper elements.
- Chrome plated brass ferrule.
- Overall length: 19'.
- Two sections: Base 162", Tip 66".
- Mounting Type. Use 608460 (410-R) mounting kit for deck or side mounting. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
606838	(4018) Commercial VHF Antenna	$354.98 E

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Shakespeare 5225-XT and 5226-XT Galaxy Series VHF Antennas



- Collinear-phased 5/8 wave elements.
- It's extra tough for use on Hard-tops, T-tops, radar arches or wherever its extra resistance to high winds and high speeds is welcome.
- Includes: 20' RG-8/X cable and a PL-259 connector.
- Brass and copper elements.
- Stainless steel ferrule with 1"-14 threads.
- Overall length: 8'.
- One section.
- Mounting Type: Use a 744917 (4187) ratchet mount. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
607006	(5225-XT) Galaxy White	$175.98 E
607018	(5226-XT) Galaxy Black	$185.98 E

Shakespeare Galaxy Style 5410-XT Dual Band Cellular Antenna



- 800/900 MHz and 1900 MHz Cellular.
- This antenna covers digital, analog and PCS cell phone bands.
- Electrical connections are hand soldered for reliability.
- Use one of Shakespeare's CPA Series adapters to connect your portable cell phone.
- Solid performance packed into an extra heavy duty radome.
- Brass and copper elements.
- Stainless steel ferrule with 1"-14 threads.
- Overall length: 4'.
- One section.
- Includes 25ft of Shakespeare's exclusive Lo-Max cable and a TNC connector.
- Mounting Type. Use a 744917 (4187) ratchet mount (self-supporting). Note: Mount not included.

Order No.	Mfg. No. / Description	Price
607899	(5410-XT) Cellular Antenna	$198.98 F

Shakespeare Style 393 Single Side Band Antenna



- Whip antenna with conductors running full length (no loading coil).
- This antenna is electrically the same as the industry standard Style 390, but it's designed in three sections.
- For use in calm to moderate seas.
- White Shakespeare Fiberglass with permanently sealed conductors.
- Chrome plated brass ferrule with 1"-14 threads.
- Side feed termination band.
- Power input up to 1 kw.
- Overall length: 23'.
- Three sections: Base 92", Center 92", Tip 92".
- Mounting Type. Use 608460 (410-R) mounting kit for deck or side mounting. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
606866	(393) Single Side Band Antenna	$298.98 F

Digital Antenna Cell Phone Adapter Cable



- Universal inductive coupler adapter.
- This adapter allows any cell phone or aircard to be used with a PowerMax amplifier.
- 3' length.

Order No.	Mfg. No. / Description	Price
608812	(DA97U) Cell Phone Adapter Cable	$18.98 E

Shakespeare Style 390 Single Side Band Antenna




- Whip antenna with conductors running full length (no loading coil).
- White Shakespeare Fiberglass with permanently sealed conductors.
- Chrome plated brass ferrule with 1"-14 threads.
- Side feed termination band.
- Power input up to 1 kw.
- Overall length: 23'.
- Two sections: Base 162", Tip 112".
- Mounting Type. Use 608460 (410-R) mounting kit for deck or side mounting. Note: Mount not included.

Order No.	Mfg. No. / Description	Price
607703	(390) Single Side Band Antenna	$211.98 F

Shakespeare SeaWatch® Marine TV Antennas


606333


606351

- System includes: Antenna with built-in preamp, AC/DC power supply, 30' of ultra low loss RG-59 coax cable, and gold-plated, screw-on F-type connectors.
- Built-in 1"-14 thread ferrule.
- Omnidirectional antennas capture VHF, UHF, and FM point of the compass without aiming the antenna.
- 110vAC or 12/24 DC power.
- Digital HDTV ready.

Order No.	Mfg. No. / Description	Price
606351	(2020-G) Diameter 14"	$212.98 Q
606333	(2030-G) Diameter 21"	$220.98 Q

©2014 Donovan Marine, Inc.

Shakespeare Extension Mast



- 1" diameter extension mast for light to moderate duty applications.
- White molded polycarbonate male upper and female lower 1"-14 threads.
- Excellent for Marine TV antennas.
- Length 1'.

Order No.	Mfg. No. / Description	Price
607981	(4364) Extension Mast	$33.98 Q

Shakespeare Ratchet Mount



- Stainless steel.
- Quick-action handle makes operation easy.
- Versatile 4-way ratchet design for deck or side mounting.
- Bolt holes: 5/16" diameter, 3" x 1-1/2" on center.
- Special cable slot eliminates removal of most factory-installed connectors.
- Standard 1"-14 male thread.

Order No.	Mfg. No. / Description	Price
744917	(4187) Ratchet Mount	$64.98 Q

Shakespeare Lift-n-Lay Mount



- White polycarbonate.
- Handles antennas up to 8'.
- Enables antenna to Lift-n-Lay with positive snap action.
- Levelling plate provided for mounting to a sloping deck.
- Has 3/8" - 24 thread brass insert.
- Standard 1"-14 male thread.

Order No.	Mfg. No. / Description	Price
608286	(495-B) Lift-n-Lay Mount	$33.98 Q

Shakespeare Upper Bracket



- Insulated stand-off bracket of white molded plastic.
- Corrosion resistant.
- Easy-open for quick laydown.
- For use with 608349 (81-S) swivel mount and antennas of 1", 1-1/8" and 1-1/2" diameter.

Order No.	Mfg. No. / Description	Price
608438	(408-R) Upper Bracket	$23.98 Q

Shakespeare Heavy Duty Extension Masts



- A sturdy, lightweight 1-1/2" diameter extension mast.
- Chrome plated brass ferrules, male upper and female lower 1"-14 threads.
- Use 608460 (410-R) mounting kit.

Order No.	Mfg. No. / Description	Price
608250	(4008-4) Length 4'	$129.98 Q
608262	(4008) Length 8'	$152.98 Q

Shakespeare Ratchet Mount



- Solid nylon.
- 4-way ratchet design with handle for deck or side mounting.
- Not for use with antennas longer than 8' in self-supporting mode.
- Bolt holes: 5/16" diameter, 3" x 1-1/2" on center.
- Standard 1"-14 male thread.

Order No.	Mfg. No. / Description	Price
608301	(4186BP) Ratchet Mount	$10.98 Q

Shakespeare Swivel Mount



- Stainless steel.
- For deck or side mounting when used with an upper support bracket.
- Base is dual joint, free-pivoting, and allows easy lowering of antenna for clearing overhead obstructions.
- Standard 1"-14 male thread.

Order No.	Mfg. No. / Description	Price
608349	(81-S) Swivel Mount	$76.98 Q

Shakespeare Mounting Kit



- Combines 608349 (81-S) swivel mount with 608438 (408-R) upper bracket.
- The bracket features an insert to accept 1", 1-1/8" and 1-1/2" diameter antennas or extension masts.

Order No.	Mfg. No. / Description	Price
608460	(410-R) Mounting Kit	$102.98 Q

Shakespeare Power Supply



- Replacement part for the 606351 (2020-G) or the 606333 (2030-G) Antenna Systems.

Order No.	Mfg. No. / Description	Price
608503	(PS-9381) Power Supply	$68.98 Q

Marpac Ratchet Mount



- Nylon.
- 4-way ratchet with handle for deck or bulkhead mounting.
- Direct feed-thru hole for coax cable.
- Standard 1"-14 male threads.

Order No.	Description	Price
7-0435	Ratchet Mount	$10.98 G

Boater Sports Surface Mount Ratchet



- Locking handle.
- Loran or GPS.
- 1" x 14 thread.

Order No.	Mfg. No. / Description	Price
1-52253	(52253)	$14.69 H

Marpac Ratchet Rail Mounts





- Can be mounted on any standard 1" or 7/8" railing.
- Direct feed-thru hole for coax cable.
- Standard 1"-14 male threads.

Order No.	Description	Price
7-1329	Nylon	$14.98 G
7-1330	Stainless Steel	$47.98 G

Shakespeare Straight Mount



- 4" high, stainless steel mount.
- Standard 1"-14 male thread.
- Perfect for radar arches.
- May be used with 607981 (4364) extension mast.

Order No.	Mfg. No. / Description	Price
607993	(4365) Straight Mount	$32.98 Q

Sea Dog Fixed Mount Antenna Base



- Injection molded nylon.
- Will accept any standard antenna with 1"-14 male threads.
- Base width: 2-13/16".

Order No.	Mfg. No. / Description	Price
205642	(329500-1) Antenna Base	$4.98 Q

Shakespeare Centerpin® Connectors


606244


606232

- Gold-Plated.
- The perfect solution to the troublesome task of installing a PL-259 connector or splicing RG-58 A/U or RG-8/X coax cables.
- Solderless, fret-less and botchless.
- No measuring, no critical stripping of coax insulation, no fussing with the coax's braid and no "tinning".

Order No.	Mfg. No. / Description	Price
606232	(PL-258-CP-G)	$18.98 Q
606244	(PL-259-CP-G)	$15.98 Q

Marpac Pre-Spliced Antenna Extension Cable - RG-58U



- Includes: PL-259 coax connectors on each end.

Order No.	Description	Price
7-0141	Length 20'	$24.98 G
7-0142	Length 100'	$45.98 G

Newmar CS-201 Coax Switch



- Unused terminal is grounded.
- Die cast aluminum case.
- Two position switch allows manual selection of one or two antennas with a single radio or one of two radios with a single antenna.
- Impedance: 50 ohm.
- Power: 1.5 kW peak, 1 kW continuous.

Order No.	Mfg. No. / Description	Price
699800	(CS-201) Coax Switch	$89.98 D

Newmar Copper Straps and Screen



Order No.	Mfg. No. / Description	Price
699911	(GS-2-25) 2" Width x 25' Length	$71.98 E
698914	(GS-2-50) 2" Width x 50' Length	$170.98 E
697917	(GS-2-100) 2" Width x 100' Length	$341.98 E
696920	(GS-4-100) 4" Width x 100' Length	$586.98 E
700599	(SCREEN-25) 4' Width x 25' Length, Copper Screen	$586.98 E

Newmar Ground Shoes



- Improves performance of Loran C receivers, SSB radios and hull bonding systems.
- Provide an excellent noise-free ground by making direct contact with the water.
- Porous copper construction magnifies contact area with the water.
- Large surface contact area in compact size.
- All shoes are 1/2" thick.
- Silicone bronze bolts are provided for easy installation and wiring.

Order No.	Mfg. No. / Description	Price
227606	(8A) Dim.: 8" x 2", Ground Area Equivalent: 20 sq. ft.	$153.98 D
227610	(18E) Ground Shoe	$660.98 D
227618	(12C) Dim.: 12" x 3", Ground Area Equivalent: 40 sq. ft.	$183.98 D

Newmar Noise Filters



- Controls residual noise in electrical systems, eliminates noise in depth sounders, stereos and radio receivers.
- Heavy duty aluminum construction.
- Operate on 6-48 VDC systems.
- Integral mounting flanges for secure installation.
- Brass stud connectors on alternator filters accommodate high current cables and terminals.
- Installation location: In the alternator output lead.

Order No.	Mfg. No. / Description	Price
699896	(150-A) 150 amp	$203.98 D

- Installation location: In the + and - power leads close to affected equipment.

Order No.	Mfg. No. / Description	Price
699415	(PC-10) 10 amp	$76.98 D
699899	(PC-25) 25 amp	$115.98 D

Coax Cable Adapter



- For R-1427, RG-59 and RG-8X Cables.

Order No.	Mfg. No. / Description	Price
420033	(UG-176)	$2.86 I

PL-258 Double Female Barrel Connector



- This connector is used to join (2) PL-259 coax connectors.

Order No.	Description	Price
7-0137	Barrel Connector	$5.98 G

PL-259 Coax Connector with Coax Cable Adapters



- Includes: UG175 and UG176 adapters.

Order No.	Description	Price
7-0130	Coax Cable Adapter	$6.98 G

©2014 Donovan Marine, Inc.

Humminbird Model 1199ci SI Fishfinder and GPS Combo



- Internal GPS.
- New higher speed processor.
- All models can receive SI and 360 imaging via ethernet.
- Updated cosmetics & cursor key.
- I-pilot link compatibility.
- Warranty: 1 Year.
- Made in the USA.
- Dimensions: 11" H x 15.1" W x 29.1" D, 8.5 lbs.

Order No.	Mfg. No. / Description	Price
404080	(409230-1)	$2,800.98 C

Humminbird 1158c Combo FISH/GPS



- 10.4" Display 600V x 800H, 4:3 Color Dual Beam PLUS w/ Switch Fire.
- 200kHz / 20 @ -10db83kHz / 60 @ -10db.
- Depth: 1500 ft (3000 ft) 8000 W (PTP), 1000 W (RMS).
- Precision GPS Humminbird Contour XD Dual SD Card Slots/Upgradeable Software.

Order No.	Mfg. No. / Description	Price
404007	(407980-1) 1158c Combo Fish/GPS	$2,028.98 C

Humminbird Model 998c SI Combo Fishing System



- Display: 8.0" Diagonal, 480V x 800H, 16:9 Color TFT.
- Sonar: HD Side Imaging & Down Imaging; DualBeam PLUS; 180° total coverage. Depth: 150 ft (SI/DI), 1,500 ft, 3,000 ft.
- Power: 8,000 W (PTP), 1,000 W (RMS).
- GPS features: 50 Channel GPS; Trackplotting; Chartplotting; GPS Speed; Humminbird ContourXD.
- Dual SD Card Slots/Upgradeable Software.
- Water Temperature and GPS Speed included.
- With Transom Mount Transducer.

Order No.	Mfg. No. / Description	Price
403356	(407760-1) 998c SI Combo Fishing System	$1,499.98 C
402891	(XHS 9 HDSI 180 T) Transom Mount Transducer	$269.98 E

Humminbird Model 1198c SI HD Combo Fishing System



- Display: HD 10.4" Diagonal, 600V x 800H, 4:3 Color.
- Sonar: HD Side Imaging & Down Imaging, DualBeam PLUS with SwitchFire; 180° total coverage. Depth: 150 ft (SI/DI), 1,500 ft, 3,000 ft.
- Power: 8,000 W (PTP), 1,000 W (RMS).
- GPS features: 50 Channel GPS; Humminbird ContourXD.
- Dual SD Card Slots/Upgradeable Software.

Order No.	Mfg. No. / Description	Price
404006	(407990-1) 1198c SI HD Combo Fishing System	$2,955.98 C

Humminbird 1158c DI Combo FISH/GPS



- 10.4" Display 600V x 800H, 4:3 Color Dual Beam PLUS w/ Switch Fire.
- 200kHz / 25 @ -10db455kHz / 16 @ -10db.
- HD Down Imaging 455kHz / 75 @ -10db800kHz / 45 @ -10db.
- Depth: 250 ft (DI), 600 ft 4000 W (PTP), 500 W (RMS).
- Precision GPS Humminbird Contour XD Dual SD Card Slots/Upgradeable Software.

Order No.	Mfg. No. / Description	Price
404008	(408260-1) 1158c DI Combo Fish/GPS	$2,111.98 D

Humminbird 998c HD SI Combo



- Display Size: 8.0" diagonal.
- Display Pixel Matrix: 480V x 800H.
- Display Type: 16:9 Color TFT.
- Display Colors/Grayscale: 65,000 Colors.
- DualBeam PLUS Sonar Coverage: 200 kHz / 20 @ -10db, 83 kHz / 60 @ -10db.
- HD Side Imaging & Down Imaging Sonar Coverage: 455 kHz / (2) 86 @ -10db, 800 kHz / (2) 55 @ -10db.
- Sonar Optional: QuadraBeam PLUS.
- Target Separation: 2.5 inches.
- Power Output (RMS): 1000 Watts (RMS).
- Power Output (Peak to Peak):8000 Watts (Peak-to-Peak).
- Temperature: Included.
- Speed: GPS Speed Included.

Order No.	Mfg. No. / Description	Price
403360	(408720-1) 998c HD SI Combo	$2,111.98 D

Humminbird Model 959ci HD SI Combo



- HD 8-inch display: 480V x 800H, 16:9 Color.
- DualBeam PLUS w/SwitchFire, HD Side Imaging & HD Down Imaging.
- Sonar coverage: 20°, 60° and 180° @ -10dB.
- Sonar frequencies: 83/200/455/800kHz.
- Depth: 1,50' (SI), 1,50 8,000W (PTP), 1,000W (RMS).
- Internal GPS Receiver 10H GPS Speed Included.
- Dual SD Card Slots.
- Upgradable Software.
- Ethernet Networking.
- 360° Imaging.
- Comes standard with XHT-9-HDSI-180-T transducer.
- Options: Navionics Gold/HotMaps; 360° Imaging; QuadraBeam Plus; 5-Port Expansion Module Minn Kota i-Pilot Link; Radar; NMEA 2000 and AIS compatibility.
- Side Imaging Transom Mount Transducer 409190-1.

Order No.	Mfg. No. / Description	Price
404070	(409180-1)	$1,299.98 C

Humminbird 958c HD Combo Fish/GPS



- Display: 8.0" diagonal, 480V x 800H, 16:9 Color TFT.
- Cartography: Navionics Compatible, LakeMaster Compatible.
- Memory: Waypoints: 2,750, Routes: 45, Tracks: 50 w/20,000 points each.
- Sonar: DualBeam PLUS 200 kHz / 20 @ -10db, 83 kHz / 60 @ -10db.
- Depth: 1500 ft. (3000 ft with optional 200/50 kHz transducer for deepwater use).
- Power Output: 1000 Watts (RMS), 8000 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird Contour XD, Navionics Compatability, LakeMaster Comptability.
- Network Modules: WeatherSense (optional), CannonLink (optional), InterLink (optional).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
404003	(408690-1) 958c HD Combo Fish/GPS	$1,299.98 C

Humminbird Model 899ci HD SI Combo



- HD 7-inch display: 480V x 800H, 16:9 Color TFT display.
- Includes HD Side Imaging, HD Down Imaging and DualBeam PLUS.
- Sonar coverage: 20°, 60° & 180° @ -10dB.
- Sonar frequencies of 200/83/455/800 kHz.
- 2.5" target separation.
- Depth: 150' (SI) & 1,500'. 8,000W (PTP), 1,000W (RMS).
- Selective Fish ID+.
- Internal GPS Receiver 10Hz GPS Speed Included.
- Dual SD Card Slots.
- Upgradable Software.
- Ethernet Networking.
- Comes standard with XHS-9-HDSI-180-T transducer.
- Options: Navionics Gold/HotMaps; 360 Imaging; QuadraBeam Plus; 5-Port Expansion Module. Minn Kota i-Pilot Link; Radar; NMEA 2000; and AIS.
- Side Imaging Transom Mount Transducer 409150-1.

Order No.	Mfg. No. / Description	Price
404062	(409150-1)	$1,499.98 C

Humminbird 898c HD SI Combo



- Display: 7.0" diagonal, 480V x 800H, Color TFT.
- Memory: Waypoints: 2,750, Routes: 45, Tracks: 50 w/ 20,000 points each.
- Sonar: DualBeam PLUS, 200 kHz / 20 @ -10db, 83 kHz / 60 @ -10db, Depth: 1500 ft.
- Side Imaging & Down Imaging: 455 kHz / (2) 86 @ -10db, 800 kHz / (2) 55 @ -10db, Depth: 150 ft. , 180 total coverage.
- Power Output: 1,000 Watts (RMS), 8,000 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird Contour XD, Navionics Compatability, LakeMaster Comptability.
- Network Modules: 360 Imaging (optional), WeatherSense (optional), CannonLink (optional), InterLink (optional).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
403399	(408890-1) 898c HD SI Combo	$1,583.98 D

Humminbird Model 898c SI Combo Fishing System



- Display: 7.0" Diagonal, 480V x 800H, 16:9 Color TFT.
- Sonar: Side Imaging & Down Imaging; DualBeam PLUS; 180° total coverage. Depth: 150 ft (SI/DI), 1,500 ft.
- Power: 8,000 W (PTP), 1,000 W (RMS).
- GPS features: 50 Channel GPS; Trackplotting; Chartplotting; GPS Speed; Humminbird ContourXD.
- Dual SD Card Slots/Upgradeable Software.
- Water Temperature and GPS Speed included.

Order No.	Mfg. No. / Description	Price
403399D	(407820-1) 898C SI Combo Fishing System	$1,804.98 F
402891	(XHS 9 HDSI 180 T) Transom Mount Transducer	$269.98 E

©2014 Donovan Marine, Inc.

Humminbird Model 859ci HD Combo - Dual Beam



- HD 7-inch display: 480V x 800H, 16:9 Color TFT display.
- Includes DualBeam PLUS.
- Sonar coverage: 20° and 60° @ -10dB.
- Sonar frequencies of 200/83/455 kHz.
- 2.5" target separation.
- Depth: 1,500' and 3,000' (3000 feet w/ optional 50 kHz deep water transducer). 8,000W (PTP), 500W (RMS).
- Selective Fish ID+.
- Internal GPS Receiver 10Hz.
- GPS Speed Included.
- Dual SD Card Slots.
- Upgradable Software.
- Ethernet Networking.
- Comes standard with XNT-9-20-T transducer.
- Options: Navionics Gold/HotMaps; 5-Port Expansion Module; Minn Kota i-Pilot Link; Radar; NMEA. 2000; and AIS.
- Dual Beam Transom Mount Transducer 409120-1.

Order No.	Mfg. No. / Description	Price
404054	(409120-1)	$635.98 C

Humminbird Model 858c Combo Fishing System



- Display: 7.0" Diagonal, 480V x 800H, 16:9 Color TFT.
- Sonar: DualBeam PLUS; Depth: 1,500 ft, 2,000 ft.
- Power: 4,000 W (PTP), 500 W (RMS).
- GPS features: 50 Channel GPS; Trackplotting; Chartplotting; GPS Speed; Humminbird ContourXD.
- Water Temperature and GPS Speed included.
- With Transom Mount Transducer.

Order No.	Mfg. No. / Description	Price
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
403398D	(407810-1) 858c Combo Fishing System	$1,203.98 F
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402711	(XNT 9 QB 90) Transom Mount Transducer	$109.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model 858c DI Combo



- 7" Display 480V x 800H, 16:9 Color HD.
- Down Imaging 455 kHz / 75 @ -10db 800 kHz / 45 @ -10db.
- Depth: 250 ft (DI), 600 ft 4000 W (PTP), 500 W (RMS).
- Precision GPS Humminbird Contour XD Dual SD Card Slots.
- Upgradeable Software.

Order No.	Mfg. No. / Description	Price
404001	(409000-1)	$1,002.98 D

Humminbird Model 859ci HD DI Combo



- HD 7-inch display: 480V x 800H, 16:9 Color TFT display.
- Includes Down Imaging and DualBeam PLUS.
- Sonar coverage: 16°, 28°, 45°, & 75° @ -10dB.
- Sonar frequencies of 455/800/200/455 kHz.
- 2.5" target separation.
- Depth: 250' & 600'. 4,000W (PTP), 500W (RMS).
- Selective Fish ID+.
- Internal GPS Receiver 10Hz.
- GPS Speed Included.
- Dual SD Card Slots.
- Upgradable Software.
- Ethernet Networking.
- Comes standard with XNT-9-DI-T transducer.
- Options: Navionics Gold/HotMaps; 5-Port Expansion Module; Minn Kota i-Pilot Link; Radar; NMEA 2000; and AIS.
- Down Imaging Transom Mount Transducer 409140-1.

Order No.	Mfg. No. / Description	Price
404058	(409140-1)	$949.98 C

Humminbird 858c HD Combo Fishing System



- Display: 7.0" diagonal, 480V x 800H, 16:9 Color TFT.
- Memory: Waypoints: 2,750, Routes: 45, Tracks: 50 w/20,000 points each.
- Sonar: DualBeam PLUS w/SwitchFire, 200 kHz / 20 @ -10db, 83 kHz / 60 @ -10db.
- Depth: 1500 ft. (2000 ft with optional 200/50 kHz transducer for deepwater use).
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird Contour XD, Navionics Compatability, LakeMaster Compatability.
- Network Modules: WeatherSense (optional), CannonLink (optional), InterLink (optional).

Order No.	Mfg. No. / Description	Price
403398	(409010-1) 858c HD Combo Fishing System	$899.98 S

Humminbird 788ci HD DI Combo



- 5" Display 640V x 640H, 256 Color.
- Down Imaging 455 kHz / 75 @ -10db 800 kHz / 45 @ -10db.
- Dual Beam PLUS w/SwitchFire 200 kHz / 25 @ -10db 455 kHz / 16 @ -10db.
- Depth: 250ft (DI) / 600 ft 4000 W (PTP), 500 W (RMS).
- Precision GPS Humminbird Contour XD Dual SD Card Slots /Upgradeable Software.

Order No.	Mfg. No. / Description	Price
403352	(408130-1) 788ci HD DI Combo	$844.98 D
402589	(407950-1CHO) 788ci HD without Transducer	$686.98 D

Humminbird Model 798ci SI HD Combo Fishing System



- Display: HD 5" Diagonal, 640V x 640H, 256 Color TFT.
- Sonar: Side Imaging & Down Imaging; DualBeam PLUS; 180° total coverage. Depth: 150 ft (SI/DI), 1,500 ft.
- Power: 4,000 W (PTP), 500 W (RMS).
- GPS features: 50 Channel GPS; Trackplotting; Chartplotting; GPS Speed; Humminbird UniMap.
- Dual SD Card Slots/Upgradeable Software.
- Water Temperature and GPS Speed included.
- Internal GPS Combo.

Order No.	Mfg. No. / Description	Price
404004	(407970-1) 798ci SI HD Combo Fishing System	$1,108.98 D
402891	(XHS 9 HDSI 180 T) Transom Mount Transducer	$269.98 E

Humminbird Model 778c HD Fishfinder - Sonar Only



- Display: HD 5" Diagonal, 640V x 640H, 256 Color TFT.
- Sonar: DualBeam PLUS with SwitchFire. Depth: 1,500 ft.
- Power: 4,000 W (PTP), 500 W (RMS).
- GPS - capable: 50 Channel GPS; Trackplotting.
- Water Temperature included.

Order No.	Mfg. No. / Description	Price
404000	(407930-1) 778c HD Fishfinder	$580.98 D
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402711	(XT 9 QB 90) Transom Mount Transducer	$109.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model 788ci HD Combo Fishing System



- Display: HD 5" Diagonal, 640V x 640H, 256 Color.
- Transducer: DualBeam PLUS with SwitchFire 200kHz/20° @ -10db & 83kHz/60° @ -10db.
- Power: 4,000 W (PTP), 500 W (RMS).
- Depth: 1,500 ft.
- 50 Channel GPS.
- Humminbird ContourXD.
- Dual SD Card Slots/Upgradeable Software.
- Internal GPS Antenna Kit.

Order No.	Mfg. No. / Description	Price
404002	(407950-1) 788ci HD Combo Fishing System	$738.98 D

Humminbird Model 718 Combo Fishfinder



- Display: 5" Diagonal, 320V x 320H, FSTN LCD 16 Level Grayscale.
- Sonar: DualBeam PLUS. Depth: 1,000 ft.
- Power: 2,400W (PTP), 300 W (RMS).
- GPS - Capable. 50 Channel GPS; Trackplotting.
- Water Temperature included and Speed capable.

Order No.	Mfg. No. / Description	Price
402585	(407380-1) 718 Combo Fishfinder	$199.98 S
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402711	(XNT 9 QB 90) Transom Mount Transducer	$109.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model 698ci HD SI Combo



- Internal GPS Combo with Side Imaging.
- The 698ci HD SI Combo features a brilliant 480H x 640V, 5" 256 color display with backlight.
- Side Imaging and Down Imaging sonar with 4000 watts PTP power output, Precision Internal GPS. Chartplotting with built-in Humminbird UniMap cartography with a card slot.
- Optional maps and saving waypoints along with a Tilt & Swivel Quick Disconnect mounting system.
- It also has three programmable preset buttons to save your favorite views.
- The design allows for drop-in replacement capability for competitive in-dash models.

Order No.	Mfg. No. / Description	Price
404048	(409470-1)	$770.98 C

©2014 Donovan Marine, Inc.

Humminbird Model 688ci HD DI Combo



- The 688ci HD DI Combo features a High Definition 480H x 640V 5", 256 color display with backlight.
- DualBeam PLUS sonar and Down Imaging sonar with 4000 Watts PTP power output, GPS Chartplotting.
- In addition, it includes a card slot for maps and saving waypoints, as well as three programmable preset buttons to save your favorite views.
- Maximize your angling experience with the Humminbird 688ci HD DI Combo fishfinder GPS system.

Order No.	Mfg. No. / Description	Price
404046	(409460-1)	$550.98 C

Humminbird Model 688ci HD XD Internal GPS Combo - Xtreme Depth



- The 688ci HD XD Combo features:
  High Definition 480H x 640V 5", 256 color display with backlight, DualBeam PLUS sonar with 8000 Watts PTP.
- Power output and 3000 ft depth capability along with GPS Chartplotting.
- In addition, it includes a card slot for maps and saving waypoints, as well as three programmable preset.
- Buttons to save your favorite views.
- Maximize your angling experience with the Humminbird 688ci HD XD Combo fishfinder GPS system.

Order No.	Mfg. No. / Description	Price
404044	(409450-1)	$550.98 C

Humminbird Model 688ci HD Internal GPS Combo



- Internal GPS Combo.
- The 688ci HD Combo features a High Definition 480H x 640V 5" 256 color display with backlight.
- DualBeam PLUS sonar with 4000 Watts PTP power output, GPS Chartplotting.
- In addition, it includes a card slot for maps and saving waypoints, as well as three programmable preset button to save your favorite views.
- Maximize your angling experience with the Humminbird 688ci HD Combo fishfinder GPS system.

Order No.	Mfg. No. / Description	Price
404042	(409440-1)	$495.98 C

Humminbird Model 678c HD DI Down Imaging Sonar Only



- The 678c HD DI features a 480H x 640VH 5" color display with backlight.
- DualBeamPLUS sonar with 4000 Watts PTP power output.
- Maximize your angling experience with the Humminbird 678c HD DI fishfinder.

Order No.	Mfg. No. / Description	Price
404040	(409430-1)	$440.98 C

Humminbird Model 678c HD XD Fishfinder Sonar Only



- The 678c HD XD features a 480H x 640V 5" display with backlight.
- DualBeamPLUS sonar with 8000 Watts PTP power output, and 3000 ft depth capability.
- In addition, it includes three programmable preset buttons to save your favorite views.
- Maximize your angling experience with the Humminbird 778c HD fishfinder GPS.

Order No.	Mfg. No. / Description	Price
404038	(409420-1)	$440.98 C

Humminbird Model 678c HD Fishfinder Sonar Only



- The 678c HD features a 480H x 640VH 5" color display with backlight.
- DualBeamPLUS sonar with 4000 Watts PTP power output.
- Maximize your angling experience with the Humminbird 678c HD fishfinder.

Order No.	Mfg. No. / Description	Price
404036	(409410-1)	$385.98 C

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Humminbird Model 598ci HD SI HD Combo Fishfinder



- Display: 5.0" diagonal, 640V x 640H, 256 Color TFT
- Cartography: Navionics Compatible, LakeMaster Compatible
- Memory: Waypoints: 2,500, Routes: 50, Tracks: 50 w/20,000 points each
- Sonar: DualBeam PLUS 200 kHz / 20° @ -10db, 83 kHz / 60° @ -10db; Depth: 1500 ft.
- Side Imaging/Down Imaging: 455 kHz / (2) 86° @ -10db, Max Depth: 100 ft., 180° total coverage
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak)
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird UniMap.

Order No.	Mfg. No. / Description	Price
404011	(408950-1) 598ci HD SI Combo Fishfinder	$900.98 C

Humminbird Model 597ci HD Combo Fishfinder



- Display: HD 5" Diagonal, 640V x 640H, 256 color TFT.
- Sonar: DualBeam PLUS with SwitchFire. Depth: 1,200 ft.
- Power: 4,000W (PTP), 500 W (RMS).
- GPS features: 50 Channel GPS; Chartplotting; Humminbird UniMap.
- Single SD Card Slot.
- Water Temperature and GPS Speed included.
- Internal GPS Antenna.

Order No.	Mfg. No. / Description	Price
402584	(407920-1) 597ci HD Combo Fishfinder	$551.98 C
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model 597ci HD DI Combo



- 5" Display 640V x 640H, 256 Color.
- Down Imaging 455 kHz / 75 @ -10db 800 kHz / 45 @ -10db.
- Dual Beam PLUS w/Switch Fire 200 kHz / 25 @ -10db 455 kHz / 16 @ -10db.
- Depth: 250 ft (DI), 600 ft 4000 W (PTP), 500 W (RMS).
- Precision GPS Humminbird UniMap Single SD Card Slot.

Order No.	Mfg. No. / Description	Price
402590	(408120-1) 597ci HD DI Combo	$699.98 C

Humminbird Model 596c HD DI Fishfinder



- 5" Display 640V x 640H, 256 Color.
- Down Imaging 455 kHz / 75 @ -10db 800 kHz / 45 @ -10db.
- DualBeam PLUS w/ SwitchFire 200 kHz / 25 @ -10db 455 kHz / 16 @ -10db.
- Depth: 250ft (DI), 600 ft 4000 W (PTP), 500 W (RMS).

Order No.	Mfg. No. / Description	Price
402588	(408110-1) 596c HD DI Fishfinder	$600.98 C

Humminbird Model 596c HD Fishfinder



- HD 5 Display-640V x 640H.
- 256 Color Transducer: DualBeam PLUS w/ SwitchFire.
- 200kHz / 20 @ -10db & 83kHz / 60 @ -10db Depth: 1200 ft.
- Power: 4000 W (PTP), 500 W (RMS).

Order No.	Mfg. No. / Description	Price
402582	(407910-1)	$452.98 E

Humminbird Model 581i HD DI Combo



- Display: 5.0" diagonal, 640V x 320H, 16 Level Grayscale.
- Cartography: Navionics Compatible.
- Memory: Waypoints: 2,500, Routes: 50, Tracks: 50 w/20,000 points each.
- Sonar: Down Imaging w/DualBeam PLUS w/SwitchFire, 200 kHz / 25 @ -10db, 455 kHz / 16 @ -10db, 455 kHz / 75 @ -10db, 800 kHz / 45 @ -10db; Depth: 350ft (DI)/600 ft.
- Power Output: 300 Watts (RMS), 2400 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird UniMap.
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402558	(408990-1) 581i HD DI Combo	$309.98 B

©2014 Donovan Marine, Inc.

Humminbird Model 571 HD DI Fishfinder



- Display: 5.0" diagonal, 640V x 320H, 16 Level Grayscale.
- Sonar: Down Imaging w/DualBeam PLUS w/SwitchFire, 200 kHz / 25 @ -10db, 455 kHz / 16 @ -10db, 455 kHz / 75 @ -10db, 800 kHz / 45 @ -10db; Depth: 350ft (DI)/600 ft.
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402556	(408960-1) 571 HD DI Fishfinder	$259.98 B

Humminbird Model 561 DI Fishfinder



- Display: 5.0" diagonal, 320V x 320H, 12 Level Grayscale.
- Sonar: Down Imaging w/ DualBeam PLUS w/SwitchFire, 200 kHz / 25 @ -10db, 455 kHz / 16 @ -10db, 455 kHz / 75 @ -10db, 800 kHz / 45 @ -10db Depth: 350ft (DI)/600 ft.
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402554	(408980-1) 561 DI Fishfinder	$209.98 B

Humminbird Model 561 Fishfinder



- 5" Display, 320V x 320H12 Level Grayscale.
- DualBeam PLUS w/SwitchFire, 200kHz / 20 @ -10db83kHz / 60 @ -10db; Depth: 800 ft 2400 W (PTP) 300 W (RMS).

Order No.	Mfg. No. / Description	Price
402555	(408460-1)	$159.98 B

Humminbird Model 398ci SI Combo



- Display: 3.5" diagonal, 320V x 240H, 256 Color TFT.
- Cartography: Navionics Compatible, LakeMaster Compatible.
- Memory: Waypoints: 2,500, Routes: 50, Tracks: 50 w/20,000 points each.
- Sonar: DualBeam PLUS, 200 kHz / 20° @ -10db, 83 kHz / 60° @ -10db, Depth: 1500 ft.
- Side Imaging/Down Imaging: 455 kHz / (2) 86° @ -10db, Max Depth: 100 ft., 180° total coverage.
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- GPS FEATURES: Precision GPS , Trackplotting , Chartplotting , GPS Speed , Humminbird UniMap.

Order No.	Mfg. No. / Description	Price
404035	(409380-1)	$509.98 B

Humminbird Model 386ci Combo Fishfinder



- Display: 3.5" diagonal, 320V x 240H, 256 Color TFT.
- Memory: Waypoints: 2,500, Routes: 50, Tracks: 50 w/20,000 points each.
- Sonar: DualBeam PLUS, 200 kHz / 20 @ -10db, 83 kHz / 60 @ -10db; Depth: 1500 ft.
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird UniMap.
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
403313	(409030-1) 386ci Combo Fishfinder	$305.98 B

Humminbird Model 386ci DI Combo Fishfinder



- Display: 3.5" diagonal, 320V x 240H, 256 Color TFT.
- Memory: Waypoints: 2,500, Routes: 50, Tracks: 50 w/20,000 points each.
- Sonar: Down Imaging w/ DualBeam PLUS w/SwitchFire; 200 kHz / 25 @ -10db, 455 kHz / 16 @ -10db, 455 kHz / 75 @ -10db, 800 kHz / 45 @ -10db.
- Depth: 350ft (DI)/600 ft.
- DI Only Mode and Digital Depth Source Selection - 2D or DI.
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird UniMap.
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
403330	(409050-1) 386ci DI Combo	$409.98 B

Humminbird Model 385ci DI Combo Fishfinder



- Display: 3.5" diagonal, 320V x 240H, 256 Color TFT.
- Memory: Waypoints: 2,500, Routes: 50, Tracks: 50 w/20,000 points each.
- Sonar: Down Imaging w/DualBeam PLUS w/SwitchFire, 200 kHz / 25° @ -10db, 455 kHz / 16° @ -10db, 455 kHz / 75° @ -10db, 800 kHz / 45° @ -10db.
- Depth: 250ft (DI)/600 ft.
- Power Output: 500 Watts (RMS), 4000 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, Chartplotting, GPS Speed, Humminbird UniMap.
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
403330D	(408430-1)	$609.98 F

Humminbird Model 385ci Combo Fishfinder



- Display: 3.5" Diagonal, 320V x 240H, 256 color TFT.
- Sonar: DualBeam. Depth: 1,000 ft.
- Power: 2,400W (PTP), 300 W (RMS).
- GPS features: 50 Channel GPS; Trackplotting; Chartplotting; GPS Speed; Humminbird UniMap.
- Water Temperature and GPS Speed included.
- Internal GPS Antenna.

Order No.	Mfg. No. / Description	Price
403313D	(407680-1) 385ci Combo Fishfinder	$488.98 E
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model 345c DI Fishfinder



- 3.5" Display 320V x 240H 256 Color.
- Dual Beam PLUS w/ Switch Fire 200 kHz / 20 @ -10db 83 kHz / 60 @ -10db
- Depth: 250 ft (DI), 600 ft 4000 W (PTP) 500 W (RMS).

Order No.	Mfg. No. / Description	Price
403316	(409020-1) 345c DI Fishfinder	$255.98 B

Humminbird Model PiranhaMAX 196ci Fishfinder



- Display: 3.5" diagonal, 320V x 240H, 256 Color.
- Sonar: Dual Beam 455kHz / 16 @ -10db, 200 kHz / 28 @ -10db; Depth: 600 ft.
- Power Output: 200 Watts (RMS), 1600 Watts (Peak-to-Peak).
- GPS Features: Precision GPS, Trackplotting, GPS Speed.
- Memory: Waypoints: 500, Routes: 0, Points: 2,000.
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402223	(408730-1) PiranhaMAX 196ci	$199.98 B

Humminbird Model PiranhaMax 195c Fishfinder



- Features a 256 color 320V X 240H, 3.5" display with 1600 watts PTP power output with Dual Beam sonar.
- The design also allows drop-in replacement for competitive in-dash models.
- 200 Watts (RMS).
- 1600 Watts (Peak-to-Peak).
- 3.5" diagonal display.

Order No.	Mfg. No. / Description	Price
402225	(408700-1) PiranhaMax 195c	$169.98 B

Humminbird Model PiranhaMax 175 Fishfinder



- Display: 4.0" diagonal, 240V x 160H, 16 Level Grayscale.
- Sonar: Dual Beam 455 kHz / 16 @ -10db, 200 kHz / 28 @ -10db; Depth: 600 ft.
- Power Output: 200 Watts (RMS), 1600 Watts (Peak-to-Peak).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402221	(408640-1) PiranhaMax 175	$99.98 B

Humminbird Model PiranhaMAX 190c Fishfinder - Sonar Only



- Display: 3.5" Diagonal, 320V x 240H, 256 color TFT.
- Sonar: Single Beam. Depth: 800 ft.
- Power: 1,600W (PTP), 200 W (RMS).
- Water Temperature included.

Order No.	Mfg. No. / Description	Price
402223D	(407270-1) PiranhaMax 190c Fishfinder	$266.98 E
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

©2014 Donovan Marine, Inc.

Humminbird Model PiranhaMAX 170 Fishfinder - Sonar Only



- Display: 4.0" Diagonal, 240V x 160H, FSTN LCD 8 Level Grayscale.
- Sonar: DualBeam. Depth: 800 ft.
- Power: 1,600W (PTP), 200 W (RMS).
- Water Temperature included.

Order No.	Mfg. No. / Description	Price
402221D	(407250-1) PiranhaMAX 170 Fishfinder	$121.98 D
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model PiranhaMAX 150 Fishfinder - Sonar Only



- Display: 4.0" Diagonal, 160V x 128H, FSTN LCD 4 Level Grayscale.
- Sonar: Single Beam. Depth: 600 ft.
- Power: 800W (PTP), 100 W (RMS).
- Water Temperature included.

Order No.	Mfg. No. / Description	Price
402219	(407190-1) PiranhaMAX 150 Fishfinder	$79.98 B
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model PiranhaMax 176i Combo



- Display: 4.0" diagonal, 240V x 160H, 16 Level Grayscale.
- GPS Features: Precision GPS, Trackplotting, GPS Speed.
- Memory: Waypoints: 500, Routes: 0, Points: 2,000.
- Sonar: Dual Beam 455 kHz / 16° @ -10db, 200 kHz / 28° @ -10db; Depth: 600 ft.
- Power Output: 200 Watts (RMS), 1600 Watts (Peak-to-Peak).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402500	(408670-1) PiranhaMax 176i	$129.98 B

Humminbird 360 Imaging



- Humminbirds 360 Imaging provides a complete around-the-boat, underwater image with the same sharp detail anglers have come to know with Side Imaging technology.
- With a single sweep, 360 Imaging has the ability to cover a 300-foot diameter circle (70,685 square feet).
- This optional accessory DOES NOT replace your standard SI transducer, it enhances your product.
- You must use standard transducer in order to have a digital depth reading.

Order No.	Mfg. No. / Description	Price
404032	(408310-1) 360 Imaging	$1,999.98 C

Humminbird Model PiranhaMAX 160 Fishfinder - Sonar Only



- Display: 4.0" Diagonal, 160V x 128H, FSTN LCD 4 Level Grayscale.
- Sonar: DualBeam. Depth: 600 ft.
- Power: 800W (PTP), 100 W (RMS).
- Water Temperature included.

Order No.	Mfg. No. / Description	Price
402220	(407230-1) PiranhaMAX 160 Fishfinder	$89.98 B
402802	(XTM 9 20 T) Trolling Motor Mount Transducer	$79.98 E
402892	(XP 9 20 T) Puck Type Shoot Thru the Hull Transducer	$89.98 E
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E
402888	(XTH 9 20 P) Plastic Thru Hull Transducer	$139.98 E

Humminbird Model PiranhaMAX 143 Fishfinder



- Display: 4.0" diagonal, 160V x 128H, 4 Level Grayscale.
- Sonar: Single Beam, 200 kHz / 20° @ -10db; Depth: 600 ft.
- Power Output: 100 Watts (RMS), 800 Watts (Peak-to-Peak).
- Warranty: One Year.

Order No.	Mfg. No. / Description	Price
402216	(408940-1) PiranhaMax 143	$69.98 B

Humminbird AS 360 TM - 360 Imaging



- Ability to mark waypoints anywhere on the 360 Imaging screen.
- An audio alert is given when the boat nears a waypoint within casting range.
- Capable of recording video and screen captures.
- Eight color palettes.
- Four sonar speed settings.
- Specific area can be selected and zoomed in on.
- The bow mount 360 Imaging is designed to work exclusively with Minn Kota Maxxum and Minn Kota Fortrex trolling motors with foot controls only. It attaches directly to the shaft of the trolling motor with a quick release bracket and stows and deploys quickly and easily.
- For Use with: 1198c SI, 998c HD SI, 998c SI, 898c HD SI, 898c SI, 798ci HD SI, Minn Kota Maxxum and Minn Kota Fortrex.

Order No.	Mfg. No. / Description	Price
404033	(409250-1)	$1,499.98 C

Humminbird Portable Transducer



- Hydrodynamic, Single or Dual Beam (depending on which fish finder used with), 20/60 degree, 200/83 kHz with built in temperature.
- Includes: 15' cable.
- For use with: 141C, 161, 323, 325, 343C, 345c, 363, 365i, 383C, 385ci, 386ci, 515, 525, 535, 550, 560, 561, 565, 570, 575, 580, 581i, 585C, 586C, 586c HD, 587CI, 587ci HD, 595C, 596C, 596c HD, 597CI, 597ci HD, 717, 718, 727, 728, 737, 747c, 757c, 767, 768, 777c2, 778C, 778c HD, 787c2, 787c2I, 788C, 788ci, 788ci HD, 858c, 858c HD, 931C, 937C, 957c, 958c, 958c HD, 1157c, 1158c, HDR 610, HDR650, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77C, MATRIX 87C, MATRIX 97, PIRANHA 1, PIRANHA 2, PIRANHA 3, PIRANHA 4, PIRANHA 5, PiranhaMax 10, PiranhaMax 15, PiranhaMAX 143, PiranhaMax 150, PiranhaMAX 153, PiranhaMax 160, PiranhaMax 170, PiranhaMax 190C, PiranhaMax 20, PiranhaMax 210, PiranhaMax 215, PiranhaMax 220, PiranhaMax 230, PiranhaMax 240, PiranhaMax 30.

Order No.	Mfg. No. / Description	Price
402893	(710161-1) Portable Transducer, XPT 9 20 T	$89.98 E

Humminbird Transom Mount Transducer



- Dual/HD Side Imaging Transom, 20/60/180 Degree, 200/83/455/800 kHz with built in temperature.
- Includes: 20' cable.
- For use with: 1197c SI Combo, 997c SI Combo, 797c2 SI Combo and 798c SI Combo.

Order No.	Mfg. No. / Description	Price
402891	(XHS 9 HDSI 180 T) Transom Mount Transducer	$269.98 E

Humminbird Trolling Motor Mount Transducer



- Down Imaging/DualBeam Plus, 75°/45°, 455/800 kHz (DI) and 25°/16°, 200/455 kHz, with built in temperature, 15' Cable.
- Low profile design minimize snags.
- Easy installation, all hardware included.
- 1' cable.

Order No.	Mfg. No. / Description	Price
402768	(710234-1)	$149.98 E

Humminbird Plastic Thru Hull Transducer



- Single/Dual Beam, 20/60 Degree, 200/83 kHz.
- Includes: 30' cable.
- For use with: 141c, 161, 323, 325, 343c, 345c, 363, 365i, 383c, 385ci, 515, 525, 535, 550, 560, 565, 570, 575, 580, 581i, 585c, 586c, 587ci, 595c, 596c, 597ci, 717, 718, 727, 728, 737, 747c, 757c, 767, 768, 777c2, 778c, 787c2, 787c2i, 788c, 858c, 931c, 937c, 957c, 958c, 1157c, HDR 610, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c, MATRIX 97, PIRANHA 1, PIRANHA 2, PIRANHA 3, PIRANHA 4, PIRANHA 5, PiranhaMax 10, PiranhaMax 15, PiranhaMax 150, PiranhaMax 160, PiranhaMax 170, PiranhaMax 190c, PiranhaMax 20, PiranhaMax 210, PiranhaMax 215, PiranhaMax 220, PiranhaMax 230, PiranhaMax 240, PiranhaMax 30.

Order No.	Mfg. No. / Description	Price
402888	(XTH 9 20 P) Thru Hull Transducer	$139.98 E

Humminbird Transom Mount Transducer

- Quadra Beam, 20/60/90 Degree, 200/83/455 kHz.
- Includes: 20' cable.
- For use with: 1157c, 300 TX (Tri Beam only), 400 TX (Tri Beam only), 717, 718, 727, 728, 737, 747c, 757c, 767, 768, 777c2, 778c, 787c2, 787c2i, 788c, 858c, 917c, 957c, 958c, MATRIX 35, MATRIX 37, PiranhaMax 180 (Tri Beam only), WIDE OPTIC (Tri Beam only), WIDE PANORAMA, WIDE PARAMOUNT (Tri Beam only), WIDE PORTRAIT (Tri Beam only).

Order No.	Mfg. No. / Description	Price
402711	(XNT 9 QB 90) Transom Mount Transducer	$109.98 E

Humminbird Transom Mount Transducer



- Single/Dual Beam, 16/28 Degree, 455/200 kHz, with built in temperature.
- Includes: 20' cable.
- Improved running angle and an optional lock down screw to override the kick up.
- For use with: PiranhaMAX 165, PiranhaMAX 175, PiranhaMAX 176i, PiranhaMAX 195c, PiranhaMAX 196ci

Order No.	Mfg. No. / Description	Price
402894	(710236-1) Transom Mount Transducer, XNT 9 28 T	$79.98 E

Humminbird Transom Mount Transducer



- Single/Dual Beam, 20/60 Degree, 200/83 kHz with built-in temperature.
- Includes: 20' cable.
- For use with: 141c, 161, 323, 325, 343c, 345c, 363, 365i, 383c, 385ci, 515, 525, 535, 550, 560, 565, 570, 580, 581i, 585c, 586c, 587ci, 595c, 596c, 597ci, 717, 718, 727, 728, 737, 747c, 757c, 767, 768, 777c2, 778c, 787c2, 787c2i, 788c, 858c, 931c, 937c, 957c, 958c, 1157c, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c, MATRIX 97, PIRANHA 1, PIRANHA 2, PIRANHA 3, PIRANHA 4, PIRANHA 5, PiranhaMax 10, PiranhaMax 15, PiranhaMax 150, PiranhaMax 160, PiranhaMax 170, PiranhaMax 190c, PiranhaMax 20, PiranhaMax 210, PiranhaMax 215, PiranhaMax 220, PiranhaMax 230, PiranhaMax 240, PiranhaMax 30.

Order No.	Mfg. No. / Description	Price
402760	(XNT 9 20 T) Transom Mount Transducer	$79.98 E

Humminbird Trolling Motor Mount Transducer



- With built in Temperature Sensor, Dual Beam, 20 and 60 degree cone angles, 200/83 kHz.
- Includes: 15' cable and trolling motor mounting hardware.
- For use with: 141c, 161, 323, 325, 343c, 345c, 363, 365ci, 383c, 385ci, 515, 525, 535, 565, 575, 580, 585c, 586c, 587ci, 595c, 596c, 597ci, 717, 718, 727, 728, 737, 747c, 757c, 767, 768, 777c2, 778c, 787c2, 787c2i, 788c, 931c, 937c, 957, 1157c, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c, MATRIX 97, PIRANHA 1, PIRANHA 2, PIRANHA 3, PIRANHA 4, PIRANHA 5, PiranhaMax 10, PiranhaMax 15, PiranhaMax 150, PiranhaMax 160, PiranhaMax 170, PiranhaMax 190c, PiranhaMax 20, PiranhaMax 210, PiranhaMax 215, PiranhaMax 220, PiranhaMax 230, PiranhaMax 240 and PiranhaMax 30.

Order No.	Mfg. No. / Description	Price
402802	(XTM 9 20 T) Motor Mount Transducer	$79.98 E

©2014 Donovan Marine, Inc.

Humminbird Puck Type Shoot Thru The Hull Transducer



- Single/Dual Beam, 20/60 degree, 200/83 kHz with built in temperature pigtail.
- Includes: 20' cable.
- For use in single layer fiberglass hull boats.
- For use with: 141c, 161, 323, 325, 343c, 345c, 363, 365ci, 383c, 385ci, 515, 525, 535, 550, 560, 565, 570, 575, 580, 581i,585c, 586c, 587ci, 595c, 596c, 597ci, 717, 718, 727, 728, 737, 747c, 757c, 767, 768, 777c2, 778c, 787c2, 787c2i, 788c, 931c, 937c, 957, 1157c, HDR 610, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c, MATRIX 97, PIRANHA 1, PIRANHA 2, PIRANHA 3, PIRANHA 4, PIRANHA 5, PiranhaMax 10, PiranhaMax 15, PiranhaMax 150, PiranhaMax 160, PiranhaMax 170, PiranhaMax 190c, PiranhaMax 20, PiranhaMax 210, PiranhaMax 215, PiranhaMax 220, PiranhaMax 230, PiranhaMax 240 and PiranhaMax 30.

Order No.	Mfg. No. / Description	Price
402892	(XP 9 20 T) Puck Type Thru Hull Transducer	$89.98 E

Humminbird Transducer Extension Cable - Length 10'



- 10' transducer extension cable for transducers.
- For use with: 1155c, 1157c, 1197c SI, 141c, 161, 300 TX, 323, 343c, 363, 383c, 400 TX, 515, 525, 535, 550, 560, 565, 570, 575, 580, 581i Combo, 585c, 586c, 587ci, 595c, 596c, 597ci, 717, 718, 727, 728, 737, 747c, 755c, 757c, 767, 768, 777c2, 778c, 785c2, 787c2, 787c2i, 788c, 797c2 SI, 797c2i SI, 798c, 917c, 931c DF, 931c, 937c DF, 937c, 947c 3D, 955c, 957, 967c 3D, 981c SI, 987c SI, 997c SI, HDR 610, ICE 35, ICE 45, ICE 55, LCR 3D, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 35, MATRIX 37, MATRIX 45, MATRIX 47 3D, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c, MATRIX 97, PIRANHA 1, PIRANHA 2, PIRANHA 3, PIRANHA 4, PIRANHA 5, PiranhaMax 10, PiranhaMax 15, PiranhaMax 150, PiranhaMax 160, PiranhaMax 170, PiranhaMax 180, PiranhaMax 190c, PiranhaMax 20, PiranhaMax 210, PiranhaMax 215, PiranhaMax 220, PiranhaMax 230, PiranhaMax 240, PiranhaMax 30, WIDE 3D PARAMOUNT, WIDE 3D VIEW, WIDE 3D VISION, WIDE 3D VISTA, WIDE OPTIC, WIDE PANORAMA, WIDE PARAMOUNT, WIDE PORTRAIT, WIDE VIEW, WIDE VISION, XP 2000, XP 4000.

Order No.	Mfg. No. / Description	Price
402999	(EC W10) Transducer Extension Cable, Length 10'	$34.98 E

Humminbird Ethernet Adapter Cable



- 12" cable that is required if you want Ethernet capabilities on a 700 HD Series Humminbird product. If you are connecting one 700 HD Series product with another 700 HD Series product, you will require two of these cables. If you are connecting one 700 HD Series product with either a 800, 900 or 1100 Series product, you will only need one of these adapters plus one of the AS EC2, 10, 20 or 30 foot cables. Software updates on some 700 HD and some 800, 900 and 1100 Series products may be necessary also.
- For use with: MS 700E, 778c HD, 788ci HD Combo, 798ci HD SI Combo

Order No.	Mfg. No. / Description	Price
403005	(720074-1) Ethernet Adapter Cable, AS EC QDE	$29.98 E

Humminbird Ethernet Cable

- 15' cable that allows the connection of two Ethernet capable units to be connected.
- For use with 1157c, 1158c, 1158c DI, 1197c SI, 1198c SI, 778c HD, 788ci HD, 788ci HD DI, 798ci HD SI, 858c, 858c HD, 858c DI, 858c HD DI, 898c SI, 898c HD SI, 958c, 958c HD, 958c DI, 958c HD DI, 998c SI, 998c HD SI

Order No.	Mfg. No. / Description	Price
403003	(720073-5) Ethernet Cable, AS EC 15E	$59.98 E

Humminbird Temperature/Speed Sensor



- Includes: 20' cable.
- Temperature range of 25° - 99.9° F.
- Speed range of 2 - 75 MPH.
- For use with: 1155c, 1157c, 1197c SI, 141c, 161, 200 DX, 300 TX, 323, 325, 343c, 345c, 363, 365, 383c, 385ci, 400 TX, 515, 525, 535, 550, 560, 565, 570, 575, 580, 581i Combo, 585c, 587ci, 595c, 596c, 597ci, 717, 718 727, 728, 737, 747c, 755c, 757c, 767, 768, 777c2, 778c, 785c2, 787c2, 787c2i, 788c, 797c2 SI, 797c2i SI, 798c, 917c, 931c DF, 931c, 937c DF, 937c, 947c 3D, 955c, 957, 967c 3D, 981c SI, 987c SI, 997c SI, LEGEND 1000, LEGEND 1000D, LEGEND 2000, LEGEND 2000D, LEGEND 3000, LEGEND 3000D, LEGEND ID40, LPG 2000, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 35, MATRIX 37, MATRIX 45, MATRIX 47 3D, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c, MATRIX 97, WIDE 2000, WIDE 3D PARAMOUNT, WIDE 3D VIEW, WIDE 3D VISION, WIDE 3D VISTA, WIDE EYE, WIDE ONE, WIDE OPTIC, WIDE PANORAMA, WIDE PARAMOUNT, WIDE PORTRAIT, WIDE VIEW, WIDE VISION, WIDE W, XP 2000, XP 4000, XTREME 160, XTREME 160T, Z160.

Order No.	Mfg. No. / Description	Price
402610	(TS W) Temperature/Speed Sensor	$69.98 E

Humminbird Trolling Motor Adapter



- For use with: SHS 7W, XHS 6 16, XT WS, XHS 9 DB 74 T, XHS 9 SI 160 T, XHS 9 HDSI 180 T, 931c, 937c, 947c 3D, 967c 3D, 981c SI, 987c SI, 997c SI, 1197c SI, LCR 100G, LCR 100I, LCR W, PLAT ID 600, TCR ID 10, Dimension 3 120, Dimension 3 600, WIDE EYE, WIDE VIEW, WIDE 3D VIEW, WIDE VISION, WIDE 3D VISTA, WIDE 3D VISION, WIDE W, WIDE OPTIC, WIDE PORTRAIT, WIDE PARAMOUNT, WIDE PANORAMA, WIDE 3D PARAMOUNT, TFX100ID, LCR W.

Order No.	Mfg. No. / Description	Price
403004	(AD STM 7) Trolling Motor Adapter	$24.98 E

Humminbird 5-Port Ethernet Switch



- This waterproof switch allows you to quickly and easily connect up to five Ethernet items.
- Use it to link multiple Humminbird head units, share transducers, add an NMEA 2000 network or step up to the Humminbird Radar.
- The purchase of Ethernet cables is required depending on the number of devices you plan to add to this switch.

Order No.	Mfg. No. / Description	Price
402809	(408200-1) 5-Port Ethernet Switch	$300.98

Humminbird Fishfinder Switch



- This switch connects two fishfinders to one transducer.
- This switch includes three cables: 24 inches to the transducer, approximately 4.5 feet to one unit and 20 feet to the other unit.

Order No.	Mfg. No. / Description	Price
403002	(720070-1) Fishfinder Switch	$89.98 E

Humminbird Video Output Cable



- 6' long with two standard male RCA connectors on the output side and one connector that is standard to the 1100 and 800 Series and select 900 Series products for hook up.
- For use with 1155c, 1157c, 1158c, 1158c DI, 1197c SI, 1198c SI, 998c HD SI, 998c SI, 958c HD DI, 958c DI, 958c HD, 958c, 898c HD SI, 898c SI, 858c HD, 858c, 858c HD DI, 858c DI.

Order No.	Mfg. No. / Description	Price
403001	(720054-1) Video Output Cable, VC 1	$29.98 E

Humminbird Y Cable



- This Y cable is required if you want temp capabilities on a 700 HD Series product.

Order No.	Mfg. No. / Description	Price
402807	(720075-1) Y Cable	$39.98 G

Humminbird Indash Mounting Kit for 300 Series



- For all 300 Series products listed below: 141C, 161, 323, 325, 343C, 345c, 345c DI, 346c DI, 363, 365i, 383C, 385ci, 385ci DI, 386ci, 386ci DI

Order No.	Mfg. No. / Description	Price
4025072	(IDMK300)	$29.98 H

Humminbird Unit Mount



- Quick disconnect mounting system.
- Tilts and swivels.
- For use with: 141c, 161, 323, 325, 343c, 345c, 363, 365, 383c, 385ci, 515, 525, 535, 550, 560, 565, 570, 570 Portable, 575, 580, 581i Combo, 585c, 586c, 587ci, 595c, 596c, 597ci, 717, 718 727, 728, 737, 747c, 755c, 757c, 767, 768, 777c2, 778c, 785c2, 787c2, 787c2i, 788c, 797c2 SI, 797c2i SI, 798c, MATRIX 10, MATRIX 12, MATRIX 15, MATRIX 17, MATRIX 20, MATRIX 25, MATRIX 27, MATRIX 35, MATRIX 37, MATRIX 47 3D, MATRIX 55, MATRIX 65, MATRIX 67, MATRIX 77c, MATRIX 87c.

Order No.	Mfg. No. / Description	Price
403346	(MS M) Unit Mount	$34.98 E

Humminbird Cable Management Kit



- This cable management kit collects all the cables that connect into the back of your unit, holding them securely in place.
- Works with all 800 & 900 Series products.

Order No.	Mfg. No. / Description	Price
402810	(740129-1) Cable Management Kit	$24.98 E

Humminbird Power Cable - Length 10'



- 10', waterproof.
- Used with all Humminbird products produced since 1989, except the 1100 Series, 997, 797 and 798.

Order No.	Mfg. No. / Description	Price
402987	(PC 10) Power Cable - Length 10'	$19.98 E

Humminbird Y Cable

- Y Cable - Side Imaging and Dual Beam - allows you to use two transducers on one unit without the use of a transducer switch.
- For use with Side Imaging products only, in conjunction with a dual beam transducer only.
- For improved high speed performance for bottom tracking.

Order No.	Mfg. No. / Description	Price
402800	(720055-1) Y Cable	$29.98 E

Humminbird Serial Port Splitter Cable



- Add two serial accessories.
- Simply connect Y cable to the secondary serial port tower on the back of your Humminbird unit.

Order No.	Mfg. No. / Description	Price
402806	(720076-1) Splitter Cable	$34.98 E

Humminbird Indash Mounting Kit for 700 Series



- For most 700 Series products listed below: 550, 560, 561, 561 DI, 570, 570 DI, 571 HD DI, 581i, 581i HD DI, 586C, 586c HD, 587CI, 587ci HD, 587ci HD DI, 596c, 596c HD, 596c HD DI, 597ci, 597ci HD , 597ci HD DI, 597ci HD XD, 598ci HD SI, 71, 718, 727, 728, 737, 747c, 757, 767, 768, 777c2, 778C, 785c2, 787c2, 788C, 788ci, 797c2 SI, 798c SI, 798ci SI.
- Requires an opening of 5.76" W x 4.46" H.

Order No.	Mfg. No. / Description	Price
4025073	(IDMK700)	$29.98 H

Humminbird Unit Cover - Small



- Unit cover protects the unit while the boat is being trailored with the unit on the mount or while the unit is being transported away from the boat.
- Protects against bugs or flying debris.
- Will also keep the unit from getting scratched when not on the mount.
- Made of stretch neoprene with HUMMINBIRD logo printed on front.
- For use with: WIDE ONE, WIDE 100, WIDE EYE, WIDE OPTIC, WIDE W, TRAK PRO 128, PRO FLASHER, 100SX, 200DX, 300TX, TOUR SERIES, PRO ANGLER.

Order No.	Mfg. No. / Description	Price
402266	(UC WS) Unit Cover - Small	$14.98 B

Humminbird Hardware Management Kit



- This hardware management kit collects all the cables that plug into the back of your unit and holds them securely in place.
- Works with all 1100 Series products.

Order No.	Mfg. No. / Description	Price
402812	(740130-1) Hardware Management Kit	$24.98 E

©2014 Donovan Marine, Inc.

Humminbird Kayak Mounting Hardware



- Transducer mounting hardware for installation in a Kayak.
- Kit includes surface preparation products in addition to a transducer cradle and adhesive products.

Order No.	Mfg. No. / Description	Price
403348	(740103-1) Kayak Mounting Hardware	$48.98 F

Humminbird In-Dash Mounting Kits



- For use with: 141c, 161, 323, 325, 343c, 345c, 363, 365i, 383c and 385ci.

Order No.	Mfg. No.	Price
403345	(IDMK 300)	$39.98 E

- For use with: 550, 560, 570, 581i Combo, 586c 587ci, 596c, 597ci, 717, 718, 727, 728, 737, 747c, 767, 768, 777c2, 778c, 785c2, 787c2, 788c, 797c2 SI, 798c SI.

Order No.	Mfg. No. / Description	Price
403344	(IDMK 700)	$39.98 E

Humminbird ICE 385ci Combo



- The ICE 385ci Combo features a brilliant color 320V x 240H 3.5" display and advanced DualBeam sonar with 2400 Watts PTP power output, all in a soft-sided carry case.
- OPTIONAL: Navionics Gold/HotMaps I LakeMaster I ATV Handlebar Mount I Suction Cup Transducer.
- AGM Battery and charger included. (not included with Metric/International versions of this product).

Order No.	Mfg. No. / Description	Price
404022	(407880-1) ICE 385ci Combo	$475.98 D

Humminbird ICE 55



- The ICE 55 ice fishing flasher has a 6-color, industry-best fiber-optic flasher display that offers unmatched performance and gives greater distinction between targets in the beam.
- It also features an extreme temperature LCD with digital depth and automatic depth scale.
- Its unique purple target line allows fishermen to set a visual indicator at a specific depth to know exactly how far to lower their jig.
- Professional-grade carrying case included.
- Rely on Humminbird ice flashers to find your spots and keep your cooler full.

Order No.	Mfg. No. / Description	Price
404016	(407040-1) ICE 55	$510.98 D

Humminbird ICE 35



- The ICE 35 ice fishing flasher features a large 3-color fiber optic display with overlay depth scale that delivers excellent readability.
- The combination of selectable dual beam transducer and a powerful 800 watts of peak-to-peak power are sure to make this flasher a trusted companion at a great value.
- Rely on Humminbird ice flashers to find your spots and keep your cooler full.

Order No.	Mfg. No. / Description	Price
404012	(407020-1) ICE 35	$299.98 S

Humminbird Kayak Mounting Hardware



- Transducer Mounting Hardware for installation in a Kayak for our Down Imaging products.
- Kit includes surface preparation products in addition to a transducer cradle and adhesive products.
- Allows removal of transducer if needed.
- Designed for use with XNT 9 DI T Transducer.
- Note: Transducer not included.

Order No.	Mfg. No. / Description	Price
403349	(740125-1) Kayak Mounting Hardware	$49.98 F

Humminbird In-Dash Mounting Kit



- Kit allows in-dash mounting of all 900 Series products.
- Requires an opening of 10-1/16"W X 4-15/16"H.
- For use with: 858c, 858c HD, 858c DI, 858c HD DI, 898c SI, 898c HD SI, 917c, 931c, 937c, 947c 3D, 955c, 957c, 958c, 958c HD, 958c DI, 958c HD DI, 967c 3D, 981c SI, 987c SI, 997c SI, 998c SI, 998c HD SI

Order No.	Mfg. No. / Description	Price
403347	(740094-1) IDMK 900	$39.98 E

Humminbird ICE 345c



- The ICE 345c features a brilliant color 320V x 240H 3.5" display and advanced DualBeam sonar with 2400 Watts PTP power output, all in a soft-sided carry case.
- AGM Battery and charger included. (not included with Metric/International versions of this product).

Order No.	Mfg. No. / Description	Price
404020	(407870-1) ICE 345c	$348.98 D

Humminbird ICE 45



- The ICE 45 ice fishing flasher uses 3-color fiber optic flasher with a center dial LCD display engineered for peak performance in temperatures as cold as -20F.
- The LCD includes digital depth and allows the flasher to automatically adjust the depth scale, eliminating the guesswork and estimation of depth scale overlays.
- Rely on Humminbird ice flashers to find your spots and keep your cooler full.

Order No.	Mfg. No. / Description	Price
404014	(407030-1) ICE 45	$399.98 S

Humminbird LakeMaster

- Easy to read contours
- Depth Highlight Range
- Water Level Offset
- Shallow Water Highlight
- Scrollable Lake List
- Card also includes contours for the Gulf of Mexico Includes Waterproof Caboodle for storing your SD Card.



Order No.	Mfg. No. / Description	Price
404025	(HPAFGC-1) Florida/Alabama/Georgia	$124.98 F
404026	(600009-1) Louisiana/Oklahoma/Arkansas/Texas	$124.98 F
404027	(600023-1) Louisiana/Georgia/Mississippi/ Tennessee/Alabama	$124.98 F

Humminbird Digital Depth Gauge



- Instant, reliable depth readings even at speeds of up to 70 mph.
- Installation in any existing 2-1/8" opening is easy and can be wired to the ignition to automatically turn on.
- 1.25" LCD display reads in feet, meters or fathoms.
- Customizable (2 face plates and 3 trim rings included).
- Deep/Shallow water alarms.
- 600 ft depth.
- 200 kHz operating frequency.

Order No.	Mfg. No. / Description	Price
402570	(HDR 650) Digital Depth Gauge	$109.98 C

Lowrance L.E.D. Depth Gauge



- High-contrast dox matrix display with advanced white LED Backlighting
- 200 kHz Skimmer® transom- mount transducer with built-in water temp sensor
- Depths to 700ft/213m
- Shallow and deep depth alarms
- High-visibility display and target detail even in direct sunlight
- Compact case fits the smallest boats and spaces.
- Fits standard 2-1/8 in/55mm dia. hole
- Fully waterproof for the harshest environments

Order No.	Mfg. No. / Description	Price
140252	(47-94) LED Depth Gauge	$197.98 C

Faria In-Dash Digital Depth Finders



- Reads depth from 3' to 199', 0.5 to 32 Fathoms.
- 2-1/16" diameter mount hole. 3 min. Depth.
- Front will withstand direct water spray.
- Allows you to adjust offset keel at the display.
- 3-character LCD. Red diffused lighting for display.
- Audio and visual alarm indicates shallow or deep water conditions exists.
- Out of range indication.
- Returns depth sounder to last power on status.
- Three easy to use push buttons.
- Easy to read icons.
- 8 VDC to 16.5 VDC.
- 90 MA max. with supplied high-speed transducer.

Order No.	Mfg. No. / Description	Price
3511070	(12850) Black Bezel	$203.98 H
3511345	(13150) White Bezel	$203.98 H
3512750	(SN2011) Transom Mount	$82.98 F


Faria In-Dash Digital Depth Sounders with Air and Water Temp



- Digital Depth Sounder displays depth in feet and meters.
- Shallow and Deep Water alarms.
- Alarms are Audio and Visual.
- Programmable keel offset.

Order No.	Mfg. No. / Description	Price
3511360	(13154) Chesapeake White Stainless Steel	$273.98 H
3511445	(13752) Chesapeake Black Stainless Steel	$273.98 H

Marpac Digital Depth Sounders

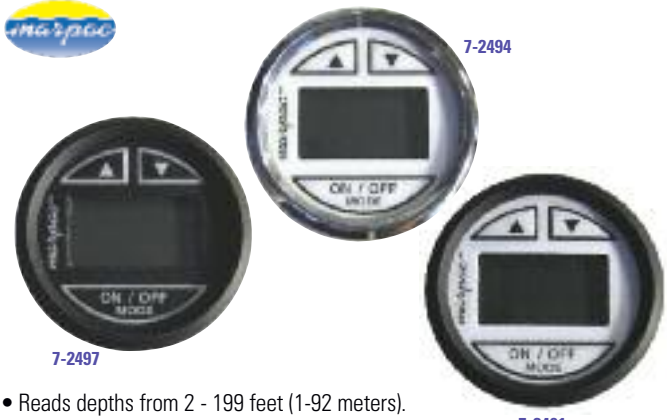

- Reads depths from 2 - 199 feet (1-92 meters).
- Displays depth in feet, fathoms or meters.
- Shallow and deep alarms are both audio and visual.
- Adjustable keel offset.
- Fits standard 2-1/8" gauge hole.

White face with black bezel

Order No.	Description	Price
7-2491	Transom Mount Transducer	$109.98 G
7-2492	In Hull Mount Transducer	$109.98 G
7-2493	Thru-Hull Mount Transducer	$109.98 G

White face with stainless bezel

Order No.	Description	Price
7-2494	Transom Mount Transducer	$129.98 G
7-2495	In Hull Mount Transducer	$129.98 G
7-2496	Thru-Hull Mount Transducer	$129.98 G

Black face with black bezel

Order No.	Description	Price
7-2497	Transom Mount Transducer	$129.98 G
7-2498	In Hull Mount Transducer	$129.98 G
7-2499	Thru-Hull Mount Transducer	$129.98 G

©2014 Donovan Marine, Inc.

Lowrance HDS-12 Gen2 Touch - Touchscreen Fishfinder/Chartplotter

LOWRANCE



- The largest Lowrance high-definition, 12", widescreen color display available with touchscreen for fast and easy operation.
- Built-in, exclusive Insight USA mapping, Broadband Sounder and StructureScan HD Sonar Imaging.
- Dual Ethernet ports and two full-size SD card slots.
- Video capable with video input cable sold separately.

Order No.	Mfg. No. / Description	Price
142025	(11281-001) Insight USA + 83/200 & SS XDCR	$3,499.98 B
143170	(10776-001) Insight USA + 83/200 kHz Transducer	$3,298.98 B
143175	(10777-001) Insight USA + 50/200 kHz Transducer	$3,348.98 B

Lowrance HDS-10 Gen2 Fishfinder/Chartplotter

LOWRANCE



- Display Size: 10.4".
- Display resolution: 600H x 800W.
- Offers the biggest, brightest possible HDS viewing experience.

Order No.	Mfg. No. / Description	Price
140982	(10541-001) Insight USA + 50/200 kHz Transducer	$2,349.98 D

Lowrance HDS-9 Gen2 Touch - Touchscreen Fishfinder/Chartplotter

LOWRANCE



- High-definition, 9", 16:9 widescreen color display with touchscreen functionality for fast and easy operation.
- Dual Ethernet ports and two full size SD card slots.
- Built-in, exclusive Insight USA mapping, Broadband Sounder and StructureScan HD Sonar Imaging.
- Video input capable with input cable sold separately

Order No.	Mfg. No. / Description	Price
142030	(11280-001) Insight USA + 83/200 & SS XDCR	$2,698.98 C
143150	(10770-001) Insight USA (Transducer Sold Separately)	$2,380.98 D
143155	(10771-001) Insight USA + 83/200 kHz Transducer	$2,499.98 D
143160	(10772-001) Insight USA + 50/200 kHz Transducer	$2,549.98 D

Lowrance HDS-10 Fishfinder/GPS Chartplotter

LOWRANCE



- Brilliant, 10.4" 16-bit color Super VGA SolarMAX PLUS TFT display.
- Display resolution: 600H X 800W.
- Sonar output power: Max 250W/32W RMS actual; 30,000/3,750 RMS analog equivalent W.
- Built-in Broadband Sounder.
- Internal 16-channel GPS+WAAS Antenna.
- Built-in Insight Mapping Options.
- Largest Selection of Chartcard Options Including Navionics Platinum+ with TurboView.
- SIRIUS Satellite Weather and Stereo-Quality Radio Capability.
- Ethernetworks and NMEA 2000 Performance Networking Options.
- Expanded New 2-Year Limited Warranty.

Order No.	Mfg. No. / Description	Price
140959	(140-00) 83/200 kHz Skimmer Transducer, Enhanced Background Map Only	$2544.98 C
140963	(10542-001) 83/200 kHz, Gen 2 Skimmer Transducer, Insight USA Mapping	$2,298.98 C

Lowrance HDS-10 Gen2 Insight USA with LSS-2 System

LOWRANCE



- Bundle with LSS-2, 83/200 kHz and LSS-2 Transducer.

Order No.	Mfg. No. / Description	Price
140974	(10871-001) HDS-10 Gen2 Insight USA	$2,798.98 D

Lowrance HDS-8 Gen2 Fishfinder/Chartplotter

LOWRANCE



- Realtime StructureMap capability.
- Built-in, award-winning Broadband Sounder.
- Super-accurate, internal GPS antenna.
- High-bright, sunlight-viewable display with LED backlighting.
- TrackBack feature to review sonar history and save waypoints on key locations.
- Built-in Insight USA mapping options (Americas models) or Navionics world background map.
- High-detail mapping options including Insight HD, Navionics Platinum+ with TurboVIew, and Fishing Hot Spots PRO.
- NMEA 2000 and high-speed Ethernet networking options.
- Two-year limited warranty.

Order No.	Mfg. No. / Description	Price
1440056	(10622-001)	$2,297.98 B

Lowrance HDS-8 Gen2 Fishfinder/GPS Chartplotter

LOWRANCE



- Brilliant, 8" 16-bit color Super VGA SolarMAX Plus TFT display.
- Display resolution: 600H X 800W.
- Sonar output power: Max 250W/32W RMS actual; 30,000/3,750 RMS analog equivalent W.
- Built-in Broadband Sounder.
- Internal 16-channel GPS+WAAS Antenna.
- Built-in Insight Mapping Options.
- Largest Selection of Chartcard Options Including Navionics Platinum+ with TurboView.
- SIRIUS Satellite Weather and Stereo-Quality Radio Capability.
- Ethernetworks and NMEA 2000 Performance Networking Options.
- Expanded New 2-Year Limited Warranty.

Order No.	Mfg. No. / Description	Price
140961	(10537-001) 83/200 kHz, Gen 2 Skimmer Transducer, Built-in Maps with Insight USA	$1,698.98 D
140958	(140-06) 50/200 kHz Skimmer Transducer, Built-in Maps with Insight USA	$2046.98 C

Lowrance HDS-8 Gen2 Fishfinder/Chartplotter

LOWRANCE



- Display size: 8".
- Display resolution: 600H x 800W.
- An excellent size to get the whole picture by dividing the screen into three or four panels: Chartplotter, Broadband Sounder, engine and system data, and optional StructureScan viewing plus users get the added advantage of programmable softkeys.

Order No.	Mfg. No. / Description	Price
140979	(10536-001) Insight USA + 50/200 kHz Transducer	$1,748.98 C

Lowrance HDS-7 Gen2 Fishfinder/GPS Chartplotter

LOWRANCE



- Brilliant, 6.4" 16-bit color full VGA SolarMAX PLUS TFT display.
- Display resolution: 480H X 640W.
- Sonar output power: Max 250W Peak to Peak actual; 30,000W Peak to Peak analog equivalent W.
- Built-in Broadband Sounder.
- Internal 16-channel GPS+WAAS Antenna.
- Built-in High-Definition Insight Mapping Options.
- Largest Selection of Chartcard Options Including Navionics Platinum+ with TurboView.
- SIRIUS Satellite Weather and Stereo-Quality Radio Capability.
- Ethernetworks and NMEA 2000 Performance Networking Options.
- Expanded New 2-Year Limited Warranty.

Order No.	Mfg. No. / Description	Price
140956	(10530-001) Insight USA + 83/200 kHz Transducer	$999.98 C
140964	(10529-001) Insight USA + 50/200 kHz Transducer	$1,048.98 C
140989	(10869-001) Insight USA + StructureScan Sonar Imaging	$1,499.98 D

Lowrance HDS-8 Gen2 Insight USA with LSS-2 System

LOWRANCE



- Bundle with LSS-2, 83/200 kHz and LSS-2 Transducer.
- With HDS Gen2 multifunction displays, anglers and boaters can easily overlay StructureScan HD images on traditional charting for real-time views of all underwater structure and their precise location on the map.
- Plus, you can create and save StructureMap charts of scanned areas for a complete and detailed underwater view all around the boat!

Order No.	Mfg. No. / Description	Price
140969	(10870-001) Insight USA + StructureScan Sonar Imaging	$2,199.98 D

Lowrance HDS-7 Gen2 Touch Touchscreen Fishfinder/Chartplotter

LOWRANCE



- High-definition, 7-inch, widescreen color display with touchscreen functionality for fast and easy operation.
- Built-in StructureScan™ HD sonar imaging, plus award-winning Broadband Sounder™ with DownScan Overlay™ and TrackBack™ feature.
- Personalized or built-in Insight mapping and optional Navionics® charts.
- View both at once in 3D perspective view, plus StructureMap™, Broadband Radar™ and SIRIUS® weather overlay capability.
- Brilliant, enhanced SolarMAX™ PLUS display for superior sunlight and wider-angle viewing.
- Single Ethernet port and one full-sized SD card slot.

Order No.	Mfg. No. / Description	Price
143130	(10764-001) Insight USA (Transducer Sold Separately)	$1,549.98 C
143135	(10765-001) Insight USA + 83/200 kHz Transducer	$1,599.98 C
143140	(10766-001) Insight USA + 50/200 kHz Transducer	$1,648.98 C
143180	(10778-001) Insight USA + 83/200 kHz and StructureScan HD Transducer	$1,799.98 C

Lowrance HDS-5 Gen2 Lake Insight Bundle with LSS-2

LOWRANCE



- Fishfinder/LSS-2 Sonar Bundle with 83/200 kHz Transducer.
- Includes LSS-2 StructureScan HD Sonar.
- New SolarMax Plus 5" Display.
- Enhanced Responsiveness.
- Built-in Recording Capability.
- High Definition Fishfinding.
- Lightning-Fast Chart Panning & Zooming Speeds.
- NMEA 2000 Network Connectivity.
- Built-in Broadband Sounder.
- 2x Processor Speed.

Order No.	Mfg. No. / Description	Price
140976	(10868-001) Lake Insight + StructureScan Sonar Imaging	$1,148.98 B

©2014 Donovan Marine, Inc.

Lowrance HDS-5 Gen2 Combo

LOWRANCE



- Nautic Insight built-in Insight coastal/offshore maps.
- 50/200 kHz Skimmer.
- Faster processing for quicker start-ups, chart panning and zooming, and menu operation.
- Real-time Structure Map capability for overlaying Structure Scan.
- Sonar Imaging data and maps to create a more life-like underwater view.
- Built-in Broadband Sounder.
- Internal high-sensitivity GPS+ WAAS / EGNOS /MSAS antenna.
- Brilliant, backlit display and keypad.
- Built-in cartography choices - U.S. basemap, Lake Insight, Nautic Insight or Insight USA.
- Compatible with: Lake Insight HD, Nautic Insight HD, Navionics Platinium, Platinum+ and Hotmaps Platinium Lake Maps, powered by TurboView, in addition to Fishing HotSpots cartography products.
- Performance Add-On Options: LSS-1 StructureScan sonar imaging, Broadband 3G/4G Radar HD Digital Radars LWX 1 SIRIUS satellite weather and radio, SonicHub marine audio server.
- Plug-and-play connectivity with dual-platforms: high speed Ethernet for display networking and performance module add-ons; and NMEA 2000 for onboard engine- and system-data sharing.
- Two-year limited warranty with Lowrance 5-Year Advantage upgrade coverage.

Order No.	Mfg. No. / Description	Price
140977	(10519-001) Nautic Insight + 50/200 kH Transducer	$748.98 B

Lowrance HDS-5 Gen2 Combo

LOWRANCE



- Lake Insight built-in maps, 83/200 kHz Skimmer.
- Faster processing for quicker start-ups, chart panning and zooming, and menu operation.
- Real-time StructureMap capability for overlaying StructureScan Sonar Imaging data and maps to create a more life-like underwater view.
- Built-in Broadband Sounder Internal high-sensitivity GPS+ WAAS / EGNOS /MSAS antenna Brilliant, backlit display and keypad.
- Built-in cartography choices - U.S. basemap, Lake Insight, Nautic Insight or Insight USA Compatible with: Lake Insight HD, Nautic Insight HD, Navionics Platinium, Platinum+ and Hotmaps Platinium Lake Maps, powered by TurboView, in addition to Fishing HotSpots cartography products.
- Performance Add-On Options: LSS-1 StructureScan sonar imaging, Broadband 3G/4G Radar HD Digital Radars LWX 1 SIRIUS satellite weather and radio, SonicHub marine audio server.
- Plug-and-play connectivity with dual-platforms: high speed Ethernet for display networking and performance module add-ons; and NMEA 2000 for onboard engine- and system-data sharing.
- Two-year limited warranty with Lowrance 5-Year Advantage upgrade coverage.

Order No.	Mfg. No. / Description	Price
140975	(10515-001) Lake Insight + 83/200 kHz Transducer	$648.98 B

Lowrance HDS-5x Gen2 Multifunction Fishfinder

LOWRANCE



- Display size: 5".
- Display resolution: 480H x 480W.
- The HDS-5x has an exclusive high-resolution 5" display.
- The splitscreen-zoom view with Broadband Sounder is a popular choice, options also include a three-window display.

Order No.	Mfg. No. / Description	Price
140978	(10526-001) HDS-5x Gen2 Multifunction Fishfinder	$548.98 B

Lowrance HDS-5M Nautic Insight - Mapping Only

LOWRANCE



- Same great features as the HDS-7 in a popular space-saving size, with an exclusive high resolution color display.
- Built-in, exclusive Lake Insight or Nautic Insight mapping model choices.
- StructureScan Sonar Imaging required to generate StructureMap images.

Order No.	Mfg. No. / Description	Price
1440049	(10520-001)	$548.98 B

Lowrance Protective Covers

LOWRANCE



Order No.	Mfg. No. / Description	Price
142555	(124-61) CVR-12, For HDS-5 Units	$29.98 F
142560	(124-62) CVR-13, For HDS-7 Units	$29.98 F
142565	(124-63) CVR-14, For HDS-8 Units	$32.98 F
1440092	(11069-001) Sun Cover for Elite-7, Elite-7x and Elite-7m	$19.98 C

Lowrance SonicHub Marine Audio Server

LOWRANCE


Server


Speakers


Dock

- Full integration with Lowrance HDS multifunction displays using NMEA 2000 network.
- Includes: Marine-grade audio server with multiple input sources, dock for iPod, iPhone, iTouch and MP3 devices and two marine-grade 6.5" speakers (200W output).
- SonicHub status is displayed at bottom of display screen when active.
- Includes a four channel x 50 watt speaker amplifier and AM/FM stereo tuner.
- Line-out to subwoofer for added bass.
- Numerous audio source inputs including Apple products, other MP3 sources via USB port and flash drive.
- Stereo AUX line input for audio.
- Compatible with LWX-1 SIRIUS satellite radio/marine weather module - service subscription needed.

Order No.	Mfg. No. / Description	Price
140980	(10141-001)	$299.98 B

Lowrance Ethernet Expansion Port

LOWRANCE



- For use with Lowrance HDS systems.
- For adding multiple units to system.
- 1 input and 5 output ports.
- Yellow 5 pin cables not included.
- One year parts and labor warranty.

Order No.	Mfg. No. / Description	Price
1440012	(10029-001)	$279.98 B

Lowrance Transom Mount Transducer

LOWRANCE



- Transom mount, skimmer with built-in temperature sensor.
- Includes 20' power cable.
- Works with: HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-330C, LMS-332C, LMS-334C iGPS, LMS-480, LMS-520C, LMS-522C iGPS, X100C, X102C, X125, X135, X510C, X-510C, X52.

Order No.	Mfg. No. / Description	Price
140214	(106-72) HST-WSBL	$79.98 F

Lowrance Broadband Radar

LOWRANCE



- Compatible with all HDS chartplotter-equipped models via ethernet.
- First radar with no radiation hazard.
- Instant On with no tuning required.
- Crystal clear image of your immediate surroundings.
- Easier to use for both experienced and novice navigators.
- Low power consumption, ideal for yachts.

Order No.	Mfg. No. / Description	Price
142455	(AA010212) External Radar Cable, 20m	$222.98 D
142480	(19042) Adapter Plate	$199.98 F

Lowrance SonarHub Module

LOWRANCE



- NEW compact SonarHub module provides a single plug-and-play, all-in-one network solution for adding best-in-class StructureScan HD and CHIRP sonar capabilities to Lowrance fishfinder/chartplotter displays.
- Makes it easier than ever to identify productive fishing areas with connectivity to the latest Lowrance sonar technologies.
- Including StructureScan HD, CHIRP and SpotlightScan.

Order No.	Mfg. No. / Description	Price
142040	(11141-001)	$798.98 B

Lowrance StructureScan™ Sonar Imaging System

LOWRANCE


142370


140518

- Add-on module for all HDS displays.
- Share side-view imaging with multiple HDS displays via ethernet network.
- Review sonar "history" and set waypoints with synchronized scroll-back.
- Easy to use, network and install.

Order No.	Mfg. No. / Description	Price
140518	(10800-001) LSS-2	$598.98 B

- StructureScan 10' 9-pin transducer extension cable.
- Works with: HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, StructureScan.

Order No.	Mfg. No. / Description	Price
142370	(99-006) 10EX-BLK	$69.98 C

Lowrance Gimbal Brackets

LOWRANCE



- Includes gimbal knobs.

Order No.	Mfg. No. / Description	Price
1440021	(101-99) GB-14, For S71, 91, LMS 240	$32.98 C
142250	(124-57) GB-19, For HDS-5 Units	$28.98 D
142280	(124-58) GB-20, For HDS-7 Units	$33.98 D
142315	(124-60) GB-22, For HDS-10 Units	$42.98 D
143255	(11019-001) Fits HDS-7 Gen 2 Units	$45.98 F
143260	(11020-001) Fits HDS-12 Gen 2 Units	$43.98 D
143265	(11021-001) Fits HDS-12 Gen 2 Touch Units	$75.98 F

Lowrance LGC-4000 GPS Receiver Antenna

LOWRANCE



- 12 parallel channel GPS module.
- WAAS capable.
- Red connector.
- Compatible with: GlobalMap (5200C, 7200C, 7300C HD, 8200C, 8300C HD, 9200C, 9300C HD), LCX-112C, LCX-113C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-520C, LMS-525C DF.

Order No.	Mfg. No. / Description	Price
140517	(125-28) LGC-4000	$219.98 C

©2014 Donovan Marine, Inc.

Lowrance Flush Mount Kit

LOWRANCE

- Includes paper template and four screws.
- Compatible with: HDS-10, HDS-10m, HDS-5, HDS-5m, HDS-5x, HDS-7, HDS-7m, HDS-8, HDS-8m.

Order No.	Mfg. No. / Description	Price
142230	(124-65) FM-12	$18.98 D

Lowrance Fluxgate Compass

- SimNet Adaptor Kit.
- Connects heading sensor to network, with SimNet-to-NMEA 2000 male adaptor, SimNet-2 joiner, T connector.

Order No.	Mfg. No. / Description	Price
142445	(127-45)	$99.98 C

Lowrance Electronic Probe System Sensors

LOWRANCE



- Only Lowrance offers the most NMEA 2000 sensors for vital vessel data monitoring, each with a built-in "smart module" that's fully programmable for greater accuracy in dedicated system sensor data delivery.
- Fuel Flow Sensor.
- Gasoline only/single engine, twin engine requires two.
- Cable length: 10'.
- For use with LowranceNET networks with red connectors (do not connect to blue connectors).

Order No.	Mfg. No. / Description	Price
142430	(120-39) EP-60R	$219.98 D

- Fuel Level Sensor.
- Gasoline, oil or water levels.
- Cable length: 18" from connector to smart module, 10' from module to end of cable.
- For use with LowranceNET networks with red connectors (do not connect to blue connectors).

Order No.	Mfg. No. / Description	Price
142405	(120-41) EP-65R	$109.98 C

- Temperature Sensor.
- Surface water, livewell and baitwell temperature.
- Cable length: 18" from connector to smart module, 10' from module to end of cable.
- For use with LowranceNET networks with red connectors (do not connect to blue connectors).

Order No.	Mfg. No. / Description	Price
142410	(120-51) EP-80R	$109.98 D

- Thru-hull Temperature Sensor with 10' cable.
- Includes N2K-T-RD (119-79).
- Can also be connected to a blue connector network with an adapter (127-05).
- Works with: NMEA 2000 Compliant Units

Order No.	Mfg. No. / Description	Price
142415	(120-53) EP-80R	$109.98 D

- Pressure Sensor.
- Provides pressure data such as atmospheric, engine boost, engine oil, engine water, fuel, transmission oil and pitot speed.
- Cable length: 1.5'.
- For use with LowranceNET networks with red connectors (do not connect to blue connectors).

Order No.	Mfg. No. / Description	Price
142425	(120-29) EP-90R	$139.98 D

Lowrance Power Cable

LOWRANCE



- Power cable for all HDS units.
- Works with: HDS-10, HDS-10m, HDS-5, HDS-5m, HDS-5x, HDS-7, HDS-7m, HDS-8, HDS-8m.

Order No.	Mfg. No. / Description	Price
142295	(127-49) PC-30	$33.98 D

Lowrance NMEA 2000® Network Starter Kit

LOWRANCE

- Easily begin building your own expandable NMEA 2000 onboard network, to add sensors and displays for your needs, at your place.
- NMEA 2000 - compliant components include two T connectors (N2K-T-RD), 2' extension cable (N2KEXT-2RD), 15' extension cable (N2KEXT-15RD), two terminating resistors (TR-120M-RD, TR-120F-RD) and a power cable (N2K-PWR-RD).

Order No.	Mfg. No. / Description	Price
142360	(124-69)	$78.98 D

Lowrance NMEA 2000® Accessories

LOWRANCE

Order No.	Mfg. No. / Description	Price
142240	(119-79) T Connector, N2K-T-RD	$22.98 D
142355	(127-53) 6' Extension Cable, N2KEXT-6RD	$45.98 D
142350	(119-86) 15' Extension Cable, N2KEXT-15RD	$56.98 D
142375	(119-83) 25' Extension Cable, N2KEXT-25RD	$79.98 D
142365	(119-75) Power Cable, N2K-PWR-RD	$56.98 D

Lowrance Ethernet Network Cables

LOWRANCE

- Compatible with: Broadband Radar, Broadband Sounder-1, GlobalMap 5200C, GlobalMap 5300C iGPS, GlobalMap 7200C, GlobalMap 7300C HD, GlobalMap 8200C, GlobalMap 8300C HD, GlobalMap 9200C, GlobalMap 9300C HD, GlobalMap Baja 540C, GlobalMap Baja 840C, LCX-112C, LCX-113C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-520C, LMS-522C iGPS, LMS-525C DF, LMS-527C DF iGPS, Navico Expansion Port-1, StructureScan.

Order No.	Mfg. No. / Description	Price
142320	(127-51) Length 6', ETHEXT-6YL	$34.98 D
142345	(127-29) Length 15', ETHEXT-15YL	$56.98 D
142380	(127-30) Length 25', ETHEXT-25YL	$79.98 D

Lowrance Terminator Kit

LOWRANCE

- Set of 1 male and 1 female NMEA 2000 120 ohm terminators.

Order No.	Mfg. No. / Description	Price
142220	(127-52) TR-120-KIT	$21.98 D

Lowrance Engine Interface Sensors - Red

LOWRANCE

- Cable sensors for top outboard motor brands connect to NMEA 2000 networks for engine data display.
- Includes: Interface sensor, 15' cable and network bus T connector.

Order No.	Mfg. No. / Description	Price
142420	(120-62) Evinrude Engine Interface	$137.98 D
142400	(120-37) Yamaha Engine Interface	$109.98 C

Lowrance Adapter Cable

- NMEA 2000 network adapter cable.
- Works with: NMEA 2000 Compliant Units.
- Adapts a red connector device to a blue connector network.

Order No.	Mfg. No. / Description	Price
142290	(127-05) NAC-FRD2FBL	$44.98 D

Lowrance Elite-7x HDI Fishfinder

LOWRANCE



- Hybrid Dual Imaging (HDI) - Broadband Sounder plus exclusive DownScan Imaging 70% larger color display
- Exclusive technology overlays DownScan Imaging onto Broadband Sounder
- A new page selector menu with quick access to all features using one-thumb operation
- Multi-window displays let you choose up to three panels in split-screen mode simultaneously
- Advanced NMEA 2000 networking compatibility
- Options include external GPS Antenna for basic digital GPS data overlay, marking waypoints & waypoint sharing with networked Lowrance chartplotters
- Supported by Lowrance Advantage Service

Order No.	Mfg. No. / Description	Price
143190	(10961-001) Includes 83/200 kHz transducer	$548.98 B
143195	(10962-001) Includes 50/200 kHz transducer	$719.98 B
143200	(10965-001) No Transducer Included (Sold Separately)	$497.98 B

Lowrance Elite-7m Gold Chartplotter

LOWRANCE



- Elite-7m Chartplotter delivers superior navigational performance with a highly accurate built-in GPS antenna.
- The 7" display with LED backlight provides an easy-to-view screen.
- Highly accurate, built-in GPS antenna plus a detailed U.S. background map, with optional charting upgrades
- Works with high-capacity micro SD cards
- Create your own map from real sonar data that you record with Insight Genesis™
- 70% larger color display
- A new page selector menu system with quick access to all features
- Advanced NMEA 2000 networking compatibility
- Supported by 5-Year Advantage Service

Order No.	Mfg. No. / Description	Price
143230	(10975-001) Elite-7m Gold Chartplotter	$668.98 B

Lowrance Elite-7 HDI Fishfinder/Chartplotter

LOWRANCE



- 7" fishfinder/chartplotter with high-bright, LED-backlit display
- Hybrid Dual Imaging (HDI) - Broadband Sounder plus exclusive DownScan Imaging
- Highly accurate, built-in GPS antenna plus a detailed U.S. background map, with optional charting upgrades
- Create your own map from real sonar data that you record with Insight Genesis™
- 70% larger Elite color display
- Exclusive technology overlays DownScan Imaging onto Broadband Sounder
- New page selector menu with quick access to all features using one-thumb operation
- Multi-Window displays let's you choose up to three panels in split-screen mode
- Advanced NMEA 2000 networking compatibility
- Supported by Lowrance Advantage Service

Order No.	Mfg. No. / Description	Price
143270	(11051-001) 83/200 + 455/800 HDI + Gold Pkg	$770.98 B
143225	(10972-001) 50/200 + 455/800 HDI + Gold Pkg	$868.98 B
143205	(10966-001) 83/200 + 455/800 HDI	$698.98 B
143210	(10967-001) 50/200 + 455/800 HDI	$798.98 B
143220	(10970-001) No Transducer Included (Sold Separately)	$663.98 B

Lowrance Elite-7 Broadband Fishfinder/Chartplotter

LOWRANCE



- 7" LED backlit display.
- Broadband Sounder technology with 83/200 kHz transducer, built-in GPS antenna and high-definition mapping. HDI ready
- 70% larger Elite color display
- Multi-Window displays let's you choose up to three panels in split-screen mode to view chart, sonar and DownScan Imaging - all on one screen
- Reliable navigation that's easy-to-use
- Exclusive technology overlays DownScan Imaging onto Broadband Sounder display for one stunning view
- TrackBack through sonar history
- Hybrid Dual Imaging (HDI) ready
- Supported by Lowrance Advantage Service

Order No.	Mfg. No. / Description	Price
143215	(10968-001) Includes 83/200 kHz transducer	$663.98 B

Lowrance DownScan Imaging Elite-5 DSI Fishfinder/Chartplotter

LOWRANCE



- 5" 256-color SolarMAX TFT.
- Display resolution: 480H x 480W.
- Sonar output power: Max 500W RMS, 4,000W PTP.
- Sonar depth: Max 250'.
- Dual-coverage imaging; 455/800 kHz fishfinding.
- Exclusive Lowrance down-looking sonar imaging innovation.
- Detailed, automatic photo-like viewing locates prime fishing spots under boat
- Easy-to-use with manual fine-tuning option.
- Built-in precision GPS antenna & detailed basemap U.S. inland waters & coasts.
- Multiple map/chart card options.
- Includes special-issue Navionics Gold chartcard featuring coastal U.S. and Canada detail, plus major Canadian lakes and Great Lakes coverage.

Order No.	Mfg. No. / Description	Price
140996	(10245-001) Elite-5 DSI Gold	$629.98 C

©2014 Donovan Marine, Inc.

Lowrance Elite-5m Chartplotter

LOWRANCE



- 5" 256-color SolarMAX PLUS TFT.
- Display resolution: 480H x 480W.
- Internal 16-channel GPS antenna with WAAS+EGNOS+MSAS precision.
- Built-in background mapping/charting.
- Includes special-issue Navionics Gold chartcard featuring coastal U.S. and Canada detail, plus major Canadian lakes and Great Lakes coverage.
- Fully compatible with Fishing Hot Spots and LakeMaster mapcards

Order No.	Mfg. No. / Description	Price
140926	(103-001) Elite-5m Gold	$607.98 C

Lowrance Elite-4 HDI Fishfinder/Chartplotter

LOWRANCE



- All-NEW 4.3-inch fishfinder/chartplotter now with Hybrid Dual Imaging.
- Lowrance-exclusive, brilliant, high-resolution, 4.3-inch, LED-backlit color display.
- Exclusive Hybrid Dual Imaging (HDI) - Broadband Sounder plus DownScan Imaging - the power of two award-winning technologies combined to provide the best possible view beneath your boat.
- Highly accurate, built-in GPS antenna plus a detailed U.S. map featuring more than 3,000 lakes and rivers and coastal contours to 1,000 feet.
- Optional chart upgrades include Lake Insight and Nautic Insight PRO and HD, Navionics Gold and HotMaps Premium, Fishing Hotspots PRO and Jeppesen C-Map Max-N.
- Create your own map from real sonar data that you record with Insight Genesis.
- DownScan Overlay technology overlays DownScan Imaging onto Broadband Sounder.
- Includes Transducer

Order No.	Mfg. No. / Description	Price
142045	(11216-001) 83/200 + 455/800 HDI	$299.98 B
142035	(11288-001) 50/200 + 455/800 HDI	$399.98 B

Lowrance Elite-4 DSI Fishfinder/Chartplotter

LOWRANCE



- New, brighter LED backlighting
- Exclusive TrackBack feature
- Easy-to-use menu page and menu controls
- Simplified menu navigation
- Quick-release tilt and swivel bracket
- Accurate internal GPS antenna
- MicroSD card expandability

Order No.	Mfg. No. / Description	Price
141007	(10494-001) 455/800 kHz	$386.98 C

Lowrance Elite-4x DSI Fishfinder

LOWRANCE



- New, brighter LED backlighting
- Exclusive TrackBack feature
- Easy-to-use menu page and menu controls
- Simplified menu navigation
- Quick-release tilt and swivel bracket

Order No.	Mfg. No. / Description	Price
141002	(10487-001) 455/800 kHz	$217.98 B

Lowrance Elite-4 HDI Gold Fishfinder/Chartplotter

LOWRANCE



- All-NEW 4.3-inch fishfinder/chartplotter now with Hybrid Dual Imaging.
- Combines Broadband Sounder with DownScan Imaging technology.
- Built-in GPS antenna and Navionics Gold high-definition mapping.
- Comes pre-packaged with a custom Navionics chart card featuring U.S./Canada/Alaska and Bahamas Coastal, Great Lakes and major Canadian lakes detail.
- TrackBack to view Sonar History - Save time and fuel with the instant capability to track back. Review recent sonar readings that have already scrolled off the screen.
- Allows you to scroll back and mark a waypoint at your cursor location with the press of a button.

Order No.	Mfg. No. / Description	Price
142015	(11292-001) 83/200 + 455/800 HDI	$369.98 B
142020	(11291-001) 50/200 + 455/800 HDI	$469.98 B

Lowrance Elite-4x HDI Fishfinder

LOWRANCE



- Lowrance-exclusive, brilliant, high-resolution, 4.3-inch, LED-backlit color display.
- Exclusive Hybrid Dual Imaging (HDI) - Broadband Sounder plus DownScan Imaging.
- DownScan Overlay technology overlays DownScan Imaging onto Broadband Sounder.
- Exclusive TrackBack to review recorded sonar history including structure, transitions or fish targets.
- Multi-Window Display lets you choose from pre-set split-screen layouts - including a three-panel view.
- New page selector menu with quick access to all features using one-thumb operation.
- Advanced Signal Processing (ASP) reduces the need to manually adjust settings to see fish, structure and bottom detail more clearly.
- Supported by Lowrance Advantage Service program.
- Transducer Included.

Order No.	Mfg. No. / Description	Price
142065	(11212-001) 83/200	$187.98 C
142060	(11213-001) 83/200 + 455/800 HDI	$220.98 C
142005	(11297-001) 50/200 + 455/800 HDI	$299.98 B

Lowrance Elite-4 Fishfinder/Chartplotter

LOWRANCE



- Color, 83/200kHz- Enhanced background map only
- Bright 3.5 LED-backlit displays offers the best viewing in any boating condition.
- Simplified, automatic operation and easy-to-use menu.
- Sleek compact case design for bracket- or flush mounting.
- Unique, easy-to-adjust/release swivel mounting bracket.
- Built-in basemap for easy navigation.
- Accurate internal GPS antenna works great, even when flush-mounted in the dash MicroSD card slot for optional mapping choices, including Navionics Gold.

Order No.	Mfg. No. / Description	Price
141004	(10491-001) 83/200 kHz	$329.98 C

Lowrance Elite-4m Gold Chartplotter

LOWRANCE



- Bright 3.5 LED-backlit displays offers the best viewing in any boating condition
- Simplified, automatic operation and easy-to-use menu
- Sleek compact case design for bracket- or flush mounting
- Unique, easy-to-adjust/release swivel mounting bracket
- Built-in basemap for easy navigation
- Accurate internal GPS antenna works great, even when flush-mounted in the dash
- MicroSD card slot for optional mapping choices, including Navionics Gold

Order No.	Mfg. No. / Description	Price
141003	(10489-001) Coastal/Canadian Navionics Gold Bundle	$297.98 B

Lowrance Sun Cover For Mark and Elite 4 Series

LOWRANCE

Order No.	Mfg. No. / Description	Price
142573	(10495-001) Sun Cover	$29.98 F

Lowrance DownScan Imaging Mark-5x DSI Fishfinder/Chartplotter

LOWRANCE



- 5" 16-level gray scale Film SuperTwist LCD.
- Display resolution: 480H x 480W.
- Sonar output power: Max 500W RMS, 4,000W PTP.
- Sonar depth: Max 250'.
- Dual-coverage imaging; 455/800 kHz fishfinding.
- Exclusive Lowrance down-looking imaging innovation.
- Detailed, automatic photo-like viewing locates prime fishing spots under the boat.
- Easy-to-use with manual fine-tuning option.

Order No.	Mfg. No. / Description	Price
140990	(10233-001) 455/800 kHz	$219.98 C

Lowrance X-4 Pro Compact Fishfinder

LOWRANCE



- 4" 4-level gray scale Film SuperTwist monochrome.
- Display resolution: 240H x 160W.
- Sonar output power: Max 188W RMS, 1,500W PTP.
- Sonar depth: Max 1,000'.
- Dual-search 83/200 kHz Skimmer transducer with water temp sensor.
- Features: Automatic depth ranging, auto and zoom bottom lock, sonar alarms: Fish, max and min depth and temperature display.

Order No.	Mfg. No. / Description	Price
140282	(10229-001) 83/200 kHz	$109.98 B

Lowrance X-4 Compact Fishfinder

LOWRANCE



- 4" 4-level gray scale Film SuperTwist monochrome.
- Display resolution: 240H x 160W.
- Sonar output power: Max 100W RMS, 800W PTP.
- Sonar depth: Max 600'.
- Exclusive 200 kHz Skimmer transducer with water temp sensor.
- Features: Automatic depth ranging, auto and zoom bottom lock, sonar alarms: Fish, max and min depth and temperature display.

Order No.	Mfg. No. / Description	Price
140280	(10227-001) 200 kHz	$93.98 C

Lowrance Chartplotter Gold Map Only

LOWRANCE



- NEW compact SonarHub module provides a single plug-and-play, all-in-one network solution for adding best-in-class StructureScan HD and CHIRP sonar capabilities to Lowrance fishfinder/chartplotter displays.
- Makes it easier than ever to identify productive fishing areas with connectivity to the latest Lowrance sonar technologies.
- Including StructureScan HD, CHIRP and SpotlightScan.

Order No.	Mfg. No. / Description	Price
142010	(11294-001)	$269.98 B

Lowrance Mark-5x Pro Fishfinder

LOWRANCE



- 5" 16-level gray scale SuperTwist monochrome.
- Display resolution: 480H x 480W.
- Sonar output power: Max 300W RMS, 2,400W PTP.
- Sonar depth: Max 1,000'.
- Dual-frequency 83/200 kHz Skimmer transom-mount transducer with internal temp sensor and up to 120° of wider sonar coverage.
- Optimized automatic mode for high-performance out-of-the-box fishfinding.

Order No.	Mfg. No. / Description	Price
140932	(00175-001) 83/200 kHz	$175.98 C

Lowrance Mark-4 HDI Fishfinder/Chartplotter

LOWRANCE



- The Mark-4 HDI includes all of the great features of the new Elite-4 HDI but with a more affordable display.
- All-NEW 4.3-inch grayscale fishfinder/chartplotter now with Hybrid Dual Imaging that combines Broadband Sounder with DownScan Imaging technology.
- Built-in GPS antenna and high-definition mapping.
- Transducer included.

Order No.	Mfg. No. / Description	Price
142000	(11299-001) 83/200 + 455/800 HDI	$329.98 B
142050	(11215-001) 83/200 + 455/800 HDI	$253.98 C
142055	(11214-001) 83/200	$220.98 C

Lowrance Mark-4 Fishfinder/Chartplotter

LOWRANCE



- Bright 3.5 LED-backlit display offers the best viewing in any boating condition.
- Simplified, automatic operation and easy-to-use menu.
- Sleek compact case design for bracket- or flush mounting.
- Unique, easy-to-adjust/release swivel mounting bracket.
- Built-in basemap for easy navigation.
- Accurate internal GPS antenna works great, even when flush-mounted in the dash.
- MicroSD card slot for optional mapping choices, including Navionics Gold.
- View up to four pages of sonar-display history with Trackback feature.
- Includes low-profile, high-speed, transom-mount, 83/200 kHz Skimmer transducer with built-in temp sensor, and trolling motor-mount bracket option.

Order No.	Mfg. No. / Description	Price
140923	(10483-001) 83/200 kHz	$219.98 C

©2014 Donovan Marine, Inc.

Lowrance Skimmer® Transducer DSI with Temp

LOWRANCE



- 20' DSI with Temp.

Order No.	Mfg. No. / Description	Price
142395	(10260-001) Transducer DSI with Temp	$94.98 D

Lowrance Transom Mount Transducer

LOWRANCE



- Transom mount, dual frequency skimmer with built-in temperature sensor (50 kHz 35 degree & 200 kHz 12 degree).
- Includes 25' power cable.
- CAN BE USED WITH X67C, M68C AND FISHEASY 320C FOR DEEPWATER/SALTWATER APPLICATIONS.
- Works with: FishEasy 320, M56 S/MAP, M68C S/MAP, SeaChamp 1000C DF, SeaChamp 2000C DF, SeaCharter 500C DF, SeaCharter 502C DF iGPS, SeaCharter 642C DF iGPS, SeaFinder 240DF, SeaFinder 250DF, SeaFinder 320DF, SeaFinder 480DF, SeaFinder 500C DF, SeaFinder 640C DF, X67C.

Order No.	Mfg. No. / Description	Price
142520	(106-49) HST-50/200-WSU	$164.98 C

Lowrance Transom Mount Transducer

LOWRANCE



- Transom mount, 20 degree skimmer (200 kHz) with built-in temperature.
- Includes 20' power cable.
- Works with: Cuda 128, Cuda 128 P, Cuda 168, Cuda 168 EX, Cuda 240 S/GPS, Cuda 242, Cuda 250 S/Map, Cuda 300, FishEasy 2 (w/ Black Connector), FishEasy 240, FishEasy 245 DS, FishEasy 250 DS, FishEasy 320, FishElite 320, FishElite 480, FishElite 500C, FishElite 502C iGPS, FishElite 640C, FishElite 642C iGPS, FishMark 320, FishMark 480, FishMark 500C, FishMark 640C, FishStrike 1000C, FishStrike 2000C, LCF-1440, LST-3800, M56 S/MAP, M68C S/MAP, SeaFinder 245DS, X47, X47EX, X-50 DS, X67C, X-86 DS, X96.

Order No.	Mfg. No. / Description	Price
140212	(106-48) HST-WSU	$69.98 F

Lowrance LSS-2 StructureScan HD Skimmer Transducer

LOWRANCE



Order No.	Mfg. No. / Description	Price
143275	(10802-001)	$299.98 C

Lowrance Trolling Motor Adapter For HDI Transducer

LOWRANCE



- Fits HDS Gen2 Lowrance Blue-Connector Transducers

Order No.	Mfg. No. / Description	Price
143245	(10978-001) Trolling Motor Adapter For HDI Transducer	$23.98 D

Lowrance Transducer Extension Cable DSI

LOWRANCE

Order No.	Mfg. No. / Description	Price
142305	(10263-001) Length 15'	$44.98 D

Lowrance Trolling Motor Transducer Adapter DSI

LOWRANCE

Order No.	Mfg. No. / Description	Price
142265	(10261-001)	$22.98 D

Lowrance Transom Mount Transducer

LOWRANCE



- Transom-mount, dual frequency skimmer with built-in temperature sensor.
- Includes 25' cable.
- Works with: HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-38C HD, LMS-335C DF, LMS-337C DF, LMS-339C DF iGPS, LMS-480, LMS-525C DF, LMS-527C DF iGPS, X105C DF, X107C DF, X126DF, X136DF, X-515C DF, X59DF

Order No.	Mfg. No. / Description	Price
142450	(106-77) HST-DFSBL	$119.98 D

Lowrance Transom Mount Transducer

LOWRANCE



- Transom mount, skimmer with built-in temperature sensor.
- Includes 20' power cable.
- Works with: HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-330C, LMS-332C, LMS-334C iGPS, LMS-480, LMS-520C, LMS-522C iGPS, X100C, X102C, X125, X135, X510C, X-510C, X52.

Order No.	Mfg. No. / Description	Price
140214	(106-72) HST-WSBL	$79.98 F

Lowrance Hybrid Dual Imaging™ (HDI) Transducers

LOWRANCE



- Transom-mount Skimmer transducer design featuring all-in-one Broadband Sounder™ and DownScan Imaging capability.
- Works with Elite-7 and HDS Gen2 Touch models.

Order No.	Mfg. No. / Description	Price
143235	(10976-001) HDI 83/200 Skimmer Transducer	$119.98 C
143240	(10977-001) HDI 50/200 Skimmer Transducer	$259.98 D

Lowrance Pod Type Transducer

LOWRANCE



- Trolling motor mount, pod type with built in temperature sensor.
- Includes 12' power cable.
- Works with: HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-330C, LMS-332C, LMS-334C iGPS, LMS-480, LMS-520C, LMS-522C iGPS, X100C, X102C, X125, X135, X510C, X-510C, X52.

Order No.	Mfg. No. / Description	Price
140215	(106-74) PDT-WBL	$84.98 E

Lowrance Pod Type Transducer

LOWRANCE



- Trolling motor mount, 20 degree pod type with built in temperature sensor (200 kHz).
- Includes 10' power cable.
- Works with: Cuda 128, Cuda 168, Cuda 168 EX, Cuda 240 S/GPS, Cuda 242, Cuda 250 S/Map, FishEasy 2 (w/ Black Connector), FishEasy 240, FishEasy 245 DS, FishEasy 250 DS, FishEasy 320, FishElite 320, FishElite 480, FishElite 500C, FishElite 502C iGPS, FishElite 640C, FishElite 642C iGPS, FishMark 320, FishMark 480, FishMark 500C, FishMark 640C, FishStrike 1000C, FishStrike 2000C, LCF-1440, LST-3800, M56 S/MAP, M68C S/MAP, X47, X47EX, X-50 DS, X67C, X-86 DS, X96.

Order No.	Mfg. No. / Description	Price
142213	(106-50) PDT-WSU	$78.98 D

Lowrance Pod Type Transducer

LOWRANCE

- Shoot-thru-hull transducer No Temp For Elite and Mark Series.
- Includes 20' power cable.
- Works with: Cuda 350, LCF-1440, LST-3800.

Order No.	Mfg. No. / Description	Price
142210	(106-52) PD-WSU	$89.98 D

Lowrance Pod Type Transducer

LOWRANCE

- Shoot-thru-hull mount, 20° pod type with remote temperature (200 kHz).
- Includes 20' power cable.
- Works with: HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-330C, LMS-332C, LMS-334C iGPS, LMS-335C DF, LMS-337C DF, LMS-339C DF iGPS, LMS-480, LMS-520C, LMS-522C iGPS, LMS-525C DF, LMS-527C DF iGPS, X100C, X102C, X105C DF, X107C DF, X125, X126DF, X135, X136DF, X510C, X515C DF, X52.

Order No.	Mfg. No. / Description	Price
142390	(106-89) PDRT-WBL	$89.98 D

Lowrance Transducer Kayak Scupper Mount

LOWRANCE



- This transducer-mounting system for sit-on-top fishing kayaks takes full advantage of Lowrance echosounder performance.
- It allows total submersion of a Skimmer transducer in the water below the kayak for maximum sonar performance and the clearest underwater returns of structure and fish possible.
- Easy to install in most kayak scupper openings with few tools and without messy adhesives.
- Perfect for all 83/200 kHz and earlier (200 kHz) Lowrance Skimmer models, plus DSI imaging transducer.
- Not for 50/200 kHz Skimmer mounting.

Order No.	Mfg. No. / Description	Price
141008	(10606-001) Transducer Kayak Scupper Mount	$44.98 D

Lowrance Adapter Cable

LOWRANCE

- Adapts blue connector 50/200 kHz or 200 kHz transducers to units with newer black 50/200 or 200 kHz transducer power connectors.

Order No.	Mfg. No. / Description	Price
142535	(119-00) TA-BL2U	$41.98 C

Lowrance Transducer Extension Cable

LOWRANCE

- Uniplug extension 15' cable.

Order No.	Mfg. No. / Description	Price
140918	(99-91)	$35.98 D

Lowrance Pod Type Transducer

LOWRANCE



- Shoot-thru-hull mount, 20 degree pod type with remote temperature (200 kHz).
- Includes 20' power cable.
- Works with: Cuda 350, LCF-1440, LST-3800.

Order No.	Mfg. No. / Description	Price
142385	(106-69) PDRT-WSU	$86.98 D

Lowrance Pod Type Transducer

LOWRANCE

- Trolling motor-mount or shoot-thru-hull, pod type transducer.
- Includes 20' power cable.
- Works with: HDS-10, HDS-10, HDS-5, HDS-5x, HDS-7, HDS-8, LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-15CI, LCX-15CT, LCX-15MT, LCX-16CI, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-332C, LMS-334C iGPS, LMS-520C, LMS-522C iGPS, X102C, X125, X135, X-510C, X52.

Order No.	Mfg. No. / Description	Price
142525	(106-73) PD-WBL	$89.98 C

Lowrance Transducer Brackets

LOWRANCE

- Stainless steel transom mount bracket for 20° HS-WS transducer.
- Use with: Fish I.D. II Plus, Magna II, Magna II Plus, SeaView 2000, Ultra, Ultra II, Ultra II Plus, Ultra Plus, UltraNav, UltraNav II, X-55, X-70, X-70A.

Order No.	Mfg. No. / Description	Price
142505	(99-06) HS-WS-SS	$21.98 C

- Plastic bracket adapts HS-WS transducer to trolling motor.
- For use with: Fish I.D. II Plus, LMS-480, Magna II, Magna II Plus, SeaView 2000, Ultra, Ultra II, Ultra II Plus, Ultra Plus, UltraNav, UltraNav II, X125, X135, X-510C, X-55, X-70, X-70A.

Order No.	Mfg. No. / Description	Price
141262	(51-45) TMB-S	$17.98 D

Lowrance Epoxy Tube

LOWRANCE

Order No.	Mfg. No. / Description	Price
140917	(10698) Epoxy Tube	$7.98 Q

Lowrance Transducer Extension Cable

LOWRANCE

- Works with: LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-332C, LMS-334C iGPS, LMS-337C DF, LMS-339C DF iGPS, LMS-480, LMS-520C, LMS-522C iGPS, LMS-525C DF, LMS-527C DF iGPS, X102C, X107C DF, X125, X126DF, X135, X136DF, X510C, X-510C, X-515C DF, X52, X59DF.

Order No.	Mfg. No. / Description	Price
142335	(99-94) XT-20BL, 20' Transducer Extension Cable	$44.98 D

Lowrance 10E-BLK Extension Cable

LOWRANCE

- 10' 9-pin transducer extension cable.
- For: LSS-1 Transducer.

Order No.	Mfg. No. / Description	Price
1440156	(99-006)	$76.98 C

©2014 Donovan Marine, Inc.

Lowrance NMEA Adapter Cable

LOWRANCE

- Compatible with: FishElite 480, FishElite 500C, FishElite 502C iGPS, FishStrike 1000C, FishStrike 2000C, IntelliMap 480, IntelliMap 500C, IntelliMap 502C iGPS, IntelliMap 642C iGPS, M56 S/MAP, M68C S/MAP, SeaChamp 1000C DF, SeaChamp 2000C DF, SeaCharter 500C DF, SeaCharter 502C DF iGPS, SeaCharter 640C DF.

Order No.	Mfg. No. / Description	Price
142275	(119-31) NDC-4	$32.98 D

Lowrance Adapter Cable

LOWRANCE

- Uniplug transducer to blue unit adapter.
- Works with: Elite-5, Elite-5x, Elite-5x, Mark-5x, Mark-5x Pro.

Order No.	Mfg. No. / Description	Price
142325	(10052-001) TA-UQ2BL-T	$39.98 D

Lowrance Speed Only Sensor

LOWRANCE



- Works with: LCX-110C, LCX-111C HD, LCX-112C, LCX-113C HD, LCX-17M, LCX-20C, LCX-25C, LCX-26C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-332C, LMS-334C iGPS, LMS-337C DF, LMS-339C DF iGPS, LMS-480, LMS-520C, LMS-522C iGPS, LMS-525C DF, LMS-527C DF iGPS, X102C, X107C DF, X125, X126DF, X135, X136DF, X-510C, X-515C DF, X52, X59DF.

Order No.	Mfg. No. / Description	Price
140922	(99-96) SP-BL	$85.98 F

Lowrance Gimbal Knobs

LOWRANCE



- Works with: X51, X58, FishEasy2, TriFinder2.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
141307	(113-02) GK-10	$25.98 D

Lowrance Gimbal Bracket

LOWRANCE



- Works with: Cuda 128, Cuda 168, Cuda 240 S/GPS, Cuda 242, Cuda 250 S/Map, Cuda 300, FishEasy 240, FishEasy 245 DS, FishEasy 320, M56 S/MAP, M68C S/MAP, SeaFinder 245DS, X47, X-50 DS, X67C.

Order No.	Mfg. No. / Description	Price
142235	(113-16) GB-17	$29.98 D

Lowrance Mounting Bracket

LOWRANCE



- Bracket for: Mark-5 and Elite-5 Models.
- Works with: Elite-5, Elite-5m, Elite-5x, Mark-5x, Mark-5x Pro.

Order No.	Mfg. No. / Description	Price
142255	(10027-001) QRB-5	$23.98 D

Lowrance Power Cable

LOWRANCE

- Works with: GlobalMap 5200C, GlobalMap 5300C iGPS, GlobalMap 7200C, GlobalMap 7300C HD, GlobalMap 8200C, GlobalMap 8300C HD, GlobalMap 9200C, GlobalMap 9300C HD, LCX-112C, LCX-113C HD, LCX-27C, LCX-28C HD, LCX-37C, LCX-38C HD, LMS-520C, LMS-522C iGPS, LMS-525C DF, LMS-527C DF iGPS, X-510C, X-515C DF.

Order No.	Mfg. No. / Description	Price
142575	(127-08) PC-27BL	$59.98 F

Lowrance Power Cable

LOWRANCE

- Works with: IntelliMap 320, IntelliMap 480, IntelliMap 500C, IntelliMap 502C iGPS, IntelliMap 642C iGPS.

Order No.	Mfg. No. / Description	Price
142270	(99-83) PC-24U	$23.98 C

Lowrance GPS Module

LOWRANCE



- 16 channel, low-profile, GPS module.
- Includes 20' cable.
- Works with: Elite-5, Elite-5, Elite-5, Elite-5m, Elite-5m, Elite-5m.

Order No.	Mfg. No. / Description	Price
142435	(146-001) LGC-16W	$89.98 D

Lowrance Speed/Temp Probe

LOWRANCE

- Works with: Elite-5, Elite-5x, FishEasy 2 (w/ Black Connector), FishEasy 240, FishEasy 320, FishElite 320, FishElite 480, FishElite 500C, FishElite 502C iGPS, FishElite 640C, FishElite 642C iGPS, FishMark 320, FishMark 480, FishMark 500C, FishMark 640C, FishStrike 1000C, FishStrike 2000C, M56 S/MAP, M68C S/MAP, Mark-5x, Mark-5x Pro, SeaChamp 1000C DF, SeaChamp 2000C DF, SeaCharter 500C DF, SeaCharter 502C DF iGPS, SeaCharter 642C DF iGPS, SeaFinder 240DF, SeaFinder 320DF, SeaFinder 480DF, SeaFinder 500C DF, SeaFinder 640C DF, X67C, X96.

Order No.	Mfg. No. / Description	Price
142510	(99-75) ST-TU	$89.98 C

Lowrance Gimbal Knobs

LOWRANCE

- Bracket knobs for pre-2009 products

Order No.	Mfg. No. / Description	Price
141263	(51-81)	$27.98 F

Lowrance Protective Cover

LOWRANCE

- Screen cover - fits all Mark-5 and Elite-5 Models.
- Works with: Elite-5, Elite-5m, Elite-5x, Mark-5x, Mark-5x Pro.

Order No.	Mfg. No. / Description	Price
142572	(10050-001) CVR-16	$29.98 F

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Lowrance Flush Mount Kits

LOWRANCE



- Flush mount kit.
- Works with: Cuda 168 EX, FishEasy 250 DS, FishElite 320, FishElite 480, FishElite 500C, FishElite 640C, FishMark 320, FishMark 480, FishMark 500C, FishMark 640C, GlobalMap 3500C, GlobalMap 4800, GlobalMap 5200C, IntelliMap 480, IntelliMap 500C, LMS-332C, LMS-337C DF, LMS-480, LMS-520C, LMS-522C iGPS, LMS-525C DF, LMS-527C DF iGPS, SeaCharter 480DF, SeaCharter 500C DF, SeaFinder 250DF, SeaFinder 320DF, SeaFinder 480DF, SeaFinder 500C DF, SeaFinder 640C DF, X102C, X107C DF, X125, X126DF, X135, X136DF, X47EX, X-510C, X-515C DF, X-86 DS, X96.

Order No.	Mfg. No. / Description	Price
141306	(113-04) FM-5	$54.98 F

- Flush mount kit for 5" models.
- Works with: Elite-5, Elite-5m, Elite-5x, Mark-5x, Mark-5x Pro.

Order No.	Mfg. No. / Description	Price
142260	(10028-001) FM-ME5	$19.98 D

Order No.	Mfg. No. / Description	Price
140914	(101-94) FM-3	$24.98 F

- Works with: Cuda 128, Cuda 168, Cuda 242, Cuda 250 S/Map, Cuda 300, Cuda 350, FishEasy 240, FishEasy 245 DS, FishEasy 320, SeaFinder 245DS, X47, X-50 DS.

Order No.	Mfg. No. / Description	Price
142225	(113-20) FM-6	$21.98 D

Standard Horizon Depth Transducers





- 500 W 2" nylon thru-hull depth/temp transducer.

Order No.	Mfg. No. / Description	Price
607082	(DST520)	$127.98 E

- 500 W transom mount depth/speed/temp transducer.

Order No.	Mfg. No. / Description	Price
607083	(DST521)	$105.98 E

RAM-B-101-LO11 "Light Use" Mount

RAM MOUNTS



- The RAM-B-101-LO11 consists of a double socket arm, 2.5" diameter round base with the universal AMPS hole pattern and adapter base that inserts directly to the back of Lowrance Elite-4 and Mark-4 Fishfinders.
- The adapter serves as a quick release mechanism, allowing you to remove or transfer your Fishfinder in seconds.
- Designed into the mount is a 1" diameter patented rubber ball and socket system with adjustment points at both socket ends of the arm; this with RAM's rubber ball and socket technology allows for almost infinite adjustment and perfect viewing angles.

Order No.	Mfg. No. / Description	Price
672025	(RAM-B-101L01) For Lowrance Elite-4 & Mark-4 Series Fishfinders	$27.98 F

Lowrance Flush Mount Kit

LOWRANCE



Order No.	Mfg. No. / Description	Price
143250	(10979-001) Fits Elite 7 Series	$19.98 F

Minn Kota Transducer Mounting Kit



- Allows mounting on lower unit of bow or transom mount motors.
- Rugged, durable construction.
- Fits transducers of all major manufacturers.

Order No.	Mfg. No. / Description	Price
477035	(MKR-15) Transducer Mounting Kit	$19.98 F

T-H Marine Transducer Mounting Kit



- This universal kit allows for easy mounting of transducer to the base of a trolling motor.
- The 4" stainless steel hose clamp secures virtually any transducer to any trolling motor gear case.
- Twelve (12) radiused cable ties neatly fasten the cable along the shaft.

Order No.	Mfg. No. / Description	Price
641111	(TMK-1) Transducer Mounting Kit	$10.98 H

Boater Sports Transducer Mount Kit



- Transducer mount.
- Easily mounts all Lowrance HS-WS, HS-WST, HS-WSBK, HS-WSPC, LHSWS and LHS-WST Skimmer (high speed) and Broadview transducers to any trolling motor.
- 1/2" ID on mounting ears.
- Clam shell pack for display.

Order No.	Mfg. No. / Description	Price
1-52648	(52648)	$6.65 H

RAM-B-107 "Light Use" Mounts

RAM MOUNTS



- The RAM-B-107 consists of a 2.5" diameter round base with the universal AMPs hole pattern, double socket arm and connecting Humminbird/Apelco marine adapter base.
- The mount is designed with a RAM 1" diameter patented rubber ball and socket system that has adjustment points at both ends of the double socket arm; this allowing for almost infinite adjustment and perfect viewing angles.
- The RAM-B-107 is a "LIGHT USE" mount, designed to hold smaller marine electronic devices.

Order No.	Mfg. No. / Description	Price
672030	(RAM-B-107) For the Humminbird 100, 300, 500, 700 Series, Matrix Series and Lowrance Elite-5 Series	$36.98 F
6720013	(107-52) Packaged in Poly Bag	$43.98 H

©2014 Donovan Marine, Inc.

RAM-101-L011 "Rugged Use" Mount



- The RAM-101-L011 consists of a double socket arm, 2.5" diameter round base with the universal AMPS hole pattern and adapter base that inserts directly to the back of Lowrance Elite-5 and Mark-5 Fishfinders.
- The adapter serves as a quick release mechanism, allowing you to remove or transfer your Fishfinder in seconds.
- Designed into the mount is a 1.5" diameter patented rubber ball and socket system with adjustment points at both socket ends of the arm; this with RAM's rubber ball and socket technology allows for almost infinite adjustment and perfect viewing angles.

Order No.	Mfg. No. / Description	Price
672000	(RAM-101-L011) For Lowrance Elite-5 & Mark-5 Series Fishfinders	$46.98 F

RAM-B-107-1 Flat Surface Marine Electronic Mount



- The RAM-B-107-1, powder coated marine grade aluminum mount, consists of a double socket arm, one 2.5" diameter round base and connecting Humminbird/Eagle/Lowrance marine base.
- The mount is designed with a 1" diameter patented rubber ball and socket system that has adjustment points at the cradle base and bottom base.
- With a twist of the arm knob, you can move the marine mount to your optimum viewing position.

Order No.	Mfg. No. / Description	Price
672035	(RAM-B-107-1) For the Eagle Cuda, FishEasy, Humminbird Piranha & Lowrance X-4	$31.98 F

RAM-111 Ball Mount (AMPs Hole Pattern)



- The RAM-111 consists of a double socket arm, 2.5" diameter round base and 6.25" x 2" rectangle base.
- The round base contains pre-drilled holes, including the universal AMPS hole pattern.
- The rectangle base contains different combinations of pre-drilled holes which will match up to many electronic devices and mounts, including Marine GPS, CB Radios, Ham Radios, Gimbal Brackets and more.
- Note: The 6.25" x 2" rectangle base is a universal mounting bracket with a selection of mounting hole locations. In certain applications additional holes may need to be drilled for proper fit with your electronic device.

Order No.	Mfg. No. / Description	Price
672015	(RAM-111) Ball Mount	$48.98 F

RAM-107 "Rugged Use" Mount



- The RAM-107 consists of a double socket arm, 2.5" diameter round base with the universal AMPS hole pattern and connecting Humminbird/Apelco marine adapter base.
- The mount is designed with a RAM 1.5" diameter patented rubber ball and socket system that has adjustment points at both ends of the double socket arm; this allowing for almost infinite adjustment and perfect viewing angles.
- Rubber ball and socket technology allows for almost infinite adjustment and perfect viewing angles.

Order No.	Mfg. No. / Description	Price
672005	(RAM-107) For the Humminbird 100, 300, 500, 700 Series, Matrix Series and Lowrance Elite-5 Series	$52.98 F

RAM Trolling Motor Stabilizer Mount



- The RAM-108 consists of a double socket arm, 2.5" diameter round base that contains the universal AMPs hole pattern and single strap base.
- The strap will accommodate rails from 0.5" to 2" in diameter.
- The trolling motor stabilizer will take every bit of the vibration out of your trolling motor while all the time protecting the head, shaft and mount from damage.
- A must for any angler with a bow mount trolling motor.
- The maximum allowable distance between the mounting surface on the boat and the lowest point of the trolling motor shaft is 8.75".
- Distances shorter than this are compatible.

Order No.	Mfg. No. / Description	Price
672010	(RAM-108) Trolling Motor Stabilizer Mount	$50.98 F

RAM 6.25" x 2" Universal Electronics Base with 1.5" Ball



- The RAM-111B consists of a 1.5" diameter rubber ball connected at right angles to a flat 6.25 x 2" rectangular plate.
- The plate contains different combinations of pre-drilled holes which will match up to many electronic devices and mounts, including Marine GPS, CB Radios, Ham Radios, Gimbal Brackets and more.

Order No.	Mfg. No. / Description	Price
672020	(RAM-111-B) Universal Electronics Base	$47.98 F

RAM-D-111 Ball Mount



- The RAM-D-111 consists of a double socket arm, 3.68" diameter round base and 11" x 3" rectangular base.
- The round base contains pre-drilled holes, including two holes at 180 degrees and three holes at 120 degrees.
- The rectangle base contains different combination of pre-drilled holes which will match up to many electronic devices and mounts, including Marine GPS, CB Radios, Ham Radios, Gimbal Brackets and more.
- Compatible With: Garmin Fishfinders and GPS Chartplotters Humminbird Fishfinders and GPS Chartplotters Lowrance Fishfinders and GPS Chartplotters Raymarine Fishfinders and GPS Chartplotters

Order No.	Mfg. No. / Description	Price
672040	(RAM-D-111) Ball Mount	$139.98 F

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

RAM Ball Mount



- Powder coated marine grade aluminum mount.
- Double socket arm mount, one 2.5" diameter round base with 1.5" rubber ball.
- Flat 11" x 3" rectangular plate.

Order No.	Mfg. No. / Description	Price
6720015	(RAM-137U)	$82.98 R

RAM Ball Mount



- The RAM-B-111 consists of a double socket arm, 2.5" diameter round base and 6.25" x 2" rectangle base.
- The round base contains pre-drilled holes, including the universal AMPS hole pattern.
- The rectangle base contains different combinations of pre-drilled holes which will match up to many electronic devices and mounts, including Marine GPS, CB Radios, Ham Radios, Gimbal Brackets and more.

Order No.	Mfg. No. / Description	Price
672036	(RAM-B-111) Diameter 1"	$33.98 F

RAM Ball Mount



- RAM 2.25" diameter ball mount with 11" X 3".
- Rectangle base and 3.68" round base.
- Overall height: 11.5".

Order No.	Mfg. No. / Description	Price
672048	(RAM-D-111U)	$132.98 F

RAM Vertical Single Swing Arm Mount



- The RAM single swing arm mount consists of a 6" long bent swing arm mounted on a vertical surface mounting base.
- At the device mounting end of the mount is a rectangular 6.25" x 2" plate.
- There are two pivoting points on the mount.
- One at the swing arm and base and one at the center of the rectangular plate and the end of the swing arm.
- Each pivoting point allows a complete 360 degree rotation.

Order No.	Mfg. No. / Description	Price
672013	(RAM-109V)	$79.98 F

RAM-D-111-C Ball Mounts



- The RAM-D-111-C consists of a short double socket arm, 3.68" diameter round base and 11" x 3" rectangular base.
- The round base contains pre-drilled holes, including two holes at 180 degrees and three holes at 120 degrees.
- The rectangle base contains different combinations of pre-drilled holes which will match up to many electronic devices and mounts, including Marine GPS, CB Radios, Ham Radios, Gimbal Brackets and more.
- The RAM-D-111-C is Compatible With: Garmin Fishfinders and GPS Chartplotters Humminbird Fishfinders and GPS Chartplotters Lowrance Fishfinders and GPS Chartplotters Raymarine Fishfinders and GPS Chartplotters

Order No.	Mfg. No. / Description	Price
672045	(RAM-D-111-C) Ball Mount	$119.98 F
6720014	(111-52) Packaged in Poly Bag	$129.98 H

RAM Ball Mount



- Consists of a double socket arm, 2.5" diameter round base and 6.25" x 2" rectangle base.
- The round base contains pre-drilled holes, including the universal AMPS hole pattern.

Order No.	Mfg. No. / Description	Price
6720012	(101-79)	$38.98 H

RAM Ball Mount



- The RAM-D-111U-C consists of a 3.68" diameter round base, short double socket arm and 11" x 3" rectangular base.
- The round base contains pre-drilled holes, including two holes at 180° and three holes at 120°.
- The rectangle base contains different combinations of pre-drilled holes which will match up to many electronic devices and mounts, including Marine GPS, CB Radios, Ham Radios, Gimbal Brackets and more.

Order No.	Mfg. No. / Description	Price
672049	(RAM-D-111U-C) Diameter 2.25"	$111.98 F

RAM Flat Surface Horizontal Single Swing Arm Mount



- The RAM single swing arm mount consists of a 6" long bent swing arm mounted on a horizontal surface mounting base.
- At the device mounting end of the mount is a rectangular 6.25" x 2" plate.
- There are two pivoting points on the mount.
- One at the swing arm and base and one at the center of the rectangular plate and the end of the swing arm.
- Each pivoting point allows a complete 360 degree rotation.

Order No.	Mfg. No. / Description	Price
672012	(RAM-109H)	$67.98 F

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
3400 000-0047-15 (1985-1989)	Integral requires repair	N/A	N/A	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
3200 000-0047-49 (1990-1996)	Integral requires repair	N/A	N/A	HS-WS 000-0090-36 (obsolete)	N/A	N/A	N/A
3500 000-0047-82 (1991-2003)	Integral requires repair	N/A	N/A	HS-WS 000-0090-36 (obsolete)	N/A	N/A	N/A
Elite 4 000-10491-001 (2012 -)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	Internal
Elite 4m 000-10489-001 (2012 -)	PC-24U 000-0099-83	QRB-5 000-10027-001	N/A	N/A	N/A	N/A	Internal
Elite 4x 000-10484-001 (2012 -)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
Elite 4 DSI 000-10494-001 (2012 -)	See XD Part #	QRB-5 000-10027-001	N/A	Skimmer Xdcr DSI 000-10260-001	N/A	ST-TU 000-0099-75	Internal
Elite 4x DSI 000-10487-001 (2012 -)	See XD Part #	QRB-5 000-10027-001	N/A	Skimmer Xdcr DSI 000-10260-001	N/A	ST-TU 000-0099-75	N/A
Elite-5 000-00104-001 (2010 - 2013)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	Internal LGC-16W (optional) 000-00146-001
Elite-5m 000-00103-001 (2010 - 2013)	PC-24U 000-0099-83	QRB-5 000-10027-001	N/A	N/A	N/A	ST-TU 000-0099-75	Internal LGC-16W (optional) 000-00146-001
Elite-5x 000-00102-001 (2010 - 2013)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
Elite-5 DSI 000-10236-001 (2011 -2013)	See XD Part #	QRB-5 000-10027-001	N/A	Skimmer Xdcr DSI 000-10260-001	N/A	ST-TU 000-0099-75	Internal LGC-16W (optional) 000-00146-001
Elite -5x DSI 000-10235-001 (2011 -2013)	See XD Part #	QRB-5 000-10027-001	N/A	Skimmer Xdcr DSI 000-10260-001	N/A	ST-TU 000-0099-75	N/A
Elite-5 HDI 000-11145-001 83/200 455/800 000-11145-004 83/200 Cmap 000-11146-001 50/200 455/800 000-11146-004 50/200 Cmap 000-11171-001 Gold Bundle 83/200 455/800 000-11172-001 Gold Bundle 50/200 455/800 000-11173-001 w/o xdcr 000-11173-004 Cmap no xdcr 000-11174-001 83/200 000-11175-001 Gld Bndl no xdcr 000-11239-001 Ice Machine w/PPP-18i 83/200 (2013 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	QRB-5 000-10027-001	N/A	HDI 83/200 000-10976-001 HDI 50/200 000-10977-001	N/A	ST-TBL 000-0099-97	Internal LGC-16W (optional) 000-00146-001
Elite-5x HDI 000-11143-001 83/200 455/800 000-11144-001 50/200 455/800 000-11170-001 w/o xdcr (2013 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	QRB-5 000-10027-001	N/A	HDI 83/200 000-10976-001 HDI 50/200 000-10977-001	N/A	ST-TBL 000-0099-97	N/A

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
Elite-5M HD 000-11147-001 Base 000-11176-001 Gold (2013 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	QRB-5 000-10027-001	N/A	N/A	N/A	N/A	Internal LGC-16W (optional) 000-00146-001
Elite-5M HD Baja 000-11238-001 (2013 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	QRB-5 000-10027-001	N/A	N/A	N/A	N/A	Internal LGC-16W (optional) 000-00146-001
Elite-7 HDI 000-10966-001 83/200 455/800 000-10967-001 50/200 455/800 000-10968-001 83/200 000-10970-001 w/o xdcr 000-11051-001 Gld Bndle 83/200 455/800 000-10972-001 Gld Bndle 50/200 455/800 (2013-)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 7 Gen2 Touch Gimbal Bracket 000-11019-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	HDI 83/200 000-10976-001 HDI 50/200 000-10977-001	N/A	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
Elite-7m 000-10975-001 Chrtplottr Gold (2013 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 7 Gen2 Touch Gimbal Bracket 000-11019-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
Elite-7x HDI 000-10961-001 83/200 455/800 000-10962-001 50/200 455/800 000-10965-001 w/o xdcr (2013 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 7 Gen2 Touch Gimbal Bracket 000-11019-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	HDI 83/200 000-10976-001 HDI 50/200 000-10977-001	N/A	ST-TBL 000-0099-97	N/A
GlobalMap Baja 000-0117-47 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	LGC-Baja 000-0112-59 (obsolete)
GlobalMap Baja 480c 000-0117-81 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 Baja 000-11045-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap Baja 540c 000-0123-38 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 Baja 000-11045-001
GlobalMap Baja 840c 000-0123-56 (2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 Baja 000-11045-001
GlobalMap 1000 (1994-1995)	PC-14 000-0008-91 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	N/A	N/A	N/A	LGC-1 000-0094-122 (obsolete)
GlobalMap 1600 000-0096-54 (1998-2001)	PC-20BK 000-0099-43 (obsolete)	GB-10 000-0101-38 (obsolete)	GK-8 000-0051-81 (obsolete)	N/A	N/A	N/A	LANT-1 000-0094-44 (obsolete)
GlobalMap 2000 000-0096-46 / 000-0096-461, 000-0096-462 (1996-98 / 1998-2000)	PC-14 000-0008-91 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	HS-WSBK 000-0090-73 (obsolete) w/SAM-1 ST 000-0105-02 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	LGC-1 000-0094-122 (obsolete) LGC-12 000-0094-74 (obsolete)
GlobalMap 2400 (2002)	PC-21X 000-0099-56 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete)
GlobalMap 3000MT (2001-2003)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete) firmware 2.2 or higher
GlobalMap 3200 (2003)	PC-21X 000-0099-56 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete)

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
GlobalMap 3300C 000-0117-00 (2004)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 3500C 000-0117-40 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 3600C iGPS 000-0116-20 (2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Internal
GlobalMap 4000M 000-0111-87 (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete)
GlobalMap 4800M 000-0117-041 (2004-2007)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 4900M 000-0117-30 (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 5000C 000-0111-88 (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete)
GlobalMap 5200c 000-0116-29 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001
GlobalMap 5300c iGPS 000-0116-29 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	N/A	N/A	N/A	Internal
GlobalMap 5500C 000-0117-31 (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 6000C 000-0111-89 (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete)
GlobalMap 6500C 000-0117-33 (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 6600C HD 000-0117-32 (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 7000C 000-0111-92 (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	N/A	N/A	N/A	LGC-12W 000-0112-06 (obsolete)
GlobalMap 7200c 000-0123-22 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	LGC-4000 000-0125-28

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
GlobalMap 7300c HD 000-0123-23 (2007)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001
GlobalMap 7500C 000-0117-49 (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 7600C HD 000-0117-35 (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
GlobalMap 8200c 000-0123-48 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001
GlobalMap 8300c HD 000-0123-54 (2007)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001
GlobalMap 9200c 000-0123-24 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001
GlobalMap 9300c HD 000-0123-25 (2007)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	N/A	N/A	N/A	Point-1 000-11047-001
GlobalNav (1992)	PC-11 000-0008-34 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	N/A	N/A	N/A	LGC-1 000-0094-122 (obsolete)
GlobalNav II **GlobalNav IIA** (1993 / 1994-1996)	PC-9 000-0008-52 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	N/A	N/A	N/A	LGC-1 000-0094-122 (obsolete)
GlobalNav 310 000-0094-404 (1996-2000)	NDC-2 000-0101-36 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	N/A	N/A	N/A	LANT-1 000-0094-44 (obsolete)
HDS-5m Nautic Insight 000-0140-23 (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-19 000-0124-57	GK-12 000-0124-56	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-5m Gen2 NauticInsght 000-10520-001 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 5" 000-10712-001	HDS Gen2 Gimbal Knobs 000-10716-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-5x 000-0140-27 83/200 000-0140-28 50/200 000-0140-29 w/o XD (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-19 000-0124-57	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
HDS-5x Gen2 000-10526-001 83/200 000-10525-001 50/200 000-10527-001 w/o XD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 5" 000-10712-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
HDS-5 Combo 000-0140-19 LkeInsght 83/200 000-0140-30 LkeInsght w/o XD 000-0140-21 Base US 83/200 000-0140-32 Base US w/o XD (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-19 000-0124-57	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-5 Gen2 Combo 000-10515-001 Insight 83/200 000-10516-001 Insight w/o XD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 5" 000-10712-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
HDS-5 NauticInsight Cmbo 000-0140-20 50/200 000-0140-31 w/o XD (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-19 000-0124-57	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-5 Gen2 NauticInsight Combo 000-10519-001 Nautic 50/200 000-10518-001 Nautic w/o XD (2012-)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 5" 000-10712-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-5 Insight BNDL 000-00099-001 (2010 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-19 000-0124-57	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-1 000-00099-007 (obsolete)	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-5 Gen2 Insight BNDL 000-10517-001 LSS-1 (Obs) 000-10868-001 LSS-2 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 5" 000-10712-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-1 000-00099-007 (obsolete) LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-5 Baja 000-0140-26 (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-19 000-0124-57	GK-12 000-0124-56	N/A	N/A	N/A	Internal (LGC-4000 Baja Opt) 000-0125-31
HDS-7m 000-0140-16 (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-20 000-0124-58	GK-12 000-0124-56	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-7m Gen2 000-10532-001 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 7" 000-10713-001	HDS Gen2 Gimbal Knobs 000-10716-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-7m Gen2 Touch Insight 000-10761-001 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 7 Gen2 Touch Gimbal Bracket 000-11019-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-7 Combo 000-0140-12 Insight 83/200 000-0140-14 Insight 50/200 000-0140-36 Insight w/o XD 000-0140-05 Base US 83/200 000-0140-34 Base US w/o XD (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-20 000-0124-58	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-7 Gen2 Combo 000-10530-001 Insight 83/200 000-10529-001 Insight 50/200 000-10531-001 Insight w/o XD 000-10533-001 Base US 83/200 000-10653-001 Base US w/o XD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 7" 000-10713-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-7 Gen2 Insight BNDL 000-10528-001 LSS-1 (obs) 000-10869-001 LSS-2 HD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 7" 000-10713-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-1 000-00099-007 (obsolete) LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
HDS-7 Gen2 Touch Combo 000-10765-001 Insight 83/200 000-10766-001 Insight 50/200 000-10764-001 Insight w/o XD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 7 Gen2 Touch Gimbal Bracket 000-11019-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-7 Gen2 Touch Insight BNDL 000-10778-001 w/ LSS-2 xdcr (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 7 Gen2 Touch Gimbal Bracket 000-11019-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS -8 Combo 000-0140-07 Insight 83/200 000-0140-06 Insight 50/200 000-0140-39 Insight w/o XD 000-0140-09 Base US 83/200 000-0140-38 Base w/o XD (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-21 000-0124-59	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS -8 Gen2 Combo 000-10537-001 Insight 83/200 000-10536-001 Insight 50/200 000-10538-001 Insight w/o XD 000-10624-001 Base US 83/200 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 8" 000-10714-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-8 Gen2 Insight BNDL 000-10635-001 LSS-1 (obs) 000-10870-001 LSS-2 HD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 8" 000-10714-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-1 000-00099-007 (obsolete) LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-8m 000-0140-17 (2009)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-21 000-0124-59	GK-12 000-0124-56	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-8m Gen2 WWB 000-10540-001 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 8" 000-10714-001	HDS Gen2 Gimbal Knobs 000-10716-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS -9 Gen2 Touch Combo 000-10771-001 Insight 83/200 000-10772-001 Insight 50/200 000-10770-001 Insight w/o XD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 9 Gen2 Touch Gimbal Bracket 000-11020-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-9m Gen2 Touch Insight 000-10767-001 (2012)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 9 Gen2 Touch Gimbal Bracket 000-11020-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS 10 Combo 000-0140-13 Insight 83/200 000-0140-02 Insight 50/200 000-0140-41 Insight w/o XD 000-0140-00 Base US 83/200 000-0140-40 Base w/o XD (2009 - 2011)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-22 000-0124-60	GK-12 000-0124-56	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS 10 Gen2 Combo 000-10542-001 Insight 83/200 000-10541-001 Insight 50/200 000-10543-001 Insight w/o XD 000-10625-001 Base US 83/200 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 10" 000-10715-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
HDS-10 Gen2 Insight BNDL 000-10636-001 LSS-1 (obs) 000-10871-001 LSS-2 HD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 10" 000-10715-001	HDS Gen2 Gimbal Knobs 000-10716-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-1 000-00099-007 (obsolete) LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
HDS-10m 000-0140-15 (2009)	HDS Pwr Cbl PC-30-RS422 000-0127-49	GB-22 000-0124-60	GK-12 000-0124-56	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS-10m Gen2 WWB 000-10545-001 (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS Gen2 Gimbal Brkt 10" 000-10715-001	HDS Gen2 Gimbal Knobs 000-10716-001	N/A	N/A	N/A	Internal (Point-1 optional) 000-11047-001
HDS 12 Gen2 Touch Combo 000-10776-001 Insight 83/200 000-10777-001 Insight 50/200 000-10775-001 Insight w/o XD (2012 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	HDS 12 Gen2 Touch Gimbal Bracket 000-11021-001	Bracket Knobs Pair - NSS/Gen2T 000-10467-001	HST-WSBL 000-0106-72 HST-DFSBL 000-0106-77 LSS-2 000-10802-001	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal (Point-1 optional) 000-11047-001
LCF-1440 000-0049-471 (2003-2010)	See XD Part #	N/A	N/A	HST-WSU 000-0106-48	N/A	N/A	N/A
LCX-15MT (2001-2002 / Enh 2003-2004) **LCX-15CI** (2001-2002) **LCX-15CT** (2001)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete) firmware 2.2 or higher
LCX-16CI (2001-2002)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete) firmware 2.2 or higher
LCX-17M 000-0117-24 000-0117-25 DF 000-0117-50 Combo 000-0117-51 Combo DF (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LCX-18C (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete)
LCX-19C (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete)
LCX-20C DF (2005)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LCX-25C 000-0117-28 000-0117-56 DF 000-0117-57 Combo 000-0117-58 Combo DF (2006-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LCX-26C HD 000-0117-29 000-0117-60 DF 000-0117-61 Combo 000-0117-62 Combo DF (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
LCX-27C 000-0123-12 Combo 000-0123-13 DF Combo 000-0123-11 DF Sonar only 000-0123-10 200k only 000-0123-14 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LCX-28C HD 000-0123-17 Combo 000-0123-18 DF Combo 000-0123-16 DF Sonar only 000-0123-15 200k Sonar only 000-0123-19 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LCX-37C 000-0123-45 Combo 000-0123-46 DF Combo 000-0123-44 DF Sonar only 000-0123-43 200k only 000-0123-47 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LCX-38C HD 000-0123-51 Combo 000-0123-52 DF Combo 000-0123-50 DF Sonar only 000-0123-49 200k Sonar only 000-0123-53 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LCX-104C (2003-2004)	PC-21X 000-0099-56 (obsolete)	GB-12 000-0101-78 (obsolete)	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete)
LCX-110C 000-0117-64 Combo 000-0117-48 Combo DF 000-0117-66 Combo w/o XD 000-0117-65 w/o XD and GPS (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LCX-111C HD 000-0117-67 Combo 000-0117-34 Combo DF 000-0117-69 Combo w/o XD 000-0117-68 w/o XD and GPS (2005-2006)	PC-26BL 000-0099-98	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LCX-112C 000-0117-92 Combo 000-0117-93 DF Combo 000-0117-94 Combo w/o XD 000-0117-95 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LCX-113C HD 000-0117-96 Combo 000-0117-97 DF Combo 000-0117-98 Combo w/o XD 000-0117-99 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-18 000-0113-75	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LDT-3001 (1992-2003)	Integral Requires Repair	N/A	N/A	N/A	N/A	Requires Calibration Send to Factory	N/A
LDT-3002 (1996-2004)	Integral Requires Repair	N/A	N/A	N/A	N/A	Requires Calibration Send to Factory	N/A
LDT-3003 (1996-2005)	Integral Requires Repair	N/A	N/A	N/A	N/A	TS-2BK 000-0007-21 (obsolete)	N/A

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
LDT-3200 000-0007-28 (2005-2007)	Integral Requires Repair	N/A	N/A	N/A	N/A	Requires Calibration Send to Factory	N/A
LMF-200 000-0049-55 000-0049-551 (2006 BL / 2007 - present Rd)	Integral Requires Repair	N/A	N/A	N/A	N/A	EP-70R 000-0120-49 / EP-80R 000-0120-51	N/A
LMF-400 000-0049-54 000-0049-541 (2006 BL / 2007- present RD)	Integral Requires Repair	N/A	N/A	N/A	N/A	EP-70R 000-0120-49 / EP-80R 000-0120-51	N/A
LMS-10 **LMS-15** (1991 / 1992-1994)	PC-5 000-0008-51 (obsolete)	GB-1 000-0051-38 (obsolete)	GK-1 000-0051-15 (obsolete)	N/A	N/A	N/A	LGC-1 000-0094-122 (obsolete)
LMS-150 (1990-1992)	PC-6 000-0008-58 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	LGC-1 000-0094-122 (obsolete)
LMS-160 000-0096-53 (1998-2001)	PC-19BK 000-0099-39 (obsolete)	GB-10 000-0101-38 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete) PC-19BK 000-0099-39 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete) NDC-3 000-0099-40 (obsolete)	LANT-1 000-0094-44 (obsolete)
LMS-200 (1989-1992)	PC-3 000-0008-38 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	LC-1 000-0078-00 (obsolete)
LMS-240 (2002)	PC-21X 000-0099-56 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete)
LMS-300 (1989-1992)	PC-3 000-0008-38 (obsolete)	GB-5 000-0051-56 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	LC-1 000-0078-00 (obsolete) LGC-1 000-0094-122 (obsolete)
LMS-320 (2003)	PC-21X 000-0099-56 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	LGC-12W 000-0112-06 (obsolete)
LMS-330C 000-0111-98 (2004)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LMS-332C 000-0117-38 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LMS 334C iGPS 000-0116-16 (2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal
LMS-335C DF 000-0111-99 (2004)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LMS-337C DF 000-0117-39 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
LMS-339C DF iGPS 000-0116-17 (2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal
LMS-350 (1993)	PC-13 000-0008-72 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	LGC-1 000-0094-122 (obsolete)
LMS-350A 000-0096-20 / 000-0096-202 (1994-96 / 96-2000)	PC-13 000-0008-72 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	LGC-1 000-0094-122 (obsolete) LGC-12 000-0094-74 (obsolete)
LMS-480M 000-0117-031 000-0117-151 DF 000-0117-161 w/o XD (2004-2007)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001 w/red to blue adaptor NAC-FRD2FBL 000-0127-05
LMS-520c 000-0123-35 Combo 000-0123-40 Combo w/o XD 000-0123-41 w/o XD and GPS (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LMS-522c iGPS 000-0116-27 000-0116-30 w/o XD 000-0116-33 Ice Machine (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal
LMS-525c DF 000-0123-36 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Point-1 000-11047-001
LMS-527c DF iGPS 000-0116-28 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	Internal
LSS-1 Structure Scan 000-0132-06 (2010-2012)	PC-31BLN 000-0127-54	N/A	N/A	LSS-1 Skimmer 000-00099-007 (obsolete)	N/A	N/A	N/A
LSS-2 Structure Scan HD 000-10800-001 (2012-)	PC-31BLN 000-0127-54	N/A	N/A	LSS-2 Skimmer 000-10802-001	N/A	N/A	N/A
LST-3800 000-0047-95 w/o XD 000-0047-94 (2005 - present)	See XD Part #	N/A	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
M-56 S/MAP (2004-2005)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	Internal
M-68C S/MAP 000-0116-03 000-0116-07 DF 000-0116-04 ICE 000-0116-05 w/o XD 000-0116-032 200kHz 000-0116-072 50/200 kHz 000-0116-052 w/o XD (2004-2011)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	Internal
Mark 4 000-10483-001 (2012 -)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	Internal
Mark-4x DSI 000-10638-001 (2012 -)	See XD Part #	QRB-5 000-10027-001	N/A	Skimmer Xdcr DSI 000-10260-001	N/A	ST-TU 000-0099-75	N/A

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
Mark-4 HDI 000-11214-001 83/200 000-11215-001 83/200 455/800 000-11298-001 no / xdcr 000-11299-001 50/200 455/800 (2014 -)	HDS Pwr Cbl PC-30-RS422 000-0127-49	QRB-5 000-10027-001	N/A	HDI 83/200 000-10976-001 HDI 50/200 000-10977-001	N/A	ST-TBL 000-0099-97	Internal
Mark-5x DSI 000-10233-001 000-10234-001 Portable (2011 -)	See XD Part #	QRB-5 000-10027-001	N/A	Skimmer Xdcr DSI 000-10260-001	N/A	ST-TU 000-0099-75	N/A
Mark-5x 200kHz 000-00100-001 000-00101-001 Portable (2010 -)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
Mark-5x PRO 000-00175-001 83/200 kHz (2010 -)	See XD Part #	QRB-5 000-10027-001	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
X-3 (1986)	PC-12 000-0008-66 (obsolete) PC-4 000-0008-36 (obsolete)	003-2045-00 (obsolete)	151-0067-00 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-4 (1987-1989)	PC-11 000-0008-34 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-4 000-10227-001 000-10228-001 Portable (2011 - ?)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-4 Pro 000-10229-001 (2011 - ?)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-5 **X-50** (1987 / 1988-1989)	PC-10 000-0008-50 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	LSS-5 000-0040-81 (obsolete) temp 003-2251-00 (obsolete)	N/A
X-15 (1983-1984)	PC-12 000-0008-66 (obsolete) PC-4 000-0008-36 (obsolete)	167-0006-00 (obsolete)	GK-5 000-0051-17 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-15A (1984)	PC-7 000-0008-42 (obsolete)	GB-3 000-0051-41 (obsolete)	GK-6 000-0051-20 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-15B (1985)	PC-7 000-0008-42 (obsolete)	GB-3 000-0051-41 (obsolete)	GK-6 000-0051-20 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-16 gray connector (1985-1994)	PC-9 000-0008-52 (obsolete)	GB-3 000-0051-41 (obsolete)	GK-6 000-0051-20 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	N/A	N/A
X-16 black connector (1994)	PC-8 000-0008-37 (obsolete)	GB-3 000-0051-41 (obsolete)	GK-6 000-0051-20 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-20 **X-20A** (1989-1990 / 1991-1993)	PC-1 000-0008-54 (obsolete)	GB-1 000-0051-38 (obsolete)	GK-1 000-0051-15 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	N/A	N/A
X-22A (1994-1998)	PC-15BK 000-0008-92 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	N/A	N/A
X-22A-1 (1994-1998)	See XD Part #	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSPC 000-0090-67 (obsolete)	N/A	N/A	N/A

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
X-23 000-0092-74 (1998-2000)	See XD Part #	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSPC 000-0090-67 (obsolete)	N/A	N/A	N/A
X-24 000-0110-05 (2000)	PC-15BK 000-0008-92 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	N/A	N/A
X-25 (1991-1994)	PC-2 000-0008-53 (obsolete)	GB-1 000-0051-38 (obsolete)	GK-1 000-0051-15 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-25A (1995)	PC-16BK 000-0008-93 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete) Broadview 000-0090-81 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-25B 000-0092-68 (1996-1998)	PC-15BK 000-0008-92 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	N/A	N/A
X-28 000-0092-86 (1998-2000)	PC-15BK 000-0008-92 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	N/A	N/A
X-29 000-0110-16 (2000-2001)	PC-15BK 000-0008-92 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	N/A	N/A
X-30 (1998)	PC-11 000-0008-34 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-35 (1989)	PC-1 000-0008-54 (obsolete)	GB-1 000-0051-38 (obsolete)	GK-1 000-0051-15 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	N/A	N/A
X-37TX (2003)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-38 (1998-2001)	PC-17BK 000-0099-12 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	N/A
X-40 (1988-1989)	PC-11 000-0008-34 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	TA-300 000-0008-60 (obsolete)	N/A	N/A
X-45 000-0092-77 (1996-1997)	PC-16BK 000-0008-93 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete) Broadview 000-0090-81 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-47 **X-47TX** (2003-2005 / 2003-2006)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-47EX (2003-2005)	See XD Part #	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-48 000-0092-92 (1998-2000)	PC-17BK 000-0099-12 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete) Broadview 000-0090-81 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	N/A
X-49 000-0110-15 (2000-2001)	PC-17BK 000-0099-12 (obsolete)	GB-8 000-0051-82 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	N/A
X-50 (1988-1989)	PC-10 000-0008-50 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	N/A	N/A
X-50 DS 000-0110-68 (2006-2010)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-51 000-0110-27 (2002-2004)	PC-23X 000-0099-69 (obsolete)	GB-13 000-0101-98	GK-10 000-0113-02	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A

©2014 Donovan Marine, Inc.

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
X-52 000-0110-61 000-0110-67 w/o XD 00-0110-612 200 KhZ (2005-2011)	PC-26BL 000-0099-98	GB-13 000-0101-98	GK-10 000-0113-02	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-55 (1993-1994)	PC-2 000-0008-53 (obsolete)	GB-1 000-0051-38 (obsolete)	GK-1 000-0051-15 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-55A (1995-1996)	PC-16BK 000-0008-93 (obsolete)	GB-1 000-0051-38 (obsolete)	GK-1 000-0051-15 (obsolete)	HS-WSBK 000-0090-73 (obsolete) Broadview 000-0090-81 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-57TX (?)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
X-58DF 000-0110-42 (2003-2004)	PC-23X 000-0099-69 (obsolete)	GB-13 000-0101-98	GK-10 000-0113-02	HS-50/200-DX 000-0106-23 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A
X-59 DF 000-0110-63 000-0110-632 (2005- 2011)	PC-26BL 000-0099-98	GB-13 000-0101-98	GK-10 000-0113-02	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-60 (1990-1993)	PC-2 000-0008-53 (obsolete)	GB-2 000-0051-42 (obsolete)	GK-2 000-0051-25 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-65 000-0096-41 000-0096-411 (1997-2001)	PC-17BK 000-0099-12 (obsolete)	GB-10 000-0101-38 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	N/A
X-67C 000-0110-50 000-0110-53 DF 000-0110-54 ICE 000-0110-51 w/o XD 000-0110-502 200 kHz 000-0110-512 w/o XD 000-0110-542 200 kHz ICE (2003-2011)	See XD Part #	GB-17 000-0113-16	N/A	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
X-70 **X-70A** (1993 / 1994-1997)	PC-2 000-0008-53 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	HS-WS 000-0090-36 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-70A 3D 000-0096-34 (1995-1997)	PC-2 000-0008-53 (obsolete)	GB-6 000-0051-58 (obsolete)	GK-7 000-0051-68 (obsolete)	HS-3D4 000-0090-86 (obsolete)	N/A	ST-T 000-0090-35 (obsolete)	N/A
X-71 (2002)	PC-23X 000-0099-69 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A
X-75 (1997-2000)	PC-17BK 000-0099-12 (obsolete)	GB-10 000-0101-38 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	N/A
X-85 (1997-2001)	PC-17BK 000-0099-12 (obsolete)	GB-10 000-0101-38 (obsolete)	GK-8 000-0051-81 (obsolete)	HS-WSBK 000-0090-73 (obsolete)	N/A	ST-TBK 000-0090-98 (obsolete)	N/A
X-86 DS 000-0110-70 (2006-2007)	See XD Part #	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	N/A	N/A
X-87 (2003)	PC-23X 000-0099-69 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A
X-88DF (2003)	PC-23X 000-0099-69 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HS-50/200-DX 000-0106-23 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A
X-91 (2002)	PC-23X 000-0099-69 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A

Lowrance Replacement Accessories - Cross-Reference Guide

Model (year)	Power Cable	Gimbal Bracket	Gimbal Knobs	Transducer	Transducer Adapter	Speed/Temp non-networked	GPS
X-96 000-0110-76 000-0110-77 w/o XD (2006-2009)	See XD Part #	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSU 000-0106-48	TA-BL2U-T 000-0127-66	ST-TU 000-0099-75	N/A
X-97 (2003)	PC-23X 000-0099-69 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSDX 000-0106-22 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A
X-98DF (2003)	PC-23X 000-0099-69 (obsolete)	GB-14 000-0101-99	GK-9 000-0101-80	HS-50/200-DX 000-0106-23 (obsolete)	N/A	ST-TX 000-0099-54 (obsolete)	N/A
X-100C (2004)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-102C 000-0117-36 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-105C DF (2004)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-107C DF 000-0117-37 (2005-2006)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-125 000-0117-07 000-0117-12 w/o XD (2004-2009)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-126DF 000-0117-08 (2004-2008)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-135 000-0117-01 000-0117-13 w/o XD (2004-2009)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-136DF 000-0117-02 (2004-2009)	PC-26BL 000-0099-98	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-510c 000-0123-33 000-0123-39 w/o XD (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	HST-WSBL 000-0106-72	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A
X-515c DF 000-0123-34 (2007-2008)	PC-26BL 000-0099-98 PC-27BL 000-0127-08	GB-14 000-0101-99	GK-9 000-0101-80	HST-DFSBL 000-0106-77	TA-UQ2BL-T 000-10052-001	ST-TBL 000-0099-97	N/A

©2014 Donovan Marine, Inc.

Navionics Electronic Navigational Charts - HotMaps Premium



- For Your GPS Chart Plotter.
- Navionics charts cover the world providing navigators and fisherman with all the necessary data for safer and easier navigation.
- Provided by geographic area on pre-programmed cartridges compatible with today's most popular chartplotters including: Eagle, Furuno, Geonav, Humminbird, Lowrance, Northstar, Raymarine and more.
- Just plug-and-play into a Navionics compatible plotter and have easy access to all the essential information found on official paper charts and fishing maps: tide and current data, depth contours, spot soundings, navaids, location names, detailed port plans, port service guides, and more.
- Coverage size: XL3.
- Works on both Humminbird and Lowrance.

Order No.	Mfg. No. / Description	Price
150107	(SD/PREM-E6) East	$157.98 B
151059	(SD/PREM-S6) South	$157.98 B

Lowrance Lake Insight™ HD Marine Charts



- Four times the detail of built-in HDS Insight Maps.
- Eight more zoom levels of shaded relief data.
- Find fish faster with Exclusive Fishing Hot Spots.
- Loads of free space to save sonar and navigation data.
- Expansive coverage of lakes across the Continental U.S.

Order No.	Mfg. No. / Description	Price
142465	(10039-001) Lake Insight HD Marine Charts	$109.98 F

Simrad ADP Cable BS-1

- 7 pin blue to bare wires.

Order No.	Mfg. No. / Description	Price
143020	(10046-001) ADP Cable BSM-1	$27.98 F

Navionics Electronic Navigational Chart - Gold



- For Your GPS Chart Plotter.
- 2-dimensional Gold marine charts are the navigation standard for serious mariners and fishermen offering the largest coverage areas for the widest range of today's most popular chartplotters.
- Features include tides, currents, wrecks, port plans, marsh areas, marine services, coastal roads, and much more.
- Whether you are on the water or planning a trip, Navionics Gold charts can take you there.
- Covers entire US west coast and Baja to Cabo San Lucas, Hawaii and Alaska.
- Works on both Humminbird and Lowrance.

Order No.	Mfg. No. / Description	Price
151065	(SD/1XG) Electronic Navigational Chart - Gold	$210.98 B

Simrad B60 Transducer

- Thru hull low profile 20° tilted element bronze 600W 50/200 kHz.
- CONNECTOR: 7F-Airmar (7 pin).

Order No.	Mfg. No. / Description	Price
143025	(21-001) B60 Transducer	$398.98 F

Simrad Ethernet Cable

- Expansion Port-1 plug-and-play hub for high-speed data-sharing of multiple NSE series products with Ethernet modules.
- Waterproof expansion ports resist corrosive marine environments.
- Unused expansion ports capped for future expansion.

Order No.	Mfg. No. / Description	Price
143045	(127-51) Yellow 5 pin 2m (6.5')	$45.98 F
143050	(127-29) Yellow 5 pin 4.5m (15')	$75.98 F

Simrad SlimNet Cables

Order No.	Mfg. No. / Description	Price
143090	(24006413) Micro-C Female Cable 4m	$81.98 F

Minn Kota Trolling Motor Reference Guide

DMI #	Product Code	Product Description	Shaft Length	Max. Thrust	Volts
Fortrex Bow-Mount Series					
475590	1368660	FORTREX 80	45"	80 lb.	24
475591	1368661	FORTREX 80	52"	80 Lb.	24
475593	1368670	FORTREX 80/US2	45"	80 Lb.	24
475592	1368671	FORTREX 80/US2	52"	80 Lb.	24
475596	1368672	FORTREX 80/US2	62"	80 Lb.	24
475599	1368687	FORTREX 112	45"	112 Lb.	36
475602	1368688	FORTREX 112	52"	112 Lb.	36
475610	1368695	FORTREX 112/US2	45"	112 Lb.	36
475613	1368696	FORTREX 112/US2	52"	112 Lb.	36
Special Order	1368697	FORTREX 112/US2	62"	112 Lb.	36
Special Order	1368686	FORTREX 112/HAND	52"	112 Lb.	36
Maxxum Bow-Mount Series					
475361	1368550	MAX 55/SC/BG	42"	55 Lb.	12
Special Order	1368551	MAX 55/SC/BG	52"	55 Lb.	12
475323	1368553	MAX 55/BG	42"	55 Lb.	12
475347	1368554	MAX 55/BG	52"	55 Lb.	12
475505	1368620	MAX 55/SC/HAND	52"	55 Lb.	12
475410	1368561	MAX 70/BG	42"	70 Lb.	24
475424	1368562	MAX 70/BG	52"	70 Lb.	24
475520	1368630	MAX 70/SC/HAND	52"	70 Lb.	24
475397	1368560	MAX 70/SC/BG	42"	70 Lb.	24
475448	1368580	MAX 80/BG	42"	80 Lb.	24
475460	1368581	MAX 80/BG	52"	80 Lb.	24
475462	1368640	MAX 80/BG/HAND	52"	80 Lb.	24
Edge Bow-Mount Series					
475212	1355946	EDGE 45/L&D	36"	45 Lb.	12
475214	1355947	EDGE 45/L&D	45"	45 Lb.	12
475215	1355948	EDGE 45/L&D	50"	45 Lb.	12
475216	1355945	EDGE 45/L&D/HAND	45"	45 Lb.	12
475290	1355956	EDGE 55/L&D	45"	55 Lb.	12
475292	1355957	EDGE 55/L&D	52"	55 Lb.	12
475294	1355955	EDGE 55/L&D/HAND	52"	55 Lb.	12
475296	1355970	EDGE 70/L&D	45"	70 Lb.	24
475297	1355971	EDGE 70/L&D	52"	70 Lb.	24
Powerdrive V2 Bow-Mount Combo (i-Pilot Preinstalled)					
474740	1358740	55 PD V2 with i-Pilot NO foot pedal	48"	55 Lb.	12
474750	1358741	55 PD V2 with i-Pilot NO foot pedal	54"	55 Lb.	12
474751	1358753	55 PD V2/US2 with i-Pilot NO foot pedal	54"	55 Lb.	12
474753	1358726	70 PD V2 with i-Pilot NO foot pedal	54"	70 Lb.	24
474755	1358758	70 PD V2/US2 with i-Pilot NO foot pedal	60"	70 Lb.	24
Powerdrive V2 Bow-Mount					
474720	1358704	45 PD V2	48"	45 Lb.	12
474719	1358705	50 PD V2	48"	50 Lb.	12

©2014 Donovan Marine, Inc.

Minn Kota Trolling Motor Reference Guide

DMI #	Product Code	Product Description	Shaft Length	Max. Thrust	Volts
Powerdrive V2 Bow-Mount *Continued*					
474731	1358710	55 PD V2	48"	55 Lb.	12
474732	1358711	55 PD V2	54"	55 Lb.	12
Special Order	1358750	55 PD V2/US2	48"	55 Lb.	12
Special Order	1358751	55 PD V2/US2	54"	55 Lb.	12
Special Order	1366200	55 PD V2/AP	48"	55 Lb.	12
Special Order	1366201	55 PD V2/AP	54"	55 Lb.	12
Special Order	1366251	55 PD V2/AP/US2	54"	55 Lb.	12
474752	1358720	70 PD V2	54"	70 Lb.	24
Special Order	1358721	70 PD V2	60"	70 Lb.	24
Special Order	1358755	70 PD V2/US2	54"	70 Lb.	24
Special Order	1358756	70 PD V2/US2	60"	70 Lb.	24
Special Order	1366211	70 PD V2/AP	60"	70 Lb.	24
Special Order	1366260	70 PD V2/AP/US2	54"	70 Lb.	24
Special Order	1366261	70 PD V2/AP/US2	60"	70 Lb.	24
Terrova Bow-Mount Combo (i-Pilot Link Preinstalled)					
476083	1358855	TERROVA 55/US2 with Link incl foot pedal	54"	55 Lb.	12
476084	1358866	TERROVA 80/US2 with Link incl foot pedal	45"	80 Lb.	24
476085	1358867	TERROVA 80/US2 with Link incl foot pedal	60"	80 Lb.	24
Special Order	1358840	TERROVA 112/US2 with Link incl foot pedal	60"	112 Lb.	36
Terrova Bow-Mount Combo (i-Pilot Preinstalled)					
476075	1358854	TERROVA 55/US2 with i-Pilot incl foot pedal	45"	55 Lb.	12
476073	1358853	TERROVA 55/US2 with i-Pilot incl foot pedal	54"	55 Lb.	12
476078	1358864	TERROVA 80/US2 with i-Pilot incl foot pedal	45"	80 Lb.	24
476080	1358865	TERROVA 80/US2 with i-Pilot incl foot pedal	60"	80 Lb.	24
Special Order	1358841	TERROVA 112/US2 with i-Pilot incl foot pedal	54"	112 Lb.	36
Special Order	1358842	TERROVA 112/US2 with i-Pilot incl foot pedal	60"	112 Lb.	36
Terrova Bow-Mount Series					
Special Order	1358800	TERROVA 55	48"	55 Lb.	12
Special Order	1358801	TERROVA 55	54"	55 Lb.	12
Special Order	1358811	TERROVA 80	60"	80 Lb.	24
475088	1358860	TERROVA 80/US2	54"	80 Lb.	24
Special Order	1358861	TERROVA 80/US2	60"	80 Lb.	24
Special Order	1366161	TERROVA 80/AP/US2	60"	80 Lb.	24
Special Order	1358843	TERROVA 112/US2	60"	112 Lb.	36
Special Order	1366180	TERROVA 112/AP/US2	60"	112 Lb.	36
Pontoon Bow-Mount Series					
474733	1358712	54 PD V2 PONTOON	48"	54 Lb.	12
474738	1358722	68 PD V2 PONTOON	48"	68 Lb.	24
474742	1355954	PONTOON 55/HAND	52"	55 Lb.	12
474744	1355975	PONTOON 70/HAND	52"	70 Lb.	24
Vintage Transom Mount Series					
Special Order	1352625	VANTAGE 80	VARIABLE	80 Lb.	24
Special Order	1352638	VANTAGE 101	VARIABLE	101 Lb.	36

Minn Kota Trolling Motor Reference Guide

DMI #	Product Code	Product Description	Shaft Length	Max. Thrust	Volts
Traxxis Transom Mount Series					
Special Order	1368707	TRAXXIS 45	36"	45 Lb.	12
Special Order	1368715	TRAXXIS 55	36"	55 Lb.	12
475179	1368716	TRAXXIS 55	42"	55 Lb.	12
Special Order	1368720	TRAXXIS 70	42"	70 Lb.	24
Special Order	1368730	TRAXXIS 80	42"	80 Lb.	24
Endura Max Transom Mount Series					
474850	1352140	ENDURA MAX 40	36"	40 Lb.	12
474855	1352145	ENDURA MAX 45	36"	45 Lb.	12
474860	1352150	ENDURA MAX 50	36"	50 Lb.	12
474865	1352151	ENDURA MAX 50	42"	50 Lb.	12
474870	1352155	ENDURA MAX 55	36"	55 Lb.	12
474875	1352156	ENDURA MAX 55	42"	55 Lb.	12
Endura C2 Transom Mount Series					
474830	1352230	ENDURA C2 30	30"	30 Lb.	12
474835	1352240	ENDURA C2 40	36"	40 Lb.	12
Special Order	1352245	ENDURA C2 45	36"	45 Lb.	12
474840	1352250	ENDURA C2 50	36"	50 Lb.	12
Special Order	1352251	ENDURA C2 50	42"	50 Lb.	12
Special Order	1352255	ENDURA C2 55	36"	55 Lb.	12
474845	1352256	ENDURA C2 55	42"	55 Lb.	12
Camo/Waterfowl Edition Transom Mount Series					
Special Order	1351922	CAMO 45/WATERFOWL	36"	45 Lb.	12
Special Order	1351927	CAMO 55/WATERFOWL	36"	55 Lb.	12
Engine Mounted Series					
Special Order	1370610	MK 55/EM	N/A	55 Lb.	12
Special Order	1370620	MK 80/EM	N/A	80 Lb.	24
Special Order	1370630	MK 101/EM	N/A	101 Lb.	36
Special Order	1370615	RT 55/EM	N/A	55 Lb.	12
Special Order	1370625	RT 80/EM	N/A	80 Lb.	24
Special Order	1370645	RT 160/EM	N/A	160 Lb.	24
E-Drive Series					
Special Order	1371010	E-DRIVE	20"	2 HP	48
Riptide SF Lift Assist Saltwater Bow-Mount Series					
475109	1363640	RT 80/SF/BG/HAND	52"	80 Lb.	24
475110	1363641	RT 80/SF/BG/HAND	62"	80 Lb.	24
475116	1363660	RT 112/SF/BG/HAND	62"	112 Lb.	36
Riptide SE Series					
475032	1355915	RT 55/SE/HAND	52"	55 Lb.	12
475033	1355920	RT 70/SE/HAND	52"	70 Lb.	24
Riptide SM Series					
475041	1363420	RT 55/SM/L&D/SC/HAND	42"	55 Lb.	12
475043	1363421	RT 55/SM/L&D/SC/HAND	52"	55 Lb.	12

©2014 Donovan Marine, Inc.

Minn Kota Trolling Motor Reference Guide

DMI #	Product Code	Product Description	Shaft Length	Max. Thrust	Volts
Riptide SM Series *Continued*					
475031	1363422	RT 55/SM/L&D/HAND	52"	55 Lb.	12
475071	1363425	RT 70/SM/L&D/SC/HAND	52"	70 Lb.	24
475118	1363447	RT 80/SM/L&D/HAND	52"	80 Lb.	24
475119	1363445	RT 80/SM/BG/HAND	52"	80 Lb.	24
475120	1363446	RT 80/SM/BG/HAND	62"	80 Lb.	24
475122	1363468	RT 101/SM/BG/HAND	62"	101 Lb.	36
Riptide SP Series					
475129	1363550	RT 55/SP/CP	48"	55 Lb.	12
Special Order	1363554	RT 55/SP/CP	54"	55 Lb.	12
475070	1363560	RT 70/SP/CP	54"	70 Lb.	24
Riptide ST Series					
475094	1363760	RT 80/ST/CP	54"	80 Lb.	24
Special Order	1363761	RT 80/ST/CP	60"	80 Lb.	24
475173	1363710	RT 80/ST/CP/AP	54"	80 Lb.	24
475174	1363711	RT 80/ST/CP/AP	60"	80 Lb.	24
475177	1363730	RT 112/ST/CP/AP	60"	112 Lb.	36
Riptide Saltwater Bow-Mount (i-Pilot Link Pre-Installed)					
Special Order	1363705	RT55/ST with Link	54"	55 Lb.	12
Special Order	1363716	RT80/ST with Link	54"	80 Lb.	24
Special Order	1363717	RT80/ST with Link	60"	80 Lb.	24
Riptide Saltwater Bow-Mount (i-Pilot Pre-Installed)					
475141	1363704	RT 55/ST with i-Pilot NO foot pedal	54"	55 Lb.	12
475142	1363714	RT 80/ST with i-Pilot NO foot pedal	54"	80 Lb.	24
475144	1363715	RT 80/ST with i-Pilot NO foot pedal	60"	80 Lb.	24
475146	1363731	RT 112/ST with i-Pilot NO foot pedal	60"	112 Lb.	36
475131	1363553	RT 55/SP with i-Pilot NO foot pedal	48"	55 Lb.	12
475132	1363563	RT 70/SP with i-Pilot NO foot pedal	54"	70 Lb.	24
Riptide Saltwater Transom-Mount Series					
475114	1363844	RT 45/SC/T	36"	45 Lb.	12
Special Order	1363845	RT 45/V/T	36"	45 Lb.	12
475115	1363854	RT 55/SC/T	42"	55 Lb.	12
Special Order	1363855	RT 55/V/T	36"	55 Lb.	12
Special Order	1363856	RT 55/V/T	42"	55 Lb.	12
475108	1363830	RT 80/T	42"	80 Lb.	24
Special Order	1363860	RT 112/T	52"	112 Lb.	36

MotorGuide Trolling Motor Reference Guide

Series	DMI #	MotorGuide Number	Model Description (Model, Thrust Style, Shaft Length, Voltage & Mount)	Peak Thrust Rating	Shaft (in.)	Shaft Material	Speed Control	Steering	Machete III Propeller
Foot Control Bow Mount Motors - Freshwater Use									
Freshwater	501036	921310200	FW40FB 36" 12V FLEXMT	40	36	AL	5	Rack & Pinion	Yes
	501037	921310210	FW40FB 42" 12V FLEXMT	40	42	AL	5	Rack & Pinion	Yes
	501066	921310110	FW46FB 36" 12V FLEXMT	46	36	AL	5	Rack & Pinion	Yes
	501078	921310120	FW46FB 42" 12V FLEXMT	46	42	AL	5	Rack & Pinion	Yes
	Special Order	921310130	FW46FB 42" 12V FLEXMT 84" Cable	46	42	AL	5	Rack & Pinion	Yes
	Special Order	921310140	FW46FB 50" 12V FLEXMT	46	50	SS	5	Rack & Pinion	Yes
	Special Order	921310150	FW54FB 36" 12V FLEXMT	54	36	AL	5	Rack & Pinion	Yes
	501043	921310160	FW54FB 42" 12V FLEXMT	54	42	AL	5	Rack & Pinion	Yes
	501054	921310170	FW54FB 50" 12V FLEXMT	54	50	SS	5	Rack & Pinion	Yes
	Special Order	923310030	FW54FBV 36" 12V FLEXMT	54	36	SS	V	Rack & Pinion	Yes
	Special Order	923310040	FW54FBV 42" 12V FLEXMT	54	42	SS	V	Rack & Pinion	Yes
	501125	921310490	FW75FB 45" FLXMNT	75	45	SS	5	Rack & Pinion	Yes
	501124	921310440	FW75 FB 45" 24V 20.8MT	75	45	SS	5	Rack & Pinion	Yes
	501126	921310450	FW75 FB 50" 24V 20.8MT	75	50	SS	5	Rack & Pinion	Yes
X3	501770	940200050	X3-45FW FB 36" 12V	45	36	CP	5	Pull/Pull	Yes
	501771	940200060	X3-45FW FB 45" 12V	45	45	CP	5	Pull/Pull	Yes
	501772	940200070	X3-45FW FB 50" 12V	45	50	CP	5	Pull/Pull	Yes
	501773	940200080	X3-55FW FB 36" 12V	55	36	CP	5	Pull/Pull	Yes
	501774	940200090	X3-55FW FB 45" 12V	55	45	CP	5	Pull/Pull	Yes
	501775	940200100	X3-55FW FB 50" 12V	55	50	CP	5	Pull/Pull	Yes
	501776	940200110	X3-70FW FB 45" 12V	70	45	CP	5	Pull/Pull	Yes
	501777	940200120	X3-70FW FB 50" 12V	70	50	CP	5	Pull/Pull	Yes
Tour	501107	930010390	TR75 FBD 45" 24V 20.8MT	75	45	SS	V	Metal/Pull/Pull	Yes
	501088	9BT42GAAF	TR82 FBD 45" 24V 21MT	82	45	SS	V	Metal/Pull/Pull	Yes
	501103	9BT52GAAF	TR82 FBD 50" 24V 21MT	82	50	SS	V	Metal/Pull/Pull	Yes
	501139	9BX43GAAF	TR109 FBD 45" 36V 21MT	109	45	SS	V	Metal/Pull/Pull	Yes
	501141	9BX53GAAF	TR109 FBD 50" 36V 21MT	109	50	SS	V	Metal/Pull/Pull	Yes
Tour - Sonar	Special Order	930010450	TR75L FBD 45" 24V 20.8MT	75	45	SS	V	Metal/Pull/Pull	Yes
	501108	930011020	TR82L FBD 45 24V 21MT	82	45	SS	V	Metal/Pull/Pull	Yes
	501109	930011030	TR82L FBD 50 24V 21MT	82	50	SS	V	Metal/Pull/Pull	Yes
	Special Order	930011040	TR82L FBD 60 24V 24MT	82	60	SS	V	Metal/Pull/Pull	Yes
	501110	930011050	TR109L FBD 45 36V 21MT	109	45	SS	V	Metal/Pull/Pull	Yes
	501112	930011060	TR109L FBD 50 36V 21MT	109	50	SS	V	Metal/Pull/Pull	Yes
	Special Order	930011070	TR109L FBD 60 36V 24MT	109	60	SS	V	Metal/Pull/Pull	Yes
Foot Control Transom Mount Motors - Freshwater Use									
Bulldog	Special Order	921500020	BULLDOG 40 30" 03MT	40	30	AL	5	Rack & Pinion	Yes
	Special Order	921500090	BULLDOG 54 30" 09MT	54	30	AL	5	Rack & Pinion	Yes
Hand Control Bow Mount Motors - Freshwater Use									
X3	Z110013	940200010	X3 - 45 HB 50" 12V FLX MT	45	50	AL	5/2	Ext. Twist-Tiller	Yes
	Z110014	940200020	X3 - 55 HB 50" 12V FLX MT	55	50	AL	5/2	Ext. Twist-Tiller	Yes
	501778	940200130	X3-45FW HB 50" 12V	45	50	AL	5/2	Ext. Twist-Tiller	Yes
	501779	940200140	X3-55FW HB 50" 12V	55	50	AL	5/2	Ext. Twist-Tiller	Yes
VariMax	501384	966080020	V55 HB 50" 12V FLX MT	55	50	AL	V/R	Ext. Twist-Tiller	Yes

©2014 Donovan Marine, Inc.

MotorGuide Trolling Motor Reference Guide

Series	DMI #	MotorGuide Number	Model Description (Model, Thrust Style, Shaft Length, Voltage & Mount)	Peak Thrust Rating	Shaft (in.)	Shaft Material	Speed Control	Steering	Machete III Propeller
VariMax *cont.*	501780	966000080	V55 HB 50" 12V 20.8MT	55	50	AL	V/R		
	501388	966080035	V75 HB 50" 24V 20.8MT	75	50	AL	V/R	Ext. Twist-Tiller	Yes
Freshwater	Special Order	923410020	FW109 HBD 50" 36V 21RMT	109	50	SS	V/R	Ext. Twist-Tiller	Yes
Hand Control Transom Mount Motors - Freshwater Use									
R3	501288	940100070	R3-30 HT 30" 12V 03MT	30	30	AL	5/2	Ext. Twist-Tiller	Yes
	Special Order	940100020	R3-40 HT 36" 12V 03MT	40	36	AL	5/2	Ext. Twist-Tiller	Yes
	Special Order	940100030	R3-45 HT 36" 12V 09MT	45	36	AL	5/2	Ext. Twist-Tiller	Yes
	Special Order	940100050	R3-55 HT 36" 12V 09MT	55	36	AL	5/2	Ext. Twist-Tiller	Yes
VariMax	501300	966000010	V40 HT 30" 12V 09MT	40	30	AL	V/R	Ext. Twist-Tiller	Yes
	501310	966000020	V40 HT 36" 12V 09MT	40	36	AL	V/R	Ext. Twist-Tiller	Yes
	501315	966000030	V45 HT 36" 12V 09MT	45	36	AL	V/R	Ext. Twist-Tiller	Yes
	Special Order	966000040	V45 HT 42" 12V 09MT	45	42	AL	V/R	Ext. Twist-Tiller	Yes
	501320	966000050	V55 HT 36" 12V 09MT	55	36	AL	V/R	Ext. Twist-Tiller	Yes
	Special Order	966000060	V55 HT 42" 12V 09MT	55	42	AL	V/R	Ext. Twist-Tiller	Yes
	Special Order	966000070	V75 HT 42" 24V 09MT	75	42	AL	V/R	Ext. Twist-Tiller	Yes
Hand Control Pontoon Mount Motors - Freshwater Use									
VariMax	501460	966050010	V55 HP 50" 12V PMT	55	50	AL	V/R	Ext. Twist-Tiller	Yes
	501480	966050025	V75 HP 50" 24V PMT	75	50	AL	V/R	Ext. Twist-Tiller	Yes
Electric Steer Motors - Freshwater Use									
Wireless	501470	970100360	W45 48" 12V w/ Foot Pedal	45	48	CP	V	WR Pedal	Yes
	Special Order	970100370	W45 54" 12V w/ Foot Pedal	45	54	CP	V	WR Pedal	Yes
	501754	970100020	W55 48" 12V w/ Foot Pedal	55	48	CP	V	WR Pedal	Yes
	501757	970100030	W55 54" 12V w/ Foot Pedal	55	54	CP	V	WR Pedal	Yes
	Special Order	970100060	W55 60" 12V w/ Foot Pedal	55	60	CP	V	WR Pedal	Yes
	Z049413	970100080	W75 48" 24V w/ Foot Pedal	75	48	CP	V	WR Pedal	Yes
	Special Order	970100040	W75 54" 24V w/ Foot Pedal	75	54	CP	V	WR Pedal	Yes
	Special Order	970100050	W75 60" 24V w/ Foot Pedal	75	60	CP	V	WR Pedal	Yes
Wireless Sonar	Special Order	970100100	W55L 54" 12V w/ Foot Pedal	55	54	CP	V	WR Pedal	Yes
	Special Order	970100110	W75L 48" 24V w/ Foot Pedal	75	48	CP	V	WR Pedal	Yes
	Special Order	970100120	W75L 60" 24V w/ Foot Pedal	75	60	CP	V	WR Pedal	Yes
Xi5	501781	940800170	Xi5-55FW 48" 12V FP	55	48	CP	V	WR Pedal	Yes
	501782	940800180	Xi5-55FW 54" 12V FP	55	54	CP	V	WR Pedal	Yes
	501783	940800080	Xi5-80FW 54" 24V FP	80	54	CP	V	WR Pedal	Yes
	501784	940800090	Xi5-80FW 60" 24V FP	80	60	CP	V	WR Pedal	Yes
	501785	940800130	Xi5-105FW 54" 36V FP	105	54	CP	V	WR Pedal	Yes
	501786	940800140	Xi5-105FW 60" 36V FP	105	60	CP	V	WR Pedal	Yes
	501798	940800190	Xi5-55FW 48" 12V FP SNR	55	48	CP	V	WR Pedal	Yes
	501799	940800200	Xi5-55FW 54" 12V FP SNR	55	54	CP	V	WR Pedal	Yes
	501794	940800110	Xi5-80FW 54" 24V FP SNR	80	54	CP	V	WR Pedal	Yes
	501795	940800120	Xi5-80FW 60" 24V FP SNR	80	60	CP	V	WR Pedal	Yes
	501796	940800150	Xi5-105FW 54" 36V FP SNR	105	54	CP	V	WR Pedal	Yes
	501797	940800160	Xi5-105FW 60" 36V FP SNR	105	60	CP	V	WR Pedal	Yes
	501800	940800210	Xi5-55FW 45" 12V FP SNR GPS	55	45	CP	V	WR Pedal	Yes
	501801	940800220	Xi5-55FW 54" 12V FP SNR GPS	55	54	CP	V	WR Pedal	Yes

MotorGuide Trolling Motor Reference Guide

Series	DMI #	MotorGuide Number	Model Description (Model, Thrust Style, Shaft Length, Voltage & Mount)	Peak Thrust Rating	Shaft (in.)	Shaft Material	Speed Control	Steering	Machete III Propeller
	Special Order	940800270	Xi5-80FW 45" 24V FP SNR GPS	80	45	CP	V	WR Pedal	Yes
	501802	940800230	Xi5-80FW 54" 24V FP SNR GPS	80	54	CP	V	WR Pedal	Yes
	501803	940800240	Xi5-80FW 60" 24V FP SNR GPS	80	60	CP	V	WR Pedal	Yes
	501804	940800250	Xi5-105FW 54" 36V FP SNR GPS	105	54	CP	V	WR Pedal	Yes
	501805	940800260	Xi5-105FW 60" 36V FP SNR GPS	105	54	CP	V	WR Pedal	Yes
Hand Control Bow Mount Motors - Saltwater Use									
VariMax	501266	966180810	V55SW HB 50" 12V FLX MT	55	50	SS	V/R	Ext. Twist-Tiller	Yes
	501787	966100040	V55SW HB 50" 12V 20.8MT	55	50	SS	V/R	Ext. Twist-Tiller	Yes
	501415	966180830	V75SW HB 50" 24V 20.8MT	75	50	SS	V/R	Ext. Twist-Tiller	Yes
	501420	966180840	V75SW HB 60" 24V 20.8MT	75	60	SS	V/R	Ext. Twist-Tiller	Yes
Saltwater	501710	924410050	SW82 HBV 50" 24V 21RMT	82	50	SS	V/R	Ext. Twist-Tiller	Yes
	501713	924410060	SW82 HBV 60" 24V 24RMT	82	60	SS	V/R	Ext. Twist-Tiller	Yes
	501725	924410070	SW109 HBV 50" 36V 21RMT	109	50	SS	V/R	Ext. Twist-Tiller	Yes
	501727	924410080	SW109 HBV 60" 36V 24RMT	109	60	SS	V/R	Ext. Twist-Tiller	Yes
Hand Control Transom Mount Motors - Saltwater Use									
VariMax	Special Order	966100020	V45SW HT 36" 12V 09MT	45	36	SS	V/R	Ext. Twist-Tiller	Yes
	Special Order	966100030	V55SW HT 36" 12V 09MT	55	36	SS	V/R	Ext. Twist-Tiller	Yes
Saltwater	Special Order	9CT42KQAX	SW82 HTV 45" 24V 09MT	82	45	SS	V/R	Ext. Twist-Tiller	Yes
	Special Order	9CX53KQAX	SW109 HTV 50" 36V 09MT	109	50	SS	V/R	Ext. Twist-Tiller	Yes
Hand Control Kayak Motors - Saltwater Use									
VariMax	Special Order	966100010	V45SW HT 18" 12V 09MT-Kayak	45	18	SS	V/R	Ext. Twist-Tiller	Yes
Electric Steer Motors - Saltwater Use									
Wireless	Special Order	970200010	W55 48" 12V SW w/ Foot Pedal	55	48	CP	V	WR Pedal	Yes
	Special Order	970200020	W55 54" 12V SW w/ Foot Pedal	55	54	CP	V	WR Pedal	Yes
	501759	970200030	W75 48" 24V SW w/ Foot Pedal	75	48	CP	V	WR Pedal	Yes
	501761	970200040	W75 60" 24V SW w/ Foot Pedal	75	60	CP	V	WR Pedal	Yes
Xi5	501788	941700060	Xi5-55SW 48" 12V FOB	55	48	CP	V	WR FOB	Yes
	501789	941700070	Xi5-55SW 54" 12V FOB	55	54	CP	V	WR FOB	Yes
	501790	941700020	Xi5-80SW 54" 24V FOB	80	54	CP	V	WR FOB	Yes
	501791	941700030	Xi5-80SW 60" 24V FOB	80	60	CP	V	WR FOB	Yes
	501792	941700040	Xi5-105SW 54" 36V FOB	105	54	CP	V	WR FOB	Yes
	501793	941700050	Xi5-105SW 60" 36V FOB	105	60	CP	V	WR FOB	Yes
	501806	941700080	Xi5-55SW 54" 12V GPS	55	54	CP	V	WR FOB	Yes
	501807	941700090	Xi5-80SW 60" 24V GPS	80	60	CP	V	WR FOB	Yes
	501808	941700100	Xi5-105SW 60" 36V GPS	105	60	CP	V	WR FOB	Yes

©2014 Donovan Marine, Inc.

Minn Kota Terrova Series Trolling Motors with i-Pilot Link



- Freshwater.
- Bow mount, foot control.
- Stow/Deploy Lever.
- Digital Maximizer.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.
- Universal Sonar 2.
- Includes: i-Pilot Link accessory - i-Pilot Link allows Terrova to communicate with your Humminbird fishfinder and LakeMaster digital GPS maps for unprecedented navigation control.

Order No.	Mfg. No. / Description	Price
476083	(1358855) 54 Shaft, 55# Thrust, 12 volt	$1,550.98 S
476084	(1358866) 45 Shaft, 80# Thrust, 24 volt	$1,800.98 S
476085	(1358867) 60 Shaft, 80# Thrust, 24 volt	$1,819.98 S
476086	(1358875) 60 Shaft, 101# Thrust, 36 volt	$1,992.98 C

Minn Kota i-Pilot Link for Terrova



- The i-Pilot Link accessory is compatible with all models of Terrova. i-Pilot Link also comes pre-installed on: Terrova 101/US2/i-Pilot Link, Terrova 80/US2/i-Pilot Link and Terrova 55/US2/i-Pilot Link.
- Note: i-Pilot Link for Terrova can work in conjunction with the foot pedal.

Order No.	Mfg. No. / Description	Price
477010	(1866400)	$799.98 D

Minn Kota i-Pilot for Terrova



- Record a track.
- Spot-Lock.
- CoPilot and Cruise Control.
- Advanced AutoPilot.
- i-Pilot's integrated, backlit LCD screen is easy to read and delivers instant feedback on active functions, speed, prop on/off status, battery power and GPS signal strength.
- It's all encased in a watertight, fully gasketed remote that floats.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
477030	(1866200)	$477.98 C

Minn Kota Terrova Series Trolling Motors with i-Pilot



- Freshwater.
- Bow mount, foot control.
- Stow/Deploy Lever.
- Digital Maximizer.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.
- Universal Sonar 2.
- Includes: i-Pilot accessory - i-Pilot wireless trolling system accessory uses GPS technology to control and steer the boat, stay on a fishing spot, or store and retrace productive trolling paths.

Order No.	Mfg. No. / Description	Price
476075	(1358854) 45" Shaft, 55# Thrust, 12 volt	$1,250.98 S
476073	(1358853) 54" Shaft, 55# Thrust, 12 volt	$1,260.98 S
476078	(1358864) 45" Shaft, 80# Thrust, 24 volt	$1,490.98 S
476080	(1358865) 60" Shaft, 80# Thrust, 24 volt	$1,510.98 S
476082	(1358873) 62" Shaft, 101# Thrust, 36 volt	$1,680.98 C

Minn Kota Terrova Series Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Stow/Deploy Lever.
- Digital Maximizer.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.
- Universal Sonar 2.

Order No.	Mfg. No. / Description	Price
475088	(1358860) 54" Shaft, 80# Thrust, 24 volt	$1,210.98 S

Minn Kota Terrova/Riptide ST Foot Pedal



- Low-profile design offers two steering options: Heel/toe pedal or left/ right steering buttons.
- Includes rotary speed control dial, momentary/constant on toggle, AutoPilot on/off toggle and an 18' cable with IP68-rated waterproof connector plug.
- Plug-n-play with Terrova or Riptide ST bow-mount motors.
- Works in conjunction with CoPilot.

Order No.	Mfg. No. / Description	Price
477000	(1866075)	$149.98 E

Minn Kota PowerDrive V2 Series Trolling Motors



- Freshwater.
- Bow mount.
- Digital Maximizer.
- Deploy-Assist lever.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- i-Pilot GPS trolling system accessory pre-installed.
- Pedal not included.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
474740	(1358740) 48" Shaft, 55# Thrust, 12 volt	$930.98 S
474750	(1358741) 54" Shaft, 55# Thrust, 12 volt	$940.98 S
474753	(1358726) 54" Shaft, 70# Thrust, 24 volt	$1100.98 S

- Universal Sonar 2.

Order No.	Mfg. No. / Description	Price
474751	(1358753) 54" Shaft, 55# Thrust, 12 volt	$1,030.98 S
474755	(1358758) 60" Shaft, 70# Thrust, 24 volt	$1,180.98 S

Minn Kota i-Pilot Link for PowerDrive V2



- The i-Pilot Link accessory is compatible with all models of PowerDrive V2.
- Note: i-Pilot Link for PowerDrive V2 replaces the foot pedal.

Order No.	Mfg. No. / Description	Price
477015	(1866410)	$799.98 D

Minn Kota i-Pilot for PowerDrive V2



- The i-Pilot accessory is compatible with all models of PowerDrive V2.
- Record a track.
- Spot-Lock.
- CoPilot and Cruise Control.
- Advanced AutoPilot.
- i-Pilot remote.
- i-Pilot for PowerDrive V2 replaces the foot pedal.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
477032	(1866310)	$449.98 D

Minn Kota PowerDrive Foot Pedal



- Replacement MicroTouch foot pedal for PowerDrive and Riptide electric steer bow mount motors.

Order No.	Mfg. No. / Description	Price
476720	(1866040)	$99.98 D

Minn Kota PowerDrive V2 Series Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Digital Maximizer.
- Deploy-Assist lever.
- Ergonomically designed foot pedal.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
474720	(1358704) 48" Shaft, 45# Thrust, 12 volt	$479.98 B
474719	(1358705) 48" Shaft, 50# Thrust, 12 volt	$489.98 B
474731	(1358710) 48" Shaft, 55# Thrust, 12 volt	$590.98 B
474732	(1358711) 54" Shaft, 55# Thrust, 12 volt	$599.98 B
474752	(1358720) 54" Shaft, 70# Thrust, 24 volt	$770.98 B

- No foot pedal.
- Includes: i-Pilot wireless trolling system accessory and AutoPilot.

Order No.	Mfg. No. / Description	Price
474735	(1358719) 48" Shaft, 55# Thrust, 12 volt	$871.98 S
474734	(1358718) 54" Shaft, 55# Thrust, 12 volt	$885.98 S

Minn Kota PowerDrive V2 Foot Pedal



- For use with PowerDrive V2 trolling motors.
- Side-to-side steering pedal includes momentary/constant on switch, speed control knob for precise adjustments.
- Works in conjunction with CoPilot.
- Includes: 18' cable with IP68-rated waterproof plug.

Order No.	Mfg. No. / Description	Price
476998	(1866066)	$99.98 E

MotorGuide Wireless Freshwater Edition Trolling Motors





- Freshwater.
- Bow mount, foot control.
- Includes wireless foot pedal
- Fingertip control is available with a Wireless Hand-Held Remote.
- Mix and match up to four Wireless Hand-Helds or Wireless Foot Pedals in any combination.
- Cradle lock mount.
- Composite shaft.
- Quick-release mounting plate included.
- Oversized brushes.
- Built-in battery indicator.

Order No.	Mfg. No. / Description	Price
501470	(970100360) 48" Composite Shaft, 45# Thrust, 12 volt	$604.98 D
501754	(970100020) 48" Composite Shaft, 55# Thrust, 12 volt	$677.98 D
501757	(970100030) 54" Composite Shaft, 55# Thrust, 12 volt	$687.98 C
501766	(8M4000975) Wireless Mounting Plate	$36.98 F

©2014 Donovan Marine, Inc.

MotorGuide Xi5 Wireless Freshwater Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Composite shaft can withstand impact and obstructions.
- Fully-protected electronics.
- Sophisticated steering transmission.
- Wireless "pro style" foot pedal provides outstanding control from anywhere on the boat
- Smooth spinning 2-blade weedless propeller.
- Low-profile mount uses anodized aluminum to prevent corrosion.
- Hand-held remote provides outstanding control from anywhere on the boat.
- Digital variable speed control enables exceptional low-speed trolling and smooth power delivery.
- Extra rigid shaft support and low-vibration steering motor reduce noise, vibration and harshness.
- Unique mechanism aligns and guides the motor into the stowed position and secures it in place.
- Secondary lock prevents unintentional deployment.
- Easy-to-see LED lights in the dashboard for quick status check of key operating modes.
- Next generation Digital technology.
- Two-year limited warranty.

Order No.	Mfg. No. / Description	Price
501781	(940800170) 48" Composite Shaft, 55# Thrust, 12 volt	$789.98 S
501782	(940800180) 54" Composite Shaft, 55# Thrust, 12 volt	$799.98 S
501783	(940800080) 54" Composite Shaft, 80# Thrust, 24 volt	$1,121.98 C
501784	(940800090) 60" Composite Shaft, 80# Thrust, 24 volt	$1,131.98 C
501785	(940800130) 54" Composite Shaft, 105# Thrust, 36 volt	$1,326.98 C
501786	(940800140) 60" Composite Shaft, 105# Thrust, 36 volt	$1,337.98 C

- With onar.

Order No.	Mfg. No. / Description	Price
501798	(940800190) 48" Composite Shaft, 55# Thrust, 12 volt	$900.98 C
501799	(940800200) 54" Composite Shaft, 55# Thrust, 12 volt	$911.98 C
501794	(940800110) 54" Composite Shaft, 80# Thrust, 24 volt	$1,121.98 C
501795	(940800120) 60" Composite Shaft, 80# Thrust, 24 volt	$1,131.98 C
501796	(940800150) 54" Composite Shaft, 105# Thrust, 36 volt	$1,326.98 C
501797	(940800160) 60" Composite Shaft, 105# Thrust, 36 volt	$1,337.98 C

- With Sonar and GPS.

Order No.	Mfg. No. / Description	Price
501800	(940800210) 45" Composite Shaft, 55# Thrust, 12 volt	$1,255.98 C
501801	(940800220) 54" Composite Shaft, 55# Thrust, 12 volt	$1,265.98 C
501802	(940800230) 54" Composite Shaft, 80# Thrust, 24 volt	$1,558.98 C
501803	(940800240) 60" Composite Shaft, 80# Thrust, 24 volt	$1,569.98 C
501804	(940800250) 54" Composite Shaft, 105# Thrust, 36 volt	$1,761.98 C
501805	(940800260) 60" Composite Shaft, 105# Thrust, 36 volt	$1,771.98 C

Minn Kota Riptide SP Foot Pedal



- For use with Riptide SP trolling motors.
- Side-to-side steering pedal includes momentary/constant on switch, speed control knob for precise adjustments.
- Works in conjunction with CoPilot.
- Includes: 18' cable with IP68-rated waterproof plug.

Order No.	Mfg. No. / Description	Price
476722	(1866065)	$99.98 D

Watersnake Shadow DR Freshwater Trolling Motor



- Control the direction or speed of the boat with a touch of your foot with the variable speed foot control unit.
- Stringently built to withstand the harsh conditions associated with freshwater fishing.
- Sleek design with a silent, yet powerful motor.
- Features stainless steel propeller shafts, weedless propellers and corrosion free composite shafts that flex on impact.
- A cut-off switch is installed that engages as soon as the motor is placed in the stow position.
- The mounts are very easy to install, easy to stow and light to carry.
- The potted circuit board is fully waterproofed and sealed in the motor casing for extra protection.

Order No.	Mfg. No. / Description	Price
2000037	(W55065) 48" Shaft, 54# Thrust, 12 volt	$429.98 J

Minn Kota Riptide SP Series Trolling Motors



- Saltwater.
- Bow mount.
- Digital maximizer.
- Deploy-Assist lever.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection.
- Fully encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Pedal not included.
- i-Pilot wireless trolling system accessory uses GPS technology to control and steer the boat, stay on a fishing spot, or store and retrace productive trolling paths.
- Fish from anywhere on the boat with the wireless CoPilot accessory
- AutoPilot locks onto any heading chosen and delivers the boat there.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475131	(1363553) 48" Shaft, 55# Thrust, 12 volt	$1,040.98 S
475132	(1363563) 54" Shaft, 70# Thrust, 24 volt	$1,200.98 S

Minn Kota Riptide SP Series Trolling Motors



- Saltwater.
- Bow mount.
- Digital maximizer.
- Deploy-Assist lever.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection.
- Fully encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Includes: CoPilot. Fish from anywhere on the boat with the wireless CoPilot accessory. Can be mounted on a lanyard, rod or wrist for easy access.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475129	(1363550) 48" Shaft, 55# Thrust, 12 volt	$759.98 S
475070	(1363560) 54" Shaft, 70# Thrust, 24 volt	$920.98 S

Minn Kota i-Pilot Link for Riptide SP



- The i-Pilot Link accessory is compatible with all models of Riptide SP.
- Note: i-Pilot Link for Riptide SP replaces the foot pedal.

Order No.	Mfg. No. / Description	Price
477025	(1866415)	$799.98 D

Minn Kota Riptide ST Series Trolling Motors



- Saltwater.
- Bow mount.
- Digital maximizer.
- Stow/Deploy lever.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection.
- Fully encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Includes: i-Pilot wireless trolling system accessory and AutoPilot.
- Pedal not included.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475141	(1363704) 54" Shaft, 55# Thrust, 12 volt	$1,200.98 S
475142	(1363714) 54" Shaft, 80# Thrust, 24 volt	$1,470.98 S
475144	(1363715) 60" Shaft, 80# Thrust, 24 volt	$1,480.98 S
475146	(1363731) 60" Shaft, 112# Thrust, 36 volt	$1,830.98 S

Minn Kota i-Pilot for Riptide ST



- The i-Pilot accessory is compatible with all models of Riptide ST.
- Record a track.
- Spot-Lock.
- CoPilot and Cruise Control.
- Advanced AutoPilot.
- i-Pilot remote.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
477031	(1866305)	$449.98 D

Minn Kota i-Pilot Link for Riptide ST



- The i-Pilot Link accessory is compatible with all models of Riptide ST.
- Note: i-Pilot Link for Riptide ST can work in conjunction with the foot pedal.

Order No.	Mfg. No. / Description	Price
477020	(1866405)	$799.98 D

Minn Kota i-Pilot for Riptide SP



- The i-Pilot accessory is compatible with all models of Riptide SP.
- Record a track.
- Spot-Lock.
- CoPilot and Cruise Control.
- Advanced AutoPilot.
- i-Pilot remote.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
477033	(1866315)	$449.98 D

Minn Kota Riptide ST Series Trolling Motors



- Saltwater.
- Bow mount.
- Digital maximizer.
- Stow/Deploy lever.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection.
- Fully encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Includes: CoPilot.
- Fish from anywhere on the boat with the wireless CoPilot accessory.
- CoPilot can be mounted on a lanyard, rod or wrist for easy access.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475094	(1363760) 54" Shaft, 80# Thrust, 24 volt	$1,220.98 S

- Includes: AutoPilot and CoPilot.
- Fish from anywhere on the boat with the wireless CoPilot accessory.
- CoPilot can be mounted on a lanyard, rod or wrist for easy access.

Order No.	Mfg. No. / Description	Price
475173	(1363710) 54" Shaft, 80# Thrust, 24 volt	$1,420.98 S
475174	(1363711) 60" Shaft, 80# Thrust, 24 volt	$1,430.98 S
475176	(1363721) 60" Shaft, 101# Thrust, 36 volt	$1,712.98 D
475177	(1363730) 60" Shaft, 112# Thrust, 36 volt	$1,700.98 S

Minn Kota Terrova/Riptide ST Foot Pedal



- Low-profile design offers two steering options: Heel/toe pedal or left/ right steering buttons.
- Includes rotary speed control dial, momentary/constant on toggle, AutoPilot on/off toggle and an 18' cable with IP68-rated waterproof connector plug.
- Plug-n-play with Terrova or Riptide ST bow-mount motors.
- Works in conjunction with CoPilot.

Order No.	Mfg. No. / Description	Price
477000	(1866075)	$149.98 E

©2014 Donovan Marine, Inc.

Minn Kota i-Pilot Link Replacement Remote



- Add additional remotes to your i-Pilot Link integrated system for increased versatility.
- i-Pilot Links wireless remote features a full-color LCD screen to display your current function, user menus, GPS signal strength, prop status and battery state.
- Powered by a rechargeable battery, the remote is waterproof and it floats.
- The replacement remote is compatible with all i-Pilot Link systems.

Order No.	Mfg. No. / Description	Price
477026	(1866450)	$349.98 F

Minn Kota i-Pilot Link Charging Cable



- i-Pilot Link's wireless remote charges like a cell phone.
- This spare or replacement charging cable features a USB terminal that lets you choose between AC and DC power (AC and DC adapters not included).

Order No.	Mfg. No. / Description	Price
477027	(1866460)	$29.98 D

Minn Kota CoPilot Remote for PowerDrive V2, PowerDrive or Riptide SP



- For PowerDrive V2, PowerDrive or Riptide SP motors.
- This replacement remote gives you control of steering, speed and on/off from anywhere on the boat.

Order No.	Mfg. No. / Description	Price
476721	(1866120) CoPilot Remote	$49.98 D

MotorGuide Wireless Saltwater Edition Trolling Motors



- Saltwater.
- Bow mount, foot control.
- Wireless foot pedal.
- Cradle lock mount.
- Quick-release mounting plate included.
- Composite shaft.
- Oversized brushes.
- Built-in battery indicator.
- One hand stow and deploy is easy and ultra-smooth with our Saltwater Wireless edition.

Order No.	Mfg. No. / Description	Price
5010088	(970200010) 48" Composite Shaft, 55# Thrust, 12 volt	$849.98 S
5010090	(970200020) 54" Composite Shaft, 55# Thrust, 12 volt	$859.98 S
501759	(970200030) 48" Composite Shaft, 75# Thrust, 24 volt	$943.98 C
501761	(970200040) 60" Composite Shaft, 75# Thrust, 24 volt	$964.98 C
502321	(MGA515A1) Removable Mounting Plate, White	$103.98 F

Minn Kota i-Pilot Replacement Remote



- Ergonomically redesigned remote.
- Features a 20% larger LCD screen, high-visibility laser-etched buttons and an easy-access external battery compartment.
- Compact, watertight and easy to use, this remote gives you instant feedback on active functions, speed, prop on/off status, battery power and GPS signal strength.
- Add an unlimited number of remotes to your i-Pilot GPS trolling system for increased flexibility.

Order No.	Mfg. No. / Description	Price
477038	(1866350)	$159.98 D

Minn Kota i-Pilot Link Holding Cradle



- Secure i-Pilot Link to your belt or console with this versatile cradle.
- Use the belt clip for constant easy access, or remove the belt clip and mount i-Pilot Link to your dash for simple, straightforward operation.

Order No.	Mfg. No. / Description	Price
477028	(1866470)	$29.98 D

MotorGuide Xi5 Wireless Saltwater Trolling Motors



- Saltwater.
- Bow mount, foot control.
- Composite shaft can withstand impact and obstructions.
- Fully-protected electronics.
- Sophisticated steering transmission.
- Smooth spinning 2-blade weedless propeller.
- Low-profile mount uses anodized aluminum to prevent corrosion.
- Hand-held remote provides outstanding control from anywhere on the boat.
- Digital variable speed control enables exceptional low-speed trolling and smooth power delivery.
- Extra rigid shaft support and low-vibration steering motor reduce noise, vibration and harshness.
- Unique mechanism aligns and guides the motor into the stowed position and secures it in place.
- Secondary lock prevents unintentional deployment.
- Easy-to-see LED lights in the dashboard for quick status check of key operating modes.
- Next generation Digital technology.
- Two-year limited warranty.

Order No.	Mfg. No. / Description	Price
501788	(941700060) 48" Composite Shaft, 55# Thrust, 12 volt	$915.98 C
501789	(941700070) 54" Composite Shaft, 55# Thrust, 12 volt	$925.98 C
501790	(941700020) 54" Composite Shaft, 80# Thrust, 24 volt	$521.98 S
501791	(941700030) 60" Composite Shaft, 80# Thrust, 24 volt	$1,234.98 C
501792	(941700040) 54" Composite Shaft, 105# Thrust, 36 volt	$1,429.98 C
501793	(941700050) 60" Composite Shaft, 105# Thrust, 36 volt	$1,440.98 C

- With Pinpoint GPS.

Order No.	Mfg. No. / Description	Price
501806	(941700080) 54" Composite Shaft, 55# Thrust, 12 volt	$1,265.98 C
501807	(941700090) 60" Composite Shaft, 80# Thrust, 24 volt	$1,569.98 C
501808	(941700100) 60" Composite Shaft, 105# Thrust, 36 volt	$1,771.98 C

Watersnake Slider Bow Mount Trolling Motor



- Powerful units that provide the ultimate performance for the serious angler.
- Ready for the challenge of fishing harsh saltwater environments.
- Features a large turning box for more infinite control in steering, fully encapsulated circuit boards, sacrificial zinc anodes and anti-corrosive treatments.
- Strong but lightweight composite shafts are unbreakable under normal conditions.
- Sleek and corrosion proof bracket features an integrated quick release plate-stowing these motors is a breeze!
- Large cradles for greater stability, allow the lower unit to nestle in safely, even when travelling in rough conditions.

Order No.	Mfg. No. / Description	Price
2000045	(W55151) 54" Shaft, 80# Thrust, 24 volt	$730.98 D

Minn Kota Fortrex Series Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Mono-Arm design.
- Counter-Tension stabilizer (CTS).
- Lift-Assist.
- Removable Bowguard 360°.
- Illuminated directional indicator.
- Foot pedal.
- Digital Maximizer.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475590	(1368660) 45" Shaft, 80# Thrust, 24 volt	$1,199.98 C
475591	(1368661) 52" Shaft, 80# Thrust, 24 volt	$1,230.98 C
475594	(1368662) 62" Shaft, 80# Thrust, 24 volt	$1,227.98 S
475595	(1368680) 45" Shaft, 101# Thrust, 36 volt	$1,316.98 D
475599	(1368687) 45" Shaft, 112# Thrust, 36 volt	$1,349.98 C
475602	(1368688) 52" Shaft, 112# Thrust, 36 volt	$1,379.98 C

- Universal Sonar 2.

Order No.	Mfg. No. / Description	Price
475593	(1368670) 45" Shaft, 80# Thrust, 24 volt	$1,299.98 C
475592	(1368671) 52" Shaft, 80# Thrust, 24 volt	$1,330.98 C
475596	(1368672) 62" Shaft, 80# Thrust, 24 volt	$1,359.98 C
475611	(1368691) 52" Shaft, 101# Thrust, 36 volt	$1,462.98 D
475612	(1368692) 62" Shaft, 101# Thrust, 36 volt	$1,506.98 D
475610	(1368695) 45" Shaft, 112# Thrust, 36 volt	$1,449.98 C
475613	(1368696) 52" Shaft, 112# Thrust, 36 volt	$1,479.98 C

Minn Kota Edge Series Trolling Motors





- Freshwater.
- Bow mount, foot control.
- Rock-Solid mount with latch & door.
- Indestructible composite shaft.
- Directional indicator.
- 5 Speed.
- Cool, quiet power.
- Cable steer foot pedal.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475212	(1355946) 36" Shaft, 45# Thrust, 12 volt	$379.98 B
475214	(1355947) 45" Shaft, 45# Thrust, 12 volt	$389.98 B
475215	(1355948) 50" Shaft, 45# Thrust, 12 volt	$388.98 B
475290	(1355956) 45" Shaft, 55# Thrust, 12 volt	$519.98 B
475292	(1355957) 52" Shaft, 55# Thrust, 12 volt	$528.98 B
475296	(1355970) 45" Shaft, 70# Thrust, 24 volt	$599.98 B
475297	(1355971) 52" Shaft, 70# Thrust, 24 volt	$605.98 B

- Edge Series Trolling Motors with PiranhaMAX 143 Fishfinder.

Order No.	Mfg. No. / Description	Price
475298	(1355959) 45" Shaft, 55# Thrust, 12 volt	$629.98 S
475299	(1353974) 45" Shaft, 70# Thrust, 12 volt	$713.98 S

Minn Kota Edge Trolling Motor with PiranhaMAX 150 Fishfinder Combination





- Get rigged and ready with this trolling motor and fishfinder combination.
- Edge trolling motor features:
  Bow mount, foot control. Rock-Solid mount with latch & door. Indestructible composite shaft. Directional indicator. 5 Speed. Cool, quiet power. Cable steer foot pedal.
- PiranhaMAX 150 Fishfinder features:
  Display: 4.0" Diagonal, 160V x 128H, FSTN LCD 4 Level Grayscale. Sonar: Single Beam. Depth: 600 ft. Power: 800W (PTP), 100 W (RMS). Water Temperature included.

Order No.	Mfg. No. / Description	Price
475291	(1355952) 45" Shaft, 55# Thrust, 12 volt	$558.98 S
475293	(1355953) 50" Shaft, 55# Thrust, 12 volt	$579.98 S

©2014 Donovan Marine, Inc.

Minn Kota Maxxum Series Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Bowguard 360°.
- Illuminated directional indicator.
- Push-to-Test battery gauge.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475323	(1368553) 42" Shaft, 55# Thrust, 12 volt	$799.98 S
475347	(1368554) 52" Shaft, 55# Thrust, 12 volt	$810.98 B
475410	(1368561) 42" Shaft, 70# Thrust, 24 volt	$830.98 S
475424	(1368562) 52" Shaft, 70# Thrust, 24 volt	$835.98 S
475448	(1368580) 42" Shaft, 80# Thrust, 24 volt	$1,058.98 S
475460	(1368581) 52" Shaft, 80# Thrust, 24 volt	$1,100.98 S
475490	(1368601) 52" Shaft, 101# Thrust, 36 volt	$1,149.98 S

- 5 Speed motors put you in command with forward, reverse and multiple speed settings.

Order No.	Mfg. No. / Description	Price
475361	(1368550) 42" Shaft, 55# Thrust, 12 volt	$655.98 B
475397	(1368560) 42" Shaft, 70# Thrust, 24 volt	$735.98 S

MotorGuide X3 Freshwater Edition Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Rigid aircraft-grade aluminum mount, stainless steel bushings and outer shaft and composite shaft with a lifetime guarantee.
- Comes with a 2-blade weedless propeller.
- Quick-view directional indicator.
- Easy to stow and deploy.
- Classic five-speed operation.
- Ergonomic, heel-toe operated foot pedal is easy to use.
- Hinged "door" for easy motor height adjustment and removal.
- Fewer metal-to-metal interfaces, precision bearings, and new composite locking pins.
- Proprietary Variable Ratio Steering (patent pending) delivers precise higher-response steering in the primary angling zone.
- Torque steering feedback is reduced for smoother operation.
- Premium dual-cable, pull-pull steering is standard.
- 2-year limited warranty.

Order No.	Mfg. No. / Description	Price
501770	(940200050) 36" Composite Shaft, 45# Thrust, 12 volt	$369.98 B
501771	(940200060) 45" Composite Shaft, 45# Thrust, 12 volt	$379.98 B
501772	(940200070) 50" Composite Shaft, 45# Thrust, 12 volt	$399.98 B
501773	(940200080) 36" Composite Shaft, 55# Thrust, 12 volt	$519.98 B
501774	(940200090) 45" Composite Shaft, 55# Thrust, 12 volt	$549.98 B
501775	(940200100) 50" Composite Shaft, 55# Thrust, 12 volt	$549.98 B
501776	(940200110) 45" Composite Shaft, 70# Thrust, 12 volt	$599.98 B
501777	(940200120) 50" Composite Shaft, 70# Thrust, 12 volt	$600.98 B

- Mount style: Gator Flex 360.

Order No.	Mfg. No. / Description	Price
2350073	(940200010) 50" Composite Shaft, 45# Thrust, 12 volt	$299.98 S
2350107	(940200020) 50" Composite Shaft, 55# Thrust, 12 volt	$449.98 S

MotorGuide Tour Edition Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Stainless steel shafts, metal heads and metal pedals.
- Completely sealed Digital variable speed module.
- Soft-start feature.
- Quiet, smooth variable speed operation.
- Machete III Black Prop.
- No play, pull-pull adjustable steering with stainless steel pulleys.
- Compact, hydrodynamic, lightweight lower units.
- MicroSwitch designed.
- Gator Spring mount.

Order No.	Mfg. No. / Description	Price
501107	(930010390) 45" Shaft, 75# Thrust, 24 volt	$868.98 C
501088	(9BT42GAAF) 45" Shaft, 82# Thrust, 24 volt	$1,091.98 C
501103	(9BT52GAAF) 50" Shaft, 82# Thrust, 24 volt	$1,101.98 C
501139	(9BX43GAAF) 45" Shaft, 109# Thrust, 36 volt	$1,182.98 C
501141	(9BX53GAAF) 50" Shaft, 109# Thrust, 36 volt	$1,192.98 C

Motorguide Tour Edition Trolling Motors with Built-in Lowrance Transducer



- Freshwater.
- Bow mount, foot control.
- With built-in Lowrance 200/83 kHz transducer and temperature sensor.
- Stainless steel shafts, metal heads and metal pedals.
- Completely sealed Digital variable speed module.
- Soft-start feature.
- Quiet, smooth variable speed operation.
- Machete III Black Prop.
- No play, pull-pull adjustable steering with stainless steel pulleys.
- Compact, hydrodynamic, lightweight lower units.
- MicroSwitch designed.
- Gator Spring mount.

Order No.	Mfg. No. / Description	Price
501108	(930011020) 45" Shaft, 82# Thrust, 24 volt	$1,161.98 C
501109	(930011030) 50" Shaft, 82# Thrust, 24 volt	$1,172.98 C
501110	(930011050) 45" Shaft, 109# Thrust, 36 volt	$1,252.98 C
501112	(930011060) 50" Shaft, 109# Thrust, 36 volt	$1,262.98 C

MotorGuide X3 Freshwater Edition Trolling Motors



- Freshwater.
- Bow mount, foot control.
- Rigid aircraft-grade aluminum mount, stainless steel bushings and outer shaft and composite shaft with a lifetime guarantee.
- Fewer metal-to-metal interfaces, precision bearings, and new composite locking pins eliminate more noise and ensure noise-free operation over time.
- Proprietary Variable Ratio Steering (patent pending) delivers precise higher-response steering in the primary angling zone.
- Torque steering feedback is reduced for smoother operation.
- Premium dual-cable, pull-pull steering is standard.
- Ergonomic, heel-toe operated foot pedal is easy to use.
- Comes with a 2-blade weedless propeller.
- Hinged "door" for easy motor height adjustment and removal.
- Quick-view directional indicator.
- Easy to stow and deploy.
- Classic five-speed operation.
- 2-year limited warranty.

Order No.	Mfg. No. / Description	Price
501770	(940200050) 36" Composite Shaft, 45# Thrust, 12 volt	$369.98 B
501771	(940200060) 45" Composite Shaft, 45# Thrust, 12 volt	$379.98 B
501772	(940200070) 50" Composite Shaft, 45# Thrust, 12 volt	$399.98 B
501773	(940200080) 36" Composite Shaft, 55# Thrust, 12 volt	$519.98 B
501774	(940200090) 45" Composite Shaft, 55# Thrust, 12 volt	$539.98 B
501775	(940200100) 50" Composite Shaft, 55# Thrust, 12 volt	$549.98 B
501776	(940200110) 45" Composite Shaft, 70# Thrust, 12 volt	$599.98 B
501777	(940200120) 50" Composite Shaft, 70# Thrust, 12 volt	$600.98 B

- Mount style: Gator Flex 360.

Order No.	Mfg. No. / Description	Price
2350073	(940200010) 50" Composite Shaft, 45# Thrust, 12 volt	$299.98 S
2350107	(940200020) 50" Composite Shaft, 55# Thrust, 12 volt	$449.98 S

Minn Kota Maxxum Series Trolling Motors



- Freshwater.
- Bow mount, hand control.
- Bowguard 360°.
- Illuminated directional indicator.
- Tilt-Extend tiller.
- Push-to-Test battery gauge.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475462	(1368640) 52" Shaft, 80# Thrust, 24 volt	$936.98 S

- 5 Speed motors put you in command with forward, reverse and multiple speed settings.

Order No.	Mfg. No. / Description	Price
475505	(1368620) 52" Shaft, 55# Thrust, 12 volt	$544.98 S
475520	(1368630) 52" Shaft, 70# Thrust, 24 volt	$735.98 S

MotorGuide Freshwater Edition Trolling Motors



- Freshwater.
- Bow mount, foot control.
- 5 speed.
- Quiet, smooth operation.
- Compact, lightweight lower units.
- Illuminated directional indicator.
- Tapered hub, 3-blade, weed-free Machete III prop.
- Lower units built to last.
- Columns built for success.
- Mount style: Gator Flex 360.

Order No.	Mfg. No. / Description	Price
501037	(921310210) 42" Aluminum Shaft, 40# Thrust, 12 volt	$369.98 D
501066	(921310110) 36" Aluminum Shaft, 46# Thrust, 12 volt	$389.98 C
501078	(921310120) 42" Aluminum Shaft, 46# Thrust, 12 volt	$395.98 C
5010040	(921310150) 36" Aluminum Shaft, 54# Thrust, 12 volt	$499.98 S
501043	(921310160) 42" Aluminum Shaft, 54# Thrust, 12 volt	$509.98 S
501054	(921310170) 50" Stainless Steel Shaft, 54# Thrust, 12 volt	$524.98 S
501125	(921310490) 45" Stainless Steel Shaft, 75# Thrust, 24 volt	$594.98 S

- Mount style: Gator Breakaway.

Order No.	Mfg. No. / Description	Price
501126	(921310450) 50" Stainless Steel Shaft, 75# Thrust, 24 volt	$711.98 S

Minn Kota Fortrex Series Trolling Motor



- Freshwater.
- Bow mount, hand control.
- Mono-Arm design.
- Counter-Tension stabilizer (CTS).
- Lift-Assist.
- Removable Bowguard 360°.
- Illuminated directional indicator.
- Tilt-Extend tiller.
- Digital Maximizer.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475601	(1368685) 52" Shaft, 101# Thrust, 36 volt	$1,172.98 D

Minn Kota Edge Series Trolling Motors



- Freshwater.
- Bow mount, hand control.
- Rock-Solid mount with latch & door.
- Indestructible composite shaft.
- Directional indicator.
- 5 Speed.
- Cool, quiet power.
- Cable steer foot pedal.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475216	(1355945) 36" Shaft, 45# Thrust, 12 volt	$299.98 B
475294	(1355955) 52" Shaft, 55# Thrust, 12 volt	$469.98 B

©2014 Donovan Marine, Inc.

MotorGuide Varimax Freshwater Edition Trolling Motors



- Freshwater.
- Bow mount, hand control.
- Digital variable speed control.
- 1.25" diameter aluminum shaft.
- Powerful 3.5" diameter VariMAX Digital motors.
- Twist-turn control.
- BluVis integrated speed and battery indicator.
- Taper-Lock mount.
- One-touch, rapid slide-depth adjustment collar.
- Extending Tri-Lobe, soft-touch handle for the perfect feel and control.
- 12 volt motors: One-year limited warranty.
- 24 volt motors: Two-year limited warranty.
- Mount style: Gator Flex 360.

Order No.	Mfg. No. / Description	Price
501384	(966080020) 50" Aluminum Shaft, 55# Thrust, 12 volt	$461.98 C

- Mount style: Gator Breakaway.

Order No.	Mfg. No. / Description	Price
501780	(966000080) 50" Aluminum Shaft, 55# Thrust, 12 volt	$521.98 S
501388	(966080035) 50" Aluminum Shaft, 75# Thrust, 24 volt	$697.98 C


Minn Kota Riptide SE Series Trolling Motors



- Saltwater.
- Bow mount, hand control.
- Riptide SE's all-new mount takes no prisoners, with an extruded, anodized aluminum arm running right down the center.
- It also features rock-solid stowing and a Latch & Door design.
- Quick-lock cam depth adjuster.
- Push-to-test battery gauge.
- Digital Maximizer.
- Tilt-Extend tiller.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection.
- Fully encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475032	(1355915) 52" Shaft, 55# Thrust, 12 volt	$669.98 S
475033	(1355920) 52" Shaft, 70# Thrust, 24 volt	$799.98 S

MotorGuide X3 Freshwater Edition Trolling Motors



- Freshwater.
- Bow mount, hand control.
- Rigid aircraft-grade aluminum mount, stainless steel bushings and outer shaft and composite shaft with a lifetime guarantee.
- Fewer metal-to-metal interfaces, precision bearings, and new composite locking pins eliminate more noise and ensure noise-free operation over time.
- Proprietary Variable Ratio Steering (patent pending) delivers precise higher-response steering in the primary angling zone.
- Torque steering feedback is reduced for smoother operation.
- Premium dual-cable, pull-pull steering is standard.
- Ergonomic, heel-toe operated foot pedal is easy to use.
- Comes with a 2-blade weedless propeller.
- Hinged "door" for easy motor height adjustment and removal.
- Quick-view directional indicator.
- Easy to stow and deploy.
- Classic five-speed operation.
- Extending handle.
- 2-year limited warranty.

Order No.	Mfg. No. / Description	Price
501778	(940200130) 50" Composite Shaft, 45# Thrust, 12 volt	$299.98 S
501779	(940200140) 50" Composite Shaft, 55# Thrust, 12 volt	$449.98 S

Minn Kota Riptide SM Series Trolling Motors



- Saltwater.
- Bow mount, hand control.
- Quick-Lock cam depth adjuster.
- Push-to-Test battery gauge.
- Tilt-Extend tiller.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection.
- Fully encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

- 5 Speed.
- Latch & Door design.

Order No.	Mfg. No. / Description	Price
475041	(1363420) 42" Shaft, 55# Thrust, 12 volt	$599.98 B
475043	(1363421) 52" Shaft, 55# Thrust, 12 volt	$635.98 B
475071	(1363425) 52" Shaft, 70# Thrust, 24 volt	$699.98 S

- Latch & Door design.
- Digital Maximizer.

Order No.	Mfg. No. / Description	Price
475031	(1363422) 52" Shaft, 55# Thrust, 12 volt	$699.98 S
475118	(1363447) 52" Shaft, 80# Thrust, 24 volt	$969.98 S

- Bowguard 360°.
- Digital Maximizer.

Order No.	Mfg. No. / Description	Price
475119	(1363445) 52" Shaft, 80# Thrust, 24 volt	$999.98 S
475120	(1363446) 62" Shaft, 80# Thrust, 24 volt	$1,029.98 S
475122	(1363468) 62" Shaft, 101# Thrust, 36 volt	$1,139.98 S

Minn Kota Riptide SF Series Trolling Motors



- Saltwater.
- Bow mount, hand control.
- Mono-Arm design.
- Counter-Tension Stabilizer (CTS).
- Lift-Assist.
- Removable Bowguard 360°.
- Push-to-Test battery gauge.
- Digital Maximizer.
- Tilt-Extend tiller.
- Quick-Lock cam depth adjuster.
- Weedless Wedge 2 Prop.
- Advanced corrosion protection. Fully encapsulated electronics.
- Sacrificial anode. Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475109	(1363640) 52" Shaft, 80# Thrust, 24 volt	$1,149.98 S
475110	(1363641) 62" Shaft, 80# Thrust, 24 volt	$1,179.98 S
475112	(1363651) 62" Shaft, 101# Thrust, 36 volt	$1,252.98 S
475116	(1363660) 62" Shaft, 112# Thrust, 36 volt	$1,299.98 C

MotorGuide VariMAX Saltwater Series Trolling Motors



- Saltwater.
- Bow mount, hand control.
- Digital variable-speed control.
- Legendary Great White corrosion protection and durability.
- Large 1.25 diameter stainless shaft.
- Powerful 3.5 diameter VariMAX motors.
- Twist-Tiller hand control.
- Intuitive push/pull, forward and reverse speed adjustments.
- BluVis integrated speed and battery indicator.
- Extendable tri-lobe, soft-touch handle.
- 12 volt: One-year limited warranty. 24 volt: Two-year limited warranty.
- Mount style: Gator Breakaway.

Order No.	Mfg. No. / Description	Price
501787	(966100040) 50" Stainless Steel Shaft, 55# Thrust, 12 volt	$594.98 C
501415	(966180830) 50" Stainless Steel Shaft, 75# Thrust, 24 volt	$756.98 C
501420	(966180840) 60" Stainless Steel Shaft, 75# Thrust, 24 volt	$860.98 C

- Mount style: Gator Flex 360.

Order No.	Mfg. No. / Description	Price
501266	(966180810) 50" Stainless Steel Shaft, 55# Thrust, 12 volt	$536.98 C

Minn Kota Pontoon Hand Control Series Trolling Motors



- Pontoon mount.
- Compact hand control mount.
- Tilt twist tiller.
- 5 Speed.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
474742	(1355954) 52" Shaft, 55# Thrust, 12 volt	$399.98 B
474744	(1355975) 52" Shaft, 70# Thrust, 24 volt	$499.98 B

MotorGuide Great White Saltwater Edition Trolling Motors



- Saltwater.
- Bow mount, hand control.
- Ultra pure aluminum coating.
- Stainless steel shaft, fasteners and control cables.
- Anodized aluminum mounts and components.
- Completely sealed Digital module.
- Soft-start feature.
- Quiet, smooth operation.
- Machete III propeller.
- Compact, lightweight lower units.
- Dual saltwater anodes for added corrosion protection.

Order No.	Mfg. No. / Description	Price
501710	(924410050) 50" Stainless Steel Shaft, 82# Thrust, 24 volt	$1,024.98 C
501713	(924410060) 60" Stainless Steel Shaft, 82# Thrust, 24 volt	$1,075.98 C
501725	(924410070) 50" Stainless Steel Shaft, 109# Thrust, 36 volt	$1,126.98 C
501727	(924410080) 60" Stainless Steel Shaft, 109# Thrust, 36 volt	$1,177.98 C

Watersnake Ambush DR-ET Saltwater Trolling Motor



- Strong, reliable, no-frills, affordable, hand control bow mount motor.
- Five forward and two reverse speeds.
- Extendable tiller handle.
- All Watersnake Ambush motors receive anti-corrosion treatments.
- Fitted with fully encapsulated circuit boards, sacrificial zinc anodes, stainless steel hardware, stainless steel propeller shafts, composite main shafts and weedless propellers.
- Scissor bracket mount for easy stowing.

Order No.	Mfg. No. / Description	Price
2000041	(W55107) 54" Shaft, 54# Thrust, 12 volt	$449.98 E

Minn Kota PowerDrive V2 Series Trolling Motors



- Pontoon Model with aluminum quick release bracket.
- Digital Maximizer.
- Deploy-Assist lever.
- Ergonomically designed foot pedal.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
474733	(1358712) 48" Shaft, 54# Thrust, 12 volt	$589.98 B
474738	(1358722) 48" Shaft, 68# Thrust, 24 volt	$739.98 B

©2014 Donovan Marine, Inc.

MotorGuide Varimax Freshwater Edition Trolling Motors



- Pontoon mount, hand control.
- Digital variable speed control.
- 1.25" diameter aluminum shaft.
- Powerful 3.5" diameter VariMAX Digital motors.
- Twist-turn control.
- BluVis integrated speed and battery indicator.
- Taper-Lock mount.
- One-touch, rapid slide-depth adjustment collar.
- Extendable tri-lobe, soft-touch handle.
- 12 volt: One-year limited warranty.
- 24 volt: Two-year limited warranty.

Order No.	Mfg. No. / Description	Price
501460	(966050010) 50" Shaft, 55# Thrust, 12 volt	$425.98 C
501480	(966050025) 50" Shaft, 75# Thrust, 24 volt	$528.98 C

Minn Kota Endura Max Trolling Motors



- Freshwater.
- Transom mount, hand control.
- Digital Maximizer Endura Max.
- Variable speed control.
- Battery meter.
- Telescoping handle.
- Power prop.
- Lever lock bracket.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
474850	(1352140) 36" Shaft, 40# Thrust, 12 volt	$219.98 B
474855	(1352145) 36" Shaft, 45# Thrust, 12 volt	$239.98 B
474860	(1352150) 36" Shaft, 50# Thrust, 12 volt	$259.98 B
474865	(1352151) 42" Shaft, 50# Thrust, 12 volt	$264.98 B
474870	(1352155) 36" Shaft, 55# Thrust, 12 volt	$279.98 B
474875	(1352156) 42" Shaft, 55# Thrust, 12 volt	$285.98 B

Minn Kota Endura C2 Series Trolling Motors



- Freshwater.
- Transom mount, hand control.
- Ergonomic, 6" telescoping handle.
- Lever lock bracket.
- 5 speed.
- Power prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
474830	(1352230) 30" Shaft, 30# Thrust, 12 volt	$109.98 B
474835	(1352240) 36" Shaft, 40# Thrust, 12 volt	$169.98 B
474840	(1352250) 36" Shaft, 50# Thrust, 12 volt	$209.98 B
474845	(1352256) 42" Shaft, 55# Thrust, 12 volt	$237.98 B

Watersnake Shadow DR Freshwater Trolling Motors



- Control the direction or speed of the boat with a touch of your foot with the variable speed foot control unit.
- Stringently built to withstand the harsh conditions associated with freshwater fishing.
- Sleek design with a silent, yet powerful motor.
- Features stainless steel propeller shafts, weedless propellers and corrosion free composite shafts that flex on impact.
- A cut-off switch is installed that engages as soon as the motor is placed in the stow position.
- The mounts are very easy to install, easy to stow and light to carry.
- The potted circuit board is fully waterproofed and sealed in the motor casing for extra protection.

Order No.	Mfg. No. / Description	Price
2000037	(W55065-PON) 48" Shaft, 54# Thrust, 12 volt	$429.98 J
2000040	(W55068-PON) 54" Shaft, 70# Thrust, 24 volt	$599.98 I

Minn Kota Traxxis Series Trolling Motor



- Freshwater.
- Transom mount, hand control.
- Digital Maximizer.
- One-Hand stow.
- Steering tension control.
- Quick-Lock cam depth adjuster.
- Push-to-Test battery gauge.
- Tilt-Extend tiller.
- Variable speed.
- Weedless Wedge 2 Prop.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475179	(1368716) 42" Shaft, 55# Thrust, 12 volt	$334.98 S

MotorGuide R3 Freshwater Edition Trolling Motor



- Freshwater.
- Transom mount, hand control.
- 5 speeds forward and 2 reverse.
- Reversible motor head for bow or transom mount operation.
- Ergonomic, extending handle.
- Taper-Lock mount.
- Aluminum shaft.
- Solid aluminum and steel lower unit with powder coat finish.
- Stainless steel propeller shaft and 3-blade Machete prop.
- Powerful, 3.5" lower unit.
- One-touch, rapid slide-depth adjustment collar.

Order No.	Mfg. No. / Description	Price
501288	(940100070) 30" Shaft, 30# Thrust, 12 volt	$126.98 D

MotorGuide Varimax Freshwater Edition Trolling Motors



- Freshwater.
- Transom mount, hand control.
- Digital variable speed control.
- 1.25" diameter aluminum shaft.
- Powerful 3.5" diameter VariMAX Digital motors.
- Twist-turn control.
- BluVis integrated speed and battery indicator.
- Taper-Lock mount.
- One-touch, rapid slide-depth adjustment collar.
- Extending Tri-Lobe, soft-touch handle for the perfect feel and control.
- 12 volt motors: One-year limited warranty.

Order No.	Mfg. No. / Description	Price
501300	(966000010) 30" Shaft, 40# Thrust, 12 volt	$251.35 C
501310	(966000020) 36" Shaft, 40# Thrust, 12 volt	$261.62 C
501290	(966010030) 36" Shaft, 45# Thrust, 12 volt	$221.98 D
501315	(966000030) 36" Shaft, 45# Thrust, 12 volt	$271.88 C
501291	(966010050) 36" Shaft, 55# Thrust, 12 volt	$291.98 D
501320	(966000050) 36" Shaft, 55# Thrust, 12 volt	$333.98 C

Minn Kota Riptide Transom Series Trolling Motors



- Saltwater.
- Transom mount, hand control.
- One-Hand stow.
- Steering tension control.
- Quick-Lock cam depth adjuster.
- Tilt-Extend tiller.
- Push-to-Test battery gauge.
- Variable speed.
- Power prop.
- Advanced corrosion protection.
- Full encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475104	(1363805) 36" Shaft, 45# Thrust, 12 volt	$302.98 B
475105	(1363810) 42" Shaft, 50# Thrust, 12 volt	$362.98 B
475106	(1363820) 36" Shaft, 55# Thrust, 12 volt	$525.62 S
475107	(1363821) 42" Shaft, 55# Thrust, 12 volt	$532.98 S
475108	(1363830) 42" Shaft, 80# Thrust, 24 volt	$699.98 B

T-H Marine The Extender



- For hand controlled electric fishing motors.
- Easily installs on any motor with a 1" or 1-1/8" diameter shaft.
- Constructed of high quality cast aluminum with a stainless steel shaft, stainless steel hardware, nylon bushings with molded plastic knobs.
- The shaft is adjustable from 0" - 30" long.

Order No.	Mfg. No. / Description	Price
642202	(EX-1) The Extender	$79.98 Q

Minn Kota Riptide Transom Series Trolling Motors



- Saltwater.
- Transom mount, hand control.
- One-Hand stow.
- Steering tension control.
- Quick-Lock cam depth adjuster.
- Tilt-Extend tiller.
- Push-to-Test battery gauge.
- 5 Speed.
- Power prop.
- Advanced corrosion protection.
- Full encapsulated electronics.
- Sacrificial anode.
- Indestructible composite shaft.
- Cool, quiet power.
- Two-year warranty.

Order No.	Mfg. No. / Description	Price
475114	(1363844) 36" Shaft, 45# Thrust, 12 volt	$252.98 B
475115	(1363854) 42" Shaft, 55# Thrust, 12 volt	$364.98 B

Minn Kota Extension Handles



- Provides easier steering and speed control for Minn Kota hand controlled bow-mount, transom-mount or small outboard motors.

Order No.	Mfg. No. / Description	Price
476615	(1854101) Length 18", MKA-18	$19.98 D
476603	(1854100) Length 30", MKA-7	$29.98 D

MotorGuide Universal Extension Handle



- Made for trolling motors and kicker engines.
- Locks into place to fit most transom-mount trolling motors and popular tiller engines.
- Built out of aluminum tubing with soft-grip handles and adjustable connectors for a solid connection.
- 24" adjustable.

Order No.	Mfg. No. / Description	Price
5010059	(MGA503A1)	$24.98 F

Big Foot 2 Trolling Motor Handle



- One-Size will fit any hand operated trolling motor.
- Easy to install.
- Twist and lock grip for easy operations.

Order No.	Mfg. No. / Description	Price
2001385	(BFH-2)	$67.98 Q

©2014 Donovan Marine, Inc.

Minn Kota Universal Sonar 2 Adapter Cables



- Choose from any of the following plug-in adapters to connect your motor to your favorite brand of sonar or fishfinder.

Order No.	Mfg. No. / Description	Price
476566	(1852068) Humminbird 7-pin, MKR-US2-8	$29.98 D
476567	(1852069) Lowrance 6-pin/Eagle Blue, MKR-US2-9	$29.98 D
476568	(1852060) Lowrance, MKR-US2-10	$29.98 D

Minn Kota Universal Sonar Adapter Cables

- Choose from any of the following plug-in adapters to connect your motor to your favorite brand of sonar or fishfinder.

Order No.	Mfg. No. / Description	Price
4740215	(MKR-US-6) Lowrance/Eagle Black	$37.98 Q
4740216	(MKR-US-9) Lowrance 6-pin/Eagle Blue	$37.98 Q

Motorguide Cable Assembly with Stud

Order No.	Mfg. No. / Description	Price
502573	(M9377) 63 Cable Assembly with Stud	$24.98 F

Motorguide Nylon Rope

Order No.	Mfg. No. / Description	Price
502232	(M879192T) Nylon Rope, 48	$2.98 F

Motorguide Tie Down Straps



- The adjustable hook and loop strap keeps your trolling motor safely secured while trailering or on the water.

Order No.	Mfg. No. / Description	Price
5010063	(MGA507A1)	$13.98 Q

Boater Sports Trolling Motor Pull Cord



- Durable, abrasion resistant 48" nylon pull cord with heavy duty plastic handle.

Order No.	Mfg. No. / Description	Price
1-52245	(52245)	$5.50 H

Boater Sports Trolling Motor Mounting Isolators



- For mounting bow mount motors.
- Set consists of bolts and isolators.

Order No.	Mfg. No. / Description	Price
2000595	(RL8374) Set of 4 "T-Type" Isolators	$15.98 H
2000596	(RL8374SP) Bulk Kit of 24 Isolators	$83.98 H

Big Foot Trolling Motor Switch



- Two switches in one.
- Momentary and On/Off for all hand operated 12V or 24V Trolling Motors.
- Hand or foot activated On/Off lever.
- Protective switch cap.
- 32" heavy duty marine wiring.

Order No.	Mfg. No. / Description	Price
2001386	(BFS-2)	$20.98 H

T-H Marine Foot Control Switches



- For manually operated (hand controlled trolling motors that provides the convenience of turning the motor on by simply pressing down on the switch with your foot without having to reach the trolling motor head.
- Rated up to 50 amps DC and features a 15° tilt angle for easy operation.

Order No.	Mfg. No. / Description	Price
640257	(FCS-1)	$21.98 H
640258	(FCS-2) With Flip Lever for Continuous "ON"	$22.98 H

Minn Kota Bow-Mount Stabilizer Kit - Top Mount



- For Maxxum Pro, Maxxum, Riptide Pro or Riptide SM bow mount trolling motors.
- Features a rubber bumper to protect the get coat and boat finish.

Order No.	Mfg. No. / Description	Price
477047	(1862013) MKA-4	$29.98 D

T-H Marine G-Force Handles



- Trolling motor replacement lift and release cord.
- Stops cord and handle breakage.
- Full grip cushioned handle.
- 42" stainless steel cable - nylon jacket.
- Fits most trolling motors.
- Hook and loop restraint strap.

Order No.	Mfg. No. / Description	Price
642647	(GFH-1R) Red	$42.98 H
642650	(GFH-1G) Gray	$42.98 H

MotorGuide Mounting Isolators



- Absorbs shock and protects electronics.
- Ideal for mounting all marine accessories without having to go under the deck.
- Four per package.

Order No.	Mfg. No. / Description	Price
502319	(MGA015PB6)	$15.98 F


Minn Kota Quick Nuts



- Allows for mounting motor/accessories where there is limited space or no access from below (as required by standard nuts and bolts).

Order No.	Mfg. No. / Description	Price
476451	(1865100) MKR-8	$7.98 D

T-H Marine G-Force Culling System

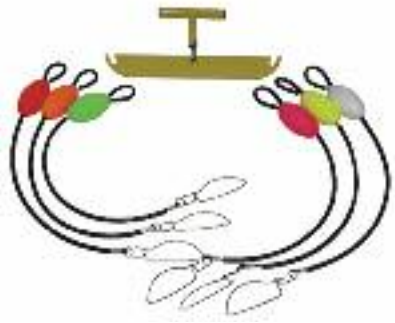

- Quick and accurate tournament culling system.
- Handle fish only once.
- Aluminum balance beam.
- Stainless steel hooks.
- Color coded buoys.

Order No.	Mfg. No. / Description	Price
642653	(GFC-1)	$59.98 H

Aronda Foot Pedal Recess



- Finally an economical aftermarket foot pedal recess for the deck of your Bass Boat!
- This recess allows more even weight distribution while fishing for less stress on the knees and back.
- One size fits most trolling motor foot pedals.
- Fiberglass construction with 1/2" plywood bottom reinforcing for strength and durability.

Order No.	Mfg. No. / Description	Price
2000025	(RFP-B) Black	$65.98 H
2000026	(RFP-G) Gray	$65.98 H
2000027	(RFP-W) White	$65.98 H

MotorGuide Wireless Hand-Held Remote



- Take control from anywhere in the boat with our exclusive high-frequency remote.
- For use with Wireless Series trolling motor.

Order No.	Mfg. No. / Description	Price
501762	(M887657)	$75.98 E

Minn Kota Trolling Motor Power Center



- Ideal for small boat, transom trolling motor applications.
- Features easy access external battery terminals that allow trolling motor leads and charger leads to be connected without opening the box.
- Built-in battery meter displays battery state of charge.
- Includes two 12 volt accessory plugs, two manual reset circuit breakers: One 10 amp breaker for the accessory plugs and one 60 amp breaker for the trolling motor.
- Fits group 24 and 27 size batteries.

Order No.	Mfg. No. / Description	Price
476718	(1820175) Trolling Motor Power Center	$64.98 D

MotorGuide Wireless Foot Pedal



- For use with all Wireless Series trolling motors.
- On/off, right/left and faster/slower wireless motor commands make it a cinch to master for novice and expert alike.

Order No.	Mfg. No. / Description	Price
501764	(8M4000952) Wireless Foot Pedal	$109.98 D

R & R Designs Foot Pedal Recess



- High quality trolling motor foot pedal recess.
- Mount Lip Dimensions: 19-3/8" L x 11-15/16" W.
- Dimensions: 4-1/8" D x 17-1/4" L x 8-7/8" W.

Order No.	Mfg. No. / Description	Price
2003680	(RR-TMP)	$74.98 H

Swivl-Eze Trol-Lock Motor Mounts



- Unique, Trol-Lock products let you remove trolling motor in seconds.
- 5-1/2" x 20-1/2" black powder coated base with 5-1/2" diameter mounting plates.
- For MotorGuide trolling motors with 07 and 16 mounts.
- Max. torque: 2,604 - lb. - in.
- Retro fits the 01 and 15 mounts.
- Comes with glass filled plastic mounting pads and step pad covers.

Order No.	Mfg. No. / Description	Price
587370	(5000) For 01 and 15 Mounts	$99.98 F

- For MotorGuide trolling motors with 20.5 and 21 mounts.
- Max. torque: 6,540 - lb. - in.
- Retro fits the 20 and 25 mounts.
- Comes with aluminum mounting pads.

Order No.	Mfg. No. / Description	Price
587375	(5650) For 20.5 and 21 Mounts	$159.98 G

©2014 Donovan Marine, Inc.

Minn Kota Quick Release Scissor Mount

- Instantly attach or detach any All Terrain bow-mount motor.
- Constructed of high-grade anodized aluminum for light weight and rugged durability.
- Features a unique locking, quick-release design.

Order No.	Mfg. No. / Description	Price
476209	(1862015) MKA-8	$48.98 F

Minn Kota Universal Mounting Bracket



- Easily switch between cable steer and electric steer motors-choose the right trolling motor for the application.
- Utilizes existing mounting hole patterns.
- No additional drilling is required.
- Innovative positioning mechanism allows motor to slide inboard (up to 6") for additional clearance when launching boat.
- Removable top plate allows motor to be easily removed for storage and security.

Order No.	Mfg. No. / Description	Price
476999	(1854040) MKA-47	$149.98 E

Minn Kota Adapter Plate



- Allows hole patterns from previously mounted motors to be used with composite brackets (MKA-21 and RTA-17).
- Ideal for carpeted deck surfaces.
- Compatible with trolling motor models with less than 80 lbs. thrust.
- Center puck is not included with adapter plate.

Order No.	Mfg. No. / Description	Price
4740171	(MKA-22)	$46.98 F

MotorGuide Removable Mounting Plate



- Makes motor removal and installation fast and simple.
- Universal hole patterns.
- Fits Gator Flex 360, 20.8, 21, 21R, 24 and 24R mounts

Order No.	Mfg. No. / Description	Price
5010058	(MGA501A2)	$106.98 F

MotorGuide Trolling Motor Mounting Kit



- Absorbs shock and protects electronics.
- Stainless-steel bolts, fender washers, and nylon lock nuts fit all trolling motors.
- Four per package.

Order No.	Mfg. No. / Description	Price
5010021	(8M4000873)	$14.98 K

Minn Kota Quick Release Bracket Mounts



- They provide easy removal of your motor for storage and safety, and they integrate seamlessly with your boat's design.
- Features a side screw that provides a quiet and secure locking system.
- For use with Terrova, PowerDrive V2 or PowerDrive foot control models.

Order No.	Mfg. No. / Description	Price
476595	(1854013) MKA-16-02	$49.98 D

- They're ultra-strong, corrosion resistant and low-profile design.
- A locking handle with stainless steel pins can be secured with a padlock.
- For use with Fortrex, Maxxum, Maxxum Pro, All Terrain or Edge models.

Order No.	Mfg. No. / Description	Price
476635	(1854023) MKA-23	$99.98 D

- Features a side screw that provides a quiet and secure locking system.
- For use with Fortrex or Maxxum motors that are 52" - 62" shaft foot control models, or 62" shaft hand control models.

Order No.	Mfg. No. / Description	Price
476627	(1862016) MKA-52/62	$149.98 D

- They're ultra-strong, corrosion resistant and low-profile design.
- A locking handle with stainless steel pins can be secured with a padlock.
- For use with Riptide ST or Riptide SP models.

Order No.	Mfg. No. / Description	Price
476667	(1854017) RTA-17-02	$79.9.8 D

- They're ultra-strong, corrosion resistant and low-profile design.
- A locking handle with stainless steel pins can be secured with a padlock.
- For use with Riptide SF, Riptide SM or Riptide SE models.

Order No.	Mfg. No. / Description	Price
476630	(1854019) RTA-19	$99.98 D

Boater Sports Trolling Motor Bracket



- Universal mounting bracket is designed to accommodate all bow mount trolling motors.
- Heavy duty aluminum construction.
- Adapts to fit on both bow and stern applications.
- 6" wide by 16" long and adjusts from 3-1/8" to 4" in height.

Order No.	Mfg. No. / Description	Price
2100060	(EBG)	$33.98 H

T-H Marine Trolling Motor Mount



- For clamp-on type trolling motors.
- Designed for motor to be removed when boat is under engine power or being trailered.
- Made of cast aluminum with seasoned wood mounting block.
- Maximum thrust of 36 pounds.

Order No.	Mfg. No. / Description	Price
641109	(TMM-1)	$64.98 H

Minn Kota Weedless Wedge 2 Propellers



- This 100% weedless prop features a unique, patented design with swept-back and flared blades that "wedge" weeds away while conserving battery power.
- For use with: 55AT, 55AT/H, 70AT, MAX 55/SC, MAX 55, MAX 55/SC/H/3X, MAX 70, MAX 70/H/3X, MAX 70/SC, MAX 70/US, MAX 55T, MAX 70T, 50PD, 55PD/AP, 55PD/AP/US, 55PD/US, 65 PD, 54 PD PONTOON, 68PD PONTOON, 70PD, 70PD/AP, 70PD/US, 70PD/AP/US, VECTOR 46, VECTOR 55, VECTOR 55/3X, VECTOR 70, VECTOR 70/3X, ENDURA 46, ENDURA 50, ENDURA 55, ENDURA PRO 46, ENDURA PRO 55, CAMO 55XL, RT55/B/SC/L&D, RT55/B/L&D/3X, RT55/B/3X, RT65/B/SC, RT65/B/SC/L&D/3X, RT55/AP, RT70/AP, RT50/S, RT55/S.

Order No.	Mfg. No. / Description	Price
476286	(1865017) MKP-32	$27.98 D

- For use with: MAX 80, MAX 80/US, MAX 80/H/3X, MAX 101, MAX 101/US, MAX 101/H/3X, MAX PRO 80, MAX PRO 80/US, MAX PRO 101, MAX PRO 101/US, MAX 80T, 80PD, 80PD/AP, 80PD/AP/US, VECTOR 80/3X, VECTOR 101/3X, VANTAGE 80, VANTAGE 101, RT80/B, RT80/B/L&D, RT80/B/3X, RT80/B/L&D/3X, RT80/S/3X, RT101/B, RT101/B/3X, RT101/ S/3X, RT80/AP.

Order No.	Mfg. No. / Description	Price
476287	(1865018) MKP-33	$39.98 D

Minn Kota Weedless Wedge Propellers



- This 100% weedless prop is designed to push weeds away and conserve battery power.
- Even at slow speeds, it powers through heavy vegetation or cover.
- For use with: 40PD, Endura 40, 40AT and 40AT/H.

Order No.	Mfg. No. / Description	Price
476261	(1865003) MKP-6, 3-1/4"	$17.98 D

- For use with: 50PD, 55PD, 65PD, Genesis 55/AP, MAX55, MAX55BT, MAX55/H, MAX55/SC, MAX55T, MAX65, MAX65T, MAX65-US, MAX65BT, MAX65/H, MAX65/SC, Endura 50, Endura 55, 55AT, 55AT/H, 65AT, RT55/S, RT55/B/H, RT55/SC/H, RT55/AP, RT65/S, RT65/B, RT65/AP, Camo 44, 54PD Pontoon and 64PD Pontoon.

Order No.	Mfg. No. / Description	Price
476273	(1865006) MKP-7, 3-5/8"	$25.98 D

- For use with: MAX74, MAX74-US, MAX74/H, MAX74T, MAX74BT, RT74/S, RT74/B/B and Genesis 74/AP.

Order No.	Mfg. No. / Description	Price
476285	(1865007) MKP-8, 4"	$35.98 D

- For use with: MAX101, MAX101/H, Vantage 101, RT101/S, RT101/B and RT101/B/B.

Order No.	Mfg. No. / Description	Price
476425	(1865013) MKP-24, 4"	$37.98 D

Minn Kota Power Propeller



- Fits 3-1/4" diameter.
- For use with: Classic 28, Edge 45, Edge 45/H, Endura 30, Endura 36, Endura 38, Endura 40, Endura 45, RT40/SC, Endura Pro 32, Endura Pro 38, 45PD V2, RT45/SC/T, Traxxis 45/SC, Traxxis 45.

Order No.	Mfg. No. / Description	Price
476223	(1865002) MKP-2	$14.98 E

Boater Sports Trolling Motor Props



- These replacement trolling motor props are designed for use with Minn Kota trolling motors.
- Made from impact-resistant nylon, these will fit your motor with no modification and will last just as long as the original prop.
- Designed for strength, durability and efficiency, these props will mow through the roughest of undergrowth.
- Hub span 3", blade height 10", hub size 1-1/2", shaft 3/8".
- Will replace MKP-6.

Order No.	Mfg. No. / Description	Price
2100046	(BS-6)	$18.98 G

- Hub span 3-1/4", blade height 9", hub size 1-1/2", shaft 3/8".
- Will replace MKP-2.

Order No.	Mfg. No. / Description	Price
2100041	(BS-2)	$15.98 F

- Hub span 3-1/2", blade height 11", hub size 2-1/4", shaft 3/8".
- Will replace MKP-7.

Order No.	Mfg. No. / Description	Price
2100047	(BS-7)	$21.98 D

- Hub span 3-5/8", blade height 11", hub size 2-3/8", shaft 1/2".
- Will replace MKP-8.

Order No.	Mfg. No. / Description	Price
2100052	(BS-8)	$26.98 C

- Hub span 3-5/8", blade height 11", hub size 2-3/8", shaft 1/2".
- Will replace MKP-32.

Order No.	Mfg. No. / Description	Price
2100041	(BS-2)	$15.98 F

- Hub span 4", blade height 11", hub size 2-3/8", shaft 1/2".
- Will replace MKP-24.

Order No.	Mfg. No. / Description	Price
2100042	(BS-24)	$26.98 B

- Hub span 4", blade height 11", hub size 2-3/8", shaft 1/2".
- Will replace MKP-33.

Order No.	Mfg. No. / Description	Price
2100044	(BS-33)	$26.98 S

Watersnake Propellers

2000043



2000042



- Includes: 3-blade propeller, propeller nut and shaft pin.
- Suits 44 lb., 54 lb.

Order No.	Mfg. No. / Description	Price
2000042	(W55130)	$19.98 Q

- Includes: 2-blade propeller, propeller nut and shaft pin.
- Suits 28 lb., 30 lb., 34 lb.

Order No.	Mfg. No. / Description	Price
2000043	(W55131)	$9.98 Q

©2014 Donovan Marine, Inc.

MotorGuide Propellers



- 2-Blade power prop with 3" hub size.
- Application: Power and efficiency.

Order No.	Mfg. No. / Description	Price
502028	(MGA0476B)	$30.98 F

- 2-Blade power prop with 3-1/2" hub size.
- Application: Power and efficiency.

Order No.	Mfg. No. / Description	Price
502030	(MGA0495B)	$30.98 F

- 2-Blade Safari weedless prop with 3-1/2" hub size.
- Application: Weedless and power.

Order No.	Mfg. No. / Description	Price
502033	(8M0028330)	$30.98 F

- 3-Blade aluminum Machete prop with 3-1/2" hub size.
- Application: Shallow and durability.

Order No.	Mfg. No. / Description	Price
502042	(MGA087M)	$53.98 F

- 3-Blade Machete III black prop with 3-1/2" hub size.
- Application: Speed and efficiency.

Order No.	Mfg. No. / Description	Price
502054	(MGA089B) Black	$30.98 F
5010055	(MGA089G) Grey	$41.98 F
5010056	(MGA089W) White	$41.98 F

MotorGuide Trolling Motor Accessories



Order No.	Mfg. No. / Description	Price
502117	(MGA050B6) Prop-Nut Wrench Kit	$15.98 F
502232	(M879192T) Release Cable	$2.98 F
502307	(MHF15001T) Rotary Switch	$15.98 F
502511	(MGA092X1) Removable Troll	$112.98 F
502515	(MGA097B6) Bounce Buster II	$44.98 F
502573	(M9377) 63" Cable Assembly with Stud	$24.98 F
700843	(W23X1A1G10) Circuit Breaker, 10 Amp	$44.98 B
7-0018	Micro Switch	$21.98 G
7-0019	Prop Pin	$6.98 G

Marpac Micro Switch



Order No.	Description	Price
7-0018B	(MAP15104T)	$15.98 G

Boater Sports Push Button Switch



- Fits MotorGuide and Minn Kota.

Order No.	Mfg. No. / Description	Price
2100011	(51439)	$16.98 H

Minn Kota Prop and Nut Kits



- Each kit includes a prop nut and washer.
- A crescent wrench is required for installation.

Order No.	Mfg. No. / Description	Price
476297	(1865010) "A", MKP-9	$6.98 D
476312	(1865012) "C", MKP-11	$6.98 D

- Easy-to-use kit that allows for fast removal/replacement of prop.
- Available in three different sizes to fit Minn Kota prop dimensions (3/8", 1/2" and 5/16").
- Includes prop nut and washer.
- Requires a crescent wrench for installation.

Order No.	Mfg. No. / Description	Price
476292	(1865019) MKP-34	$6.98 D

Motorguide Prop Nut



- Comes complete with spare prop nut and two prop pins.
- New prop nuts have a brass insert and allow for fast prop changes.

Order No.	Mfg. No. / Description	Price
502105	(MAR09902T) Prop Nut	$3.92 F

Marpac Prop Pin



Order No.	Description	Price
7-0019B	Prop Pin	$6.98 G

Trolling Motor Replacement Pull Cable



- This replacement cable will not rust, break or rot.
- Stainless steel cable for T/M pull rope.

Order No.	Mfg. No. / Description	Price
2003835	(TR)	$20.98 H

Motorguide Replacement Cable



- Cable with crimped-on stud.
- 63" Long.

Order No.	Mfg. No. / Description	Price
2001390	(9377)	$34.98 H

OMC Replacement Cable



Order No.	Mfg. No. / Description	Price
2001845	(65-2215-2006)	$49.98 F

Marpac Male Boat Side Connectors



- 8 Gauge wire with butt connectors.
- Mounting screws included.

Order No.	Description	Price
7-1304	12 volt, 2 Wires	$10.98 G
7-1308	24 volt, 3 Wires	$13.98 G

Marpac Female Motor Side Plugs



- 8 Gauge wire with butt connectors.

Order No.	Description	Price
7-1306	12 volt, 2 Wires	$11.98 G
7-1310	24 volt, 3 Wires	$11.98 G

Boater Sports Male Trolling Motor Connectors



- Designed to be flush-mounted, this socket makes the connection of a trolling motor quick and easy.
- Wire the plug to the motor end, and add 8- or 10-gauge heavy gauge cable from the battery to the socket, and you're ready to go.
- Includes butt connectors.
- Works on 12 volt or 24 volt motors.

Order No.	Mfg. No. / Description	Price
1-51445	(51445) 2 Wire, 8 Gauge	$13.00 H
1-51447	(51447) 3 Wire, 8 Gauge	$15.80 H

Boater Sports Female Trolling Motor Connectors



- Designed to be flush-mounted, this socket makes the connection of a trolling motor quick and easy.
- Wire the plug to the motor end, and add 8- or 10-gauge heavy gauge cable from the battery to the socket, and you're ready to go.
- Includes butt connectors.
- Works on 12 volt or 24 volt motors.

Order No.	Mfg. No. / Description	Price
1-51446	(51446) 2 Wire, 8 Gauge	$11.65 H
1-51448	(51448) 3 Wire, 8 Gauge	$13.50 H

Sierra Male Boat Side Connectors



- 6" wire with butt connector.
- 8 Gauge.
- Ready-wired.

Order No.	Mfg. No. / Description	Price
181052	(WH10520) 12 volt, 2 Wires	$13.82 H
181054	(WH10540) 24 volt, 3 Wires	$16.54 H

Sierra Female Motor Side Plugs



- 6" wire with butt connector.
- 8 Gauge.
- Ready-wired.

Order No.	Mfg. No. / Description	Price
181053	(WH10530) 12 volt, 2 Wires	$12.22 H
181055	(WH10550) 24 volt, 3 Wires	$14.69 H

Marpac Male Trolling Motor Plugs



- 10 Gauge wire with butt connectors.

Order No.	Description	Price
7-1298	12 volt, 2 Wires	$10.98 G
7-1302	24 volt, 3 Wires	$13.98 G

Marpac Female Trolling Motor Sockets



- 10 Gauge wire with butt connectors.
- Mounting screws included.

Order No.	Description	Price
7-1296	12 volt, 2 Wires	$10.98 G
7-1300	24 volt, 3 Wires	$13.98 G

Boater Sports Male Trolling Motor Connectors



- Designed to be flush-mounted, this socket makes the connection of a trolling motor quick and easy.
- Wire the plug to the motor end, and add 8- or 10-gauge heavy gauge cable from the battery to the socket, and you're ready to go.
- Includes butt connectors.
- Works on 12 volt or 24 volt motors.

Order No.	Mfg. No. / Description	Price
1-51441	(51441) 2 Wire, 10 Gauge	$11.49 H
1-51443	(51443) 3 Wire, 10 Gauge	$12.60 H

Boater Sports Female Trolling Motor Connectors



- Designed to be flush-mounted, this socket makes the connection of a trolling motor quick and easy.
- Wire the plug to the motor end, and add 8- or 10-gauge heavy gauge cable from the battery to the socket, and you're ready to go.
- Includes butt connectors.
- Works on 12 volt or 24 volt motors.

Order No.	Mfg. No. / Description	Price
1-51442	(51442) 2 Wire, 10 Gauge	$12.45 H
1-51444	(51444) 3 Wire, 10 Gauge	$14.10 H

Sierra Male Trolling Motor Plugs



- 10 Gauge wire with butt connector
- Ready-wired.

Order No.	Mfg. No. / Description	Price
181048	(WH10480) 12 volt, 2 Wires	$11.12 H
181050	(WH10500) 24 volt, 3 Wires	$13.21 H

Sierra Female Trolling Motor Sockets



- 10 Gauge wire with butt connector.
- Ready-wired.

Order No.	Mfg. No. / Description	Price
181047	(WH10470) 12 volt, 2 Wires	$13.32 H
181049	(WH10490) 24 volt, 3 Wires	$15.30 H

©2014 Donovan Marine, Inc.

Boater Sports Trolling Motor Plugs - 4 Prong



- 4 prong locking plug or socket for trolling motors.
- Replaces: Marinco 2018BR & 2018BP-24.

Order No.	Mfg. No. / Description	Price
1-51555	(51555) Female, Boat Side	$19.95 H
1-51556	(51556) Male, Motor Side	$19.95 H

Minn Kota Trolling Motor Plug and Receptacle



- Provides universal design for 2 or 3 wire configurations on 12 to 36 volt systems.
- Features a watertight sealing cap and corrosion resistant, plated brass electrical components.
- Locks into receptacle for a watertight seal.
- Requires a standard 1-1/8" diameter mounting hole.

Order No.	Mfg. No. / Description	Price
476590	(1865102) MKR-18	$29.98 D

T-H Marine Ranger Trolling Motor Plugs and Base



- Direct OEM replacement, rated at 50+ AMPs.
- Gold contacts.

Order No.	Mfg. No. / Description	Price
641870	(TMBMP-1) Replacement Plug	$31.98 H
641894	(TMRCP-1) Replacement Charging Plug	$32.98 H
641882	(TMFR-1) Replacement Base	$49.98 H


Marinco Hard Wired Charger Inlets



- 15 amp straight blade inlet.
- Low profile cap won't catch fishing line.
- Mounts easily to fiberglass and aluminum hulls.
- Perma-Lock terminals and color coded wire entrance holes make wiring a snap.
- UV resistant housing/cap.
- Universal mount.

Order No.	Mfg. No. / Description	Price
217908	(150BBI) Black	$24.98 F
218640	(150BBIW) White	$30.98 I

Boater Sports Trolling Motor Plugs - 3 Prong

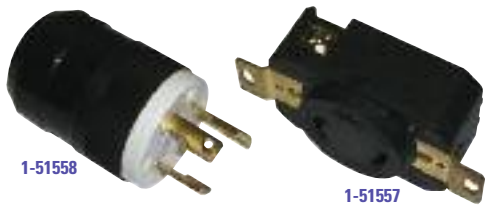

- 3 prong locking plug or socket for trolling motors.
- Replaces: Marinco 305CRR & 305BP.

Order No.	Mfg. No. / Description	Price
1-51557	(51557) Female, Boat Side	$19.95 H
1-51558	(51558) Male, Motor Side	$19.95 H

Sierra Trolling Motor Socket and Plug

- 6", 8GA 12 volt wire with butt connectors.
- V-groove.

Order No.	Mfg. No. / Description	Price
772229	(WH10600) Female Motor Side	$12.98 H
772230	(WH10610) Male Boat Side	$14.98 H

Marinco ConnectPro™ Trolling Motor Plug and Receptacle


217940



- The ConnectPro has superior electric current carrying capacity to eliminate problems that rob motors of power and reduce battery life.
- Features a locking plug and receptacle with spring clamping connections which provides a secure electrical contact.
- Universal design for 2 or 3 wire configuration; 12, 24, 12/24, 24/36 or 36 volt systems.
- Corrosion resistant, plated brass electrical components.

Order No.	Mfg. No. / Description	Price
217942	(12VCP) Receptacle and Plug	$45.98 F
217940	(12VBP) Plug Only	$21.98 F
217941	(12VBR) Receptacle Only	$26.98 F

Marinco Trolling Motor Plug - Male



- Trolling motor plug (male) connects to the trolling motor.
- Jumpered internally to supply 12 volt and 24 volt power to the trolling motor when plugged into the receptacle.

Order No.	Mfg. No. / Description	Price
217984	(2018BP-24) Black	$25.98 F

Marinco On-Board Charger Inlet



- 15 amp 125 volt straight blade inlet.
- Can be mounted almost anywhere on a boat.
- Low profile cap won't catch fishing line.
- Mounts easily to fiberglass and aluminum hulls.
- Perma-Lock terminals and color coded wire entrance holes make wiring a snap.
- UV resistant housing and cap.

Order No.	Mfg. No. / Description	Price
217910	(150CCI)	$24.98 F

2014 RIGGING ALLOWANCE PROGRAM

Dealer: _____

Contact: _____

Address: _____

_____

Phone: _____

Fax: _____

E-mail: _____

$20.00 RIGGING ALLOWANCE APPLIES TO THE FOLLOWING IN-LINE MOTORS:

- TERROVA
- FORTREX
- RIPTIDE BOW MOUNT
- POWERDRIVE V2 (excluding 45, 50, 65lb models)
- MAXXUM BOW MOUNT

$15.00 RIGGING ALLOWANCE APPLIES TO THE FOLLOWING IN-LINE MOTORS:

- EDGE (excluding 45lb models)

SEE LISTING ON BACK FOR QUALIFYING SKU'S

MODEL	SERIAL #											BOAT MANUFACTURER	BOAT SERIAL NUMBER	CONSUMER NAME	CONSUMER E-MAIL ADDRESS
TERROVA 80/AP 54"	J	3	6	5	M	K	0	5	2	8	1	RANGER	RNG7S082606	JOE SMITH	JSMITH@FREEMAIL.COM

Program Guidelines:

- Program dates are **9/30/13 - 10/3/14**
- Complete information must be received on each motor to qualify for the rigging allowance
- Discontinued, OEM and reconditioned motors do not apply
- Minn Kota reserves the right to request proof of installation
- Submission must be postmarked or received via fax by **10/3/14** to qualify
- Please allow 8-10 weeks processing time to receive your payment
- Guidelines are subject to change

Submit complete form via mail, fax or e-mail to:

Johnson Outdoors Inc
Attn: Ron Bailey
555 Main Street, Suite 241
Racine, WI 53403
PH: 1-800-299-2592
FAX: 1-262-631-6609
E-mail: rbailey@johnsonoutdoors.com

HUMMINBIRD.

2014 RIGGING ALLOWANCE PROGRAM - QUALIFYING HUMMINBIRD UNITS

PRODUCT CODE	UPC MFG	PRODUCT DESCRIPTION	RIGGING ALLOWANCE AMOUNT
700 Series			
407930-1	0-82324-03464-0	778c HD	$30.00
407950-1	0-82324-03472-5	788ci HD Combo	$30.00
408130-1	0-82324-03519-7	788ci HD DI Combo	$30.00
407970-1	0-82324-03485-5	798ci HD SI Combo	$50.00
800 Series			
408240-1	0-82324-03569-2	858c HD DI Combo	$40.00
407820-1	0-82324-03434-3	898c HD SI Combo	$50.00
900 Series			
408250-1	0-82324-03570-8	958c HD DI Combo	$40.00
407760-1	0-82324-03418-3	998c HD SI Combo	$50.00
1100 Series			
408260-1	0-82324-03571-5	1158c DI Combo	$40.00
407990-1	0-82324-03493-0	1198c SI Combo	$50.00

2014 RIGGING ALLOWANCE PROGRAM - QUALIFYING MINN KOTA MOTORS

Effective 9/30/13 - 10/3/14

PRODUCT DESCRIPTION	SHAFT LENGTH	PROD. CODE	UPC 29402	SHAFT LENGTH	PROD. CODE	UPC 29402	SHAFT LENGTH	PROD. CODE	UPC 29402
EDGE SERIES									
EDGE 55/I&O	45"	1355956	03631-8	52"	1356957	03632-5			
EDGE 55/I&O/HAND	52"	1355955	03630-1						
EDGE 70/I&O	46"	1356970	03634-9	52"	1356971	03635-6			
FORTREX SERIES									
FORTREX 80	45"	1368880	03194-8	52"	1368881	03195-5			
FORTREX 80/US2	45"	1368870	03197-9	52"	1368871	03198-6	62"	1368872	03199-3
FORTREX 112	46"	1368887	04064-3	52"	1368888	04065-0			
FORTREX 112/US2	46"	1368896	04066-7	52"	1368896	04067-4			
FORTREX 112/US2	62"	1368897	04068-1						
FORTREX 112/HAND	52"	1368886	04063-6						
MAXXUM BOW MOUNT SERIES									
MAXXUM 55/SC/BG	42"	1368550	02248-9	52"	1368551	02249-6			
MAXXUM 55/BG	42"	1368553	02251-9	52"	1368554	02252-6			
MAXXUM 55/SC/HAND	52"	1368520	03308-9						
MAXXUM 70/BG	42"	1368561	02254-0	52"	1368562	02255-7			
MAXXUM 70/SC/HAND	52"	1368530	03309-6						
MAXXUM 70/SC/BG	42"	1368560	02253-3						
MAXXUM 80/BG	42"	1368580	02258-5	52"	1368581	02260-1			
MAXXUM 80/BG/HAND	52"	1368540	03310-2						
POWERDRIVE V2 SERIES									
55 PD V2	48"	1358710	02896-2	54"	1358711	02897-9			
55 PD V2/US2	48"	1358750	02902-0	54"	1358751	02903-7			
55 PD V2/AP	48"	1366200	02985-3	54"	1366201	02986-0			
55 PD V2/AP/US2	54"	1366251	02990-7						
55 PD V2 w/ i-Pilot (no foot pedal)	48"	1358740	03647-9	54"	1358741	03648-6			
55 PD V2/US2 w/ i-Pilot (no foot pedal)	54"	1358753	03650-9						
70 PD V2	54"	1358720	02900-6	60"	1358721	02901-3			
70 PD V2/US2	54"	1358755	02904-4	60"	1358756	02905-1			
70 PD V2/AP	60"	1366211	02988-4						
70 PD V2/AP/US2	54"	1366260	02991-4	60"	1366261	02992-1			
70 PD V2 w/ i-Pilot (no foot pedal)	54"	1358726	03649-3						
70 PD V2/US2 w/ i-Pilot (no foot pedal)	60"	1358758	03651-6						
TERROVA SERIES									
TERROVA 55	48"	1358800	02906-8	54"	1358801	02907-5			
TERROVA 55/US2 w/ i-Pilot (incl. foot pedal)	45"	1358854	03691-2	54"	1358853	03652-3			
TERROVA 55/US2 w/Link, incl ft pedal	54"	1358855	03813-8						
TERROVA 80	60"	1358811	02908-9						
TERROVA 80/US2	54"	1358860	02914-3	60"	1358861	02915-0			
TERROVA 80/US2 w/ i-Pilot (incl. foot pedal)	45"	1358864	03653-0	60"	1358865	03654-7			
TERROVA 80/US2 w/Link, incl ft pedal	45"	1358866	03814-5	60"	1358867	03815-2			
TERROVA 80/AP/US2	60"	1366161	02827-3						
TERROVA 112/US2 w/Link incl ft pedal	60"	1358840	04071-1						
TERROVA 112/US2 w/i-Pilot incl ft pedal	54"	1358841	04072-8	60"	1358842	04073-5			
TERROVA 112/US2	60"	1358843	04079-7						
TERROVA 112/AP/US2	60"	1366180	04074-2						

PRODUCT DESCRIPTION	SHAFT LENGTH	PROD. CODE	UPC 29402	SHAFT LENGTH	PROD. CODE	UPC 29402
RIPTIDE SF SERIES						
RT SF 80/BG	52"	1363640	03206-6	62"	1363641	03207-5
RT 112/SF/BG/HAND	62"	1363660	04075-9			
RIPTIDE SE SERIES						
RT 55/SE/I&O	52"	1355915	03845-5			
RT 70/SE/I&O	52"	1355920	03846-2			
RIPTIDE SM SERIES						
RT 55/SM/I&O/SC	42"	1363420	03312-6	52"	1363421	03313-3
RT 55/SM/I&O	52"	1363422	03314-0			
RT 70/SM/I&O/SC	52"	1363425	03315-7			
RT 80/SM/I&O	52"	1363447	03318-8			
RT 80/SM/BG	52"	1363445	03316-4	62"	1363446	03317-1
RT 101/SM/BG	62"	1363468	03320-1			
RIPTIDE SP SERIES						
RT 55/SP/CP	48"	1363590	02930-3			
RT 55/SP w/ i-Pilot (no foot pedal)	48"	1363593	03656-1			
RT 70/SP/CP	54"	1363580	02931-0			
RT 70/SP w/ i-Pilot (no foot pedal)	54"	1363583	03657-8			
RIPTIDE ST SERIES						
RT 55/ST w/ i-Pilot (no foot pedal)	54"	1363704	03658-5			
RT 80/ST/CP	54"	1363780	02996-9	60"	1363781	02997-6
RT 80/ST/CP/AP	54"	1363710	02933-4	60"	1363711	02934-1
RT 80/ST w/ i-Pilot (no foot pedal)	54"	1363714	03659-2	60"	1363715	03743-8
RT 112/ST/CP/AP	60"	1363730	04076-6			
RT 112/ST w/i-Pilot NO foot pedal	60"	1363731	04077-3			

MotorGuide

motorguide.com

2014 Rigging Reimbursement Form

Effective Dates: January 1, 2014 - December 31, 2013

Dealership number:	Dealership name:	Dealer contact:	Address 1:	Address 2:	City:	State:	Zip Code:	Phone:

Model Description*	Part Number*	Serial Number*	Boat Manufacturer*	Boat HIN #*	Consumer Name*	Consumer Phone	Consumer Email Address

* Required Information

Submit completed Excel attachment via email to:

MotorGuideRigging@avalamarketing.com

NOTE: All rebate forms must be received by 12/31/2014 to be eligible.

Program is subject to change. Please refer to the website for the latest program.

Marpac L.E.D. Advantage Portable Bow Lights



- LED Advantage means low power draw, batteries last longer than standard incandescent bulbs.
- Compact size-takes up less space on deck, easy to store.
- Great for boats less than 23' (7 meters) with a maximum speed of 7 knots (8 MPH).
- Requires 3 "AAA" Batteries. Not included.

Order No.	Description	Price
7-1312	Clamp-On Mount	$24.98 G
7-1313	Suction Cup Mount	$26.98 G


Attwood Stern Lights with C-Clamp Mount



- For night time operation of small boats and tenders without 12 volt electrical systems.
- Features a krypton bulb that burns bright and lasts long.
- Constructed of rugged high impact resin with easy thumb switch operation.
- Clamp-on attachment for a variety of surface thicknesses.
- Clear lens.
- Requires (2) "D" cell batteries. Not included.

Order No.	Mfg. No. / Description	Price
235019	(14260-7) Gray	$21.98 H
235627	(14274-7) Camouflage	$27.98 H

Fulton 2 D-Cell Portable All-Round/Sternlites



- 2 D-Cell All-Round/Sternlites with clear-reflective lens.
- U.V. stabilized mica-filled polypropylene plastic body.
- Easy-to-operate positive action slide switches.
- Must use Fulton #1 bulb to meet requirements.
- Diameter 2-1/2".
- Pole height 25".

Order No.	Mfg. No. / Description	Price
261747	(48-P-SK) C-Clamp Mount	$25.98 I
261759	(50-P-SK) Suction Cup Mount	$25.98 I

Boater Sports Clamp-On Bi-Color Bow Light



- Waterproof portable bow light with 2 positions, aluminum clamp.
- Reversible clamp for horizontal or vertical mounting.
- Uses 2 D-Cell batteries (Not Included).

Order No.	Mfg. No. / Description	Price
1-51279	(51279) Black Outer	$14.65 H

Marpac L.E.D. Advantage Portable All-Around Lights



- LED Advantage means low power draw, batteries last longer than standard incandescent bulbs.
- Great for boats less than 23' (7 meters) with a maximum speed of 7 knots (8 MPH).
- Requires 3 "AAA" Batteries. Not included.

Order No.	Description	Price
7-1315	Clamp-On Mount	$25.98 G
7-1316	Suction Cup Mount	$27.98 G

Attwood Portable L.E.D. Navigation Light Kit



- Multiple mounting options, horizontal and vertical attachment.
- Easy to remove for portable use and storage.
- Kit Includes: (1) Red/green LED bow light, (1) White LED stern light quick release light mounts, pole C-clamps and hardware.
- Water and shock resistant, and features rubber seals and rubber booted switches.

Order No.	Mfg. No. / Description	Price
2350035	(14180-7) Gray	$32.98 F

Fulton 2 D-Cell Portable Bowlites



- 2 D-Cell Bowlites with red/green lens.
- U.V. stabilized mica-filled polypropylene plastic body.
- Easy-to-operate positive action slide switches.
- Must use Fulton #1 bulb to meet requirements.
- Diameter 2-1/2".

Order No.	Mfg. No. / Description	Price
261761	(51-P-SK) C-Clamp Mount	$25.98 I
261773	(52-P-SK) C-Clamp Mount for Horizontal Surface	$25.98 I
261785	(53-P-SK) Suction Cup Mount	$25.98 I

Boater Sports Clamp-On Stern Light



- Waterproof 360° all round light with 2 position aluminum clamp.
- 15 candle power bulb (2 mile visibility).
- Dimensions: Pole length is 24".
- Base is 1-3/8" wide 3-3/4" long.
- Uses 2 D-Cell batteries (Not Included).

Order No.	Mfg. No. / Description	Price
1-51278	(51278) Black Outer	$20.75 H

©2014 Donovan Marine, Inc.

Perko Fig. 1201 Tri-Color Light



- Black polymer and chrome plated zinc alloy top with black polymer base.
- Red and green bi-color - 1 mile visibility.
- For use on vessels under sail alone under 12 meters in length.
- White (stern) - 2 mile visibility.
- Vertical height 3-1/4".
- Base dimensions: 1" x 2-5/8".
- Uses #8 fasteners.
- Two #71 12 volt bulbs included.

Order No.	Mfg. No. / Description	Price
533280	(1201 DP0 BLK)	$65.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 1310 Bi-Color Light - Horizontal Mount



- Chrome plated zinc alloy top with black polymer base.
- 1 mile visibility.
- For use on power driven vessels under 12 meters in length.
- Vertical height 1", length 4", width 3-1/8".
- Uses #8 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
534380	(1310 DP0 CHR)	$39.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Marpac Combination Bow Light



- Stainless steel.
- Teardrop design.

Order No.	Description	Price
7-0060	10 watt, 12 volt	$35.98 G

Marpac Combination Bow Light



- Chrome plated finish.
- For use on power boats under 39.4'.
- 1 mile visibility.
- #71 12 volt bulb included.
- 5 year warranty. Made in the USA.

Order No.	Description	Price
7-0375		$32.98 F
7-3930	(71) Spare Bulbs, 2 Per Pack	$3.29 G

Perko Fig. 904 Bi-Color Light - Horizontal Mount



- Chrome plated brass top with black polymer base.
- 1 mile visibility.
- For replacement use only under 12 meters in length.
- Vertical height 7/8", length 4-1/4", width 2-1/8".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
543378	(904 DP0 CHR)	$96.98 R
536838	(296 DP0 LNS) Spare Lens Set, Red/Green	$16.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 1218 Bi-Color Light - Horizontal Mount



- Chrome plated zinc alloy with 3/4" ID flag staff socket.
- 1 mile visibility.
- For replacement use only on power driven vessels under 12 meters in length.
- Vertical height 1-5/8".
- Base dimensions: 6-3/4" x 3-7/8".
- Uses #8 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
533390	(1218 DP0 CHR)	$60.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 252 Bi-Color Light - Horizontal Mount



- All black polymer with gold plated contacts.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Vertical height 13/16", length 3-1/2", width 2-1/4".
- Uses #8 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
534378	(252 BB0 DP1)	$35.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Marpac Combination Bow Light



- Stainless steel.
- Round design.

Order No.	Description	Price
7-0058	10 watt, 12 volt	$21.98 G

Perko Fig. 972 Bi-Color Light - Horizontal Mount



- Chrome plated brass top with black polymer base.
- 1 mile visibility.
- For use on sail or power driven vessels under 12 meters in length.
- Vertical height 7/8".
- OD base 2-3/8".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
544115	(972 DP0 CHR)	$63.98 R
536838	(296 DP0 LNS) Spare Lens Set, Red/Green	$16.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 229 Bi-Color Light - Horizontal Mount



- Chrome plated bronze top with black polymer base.
- One piece lens/base assembly.
- Gold plated contacts.
- Includes mounting gasket.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Vertical height 7/8", length 4", width 3".
- Uses #8 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
535418	(229 DP0 CHR)	$97.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Marpac L.E.D. Advantage Bow Light - Low Profile



- LED Advantage of low power use (2.2W), long life and shock resistant durability.
- Certified USCG 2nm, for use on boats under 39.4' (12 meters).
- Low profile mounts securely on almost any flat surface.
- Epoxy coated electronics encased in corrosion proof composite case protected by a tough Nichronium shell.
- Uses #8 pan head mounting screws (not included).
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- 12 volt.

Order No.	Description	Price
7-6598	LED Low Profile Bow Light	$54.98 G

Marpac Combination Bow Light



- Stainless steel.
- 20 points, 225°.
- Red and green lens.
- Diameter 2-1/4".
- #90 12 volt bulb included.

Order No.	Description	Price
7-0080		$15.98 F
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Boater Sports Combination Bow Light



- Chrome plated zamak housing with red and green lens.
- 12 volts with a 15 candlepower bulb.
- Dimensions: 2-3/4" long x 2-1/2" wide x 1-3/8" high.

Order No.	Mfg. No. / Description	Price
1-51202	(51202)	$16.50 H

Attwood Bi-Color Bow Light - Horizontal Deck Mount



- 316 stainless steel.
- Red/green lens.
- For use on boats up to 20 meters (65.6').
- 2 mile, 225° visibility.
- Height 1-1/2", length 3-3/8", width 2-7/16" (at base).
- Includes efficient, high-output 10-watt bayonet lamp.
- 12 volt.

Order No.	Mfg. No. / Description	Price
235413	(3810-7)	$41.98 H


Attwood Bi-Color Bow Light - Horizontal Deck Mount



- Die-cast zamak with perma-plate chrome finish.
- Red/green lens.
- For use on boats up to 12 meters (39.4').
- 1 mile visibility.
- Height 1-3/8", length 2-3/4", width 2-1/2" (at base).
- #90 12 volt bulb included.
- Two holes for #8 flat or oval head screws.

Order No.	Mfg. No. / Description	Price
235122	(6375D6)	$23.98 G
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Marpac Combination Bow Light



- For use on power boats under 39.4'.
- 1 mile visibility.
- Meets ABYC standard A-16.
- #90 12 volt bulb included.

Order No.	Description	Price
7-0841		$11.98 H
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Boater Sports Flush-Mount Bi-Color Bow Light



- Red and green combination navigation light.
- Chrome plated zamak housing with a black plastic base (low profile).
- For boats under 39.

Order No.	Mfg. No. / Description	Price
1-51204	(51204)	$16.30 H

Attwood Bi-Color Bow Light - Horizontal Deck Mount



- 304 stainless steel.
- Red/green lens.
- For use on boats up to 12 meters (39.4').
- 1 mile, 225° visibility.
- #90 12 volt bulb included.
- Three holes for #6 screws.

Order No.	Mfg. No. / Description	Price
235401	(66318-7)	$32.98 H
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Attwood Quasar Bi-Color Deck Mount Bow Light



- All black.
- Includes waterproof gasket.
- Dimensions: 3" L x 2-1/4" W x 1-7/8" H.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2351059	(3120-7)	$24.98 H

Deck Mount - Top or Bottom



- Certified USCG 2 mile visibility vessels up to 65'.
- Low power consumption (only 0.18 amps).
- Completely sealed and waterproof.
- EMC tested and certified.
- Rated up to 20,000 hours.

Order No.	Mfg. No. / Description	Price
207442	(33100-7) 1" H x 3" W.	$103.98 Q

Boater Sports L.E.D. Bow Light Combination



- Stamped stainless steel.
- Cover with adapter plate and gasket.
- Stainless steel hardware.

Order No.	Mfg. No. / Description	Price
1-51164	(51164)	$38.95 H

Attwood L.E.D. Bow Light - Horizontal Deck Mount



- Stainless steel.
- Red/green lens.
- For use on boats up to 20 meters (65.6').
- 2 mile visibility.
- Proprietary optics design draws only 2.4 watts at 12 volts.
- Lights are completely sealed and are watertight.
- LED technology keeps lights cool to the touch and is rated for 50,000+ hours of use.

Order No.	Mfg. No. / Description	Price
235665	(3540-7)	$57.98 R

Attwood Bi-Color Bow Light - Horizontal Deck Mount



- Die-cast zamak with perma-plate chrome finish.
- Red/green lens.
- For use on boats up to 12 meters (39.4').
- 1 mile visibility.
- Lamp can be serviced without removing light from the boat.
- Height 2-1/2", length 3", width 2-5/8" (at base).
- #90 12 volt bulb included.
- Two holes for #10 screws.

Order No.	Mfg. No. / Description	Price
235108	(6357D7)	$42.98 Q
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Aqua Signal Series 20 Bi-Color Light - Deck Mount



- Rigid polycarbonate black, shock resistant, non-corrosive, non-magnetic, seawater resistant.
- 1 mile visibility.
- Red/Green lens.
- Optics: (Fresnel) poly-carbonate, shock resistant.
- For use on power boats up to 12 meters.

Order No.	Mfg. No. / Description	Price
207086	(20100-7) 12 volt	$37.98 F

©2014 Donovan Marine, Inc.


Marpac Bi-Color Plug-In Bow Light



- Black with base.
- Red/green lens.
- Pole length 12".
- 10 watt.
- 12 volt.

Order No.	Description	Price
7-0055	Bow Light	$33.98 F
7-0052	Spare Base	$15.98 G
7-0053	Stainless Steel Base	$32.98 F

Perko Fig. 1612 Removable Bi-Color Pole Light



- Black polymer top and collar with red and green lens.
- 3/4" diameter anodized aluminum tube.
- 1 mile visibility.
- For use on sail or power driven vessels under 12 meters in length.
- Pole length: 12".
- Pole rake: 0°.
- Locking collar.
- Requires 2 pin mounting base.
- Fits base: 536384 (1045 P00 DP) 2-Pin.
- #71 12 volt bulb included.
- **Must order base separately**

Order No.	Description	Price
535133	(1612 DP2 BLK) Pole Only	$30.98 R
536384	(1045 P00 DP) Plug-In Type Base	$28.98 H
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Boater Sports Tear Drop Bi-Color Bow Lights



- Red and green light provides visibility for 1 mile, 225° visibility.
- Plastic housing with aluminum pole.
- Quality die-cast zamak finish.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
1-51220	(51220) 10" Pole, Angled	$16.85 H
1-51221	(51221) 10" Pole, Straight	$17.99 H

Perko Figs. 1211 and 1212 Removable Bi-Color Pole Lights with Utility Light



- Black polymer top and collar with red and green lens.
- 3/4" diameter anodized aluminum tube.
- Deck illuminating utility light.
- Stow-a-way plug-in type pole.
- 1 mile visibility.
- For use on sail or power driven vessels under 12 meters in length.
- Pole length 12-1/2".
- Requires 3 pin mounting base, sold separately.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
535294	(1212 DP2 CHR) Pole Rake: 5°	$52.98 R
533315	(1211 DP2 CHR) Pole Rake: 0°	$53.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 1421 Removable Bi-Color Pole and Utility Light



- Black polymer top and collar with red and green lens.
- 3/4" diameter anodized aluminum tube.
- Deck illuminating utility light.
- Stow-a-way plug-in type pole.
- Requires 3 pin mounting base.
- 12 volt bulb included.
- Locking collar.
- Fits bases: 1045 and 1047 (3-pin).

Order No.	Mfg. No. / Description	Price
5315081	(1421 DP2 CHR) Pole Rake: 0°	$46.98 H

Attwood Bi-Color Plug-In Bow Light



- Anodized aluminum angled pole.
- Red/green lens.
- For use on boats up to 12 meters (39.4').
- 1 mile, 225° visibility.
- The base extends just 3" below the deck and has a swivel cover to protect socket when the light is stowed away.
- 10" high with 4" long x 1-5/8" wide base.
- #90 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
235156	(6368-3)	$59.98 G
235259	(911339-7) Spare Base for Angled Pole	$21.98 H
235300	(910851-7) Spare Side Light without Base	$44.98 H
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Boater Sports Chrome Plug-In Angled Bow Light



- Classic style zamac 10" angled bow light.
- Stores easily and replaces most common bow lights.
- Fits most standard 2-pin light base.
- One mile, 225° visibility.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
1-51217	(51217) 10" Pole	$28.65 H

Boater Sports Stowaway Bi-Color Bow Light



- Features convenient plug-ins that enable the light to be activated or removed quickly and easily.
- Provides one-mile, 225° visibility for safer boating.
- Anodized aluminum pole and nylon base with cap included.
- Pole length: 14".

Order No.	Mfg. No. / Description	Price
1-51216	(51216)	$26.15 H

Attwood Pulsar Bi-Color Stowaway Bow Light



- Comes with task light.
- 10 times brighter than competition.
- Durable rubber push-on switch.
- Pole length: 10".

Order No.	Mfg. No. / Description	Price
2350202	(5095-10-1)	$33.98 R

Aqua Signal Series 33 L.E.D. Side Lights



- Black housing.
- Certified USCG for 2 mile visibility for vessels up to 65'.
- Low power consumption (only 0.18 amps).
- Completely sealed and waterproof.
- EMC tested and certified.
- Rated up to 20,000 hours.
- Dimensions: 2-3/4" L x 2" H x 1-3/4" D.

Order No.	Mfg. No. / Description	Price
207421	(33202-7) Green Side Light Only	$69.98 Q
207428	(33302-7) Red Side Light Only	$69.98 Q

Perko Fig. 228 Side Lights - Horizontal Mount



- Chrome plated zinc alloy top with black polymer base.
- Red and green lens.
- Certified for use on power driven vessels under 20 meters (65.6 ft.) in length.
- Vertical height: 5/8".
- Length: 3-1/4", width 2-5/16".
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
5315112	(228 DP0 CHR)	$79.98 H
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 253 Side Lights - Horizontal Mount



- Chrome plated bronze top with black polymer base or all white polymer.
- Red and green lens.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Vertical height 13/16", length 3-1/2", width 2-1/4".
- Uses #8 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
542476	(253 W00 DP1) White	$70.98 R
5315117	(253 M00 DP1) Chrome	$127.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Marpac L.E.D. Advantage Side Lights - Horizontal Mount



- LED Advantage of low power use (1.3W/red, .8W/green), long life and shock resistant durability.
- Certified USCG 2nm, for use on boats under 39.4' (12 meters).
- Epoxy coated electronics encased in corrosion proof composite case protected by a tough Nichronium shell.
- Uses #8 pan head mounting screws (not included).
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- 12 volt.
- Sold per pair.

Order No.	Description	Price
7-6555	LED Advantage Side Lights	$71.98 G

Perko Fig. 963 Side Lights - Horizontal Mount



- Chrome plated brass top.
- Black polymer base.
- Red and green lens.
- 1 mile visibility.
- For use on sail or power driven vessels under 12 meters in length.
- Vertical height 7/8".
- Base OD 2-3/8".
- Uses #8 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
543997	(963 DP0 CHR)	$119.98 R
536737	(281 DPA LNS) Spare Lens Set	$17.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 915 Side Lights - Horizontal Mount



- Chrome plated brass top.
- Black polymer base.
- Red and green lens.
- 1 mile visibility.
- For replacement use only on sail or power driven vessels under 12 meters in length.
- Length 4-1/4", width 2-3/8", vertical height 7/8".
- Uses #4 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
542480	(915 DP0 CHR)	$154.98 R
536737	(281 DPA LNS) Spare Lens Set	$17.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Attwood L.E.D. Side Lights - Horizontal Deck Mount



- Stainless steel.
- For use on boats up to 20 meters (65.6').
- 2 mile visibility.
- Proprietary optics design draws only 2.4 watts at 12 volts.
- Lights are completely sealed and are water tight.
- LED technology keeps lights cool to the touch and is rated for 50,000+ hours of use.

Order No.	Mfg. No. / Description	Price
235689	(3550R7) Red Side Light Only	$49.98 R
235677	(3550G7) Green Side Light Only	$49.98 R

Perko Fig. 1601 Side Lights - Horizontal Mount



- Black polymer.
- Red and green lens.
- Normal "Base-Down" mount.
- 1 mile visibility.
- For use on sail or power driven vessels under 12 meters in length.
- Vertical height 1-1/4", height overall 1-7/8".
- Base dimensions: 1-1/8" x 3".
- Uses #8 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
542488	(1601 DP0 BLK)	$70.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Attwood Quasar Side Lights - Horizontal Mount



- Smooth contour prevents lines from snagging on housing.
- Available in black or chrome.
- For use on boats to 20 meters (65.6').
- Dimensions: 3" L x 2-1/4" W x 1-7/16" H.
- Includes waterproof gasket.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2350191	(3150GP) Black/Green Lens	$19.98 H
2350192	(3150RP) Black/Red Lens	$19.98 H
2350194	(3153GP) Chrome/Green Lens	$20.98 H
2350195	(3153RP) Chrome/Red Lens	$20.98 H

©2014 Donovan Marine, Inc.

Attwood Side Lights - Horizontal Deck Mount



- 304 stainless steel.
- For use on boats up to 12 meters (39.4').
- 1 mile visibility.
- Height 1-1/2", length 2-1/2", width 2-1/4" (at base).
- Includes: One 8 watt lamp.
- Three holes for #6 screws.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
235427	(66319G7/R7) Side Light Kit	$67.98 R
235437	(66319G7) Green Side Light Only	$33.98 Q
235449	(66319R7) Red Side Light Only	$33.98 Q

Marpac L.E.D. Advantage Side Lights - Vertical Mount



- Attractive stainless steel composite housing.
- LED Advantage of low power use (only .9W), long life and shock resistant durability.
- Certified USCG 2nm, for use on boats under 39.4' (12 meters).
- Uses two #8 flat/oval head screws (not included).
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- 12 volt.
- Red/Green, sold per pair

Order No.	Description	Price
7-6559	Side Lights	$51.98 G

Perko Fig. 602 L.E.D. Side Lights - Vertical Mount



- White epoxy coated bronze.
- Uses 10% of the energy draw of standard lights. Low heat. Long life.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Length 3-1/4", width 2", projection 1-1/8".
- Uses #8 fasteners.
- 12 volt.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
544432	(602 DP1 WHT)	$197.98 R

Attwood Side Lights - Horizontal Deck Mount



- 316 stainless steel.
- For use on boats to 20 meters (65.6').
- 2 mile, 112.5° visibility.
- Height 1-1/2", length 3-3/8", width 2-7/16" (at base).
- Includes efficient, high-output 10 watt bayonet lamp.
- 12 volt.

Order No.	Mfg. No. / Description	Price
235241	(3820R7) Red Side Light Only	$42.98 H
235242	(3820G7) Green Side Light Only	$42.98 H

Marpac Side Lights - Horizontal Mount



- Stainless steel.
- Red and green lens.
- 112-1/2° visibility.
- 10 watt.
- 12 volt.
- Sold per pair.

Order No.	Description	Price
7-0059	Side Lights	$44.98 G

Boater Sports L.E.D. Side Lights - Vertical Mount



- Long lasting LED bulbs provide 1 mile visibility while remaining cool to the touch.
- Sealed and watertight.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-51215	(51215)	$46.30 H

Perko Fig. 254 Side Lights - Vertical Mount



- All black polymer.
- Red and green lens.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Length 3-1/2", width 2-1/4", projection 7/8".
- Uses #8 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
536067	(254 B00 DP1)	$66.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Attwood Side Lights - Horizontal Deck Mount



- Die-cast zamak with perma-plate chrome finish.
- For use on boats up to 12 meters (39.4').
- 1 mile visibility.
- Lamp can be serviced without removing light from the boat.
- Height 2-1/2", length 3", width 2-5/8" (at base).
- #90 12 volt bulb included.
- Two holes for #10 screws.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
235112	(6358D4) Side Light Kit	$79.98 Q
235115	(6358G7) Green Side Light Only	$36.98 G
235118	(6358R7) Red Side Light Only	$36.98 G
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Perko Fig. 955 Side Lights - Vertical Mount



- Chrome plated brass top.
- Black polymer base.
- Red and green lens.
- 1 mile visibility.
- For use on sail or power driven vessels under 12 meters in length.
- Length 4-1/4", width 2-3/8", projection 5/8".
- Uses #4 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
543947	(955 DP0 CHR)	$108.98 R
536361	(260 DP0 LNS) Spare Lens Set	$15.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 1264 Side Lights - Vertical Mount



- Chrome plated zinc alloy with black vinyl mounting gasket.
- Red and green lens.
- 1 mile visibility.
- For replacement use only on power driven vessels under 12 meters in length.
- Overall projection 1-3/4", length 5-1/2", width 3-1/8".
- Uses #8 fasteners.
- #71 12 volt bulbs included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
533895	(1264 DP0 CHR)	$80.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Aqua Signal Series 20 Side Lights



- Housing: Rigid polycarbonate black, shock resistant, non-corrosive, non-magnetic, seawater resistant.
- Optics: (Fresnel) polycarbonate, shock resistant.
- 1 mile visibility.
- For use on power boats up to 12 meters.
- 12 volt.

Order No.	Mfg. No. / Description	Price
207105	(20202-7) Starboard (Green)	$34.98 F
207117	(20302-7) Port (Red)	$29.98 F

Attwood Side Lights - Vertical Mount



- 316 stainless steel.
- For use on boats to 20 meters (65.6').
- 2 mile, 112.5° visibility.
- Length 3-1/2", width 2-3/16" (at base).
- 12 volt.

Order No.	Mfg. No. / Description	Price
235237	(3838R7) Red Side Light Only	$39.98 H
235239	(3838G7) Green Side Light Only	$39.98 H

Attwood Side Lights - Vertical Mount



- 304 stainless steel.
- For use on boats up to 12 meters (39.4').
- 1 mile, 112.5° visibility.
- Height 1-1/2", length 2-1/2", width 2-1/4" (at base).
- #90 12 volt bulb included.
- Installs with three #6 stainless steel screws, included.

Order No.	Mfg. No. / Description	Price
235244	(66314R7) Red Side Light Only	$42.98 H
235245	(66314G7) Green Side Light Only	$42.98 H
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Marpac Side Lights - Vertical Mount



- Stainless steel.
- Red and green lens.
- #90 12 volt bulb included.
- Sold per pair.

Order No.	Description	Price
7-0079		$27.98 G
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Marpac Side Lights - Vertical Mount



- Polished stainless steel.
- Red and green lens.
- 112-1/2° visibility.
- Dimensions: 4" L x 2-1/4" W.
- #90 12 volt bulb included.
- Sold per pair.

Order No.	Description	Price
7-0111		$31.98 G
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

White Cap Round Side Lights



- Stainless steel.
- Red and green lens.
- #90 12 volt bulb included.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
2011571	(S-107C)	$24.98 H

Marpac Side Lights - Flush Mount



- Stainless steel.
- Red and green lens.
- 112-1/2° visibility.
- 7-3/4" L x 2-1/4" H.
- #90 12 volt bulb included.
- Sold per pair.

Order No.	Description	Price
7-0095		$46.98 G
7-9034	Spare Red and Green Lens Set	$7.98 G
7-9035	Spare Socket Assembly	$10.98 G
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Boater Sports Side Light - Flush Mount



- Stainless steel tear drop shaped housing.
- 8 candle power bulb.
- 7-3/4" length x 2-1/4".
- Clam pack.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-51236	(51236)	$44.95 H

Marpac L.E.D. Advantage Side Lights - Flush Mount



- LED Advantage of low power use, long life and shock resistant durability.
- Stainless steel housing.
- 112-1/2° visibility.
- Red/Green, sold per pair.
- Certified USCG 2nm, for use on boats under 39.4' (12 meters).
- Dimensions: 7-3/4" L x 2-1/4" H.
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- 12 volt.

Order No.	Description	Price
7-6595	Side Lights	$72.98 G

Marpac Stern Light - Horizontal Mount



- Polished stainless steel.
- Clear lens.
- Diameter 2-3/8".
- #90 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
7-0081		$10.98 F
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Perko Fig. 965 Stern Light - Horizontal Mount



- Chrome plated brass top with black polymer base.
- Clear lens.
- 2 mile visibility.
- For use on sail or power driven vessels under 20 meters in length.
- Vertical height 7/8", base OD 2-3/8".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
544038	(965 DP0 CHR)	$58.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

©2014 Donovan Marine, Inc.

Marpac Stern Light - Vertical Flush Mount



- Polished stainless steel.
- Clear lens.
- 2 mile visibility.
- Diameter 3-1/8", depth 1-3/4".
- Supplied with rubber mounting gasket.
- 12 volt, 15 watt.

Order No.	Description	Price
7-0577		$8.98 G
7-4010	(70 DP1) Spare Bulbs	$6.59 G

Perko Fig. 939 Stern Light - Vertical Flush Mount



- Chrome plated brass top with black plastic base.
- Clear lens.
- 2 mile visibility.
- For use on sail or power driven vessels under 20 meters in length.
- Dimensions: 5-3/16" x 3-3/8". Depth 1-1/2".
- Uses #8 fasteners.
- #70 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
543694	(939 DP1 12V)	$141.98 R
536776	(284 DP0 CLR) Spare Lens Set	$10.98 R
541626	(70 DP0 CLR) Spare Bulbs, 2 Per Pack	$13.98 R

Aqua Signal Series 20 Stern Lights



207079



207092

- Clear all-round light.
- Housing: Rigid polycarbonate black, shock resistant, non-corrosive, non-magnetic, seawater resistant.
- Pole constructed of durable fiberglass.
- Optics: (Fresnel) polycarbonate, shock resistant.
- 2 mile visibility.
- For use on power boats up to 12 meters.
- 12 volt.

Order No.	Mfg. No. / Description	Price
207079	(20040-7) Pedestal, Height 4"	$30.98 F
207080	(20080-7) Pedestal, Height 8"	$31.98 F
207092	(20180-7) Fold Down, Height 18"	$137.98 F

Perko Fig. 1332 Stern Light - Vertical Mount



- Chrome plated zinc alloy top with black polymer base.
- Clear lens.
- 2 mile visibility.
- Certified for replacement use only on sail or power driven vessels under 20 meters in length.
- Length 3-3/4", width 1-1/2".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
534608	(1332 DP0 CHR)	$58.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 946 Stern Light - Vertical Flush Mount



- Chrome plated brass bezel with black plastic base.
- Clear lens.
- 2 mile visibility.
- For use on sail or power driven vessels under 20 meters in length.
- OD 3", depth 1".
- Uses #8 fasteners.
- #70 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
543771	(946 DP1 CHR)	$69.98 R
541626	(70 DP0 CLR) Spare Bulbs, 2 Per Pack	$13.98 R

Attwood Transom Light - Vertical Flush Mount



- 304 stainless steel with a plastic body and watertight lamp socket.
- 2 mile, 135° visibility.
- For power boats and sailing vessels up to 50 meters (164').
- Diameter 3".
- Installation hole size: 2" diameter.
- #90 12 volt bulb included.
- Includes two stainless steel #8 screws.

Order No.	Mfg. No. / Description	Price
235235	(6356D7)	$19.98 H
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Boater Sports Transom Light



- Waterproof construction, with two gaskets.
- One seals light to the hull, the other seals the lens.
- Stainless steel fasteners included.
- Diameter 2-15/16".

Order No.	Mfg. No. / Description	Price
1-51240	(51240) Round, Stainless Steel	$14.15 H

Perko Fig. 945 Stern Light - Vertical Mount



- Chrome plated brass top with black polymer base.
- Clear lens.
- 2 mile visibility.
- For replacement use only on sail or power driven vessels under 20 meters in length.
- Vertical height 7/8", base OD 2-3/8".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
543769	(945 DP0 CHR)	$62.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Aqua Signal Series 22 Stern Lights



- Clear all-round light.
- Housing: Rigid polycarbonate black with aluminum poles.
- Optics: Polycarbonate and stainless steel cap.
- 2 mile visibility.
- For use on power boats up to 12 meters.
- 12 volt.

Order No.	Mfg. No. / Description	Price
207042	(22246-7) Length 24"	$23.98 F
207046	(22420-7) Length 42"	$33.98 F
207048	(22480-7) Length 48"	$34.98 F

Marpac L.E.D. Advantage Transom Lights



- LED Advantage of low power use (only 1.2W), long life and shock resistant durability.
- Marine grade stainless steel housing.
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- Certified USCG 2nm, for use on boats under 65.5' (20 meters).
- Uses two #8 flat/oval head screws (not included).
- 12 volt.

Order No.	Description	Price
7-6561	Rectangular	$40.98 G
7-6577	Round	$37.98 G

Marpac Transom Light - Rectangular



- Polished stainless steel.
- Clear lens.
- Dimensions: 5-1/16" x 3-1/16".
- Uses #10 fasteners.
- 12 volt, 6 C.P. bulb included.

Order No.	Mfg. No. / Description	Price
7-0861		$9.98 G
7-4010	(70 DP1) Spare Bulbs	$6.59 G

Aqua Signal Series 33 L.E.D. Stern Transom Mount



- Black housing.
- Low power consumption (only 0.18 amps).
- Completely sealed and waterproof.
- Certified USCG for 2 mile visibility for vessels up to 65'.
- EMC tested and certified.
- Rated up to 20,000 hours.
- Dimensions: 2-3/4" L x 2" H x 1-3/4" D.

Order No.	Mfg. No. / Description	Price
207435	(33502-7)	$76.98 Q

Aqua Signal Series 34 L.E.D. Masthead Navigation Light - 225° White



- Black housing.
- 12V, 24V.
- 2,1 W.
- Mast-Mount.
- Polycarbonate, seawater resistant, UV protected, non-corrosive, non-magnetic, impact and shock resistant.
- IMO, BSH, GL, CE, Steuerrad Approved.
- Sail/Power Ship size: < 20 < 65 m / ft.
- Invers polarity protection included, bulb included.
- Innovative lens technology for wide visibility requires only one light-emitting diode.
- Dimensions: 4" H x 3.85" W.

Order No.	Mfg. No. / Description	Price
207456	(34400-7)	$217.98 Q

Perko Fig. 1378 L.E.D. Black Masthead Light

Please Note:
This picture is showing a White Masthead Light instead of Black.



- Black polymer.
- Watertight access cap for rebuilding and cleaning.
- For use on vessels over 20 meters in length.
- 120 VAC.
- Height overall: 7-1/2".
- Height lens: 4-1/2".
- Screw size: #1/4".
- Visibility arc: 225°.
- Visibility miles: 5.

Order No.	Mfg. No. / Description	Price
526164	(1378 000 BLK)	$1,174.98 I

Attwood Masthead Light with Cam-Lock Adjustable Base



- 3 mile, 360° visibility.
- For use on boats up to 12 meters.
- Cam-lock base installs with two #10 fasteners (not included).
- Big cam-lock handle is easy to grasp.
- Once locked, stays locked in normal conditions.
- Comes with both horizontal and vertical mounts.
- Each light includes 9-watt wedge base lamp.
- 12 volt.

Order No.	Mfg. No. / Description	Price
235510	(7202-7) Length 20"	$62.98 R

Aqua Signal Series 34 L.E.D. A/R Navigation Light - 360° White



- Black housing.
- 12V, 24V.
- 1,0 W.
- Mast-mount.
- Polycarbonate, seawater resistant, UV protected, non-corrosive, non-magnetic, impact and shock resistant.
- IMO, BSH, GL, CE, Steuerrad Approved.
- Sail/Power Ship size: < 20 < 65 m / ft.
- Invers polarity protection included, bulb included.
- Innovative lens technology for wide visibility requires only one light-emitting diode.
- Dimensions: 2.3" H x 3" W.

Order No.	Mfg. No. / Description	Price
207449	(34000-7)	$159.98 Q

Aqua Signal Series 34 Masthead/Anchor Nav Light - 225°; 360° White



- Black housing.
- 12V, 24V.
- 2,1 W (Masthead) 1,0 W (Anchor).
- Mast-Mount.
- Polycarbonate, seawater resistant, UV protected, non-corrosive, non-magnetic, impact and shock resistant.
- IMO, BSH, GL, CE, Steuerrad Approved.
- Sail/Power Ship size: < 20 < 65 m / ft.
- Invers polarity protection included, bulb included.
- Innovative lens technology for wide visibility requires only one light-emitting diode.
- Dimensions: 6" H x 3.85" W.

Order No.	Mfg. No. / Description	Price
207463	(34410-7)	$376.98 Q

Perko Fig. 964 Masthead Light - Horizontal Mount



- Chrome plated brass top with black plastic base.
- 2 mile visibility.
- Certified for replacement use only on sail or power driven vessels under 12 meters in length.
- Base OD 2-3/8", height 7/8".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
544014	(964 DP0 CHR)	$60.98 Q
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 1331 Masthead Light - Vertical Mount



- Chrome plated zinc alloy top with black plastic base.
- 3 mile visibility.
- For use on sail or power driven vessels under 20 meters in length.
- Length 3-1/4", width 1-1/2".
- Uses #4 fasteners.
- #71 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
534619	(1331 DP0 CHR)	$58.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

©2014 Donovan Marine, Inc.

Perko Fig. 455 Combination Masthead Lights



- Black plastic base with clear fresnel globe.
- Fixed mount.
- 3/4" diameter tube.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Base OD 2-1/8".
- Uses #8 fasteners.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
538631	(455 DP1 CHR) Height 4-1/2"	$55.98 R
538643	(455 DP2 CHR) Height 11-7/8"	$66.98 R
536031	(248 DP0 CLR) Spare Globe	$13.98 R

Combination Masthead and White All-Round Lights



- Black plastic top with black plastic base.
- Reduced glare design.
- Fixed mount.
- 3/4" diameter anodized aluminum tube.
- 2 mile visibility.
- For use on power driven vessels under 12 meters in length.
- Base dimensions: 1" x 2-5/8".
- Uses #8 fasteners.
- (2) 12 volt bulbs included.

Order No.	Mfg. No. / Description	Price
532983	(1283 DP0 BLK) Height 2-1/4"	$44.98 R
533188	(1236 DP1 BLK) Height 4-1/4"	$46.98 R
533202	(1236 DP2 BLK) Height 10-1/2"	$53.98 R

Marpac All-Round Light



- For use on power boats under 65.6'.
- Includes: A heavy duty plug-in base.
- Length 24".
- 12 volt, 10 watts.
- Meets USCG A-16 requirements.

Order No.	Description	Price
7-0050	Light with Base	$32.98 F
7-0051	Replacement Pole	$25.98 F

Perko Fig. 1281 Combination Masthead Light



- Black plastic top with black plastic base.
- Fold-down, adjustable angle.
- 3/4" diameter anodized aluminum tube.
- Reduced glare design.
- Clear plastic lens.
- Plastic adapters for flat or "V" type mount, contains notch for through-base wiring.
- 2 mile visibility.
- For use on power driven vessels under 12 meters in length.
- Height 12-3/16", base dimensions: 2" x 1-1/2".
- Uses #8 fasteners.
- (2) #71 12 volt bulbs included.

Order No.	Mfg. No. / Description	Price
532967	(1281 DP0 CHR)	$58.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R
531640	(1052 DPA CHR) Spare Old Style Zinc Bracket	$25.98 R

Perko Fig. 1634 Fold-Down All-Round Light



- "Reduced Glare" design.
- Black polymer top with clear fluted lens and frosted globe.
- Black polymer base.
- Fold-down, adjustable angle.
- Height: 13-3/8".
- 3/4" diameter anodized aluminum tube.
- Uses #8 fasteners.
- 12 volt bulb included.
- Polymer adapter available for flat or "V" type mounts, contains notch for through-base wiring.

Order No.	Mfg. No. / Description	Price
5315105	(1634 DP0 CHR) Base 2" x 1-1/2"	$39.98 H
5315106	(1637 DP0 CHR) Base 2-1/4" x 5/8"	$39.98 H

Marpac All-Round Light



- Polished stainless steel.
- Clear lens.
- Diameter 2-3/8".
- #90 12 volt bulbs included.

Order No.	Description	Price
7-0101		$11.98 G
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Perko Fig. 1284 Combination Masthead Light



- Black plastic top with clear plastic lens.
- Black plastic base.
- Reduced glare design.
- Vertical mount.
- Fold-down, adjustable angle.
- 3/4" diameter anodized aluminum tube.
- Plastic adapters for flat or "V" type mount, contains notch for through-base wiring.
- 2 mile visibility.
- For use on power driven vessels under 12 meters in length.
- Height 12-3/16".
- Base dimensions: 2-1/4" x 5/8".
- Uses #8 fasteners.
- (2) #71 12 volt bulbs included.

Order No.	Mfg. No. / Description	Price
532995	(1284 DP0 CHR)	$61.98 R
541739	(71 DP0 CLR) Spare Bulbs, 2 Per Pack	$11.98 R

Perko Fig. 1345 L.E.D. White All-Round Light



- White plastic top with clear fluted lens and frosted globe.
- Fixed mount white plastic base.
- Reduce glare design.
- Height 7-1/8".
- Base dimensions: 1" x 2-5/8".
- Uses #8 fasteners.
- 3/4" diameter anodized aluminum tube.
- 12 volt.

Order No.	Mfg. No. / Description	Price
544507	(1345 DP1 WHT) White	$128.98 R

Perko Fig. 1604 Fixed Mount All-Round Light



- "Reduced Glare" design.
- Black polymer top with clear fluted lens and frosted globe.
- Fixed mount black polymer base.
- Base dimensions: 1" x 2-5/8".
- 3/4" diameter anodized aluminum tube.
- Uses #8 fasteners.
- 12 volt bulb included.
- Height 7-1/8"

Order No.	Mfg. No. / Description	Price
5315098	(1604 DP0 CHR)	$19.9.8 H

Perko Delta Series - Universal Repl. All-Round Lights



- Package includes: (2) Globes (reduced glare and ful output) and (2) Collars (threaded and locking).
- Wide 40° adjustability head.
- 2 screw positions for multiple base applications.
- 3/4" diameter anodized tube.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- 12 volt bulb.

Order No.	Mfg. No. / Description	Price
534758	(1470 DP5 CHR) Pole Length 42"	$48.98 R
5315093	(1470 DP6 CHR) Pole Length 48"	$52.98 H
5315094	(1470 DP7 CHR) Pole Length 54"	$54.98 H
534772	(1470 DP8 CHR) Pole Length 60"	$60.98 R

Perko Stealth Series - L.E.D. White All-Round Lights



- The "Reduced Glare" light, this design helps preserve night vision.
- Stow-a-way plug-in pole.
- Clear fluted globe.
- Black polymer top and collars.
- Contemporary styling.
- Pole rake: 0°.
- 12 volt.
- 3/4" diameter anodized aluminum tube.
- Locking collar.
- Fits bases: 1045 and 1047 (2 pin).
- For use on vessels under 20 meters in length.

Order No.	Mfg. No. / Description	Price
5315085	(1442 002 CHR) Length 24"	$88.98 R
5315086	(1442 003 CHR) Length 30"	$90.98 R
5315087	(1442 006 CHR) Length 48"	$97.98 R

Boater Sports Fold Down Anchor/Stern Light



- All-around folding dual mount anchor/stern light.
- Adjusts to any angle with thumb screw.
- Anodized tube non-corrosive and water tight.
- Provides 2 mile 360° visibility.
- Includes angled windshield base.

Order No.	Mfg. No. / Description	Price
1-51264	(51264) Length 10-3/4"	$25.40 H

Perko Inland Series - White All-Round Lights



- The "Reduced Glare" light, this design helps preserve night vision.
- Stow-a-way plug-in pole.
- Clear fluted globe.
- Black polymer top and collars.
- Contemporary styling.
- Pole rake: 5°.
- 3/4" diameter anodized aluminum tube.
- Locking collar.
- Fits bases: 1046 and 1060 (2 pin).
- 12 volt.
- For use on vessels under 20 meters in length.

Order No.	Mfg. No. / Description	Price
5315088	(1445 DP2 CHR) Length 24"	$28.98 H
5315089	(1445 DP4 CHR) Length 36"	$33.98 H
5315090	(1445 DP6 CHR) Length 48"	$41.98 H

Marpac L.E.D. Advantage Fixed All-Round Lights



7-6550



7-6552

- LED Advantage of low power use (only 1W), long life and shock resistant durability.
- Tough marine grade aluminum for base and pole.
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- Certified USCG 2nm, for use on boats under 39.4' (12 meters).
- Excellent for use on pontoon boats, hard tops and radar arches.
- Uses two #8 flat/oval head screws (not included).
- 12 volt.

Order No.	Description	Price
7-6550	Length 4"	$44.98 G
7-6552	Length 7"	$47.98 G

Boater Sports All-Round Folding Anchor/Stern Light



- All-around folding anchor/stern light.
- Adjusts to any angle with thumb screw.
- Anodized tube non-corrosive and water tight.
- Provides 2 mile 360° visibility.

Order No.	Mfg. No. / Description	Price
1-51260	(51260) Length 10-1/2"	$32.85 H

Perko Alpha Series - Universal Repl. All-Round Light



- Traditional frosted globe allows for all round visibility even when globe orientation is not horizontally aligned.
- In addition, this design also provides limited cockpit illumination.
- Replacement stow-a-way plug-in type.
- Black polymer top with white translucent globe.
- Selective use of 2 screws holes and/or collar allow for use in multiple applications.
- Pole rake: 0°.
- 3/4" diameter anodized aluminum tube.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
5315078	(1400 DP2 CHR) Height 24"	$36.98 H

Attwood L.E.D. Straight Pole All-Round Light



- Proprietary optics design draws only 1.8 watts at 12V DC - the lowest power draw of any 2 mile All-Round light on the market today.
- Lights are rated for 50,000+ hours of use.
- 2 mile, 360° visibility.
- For use on boats up to 12 meters (39.4').
- Articulating head.
- 2-pin locking collar pole.

Order No.	Mfg. No. / Description	Price
235691	(5530-42-7) Length 42"	$61.98 H

Perko Fold-Down White All-Round Lights



- Black plastic base with white translucent globe.
- Fold-down, adjustable angle.
- 3/4" anodized aluminum tube.
- Plastic adapter available for flat or "V" type mounts, contains notch for through-base wiring.
- 2 mile visibility.
- Length 14".
- For use on sail or power driven vessels under 20 meters in length.
- Uses #8 fasteners.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
532223	(1134 DP0 CHR) Horizontal Mount Base 2" x 1-1/2"	$42.98 R
532247	(1137 DP0 CHR) Vertical Mount Base 2-1/4" x 5/8"	$40.98 R
531640	(1052 DPA CHR) Spare Bracket for 532223	$25.98 R
535611	(201 DP0 WHT) Spare Globe	$12.98 R

©2014 Donovan Marine, Inc.

Attwood Telescoping All-Round Light



- A die cast zamak base with locking knob that allows pole to be lowered to the gunwale when not in use.
- 3/4" diameter pole is constructed of anodized aluminum.
- 2 mile, 360° visibility.
- For use on boats up to 12 meters (39.4').
- Base dimensions: 1" W x 4-1/2" D.
- Includes: (1) #1004 12 volt bulb.
- Angled zamak base.

Order No.	Mfg. No. / Description	Price
235209	(7101A7) Length 24"	$47.98 H
235805	(91017B7) Spare Globe	$5.98 R
219534	(1004) Spare Bulbs, 10 Per Pack	$0.98 I


Boater Sports All-Round Stern Lights



- 2-pin standard stowaway plug-in pole with frosted globe and lens.
- 360° 2 mile visibility.
- Standardized pole.

Order No.	Mfg. No. / Description	Price
1-51251	(51251) Length 24"	$17.20 H
1-51253	(51253) Length 36"	$20.75 H
1-51255	(51255) Length 48"	$22.89 H

Perko Fig. 1209 Stow-a-way Plug-in All-Round Light



- Chrome plated brass top and base.
- Clear fresnel globe.
- Waterproof cap and retainer.
- Screw on plastic collar.
- 3/4" anodized aluminum tube.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Pole has 16° rake.
- Height 28-1/2".
- Base length 3-3/8", base width 2-1/4".
- Uses #8 fasteners.
- #90 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
533302	(1209 DP3 CHR)	$108.98 R
536031	(248 DP0 CLR) Spare Globe	$13.98 R
219469	(90) Spare Bulbs, 10 Per Pack	$2.98 I

Attwood Straight Pole All-Round Lights



- The new frosted globe lights use a standardized lamp.
- The new lens has a clean, translucent look.
- 2-pin locking collar pole.
- 2 mile, 360° visibility.

Order No.	Mfg. No. / Description	Price
235324	(5110-24-7) Length 24"	$21.98 H
235336	(5110-30-7) Length 30"	$26.98 H
235337	(5110-36-7) Length 36"	$29.98 H
235348	(5110-42-7) Length 42"	$30.98 H
235350	(5110-48-7) Length 48"	$31.98 H
235259	(911339-7) Angled Spare Zamak Base	$21.98 H
235172	(91024-7) Spare Black Base	$22.98 Q
235805	(91017B7) Spare Globe	$5.98 R
2350162	(9235-7) Spare Bulb	$4.95 H

Attwood Telescoping Pole Light



- Stores easily in less space than conventional stern light and can be removed quickly from the any Attwood pole light base.
- Aluminum pole telescopes from 26" to 42".
- Provides 2-mile 360 illumination for boats up to 65.6 ft. (20m)
- Includes 12-watt lamp.

Order No.	Mfg. No. / Description	Price
235186	(5610-48-7)	$33.98 H

Marpac Stow-a-way All-Round Light





- Chrome plated finish.
- Clear fresnel globe.
- Locking collar on pole.
- 16° rake.
- Base has water proof snap-on cover.
- For use on power boats under 65.6'.
- 2 mile visibility.
- Limited cockpit illumination.
- 12 volt, 6 C.P. bulb included.
- 5 year warranty.
- Made in the USA.

Order No.	Description	Price
7-0377	Light with Base	$60.98 F
7-0373	Replacement Pole	$30.98 F
7-0374	Replacement Base	$27.98 G
7-3936	(90) Spare Bulbs, 2 Per Pack	$2.69 G

Marpac L.E.D. Advantage Telescoping All-Round Light



- LED Advantage of low power use (only 1.7 watts on 12 volt systems or only 3.4 watts for 24 volt systems), long life and shock resistant durability.
- 24 - 48" telescopic white light is visible 360°.
- Tough marine grade aluminum for base and pole.
- Adjustable head allows for correct alignment independent from the base.
- Meets the stringent requirements for USCG, ABYC A-16, and IMO COLREG.
- Certified USCG 2nm, for use on boats under 39.4' (12 meters).
- Uses two #8 flat/oval head screws (not included).

Order No.	Description	Price
7-6553	Length 24" - 48"	$51.98 G

Boater Sports Adjustable Telescopic Stern Light



- 360° All-Round navigation light.
- Frosted globe, 2 pin standard plug.
- Anodized tube is non-corrosive and water tight.
- 2 mile, 360° visibility.

Order No.	Mfg. No. / Description	Price
1-51243	(51243) Length 26" - 42"	$33.35 G

Attwood Stow-a-way All-Round Lights



- Convenient all-round light can be removed from base for storage.
- Swivel cover on base protects the socket when light is stowed away.
- Frosted globe.
- 3/4" diameter pole is constructed of anodized aluminum.
- 2 mile, 360° visibility.
- For use on boats up to 12 meters.
- Base dimensions: 4" long x 1-5/8" wide x 1-3/8" diameter.
- Includes: angled Zamak base and (1) 8-watt wedge-base lamp.

Order No.	Mfg. No. / Description	Price
235223	(7100A7) Length 24"	$41.98 H
235475	(7100B7) Length 30"	$46.98 R
235487	(7100C7) Length 36"	$46.98 Q
235259	(911339-7) Angled Spare Zamak Base	$21.98 H
235805	(91017B7) Spare Globe	$5.98 R
S/O	(9235-7) Spare Bulb	

Perko Fig. 1440 Repl. Stow-a-way Plug-in Lights



- Reduced glare design.
- Clear fluted globe.
- Black plastic top.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- 3/4" anodized aluminum tube with locking collar.
- 12 volt bulb included.
- Fits Perko Style vertical bases.
- Note: Bases not included.

Order No.	Mfg. No. / Description	Price
534705	(1440 DP2 CHR) Length 24"	$30.98 R
534707	(1440 DP4 CHR) Length 36"	$32.98 R
534708	(1440 DP5 CHR) Length 42"	$36.98 R
5315084	(1440 DP6 CHR) Length 48"	$39.98 H
534710	(1440 DP7 CHR) Length 54"	$44.98 R
535306	(238 DP0 BLK) Spare Globe	$10.98 R

Attwood Anti-Glare Lens All-Round Pole Lights



- They focus light at the horizon and above, not in the pilot's eyes.
- The bottom aperture reduces glare at 7.5° below horizontal.
- Above horizontal, the continuous arc of light makes the boat more visible to taller craft.
- The 2-NM locking collar poles offer "Universal Fit" because customers can use them with a wide variety of Attwood 2-pin straight or angled bases.

Order No.	Mfg. No. / Description	Price
2350205	(5320-42-1) Length 42"	$24.98 H
2350206	(5320-48-1) Length 48"	$25.98 H
2350207	(5320-54-1) Length 54"	$25.98 H

Attwood Anti-Glare Lens All-Round Light



- Fold-down white all-round light.
- Plastic cam-lock base.
- Anti-glare head.
- Big cam-lock handle is easy to grasp.
- Materials are non-corrosive, including bases of glass-filled polymer and poles of sturdy black plastic.
- With vertical and horizontal mounts.
- 2 mile, 360° visibility.
- For use on boats up to 12 meters (39.4').

Order No.	Mfg. No. / Description	Price
235326	(5358-12-7) Length 12"	$35.98 H
235806	(912852-7) Spare Globe	$3.98 G
S/O	(9235-7) Spare Bulb	

Attwood All-Round Fold-Down Lights



- Fold-down bases allow light to swing 180°.
- Big cam-lock, handle is easy to grasp.
- Materials are non-corrosive.
- Bases are glass-filled polymer and poles are highly anodized aluminum.
- Length 12".
- 2 mile, 360° visibility.
- For use on boats up to 12 meters (39.4').

Order No.	Mfg. No. / Description	Price
2350203	(5121-12-1) Vertical Mount	$29.98 H
235474	(5123-12-7) Vertical and Horizontal Mounts	$41.98 R
235805	(91017B7) Spare Globe	$5.98 R
S/O	(9235-7) Spare Bulb	

Attwood Articulating Anti-Glare All-Round Folding Light



- Has all the features of the patented Articulating Anti-Glare light plus one great advantage - the removable pole folds in half for easy stowage.
- The mid-point hinge is corrosion resistant, glass-filled black plastic with a durable hinge pin.
- Wiring is sheathed at the hinge for trouble-free operation.
- 2-pin locking collar pole.
- 2 mile, 360° visibility.

Order No.	Mfg. No. / Description	Price
235184	(5340-54-7) Length 54"	$59.98 H
235806	(912852-7) Spare Globe	$3.98 G
2350162	(9235-7) Spare Bulb	$4.95 H

Perko Fig. 120 All-Round Light



- Black plastic top with white translucent globe.
- Black plastic base.
- Fixed mount.
- 2 miles visibility.
- For use on sail or power driven vessels under 20 meters in length.
- Vertical height 3-7/8", base 1" x 2-5/8".
- Uses #8 fasteners.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
533274	(120 SWB DP1)	$26.98 R
535611	(201 DP0 WHT) Spare Globe	$12.98 R

Attwood Fixed Base All-Round Pole Light



- Fixed base all-round light.
- Globe style.
- Base dimensions are 2-1/2" long x 1" wide.
- 2 mile, 360° visibility.
- For use on boats up to 12 meters (39.4').

Order No.	Mfg. No. / Description	Price
235502	(5122-08-7) Length 8"	$24.98 R
235805	(91017B7) Spare Globe	$5.98 R
S/O	(9235-7) Spare Bulb	

Attwood Articulating Anti-Glare All-Round Lights



- They focus light at the horizon and above, not in the pilot's eyes.
- The bottom aperture reduces glare at 7.5° below horizontal.
- Above horizontal, the continuous arc of light makes the boat more visible to taller craft.
- The patented Articulating Head adjusts from 15° forward to 15° aft.
- 2-pin locking collar pole.
- 2 mile, 360° visibility.

Order No.	Mfg. No. / Description	Price
235415	(5330-42-7) Length 42"	$38.98 H
235417	(5330-48-7) Length 48"	$39.98 R
235172	(91024-7) Spare Black Base	$22.98 Q
235806	(912852-7) Spare Globe	$3.98 G
2350162	(9235-7) Spare Bulb	$4.95 H

Boater Sports Pole Light Storage Clips



- Resilient plastic clip holds standard 3/4" diameter poles.
- Ideal for storing and protecting plug-in pole lights.
- Dimensions: 2" L x 1" H.

Order No.	Mfg. No. / Description	Price
1-54096	(54096)	$6.25 H

Boater Sports Fixed Base All-Round Pole Light



- Great for pontoon boats.
- Anodized aluminum pole and sturdy plastic base for corrosion resistance.
- 2 mile all-round light for power boats under 39.4'.
- Frosted, screw-on globe.

Order No.	Mfg. No. / Description	Price
1-51261	(51261)	$15.85 H
1-51258	(51258) Replacement Globe	$2.95 H

©2014 Donovan Marine, Inc.

Perko Fig. 362 White All-Round Lights



- Cast bronze.
- Frosted globe.
- Double contact socket.
- Base is tapped for 1/2" pipe.
- 2 mile visibility.
- For use on sail or power driven vessels under 20 meters in length.
- Height 1-1/2".
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
537879	(362 DP0 CHR) Chrome Plated	$160.98 R
537881	(362 DP0 PLB) Plain	$136.98 R
536031	(248 DP0 CLR) Spare Globe	$13.98 R
535976	(24 DP1) Spare Socket	$8.98 R

Perko White All-Round Lights


527880


527854

- Cast bronze.
- Medium screw base type electrical socket.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Uses #8 fasteners.
- Overall height 8-3/4", base OD 3-1/8".
- Requires 15W frosted medium screw bulb.
- Bulb not included.

Order No.	Mfg. No. / Description	Price
527854	(112 B00 PLB) White	$315.98 I

- Base is tapped for 1/2" pipe.
- Overall height 6-1/2".
- Requires frosted medium screw bulb.
- Bulbs not included.

Order No.	Mfg. No. / Description	Price
527880	(309 B00 PLB) White, Requires 15W Bulb	$225.98 I
527892	(309 RB0 PLB) Red, Requires 25W Bulb	$225.98 I
527905	(309 GB0 PLB) Green, Requires 25W Bulb	$225.98 I

- Spare medium screw base socket.

Order No.	Mfg. No. / Description	Price
529620	(226)	$17.98 I

Perko Replacement Base - Horizontal Mount



- Chrome plated zinc alloy.
- Does not contain notch for through base wiring.
- Horizontal mount.
- Fits Perko Figs. 1134 and 1634.

Order No.	Mfg. No. / Description	Price
531645	(1052 DP0 CHR) 2" x 1.5"	$26.98 R

Perko Fig. 371 White All-Round Light



- Cast bronze.
- Frosted globe.
- Double contact socket.
- 2 mile visibility.
- For use on sail or power driven vessels under 20 meters in length.
- Height 1-1/2", base OD 2-1/2".
- Uses #8 fasteners.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
537932	(371 DP0 PLB) Plain	$121.98 R
536031	(248 DP0 CLR) Spare Globe	$13.98 R
535976	(24 DP1) Spare Socket	$8.98 R

Perko Fig. 108 All-Round Lights



- Black plastic with festoon type electrical socket.
- Base is tapped for 1/2" pipe or can be removed for surface mounting with #10 fasteners.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Overall height 6", base OD 3-1/8".
- For 12 or 32 volt systems.
- Bulbs not included.
- *Note: White light has grey tinted lens.

Order No.	Mfg. No. / Description	Price
527828	(108 000 BLK) White*	$107.98 I
527830	(108 G00 BLK) Green	$107.98 I
527842	(108 R00 BLK) Red	$107.98 I
541638	(70 DP1 CLR) Bulbs, 12 Volt, 2 Per Pack	$14.98 R
541640	(70 DP2 CLR) Bulbs, 32 Volt, 2 Per Pack	$14.98 R

Perko Plug-In Type Bases


536500


536485

- Chrome plated zinc alloy and black plastic insert.
- Waterproof snap-on cover.
- Locking collar.
- Number of contacts: 2.
- Uses #8 fasteners.
- For Perko Fig. 1470 Delta Series All-Round Lights.
- Base dimensions: 3-3/4" x 1-5/8".

Order No.	Mfg. No. / Description	Price
536485	(1059 P00 DP) Tube Angle: 16°	$27.98 R

- Base dimensions: 3-3/4" x 1-3/4".

Order No.	Mfg. No. / Description	Price
536500	(1060 PB0 DP) Tube Angle: 5°	$31.98 R

Perko Fig. 309 All-Round Lights



- Plain cast bronze anchor or signal light.
- For use on vessels 20 meters to 50 meters in length.
- Base is tapped for 1/2" pipe.
- 2 mile visibility.
- Overall height 6-1/2".
- Complete with double contact electrical socket.
- Bulbs not included.

Order No.	Mfg. No. / Description	Price
524822	(309 A00 PLB) White	$243.98 I
524834	(309 RA0 PLB) Red	$243.98 I

Spare Bulbs

528387	(374 001 CLR) 12 volt, 30 watt	$50.98 I
528399	(374 002 CLR) 24 volt, 30 watt	$50.98 I
528402	(374 003 CLR) 32 volt, 30 watt	$50.98 I
528414	(374 004 CLR) 120 volt, 30 watt	$58.98 I

Perko Fig. 248 Spare Globe



- Fits most small Perko All-Round Lights and other lights with screw-on globes.
- Dimensions: 2" OD.
- 1-11/16" ID.
- Height 2-1/2".

Order No.	Mfg. No. / Description	Price
536031	(248 DP0 CLR) Clear	$13.98 R

Perko Fig. 106 Spare Globes



- Spare globes for Perko Figs. 108, 112 and 309 All-Round Lights.

Order No.	Mfg. No. / Description	Price
529000	(106 000 WHT) White	$61.98 E
529012	(106 000 GRN) Green	$61.98 E
529024	(106 000 YLW) Yellow	$61.98 E
529036	(106 000 RED) Red	$61.98 E

Marpac Plug-In Bases


7-0053

7-0052

- Fits most plug-in style poles.
- Includes: Positive locking cover and 8" leads.

Order No.	Description	Price
7-0052		$15.98 G
7-0053	Stainless Steel	$32.98 F

Perko Plug-In Type Bases



- Chrome plated brass and black plastic.
- Number of contacts: 2.
- Uses #8 fasteners.
- For Perko Fig. 1470 Delta Series All-Round Lights.
- Water resistant slide cover.
- Locking collar.
- Base dimensions: 3-1/2" x 1-1/2".

Order No.	Mfg. No. / Description	Price
536409	(1046 P00 DP) Tube Angle: 5°	$42.98 R
536411	(1047 P00 DP) Tube Angle: 0°	$36.98 R

- Waterproof snap-on cover.
- Threaded collar.
- Base dimensions: 3-1/2" x 2".

Order No.	Mfg. No. / Description	Price
536435	(1048 P00 DP) Tube Angle: 5°	$34.98 R

Boater Sports Plug-In Light Base



- Chrome plated zamak stern light base with swivel cover.
- 2-pin contact socket for standard and angled poles is keyed to prevent incorrect insertion.
- Direct replacement for Attwood and other competitive brands.

Order No.	Mfg. No. / Description	Price
1-51273	(51273)	$14.95 H

Accon Pop-Up® Lights



- Keeps deck free of protruding lights.
- Made of marine grade 316 stainless steel.
- Folds down flush when not in use.
- USCG approved 1 nautical mile.
- Each light is shipped with a backing plate which also serves as a cut-out template.
- Fastens with three #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(204-M) Bow Light	Call for Price
Special Order	(205-M) Port Light	Call for Price
Special Order	(206-M) Starboard Light	Call for Price
Special Order	(207-M) Side Light	Call for Price
Special Order	(204-M-C) Waterproofing Cup for 204-M	Call for Price
Special Order	(204-RGL) Replacement. Lens for 204-M	Call for Price
Special Order	(204-B) Replacement Bulb	Call for Price
Special Order	(204-SOCKET) Replacement Socket	Call for Price
Special Order	(204-RK) Repair Kit	Call for Price

Perko Plug-In Type Bases



- Chrome plated brass and black polymer insert.
- Locking collar is included to allow interchangeability with discontinued style bases.
- Number of contacts: 3.
- For Perko bow light 533315 (1211 DP2 CHR).

Order No.	Description	Price
536396	(1045 300 DP) Waterproof Snap-On Cover	$34.98 R
536423	(1047 3B0 DP) Water Resistant Slide Cover	$42.98 R

Perko Plug-In Type Base



- Chrome plated zinc alloy and black polymer insert.
- Locking collar is included to allow interchangeability with discontinued style bases.
- Number of contacts: 3.
- Waterproof snap-on cover.
- For Perko bow light 535294 (1212 DP2 CHR).

Order No.	Description	Price
536512	(1060 3B0 DP)	$34.98 R

Boater Sports Plug-In Light Base



- Keeps clean and dry when not in use with tethered cover.
- Fits standard stowable lights.
- Corrosion free high-impact black nylon.
- Direct replacement to Attwood and other competitive bases.

Order No.	Mfg. No. / Description	Price
1-51274	(51274)	$9.15 H

Accon Pop-Up® L.E.D. Lights



- Keeps deck free of protruding lights.
- Made of marine grade 316 stainless steel.
- Folds down flush when not in use.
- USCG approved 2 nautical mile.
- Fastens with three #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(210-M) Bow Light	Call for Price
Special Order	(210-M-S) Bow Light, Stud Mount	Call for Price
Special Order	(210-M-C) Waterproofing Cup for 210-M	Call for Price
Special Order	(211-M) Bow Light, 204 Style	Call for Price
Special Order	(211-M-C) Waterproofing Cup for 211-M	Call for Price

©2014 Donovan Marine, Inc.

Perko Fig. 170 Navigation Lights



- Black plastic with soft black vinyl mounting gasket.
- For use on sail or power driven vessels under 20 meters in length.
- Overall height 3-5/8", width 4-1/8".
- Overall projection 4-3/4".
- Uses #10 fasteners.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
533270	(170 BSD DP1) Green Side, 2 Mile, 112-1/2° Visibility	$36.98 R
533271	(170 BP0 DP1) Red Side, 2 Mile, 112-1/2° Visibility	$36.98 R
533269	(170 BM0 DP1) White Masthead , 2 Mile, 225° Visibility	$36.98 R
533272	(170 BSN DP1) White Stern, 3 Mile, 135° Visibility	$36.98 R

- Spare 12 volt bulb for: 533272 (170 BSN DP1).

Order No.	Mfg. No. / Description	Price
541530	(69 DP0 CLR) 2 Per Pack	$15.98 R

- Spare 12 volt bulb for: 533270 (170 BSD DP1), 533271 (170 BP0 DP1) and 533269 (170 BM0 DP1).

Order No.	Mfg. No. / Description	Price
541638	2 Per Pack (70 DP1 CLR)	$14.98 R

Aqua Signal Series 41 Navigation Lights



- Housing: Rigid polycarbonate black, shock resistant, non-corrosive, non- magnetic, seawater resistant.
- Optics: Rigid acrylic fresnel lens, shock resistant, seawater resistant.
- Overall height 4.1". Lens height 2.6".
- For use on sail or power driven vessels under 20 meters.
- 12 volt.

Order No.	Mfg. No. / Description	Price
207250	(41100-7) Bicolor, Green/Red Lens, 2 Mile Visibility	$88.98 F
207261	(41200-7) Starboard, Green Lens, 2 Mile Visibility	$72.98 F
207267	(41300-7) Port, Red Lens, 2 Mile Visibility	$72.98 F
207274	(41400-7) Masthead, White Lens, 3 Mile Visibility	$88.98 F
207286	(41500-7) Stern, White Lens, 2 Mile Visibility	$73.98 F

Perko Figs. 109, 110 and 111 Navigation Lights



- Black plastic.
- For use on sail or power driven vessels under 20 meters in length.
- Overall height 5-1/4".
- Lens height 4-1/4".
- Uses #10 fasteners.
- For 12 or 32 volt bulbs. Bulbs not included.

Order No.	Mfg. No. / Description	Price
527690	(109 R00 BLK) Red Side, 2 Mile, 112-1/2° Visibility	$117.98 I
527703	(109 G00 BLK) Green Side, 2 Mile, 112-1/2° Visibility	$117.98 I
527715	(110 000 BLK) White Masthead , 3 Mile, 225° Visibility	$117.98 I
527727	(111 000 BLK) White Stern, 2 Mile, 135° Visibility	$117.98 I
527739	(111 M00 BLK) Yellow Towing, 2 Mile, 135° Visibility	$117.98 I

- Spare bulbs.

Order No.	Mfg. No. / Description	Price
541638	(70 DP1 CLR) 12 volt, 2 Per Pack	$14.98 R
541640	(70 DP2 CLR) 32 volt, 2 Per Pack	$14.98 R

Perko Figs. 1127, 1128, 1129 and 1130 Navigation Lights



- Black plastic.
- For use on vessels 20 meters to 50 meters in length.
- Complete with pre-wired double contact socket and 3' of 16/3-SO cable.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 7-1/2". Lens height 4-1/2".
- Uses 1/4 fasteners.
- Use Perko Fig. 374 bulbs. Bulbs not included.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
525901	(1127 GA0 BLK) Green Side, 2 Mile, 112-1/2° Visibility	$242.98 I
525913	(1127 RA0 BLK) Red Side, 2 Mile, 112-1/2° Visibility	$242.98 I
525937	(1128 A00 BLK) White Masthead , 5 Mile, 225° Visibility	$242.98 I
525951	(1129 A00 BLK) White Stern*, 2 Mile, 135° Visibility	$242.98 I
525963	(1129 MA0 BLK) Yellow Towing, 2 Mile, 135° Visibility	$242.98 I
525987	(1130 A00 BLK) White All-Round*, 2 Mile, 360° Visibility	$242.98 I
525999	(1130 GA0 BLK) Green All-Round, 2 Mile, 360° Visibility	$242.98 I
526105	(1130 RA0 BLK) Red All-Round, 2 Mile, 360° Visibility	$242.98 I

Perko Fig. 200 Navigation Lights



535840



535646

- Black plastic.
- For use on sail or power driven vessels under 20 meters in length.
- Base mount with #10 fasteners or use 535840 (222 DP BLK) pipe mounting bracket.
- Overall height 4-7/8".
- Base OD 3-5/16".
- Lens height 2-3/4".
- Use Perko Fig. 375 12 volt bulb of proper wattage.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
535640	(200 SDB DP1) Green Side, 2 Mile, 112-1/2° Visibility	$121.98 Q
535641	(200 PB0 DP1) Red Side, 2 Mile, 112-1/2° Visibility	$121.98 Q
535645	(200 MB0 DP1) White Masthead , 3 Mile, 225° Visibility	$121.98 Q
535646	(200 SNB DP1) White Stern, 2 Mile, 135° Visibility	$121.98 Q
535652	(200 SWB DP1) White All-Round, 2 Mile, 360° Visibility	$121.98 Q

- Spare 12 volt bulb for: 535646 (200 SNB DP1) & 535652 (200 SWB DP1).

Order No.	Mfg. No. / Description	Price
528503	(375 12V 10W) 10 Watt	$52.98 I

- Spare 12 volt bulb for: 535640 (200 SDB DP1), 535641 (200 PB0 DP1) and 535645 (200 MB0 DP1).

Order No.	Mfg. No. / Description	Price
528515	(375 12V 25W) 25 Watt	$57.98 I

- Pipe mounting bracket for use on all 200 Series Base Mount Navigation Lights in order to mount on 1/2" pipe.
- Black plastic.
- Complete with screws and soft black mounting gasket for mounting bracket to light.
- Overall OD 3-5/16".

Order No.	Mfg. No. / Description	Price
535840	(222 DP0 BLK)	$17.98 R

Perko Spare Lens and Accessories

- Fits 1127 Series

Order No.	Mfg. No. / Description	Price
535419	(249 000 RED) Spare Red Lens	$144.98 F
535421	(249 000 GRN) Spare Green Lens	$144.98 F
535433	(249 000 GRY) Spare Gray Lens	$144.98 F
529466	(134) Spare Double Contact Socket	$37.98 F
529860	(1105 000 BLK) Spare Access Cap with Chain	$48.98 I
529872	(1119) Spare O-Ring for Cap	$8.98 F

Perko Fig. 374 Double Contact Bayonet Bulbs



- Clear Type T-8. C-8.
- Filament, length 1-3/8".
- Sold each. Standard pack 50.

Order No.	Mfg. No. / Description	Price
528387	(374 001 CLR) 12 volt, 30 watt	$50.98 I
528399	(374 002 CLR) 24 volt, 30 watt	$50.98 I
528402	(374 003 CLR) 32 volt, 30 watt	$50.98 I
528414	(374 004 CLR) 120 volt, 30 watt	$50.98 I

Perko Figs. 1364, 1365, 1366, 1367 and 1368 Double Lens Navigation Lights



523399



523351

- Lightweight but durable fiber-filled polycarbonate black plastic.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (2) 3' lengths of 16/3-SO cable through watertight terminal tubes.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 17-1/4".
- Lens height 6-3/4".
- Uses 3/8" mounting bolt.
- 24, 120 and 220 volt options.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Bulbs not included.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523351	(1364 GE0 BLK) Green Side, 3 Mile, 112-1/2° Visibility	$571.98 Q
523363	(1364 RE0 BLK) Red Side, 3 Mile, 112-1/2° Visibility	$571.98 Q
523375	(1365 E00 BLK) White Masthead , 6 Mile, 225° Visibility	$571.98 Q
523387	(1366 E00 BLK) White Stern*, 3 Mile, 135° Visibility	$571.98 Q
523399	(1366 ME0 BLK) Yellow Towing, 3 Mile, 135° Visibility	$571.98 Q
523402	(1367 E00 BLK) White All-Round*, 3 Mile, 360° Visibility	$548.98 Q
523414	(1368 GE0 BLK) Green All-Round, 3 Mile, 360° Visibility	$548.98 Q
523426	(1368 RE0 BLK) Red All-Round, 3 Mile, 360° Visibility	$548.98 Q

- **Important Bulb Data:**

To comply with the UL Standard 1104, these lights must be used with the following Perko Catalog Numbers: 24 volt use - 528289 (342 024 CLR) bulb, 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required and 220 volt use 528292 (342 220 CLR) bulb.

Perko Fig. 342 Medium Prefocus Bulbs



- Clear.
- 120 volt bulbs for 1150 Series and other navigation lights.
- Sold each. Standard pack 25.

Order No.	Mfg. No. / Description	Price
528250	(342 001 CLR) 15 watt	$44.98 F
528262	(342 002 CLR) 25 watt	$44.98 F
528274	(342 003 CLR) 40 watt	$44.98 F
528286	(342 004 CLR) 60 watt	$44.98 F
528289	(342 024 CLR) 24 volt, 55 watt	$53.98 F
528298	(342 RS4 CLR) 60 watt, For Rough Service	$61.98 F
528292	(342 220 CLR) 220 volt, 65 watt	$57.98 F

©2014 Donovan Marine, Inc.

Perko Figs. 1369, 1370, 1372, 1373 and 1374 Single Lens Navigation Lights


523490


523452


523440

- Lightweight but durable fiber-filled polycarbonate black plastic.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (1) 3' length of 16/3-SO cable through watertight terminal tube.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 9-1/4". Lens height 6-3/4".
- Uses 3/8 mounting bolt.
- 24, 120 and 220 volt options.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Bulbs not included.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523438	(1372 GE0 BLK) Green Side, 3 Mile, 112-1/2° Visibility	$426.98 Q
523440	(1372 RE0 BLK) Red Side, 3 Mile, 112-1/2° Visibility	$426.98 Q
523452	(1373 E00 BLK) White Masthead , 6 Mile, 225° Visibility	$426.98 Q
523464	(1374 E00 BLK) White Stern*, 3 Mile, 135° Visibility	$426.98 Q
523476	(1374 ME0 BLK) Yellow Towing, 3 Mile, 135° Visibility	$426.98 Q
523488	(1369 E00 BLK) White All-Round*, 3 Mile, 360° Visibility	$410.98 Q
523490	(1370 RE0 BLK) Red All-Round, 3 Mile, 360° Visibility	$410.98 Q

- **Important Bulb Data:**

To comply with the UL Standard 1104, these lights must be used with the following Perko Catalog Numbers: 24 volt use - 528289 (342 024 CLR) bulb, 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required and 220 volt use 528292 (342 220 CLR) bulb.

Perko Spare Lens and Accessories

- Fits 1150-1154 and 1169-1172 Series Navigation Lights.

Order No.	Mfg. No. / Description	Price
528807	(261 001 CLR) Spare White Lens	$177.98 F
528818	(261 001 GRN) Spare Green Lens	$177.98 F
528820	(261 001 YLW) Spare Yellow Lens	$177.98 F
528832	(261 001 RED) Spare Red Lens	$177.98 F

- Fits 1164-1168 and 1169-1172 Series Navigation Lights.

Order No.	Mfg. No. / Description	Price
529808	(1133) Spare Lens Retaining Clip with Bolt	$27.98 F
529810	(1143) Spare Lens Gasket	$13.98 F

- Fits 1127-1130, 1129 (Panama Canal Blue Steering Light), 1111 (Flashing Yellow Light, 1150-1154, 1164-1168 & 1169-1172 Series Navigation Lights.

Order No.	Mfg. No. / Description	Price
529860	(1105 000 BLK) Spare Access Cap, O-Ring and Retainer	$48.98 I
529872	(1119) Spare O-Ring for Cap	$8.98 F

- Fits 1164-1168 Series Navigation Lights.

Order No.	Mfg. No. / Description	Price
529428	(303) Spare Dual Medium Prefocus Socket	$263.98 F

Order No.	Mfg. No. / Description	Price
529404	(347) Spare Medium Prefocus Socket	$69.98 F

Perko Fig. 1377, 1379 and 1380 L.E.D. Navigation Lights


526189


526169

- Black polymer.
- For use on vessels over 20 meters in length.
- 3' of 16/3-SO cable.
- LED: 120 VAC.
- Screw size: 1/4".
- Height overall: 7-1/2".
- Height lens: 4-1/2".

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
526154	(1377 G00 BLK) Green Side, 2 Mile, 112-1/2° Visibility	$1,007.98 I
526159	(1377 R00 BLK) Red Side, 2 Mile, 112-1/2° Visibility	$1,007.98 I
526169	(1379 000 BLK) White Stern*, 2 Mile, 135° Visibility	$1,007.98 I
526174	(1379 M00 BLK) Yellow Towing, 2 Mile, 135° Visibility	$1,007.98 I
526179	(1380 000 BLK) White All-Round*, 2 Mile, 360° Visibility	$1,007.98 I
526184	(1380 G00 BLK) Green All-Round, 2 Mile, 360° Visibility	$1,007.98 I
526189	(1380 R00 BLK) Red All-Round, 2 Mile, 360° Visibility	$1,007.98 I

Perko Figs. 1169, 1170, 1172, 1173 and 1174 Single Lens Navigation Lights


523856


523818


523806

- Heavy duty cast bronze.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (1) 3' length of 16/3-SO cable through a watertight terminal tube.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 9-1/4".
- Lens height 6-3/4".
- Uses 3/8 mounting bolt.
- 120 volt only.
- Bulbs not included.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523806	(1172 GE0 PLB) Green Side, 3 Mile, 112-1/2° Visibility	$804.98 Q
523818	(1172 RE0 PLB) Red Side, 3 Mile, 112-1/2° Visibility	$804.98 Q
523832	(1173 E00 PLB) White Masthead , 6 Mile, 225° Visibility	$804.98 Q
523856	(1174 E00 PLB) White Stern*, 3 Mile, 135° Visibility	$804.98 Q
523868	(1174 ME0 PLB) Yellow Towing, 3 Mile, 135° Visibility	$804.98 Q
523882	(1169 E00 PLB) White All-Round*, 3 Mile, 360° Visibility	$773.98 Q
523919	(1170 RE0 PLB) Red All-Round, 3 Mile, 360° Visibility	$773.98 Q

- **Important Bulb Data:**

To comply with the UL Standard 1104, the lights listed on this page must be used with the following Perko Catalog Numbers: 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required.

Perko Figs. 1164, 1165, 1166, 1167 and 1168 Double Lens Navigation Lights



523577



523503

- Heavy duty cast bronze.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (2) 3' length of 16/3-SO cable through a watertight terminal tubes.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 17-1/4".
- Lens height 6-3/4".
- Uses 3/8 mounting bolt.
- 120 volt only.
- Bulbs not included.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523503	(1164 GE0 PLB) Green Side, 3 Mile, 112-1/2° Visibility	1,234.98 Q
523515	(1164 RE0 PLB) Red Side, 3 Mile, 112-1/2° Visibility	$1,234.98 Q
523541	(1165 E00 PLB) White Masthead , 6 Mile, 225° Visibility	$1,234.98 Q
523565	(1166 E00 PLB) White Stern*, 3 Mile, 135° Visibility	$1,234.98 Q
523577	(1166 ME0 PLB) Yellow Towing, 3 Mile, 135° Visibility	$1,234.98 Q
523591	(1167 E00 PLB) White All-Round*, 3 Mile, 360° Visibility	$1,215.98 Q
523630	(1168 RE0 PLB) Red All-Round, 3 Mile, 360° Visibility	$1,215.98 Q
523628	(1168 GE0 PLB) Green All-Round, 3 Mile, 360° Visibility	$1,215.98 Q

- **Important Bulb Data:**
  To comply with the UL Standard 1104, the lights listed on this page must be used with the following Perko Catalog Numbers: 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required.

Perko Fig. 1129 Panama Canal Blue Steering Light



- Black plastic.
- Pre-wired double contact socket with 3' of 16/3-SJO cable.
- Overall height 7-1/2. Lens height 4-1/4.
- Visibility arc 135°. 12, 24, 32 or 120 volt options.
- Bulb not included.
- To comply with Panama Canal Requirements this light must use a Perko Fig. 374 bulb.
- Sold each per display box.

Order No.	Mfg. No. / Description	Price
525975	(1129 BA0 BLK) Steering Light	$401.98 I
529466	(134) Spare Double Contact Socket	$37.98 F
529860	(1105 000 BLK) Spare Access Cap with Chain	$48.98 I
529872	(1119) Spare O-Ring for Cap	$8.98 F

Perko Figs. 1150, 1151 and 1152 Navigation Lights



524682



524668

- Sheet metal, preprimed galvanized steel.
- Medium prefocus socket.
- Watertight terminal tube for 16/3-SO cable.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Uses 1/4" fasteners.
- 120 volt only.
- Bulbs not included.
- Use Perko Fig. 342 Medium Prefocus Bulbs.

- For use on vessels 20 meters to 50 meters in length.
- Overall height 11-1/2".
- Lens height 6-3/4".

Order No.	Mfg. No. / Description	Price
524656	(1150 GE1 GAL) Green Side, 2 Mile, 112-1/2° Visibility	$604.98 Q
524668	(1150 RE1 GAL) Red Side, 2 Mile, 112-1/2° Visibility	$604.98 Q
524682	(1151 E01 GAL) White Masthead , 5 Mile, 225° Visibility	$604.98 Q
524707	(1152 E01 GAL) White Stern, 2 Mile, 135° Visibility	$604.98 Q
524719	(1152 ME1 GAL) Yellow Towing, 2 Mile, 135° Visibility	$604.98 Q

- For use on vessels over 20 meters in length.
- Overall height 13-1/2".
- Lens height 7-1/2".

Order No.	Mfg. No. / Description	Price
524353	(1150 GE2 GAL) Green Side, 3 Mile, 112-1/2° Visibility	$764.98 Q
524366	(1150 RE2 GAL) Red Side, 3 Mile, 112-1/2° Visibility	$764.98 Q

Perko Fig. 1111 Flashing Yellow Light



- Sheet metal, preprimed galvanized steel.
- For use on vessels of any length.
- Medium prefocus socket.
- Watertight terminal tube for 16/3-SO cable.
- 2 mile visibility.
- Overall height 11-1/2", lens height 6-3/4".
- Visibility arc 225°.
- Flashes per minute: 50 - 70.
- 120 volt only.
- Bulb not included.
- To comply with Federal Requirements this light must use: 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required.
- Designed to meet Federal Requirements for Flashing Yellow 180° - 225° light for barges, canal boats, etc., that are being pushed ahead or towed along side of a tug boat. Refer to U.S. Inland Navigation Rules for details.

Order No.	Mfg. No. / Description	Price
524771	(1111 ME1 GAL)	$797.98 I
529909	(133) Spare Flasher Unit	$225.98 F

Julian A. McDermott Anchor Lights



- Range: 1 nautical miles
- Mount: Magnetic, Stand-alone
- Light Source: High-powered LEDs
- Material: High-Impact polycarbonate
- Battery Life: 3 months, 6 months available
- Weight: 4 lbs.

Order No.	Mfg. No. / Description	Price
453201	(ANCHOR-RR-DL) Yellow	$99.98 C
453213	(ANCHOR-RR-DL) Red	$121.98 C

©2014 Donovan Marine, Inc.

Pauluhn Lighting Pendant Mount Incandescent Fixture



- Cast copper free aluminum.
- Compact, one piece pendant mount design.
- Lamp holder: Medium base, high temperature PBT.
- Nickel plated copper screw shell.
- Clear glass globe.
- Length 8-3/4".
- 3/4" IPS.
- UL Marine and USCG Approved.
- 6" globe.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
686470	(767A) A-19, 100 watt Lamp	$164.98 C

Pauluhn Lighting Wall Mount Incandescent Fixture



- Cast copper free aluminum.
- Lamp holder: Medium base, high temperature PBT.
- Nickel plated copper screw shell.
- Clear glass globe.
- Length 11".
- UL Marine and USCG Approved.
- 6" globe.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
686381	(707A) A-19, 100 watt Lamp	$199.98 C

Hubbell Non-Metallic Vaportight Incandescent Fixture



398203



- Ceiling mount.
- UV resistant, gray, glass filled thermoplastic polyester box, mounting adapters and globe guards.
- Excellent temperature operating range of -40° F (-40° C) to +150° C.
- Heat resistant glass globe withstands thermal shock.
- High strength protective globe guard.
- UL listed including UL 1571 and UL 595.
- Accepts up to 150 watt type A incandescent bulb.
- Note: Bulb not included.
- Includes: Fixture, mounting box, guard and heat resistant glass globe.

Order No.	Mfg. No. / Description	Price
398102	(NVX15GHGA) Ceiling Mount	$167.98 G
398203	(NVBA) Wall Mount Bracket	$43.98 G
398215	(NVGA) Replacement Guard	$53.98 G

Phoenix Non-Metallic Vaporproof Incandescent Fixtures

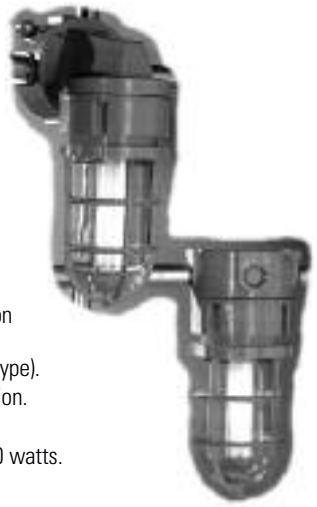

- Engineering-grade non-metallic, glass reinforced thermoplastic construction.
- Clear glass globe.
- UL listed.
- Meets standard 844 hazardous location Class I, Division 2.
- Meets standard 595 (Marine outside type).
- Meets standard 1570/1571 Wet location.
- USCG Approved.
- Accepts incandescent lamps up to 150 watts.
- Note: Bulb not included.
- 120/240 volt.

Order No.	Mfg. No. / Description	Price
603800	(VPCINC120GLC) Ceiling Mount	$148.98 I
603808	(VPWINC120GLC) Wall Mount	$191.98 I

6" Plastic Globes for Deck Light



- Prism, flat top cylinder.

Order No.	Mfg. No. / Description	Price
253411	(518) Clear	$20.98 F
253423	(518) Amber	$21.98 F



- Smooth, round top cylinder.

Order No.	Mfg. No. / Description	Price
686278	(507) Clear	$20.98 C
686280	(507) Amber	$21.98 C

Pauluhn Replacement 6" Guards

Order No.	Mfg. No. / Description	Price
686230	(INX1036A) Aluminum	$53.98 C
686242	(INX1036B) Brass	$74.98 C

Pauluhn 6" Glass Globes

Order No.	Mfg. No. / Description	Price
686266	(COAC60) Clear	$13.98 C
686329	(COAC62) Red	$60.98 C
686331	(COAC63) Green	$50.98 C
686343	(COAC65) Amber	$38.98 C

Pauluhn Medium Screw Replacement Bakelite Sockets

- Four hole model fits current Pauluhn lights.
- Three hole model fits old Pauluhn and some old Perko lights.

Order No.	Mfg. No. / Description	Price
686367	(INX4000) Four Hole	$23.98 C
537918	(INX4001) Three Hole	$24.98 C

Cole Hersee Red Indicator Light with Smooth Lens



- Insulated.
- Single contact with ground wire for use on insulated panels.
- Chrome plated brass bezel 7/8" diameter. Lens 17/32" diameter.
- Mounting stem 3/4" diameter, 1-1/16" long.
- Supplied with 12 volt bulb.

Order No.	Mfg. No. / Description	Price
300587	(M-320-RC-BP)	$20.98 F
219433	(53) Spare Bulb	$4.98 I


Cole Hersee Red Indicator Light with Faceted Lens



- Insulated.
- Double contact.
- Plated brass bezel 1-1/4" diameter.
- Lens 15/16" diameter.
- Mounting stem 7/8" diameter, 1-1/4" long.
- Supplied with 12 volt bulb.

Order No.	Mfg. No. / Description	Price
300602	(M-326-RC-BP)	$31.98 F
219433	(53) Spare Bulb	$4.98 I

Optronics Interior/Utility Light



- Low-profile, flush-mount design.
- Chrome-trimmed, corrosion proof housing.

Order No.	Mfg. No. / Description	Price
223149	(UL-71CS)	$4.98 H

Anderson Marine Compact Courtesy Light



- Rectangular interior, compartment, courtesy or general illumination utility light with chrome-plated
- ABS housing. Mounts on 2 11/16" centers using lens screws as mounting hardware.
- Twist-in socket assembly contains both lead wire and ground wire for mounting on all surfaces.
- Requires 1 1/4" socket mounting hole for installation.

Order No.	Mfg. No. / Description	Price
223461	(E126C) Clear	$8.98 H

Perko Fig. 140 Surface Mount Utility Light



- Molded white plastic.
- Diffused light cover.
- Surface mount.
- Use for instruments, charts or general illumination.
- Length overall 1-7/8", width 9/16".
- Uses #6 fasteners.
- Complete with 12 volt, 1 watt bulb.

Order No.	Mfg. No. / Description	Price
534695	(140 DP0 NYN)	$11.98 R

Anderson Marine Mini Utility/Courtesy Light



- Features polished, chrome-plated brass housing with hooded shield to prevent upward glare.
- Surface mounts with two stainless steel screws on 2" centers and has separate ground wire for non-metallic surfaces.

Order No.	Mfg. No. / Description	Price
223485	(E434) Clear	$5.98 H

Attwood Surface Mount Utility Light



- For illuminating companionways, cockpits and other low-level lighting areas.
- Surface mount.
- Transparent polycarbonate lens can be removed for lamp service or replacement.
- Dimensions: 3-7/16" L x 1-13/16" H x 1-1/16" D.
- Base is pre-drilled for #8 screws.
- Includes: (1) 12 volt, 3.8 watt bulb.
- Gray.

Order No.	Mfg. No. / Description	Price
235564	(6314-3)	$13.98 G

Lumitec Indirect Courtesy/Accent Light



- Compact, attractive, surprisingly bright.
- Use to illuminate counters, stairs, companionways.
- Dimeter 1".
- Completely sealed and IP67 compliant, these lights are also suitable for cockpits, hardtops or illuminating helm stations.
- 30mA @ 12VDC.
- 12 volt.

Order No.	Mfg. No. / Description	Price
378758	(101043) White Light	$27.98 G

T-H Marine L.E.D. Companion Way Lights



- Light pathways, steps and utility boxes economically!
- Opaque PC lens produces warm glow.
- Circuit boat completely sealed in epoxy to resist water, corrosion and vibration.
- Low current draw, super long life span up to 100,000 hours.
- Easy surface mount.
- Fasteners included.
- Dimensions: 2.6" long x 1.3" wide.

Order No.	Mfg. No. / Description	Price
642506	(LED-51816-DP) Black Plastic Bezel, 2 White LEDs	$11.98 H
642509	(LED-51819-DP) White Plastic Bezel, 2 White LEDs	$11.98 I
642512	(LED-51818-DP) White Plastic Bezel, 2 Red LEDs	$11.98 I
642515	(LED-51822-DP) Chrome Bezel, 2 White LEDs	$13.98 I
642518	(LED-51820-DP) Chrome Bezel, 2 Blue LEDs	$13.98 I

©2014 Donovan Marine, Inc.

T-H Marine L.E.D. Courtesy Companion Way Lights



- Recessed courtesy companion way lights provide light in a variety of uses.
- Great for compartments, rod lockers, gear bins, or light a pathway or storage area.
- Low power LEDs; long life up to 100,000 hours; frosted PC lens; circuit board completely sealed from water, corrosion and vibration resistance.
- 3 white LEDs.
- Face size: 2-1/4" square.
- Exposed fasteners.

Order No.	Mfg. No. / Description	Price
642581	(LED-51876-DP) White Bezel	$11.98 I

- 3 white LEDs.
- Face size: 2-1/4" square.
- Hidden fasteners.

Order No.	Mfg. No. / Description	Price
642584	(LED-51894-DP) White Bezel	$11.98 I
642587	(LED-51891-DP) Black Bezel	$11.98 I

- White plastic bezel and 1 white LED bulb.
- Face size: 2-3/4" square.
- Exposed fasteners.

Order No.	Mfg. No. / Description	Price
639840	(CL-2LED)	$13.98 H

T-H Marine Courtesy Light



- A molded poly housing that is weather resistant.
- The face is pleasingly styled and the reflector directs light downward.
- Light requires a 2-1/8" diameter hole for mounting.
- Face plate is 2-3/4" square.
- Uses a standard wedge base automotive type bulb.
- Note: Bulb included.
- Black

Order No.	Mfg. No. / Description	Price
639837	(CL-1)	$8.98 H

T-H Marine Mini L.E.D. Dual Mount Courtesy Light



- All purpose dual mount LED courtesy light mounts anywhere light is needed!
- They mount vertically or horizontally for low profile placement on steps, companionways, under cabinets, compartments and more.
- Low heat, low amp draw, non-corrosive, shock and water resistant.
- Stainless steel fasteners included.
- Dimensions: 2-1/8" L x 5/8" H x 1/2" W.

Order No.	Mfg. No. / Description	Price
642590	(LED-51880-DP) 3 White LEDs	$10.98 I

Perko Fig. 1044 Flush Mount Utility Light



- Black molded plastic.
- Diffusion lens.
- Snap-on front cover conceals mounting screws.
- Flush mount.
- Installs in a 1-3/4" diameter hole.
- Length 2-1/4", width 2-1/4".
- Uses #6 fasteners.
- Complete with 12 volt, 3 watt bulb.

Order No.	Mfg. No. / Description	Price
531600	(1044 DP1 BLK)	$10.98 R

Attwood L.E.D. Courtesy Light



- 3-diode lights.
- Match output of 12w bulbs.
- Use only .55 watts of power.
- Honeycomb lens.
- Sculpted bezel.
- Low profile design.
- No exposed fasteners.
- Waterproof to 7'.

Order No.	Mfg. No. / Description	Price
235568	(6306-7) Oblong, Black/White	$27.98 R

Anderson Marine Great White® L.E.D. Interior/Exterior Dome, Utility & Accent Light



- 16 diode LED auxiliary light.
- Includes bracket for surface mounting, or can be recess-mounted.
- V388C features Great White® diodes and black bracket.
- V388WB features blue diodes and white bracket; great for marine use!
- Optional chrome accessory bracket available.
- Recessed or surface mount LED strip light.
- Wires exit in center of light.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Low amp draw.

Order No.	Mfg. No. / Description	Price
223857	(V388C) White LED	$27.98 H
223862	(V388WB) Blue with White Bracket	$40.98 H

T-H Marine L.E.D. Oblong Courtesy Lights



- Attractive stainless bezel courtesy lights can be used virtually anywhere.
- Great for accent lighting, step, task, compartment, cabinet or courtesy lighting.
- Surface mount.
- Hidden fasteners.
- 3 bright LEDs provide excellent brilliance.
- Circuit board completely sealed to provide water, corrosion and vibration resistance.
- Super long life LEDs - up to 100,000 hours.
- Dimensions: 3" L x 1.25" H.

Order No.	Mfg. No. / Description	Price
642521	(LED-51823-DP) 3 Blue LEDs	$18.98 I
642524	(LED-51824-DP) 3 Red LEDs	$18.98 I
642527	(LED-51825-DP) 3 White LEDs	$18.98 I

T-H Marine Slim Line L.E.D.. Utility Strip Lights


642491


642497


642500

- Long lasting strip light is a multi-purpose solution!
- Excellent for lighting or decorating interior and exterior of boats, RVs and other vehicles.
- Submersible: Surface mount; low amp draw; clear lens provides maximum light.

Order No.	Mfg. No. / Description	Price
642491	(LED-51803-DP) 6 Red LEDs, Length 4"	$12.98 H
642486	(LED-51800-DP) 6 White LEDs, Length 4"	$12.98 H
642488	(LED-51801-DP) 6 Blue LEDs, Length 4"	$12.98 H
642494	(LED-51805-DP) 12 White LEDs, Length 6"	$21.98 H
642497	(LED-51806-DP) 12 Blue LEDs, Length 6"	$21.98 H
642500	(LED-51810-DP) 18 White LEDs, Length 8"	$27.98 H
642503	(LED-51811-DP) 18 Blue LEDs, Length 8"	$27.98 H

Boater Sports L.E.D. Waterproof Utility Strip Lights



- White, Red, Blue or Green LED light with clear lens.
- 6 LED light is totally waterproof.
- Designed to use above or below the water line.
- Low amp draw, shock resistant.
- 12 volt wire connection is fully sealed.
- 10 year LED warranty.

Order No.	Mfg. No. / Description	Price
1-51600	(51600) White, Length 4"	$11.95 H
1-51601	(51601) Blue, Length 4"	$11.95 H
1-51602	(51602) Green, Length 4"	$11.95 H
1-51603	(51603) Red, Length 4"	$11.95 H
1-51605	(51605) White, Length 6"	$19.95 H
1-51606	(51606) Blue, Length 6"	$19.95 H
1-51607	(51607) Green, Length 6"	$19.95 H
1-51608	(51608) Red, Length 6"	$19.95 H
1-51610	(51610) White, Length 8"	$26.95 H
1-51611	(51611) Blue, Length 8"	$26.95 H
1-51612	(51612) Green, Length 8"	$26.95 H
1-51613	(51613) Red, Length 8"	$26.95 H

Boater Sports L.E.D. Recessed Mount Light



- 3" LED round, recessed mount interior light.
- Includes: 3 Bezels (black, white and chrome plated).

Order No.	Mfg. No. / Description	Price
1-51654	(51654)	$21.46 H

T-H Marine Recessed L.E.D. Puck Lights



- Low profile LED lights creates a smooth look!
- Ideal for cabin and compartment lighting in boats and RVs.
- Includes three bezels (chrome, black and white) to allow for interchangeable options.
- Recessed mounting.
- Circuit board sealed for water, corrosion and vibration resistance.
- Low amp draw.
- Diameter 3".
- Requires 2" hole diameter.

Order No.	Mfg. No. / Description	Price
642551	(LED-51847-DP) 6 White LEDs	$29.98 I
642554	(LED-51848-DP) 6 Red LEDs	$29.98 I
642557	(LED-51849-DP) 6 Blue LEDs	$29.98 I

Lumitec Courtesy/Accent Light



- Compact, attractive, surprisingly bright.
- Use to illuminate counters, stairs, companionways.
- Diameter .98".
- Completely sealed and IP67 compliant, these lights are also suitable for cockpits, hardtops or illuminating helm stations.
- 30mA @ 12VDC.
- 12 volt.

Order No.	Mfg. No. / Description	Price
378764	(101050) Blue Light	$27.98 H

T-H Marine L.E.D. Rail Lights



- Features a rotating axis design to adjust the light to any desired direction.
- Circuit board coated with conformal coating to resist moisture, corrosion and vibration.
- Surface mount.
- Powder coated aluminum extrusion rail with molded mounting ends.
- Frosted lens pattern for uniform light distribution.
- Super bright, efficient, long lasting LEDs (up to 100,000 hours).
- Low power draw.

Order No.	Mfg. No. / Description	Price
642560	(LED-51857-DP) 12 Cool White LEDs, Length 6"	$25.98 I
642563	(LED-51858-DP) 24 Cool White LEDs, Length 12"	$36.98 I

Scan-Strip L.E.D. Light Strips



- Small, bright, low power consumption, high intensity LED strip light.
- 30,000 hour life. 120° wide angle.
- 12-14 volt DC.
- Mounting screws included.
- Dimensions: 9" long x 7/8" wide x 1/2" high.

Order No.	Mfg. No. / Description	Price
606206	(41346) White, 8"	$29.98 H
606207	(41347) Blue, 8"	$29.98 H
606208	(41348) Red, 8"	$29.98 H
606209	(41349) Green, 8"	$29.98 H

Attwood L3600 Series L.E.D. Courtesy Light



- These LED lights exceed the output of comparable halogen lights while using 20% of the power.
- Fully potted electronics and stainless steel housing allow for interior and exterior mounting - even underwater!
- Rated for 50,000+ hours of life.
- Diameter 1.5".
- LED color: White.
- 12 volt.

Order No.	Mfg. No. / Description	Price
235576	(6342-SS7) Stainless Steel	$32.98 Q

T-H Marine Stainless L.E.D. Puck Lights



- Highly polished 304 stainless steel housing for a rich, clean look.
- Ideal for use as ceiling, courtesy or task lighting.
- Clear polycarbonate engineered lends optics provide uniform and wide angle illumination.
- Surface mount on any flat surface.
- Hidden fasteners.
- Circuit board completely sealed for water, corrosion & vibration resistance.
- LEDs feature super long life-span up to 50,000 hours.

Order No.	Mfg. No. / Description		Price
642530	(LED-51827-DP) 4 Warm White LEDs	Diameter 3"	$37.98 I
642535	(LED-51828-DP) 4 Blue LEDs	Diameter 3"	$37.98 I
642536	(LED-51897-DP) 4 Red LEDs	Diameter 3"	$37.98 I
642539	(LED-51831-DP) 6 Warm White LEDs	Diameter 4"	$56.98 I
642542	(LED-51832-DP) 6 Blue LEDs	Diameter 4"	$56.98 I

©2014 Donovan Marine, Inc.

Marpac Flexible Light Strips



- Add light where it's needed! Like inside hatches engine compartment, boat interiors, under gunnels.
- 3M adhesive back sticks almost anywhere - no more screw holes.
- 90° bends possible.
- Trim to length, can be cut every 3 LED's (roughly every 2").

Order No.	Mfg. No. / Description	Price
7-6601	Blue, 60 cm	$12.98 G
7-6603	White, 60 cm	$12.98 G
7-6609	Blue, 5 meter	$130.98 G
7-6610	White, 5 meter	$130.98 G

Audiopipe Heavy Duty L.E.D. Strips



- Easy installation.
- Simple 2 wire hook up.
- Ultra bright LEDs.
- Flexible.
- Four colors available for any application (Green, blue, red and white).
- Ideal use: Illuminating storage areas, engine compartments and under gunnels.
- Mounts with 3M marine grade adhesive and (2) stainless steel screws.

Order No.	Mfg. No. / Description	Price
559945	(MLDST-4BL) 4", Blue	$11.98 F
559950	(MLDST-4GR) 4", Green	$11.98 F
559955	(MLDST-4RD) 4", Red	$15.98 F
559960	(MLDST-4WH) 4", White	$11.98 F
559965	(MLDST-8BL-BT) 8", Blue	$18.98 F
559970	(MLDST-8GR-BT) 8", Green	$23.98 F
559975	(MLDST-8RD-BT) 8", Red	$23.98 F
559980	(MLDST-8WH-BT) 8", White	$18.98 F
559985	(MLDST-12BL) 12", Blue	$21.98 F
559990	(MLDST-12GR) 12", Green	$28.98 F
559995	(MLDST-12RD) 12", Red	$28.98 F
560000	(MLDST-12WH) 12", White	$21.98 F
560005	(MLDST-20BL) 20", Blue	$37.98 F
560010	(MLDST-20GR) 20", Green	$37.98 F
560015	(MLDST-20RD) 20", Red	$37.98 F
560020	(MLDST-20WH) 20", White	$31.98 F
559935	(MLDLST8MULTI) 8', Multicolored	$123.98 C
559940	(MLDLST16MULT) 16', Multicolored	$193.98 C

Audiopipe Multicolor L.E.D. Lighting



- Width: 0.8 cm, height: 0.2 cm, length: 16'.
- A clearly marked line shows exactly where to cut.
- 24 key super thin IP remote control allows user to conveniently set color and control patterns.
- Retains memory of color and pattern creates a stunning light show.

Order No.	Mfg. No. / Description	Price
559602	(NL-FK116LED) Multicolor LED Strip	$134.98 E
559603	(NL-FK216LED) Double Multicolor LED Strip	$150.98 E

Audiopipe Flexible/Cuttable L.E.D. Lighting





- The NL-F512 Series are great for motorcycles, engine bays and interior lighting.
- They come in a variety of colors.
- These strips are very easy to install as they come with 3M double sided tape.
- The rolls are marked every three LEDs which can be cut for exact sizing.
- Width: 1 cm, height: 0.25 cm.

Order No.	Mfg. No. / Description	Price
559384	(NL-F512CB-BL) Blue, Length 12"	$10.98 F
559392	(NL-F524CB-BL) Blue, Length 24"	$18.98 F
559394	(NL-F512CB-RD) Red, Length 12"	$10.98 F
559399	(NL-F524CB-RD) Red, Length 24"	$18.98 F
559422	(NL-F512CB-WH) White, Length 12"	$10.98 F
559423	(NL-F524CB-WH) White, Length 24"	$18.98 F
559810	(NL-F512CB-GR) Green, Length 12"	$9.98 F

Audiopipe Flexible/Cuttable L.E.D. Lighting





- The NL-F10 Strip Series are great for any application where the lights are likely to get wet as they have a thicker and bulkier rubber housing which makes them completely weatherproof.
- These Strips can be used on boats, ATV's, jet-skis, golf cars and just about anything else you might want to light up.
- The rolls are marked every three LEDs which can be cut for exact sizing.
- Width: 0.7 cm, height: 1.25 cm.

Order No.	Mfg. No. / Description	Price
559425	(NL-F1010CW-BL) Blue, Length 10"	$12.98 F
559428	(NL-F1020CW-BL) Blue, Length 20"	$17.98 F
559453	(NL-F1072CW-BL) Blue, Length 72"	$65.98 F
559433	(NL-F1010CW-WH) White, Length 10"	$12.98 F
559434	(NL-F1020CW-WH) White, Length 20"	$17.98 F
559452	(NL-F1072CW-WH) White, Length 72"	$65.98 F
559815	(NL-F1010CW-GR) Green, Length 10"	$11.98 F
559476	(NL-F10TRACK) 6' Track to Mount Any NL-F10 Series	$12.98 F

Audiopipe Flexible/Cuttable L.E.D. Lighting






- The NL-F216 Series are great for motorcycles, engine bays and interior lighting.
- They come in a variety of colors.
- These strips are very easy to install as they come with 3M double sided tape.
- The rolls are marked every three LEDs which can be cut for exact sizing.
- You can easily connect multiple runs together by soldering the contacts.
- Width: 0.8 cm, height: 0.2 cm.

Order No.	Mfg. No. / Description	Price
559454	(NL-F216-GR) Green, Length 16'	$35.98 D
559455	(NL-F216-OR) Orange, Length 16'	$39.98 D
559463	(NL-F216-PR) Purple, Length 16'	$39.98 D
559471	(NL-F216-BL) Blue, Length 16'	$35.98 D
559472	(NL-F216-WH) White, Length 16'	$35.98 D
559474	(NL-F216-RD) Red, Length 16'	$35.98 D

Boater Sports L.E.D. Flex Lights

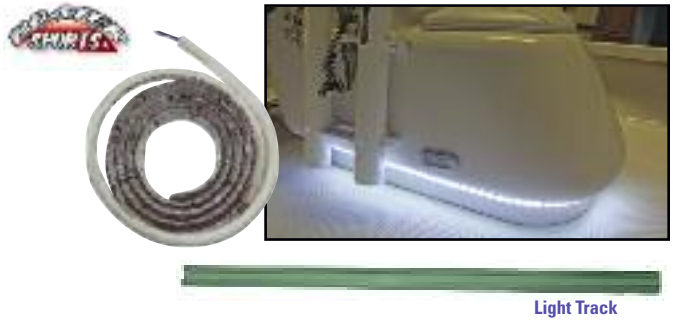

Light Track

- 4 watt LED rope light is perfect for creating sharp angles and definition lines in your boat or camper; super bright, outdoor or indoor use.
- Low power drain.
- Cool to touch when in use.
- LED lights last up to 20x longer than regular bulbs.
- Available in varying lengths and able to be trimmed to fit any size or shape.

Order No.	Mfg. No. / Description		Price
1-51920	(51920) White	Length 12"	$10.95 H
1-51678	(51678) White	Length 24"	$17.95 H
1-51926	(51926) White	Length 48"	$31.95 H
1-51672	(51672) White	Length 72"	$43.95 H
1-51942	(51942) White	Length 144"	$91.98 H
1-51921	(51921) Blue	Length 12"	$10.95 H
1-51677	(51677) Blue	Length 24"	$17.95 H
1-51927	(51927) Blue	Length 48"	$31.95 H
1-51671	(51671) Blue	Length 72"	$43.95 H
1-51943	(51943) Blue	Length 144"	$91.98 H
1-51922	(51922) Red	Length 12"	$10.95 H
1-51924	(51924) Red	Length 24"	$17.95 H
1-51928	(51928) Red	Length 48"	$31.95 H
1-51930	(51930) Red	Length 72"	$43.95 H
1-51923	(51923) Green	Length 12"	$10.95 H
1-51925	(51925) Green	Length 24"	$17.95 H
1-51929	(51929) Green	Length 48"	$31.95 I
1-51931	(51931) Green	Length 72"	$43.95 H
1-51932	(51932) Blue/White	Length 24"	$19.95 H
1-51934	(51934) Blue/White	Length 48"	$34.95 H
1-51936	(51936) Blue/White	Length 72"	$49.95 H
1-51939	(51939) Light Track	3 pcs. x 4' with End Cap	$20.98 H
1-51889	(51889) Light Track	6 pcs. x 4' with End Cap	$40.98 H

Marpac L.E.D. Courtesy Lights



- Single LED diode accent lights provide as much light output as a conventional 12 volt incandescent bulb.
- Draws at least 10 times less power than incandescents.
- Completely sealed for use in livewells.
- Perfect for accent lighting and as a courtesy light for bulkhead, steps and walkways.
- Requires 7/8" diameter hole for mounting.

Order No.	Description	Price
7-0077	White	$9.98 G
7-0078	Blue	$9.98 G

T-H Marine Mini L.E.D. Livewell Light



- Bright LED light.
- Fits 5/8" hole.
- Waterproof design.

Order No.	Mfg. No. / Description	Price
641660	(LWLM-1PLED) Livewell Light	$13.98 H

T-H Marine L.E.D. Flex Strip Rope Lights



- Add WOW to your boat!
- Can be cut to lengths.
- Moisture and water resistant.
- Strong 3M mounting tape on back.
- Low amp draw won't run batteries down.

Order No.	Mfg. No. / Description		Price
642599	(LED-51946-DP) White LEDs	Length 12"	$10.98 I
642602	(LED-51947-DP) Blue LEDs	Length 12"	$10.98 I
642605	(LED-51948-DP) Red LEDs	Length 12"	$10.98 I
642608	(LED-51949-DP) Green LEDs	Length 12"	$10.98 I
642611	(LED-51950-DP) White LEDs	Length 24"	$18.98 H
642614	(LED-51951-DP) Blue LEDs	Length 24"	$18.98 H
642617	(LED-51952-DP) Red LEDs	Length 24"	$18.98 H
642620	(LED-51965-DP) Green LEDs	Length 24"	$18.98 H
642623	(LED-51953-DP) White LEDs	Length 48"	$33.98 H
642626	(LED-51954-DP) Blue LEDs	Length 48"	$33.98 H
642629	(LED-51955-DP) Red LEDs	Length 48"	$33.98 H
642632	(LED-51966-DP) Green LEDs	Length 48"	$33.98 H
642635	(LED-51956-DP) White LEDs	Length 72"	$47.98 H
642638	(LED-51957-DP) Blue LEDs	Length 72"	$47.98 H

Perko Fig. 217 Bulkhead Light Fixture



- Chrome plated zinc alloy.
- Medium screw socket.
- Turn switch.
- For systems up to 50 volts.
- Base dimensions: 2-1/2" x 1-3/4".
- Projection less bulb: 2-5/8".
- Uses #6 R.H. fasteners.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
535697	(217 DP0 CHR) Light Fixture	$27.98 R

Perko Fig. 1303 Bulkhead Light Fixture



- White molded polymer.
- For systems up to 50 volts.
- Medium screw socket that will accommodate a bulb up to 40 watts.
- Wall plate dimensions: 4-1/2" x 3-1/4".
- Shade length 4-1/2". Projection 5".
- Uses #8 fasteners.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
534230	(1303 002 WHT) Light Fixture	$49.98 I

Boater Sports L.E.D. Submersible Utility/Livewell Light



- Cool white with clear lens.
- Single LED light is totally waterproof.
- Designed to be used above or below water line.
- Through wall mounting.
- Dimensions: 1.25" x 1.25".

Order No.	Mfg. No. / Description	Price
1-51114	(51114)	$6.95 H

©2014 Donovan Marine, Inc.

T-H Marine Flush Head L.E.D. Livewell Lights



- Waterproof, super bright LED designed for livewells, lockers or compartments.
- Can be used above or below the water level with through wall mounting.
- Also great for accent and courtesy lighting!
- Low amp draw, super life span up to 100,000 hours.
- Impact resistant lens with wide viewing angle.
- 1 LED with diffuser lens.
- Pigtail connection, 12 volt.

Order No.	Mfg. No. / Description	Price
642575	(LED-51874-DP) White	$11.98 I
642578	(LED-51875-DP) Blue	$11.98 I

Marpac High Intensity Underwater Lights





- Stainless steel housing.
- Sealed and watertight.
- For underwater use ONLY.
- High lumens.
- Easy install.
- Low amp draw.
- No burning filament.
- Pig tail wire connection.

Order No.	Mfg. No. / Description		Price
7-6620	White	1.5" x 3.5" Oval	$30.98 H
7-6622	Blue	1.5" x 3.5" Oval	$30.98 H
7-6624	Green	1.5" x 3.5" Oval	$30.98 H
7-6630	White	3.5" Round	$69.98 H
7-6632	Blue	3.5" Round	$69.98 H
7-6634	Green	3.5" Round	$69.98 H

T-H Marine High Intensity L.E.D. Underwater Lights



- Totally waterproof and designed to be used above or below the waterline.
- A broad flood light effect is created by the engineered optics of this convex light face.
- Compared to other LED models, this 180 lumen light has greater light output and a wider aperture.
- Surface mount or small hole for wiring.
- Low amp draw, 10,000 hour life.
- Stainless steel hardware included.
- Surface dimensions: 3.5" x 1.5".

Order No.	Mfg. No. / Description	Price
642566	(LED-51866-DP) 6 White LEDs	$39.98 I
642569	(LED-51867-DP) 6 Blue LEDs	$39.98 I
642572	(LED-51868-DP) 6 Green LEDs	$39.98 I

Boater Sports L.E.D. Underwater Lights



- 12 watt, 6 LEDs.
- Stainless steel.
- Includes: Gasket, hardware, epoxy cover and stainless housing.
- 800+ Lumens.

Order No.	Mfg. No. / Description	Price
1-51094	(51094) White	$69.95 H
1-51095	(51095) Blue	$69.95 H
1-51097	(51097) Green	$69.95 H

Perko Fig. 174 Thru-Hull Mount Underwater Light



- Polished brass with plain bronze mounting ring.
- Safety seal design prevents water intrusion in the event of glass breakage.
- Length overall: 6-3/4".
- Flange diameter: 3-3/4", mounting hole diameter: 2-3/8".
- 10' of 16/2 electrical cable.
- Two bulb options: 25° Beam Bulb and 40° Beam Bulb.
- 12 volt, 50 watt.

Order No.	Mfg. No. / Description	Price
544470	(174 DP3 PLB) Underwater Light	$574.98 F

Boater Sports High Intensity L.E.D. Underwater Lights



- Totally waterproof and designed to be used above or below water line.
- The convex glass creates a flood effect.
- The LED design draws less amperage.
- Includes surface option mounting pad.
- Dimensions: 3.5" L x 1.5" W.

Order No.	Mfg. No. / Description	Price
1-51088	(51088) White	$30.59 H
1-51089	(51089) Blue	$30.59 H
1-51090	(51090) Green	$30.59 H

Lumitec SeaBlaze 3 L.E.D. Underwater Lights



- Boasting light output equal to that of competitors costing 3 to 5 times more.
- Surface mount for fast easy installation.
- Diameter 3.88".
- Voltage: 10 to 30VDC.
- Current: 2.5A @ 12VDC, 0.95A @ 24VDC.
- Single color models (White, Blue, Green) boast a dazzling light output more intense than competitors costing 3 to 5 times more.

Order No.	Mfg. No. / Description	Price
378820	(101055) White Light	$319.98 F
378821	(101056) Blue Light	$319.98 F
378825	(101057) Green Light	$319.98 F

- Dual color.
- Intelligent microprocessor driven circuitry allows for 2 color operation - select white, blue, or white and blue simultaneously.

Order No.	Mfg. No. / Description	Price
378833	(101058) White/Blue Light	$319.98 F

Lumitec SeaBlaze 2 L.E.D. Underwater Lights



- This light leverages the ease of installation, high intensity and extreme durability of the original SeaBlaze, but offers 15% greater output.
- All control circuitry is contained within the fixture, so no external drive modules are needed.
- Diameter 3.91".
- Voltage: 10 to 30VDC.
- Current: 950mA @ 12VDC, 475mA @ 24VDC.

Order No.	Mfg. No. / Description	Price
378819	(101013) Blue Light	$247.98 F

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Briter L.E.D. Underwater Lights



- Powerful LED underwater light made with high quality marine grade 316 stainless steel.
- This light adds ambiance to your boat and attracts fish.
- Surface mount.
- Fastens with 8 x 1 tapered screws.

Order No.	Mfg. No. / Description	Price
350000	(BL-BL) Blue Color, 3-1/2" Diameter x 5/8" H	$393.98 F
350010	(BL-GR) Green Color, 3-1/2" Diameter x 5/8" H	$393.98 L
350012	(BL-WH) White Color, 3-1/2" Diameter x 5/8" H	$362.98 L
350015	(CY-BL) Blue Color, 4-5/8" Diameter x 1-1/16" H	$673.98 L
350020	(CY-GR) Green Color, 4-5/8" Diameter x 1-1/16" H	$673.98 L
350022	(CY-WH) White Color, 4-5/8" Diameter x 1-1/16" H	$598.98 L

Aqua Signal Cabin Light



- Black plastic.
- Has an integral on/off switch built into housing.
- Installs easily with two mounting screws.
- Diameter 2.8".
- 12 volt, 5 watt.
- Ball shaped bulb, socket BA 15d.
- Note: Bulb included.

Order No.	Mfg. No. / Description	Price
207051	(15064-7) Cabin Light	$110.98 F

Perko Fig. 1253 Exterior Surface Mount Dome Light



- Ivory Perko
- Kote zinc alloy with black vinyl mounting gasket.
- Double contact bayonet socket.
- Push switch with water resistant boot.
- Lens OD 5", base OD 6", overall depth 2".
- Uses #12 R.H. fasteners.
- Complete with 12 volt, 17 watt bulb.

Order No.	Mfg. No. / Description	Price
533813	(1253 DP2 WHT)	$59.98 R
219572	(1142) Spare Bulb	$1.98 I

Perko Fig. 300 Surface Mount Dome Lights



- Chrome plated zinc alloy.
- Black vinyl mounting gasket.
- Double contact bayonet socket.
- Push switch with water resistant boot.
- Lens OD 4", base OD 5", overall depth 1-7/8".
- Uses #10 R.H. fasteners.
- Complete with 12 volt, 11 watt bulb.

Order No.	Mfg. No. / Description	Price
536889	(300 DP1 CHR)	$52.98 R

- Lens OD 5", base OD 6", overall depth 2".
- Uses #12 R.H. fasteners.
- Complete with 12 volt, 17 watt bulb.

Order No.	Mfg. No. / Description	Price
536891	(300 DP2 CHR)	$61.98 R

Lumitec Anywhere Lights



- Quality aluminum brushed housing with Type II anodizing for an appealing satin look that will stand up to the elements.
- Surface mount.
- Completely sealed, IP67 compliant.
- 90mA @ 12VDC.
- Voltage: 10 to 30VDC.
- Diameter 1.73".

Order No.	Mfg. No. / Description	Price
378754	(101033) White Light	$47.98 H
378756	(101034) Blue Light	$47.98 H

Marpac Dome Lights



- Polished stainless steel housing and trim ring with solid glass lens.
- Prewired with an on/off switch.
- 12 volt, 15 watt bulbs included.

Order No.	Description	Price
7-0578	Diameter 4"	$21.98 G
7-0601	Diameter 5"	$31.98 G

Perko Fig. 1263 Exterior Surface Mount Dome Light



- Ivory Perko Kote zinc alloy with red & white bulbs.
- Three position toggle switch.
- Lens OD 4", base OD 5", depth 1-7/8".
- Uses #10 R.H. fasteners.
- Complete with 12 volt, 11 watt bulb.

Order No.	Mfg. No. / Description	Price
544468	(1263 DP1 WHT) Dome Light	$76.98 R

Perko Fig. 1258 Round Surface Mount Dome Light



- Chrome plated zinc alloy.
- White translucent polymer lens.
- Adjustable dimmer.
- Dimensions 3-3/4", overall depth 1-1/4".
- Uses #8 R.H. fasteners.
- Complete with 12 volt, 10 watt bulb.

Order No.	Mfg. No. / Description	Price
544367	(1258 DP2 CHR)	$39.98 R
541626	(70 DP0 CLR) Spare Bulbs, 2 Per Pack	$13.98 R

T-H Marine L.E.D. Surface Mount Dome Lights



- Easy, surface mount LED dome light with switch.
- Ideal for interior use on boats and RVs!
- UV stable white housing resists color fading.
- Hidden fasteners. On/off rocker switch on bezel.
- Diameter 4".
- Super Flux (P4) type LEDs, super bright with long life span of up to 100,000 hours.

Order No.	Mfg. No. / Description	Price
642545	(LED-51829-DP) 15 Cool White LEDs	$34.98 I
642548	(LED-51830-DP) 6 Red/9 White LEDs	$37.98 I

©2014 Donovan Marine, Inc.

Mobern Series VT Fluorescent Fixtures - Vaportite



- Dust and moisture resistant.
- Virtually unbreakable fiberglass housing provides superior corrosion resistance.
- No drilling necessary with external brass studs.
- White molded end plugs snap and lock to maintain tight seal of unused end holes.
- High impact acrylic diffuser held with positive cam latches.
- Continuous poured in place gasket.
- 2 lamp. Note: Lamps not included.
- No joints to open.
- UL listed for damp location.
- 120 volt.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
603743	(VT 2 20) Length 2'	$162.98 F
603755	(VT 2 40E) Length 4'	$166.98 F
603767	(H92) Stainless Steel Clips	$5.98 E
603779	(L293) Replacement Lens for 2' Fixture	$45.98 E
603785	(L196) Replacement Lens for 4' Fixture	$57.98 E

Fluorescent Dual Tube Light Fixture



- All aluminum housing with non-yellowing diffuser lens.
- White prepainted finish and attractive woodgrain trim.
- Dimensions: 12-1/4" x 5-1/2" x 1".
- 12 volt, 16 watt.
- Note: (2) 12 volt bulbs included.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
378490	(54880) Spare Bulb	$8.98 Q

Aqua Signal Commercial Halogen Floodlight



- Seamless deep drawn stainless steel.
- Powder coated white enamel.
- Clear safety glass.
- External junction box with watertight cable gland(s).
- Dimensions: 14.8" x 12".
- USCG Accepted tested and certified according to UL595, UL File E71486.
- 120 volt, 500 watt.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
210500	(1069040) Floodlight	$713.98 Q

Jabsco Quartz Floodlights



- Rugged housing of heavy duty die-cast aluminum.
- Reflector has superior anodic finish with diffused finish to provide wide beam spreads.
- Silicone gaskets weatherproof all critical points.
- Corrosion resistant hardware used on all exposed su
- Factory prewired with silicone glass braided wires extending 6" from stem.

Order No.	Mfg. No. / Description	Price
413601	(14780-0001) Standard, Jabsco	$105.98 G
415934	(QL-505) 300/500 Watt, Hubbell	$79.98 C
413613	(1000719) Spare Bulb, 12 volt, 150 watt	$24.98 Q
413637	(1000779) Spare Bulb, 32 volt, 300 watt	$33.98 G
219813	(1000224) Spare Bulb, 130 volt, 500 watt	$6.98 I

Phoenix Heavy Duty, Low Profile 2' Fluorescent Fixture



- Marine-grade, low-copper content aluminum alloy with thermoset white powder coat.
- Non-magnetic, stainless steel end caps and hardware.
- EPDM gasketing.
- Vibration resistant and spring loaded locking type lamp holders standard.
- Accommodates (2) 2' fluorescent lamps.
- 120 volt, 20 watt.
- CSA Certified. UL 1598, 1598A, 844 Listed.
- USCG Accepted.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
603793	(LFL220) Length 2'	$414.98 F

Phoenix Marine-Rated 4' Fluorescent Fixture



- Corrosion free, high impact glass reinforced, UV stabilized nylon.
- Watertight gasketing.
- External hardware is captive and non-magnetic stainless steel.
- Vibration resistant spring loaded lamp holders standard.
- 120 volt, 40 watt.
- UL 1598, 1598A, 924 Listed.
- USCG Accepted. ABS.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
603795	(LFSB240) Length 4'	$464.98 F

Phoenix Quartz Halogen Floodlight



- Marine-grade, copper-free aluminum housing.
- Thermoset powder coat - white.
- Stainless steel exterior hardware.
- Sockets adjustable to provide three different beam patterns.
- 500 watts.
- Accepts lamps to 240 volts.
- UL Listed - 1598 and 1598a. USCG Accepted.

Order No.	Mfg. No. / Description	Price
548113	(MS 500 QH) Floodlight	$891.98 F

Optronics Utility Floodlight



- Launch/load floodlight.
- Rugged, weatherproof rubber housing.
- Stainless hardware.
- 12 volt.

Order No.	Mfg. No. / Description	Price
222812	(TL-10SS) Floodlight	$22.98 H

Anderson Marine Floodlight



- Rubber molded housing cushions a flush-mount, par 36 sealed beam from shock and vibration.
- Universal 5/16" mounting stud and adjustable zinc-plated bracket allow mounting in any position.
- 10" lead wire exits through back of housing.

Order No.	Mfg. No. / Description	Price
223622	(3184) Floodlight	$24.98 E

Marpac Halogen Floodlight



- Stainless steel bracket with hardware and nylon housing.
- Dimensions: 4-1/2" x 7".
- Mounts with 1/4" screw.
- #H3, 12 volt, 55 watt halogen bulb.

Order No.	Description	Price
7-0043		$37.98 G
7-9001	Spare Bulb	$8.98 G

T-H Marine L.E.D. Super Spreader Light



- Flood your boat deck with bright and smooth illumination in low light or night fishing!
- 5 super high intensity 1W LEDs.
- 1150 lumens of light output.
- Great for new installations or replacing 55W halogen flood lights.
- Power consumption 80% lower than incandescent lights.
- Die cast aluminum housing, powder coated white.
- Optical grade PMMA lens.
- Operating voltage: 10-30V DC.
- Color temperature: 6000K.
- Completely sealed with waterproof rating: IP67.
- Super long life up to 30,000 hours.
- White housing with stainless steel mounting bracket and hardware.
- Simple, single bolt installation.

Order No.	Mfg. No. / Description	Price
642596	(LED-51914-DP)	$174.98 I

Boater Sports L.E.D. Docking/Spreader Light



- LED docking lights.
- Brighter than standard sealed beams and last longer.
- Clear lenses for maximum light.
- Rustproof and impact resistant housing.
- Dimensions: 4" x 1-3/8".
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-51193	(51193) White	$129.95 R

Marpac Adjustable Spreader Light



- Stainless steel housing.
- Adjustable.
- Length 4-1/2".
- 12 volt, 35 watt sealed beam.

Order No.	Description	Price
7-0082		$50.98 G
7-9001	Spare Bulb	$8.98 G

Jabsco Tungsten Halogen Floodlights





- Unique trapezoidal light beam allows light to spread with even intensity when lamp is mounted from above at one end of a work area.
- Ideal for lighting deck or work surface from cabin top, spoiler or Tuna Tower.
- 12 volt, 50 watt.
- White housing.

Order No.	Mfg. No. / Description	Price
413512	(45900-1000) 3" x 5"	$72.98 G
413500	(45900-0000) 4" x 6"	$102.98 G
413562	(45903-0002) Spare Bulb for 413512	$51.98 F
413550	(45903-0000) Spare Bulb for 413500	$87.98 G

Scandvik L.E.D. Spreader Lights





- LED Spreader Light will make working your deck or cockpit much safer on a dark night.
- Strong aluminum alloy housing with powder coat finish will stand up to years of use.
- Four 3 Watt LED with 50000 hours lifetime.
- Equivalent to a 40 to 50 Watt Halogen Bulb.
- LED beam angle: 110°.
- Daylight White LED color.
- Color Temperature: 5500K-6300K.
- Lumens: 130-147 x 4.
- Temperature of LED is less than 158° with ambient temperature of 77°.
- Working Voltage: 8-30 volts DC.
- Current Draw: .8 amp.
- Dimensions (without bracket): 5-7/8" Long x 2-3/8" wide x 1-7/16" deep.
- Bracket mount: The adjustable bracket allows flexibility in mounting options.

Order No.	Mfg. No. / Description	Price
606203	(41342) LED Spreader Light	$155.98 H

- Flush mount.

Order No.	Mfg. No. / Description	Price
606204	(41343) LED Spreader Light	$155.98 H

TACO L.E.D. Spreader Light



- Six, high-powered 1-watt LEDs.
- Wide 150° light spread.
- High (988 lumens) light output equivalent to a 50W halogen.
- Waterproof (non-submersion).
- Shock resistant LEDs.
- Adjustable stainless steel mounting bracket with adjustable tilt.
- Includes clamp for standard 3/4" - 1" IPS T-top ring (1-1/16" and 1-5/16" OD pipe).

Order No.	Mfg. No. / Description	Price
444248	(F38-4600WHA1) LED Spreader Light	$73.98 F

©2014 Donovan Marine, Inc.

Rigid E-Series L.E.D. Light Bars



- First developed in 2004, the E-Series lineup of products by Rigid Industries set the standard in forward projecting LED lights.
- The original patented "Hybrid" optical system continues to lead the field in efficiency and projection.
- Highest Lumen output per watt - Each 10" section produces approx. 3950 lumens - equivalent to 150 watts of halogen light. 50,000+ hour lifespan.

Order No.	Mfg. No. / Description	Price
2003701	(10621) 6" Spot	$298.98 E
2003702	(11021) 10" Spot	$399.98 E
2003703	(12031) 20" Spot/Flood Combo	$699.98 E

Rigid D-Series Dually L.E.D. Lights



- A compact LED light that can be used for anything from a reverse light on a truck, a handlebar light on a motorcycle, to a flood light on a trailer.
- Versatile mounting options combined with superior optics make the D-Series the solution for your high-performance lighting needs.
- Thermally managed circuitry prevents overheating.
- 3"x 3" housing.
- 50,000+ hour lifespan.

Order No.	Mfg. No. / Description		Price
2003706	(20211) White, Flood	Set of 2	$199.98 E
2003707	(20221) White, Spot	Set of 2	$199.98 E

Marpac L.E.D. Advantage Deck Light



- Compact, but bright LED design consumes only 17 watts.
- Tough, waterproof aluminum housing.
- Built in heat sink.
- Mounts with 5/16" screw.
- Suitable for 9-36 volts.

Order No.	Description	Price
7-0041	LED Deck Light	$99.98 G

Aqua Signal Salvador L.E.D. Deck Light



- Each light contains 60 individual energy saving LEDs.
- Low Amp draw, 0.4 amp.
- Swivel mounting allows for easy positioning light to any desired deck location.
- High strength plastic chrome housing and plastic lens.
- Powder coated aluminum mounting bracket.

Order No.	Mfg. No. / Description	Price
207414	(86500-7) 6" Oval	$76.98 Q

Rigid SR-Series Single Row L.E.D. Light Bars



- Once again Rigid Industries raises the standard with their latest offering, the SR Series Single Row Lightbars.
- Measuring only 1.5" tall, the SR is set to change the face of LED light systems.
- Producing over 3200+ lumens in the 10" version, while drawing only 35 watts.
- 50,000+ hour lifespan.

Order No.	Mfg. No. / Description	Price
2003724	(90621) 6" Spot	$219.98 E
2003725	(91031) 10" Spot/Flood Combo	$299.98 E

Rigid M-Series Single Row Mini (SRM) L.E.D. Light Bar



- High-powered LED lighting has never come in a smaller more efficient package.
- The SR-M draws as low as 0.63 amps and can run on any 7 to 36 volt system.

Order No.	Mfg. No. / Description	Price
2003729	(95231) Spot	$164.98 E

T-H Marine L.E.D. Spreader Light



- 10 high intensity LEDs.
- 1000 lumens of light output.
- Great for new installations or replacing 55W halogen flood lights.
- Power consumption 80% lower than incandescent lights.
- Die cast aluminum housing, powder coated white.
- Optical grade lens.
- Operating voltage: 10-30V DC.
- Completely sealed with waterproof rating: IP67.
- Super long life up to 30,000 hours.
- White housing with stainless steel mounting bracket and hardware.
- Simple, single bolt installation.

Order No.	Mfg. No. / Description	Price
642593	(LED-51888-DP)	$199.98 I

TACO L.E.D. Deck Light



- Has over 30 LEDs with 100,000 hour operating life.
- Impervious to vibration and shock from high wake pounding.
- High-impact, UV-resistant white plastic housing and polycarbonate lens.
- Water and impact-resistant.
- Includes: Adjustable clamp for easy clamp-on installation on T-Top rings and other 3/4" - 1" IPS pipe.

Order No.	Mfg. No. / Description	Price
444238	(F38-3521-WHA-1) Deck Light	$54.98 F

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Boater Sports Docking Light Kits



- Docking halogen lamps deliver more power than standard sealed beams and last longer.
- Clear lenses for maximum light output.
- Rustproof, impact-resistant housing.
- Includes two lights, rocker switch, wire, connectors, and instructions.
- Fuse: 15 amp (included).
- Dimensions: 5-3/4" x 3-1/4" x 3".

Order No.	Mfg. No. / Description	Price
1-51190	(51190) Black	$29.95 H
1-51191	(51191) White	$31.95 R

Anderson Nightwatcher® Mini Halogen Driving/Docking Lights



- Powerful 55-watt, halogen driving or docking light features black or white housing with precision cast, hardened-glass lens, and vaporized aluminum reflector.
- Features: Stainless steel mounting hardware and bezel screws.
- Wiring kit sold separately.

Order No.	Mfg. No. / Description	Price
223511	(E517-2) Black Kit	$39.98 H
223512	(E517-2W) White Kit	$39.98 H

Optronics DLL Series L.E.D. Docking Lights



- Durable diecast aluminum housing, coated for protection against corrosion and UV exposure.
- Illuminate docks, buoys, breakwaters and other watercraft.
- Beam illuminates reflective surfaces at over 500 yards, and the rugged, weatherproof design is suitable for fresh and saltwater applications.
- Optically engineered lens produces wide, flat beam.
- Low amp draw - 0.683 amps at 12 or 24VDC.
- Dual power - works with 12VDC and 24VDC systems.
- Impact resistant polycarbonate lens.
- Fully adjustable, corrosion resistant stainless steel mounting bracket and hardware.
- Sold pair of lights with wiring and switch.

Order No.	Mfg. No. / Description	Price
523112	(DLL-50CC) Black Housing	$125.98 Q
523114	(DLL-50WC) White Housing	$125.98 Q

Aqua Signal Universal Halogen Deck Lamps



- State-of-the-art free form lens reflector technology allows for 30% more light output than comparable 55W lamps.
- Universal mounting brackets and compact size make for easy installation anywhere.
- Lamp housing is made of UV stabilized plastic and all hardware is 316 chrome plated stainless steel.
- Includes: 12 volt, 55W halogen bulb and is 24 volt, 70W compatible.

Order No.	Mfg. No. / Description	Price
702150	(ML-005BW/DSP) Black	$54.98 Q
702155	(ML-005QQ/DSP) White	$54.98 Q

Anderson Nightwatcher® Slim Oval ION Fog Light



- Low profile, 55-watt halogen clear fog light features ion-coated lens and black metal housing.
- Slim size provides maximum road clearance.
- Mount above or below bumper with screws or double-sided tape for installation on any surface.
- Kit includes: Two lights, wiring, illuminated rocker switch and installation instructions.
- Also available with white powder-coated finish and stainless-steel hardware for marine applications.

Order No.	Mfg. No. / Description	Price
223527	(E582-2W) Docking Kit	$71.98 H

Anderson Nightwatcher® Compact Square ION Driving Light



- Compact, 55-watt halogen driving light features ion-coated lens and black metal housing.
- Kit contain: Two lights, wiring, illuminated rocker switch and installation instructions.
- Also available with white powder-coated finish and stainless-steel hardware for marine applications.
- Replacement bulb available by special order only.

Order No.	Mfg. No. / Description	Price
223528	(E586-2W) Docking Kit	$59.98 H

Optronics Docking Light Kits



- Includes: (2) Quartz Halogen 55 watt lights, stainless mounting brackets, rubber bracket boots, safety-fused wiring harness and lighted switch.
- Rubber bracket boots are color matched to light housings.

Order No.	Mfg. No. / Description	Price
523096	(DL-16CC) Black	$31.98 Q
523109	(DL-16WC) White	$31.98 Q

©2014 Donovan Marine, Inc.

Sierra Heavy Duty Docking Light



- 30,000 cp bulb illuminates below the deckline.
- Newly-designed housing is fully sealed.
- Align and change eyeball from exterior of the hull.
- New eyeball will fit into old-style docking light housing.
- New-style housing will fit existing cut-out with only slight modification.
- Mil-Spec sealed waterproof/dustproof rocker switch panel included.
- 12 volt.
- White.

Order No.	Mfg. No. / Description	Price
995001	(95001)	$497.30 H
995002	(95002) Replacement 12 volt Light	$129.33 H

Attwood L.E.D. Docking Lights



- Designed to be mounted directly to the surface of the hull.
- With only a small hole for wiring and 3 screws for attachment, Attwood's surface mount design makes installation quick and noncomplicated.
- Designed and tested for extreme conditions.

Order No.	Mfg. No. / Description	Price
2350117	(6520SS4) Stainless Steel Bezel, White	$371.98 H
2350119	(6523BK7) Black Powder Coat Bezel, Black	$176.98 H

Aqua Signal Stainless Steel Halogen Docking Light



- Stainless steel cover.
- Halogen docking lights for safe maneuvering around docks, anchorages and moorings at night.
- Flush mount.
- 12 volt, 50 watt.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
207394	(85104-7) Docking Light	$244.98 Q

TACO LUMA L.E.D. Tube Light



- 108 LEDs; 300 Lumens of bright, White light; 150 Lumens of low-glare Red light
- Energy-efficient, low-draw LED lights won't drain battery.
- White LEDs offer max overhead safety lighting and Red LEDs ideal for chart reading.
- Water and impact-resistant, marine-grade for wet locations and outdoor applications.
- Ample cable for safe wiring.
- Also available with polished anodized aluminum housing (F38-2050-1)

Order No.	Mfg. No. / Description	Price
444240	(F38-2060-1)	$60.98 F

T-H Marine Headlight Kit



- Durable, rugged all rubber housing is completely weatherproof and unbreakable.
- Protects sealed beam from shock and vibration.
- The sealed beam lamp is 110,000 candlepower with a concentrated beam.
- Includes: (2) Housings, (2) sealed beams, switch panel and all mounting hardware for lights.

Order No.	Mfg. No. / Description	Price
642312	(HL-1) Headlight Kit	$149.98 L
642313	(HLB-1) Mounting Brackets	$20.98 H

Aqua Signal L.E.D. Surface Mount Docking Light



- 550 lumens output;
- New product features the latest in LED technology providing 550 lumens of light output.
- Illuminates a large area in low visibility for safe maneuvering around docks, anchorages and moorings at night.
- Surface mount provides for easy installation without having to cut large holes on the mounting surface.
- Its small compact design makes it suitable for any size power boat.
- Includes LED accent lights for accenting at night.
- Housing is made from polished 316 stainless steel.

Order No.	Mfg. No. / Description	Price
207407	(86104-7) Dimensions: 4.75" L x 2.64" W	$307.98 Q

Aqua Signal L.E.D. Multipurpose Light



- New LED multipurpose light has rocker switch to control both red and white LED light.
- Overall length is 16" for a very bright output in engine rooms, storage lockers, and work spaces. Surface mount.
- Light Style: Utility light Voltage/Draw: 12V/0.50A Fixture Material: Plastic Lens Material/Description: Clear plastic Switch Type: Three-position rocker switch-white/off/red
- Fixture Dimensions: 16"W x 4.45"H x 1"D
- Mounting Hardware: Four mounting screws required, not included
- Warranty: One year

Order No.	Mfg. No. / Description	Price
207400	(16530-7) Red/White LED's.	$115.98 Q

TACO LUMA L.E.D. T-Top Light



- Features 100 highly efficient LED lights for long 100,000 hour operating life.
- White LEDs offer maximum lighting and visibility, switch to red LEDs for chart-reading.
- Impact-resistant and waterproof, draws less than 1/4 amps and operates on a standard 12 volt marine battery.
- A generous 18' of safe, shielded cable.
- Polished anodized housing is pre-drilled for easy hook-up.

Order No.	Mfg. No. / Description	Price
444243	(F38-2050-1)	$130.98 F

Optronics Pro-Torx™ Rechargeable Spotlight



- 110 volt and 12 volt chargers included.
- 6 volt, 4 amp battery.
- 55 watt quartz halogen bulb.
- White housing.
- 1,000,000 candlepower cordless, rechargeable handheld spotlight.
- Halogen technology for maximized beam power and distance.

Order No.	Mfg. No. / Description	Price
523213	(GR-100W) Rechargeable Spotlight	$23.98 Q

Audiopipe Rechargeable Spot Light



- Built in sealed rechargeable battery. provides up to 20 minutes of continuos operation.
- High impact rubber lens protector.
- Anti-slip handle additional.
- LED map light includes AC charger for home charge and 12 volt charger.

Order No.	Mfg. No. / Description	Price
559715	(AT-694) Rechargeable Spot Light	$37.98 F

Boater Sports Rechargeable Spotlight



- Rechargeable mini LED spotlight.
- 3 watt cordless light.
- Black housing.
- AC/DC charger included.

Order No.	Mfg. No. / Description	Price
1-51098	(51098)	$32.95 H

Optronics BlueEye Beam Series Spotlight



- Eliminates reflective glare and protects against night blindness.
- 400,000 candlepower.
- Sealed beam 12 volt spotlight.
- Glare free saltwater/marine version with corrosion resistant hardware.
- 170 watt Par 46 BlueEye Beam sealed beam bulb.
- 10' white coil cord.
- Push button switch.

Order No.	Mfg. No. / Description	Price
523187	(KB-4001)	$47.98 Q

Optronics Nightblaster Handheld Spotlights



- 12 volt handheld spotlights.
- Halogen technology for maximized beam power and distance.
- 10' coil cord with 12 volt cigarette lighter style plug.
- Marine glare reduction lens.
- Convenient storage compartment for cord.
- Trigger switch.

Order No.	Mfg. No. / Description		Price
523225	(QH101) 1,000,000 CP	55 watt	$23.98 Q
5220042	(QH3001) 3,000,000 CP	130 watt	$31.98 H

Energizer Hard Case Professional 4C L.E.D. Spotlight



- Bright white LED delivers - 80 lumens.
- Impact resistant ABS plastic frames with steel sides and shock absorbing rubber overmolds.
- Rugged shatterproof - survives a 15' drop.
- Runtime: 12 hours.
- Black and Dark Grey.

Order No.	Mfg. No. / Description	Price
340257	(TUF4CPE) LED Spotlight	$46.98 Q

Marpac L.E.D. Advantage Rechargeable Utility Light



- 60 super bright LEDs for adding light anywhere it's needed
- Lasts up to six hours or longer on a full charge
- Cordless convenience-no power wires in the work area
- Hang where needed with the swivel hook
- Hexagonal shaped bezel for use on flat surfaces without rolling
- Water, shock and oil resistant
- AC and 12V DC chargers included
- Recharges in approximately 3 hours

Order No.	Description	Price
7-0039	(LT100321)	$26.98 H

High Beam Series L.E.D. 60 High Intensity Cordless Light Bar



- Features super bright illumination with up to 4 hours of use on a single charge with 100,000 hour LED life.
- Includes a magnetic mount, 360° swivel hook, AC/DC chargers, a NiMH internal rechargeable battery and is weather resistant.
- Length 15", width 2".

Order No.	Mfg. No. / Description	Price
788313	(LED 60) LED Light Bar	$25.98 D

Optronics NightBlaster® Submersible Fish-N-Lite



- Submersible Green Fish-N-Lite.
- Operates both in and out of the water.
- 9" fluorescent tube glows green when illuminated.
- Includes: Battery clips, 15' cord and 20' safety cord.
- 12 volt.

Order No.	Mfg. No. / Description	Price
523022	(UW-100G) Fish-N-Lite	$30.98 Q

©2014 Donovan Marine, Inc.

High Beam Series L.E.D. 18 High Intensity Cordless Flip Light

Cobra Marine



- A compact fold up design.
- Features super bright illumination with up to 7 hours of use on a single charge with 100,000 hour LED life.
- Includes a magnetic mount, 360° swivel hook, AC/DC chargers, a NiMH internal rechargeable battery and is weather resistant.
- Dimensions: 7.50" H x 2.55" W x 1.50" L.

Order No.	Mfg. No. / Description	Price
788301	(LED 18) LED Flip Light	$17.98 D

eGear E02™ Ultralight Headlamp

eGear®



- Hands-free lighting.
- Perfect for impulse shopping, especially at checkout.
- Easy to grab-n-go.
- Each item individually barcoded.
- Sturdy, clear plastic with lid reduces packaging and consolidates shelf space.
- Reusable, refillable and recyclable.

Order No.	Mfg. No. / Description	Price
586262	(21-HL1341A30) 30 Count, Assorted Colors	$367.98 H

Energizer Hard Case Professional L.E.D. Flashlight

Energizer



- The anti-roll design combined with impact resistance greatly reduces the potential for damage to internal components.
- Shatterproof lens protect LED from damage.
- Impact resistant light survives a 30' drop.
- Push button switch.
- Uses 2 "AA" batteries and 3 Nichia LEDs.
- Runtime: 20 hours.

Order No.	Mfg. No. / Description	Price
340261	(TUF2AAPE) Black and Dark Grey	$28.98 Q

Energizer Industrial Flashlight

Energizer



- An impact-resistant housing reduces the chance of breakage from dropping and abuse and the chemical-resistant polypropylene body protects it from staining and corrosion.
- Shockproof and floats for easy recovery from water.
- A built-in hanger ring makes it easy to keep this sturdy light within reach.
- Uses 2 "D" batteries and KPR-102 bulb.
- Note: Batteries not included.

Order No.	Mfg. No. / Description	Price
340226	(1251) Yellow	$8.98 Q

Optronics L.E.D. Submersible Green Fishing Light

optronics



- 6 submersible LEDs provide light output comparable to fluorescent and halogen models of the same size.
- Fluted reflector multiplies the LEDs light and reflects it in every angle to reach more fish.
- Lasts up to 50 hours powered by 3 "AAA" batteries.
- Compact size (less than 10") for easy storage.
- Eyelet on endcap for weight allows light to be submersed at desired level.

Order No.	Mfg. No. / Description	Price
523035	(LED-100G) Fishing Light	$30.98 Q

Energizer L.E.D. Headlight

Energizer



- Swivel adjustment aims light.
- Spot light, flood light or red LEDs.
- Equipped with 6 LEDs: (2) White spot, (2) White flood and (2) Red.
- Multiple position push button switch.
- Mounts over hard hat with no slippage.
- Headband designed for comfort.
- Uses 3 "AAA" batteries.

Order No.	Mfg. No. / Description	Price
340104	(HDL33AINE) Yellow	$28.98 Q

Rigid L.E.D. Halo Torch Flashlight



- Offers five modes of operation: High, medium, low, flasher and SOS.
- Has a nice wide beam for area illumination and, when set to High, it produces 800 raw lumens with a focused center that projects 1,000 feet.
- Has almost 10 times more light output.
- Can run for almost 3 hours on a full charge.
- Impact and water resistant.
- Kit includes a rechargeable battery and both a 110V wall chargers and an AC/DC 12V charger for your vehicle.

Order No.	Mfg. No. / Description	Price
2003710	(30120)	$99.98 E

Energizer Industrial Economy Flashlight

Energizer



- Sturdy polyethylene case and a shatterproof lens.
- Resists breaking from dropping or abuse.
- Flip-up hanger ring is always there when you need it.
- Uses 2 "D" batteries and KPR-102 bulb.
- Note: Batteries not included.

Order No.	Mfg. No. / Description	Price
340199	(E250Y) Yellow	$3.98 Q

Optronics NightBlaster Submersible Fish-N-Lite

optronics



- Submersible Fish-N-Lite.
- 9 fluorescent tube glows green when illuminated.
- Includes: Battery clips, 15' cord and 20' safety cord.
- Operates both in and out of the water.
- Draws only 1/2 amp.
- 12 volt.

Order No.	Mfg. No. / Description	Price
523039	(FLL-712-UV) Fish-N-Lite	$37.98 Q

Energizer L.E.D. Headbeam

Energizer



- Swivel and tilt adjustment aims light.
- Equipped with 3 LEDs: (2) White spot for flood and (1) red for night vision.
- Multiple position push button switch.
- Runs 50 hours on one set of batteries.
- Uses 3 "AAA" batteries (included).

Order No.	Mfg. No. / Description	Price
340101	(HD33A1EN) Black and Blue	$21.98 Q

Energizer Hard Case Professional L.E.D. Flashlight

Energizer



- Durable and weatherproof.
- Hands-free operation allows table or bench top use.
- Swivel head puts light where you need it.
- Shatterproof lens protect LED from damage.
- Impact resistant light survives a 15' drop.
- Uses 4 "AA" batteries and 4 Nichia CS LEDs.
- Runtime: 15 hours.

Order No.	Mfg. No. / Description	Price
340265	(TUF421PE) Black and Dark Grey	$33.98 Q

Energizer Industrial Safety Flashlight

Energizer



- Heavy duty construction.
- Break resistant lens protects lamp from damage.
- Hanger ring in end cap gives ability to hang up or belt-carry.
- MSHA approved for use in methane-air mixture and UL listed for Division I and II, Class I, Group C and D environments.
- For use in gas-air mixtures of Acetone, Butane, Benzene, Diethyl Ether, Ethyl and Methyl Alcohols, Gasoline, Methane (natural gas), Naphtha, and Propane.
- Uses 2 "D" batteries and PR2 bulb.
- Note: Batteries not included.

Order No.	Mfg. No. / Description	Price
340238	(1259) Safety Orange	$11.98 Q

Fulton Waterproof Flashlight

FULTON



- Class II Group G and Class I Group C, D Approved.
- Approved for hazardous areas of atmosphere.
- Waterproof.
- 3 position switch, switch guard and spare bulb.
- Uses 3 "D" batteries.
- Orange body with black lens ring and end cap.
- Note: Batteries not included.

Order No.	Mfg. No. / Description	Price
261736	(932-1B) Orange	$19.98 Q

Energizer Industrial Safety Lantern

Energizer



- Heavy duty construction minimizes potential for damage to light.
- Break resistant lens protects lamp from damage.
- Floats for easy recovery from water.
- MSHA approved for use in methane-air mixture and UL listed for Division I and II, Class I, Group C and D environments.
- For use in gas-air mixtures of Acetone, Butane, Benzene, Diethyl Ether, Ethyl and Methyl Alcohols, Gasoline, Methane (natural gas), Naphtha, and Propane.
- Uses 6 volt spring terminal battery and PR-13 or KPR-113 bulb.
- Note: Batteries not included.

Order No.	Mfg. No. / Description	Price
340202	(459) Safety Lantern	$18.98 Q

eGear PICO NV™ Red Night Vision Survival Light

eGear



- The Pico NV maintains the same quality as the standard Pico, plus:
- Red LED light to preserve night vision
- Black case with red bezel
- Bulb: 5mm red unbreakable, lifetime LED
- Brightness: 1-3 Lumens
- Run time: More than 6 hours
- Designed specifically for nighttime situations when maintaining night vision is critical.
- Excellent for use on boats and for reading maps.

Order No.	Mfg. No. / Description	Price
586313	(21-1450-14) Black/Red	$9.98 Q

eGear Splashflash™ LED Light

eGear



- A must-have, submersible LED.

Order No.	Mfg. No. / Description	Price
586346	(2117001006M) Yellow	$11.98 Q
586342	(21-17001-A50) 50 Count, Assorted Colors	$611.98 H

Audiopipe Emergency Lamp

Audiopipe



- 7 x 1500MCD, 110 bright LED Torch.
- 4V 1.0Ah rechargeable sealed lead-acid battery.

Order No.	Mfg. No. / Description	Price
559730	(EL-7002L) Emergency Lamp	$14.98 F

Audiopipe L.E.D. Emergency Lamps

Audiopipe



- 12 x 1500MCD, 110 bright LED Torch.
- 4V 3.0Ah rechargeable sealed lead-acid battery.

Order No.	Mfg. No. / Description	Price
559735	(EL-8003L) Emergency Lamp	$28.98 F
559740	(EL-8005L) Emergency Lamp	$31.98 F

eGear PICO™ Personal Survival Light

eGear



- Easy twist on/off operation.
- Case material: 6061 anodized aluminum.
- Size: 1-1/2" H x 1/2" D.
- Weight with batteries (included): < 1 oz Run time: 15 hours.
- Beam Distance: 30 feet.
- Water resistant IPX4.

Order No.	Mfg. No. / Description	Price
586317	(21-1400-001) Black	$9.98 Q
586321	(21-1400-004) Red	$9.98 Q
586332	(21-1400-000) Blue	$9.98 Q
586337	(21-1400-002) Titanium	$9.98 Q
586325	(21-1400-050) 50 Count, Assorted Colors	$509.98 H

VOLT™ 12V USB Charger/Adaptor & JOLT™ Rechargeable USB Mini Light Combo Pack

eGear



- Conveniently charges USB electronics through 12 volt outlet (cigarette lighter).
- 5.0v output.
- Red LED charge indicator on charger top.
- Size: 2.2" H x 1" D.
- Weighs just .6 oz.

JOLT:

- Charges in just 30 MINUTES, Lasts 120+ minutes.
- Rubberized, soft grip case.
- Steady on and flashing modes.
- Size: 2.2" H x .7" D.
- Weighs just .6 oz.
- Bulb: .5 watt unbreakable, lifetime 25 lumen LED.
- Run time: 120+ minutes per charge.

Order No.	Mfg. No. / Description	Price
586300	(21-1530-01) Black/Black	$20.98 Q
586305	(21-1530-00) Blue/Black	$20.98 Q
586309	(21-1530-04) Red/Black	$20.98 Q

©2014 Donovan Marine, Inc.

Emergency Battle Lanterns



- Designed and mfg. to US Navy Spec MIL-F-16377.
- Lanterns are made of yellow high impact glass filled polyester resin and are virtually indestructible.
- When connected to a 115 volt power source the relay is energized and the sealed beam is off.
- Model SMY100-2 is portable with a built-in carrying handle and has "T" bracket.
- Model SMY101-2 includes a 115V AC relay and 10' of power cord.
- Lanterns required (2) 6 volt spring type batteries. (Not included).

Order No.	Mfg. No. / Description	Price
696320	(SMY100-2) Lantern Only	$237.98 Q
696344	(SMY101-2) Lantern with Relay	$265.98 Q
696332	(2438) Slotted Bracket	$18.98 G
696368	(SMY2546) "T" Bracket	$19.98 G
220486	(4546) Spare Bulb	$27.98 I
340125	(1209) 6 Volt Spring Battery	$4.98 Q

- An emergency lantern with a solid stat charger/control unit, rechargeable battery and push button test switch.
- The lantern may be used anytime during the charge cycle.
- Recharge time: 8 hours.
- Lamp burn time: 6.5 - 7.5 hours depending on age and condition of battery.

Order No.	Mfg. No. / Description	Price
696349	(SMY101.3) Rechargeable (Battery Not Included)	$563.98 Q
696351	(PS650L) Rechargeable, 6 Volt Battery	$91.98 Q

Aqua Signal Bremen Searchlight

Handle Bracket





- SOLAS approved searchlight.
- Used by coast guard and military around the world.
- Morse code capable.
- Black elastic rubber housing that is non-corrosive, non-magnetic, and is completely submersible (IP68).
- Uses 50 W halogen bulb, included.
- 10' pigtail cable.
- 12 volt.

Order No.	Mfg. No. / Description	Price
207298	(80600-7) Searchlight	$221.98 F

- Handle bracket for handheld searchlight.

Order No.	Mfg. No. / Description	Price
207313	(80903-1)	$25.98 F

eGear 6-Day Lantern™



- Little Brother to our best-selling 10-Day Lantern.
- Water resistant.
- Runs 6 days (144 continuous hours) on low setting.
- Compact, lightweight, floating lantern.
- Rubberized handle and base for easy grip.
- Adjustable brightness provides just the light you need from 10 to 45 lumens.
- Light glows through translucent brim.
- Case material: High-impact ABS plastic
- Dimensions: 5.2" H x 4.5" D.
- Weight with batteries: 10.6 oz.
- Batteries: 4x AA (not included).

Order No.	Mfg. No. / Description	Price
586258	(21-LT1304000) Silver	$20.98 Q

Audiopipe Emergency Lamp



- 24 pcs bright LED, Water-proof.
- With handle and hanging hook.
- 4D size dry batteries (not included).

Order No.	Mfg. No. / Description	Price
559720	(EL-603D) Emergency Lamp	$24.98 F

Audiopipe Rechargeable Camping Lantern



- AC power 120v.
- Charging time: approx 20-24 hours.
- Duration time: approx 20 hours.
- Rechargeable battery: 6v 4.0ah dealed lead-acid battery.

Order No.	Mfg. No. / Description	Price
559725	(EL-6003L) Camping Lantern	$44.98 F

eGear 10-Day Lantern



- Incredible 10 days (260 hours) burn time on low setting.
- 40 hours burn time on high setting.
- 12 ultra-bright lifetime LEDs are unbreakable and never need replacing.
- Adjustable brightness provides just the light you need from 10 to 160 lumens.
- Translucent brim diffuses light evenly.
- Easy grip rubberized handle.
- Safe for indoor and outdoor use.
- Great alternative to candles/fuel lanterns.
- Case material: High-impact ABS plastic.
- Dimensions: 10.8" x 6.3".
- Weight with batteries: 2.5 lbs.
- Batteries: 4x 1.5v D-Cell batteries (not included).
- Water resistant.

Order No.	Mfg. No. / Description	Price
586250	(21-13012-00) 10-Day Lantern	$40.98 Q

eGear 30-Day Lantern™



- eGears longest lasting lantern ever!
- Lasts an amazing 30-Days.
- Super Bright 300 Lumen LED.
- Brightness: Up to 45 lumens.
- 4 different lighting modes (includes an SOS flashing mode).
- Converts to a downlight.
- Water and impact resistant.
- Run Time: Low: 30-Days, Medium: 3.5 Days, High: 32 Hours, SOS Flashing: 15 Days.
- Case material: High-impact ABS plastic.
- Dimensions: 9.5" H x 4" D.
- Weight with batteries: 1.25 lbs.
- Batteries: 3x 1.5v D Alkaline (not included).

Order No.	Mfg. No. / Description	Price
586254	(21-LT1330000) Silver	$61.98 Q

eGear Guardian™ Dual Function Signal Light

REVERE



- Unbreakable lifetime 10 lumen LED bulb.
- Size: 1.6" H x 1.5" D.
- Universal clip.
- Weight with batteries (included): < 1 oz.
- Visible up to 2 miles.
- Waterproof to 300 feet.
- Steady-On: 100 hours.
- Flashing: 250 hours.

Order No.	Mfg. No. / Description	Price
586270	(21-A54-000) Yellow	$15.98 Q
586274	(21-A54-002) Blue	$15.98 Q
586277	(21-A54-003) Green	$15.98 Q
586282	(21-A54-001) Red	$15.98 Q
586286	(21-A54-004) White (Clear)	$15.98 Q

eGear Tag-It™ Dual Function Signal Light

eGear



- Unbreakable lifetime 10 lumen LED bulb.
- Size: 1.6" H x 1.5" D.
- Built-in carabiner.
- Weight w/batteries (included): < 1 oz.
- Visible up to 2 miles.
- Waterproof to 300 feet.
- Steady-On: 100 hours.
- Flashing: 250 hours.

Order No.	Mfg. No. / Description	Price
586497	(21-51512) Blue	$15.98 Q
586503	(21-51513) Green	$15.98 Q
586505	(21-51511) Red	$15.98 Q
586509	(21-51514) White (clear)	$15.98 Q
586513	(21-51510) Yellow	$15.98 Q

Energizer Everyday Use Batteries

Energizer





Order No.	Mfg. No. / Description	Price
340245	(E91BP-4) "AA" Cell Battery, 4 Pack	$5.98 Q
340247	(E92BP-2) "AAA" Cell Battery, 2 Pack	$4.82 Q
340249	(E93BP-2) "C" Cell Battery, 2 Pack	$7.98 Q
340251	(E95BP-2) "D" Cell Battery, 2 Pack	$7.98 Q

Industrial Alkaline Batteries

Energizer





Order No.	Mfg. No. / Description	Price
340113	(EN22) 9 Volt Battery	$2.98 Q
340137	(EN91) "AA" Cell Battery	$0.98 Q
340149	(EN92) "AAA" Cell Battery	$0.98 Q
340151	(EN93) "C" Cell Battery	$1.98 Q
340163	(EN95) "D" Cell Battery	$2.98 Q

eGear Trekker™ Stormproof Lighter

eGear



- Extra large fuel tank.
- Stainless steel wire closure.
- 1,000+ ignitions on a single fill.
- Easy grip rubberized case.
- Includes wrist lanyard.
- Watertight rubberized casing.
- Fuel capacity: 4g.
- Dimensions: 3.7" H x 1.2" D.
- Weight: 2.5 oz.

Order No.	Mfg. No. / Description	Price
586358	(21-W03-006) Matte Black	$61.98 Q

eGear Delta™ Stormproof Lighter

eGear



- The Delta has all the standard Trekker Stormproof Lighter features, plus:
- Elastomer armor outer covering.
- Incredible impact resistance.
- Dimensions: 2.6" x 2.05" x 0.93".
- Fuel Capacity: 1g.
- Weight: 2 oz.
- All Trekker Stormproof Lighters generate an invisible, torch-like flame that works even in the most adverse weather conditions.
- Quadruple-refined or Premium butane fuel is required for maximum performance. (Standard grade butane is NOT recommended).

Order No.	Mfg. No. / Description	Price
586350	(21-390-0001) Matte Black	$61.98 Q

Eveready 6 Volt Batteries

Energizer



Order No.	Mfg. No. / Description	Price
340125	(1209) 6 Volt Spring, Super Heavy Duty	$4.98 Q
340214	(510S) 6 Volt Screw, Classic	$6.98 Q

Eveready Super Heavy Duty Carbon Zinc D Cell Battery

Energizer



Order No.	Mfg. No. / Description	Price
340175	(1250) D Cell Battery	$1.98 Q

©2014 Donovan Marine, Inc.

Perko Fig. 314 Pilot House Control Searchlights



- Chrome plated brass head with chrome plated bronze base.
- Lever action, pilot house control.
- Lever handle controls both horizontal and vertical movement.
- 380° horizontal movement.
- 70° vertical movement.
- For ceiling thicknesses of up to 5".
- 12 volt.

- 7" Sealed beam unit.
- Approximately range 5/8 mile.
- Overall length 24".
- 100 watts.
- 250,000 candlepower.

Order No.	Mfg. No. / Description	Price
527917	(314 C07 12V)	$1,159.98 Q
530003	Rubber Boot	$24.98 B
220462	(433 003 12V) Spare Sealed Beam Unit	$141.98 I

- 8" Sealed beam unit.
- Approximately range 3/4 mile.
- Overall length 26".
- 250 watts.
- 500,000 candlepower.

Order No.	Mfg. No. / Description	Price
412433	(314 C08 12V)	$1,738.98 H

ACR RCL-100 Remote Control Searchlight



- Rugged marine grade aluminum.
- Saltwater resistant design includes triple-primed and sealed construction, nylon and phenolic washers and aluminized stainless steel screws with insulating lubricant.
- Twin high intensity 55 watt halogen bulbs.
- Internal elevation mechanism for precise pitch control of beam.
- Includes fingertip remote control Point Pad; up to three remote Point Pad units may be installed on system.
- Exclusive XRCiZ feature rotates and moves light assembly every 30 days from activation to keep all bearing surface free of corrosion.
- Beam angle: 5° vertical, 7° horizontal.
- Elevation angle: 9° up, 17° down.
- Rotation speed: Fast 28° per second, slow 18° per second.
- Elevation speed: 2° - 7° per second.
- 200,000 candlepower.
- Dimensions: 8" H x 8" D x 9" W.
- 12 volt.

Order No.	Mfg. No. / Description	Price
200701	(1930.3)	$1252.98 B
200713	(6001) Halogen Bulb, 12 Volt, 55 Watt	$114.98 E

Perko Fig. 535 Pilot House Control Solar-Ray® Searchlight



- Chrome plated brass head with chrome plated bronze base.
- 7" sealed beam bulb.
- Lever handle controls both horizontal and vertical movement.
- Control length 7-1/2".
- Waterproof construction.
- Approximately range 5/8 mile.
- Maximum ceiling thickness 4-1/2".
- Height above surface 12-1/2".
- Base diameter: 4-7/8" x 3-1/8".
- 100 watts.
- 12 volt.
- 250,000 candlepower.

Order No.	Mfg. No. / Description	Price
540559	(535 003 12V)	$831.98 E
220462	(433 003 12V) Spare Sealed Beam Unit	$109.98 I

Guest Remote Control Spotlight Kit



- This 100,000 candlepower halogen sealed beam spotlight provides the ultimate combination of sleek, contemporary styling and exceptional performance.
- Spotlight kit includes: Joystick control (22209) and 15' wiring cable with easy install plug ends.
- Easy to retrofit, same footprint of the 5 spotlight.
- Corrosion proof, impact resistant UV stabilized ABS.
- Remote operation with joystick control.
- Light can be directed manually without damaging motors.
- For boats 19' - 29'. 355° horizontal rotation and 80° vertical sweep.
- Low 4 amp current draw.
- Easy to install with wiring harness provided.
- Directional control operates with or without the light on.
- Base dimensions: 5 diameter.
- Joystick control requires 1-5/8 H x 2-3/4 L cut out.
- Lamp dimensions: 8-5/8 W x 9-3/16 H x 8-11/16 D.
- 12 volt.

Order No.	Mfg. No. / Description	Price
378908	(22200) Spotlight Kit	$397.98 E

Optronics Remote Control Spotlight



- 500,000 candlepower sealed beam remote control spotlight.
- 340° horizontal rotation.
- 10' portable control cable.
- Rotate light horizontally and vertically at the touch of a button.
- Cold cathode area light - bright, low amp draw bulb lights up immediate area.
- Stainless hardware.
- Suction mount.
- Black housing.

Order No.	Mfg. No. / Description	Price
5220043	(RC-5500)	$128.98 H

Jabsco 233SL Dual Beam Searchlight



- Rugged anodized and painted aluminum housing.
- Powerful dual beam halogen bulb.
- 200,000 candlepower.
- Focus mechanism delivers true Spot/Flood capability.
- Wireless searchlight control system allowing up to 4 easy to install control stations.
- 27 degree vertical elevation capabilities.
- Fast and slow speed capabilities.
- Patent protected easy to install bayonet base with security locking mechanism.
- Full 360° horizontal rotation.
- Dimensions: 9.4" W x 9.6" D x 8" H.
- 10 amps.
- 12 volt.

Order No.	Mfg. No. / Description	Price
412659	(60233-0012) Dual Beam Searchlight	$1,543.98 F

Jabsco 255SL Remote Control Searchlight



- Sleek design.
- Rugged construction.
- Tough polyurethane finish.
- White thermoplastic.
- Twin high output sealed beam lamps.
- 200,000 candlepower.
- Full 360° horizontal rotation, 30° up, 30° down vertical sweep.
- Includes: Weather resistant remote control and 25' cable.
- Dimensions: 10-1/2" W x 10-15/16" D x 8-13/16" H.
- 8 amps.
- 12 volt.

Order No.	Mfg. No. / Description	Price
412647	(60010-2012)	$1,440.98 F
413257	(43670-0004) Secondary Remote Control Kit	$319.98 F
413079	(18753-0336) Spare Bulb	$57.98 G

Jabsco 146SL Remote Control Searchlight



- Sleek design.
- Rugged construction.
- Corrosion resistant housing.
- White thermoplastic.
- High output halogen sealed beam lamp.
- 175,000 candlepower.
- Full 360° horizontal rotation, 30° up, 30° down vertical sweep.
- Includes: Weather resistant remote control and 15' cable.
- Dimensions: 8-1/2" W x 10-1/8" D x 8-15/16" H.
- 4 amps.
- 12 volt.

Order No.	Mfg. No. / Description	Price
412623	(60080-0012)	$566.98 F
413257	(43670-0004) Secondary Remote Control Kit	$319.98 F
413081	(18753-0455) Spare Bulb	$84.98 G

Jabsco 155SL Remote Control Searchlight



- Constructed of noncorrosive materials.
- White thermoplastic.
- Sealed beam halogen lamp.
- 100,000 candlepower.
- Full 320° horizontal rotation, 75° vertical sweep.
- Includes: Remote control and 15' cable.
- Dimensions: 6-3/8" W x 8" L x 8" H.
- 4.5 amps.
- 12 volt.

Order No.	Mfg. No. / Description	Price
412611	(61050-0012)	$289.98 F
413257	(43670-0004) Secondary Remote Control Kit	$319.98 F

Jabsco 135SL Remote Control Searchlight



- Constructed of noncorrosive materials.
- White thermoplastic.
- Sealed beam halogen lamp.
- 100,000 candlepower.
- Full 320° horizontal rotation, 75° vertical sweep.
- Includes: Remote control and 15' cable.
- Dimensions: 7-1/16" W x 7-1/2" D x 7-7/8" H.
- 3.6 amps.
- 12 volt.

Order No.	Mfg. No. / Description	Price
412609	(60020-0000)	$284.98 F
413395	(60030-0000) Dual Station Control	$123.98 F
413067	(18753-0178) Spare Bulb	$54.98 G

©2014 Donovan Marine, Inc.

Jabsco 6" Remote Control Searchlights



- Chrome plated brass.
- Complete drive unit enclosed in light housing.
- Single control lever for vertical and horizontal movement.
- Two speed light movement.
- Control panel included.
- Auto-sweep mode cycles light side-to-side automatically.
- Light will transmit an "SOS" distress signal automatically.
- Two station operation optional with use of dual station kit.
- Full 360° horizontal rotation, 70° vertical sweep.
- 15 amp.
- Note: These lights replace the 62022, 62026 and 62040 Series Searchlights and fit the same cutout.
- Beam: Spot/Flood.
- 200,000 candlepower.
- 12/24 volt.

Order No.	Mfg. No. / Description	Price
412750	(63022-0012)	$720.98 F
413051	(64046-0006) Spare Bulb	$55.98 G

- Beam: HID Spot.
- 600,000 candlepower.
- 12 volt.

Order No.	Mfg. No. / Description	Price
412762	(63042-0012)	$1,646.98 F

Jabsco Spare Bulbs

Order No.	Mfg. No. / Description	Price
413043	(67262-0000) For 7" Searchlight	$129.98 G

GOLIGHT Search/Navigation Light



- Exclusive Cr5 Pentabeam II Technology.
- Programmable wireless remote.
- 370° rotation x 135° tilt.
- 400,000 candlepower.
- UV ray and saltwater resistant.
- 12" Stanchion mount.
- 2 Prong receptacle.
- 5.5 amps.
- White.

Order No.	Mfg. No. / Description	Price
386017	(2100) Search/Navigation Light	$339.98 E

GOLIGHT Portable Searchlight



- Exclusive Cr5 Pentabeam II Technology.
- Wired remote.
- 370° rotation x 135° tilt.
- 400,000 candlepower.
- UV ray and saltwater resistant.
- 5.5 amps.
- Includes: Suction cup and permanent mount shoe.
- 15' cord with cigarette plug for 12 volt.
- Charcoal.

Order No.	Mfg. No. / Description	Price
386021	(5149) Portable Searchlight	$169.98 E

Jabsco Extension Harness (Electronic Controls)



- Extension harness enable remote controls to be fitted further from the light than standard cables allow and are needed to install secondary remote control kits.
- For 155SL (12/24 volt), 233SL (12/24 volt) and 6" remote control models.

Order No.	Mfg. No. / Description	Price
413423	(64042-1008) Length 25'	$88.98 G

Jabsco Secondary Remote Control Kit



- This kit is the only way to achieve dual station control of a remote control searchlight.
- For 146SL (12/24 volt), 155SL (12 volt), 255SL (12 volt) and 5", 7", 8" chrome remote control.

Order No.	Mfg. No. / Description	Price
413257	(43670-0004) Secondary Remote Control Kit	$319.98 F
413245	(43670-0003) Replacement Control	$231.98 F

Jabsco Extension Harness

- Extension harness enable remote controls to be fitted further from the light than standard cables allow and are needed to install secondary remote control kits.
- For 135SL, 146SL, 155SL (12 volt), 255SL, 5" and 7" remote control models.

Order No.	Mfg. No. / Description	Price
413269	(43990-0014) Length 15'	$144.98 G

GOLIGHT Stryker Remote Control Searchlight



- Exclusive Cr5 Pentabeam II Technology.
- Wireless hand-held remote.
- 370° rotation x 135° tilt.
- 500,000 candlepower.
- UV ray and saltwater resistant.
- Integrated 12 volt high-torque motor.
- R.F. programmable super heterodyne receive.
- 5.5 amps.
- White.

Order No.	Mfg. No. / Description	Price
386032	(3000) Remote Control Searchlight	$349.98 E

GOLIGHT Permanent Mount Searchlights



- Exclusive Cr5 Pentabeam II Technology.
- 370° rotation x 135° tilt.
- 400,000 candlepower.
- UV ray and saltwater resistant.
- 5.5 amps.
- White.

Order No.	Mfg. No. / Description	Price
386015	(2020) Dash-Mount Remote	$199.98 E
386019	(2000) Programmable Wireless Remote	$249.98 E



- Compatible with all wireless units.

Order No.	Mfg. No. / Description	Price
386044	(30200) Wireless Remote	$59.98 E

Perko 800 Series Solar-Ray® Searchlights

- Heavy gauge brass and cast bronze.
- White Perko • Kote finish.
- 12, 24, 32 or 120 volts.
- All models feature: Halo deflectors, parabolic glass mirror reflectors for maximum light output and ventilation covers for quick dissipation of heat to help prolong bulb life.
- Hinged front doors have quick release stainless steel latches.
- Weatherproof construction interior finished in flat black.
- Lower vent cover on 12" and 14" sizes.
- Slide-lock focusing device behind lower vent.
- Heavy duty yoke mounting.
- Standard pedestal base diameter: 7".
- 10" lights are standard with 2-pin prefocus socket.
- 12" and 14" lights are standard with medium prefocus socket.
- Bulbs are not included and must be ordered separately.

Special Handling May Apply

Perko Fig. 885 Wheel or Lever/Gear Control Solar-Ray® Searchlights



- Wheel Control Assemblies.
  Turn upper wheel for horizontal position.
  Turn lower wheel for vertical position.
  Distance between wheels: 2".
  Maximum ceiling thickness: 3".
- Lever/Gear Control Assemblies.
  Aim handle for horizontal position.
  Twist handle for vertical position.
  Maximum ceiling thickness: 3-1/2".
- Order head and wheel or lever/gear control assemblies separately.

Order No.	Mfg. No. / Description	Price
526876	(885 0P1 WHT) 10" Head Assembly	$1,151.98 F
526888	(885 0P2 WHT) 12" Head Assembly	$1,520.98 F
526890	(885 0P3 WHT) 14" Head Assembly	$2,084.98 F
527208	(852 000) Wheel Control Assembly, 7-1/2" L	$377.98 F
527211	(852 0A0) Wheel Control Assembly, 14-1/2" L	$435.98 F
527223	(852 0B0) Wheel Control Assembly, 21-1/2" L	$487.98 F
527234	(852 0C0) Wheel Control Assembly, 28-1/2" L	$552.98 F
527247	(969 0C0) Lever/Gear Assembly, 29-1/2" L	$1,232.98 F

Perko Fig. 883 Deck Control Solar-Ray® Searchlights



- Equipped with handles on the rear cover for positioning.
- These searchlights cannot be fitted with controls.

Order No.	Mfg. No. / Description	Price
526802	(883 0P1 WHT) 10", Height Overall 20-1/8"	$1,380.98 F
526814	(883 0P2 WHT) 12", Height Overall 22-1/8"	$1,634.98 F
530433	(883 000 99A) Catch Kit	$58.98 F

Perko Fig. 884 Lever Control Solar-Ray® Searchlights



- Aim handle for horizontal position.
- Move handle up and down for vertical position.
- Maximum ceiling thickness: 4-1/2".
- Order head and lever control assemblies separately.

Order No.	Mfg. No. / Description	Price
526838	(884 0P1 WHT) 10" Head Assembly	$1,208.98 F
526840	(884 0P2 WHT) 12" Head Assembly	$1,574.98 F
526852	(884 0P3 WHT) 14" Head Assembly	$2,088.98 F
527108	(851 000) Lever Control Assembly, 8-1/2" L	$317.98 F
527119	(851 0A0) Lever Control Assembly, 15-1/2" L	$377.98 F
527121	(851 0B0) Lever Control Assembly, 22-1/2" L	$435.98 F
527132	(851 0C0) Lever Control Assembly, 29-1/2" L	$487.98 F

Perko Spare Parts for Fig. 851 Lever Control Assemblies

Order No.	Mfg. No. / Description	Price
530015	(21) Ceiling Lock	$109.98 F
530027	(22) Lock Knob	$28.98 F
530053	(25) Upper Bushing	$25.98 F
530077	(27) O-Ring Seal	$18.98 F
530089	(28) Lower Bushing	$25.98 F
530091	(29) Handle Shaft	$32.98 F
530104	(30) Handle	$32.98 F
530116	(31) Fulcrum Collar	$31.98 F
530128	(32) Fulcrum Bar	$28.98 F
530142	(55) Fork Seal Bushing	$25.98 F
530154	(56) Base Seal	$29.98 F

See next page for spare sockets, parts and bulbs for Perko 800 Series Solar-Ray® Searchlights

©2014 Donovan Marine, Inc.

Perko Spare Sockets for 800 Series Solar-Ray® Searchlights

Order No.	Mfg. No. / Description	Price
530458	(894) Medium Screw Socket, Code B	$25.98 F
530469	(895) Medium Prefocus Socket, Code E	$189.98 F
530471	(897) Mogul Screw Socket, Code D	$43.98 F
530483	(899) 2-Pin Prefocus Socket, Codes F, G, H & I	$46.98 F

Perko Spare Parts for 800 Series Solar-Ray® Searchlights

Order No.	Mfg. No. / Description	Price
543202	(890 001) Spare Reflector for 10" Searchlights	$817.98 D
543214	(890 002) Spare Reflector for 12" Searchlights	$868.98 D
543226	(890 003) Spare Reflector for 14" Searchlights	$1,906.98 D
530178	(910) Spare Retaining Clips	$57.98 F

Bulb & Socket Information for Perko 800 Series Solar-Ray® Searchlights

- Bulbs are not included in lights.
- To give good results, the bulb and reflector must be perfectly compatible; therefore be sure to specify the stock number of the bulb desired.
- Peak candlepower is exceedingly sensitive to many factors, (i.e. a light source out of focus by 1/32 inch, under-voltage of only 4% or differences between bulb manufactures) which can cause reduction of range of up to 20%.

Incandescent Bulb Recommendations

DMI #	MFG #	Voltage	Wattage	Socket Type	Socket Code Letter	For Searchlight Size	Rated* Life Hours	Mfg. Bulb Code
	806	32	500	Medium Screw	B	10", 12", 14"	50	DLT
219887	807	120	500	Medium Prefocus	E	10", 12", 14", 19"	25	CZX/DAB
	809	120	750	Medium Prefocus	E	12", 14", 19"	25	DPJ
	837	120	750	Medium Prefocus	E	12", 14", 19"	200	DDY
	810	120	1,000	Medium Prefocus	E	12", 14", 19"	25	DRS
	811	120	1,000	Mogul Screw	D	12", 14"	50	DRW
219989	860	230	1,000	Medium Prefocus	E	12", 14", 19"	50	DWK

"Quartz" Tungsten Halogen Bulb Recommendations

DMI #	MFG #	Voltage	Wattage	Socket Type	Socket Code Letter	For Searchlight Size	Rated* Life Hours	Mfg. Bulb Code
220070	816	12	100	2-Pin Prefocus	F	10", 12", 14"	50	FDT
	836	24	150	2-Pin Prefocus	G	10", 12", 14"	50	DZE/FDS
219825	844	120	500	Medium Prefocus	E	10", 12", 14", 19"	500	BTM
220020	820	120	600	2-Pin Prefocus	I	10", 12", 14"	75	DYS
219837	845	120	750	Medium Prefocus	E	12", 14", 19"	200	BTP
219851	839	120	900	2-Pin Prefocus	K	12", 14"	75	BVA
219849	846	120	1,000	Medium Prefocus	E	12", 14", 19"	200	BTR

- Electric bulbs are not returnable unless the fault is ours.


*Note: These are the "Rated Average Laboratory Life in Hours" of the Bulb Manufacturer. No guarantee to the time indicated.

Electric Socket and Support Stand Assemblies

- Perko Solar-Ray Searchlights include a socket and support stand based on the bulb or socket information given when ordering.
- The following chart makes it possible for distributors or dealers to order and stock different styles of these assemblies separately for field conversion, thereby covering a large variety of voltage and candlepower requirements with a minimum of inventory. (Donovan numbers are bold).


Medium Screw
Code B


Medium Prefocus
Code E


2-Pin Prefocus
Code K


Mogul Screw
Code D


Mogul Prefocus
Code L and M


2-Pin Prefocus
Code F, G, H and I

Order No.	Mfg. No. / Description	Price
530332	(0873 001) For 10" Searchlights	**$195.98** F
530344	(0873 002) For 12" Searchlights	**$195.98** F
530356	(0873 003) For 14" Searchlights	**$195.98** F
530421	(0879 001) 2-Pin Prefocus for 10" Searchlights	**$159.98** F

Socket Type	Socket Code	For 10" Searchlights	Height Stand	For 12" Searchlights	Height Stand	For 14" Searchlights	Height Stand
Medium Screw	B	872 001	1-1/4"	872 002	2-1/4"	872 003	3-1/4"
Medium Prefocus	E	**530332** (873 001)	1-5/16"	**530344** (873 002)	1-15/16"	**530356** (873 003)	2-15/16"
Mogul Screw	D			874 002	7/16"	874 003	1-1/4"
2-Pin Prefocus (12 volt)	F	875 001	3-1/2"	875 002	4-1/2"	875 003	5-1/2"
2-Pin Prefocus (24 volt)	G	876 001	3-1/4"	876 002	4-1/4"	876 003	5-1/4"
2-Pin Prefocus (32 volt)	H	878 001	3-1/4"	878 002	4-1/4"	878 003	5-1/4"
2-Pin Prefocus (600 watt)	I	**530421** (879 001)	3-1/8"	879 002	4-1/8"	879 003	5-1/8"
2-Pin Prefocus (900 watt)	K			880 002	3-13/16"	880 003	4-13/16"

Perko Distant Electric Control Solar-Ray Searchlight - 887 Series



- All aluminum with White Perko
- Kote finish.
- Searchlight head assembly comes with Distant Electric Control Base.
- For 12, 24 and 120 volt.
- Remote electric.
- Joystick type controller with variable speed control for both horizontal and vertical positioning.
- Nominal drum diameter: 14".
- Length Drum: 17".

Call for Prices and Availability

Special Handling May Apply

Suez Canal Searchlight - 2,000W/3,000W Halogen



- The searchlight is made of seawater resistant aluminum finished in white corrocoat polyester.
- It is gas tight, pressure tested and equipped with a safety valve.
- A 1/4" rubber hose may be connected to the escape valve transferring hot air to a gas-free zone.
- The searchlight drum weighs only 37 kg which simplifies installation.
- When not in use, it can easily be removed to a bow in a storage room by one person.
- Handles for lifting are provided for this purpose.
- A protection cover can also be attached to the front glass to prevent damages.

Manufactured by Norselight

Price On Request

Special Handling May Apply

Perko 19" Solar-Ray® Searchlight - 1900 Series



- These are designed and built with the commercial user in mind where maximum size and brilliance counts.
- These units are constructed of marine aluminum with heavy duty castings and heavy gauge reinforced bodies for extra durability.
- White Perko • Kote finish.
- Features: Halo deflectors, parabolic glass mirror reflectors and ventilation covers to extend bulb life.
- Hinged front doors have quick release stainless steel latches to provide easy access for bulb replacement.
- Solar-Ray searchlight includes a socket, support stand based on the bulb or socket information given when ordering.
- The chart below makes it possible to make your decision.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
526600	(1902 004 WHT) Searchlight Head Only	**$2,548.98** F
526650	(1921 000 WHT) 70" Lever/Gear Control Only	**$1,679.98** F
526674	(1922 000 WHT) 70" Wheel Control Only	**$1,673.98** F
543238	(890 004) Spare Reflector	**$2,821.98** D
530229	(905) Spare Pinion Gear	**$148.98** F

Socket Type	Socket Code	Socket & Stand Fig. #	Height Stand
Medium Screw	B	872 004	5-3/4"
Medium Prefocus	E	873 004	5-7/16"
Mogul Prefocus (1,500 watt)	L	1930 004	3-5/8"
Mogul Prefocus (1,000 & 2,000 watt)	M	1931 004	3-1/8"
2-Pin Prefocus (900 watt)	K	880 004	7-5/16"

©2014 Donovan Marine, Inc.

The Carlisle & Finch Co. 500 Watt Xenon Arc Searchlights



Manual Control.

- Drum-size nominal 15".
- 45 Million beam candlepower.
- Nominal 1 degree beam collimation.
- Remote electric beam-size focus (1 to 15 degrees).
- External manual beam-size focus knob (provides back-up if focus motor fails).
- Precision electroformed deep-dish reflector made of bullet-resistant nickel with polished rhodium finish.
- Rugged marine aluminum and stainless steel construction. (Optional brass with sparkling chrome finish for yachts).
- Voltages: 115VAC.
- Aiming: Remote lever-gear or local handle.
- Safety power cut-off switches on searchlight door and power supply.
- Scratch-resistant and salt-resistant powder coat finish.
- Long-life warranted xenon lamp.
- Sealed weatherproof drum.
- Exceeds 385 degree horizontal rotation (with unique sliding stop design).

Remote Electric Control units have all the features listed above and also the following.

- "Proportional-Speed" joystick provides aiming and speed control with single-hand.
- Motorized rugged cast base with horizontal and vertical clutch assemblies and ball bearings contained in stainless steel races.
- Exceeds 385 degrees horizontal rotation (with unique sliding stop design).
- Fast speed searches at 30 degrees per second.
- Single station or multiple stations.
- Indoor and outdoor weatherproof control stations.
- Optional anti-icing heater circuitry in base, rack and trunnions.
- Optional digital azimuth indicator.
- Optional manual back-up (in case of motor failure).

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
275304	(X9396LG-RF) Head Only	$7773.00 A
275328	(4441X-RF) Control Station	$300.00 A
275405	(4198PS-1) Power Supply	$2695.00 A

The Carlisle & Finch Co. 1.0kw and 2.5kw Xenon Arc Searchlights



Manual Control.

- Drum-size nominal 19".
- 80 Million (1.0kw) and 150 (2.5kw) beam candlepower.
- Nominal 1-degree beam spread collimation.
- Remote electric beam-size focus (1 to 15 degrees).
- External manual beam-size focus knob (provides back-up if focus motor fails).
- Precision electroformed deep-dish reflector made of bullet-resistant nickel with polished rhodium finish.
- Rugged marine aluminum and stainless steel construction.
- Voltages: 3-phrase 208/240 VAC, 380 VAC, 480 VAC or 575 VAC.
- Aiming: Remote lever-gear or local handle.
- Searchlight door interlock switch shuts off power to system.
- Scratch-resistant and salt-resistant powder coat finish.
- Long-life warranted xenon lamp.
- Sealed weatherproof drum.
- Exceeds 385 degree horizontal rotation (with unique sliding-stop design).

Remote Electric Control units have all the features listed above and also the following.

- Motorized rugged cast base with horizontal and vertical clutch.
- Assemblies and ball bearings contained in stainless steel races.
- Exceeds 380 degrees horizontal rotation.
- 8-position joystick provides simultaneous vertical and horizontal movement.
- Speed control dial changes beam speed from 0 to 27 degrees per second.
- Single station or multiple stations.
- Indoor and outdoor weatherproof control stations.
- Optional anti-icing heater circuitry in base, rack and trunnions.
- Optional digital azimuth indicator.
- Optional manual back-up (in case of motor failure).

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
275417	(XE9664LG-RF) Head Only	$10236.50 A
275431	(9754X-RF) Control Station	$370.00 A
275429	(5275PS2-1) Power Supply	$4525.00 A


How to Order Searchlights

- Specify size searchlight, type control, type base, type drum, type finish, type lampholder, and give code word or catalog number.
- Give ordering code and volts of lamp.
- Specify length of control (measured from bottom of base to centerline of lever or upper wheel) if other than the standard dimensions shown on the dimension drawings.
- Specify pedestal height (measured from bottom of base to centerline of drum) if different from the standard 48 inches.
- Example: 12" searchlights, lever control, standard base, vented drum, enamel finish, medium prefocus lampholder, code RECITE-E2. Special length control 22" base to centerline lever. Two lamps code 54889-0 120 volts.
- To designate the specific lampholder desired add one of the following suffixes to the code word or catalog number:
- Medium Screw Lampholder –1
- Medium Prefocus Lampholder –2
- Mogul Screw Lampholder –3
- Mogul Bipost Lampholder –4
- 2-Pin Prefocus Lampholder –5

Accessories and Parts

Description	10" Scht. Part #	12" Scht. Part #	15" Scht. Part #
Cover, Protective	SL3322A	SL3322A	SL3322B
Cover Glass	SL62	SL102	SL1085
Gasket, Base, DMC	SL3318B	SL3318B	SL3318B
Gasket, Base, High	SL3318B	SL3318B	SL3318B
Gasket, Base, Pedestal	SL3318C	SL3318C	SL3318C
Gasket, Base, Standard	SL3318A	SL3318B	SL3318B
Lampholder, Med. Pref. (273918)	SL1250C	SL1250C	SL1250C
Lampholder, Med. Screw	SL1087-1	SL1087-1	SL1087-1
Lampholder, Mogul Bipost			FE132X
Lampholder, Mogul Screw (274302)		SL96X	SL96X
Lampholder, 2-Pin Pref. (273526)	8704	8704	8704
Reflector	SL1083A (273831)	SL107 (273829)	CL14 (273843)

The Carlisle & Finch Co. 19" Incandescent Halogen Searchlights

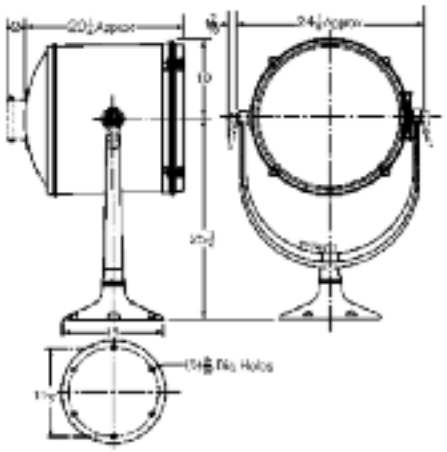



- Beam characteristics of 19" incandescent searchlights with various lamps.

Price On Request

Special Handling May Apply

Lamp Data / Beam Characteristics

Watts	Volts	Bulb Size	Base	Filament	Service	Average Hours Life	Code	Peak Beam Candlepower	Horizontal Spread	Vertical Spread
750	120	T20	Medium Prefocus	C13D	Projection	25	DPJ	4,260,000	3.5°	3.6°
1,000	120	T20	Mogul Bipost	C13D	Projection	25	DRE	4,200,000	4.5°	4.2°
1,000	120	T20	Mogul Prefocus	C13D	Projection	25	DSB	4,410,000	4.5°	4.2°
1,000	120	T20	Mogul Screw	C13D	Projection	25	DRW	4,410,000	4.5°	4.2°
1,000	120	G40	Mogul Screw	C13D	Sptit	25	1M/1M/G40/1	3,200,000	4.4°	5.4°
1,000	120		3 Contact	C13	Flood	25		475,000	15°	15°
1,000	120	T20	Medium Prefocus	C13D	Projection	200	1M/T20P/SP	2,680,000	5°	5°
1,000	120	T20	Medium Prefocus	C13D	Projection	25	DRS	4,410,000	4°	4.3°
1,000	120	T20	Mogul Bipost	C13	Aero	500	1M/T20BP	2,381,000	5.4°	5.4°
1,000	120	T20	Mogul Prefocus	C13	Aero	500	1M/20P/AB	1,750,000	5.4°	5.4°
1,000	120	T20	Mogul Prefocus	C13	Projection	50	DPW	2,700,000	5.6°	5.2°
1,000	120	T20	Mogul Screw	C13	Aero	500	1M/T20AB	1,750,000	5.4°	5.4°
1,000	120	T20	Mogul Screw	C13	Projection	50	DPT	2,700,000	5.6°	5.2°
1,000	120	T20	Medium Prefocus	C13	Projection	50	DRC	2,700,000	3.3°	5.2°
1,500	120	T20	Mogul Bipost	C13D	Projection	25	DTS	4,750,000	4.4°	4.5°
1,500	120	T20	Mogul Prefocus	C13D	Projection	25	DTJ	4,750,000	4.4°	4.5°
1,500	120	G40	Mogul Prefocus	C5	Sptit	200	1500G40/15	1,750,000	10°	7°
1,500	120	G40	Mogul Screw	C5	Sptit	200	1500G40/10	1,750,000	10°	7°
2,000	120	G48	Mogul Bipost	C13	Sptit	200	2M/G48/17	2,750,000	7.4°	6.5°

The Carlisle & Finch Co. 10", 12" and 15" All Brass Incandescent Halogen Searchlights

- Searchlight lamp data.

Special Handling May Apply

DMI #	Ref.	Code	watts	volts	Bulb Size	Base	Description	Filament	Average Hrs. Life	10" Scht.	12" Scht.	15" Scht.
220070	21.5	FDT	100	12	T4	2-Pin Prefocus	Tungsten Halogen	C6	50	765,000	1,170,000	1,750,000
	23.01	FDS	150	24	T4	2-Pin Prefocus	Tungsten Halogen	C6	500	935,000	1,380,000	2,030,000
	35	CRX	300	32	T12	Medium Screw	Projection	C13	50	417,000	705,000	1,110,000
219825	46.5	BTM	500	120	T6	Medium Prefocus	Tungsten Halogen	C13D	100	950,000	1,160,000	2,080,000
219887	47	CZX	500	120	T10	Medium Prefocus	Projection	C13D	25	900,000	1,170,000	
	49	DLY	500	32	T20	Medium Prefocus	Projection	C13	50	630,000	750,000	
528806	50	DLT	500	32	T20	Medium Screw	Projection	C13	50	630,000	750,000	
	51	DMX	500	120	T20	Medium Prefocus	Projection	C13	50	475,000	780,000	
	52	DMS	500	120	T20	Medium Screw	Projection	C13	50	475,000	780,000	
220020	53.8	DYS	600	120	G7	2-Pin Prefocus	Tungsten Halogen	CC6	75	**781,000	1,130,000	1,840,000
219899	54.6	DCX	750	120	T20	Medium Screw	Tungsten Halogen	C13D	500	Not Used	1,520,000	2,820,000
	58	DPJ	750	120	T20	Medium Prefocus	Projection	C13D	25	Not Used	1,360,000	3,280,000

- Lamps below to be used in vented drums only.

DMI #	Ref.	Code	watts	volts	Bulb Size	Base	Description	Filament	Average Hrs. Life	10" Scht.	12" Scht.	15" Scht.
219849	68.06	BTR	1,000	120	T7	Medium Prefocus	Tungsten Halogen	C13D	200	Not Used	1,520,000	2,820,000
	70	DRS	1,000	120	T20	Medium Prefocus	Projection	C13D	25	Not Used	1,650,000	3,280,000
	80	DRW	1,000	120	T20	Medium Screw	Projection	C13D	25	Not Used	1,650,000	3,130,000

* These lamp manufacturer's figures are relative only. Individual lamps may vary considerably.
** Intermittent duty only (one hour or less).

Price On Request


©2014 Donovan Marine, Inc.

The Carlisle & Finch Co. Searchlight Selection Table

Type Control	Type Base	Type Drum	Enamel Finish (Scht. Code Word)	Polished Finish (Scht. Code Word)	Chromium Finish (Scht. Code Word)	Net Wt.	Shipping Wt.
10 Inch							
Local	Standard	Non Vented	RAIN-E	RAIN	CRAIN	15 lbs.	21 lbs.
Local	High	Non Vented	ROSE-E	ROSE	CROSE	22 lbs.	28 lbs.
Local	Pedestal	Non Vented	RAJAH-E	RAJAH	CRAJAH	29 lbs.	59 lbs.
Lever	Standard	Non Vented	REDAN-E	REDAN	CREDAN	19 lbs.	25 lbs.
Lever	High	Non Vented	REFORM-E	REFORM	CREFORM	27 lbs.	33 lbs.
Lever	Pedestal	Non Vented	10SL1624XE	10SL1624X	10SL1624XC	34 lbs.	55 lbs.
Lever-Gear	Standard	Non Vented	10SL8425E	10SL8425P	10SL8425C	22 lbs.	28 lbs.
Lever-Gear	High	Non Vented	10SL8426E	10SL8426P	10SL8426C	30 lbs.	36 lbs.
Lever-Gear	Pedestal	Non Vented	10SL8427E	10SL8427P	10SL8427P	37 lbs.	58 lbs.
Wheel	Standard	Non Vented	RANK-E	RANK	CRANK	19 lbs.	25 lbs.
Wheel	High	Non Vented	ROPE-E	ROPE	CROPE	27 lbs.	33 lbs.
Wheel	Pedestal	Non Vented	10SL1620XE	10SL1620X	10SL1620XC	37 lbs.	55 lbs.
DMC	Standard	Non Vented	10SL200E	10SL200P	10SL200C	32 lbs.	53 lbs.
12 Inch							
Local	Standard	Non Vented	RAKE-E	RAKE	CRAKE	22 lbs.	31 lbs.
		Vented	RATE-E	RATE	CRATE	22 lbs.	31 lbs.
Local	High	Non Vented	ROME-E	ROME	CROME	27 lbs.	36 lbs.
		Vented	RUN-E	RUN	CRUN	27 lbs.	36 lbs.
Local	Pedestal	Non Vented	RETARD-E	RETARD	CRETARD	34 lbs.	64 lbs.
		Vented	12SL1648XE	12SL1648X	12SL1648XC	34 lbs.	64 lbs.
Lever	Standard	Non Vented	REDEEM-E	REDEEM	CREDEEM	26 lbs.	35 lbs.
		Vented	RECITE-E	RECITE	CRECITE	26 lbs.	35 lbs.
Lever	High	Non Vented	REFUGE-E	REFUGE	CREFUGE	32 lbs.	41 lbs.
		Vented	RESIN-E	RESIN	CRESIN	32 lbs.	41 lbs.
Lever	Pedestal	Non Vented	12SL1625XE	12SL1625X	12SL1625XC	39 lbs.	60 lbs.
		Vented	12SL1650XE	12SL1650X	12SL1650XC	39 lbs.	60 lbs.
Lever-Gear	Standard	Non Vented	12SL8186E	12SL8186P	12SL8186C	29 lbs.	38 lbs.
		Vented	12SL8186VE	12SL8186VP	12SL8186VC	29 lbs.	38 lbs.
Lever-Gear	High	Non Vented	12SL8410E	12SL8410P	12SL8410C	35 lbs.	44 lbs.
		Vented	12SL8410VE	12SL8410VP	12SL8410VC	35 lbs.	44 lbs.
Lever-Gear	Pedestal	Non Vented	12SL8428E	12SL8428P	12SL8428C	42 lbs.	63 lbs.
		Vented	12SL8428VE	12SL8428VP	12SL8428VC	42 lbs.	63 lbs.
Wheel	Standard	Non Vented	RASP-E	RASP	CRASP	26 lbs.	35 lbs.
		Vented	REAR-E	REAR	CREAR	26 lbs.	35 lbs.
Wheel	High	Non Vented	RUSE-E	RUSE	CRUSE	32 lbs.	41 lbs.
		Vented	RIPE-E	RIPE	CRIPE	32 lbs.	41 lbs.
Wheel	Pedestal	Non Vented	12SL1621XE	12SL1621X	12SL1621XC	39 lbs.	60 lbs.
		Vented	12SL1649XE	12SL1649X	12SL1649XC	39 lbs.	60 lbs.
DMC	Standard	Non Vented	12SL201E	12SL201P	12SL201C	37 lbs.	58 lbs.
		Vented	12SL203E	12SL203P	12SL203C	37 lbs.	58 lbs.
15 Inch							
Local	Standard	Non Vented	REDGUM-E	REDGUM	CREDGUM	39 lbs.	51 lbs.
		Vented	REDGUM-VE	REDGUM-V	CREDGUM-V	39 lbs.	51 lbs.
Local	High	Non Vented	REEL-E	REEL	CREEL	44 lbs.	56 lbs.
		Vented	REEL-VE	REEL-V	CREEL-V	44 lbs.	56 lbs.
Local	Pedestal	Non Vented	RONTY-E	RONTY	CRONTY	50 lbs.	80 lbs.
		Vented	RONTY-VE	RONTY-V	CRONTY-V	50 lbs.	80 lbs.
Lever	Standard	Non Vented	RADIAL-E	RADIAL	CRADIAL	43 lbs.	55 lbs.
		Vented	RADIAL-VE	RADIAL-V	CRADIAL-V	43 lbs.	55 lbs.
Lever	High	Non Vented	RAINBOW-E	RAINBOW	CRAINBOW	49 lbs.	61 lbs.
		Vented	RAINBOW-VE	RAINBOW-V	CRAINBOW-V	49 lbs.	61 lbs.
Lever	Pedestal	Non Vented	15SL1626XE	15SL1626X	15SL1626XC	56 lbs.	77 lbs.
		Vented	15SL1626XVE	15SL1626XV	15SL1626XVC	56 lbs.	77 lbs.
Lever-Gear	Standard	Non Vented	15SL8184E	15SL8184P	15SL8184C	46 lbs.	58 lbs.
		Vented	15SL8184VE	15SL8184VP	15SL8184VC	46 lbs.	58 lbs.
Lever-Gear	High	Non Vented	15SL8408E	15SL8408P	15SL8408C	52 lbs.	64 lbs.
		Vented	15SL8408VE	15SL8408VP	15SL8408VC	52 lbs.	64 lbs.
Lever-Gear	Pedestal	Non Vented	15SL8429E	15SL8429P	15SL8429C	59 lbs.	80 lbs.
		Vented	15SL8429VE	15SL8429VP	15SL8429VC	59 lbs.	80 lbs.
Wheel	Standard	Non Vented	RACKET-E	RACKET	CRACKET	43 lbs.	55 lbs.
		Vented	RACKET-VE	RACKET-V	CRACKET-V	43 lbs.	55 lbs.
Wheel	High	Non Vented	RABBIT-E	RABBIT	CRABBIT	49 lbs.	61 lbs.
		Vented	RABBIT-VE	RABBIT-V	CRABBIT-V	49 lbs.	61 lbs.
Wheel	Pedestal	Non Vented	15SL1622XE	15SL1622X	15SL1622XC	56 lbs.	77 lbs.
		Vented	15SL1622XVE	15SL1622XV	15SL1622XVC	56 lbs.	77 lbs.
DMC	Standard	Non Vented	15SL202E	15SL202	15SL202C	54 lbs.	75 lbs.
		Vented	15SL202VE	15SL202V	15SL202VC	54 lbs.	75 lbs.


Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

The Carlisle & Finch Co. 10", 12" and 15" All Brass Incandescent Halogen Searchlights

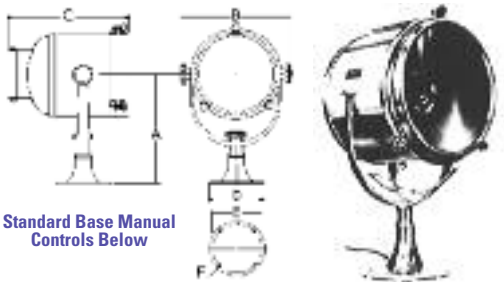

Standard Base Manual Controls Below

Size	A	B	C	D	E	F
10"	12-3/4"	11"	10"	6-3/8"	5-3/8"	11/32"
12"	15-15/16"	13-1/2"	13-1/4"	8-1/4"	7-3/8"	13/32"
15"	19-7/8"	16-3/4"	14-7/8"	8-1/4"	7-3/8"	13/32"

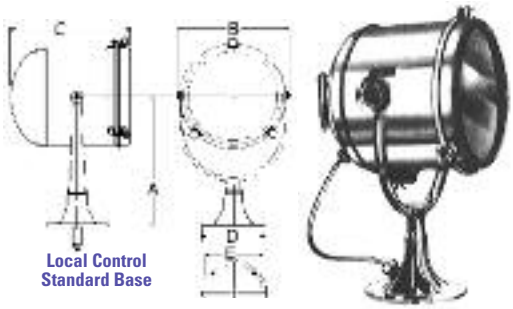


Local Control Standard Base

Size	A	B	C	D	E	F
10"	12-3/4"	13-1/8"	12"	6-3/8"	5-3/8"	11/32"
12"	15-15/16"	15-5/8"	15-1/2"	8-1/4"	7-3/8"	13/32"
15"	19-7/8"	18-7/8"	16-7/8"	8-1/4"	7-3/8"	13/32"




Size	G
10"	11-3/8"
12"	10-7/8"
15"	10-7/8"

Lever Control



Size	G
10"	11-3/8"
12"	10-7/8"
15"	10-7/8"


Lever-Gear Control





Size	G
10"	9-1/2"
12"	9"
15"	9"

Wheel Control



Other Products • Price On Request

10, 12, 15 inch Distant Electric Control • 19 inch Incandescent Searchlights • 24 inch Searchlights • Xenon Searchlights • Carbon Arc Searchlights • Searchlight Power Supplies • Signaling Searchlights • Marine Floodlights • Navy Searchlights/Navigation Lights • Lighthouse Beacons

The Carlisle & Finch Co. 10" Searchlight with 2-Pin Prefocus Socket

• Painted finish.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274489	(REDAN-E-5) Lever Control, 18" Longer than Standard	$1,787.00 D
274542	(RANK-E-5) Wheel Control, 12" Longer than Standard	$1,763.00 D

• Spare Parts for 10" Searchlight

Order No.	Mfg. No. / Description	Price
273831	(SL1083A) Reflector, Diameter 9"	$213.98 B

The Carlisle & Finch Co. 15" Searchlight with Medium Prefocus Socket

• Painted finish, vented drum.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274655	(RACKET-VE-2) Wheel Control, 24" Longer than Standard	$2,956.00 D

• Spare Parts for 15" Searchlight

Order No.	Mfg. No. / Description	Price
273843	(CL14) Reflector, Diameter 14-3/16"	$519.98 B

Spare Common Parts for 10", 12" and 15" Searchlights

Order No.	Mfg. No. / Description	Price
274047	(K5482) Pinion Gear f/Wheel Control	$30.00 A
273969	(SL1937) Reflector Mnt. Clips, 4 Per Light	$4.30 A
273526	(8704) 2-Pin Prefocus Socket Only	$31.00 A
273918	(SL1250C) Med. Prefocus Socket Only	$62.00 A
274302	(SL96X) Mogul Screw Socket Only	$61.00 A

The Carlisle & Finch Co. 12" Searchlight with Medium Prefocus Socket

• Painted finish, vented drum.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274631	(RECITE-E-2) Lever Control, 18" Longer than Standard	$2,387.00 D
274605	(REAR-E-2) Wheel Control, 24" Longer than Standard	$2,411.00 D
274592	(REAR-E-2) Wheel Control, 6" Longer than Standard	$2,339.00 D

• Spare Parts for 12" Searchlight

Order No.	Mfg. No. / Description	Price
273690	(9865XV) Med. Prefocus Socket w/Mnt. Stand	$207.00 A
273829	(SL107) Reflector, Diameter 10-15/16"	$271.98 B

The Carlisle & Finch Co. 19" Searchlight with Medium Prefocus Socket

• Painted brass and stainless steel drum.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274782	(19SL3794DX) Lever Control, 48" Longer than Standard	$3,573.00 B
274681	(REDCOAT-D) Wheel Control, 48" Longer than Standard	$3,303.00 B

• Spare Parts for 19" Searchlight

Order No.	Mfg. No. / Description	Price
273754	(KEF217) Pinion Gear, Wheel/Lever Gear Control	$41.00 A
273766	(CL19) Reflector, Diameter 18-1/8"	$711.98 B
273970	(SL1461/1455) Reflector Clamp Assembly 19"	$13.98 A

©2014 Donovan Marine, Inc.

The Carlisle & Finch Co. 12" Searchlights - Distant Electric Control (DEC)

Special Handling May Apply



- Rugged drive unit is housed in watertight corrosion resistant marine aluminum or brass base as specified.
- Slip clutches allow manual override at all times, a convenience when relamping.
- A small heater on drive unit keeps temperature in base housing above ambient to minimize condensation on and in motors.
- Powerful motors in weatherproof base direct the penetrating beam with finger-tip ease from any distance.
- Automatic brakes provide instant start and instant stop with no overtravel.
- Complete flexibility in mounting.
- Searchlight can be controlled from many separate locations.
- Motors operate on 110-125 volts, 50-60 hz (cycles).
- Drum, door, and yoke, etc., constructed of solid brass.
- Base is brass.
- Drum/door and yoke is white enamel.
- Rugged joystick switch controls both motions.
- No limit to distance between searchlight and joystick.
- Second, third, fourth, or more joysticks can be added at any time.
- Just five control conductors and a ground conductor required between searchlight and joystick.
- Either way, one standard unit is used.
- No interlocks required.
- Corrosion resistant and oiltight, the joystick can be mounted almost anywhere.
- Uses medium prefocus lampholder.
- Vented.

Order No.	Mfg. No. / Description	Price
274908	(125BEV-2) Includes: 12" Brass Control	$3,885.00 B
	Available in 10", 12" and 15"	Price On Request

Medium Screw Bulbs - Low Voltage



- Sold each.

Order No.	Mfg. No. / Description	Price
220157	(A15) 12 Volt, 15 Watt	$5.98 I
220195	(A19) 12 Volt, 25 Watt	$6.98 I
220234	(A19) 12 Volt, 50 Watt	$4.98 I
220235	(A19) 12 Volt, 75 Watt	$4.98 I
220121	(A19) 12 Volt, 100 Watt	$5.98 I
220208	(A19) 24 Volt, 25 Watt	$7.98 I
220246	(A19) 24 Volt, 50 Watt	$7.98 I
220169	(A19) 34 Volt, 15 Watt	$6.98 I
220210	(A19) 34 Volt, 25 Watt	$6.98 I
220258	(A19) 34 Volt, 50 Watt	$6.98 I
220094	(A19) 34 Volt, 100 Watt	$6.98 I

Medium Screw Bulbs - 130 Volt





Order No.	Mfg. No. / Description	Price
569232	(00329B) 100 Watt, Frosted Bulb	$2.98 B
569244	(00246D) 60 Watt, Frosted Bulb	$2.98 B
569268	(00070E) 15 Watt, Frosted Bulb	$2.98 B
569304	(00037C) 7.5 Watt, S.B. Blue Bulb	$2.98 B
569307	(00262B) 60 Watt, Yellow "Bug Light" Bulb	$3.97 B

Medium Screw Bulb - Low Voltage



- Sold each.

Order No.	Mfg. No. / Description	Price
220150	(S14) 12 Volt, 5 Watt	$6.98 I

Miniature Bayonet Base Bulb



- Sold each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219433	(53) 12 Volt, .12 Amp	$4.98 I

Miniature Bayonet Base Bulbs



- Sold each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219786	(1895) 12 Volt, .27 Amp	$0.98 I
569320	(5951A) 5.1 Volt, .15 Amp	$2.98 F

Miniature Bayonet Base Bulb



- Sold each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219460	(89) 12 Volt, .58 Amp	$0.98 I

Miniature Bayonet Base Bulb



- Sold each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219659	(1416) 12 Volt, .80 Amp	$4.98 I

Miniature Bayonet Base Bulbs



- Sold each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219724	(1816) 12 Volt, .33 Amp	$0.98 I
219765	(1850) 6 Volt, .09 Amp, for Guest 461	$4.98 I

Oblong Medium Screw Bulbs (T10)



• Sold each.

Order No.	Mfg. No. / Description	Price
220311	(00212A) 130 Volt, 40 Watt	$3.98 I
220323	(00280A) 120 Volt, 60 Watt	$4.98 I

Double Contact Bayonet Base Bulb



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219534	(1004) 12.8 Volt, 15 c.p.	$0.98 I

Perko Double Contact Bayonet Base Bulb

PERKO



Order No.	Mfg. No. / Description	Price
544469	(0337R12DP) Red, 2 Pack	$46.98 R

Anchor Products Miniature Bayonet Base Bulbs

Order No.	Mfg. No. / Description	Price
520053	(520053) Trade # 53, System Volts 12, Design Volts 14.40, Design Amps .12, Design Watts 1.70, C.P. 1.00	$3.54 Q
520057	(520057) Trade # 57, System Volts 12, Design Volts 14.00, Design Amps .24, Design Watts 3.40, C.P. 2.00	$3.54 Q
521816	(521816) Trade # 1816, System Volts 12, Design Volts 13.00, Design Amps .33, Design Watts 4.30, C.P. 3.00	$3.54 Q

Anchor Products Single Contact Bayonet Base Bulbs

Order No.	Mfg. No. / Description	Price
520093	(520093) Trade # 93. System Volts 12, Design Volts 12.80, Design Amps 1.04, Design Watts 13.30, C.P. 15.00	$3.54 Q
520097	(520097) Trade # 97, System Volts 12, Design Volts 13.50, Design Amps .69, Design Watts 9.30, C.P. 4.00	$3.54 Q
521141	(521141) Trade # 1141, System Volts 12, Design Volts 12.80, Design Amps 1.44, Design Watts 18.40, C.P. 21.00	$3.54 Q

Anchor Products Medium Screw Base Bulbs

Order No.	Mfg. No. / Description	Price
531026	(531025) Trade # 25A17/12, System Volts 12, Design Volts 13.50, Design Amps 2.08, Design Watts 25.00	$7.98 Q
531050	(531050) Trade # 50A17/12, System Volts 12, Design Volts 13.50, Design Amps 4.17, Design Watts 50.00	$7.98 Q
531075	(531075) Trade # 75A17/12, System Volts 12, Design Volts 13.50, Design Amps 6.25, Design Watts 75.00	$7.98 Q

Anchor Products Double Contact Bayonet Base Bulbs

Order No.	Mfg. No. / Description	Price
520068	(520068) Trade # 68, System Volts 12, Design Volts 13.50, Design Amps .59, Design Watts 8.00, C.P. 4.00	$3.54 Q
520090	(520090) Trade # 90, System Volts 12, Design Volts 13.00, Design Amps .58, Design Watts 7.50, C.P. 6.00	$3.54 Q
520094	(520094) Trade # 94, System Volts 12, Design Volts 12.80, Design Amps 1.04, Design Watts 13.30, C.P. 15.00	$3.54 Q
521142	(521142) Trade # 1142, System Volts 12, Design Volts 12.80, Design Amps 1.44, Design Watts 18.40, C.P. 21.00	$3.54 E

Anchor Products Wedge Base Bulbs

Order No.	Mfg. No. / Description	Price
520168	(520168) Trade # 168, System Volts 12, Design Volts 14.00, Design Amps .35, Design Watts 4.90, C.P. 3.00	$3.54 Q
520194	(520194) Trade # 194, System Volts 12, Design Volts 14.00, Design Amps .27, Design Watts 3.80, C.P. 2.00	$3.54 Q
520906	(520906) Trade # 906, System Volts 12, Design Volts 13.00, Design Amps .69, Design Watts 9.00, C.P. 6.00	$3.54 Q

Anchor Products Double Contact Index Base Bulb

Order No.	Mfg. No. / Description	Price
521157	(521157) Trade # 1157, System Volts 12, Design Volts 12.8/14, Design Amps 2.1/.59, Design Watts 27/8	$3.54 E

Anchor Products Navigation Lamps

Order No.	Mfg. No. / Description	Price
529340	(529340) Trade # 95, System Volts 12, Design Volts 12.00, Design Amps 2.08, Design Watts 25.00, C.P. 24.00	$18.98 Q
529341	(529341) Trade # 96, System Volts 24, Design Volts 24.00, Design Amps 1.04, Design Watts 25.00, C.P. 24.00	$18.98 Q
529343	(529343) System Volts 12, Design Amps .83, Design Watts 10	$19.98 Q

Anchor Products Festoon Bulbs

Order No.	Mfg. No. / Description	Price
522112	(522112) Trade # 211–2, System Volts 12, Design Volts 12.80, Design Amps .97, Design Watts 15.00, C.P. 12.00	$4.98 Q
522122	(522122) Trade # 212–2, System Volts 12, Design Volts 13.50, Design Amps .74, Design Watts 10.00, C.P. 6.00	$4.98 Q
529095	(529095) System Volts 12, Design Volts 13.50, Design Amps .50, Design Watts 6.00, C.P. 2.00	$5.98 Q
529102	(529102) System Volts 12, Design Volts 13.50, Design Amps .83, Design Watts 10.00, C.P. 8.00	$4.98 Q

Anchor Products Miniature Halogen Lamps

Order No.	Mfg. No. / Description	Price
529338	(529338) System Volts 24, Design Volts 24.00, Design Amps .42, Design Watts 10.00, C.P. 11.00	$6.98 Q
529361	(529361) System Volts 12, Design Volts 12.00, Design Amps .42, Design Watts 5.00, C.P. 5.00	$7.98 Q
529362	(529362) System Volts 12, Design Volts 12.00, Design Amps .83, Design Watts 10.00, C.P. 11.00	$7.98 Q
529367	(529367) System Volts 12, Design Volts 12.00, Design Amps 1.67, Design Watts 20.00, C.P. 20.00	$7.98 Q
529368	(529368) System Volts 24, Design Volts 24.00, Design Amps .83, Design Watts 20.00, C.P. 20.00	$7.98 Q
529370	(529370) System Volts 12, Design Volts 12.00, Design Amps .83, Design Watts 10.00	$14.98 Q
529371	(529371) System Volts 12, Design Volts 12.00, Design Amps 1.67, Design Watts 20.00	$14.98 Q

©2014 Donovan Marine, Inc.

Double Contact Bayonet Base Bulbs



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219457	(68) 13.5 Volt, 4 c.p.	$0.98 I
219469	(90) 13 Volt, 6 c.p.	$2.98 I
219609	(1224) 34 Volt, 3.8 c.p.	$5.98 I
219635	(1252) 28 Volt, 3 c.p.	$0.98 I

Double Contact Index Bayonet Base Bulbs



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219558	(1034) 12.8 Volt, 14 Watt, 32 c.p.	$0.98 I
219596	(1157) 12.8 Volt, 14 Watt, 32 c.p.	$0.98 I

Aqua Signal Bulb for Series 20 Lights



Order No.	Mfg. No. / Description	Price
207387	(90496-7) 12 Volt, 5 Watt	$16.98 Q

Aqua Signal Bulb for Series 55 Lights



• Double contact bayonet base offset pins.

Order No.	Mfg. No. / Description	Price
207464	(90400286) 120 Volt, 25 Watt	$21.98 Q

Miniature Screw Bulbs



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219520	(458) 1.5 Volt, .20 Amp	$3.98 I
569206	(502) 5.1 Volt, .15 Amp	$2.98 B
662571	(306) Miniature Pigtails	$4.98 F

Double Contact Bayonet Base Bulbs



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219471	(94) 12.8 Volt, 15 c.p.	$0.98 I
219572	(1142) 12.8 Volt, 21 c.p.	$1.98 I
219611	(1228) 32 Volt, 15 c.p.	$5.98 I

Single Contact Bayonet Base Bulb



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219560	(1141) 12.8 Volt, 18 Watt, 21 c.p.	$0.98 I

Aqua Signal Bulb for Series 25 Lights



• Special festoon.

Order No.	Mfg. No. / Description	Price
207375	(90200-7) 12 Volt, 10 Watt	$17.98 Q

Aqua Signal Bulbs for Series 70 Lights



• Double contact bayonet base.

Order No.	Mfg. No. / Description	Price
207514	(90400171) 24 Volt, 40 Watt	$40.98 Q
207515	(90400172) 110 Volt, 60 Watt	$45.98 Q
207516	(90400173) 220 Volt, 65 Watt	$45.98 Q

Wedge Base Bulbs



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219476	(161) 14 Volt, .19 Amp	$0.98 I
219483	(194) 12 Volt, .27 Amp	$0.98 I

Double Contact Bayonet Base Bulb



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219800	(00090C) 130 Volt, 15 Watt	$1.98 I

Marpac 360° L.E.D. Replacement Bulb



• Long Life LED replaces the most popular sternlight bulbs on the market.
• Direct replacement for #90 incandescent bulb.
• Low power consumption, yet ultra bright.
• Double contact.
• 12 volt.

Order No.	Description	Price
7-7200	LED Replacement Bulb	$16.98 G

Aqua Signal Bulbs for Series 40 and 41 Lights



• Double contact bayonet base offset pins.

Order No.	Mfg. No. / Description	Price
207363	(90002-7) 12 Volt, 25 Watt	$30.98 Q
207369	(90005-7) 12 Volt, 10 Watt	$30.98 Q

Miniature Screw Bulb



• Price each. Standard pack 10.

Order No.	Mfg. No. / Description	Price
219508	(407) 4.9 Volt, .30 Amp	$4.98 I

Perko Fig. 338 Wedge Base Bulbs



• Price 2 bulbs per card. Standard pack 5.

Order No.	Mfg. No. / Description	Price
5315124	(338 DP1 CLR) 12 Volt, 5 Watt, .35 Amp	$9.98 H
537475	(338 DP2 CLR) 12 Volt, 9 Watt, .69 Amp	$10.98 R

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Perko Fig. 374 Double Contact Bayonet Bulbs



- Clear Type T-8. C-8. Filament, length 1-3/8".
- Standard pack 50.

Order No.	Mfg. No. / Description	Price
528387	(374 001 CLR) 12 Volt, 30 Watt	$50.98 I
528399	(374 002 CLR) 24 Volt, 30 Watt	$50.98 I
528402	(374 003 CLR) 32 Volt, 30 Watt	$50.98 I
528414	(374 004 CLR) 120 Volt, 30 Watt	$58.98 I

Perko Bulbs - Double Ended



- Sold 2 bulbs per card. Standard pack 5.

Order No.	Mfg. No. / Description	Price
541530	(69 DP0 CLR) 12 Volt, 8 c.p., Fest. Length 1-5/8"	$15.98 R
541626	(70 DP0 CLR) 12 Volt, 6 c.p., Length 1-11/16"	$13.98 R
541739	(71 DP0 CLR) 12 Volt, 8 c.p., Length 1-1/8"	$11.98 R
541638	(70 DP1 CLR) 12 Volt, 12 c.p., Length 1-11/16"	$14.98 R
541640	(70 DP2 CLR) 32 Volt, 12 c.p., Length 1-5/8"	$14.98 R
541740	(72 DP1 CLR) 24 Volt, 10 Watt, Length 1-1/8"	$19.98 R

Sealed Beams



- Type: PAR-36.
- Diameter 4-1/2".
- Sold each.

Order No.	Mfg. No. / Description	Price
220486	(4546) 4.7 Volt, 2.35 Watt, .50 Amp, Lantern	$27.98 I

- Type: PAR-56.
- Diameter 7".
- Sold each.

Order No.	Mfg. No. / Description	Price
220462	(433 003 12V) 12 Volt, 100 Watt, Spot	$109.98 I
413043	(67262-0000) 12 Volt, 100 Watt, Spot/Flood	$129.98 G

Perko Fig. 375 Double Contact Bayonet Indexing Base Bulbs



- Standard pack 50.

Order No.	Mfg. No. / Description	Price
528503	(375 12V 10W) 12 Volt, .83 Amp	$52.98 I
528515	(375 12V 25W) 12 Volt, 2.08 Amp	$57.98 I
528527	(375 24V 25W) 24 Volt, 1.04 Amp	$57.98 I
528539	(375 32V 25W) 32 Volt, .78 Amp	$69.98 I

Tungsten Halogen Bulbs



- Rectangular.
- 12 volt.
- 9,900 c.p.
- Spare bulbs for Jabsco (45900 Series) floodlights.

Order No.	Mfg. No. / Description	Price
413562	(45903-0002) 50 Watt, Dimensions: 3" x 5"	$51.98 F
413550	(45903-0000) 50 Watt, Dimensions: 4" x 6"	$87.98 G

Marpac Single Contact Bayonet Base Bulbs



- Sold by Box of 5 Packages Only!
- Priced per Display Package of 2 Bulbs

Order No.	Mfg. No. / Description	Price
7-3915	(67) 13.5 Volt, 8 Watt	$2.69 G
7-3930	(71) 2.2 Volt, 0.4 Watt	$3.29 G
7-3940	(93) 12.8 Volt, 13.3 Watt	$3.09 G
7-3975	(1141) 12.8 Volt, 18.4 Watt	$3.09 G
7-3986	(1156) 12.8 Volt, 26.9 Watt	$2.49 G

Marpac Wedge Base Bulbs



- Sold by Box of 5 Packages Only!
- Priced per Display Package of 2 Bulbs

Order No.	Mfg. No. / Description	Price
7-3925	(70) 14 Volt, 2.1 Watt	$3.29 G
7-3951	(194) 14 Volt, 3.8 Watt	$2.49 G

Halogen Quartz Lamps - Double Ended



Order No.	Mfg. No. / Description	Price
413613	(1000719) 12 Volt, 150 Watt	$24.98 Q
413637	(1000779) 32 Volt, 300 Watt	$33.98 G
219813	(1000224) 130 Volt, 500 Watt	$6.98 I

Perko Fig. 342 Medium Prefocus Bulbs



- Clear.
- 120 volt bulbs for 1150 Series and other navigation lights.
- Standard pack 25.

Order No.	Mfg. No. / Description	Price
528250	(342 001 CLR) 15 Watt	$44.98 F
528262	(342 002 CLR) 25 Watt	$44.98 F
528274	(342 003 CLR) 40 Watt	$44.98 F
528286	(342 004 CLR) 60 Watt	$44.98 F
528298	(342 RS4 CLR) 60 Watt, For Rough Service	$61.98 F

Marpac Mini Bayonet Base Bulbs



- Sold by Box of 5 Packages Only!
- Priced per Display Package of 2 Bulbs.

Order No.	Mfg. No. / Description	Price
7-3905	(53) 14.4 Volt, 1.7 Watt	$2.69 G
7-3910	(57) 14 Volt, 3.4 Watt	$2.49 G
7-4000	(1895) 14 Volt, 3.8 Watt	$6.59 G

Marpac Double Contact Bayonet Base Bulbs



- Sold by Box of 5 Packages Only!
- Priced per Display Package of 2 Bulbs.

Order No.	Mfg. No. / Description	Price
7-3920	(68) 13.5 Volt, 8 Watt	$3.09 G
7-3936	(90) 13 Volt, 7.5 Watt	$2.69 G
7-3946	(94) 12.8 Volt, 13.3 Watt	$3.09 G
7-3966	(1004) 12.8 Volt, 12 Watt	$3.09 G
7-3970	(1034) 12.8 Volt, 23 Watt	$3.09 G
7-3980	(1142) 12.8 Volt, 18.4 Watt	$3.29 G
7-3991	(1157) 12 Volt	$2.49 G

Marpac Festoon Bulbs



- Sold by Box of 5 Packages Only!
- Priced per Display Package of 2 Bulbs.

Order No.	Mfg. No. / Description	Price
7-3955	(211) 12.8 Volt, 12 Watt	$3.09 G
7-3960	(212) 13.5 Volt, 10 Watt	$3.09 G
7-4010	(70 DP1) 12 Volt, 15 Watt	$6.59 G
7-4020	(71 DP0) 12 Volt, 10 Watt	$7.29 G

Optronics Replacement Bulbs

Order No.	Mfg. No. / Description	Price
523340	(A-700) For Illuma-Light Spotlight	$5.98 G

©2014 Donovan Marine, Inc.

Marpac Single Contact Bayonet Base Bulbs



- All bulbs packed 2 per display package.
- This display includes 5 bags of the following:
  - 7-3905 (53) Mini Bayonet Base
  - 7-3910 (57) Mini Bayonet Base
  - 7-3915 (67) Single Contact Bayonet Base
  - 7-3920 (68) Double Contact Bayonet Base
  - 7-3925 (70) Wedge Base
  - 7-3930 (71) Single Contact Bayonet Base
  - 7-3936 (90) Double Contact Bayonet Base
  - 7-3940 (93) Single Contact Bayonet Base
  - 7-3946 (94) Double Contact Bayonet Base
  - 7-3950 (194) Wedge Base
  - 7-3955 (211) Festoon
  - 7-3960 (212) Festoon
  - 7-3966 (1004) Double Contact Bayonet Base
  - 7-3970 (1034) Double Contact Bayonet Base
  - 7-3975 (1141) Single Contact Bayonet Base
  - 7-3986 (1156) Single Contact Bayonet Base
  - 7-3990 (1157) Double Contact Bayonet Base
  - 7-4000 (1895) Mini Bayonet Base
  - 7-4020 (71 DP CLR) Festoon

Order No.	Mfg. No. / Description	Price
7-3006	Bayonet Base Bulbs Display	$307.98 G

Perko Fig. 290 Electric Adapter



- Brass, spring type for double ended bulbs.
- Opening light ID 3-3/16".
- Overall OD 4-1/2".

Order No.	Mfg. No. / Description	Price
529529	(290 F03) Electric Adapter	$79.98 F

Perko Fig. 24 Double Contact Bayonet Socket



- Black polymer body.
- OD 3/4". Pigtail length 10".

Order No.	Mfg. No. / Description	Price
535976	(24 DP1) Bayonet Socket	$8.98 R

Fluorescent Bulbs



Order No.	Mfg. No. / Description	Price
378490	(F8T5CW) 12 Volt, 8 Watt, Length 1'	$8.98 Q
569117	(00669B) 120 Volt, 20 Watt, Length 2'	$7.98 B
569105	(00807D) 120 Volt, 34 Watt, Length 4'	$9.98 B
569106	(04499C) 17 Watt, Length 2'	$7.98 B
569107	(04500C) 32 Watt, Length 4'	$7.98 B

Searchlight Projection Bulbs


(1) Medium Screw 530458


(2) Medium Prefocus 530469


(3) Mogul Screw 530471


(4) 2-Pin Prefocus 530495


(6) 2-Pin Prefocus 530483


(5) Mogul Prefocus

DMI #	MFG. Bulb Code	Voltage	Wattage	Socket Type	Price
219825	BTM	120	500	Medium Prefocus Base (2)	$62.98 I
219837	BTP	120	750	Medium Prefocus Base (2)	$53.98 I
219849	BTR	120	1,000	Medium Prefocus Base (2)	$52.98 I
219851	BVA	120	900	2-Pin Prefocus Base (6)	$71.98 I
219887	CZX/DAB	120	500	Medium Prefocus Base (2)	$104.98 I
219899	DCX	120	750	Medium Screw Base (1)	$85.98 I
528806	DLT	32	500	Medium Screw Base (1)	$145.98 F
219976	DPT	120	1,000	Mogul Screw Base (3)	$88.98 I
219989	DWK	230	1,000	Medium Prefocus Base (2)	$109.98 I
220020	DYS	120	600	2-Pin Prefocus Base (4/6)	$25.98 I
220070	FDT	12	100	2-Pin Prefocus Base (4/6)	$23.98 I

Anchor Products Dielectric Silicone Compound

- Fights oxidation to improve conductivity.
- Penetrates aluminum oxide to maintain current paths.
- Temperature rated 40° - 500° F.

Order No.	Mfg. No. / Description	Price
700115	(700115) 1/3 oz tube.	$9.98 Q

Perko Fig. 52 Double Contact Bayonet Socket



- Brass with 6" wire leads.
- Socket length 1".

Order No.	Mfg. No. / Description	Price
540131	(52 DP) Bayonet Socket	$15.98 R

Perko Fig. 303 Dual Medium Prefocus Socket Assembly



- Phenolic. 250 volts, 1,000 watts.
- Prewired with two medium prefocus sockets.
- For use in 1164 Series double lens lights.
- Overall height 3-7/8", overall width 3-7/8".

Order No.	Mfg. No. / Description	Price
529428	(303)	$263.98 F
529430	(303 A00) Male Plug Only	$19.98 F
529442	(303 B00) Female Socket Only	$16.98 F

Perko Fig. 1087 Socket for Vaporproof Lighting Fixture

- Satin finish die cast aluminum with glass globes.
- Integral junction box with four 1/2" IPS fittings.
- UL Marine type accepted.
- Medium screw socket for bulbs up to 100 watts.

Order No.	Mfg. No. / Description	Price
531790	(1087 000 99B) Socket	$31.98 F

Perko Fig. 346 Medium Screw Socket



- Internal thread. 3/8" IPS.

Order No.	Mfg. No. / Description	Price
529668	(346 002 MED) Screw Socket	$6.98 B

Perko Fig. 347 Medium Prefocus Socket



- Phenolic. 250 volts, 1,000 watts.
- Includes: Metal mounting cap tapped for 3/8" IPS.
- Overall height 1-7/8", overall diameter 1-1/2".

Order No.	Mfg. No. / Description	Price
529404	(347 A00) Prefocus Socket	$69.98 F

Perko Fig. 276 Double Contact Bayonet Socket



- Brass with 6" wire leads.
- Tapped for 1/8" pipe.
- Overall length 2".

Order No.	Mfg. No. / Description	Price
529644	(276 002) Bayonet Socket	$14.98 F

©2014 Donovan Marine, Inc.

Wire & Cable

Donovan Marine offers a complete line of marine wire and cable products. All wire and cable is RoHS compliant and built to meet SAE, UL, and/or CSA specifications. All wire is made in the USA

105° C Tinned Wire

UL-Listed, tinned wire is ideal for use in the highly corrosive environment of marine applications. Special electro-tinned, copper strands also increase protection against corrosion for recreational vehicles, automotive, trucks, and trailers. Tinned copper stranding is extremely flexible for easy routing through marine applications and easier to solder than bare copper. Flame retardant, PVC insulation is highly resistant to water, oil, grease, gasoline and other damaging solvents. High voltage tolerance of up to 600 volts adds versatility to its use in multiple marine and other sustainable applications.


- Voltage: Rated at 600 volts.
- Temperature: Rated at 105° C (221° F) dry and 75° C (167° F) wet.
- Specifications: Meets DOT and Coast Guard specs for electrical systems.

80° C Bonded Parallel Wire

Multiple primary wire parallel bonded with color-coding for identification purposes. Especially ideal for use in RVs, marine, and utility trailer applications. Built to stay together under the toughest operating conditions yet easy to separate at the end of a run for final terminal connection. All-copper stranded core is highly conductive maximizing current transfer while remaining flexible for easy installation.

- Voltage: Rated at 600 volts or less.
- Temperature: Rated at –30° C (–22° F) to 80° C (176° F).
- Specifications: SAE J1128.

105° C Tinned Single-Conductor UL Listed 1426 Wire

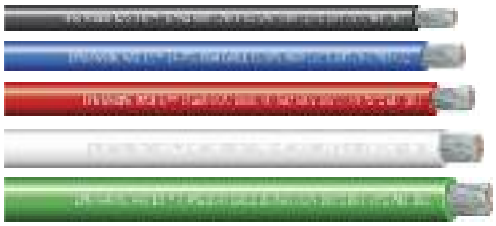

105° C Tinned Single-Conductor UL Listed 1426 Cable



105° C Tinned Multi-Conductor UL Listed 1426 Cable



105° C Tinned Bonded Parallel Wire



80° C Bonded Parallel Wire



Wiring Color Code - Direct Current Systems - Under 50 Volts

Color	Item	Use
Dark Green	Bonding System	Bonding Wires (if insulated)
Black	Ground	Return Wires (if insulated)
Red	Main Power Feeds	Positive Mains, Particularly Unfused
Yellow with a Red Stripe	Starting Circuit	Starting Switch to Solenoid
Yellow	Generator or Alternator Field	Generator to Alternator Field to Regulate Field Terminal
	Bilge Blowers	Fuse or Switch to Bilge Blowers
Dark Gray	Navigation Lights	Fuse or Switch to Lights
	Tachometer	Tachometer to Gauge
Brown	Generator Armature	Generator Armature to Regulator
	Alternator Charge Light	Generator Terminal/Alternator Auxiliary Terminal to Light to Regulator
	Pumps	Fuse or Switch to Pumps
Orange	Accessory Feed	Ammeter to Alternator or Generator Output & Accessory Fuses or Generator Switches Distribution Panel to Accessory Switch
Purple	Ignition	Ignition Switch to Coil and Electrical Instruments
	Instrument Feed	
Dark Blue	Oil Pressure	Oil Pressure Sender to Gauge
Tan	Water Temperature	Water Temperature Sender to Gauge
Pink	Fuel Gauge	Fuel Gauge Sender to Gauge

Marpac Tinned Copper Marine Primary Wire



Order No.	Description			Price
7-4130	16 AWG	White	Length 30'	$15.98 H
7-4135	14 AWG	Black	Length 20'	$15.98 H
7-4145	14 AWG	Red	Length 20'	$15.98 H
7-4150	14 AWG	White	Length 20'	$15.98 H
7-4160	12 AWG	Green	Length 15'	$15.98 H
7-4165	12 AWG	Red	Length 15'	$15.98 H
7-4170	12 AWG	White	Length 15'	$15.98 H
7-4175	10 AWG	Black	Length 10'	$15.98 H
7-4180	10 AWG	Green	Length 10'	$15.98 H
7-4190	10 AWG	White	Length 10'	$15.98 H

East Penn Manufacturing Bulk Primary Wire



Order No.	Mfg. No. / Description			Price
2000553	(11081-02) 8 Gauge	White	100' Spools	$99.98 F
2000554	(11081-05) 8 Gauge	Black	100' Spools	$99.98 R
2000557	(11101-01) 10 Gauge	Red	100' Spools	$61.98 H
2000558	(11101-02) 10 Gauge	White	100' Spools	$61.98 G
2000559	(11101-05) 10 Gauge	Black	100' Spools	$61.98 H
2000560	(11121-01) 12 Gauge	Red	100' Spools	$38.98 H
2000561	(11121-02) 12 Gauge	White	100' Spools	$38.98 G
2000562	(11121-05) 12 Gauge	Black	100' Spools	$38.98 H
2000563	(11141-01) 14 Gauge	Red	100' Spools	$26.98 H
2000564	(11141-02) 14 Gauge	White	100' Spools	$26.98 H
2000565	(11141-03) 14 Gauge	Blue	100' Spools	$26.98 H
2000566	(11141-04) 14 Gauge	Green	100' Spools	$26.98 H
2000567	(11141-05) 14 Gauge	Black	100' Spools	$26.98 H
2000568	(11141-06) 14 Gauge	Yellow	100' Spools	$26.98 H
2000569	(11141-07) 14 Gauge	Brown	100' Spools	$26.98 H
2000570	(11141-09) 14 Gauge	Purple	100' Spools	$26.98 H
2000571	(11141-10) 14 Gauge	Orange	100' Spools	$26.98 H
2000572	(11161-01) 16 Gauge	Red	100' Spools	$17.98 H
2000573	(11161-02) 16 Gauge	White	100' Spools	$17.98 H
2000574	(11161-03) 16 Gauge	Blue	100' Spools	$17.98 H
2000575	(11161-04) 16 Gauge	Green	100' Spools	$17.98 H
2000576	(11161-05) 16 Gauge	Black	100' Spools	$17.98 H
2000577	(11161-06) 16 Gauge	Yellow	100' Spools	$17.98 H
2000578	(11161-07) 16 Gauge	Brown	100' Spools	$17.98 H
2000579	(11161-09) 16 Gauge	Purple	100' Spools	$17.98 H
2000580	(11161-10) 16 Gauge	Orange	100' Spools	$17.98 H
2000581	(11165-01) 16 Gauge	Red	500' Spools	$69.98 H
2000583	(11165-05) 16 Gauge	Black	500' Spools	$69.98 H

Marpac Tinned Copper Marine Primary Wire Display

Sold By Box of 5 Packages Only!
Priced Per Display Package.

- This display includes 5 display packs of the following:

7-4113	18 AWG	Black Tinned Copper Wire	Length 35'
7-4114	18 AWG	Red Tinned Copper Wire	Length 35'
7-4125	16 AWG	Red Tinned Copper Wire	Length 25'
7-4126	16 AWG	Brown Tinned Copper Wire	Length 25'
7-4127	16 AWG	Purple Tinned Copper Wire	Length 25'
7-4135	14 AWG	Black Tinned Copper Wire	Length 18'
7-4145	14 AWG	Red Tinned Copper Wire	Length 18'
7-4165	12 AWG	Red Tinned Copper Wire	Length 12'
7-4166	12 AWG	Brown Tinned Copper Wire	Length 12'
7-4167	12 AWG	Purple Tinned Copper Wire	Length 12'
7-4170	12 AWG	Black Tinned Copper Wire	Length 12'
7-4175	10 AWG	Black Tinned Copper Wire	Length 8'
7-4185	10 AWG	Red Tinned Copper Wire	Length 8'
7-4351	10 AWG	Yellow Tinned Copper Wire	Length 8'
7-4359	8 AWG	Yellow Tinned Copper Wire	Length 8'
7-4192	18/2	Clear Speaker Wire	Length 35'
7-4193	16/2	Clear Speaker Wire	Length 15'

Order No.	Description	Price
7-3013	Tinned Copper Marine Primary Wire Display	$1,024.98 G

Marpac Marine Primary Tinned Wire - Single Conductor



- Meets Coast Guard, ABYC, NMMA and DOT specifications for electric systems.
- Temperature rating of 105° C (221° F) dry and 75° C (167° F) wet.
- Electro-tinned, copper strands increase corrosion protection.
- Flame retardant PVC insulation.
- Rated 600 volts.
- UL Listed.
- RoHS complaint.
- 100' Spool.

Order No.	Description		Price
7-4358	8 Gauge	Green	$139.98 L
7-4356	8 Gauge	Red	$139.98 L
7-4354	8 Gauge	Black	$139.98 L
7-4359	8 Gauge	Yellow	$139.98 L
7-4350	10 Gauge	Green	$75.98 L
7-4348	10 Gauge	White	$75.98 L
7-4346	10 Gauge	Red	$75.98 L
7-4344	10 Gauge	Black	$75.98 L
7-4351	10 Gauge	Yellow	$75.98 L
7-4340	12 Gauge	Green	$52.98 L
7-4338	12 Gauge	White	$52.98 L
7-4336	12 Gauge	Red	$52.98 L
7-4334	12 Gauge	Black	$52.98 L
7-4328	14 Gauge	Pink	$33.98 L
7-4326	14 Gauge	Dark Blue	$33.98 L
7-4324	14 Gauge	Light Blue	$33.98 L
7-4322	14 Gauge	Orange	$33.98 L
7-4320	14 Gauge	Brown	$33.98 L
7-4318	14 Gauge	Yellow	$33.98 L
7-4316	14 Gauge	Green	$33.98 L
7-4314	14 Gauge	White	$33.98 L
7-4312	14 Gauge	Red	$33.98 L
7-4310	14 Gauge	Black	$33.98 L
7-4306	16 Gauge	Green	$23.98 L
7-4304	16 Gauge	White	$23.98 L
7-4302	16 Gauge	Red	$23.98 L
7-4300	16 Gauge	Black	$23.98 L

Ancor Marine Grade™ Primary Wire

- UL 1426 Tinned Boat Cable
- Ancor Marine Grade™ wire is manufactured from tinned copper stranding for maximum protection against corrosion and electrolysis.
- Ultra flexible (Type 3) stranding resists fatigue due to vibration and flexing.
- Ancor's proprietary premium vinyl insulation stays flexible even in extreme cold and resists salt water, battery acid, oil, gasoline and ultra-violet radiation.
- Exclusive insulation is rated at 600 volts, 105° C dry and 75° C wet, and is resistant to heat and abrasion.
- Exceeds all UL 1426, US Coast Guard Charterboat (CFR Title 46) and ABYC standards.

Order No.	Mfg. No. / Description			Price
211003	(180003) 18 AWG	Black	Length 35'	$11.98 Q
211005	(180803) 18 AWG	Red	Length 35'	$11.98 Q
211213	(182003) 16 AWG	Black	Length 25'	$11.98 Q
211217	(182803) 16 AWG	Red	Length 25'	$11.98 Q
211215	(182303) 16 AWG	Green	Length 25'	$11.98 Q
211219	(182903) 16 AWG	White	Length 25'	$11.98 Q
211683	(186803) 12 AWG	Red	Length 12'	$12.98 G
211808	(188803) 10 AWG	Red	Length 8'	$12.98 G

©2014 Donovan Marine, Inc.

Marpac Bonded Parallel Plastic Primary Wire


4-Conductor
Green/Yellow/Brown/White


3-Conductor
Green/Yellow/Brown


2-Conductor - Red/Black

- 100% copper conductor.
- RoHS compliant.
- Heavy duty PVC jacket with color-coded conductors.
- Conductors meet SAE J1128 specs.
- Temperature rating of 80° C (176° F), nominal cold temperature rating of –30° C (–22° F).
- For use at 60 volts or less.

Order No.	Description				Price
7-4386	2-Conductor	14 Gauge	Red/Black	Length 100'	$71.98 L
7-4382	2-Conductor	16 Gauge	Yellow/Brown	Length 100'	$51.98 L
7-4384	2-Conductor	16 Gauge	Red/Black	Length 500'	$219.98 L
7-4380	2-Conductor	18 Gauge	Red/Black	Length 100'	$45.98 L
7-4390	2-Conductor	10 Gauge	Black/Red	Length 100'	$151.98 L
7-4394	3-Conductor	14 Gauge	Brown/Yellow/Green	Length 100'	$117.98 L
7-4392	3-Conductor	16 Gauge	Brown/Yellow/Green	Length 100'	$79.98 L
7-4400	4-Conductor	14 Gauge	White/Brown/Yellow/Green, Length 100'		$123.98 L
7-4398	4-Conductor	16 Gauge	White/Brown/Yellow/Green, Length 100'		$99.98 L
7-4396	4-Conductor	18 Gauge	White/Brown/Yellow/Green, Length 100'		$79.98 L

- Rated -22° F (-30° C) to 176 ° F (80° C).
- Rated 60 volts or less.
- RoHS compliant.
- Meets SAE J1128.
- Electro-tinned, copper strands increase corrosion protection.

Order No.	Description				Price
7-4369	2 Conductor	10 Gauge	Red/Black	Length 100'	$179.98 L

Marpac Marine Cable - Duplex



- Meets Coast Guard, ABYC, NMMA and DOT specifications.
- Temperature rating of 105° C (221° F) dry and 75° C (167° F) wet.
- Flame retardant PVC insulation.
- Rated 600 volts.
- RoHS complaint.
- Electro-tinned, copper strands increase corrosion protection.
- UL Listed.
- White Jacket.
- Made in USA.

Order No.	Description			Price
7-4370	10 Gauge	Black/White	Length 100'	$183.98 L
7-4371	10 Gauge	Yellow/Red	Length 100'	$183.98 L
7-4368	12 Gauge	Black/White	Length 100'	$125.98 L
7-4366	14 Gauge	Black/White	Length 100'	$85.98 L
7-4367	14 Gauge	Yellow/Red	Length 100'	$85.98 L
7-4364	16 Gauge	Black/White	Length 100'	$63.98 L
7-4365	16 Gauge	Yellow/Red	Length 100'	$63.98 L

Newmar Intercom Wire

Order No.	Mfg. No. / Description	Price
694926	(22-15) 22 AWG, 15 Conductors	$3.41 D
695923	(22-10) 22 AWG, 10 Conductors	$2.62 D

East Penn Manufacturing Bonded Parallel Trailer Wire

Order No.	Mfg. No. / Description			Price
2000591	(82161) 16 Gauge	Yellow/Brown	100' Spools	$37.98 H

Marpac Marine Cable - Triplex



- Black/Green/White with White Jacket.

Order No.	Description		Price
7-4376	10 Gauge	Length 100'	$253.98 L
7-4374	12 Gauge	Length 100'	$169.98 L
7-4372	14 Gauge	Length 100'	$119.98 L

Marpac Bulk Spool Tinned Copper Marine Primary Wire Display with Rack



- This display includes each of the following:

7-4300	Plastic Primary Wire - Single Conductor	16 Gauge	Black
7-4302	Plastic Primary Wire - Single Conductor	16 Gauge	Red
7-4310	Plastic Primary Wire - Single Conductor	14 Gauge	Black
7-4312	Plastic Primary Wire - Single Conductor	14 Gauge	Red
7-4318	Plastic Primary Wire - Single Conductor	14 Gauge	Yellow
7-4320	Plastic Primary Wire - Single Conductor	14 Gauge	Brown
7-4334	Plastic Primary Wire - Single Conductor	12 Gauge	Black
7-4336	Plastic Primary Wire - Single Conductor	12 Gauge	Red
7-4344	Plastic Primary Wire - Single Conductor	10 Gauge	Black
7-4346	Plastic Primary Wire - Single Conductor	10 Gauge	Red
7-4354	Plastic Primary Wire - Single Conductor Note: Not Tinned	8 Gauge	Black
7-4356	Plastic Primary Wire - Single Conductor Note: Not Tinned	8 Gauge	Red
7-4380	Bonded Parallel Plastic Primary Wire	18 Gauge	Length 100'
7-4382	Bonded Parallel Plastic Primary Wire	16 Gauge	Length 100'
7-4386	Bonded Parallel Plastic Primary Wire	14 Gauge	Length 100'
7-4364	Boat Cable - Duplex	16 Gauge	Length 100'
7-4366	Boat Cable - Duplex	14 Gauge	Length 100'
7-4368	Boat Cable - Duplex	12 Gauge	Length 100'
7-4370	Boat Cable - Duplex	10 Gauge	Length 100'
7-4372	Boat Cable - Triplex	14 Gauge	Length 100'
7-4374	Boat Cable - Triplex	12 Gauge	Length 100'
7-4999B	Wire Rack		

Order No.	Description	Price
7-4999	Marine Primary Wire Display with Rack	$1,767.98 L
7-4999B	Display Rack Only	Price On Request

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Marpac Boat Starter Cable



- Meets Coast Guard, ABYC, NMMA and DOT specifications.
- Temperature rating of 105° C (221° F) dry and 75° C (167° F) wet.
- Flame retardant PVC insulation.
- Rated 600 volts.
- RoHS complaint.
- Electro-tinned, copper strands increase corrosion protection.
- UL Listed.
- Made in USA.

Order No.	Description			Price
7-4436	2/0 Gauge	Black	Length 100'	$939.98 L
7-4432	2/0 Gauge	Black	Length 25'	$239.98 L
7-4434	2/0 Gauge	Red	Length 100'	$939.98 L
7-4430	2/0 Gauge	Red	Length 25'	$239.98 L
7-4428	1 Gauge	Black	Length 25'	$159.98 L
7-4426	1 Gauge	Red	Length 25'	$159.98 L
7-4424	2 Gauge	Black	Length 100'	$469.98 L
7-4420	2 Gauge	Black	Length 25'	$119.98 L
7-4422	2 Gauge	Red	Length 100'	$469.98 L
7-4418	2 Gauge	Red	Length 25'	$119.98 L
7-4416	4 Gauge	Black	Length 100'	$309.98 L
7-4412	4 Gauge	Black	Length 25'	$79.98 L
7-4414	4 Gauge	Red	Length 100'	$309.98 L
7-4417	4 Gauge	Yellow	Length 100'	$309.98 L
7-4410	4 Gauge	Red	Length 25'	$79.98 L
7-4408	6 Gauge	Black	Length 100'	$203.98 L
7-4406	6 Gauge	Red	Length 100'	$203.98 L

East Penn Manufacturing Bulk Primary Wire



- Priced by the foot and cut to order.

Order No.	Mfg. No. / Description		Price
2000584	(302-BLK) 2 Gauge	Black	$3.35 H
2000585	(302-RED) 2 Gauge	Red	$3.35 H
2000586	(304-BLK) 4 Gauge	Black	$2.60 H
2000587	(304-RED) 4 Gauge	Red	$2.60 H
2000588	(306-BLK) 6 Gauge	Black	$1.99 H
2000589	(306-RED) 6 Gauge	Red	$1.99 H

Audiopipe Gold Battery Terminals



- 24 Kt. Gold Finish.
- One 1/0 Gauge Input and Four 4 Gauge Outputs.
- Inner steps ensure perfect.
- Recessed fit of 4 and 8 gauge cable.
- Base is precision machined.

Order No.	Mfg. No. / Description	Price
559705	(BT-100P) Positive (+)	$9.98 F
559710	(BT-100N) Negative (-)	$9.98 F

Boater Sports Battery Wing Nuts

Order No.	Mfg. No. / Description	Price
2000010	(31CNWFA9) 5/16" - 18 Wing Nut, Each	$0.99 H
2000011	(37CNWFA9) 3/8" - 16 Wing Nut, Each	$0.99 H

Marpac Premade Tinned Copper Battery Cable



- Pre-assembled battery cable.
- UL Listed 1426.
- Tinned wire, copper strands increase corrosion protection.
- Meets DOT and Coast Guard specifications.
- Temperature ratings of 105° C/221° F - dry and 75° C/167° F - wet.
- Flame retardant PVC insulation.
- RoHS complaint.

Order No.	Description		Price
7-4055	4 AWG x 24	Black	$17.98 G
7-4060	4 AWG x 24	Red	$17.98 G
7-4065	4 AWG x 36	Black	$20.98 G
7-4070	4 AWG x 36	Red	$20.98 G
7-4075	4 AWG x 48	Black	$25.98 G
7-4080	4 AWG x 48	Red	$25.98 G
7-4085	2 AWG x 48	Black	$33.98 G
7-4090	2 AWG x 48	Red	$33.98 G
7-4095	2 AWG x 60	Black	$40.98 H
7-4100	2 AWG x 60	Red	$40.98 H
7-4105	2 AWG x 72	Black	$45.98 G
7-4110	2 AWG x 72	Red	$45.98 G

Marpac Battery Terminal Guards



- Sold per pair per package.

Order No.	Description	Price
7-4195	For 2 AWG Battery Cable	$4.39 G
7-4200	For 4 AWG Battery Cable	$4.39 G

Moeller Battery Terminal Covers



- The flexible PVC covers will accept up to 1/2" OD cable.
- One black cover and one red cover.
- Meets USCG and BIA safety regulations for anti-short protection.
- Sold per pair per clam shell package. Standard pack 12.

Order No.	Mfg. No. / Description	Price
487505	(99078-10) Battery Terminal Covers	$7.98 F

Battery Terminals



- Lead terminals with brass plated wing nut.
- For marine use.
- Sold per pair skin packed: 1 positive and 1 negative.

Order No.	Mfg. No. / Description	Price
277875	(00354)	$7.98 L

Boater Sports Battery Terminal Kit



- Convert your "post" style battery into a marine "wing nut" style battery in seconds!
- 5/16" negative terminal and 3/8" positive terminal.
- Color coded coating.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-51006	(51006)	$10.95 H

©2014 Donovan Marine, Inc.

Marpac Tinned Copper Lugs



Sold by box of 5 Packages only!
Priced per Package.

- Sold 2 per display package.

Order No.	Description		Price
7-3450	8 AWG	#1/4	$2.19 G
7-3455	8 AWG	#5/16	$2.19 G
7-3460	8 AWG	#3/8	$2.69 G
7-3465	6 AWG	#1/8	$2.69 G
7-3470	6 AWG	#1/4	$2.69 G
7-3475	6 AWG	#5/16	$2.69 G
7-3480	6 AWG	#3/8	$3.29 G
7-3490	4 AWG	#5/16	$3.29 G
7-3500	4 AWG	#3/8	$3.29 G
7-3510	2 AWG	#5/16	$3.99 G
7-3520	2 AWG	#3/8	$4.39 G
7-3525	1 AWG	#5/16	$3.99 G
7-3530	1 AWG	#3/8	$4.39 G
7-3535	1/0 AWG	#5/16	$4.39 G
7-3540	1/0 AWG	#3/8	$4.39 G
7-3545	1/0 AWG	#1/2	$4.99 G
7-3550	2/0 AWG	#1/4	$5.69 G
7-3555	2/0 AWG	#5/16	$5.69 G
7-3560	2/0 AWG	#3/8	$5.69 G
7-3565	2/0 AWG	#1/2	$5.69 G
7-3570	4/0 AWG	#3/8	$8.19 G
7-3575	4/0 AWG	#1/2	$8.79 G

Marpac Booster Cable



- Color coded.
- No tangle, dual construction.

Order No.	Description	Price
7-4450	12' x 8 Gauge	$17.98 F

Boater Sports Copper Lugs



- Display packaged.
- Per pair.

Order No.	Mfg. No. / Description		Price
2000555	(110A) 2 AWG	3/8" Eye	$2.40 H
2000556	(110E) 2 AWG	1/2" Eye	$2.40 H
2000590	(808A) 4 AWG	3/8" Eye	$1.75 H

Heavy Duty Flared Lugs



- Solid copper.
- Not tinned.
- Sold each.

Order No.	Mfg. No. / Description		Price
277684	(05468) Stud Size 5/16"	6 Gauge	$1.78 H
277687	(05328) Stud Size 5/16"	4 Gauge	$1.78 H
277689	(05462) Stud Size 5/16"	2 Gauge	$1.98 H
277691	(05459) Stud Size 5/16"	1 Gauge	$1.98 H
277693	(05460) Stud Size 5/16"	1/0 Gauge	$2.18 H
277695	(05463) Stud Size 5/16"	2/0 Gauge	$2.48 H
277699	(05326) Stud Size 3/8"	6 Gauge	$1.78 H
277702	(05327) Stud Size 3/8"	4 Gauge	$1.78 H
277714	(05329) Stud Size 3/8"	2 Gauge	$1.98 H
277726	(05331) Stud Size 3/8"	1 Gauge	$1.98 H
277738	(05333) Stud Size 3/8"	1/0 Gauge	$2.18 H
277773	(05335) Stud Size 3/8"	2/0 Gauge	$2.18 H
277777	(05339) Stud Size 3/8"	4/0 Gauge	$4.98 H
277779	(05330) Stud Size 1/2"	2 Gauge	$1.98 H
277790	(05332) Stud Size 1/2"	1 Gauge	$2.18 H
277780	(05334) Stud Size 1/2"	1/0 Gauge	$2.48 H
277815	(05336) Stud Size 1/2"	2/0 Gauge	$2.48 H
479914	(05338) Stud Size 1/2"	3/0 Gauge	$2.68 H
277775	(05340) Stud Size 1/2"	4/0 Gauge	$4.98 H

Marpac Vinyl Butt Connectors

Sold by box of 5 Packages only! Priced per Package.



Order No.	Description			Price
7-3110	22-18 AWG	Red	Qty. Per Package 6	$2.49 G
7-3115	16-14 AWG	Blue	Qty. Per Package 6	$2.49 G
7-3120	12-10 AWG	Yellow	Qty. Per Package 6	$2.49 G

Vinyl Insulated Butt Connectors - Display Packaged

Order No.	Mfg. No. / Description			Price
7270097	(110011) 22-18 Gauge	Red	6 Per Package	$3.30 H
7270098	(110021) 16-14 Gauge	Blue	6 Per Package	$3.30 H
7270099	(110031) 12-10 Gauge	Yellow	6 Per Package	$3.30 H

Vinyl Insulated Butt Connectors



Order No.	Mfg. No. / Description			Price
479899	(110055) 6 Gauge	Blue	25 Per Bag	$46.98 M
479801	(110045) 8 Gauge	Red	25 Per Bag	$27.98 M
479700	(110038) 12-10 Gauge	Yellow	100 Per Bag	$26.98 H
479508	(110028) 16-14 Gauge	Blue	100 Per Bag	$15.98 H
479320	(110018) 22-18 Gauge	Red	100 Per Bag	$19.98 M

Vinyl Insulated Ring Terminals



Order No.	Mfg. No. / Description				Price
479938	(110065) 4 Gauge	Yellow	5/16"	25 Per Bag	$46.98 M
479875	(110325) 6 Gauge	Blue	3/8"	25 Per Bag	$33.98 M
479863	(110315) 6 Gauge	Blue	5/16"	25 Per Bag	$33.98 M
479851	(110305) 6 Gauge	Blue	1/4"	25 Per Bag	$31.98 M
479786	(110285) 8 Gauge	Red	3/8"	25 Per Bag	$25.98 M
479774	(110275) 8 Gauge	Red	5/16"	25 Per Bag	$22.98 M
479762	(110265) 8 Gauge	Red	1/4"	25 Per Bag	$22.98 M
479750	(112255) 8 Gauge	Red	#10	25 Per Bag	$19.98 M
479609	(110258) 12-10 Gauge	Yellow	1/2"	100 Per Bag	$55.98 M
479596	(110248) 12-10 Gauge	Yellow	3/8"	100 Per Bag	$34.98 H
479584	(110238) 12-10 Gauge	Yellow	5/16"	100 Per Bag	$33.98 H
479572	(110228) 12-10 Gauge	Yellow	1/4"	100 Per Bag	$32.98 H
479560	(110218) 12-10 Gauge	Yellow	#10	100 Per Bag	$29.98 H
479407	(110188) 16-14 Gauge	Blue	3/8"	100 Per Bag	$24.98 H
479394	(110178) 16-14 Gauge	Blue	5/16"	100 Per Bag	$18.98 M
479382	(110168) 16-14 Gauge	Blue	1/4"	100 Per Bag	$25.98 M
479370	(110158) 16-14 Gauge	Blue	#10	100 Per Bag	$13.98 M
479368	(110148) 16-14 Gauge	Blue	#8	100 Per Bag	$16.98 H
479243	(110118) 22-18 Gauge	Red	5/16"	100 Per Bag	$30.98 M
479231	(110108) 22-18 Gauge	Red	1/4"	100 Per Bag	$17.98 M
479229	(110098) 22-18 Gauge	Red	#10	100 Per Bag	$18.98 M
479217	(110088) 22-18 Gauge	Red	#8	100 Per Bag	$18.98 M

Vinyl Insulated Ring Connectors - Display Packaged

Order No.	Mfg. No. / Description			Price
7270100	(110071) 22-18 Gauge - #6	Red	7 Per Package	$3.30 H
7270101	(110091) 22-18 Gauge - #10	Red	7 Per Package	$3.30 H
7270102	(110131) 16-14 Gauge - #6	Blue	7 Per Package	$3.30 H
7270103	(110151) 16-14 Gauge - #10	Blue	7 Per Package	$3.30 H
7270104	(110211) 12-10 Gauge - #10	Yellow	6 Per Package	$3.30 H
7270105	(110241) 12-10 Gauge - #3/8	Yellow	5 Per Package	$3.30 H

Greenlite Cable Premium Nylon Insulated Butt Connectors



- Premium nylon insulator will not crack or split.
- Deep serrations in barrel grip wire to exceed UL specifications.
- Highest grade electrolytic copper, tin plated for greatest corrosion resistance and least power loss.
- Best for vibration, flexing and extreme environmental conditions.

Order No.	Mfg. No. / Description			Price
2000787	(GB-Y6N) 12-10 AWG	Yellow	100 Per Pack	$14.98 H
2000785	(GB-B6N) 16-14 AWG	Blue	100 Per Pack	$10.98 H
2000786	(GB-R6N) 22-18 AWG	Red	100 Per Pack	$10.98 H

Marpac Vinyl Ring Tongues

Sold by box of 5 Packages only! Priced per Package.



Order No.	Mfg. No. / Description			Price
7-3125	22-18 AWG - #6	Red	Qty. Per Package 7	$2.49 G
7-3130	22-18 AWG - #8	Red	Qty. Per Package 7	$2.49 G
7-3135	22-18 AWG - #10	Red	Qty. Per Package 7	$2.49 G
7-3140	16-14 AWG - #6	Blue	Qty. Per Package 7	$2.49 G
7-3145	16-14 AWG - #8	Blue	Qty. Per Package 7	$2.49 G
7-3150	16-14 AWG - #10	Blue	Qty. Per Package 7	$2.49 G
7-3155	16-14 AWG - #1/4	Blue	Qty. Per Package 6	$2.49 G
7-3165	16-14 AWG - #3/8	Blue	Qty. Per Package 5	$2.49 G
7-3170	12-10 AWG - #10	Yellow	Qty. Per Package 6	$2.49 G
7-3175	12-10 AWG - #1/4	Yellow	Qty. Per Package 5	$2.49 G
7-3180	12-10 AWG - #5/16	Yellow	Qty. Per Package 5	$2.49 G
7-3185	12-10 AWG - #3/8	Yellow	Qty. Per Package 5	$2.49 G

Greenlite Cable Vinyl Insulated Ring Terminals



- Vinyl insulated
- 100 per pack.

Order No.	Mfg. No. / Description		Price
2000750	(453065) 12-10 AWG - #6	Yellow	$9.98 G
2000751	(453085) 12-10 AWG - #8	Yellow	$9.98 H
2000753	(453125) 12-10 AWG - 1/2"	Yellow	$21.98 G
2000744	(452065) 16-14 AWG - #6	Blue	$5.98 H
2000740	(451065) 22-16 AWG - #6	Red	$5.98 G
2000741	(451085) 22-16 AWG - #8	Red	$5.98 G

Greenlite Cable Nylon Insulation Ring Terminals



- Nylon insulation.
- Tin plated brass terminal.
- 100 per pack.

Order No.	Mfg. No. / Description		Price
2000788	(GR-B10N) 16-14 AWG - #10	Blue	$10.98 H
2000792	(GR-B8N) 16-14 AWG - #8	Blue	$10.98 H
2000789	(GR-B14N) 16-14 AWG - 1/4"	Blue	$2.50 L
2000790	(GR-B38N) 16-14 AWG - 3/8"	Blue	$14.98 H
2000791	(GR-B516N) 16-14 AWG - 5/16"	Blue	$13.98 H
2000793	(GR-R10N) 22-16 AWG - #10	Red	$9.98 G
2000794	(GR-R8N) 22-16 AWG - #8	Red	$9.98 H

©2014 Donovan Marine, Inc.

Marpac Vinyl Spade Forks

Sold by box of 5 Packages only! Priced per Package.



Order No.	Description			Price
7-3190	22-18 AWG - #10	Red	Qty. Per Package 7	$2.49 G
7-3195	16-14 AWG - #10	Blue	Qty. Per Package 7	$2.49 G
7-3200	12-10 AWG - #10	Yellow	Qty. Per Package 6	$2.49 G

Vinyl Insulated Spade Forks - 100 Per Bag



Order No.	Mfg. No. / Description			Price
479623	(110478) 12-10 Gauge	Yellow	#10	$22.98 H
479421	(110438) 16-14 Gauge	Blue	#10	$23.98 H
479419	(110428) 16-14 Gauge	Blue	#8	$20.98 H

Greenlite Cable Vinyl Insulated Snap Spades



- Vinyl insulated
- 100 per pack.

Order No.	Mfg. No. / Description		Price
2000767	(482065) 16-14 AWG - #6	Blue	$6.98 H
2000768	(482085) 16-14 AWG - #8	Blue	$6.98 H
2000769	(482105) 16-14 AWG - #10	Blue	$6.98 G
2000765	(481065) 22-16 AWG - #6	Red	$5.98 G
2000766	(481085) 22-16 AWG - #8	Red	$5.98 G

Marpac Vinyl Quick Disconnects - Fully Insulated

Sold by box of 5 Packages only! Priced per Package.



Order No.	Description			Price
7-3205	22-18 AWG - Male	Red	Qty. Per Package 4	$2.49 G
7-3210	22-18 AWG - Female	Red	Qty. Per Package 4	$2.49 G
7-3215	16-14 AWG - Male	Blue	Qty. Per Package 4	$2.49 G
7-3220	16-14 AWG - Female	Blue	Qty. Per Package 4	$2.49 G
7-3225	12-10 AWG - Male	Yellow	Qty. Per Package 4	$2.49 G
7-3230	12-10 AWG - Female	Yellow	Qty. Per Package 4	$2.49 G

Fully Insulated Quick Disconnect - Display Packaged

Order No.	Mfg. No. / Description			Price
7270106	(110531) 22-18 Gauge - Male	Red	4 Per Package	$3.30 H
7270107	(110541) 22-18 Gauge - Female	Red	4 Per Package	$3.30 H
7270108	(110571) 16-14 Gauge - Male	Blue	4 Per Package	$3.30 H
7270109	(110581) 16-14 Gauge - Female	Blue	4 Per Package	$3.30 H

Greenlite Cable Vinyl Insulated Flanged Block Spades



- Vinyl insulated.
- 100 per pack.

Order No.	Mfg. No. / Description			Price
2000724	(402065) 16-14 AWG	#6	Blue	$7.98 G
2000725	(402085) 16-14 AWG	#8	Blue	$7.98 G
2000726	(402105) 16-14 AWG	#10	Blue	$7.98 G
2000722	(401065) 22-16 AWG	#6	Red	$6.98 G
2000723	(401085) 22-16 AWG	#8	Red	$6.98 G

Greenlite Cable Vinyl Insulated Non-Flanged Block Spades



- Vinyl insulated
- 100 per pack.

Order No.	Mfg. No. / Description		Price
2000763	(463085) 12-10 AWG - #8	Yellow	$10.98 G
2000760	(462065) 16-14 AWG - #6	Blue	$7.98 G
2000761	(462085) 16-14 AWG - #8	Blue	$7.98 H
2000762	(462105) 16-14 AWG - #10	Blue	$7.98 G
2000757	(461065) 22-16 AWG - #6	Red	$6.98 G
2000758	(461085) 22-16 AWG - #8	Red	$6.98 G
2000759	(461105) 22-16 AWG - #10	Red	$7.98 G

Greenlite Cable Fully Insulated Quick Slides





- Nylon insulation.
- Tin plated brass terminal.
- 100 per pack.

Order No.	Mfg. No. / Description			Price
2000781	(695005) 12-10 AWG	Yellow	Female	$13.98 H
2000778	(635005) 12-10 AWG	Yellow	Male	$13.98 H
2000780	(694005) 16-14 AWG	Blue	Female	$10.98 H
2000777	(634005) 16-14 AWG	Blue	Male	$10.98 H
2000779	(690005) 22-18 AWG	Red	Female	$10.98 H
2000776	(630005) 22-18 AWG	Red	Male	$30.98 H

Vinyl Insulated .250 Quick Disconnects - 100 Per Bag



Order No.	Mfg. No. / Description			Price
479647	(110818) 12-10 Gauge	Yellow	Male	$22.98 H
479659	(110828) 12-10 Gauge	Yellow	Female	$20.98 H
479445	(110798) 16-14 Gauge	Blue	Male	$12.98 H
479457	(110808) 16-14 Gauge	Blue	Female	$16.98 H

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Greenlite Cable Vinyl Insulated Quick Slides





- Vinyl insulated
- 100 per pack.

Order No.	Mfg. No. / Description			Price
2000775	(493005) 12-10 AWG - .25 x .032	Yellow	Female	$8.98 H
2000735	(433005) 12-10 AWG - .25 x .032	Yellow	Male	$8.98 H
2000773	(492115) 16-14 AWG - .11 x .020	Blue	Female	$5.98 H
2000733	(432115) 16-14 AWG - .11 x .020	Blue	Male	$9.98 H
2000734	(432705) 16-14 AWG - .187 x .020	Blue	Male	$5.98 G
2000774	(492705) 16-14 AWG - .187 x .020	Blue	Female	$5.98 H
2000721	(400675) 16-14 AWG - .250	Piggy Back		$8.98 H
2000772	(492005) 16-14 AWG - .25 x .032	Blue	Female	$5.98 H
2000732	(432005) 16-14 AWG - .25 x .032	Blue	Male	$5.98 H
2000771	(491705) 22-16 AWG - .187 x .020	Red	Female	$5.98 H
2000731	(431705) 22-16 AWG - .187 x .020	Red	Male	$5.98 G
2000770	(491005) 22-16 AWG - .25 x .032	Red	Female	$5.98 H
2000730	(431005) 22-16 AWG - .25 x .032	Red	Male	$5.98 H
2000720	(400665) 22-18 AWG - .250	Piggy Back		$8.98 H

Marpac Vinyl Closed End Connectors

Sold by box of 5 Packages only! Priced per Package.



Order No.	Description		Price
7-3255	22-14 AWG	Qty. Per Package 9	$2.49 G
7-3260	18-10 AWG	Qty. Per Package 8	$2.49 G

Marpac Vinyl Scotch Locks

Sold by box of 5 Packages only! Priced per Package.



Order No.	Description			Price
7-3235	14-18 AWG	Blue	Qty. Per Package 3	$2.49 G
7-3240	12-10 AWG	Yellow	Qty. Per Package 3	$3.09 G

Vinyl Insulated Quick Splices - Display Packaged

Order No.	Mfg. No. / Description				Price
7270110	(110641) 18-14 Gauge	Tab Splice	Blue	3 Per Package	$3.30 H
7270111	(110661) 18-14 Gauge	T-Tap	Blue	3 Per Package	$3.30 H

Vinyl Insulated Quick Splices - 100 Per Bag



Order No.	Mfg. No. / Description		Price
479964	(110648) 18-14 Gauge	Blue	$29.98 M
479976	(112648) 18-14 Gauge	White	$29.98 M

Marpac Vinyl Bullet Connectors

Sold by box of 5 Packages only! Priced per Package.



Order No.	Description			Price
7-3245	16-14 AWG	Plug	Qty. Per Package 7	$2.49 G
7-3250	16-14 AWG	Receptacle	Qty. Per Package 4	$2.49 G

Vinyl Insulated Bullet Connectors - Display Packaged

Order No.	Mfg. No. / Description				Price
7270112	(110731) 16-14 Gauge	Plug	Blue	7 Per Package	$3.30 H
7270113	(110731) 16-14 Gauge	Receptacle	Blue	4 Per Package	$3.30 H

Vinyl Insulated .157 Bullet Connectors - 100 Per Bag



Order No.	Mfg. No. / Description			Price
479469	(110728) 16-14 Gauge	Plug	Blue	$16.98 H
479471	(110738) 16-14 Gauge	Receptacle	Blue	$17.98 H

Greenlite Cable Vinyl Insulated Bullet-End Connectors




- Vinyl insulated.
- 100 per pack.

Order No.	Mfg. No. / Description			Price
2000739	(449205) 16-14 AWG	Blue	Female	$8.98 H
2000736	(440205) 16-14 AWG	Blue	Male	$6.98 H
2000738	(449105) 22-16 AWG	Red	Female	$8.98 H
2000737	(441205) 22-16 AWG	Red	Male	$6.98 H

Greenlite Cable Vinyl Insulated Quick Splices



- Vinyl insulated.
- 50 per pack.

Order No.	Mfg. No. / Description		Price
2000784	(904625) 12-10 AWG	Yellow	$15.98 G
2000782	(904445) 16-14 AWG	Blue	$9.98 H
2000783	(904485) 22-16 AWG	Red	$9.98 H

Tab Adapter - 100 Per Bag

- Converts one .250 x .032 male tab to two male tabs.

Order No.	Mfg. No. / Description	Price
479510	(112301) Tab Adapter	$27.98 M

Handi-Man Electrical Connector Kit



- Comprehensive electrical kit consisting of 18 different connectors.
- Includes: Ring terminals, fork terminals, solder-less splices, wire nuts, wire disconnects and trailer tap in splices.
- Total of 326 pieces, packed in a durable plastic case.

Order No.	Mfg. No. / Description	Price
731545	(WMMK5)	$113.98 I

©2014 Donovan Marine, Inc.

Marpac Vinyl Electrical Terminal Kit




- This kit includes 96 pieces in a closable plastic case:

(15) 7-3110 22-18 AWG Butt Connectors
(30) 7-3115 16-14 AWG Butt Connectors
(6) 7-3120 12-10 AWG Butt Connectors
(6) 7-3135 22-18 AWG #10 Ring Tongue Terminals
(8) 7-3150 16-14 AWG #10 Ring Tongue Terminals
(5) 16-14 AWG 5/16 Ring Tongue Terminals
(5) 7-3170 12-10 AWG #10 Ring Tongue Terminals
(6) 7-3185 12-10 AWG 3/8 Ring Tongue Terminals
(2) 8 AWG 3/8 Ring Tongue Terminals
(3) 7-3215 16-14 AWG Male Quick Disconnects
(3) 7-3220 16-14 AWG Female Quick Disconnects
(2) 7-3245 16-14 AWG Bullet Connector Plugs
(2) 7-3250 16-14 AWG Bullet Connector Receptacles
(3) 7-3235 14-16 Scotch Locks

Order No.	Description	Price
7-4205	Vinyl Electrical Terminal Kit	$17.39 G

Marpac Heat Shrink Ring Tongues



- Sold 2 per package, except for 7-3325 (Sold 4 per package) Mini-Blister - 5 per box.

Order No.	Description		Price
7-3320	22-18 AWG - #10	Red	$3.09 G
7-3325	22-18 AWG - #1/4	Red	$3.09 G
7-3335	16-14 AWG - #8	Blue	$3.09 G
7-3345	16-14 AWG - #10	Blue	$3.09 G
7-3350	16-14 AWG - #1/4	Blue	$3.09 G
7-3355	16-14 AWG - #5/16	Blue	$3.09 G
7-3365	16-14 AWG - #3/8	Blue	$3.09 G
7-3370	12-10 AWG - #10	Yellow	$3.99 G
7-3375	12-10 AWG - #1/4	Yellow	$3.99 G
7-3385	12-10 AWG - #3/8	Yellow	$3.99 G
7-3390	12-10 AWG - #1/2	Yellow	$3.99 G
7-3425	12-10 AWG - #5/16	Yellow	$3.99 G

Marpac Heat Shrink Quick Disconnects - Insulated





Sold by box of 5 Packages only! Priced per Package.

- Sold 2 per package. Mini-Blister - 5 per box.

Order No.	Description		Price
7-3395	22-18 AWG - Male	Red	$3.99 G
7-3400	22-18 AWG - Female	Red	$3.99 G
7-3405	16-14 AWG - Male	Blue	$3.99 G
7-3410	16-14 AWG - Female	Blue	$3.99 G
7-3415	12-10 AWG - Male	Yellow	$3.99 G
7-3420	12-10 AWG - Female	Yellow	$3.99 G

Marpac Heat Shrink Butt Connectors

Sold by box of 5 Packages only! Priced per Package.



- Sold 2 per package. Mini-Blister - 5 per box.

Order No.	Description		Price
7-3290	22-18 AWG	Red	$3.09 G
7-3300	16-14 AWG	Blue	$3.09 G
7-3310	12-10 AWG	Yellow	$3.09 G

Handi-Man Electrical Kits

Order No.	Mfg. No. / Description	Price
731565	(970220) Electrical Terminal - Ring/Fork Kit - 40 Pieces	$16.98 I
731570	(970221) Fully Insulated Electrical Disconnect Kit - 30 Pieces	$16.98 I
731575	(970222) Electrical Butt Connectors/Wire Nut Kit - 25 Pieces	$13.98 I

Handi-Man Electrical Pliers and Terminal Kit



Kit contains:
(5) 22-18 AWG Butt Connector
(5) 16-14 AWG Butt Connector
(5) 22-18 AWG #10 Ring Tongue Terminal
(5) 16-14 AWG #10 Ring Tongue Terminal
(5) 22-18 AWG #10 Spade Terminal
(5) 16-14 AWG #10 Spade Terminal
(1) Terminal Crimping and Wire Stripping Pliers

Order No.	Mfg. No. / Description	Price
731560	(970165-DON)	$25.98 I

Heat Shrink Connectors - 25 Per Bag



- These connectors provide a rugged connection that will insulate, seal and protect joints from abrasion, water, salt and other corrosive compounds.
- No special tools are required.
- Simply heat the insulation and the adhesive will melt and flow filling any existing voids and creating an all-weather seal.

Order No.	Mfg. No. / Description	Price
479990	(120065) 22-18 Gauge Red, #10 Ring	$20.98 H
480018	(120015) 22-18 Gauge Red, Butt Connector	$21.98 H
480020	(120105) 16-14 Gauge Blue, #10 Ring	$21.98 H
480032	(122305) 16-14 Gauge Blue, #10 Spade	$21.98 H
480044	(120025) 16-14 Gauge Blue, Butt Connector	$21.98 H
480056	(120155) 12-10 Gauge Yellow, #10 Ring	$29.98 H
480068	(122315) 12-10 Gauge Yellow, #10 Spade	$30.98 H
480070	(120035) 12-10 Gauge Yellow, Butt Connector	$27.98 H

Marpac Heat Shrink Crimp Terminal Display



- This display includes 5 display packs of the following:

7-3290	Butt Connectors	22-18 AWG
7-3325	Ring Tongue	22-18 AWG #1/4
7-3300	Butt Connectors	16-14 AWG
7-3335	Ring Tongue	16-14 AWG #8
7-3310	Butt Connectors	12-10 AWG
7-3345	Ring Tongue	16-14 AWG #10
7-3395	Quick Disconnect	22-18 AWG Male
7-3350	Ring Tongue	16-14 AWG #1/4
7-3400	Quick Disconnect	22-18 AWG Female
7-3355	Ring Tongue	16-14 AWG #5/16
7-3405	Quick Disconnect	16-14 AWG Male
7-3365	Ring Tongue	16-14 AWG #3/8
7-3410	Quick Disconnect	16-14 AWG Female
7-3370	Ring Tongue	12-10 AWG #10
7-3415	Quick Disconnect	12-10 AWG Male
7-3375	Ring Tongue	12-10 AWG #1/4
7-3420	Quick Disconnect	12-10 AWG Female
7-3385	Ring Tongue	12-10 AWG #3/8
7-3320	Ring Tongue	22-18 AWG #10

Order No.	Description	Price
7-3004	Heat Shrink Crimp Terminal Display	$298.98 G

Marpac 80 Item Electrical Display



- This display includes the following:

(5) 7-3110 - Butt Connectors - 22-18 AWG
(5) 7-3115 - Butt Connectors - 16-14 AWG
(5) 7-3120 - Butt Connectors - 12-10 AWG
(5) 7-3125 - Ring Tongue - 22-18 AWG #6
(5) 7-3130 - Ring Tongue - 22-18 AWG #8
(5) 7-3135 - Ring Tongue - 22-18 AWG #10
(5) 7-3140 - Ring Tongue - 16-14 AWG #6
(5) 7-3145 - Ring Tongue - 16-14 AWG #8
(5) 7-3150 - Ring Tongue - 16-14 AWG #10
(5) 7-3155 - Ring Tongue - 16-14 AWG #1/4
(5) 7-3165 - Ring Tongue - 16-14 AWG #3/8
(5) 7-3170 - Ring Tongue - 12-10 AWG #10
(5) 7-3175 - Ring Tongue - 12-10 AWG #1/4
(5) 7-3180 - Ring Tongue - 12-10 AWG #5/16
(5) 7-3185 - Ring Tongue - 12-10 AWG #3/8
(5) 7-3190 - Spade Fork - 22-18 AWG #10
(5) 7-3195 - Spade Fork - 16-14 AWG #10
(5) 7-3200 - Spade Fork - 12-10 AWG #10
(5) 7-3205 - Quick Disconnect - 22-18 AWG Male
(5) 7-3210 - Quick Disconnect - 22-18 AWG Female
(5) 7-3215 - Quick Disconnect - 16-14 AWG Male
(5) 7-3220 - Quick Disconnect - 16-14 AWG Female
(5) 7-3225 - Quick Disconnect - 12-10 AWG Male
(5) 7-3230 - Quick Disconnect - 12-10 AWG Female
(5) 7-3235 - Scotch Lock - 14-18 AWG
(5) 7-3240 - Scotch Lock - 12-10 AWG
(5) 7-3245 - Bullet Conn. - 16-14 AWG - Plug
(5) 7-3250 - Bullet Conn. - 16-14 AWG - Recpt.
(5) 7-3255 - Closed End Conn. - 22-14 AWG
(5) 7-3260 - Closed End Conn. - 18-10 AWG
(5) 7-3290 - Heat Shrink Butt Conn. - 22-18 AWG
(5) 7-3300 - Heat Shrink Butt Conn. - 16-14 AWG
(5) 7-3310 - Heat Shrink Butt Conn. - 12-10 AWG
(5) 7-3320 - Heat Shrink Ring - 22-18 AWG #10
(5) 7-3335 - Heat Shrink Ring - 16-14 AWG #8
(5) 7-3345 - Heat Shrink Ring - 16-14 AWG #10
(5) 7-3365 - Heat Shrink Ring - 16-14 AWG #3/8
(5) 7-3385 - Heat Shrink Ring - 12-10 AWG #3/8
(5) 7-3450 - Tinned Copper Lugs - 8 AWG #1/4
(5) 7-3455 - Tinned Copper Lugs - 8 AWG #5/16
(5) 7-3460 - Tinned Copper Lugs - 8 AWG #3/8
(5) 7-3465 - Tinned Copper Lugs - 6 AWG #10
(5) 7-3470 - Tinned Copper Lugs - 6 AWG #1/4
(5) 7-3475 - Tinned Copper Lugs - 6 AWG #5/16
(5) 7-3480 - Tinned Copper Lugs - 6 AWG #3/8
(5) 7-3490 - Tinned Copper Lugs - 4 AWG #5/16
(5) 7-3500 - Tinned Copper Lugs - 4 AWG #3/8
(5) 7-3510 - Tinned Copper Lugs - 2 AWG #5/16
(5) 7-3520 - Tinned Copper Lugs - 2 AWG #3/8
(5) 7-3525 - Tinned Copper Lugs - 1 AWG #5/16
(5) 7-3530 - Tinned Copper Lugs - 1 AWG #3/8
(5) 7-3535 - Tinned Copper Lugs - 1/0 AWG #5/16
(5) 7-3540 - Tinned Copper Lugs - 1/0 AWG #3/8
(5) 7-3545 - Tinned Copper Lugs - 1/0 AWG #1/2
(5) 7-3550 - Tinned Copper Lugs - 2/0 AWG #1/4
(5) 7-3555 - Tinned Copper Lugs - 2/0 AWG #5/16
(5) 7-3560 - Tinned Copper Lugs - 2/0 AWG #3/8
(5) 7-3565 - Tinned Copper Lugs - 2/0 AWG #1/2
(5) 7-3570 - Tinned Copper Lugs - 4/0 AWG #3/8
(5) 7-3575 - Tinned Copper Lugs - 4/0 AWG #1/2
(5) 7-3665 - Vinyl Hole Grommets - 1/4
(5) 7-3670 - Vinyl Hole Grommets - 1/2
(10) 7-3785 - Waterproof Fuse Holder
(5) 7-3800 - ATO Fuse - 3 amp
(5) 7-3805 - ATO Fuse - 4 amp
(5) 7-3810 - ATO Fuse - 5 amp
(5) 7-3815 - ATO Fuse - 7.5 amp
(5) 7-3820 - ATO Fuse - 10 amp
(5) 7-3825 - ATO Fuse - 15 amp
(5) 7-3830 - ATO Fuse - 20 amp
(5) 7-3835 - ATO Fuse - 25 amp
(5) 7-3936 (90) Double Contact Bayonet Base
(5) 7-3946 (94) Double Contact Bayonet Base
(5) 7-3951 (194) Wedge
(5) 7-3966 (1004) Double Contact Bayonet Base
(5) 7-3980 (1142) Double Contact Bayonet Base
(5) 7-3986 (1156) Single Contact Bayonet Base
(5) 7-3991 (1157) Double Contact Bayonet Base
(5) 7-4010 (70 DP1 CLR) Festoon
(5) 7-4020 (71 DP CLR) Festoon

Order No.	Description	Price
7-3007	Electrical Display	$1,118.98 G

Handi-Man Marine Nylon Black Cable Ties



- Standard cable ties. Sold 100 per poly bag.

Order No.	Mfg. No. / Description	Price
480501	(160088) Length 4", Width .10"	$8.98 I
480525	(160098) Length 5.6", Width .13"	$9.98 I
480549	(160108) Length 7.5", Width .187"	$9.98 I
480563	(160118) Length 11.1", Width .187"	$18.98 I
480587	(160128) Length 14.1", Width .187"	$21.98 I

- Screw mount cable ties. Sold 100 per poly bag.

Order No.	Mfg. No. / Description	Price
480664	(162158) Length 6", Width .14", Uses #8	$15.98 I
480688	(160138) Length 7.5", Width .185", Uses #10	$17.98 I
480690	(160148) Length 14.5", Width .187", Uses #10	$44.98 I

Marpac Nylon Cable Ties



Order No.	Description	Price
7-6130	6" Natural	$2.49 G
7-6135	8" Natural, 12" Natural	$2.49 G
7-6145	7-1/2" Screw Mount Natural	$2.49 G
7-6155	8" UV Black, 12" UV Black	$2.69 G
7-6160	12" UV Black	$2.69 G

Handi-Man Marine Compression Cable Ties - Black



Order No.	Mfg. No. / Description	Price
722028	(160518) Length 4", 100 Per Pack	$13.98 I
722025	(160539) Length 8", 1,000 Per Pack	$154.98 I

©2014 Donovan Marine, Inc.

Boater Sports Black Tie Wraps



- Heavy duty nylon wire ties.
- Super strong and durable.
- Useful in almost any situation.

Order No.	Mfg. No. / Description		Price
1-51048	(51048) 4"	100 Per Pack	$1.69 H
1-51049	(51049) 8"	100 Per Pack	$5.15 H
1-51050	(51050) 11"	100 Per Pack	$6.65 H
1-51051	(51051) 14"	100 Per Pack	$7.99 H
1-51052	(51052) 7", with Mount Hole	100 Per Pack	$8.99 H

Greenlite Cable Black Tie Wraps

- UV resistant.
- 100 per pack.

Order No.	Mfg. No. / Description		Price
2000798	(UV-4) 4"	Maximum Diameter 13/16"	$2.50 L
2000799	(UV-7) 8"	Maximum Diameter 2"	$5.98 L
2000796	(UV-11) 11"	Maximum Diameter 3"	$10.98 L
2000795	(MUV-7) 7"	With Mounting Hose	$11.98 L

Sierra Protective Flex Tubing



- This black flex tubing provides protection for various wiring situations.
- Sold in 3' lengths per poly bag. Standard pack 10.

Order No.	Mfg. No. / Description	Price
363426	(EC01620) Diameter 3/8"	$6.06 H
363438	(EC01630) Diameter 1/2"	$5.85 H

Ancor Stainless Steel Cushion Clamps



- Reduces unwanted noise.
- Prevents corrosion.
- Resistant to oils, acids and saltwater.
- Temperatures range from -50° to 300° F.
- Absorbs shock and vibration.
- Sold 10 per display pack.

Order No.	Mfg. No. / Description	Price
211639	(403182) 3/16" ID, Screw Width 3/8"	$12.98 F
211641	(403252) 1/4" ID, Screw Width 3/8"	$13.98 G
211653	(403312) 5/16" ID, Screw Width 3/8"	$13.98 G
211665	(403372) 3/8" ID, Screw Width 3/8"	$13.98 G
211677	(403502) 1/2" ID, Screw Width 1/2"	$13.98 G
211689	(403622) 5/8" ID, Screw Width 1/2"	$14.98 G
211691	(403752) 3/4" ID, Screw Width 1/2"	$17.98 G
211704	(403892) 1" ID, Screw Width 1/2"	$19.98 G
211716	(403902) 1-1/4" ID, Screw Width 1/2"	$22.98 G
211728	(404152) 1-1/2" ID, Screw Width 1/2"	$23.98 G

Anchor Stainless Steel Cushion Clamp



- Prevents corrosion.
- Resistant to oils, acids, saltwater.
- Temperatures range from -50° to 300° F.
- Absorbs shock and vibration.
- Reduces unwanted noise.
- Sold 10 per package.

Order No.	Mfg. No. / Description	Price
404172	(404172) Nominal Diameter: 1-3/4" (44 mm)	$22.98 Q

T-H Marine Wire & Hose Hanger



- Fits standard cable ties.
- Molded - non-corrosive.
- Secures wiring harness or hoses.
- Can be glassed in or screwed down.

Order No.	Mfg. No. / Description	Price
640975	(WHH-1) Wire & Hose Hanger	$9.98 H

Black Polyethylene Heli-Tube® Spiral Cable Wrap



- Bundles wires, cables, hoses and tubing firmly, but allows flexibility.
- Resists abrasion, dampens vibration, organizes and insulates.
- Ultra violet resistant.
- Available in 100' rolls.

Order No.	Mfg. No. / Description	Price
772916	(HT 1/4 UR) 1/4"	$43.98 I
772928	(HT 3/8 UR) 3/8"	$64.98 I
772933	(HT 1/2 UR) 1/2"	$90.98 I
772942	(HT 3/4 UR) 3/4"	$147.98 I

MPI Products Black Split Conduit Tubing



- Corrugated split polyethylene provides excellent conduit for multiple wire or cable routings.
- Creates quality appearance in wiring systems.
- Ideal product for hose abrasion protection.
- Specially formulated in accordance with UL94 V2 tests for flammability.
- Meets tough ABYC standards.

Order No.	Mfg. No. / Description	Price
543320	(123-0126) 1/2" x 50'	$29.98 I
543321	(123-0386) 3/8" x 50'	$19.98 I
543319	(123-0346) 3/4" x 50'	$32.98 I
772043	(123-1126) 1-1/2" x 50'	$144.98 M

Anchor Nylon Cable Clamps



- Made from UV black nylon for maximum strength.
- Resistant to solvents, oils, acids and moisture.
- Unique screw hole alignment feature to speed installation.
- Absorbs shock and vibration; reduces unwanted noise.
- Sold 25 per display pack.

Order No.	Mfg. No. / Description	Price
211576	(402252) 1/4" ID	$5.98 Q
211588	(402312) 5/16" ID	$5.98 Q
211590	(402372) 3/8" ID	$5.98 Q
211603	(402502) 1/2" ID	$6.98 Q
211615	(402622) 5/8" ID	$7.98 Q
211627	(402752) 3/4" ID	$7.98 Q

Handi-Man Marine Black Nylon Cable Clamps



Order No.	Mfg. No. / Description		Price
7270115	(162021) 3/16"	20 Per Bag	$3.87 H
7270116	(162031) 1/4"	18 Per Bag	$3.87 H
7270117	(162041) 5/16"	16 Per Bag	$3.87 H
7270118	(162051) 3/8"	14 Per Bag	$3.87 H
7270120	(162111) 3/4"	9 Per Bag	$3.99 H

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Marpac Heat Shrink Tubing



- Diameter 1/2".
- Length 3".
- Double wall 8 AWG to 4 AWG.
- 2 pieces red, 1 piece black per card.
- Sold 5 bags per card.

Order No.	Description	Price
7-4040	Heat Shrink Tubing	$4.99 G

Anchor Electrical Heat Shrink Tubing



- Adhesive lined heat shrink tubing recourses to 33% of its original diameter.
- Especially for applications as a moisture barrier in high humidity and corrosive environments.

Order No.	Mfg. No. / Description	Price
480082	(190058) 1/2" x 4'	$16.98 M
480094	(190078) 3/4" x 4'	$31.98 M
480107	(190098) 1" x 4'	$46.98 M

3M Tartan General Use Vinyl Electrical Tape - Black



- On a 1-1/2" core, this black, 7 mil vinyl tape is a good quality, economical general purpose insulating tape.
- Its elastic backing ensures easy, moisture-tight conformation to irregular surfaces.
- UL Listed and is flame-retardant.

Order No.	Mfg. No. / Description	Price
512168	(49656) 3/4" x 60'	$3.96 H

3M Scotch #35 Electrical Tape



- Use it for phase identification, marking of motor leads and piping systems and for outlining safety areas.
- Tape is stretchy, conformable, vinyl plastic.
- Flame retardant and weather resistant.
- Also used as a rigging tape.

Order No.	Mfg. No. / Description	Price
857447	(10810) 3/4" x 66', Red	$10.98 H
857450	(10828) 3/4" x 66', White	$9.98 H

3M Scotch 2242 Linerless Electrical Rubber Tape



- Linerless, self-bonding, insulating tape.
- Ethylene propylene base.
- Flame retardant.
- Weather resistant.
- Physical and electrical properties unaffected by degree of stretch.
- Stable over wide application temperature range.
- Primary insulation for cable splices & terminations, moisture-sealing & insulating electrical connections, bus bar insulation, moisture-sealing of cable ends, motor leads and wire & cable jacket repair.

Order No.	Mfg. No. / Description	Price
2012229	(06165) 3/4" x 15'	$9.98 H

Sierra Shrink Tubing



- Ideal for electrical insulation, abrasion protection and covering unsightly joints.
- Apply heat and material shrinks tight.
- Sold 7 assorted size pieces per zip-top recloseable bag.

Order No.	Mfg. No. / Description	Price
363402	(EC01750) Shrink Tubing	$4.23 H

3M Marine Heat Shrink Tubing - FP-301



- Offers an outstanding balance of electrical, physical and chemical properties for a wide variety of industrial and military applications.
- Split resistant, mechanically tough, easily marked and resists cold flow.
- Rated for continuous operation at -55° C (-67° F) to 135° C (275°F) and is designed to withstand elevated temperatures to 300° C (572° F) for short periods.
- Minimum shrink temperature for all FP-301 tubing is 100° C (212° F).

Order No.	Mfg. No. / Description	Price
005214	(054007-08610) 3/4" x 4', Black	$3.01 B
005226	(054007-08613) 3/4" x 4', Red	$3.01 B

3M Highland Vinyl Electrical Tape - Black



- This black, 7 mil tape is a flexible, stretchy, conformable, commercial grade vinyl, that is flame retardant.
- Can be used for protective jacketing and harnessing.

Order No.	Mfg. No. / Description	Price
857423	(16720) 3/4" x 66'	$5.98 H

3M Scotch Vinyl Plastic Electrical Tape Super 33 Plus - Black



- A premium grade all-weather tape.
- Has excellent resistance to flame, abrasions, moistur alkalies, solvents, oil and many acids.
- Gives full electrical and mechanical protection.

Order No.	Mfg. No. / Description	Price
857435	(06133) 3/4" x 52'	$8.98 H

Star Brite Liquid Electrical Tape



- Waterproofs and protects electrical connections.
- Forms a protective UV resistant dielectric coating.
- Prevents corrosion on wires and terminals.
- UL tested.
- 4 oz.

Order No.	Mfg. No. / Description	Price
628202	(84104B) Black	$10.98 G
628214	(84105B) Red	$10.98 G

©2014 Donovan Marine, Inc.

Handi-Man Marine Heat Gun System



- 120 volt heat gun system.
- 1,440 watts maximum at 120 volts.
- Electronics temperature control.
- Temperature rating 180° F to 1,100° F.
- Includes molded plastic case, recirculator attachment and spreader attachment.

Order No.	Mfg. No. / Description	Price
543318	(990727) Heat Gun System	$117.98 I

Handi-Man Marine Micro-Jet Portable Butane Torch



- Powered by disposable butane cartridge.
- Flame tem up to 2,500° F (1,300° C).
- Features Piezo Electronic ignition system with safety lock.
- Compact and portable.
- Use to apply heat shrink tubing, waterproof terminals, solder, rope whipping.
- Keep on board for multiple tasks.

Order No.	Mfg. No. / Description	Price
731542	(990721)	$102.98 I

Audiopipe Clamp Type Tester



- Diode Tests: DCV: 200mV-2-20-200-1000V, ACV: 200mV-2-20-200-700V, DCA: 20-200-2m-20m-200m-2-10A, ACA: 200-2m-20m-200m-2-10A, Ohm: 200-2k-20k-200k-2M-20M-200M.
- Power: 9 volt.

Order No.	Mfg. No. / Description	Price
559890	(D-266)	$21.98 C

Perko Figs. 424 and 1191 Watertight Cable Outlets



- For 5/16" OD cable.
- Equipped with rubber grommet for watertight passage of cable through deck or bulkhead.
- Prevents chafing of cable insulation.
- Base diameter 1-1/4".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
533148	(1191 DP0 CHR) Chrome Plated Zinc	$19.98 R
538439	(424 DP0 CHR) Chrome Plated Brass	$38.98 R

T-H Marine Decorative Wire Cover



- Gives boat that finished look, covers unsightly wire pass-thru holes.
- A black plastic cover to provide a finished look for wiring which passes through holes that are unsightly when left uncovered.
- Covers holes up to 1-1/4" in diameter.
- Comes complete with mounting screws.

Order No.	Mfg. No. / Description	Price
639940	(DWC-1) Wire Cover	$5.98 H

Marpac Universal Wire Stripper



- Self-adjusting between 10 AWG - 24 AWG.
- Crimps and cuts.
- Strips middle of wire for taps.
- Works on two conductor wire.
- Strips wire insulation in fast, precision motion without damaging strands.

Order No.	Description	Price
7-4210	Universal Wire Stripper	$37.39 G

Ancor Mini Pocket Butane Torch



- Electronic ignition system with safety locking switch.
- 4-3/8" H x 1-7/8" diameter.
- Flame temperature up to 1,300° C (2,500° F).
- Refillable butane cartridge included.

Order No.	Mfg. No. / Description	Price
211552	(702024) Mini Pocket Butane Torch	$27.98 E

Blue Sea Systems Mini Clamp Multimeter



- Clamp allows measurement of AC and DC current in wires without disturbing the circuits or contacting live terminals.
- Auto range simplifies operation: 0.01-400 amps, 0.001-600 volts.
- Auto power-off selection.
- True RMS - required for accurate measurement of inverter output.
- Data hold.
- Test leads included with meter.

Order No.	Mfg. No. / Description	Price
379277	(8110) Mini Clamp Multimeter	$179.98 E

Marpac Watertight Cable Outlets



- Chrome plated brass.
- Gasketed to assure water tightness.
- Diameter 1-1/2".
- Uses #6 fasteners.

Order No.	Description	Price
7-0451	5/16"	$5.98 G
7-0452	3/8"	$5.98 G

Marpac Vinyl Hole Grommets



- Sold by Box of 5 Packages Only! Priced per display package.

Order No.	Description		Price
7-3665	1/4"	6 Per Package	$1.89 G
7-3670	1/2"	4 Per Package	$2.19 G

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Marpac Insulated Alligator Clips



- Sold 2 per display card.

Order No.	Description	Price
7-0135	2"	$1.98 G
7-0133	1-1/4"	$1.98 G

Ancor Charging Clips



- Sold 2 per display card.

Order No.	Mfg. No. / Description	Price
277966	(EC01390) 20 amps	$3.63 H
364492	(EC06230) 30 amps	$4.82 H

Boater Sports Alligator Clips



- Spring loaded copper plated battery clips commonly used for aerators and portable lights.
- 30 amp.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-51010	(51010)	$1.95 H

Optronics Battery Clips



- Copper clad 50 amp battery clips with red and black handles.
- 12 volt.

Order No.	Mfg. No. / Description	Price
523274	(A-100) Battery Clips	$2.98 Q

Boater Sports Battery Clips



- Spring loaded copper plated 3" battery clips commonly used for aerators and portable lights.
- Color coded coated handles.
- 15 amp.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-51008	(51008)	$2.35 H

Marpac Deluxe Socket with Alligator Clips



- Made from corrosion resistant marine grade materials.
- This portable socket extends over 6' with its heavy duty coiled wire.

Order No.	Description	Price
7-0869	Socket with Alligator Clips	$19.98 G

Marinco SeaLink® Receptacle with Alligator Clips



- 6' heavy duty straight cable wire.
- Watertight cap.
- Corrosion resistant alligator clips.
- Accepts SeaLink plug or standard 12 volt plug.

Order No.	Mfg. No. / Description	Price
217944	(12VXC) Sealink Receptacle	$42.98 F

Optronics Battery Adapter



- Connect directly to any battery using this adapter with 15 amp fuse.
- Includes 3' cord.

Order No.	Mfg. No. / Description	Price
523290	(A-203) Battery Adapter	$6.98 Q

Boater Sports Battery Clip Extension



- Connect 12 volt accessories directly to the battery.
- Copper plated color coded battery clips with 12" wire to corrosion resistant socket.

Order No.	Mfg. No. / Description	Price
1-51012	(51012)	$5.15 H

Boater Sports Heavy Duty Battery Clips



- Spring loaded copper plated 3" battery clips.
- Color coded plastic handles.
- Fits up to 6 gauge wire.
- 30 amp.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-51011	(51011)	$4.15 H

Blue Sea CableClams



- Waterproof co-axial installation without removing connectors.
- Avoid poor connections from removing factory connectors.
- Acetal body.
- UV-Stabilized Buna-N Rubber.
- Stainless steel screws.

Order No.	Mfg. No. / Description	Price
379998	(1001) Connector Opening: 0.625"	$20.98 F
380004	(1002) Connector Opening: 0.825"	$20.98 F
380016	(1003) Connector Opening: 1.385"	$23.98 F

Optronics Black Extension Cord



- 10' coil cord with male adapter at one end and female at the other end.
- 12 volt, 12 amp, 150 watt.

Order No.	Mfg. No. / Description	Price
523310	(A-303) Extension Cord	$8.98 Q

Newmar Thru-Dex® Waterproof Fittings



- Rugged, weatherproof glass-filled nylon.
- Accommodate wide range of cables.
- Multiple cables may be passed through a single fitting.
- Create a 100% waterproof seal when routing cables through decks and bulkhead.
- DX Series - Drill holes and slit cable gland as required to accommodate cable with or without factory installed connector.
- Allow installation and/or removal of cable with connector still attached.

Order No.	Mfg. No. / Description	Price
699824	(CCX-R) Cable Dia. Range: .47" - .59", Max. Conn. Dia.: 1.57", Typical Conn.: Large Radar Plug	$59.98 D
699828	(CCX-S) Cable Dia. Range: .35" - .55", Max. Conn. Dia.: .83", Typical Conn.: Small Radar Plug	$50.98 D
699832	(CCX-T) Cable Dia. Range: .18" - .35", Max. Conn. Dia.: .83", Typical Conn.: PL-259, BNC, Wind Instrument Plugs	$50.98 D
699820	(DX-2) Drill Thru Aperture: 1.18" Dia., Max. Conn. Dia.: 1.18"	$47.98 D
699840	(DX-3) Drill Thru Aperture: 1.57" Dia., Max. Conn. Dia.: 1.57"	$51.98 D
699844	(DX-5) Drill Thru Aperture: 1.9" Dia., Max. Conn. Dia.: 1.9"	$132.98 D

©2014 Donovan Marine, Inc.

Newmar Galvanic Isolator

- Sacrificial zincs corrode away as they protect metal thru hulls, shafts and props from damaging electrolysis.
- Stray, low voltage current flowing between the AC safety ground and DC bonding system is a principal cause of this "galvanic" action.
- Installing the Galvanic Isolator between the AC safety ground and DC bonding system, blocks a majority of the low voltage currents and corrosive action on the zincs is significantly reduced (while the integrity of the critical safety ground path is maintained.)
- This means a significant savings in boat haul-out fees and zinc replacement costs.
- For additional safety, all units feature a large capacitor, providing a secondary low impedance path for sending AC current to ground.



Order No.	Mfg. No. / Description	Price
699902	(GI-30) Rated for 30 amps, Dimensions: 2.7" H x 4.8" W x 7.3" D	$239.98 E
699905	(GI-50) Rated for 50 amps, Dimensions: 4.5" H x 4.7" W x 8.9" D	$282.98 E

Sea-Dog Polarized Electrical Connector



- Machined brass/chrome plated.
- As a safety feature, polarized pins are sized to be connected in only one way.
- 3 amps.
- 2 pin.
- Uses #5 fasteners.

Order No.	Mfg. No. / Description	Price
214940	(426262-1)	$17.98 F

Perko Fig. 1190 Watertight Deck Connection



- Chrome plated zinc.
- Flange gasket with integral waterproof cap for base when plug is removed.
- Rated for 15 amps at 12 volts.
- Polarized double contact connector.
- Diameter 1-5/8", height 1-3/16".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
533124	(1190 DP0 CHR)	$25.98 R

Marpac Deluxe 12 volt Plug and Socket Set



- The set contains: (1) Deluxe Socket, (2) 12 volt Deluxe Plugs, mounting hardware, electrical connectors and a boot for the wires.

Order No.	Description	Price
7-0864	12 volt Plug and Socket Set	$19.98 G

Marpac Accessory Plug and Socket



- All metal parts are nickel plated phosphor bronze.
- Universal socket/plug will mate with other cigarette lighter type units.
- Includes: O-ring gasket and weather-seal flap.
- 12 volt.

Order No.	Description	Price
7-0867	Plug and Socket	$6.98 G
7-0868	Socket Only	$4.98 H

Cole Hersee Electrical Connector



- Universal trailer plug and socket.
- Thermo plastic molded insulator with rubber cap.
- 2-Pole in line mated connector with brass screws.
- Machined brass contacts.
- Rubber boot protects terminals and connections from moisture and dirt.

Order No.	Mfg. No. / Description	Price
300549	(M-121-BP)	$13.98 F

Marpac Deluxe 12 volt Plug



- Made from marine grade, corrosion resistant materials.
- Polarized, with a moisture resistant sealing ring the plug comes with an internal fuse.
- Sold 2 per display pack.

Order No.	Description	Price
7-0862	12 volt Plug	$9.98 G

Marpac Deluxe Moisture Resistant Socket



- Made from corrosion resistant marine grade materials.
- Mounts in just a 1-1/8" hole from the front using the plate or from the rear using the locking ring.
- Includes: Mounting screws, electrical connectors and a boot for the wires.

Order No.	Description	Price
7-0863	Moisture Resistant Socket	$10.98 G

Boater Sports Power Plug and Socket





- Universal plug and socket for many 12 volt applications.
- Weather resistant cover.
- Push on wires.
- Includes mounting hardware.

Order No.	Mfg. No. / Description	Price
1-51412	(51412) Power Socket and Plug	$8.99 H
1-51416	(51416) Power Socket Only	$5.15 H
1-51417	(51417) Power Plug Only	$4.39 H

Marpac Power Socket



- Stainless steel socket and molded cap with type 304 stainless steel mounting plate.
- Ideal for additional power outlets.
- Uses #8 fasteners.
- 12 volt.

Order No.	Description	Price
7-0866	Power Socket	$11.98 G

Marpac Polarized Power Outlet



- Chrome brass base with waterproof snap-on cover.
- Polarized double contact connector.
- 12 volt.

Order No.	Description	Price
7-0448	Outlet and Plug	$7.98 G
7-9003	Plug Only	$5.98 G

Marpac Cigarette Lighter/Chart Light



- Stamped type 304 stainless steel mounting plate.
- Combination chart light and cigarette lighter with the flick of a switch.
- Uses #8 fasteners.
- 12 volt.

Order No.	Description	Price
7-0112		$17.98 G
7-9017	Replacement Lighter	$10.98 G

Boater Sports Power Socket



- Great for use with many 12 volt applications.
- Weather resistant cover.
- Push on wires.
- Includes mounting hardware.

Order No.	Mfg. No. / Description	Price
1-51421	(51421)	$13.25 H

Marinco SeaLink® Deluxe 12 volt Plug and Receptacle



- Corrosion resistant marine grade construction.
- Exclusive SeaLink locking system.
- The SeaLink 12 volt plug features: Green LED indicator light.
- Moisture proof sealing ring.
- Internal strain relief and cord seal.
- Interchangeable fuse.
- The SeaLink 12 volt receptacle feature: Watertight sealing cap.

Order No.	Mfg. No. / Description	Price
217946	(12VPK) Receptacle and Plug	$31.98 F
217947	(12VRC) Receptacle Only	$22.98 F
217948	(12VPG) Plug Only	$14.98 F

Boater Sports Chart Light/Cigarette Lighter



- Cigarette lighter with built-in chart light and power socket.
- Chart light has on-off switch.
- Includes mounting hardware.
- Push on wires.
- 12 volt.

Order No.	Mfg. No. / Description	Price
1-51420	(51420)	$24.45 H

©2014 Donovan Marine, Inc.

Custom Electrical Panel Easy Quote Form

Project:_____

Contact Number/E-mail for Questions:_____

DC

1) DC Voltage: 12_____, 24_____, 32_____



2) DC Master Breaker: Yes or No
If Yes: Amps_____, Poles_____

3) # of DC Branch: Breakers _____, Poles___
List of Breakers: 5A__, 10A__, 15A__, 20A__, 30A__ 40A__, 50A__, 75A__, 100A__

4) Meters: Yes_____ or No_____
If Yes: Digital_____ or Analog_____
Type of Meters: Volts_____, Amps_____, Other_____





AC

1) AC Voltage: 120_____, 240_____



2) AC Master Breaker: Yes or No
If Yes: Amps_____, Poles_____

3) # of AC Branch: Breakers_____, Poles_____,
List of Breakers: 5A__, 10A__, 15A__, 20A__, 30A__ 40A__, 50A__

4) Meters: Yes_____ or No_____
If Yes: Digital_____ or Analog_____
Type of Meters: Volts_____, Amps_____, Other_____





5) Gen-Shore Power Selector Switch: Yes or No
If Yes: # of Poles_____, # of Switch Positions_____, Amps_____



Other Desired Fuction Not Listed Above: _____

_____

_____

_____

Options

1) Power "ON" Indication Lights: Yes or No
2) Backlit Circuit ID Labels: Yes or No
3) Specific Panel Size Requirement: _____
4) Sketch Panel Below (Optional):

Customer Contact Information: Name_____ **Phone #**_____
E-mail:_____

Email this sheet to Kap@newmarpower.com or fax attention Kap to 714-957-1621

NEWMAR
DC Power Onboard
www.newmarpower.com

Blue Sea Contura Switch Waterproof Fuse Panels


379669


379633

- Two-part polyurethane slate gray finish.
- ON-OFF water resistant Contura Switches.
- On indicating LEDs embedded in switch.
- Switch rating 20 amp maximum.
- Fuse holder rating 20 amp maximum.
- Panel cumulative rating 45 amps.
- Fuse holders accept commonly available AGC and MDL glass fuses.
- Comes with set of 30 common DC labels.
- 12 volt.

Order No.	Description	Price
379633	(8053) 6 Gang, Vertical, 7-1/2" H x 5-1/4" W	$173.98 G
379645	(8054) 3 Gang, Vertical, 3-3/4" H x 5-1/4" W	$107.98 G
379657	(8261) 8 Gang, Horizontal, 3-3/4" H x 9-3/8" W	$214.98 G
379669	(8262) 4 Gang, Horizontal, 3-3/4" H x 5-1/4" W	$130.98 F

Blue Sea Waterproof Contura Switches



- Vibration, shock, thermoshock, moisture and salt spray resistant.
- Meets UP1500 and ISO8846 ignition protection requirements.
- Current rating: 20A @ 12 volt.
- Gray.

Order No.	Description	Price
379760	(8232) SPDT, ON-OFF-ON	$14.98 F
379772	(8231) SPST, OFF-MOM. ON	$10.98 F
379780	(8230) SPST, OFF-ON	$12.98 Q
379467	(5021) 3AG Water Resistant Fuse Holder	$6.98 F

Marpac Switch Panels



- Black bakelite panel.
- Includes: Chrome plated toggle switches and screw cap fuse holders.
- Rated 15 amps.
- Uses #8 fasteners.

Order No.	Description	Price
7-0516	3 Gang, 4-1/4" x 3-1/2"	$15.98 G
7-0518	6 Gang, 4-1/2" x 6-1/2"	$27.98 G
7-0534	Spare Toggle Switch	$5.98 G
7-0519	Protective Boot	$2.38 G

Marpac Switch Panel



- Black bakelite panel with chrome plated toggle switches and screw cap fuse holders.
- Rated 15 amps.
- Uses #8 fasteners.
- Dimensions: 4-1/2" x 6-1/4".

Order No.	Description	Price
7-0517	6 Gang with Boot	$35.98 F
7-0534	Spare Toggle Switch	$5.98 G
7-0519	Protective Boot	$2.98 G

Blue Sea WeatherDeck™ Waterproof Circuit Breaker Panels


379608

- Green LEDs illuminate 360° circuit labels.
- Rated IP67-temporary immersion for 30 minutes.
- Compatible with all Blue Sea Systems Digital Dimmers.
- Independent label backlighting allows switching and dimming.
- Each panel can be mounted in four different orientations.
- Panel cumulative rating 45 amps.

Order No.	Description	Price
379608	(4374) 4 Position, Gray, 4.30" H x 4-1/4" W	$109.98 F
379609	(4376) 6 Position, Gray, 6" H x 4-1/4" W	$139.98 G
379610	(4378) 8 Position, Gray, 7.70" H x 4-1/4" W	$194.98 G

Blue Sea Contura Waterproof Circuit Breaker Panels


379667

- Two-part polyurethane black finish.
- Panel front is rated IP66.
- Ignition protected.
- ON-OFF water resistant Contura Switches.
- ON indicating LEDs embedded in switch.
- Push button reset - only circuit breakers with waterproof boots.
- Circuit breaker rating 15 amp.
- Panel cumulative rating 45 amps.
- Comes with set of 60 common DC labels.
- 12 volt.

Order No.	Description	Price
379667	(8371) 8 Gang, Horizontal, 4-1/4" H x 9-3/8" W	$250.98 F
379668	(8372) 4 Gang, Horizontal, 4-1/4" H x 5-1/4" W	$145.98 F

Marpac L.E.D. Advantage Switch Panel



See page 317 for replacement breakers.

- Panel made from corrosion proof ABS plastic with reinforced corners.
- LED backlit switch names glow when activated, know what's on at a glance.
- LED's amp draw is too small to record.
- Water tight design includes Breaker and Toggle switch boots as well as panel mounting gasket.
- 15 amp push button resettable breakers are easy to replace.
- Replaceable on-off toggle switches rated at 20 amps.

Order No.	Description	Price
7-0497	6 Gang	$64.98 G

Marpac Power Panels



See page 317 for replacement breakers.

- Marine grade aluminum panel.
- Modern style illuminated rocker switches glow white when on.
- Weather resistant breaker boots included.

Order No.	Description	Price
7-0514	3 Gang, 5-1/4" x 3-3/4"	$44.98 G
7-0513	6 Gang, 5-1/4" x 7-1/2"	$71.98 G
7-1134	Spare Circuit Breaker Boot	$7.98 G

©2014 Donovan Marine, Inc.

Marpac Breaker Panel



- Pre-wired brushed aluminum panel with illuminated red rocker switches.
- Includes: (2) 3 amp, (2) 6 amp, (1) 8 amp and (1) 10 amp circuit breakers.
- Dimensions: 4-1/2" x 6-3/8".

Order No.	Description	Price
7-0512	6 Gang	$48.98 G
7-0533	Spare Rocker Switch	$4.98 G

Marpac Switch Panel



- Pre-wired brushed aluminum panel with illuminated red rocker switches.
- Includes: 10 amp fuse holders and fuses.
- Dimensions: 4-1/2" x 3-3/4".

Order No.	Description	Price
7-0510	3 Gang	$24.98 G
7-0533	Spare Rocker Switch	$4.98 G

Marpac Label Kit for All Marpac Switch Panels



- Includes: Accessory, Aerator, Anchor Light, Bait Pump, Baitwell, Bilge Pump, Bilge Pump Aft, Bilge Pump Fwd, Cabin Lights, Deck Lights, Fish Finder, Flood Lights, GPS, Nav Lights, Running Lights, Spreader Lights, VHF, Wash Down, Water Pressure and Wipers.

Order No.	Description	Price
7-0509	Label Kit	$2.98 G

BEP Micro Series Sprayproof Switch Panel



- Green LED backlit labels; red when on.
- Full range of text or graphic labels available; mix n match labels and panels to suit
- Switches rated 20A DC.
- Dimensions: 3.4" x 2.3" x 1.2".
- Waterproof to IP56.
- Label see LBL-MIC included.

Order No.	Mfg. No. / Description	Price
702105	(900-2WP) 2 x 2-Way Switches	$49.98 Q

Marpac Switch Panel with Grounding Bus Bar



- Pre-wired brushed aluminum panel with illuminated red rocker switches.
- Includes: (2) 3 amp, (2) 6 amp, (1) 8 amp and (1) 10 amp circuit breakers.
- Dimensions: 4-1/2" x 6-3/8".

Order No.	Description	Price
7-0511	6 Gang	$41.98 G
7-0533	Spare Rocker Switch	$4.98 G

Boater Sports Rocker Switch Panel



1-51400



1-51401

- Illuminated rocker switches with boots and screw in fuses.
- Corrosion resistant aluminum face.
- Includes extra labels and mounting hardware.

Order No.	Mfg. No. / Description	Price
1-51400	(51400) 4 Gang, 4.5" x 5"	$36.10 H
1-51401	(51401) 6 Gang, 4.5" x 6.5"	$47.75 H

BEP Waterproof Series Switch Panels



- Compact panel size.
- Sprayproof inline fuse holders with fuses included.
- Waterproof power receptacles (16A) in five and three way models.
- Waterproof to IP56.
- Switches rated at 20A DC.
- Dimensions: 3.75" x 4.25" x 2.9".
- Panel supplied with label LBL-WP.

Order No.	Mfg. No. / Description	Price
702110	(900-3WPS) 3 Switches, Black	$68.98 Q
702115	(900-4WP) 4 Switches, Black	$49.98 Q
702120	(900-4WPW) 4 Switches, White	$48.98 Q
702125	(900-5WPS) 5 Switches, Black	$87.98 Q
702130	(900-5WPSW) 5 Switches, White	$87.98 Q
702135	(900-6WP) 6 Switches, Black	$67.98 Q
702140	(900-6WPW) 6 Switches, White	$67.98 Q

Newmar AC Master Panels



- Essential control/protection whenever AC from shorepower or generators is on board.
- A double pole master breaker with power on indicator light protects both hot and neutral legs of the AC circuit.
- A reverse polarity light provides clear warning when wiring is reversed and poses a shock hazard.
- 30 amp master breaker.
- Dimensions: 5-1/4" x 3-3/4".

Order No.	Mfg. No. / Description	Price
699756	(AC-II) AC Master Panel	$106.98 E

- 30 amp master breaker, 5 branch circuit capacity 4 installed standard (1) 10 amp, (2) 15 amp, (1) 20 amp or specify. LS-I Label Set included.
- Dimensions: 5-1/4" x 7-1/2".

Order No.	Mfg. No. / Description	Price
699770	(AC-IX) AC Master Panel	$254.98 E

Newmar DC Master Panel - Elite Series



- Offers a large DC circuit capacity and full metering.
- Analog DC volt and ammeter, back illuminated with dimmer.
- 4 battery bank test switch.
- DC master breaker. 22 branch circuit capacity, 20 installed standard: (3) 5 amp, (5) 10 amp, (6) 15 amp and (6) 20 amp.
- Red circuit ON indicator lights.
- LS-III Label Set and multiple position ground bus bar included.
- Dimensions: 10" W x 15" H x 4" D.
- Weight: 8 lbs.

Order No.	Mfg. No. / Description	Price
699790	(ES-1) DC Master Panel	$1,228.98 E

Newmar AC or DC Accessory Panel - Elite Series



- AC or DC master breaker (AC 50 amp* standard, 30 amp optional, double pole or DC 100 amp standard; 50 or 75 amp optional, single pole.)
- Indicator lights on every circuit.
- LS-III label set included.
- Multiple position ground Bus Bar included.
- Dimensions: 5-1/4" W x 15" H x 4" D.
- Weight: 7 lbs.
- * Note: 50 amp master OK for use on 230 VAC line-to-line systems. For 230 VAC line-to-neutral systems 30 amp is maximum master breaker value.
- 16 branch circuit capacity, 12 installed standard: (2) 10 amp, (5) 15 amp and (5) 20 amp.

Order No.	Mfg. No. / Description	Price
699878	(ES-7A)	$665.98 E

- 16 branch circuit capacity, 12 installed standard: (2) 5 amp, (3) 10 amp, (5) 15 amp and (2) 20 amp.

Order No.	Mfg. No. / Description	Price
699893	(ES-7D)	$654.98 E

Newmar AC or DC Accessory Panels



- Ideal for smaller vessels with only a limited number of electrical circuits, or for larger systems where their modular design makes for an easy and attractive expansion of existing system capacity.
- LS-I Label Set included.
- 8 breaker capacity, 5 installed standard; (2) 5 amp, (1) 10 amp, (1) 15 amp, (1) 20 amp or specify. 8 DC circuit "ON" indicator lights installed standard. AC lights optional. Dimensions: 7-1/2" x 5-1/4".

Order No.	Mfg. No. / Description	Price
699782	(ACCY-IX)	$203.98 E

- Blank version of 699782 (ACCY-IX). No breakers provided. Label set, light and breaker mounting hardware provided.

Order No.	Mfg. No. / Description	Price
699747	(ACCY-IBX)	$81.98 E

- 3 breaker capacity, 3 installed standard; 3 DC "ON" indicator lights installed standard. AC optional. (1) 5 amp, (1) 10 amp, (1) 15 amp or specify. Dimensions: 3-3/4" x 5-1/4".

Order No.	Mfg. No. / Description	Price
699750	(ACCY-IIX)	$127.98 E

- Blank version of 699750 (ACCY-IIX). No breakers or lights provided. Label set, light and breaker mounting hardware provided.

Order No.	Mfg. No. / Description	Price
699753	(ACCY-IIBX)	$77.98 E

Newmar AC-DC Master Control - Elite Series



- Complete metering of voltage and current on AC and DC systems.
- Back-lit analog meters are standard.
- AC master breaker(s) with reverse polarity warning light.
- Power "on" indicator lights on all circuits.
- Four battery bank voltage test switch.
- Deluxe label set (LS-III) included, 206 functions.
- Multiple position ground bus bar.
- Rating 115/230 VAC, 65 VDC.
- Large 3-1/2" scale meters and an ample circuit breaker capacity makes this the panel of choice for boats in the 35' - 45' range.
- DC Circuits: 20 breaker capacity, 16 installed standard; (2) 5 amp, (3) 10 amp, (4) 15 amp, (3) 20 amp or specify.
- AC Circuits: Master (D.P.) 50 amp standard plus 8 S.P. branch capacity, 6 installed standard; (1) 10 amp, (3) 15 amp, (2) 20 amp or specify.
- Dimensions: 17" W x 12" H x 4" D.
- Weight: 12 lbs.

Order No.	Mfg. No. / Description	Price
699881	(ES-4)	$1,513.98 E

- Same as above with 7.5 kW, three position (Shore-Off-Gen) ship shore selector switch installed.

Order No.	Mfg. No. / Description	Price
699884	(ES-4SS)	$1,754.98 E

©2014 Donovan Marine, Inc.

Newmar AC-DC Master Control Panel - Elite Series



- Complete metering of voltage and current on AC and DC systems.
- Back-lit analog meters are standard.
- AC master breaker(s) with reverse polarity warning light.
- Power "on" indicator lights on all circuits.
- Four battery bank voltage test switch.
- Deluxe label set (LS-III) included, 206 functions.
- Multiple position ground bus bar.
- Rating 115/230 VAC, 65 VDC.
- This panel combines AC and DC control into one compact panel.
- DC circuits: 16 breaker capacity; 12 installed standard: (2) 5 amp, (3) 10 amp, (4) 15 amp and (3) 20 amp.
- AC circuits: Master (D.P.) 30 amp standard plus 6 S.P. branch capacity, 5 installed standard: (1) 10 amp, (2) 15 amp and (2) 20 amp.
- Dimensions: 13.7" W x 10" H x 4" D.
- Weight: 10 lbs.

Order No.	Mfg. No. / Description	Price
699794	(ES-3) AC-DC Master Control Panel	$1,239.98 E

Newmar DC Load Center - Elite Series



- Accommodates one meter; analog standard. (DC 0-50A ammeter standard), or specify DC volts.
- Master breaker (DC-75 amp standard; 50 or 100 amp optional, single pole)
- 10 branch circuit capacity, 8 installed standard: (1) 5 amp, (2) 10 amp, (4) 15 amp and (1)20 amp.
- Indicator lights on every circuit.
- LS-III Label Set included.
- Multiple position ground bus bar included.
- Dimensions: 5-1/4" W x 15" H x 4" D.

Order No.	Mfg. No. / Description	Price
699890	(ES-6D)	$654.98 E

Newmar Panel Meters



- For replacement or addition to existing panel systems.
- Easy to read graphics with unit divisions give precise readouts at a glance.
- Stud mount with push-on terminals.
- Designed for easy front panel mounting.
- DC ammeters require external shunts which are provided.

Order No.	Mfg. No. / Description		Price
700016	(023-9161-0) 8-16 DC Voltmeter	Panel Size: 2-1/2"	$60.98 E
700028	(023-1632-0) 16-32 DC Voltmeter	Panel Size: 2-1/2"	$60.98 E
700030	(023-0502-0) 0-50 DC Ammeter	Panel Size: 2-1/2"	$92.98 I
700658	(023-9161-5) 8-16 DC Voltmeter	Panel Size: 3-1/2"	$62.98 E
700660	(023-1632-5) 16-32 DC Voltmeter	Panel Size: 3-1/2"	$62.98 E
700045	(023-1001-5) 0-100 DC Ammeter	Panel Size: 3-1/2"	$131.98 I
700048	(023-0502-5) 0-50 DC Ammeter	Panel Size: 3-1/2"	$131.98 I

Newmar Electrical Panel - Elite Series



- Complete metering of voltage and current on AC and DC systems.
- Back-lit analog meters are standard.
- AC master breaker(s) with reverse polarity warning light.
- Power "on" indicator lights on all circuits.
- Four battery bank voltage test switch.
- Deluxe label set (LS-III) included, 206 functions.
- Multiple position ground bus bar.
- Rating 115/230 VAC, 65 VDC.
- Exceptional yachts require an extraordinary panel which incorporates all the aspects of the vessel's electrical system.
- In addition to its large DC circuit capacity, the AC section includes two load groups and a source selector switch for two shore power lines and a 15 kW generator.
- Pre-heat and start-stop controls are standard.
- DC circuits: Master plus 24 breaker capacity, 20 installed standard; (3) 5amp, (4) 10amp, (7) 15 amp, (6) 20 amp or specify.
- AC circuits: Two load groups each consisting of: Master breaker (D.P.) 50 amp standard plus 10 S.P. branch capacity, 8 installed standard; (2) 10 amp, (3) 15 amp, (3) 20 amp or specify.
- Dimensions: 20" W x 15" H x 6" D.
- Weight: 20 lbs.

Order No.	Mfg. No. / Description	Price
699887	(ES-5)	$3,180.98 E

Newmar Lamp Dimmer System



699866



699953

- Adjust DC lights to ease eye strain and enhance night vision.
- Light intensity is easily regulated by remote panel.

- Dimmer Unit - LD.
- 100 watt capacity, for 12, 24 and 32 VDC systems.
- Rugged anodized aluminum heat sink case.
- Dimensions: 9" x 4.5" x 2.75".

Order No.	Mfg. No. / Description	Price
699953	(LD)	$259.98 D

- Control Panel - LDP
- 5,000 Ohm dimmer control panel adjusts brightness between off and 85% of full voltage.
- Black anodized aluminum panel.
- Dimensions: 3" x 3".

Order No.	Mfg. No. / Description	Price
699866	(LDP)	$73.98 E

Newmar ACE: AC Energy Monitor



- For 115/230 volt systems reads: 90-300 VAC, 0-150 amps, frequency from 40-70 Hz and power from 0-150 kW.
- Features alarm circuits for high/low voltage and high/low frequency.
- Current and voltage transformers are included.
- 12 or 24 volt source required to power meter.

Order No.	Mfg. No. / Description	Price
699851	(023-4349-0)	$507.98 E

Newmar Remote Alarm Relay for DCE and ACE Energy Monitors



- Activates from the instrument alarm signal output terminal allowing remote activation and/or connection ot the vessel's 12 or 24 volt alarm panel.
- Input signal: 5 VDC.
- Relay rating: 12/24 VDC, 10 amps.
- Dimensions: 2.4" x 1.4" x 1.5".

Order No.	Mfg. No. / Description	Price
699863	(DIR)	$79.98 D

Blue Sea Weatherproof Panel Label Sets



- Reinforced, weatherproof material.
- Used on WeatherDeck waterproof panels and battery management panels.
- Black.

Order No.	Description	Price
379671	(4215) 30 Label Set	$15.98 F
379672	(4216) 60 Label Set	$16.98 F
379673	(4217) 120 Label Set	$21.98 F

Newmar LS-III Deluxe Label Set - 182 Labels



- Ideal for custom labeling of switch or circuit breaker positions on any NEWMAR or similarly constructed electrical panel.
- White lettering on black peel-and-stick mylar.
- Allows easy customizing of panel system.
- Includes: 22 standard labels, 55 electronics labels plus 105 labels for electrical accessories used on larger vessels are provided.

Order No.	Mfg. No. / Description	Price
699744	(LS-III) Deluxe Label Set - 182 Labels Total	$95.98 D
699947	(LS-II) 55 Labels - Electronic	$33.98 D

Newmar DCE: DC Energy Monitor



- Displays volts, amps, energy used and remaining for 12 or 24 volt systems up to 500 amps and up to 3,000 amp-hour capacity.
- Monitor voltage on up to three separate banks.
- 500 amp shunt included.
- NMEA 0183 compatible output for data logging.

Order No.	Mfg. No. / Description	Price
699854	(023-4346-0)	$483.98 D

Newmar Generator Meter



- Generator/AC System Monitor, Model #VAAHF large high LED digits in high visibility green 4 functions, all display simultaneously on one screen: Volts, Amps, Frequency Hourmeter displays when generator is off.
- Easy function and alarm programming via 4 button key pad, with on screen menu settings.
- 4 level adjustable LCD brightness settings.
- Programmable alarms: HIGH/LOW for volts and frequency and HIGH alarm for amps (2 lines).
- Alarm modes: Red warning color visual indication, plus built in 85 db audible, with output signal for external alarm relay.
- User programmable service hour interval settings and notification (password protected).
- 150 amp current transformers (2X) provided.
- DC powered 9-33 VDC, with low power consumption sleep mode (<20 ma) to conserve batteries.
- Waterproof instrument face.
- Power supply: 9.5 to 33 VDC, 100 mA.
- Operating temperature: 32° to 122° F (0° to 50° C).
- Accuracy: Volts: 1% +/- 1 Digit, Amps: 2% +/- 1 Digit.
- Hz and hours: .5%.
- Volts range: 90-300 VAC.
- Amps range: 0-150 amps.
- Frequency range: 30 to 100 Hz.
- Hour meter range: 99,999.99 Hours.
- Alarms: High/low voltage, high & low frequency, high amps.
- Supplied transducers: Voltage (1 each) and current transformers (2 each).
- Weight: 1 lb.
- Warranty: 3 years.
- This color LED display instrument provides simultaneous read out of generator output data: AC Voltage, Frequency, Amperage of two legs up to 36 Kw total. Programmable alarm settings on each function produces 85 db audio alert as well as visual red blinking display. It logs cumulative generator operation hours with programmable service interval hour settings and notification. This is ideal for monitoring generator sets.

Order No.	Mfg. No. / Description	Price
699908	(VAAHF)	$1,064.98 E

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Bernard Identi-Plates™

COMPASS®

ACTUAL SIZE

- White lettering and beveled edge on black plastic plates predrilled for two fasteners. Dimensions: 1/2" x 1-1/2".
- Priced each, standard pack 5.

251811	Power Winch	254223	Panel Light	254398	Bait Pump	254627	Heater
254069	Anchor Light	254235	Radio	254401	Baitwell	254641	Ignition
254071	Bilge Pump	254247	Reverse	254425	Bow Light	254677	Manual
254083	Blower	254259	Running Light	254437	Cabin Light	254691	Navigation
254108	Compass	254261	Search Light	254487	Courtesy Lights	254716	Oil Pressure
254110	Deck Light	254273	Starter	254526	Engine Room	254766	Port
254122	Depth Sounder	254285	Stern Light	254538	Engine Shutoff	254829	Radar
254146	Horn	254297	Throttle	254540	Fan	254893	Spreader Lights
254160	Light	254300	Water Temperature	254564	Flood Light	254907	Starboard
254172	Master	254312	Wiper	254576	Fresh Water System	254944	Tank 2
254184	Masthead Light	254336	12 Volt	254588	Fuel	254982	Trim
254209	Off	254362	Aerator	254590	Fuel Pump	255100	Alarm
254211	On	254374	Aft	254615	Generator		

Order No.	Mfg. No. / Description	Price
ALL	Identi-Plates	$3.33 Q

Newmar Battery Isolators

- Maximum amperage input capacity: 70 amps.

Order No.	Description	Price
378679	(1-2-70) 1 Alternator Source, 2 Battery Banks	$88.98 E
378706	(1-3-70) 1 Alternator Source, 3 Battery Banks	$133.98 E
378693	(2-3-70) 2 Alternator Sources, 3 Battery Banks	$240.98 E

- Maximum amperage input capacity: 120 amps.

Order No.	Description	Price
378681	(1-2-120) 1 Alternator Source, 2 Battery Banks	$157.98 E
700161	(1-3-120) 1 Alternator Source, 3 Battery Banks	$226.98 E
378700	(2-3-120) 2 Alternator Sources, 3 Battery Banks	$431.98 E

- Maximum amperage input capacity: 165 amps.

Order No.	Description	Price
378710	(1-3-165) 1 Alternator Source, 3 Battery Banks	$309.98 E



- These heavy duty isolators allow charging multiple batteries automatically from one or two alternators and prevent discharge or dumping of one battery into another.
- Each battery is charged according to its need without overcharging.
- Rated for 12 - 48 volt negative ground DC systems.
- Feature conservatively rated diodes and a rustproof anodized aluminum heat sink case.

Marpac Marine Rated Circuit Breakers with Switch Function



- Manual reset circuit breaker with On-Off switch capability.
- Typically used in DC power systems in marine applications (as a main or branch circuit breaker).
- Easily mounted to any flat surface.
- External ignition protected and weatherproof.
- 5/16-18 threaded studs.
- Compliances: ABYC E-11; CE; SAE J1171 (Ignition Protected).

Order No.	Description	Price
7-1740	25 Amp	$59.98 G
7-1741	30 Amp	$59.98 G
7-1742	40 Amp	$59.98 G
7-1743	50 Amp	$59.98 G
7-1744	70 Amp	$59.98 G
7-1745	100 Amp	$59.98 G

Marpac Hi-Amp Circuit Breakers



- Unique reset mechanism provides a visual indication of tripped condition.
- Features a push-to-trip option.
- Typically used in auxiliary and accessory circuits in marine systems, including battery chargers and DC audio systems.
- Sealed for engine compartment and bilge area applications.
- 1/4-28 threaded studs.
- Compliances: SAE J1625; ABYC E-11; CE; SAE J1171 (Ignition Protected).

Order No.	Description	Price
7-1720	50 Amp, Panel Mount	$47.98 G
7-1725	80 Amp, Panel Mount	$47.98 G
7-1730	25 Amp, Surface Mount	$47.98 G
7-1731	30 Amp, Surface Mount	$47.98 G
7-1732	40 Amp, Surface Mount	$47.98 G
7-1733	50 Amp, Surface Mount	$47.98 G
7-1734	70 Amp, Surface Mount	$47.98 G
7-1735	100 Amp, Surface Mount	$47.98 G

Blue Sea Thermal Circuit Breakers - Surface Mount



- Ignition protected - safe for installation aboard gasoline powered boats.
- Meets SAE J1171 external ignition protection requirements.
- Weather resistant.
- Combines switching and circuit breaker function into one unit.
- "Trip free" - cannot be held closed after trip.
- Interrupt rating: 3,000 amperes DC.
- Maximum voltage rating: 42 volts DC.

Order No.	Description	Price
379532	(7112) 70 Amp	$58.98 G
379528	(7102) 100 Amp	$58.98 G

Blue Sea Thermal Circuit Breakers (285 Series) - Surface Mount



- Drop in replacement for 185-Series Circuit Breakers.
- Visible reset lever shows open condition.
- Ignition protected - Safe for installation aboard gasoline powered boats.
- Meets SAE J1171 external ignition protection requirements.
- Weather Resistant.
- Combines switching and circuit breaker function into one unit.
- "Trip Free" - cannot be held closed after trip.

Order No.	Description	Price
379539	(7184) 60 Ampere	$51.98 F

Blue Sea Boot Reset Button



- Replaces standard mounting nut for mounting on Thermal Push Button Circuit Breakers only.
- UV resistant material resists discoloration and cracking.

Order No.	Mfg. No. / Description	Price
379404	(4137) Boot Reset Button	$4.27 F

Cole Hersee Continuous Duty Solenoid



- Universal.
- Insulated.
- Normally open.
- S.P.S.T.
- Plated steel housing with copper contacts.
- Copper terminals, 10-32 thread and 5/16" - 24 thread.
- Continuous rating: 65 amp.
- Straight bracket.
- UL Marine and CE/ISO Listed.
- Hex nuts and lock washers included.
- 12 volt.

Order No.	Mfg. No. / Description	Price
330780	(24059-08) Continuous Duty Solenoid	$38.98 F

Blue Sea Thermal Circuit Breakers - Surface Mount



- Ignition protected - safe for installation aboard gasoline powered boats.
- Meets SAE J1171 external ignition protection requirements.
- Waterproof.
- Combines switching and circuit protection into a single device.
- Clear, single lever operation.
- "Trip Free" - cannot be held "ON" during fault current condition.
- Large clearance around terminal studs accept heavy guage wire lugs.
- Robust 5/16 M8 terminals provide high torque connections.
- Maximum voltage rating: 48 volts DC.

Order No.	Description	Price
379533	(7135) 25 Amp	$81.98 F
379534	(7136) 30 Amp	$81.98 F
379535	(7138) 40 Amp	$81.98 F
379536	(7139) 50 Amp	$81.98 F
379537	(7141) 70 Amp	$81.98 F

High Amp Circuit Breakers



- Single pole.
- Surface mount.
- Switchable reset.
- Thermal type circuit breaker.

Order No.	Mfg. No. / Description	Price
2000264	(CB185-40) 40 Amp	$42.98 H
2000265	(CB185-50) 50 Amp	$42.98 H
2000266	(CB185-60) 60 Amp	$42.98 H

Blue Sea Circuit Breakers - Small



- Branch circuit breakers (can also be used for 24-hour circuit protection)
- Compact design enables high density circuit protection configurations
- Push-to-reset operation
- Trip Free design cannot be held ON during fault current condition
- Ignition protected - Safe for installation aboard gasoline powered boats
- Quick connect terminal style circuit breakers are incorporated into Blue Sea Systems WeatherDeck Waterproof Circuit Breaker Panels, Dual Battery Bank Main Distribution Panels, and 360 Distribution Panels

Order No.	Description	Price
379458	(7052) 5 Amp	$6.98 F
379460	(7054) 10 Amp	$6.98 F
379461	(7056) 15 Amp	$6.98 F
379462	(7057) 20 Amp	$6.98 F
379464	(7059) 30 Amp	$6.98 F

©2014 Donovan Marine, Inc.

Marpac Push Button Circuit Breakers



Order No.	Description	Price
7-1124	6 Amp	$6.98 G
7-1126	10 Amp	$6.98 G
7-1128	15 Amp	$6.98 G
7-1129	20 Amp	$6.98 G
7-1130	30 Amp	$6.98 G
7-1131	40 Amp	$5.98 G
7-1132	50 Amp	$9.98 G
205564	Brass Bracket for Mounting Breakers to Battery Post	$6.98 Q

- Push button circuit breaker assortment.
- Includes: 1 each of 3 amp, 6 amp, 10 amp, 15 amp and 20 amp.

Order No.	Description	Price
7-1133	Push Button Circuit Breaker Assortment	$20.98 G

Marpac Circuit Breaker Boot



- Circuit breaker boot.
- Fits all Marpac Circuit Breakers.
- Fits 15/32" mounting stem.
- Protects against dirt and moisture.
- Sold three boots per card.

Order No.	Description	Price
7-1134	Circuit Breaker Boot	$7.98 G

Boater Sports Breaker Boot



- Waterproof, clear rubber boot for use with push button breakers.

Order No.	Mfg. No. / Description	Price
1-51384	(51384) Clear	$2.95 H

Cole Hersee Circuit Breakers with Mounting Bracket



- High quality plated steel with heavy gauge steel mounting bracket.
- Continuously resets until the overload is corrected.
- Protects electrical circuits and equipment.
- Rated at 12V DC.
- Two #10-32 stud terminals with hex nuts and lock washers.
- Dimensions: 2" L x .78" W x 1.38" H.

Order No.	Mfg. No. / Description	Price
330785	(30055-15) 15 Amp	$7.98 F
330794	(30055-20) 20 Amp	$8.98 F
330807	(30055-30) 30 Amp	$7.98 F
330819	(30055-40) 40 Amp	$8.98 F
330821	(30055-50) 50 Amp	$10.98 F

Newmar Circuit Breakers



- Fit all Newmar electrical panels, as well as most other brands.
- Feature magnetic-hydraulic trip-free mechanism.
- Black toggle handles.
- #10 screw terminals on rear for wiring.
- Rated to 65 VDC or 277 VAC.
- UL recognized and CSA listed for AC and DC systems and meet USCG requirements as a qualified circuit protection device.

Order No.	Description	Price
698019	(088-0051-2) 5 amp, Single Pole	$14.98 E
698033	(088-0151-2) 15 amp, Single Pole	$14.98 E
698046	(568-0201-2) 20 amp, Single Pole	$14.98 E
698057	(088-0251-2) 25 amp Single Pole	$14.98 E
698069	(088-0301-2) 30 amp, Single Pole	$14.98 E
698083	(088-0501-2) 50 amp, Single Pole	$14.98 E
698108	(089-0151-2) 15 amp, Double Pole	$47.98 E
698110	(089-0301-2) 30 amp, Double Pole	$47.98 E
698123	(089-0501-2) 50 amp, Double Pole	$47.98 E
698007	(SCREWS) Black, Breaker Mounting Screw	$0.25 B

Newmar Circuit Breaker



Order No.	Description	Price
698133	(094-0751-1) Single Pole, 75 Amp "C" Frame	$54.98 E
698136	(094-1101-1) Single Pole, 100 Amp "C" Frame	$54.98 E

T-H Marine Trolling Motor Circuit Breaker Kit



- Protects trolling motors from damage.
- Contains: 50 amp circuit breaker. 3' of 8-gauge wire to battery.
- Kit includes mounting box, fasteners and second ring terminal for attaching trolling motor wire.

Order No.	Mfg. No. / Description	Price
640075	(CBBK-1) Trolling Motor Circuit Breaker Kit	$55.98 H

Marpac Resettable Circuit Breakers



- Inline circuit breaker.
- Manual reset button.
- For use with higher amperage accessories.
- Splash proof.
- 12 volt.

Order No.	Description	Price
7-1172	20 Amp	$7.98 G
7-1173	30 Amp	$7.98 G
7-1174	40 Amp	$7.98 G
7-1175	50 Amp	$7.98 G

Boater Sports Manual Circuit Breakers



- Manual circuit breaker for trolling motor.

Order No.	Mfg. No. / Description	Price
2000226	(75125-B) 20 Amp	$7.98 H
2000227	(75135-B) 30 Amp	$7.98 H
2000228	(75145-B) 40 Amp	$7.98 H
2000229	(75155-B) 50 Amp	$7.98 H

Boater Sports Breaker Cover



- Covers breaker terminals protecting them from elements and prevents corrosion.

Order No.	Mfg. No. / Description	Price
2000326	(BCV-1)	$1.27 H

Boater Sports Breaker Mounting Bracket



- For convenient mounting of trolling motor breaker.
- Use with manual or automatic trolling motor breakers.

Order No.	Mfg. No. / Description	Price
2000327	(BRK-1)	$3.95 H

Marpac ATC / ATO Fuses



Sold by box of 5 Packages only! Priced per Package.

- Sold 3 per pack.

Order No.	Description	Price
7-3800	3 Amp	$3.29 G
7-3805	4 Amp	$3.29 G
7-3810	5 Amp	$3.29 G
7-3815	7.5 Amp	$3.29 G
7-3820	10 Amp	$3.29 G
7-3825	15 Amp	$3.29 G
7-3830	20 Amp	$3.29 G
7-3835	25 Amp	$3.29 G
7-3840	30 Amp	$3.29 G
7-3845	40 Amp	$3.99 G

Marpac Mini Plug-In Fuses



Sold by box of 5 Packages only! Priced per Package.

- Sold 3 per pack.

Order No.	Description	Price
7-3855	2 Amp	$3.99 G
7-3860	3 Amp	$3.99 G
7-3865	4 Amp	$3.99 G
7-3870	5 Amp	$3.99 G
7-3875	7.5 Amp	$3.99 G
7-3880	10 Amp	$3.99 G
7-3885	15 Amp	$3.99 G
7-3890	20 Amp	$3.99 G
7-3895	25 Amp	$3.99 G
7-3900	30 Amp	$3.99 G

Marpac SFE Fuses



Sold by box of 5 Packages only! Priced per Package.

- Sold 5 per pack.

Order No.	Description	Price
7-3755	9 Amp	$2.19 G
7-3760	14 Amp	$2.19 G
7-3765	20 Amp	$2.19 G

"ATO" Automotive Style Fuses



- Sold 5 per pack.

Order No.	Mfg. No. / Description		Price
2000254	(ATO3BP) 3 Amp	Violet	$3.35 H
2000256	(ATO5BP) 5 Amp	Tan	$3.35 H
2000249	(ATO10BP) 10 Amp	Red	$3.35 H
2000250	(ATO15BP) 15 Amp	Blue	$3.35 H
2000251	(ATO20BP) 20 Amp	Yellow	$3.35 H
2000252	(ATO25BP) 25 Amp	Clear	$3.35 H
2000253	(ATO30BP) 30 Amp	Green	$3.35 H
2000255	(ATO40BP) 40 Amp	Amber	$3.35 H

Miniature "ATO" Style Fuses



- Sold 5 per pack.

Order No.	Mfg. No. / Description		Price
2000271	(MIN2BP) 2 Amp	Gray	$4.49 H
2000273	(MIN3BP) 3 Amp	Violet	$4.49 H
2000274	(MIN4BP) 3 Amp	Pink	$4.49 H
2000275	(MIN5BP) 5 Amp	Tan	$4.49 H
2000276	(MIN7.5BP) 7.5 Amp	Brown	$4.49 H
2000267	(MIN10BP) 10 Amp	Red	$4.49 H
2000268	(MIN15BP) 15 Amp	Light Blue	$4.49 H
2000269	(MIN20BP) 20 Amp	Yellow	$4.49 H
2000270	(MIN25BP) 25 Amp	White	$4.49 H
2000272	(MIN30BP) 30 Amp	Green	$4.49 H

"SFE" Style Glass Tube Fuses



- Sold 5 per pack.

Order No.	Mfg. No. / Description		Price
2000280	(SFE9BP) 9 Amp	1/4" x 7/8"	$2.49 H
2000277	(SFE14BP) 14 Amp	1/4" x 1-1/16"	$2.15 H
2000278	(SFE20BP) 20 Amp	1/4" x 1-1/4"	$2.15 H
2000279	(SFE30BP) 30 Amp	1/4" x 1-7/16"	$3.10 H

Blue Sea Maxi Fuse



- Economical.
- Tin-plated connector blades for corrosion resistance.
- Visible indication of blown condition.
- Maximum voltage rating: 32 Volts DC.
- Interrupt rating: 1,000 Amperes DC.
- Sold 2 per pack.

Order No.	Mfg. No. / Description	Price
379304	(5140) 50 Amp	$2.98 F

Marpac AGA and AGC Fuses



Sold by box of 5 Packages only! Priced per Package.

- Sold 5 per pack.

Order No.	Description	Price
7-3675	AGA, 20 Amp	$2.19 G
7-3680	AGA, 30 Amp	$2.19 G
7-3685	AGC, 1 Amp	$2.69 G
7-3690	AGC, 1.5 Amp	$2.69 G
7-3695	AGC, 2 Amp	$2.69 G
7-3700	AGC, 2.5 Amp	$2.69 G
7-3705	AGC, 3 Amp	$2.69 G
7-3710	AGC, 4 Amp	$2.69 G
7-3715	AGC, 5 Amp	$2.49 G
7-3720	AGC, 7.5 Amp	$2.19 G
7-3725	AGC, 10 Amp	$2.19 G
7-3730	AGC, 15 Amp	$2.19 G
7-3735	AGC, 20 Amp	$2.19 G
7-3740	AGC, 25 Amp	$2.19 G
7-3745	AGC, 30 Amp	$2.19 G
7-3795	AGC, 40 Amp	$3.29 G
7-3750	AGC, 50 Amp	$2.69 G

"AGA" Style Glass Tube Fuses



- Sold 5 per pack.
- 1/4" x 5/8".

Order No.	Mfg. No. / Description	Price
2000232	(AGA5BP) 5 Amp	$2.75 H
2000230	(AGA20BP) 20 Amp	$2.75 H
2000231	(AGA30BP) 30 Amp	$4.45 H

©2014 Donovan Marine, Inc.

"AGC" Style Glass Tube Fuses



- Sold 5 per pack.
- 1/4" x 1-1/4".

Order No.	Mfg. No. / Description	Price
2000236	(AGC1BP) 1 Amp	$3.29 H
2000233	(AGC1.5BP) 1.5 Amp	$3.29 H
2000240	(AGC2BP) 2 Amp	$3.29 H
2000237	(AGC2.5BP) 2.5 Amp	$3.29 H
2000242	(AGC3BP) 3 Amp	$3.29 H
2000243	(AGC4BP) 4 Amp	$3.29 H
2000244	(AGC5BP) 5 Amp	$2.29 R
2000245	(AGC7.5BP) 7.5 Amp	$2.29 R
2000234	(AGC10BP) 10 Amp	$2.29 R
2000235	(AGC15BP) 15 Amp	$2.29 R
2000238	(AGC20BP) 20 Amp	$2.29 R
2000239	(AGC25BP) 25 Amp	$2.29 R
2000241	(AGC30BP) 30 Amp	$2.29 R

Marpac Plug-In Fuse Holder



- Waterproof PVC.

Order No.	Description	Price
7-3780	Plug-In Fuse Holder	$4.16 G


Boater Sports "ATO" Style Waterproof Fuse Holder



- ATO - Black with 12 gauge red wire.
- Includes 30 amp fuse.

Order No.	Mfg. No. / Description	Price
1-51405	(51405)	$3.35 H

Marpac Waterproof Fuse Holder



- Waterproof enclosure for reliable electrical connection.
- For up to 30 amps and 12 gauge wire.
- 20 amp fuse included.

Order No.	Description	Price
7-3785	Waterproof Fuse Holder	$5.98 G

Ancor AGC Fuses



- Diameter: 1/4".
- Length: 1-1/4".
- 250V AC maximum.
- UL 248-14.

Order No.	Mfg. No. / Description	Price
379020	(601020) 2 Amp	$3.98 Q
379026	(601025) 2.5 Amp	$3.98 Q

Audiopipe Fuse



- Gold plated midget car fuses.
- 13/32" x 1-1/2"
- Voltage rating: 32 V/125 V/250 V.
- Replaces AGU and 4 AG fuses.
- 5 pieces per blister pack.

Order No.	Mfg. No. / Description	Price
559765	(AGU-40) 40 Amp	$5.98 H
559770	(AGU-60) 60 Amp	$5.98 H
559775	(AGU-80) 80 Amp	$5.98 H

"Mini ATO" Style Inline Fuse Holders with Cover




- Protective cover has removable straps.
- 16 gauge lead black wire; 3.5" length.

Order No.	Mfg. No. / Description	Price
2000261	(BP/HHL) Fuse Size: 2-20 Amp	$2.35 H

- 12 gauge lead red wire; 3.5" length.

Order No.	Mfg. No. / Description	Price
2000262	(BP/HHM) Fuse Size: 2-30 Amp	$2.45 H

Marpac Plastic Inline Fuse Holders



- Universal.
- 6 and 12 volt applications.
- 18 gauge wire loop.

Order No.	Description	Price
7-1120	Inline Fuse Holder	$2.48 F

- Molded bakelite complete with fuse and wire leads.

Order No.	Description	Price
7-0157	10 Amp Fuse and 16 Gauge Wire Loop	$5.98 G
7-1122	20 Amp Fuse and Wire Loop	$2.98 G
7-0158	30 Amp Fuse and 12 Gauge Wire Loop	$7.98 G

"AGU" Style Glass Tube Fuses



- Sold each.
- 13/32" x 1-1/2".

Order No.	Mfg. No. / Description	Price
2000246	(AGU30) 30 Amp	$1.65 H
2000247	(AGU40) 40 Amp	$1.65 H
2000248	(AGU50) 50 Amp	$1.62 H

Audiopipe Mini Fuse



- Midget car fuses (MIDI).
- Transparent body.
- Voltage rating: 32V.
- 5 pieces per blister pack.

Order No.	Mfg. No. / Description	Price
559780	(AFC-40) 40 Amp	$5.98 H
559785	(AFC-60) 60 Amp	$6.98 H
559790	(AFC-80) 80 Amp	$6.98 H

"ATO" Style Inline Fuse Holders with Cover



- Splash resistant protective cover.
- Fuses not included.
- Packaged for display.
- 14 gauge lead yellow wire; 3.5" length.

Order No.	Mfg. No. / Description	Price
2000258	(BP/HHF) Fuse Size: 1-20 Amp	$2.65 H

- 12 gauge lead yellow wire; 3.5" length.

Order No.	Mfg. No. / Description	Price
2000259	(BP/HHG) Fuse Size: 1-30 Amp	$3.40 H

Boater Sports Inline Waterproof Fuse Holder



- Accepts 12-18 AWG wire.
- Yellow.
- For 1/4" x 1-1/4" fuses.
- 30 Amp.

Order No.	Mfg. No. / Description	Price
1-51404	(51404)	$2.97 H

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Nylon "Twist Lock" Inline Fuse Holders



- Universal nylon, twist lock, no fuse-black body.
- For fuses: 1/4" x 5/8" to 1-1/4" and SFE-20.
- Ratings: 32V/20 amps.
- 14 Gauge yellow lead wire.

Order No.	Mfg. No. / Description	Price
2000260	(BP/HHK)	$2.50 H

- Nylon heavy duty with AGC-30 fuse-white body.
- For fuses: 1/4" x 1-1/4".
- Ratings: 32V/30 amps.
- 12 Gauge yellow lead wire.

Order No.	Mfg. No. / Description	Price
2000263	(BP/HHN)	$2.70 H

Ancor Panel Mount Fuse Holder



- For AGC and MDL style fuses.
- Rating: 15 maximum amps.

Order No.	Mfg. No. / Description	Price
205010	(607010)	$4.98 F

Handi-Man Plug-In ATC Fuse Kit

Order No.	Mfg. No. / Description	Price
731580	(970223) 17 Pieces	$16.98 I

Mar-Lan Industries Watertight Inline Fuse Holders



- A push together watertight inline fuse holder molded of heat resistance non-breakable plastic.
- Fits 1/4" x 1-1/4" fuses.

Order No.	Mfg. No. / Description	Price
205599	(2011-08-50) 50 Amp, 8 Gauge	$8.98 Q
205600	(2011-10-30) 30 Amp, 10 Gauge	$6.98 Q
205612	(2011-12-20) 20 Amp, 12 Gauge	$6.98 Q
205624	(2011-14-15) 15 Amp, 14 Gauge	$5.98 Q
205636	(2011-16-10) 10 Amp, 16 Gauge	$5.98 Q

Marpac Panel Fuse Holder



- Square face panel mount fuse holder.
- Accepts fuses to 10 amp.
- Sold 2 per card.

Order No.	Description	Price
7-0154	Panel Fuse Holder	$3.65 G

Fuse Tester/Puller



- This handy tool can be used in the fuse block to test any "ATO" (automotive style) fuse.
- The indicator light on the tester glows bright green when fuse is good.
- Has "ATO" fuse puller built in for ease in pulling.

Order No.	Mfg. No. / Description	Price
2000257	(BP/FT-3)	$9.98 H

Ancor "ATM" Waterproof Inline Fuse Holder



- For ATM style fuses.
- Rating: 15 maximum amps.
- 16 AWG wire.

Order No.	Mfg. No. / Description	Price
205021	(607021)	$14.98 F

Marpac Panel Fuse Holder



- For 3AG size fuses - 1/4". x 1-1/4".
- Rated at 15 amp.
- Sold each per card.

Order No.	Description	Price
7-0159	Panel Fuse Holder	$3.65 G

Panel Mount Fuse Holder



- Designed to accommodate all 1/4" x 1-1/4" fuses.

Order No.	Mfg. No. / Description	Price
2000067	(5055-B)	$2.95 K

Marpac Fuse Puller



Order No.	Description	Price
7-3790	Fuse Puller	$2.49 G

Marpac Combo ATO - Mini Fuse Display



- This display includes the following:
  - (5) 7-3800 - ATO Fuse - 3 amp
  - (5) 7-3805 - ATO Fuse - 4 amp
  - (5) 7-3810 - ATO Fuse - 5 amp
  - (5) 7-3815 - ATO Fuse - 7.5 amp
  - (5) 7-3820 - ATO Fuse - 10 amp
  - (5) 7-3825 - ATO Fuse - 15 amp
  - (5) 7-3830 - ATO Fuse - 20 amp
  - (5) 7-3835 - ATO Fuse - 25 amp
  - (5) 7-3845 - ATO Fuse - 40 amp
  - (5) 7-3855 - Mini Plug-In Fuse - 2 amp
  - (5) 7-3860 - Mini Plug-In Fuse - 3 amp
  - (5) 7-3865 - Mini Plug-In Fuse - 4 amp
  - (5) 7-3870 - Mini Plug-In Fuse - 5 amp
  - (5) 7-3875 - Mini Plug-In Fuse - 7.5 amp
  - (5) 7-3880 - Mini Plug-In Fuse - 10 amp
  - (5) 7-3885 - Mini Plug-In Fuse - 15 amp
  - (5) 7-3890 - Mini Plug-In Fuse - 20 amp
  - (5) 7-3895 - Mini Plug-In Fuse - 25 amp
  - (5) 7-3900 - Mini Plug-In Fuse - 30 amp
  - (10) 7-3780 - Plug-In Fuse Holder

Order No.	Description	Price
7-3010	Mini Fuse Display	$359.98 G

Marpac Glass Fuse Display



- This display includes the following:
  - (5) 7-3675 - AGA Fuse - 20 amp
  - (5) 7-3680 - AGA Fuse - 30 amp
  - (5) 7-3685 - AGC Fuse - 1 amp
  - (5) 7-3690 - AGC Fuse - 1.5 amp
  - (5) 7-3695 - AGC Fuse - 2 amp
  - (5) 7-3700 - AGC Fuse - 2.5 amp
  - (5) 7-3705 - AGC Fuse - 3 amp
  - (5) 7-3710 - AGC Fuse - 4 amp
  - (5) 7-3720 - AGC Fuse - 7.5 amp
  - (5) 7-3725 - AGC Fuse - 10 amp
  - (5) 7-3730 - AGC Fuse - 15 amp
  - (5) 7-3735 - AGC Fuse - 20 amp
  - (5) 7-3740 - AGC Fuse - 25 amp
  - (5) 7-3745 - AGC Fuse - 30 amp
  - (5) 7-3755 - SFE Fuse - 9 amp
  - (5) 7-3760 - SFE Fuse - 14 amp
  - (5) 7-3765 - SFE Fuse - 20 amp
  - (5) 20 amp In-Line Fuse Holder
  - (5) 30 amp In-Line Fuse Holder
  - (5) 7-3790 - Fuse Puller

Order No.	Description	Price
7-3003	Glass Fuse Display	$204.98 G

©2014 Donovan Marine, Inc.

BEP ATC Fuse Holders



- Allows for multiple fuse holders and bus bars to be joined together, increasing the number of circuits protected.
- Fuse holder inputs can be linked together to form a single continuous fuse holder.
- Includes patented Contour Lock system, see-thru clip-on cover and label set.
- Available with screw terminals or quick connect terminals.
- Max. current/circuit: 30A; Max. current/block: 100A; Max. voltage: 32V DC; Base & cover material: polycarbonate.
- Positions for spare fuses.

Order No.	Mfg. No. / Description	Price
702100	(80-712003900) 6 Way bus w 5 mm input studcover joiners	$17.98 Q
702145	(ATC-6W) 6 Way fuse holder screw terminals w-cover & link	$41.98 Q

BEP Digital Voltage Sensing Relay (DVSR)



- Safely charge two or more independent battery banks from one charge source (alternator, battery charger).
- Charges engine starting batteries before combining auxiliary bank for charging.
- Protects start batteries from becoming flattened by domestic loads.
- Isolates electronics from harmful electrical surges from starter and winch motors.
- Simple to install 3 wire connection, leaves alternator wiring intact.
- No volt drop vs. diode isolators.
- Ignition protected.
- Surface or panel mountable.

Order No.	Mfg. No. / Description	Price
702075	(710-140A)	$112.98 Q

BEP Marine Twin Engines Two Battery Banks



- Designed for systems with twin engine and 2 batteries.
- House loads can be switched between port and starboard batteries.
- Selector switch can be used to parallel batteries when in both position.

Order No.	Mfg. No. / Description	Price
700248	(715-S) Two Battery Banks	$126.98 G

Newmar Battery Integrator



- Battery Integrator Charging multiple battery banks without use of diode isolators dictates that the batteries be connected or integrated only whenever a charge voltage is present.

Order No.	Mfg. No. / Description	Price
700164	(BI-100) 12 vdc 100 amp continuos	$192.98 E
700170	(BI-200) 12 VDC 200 AMP	$326.98 E
700167	(BI-24100) 24 VDC 100 AMP	$210.98 E

BEP Battery Distribution Clusters



- This system ensures you will always have a fully charged reserve battery.
- When the switch is in position one, it becomes the sensing battery for the VSR.
- Battery two, which is in isolation, will be charged via the VSR when the engine is running ensuring it is always fully charged.
- When the switch is in battery two position, this becomes the sensing battery and battery one is charged via the VSR.
- Please note: With the 714-140A-DVSR the electronic loads are run off the same battery as the engine starting battery.
- With the successful release of the BEP battery distribution system, BEP saw the need for ready assembled clusters for different applications to make the installation within the battery area even easier.
- Following is the range as outlined in each diagram, which are overviews only.
- All clusters are completely bused and pre-wired internally and are supplied with mounting fastenings along with easy to follow instructions.
- These include All connecting points clearly marked with ABC labels as shown in All illustrations.

Order No.	Mfg. No. / Description	Price
702080	(714-140ADVSR) Single Engine, Two Battery Banks	$178.98 Q
702085	(716SQ140ADVS) Single Engine, Two Battery Banks	$226.98 Q
702090	(717-140ADVSR) Twin Engine, Three Battery Banks	$385.98 Q

BEP Marine Dual Sense Voltage Sensitive Relay



- Allows two batteries to be charged at the same time.
- Eliminates the possibility of draining the start battery and protects sensitive electronic equipment powered from the house battery from harmful engine start up spikes.
- No need to bypass existing alternator wiring.
- 125 amps continuous.

Order No.	Mfg. No. / Description	Price
700150	(710-125A)	$106.98 G

Newmar Start Guard



- StartGuard The abrupt DC system voltage drop that accompanies engine starting can cause micro processor-driven communication and navigation electronics to dump programmed memory.
- StartGuard solves this problem by providing supplemental voltage to sensitive electronics while the engine is cranked.
- It contains a sealed rechargeable battery which is switched on-line to electronics when the starter switch or solenoid is engaged.
- When the engine is running StartGuard automatically goes off-line and the internal battery is recharged by the alternator.

Order No.	Mfg. No. / Description	Price
700203	(NS-12-20) 12 volt, 20 amp, DC Starting Ups	$227.98 E

Blue Sea Mini On/Off Battery Switch - Single Circuit



- Ignition protected.
- Case design allows surface, front panel, or rear panel mounting.
- Isolating cover with snap-on sections protects rear contacts.
- 300A Continuous/500A Intermittent.
- 48 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379759	(6006) Single Circuit Switch	$29.98 F

Blue Sea On/Off Battery Switch - Single Circuit



- Ignition protected.
- Case design allows surface or rear panel mounting.
- Tactile indicator conveys knob position by feel only.
- 7/8" stud length to accept multiple cable terminals.
- Accepts up to 4/0 AWG battery cables.
- 350A Continuous/600A Intermittent.
- 48 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379775	(9003E) Single Circuit Switch	$44.98 F

Blue Sea Mini Battery Switch - Dual Circuit Plus



- Ignition protected.
- Case design allows surface, front panel, or rear panel mounting.
- Isolating cover with snap-on sections protects rear contacts.
- 300A Continuous/450A Intermittent.
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379698	(6011) Dual Circuit Plus	$48.98 F

Blue Sea Battery Selector Switch



- Ignition protected.
- Case design allows surface or rear panel mounting.
- Tactile indicator conveys knob position by feel only.
- 7/8" stud length to accept multiple cable terminals.
- Accepts up to 4/0 AWG battery cables.
- 350A Continuous/600A Intermittent.
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379771	(9001E) Battery Selector Switch	$45.98 F

Blue Sea Mini On/Off Battery Switch - Single Circuit



- Ignition protected.
- Case design allows surface, front panel, or rear panel mounting.
- Isolating cover with snap-on sections protects rear contacts.
- 300A Continuous/500A Intermittent.
- 48 volts DC maximum.
- Removable key.

Order No.	Mfg. No. / Description	Price
379758	(6005) Single Circuit Switch	$29.98 F

Blue Sea Battery Switch - Dual Circuit Plus



- Ignition protected.
- Case design allows surface or rear panel mounting.
- Tactile indicator conveys knob position by feel only.
- 7/8" stud length to accept multiple cable terminals.
- Accepts up to 4/0 AWG battery cables.
- 350A Continuous/525A Intermittent.
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379761	(5511E) Dual Circuit Plus	$57.98 F

Blue Sea Mini Battery Selector Switch



- Ignition protected.
- Case design allows surface, front panel or rear panel mounting.
- Isolating cover with snap-on sections protects rear contacts.
- 300A Continuous/500A Intermittent.
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379696	(6007) Battery Selector Switch	$39.98 F

Blue Sea Add A Battery



- A complete two battery bank management solution.
- Dual Circuit Plus Battery Switch isolates engine and house circuits, and combines battery banks for emergency starting.
- The 120 Amp SI ACR automatic charging relay combines batteries for charging.

Order No.	Mfg. No. / Description	Price
379773	(7650) Add A Battery	$147.98 E

©2014 Donovan Marine, Inc.

BEP Easyfit™ Battery Switch



- Following customer feedback about installations where switches need to be recessed through varying thicknesses of panels, we developed the 700 Easyfit switch.
- It achieves this through an easily removable threaded ring allowing for panel thicknesses up to 3/4".
- It uses the same features as the 701 with the removable key 45 past the off position, labelled handle and a removable back cover covering exposed terminals to meet ABYC specifications.
- The switch can also be surface mounted offering a unique style compared to other switches available on the market.
- The 700 Easyfit switch can easily be retro - fitted in place of most European post and lever type switches.

Order No.	Mfg. No. / Description	Price
702045	(700) Easyfit Battery Switch	$36.98 Q

BEP Battery Selector Switch



- The 701S is the most compact selector switch available on the market.
- Housed in the same dimensions as the 701, and includes the same removable side plates and back cover.
- While BEP recommends isolated battery systems as outlined with our distribution clusters, the 701S offers a simple economical way of separating two batteries.
- Please note selector switches will not separate electronics from harmful engine starting spikes.

Order No.	Mfg. No. / Description	Price
702070	(701S) Battery Selector Switch	$42.98 Q

BEP Heavy Duty Battery Switch



- The 720 Heavy duty Battery Switch fits into the same contour lock system as used on the battery distribution system.
- Rated at 600A continuous and 2500A cranking.
- It is well suited to larger vessels.
- As with the 701, the 720 can be recessed or surface mounted.
- The 720 uses the same style of self cleaning sliding contact as used in the 701 and uses the same label sheet.

Order No.	Mfg. No. / Description	Price
702055	(720) Heavy Duty Battery Switch	$94.98 Q

BEP Battery Selector Switch



- The 721 Battery Selector Switch is our heavy duty selector switch.
- Housed in the same module as the 720, it includes the same removable plates and back cover.
- While BEP recommends isolated battery systems as outlined with our distribution clusters, the 721 offers a simple economical way of separating two batteries.
- Please note selector switches will not separate electronics from harmful engine starting spikes.

Order No.	Mfg. No. / Description	Price
702060	(721) Battery Selector Switch	$65.98 Q

BEP Contour Battery Master Switch



- The 701 Contour Battery Master Switch offers a number of unique features, the highlight being the patented Contour Locking System, allowing it to be a stand alone unit, or locked together with other switches.
- Features a control knob which cannot be removed while in the ON or OFF position, however, can be removed by switching to an counter-clockwise 45 position. The control knob also features an interchangeable labeling system allowing a full range of applications (Part number 713 or 715: 136).
- Removable side plates on 4 sides for access of up to 1/0 cables plus a rear cover insulating the rear terminals against any short circuits. This ensures the switch meets ABYC requirements.
- Can be either surface or recess mounted by cutting a 2.1" hole.

Order No.	Mfg. No. / Description	Price
702050	(701) Battery Master Switch	$31.98 Q

BEP Remote Operated Battery Switch



- Remote operation.
- Battery switch can be mounted along side battery, reducing cable lengths and cable sizes to starter motor. (Large cost saving in copper cables) Reduced installation labor, due to shorter battery cable runs. Manual override option to meet CE requirements.
- Power Draw: Switch off: 12mA. Switch on: 15mA, switch operating 120mA for 3 seconds @ 12V nominal.
- LED status identification for remote control switch.
- Same capacities/specifications and mounting options as standard BEP battery switches.
- Uses same interchangeable labeling system as BEP battery switches.

Order No.	Mfg. No. / Description	Price
702065	(701-MD) Remote Operated Battery Switch	$196.98 Q

BEP Remote Operated Battery Switch



- Remote operation.
- Can be used to switch in positive or negative lines.
- Low stand by current draw (7mA) (zero if aux control switch used. See instruction sheet).
- Main contacts isolated from control circuit allowing operation via another battery source.
- Battery switch can be mounted alongside battery, reducing cable lengths and cable sizes to starter motor. (Large cost saving in copper cables).
- Reduced installation labor, due to shorter battery cable runs.
- Manual override option to meet CE requirements.
- Power Draw: Switch off: 12mA. Switch on: 15mA, switch operating 120mA for 3 seconds @ 12V nominal.
- LED status identification for remote control switch.
- Same capacities/specifications and mounting options as standard BEP battery switches.
- Uses same interchangeable labeling system as BEP battery switches.

Order No.	Mfg. No. / Description	Price
702095	(720-MDO) Optical Sensor Benefits (720-MDO Only)	$257.98 Q

Newmar DC Energy Monitor



- Displays volts, amps, energy used and remaining for 12 or 24 volt systems up to 500 amps and up to 3,000 amp-hour capacity.
- Makes DC energy management a breeze.
- Monitor voltage on up to three separate banks.
- House bank (or battery bank of choice) may be also be programmed for the following functions: 1) Monitor charge/discharge amperage. 2) Total energy monitor can be set for amp-hours or percent of-charge. 3) High/low voltage alarm, plus alarm set-point for low amp-hours remaining.
- 500 amp shunt included.
- NMEA 0183 compatible output for data logging.
- Available in 2-1/2" or 4-1/4" square face.

Order No.	Mfg. No. / Description	Price
699857	(DCE-VAH) Large Scale Version	$688.98 D
699860	(DCE) Small Scale Version	$483.98 D

Newmar DCE: DC Energy Monitor



- Displays volts, amps, energy used and remaining for 12 or 24 volt systems up to 500 amps and up to 3,000 amp-hour capacity.
- Monitor voltage on up to three separate banks.
- 500 amp shunt included.
- NMEA 0183 compatible output for data logging.

Order No.	Mfg. No. / Description	Price
700675	(DCE) DC Energy Monitor	$475.98 D

Newmar AC Selector Switches



- The switch eliminates the safety hazard and/or damage that can occur if two AC sources are applied to the same circuit simultaneously.
- These switches are fitted with a compact escutcheon plate with engraved switch position nomenclature.
- The switches carry UL and CSA approval, are CE marked, and feature heavy duty contacts and a positive step cam mechanism for precise contact closure.
- May be installed in panel with thickness up to 1/4".
- 115/230 VAC.

Order No.	Mfg. No. / Description	Price
700005	(SS-3.0) 3.0 kw, 2 Poles	$127.98 E
699984	(SS-7.5) 7.5 kw, 2 Poles	$186.98 E
699998	(SS-15) 15 kw, 2/4 Poles	$384.98 E

Boater Sports Battery Cutoff Switch with Key



- Don't drain the battery, cut it off completely!
- Removable key acts as theft deterrent.
- Weather resistant rubber cap.
- 100 Amp @ 12V continuous.
- 1/4" diameter mounting bolts.
- Keyed.

Order No.	Mfg. No. / Description	Price
1-51030	(51030)	$19.35 H

Newmar ACE: AC Energy Monitor



- For 115/230 volt systems reads: 90-300 VAC, 0-150 amps, frequency from 40-70 Hz and power from 0-150 kW.
- Features alarm circuits for high/low voltage and high/low frequency.
- Current and voltage transformers are included.
- 12 or 24 volt source required to power meter.

Order No.	Mfg. No. / Description	Price
700670	(ACE) AC Energy Monitor	$505.98 D

Newmar DCV: DC Voltmeter



- For three battery banks, 12 and/or 24 volt systems.
- Reads to the nearest 1/10 volt.
- Features a programmable high/low voltage alarm circuit for each bank.
- NMEA 0183 compatible for PC interface.

Order No.	Mfg. No. / Description	Price
700681	(DCV) DC Voltmeter	$277.98 E

Newmar Temperature Gauge with Sensor



- Provides an accurate digital display of temperature for up to three different areas such as mobile air fill stations/medical supply compartments.
- Degrees F or C can be displayed.
- You can set Low and High temperature alarms for each sensor independently and the TG-3 continuously monitors the temperature of each sensor at all times.
- Operating temperature: 32 to 122° F.
- 2-1/2" Diameter.

Order No.	Mfg. No. / Description	Price
700206	(TG-3)	$545.98 E

- For use with Model TG-3 Instrument.

Order No.	Mfg. No. / Description	Price
700212	(TGS-25) Temperature Sensor with 25' Cable	$134.98 E

Cole Hersee Master Disconnect Switches



- Brass case with chrome plated lever.
- Designed to prevent electrical fires, tampering, theft and battery drain when equipment is unattended.
- Brass mounting stem 3/4" diameter x 1-13/32" long.
- Fits panels up through 15/16" thick.
- For 6 - 36 volt DC.

- Single pole, two positions: Off-On.
- Disconnect battery circuit only.
- 175 amps continuous, 800 amps intermittent, 15 seconds ON, 5 minutes OFF.

Order No.	Mfg. No. / Description	Price
300551	(M-284-01) S.P.S.T.	$69.98 F

- Double pole, two positions: Off-On.
- Disconnect battery circuit and field circuit.
- Large stud - 125 amps continuous, 1,000 amps intermittent.
- Small stud - 20 amps continuous, 15 seconds ON, 5 minutes OFF.

Order No.	Mfg. No. / Description	Price
300560	(M-289) D.P.S.T.	$57.98 S

©2014 Donovan Marine, Inc.

Marpac Battery Selector Switch



- Select from battery bank 1, battery bank 2 or both for charging or emergency starting.
- Can be mounted on or behind a panel.
- Rated at 300 amps.
- Longer studs for attaching more cable terminals.
- Uses up to 4/0 AWG battery cables.

Order No.	Description	Price
7-0380	Battery Selector Switch	$37.98 G

Boater Sports Battery Switches



1-51035



1-51034

- Molded case - high impact.
- Ignition protected.
- Will replace competitive switches without modification.
- 3/8" cable lugs.
- Only 2.75" deep x 5.2" radius.

Order No.	Mfg. No. / Description	Price
1-51034	(51034) 1 Bank	$39.95 J
1-51035	(51035) 2 Bank	$41.95 J

Charles Marine Startnow Automatic Selector Switch



- Allows the main battery to drain without draining the reserve battery.
- Automatically detects if the main battery voltage is too low and activates the reserve batter to start your engine.

Order No.	Mfg. No. / Description	Price
284579	(93-STARTNWRMT-A) Remote Dash Indicator	$24.98 F

Guest Battery Selector Switch - Universal Mount



- Rugged internal components protected by a tough, impact resistant polycarbonate housing.
- New ergonomically styled turn knob provides easy On/Off switching.
- Longer stud lengths for improved assembly and easier cable routing.
- Built with heavy duty copper sweep contacts to ensure positive circuit control.
- Rated at 230 amps continuous, 345 amps momentary.
- Dimensions: 5" D x 2-3/4" H.

Order No.	Mfg. No. / Description	Price
378668	(2111A) Battery Selector Switch	$43.98 I

Marpac Battery Selector Switch



- Allows separate and combined battery selection.
- Use as an emergency main disconnect switch in the event of an electrical problem.
- Make before break design.
- Ignition protected.
- Manufactured by PERKO, Inc.
- For use with 6, 12, 24, or 32 volt alternator/generator Systems.
- 250 Amps continuous, 360 amps intermittent.

Order No.	Description	Price
7-0378	Battery Selector Switch	$43.98 G

Cole Hersee Battery Selector Switch



- Durable, fracture resistant, high temperature engineered plastic case, knob and insulator.
- Permit current to be carried by either of the two batteries, by two batteries simultaneously or cuts off all current at the source.
- Ignition protected.
- Vaporproof, waterproof, dustproof and corrosion resistant.
- May be surface mounted or installed through a panel with a 3-5/16" diameter hole.
- Flange diameter 6" and overall height 2-5/8".
- Rated 310 amps continuous, 500 amps intermittent.

Order No.	Mfg. No. / Description	Price
300765	(M-750) Battery Selector Switch	$58.98 G

Guest Heavy Duty Diesel Power Battery Switches



- Rugged internal components protected by a tough, impact resistant polycarbonate housing.
- For 6, 12, 24 or 36V systems.
- Built with heavy duty copper sweep contacts to ensure positive circuit control.
- Dimensions: 5-1/2" D x 3-1/2" H.

Heavy Duty On/Off Switch.

- Feature Alternator Field Disconnect (AFD) allowing selection of any position, including "off", without damage to alternator or electrical system.
- Rated at 450 amps continuous, 800 amps momentary.

Order No.	Mfg. No. / Description	Price
378655	(2303A)	$270.98 I

Extra Duty On/Off Switch.

- Feature Alternator Field Disconnect (AFD) allowing selection of any position, including "off", without damage to alternator or electrical system.
- Rated at 600 amps continuous, 1,000 amps momentary.

Order No.	Mfg. No. / Description	Price
378667	(2304A)	$279.98 I

Battery Selector Switch.

- Rated at 360 amps continuous, 600 amps momentary.

Order No.	Mfg. No. / Description	Price
378643	(2300A)	$183.98 R

Perko Fig. 8511 Compact Medium Duty Battery Selector Switch



- Requires 1/3rd less space to mount.
- Higher rating than popular 8500 Series.
- Same bolt patterns as Popular 8500 Series.
- Popular 90° easy to identify position rotation.
- For use with 12, 24 and 32 volt marine electrical systems.
- Diameter 4-3/4".
- Depth 1-7/8".

Order No.	Mfg. No. / Description	Price
542530	(8511 DP) Selector Switch	$49.98 R

Fig. 9611 Compact Medium Duty Main Battery Disconnect Switch



- Requires 1/3rd less space to mount.
- Higher rating than popular 8500 Series.
- Same bolt patterns as Popular 8500 Series.
- Popular 90° easy to identify position rotation.
- For use with 12, 24 and 32 volt marine electrical systems.
- Diameter 4-3/4".
- Depth 1-7/8".

Order No.	Mfg. No. / Description	Price
543987	(9611 DP) Disconnect Switch	$47.98 R

Perko Fig. 8501 Medium Duty Battery Selector Switch



- For use with 12, 24 and 32 volt marine electrical systems.
- Ignition protected.
- 250 amps continuous, 360 amps intermittent.
- When used with Non-Unitized Alternators, these models will interrupt the field current (reducing the possibility of damage) if turned "OFF" with the engine running.
- Diameter 5-1/4", depth 2-5/8".

Order No.	Mfg. No. / Description	Price
542515	(8501 DP) Selector Switch	$50.98 H

Perko Fig. 9601 Medium Duty Battery Disconnect Switch



- For use with 12, 24 and 32 volt marine electrical systems.
- Ignition protected.
- 250 amps continuous, 360 amps intermittent.
- When used with Non-Unitized Alternators, these models will interrupt the field current (reducing the possibility of damage) if turned "OFF" with the engine running.
- Diameter 5-1/4".
- Depth 2-5/8".

Order No.	Mfg. No. / Description	Price
543985	(9601 DP) Disconnect Switch	$47.98 H

Perko Fig. 8503 Medium Duty Battery Selector Switch with AFD



- Alternator Field Disconnect Model.
- For use with 12, 24 and 32 volt marine electrical systems.
- Ignition protected.
- 250 amps continuous, 360 amps intermittent.
- When used with Non-Unitized Alternators, these models will interrupt the field current (reducing the possibility of damage) if turned "OFF" with the engine running.
- Diameter 5-1/4".
- Depth 2-5/8".

Order No.	Mfg. No. / Description	Price
542527	(8503 DP) Selector Switch	$65.98 R

Perko Fig. 9603 Medium Duty Battery Disconnect Switch with AFD



- Alternator Field Disconnect Model.
- For use with 12, 24 and 32 volt marine electrical systems.
- Ignition protected.
- 250 amps continuous, 360 amps intermittent.
- When used with Non-Unitized Alternators, these models will interrupt the field current (reducing the possibility of damage) if turned "OFF" with the engine running.
- Diameter 5-1/4".
- Depth 2-5/8".

Order No.	Mfg. No. / Description	Price
543986	(9603 DP) Disconnect Switch	$73.98 R

Perko Fig. 8603 Heavy Duty Battery Selector Switch with AFD



- Alternator Field Disconnect Model.
- For use with 6, 12, 24 and 32 volt marine electrical systems.
- Ignition protected.
- 380 amps continuous, 850 amps intermittent.
- When used with Non-Unitized Alternators, these models will interrupt the field current (reducing the possibility of damage) if turned "OFF" with the engine running.
- Diameter 5-1/4", depth 3-3/8".

Order No.	Mfg. No. / Description	Price
542538	(8603 DP) Selector Switch	$192.98 R

Perko Fig. 9703 Heavy Duty Battery Disconnect Switch with AFD



- Alternator Field Disconnect Model.
- For use with 6, 12, 24 and 32 volt marine electrical systems.
- Ignition protected.
- 450 amps continuous, 1,200 amps intermittent.
- When used with Non-Unitized Alternators, these models will interrupt the field current (reducing the possibility of damage) if turned "OFF" with the engine running.
- Diameter 5-1/4", depth 3-3/8".

Order No.	Mfg. No. / Description	Price
543990	(9703 DP) Selector Switch	$182.98 R

©2014 Donovan Marine, Inc.

Marpac Combination Blocks



- Heavy duty black molded plastic base.
- Use with SFE or AGC fuses up to 20 amps.
- Brass fuse clips and 8-32 terminal screws.
- A common bus bar connects the hot side of the fuses for power feed.
- A separate bus bar is provided for ground or unfused common hot feed.
- Bus bars have 8-32 screw and stud terminals for power/ground main connections.

Order No.	Description	Price
7-0522	4 Gang	$15.98 G
7-0523	6 Gang	$17.98 G
7-0532	8 Gang	$24.98 G

Boater Sports Fuse Terminal Blocks



- 4 and 6 circuit fuse block.
- Accepts SFE and AGC style fuses.
- Buss bar for easy hookups.
- Positive and negative.

Order No.	Mfg. No. / Description	Price
1-51406	(51406) 4 Gang, 2.75" x 3.5"	$15.85 H
1-51407	(51407) 6 Gang, 3.25" x 4.5"	$21.45 H

Marpac Fuse Blocks with Ground Bus Bar



- These Patented ATO/ ATC style fuse blocks allow you to design your own fuse panel.
- Interlocking modules in various sizes snap together to create any configuration needed.
- All have 1/4" tab terminals and 8-32 threaded screws.
- Tin plated copper contact.

Order No.	Description	Price
7-0520	6 Gang	$19.98 G
7-0521	10 Gang	$23.98 G

Blue Sea ST Blade Fuse Blocks



- Positive distribution bus with #10-32 stud.
- Can be used for 24-hour circuits.
- Cover satisfies ABYC/USCG requirements for insulation, incorporates an easy to open push button latch providing easy access to fuses, storage for two spare fuses, and label recesses that accept Blue Sea Systems Small Format Labels for circuit identification.
- Includes 20 write-on circuit labels.
- Tin-plated copper buses and fuse clips.
- Accepts ring or spade type terminals.
- Accepts ATO and ATC fast acting blade fuses.
- Fuses sold separately.

Order No.	Mfg. No. / Description	Price
2000088	(5028) 6 Circuits with Cover	$43.98 H
2000089	(5029) 12 Circuits with Cover	$56.98 H

Marpac Fuse Blocks



- Heavy duty black molded plastic base.
- Use with SFE or AGC fuses up to 20 amps.
- Brass fuse clips and 8-32 terminal screws.

Order No.	Description	Price
7-0478	4 Gang	$10.98 G
7-1111	6 Gang	$14.98 G

Marpac Fuse Blocks with Hot Feed



- Heavy duty black molded plastic base.
- Use with SFE or AGC fuses up to 20 amps.
- Brass fuse clips and 8-32 terminal screws.
- A common bus bar connects the hot side of the fuses for power feed.
- Bus bar has 8-32 stud terminal for main power connection.

Order No.	Description	Price
7-1115	4 Gang	$10.98 G
7-1116	6 Gang	$15.98 G
7-1117	8 Gang	$20.98 G

Blue Sea Screw Terminal Glass Fuse Block with Cover



- Clear insulating cover with label recesses accept large format labels.
- Cover insulates all conductive parts, satisfying ABYC/USCG requirements and stores spare fuses.
- Tin-plated copper buses and Phosphor Bronze fuse clips give 30 Ampere rating per circuit.
- Accepts AGC, MDL and all other 3AG Glass Fuses.
- Dimensions: 3-1/2" x 5" x 1-1/4".
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379366	(5015) 6 Circuit with Negative Bus	$38.98 F

Blue Sea Screw Terminal Blade Fuse Blocks with Cover



- Clear insulating cover with label recesses accept small format labels.
- Cover satisfies ABYC/USCG requirements for insulation.
- Tin-plated copper buses and fuse clips give 30 Ampere rating per circuit.
- Accepts ATO and ATC fast acting blade fuses.
- 20 write-on circuit labels included.
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
380017	(5025) 6 Circuit with Negative Bus	$46.98 F
380018	(5026) 12 Circuit with Negative Bus	$57.98 F

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Blue Sea ANL Fuse Block with Cover



- Insulating cover satisfies ABYC/USCG requirements and cover breakouts allow wire access in any direction.
- For use on systems up to 32V DC.
- Large 5/16"-18 studs accept 5/16" (M8) ring terminals, 14 AWG to 2/0 AWG wire.
- Maximum Amperage: 300 Amperes DC.

Order No.	Mfg. No. / Description	Price
379455	(5005) Fuse Block	$24.98 F

Blue Sea ANL Fuses



- Ignition protected.
- Silverplated connector blades for corrosion resistance.
- Visible indication of blown condition.
- Interrupt rating: 6,000 Amperes DC.
- Satisfies ABYC requirements for main DC circuit protection on large battery banks.

Order No.	Mfg. No. / Description	Price
379479	(5122) 50 Ampere	$17.98 F
379480	(5123) 60 Ampere	$17.98 F
379483	(5124) 80 Ampere	$17.98 F
379495	(5125) 100 Ampere	$17.98 F
379506	(5127) 150 Ampere	$17.98 F
379518	(5129) 200 Ampere	$17.98 F
379280	(5131) 250 Ampere	$20.98 F
379285	(5133) 300 Ampere	$20.98 F
379290	(5136) 400 Ampere	$20.98 F
379295	(5137) 500 Ampere	$20.98 F

Blue Sea Power Post High Amperage Cable Connectors



- Connect high amperage cables securely.
- Base material: Reinforced Thermoplastic.
- 48 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379863	(2003) 3/8" x 7/8" Stud	$13.98 F
379864	(2011) 1/4" x 3/4" Stud	$9.98 F
379865	(2002) 5/16" x 7/8" Stud	$13.98 F

Blue Sea MEGA Fuses



- Most economical fuse for 100 to 300 Ampere circuit protection.
- Interrupt rating: 2,000 Amperes DC.
- 32 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379392	(5101) 100 Ampere	$8.98 F
379405	(5103) 150 Ampere	$8.98 F

Marpac Terminal Blocks



- Heavy duty black molded plastic base.
- Two solid brass bus bars with 8-32 terminal screws.
- For common hot and ground leads.

Order No.	Description	Price
7-1101	4 Gang	$8.98 G
7-1102	6 Gang	$12.98 G
7-1103	8 Gang	$14.98 G

Blue Sea PowerPost Plus Cable Connectors



- 150 Ampere bus allows small wire connections at high amperage cable connections.
- Base material: Reinforced Thermoplastic.
- Bus material: Tin-Plated copper.
- 48 volts DC maximum.

Order No.	Mfg. No. / Description	Price
379859	(2102) 5/16" x 3/4" Stud	$24.98 G
379861	(2103) 3/8" x 3/4" Stud	$25.98 F

Blue Sea Cable Cap Stud Insulators



- Insulate stud type connectors on alternators, starters, windlasses and other high amperage devices.

Order No.	Mfg. No. / Description	Price
380050	(4010) For Cable Size: 8-4, Red	$3.97 F
380060	(4012) For Cable Size: 2-2/0, Red	$2.98 D
380070	(4014) For Cable Size: 3/0-4/0, Red	$2.89 D
380080	(4011) For Cable Size: 8/4, Black	$2.89 D
380090	(4013) For Cable Size: 2-2/0, Black	$2.89 D
380100	(4015) For Cable Size: 3/0-4/0, Black	$2.89 D

Newmar Fuse Block, ANL with Cover



- Heavy duty 500 amp, insulated, compact fuse block with corrosion resistant 5/16" studs.

Order No.	Mfg. No. / Description	Price
698139	(AFB-500) Fuse Block	$34.98 E


Marpac Terminal Junction Blocks with Independent Hot Feed Links



- Double screw terminals.
- Protective insulator barrier strips. 8-32 screws.
- Moisture resistant molded plastic insulator base.
- Brass, nickel plated terminal links and binding screws.

Order No.	Description	Price
7-0473	4 Gang	$4.05 G
7-0474	6 Gang	$6.98 G
7-0167	8 Gang	$7.98 G
7-0165	10 Gang	$9.98 G

Marpac Terminal Junction Blocks with Common Hot Feed Connection



- Moisture resistant molded plastic insulator base.
- Solid brass bus bar safely carries up to 36 volts.
- Two brass 1/4" stud power terminals with hex nuts included.
- 8-32 round head screws for circuit connectors.
- Two mounting holes for #10 countersink flat head screws.

Order No.	Description	Price
7-0168	10 Gang	$15.98 G

Marpac Terminal Block with 5 Screw Terminals




- Stainless steel studs increase electrical contact.
- Tin plated copper busbar gives maximum conductivity. Tin plated brass nuts.
- Corrosion resistant materials provide excellent protection & performance.
- 8 x 32 screw terminals.
- Continuous rating: 100 amperes AC/DC.
- Maximum rating: 48 volts DC/300 volts AC.

Order No.	Description	Price
7-1171	Terminal Block	$10.98 G

©2014 Donovan Marine, Inc.

Marpac 100 Amp Common Bus Bar



- Stainless steel studs increase electrical contact.
- Tin plated copper busbar gives maximum conductivity.
- Tin plated brass nuts.
- Corrosion resistant materials provide excellent protection & performance.
- 10 x 32 stud terminals.
- Continuous rating: 100 amperes AC/DC.
- Maximum rating: 48 volts DC/300 volts AC.

Order No.	Description	Price
7-1176	100 Amp Common Bus Bar	$14.98 G

Marpac 150 Amp Common Bus Bar



- Stainless steel studs increase electrical contact.
- Tin plated copper busbar gives maximum conductivity.
- Tin plated brass nuts.
- Corrosion resistant materials provide excellent protection & performance.
- 1/4" stud terminals.
- Continuous rating: 130 amperes AC, 150 amperes DC.
- Maximum rating: 48 volts DC/300 volts AC.

Order No.	Description	Price
7-1177	150 Amp Common Bus Bar	$19.98 G

Blue Sea Mini Bus 100 Ampere Common Bus Bars



- Great for limited space applications.
- Stainless steel studs allow high torquing for excellent electrical contact.
- Tin-plated copper busbar for maximum conductivity & corrosion resistance.
- Base material: Reinforced polycarbonate.
- Continuous rating: 100 Amperes AC/DC.
- 48 volts DC maximum, 300 volts AC maximum.

Order No.	Mfg. No. / Description	Price
379784	(2304) 5 x 8-32 Screw Terminal	$13.98 F
379796	(2305) 4 x 10-32 Stud Terminal	$14.98 F

Blue Sea 150 Ampere Common Bus Bars



- Stainless steel studs allow high torquing for excellent electrical contact.
- Tin-plated copper busbar for maximum conductivity & corrosion resistance.
- Base material: Reinforced polycarbonate.
- Continuous rating: 130 Amperes AC, 150 Amperes DC.
- 48 volts DC maximum, 300 volts AC maximum.

Order No.	Mfg. No. / Description	Price
379782	(2301) 10 x 8-32 Screw Terminal, 2 x 1/4" Stud Terminal	$16.98 F
2000083	(2302) 20 x 8-32 Screw Terminal, 2 x 1/4" Stud Terminal	$27.98 H
379783	(2303) 4 x 1/4" Stud Terminal	$23.98 Q

Blue Sea PowerBar 600 Ampere Common Bus Bar



- Stainless steel studs allow high torquing for excellent electrical contact.
- Tin-plated copper busbar for maximum conductivity & corrosion resistance.
- Base material: Reinforced polycarbonate.
- Continuous rating: 545 Amperes AC, 600 Amperes DC.
- 48 volts DC maximum, 300 volts AC maximum.

Order No.	Mfg. No. / Description	Price
379862	(2104) 4 x 3/8-16 Stud Terminal	$105.98 F

Blue Sea DualBus 100 Ampere Common Bus Bars



- Combines negative and positive buses on one block.
- Tin-plated copper busbar for maximum conductivity & corrosion resistance.
- Base material: ABS.
- Continuous rating: 100 Amperes AC/DC.
- 48 volts DC maximum, 300 volts AC maximum.

Order No.	Mfg. No. / Description	Price
379809	(2701) 5 x 8-32 Screw Terminal	$16.98 Q
379811	(2702) 10 x 8-32 Screw Terminal	$22.98 Q
379962	(2709) Cover for 379809	$12.98 F
379974	(2710) Cover for 379811	$13.98 F

Blue Sea 30 Ampere Terminal Blocks



- Closed back design completely insulates power from the mounting surface.
- Each screw pair is one isolated circuit.
- Jumpers allow creation of common circuits.
- Bus material: Nickel-Plated brass.
- Base material: Phenolic.
- Continuous rating: 30 Amperes AC/DC.
- Voltage rating: 600 volts AC/DC maximum.

Order No.	Mfg. No. / Description	Price
379866	(2502) 2 Circuits	$6.98 H
379873	(2504) 4 Circuits	$7.98 H
379885	(2506) 6 Circuits	$8.98 H
379897	(2508) 8 Circuits	$9.98 H
379902	(2510) 10 Circuits	$12.98 H
379906	(2512) 12 Circuits	$13.98 H

Blue Sea DualBus Plus 150 Ampere Common Bus Bars



- Combines negative and positive buses on one block.
- Tin-plated copper busbar for maximum conductivity & corrosion resistance.
- Clear polycarbonate cover snaps on to meet Coast Guard and ABYC insulation requirements.
- Base material: Reinforced polycarbonate.
- Continuous rating: 130 Amperes AC, 150 Amperes DC.
- 48 volts DC maximum, 300 volts AC maximum.

Order No.	Mfg. No. / Description	Price
379835	(2723) 5/16" Stud, 5 x 10-32 Screw Terminal	$29.98 F
379847	(2722) 1/4" Stud, 5 x 10-32 Screw Terminal	$30.98 F

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Newmar Bus Bar



- Ideal as a DC ground tie point or positive bus, these heavy duty, 500 amp rated bus bar assemblies feature 5/16 studs on 1 centers in 1/4 thick copper bar for common connection/distribution of large wire gauges and accommodate 5/16 ring terminals.
- One combination model features two 5/16 studs and eight #8 screws, accommodating multiple size wire terminals.
- All bus material is nickel-plated copper.
- A clear insulating protective cover is provided to prevent short circuits and provide visibility of lugs.
- The mounting bases are keyed for interlocking and may be mated with the terminal strips (described above).
- Conductive parts are captured and recessed away from the mounting surface.
- Use #8 or #10 screws for mounting.

Order No.	Mfg. No. / Description	Price
700173	(BB-2) 5/16" Studs: 2, Dimensions: 3-1/16" x 1-1/2"	$48.98 E
700176	(BB-2/8) 5/16" Studs: 2 plus 8 - #8 Screws, Dimensions: 6-1/16" x 1-1/2"	$77.98 E
700179	(BB-5) 5/16" Studs: 5, Dimensions: 6-1/16" x 1-1/2"	$89.98 E
700182	(BB-8) 5/16" Studs: 8, Dimensions: 9-1/16" x 1-1/2"	$124.98 E

Newmar Terminal Strips



- Terminal Strips use as a common negative/ neutral bus for AC or DC systems.
- Dual terminal strips in 4 or 8 screw positions on 3/4 centers are secured to a high density insulated base.
- All hardware, bus material and fasteners are nickel-plated brass.
- #8 screws accommodate various size ring terminals and each terminal strip is rated for 100 amps.
- Interlocking bases allow use of multiple terminal strips and bus bars (described below) to produce secure and neat wiring assemblies.
- The terminal strip bases have provisions for either #8 or #10 mounting screws, and no conductive parts in the base are exposed to the mounting surface.
- A clear plastic insulating cover is provided with skin packed units, Specify bulk or skin pack when ordering.

Order No.	Mfg. No. / Description	Price
700215	(TS-2X4) Base Terminals: 8, Dimensions: 3-1/16" x 1-1/2"	$27.98 E
700218	(TS-2X8) Base Terminals: 16, Dimensions: 6-1/16" x 1-1/2"	$36.98 E

Newmar Connector Strips

Order No.	Mfg. No. / Description	Price
700595	(CS-1) Terminal Pairs: 12, Max. Wire Gauge: 16	$12.98 E
700597	(CS-2) Terminal Pairs: 12, Max. Wire Gauge: 14	$13.98 E

Cole Hersee Ignition Switch



- All brass construction.
- 2 positions: Off-on.
- 2 brass screw terminals.
- Rated: 10 amps at 12V DC.
- Chrome plated brass face nut.
- Brass mounting stem 13/16"-24, 1-7/32" long.
- Maximum panel thickness 1".

Order No.	Mfg. No. / Description	Price
300668	(M-489-BP) Ignition Switch	$35.98 F

Cole Hersee Ignition Switch



- All brass construction.
- 3 positions: Off-ignition-start.
- 3 brass screw terminals.
- Rated: 10 amps at 12V DC.
- Chrome plated brass face nut.
- Brass mounting stem 13/16"-24, 1-7/32" long.
- Maximum panel thickness 1".

Order No.	Mfg. No. / Description	Price
300688	(M-550-BP) Ignition Switch	$36.98 F

Cole Hersee Ignition Switch



- Zinc die cast case.
- 4 positions: Acc-Off-ignition-start.
- 4 screw terminals.
- Rated: 10 amps at 12V DC.
- Mounting stem 3/4"-20.
- Maximum panel thickness 3/8".

Order No.	Mfg. No. / Description	Price
300513	(9579-02) Ignition Switch	$33.98 F

Cole Hersee Switch Cover



- Chrome plated brass.
- Weather resistant rubber boot and mounting nuts.
- Allows key to enter through elastic slot.
- Thickness: 17/32".
- Thread: 13/16"-24.
- Fits 300668 (M-489-BP) and 300688 (M-550-BP) ignition switches.

Order No.	Mfg. No. / Description	Price
300810	(83288-BP) Switch Cover	$11.98 F

Marpac Ignition Switch - Brass Style



- All brass construction with chrome plated face nut and stainless steel springs.
- 3 positions: Off-Ignition-Start.
- Automatic return to ignition from start position.
- Mounting stem 1-5/16" long.
- Thread diameter 13/16".
- 3 screw terminals.
- Rated: 15 amp at 12V DC.

Order No.	Description	Price
7-0482	Ignition Switch - Brass Style	$29.98 F

Marpac Ignition Switch - Brass Style



- All brass construction with chrome plated face nut.
- 3 positions: Off-Ignition-Start.
- Automatic return to ignition from start position.
- Mounting stem 1-7/32" long.
- Thread diameter 13/16".
- 3 blade terminals.
- Rated: Ignition - 10 amps at 12V DC; Start - 5 amps at 12V DC.

Order No.	Description	Price
7-0885	Ignition Switch - Brass Style	$34.98 G

©2014 Donovan Marine, Inc.

Marpac Ignition Switch - Polyester Style



- Glass filled polyester housing with chrome plated brass face nut, brass backup nut and stainless steel springs.
- 3 positions: Off-Ignition-Start.
- Automatic return from start to ignition positions.
- Accommodates 1-1/8" panel.
- Thread diameter 13/16".
- 3 terminals.
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0481	Ignition Switch - Polyester Style	$20.98 G

Marpac Ignition Switch - Polyester Style



- Polyester housing with weatherproof seal and drain hole.
- Brass back-up nut and chrome plated face nut.
- 3 positions: Off-Ignition-Start.
- For OMC.
- Accommodates 1-1/8" panel.
- Mounting bushing is 13/16" diameter.
- 5 screw terminals and 1 threaded stud.
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0391	Ignition Switch - Polyester Style	$26.98 G

Marpac Heavy Duty Momentary Push Button Switch



- Silver contacts.
- 2 screw terminals.
- Glass reinforced seamless polyester housing, internally rubber gasketed with moisture and dust proof rubber cap.
- Brass washer and backup nut.
- Stainless steel springs.
- Accommodates 1" panel.
- Rated: 30 amps at 12V DC.

Order No.	Description	Price
7-0483	Push Button Switch	$10.98 G

Cole Hersee Push Button Switch



- Non-corrosive construction.
- Moisture repellent insulators.
- Brass case, stem, plunger button, terminals and mounting hardware.
- 2 positions: Off-momentary on.
- On with button depressed, spring return to off.
- Black moisture repellent rubber cover which snaps over face nut.
- Mounting stem 5/8"-32, 1-3/8" long.
- Maximum panel thickness 1".
- Rated: 35 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300741	(M-626-BP) Push Button Switch	$19.98 E

Marpac Ignition Switch - Brass Style



- Brass housing with brass back-up nut and chrome plated face nut.
- 3 positions: Off-Ignition-Start.
- Accommodates 1-1/8" panel.
- Thread diameter 13/16".
- 5 screw terminals.
- Rated: 10 amps at 12V DC.

Order No.	Description	Price
7-0480	Ignition Switch - Brass Style	$38.98 G

Marpac Ignition / Choke Switches



- Delrin body with brass back-up nut and hex black plastic.
- 3 positions: Off-Ignition-Start.
- "Push-To-Choke" feature.
- Replaces most Mercury.
- Accommodates 5/8" panel.
- Magneto.

Order No.	Description	Price
7-1155	6 Wires Potted Base	$27.98 G
7-1150	6 Screw Terminals	$19.98 G

Marpac Momentary Push Button Switch



- Chrome plated brass face nut, brass washer and backup nut.
- 2 screw terminals.
- Stainless steel springs.
- Accommodates 1" panel.
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0487	Push Button Switch	$10.98 G

Cole Hersee Push Button Switch



- Non-corrosive construction.
- Moisture repellent insulators.
- Brass case, stem, plunger button, terminals and mounting hardware.
- 2 positions: Off-momentary on.
- On with button depressed, spring return to off.
- Recessed plunger button within oversized face nut to prevent accidental actuation.
- Mounting stem 5/8"-32, 1-3/8" long.
- Maximum panel thickness 1".
- Rated: 35 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300739	(M-912-BP) Push Button Switch	$23.98 E

Marpac Ignition Switch - Polyester Style



- Polyester housing with brass back-up nut & knurled black plastic face nut with rubber cap.
- 4 positions.
- Accommodates 1-1/8" panel.
- Hole size 7/8".
- 4 blade terminals.
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0479	Ignition Switch - Polyester Style	$21.98 G

Marpac Ignition/Choke Switches



- Delrin stainless steel ignition starter switch.
- "Push-To-Choke" feature.
- Replaces Evinrude/Johnson 388173, 390129, 390133 and 393301.
- Special weather-proofing seal and drain hole.
- Eliminates need for separate electric choke switch.
- Accommodates 1/4" panel.
- Mounting bushing is 1/2" long, 13/16" diameter.
- 6 screw terminals.
- Rated: 20 amps at 12V DC.

Order No.	Description	Price
7-0390	Ignition/Choke Switch	$19.98 G

Cole Hersee Push Button Switch



- Non-corrosive construction.
- Moisture repellent insulators.
- Brass case, stem, plunger button, terminals and mounting hardware.
- 2 positions: Off-momentary on.
- On with button depressed, spring return to off.
- Gasket sealed protects against moisture and dirt.
- Brass mounting stem 5/8"-32, 1" long.
- Maximum panel thickness 3/4".
- Rated: 10 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300664	(M-485-BP) Push Button Switch	$15.98 F

Cole Hersee Push Button Switch



- Plasticized body for moisture and dirt protection.
- 2 positions: Off-momentary on.
- On with button depressed, spring return to off.
- Black moisture repellent rubber cover which snaps over face nut.
- Two 18 gauge wire leads, 12" long.
- Brass mounting stem 5/8"-32, 15/16" long.
- Maximum panel thickness 1/2".
- Rated: 10 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300727	(M-608-BP) Push Button Switch	$21.98 E

Cole Hersee Weatherproof/Dustproof Caps



- Durable, resilient rubber cap.
- Cap is permanently fastened to mounting nut by rolled brass bezel.
- Deep threaded 5/8"-32 aluminum mounting nut assures positive seal.
- Fits 300664 (M-485-BP), 300727 (M-608-BP) and 300741 (M-626-BP) push button switches.

Order No.	Mfg. No. / Description	Price
300805	(83280-03) Black	$3.56 F
300525	(83280-02) Red	$2.19 F

Boater Sports Push Button Switch



- Corrosion resistant brass switch, accommodates up to 1" thick panel.
- Water resistant cap.
- 15 Amp @ 12V.

Order No.	Mfg. No. / Description	Price
1-51360	(51360)	$17.20 H

Marpac Push-Pull Switch



- Solid brass construction.
- Chrome plated brass knob and chrome plated solid brass face nut.
- 3 positions: Off-on-on. Normally off.
- 4 screw terminals.
- Mounting stem 3/8" diameter.
- Accommodates 1" panel.

Order No.	Description	Price
7-0493	15 amps at 12V DC	$10.98 G

Cole Hersee Push-Pull Switch



- All brass construction.
- 2 positions: Off-on, normally off.
- 2 screw terminals.
- Chrome plated brass knob.
- Gasket sealed case protects against moisture and dirt.
- Complete with face nut, washer and hex nut for mounting.
- Mounting stem 3/8"-32 thread, 1-1/4" long.
- Maximum panel thickness 3/4".
- Rated: 10 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300652	(M-482-BP) Push-Pull Switch	$17.98 F

Marpac Push Button Switch



- Black plastic contoured push button.
- Compact size push button switch for horn starter or other momentary on functions.
- Two male 1/4" blade terminals.
- Uses 1/2" mounting hole in dash or panel.
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-1160	Push Button Switch	$7.98 G

Marpac Push-Pull Switch



- Solid brass construction.
- Chrome plated brass knob and chrome plated solid brass face nut.
- 3 positions: Off-on-on. Normally off.
- 3 screw terminals.
- Mounting stem 3/8" diameter.
- Accommodates 1" panel.

Order No.	Description	Price
7-0491	15 amps at 12V DC	$9.98 G

Cole Hersee Push-Pull Switch



- Plasticized body sealed against moisture and dirt.
- 2 positions: Off-on, normally off.
- Chrome plated brass knob.
- Two 18 gauge insulated copper wire leads, 12" long.
- Complete with face nut, washer and hex nut for mounting.
- Mounting stem 3/8"-32 thread, 1-1/4" long.
- Maximum panel thickness 5/8".
- Rated: 10 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300715	(M-606-BP) Push-Pull Switch	$20.98 E

Boater Sports Push-Pull Switches



- Corrosion resistant brass switch.
- Accommodates up to 1" thick panel.
- 15 Amp @ 12 volt.

Order No.	Mfg. No. / Description	Price
1-51304	(51304) 2 Position	$12.20 H
1-51305	(51305) 3 Position	$16.45 H

Marpac Horn Switch



- Black plastic button.
- Not ignition protected.
- Chrome plated brass housing.
- Momentary on-off push button switch.
- Diameter 1-1/2", Overall width 2-5/8", Height 1".
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0485	Horn Switch	$8.98 G

Boater Sports Horn Button



- Momentary push mini switch with boot is perfect for horn button.

Order No.	Mfg. No. / Description	Price
1-51361	(51361)	$7.20 H

Marpac Push-Pull Switches



- Solid brass construction.
- Chrome plated brass knob and chrome plated brass face nut.
- 2 positions: Off-on. Normally off.
- Mounting stem 3/8" diameter.
- Accommodates 1" panel.
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0489	2 Screw Terminals	$7.98 G
7-0886	2 Blade Terminals	$9.98 G

Marpac Bucket of Savings - Push-Pull Switches



- Sold 24 push-pull switches per bucket.

Order No.	Description	Price
7-0489S	2 Positions: Off-On	$159.98 F

Cole Hersee Push-Pull Switch



- All brass construction.
- Chrome plated brass knob.
- 3 positions: Off-on #1-on #1 and #2, normally off.
- 3 screw terminals.
- Complete with face nut, washer and hex nut for mounting.
- Energizes one circuit in first position and both circuits in second position.
- Mounting stem 3/8"-32 thread, 1-1/4" long.
- Maximum panel thickness 1".
- Rated: 10 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300640	(M-476-BP) Push-Pull Switch	$37.98 F

©2014 Donovan Marine, Inc.

Marpac Euro-Style Rocker Switches



- Non-illuminated.
- Black plastic rocker switch.
- Fits Contura cut-out.
- Rated: 16 amps at 12V DC.

Order No.	Description	Price
7-1135	2 Position, On-Off, SPST	$6.98 G
7-1136	2 Position, Off-Momentary On, SPST	$6.98 G
7-1137	3 Position, On-Off-On, SPDT	$6.98 G
7-1138	3 Position, Mom. On-Off-Mom. On, SPST	$7.98 G
7-1139	3 Position, On-Off-On, DPDT	$7.98 G

- Illuminated black plastic rocker switch.
- Glows white when on, can be seen in daylight.
- Fits Contura cut-out.
- Rated: 16 amps at 12V DC.

Order No.	Description	Price
7-1140	2 Position, On-Off, SPST	$7.98 G
7-1144	3 Position, On-Off-On, SPDT	$9.98 G

Marpac Illuminated Rocker Switches



- Red illuminated black plastic rocker switch.
- Single pole.
- All rockers require 27/32" x 1-15/32" rectangular cut out.
- Rated: 20 amps at 12V DC.

Order No.	Description	Price
7-0531	Off-On, 3 Terminals	$6.98 G
7-0530	On-Off-On, 4 Terminals	$8.98 G

Marpac Rocker Switches



- Non-illuminated black plastic rocker switch.
- Single pole.
- Rated: 20 amps at 12V DC.
- All rockers require 27/32" x 1-15/32" rectangular cut out.

Order No.	Description	Price
7-1200	Off-On, 2 Terminals	$4.98 G
7-1205	On-Off-On, 3 Terminals	$5.98 G
7-1235	Mom. On-Off-Mom. On, 3 Terminals	$10.98 G
7-1230	Off-Mom. On, 3 Terminals	$10.98 G

Boater Sports Rocker Switches



- Low profile switch with matte black plastic housing.
- Uses standard female disconnect terminals.
- 15 Amp @ 12 volt .

Order No.	Mfg. No. / Description		Price
1-51340	(51340) On-Off	2 Terminals	$4.98 H
1-51341	(51341) On-Off-On	3 Terminals	$6.59 H
1-51342	(51342) Mom. On-Off	2 Terminals	$4.98 H

- Illuminated rocker switches.
- Illuminated when set to "ON" position.

Order No.	Mfg. No. / Description		Price
1-51350	(51350) On-Off	4 Terminals	$6.99 H
1-51351	(51351) On-Off-On	6 Terminals	$9.15 H

Marpac Contura Rocker Switches



- Non-illuminated.
- Non-corrosive plastic construction.
- Rated: 20 amps at 12V DC.

Order No.	Description	Price
7-0535	2 Position, On-Off	$8.98 F
7-0536	2 Position, Off-Momentary On	$9.98 F
7-0537	3 Position, On-Off-On	$9.98 F
7-0538	3 Position, Mom. On-Off-Mom. On	$9.98 G
7-0539	3 Position, On-Off-On (6 Terminal)	$11.98 F

- Illuminated. Non-corrosive plastic construction.
- Brass blade terminals, silver contacts.
- Rated: 20 amps at 12V DC.

Order No.	Description	Price
7-0540	2 Position, On-Off, SPST	$10.98 F
7-0541	2 Position, Off-Momentary On, SPST	$11.98 F
7-0542	3 Position, On-Off-On, SPDT	$12.98 F
7-0543	3 Position, Mom. On-Off-Mom. On, DPST	$14.98 F
7-0544	3 Position, On-Off-On, DPDT	$14.98 F

Blue Sea Waterproof Contura Switches



- Vibration, shock, thermoshock, moisture and salt spray resistant.
- Current rating: 20A @ 12 volt.
- Meets UP1500 & ISO8846 ignition protection requirements.
- Gray.

Order No.	Description	Price
379760	(8232) SPDT, ON-OFF-ON	$14.98 F
379772	(8231) SPST, OFF-MOM. ON	$10.98 F
379780	(8230) SPST, OFF-ON	$12.98 F
379467	(5021) 3AG Water Resistant Fuse Holder	$6.98 F

Boater Sports Quick Click Rocker Switches



- Quick click rocker switch.
- On/Off configuration.
- Contura style switches

Order No.	Mfg. No. / Description	Price
1-51352	(51352) On-Off	$8.45 H
1-51353	(51353) On-Off-On	$10.96 H
1-51354	(51354) Mom. On-Off-Mom. On	$10.75 H

- Quick click rocker switch with LED illumination.
- Contura style switches.

Order No.	Mfg. No. / Description	Price
1-51355	(51355) On-Off	$10.40 H
1-51356	(51356) On-Off-On	$14.15 H
1-51357	(51357) Mom. On-Off-Mom. On	$14.25 H

Rocker Switches



- Application: Jumpers for Navigation Lights.

Order No.	Mfg. No. / Description		Price
2000066	(31682-B) On-Off-On (DPDT)	Bulk	$11.98 H
2000074	(SM31682-B) On-Off-On (DPDT)	Package	$12.98 H

Marpac Illuminated Toggle Switches



- Translucent plastic paddle.
- Switch illuminates white when dash lights are turned "on".
- Changes to red light when switch is in "on" position.
- 1/4" spade terminals.
- For panels up to 3/8".
- Rated: 15 amps at 12V DC.

Order No.	Description	Price
7-0528	Off-On	$4.98 G
7-1290	On-Off-On	$8.98 G

Marpac Toggle Switches



- Black plastic paddle and locking ring with lever seal and knurled cap nut.
- Sealed to resist water penetration.
- 1/4" spade terminals.
- Mount in 15/32" diameter panel hole.
- Fits panels up to 1/4" thick.
- Rated: 20 amps at 12V DC.

Order No.	Description	Price
7-0462	Off-On, 2 Terminals	$4.04 G
7-0464	Off-Mom. On, 2 Terminals	$4.01 G
7-0463	On-Off-On, 6 Terminals	$6.98 G
7-0465	Mom. On-Off-Mom. On, 6 Terminals	$6.98 G

Marpac Toggle Switch



- All brass with nickel plated brass face nut and brass back up nut.
- Mounting stem: 7/16"-28 thread, 3/8" length and 7/16" diameter.
- Rated: 20 amps at 12V DC.

Order No.	Description	Price
7-1270	Off-On	$7.98 G

Boater Sports Brass Toggle Switches



- Chrome plated brass.
- Accommodates 10 Amp @ 250V AC, 15 Amp @ 120V AC and 15 Amp @ 12V DC.

Order No.	Mfg. No. / Description		Price
1-51330	(51330) On-Off	2 Terminals	$6.15 H
1-51331	(51307) Mom. On-Off	2 Terminals	$6.75 H

Perko Fig. 514 Toggle Switch



- Nickel plated brass toggle with chrome plated face nut.
- Single pole, single throw (Off-On).
- Rated for 6 amps at 12 volts.

Order No.	Mfg. No. / Description	Price
539683	(514 DP) Toggle Switch	$30.98 R

Boater Sports Toggle Switches



- Black plastic lever and locking ring with paddle seal and knurled cap nut.
- Great for lights, aerators and blowers.
- 15 Amp @ 12 volt.

Order No.	Mfg. No. / Description		Price
1-51306	(51306) On-Off	2 Terminals	$4.85 H
1-51307	(51307) On-Off-On	3 Terminals	$5.55 H
1-51308	(51308) Mom. On-Off	2 Terminals	$4.75 H
1-51309	(51309) Mom. On-Off-Mom. On	3 Terminals	$5.75 H
1-51310	(51310) On-Off-Mom. On	3 Terminals	$5.75 H

- Illuminated toggle switches.
- Black plastic lever and locking ring with paddle seal and knurled cap nut.
- Great for lights, aerators and blowers.
- 15 Amp @ 12 volt.

Order No.	Mfg. No. / Description		Price
1-51320	(51320) On-Off	4 Terminals	$4.75 H
1-51321	(51321) On-Off-On	5 Terminals	$6.45 H

Marpac Toggle Switches



- Nickel plated off-on indicator plate; assembled.
- Bat handle.
- Two 6" long wire leads.
- Mounting stem: 15/32" length.
- Rated: 6 amps at 125V AC.

Order No.	Description	Price
7-0529	Toggle Switch	$4.98 G

Marpac Heavy Duty Toggle Switches



- Plastic housing with plated steel cap.
- Universal applications.
- Nickel plated brass handle - 11/16" length.
- Nickel plated brass mounting stem - 15/32"- 32 thread and 15/32" length.
- Rated: 25 amps at 12V DC.

Order No.	Description	Price
7-0880	Off-On, 2 Terminals, SPST	$6.98 H
7-0881	On-Off-On, 3 Terminals, SPDT	$8.98 G
7-0883	Mom. On-Off-Mom. On, 3 Terminals, SPDT	$9.98 H
7-0884	Off-Mom. On, 2 Terminals, SPST	$7.98 H
7-0882	On-Off-On, 6 Terminals, DPDT	$11.98 G

Marpac Toggle Switch



- Replacement switch for Marpac Panels: 7-0516, 7-0517 and 7-0518.
- For use in panels with hole diameter 13/32" and a panel thickness up to 1/8".
- Rated 15 Amps at 12V DC.

Order No.	Description	Price
7-0534		$5.98 G
7-0519	Protective Boot	$2.38 G

©2014 Donovan Marine, Inc.

Cole Hersee Medium Duty SPST Toggle Switch



- Black bakelite with plated steel cap.
- Chrome plated brass handle.
- 2 positions: Off-on.
- Standard handle.
- Single pole.
- 2 screw terminals.
- Stem mounting: 15/32"-32 thread.
- Fits panels through 9/32" thick.
- Rated: 10 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
300690	(M-484-BP)	$10.98 F
300800	(81264-BP) Boot Seal	$8.98 F

Marpac Universal Toggle Boot Seals



- Protects against dirt and moisture.
- Use with: 7-0462, 7-0463, 7-0464, 7-0465, 7-0528, 7-0529, 7-1290, 7-0880, 7-0881, 7-0882, 7-0883 and 7-0884.

Order No.	Mfg. No. / Description	Price
7-0468	Black	$2.01 G
7-0887	Gray	$6.98 G

Cole Hersee Toggle Switch Seal



- Rubber boot bonded to brass nut with 15/32"-32 thread.
- Mounting surface of nut has O-ring seal for moisture and dirt protection.
- Fits standard handles up to 11/16".
- Covers entire toggle handle.
- For 539683 (514 DP) and 300690 toggle switches.

Order No.	Mfg. No. / Description	Price
300800	(81264-BP) Toggle Seal	$8.98 F

Boater Sports On/Off Switch Panel



- Corrosion resistant brass switch, accommodates up to 1" thick panel.
- 15 Amp @ 12 volt.

Order No.	Mfg. No. / Description	Price
1-51381	(51381)	$12.95 H

Blue Sea WeatherDeck™ Toggle Switches



- Single pole.
- Nickel-plated brass and phenolic non-corrosive construction.
- Terminal size: 1/4".
- Terminal type: Quick connect tab.
- Rated: 15 amps at 12V DC.

Order No.	Mfg. No. / Description	Price
379407	(4150) Single Throw, Off-On	$6.98 F
379408	(4151) Single Throw, Off-Mom. On	$6.98 F
379409	(4152) Double Throw, On-Off-On	$6.98 F
379410	(4153) Double Throw, Mom. On-Off-On	$6.98 F
379411	(4154) Double Throw, Mom. On-Off-Mom. On	$6.98 F

Blue Sea WeatherDeck™ Toggle Switch Boot



- Replaces dress nut for mounting on WeatherDeck Panel Switches.
- UV resistant material resists discoloration and cracking.
- Case material: UV resistant silicone rubber.
- Thread: 15/32".

Order No.	Mfg. No. / Description	Price
379406	(4138) Black	$4.48 F

Boater Sports Rubber Toggle Switch Boot



- Waterproof, black rubber boot fits most standard toggle switches.

Order No.	Mfg. No. / Description	Price
1-51300	(51300) Black	$1.85 H

Boater Sports Rubber Toggle Switch Boot



- Fits standard toggle switches.
- Protects against moisture and dirt.
- Brass threads.
- Corrosion resistant.

Order No.	Mfg. No. / Description		Price
2000068	(6840-B) 1/2 Boot	Bulk	$2.09 I

Blue Sea Toggle Guard



- Protects circuit breakers from being accidentally switched ON or OFF.
- Fits all A-Series single pole circuit breakers.
- Fits all panel switches.
- Can be used on any brand of circuit breaker panel using standard toggle type circuit breakers.
- Uses circuit breaker mounting screw hole.
- Includes 2 mounting screws.

Order No.	Mfg. No. / Description	Price
379950	(4100) Toggle Guard	$4.97 F

Sealed Glass - Mat PWC and ATV Batteries

- High performance.
- Sealed and maintenance free.
- Pre-charged at the factory.
- AGM Technology.
- Sealed batteries perform mounted in any position!

Order No.	Mfg. No. / Description		Price
2001030	(WP16CL-BS) 6-7/8" L x 4" W x 6-7/8" H	300 CCA's	$89.98 R
2001055	(WPX20L-BS) 6-7/8" L x 3-7/16" W x 6-1/8" H	375 CCA's	$99.98 I
2001060	(WPX30CL-BS) 6-9/16" L x 5" W x 7-9/16" H	400 CCA's	$129.98 R
2001015	(U1-35) 7-3/4" L x 5-1/8" W x 7" H	300 CCA's	$123.98 G
2001020	(WP12-BS) 6" L x 3-7/16" W x 5-1/8" H	220 CCA's	$54.98 H
2001025	(WP14-BS) 6" L x 3-7/16" W x 5-3/4" H	210 CCA's	$71.98 H
2001035	(WP5L-BS) 4-1/2" L x 2-13/16" W x 4-3/16" H	80 CCA's	$29.98 H
2001040	(WP7B-4) 6" L x 2-9/16" W x 3-11/16" H	125 CCA's	$47.98 H
2001045	(WP9-BS) 6" L x 3-7/16" W x 4-3/16" H	180 CCA's	$45.98 H
2001050	(WPX14AH-BS) 5-5/16" L x 3-1/2" W x 6-9/16" H	210 CCA's	$78.98 H
2001065	(WPX30L-BS) 6-9/16" L x 5" W x 6-7/8" H	400 CCA's	$133.98 Q

Moeller Heavy Duty Battery Boxes



- Non-corrosive hi-strength polyethylene construction resists chemicals and rust.
- Maintains tough properties with nominal 0.185" wall thickness.
- Complies to industry requirements and meets Coast Guard regulations (E10).
- Battery capacity: (2) Standard batteries.

Order No.	Mfg. No. / Description	Price
666810	(042212) 17.5" D x 13" W x 13" H	$95.98 F

- Battery capacity: (1) 4D battery.

Order No.	Mfg. No. / Description	Price
666822	(042204) 23.63" D x 12.5" W x 14.63" H	$102.98 F

- Battery capacity: (1) 8D battery.

Order No.	Mfg. No. / Description	Price
666846	(042208) 25" D x 15" W x 13.06" H	$102.98 F
666860	(042209) 24.56" D x 14.75" W x 15.44" H	$107.98 F

- Battery capacity: (2) 8D batteries.

Order No.	Mfg. No. / Description	Price
666884	(042210) 27.5" D x 24.5" W x 14" H	$146.98 F
666908	(042211) 27.5" D x 24.5" W x 16.25" H	$152.98 F

Marpac Economy Battery Trays



- Made from non-corrosive composites.
- Durable construction for long life.

Order No.	Description	Price
7-2197	For Series 24 and 24M Batteries	$6.98 I
7-2198	For Series 27, 30 and 31 Batteries	$7.98 I

Boater Sports Battery Trays



- Keep batteries secure to prevent damage to passengers, boat and equipment.
- Includes stainless hardware and adjustable buckle strap.
- Poly bag with header.

Order No.	Mfg. No. / Description	Price
2000300	(51014) For 24 Series Batteries	$5.98 H
2000301	(51016) For 27 Series Batteries	$6.98 H
2000302	(51017) For 31 Series Batteries	$6.98 H

Marine Batteries

Order No.	Mfg. No. / Description	Price
335314	(8D-1100) 8D, 1100CC	$261.98 F
335317	(8D-AGM) 8D-AGM	$873.98 F
335324	(NC27) 12 volt, Deep Cycle, 630CC	$163.98 F
335326	(NC24) Wet 12 volt, Deep Cycle	$149.98 F
335329	(GROUP24-AGM) Group 24, AGM	$317.98 F

Marpac Battery Boxes



- Non-corrosive marine grade material.
- Holds one battery.
- Fits new battery style size.
- Injection molded high strength composite construction.
- Easy Installation with included strap and mounting hardware.
- Meets industry requirements.

Order No.	Description	Price
7-0034	Fits 24 Series Batteries	$9.98 F
7-0036	Fits 27/31 Series Batteries	$10.98 F

Attwood Large Battery Box



- Polypropylene construction for total acid resistance.
- Vented.
- Complete with hold-down straps and mounting hardware.
- Meets ABYC Standard E-10 and USCG approved.
- Overall dimensions (including top): 18-3/4" L x 9-1/4" W x 10-1/4" H.
- For batteries up to 15-7/16" L x 7-1/8" W x 9-3/4" H, including 27F series batteries.

Order No.	Mfg. No. / Description	Price
237354	(9084-1) Battery Box	$22.98 H

Marpac Deluxe Battery Trays



- Made from non-corrosive composites.
- Durable construction for long life.
- Includes: Stainless steel installation screws.

Order No.	Description	Price
7-2195	For Series 24 and 24M Batteries	$12.98 G
7-2196	For Series 27, 30 and 31 Batteries	$13.98 G

Boater Sports Screw Down Battery Trays



- Keep batteries secure to prevent damage to passengers, boat and equipment.
- Stainless steel screw tie downs keep batteries securely in place preventing damage and are corrosion resistant.
- Includes: Stainless hardware.
- Poly bag with header.

Order No.	Mfg. No. / Description	Price
1-51022	(51022) For 24M Series Batteries	$19.95 H
1-51023	(51023) For 27M Series Batteries	$22.95 H

©2014 Donovan Marine, Inc.

Marpac Battery Tray



- Sold (25 of each) Series 24 and 27 batteries.

Order No.	Description	Price
7-2199S	Battery Trays (25 each)	$313.98 I

T-H Marine Dual Battery Holder Tray



- Holds two Series 27 Deep Cycle Batteries.
- No wasted space - two batteries side by side.
- Patented poly strap with quick release buckle.
- Meets all NMMA specs for battery retention.

Order No.	Mfg. No. / Description	Price
640062	(DBH-27P) Dual Battery Holder Tray	$20.98 H

Marpac Battery Hold Down Strap



- Made from acid and gas resistant materials.
- Includes corrosion resistant hold down clamp with stainless steel screws.

Order No.	Description	Price
7-0032	Length 39"	$3.95 G

Tough Guy Gas Tank Tie Down Kit



- Durable polypropylene webbing.
- Corrosion-proof hardware.
- Easy to install and adjust.
- Made in the USA.

Order No.	Description	Price
7-2150	1.5" x 6'	$5.98 G

T-H Marine Battery Holder Replacement Strap



- Fits all T-H Marine poly strap hold-downs.

Order No.	Mfg. No. / Description	Price
639990	(BS-1) Length 38"	$5.98 H

Pro Charging Systems Professional Series Battery Chargers



- The "Green" Charger: Totally "Repairable" Not a Throw-Away.
- Approved for Wet Cell and AGM batteries.
- LED lights indicate the state of charge.
- Dependable, rugged, waterproof construction.
- Reverse polarity protected.
- Ignition protected.
- Independent outputs.
- Fully automatic/multi stage charging.

Order No.	Mfg. No. / Description	Price
284590	(PS2) Two 15 Amp Banks, 30 Amps, 12V, 24V	$346.98 E
284592	(PS3) Three 15 Amp Banks, 45 Amps, 12V-36V	$464.98 E
284594	(PS4) Four 15 Amp Banks, 60 Amps, 12V-48V	$580.98 E

T-H Marine Narrow Battery Holder Trays



- Molded of acid proof polypropylene.
- With poly strap hold down.
- These trays eliminate 1-1/2" - 2" of space when mounting trays side-by-side.
- Meets NMMA specs for battery retention.

Order No.	Mfg. No. / Description	Price
640018	(NBH-24P) For 24 Series Batteries	$7.98 H
640020	(NBH-27P) For 27 Series Batteries	$5.98 H
640036	(NBH-31P) For 29/31 Series Batteries	$5.98 H
640044	(NBH-27P-B) For 27 Series Batteries, 20 Per Box	$109.98 H
640056	(NBH-24P-B) For 24 Series Batteries, 20 Per Box	$109.98 H

Boater Sports Battery Meter/Alternator Checker



- Always know your battery condition!
- Now with built-in Alternator Checker.
- LED's light up to easily read your Alternator or Battery condition.
- Magnetic back for securing unit during battery testing.
- Color-coded black gator clip ground wire with red test probe.
- 12 volt.

Order No.	Mfg. No. / Description	Price
1-51004	(51004)	$12.35 H

Minn Kota Portable Battery Chargers



- Fully automatic 3-stage charging (Bulk, absorption and maintenance).
- LED display indicates power ON, charging, full charge and check connection.
- Short circuit and reverse polarity protection prevents the charger from operating if improperly connected to the battery.
- For use with 12V/6-Cell batteries that are flooded/wet cell, maintenance free or starved electrolyte only.
- Dimensions: 7" L x 9" W x 7-3/4" H.
- FCC Compliant and UL listed to Marine Standard 1236.

Order No.	Mfg. No. / Description	Price
476790	(1820110) MK 100P, 1 bank, 10 amps total output	$84.98 E
476794	(1822110) MK 215P, 2 banks, 10 amps total output	$109.98 E

Pro Charging Systems Recreational Series Go Chargers Battery Chargers



- The system is engineered for users who need a charging system on an occasional basis and may not want or need the capabilities of a heavier duty and higher amperage product.
- Dependable, rugged, waterproof construction.
- Ignition protected.
- Independent outputs and fully automatic.
- LED lights indicate "Each Battery's" state of charge.
- Approved for Wet Cell and Absorbed Glass Mat (AGM) batteries.
- Reverse polarity protected and no installation restrictions.

Order No.	Mfg. No. / Description	Price
284596	(RS2) Two 6 Amp Banks, 12 Amps, 12V, 24V	$147.98 E
284598	(RS3) Three 6 Amp Banks, 18 Amps, 12V-36V	$196.98 E

Pro Charging Systems Sportsman Series Battery Chargers



- The "Green" Charger: Totally "Repairable" Not a Throw-Away.
- Approved for Wet Cell and AGM batteries.
- LED lights indicate the state of charge.
- Dependable, rugged, waterproof construction.
- Reverse polarity protected.
- Ignition protected.
- Independent outputs.
- Fully automatic/multi stage charging.

Order No.	Mfg. No. / Description	Price
284600	(SS2) Two 10 Amp Banks, 20 Amps, 12V, 24V	$269.98 E
284601	(SS3) Three 10 Amp Banks, 30 Amps, 12V-36V	$370.98 E
284602	(SS4) Four 10 Amp Banks, 40 Amps, 12V-48V	$495.98 E

Pro Charging Systems Go Charge Maintainer/Battery Charger



- The system is engineered for users who need a charging system on an occasional basis and may not want or need the capabilities of a heavier duty and higher amperage product.
- State of charge LED indicator.
- Reverse polarity protected.
- Four (4) stage charge profile.
- Includes: Power cord, fused harness, alligator clips and ring terminals.
- Measures: 1-5/8" H x 1-3/4" W x 3-7/8" L.

Order No.	Mfg. No. / Description	Price
284589	(GC122) 2 amp	$72.98 Q

Schumacher Automatic SpeedCharge Ship N Shore Charger



- 15/10/2 Amp Battery Charger/ Maintainer/Tester for 12 volt batteries.
- 15 Amp Fast Charge - charger monitors battery condition and adjusts charge rate to prevent battery damage.
- 10 Amp Fast Charge - self-adjusting charge rate for everyday charging needs and keeping your battery in peak condition.
- 2 Amp Slow Charge - for charging small batteries and maintaining large ones.
- Fully automatic microprocessor controlled.
- Electronic push button controls.
- Retractable handle.

Order No.	Mfg. No. / Description	Price
603815	(SSC-1500A) SpeedCharge	$133.98 F

Guest ChargePro™ Plus Battery Chargers



- Combines a Guest charger with an alternator power module (VSR) to continuously charge the trolling motor while the engine is running.
- Input voltage range: 100-130V AC.
- Total output: 8 amps.
- Harness previously unused or waisted alternator power for trolling use.
- Rated for alternator charging systems up to 70 amps.

Order No.	Mfg. No. / Description	Price
379203	(36082-12) 12 volt	$313.98 I
379215	(36082-24) 24 volt	$438.98 I

Pro Charging Systems Charger On The Run Battery Chargers



- This unit utilizes boat engine charging current to charge auxiliary batteries while the engine is running.
- There are no connections to the ignition system or engine.
- Just connect to the starting and auxiliary batteries.
- Fully waterproof with reverse polarity and short circuit protection.
- Fully automatic shut off.
- Ignition protected.

Order No.	Mfg. No. / Description	Price
284587	(CRS1) 1 Bank, 12 volt	$238.98 E
284588	(CRS2) 2 Banks, 12 volt, 24 volt	$320.98 E

Schumacher Ship 'N Shore Auto Charger - 10 Amp



- Fully automatic - will not overcharge batteries.
- LED - full charge indicator.
- 10 amp fast charge.
- Manual operation
- For conventional 12 volt batteries.
- Reverse hookup safeguard.
- Convenient carrying handle.

Order No.	Mfg. No. / Description	Price
603832	(SS-51A-PE) 10 amp	$114.98 F

Motorguide Battery Chargers



- Automatic charging for Lead Acid or GEL Batteries.
- Charges and conditions batteries with a built-in safe maintenance mode for long and short term storage.
- Auto Transfer Technology will maintain the engine crank battery while transferring 100% of the available charging amps to your trolling batteries.
- Waterproof, shock restant and saltwater tested.
- Reverse polarity, ignition and temperature protection.
- Power, charging and maintaining LED indicators.
- Pre-wired for easy installation.

Order No.	Mfg. No. / Description	Price
512021	(31705) 1 Bank, 5 Amps, System Voltage 12, Size 5.75" x 3.5" x 2"	$89.98 D
512022	(31710) 2 Banks, 10 Amps, System Voltage 12/24, Size 9" x 5.25" x 2"	$139.98 D
512023	(31713) 3 Banks, 13 Amps, System Voltage 12/24 + Eng, Size 9" x 5.25" x 2"	$179.98 D

Guest ChargePro™ Battery Charger



- For Flooded, Gel and AGM Batteries.
- Fully potted to waterproof electronics.
- Vibration and shock protected.
- Battery system: 1-12V.
- Output: 1-4' DC cables with terminal rings.
- Output voltage: 12VDC.
- Input voltage: 100 130VDC/60Hz.
- Input connection: 6' AC cord with Connect Charge plug.
- Maintenance mode protects batteries during storage.
- Dimensions: 6.40" x 3.50" x 2.25".

Order No.	Mfg. No. / Description	Price
379185	(2608A) 6 amp, Single Output	$144.98 Q

©2014 Donovan Marine, Inc.

Guest ChargePro™ Battery Charger - 10 Amps, 2 Banks

GUEST



- Full featured on-board charger for 12 or 24 volt systems.
- For Flooded, Gel and AGM Batteries.
- 3-Stage switching electronic circuit.
- Fully potted waterproof electronics.
- Short circuit, ignition and reverse polarity protected.
- Input voltage range: 100-130V AC.
- Total output: 10 amps.
- Comes prewired with a 6' AC cord and two 4' DC outputs.

Order No.	Mfg. No. / Description	Price
379188	(2611A) 7-3/4" W x 5-1/2" H x 2-5/16" D	$139.98 Q

Guest ChargePro™ Triple Battery Charger - 15 Amps, 3 Banks

GUEST



- Full featured on-board charger for 12 or 24 volt systems.
- For Flooded, Gel and AGM Batteries.
- 3-Stage switching electronic circuit.
- Fully potted waterproof electronics.
- Short circuit, ignition and reverse polarity protected.
- Input voltage range: 100-130V AC.
- Total output: 15 amps.
- Comes prewired with a 6' AC cord and two 4' DC outputs.

Order No.	Mfg. No. / Description	Price
379191	(2613A) 9-7/16" W x 7" H x 2-7/16" D	$297.98 Q

Guest ChargePro™ Dual Battery Charger - 20 Amps, 2 Banks

GUEST



- Full featured on-board charger for 12 or 24 volt systems.
- For Flooded, Gel and AGM Batteries.
- 3-Stage switching electronic circuit.
- Fully potted waterproof electronics.
- Short circuit, ignition and reverse polarity protected.
- Input voltage range: 100-130V AC.
- Total output: 20 amps.
- Comes prewired with a 6' AC cord and two 6' DC outputs.

Order No.	Mfg. No. / Description	Price
379194	(2620A) 9-7/16" W x 7" H x 2-5/8" D	$278.98 F

Guest ChargePro™ Triple Battery Charger - 30 Amps, 3 Banks

GUEST



- Full featured on-board charger for 12, 24 or 36 volt systems.
- For Flooded, Gel and AGM Batteries.
- 3-Stage switching electronic circuit.
- Fully potted waterproof electronics.
- Short circuit, ignition and reverse polarity protected.
- Input voltage range: 100-130V AC.
- Total output: 30 amps.
- Comes prewired with a 6' AC cord and three 6' DC outputs.

Order No.	Mfg. No. / Description	Price
379197	(2631A) 13" W x 7" H x 2-5/8" D	$484.98 E

Minn Kota Digital On-Board Battery Chargers


476829


476869

- Digitally-controlled microprocessor design protects your batteries so you can stay on the water longer.
- Up to 2X faster charging in high temperatures.
- Enhanced status codes provide comprehensive feedback on charge stage, maintenance mode status, error notification and full charge.
- Convenient on-board mounting eliminates the hassle of traditional portable charges.
- Fully automatic multi-stage charging so you can get a full charge every time.
- Automatic temperature compensation.
- Waterproof, shock- and vibration-resistant aluminum construction.
- Short circuit, reverse polarity and ignition protected.
- Saltwater tested and fully resistant to corrosion.
- For use with 12 volt system with 12V/6-cell batteries that are flooded/wet cell, maintenance free or starved electrolyte (AGM) only.
- Includes: One pre-wired on-board marine battery charger with one 6' fused output cable and one 6' AC power cord.
- FCC Compliant and UL listed to Marine Standard 1236.

- 1 bank, 6 amps per bank, 6 amps total output.
- Dimensions: 8-3/4" L x 4-3/4" W x 3" H.

Order No.	Mfg. No. / Description	Price
476778	(1821065) MK 106D	$99.98 E

- 2 banks, 5 amps per bank, 10 amps total output.
- Dimensions: 11-1/2" L x 7-1/2" W x 4" H.

Order No.	Mfg. No. / Description	Price
476792	(1822105) MK 210D	$149.98 E

- 2 banks, 10 amps per bank, 20 amps total output.
- Dimensions: 13-1/2" L x 7-1/2" W x 4" H.

Order No.	Mfg. No. / Description	Price
476829	(1822205) MK 220D	$299.98 E

- 2 banks, 15 amps per bank, 30 amps total output.
- Dimensions: 11-3/4" L x 6-3/4" W x 7" H.

Order No.	Mfg. No. / Description	Price
476870	(1822305) MK 230D	$299.98 E

- 3 banks, 5 amps per bank, 15 amps total output.
- Dimensions: 12-1/2" L x 7-1/2" W x 4" H.

Order No.	Mfg. No. / Description	Price
476843	(1823155) MK 315D	$199.98 E

- 3 banks, 10 amps per bank, 30 amps total output.
- Dimensions: 16-1/4" L x 7-1/2" W x 4" H.

Order No.	Mfg. No. / Description	Price
476867	(1823305) MK 330D	$329.98 E

- 3 banks, 15 amps per bank, 45 amps total output.
- Dimensions: 11-3/4" L x 6-3/4" W x 8" H.

Order No.	Mfg. No. / Description	Price
476871	(1823455) MK 345	$389.98 E

- 4 banks, 10 amps per bank, 40 amps total output.
- Dimensions: 11-3/4" L x 6-3/4" W x 8" H.

Order No.	Mfg. No. / Description	Price
476869	(1824405) MK 440D	$429.98 E

- 4 banks, 15 amps per bank, 60 amps total output.
- Dimensions: 14-1/2" L x 6-3/4" W x 8" H.

Order No.	Mfg. No. / Description	Price
476872	(1824605) MK 460D	$489.98 D

Minn Kota Precision On-Board Chargers



- A comprehensive LED display to select the battery type by bank, and monitor each bank's connection status, power status, state of charge and selected battery type.
- Half the weight and more compact than traditional chargers.
- A rugged, marine-grade aluminum housing and fully corrosion-resistant design.
- A full, precise charge creates longer run times and longer battery life.
- Designed to sense outside temperature fluctuations and adjust charging accordingly, providing a fast, accurate charge.
- Automatically cleans and conditions your battery to extend run time and battery life.
- Multi-Stage Charging controls the voltage and current the battery gets throughout the charging cycle, ensuring a fast, safe and precise charge.
- AC Plug Holder keeps plugs dry, safe and easily accessible.
- Three year warranty.

- 1 bank, 15 amps per bank, 15 amps total output.
- Dimensions: 6-3/4" L x 10" W x 3-3/4" H.

Order No.	Mfg. No. / Description	Price
476873	(1821151) MK 115PC	$249.98 E

- 2 banks, 15 amps per bank, 30 amps total output.
- Dimensions: 9-1/2" L x 10" W x 3-3/4" H.

Order No.	Mfg. No. / Description	Price
476875	(1822301) MK 230PC	$349.98 E

- 3 banks, 15 amps per bank, 45 amps total output.
- Dimensions: 13" L x 10" W x 3-3/4" H.

Order No.	Mfg. No. / Description	Price
476876	(1823451) MK 345PC	$449.98 E

- 4 banks, 15 amps per bank, 60 amps total output.
- Dimensions: 16" L x 10" W x 3-3/4" H.

Order No.	Mfg. No. / Description	Price
476877	(1824601) MK 460PC	$549.98 E

Newmar Battery Charger - Phase Three Modular



- ABS Type Approved both as a battery charger and a redundant power supply for essential services.
- Case accommodates three 550 watt charger modules.
- Increase output power by adding modules.
- Redundant, independent, charger modules increase reliability a malfunction of one does not disable the charging system; remaining modules continue to operate.
- Three stage smart charging; bulk, absorption, float.
- Battery type selector switch; gel-cell, lead-acid, AGM.
- Temperature compensated output option.
- Numerous diagnostic and system status indicators.
- 12 Volt; 33-100 amps or 24 Volt; 22-67 amps.
- Universal input of 90-264 VAC, 50-60 Hz. can be used anywhere in the world.
- Powder coated stainless steel case.

Order No.	Mfg. No. / Description	Price
700396	(PTMS-24-67) 24 volt DC, 67 amp Output	$4,551.98 F

Newmar Battery Chargers - ABC Series



- Utilizes time tested SCR charging circuitry, individually sensing and regulating each of 2 isolated battery banks, allowing the user to leave the charger operating indefinitely, even under no-load conditions without fear of overcharging.
- Housed in a rugged, black anodized aluminum, heat-sink case.
- Features: A total output ammeter, on-off power switch, power on indicator light, 115/230 VAC input voltage selector switch, factory installed AC power cord with molded plug and shock-resistant rubber mounting grommets.
- 2 banks, 12 volt.

Order No.	Mfg. No. / Description		Price
700307	(ABC12-8) 8 amp	8" H x 6" W x 4.2" D	$435.98 E
700323	(ABC12-25) 25 amp	11.9" H x 4.7" W x 6.2" D	$673.98 E

Newmar Solar Charging Systems



- Industrial grade panel, components and heavy duty vibration mounts designed for emergency vehicle use.
- Numerous size panels match available roof space (1.2 to 7+A); panels can be wired for higher output.
- Voltage controller adapts to properly charging different battery types.
- Kits contain all parts needed for various types of vehicle installations.
- 12 volt.

Order No.	Mfg. No. / Description		Price
700185	(SOL-20) 1.2 amp	Panel: 1" H x 13.8" W x 21.7" D	$694.98 E
700188	(SOL-45) 2.5 amp	Panel: 1.38" H x 21" W x 26.2" D	$893.98 E
700191	(SOL-65) 3.7 amp	Panel: 1.38" H x 21.3" W x 38.9" D	$1,075.98 E
700194	(SOL-80) 4.9 amp	Panel: 1.38" H x 26.3" W x 39.9" D	$1,280.98 E
700200	(SOL-120) 7.0 amp	Panel: 1.97" H x 26" W x 48.5" D	$1,473.98 E

Newmar Phase Three Monitor/Control Unit



- ABS Approved.
- Digital DC voltmeter; reads DC system status to nearest 1/10th volt on up to three separate battery banks; provides local/remote high/low voltage alarm capability.
- Output voltage adjustment potentiometer (-4% to +5%).
- Double pole circuit breaker for local on-off control and AC over-current protection.
- AC "ON" indicator light.

Order No.	Mfg. No. / Description	Price
700384	(PT-MCU) Phase Three Monitor	$606.98 E

©2014 Donovan Marine, Inc.

Newmar Battery Chargers - Phase Three Series



700345



700372

- ABS Type Approved
- Smart circuitry provides three stage chargingbulk, absorption, float.
- Gel-Cell/Flooded Lead-acid/AGM battery type switch selects optimum charge/float voltages.
- Multiple isolated output banks; ammeter indicates total output current.
- Current limiting-prevents damage from overloading.
- Charger status clearly displayed with L.E.D. and/or audible indicators.
- Use as a power supply; can power loads without a battery in line.
- Built to last rugged stainless steel case with a durable white powder coat finish with an optional drip shield and marinized internal circuitry.
- Numerous Safety and EMC Compliances.
- Two year parts and labor warranty.

- 12 volt models.

Order No.	Mfg. No. / Description		Price
700370	(PT-14) 14 amp	85/264V Input	$534.98 F
700373	(PT-25) 25 amp	90/132V or 180/264V Input	$683.98 F
700345	(PT-40) 40 amp	85/135V or 170/270V Input	$1,074.98 F
700387	(PT-80) 80 amp	90-654V Input	$1,849.98 F

- 24 volt models.

Order No.	Mfg. No. / Description		Price
700372	(PT-24-8) 8 amp	85/264V Input	$574.98 F
700374	(PT-24-13) 13 amp	90/132V or 180/264V Input	$707.98 E
700371	(PT-24-20) 20 amp	85/135V or 170/270V Input	$1,131.98 F
700376	(PT-24-45) 45 amp	90/264V Input	$1,840.98 F
700379	(PT-24-60) 60 amp	207/253V Input	$2,485.98 F
700381	(PT-24-95) 95 amp	90/264V Input	$2,825.98 F

Newmar Temperature Compensation Sensors



- An optional remote sensor for optimizing the voltage output of your Phase Three charger based on ambient or battery temperature.
- It is designed for use only with the following models: PT-14, PT-20, PT-25, PT-40, PT-70, PT-24-8, PT-24-13, PT-24-20, PT-24-35, PT-24-40, as well as all PTM Series Models.

Order No.	Mfg. No. / Description	Price
699974	(TCS-12/24-25) 25' Cable	$85.98 E
699977	(TCS-12/24-40) 40' Cable	$119.98 E

Newmar Temperature Compensation Probe

- For use with the following Newmar Phase Three Charger Models: PT-32-30, PT-24-45F, PT-24-95F.
- Provided with 25' of cable, with a sensor at one end and a keyed five-pin plug at the other.

Order No.	Mfg. No. / Description	Price
700209	(TP)	$125.98 E

Newmar Remote Monitor Panel



- Remote Indicator Panel, LED's indicate charger output stage.
- Button allows manual reinitialization of three stage charge cycle.
- Supplied with 25' cable and plug-in connector.
- Panel dimensions: 3" H x 4.75" W (Not available for all models - refer to Specification Matrix above)
- The Phase Three series represents a new dimension in charger design and performance, employing smart switching circuitry which puts batteries through the optimum three-step charge process, adapts for gel-cell or lead-acid batteries, features precise voltage compensation for varying battery temperature, is rated for continuous duty and is housed in a rugged stainless steel case.
- Phase Three Chargers interact with batteries by regulating both voltage and amperage through each phase of the charging process, depending on battery state of charge, temperature, impedance, duration at high rate, system demand and battery type.
- Multi-battery output, charges 3 banks on demand.

Order No.	Mfg. No. / Description	Price
698146	(RP) Remote Monitor Panel	$142.98 D

Newmar Waterproof Battery Charger



- Water resistant battery charger for rugged marine installations.
- Designed for installation in exposed locations aboard marine vessels.
- Its 100% sealed case offers installation locations not available to traditional on-board chargers, thus freeing compartment space where non-weatherproof chargers must be mounted.
- A remote battery meter displays the charge level via color coded bar graph, allowing quick check of battery bank condition from a distance.
- Input: 115 VAC, 60 Hz, 5 amps.
- Output: 12 VDC nominal, two stage, float voltage 13.4.
- 35 amps for one hour from cold start, 17 amps continuous duty.
- Dimensions: 14" H x 5-3/4" D x 6-7/8" W.

Order No.	Mfg. No. / Description	Price
700383	(WP-35)	$1,132.98 E

Fast RSQ Charger 5A/42VAC



Order No.	Mfg. No. / Description	Price
514213	(20204) 5A/42VAC	$638.98 E

Charles Marine IMC Series Battery Chargers



- The new IMC (Intelligent Marine Charger) Charger is the first available four bank programmable chargers with selectable 12 or 24 VDC output and battery type selection per bank.
- It is all you need to keep your AGM, Gel, Lead Acid and NiCad batteries ready when you are.
- A Programmable Smart Memory Button stores your charging parameters for customized operation of your electrical system.
- Ultimate Charging Flexibility: 6 Models (20-120 Amps) available; Universal AC Input: 120/208/240 volts; Four Bank Charging Capability; Selectable DC Output per bank (12/24 volts); Selectable Battery Type per bank.
- Quality Made in the U.S.A.

Order No.	Mfg. No. / Description	Price
397200	(93-IMC20-A) 20 amp	$1,506.98 F
397205	(93-IMC40-A) 40 amp	$1,665.98 F
397210	(93-IMC60-A) 60 amp	$2,278.98 F
397215	(93-IMC80-A) 80 amp	$2,785.98 F
397220	(93-IMC100-A) 100 amp	$3,706.98 F
397227	(93-IMC120-A) 120 amp	$5,059.98 F

Charles Marine C-Charger 5000 SP Series Battery Chargers



- Available with a battery type selector switch, allowing you to charge Lead Acid, Gel or AGM batteries.
- Tested by Marine UL for safety and durability against impact, vibration, temperature and shock.
- 3-stage charging, with temperature compensation.
- Up to 3 battery banks can be simultaneously restored.
- Features an easy-to-read DC ammeter, access to terminal connections and fuses and exterior slots for easy mounting.
- Safety features include ignition and reverse-polarity protection.
- 5-year limited manufacturer's warranty.
- Made in the USA.
- 5 Year Warranty on 5000 SP Series Battery Chargers

Order No.	Mfg. No. / Description	Price
S/O	(93-12105SP-A) 10 amp, 2 Bank, 13.5V Output	Price On Request
284606	(93-12155SP-A) 15 amp, 3 Bank, 13.5V Output	$399.98 D
284618	(93-12205SP-A) 20 amp, 3 Bank, 13.5V Output	$489.98 D
284620	(93-12305SP-A) 30 amp, 3 Bank, 13.5V Output	$598.98 D
S/O	(93-12505SP-A) 50 amp, 3 Bank, 13.5V Output	Price On Request
284632	(93-12605SP-B) 60 amp, 3 Bank, 13.5V Output	$999.98 D
S/O	(93-12805SP-A) 80 amp, 3 Bank, 13.5V Output	Price On Request
S/O	(93-121005SP-A) 100 amp, 3 Bank, 13.5V Output	Price On Request
S/O	(93-24105SP-A) 10 amp, 3 Bank, 27.3V Output	Price On Request
284644	(93-24205SP-A) 20 amp, 3 Bank, 27.3V Output	$799.98 D
S/O	(93-24305SP-A) 30 amp, 3 Bank, 27.3V Output	Price On Request
284656	(93-24405SP-A) 40 amp, 3 Bank, 27.3V Output	$1,480.98 D
S/O	(93-24505SP-A) 50 amp, 3 Bank, 27.3V Output	Price On Request
284658	(93-24605SP-A) 60 amp, 3 Bank, 27.3V Output	$3,012.98 F

Charles Marine HQ Battery Chargers



- LED indicator pilot lamp.
- Quick disconnect on/off switch on front cover.
- Separate voltmeter and ammeter.
- Ability to work as power supply.
- Drip shield (necessary) included.
- Thermal, overcurrent, ignition and reverse polarity protected.
- Multi-bank (3), multi-stage (bulk, absorption and float) battery charger.
- ABS listed and certified.
- 5-year manufacturers limited warranty.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
284580	(9Q-12255HQ-A) 25 amp, 12 volt	$837.98 F
284582	(9Q-12455HQ-A) 45 amp, 12 volt	$928.98 F
284584	(9Q-24255HQ-A) 25 amp, 24 volt	$1,057.98 F
284586	(9Q-24455HQ-A) 45 amp, 24 volt	$1,718.98 F

Charles Marine C-Charger 9000 Series Battery Charger



- This is a paragon of simplicity, using a self-regulating ferroresonant transformer devoid of any complicated switching circuits.
- Marine UL listing ensures durability and safety.
- Ignition protected.
- Easy-to-read DC ammeter indicates the charge rate.
- Built of rugged, stainless steel and high quality components.
- Restores up to 3 individual battery banks simultaneously.
- Prevents overcharging and damage, extending the life of the battery.
- Height 13", width 11-1/2", depth 10-1/4".

Order No.	Mfg. No. / Description	Price
284666	(C13230A) 30 amp, 3 Bank, 32V Output	$1,634.98 F

Charles Marine Continuous Duty Power Supply



- Constructed of tough, anodized aluminum housing that stands up to the elements - including extreme heat, humidity and salt air.
- Circuit boards with UL - recommended coatings provide the ultimate in environmental protection and hydrolyte stability - meets requirements of MIL-I46058C.
- Continuous output at 13.6V DC.
- 120 volt/60 Hz input.

Order No.	Mfg. No. / Description	Price
284670	(93-PS2430-A) 30 amp, 24 volt	$1,358.98 F

©2014 Donovan Marine, Inc.

Newmar DC-DC Converter



- Standard Series.
- For powering communication/navigation equipment, on negative ground systems.
- Excellent regulation.
- Heat generated by semi-conductors is extracted and dissipated by large heat sink fins that maximize air contact for coolest operation and long life of components.
- Polyurethane conformal coating on PC boards and corrosion resistant anodized aluminum case with heavy duty shock mounts assures survival in hostile environments.
- Numerous converter and load protection circuits: Current limiting, automatic thermal shutdown, short circuit proof, reverse polarity and overvoltage protection.
- Input: 20-50 VDC.
- Output: 13.6 VDC.
- Intermittent 35 amps, continuous 30 amps, peak 40 amps.

Order No.	Mfg. No. / Description	Price
700662	(32-12-35) 6" H x 4.7" W x 16" D	$900.98 E

Marpac Power Inverter



- Converts 12 volt DC to 110 volt AC for power when needed.
- Charge most USB compatible devises.
- Plugs into cigarette lighter.
- Fits in most cup holders.
- Automatic shut off if voltage drops below 10V or exceeds 15V DC.
- Great for charging mobile phones, laptops, MP3 players.
- CE and E-Certified.

Order No.	Description	Price
7-1279	Power Inverter	$29.98 H

Audiopipe 24 volt to 12 volt Inverter



- 24V DC to 12V DC Voltage converter.
- Output power: 40 amp (Continuous) 60 amp max.
- Standby current: 0.08A.
- Input voltage: DC 20V~30V.
- Output voltage: DC 12V~13.8V.
- Efficiency: 85~90%.
- Over load: Circuit protection.
- Input fuse: 40A.
- Dimensions: 222mm L x 115mm W x 62mm H.

Order No.	Mfg. No. / Description	Price
559745	(PIDCDC241210) 10 amp	$76.98 F
559750	(PIDCDC241220) 20 amp	$119.98 F
559755	(PIDCDC241230) 30 amp	$155.98 F
559760	(PIDCDC241240) 40 amp	$189.98 F

Newmar Automatic Power Selector



- A solid state device which enables installation of a seamless, redundant power system for critical electronic loads.
- It selects the higher voltage of two isolated power sources and routes power to the load.
- Should one source falter or fail, the other will automatically supply the load with no transfer delay, operation continues uninterrupted.
- Voltage rating: 6 - 50 VDC.
- Maximum load current: 70 amps.

Order No.	Mfg. No. / Description	Price
700434	(APS-70) Automatic Power Selector	$134.98 E

Newmar Power Supplies - Heavy Duty Series



MFG #	Height	Width	Depth	Weight
115-12-8	6.0"	4.6"	8.5"	10 lbs.
115-12-20A	5.7"	4.8"	16.3"	20 lbs.
115-12-35CD	6.5"	9.5"	14.0"	32 lbs.
115-24-18CD	6.5"	9.5"	14.0"	32 lbs.
115-24-35CD	6.5"	13.0"	18.75"	60 lbs.

- Designed for powering 12 and 24 volt communication/navigation equipment aboard commercial vessels where reliability is the primary consideration.
- Excellent regulation and ripple spec.
- Polyurethane conformal coated PC board and corrosion resistant heavy duty aluminum case with integral shock mounts assures survival in hostile environments.
- Heat generated by semi-conductors is extracted and dissipated by large heat sink fins that maximize air contact for cool operation and long life of components.
- Input range: 105 - 125/210 - 250 VAC.

- 12 volt models.
- Output voltage: 13.6 VDC.

Order No.	Mfg. No. / Description	Price
700561	(115-12-8) Intermittent 8 Amps, Continuous 5 Amps	$418.98 E
700585	(115-12-20A) Intermittent 20 Amps, Continuous 8 Amps	$894.98 E
700600	(115-12-35CD) Intermittent 35 Amps, Continuous 35 Amps	$1,313.98 E

- 24 volt models.
- Output voltage: 24.5 VDC.

Order No.	Mfg. No. / Description	Price
700054	(115-24-18CD) Intermittent 18 Amps, Continuous 18 Amps	$1,409.98 E
700066	(115-24-35CD) Intermittent 35 Amps, Continuous 35 Amps	$2,095.98 E

Newmar Inverter/Charger Remote



- Remote panel of all Newmar IC series inverter chargers with 25 ft cable.

Order No.	Mfg. No. / Description	Price
700413	(ICR-2-25) Inverter/Charger Remote	$228.98 D
700416	(ICR-2-50) For Chargers with 50' Cable	$339.98 D

Newmar Inverter



- The PS Series inverters produce high efficient, pure sine wave output from 12 volt battery input with high surge power for motor start making it ideal for marine applications.
- A power saving mode, with user friendly adjustable set points, conserves batteries when not in use.
- A remote control/display panel and front panel indicator lights allows for easy analysis and control.
- Features 1,000, 1,500, 2,000W Models.
- Pure sine wave 115V output 12V input.
- High efficency ~ 90%.
- Power saving mode conserves battery when not in use, adjustable set points.
- AC duplex outlet on front panel.
- Status indicators lights on front panel: Input voltage.
- Output power level.
- Power Mode Fault Status.
- Remote control/display included.
- Protection: Low input voltage overload short circuit overtemp.
- Meets UL458.
- Rugged compact case, ideal for marine applications.

Order No.	Mfg. No. / Description	Price
700397	(12-1000 PS) 12 VDC, 1,000 Watt	$1,158.98 H

Newmar Stabilizing Converters



- Feed sensitive electronics with proper voltage regardless of battery condition.
- These stabilizing converters provide continuous, precisely regulated output over the entire range of a battery's usable voltage.
- This prevents subjecting loads to fluctuating input voltage which can cause shutdown, diminish performance and possibly damage sensitive circuitry.
- Application Benefits Include:
- Operate electronics at optimal input voltage, even from nearly drained batteries
- Boost voltage to compensate for voltage drops in long wire runs from batteries
- Eliminate voltage drops during momentary high current drain from batteries, as during engine start
- Eliminate voltage fluctuation from charge sources
- Eliminate voltage overshoot due to sudden removal of high current load

- 12 Volt, Input Voltage: 10-16 Output Voltage: 13.6

Order No.	Mfg. No. / Description	Price
699962	(12-12-31) Output Amps Intermittent: 3	$187.98 E
699965	(12-12-6I) Output Amps Intermittent: 6	$317.98 E

- 24 Volt, Input Voltage: 20-32 Output Voltage: 27.2

Order No.	Mfg. No. / Description	Price
699968	(24-24-3I Output Amps Intermittent: 3	$221.98 E
699971	(24-24-7I) Output Amps Intermittent: 7	$522.98 E

Newmar High Power DC-AC Inverters with Built-in Battery Charger



- High Power DC-AC Inverters with Built-in Battery Chargers.
- Called the Perfect Wave Series, these inverter-chargers deliver pure, quasi-sine wave AC for flawless operation of all appliances and sensitive electronics.
- They are ideal for entertainment systems and micro-processor-based equipment such as computers which are intolerant to AC wave distortion.
- Built-in high output charger for rapid battery bank replenishment - all models feature three stage, temperature compensated charger with output programmable for gel-cell, flooded lead-acid or AGM battery type, and amp-hour capacity selector for proper charging in various applications.
- Large DC input terminal blocks and front panel GFCI protected outlet receptacles. AC output from the inverter may also be hard-wired.
- Automatic low voltage shutdown circuit prevents damage to batteries due to over-discharge when using inverter function.
- Heavy duty powder coated aluminum construction and polyurethane coated internal circuitry-build to last in the harsh marine environment.

Order No.	Mfg. No. / Description	Price
700399	(12-1800IC) 12vdc input 1,800 Watt sine wave 120vac 60 hz continuos output 85 amp smart attery charger and auto transfer switch	$5,915.98 H
700401	(12-3000IC) 12 vdc input 120 vac 60 hz pure sine wave output, 105 amp smart battery charger and auto transfer switch	$8,752.98 H
700404	(24-2200IC) 115V, 60 Hz, 5,500 Watts	$7,252.98 H
700408	(24-4800IC) 24 vdc input 120 vac 60 hz pure sine wave output 4,800 watts continuos 100 amp smart charger and auto transfer switch	$10,753.98 H
700411	(32-2400) 32 vdc input 120 vac 60 hz 2,400 watt continuos output 30 amp smart battery charger and auto transfer switch	$7,752.98 H

Newmar NAV-PAC®



- Marine communication/navigation electronics such as programmable data transceivers, GPS and other micro processor-controlled devices require clean and steady DC input power.
- Their sensitive circuitry is highly vulnerable to voltage drop from engine start, noise and line spikes from alternators and motors, and conducted noise from various other electronic devices.
- NAV-PAC prevents these conditions from affecting electronics.
- Prevents voltage "drop-out" to electronics during engine start.
- Absorbs line "spikes".
- Filters out electrical interference.
- Provides supplemental voltage/battery back-up for up to 15 min.
- Remote monitor panel included.

Order No.	Mfg. No. / Description	Price
699956	(NP-12) 12 volt	$533.98 E
699959	(NP-24) 24 volt	$608.98 E

©2014 Donovan Marine, Inc.

Newmar DC-DC Converters - Standard Series



- Convert 20-50V DC to 13.6V DC output for powering communication/ navigation equipment, on negative ground systems.
- Excellent regulation.
- Heat generated by semi-conductors is extracted and dissipated by large heat sink fins that maximize air contact for coolest operation and long life of components.
- Polyurethane conformal coating on PC boards & corrosion resistant anodized aluminum case with heavy duty shock mounts assures survival in hostile environments.
- Numerous converter and load protection circuits: Current limiting, automatic thermal shutdown, short circuit proof, reverse polarity and overvoltage protection.

Order No.	Mfg. No. / Description	Price
700609	(24-12-3) Input: 17-32V, Output: 3 Amps	$159.98 E
700612	(32-12-6) Input: 20-50V, Output: 6 Amps	$335.98 E
700615	(32-12-10) Input: 20-50V, Output: 10 Amps	$421.98 E
700618	(32-12-15) Input: 20-50V, Output: 15 Amps	$483.98 E
700621	(32-12-25) Input: 20-50V, Output: 25 Amps Intermittent, 20 Amps Continuous	$677.98 E
700662	(32-12-35) Input: 20-50V, Output: 35 Amps Intermittent, 30 Amps Continuous	$900.98 E
700627	(32-12-50) Input: 20-50V, Output: 50 Amps Intermittent, 40 Amps Continuous	$1,052.98 E

Newmar Isolated DC-DC Converters - Isolated Series

- Same features as Standard Series, but with the additional capability of permitting connection of negative ground gear to positive or floating ground battery systems, or vice-versa.
- Many models may also be used as 12 or 24 volt stabilizers for highly input voltage sensitive equipment (see below)
- Input range:10-56 VDC; positive, negative or floating ground.
- Output: 13.6 VDC.

Order No.	Mfg. No. / Description	Price
700603	(12-12-12I) Input: 10-16V, Output: 12 Amps Intermittent, 8 Amps Continuous	$1,267.98 I
700606	(12-12-35I) Input: 10-16V, Output: 35 Amps Intermittent, 20 Amps Continuous	$2,159.98 I
700630	(48-12-6I) Input: 20-56V, Output: 6 Amps Intermittent, 6 Amps Continuous	$533.98 E
700633	(48-12-12I) Input: 20-56V, Output:12 Amps Intermittent, 8 Amps Continuous	$773.98 E
700636	(48-12-18I) Input: 20-56V, Output: 18 Amps Intermittent, 10 Amps Continuous	$904.98 E
700638	(48-12-35I) Input: 20-56V, Output: 35 Amps Intermittent, 20 Amps Continuous	$1,263.98 E
700640	(48-12-3I)	$1,263.98 E

- Output: 24.5 VDC.

Order No.	Mfg. No. / Description	Price
700642	(12-24-6I) Input: 10-16V, Output: 6 Amps Intermittent, 4 Amps Continuous	$1,400.98 I
700644	(12-24-18I) Input: 10-16V, Output: 18 Amps Intermittent, 10 Amps Continuous	$2,459.98 I
700646	(48-24-6I) Input: 20-56V, Output: 6 Amps Intermittent, 4 Amps Continuous	$916.98 E
700648	(48-24-9I) Input: 20-56V, Output: 9 Amps Intermittent, 5 Amps Continuous	$1,041.98 E
700650	(48-24-18I) Input: 20-56V, Output: 18 Amps Intermittent, 10 Amps Continuous	$1,536.98 E

Newmar Automatic Power Selector



- Solid state device which enables installation of a seamless, redundant power system for critical electronic loads.
- Selects the higher voltage of two isolated DC power sources and routes power to the load. Should one source falter or fail, the other will automatically supply the load with no transfer delay, operation continues uninterrupted.
- Easy installation, two independent power sources are wired to the APS and routed in a single output to the vital load.
- Rugged, rust-proof anodized aluminum case.

Order No.	Mfg. No. / Description	Price
700450	(APS-160) Max. Load 160 amps, 9.0" x 4.5" x 3.1", 5 lbs. Voltage Rating: 6-50 VDC, neg. ground	$364.98 E

Newmar Power Supplies with Built-in Battery Back-Up



- The 12 volt supply features built-in back-up batteries which are charged during normal operation and then continue to power radios even when AC power is lost.
- Input 115/230 VAC, 50-60 Hz.
- Output: 13.6 VDC @ 5A cont., 10A int.

Order No.	Mfg. No. / Description	Price
207605	(7AH) 7 amp/Hour Battery	$662.98 E
207610	(14A) 14 amp/Hour Battery	$793.98 E

Audiopipe Power Supplies



- 110V 3 amp, 5 amp surge converts to 13.8V DC low ripple built-in surge protection.

Order No.	Mfg. No. / Description	Price
559795	(DVP-512) 5 amp	$44.98 F
559800	(DVP-712) 7 amp	$87.98 F
559805	(DVP-1212) 12 amp	$124.98 F

Newmar Panel Meters



- For replacement or addition to existing panel systems.
- Easy to read graphics with unit divisions give precise readouts at a glance.
- Stud mount with push-on terminals.
- Designed for easy front panel mounting.
- DC ammeters require external shunts which are provided.

Order No.	Mfg. No. / Description		Price
700019	(023-1500-0) 0-150 AC Voltmeter	Panel Size: 2-1/2"	$124.98 I
700022	(023-3002-0) 0-300 AC Voltmeter	Panel Size: 2-1/2"	$124.98 I
700025	(023-1500-5) 0-150 AC Voltmeter	Panel Size: 3-1/2"	$132.98 I
700027	(023-3002-5) 0-300 AC Voltmeter	Panel Size: 3-1/2"	$132.98 I
700032	(023-0301-0) 0-50 AC Ammeter	Panel Size: 2-1/2"	$210.98 I
700035	(023-1001-2) 0-100 AC Ammeter	Panel Size: 2-1/2"	$210.98 I
700038	(023-0301-5) 0-50 AC Ammeter	Panel Size: 3-1/2"	$226.98 I
700040	(023-1001-7) 0-100 AC Ammeter	Panel Size: 3-1/2"	$226.98 I

Marinco On-Board Charger Inlet

MARINCO



- 15 amp 125 volt straight blade inlet.
- Can be mounted almost anywhere on a boat.
- Low profile cap won't catch fishing line.
- Mounts easily to fiberglass and aluminum hulls.
- Perma-Lock terminals and color coded wire entrance holes make wiring a snap.
- UV resistant housing and cap.

Order No.	Mfg. No. / Description	Price
217910	(150CCI)	$24.98 F

Marinco Hard Wired Charger Inlets

MARINCO



- 15 amp straight blade inlet.
- Low profile cap won't catch fishing line.
- Mounts easily to fiberglass and aluminum hulls.
- Perma-Lock terminals and color coded wire entrance holes make wiring a snap.
- UV resistant housing/cap.
- Universal mount.

Order No.	Mfg. No. / Description	Price
217908	(150BBI) Black	$24.98 F
218640	(150BBIW) White	$30.98 I

Electrical - 15 amp, 125 volt

Marinco Female Connector

MARINCO



- 15 amp, 125 volt.
- Straight blade.
- Yellow nylon.

Order No.	Mfg. No. / Description	Price
217528	(5269CR)	$33.98 F

Marinco Male Plug

MARINCO



- 15 amp, 125 volt.
- Straight blade.
- Yellow nylon.

Order No.	Mfg. No. / Description	Price
217530	(5266CR)	$35.98 F

Marinco Male Plug

MARINCO



- 15 amp, 125 volt.
- Locking type.
- Yellow nylon.

Order No.	Mfg. No. / Description	Price
217566	(4721CR)	$23.98 F

Marinco Duplex Receptacle

MARINCO



- 15 amp, 125 volt.
- Locking type.
- Yellow.

Order No.	Mfg. No. / Description	Price
217542	(4700CR)	$85.98 F

Marinco Duplex Receptacle

MARINCO



- 15 amp, 125 volt.
- Straight blade.
- Yellow.

Order No.	Mfg. No. / Description	Price
217592	(5262CRR)	$41.98 F

Marinco Sealing Collar with Threaded Ring

MARINCO



- Sealing collar with threaded ring for use with 20 and 30 amp twist lock cords and weatherproof boots.
- Provides maximum moisture protection between cordset and adapter.

Order No.	Mfg. No. / Description	Price
217338	(110R)	$16.98 F

Marinco Ground Fault Duplex Receptacles

MARINCO



- 15 amp, 125 volt.
- Ground fault circuit interrupter (GFCI) duplex receptacle.
- Includes cover.
- CAUTION: Ground Fault Circuit Interrupter protection is required when using electrical products outdoors or near water. GFCI Protection is required by the ABYC where a receptacle is in a head, galley, machinery space or weather deck.

Order No.	Mfg. No. / Description		Price
218644	(1591-FI)	Ivory	$63.98 I
217605	(1591-FI.WHT)	White	$46.98 F

Marinco Ground Fault Duplex Receptacle

MARINCO



- Stainless steel receptacle cover with lift lid.
- For 217605 (1591-FI WHT) ground circuit interrupter duplex receptacle.

Order No.	Mfg. No. / Description	Price
217489	(7879CR-FI)	$79.98 F

Electrical - 30 amp

Marinco Male Locking Plug

MARINCO



- 30 amp, 125 volt.
- Yellow nylon with Cablock System.
- Use with 218304 (102N) cover.

Order No.	Mfg. No. / Description	Price
217439	(305CRPN)	$22.98 F

Marinco Female Locking Connector

MARINCO



- 30 amp, 125 volt.
- Yellow nylon with Cablock System.
- Use with 217352 (103ELN) and 218316 (103RN) covers.

Order No.	Mfg. No. / Description	Price
217415	(305CRCN)	$39.98 G

Marinco Male Locking Plug

MARINCO



- Short housing, black nylon with internal strain relief system and recessed fasteners.

Order No.	Mfg. No. / Description	Price
217922	(305BP) 30 amp, 125 volt	$25.98 F

©2014 Donovan Marine, Inc.

Electrical - 30 amp (cont.)

Marinco Male Plug and Cover



- 30 amp, 125 volt.
- Yellow nylon with Cablock System.
- Weather resistant cover.

Order No.	Mfg. No. / Description	Price
218656	(305CRPN.VPK)	$48.98 I

Marinco Female Connector with Cover & Rings



- 30 amp, 125 volt.
- Yellow nylon with Cablock System.
- Weather resistant cover with threaded sealing ring.
- Easy Lock sealing ring.

Order No.	Mfg. No. / Description	Price
218652	(305CRCN.VPK)	$86.98 I

Marinco Weatherproof Cover for Female Connector



- Weatherproof cover with threaded sealing ring for 217415 (305CRCN) female locking connector.
- Yellow Marineguard II.

Order No.	Mfg. No. / Description	Price
218316	(103RN)	$21.98 F

Marinco Weatherproof Cover for Female Connector



- Weatherproof cover with Easy Lock Sealing Ring for 217415 (305CRCN) female locking connector.
- Yellow Marineguard II.

Order No.	Mfg. No. / Description	Price
217352	(103ELN)	$24.98 F

Marinco Threaded Sealing Ring



- Use with 30 amp systems.

Order No.	Mfg. No. / Description	Price
218620	(100R)	$11.98 I

Marinco Weatherproof Cover for Male Plug



- Weatherproof cover without locking connecting ring for 217439 (305CRPN) male locking plug.
- Yellow Marineguard II.

Order No.	Mfg. No. / Description	Price
218304	(102N)	$14.98 F

Marpac Female Locking Connector



- 30 amp, 125 volt, 3 pole, 3 wire, twist lock.
- Use with 7-1460 or 7-1461 covers.

Order No.	Description	Price
7-1425	Yellow	$35.98 F

Marpac Covers for Female Locking Connector



- Cover for 7-1425 female locking connector.

Order No.	Description	Price
7-1460	White	$16.98 F
7-1461	Yellow	$16.98 F

Marpac Covers for Male Locking Plug



- Cover for 7-1430 male locking plug.

Order No.	Description	Price
7-1465	White	$12.98 F
7-1466	Yellow	$12.98 F

Marpac Boat Inlet



- 30 amp, 125 volt, 3 pole, 3 wire, twist lock.
- White polycarbonate with flip cover.

Order No.	Mfg. No. / Description	Price
7-1470	White	$44.98 F

Marinco Contour Power Inlet



- 30 amp, 125 volt.
- Marine grade UV stabilized glass-filled polyester construction with Easy Lock System.
- Watertight cap.
- Soft Touch cap stays open in the upright position.
- 8-way right angle rear safety enclosure.
- Stainless steel trim.

Order No.	Mfg. No. / Description	Price
218648	(304EL-B)	$123.98 I

Marinco Power Inlet



- 30 amp, 125 volt.
- Marine grade UV stabilized glass-filled polyester construction with Easy Lock System.
- Soft touch cap design.
- 4-way right angle rear safety enclosure.
- Stainless steel trim on square flip-lid cover.

Order No.	Mfg. No. / Description	Price
217376	(301EL-B)	$71.98 F
217388	(301CRMB) Replacement Interior	$31.98 F
217427	(305CRMB) Replacement Interior	$32.98 F

Marinco Power Inlet - Stainless Steel



- 30 amp, 125 volt.
- Cast 316 stainless steel with Easy Lock System.
- Soft touch cap design with lock waterproof cap.
- 8-way right angle rear safety enclosure.

Order No.	Mfg. No. / Description	Price
217403	(303SSEL-B)	$108.98 F
217427	(305CRMB) Replacement Interior	$32.98 F

Marinco Locking Receptacles



- 30 amp, 125 volt, 3 wire.
- Corrosion resistant reinforced nylon construction.
- Accepts 8 gauge stranded wire or up to 6 gauge with ring terminals.

Order No.	Mfg. No. / Description	Price
217934	(305CRR) Yellow	$38.98 F
217441	(305CRRB) Black	$41.98 F

Electrical - 50 amp

Charles Marine Female Connector



- Use with 396728 (50CR) locking cover.

Order No.	Mfg. No. / Description	Price
396653	(50FI) 50 amp, 125 volt	$106.98 F

Marinco Male Plug



- 50 amp, 125 volt.
- 2 pole, 3 wire.
- Ribbed, thick wall nylon housing for secure gripping.
- Use with weatherproof cover for superior seal.

Order No.	Mfg. No. / Description	Price
218676	(6361CRN)	$135.98 I

Marinco Wire Dockside Receptacle



- 50 amp, 125 volt.
- Black nylon receptacle.
- 2 pole, 3 wire system: 1 hot, 1 neutral and 1 ground.

Order No.	Mfg. No. / Description	Price
217225	(6370CR)	$141.98 E

Marinco Male Locking Plug



- 50 amp, 125/250 volt.
- 3 pole, 4 wire.
- Corrosion resistant materials.
- Use with 217136 (7717N) cover.

Order No.	Mfg. No. / Description	Price
217198	(6365CRN)	$103.98 F

Marinco Female Locking Connector



- 50 amp, 125/250 volt.
- NEMA SS-2.
- 3 pole, 4 wire.
- Corrosion resistant materials.
- Use with 217263 (7715CRN) cover

Order No.	Mfg. No. / Description	Price
217174	(6364CRN)	$117.98 F

Marinco Weatherproof Cover for Female Connector



- Weatherproof cover with threaded ring for use with 6360CRN and 217174 (6364CRN) female connectors.

Order No.	Mfg. No. / Description	Price
217263	(7715CRN) Yellow	$34.98 F

Marinco Weatherproof Covers for Male Plug



- Weatherproof cover for use with 50 amp male plugs 6361CRN and 217198 (6365CRN) male locking plugs.

Order No.	Mfg. No. / Description	Price
217136	(7717N) Yellow	$26.98 F
218604	(102182) White	$34.98 I

Marinco Threaded Locking Sealing Ring



- Use with 50 amp systems.
- Use when combining 30A EEL cordset with another cordset.

Order No.	Mfg. No. / Description	Price
218660	(500R)	$12.98 I

Marinco Sealing Collar with Threaded Ring



- Provides maximum moisture protection between cordset and adapter.
- Use with 50 amp only systems.

Order No.	Mfg. No. / Description	Price
218664	(510R)	$21.98 I

Marinco Power Inlet - Stainless Steel



- 50 amp, 125/250 volt.
- 4 wire locking.
- Locking waterproof cap.
- Solid cast 316 stainless steel with Easy Lock System.
- Soft touch cap stays open in the upright position.
- Rear safety enclosure with strain relief.

Order No.	Mfg. No. / Description	Price
217249	(6373EL-B)	$208.98 F

Marinco Non-Metallic Standard Power Inlet



- 50 amp, 125/250 volt.
- 4 wire locking.
- Watertight cap.
- Marine grade UV stabilized glass-filled polyester construction with Easy Lock System.
- Marine stainless steel trim.
- Rear safety enclosure with strain relief.

Order No.	Mfg. No. / Description	Price
217150	(6353EL-B)	$114.98 F


Marinco Wire Dockside Receptacle



- 50 amp, 125/250 volt.
- Black nylon receptacle.
- 3 pole, 4 wire system: 2 hot, 1 neutral and 1 ground.

Order No.	Mfg. No. / Description	Price
217213	(6369CR)	$141.98 E

Marinco Weatherproof Cover



- Weatherproof cover, yellow Lexan with lift lid.
- Fits 15 amp, 20 amp and 30 amp single receptacles.

Order No.	Mfg. No. / Description	Price
218506	(7420CR)	$49.98 F

Marinco Weatherproof Cover with Lift Lid



- Weatherproof cover.
- Yellow Lexan with lift lid.
- Fits 50 amp receptacles 6369CR and 217225 (6370CR).

Order No.	Mfg. No. / Description	Price
218568	(7788CR)	$62.98 F

Charles Marine Cover Plate



- 30 amp grey cover plate.
- For use with 7-1420 receptacle.

Order No.	Mfg. No. / Description	Price
396426	(P30) 30 amp	$62.98 F

©2014 Donovan Marine, Inc.

Marinco Plastic Switch/Outlet Box



- Accepts 15 amp, 20 amp and 30 amp receptacles, telephone outlets and TV coax connectors.
- Can be secured against the back of the wall or wall facing.
- 3-9/32" W x 2-3/16" H x 2-1/2" D.

Order No.	Mfg. No. / Description	Price
218600	(6079)	$12.98 I

Marinco EEL Shore Power Cordsets



- Patented EEL (Easily Engaged Lock) Technology.
- Designed for use with standard inlets (NEMA).
- Single-handed operation.
- No sealing ring required.
- Patented jaw-clamp technology provides a watertight seal every time.
- Built-in cord light for added safety - alert light indicates if you are plugged into the dock and cord is powered.
- Power indicator light on both ends informs you full power is flowing through the cord.
- Meets and exceeds rigorous UL testing standards.

- 30 amp, 125 volt Cordset.

Order No.	Mfg. No. / Description	Price
218696	(CS30-12) Length 12', Yellow	$97.98 I
218700	(CS30-25) Length 25', Yellow	$169.98 I
218704	(CS30-50) Length 50', Yellow	$193.98 I
218709	(CS30-50W) Length 50', White	$199.98 I

- 50 amp, 125/250 volt Cordset.

Order No.	Mfg. No. / Description	Price
218712	(CS504-25) Length 25', Yellow	$950.98 I
218716	(CS504-50) Length 50', Yellow	$1,335.98 I

Charles Marine Straight Adapter



- Permits use of 50 amp, 125 volt cable set with 30 amp, 125 volt receptacle.

Order No.	Mfg. No. / Description	Price
397174	(A5030S)	$228.98 F

Marinco FS Box



- Black non-metallic.
- Two 3/4" K.O. holes.
- Accepts 15 amp, 20 amp and 30 amp receptacles and 7420CR weatherproof cover.

Order No.	Mfg. No. / Description	Price
218405	(6080)	$34.98 F

Marinco Power Cord Plus® Cordsets



- Watertight molded plug and connector for safety and durability.
- Heavy duty, super flexible marine-grade cable (30 amp 10 gauge, 50 amp 6 gauge).
- All models include a standard threaded ring for hook-up to ordinary threaded inlets.
- Corrosion resistant, nickel plated contacts.
- Power Indicator Light: Boatside connector features a molded-in LED light. When it glows red, you know you have power to the boat.
- Contour Grip with Thumbprint Locator: Both plug and connector ends are molded to fit the contour of your hand. When the thumbprint is in the 12 o'clock position, the blades line up for easy connection.
- Marinco's Easy Lock system: Quickly locks the cord set to the inlet in just 1/8 of a turn. The exclusive locking tabs engage slots built into all Marinco inlets.

- 30 amp Power Cord Plus Cordset.

Order No.	Mfg. No. / Description	Price
218608	(199116) Length 12', Yellow	$78.98 I
217314	(199119) Length 50', Yellow	$114.98 G
218612	(199120) Length 50', White	$159.98 I

- 50 amp, 125 volt Power Cord Plus Cordset (3 wire).

Order No.	Mfg. No. / Description	Price
218672	(6153SPP-25) Length 25', Yellow	$731.98 I

- 50 amp, 125/250 volt Power Cord Plus Cordset (4 wire).

Order No.	Mfg. No. / Description	Price
218668	(6152SPP) Length 50', Yellow	$166.98 I

Marinco 30 amp Cordset

- Length 50'.
- Super flexible 10/3 cable.
- High quality marine grade construction..
- Watertight molded plug and connector.
- Includes threaded ring and Easy Lock ring.

Order No.	Mfg. No. / Description	Price
218616	(202854)	$150.98 I

Marinco FD Box



- Yellow fiberglass.
- Two 3/4" K.O. holes.
- Accepts 15 amp, 20 amp, 30 amp and 50 amp receptacles and 7420CR and 7788CR weatherproof covers.

Order No.	Mfg. No. / Description	Price
218417	(6083CR)	$104.98 F

Marinco EEL Shore Power Straight Adapters



- EEL Shore Power Straight Adapters are high-quality, one-piece adapters similar in usage to Pigtail Adapters. However, they do not have sealing collars and are not recommended for use in wet locations.
- Use only in an enclosed, dry location, such as powering your boat from a 15A power receptacle inside a house.
- LED power indicator.
- Ergonomic design for easier gripping.

- Dockside (male) 20 amp, 125 volt locking plug to Boatside (female) 15 or 20 amp, 125 volt Straight Blade plug.
- Replaces the 80A.

Order No.	Mfg. No. / Description	Price
218744	(S20-15)	$70.98 I

- Dockside (male) 30 amp, 125 volt locking plug to Boatside (female) 15 or 20 amp, 125 volt Straight Blade plug.
- Replaces the 81A.

Order No.	Mfg. No. / Description	Price
218752	(S30-15)	$58.98 I

- Dockside (male) 20 amp, 125 volt locking plug to Boatside (female) 30 amp, 125 volt locking plug.
- Replaces the 84A.

Order No.	Mfg. No. / Description	Price
218748	(S20-30)	$97.98 I

Marinco One-Piece Adapter



- These adapters does not have covers and are not recommended for use in wet locations.
- 15 or 20A, 125V straight blade female connector to 20A 125V locking male plug.

Order No.	Mfg. No. / Description	Price
217631	(80A)	$69.98 F

Marinco Pigtail Adapters



- These adapters are equipped with covers and sealing collars (where indicated) and are for use in wet locations.
- Marinco's unique sealing collar system with cover joins the adapter to the cordset with a positive, mechanical connection which provides maximum moisture protection.
- Features an LED Power-on indicator and thumbgrip locator.
- 30 amp, 125 volt locking female connector with sealing collar system to 15 amp, 125 volt straight blade male plug with locking screw.

Order No.	Mfg. No. / Description	Price
217756	(104SPP)	$66.98 F

- Features a power-on indicator and thumbgrip locator.
- 15 amp, 125 volt straight blade female connector to 30 amp, 125 volt locking male plug.

Order No.	Mfg. No. / Description	Price
217706	(105SPP)	$73.98 F

- Dockside (male) 50 amp, 125 volt locking plug to Boatside (female) 30 amp, 125 volt Locking with Sealing Collar System plug.

Order No.	Mfg. No. / Description	Price
218632	(110A)	$204.98 I

- Dockside (male) 30 amp, 125 volt locking plug to Boatside (female) 50 amp, 125/250 volt locking with Sealing Collar System plug

Order No.	Mfg. No. / Description	Price
218636	(117A)	$285.98 I

- 30 amp, 125 volt locking female connector with sealing collar system to 50 amp, 125/250 volt locking male plug.

Order No.	Mfg. No. / Description	Price
217768	(121A)	$156.98 F

Marinco Shore Power Cord Clip



- For 30 amp cords.
- Organize shore power cords quickly and easily.
- Can be used on tube or wire rails.
- Packaged as set of 6 clips.
- UV stable.
- Practically unbreakable.

Order No.	Mfg. No. / Description	Price
218692	(CLIP-01)	$17.98 I

Marinco EEL Shore Power Pigtail Adapters



- EEL Shore Power Pigtail Adapters enable you to connect from one dockside receptacle (or other power source receptacle) to one boatside inlet or equipment of dissimilar power configuration.
- Sealing collar (where applicable) to create a weatherproof seal when joining cables together.
- Heavy duty, super flexible marine grade cable (30 amp 10 gauge, 50 amp 6 gauge).
- Watertight molded plug and connector ends for safety and durability.
- Corrosion resistant, nickel-plated contacts.
- Suitable for use in wet.
- Dockside (male) 50 amp, 125 volt locking plug to Boatside (female) 30 amp, 125 volt locking with Sealing Collar System plug.

Order No.	Mfg. No. / Description	Price
218720	(P15-30)	$96.98 I

- Dockside (male) 30 amp, 125 volt locking plug to Boatside (female) 15 amp, 125 volt Straight Blade plug.

Order No.	Mfg. No. / Description	Price
218724	(P30-15)	$105.98 I

- Dockside (male) 50 amp, 125 volt locking plug to Boatside (female) 30 amp, 125 volt locking with Sealing Collar System plug.

Order No.	Mfg. No. / Description	Price
218736	(P503-30)	$240.98 I

- Dockside (male) 30 amp, 125 volt locking plug to Boatside (female) 50 amp, 125 volt locking with Sealing Collar System plug.

Order No.	Mfg. No. / Description	Price
218728	(P30-503)	$308.98 I

- Dockside (male) 50 amp, 125/250 volt locking plug to Boatside (female) 30 amp, 125 volt locking with Sealing Collar System plug

Order No.	Mfg. No. / Description	Price
218740	(P504-30)	$283.98 I

- Dockside (male) 30 amp, 125 volt locking plug to Boatside (female) 50 amp, 125/250 volt locking with Sealing Collar System plug.

Order No.	Mfg. No. / Description	Price
218732	(P30-504)	$335.98 I

Charles Marine Y-Adapter



- Permits use of two 30 amp, 125 volt twist-lock cable sets to be used with one 50 amp, 125 volt twist-lock receptacle.

Order No.	Mfg. No. / Description	Price
397097	(17311)	$309.98 F

Marinco EEL Shore Power "Y" Adapters



- Split one dockside receptacle between two boat inlets of similar or dissimilar power configurations.
- Sealing collar to create a weatherproof seal when joining cables together.
- Suitable for use in wet locations.
- Watertight molded plug and connector ends for safety and durability.
- Heavy duty, super flexible marine grade cable (30 amp 10 gauge, 50 amp 6 gauge).
- Corrosion resistant, nickel-plated contacts.
- (1) Dockside (male) 50 amp, 125 volt locking plug to (2) 30 amp, 125 volt locking with Sealing Collar System plugs.

Order No.	Mfg. No. / Description	Price
218764	(Y503-2-30)	$451.98 I

- (1) Dockside (male) 50 amp, 125/250 volt locking plug to (2) 30 amp, 125 volt locking with Sealing Collar System plugs.

Order No.	Mfg. No. / Description	Price
218768	(Y504-2-30)	$388.98 I

- (1) Dockside (male) 30 amp, 125 volt locking plug to (2) 30 amp, 125 volt locking with Sealing Collar System plugs.

Order No.	Mfg. No. / Description	Price
218761	(Y30-2-30)	$349.98 I

Marinco "Y" Adapters



- Equipped with covers and sealing collars, for use in wet locations.
- Two 30 amp, 125 volt locking female connectors with sealing collar system to 50 amp, 125/250 volt locking male plug.

Order No.	Mfg. No. / Description	Price
217819	(153AY)	$259.98 F

- Two 30 amp, 125 volt locking female connector with sealing collar system to 30 amp, 125 volt locking male plug.

Order No.	Mfg. No. / Description	Price
217845	(157AY)	$236.98 F

Marinco Reverse "Y" Adapter



- 50 amp, 125/250 volt locking female connector with sealing collar system to (2) 30 amp, 125 volt locking male plugs.

Order No.	Mfg. No. / Description	Price
217869	(RY504-2-30)	$441.98 F

©2014 Donovan Marine, Inc.

Marinco Organizer Bag



- Heavy duty nylon zippered bag with handle.
- Ideal for storing cordsets and adapters.

Order No.	Mfg. No. / Description	Price
218684	(BAG)	$61.98 I


Marinco Charger Plug - Male



- Charger plug (male) connects to a 12 volt battery charger to allow simultaneous charging of two 12 volt batteries when plugged into the receptacle.

Order No.	Mfg. No. / Description	Price
217972	(2018BP-12) Red	$29.98 F

Marinco Receptacle



- Designed for use with Marinco Charger & Trolling Motor plugs.
- 12/24 volt locking.
- Glass reinforced corrosion resistant nylon.
- Accepts 8 gauge stranded wire or up to 6 gauge with ring terminals.

Order No.	Mfg. No. / Description	Price
217960	(2018BR) Black	$52.98 F

Marinco ConnectPro™ Trolling Motor Plug and Receptacle





- The ConnectPro has superior electric current carrying capacity to eliminate problems that rob motors of power and reduce battery life.
- Features a locking plug and receptacle with spring clamping connections which provides a secure electrical contact.
- Universal design for 2 or 3 wire configuration; 12, 24, 12/24, 24/36 or 36 volt systems.
- Corrosion resistant, plated brass electrical components.

Order No.	Mfg. No. / Description	Price
217942	(12VCP) Receptacle and Plug	$45.98 F
217940	(12VBP) Plug Only	$21.98 F
217941	(12VBR) Receptacle Only	$26.98 F

Marinco Cable Clips



- Easy to install.
- Includes 6 Cable Clips with stainless steel mounting screws.
- Keeps shore power cable out of the water.
- Holds 10 gauge 30 amp cable.
- Use on deck or edge of dock.
- Organize shore power cable.

Order No.	Mfg. No. / Description	Price
218688	(CLIP)	$25.98 I

Marinco Trolling Motor Plug - Male



- Trolling motor plug (male) connects to the trolling motor.
- Jumpered internally to supply 12 volt and 24 volt power to the trolling motor when plugged into the receptacle.

Order No.	Mfg. No. / Description	Price
217984	(2018BP-24) Black	$25.98 F

Marinco Receptacle and Bracket



- Convenient mounting bracket with flip lid cover and receptacle, pre-assembled.
- The receptacle is corrosion resistant made of glass reinforced nylon.
- Will accept 8 gauge stranded wire or up to 6 gauge with ring terminals.

Order No.	Mfg. No. / Description	Price
217996	(2018BR-MB) Black	$77.98 F

T-H Marine Ranger Trolling Motor Plugs and Base






- Direct OEM replacement, rated at 50+ AMPs.
- Gold contacts.

Order No.	Mfg. No. / Description	Price
641870	(TMBMP-1) Replacement Plug	$31.98 H
641894	(TMRCP-1) Repl. Charging Plug	$32.98 H
641882	(TMFR-1) Replacement Base	$49.98 H

Sierra Trolling Motor Socket and Plug



- 6, 8 GA, 12 volt, with butt connectors.
- V-Groove.

Order No.	Mfg. No. / Description	Price
772229	(WH10600) Female, Motor Side	$12.98 H

Marinco Shore Power Cord Cover



- Keep shore power cables neat and bundled.
- Holds 50 amp or 30 amp cordsets, can hold multiple cables.
- UV resistant, machine washable marine grade fabric.
- 24'.

Order No.	Mfg. No. / Description	Price
218773	(ZIP-01)	$83.98 I

Marinco 6 Gauge Wire Receptacle Adapter



- Allows 6 gauge wire connection to ConnectPro Receptacle.
- Corrosion resistant, plated brass electrical components.
- Universal hook-up feature works for any 2 or 3 wire system (12V, 24V and 36V system combinations).

Order No.	Mfg. No. / Description	Price
217617	(12VBRAD) 12 Volt	$21.98 F

Marinco Charging / Trolling System Package



- Package includes: 217972 (2018BP-12), 2018BP-24 and 217996 (2018BR-MB).
- Enclosed in one package and economically priced.

Order No.	Mfg. No. / Description	Price
218001	(2018PKG)	$105.98 F

Minn Kota Trolling Motor Plug and Receptacle



- Provides universal design for 2 or 3 wire configurations on 12 to 36 volt systems.
- Features a watertight sealing cap and corrosion resistant, plated brass electrical components.
- Locks into receptacle for a watertight seal.
- Requires a standard 1-1/8" diameter mounting hole.

Order No.	Mfg. No. / Description	Price
476590	(1865102) MKR-18	$29.98 D

Sierra Trolling Motor Connector



- 6, 8 GA, 12 volt, with butt connectors.
- V-Groove.

Order No.	Mfg. No. / Description	Price
772230	(WH10610) Male, Boat Side	$14.98 H

Marinco HDTV/Internet Cable



- 50' yellow cable.
- 75 ohm, 3G Hz RG6 Quad Shield cable with gasket sealed.
- Weatherproof F-type connections on both ends

Order No.	Mfg. No. / Description	Price
218756	(TVHD	$141.98 I

Marinco Combo TV/Phone Cordset



- Both cables jacketed together.
- Telephone and TV connections are molded on each end.
- Features 18" spliced cable at dockside for connections which are in separate power centers

Order No.	Mfg. No. / Description	Price
218049	(PHTV6599) 50', Yellow	$379.98 F

Marinco Phone Cordset



- 3 Conductor #16SJTO vinyl cord provides telephone connection for RV's & pleasure boats.

Order No.	Mfg. No. / Description	Price
218215	(PH6599) 50', Yellow	$210.98 F

Marinco FS Box with Cord Grip and PVC Adapter



- Comes with cord grip and PVC adapter.
- Use with PH6595 inlet and PH6597TV and PH6597 outlets.
- Black plastic.

Order No.	Mfg. No. / Description	Price
218241	(PH6619)	$42.98 G

Marpac 2 Port USB Charger



- Two ports allow charging of two items at the same time.
- Corrosion resistant construction.
- Includes weather proof cover.
- Easy installation, includes mounting screws and electrical connectors.
- Output 5 volts, 2.1 amps charges any iPod or iPhone and other USB devices.
- 12 volt input.

Order No.	Mfg. No. / Description	Price
7-0821	(EL200075)	$19.98 G

Newmar Phone-Com Systems



- The Phone-Com intercom system provides direct, wired, point-to-point communication anywhere on the vessel.
- Voice contact to any phone in the system is as easy as lifting the receiver and pressing the call button.
- Phone-Com operates on 12 VDC.
- They are constructed of high-impact plastic and are available in either bright white or traditional black.
- Bulkhead mounting bracket is provided.
- Two versions are available:
- PI-2: Designed for communication between only two points.
- A single call button sounds a buzzer and illuminates an indicator lamp on the companion phone.
- Available singly or as a set with 40' of interconnect wire, fuse, terminal lugs and mounting hardware.
- PI-10: For multiple station calling capability.
- Up to 10 phones may be interconnected, & each phone has 10 call buttons.
- Sold individually-- see wiring requirements below.
- Phone-Com Wiring: Color-coded multi-conductor interconnect wire (22 AWG) is available from NEWMAR at any length desired with 5, 10 or 15 conductors.
- For PI-2, use 5 conductor wire.
- For PI-10, add 3 to the total number of stations to determine minimum number of conductors required.
- Note: Phones are not waterproof and should be installed in a protected location.

Order No.	Mfg. No. / Description	Price
700589	(PI-2)	$94.98 D
700591	(PI-2 SET)	$253.98 D
700593	(PI-10)	$109.98 D

Newmar EX Series Electrical Enclosures



- These enclosures provide functional and professional protective cases for wire connectors, terminal blocks, relays, solenoids, fuses, etc.
- The corrosion-resistant polycarbonate cases are ideal for marine applications, and the deep cavity design leaves room for securing wiring and components and making connections.
- In addition, instruments, switches and panels can be surface mounted to the cover, as there is ample space for rear projection and wiring.

Order No.	Mfg. No. / Description	Price
699869	(EX-373) 7.09" L x 3.7" W x 3.19" D, Knock-Outs: 14 ea. PG-16	$85.98 E
699872	(EX-474) 7.09" L x 4.33" W x 4.37" D, Knock-Outs: 16 ea. PG-16, 4 ea. PG-21, 2 ea. PG-29	$100.98 E
699875	(EX-1074) 7.09" L x 10.0" W x 4.37" D, Knock-Outs: 24 ea. PG-16, 8 ea. PG-21, 4 ea. PG-29	$146.98 E

Newmar External Buzzer



- For use in high-noise areas.

Order No.	Mfg. No. / Description	Price
700587	(BUZZER)	$13.98 E

©2014 Donovan Marine, Inc.

Newmar BX Series Splashproof Junction Boxes



- Provides for secure, protected below-deck wiring connections, IP rating 54
- Rugged cast aluminum box with white enamel finish
- Easy wiring access through multiple grommeted cable entries
- Supplied with high quality connector strips - secure wires w/compression fittings - no terminals required

	BX-1	BX-2	BX-3
Number of Connector Strips:	1	1	2
Positions per Strip:	6	12	11
Max Wire Gauge:	16	16	14
Max amps (Per Position):	6	6	10
Cable Entries:	2	8	2
Max Cable Diameter:	.25"	.37"	.59"

Order No.	Mfg. No. / Description	Price
699929	(BX-1) Box Size: 2" x 2" x 1.2"	$44.98 E
699932	(BX-2) Box Size: 4.4" x 2.4" x 1.2"	$55.98 E
699935	(BX-3) Box Size: 4.7" x 3.7" x 1.3"	$62.98 E

Newmar Waterproof Fitting



Order No.	Mfg. No. / Description	Price
700221	(WPF-1)	$6.98 E
700224	(WPF-2)	$8.98 E
700227	(WPF-3)	$11.98 E

Newmar PX Series Waterproof Junction Boxes



- Ideal for making wiring connections above or below decks, even in areas subject to occasional spray
- Similar to BX Series junction boxes, but made from rugged, non-corrosive, high impact polypropylene
- Snap-on cover provides watertight seal
- "Universal" cut-to -fit graduated diameter cable entries accommodate wide cable range
- Multiple position connector strips with "captive" screw compression wire terminals installed – meets ABYC standards
- Multiple knockouts provided for conduit access (in addition to cable entries)
- IEC Waterproof Rating: IP54 – "Water projected in jets against the enclosure from any direction shall have no harmful effects."

	PX-1	PX-2	PX-3
Number of Connector Strips:	1	2	2
Positions per Strip:	6	6	9
Max Wire Gauge:	16	16	16
Cable Entry Points	5	7	7
Cable Entries Installed	3	7	7
Spare Cable Entries	2	0	0
Cable Diameter Range	.14-.81	.14-.81	.14-.99

Order No.	Mfg. No. / Description	Price
699938	(PX-1) Box Size: 2.95" x 2.95" x 1.66"	$29.98 E
699941	(PX-2) Box Size: 3.35" x 3.35" x 1.66"	$36.98 E
699944	(PX-3) Box Size: 4.45" x 4.45" x 2.29"	$54.98 E

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

AFI Polypropylene Platform



- Platform kits are easy to assemble using pre-marked and pre-drilled holes for all hardware assembly attachments.
- Molded platform manufactured from UV resistant, high strength polypropylene.
- Anti-skid ribs and textured surface molded onto platform.
- Handrails, brackets and hardware are stainless steel.
- Platform measures: 18" W (back), 17" W (front) x 15" D x 3/4" thick.

Order No.	Mfg. No. / Description	Price
216172	(67901) For Inboard/Outboard Motors	$115.98 G

AFI 9" Swim Platform Mounting Bracket



- Stainless steel bracket for 72", 80" and 84" platforms.

Order No.	Mfg. No. / Description	Price
216261	(67995) Dimensions: 9" H x 17" L x 1-1/2" W	$109.98 F

Marpac Drop Ladders



- Telescoping design - for compact storage and easy deployment.
- Non-skid plastic treads angled for safety and comfort.
- Heavy gauge marine grade polished stainless steel finish.
- Includes easy-store nylon strap.

Order No.	Mfg. No. / Description	Price
7-1635	2 Steps, 11-3/4" W x 23-1/2" L (Stowed: 13-1/2" L), Gudgeon: 5-7/8" L	$99.98 G
7-1636	3 Steps, 12" W x 35" L (Stowed: 15-5/16" L), Gudgeon: 7" L	$119.98 G

Garelick EEz-In Over Platform Telescoping Drop Ladders



- Electropolished stainless steel.
- Steps fold out and over, telescope down easily and fold over flat on platform.
- Flat poly treads for comfort.
- Nylon bushings between ladder sections prevent inadvertent deployment when flipping ladder into water.
- Bungee cord securing strap included.

Order No.	Mfg. No. / Description	Price
391146	(19615-61:01) 2 Steps, 11.25" W x 23.5" L (Stowed: 13.5" L) x 1.25" H	$110.98 G
391158	(19616) 3 Steps, 11.5" W x 34.5" L (Stowed: 14.5" L) x 1.25" H	$143.98 G

Garelick EEz-In Transom Platform and Telescoping Ladder



- Durable HDPE platform is pre-drilled for easy assembly.
- 361105: One stainless wrap around rail and one underside support rail, reversible.
- 361117: Two stainless wrap around rails.
- 1" diameter stainless steel.
- Poly comfort flat steps, stainless hardware.
- Height above platform: 12.5".
- Length deployed: 22.75", length stowed: 17".
- 18" W x 15.5" D x .75" T.

Order No.	Mfg. No. / Description	Price
361105	(19536) For Outbound Transoms	$240.98 F
361117	(19546) For Inboard/Outboard Transoms	$240.98 F

Garelick EEz-In Outboard Swim Platforms with Fold Down Ladder Step



- Durable HDPE platform is pre-drilled for easy assembly.
- For use on outboard transoms.
- 390962: One stainless wrap around rail and one underside support rail, reversible.
- 390974: Two stainless wrap around rails.
- 1" diameter stainless steel.
- Stainless steel hardware.
- Rail height above and below platform: 12.5".
- 1 step fold down ladder: 13" L x 14.5" W.

Order No.	Mfg. No. / Description	Price
390962	(19535) For Outbound Transoms	$225.98 F
390974	(19545) For Inboard/Outboard Transoms	$225.98 F

Boater Sports Over Mount Ladders



- Telescoping steps, drop smooth and quick into the water for convenient and safe boarding.
- Easy to flip up over platform for storage.
- Designed with stainless steel thick wall tubing for durability and corrosion resistant.
- Installs in minutes.
- 304 Stainless steel.
- 3.5" Mount tab.

Order No.	Mfg. No. / Description	Price
1-52410	(52410) 2 Step, 23.5" H (Open) x 11" W, 13.5" (Closed)	$99.95 H
1-52412	(52412) 3 Step, 35" H (Open) x 11" W, 15" (Closed)	$139.95 Q
1-52414	(52414) 4 Step, 47.5" H (Open) x 11" W, 17.55" (Closed)	$199.95 D

©2014 Donovan Marine, Inc.

Windline Over Platform Telescoping Ladders



- Constructed of thick-wall stainless steel tubing.
- Requires smaller space.
- Stainless steel telescoping steps with plastic treads.
- Folds flat onto platform.

Order No.	Mfg. No. / Description	Price
692156	(TDL-2X) 2 Steps, 12" W x 23.5" L (Stowed: 13.5" L) x 1.6" H	$102.98 F
692168	(TDL-3X) 3 Steps, 12" W x 34" L (Stowed: 15" L) x 1.8" H	$144.98 F
692207	(TDL-4X) 4 Steps, 13" W x 44" L (Stowed: 16.5" L) x 2" H	$194.98 F

Garelick EEz-In Sport/Diver Ladders



- Easy to climb - angled stair-like design.
- 2-1/4" diameter center vertical allows easy use of diving gear.
- Oval steps with textured surface.
- Stainless steel quick release transom mounting bracket and ladder storage brackets included.
- Heavy duty - rated to 400 lbs. boarding weight.
- Width 13".

Order No.	Mfg. No. / Description	Price
391297	(19803) 3 Steps, 38" Length	$290.98 F
391300	(19804) 4 Steps, 48" Length	$339.98 F

Garelick EEz-In Bass Boat Transom Ladder



- Compact 2 step for low freeboard transoms.
- Easy to climb - angled stair-like design.
- Removable when fishing or underway quick release mount.
- Oval steps with non-skid surface.
- Stainless steel quick release mounting bracket included.
- 2-1/4" diameter center vertical.
- 28" L x 13" W.

Order No.	Mfg. No. / Description	Price
391324	(19812) 2 Steps, Special Black Finish	$222.98 F

Windline Stainless Steel Dive Boat Ladders



- Highest quality all stainless steel construction.
- Rated at 400 lbs. load capacity.
- 1.75" stainless steel tubing.
- Wrap around PVC tread provide maximum foot comfort.
- Includes mounting bracket with locking tab for positive lock and quick-release for trouble-free stowage.
- Electropolished corrosion resistant tubing.
- Width 14".

Order No.	Mfg. No. / Description	Price
692170	(DL-3X) 3 Steps, Length Deployed 38"	$197.98 F
692182	(DL-4X) 4 Steps, Length Deployed 48"	$224.98 F

Garelick EEz-In Compact Stainless Steel Transom Ladder



- Designed for mounting on limited area, 3.5" x 12.5".
- Ladder stows upright against transom.
- Includes securing strap.
- Flat poly treads are attached to steps for comfort.
- Overall width 14.5", overall height 15.5".
- Length deployed 15", length stowed 15.5".

Order No.	Mfg. No. / Description	Price
391110	(19513) 2 Steps, 1" Diameter Stainless Steel	$128.98 G

Boater Sports Transom Mount Ladders



- Ladder transom mount.
- 304 Stainless steel.
- Folding transom mount ladder.
- High impact construction.
- Easy flip-up storage with snap lock bracket.

Order No.	Mfg. No. / Description	Price
1-52416	(52416) 3 Step, Folded: 9.25" W x 12.5" L, Extended: 9.24" x 24" L	$159.95 H
1-52418	(52418) 4 Step, Folded: 10.5" W x 17.75" L, Extended: 10.5" W x 35" L	$199.95 Q

Garelick EEz-In Stainless Steel Sport/Diver Ladders



- Superior corrosion resistance electropolished stainless steel.
- 1-3/4" diameter center post design - angled mount for stair-like ease.
- Stainless steel quick release transom mounting bracket included.
- Heavy duty - rated to 400 lbs. boarding weight.
- Comfortable non-skid step surface.
- Width 14.5".

Order No.	Mfg. No. / Description	Price
391336	(19833) 3 Steps, 37" Length	$324.98 G
391348	(19834) 4 Steps, 48" Length	$425.98 G

Garelick EEz-In Transom Mounting Extension Shim



- Extends ladder 3" farther from the transom.
- Used with face plate and 10 degree poly spacer included with ladder.
- 2.75" W x 3.62" H.

Order No.	Mfg. No. / Description	Price
391413	(99184) Stainless Steel	$71.98 G

Garelick EEz-In Standard Transom Mounting Bracket



- Included with all sport/diver series ladders.
- 1" thick poly spacer 10 degree angle, with lock and stainless steel face plate mounting bracket.
- 2.75" W x 3.62" H. Mounting hole diameter: 5/16".

Order No.	Mfg. No. / Description	Price
391386	(99180) Stainless Steel	$50.98 G

Paws Aboard Doggy Boat Ladder



- Attaches to most boat ladders with three or more steps – and is easy to attach and remove (note: ladders over 14" wide require extension piece).
- Portable, lightweight and durable.
- Slip resistant, ribbed design provides safe entry/exit for all pets.
- Reduces pain and strain for pets and owners.
- 16" x 64" (folds in half for easy storage).

Order No.	Mfg. No. / Description	Price
598615	(5200) Doggy Boat Ladder	$279.98 H

Boater Sports Pontoon/Dock Aluminum Ladders



- Durable, lightweight anodized aluminum.
- Large, angled steps for climbing comfort.
- Anti-skid tread for safety.
- Easily attaches to dock with J-hook hardware (included).
- Stainless steel assembly hardware.
- 300 lb. capacity.
- 11.5" Mount depth, 11.5" between steps

Order No.	Mfg. No. / Description	Price
2100012	(52419) 3 Step, 55" H x 15" W, 34" Step Length	$140.98 Q
2100014	(52421) 5 Step, 75" H x 15" W, 59" Step Length	$199.98 H

- Mounting hardware for deck or dock.

Order No.	Mfg. No. / Description	Price
2100063	(HD-MH) Hardware Only, Heavy Duty	$14.98 H
1-52422	(52422) Mounting Kit for 52419 and 52421	$10.79 H

Garelick 2-4 Step Pontoon Ladder



- Folds down 2 - 4 steps for easy boarding.
- Folds and stows in locker underneath pontoon furniture.
- Stainless steel 6" gudgeons attach to deck with Shur-loc catches, included.
- Cushioned standoffs abuts pontoon log.
- Durable 1" diameter anodized aluminum tube.
- Comfortable white traction molded poly steps.
- Includes securing strap.

Order No.	Mfg. No. / Description	Price
391261	(12150:01) 18" L x 15" W (Folds Down to 24")	$209.98 G

Sea Dog Folding Ladder



- Made of molded-in, high-visibility orange polycarbonate with nylon rope supporting the frame.
- They secure quickly to cleats, railings, stanchions and halyards and will support up to 300 pounds.

Order No.	Mfg. No. / Description	Price
322522	(582501-1) 5 Step, 11-3/4" W	$49.98 F

Garelick EEz-In Aluminum Dock/Raft Ladder





- 10° angled design provides effortless boarding.
- All aluminum heavy walled 1" diameter tube construction.
- Wide track 18" ladder with full 16" width x 4" deep step surface.
- Comfortable anodized aluminum traction tread curved step surface.
- Dual handrails 15" height and extends 14" deep onto dock.
- 48" from deck.
- Optional quick release bracket (99204) allows for easy removal and storage.

Order No.	Mfg. No. / Description	Price
391289	(15340:01) 4 Steps	$399.98 G
391290	(99204) Aluminum Quick Release Bracket	$59.98 F

Boater Sports Folding Pontoon Ladder





- Removable ladder for your pontoon boat.
- Stainless steel construction with mounting hardware.

Order No.	Mfg. No. / Description	Price
2100015	(62150) 4 Step	$154.98 H

Garelick EEz-In "Swinger" Pontoon Boarding Ladder





- Permanently mounts at side gate.
- Unique self-locking brackets - lock ladder in place.
- Easy to install - stainless steel hardware and securing strap included.
- Durable, double walled 1" diameter anodized aluminum tube.
- Comfortable non-slip oval-shaped anodized aluminum steps.

Order No.	Mfg. No. / Description	Price
391247	(19250) 3 Step, 36" L x 24" W	$193.98 G

©2014 Donovan Marine, Inc.

Boater Sports Folding Pontoon Ladders



- Installs instantly with plastic cup mounts.
- 1" anodized aluminum tubing.
- Folds and locks for compact storage.
- 2.25" wide, injection molded, plastic steps.
- UV resistant.
- 300 lb. capacity.
- Width: 15.5".
- Hook depth: 6".


Order No.	Mfg. No. / Description	Price
2100017	(ASC-4) Overall Height 44.5"	$80.98 I
2100018	(ASC-5) Overall Height 54.5"	$100.98 J
2100019	(ASC-CUP) Repl. Mounting Cups, Pair	$4.39 H
2100020	(ASC-LOCK) Locking Mechanism, Each	$1.79 H

Boater Sports Rear Entry Pontoon Ladder



Order No.	Mfg. No. / Description	Price
2100023	(BCS-4) 4 Step	$129.98 H

Boater Sports Pontoon Ladders "A Step Up"

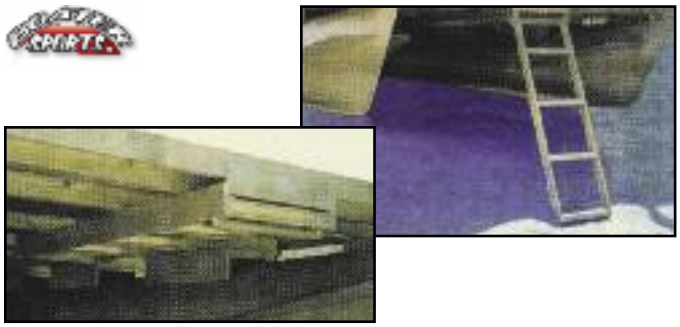

- The Ultimate Pontoon Boat Ladder!
- Self storing - Under the deck and never in your way.
- Safe - Board your boat from the front, away from the motor.
- Convenient - Put in use from the deck or in the water.
- Sturdy - All aluminum construction!
- Will not work with scissor style trailers.
- Lifetime warranty.

Order No.	Mfg. No. / Description	Price
2100053	(CR-1) Straight Edge Pontoon Bows	$259.98 G
2100054	(CR-1R) Rounded Edge Pontoon Bow	$259.98 E

Garelick EEz-In Shur-Loc Ladder Catch



- Bracket mounts to hull or deck for attaching latch type boarding ladders and cockpit steps.
- Stamped stainless steel self locking design.
- For use with 391261, 391285 and 391286

Order No.	Mfg. No. / Description	Price
391437	(76000) 2.5" H x 1.75" W, Package in Pairs	$27.98 G

Windline Removable Folding Pontoon Ladder



- Constructed of thick-wall stainless steel tubing.
- Installs and removes instantly from CM-1 plastic cup mounts.
- Height stowed: 4", overall width 16".
- Length deployed 45", length stowed 30".

Order No.	Mfg. No. / Description	Price
692194	(FDL-4B) 4 Plastic Step	$138.98 F

Boater Sports Rear Folding Ladder



Order No.	Mfg. No. / Description	Price
2100064	(REL-3) 3 Step	$170.98 Q

Marpac 4 Step Gunwale Ladder



- 15" non-slip composite steps for easy boarding.
- Corrosion resistant 1" diameter polished aluminum tubing.
- Folds flat for easy storage.
- Adjustable standoffs with non-marking tips protect the hull.
- 10-1/2" hooks fit over most gunwales.

Order No.	Description	Price
7-1634	4 Step, 15" Wide	$47.98 G

Boater Sports Aluminum Boarding Ladders



- Portable boarding ladder.
- Adjustable leg support extensions to fit most boats.
- Arms pivot to flat profile for easy storage.
- 11" hook with 13.5" inside width.

Order No.	Mfg. No. / Description	Price
1-52404	(52404) 4 Step, 46" Long	$49.95 I
1-52406	(52406) 5 Step, 56" Long	$69.95 H

Garelick EEz-In Pontoon Swim Ladders



- For use at pontoon side gate or transom.
- Attaches easily to deck with included Shur-Loc catches.
- Vinyl sleeves on verticals protect pontoon.
- Durable 1" diameter anodized aluminum tube.
- Hooks fold flat for stowage.
- Comfortable white traction molded poly steps.
- Width 15".

Order No.	Mfg. No. / Description	Price
391285	(15230) 3 Steps, Length 36"	$131.98 G
391286	(15240) 4 Steps, Length 50"	$144.98 G

Windline Telescoping Gunwale Hook Ladder



- Stainless steel tubing.
- 3 wide steps for comfortable boarding.
- Stainless standoffs with rubber crutch tips to protect your hull.
- Steps telescope and hooks fold for compact, flat storage.
- 250 lbs. workload.
- 11" hooks.

Order No.	Mfg. No. / Description	Price
692210	(TGL-3) 3 Step, 40" L (21" L When Stowed) x 16" W	$129.98 F

Marpac Telescoping Boat Hook



- Perfect for docking, launching, mooring or retrieving.
- Easy to set up, it requires only a simple twist of the telescoping tubes to lock in position.
- Hook will not mar boat's finish.
- Guaranteed unbreakable hook made of noncorrosive Lexan.

Order No.	Description	Price
7-0602	Adjustable Telescoping Boat Hook: 49" to 76"	$19.98 G

Garelick EEz-In Gunwale Hook Ladders




391362



- Comfortable and sturdy white traction molded plastic steps.
- Thick vinyl covered hooks fold flat for storage.
- Durable 1" diameter aluminum tubing.
- All aluminum adjustable standoffs with cushioned tips.
- Hooks fold flat for stowage.
- 391362: Support ladders against hull.

Order No.	Mfg. No. / Description	Price
391007	(05037) 3 Steps, 36" L x 15" W, 7" Hook	$52.98 G
391021	(05031) 3 Steps, 36" L x 15" W, 11" Hook	$50.98 G
391033	(05041) 4 Steps, 48" L x 15" W, 11" Hook	$56.98 G
391362	(99000) Alum. Ladder Standoff, 4-1/2" L (Sold Per Pair)	$25.98 G


O & H Manufacturing Rig Hooks and Push Pole

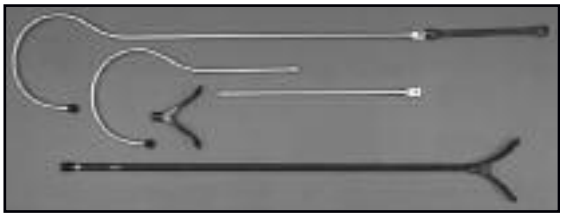

- Not UPS-able.

Order No.	Mfg. No. / Description	Price
342020	(NRH34) 3/4" x 10', 1-Piece Aluminum Rig Hooks	$91.98 E
342030	(NRHD) 1" x 12', Heavy Duty, 1-Piece Aluminum Rig Hooks	$152.98 E
342054	(NRHS34) 3/4" x 10', 2-Piece Aluminum Rig Hooks	$103.98 E
342078	(DBPP) 1-1/4" x 10', 1-Piece Push Pole with Duck Bill	$131.98 I
342066	(DB100) Duck Bill Attachment **(UPS-able)**	$25.98 I

Heavy Duty Boat Hooks and Pike Poles



- Heavy duty, commercial grade, boat hooks and pike poles.
- 1-1/2" aluminum handles.
- Not UPS-able.

Order No.	Mfg. No. / Description	Price
327711	Aluminum Pike Pole, Length 14'	$97.98 F
327736	Aluminum Pike Pole, Length 18'	$115.98 F
327747	Aluminum Pike Pole, Length 20'	$125.98 F
341001	Aluminum Boat Hook, Length 8'	$73.98 F
341003	Aluminum Boat Hook, Length 12'	$90.98 F
341004	Aluminum Boat Hook, Length 16'	$106.98 F

Garelick Boat Hooks



- Lightweight, durable aluminum is well balanced with maximum strength.
- Telescoping Boat Hooks have smooth telescoping twist lock with rolled tube edge for ease of use, comfort and maximum strength.
- Clear satin finish, premium grip.
- Hooks are permanently attached with unique formed dimple.
- High tensile anodized aluminum tube resists corrosion.
- Comfortable non-slip vinyl safety grip.

Order No.	Mfg. No. / Description	Price
323357	(55170) Telescoping, Adjusts 3.5' to 8'	$36.98 G
323369	(55175) Telescoping, Adjusts 4.5" to 12'	$55.98 G
323307	(55006) Fixed Length: 6'	$35.98 G
323319	(55008) Fixed Length: 8'	$41.98 G

©2014 Donovan Marine, Inc.

Swobbit Perfect Poles



- Teardrop design makes Perfect Pole up to 67% stronger then other telescoping handles.
- Outer pole is made of custom extruded, heat treated, anodized aluminum.
- Inner pole is made of drawn 6063 T8 heat treated, anodized aluminum.
- Comfortable hand grip.
- Patented no-lock tracking system for foolproof adjustments.

Order No.	Mfg. No. / Description	Price
460208	(SW45640) Length 2' - 4'	$20.98 G
460206	(SW45650) Length 3' - 6'	$34.98 G
460193	(SW45660) Length 5' - 9'	$45.98 G
460181	(SW45670) Length 6' - 11'	$62.98 G

- Features: Exclusive teardrop shape makes 67% stronger then other handles and Insta-Just Tracking System guarantees button will pop up in the next hole every time.

Order No.	Mfg. No. / Description	Price
460212	(SW44650) Length 3' - 6'	$19.98 G
460214	(SW44660) Length 5' - 9'	$24.98 G

Star Brite Extending Economy Boat Hook



- Telescoping pole extends with a special fast locking cam action.
- Made of unbreakable, glass reinforced nylon.
- Special air chambers make it float.

Order No.	Mfg. No. / Description	Price
675966	(40609) Length 4' - 8'	$26.98 G

Taylor Made United States Flags


225386


225347

- Packaged in individual poly bags.

Order No.	Mfg. No. / Description	Price
225347	(8418) Dimensions: 12" x 18", Embroidered	$24.98 G
225359	(8424) Dimensions: 16" x 24", Embroidered	$27.98 G
225361	(8430) Dimensions: 20" x 30", Embroidered	$30.98 G
225373	(8436) Dimensions: 24" x 36", Embroidered	$39.98 G
225385	(8460) Dimensions: 36" x 60", Embroidered	$54.98 G
225386	(2418) Dimensions: 12" x 18", Printed	$13.98 G
225401	(2424) Dimensions: 16" x 24", Printed	$17.98 G

Taylor Made Flags





- Perma-print dyed nylon with heavy white canvas heading and brass grommets.
- Sold each per poly bag.

Order No.	Mfg. No. / Description	Price
224525	(2018) 12" x 18", Bahamas Courtesy Flag	$18.98 G
224624	(1818) 12" x 18", Jolly Roger Flag	$12.98 G

Swobbit Perfect Pole Attachments


460337


460333

460335

- Uni-Snap quick release adapter snaps onto the Perfect Pole telescoping handle.

Order No.	Mfg. No. / Description	Price
460333	(SW66650) Universal Boat Hook, 9-1/4" L x 4" W, UV Resistant Polycarbonate	$14.98 G
460335	(SW66670) Stainless Steel Gaff Hook, 8" Long, For Light Duty Fishing	$39.98 G

- Perfect for retrieving overboard items or landing your fish.
- Light to medium weight, not intended for landing heavy fish or objects.

Order No.	Mfg. No. / Description	Price
460337	(SW66680) Landing Net, Pear Shape, Large, 17" x 27" x 30"	$30.98 G

Star Brite Boat Hook



- Fits all Extend-A-Brush quick connect handles.
- Constructed of unbreakable glass reinforced nylon for years of trouble free use.
- Special design makes for easy rope handling and pick up.

Order No.	Mfg. No. / Description	Price
675900	(40033) 8" Long	$13.98 G

Taylor Made U.S. Yacht Ensign



- Deluxe sewn nylon ensigns.
- Package in individual poly bags.

Order No.	Mfg. No. / Description	Price
225272	(8118) Dimensions: 12" x 18"	$19.98 G
225284	(8124) Dimensions: 16" x 24"	$26.98 G
225309	(8136) Dimensions: 24" x 36"	$38.98 G


Nylon Design Flags



- Perma-print dyed nylon with reinforced nylon heading.
- Sold each per poly bag.

Order No.	Mfg. No. / Description	Price
224509	(142148) Louisiana, Dimensions: 12" x 18"	$17.98 Q
224662	(142150) Louisiana, Dimensions: 24" x 36"	$33.98 Q
224523	(2318) Texas, Dimensions: 12" x 18"	$21.98 G
224600	(9118) Cocktail, Dimensions: 12" x 18"	$12.98 G
224612	(9218) Beer Aboard, Dimensions: 12" x 18"	$12.98 G
224624	(1818) Jolly Roger, Dimensions: 12" x 18"	$12.98 G
224648	(32183) Solid Red, Dimensions: 12" x 18"	$12.98 G
224524	(900462) Solid Red, Dimensions: 24" x 36"	$21.98 Q
224701	(32185) Solid Yellow, Dimensions: 12" x 18"	$12.98 G

Annin International Code of Signals

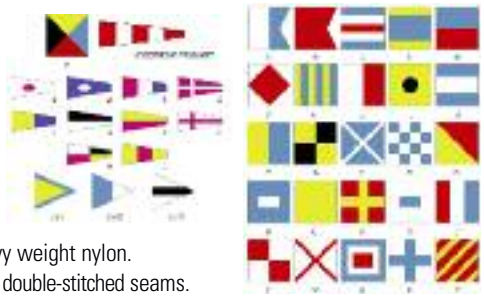

- Made of 100% heavy weight nylon.
- Set of 40 flags with double-stitched seams.
- Finished nylon rope, distance lines and ash toggles.
- Includes: (26) 12" x 18" alphabet flags, (11) 8" x 24" pennants and (3) 8" x 16" substitutes.
- Comes in a handy nylon storage bag.

Order No.	Mfg. No. / Description	Price
471390	(256000)	$579.98 Q
224656	(256101-B) Fuel Flag, 24" x 24"	$43.98 Q

Perko Fig. 1302 Clamp-On Flag Pole Socket



- Chrome plated zinc alloy with black polymer knob.
- For round rail sizes 3/4" to 1".
- Socket ID 3/4".
- Bracket dimensions: 2" x 1-3/4".

Order No.	Mfg. No. / Description	Price
534227	(1302 DP0 CHR)	$45.98 R

Perko Fig. 221 Upright Flag Pole Socket



- Chrome plated bronze.
- Socket ID 1-1/4", base OD 2-3/4", overall height 2-1/8".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
535786	(221 DP3 CHR) 13° Angled Stern Socket	$98.98 R

Springfield Barbeque Grill Rail Mount Package



Fuel Tank Not Included

- Grill with multi-fit rail mount kit.
- Converts to table-top grill.
- Legs fold upward to be used as a carry handle.
- 12,000 BTU rating.
- 189 sq. in. grill cooking surface.
- 130 sq. in. griddle surface on top of lid.
- Use with a 1 lb. propane tank (not included).

Order No.	Mfg. No. / Description	Price
550245	(1940054)	$210.98 G

Kuuma Universal Single Axis Rail Mount



- Allows BBQ to mount rails of any angle, vertical, or horizontal.
- Will mount to round or square rails.
- Heavy duty construction.
- OLD KUUMA #83650.

Order No.	Mfg. No. / Description	Price
689009	(58183) Adjustable	$58.98 F

Annin Fuel Flag



- Perma-print dyed nylon novelty flag.
- Sold each per poly bag.

Order No.	Mfg. No. / Description	Price
224524	(900462) 24" x 36" Solid Red Fuel Flag	$21.98 Q

AFI Solid Teak Yacht Flag Pole with Ball



Order No.	Mfg. No. / Description	Price
216108	(60758) Length 60", Base 1-1/4"	$62.98 G

Perko Fig. 495 Flag Staffs



- Chrome plated zinc alloy base and top with anodized aluminum tube.
- Eyes for flag halyard.
- Complete with rubber O-ring for firm fit in socket.

Order No.	Mfg. No. / Description	Price
539392	(495 DP2 CHR) 14" L x 3/4" Base OD	$64.98 I
539405	(495 DP3 CHR) 18" L x 3/4" Base OD	$70.98 R

Springfield Barbeque Grill and Post



- Designed for versatility and can be used alone, with a rail mount to attach directly to the rail of your pontoon boat or mounted on a post for your deck or boat.
- Large enough to use for family cookouts.
- It features a 170 sq.in. cooking area.
- Another unique feature is the 110 sq. in. griddle surface on top of the lid.

Order No.	Mfg. No. / Description	Price
5500050	(1970052)	$197.98 F
5500056	(2100047) Post for Barbeque Grill	$36.98 G

Kuuma Grill Rod Holder Mount



- Durable solid steel construction.
- Compatible with any later model Kuuma Grill .
- Attaches to any split-pin 60° fishing-rod holder.
- Easy to install.
- Dimensions: 14" x 8" x 5".

Order No.	Mfg. No. / Description	Price
689015	(58180)	$46.98 F

©2014 Donovan Marine, Inc.

Camco Stow & Go 150 Trim Gas Grill



- Profile Cubed 150 Gas with regulator.
- Dimensions: 20" L x 12" D x 8" H.
- Weight: 9.75 lbs.
- BTU: 9,000.
- Cooking surface area: 135 square inches.
- Designed for high pressure propane- disposable or larger refillable tanks.

Order No.	Mfg. No. / Description	Price
689004	(58162) With Regulator	$122.98 F

Camco Stow & Go 316 Gas Grill



- Features a simple control knob for precise heat control.
- Integrated fold-away legs enable easy grilling on any flat surface.
- Removable warming rack, built-in thermometer, piezo igniter, removable. Lift-and-Clean liner, grease tray, latching lid and stay-cool handle.
- Dimensions: 26" L x 12" D x 10.5" H.
- Weight: 18.5 lbs.
- BTU: 18,000.
- Cooking Surface Area: 295 square inches.
- Designed for high pressure propane- disposable or larger refillable tanks.

Order No.	Mfg. No. / Description	Price
689022	(58171) With Regulator	$318.98 F

Camco Stow & Go Grill Rail Mount



- Mounts your Stow & Go Grill on any cockpit rail.
- Can be used on 7/8" to 1-1/4" round horizontal railings, or 1-1/4" square railings.
- This mount allows your grill to hang outside the rail to protect fiberglass from spills and splatters.

Order No.	Mfg. No. / Description	Price
689024	(58182)	$33.98 F

Camco Pedestal Grill Mount



Pedestal grill mount for all Kuuma grills.

Order No.	Mfg. No. / Description	Price
689013	(58184)	$79.98 F

Camco Stow & Go 160 Gas Grill



- Stainless steel construction.
- Heat output of 13,000 BTUs.
- 160 sq. in. cooking surface.
- Double locking lid.
- Stay cool handle.
- Integral fold away legs.
- Removable grease tray.
- Dimensions: 23.25" L x 11.25" D x 11" H.
- *Designed for high pressure propane; disposable or larger refillable tanks.
- No assembly required.
- 1 year manufacturers warranty.

Order No.	Mfg. No. / Description	Price
689002	(58130)	$167.98 F

- Includes inner lid liner to help protect cover from high-heat discoloration.

Order No.	Mfg. No. / Description	Price
689005	(58132) With Regulator and Inner Lid Liner	$214.98 F

- Designed for use with regulated on-board, low-pressure propane systems.

Order No.	Mfg. No. / Description	Price
689007	(58133) With Low Pressure Connection	$217.98 F

Camco SeaChef Grill Rail Mount



- Mounts your SeaChef Grill on any cockpit rail.
- Can be used on 7/8" to 1-1/4" round horizontal railings, or 1-1/4" square railings.
- This mount allows your grill to hang outside the rail to protect fiberglass from spills and splatters.

Order No.	Mfg. No. / Description	Price
689017	(58192)	$38.98 F

Flitz BBQ Grill Care Kit



- Eco-Safe green product.
- Kit includes: Stainless steel cleaner - 1.7 oz., stainless steel polish - 1.7 oz., liquid metal polish - 3.4 oz. and microfiber cloth - 16 x 16.

Order No.	Mfg. No. / Description	Price
608120	(BBQ 41504)	$23.98 H

Too Cool™ Ice Chests by Marpac


7-7080





- Rugged, high impact, seamless polyethylene construction.
- 2 inches of polyurethane foam insulation (CFC free).
- Air-tight freezer quality gasket.
- Dry ice compatible.
- Food grade material.
- Rugged full length hinges.
- Unique recessed "easy open" drain plug.
- Large non-skid, non-marking rubber feet.
- Quality marine grade, UV resistant draw latches.
- Dual locking security lid.
- Convenient tie down attachment points fits most systems.
- Reinforced non-skid lid.

Order No.	Description	Price
7-7050	50 Quart, Exterior: 27-1/4" L x 18-1/2" W x 14" H Interior: 20-5/8" L x 12-5/8" W x 7-5/8" H, 22 lbs.	$282.98 E
7-7080	80 Quart, Exterior: 32-5/8" L x 18-1/2" W x 16-7/8" H Interior: 26-1/2" L x 12-5/8" W x 12-3/4" H, 28 lbs.	$343.98 E

Moeller Ice Station Zero Ice Chest



- High impact, seamless, Arctic White MDPE double-walled construction.
- Each lid seal undergoes a 24 hour pressure fitting process.
- Corrosion resistant, stainless steel hinges and T-nut fasteners.
- Resilient, FDA approved polyethylene won't absorb or transfer odors; no more "fishy" smells to worry about.
- Secure cam latch closures keep it closed tight.
- Stout rope handles allow for easier toting.
- Dual drains are standard for simpler, hassle free cleaning.

Order No.	Mfg. No. / Description	Price
808722	(43128) 270 Quart, 62.76" L x 22.50" W x 24.25" H	$635.98 G

Engel Coolers



- 25 Quart, Exterior: 20.5" L x 14.25" W x 13.8" H, Interior: 14.5" L x 9.3" W x 9" H, 18 lbs.

Order No.	Mfg. No. / Description	Price
481040	(ENG25T) Tan	$229.99 Q
481045	(ENG25) White	$229.99 Q

- 35 Quart, Exterior: 25.4" L x 14.8" W x 15.1" H, Interior: 19.5" L x 9.7" W x 11.1" H, 22 lbs.

Order No.	Mfg. No. / Description	Price
481048	(ENG35T) Tan	$244.99 Q
481050	(ENG35) White	$244.49 Q

- 65 Quart, Exterior: 29.9" L x 16.8" W x 16.5" H, Internal: 23.5" L x 11" W x 11.5" H, 28 lbs.

Order No.	Mfg. No. / Description	Price
481051	(ENG65T) Tan	$339.99 Q
481052	(ENG65) White	$339.99 Q

- 80 Quart, Exterior: 34.8" L x 16.8" W x 17.6" H, Internal: 28.2" L x 11.3" W x 12.7" H, 33 lbs.

Order No.	Mfg. No. / Description	Price
481053	(ENG80T) Tan	$379.99 Q
481054	(ENG80) White	$379.99 G

- 123 Quart, Exterior: 42" L x 18.8" W x 17.7" H, Internal: 35.5" L x 13" W x 13" H, 45 lbs.

Order No.	Mfg. No. / Description	Price
481056	(ENG123) White	$459.99 G

- 240 Quart, Exterior: 51.8" L x 22.2" W x 21" H (at lid), Internal: 48" W x 16.5" W x 16.35" H, 68 lbs.

Order No.	Mfg. No. / Description	Price
481059	(ENG240) White	$768.99 G

Too Cool™ Ice Chest Pads by Marpac



- Marpac's Too Cool Ice Chest Pads are available for the 50Q, 80Q, 100Q 120Q and 145Q coolers.
- At 15mm, over 1/2", thick they provide exceptional comfort for sitting and unparalled non-slip when standing on the coolers.
- The pads are made of durable, closed cell EVA foam that are white over storm (dark) gray with Marpac's Too Cool logo included.

Order No.	Description	Price
7-7040	Fits 50 Quart, 15-1/2" x 24-1/4"	$124.98 G
7-7041	Fits 80 Quart, 15-1/2" x 29-3/4"	$129.98 G
7-7042	Fits 100 Quart, 15-1/2" x 38-1/8"	$156.98 G
7-7043	Fits 120 Quart, 15-1/2" x 38-1/8"	$156.98 G
7-7044	Fits 145 Quart, 14-3/4" x 39-1/2"	$178.98 G

©2014 Donovan Marine, Inc.

Marpac Power Cool Cooler



- Solid state portable refrigerator keeps food cold and dry-no ice needed.
- Environmentally friendly Peltier Cooler is CFC & HCFC free.
- Cools approximately 54-59° F (12-15° C) below the ambient temperature.
- Convection cooling cools plastic bottles as fast as cans.
- Keeps food warm too-up to 130° F (55° C).
- LED switch glows green for cooling or red for heating.
- 12/24 volt power cord plugs into lighter style power sockets.
- Brushless fan motors for long life and less noise.
- Tow & go with retractable tow handle and built in wheels.

Order No.	Description	Price
7-7001	34.87 Quart (33L) Capacity	$132.98 G

T-H Marine Cooler Mounting Kit



- Includes four corner brackets and two hold down straps.
- The molded, UV resistant corner brackets have interior screw mounting holes to allow a flush mount against surfaces and to take up less deck space.
- Fits virtually all sizes.
- The nylon bungee straps feature molded hooks and a stainless center hook for totally corrosion-proof mounting.

Order No.	Mfg. No. / Description	Price
639856	(CMK-1)	$25.98 H

Sportsstuff 16 Quart Floating Cooler



- Keep your refreshments cool at the lake or pool and enjoy them without even leaving the water!
- Molded PVC comfort grip handles.
- PVC bladder.
- Heat sealed seams.
- Safety valves.
- Reinforced grommet.
- Full circumference zippered lid.
- Color-coded cup holders.

Order No.	Description	Price
601005	(40-1003) 16 Quart, Inflates to 30" Diameter	$49.98 G

Sportsstuff 60 Quart Floating Cooler



- Take your party to the water with this 60 Quart cooler that will hold 48 cans of your favorite beverage.
- This inflatable cooler includes 4 cup holders, zippered lid and grommet for easy tie off.

Order No.	Description	Price
601007	(40-1010) 60 Quart, Inflates to 36" Diameter	$68.98 G

Engel Dry Boxes



- Quality injection molded.
- Insulated with high-grade polystyrene core.
- Airtight O-Ring seal.
- Recessed ergonomic carry handles.
- Integrated shoulder strap.
- Self-stopping hinge.
- Stainless steel latches.
- All fittings secured with stainless steel screws.
- Stain- and odor-resistant; non-absorbent surface.
- Easy to clean.
- Compact and lightweight.

Order No.	Mfg. No. / Description	Price
481063	(UC13) 13 Quart	$52.98 E
481064	(UC19) 19 Quart	$56.98 E
481065	(UC30) 30 Quart	$79.98 E

Boater Sports Cooler Chock Corners



- Perfect for keeping your cooler in place.
- It secures the cooler to the deck or floor of your boat.
- Supplied with mounting hardware and tie-down bungee cords.

Order No.	Mfg. No. / Description	Price
1-54085	(54085) White Nylon	$11.95 H

BoatMates Pedestal Cooler



- Hook and loop straps keep cooler secure to seat pedestal, while non-skid feet prevent sliding across deck.
- Large capacity cooler holds 24 cans plus ice.
- Made from heavy 600D polyester with heat sealed insulated PVC liner that keeps beverages cold for up to 8 hours.

Order No.	Mfg. No. / Description	Price
500976	(32084)	$40.98 F

Marpac Offshore Helm Station Pads



- Ultra-thick, durable foam that helps absorb impacts while reducing fatigue caused by prolonged standing at the helm.
- Installation is easy with our simple and robust peel-and-stick backing.
- Made from closed-cell EVA foam that is specifically formulated for the marine environment.
- These pads do not absorb water and are highly stain resistant.

Order No.	Description	Price
7-7020	16" x 39" x 15mm, White/Storm Gray	$125.98 G
7-7022	16" x 39" x 15mm, Storm Gray/Black	$125.98 G
7-7024	14" x 36" x 15mm, White/Storm Gray	$112.98 G
7-7026	14" x 36" x 15mm, Storm Gray/Black	$112.98 G

Marpac Gunnel Pads



- Marpac's gunnel pads provide four pieces of 3.5" x 12" x 5mm thick non-skid EVA foam with a simple and robust peel-and-stick backing.
- The closed cell foam is highly stain resistant and cleans easily.
- Ideal for under gunnels, steps, rails, docks, trailers or any other place where non-skid is required.

Order No.	Description	Price
7-7030	Gray	$27.98 G
7-7032	Black	$27.98 G
7-7034	White	$27.98 G

Boater Sports Sure Step Non-Skid



- Offers a variety of skid resistant, adhesive tread surfaces for the "do it yourselfer."
- All materials offer a long lasting, rugged product with a proven adhesive system.
- Yet, all are simple and easy to install!
- Package contains: 2 Die-cut 6" x 12" pieces.

Order No.	Mfg. No. / Description	Price
2001001	(SP100) Grit, Sandpaper	$15.98 H
2001002	(SP200) Button, Rubber	$15.98 H
2001003	(SP300) Jelly Bean, Rubber	$15.98 H
2001004	(SP400) Diamond Bean, Rubber	$15.98 H
2001005	(SP500) LP Diamond	$15.98 H

Marpac Adjustable Drink Holders


7-0960


7-0575

- Pop-up adjustable arms hold a variety of containers.
- Folding design saves space when not in use.
- Mounts on any flat surface.
- Made of reinforced nylon with stainless steel springs and nickel plated brass rivets.
- Stainless steel mounting screws included.

Order No.	Description	Price
7-0575	Black	$5.98 G
7-0960	White	$5.98 G


BoatMates Stainless Steel Folding Drink Holder



- 304 polished stainless steel.
- Adjusts to the varying diameters of cans, cups, cozies and mugs.
- A molded silicone coaster on the inside of cover to keep containers from sliding.
- Stainless steel mounting hardware is included, along with nylon sound dampening washers.
- Dimensions: 4.5" L x 5" W x 1" D (folded).

Order No.	Mfg. No. / Description	Price
501000	(22110)	$51.98 Q

Boater Sports Rubber Matting


2001000


2000999

- This innovative new matting has found many applications.
- Standard equipment on many trailers, also effective on the bow of the boat or even under the trolling motor or along gunwales and decks.
- Why buy pre-cut?
- It's more versatile and cheaper by the sheet!
- Sold without adhesive.

Order No.	Mfg. No. / Description	Price
2000999	(HC-1) Honeycomb, 36" x 52"	$87.98 H
2001000	(JB-1) Jelly Bean, 37" x 37"	$87.98 H

T-H Marine Robo Cup and Rod Holders



- Robo cup holder/rod holder.
- Powerful spring-loaded.
- Rubberized jaws.
- Instantly attach.
- Securely holds two cups or rods.
- No tools required.
- Squeeze and attach bottom cap.
- Screws off for rod holder.

Order No.	Mfg. No. / Description	Price
642641	(ROBCP-1) Black	$27.98 H
642644	(ROBCP-2) White	$27.98 H

Marpac Universal Mount Drink Holder





- White polyethylene
- Mounts on any smooth surface.
- Stainless steel fasteners.
- Can be used with or without huggers.
- Includes rail mount adapters.

Order No.	Description	Price
7-0962	With Suction Cup Mounting	$13.98 G

Boater Sports Fold-Down Drink Holders





- Folding drink holder with pop-up adjustable arms.
- Non-corrosive material, mounting hardware included.

Order No.	Mfg. No. / Description	Price
1-52012	(52012) White	$5.95 H
1-52014	(52014) Gray	$5.95 H
1-52016	(52016) Black	$5.95 H

©2014 Donovan Marine, Inc.

Boater Sports Mug Holder



- Chrome plated drink holder with foam insulator.
- Easily detachable and swings freely.
- Comes with two mounting brackets.

Order No.	Mfg. No. / Description	Price
1-52004	(52004)	$11.95 H

Handi-Man Drink-A-Long Screwmount Drink Holder



- Avoid messy spills.
- Holds standard soft drink cans, mugs with handles and insulated containers.

Order No.	Mfg. No. / Description	Price
731510	(960025)	$29.98 I

Boater Sports Stainless Steel Cup Holder with LED Base



- 316 Stainless steel.
- 3-1/4" - 4".
- Drain hole in bottom of cup.

Order No.	Mfg. No. / Description	Price
1-52023	(52023)	$19.95 H

T-H Marine Cup Holders



- Made from super-tough poly material which resists sunlight, breakage and chemicals.
- A large diameter lip to provide a neat installation.
- Hose fitting on the bottom to accept 3/8" ID hose.
- Holds insulated or un-insulated cans and 16 oz. bottles.
- Dimensions: Depth 3-1/8", main body diameter 3.77" and top lip 4.2".

Order No.	Mfg. No. / Description	Price
642264	(LCH-1) Black	$1.98 H
642276	(LCH-1W) White	$1.98 H

Accon Drink Holders



401-W-DDH



401-W-SDH

- Marine grade 316 stainless steel construction or marine grade aluminum.
- Easily removes when not needed, simply snap back into place when needed again.
- Surface mount, no cut-outs are necessary.
- Fastens with two #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(401-W-DDH) Double, Stainless Steel	Price On Request
Special Order	(401-AL-W-DDH) Double, Alum. Top, S/S Base	Price On Request
Special Order	(401-W-SDH) Single, Stainless Steel	Price On Request
Special Order	(401-AL-W-SDH) Single, Alum. Top, S/S Base	Price On Request

Marpac Stainless Steel Drink Holder



- Marine grade stainless steel.
- Nylon hose barb for 3/8" hose.
- Included self-adhesive gasket.
- Cut-out size: 3-1/2".
- Overall flange OD: 4-1/4".
- Fits most cup holes.

Order No.	Description	Price
7-0961	Stainless Steel Drink Holder	$15.98 G

Boater Sports Recessed Cup Holder with Drain



- Stainless steel recessed cup holder with drain.
- 3-1/4" x 4".

Order No.	Mfg. No. / Description	Price
1-52003	(52003)	$13.95 H

BoatMates Largemouth Tool Tote



- Twenty outside pockets and eleven interior pockets provide plenty of room to organize tools and hardware.
- Widemouth zippered opening allows plenty of room to access power tools in roomy interior.
- Non-slip feet on bottom protect deck and keep bag from sliding.
- Reinforced seams and rigid bottom panel for years of use.
- Features padded handles, nylon hardware and self-repairing zipper with molded rubber pull.
- Shoulder strap included.
- Dimensions: 16" L x 8.5" W x 12" D.

Order No.	Mfg. No. / Description	Price
500975	(31439) Tool Tote	$40.98 F

BoatMates Cockpit Organizer



- Fabricated from polished 304 grade stainless steel.
- This upscale organizer is great for fishing gear, binoculars and other personal items.
- Stainless mounting hardware included.
- Dimensions: 12.5" L x 4.5" W x 4.5" D.

Order No.	Mfg. No. / Description	Price
501004	(22130)	$82.98 Q

BoatMates Knife and Pliers Caddy



- Fabricated from 304 polished stainless with injection molded ABS inserts to keep tools protected.
- Stainless steel hardware included.
- Dimensions: 9" L x 4" W x 3" D.

Order No.	Mfg. No. / Description	Price
501005	(22120)	$51.98 Q

Accon Quick Store Systems

Accon Marine



- Attaches to our line of quick release drink holders (not included).
- Durable, breathable, water repellent vinyl coated polyester mesh fabric.
- Antimicrobial properties make it resistant to mold and mildew.
- Sunbrella acrylic binding.
- UV resistant thread.
- Strap products utilize polypropylene webbing.
- Hook and loop fasteners and closures.

Order No.	Mfg. No. / Description	Price
Special Order	(QSDH1) Single	Price On Request
Special Order	(QSDH2) Double	Price On Request
Special Order	(QSDH3) Triple	Price On Request

Accon Quick Store Trash Bag

Accon Marine



- 415 Quick release hinge.

Order No.	Mfg. No. / Description	Price
Special Order	(QST-415)	Price On Request

BoatMates Cruisin' Caddy



- This easy to mount organizer holds your favorite beverage, personal items, and even a couple of your favorite lures.
- Mounts either vertically, or on a flat surface.
- Great for small boats with limited cockpit storage.

Order No.	Mfg. No. / Description	Price
500972	(21311)	$14.98 F

BoatMates Cockpit Organizer



- Suction mounts on any smooth surface in cockpit or cabin, and holds fishing gear, binoculars, or personal items.
- Keeps baits, pliers, and fillet knife safe, and organized.
- Can be permanently mounted with screws.

Order No.	Mfg. No. / Description	Price
500974	(21331)	$14.98 F

AFI One-Piece Knife and Pliers Holder

AFI



- Made from UV stabilized, corrosion proof material.
- Holds 2 knives, pliers and up to 15 pieces of tackle.
- Includes stainless steel mounting screws.
- Dimensions: 4" W x 9" H x 2-1/4" D.

Order No.	Mfg. No. / Description	Price
215865	(67607)	$24.98 G

Accon Quick Store Bags with 415 Quick Release Hinge

Accon Marine



Order No.	Mfg. No. / Description	Price
Special Order	(QS1-415) Single	Price On Request
Special Order	(QS2-415) Double	Price On Request

BoatMates Trash Bagger



- Easy to mount resin frame has a hinged cover to keep the contents from spilling out, and insects from creeping in.
- Quickly mounts on any smooth surface with three super suction cups, or can be permanently mounted with screws.
- Uses many types of bags (Included).

Order No.	Mfg. No. / Description	Price
500973	(21321)	$14.98 F

©2014 Donovan Marine, Inc.

Attwood Sportline Glove Box

attwood



- Made of durable, lightweight black plastic with brushed-chrome accent.
- Stainless steel hinge pin and locks with a marine locking latch.
- Door dimensions: 13-3/4" long x 5-1/2" high.
- Inside dimensions: 11-3/4" long x 4" high x 6-5/8" deep.
- Installation hole size: 12" long x 4-1/4" high.

Order No.	Mfg. No. / Description	Price
237099	(2716-4) Sportline Glove Box	$38.98 R

TACO Telescoping Outrigger Poles

TACO



- Telescopes to less than 6' for bridge clearance, trailering and storage.
- Designed for universal use with Grand Slams, Sport Slams, Striker Bases and other brands of mounts.
- Gold rings and tips.
- 3 year warranty.
- Anodized aluminum silver.

Order No.	Mfg. No. / Description			Price
444012	(OT-0441VEL15)	Length 15'	OD Base: 1-1/8"	$446.98 E
444050	(OT-0551VEL186)	Length 18'	OD Base: 1-1/2"	$686.98 E

- Anodized aluminum black.

Order No.	Mfg. No. / Description			Price
444024	(OT-0441BKA15)	Length 15'	OD Base: 1-1/8"	$446.98 E
444062	(OT-0551BKA186)	Length 18'	OD Base: 1-1/2"	$686.98 E

Heavy Duty Telescoping Outrigger Poles

- Anodized aluminum silver.

Order No.	Mfg. No. / Description			Price
444036	(OT-0541VEL15-HD)	Length 15'	OD Base: 1-1/2"	$545.98 E

- Anodized aluminum black.

Order No.	Mfg. No. / Description			Price
444048	(OT-0541BKA15-HD)	Length 15'	OD Base: 1-1/2"	$545.98 E

TACO Grand Slam 270 Outrigger Top Mount

TACO



- Polished marine grade 316 stainless steel adjustable arm.
- Fully adjustable - they are versatile, durable and reliable.
- Offers 12 locking height positions & lays down for bridges and trailering.
- The rotator arm with heavy duty grip, operates from below the top for adjustments while at the helm.
- Outrigger locking pin.
- The rotator handle position during installation is easily adjusted to avoid obstruction.
- 3 year warranty.

Order No.	Mfg. No. / Description	Price
444165	(GS-270)	$1,211.98 D

Davis Deluxe Rigging Knife

DAVIS



- Made entirely of top quality stainless steel with dura-edged blades.
- Includes marline spike, shackle key and screwdriver.

Order No.	Mfg. No. / Description	Price
323117	(1551) Rigging Knife	$29.98 R

Marpac Outrigger Pole & Holder Kit

marpac





- Telescoping outrigger pole with line guides.
- Includes: (1) 7-0098 - Outrigger pole holder and (1) 7-0631 - Telescoping outrigger pole.

Order No.	Mfg. No. / Description	Price
7-0630	Sold per pair	$163.98 F

TACO Grand Slam 370 Outrigger Top Mount with Off Handle

TACO



- Versatile design for use in soft tops and hard tops (Up to 1.93" thick).
- Fully adjustable from under the top.
- Safe operation while at the helm.
- Rotates to 12 locking positions.
- Unlimited height positions.
- 30° offset handle.
- Fold-up crank handle.
- Accepts 1-1/2" OD outriggers.
- Outrigger locking pin 4" W x 6" L plate.
- Polished stainless steel 316 arm and brushed anodized aluminum body.
- Seals and gasket to prevent water penetration.
- 3 year warranty.

Order No.	Mfg. No. / Description	Price
444168	(GS-370)	$2,118.98 D

TACO Grand Slam 170 Outrigger Top Mount

TACO



- TACOs exclusive Twist-n-Lock rotator collar locks-in 12 fishing positions with a simple turn.
- Delrin bearings and internal locking mechanism offers smooth adjustment, secure positioning and prevents movement.
- Rugged, sure-grip knob adjusts and locks-in desired height and laydown position for safe trailering and navigation under bridges.
- Stainless steel arm with locking features ensures TACO Sportfishing Outriggers remain securely in place.
- Designed for use with standard 1-1/8" butt OD outriggers.

Order No.	Mfg. No. / Description	Price
444140	(GS-170)	$684.98 D

TACO Striker Base Outrigger - Gunnel Mount



- Marine grade 316 stainless steel.
- 12 locking positions with our hex nut design including stand up and lay down.
- Ambidextrous arms are removable
- Template included for installation.
- 5-1/8" L x 2-5/8" W x 1-1/8" butt end
- Bases compatible with Lee, Perko and Rupp outrigger poles.
- 3 year warranty.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
444101	(F16-0212-F) 45° Gunnel Mount	$176.98 F

TACO Wedge Plate



- For use with curved T-tops.
- White.

Order No.	Mfg. No. / Description	Price
751229	(WP-150WHA-1) 4" W x 6" L x 7°	$127.98 F

TACO Outrigger Rigging Kit



- To rig 1 pair of outriggers up to 22'.
- Standard includes: 2 Release clips, shock cord with chrome plated snaps and glass eye, barrel swivels, snap swivels, crimps, stainless steel pad eyes and screws.
- Premium includes (Pictured): 2 Quality release clips, shock cord with stainless steel snaps & pulley, barrel swivels, snap swivels, crimps, stainless steel pad eyes, balsa wood floats & screws.
- 100' of UV protected dacron line.
- All packaged in a durable blue marine mesh bag.

Order No.	Mfg. No. / Description	Price
444009	(RK-0001SB) Standard, Black Line	$63.98 F
443995	(RK-0001PB) Premium, Black Line	$89.98 F

TACO Accessory-Ready Clamp-On Rod Holders



- Stylish tapered design.
- Designed for use with Accessory-Ready clamps and factory-installed male splines.
- 1-3/4" ID.
- Length 9-3/4".

Order No.	Mfg. No. / Description	Price
444245	(F41-2750BKA-1) Black	$30.98 F
444247	(F41-2750WHA-1) White	$25.98 D
484990	(F31-2750BXY-1) Polished, Bright Dip Anodized	$77.98 F

TACO Outrigger Line Caddy



- Easy way to store line while outriggers are rigged and in the retracted position.
- Simple clamp on installation.
- Excess rigging line is wrapped around caddy ears to keep lines neat and orderly.
- Fits: 8', 12', 15' and 18' outriggers (1-1/8" and 1-1/2").
- Sold two pairs.

Order No.	Mfg. No. / Description	Price
444122	(F40-0030BKA-1) Black Nylon	$37.98 F

TACO Outrigger Base Reducer



- Reduces inner diameter from 1-1/2" to 1-1/8" to accept the 1-1/8" butt end diameter outriggers.

Order No.	Mfg. No. / Description	Price
444010	(GSC-0025) Aluminum	$126.98 F

TACO Grand Slam Backing Plate



- Anodized aluminum.
- For additional support when mounting to hard tops and gunnels.
- 3/8" thick.

Order No.	Mfg. No. / Description	Price
444175	(BP-150BSY-320-1) 5" W x 6" L	$90.98 F

TACO Accessory-Ready Aluminum Clamp-On Rod Holders



- Features TACO's patent-pending Accessory-Ready technology for easy installation and adjustment.
- Adjustable clamp is designed to fit multiple pipe or tube sizes.
- Easy and quick adjustments made with a standard Allen wrench.
- Polished silver.

Order No.	Mfg. No. / Description	Price
444204	(F31-2721BXY-1) Fits 3/4" & 1" IPS Pipe	$148.98 F
444266	(F31-2731BXY-1) Fits 1-1/4" & 1-1/2" IPS Pipe	$139.98 F

TACO Stainless Steel Adjustable Clamp-On Rod Holders



- Polished marine grade 316 stainless steel.
- Professional flared style rod holder.
- Set screw secures rod holders in place on pipe or tube.
- Recessed screws.
- Rotates and locks every 18°.
- Heavy duty flared white vinyl liners.

Order No.	Mfg. No. / Description	Price
444288	(F16-2600POL-1) Fits 7/8" & 1" Tubing, Rod Holder ID 1-3/4"	$83.98 F
444282	(F16-2623POL-1) Fits 3/4" & 1" IPS Pipe, 1" & 1-1/4" Tubing, Rod Holder ID 1-3/4"	$85.98 F
444186	(F16-2630POL-1) Fits 1-1/4" & 1-1/2" IPS Pipe, Rod Holder ID 1-7/8"	$104.98 F

©2014 Donovan Marine, Inc.

TACO Clamp-On Rod Holders



- Glass reinforced nylon.
- For use on T-tops and bow rails.

Order No.	Mfg. No. / Description	Price
444251	(F41-2700WHA1) 1-3/4"	$45.98 G
444252	(F41-WHS27201) 1-1/16" and 1-5/16" OD	$42.98 G

Marpac Tournament Clamp-On Rod Holder



- Clamp-on, Tulip style.
- 32 rod angles make this one of the most versatile rod holders available.
- White vinyl liner.
- For use with 1-1/4" tube or 3/4" pipe.

Order No.	Description	Price
7-0898	Polished Stainless Steel	$66.98 G

Lee's Vertical Flush Mount Rod Holders



- Polished stainless steel.
- Full length white vinyl insert.
- All edges are rounded.
- Top flange is crowned for maximum strength and appearance.
- Heavy duty pin is riveted in bottom.

Order No.	Mfg. No. / Description	Price
444810	(RH-527VS) Dia. 2", 8-5/8" L, Inside Dia. 1-5/8"	$90.98 F
444822	(RH-532VS) Dia. 2-1/4", 10-5/8" L, Inside Dia. 1-13/16"	$117.98 F

Lee's 30° Flush Mount Rod Holders



- Polished stainless steel.
- Top flange is crowned for maximum strength and appearance.
- Full length white vinyl insert.
- All edges are rounded.
- Heavy duty pin is riveted in bottom.

Order No.	Mfg. No. / Description	Price
444846	(RH-525SS) Dia. 2", 8" L, Inside Dia. 1-5/8"	$81.98 F
444858	(RH-530SS) Dia. 2-1/4", 10" L, Inside Dia. 1-13/16"	$113.98 F
444911	(RH-526) White Vinyl Insert for 444846 (RH-525SS)	$10.98 F

TACO Aluminum Clamp-On Rod Holder



- Ideal for light tackle fishing.
- Clamp style: Round.
- Corrosion resistant anodized aluminum rod holder with plastic clamp and satin finish.
- Welded I-Beam pin for secure rod butt seating.
- Pipe O.D. 7/8" to 1" tube.

Order No.	Mfg. No. / Description	Price
444283	(F41-2600VEL-1)	$37.98 F

Perko Fig. 1215 Clamp-On Rod Holder



- Chrome plated zinc alloy with polished stainless steel tube.
- Hard black plastic liner.
- Clamp-on feature eliminates drilling rail and simplifies relocation.
- Mounts on vertical or horizontal rails.
- Adjustable for 7/8" to 1" rails.
- Tube ID 1-5/8", tube OD 2".

Order No.	Mfg. No. / Description	Price
533345	(1215 DPO CHR) 9" Length	$78.98 R

Marpac Stainless Steel Clamp-On Rod Holder



- Cast 316 stainless steel clamp.
- Adjustable for 7/8" and 1" rails.
- Can be mounted on horizontal or vertical rails.
- Composite liner.

Order No.	Description	Price
7-0897	9" L x 1-1/2" ID	$38.98 G

Marpac Flush Mount Rod Holders





- Stainless steel.
- Overall length 9-1/2".
- 1-7/8" ID.

Order No.	Description	Price
7-0890	Cast with Liner Only	$34.98 G
7-0891	Stamped with Liner and Cap	$23.98 G

Perko Fig. 452 Angled Flush Mount Rod Holder



- Polished stainless steel flange.
- Anodized aluminum tube.
- Soft black liner and flange gasket with integral flip-up cap.
- Tube ID 1-5/8", tube OD 2".
- Length under flange 8-1/4".
- Flange dimensions: 4-1/8" x 3-3/8".
- Uses #10 fasteners.

Order No.	Mfg. No. / Description	Price
538629	(452 DP0 STS)	$93.98 R
538869	(482 DP1 BLK) Lip and Liner	$17.98 R
538453	(481 DP0 BLK) Cap	$15.98 R

Marpac Flush Mount Rod Holders



- Molded nylon plastic.
- With textured flanged surface.
- Overall length 9-1/2".
- 1-5/8" ID.
- Flange 3-1/2" x 4-3/8".

Order No.	Description	Price
7-0437B	Black	$5.98 G
7-0438B	White	$5.98 G

T-H Marine Rod Holders



- Injection molded of ABS plastic for a long lasting durable part.
- The one-piece construction allows easy installation.
- It has a drain hole molded in bottom.
- Dimensions: 2-1/2" x 4".
- The overall length is 9-1/2" with a 1-1/4" inside diameter.
- All units have a molded in, rod index in bottom.

Order No.	Mfg. No. / Description	Price
641745	(RH-2) Black	$5.98 H
641746	(RH-2FW) White	$5.98 H

Perko Fig. 1104 Side Mount Rod Holder



- Black polymer tube with chrome plated brass brackets.
- Tube ID 1-5/8".
- Tube OD 2".
- Overall length 9".
- Bracket width 3-1/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
531992	(1104 DP0 BLK)	$27.98 R

Perko Fig. 1205 Angled Flush Mount Rod Holder



- Chrome plated zinc alloy flange.
- Anodized aluminum tube.
- Soft black liner and flange gasket with integral flip-up cap.
- Tube ID 1-5/8", tube OD 2".
- Length under flange 8".
- Flange dimensions: 4-1/4" x 3-1/2".
- Uses 1/4" fasteners.

Order No.	Mfg. No. / Description	Price
533299	(1205 DP0 CHR)	$48.98 R
538869	(482 DP1 BLK) Lip and Liner	$17.98 R
538441	(480 DP0 BLK) Cap and Gasket	$15.98 R

Boater Sports Flush Mount Rod Holders



- Durable ABS, economical and corrosion free.
- 30º angle mounting.
- 2" mounting hole required for installation.
- Use three #2 screws.

Order No.	Mfg. No. / Description	Price
1-52206	(52206) Black Nylon	$6.95 H
1-52208	(52208) White Nylon	$6.95 H
1-52224	(52224) Stainless Steel	$29.97 H

Perko Fig. 1100 Side Mount Rod Holder



- Chrome plated brass tube and brackets.
- Hard black polymer liner.
- Tube ID 1-5/8".
- Tube OD 2".
- Overall length 9".
- Bracket width 3".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
531916	(1100 DP0 CHR)	$74.98 R
538883	(483 DP1 BLK) Lip and Liner	$16.98 R

T-H Marine Rod Holders



- Rocket Launcher style with reel slot.
- Standoffs allow individual mounting.
- Fixed standoffs.

Order No.	Mfg. No. / Description	Price
641731	(RHS-3FW) Fish White	$4.29 H
641743	(RHS-3B-DP) Black	$6.98 H

©2014 Donovan Marine, Inc.

TACO 4-Rod Transom Mount Rack



- Long lasting brushed anodized aluminum performance.
- Mounts to transom to maximize on-board rod storage.
- Adjustable rack angle to fit any boat's transom.
- 40-1/2" W x 10-1/4" H x 6-1/4" D, rod holder ID 2".

Order No.	Mfg. No. / Description	Price
444306	(F31-3504BSA-1)	$237.98 F

Marpac Rod and Tool Holder



- Holds up to three poles, knife, pliers, screw drivers or fish hooks.
- Solid one piece molded construction.
- Mounts to any flat, vertical surface.

Order No.	Description	Price
7-0966	12-1/2" W x 10-3/4" H	$15.98 G

Fish-On! Stainless Rod Holders





- Polished 304 stainless steel, with injection molded ABS inserts to protect rods and tools.
- Holds fillet knife, pliers, baits and a convenient shelf for extra line or scents.
- Stainless steel mounting hardware included.

Order No.	Mfg. No. / Description	Price
501006	(22200) Holds 2 Rods, 11" L x 9.5" W x 3" D	$88.98 Q
501007	(22210) Holds 3 Rods, 13.5" L x 9.5" W x 3" D	$103.98 Q

Marpac Rod Holder Strap



- Hold up to 7 rods.
- Sold 4 per card.

Order No.	Description	Price
7-0969	Length 18"	$33.98 G

Boater Sports Rod Hold-Down



- Deck mount rod hold-down.
- Includes: One rubber hold-down strap, one eye strap and three stainless steel screws.

Order No.	Mfg. No. / Description	Price
1-52234	(52234) Length 18"	$6.95 H
1-52235	(52235) Length 12"	$5.95 H

Marpac Poly Rod Racks



- Marine grade UV-stabilized high density plastic.
- White.

Order No.	Description	Price
7-0964	For 2 Rods	$17.98 G
7-0965	For 3 Rods	$22.98 G

Boater Sports Rod Holders



- The rod holder and storage feature is a great place to store your pliers and fillet knives.
- Made of high impact white plastic that resists chips and cracks and can be cleaned with soap and water.

Order No.	Mfg. No. / Description	Price
1-52212	(52212) For 2 Rods, White Nylon	$13.95 H
1-52213	(52213) For 2 Rods, Black Nylon	$18.95 H
1-52214	(52214) For 3 Rods, White Nylon	$20.95 H
1-52215	(52215) For 3 Rods, Black Nylon	$25.95 H

AFI White Poly Tournament Rod Rack



- Polypropylene, UV-stabilized tubes and white poly mounting rails.
- Dimensions: 24-5/8" x 11-15/16" x 2-5/8".

Order No.	Mfg. No. / Description	Price
215740	(65623) For 4 Rods	$39.98 G

T-H Marine Rod Tamer Rod Straps



- Molded of black polyurethane material that will retain its stretch and remain unaffected by sunlight and most chemicals.
- The straps stretch over rods and hook into a loop mounted on the deck.
- Gunwale mount.
- The mounting flange mounts into a3/4" hole in the gunwale with two countersunk screws. Retracts into the gunwale when not in use.

Order No.	Mfg. No. / Description	Price
6400260	(RHD-1) 12", Holds Up to 3 Rods	$12.98 H

- Deck mount.
- The strap ends mounts to the deck with one countersunk screw.

Order No.	Mfg. No. / Description	Price
641692	(RT-14) 12", Holds Up to 4 Rods	$6.98 H
641729	(RT-18) 18", Holds Up to 7 Rods	$8.98 H

Attwood "Sure Grip" Steel Rod Holders



- The 3/8" diameter coated steel rod is tough, strong and corrosion resistant.
- UV resistant plastic coating protects the rod butt and handle.
- Stainless steel stem and wing nut.
- All holders include 5071 mounting base.

Order No.	Mfg. No. / Description	Price
237694	(5063-3) 45° Angle, 4" Stem, for Trolling	$18.98 H
237695	(5062-3) 25° Angle, 4" Stem, for Drifting or Trolling	$18.98 H
237709	(5065-3) 10° Angle, 4" Stem, for Bail Casting Rods	$18.98 H
2350098	(5064-3) 10° Angle, 4" Stem, for Long Handle Bait Casting Rods	$18.98 H
237712	(5060-3) 5° Angle, 4" Stem, for Horizontal Rod Position	$18.98 H
237713	(5061-3) 5° Angle, 8" Stem, for Horizontal Rod Position with Added Clearance	$18.98 H

Boater Sports Adjustable Rod Holder



- Nylon rod holder mount in one of three ways - top mount, side mount or rail mount.
- Swivels and pivots to different angles.

Order No.	Mfg. No. / Description	Price
1-52197	(52197) Black Nylon	$19.99 G

RAM Mounts Ram Rod 2000 Fishing Rod Holders



- High strength composite fishing rod holder is a must have for the fishing enthusiast.
- Designed to mount vertically in your boat, you can rotate the rod holder 360°, while tilting the cradle forward and back for the optimum angle.

Order No.	Mfg. No. / Description	Price
672050	(RAM-114-B) Bulkhead Mounting Base	$28.98 F
672052	(RAM-114-F) Flush Mounting Base	$30.98 F
672054	(RAM-114-RM) Rail Mount Adapter Kit	$9.98 F

Attwood "Sure-Grip" Mounting Bases



- Constructed from extruded aluminum.
- Fits vertical surfaces such as a gunwale or rails.

Order No.	Mfg. No. / Description	Price
239714	(5071-3) Flush Base, Fits 2" Flat Surfaces	$6.98 Q
239726	(5072-7) Flat Rail Base, Fits Square Rail	$6.98 Q
239731	(5074-3) Clamp-On Rail Base, Fits Round Rail Up to 7/8" Dia.	$9.98 Q
239738	(5073-3) V-Round Rail Base, Fits Round Rail Up to 1" Dia.	$6.98 Q
2350098	(5070-3) Side Mount Base, Fits Gunwale or Rail	$18.98 H

Boater Sports Wire Type Rod Holder



- UV resistant plastic coating protects rod from scratches and prevents corrosion.
- 3/8" coated steel rod holder.

Order No.	Mfg. No. / Description	Price
1-52078	(52078) Coated Black	$3.99 H
1-52079	(52079) Mount Only	$8.99 G

Attwood Pro Series Rod Holder



- Smooth surface, radiuses edge throat to protect the rod butt/handle.
- Improved locking collar helps retain the rod yet provides smooth, easy rotation and locking action.
- Ergonomically designed for easy, secure grip.
- Adjusts vertically 160° and horizontally 360° to effectively position rod tip.
- Unique patented cam-lock provides quick, easy yet secure vertical adjustment.
- Steel reinforced mounting post for superior strength.
- Comes with side mount.

Order No.	Mfg. No. / Description	Price
237674	(5002-4) Black	$29.98 G

Attwood Heavy Duty Combo Mount



- The Combo Mount allows for mounting in rod holders in multiple configurations.
- This new design offers an improved fit with positive lock for secure rod holder mounting.
- Can be mounted on side or top of gunwale.
- Compatible with all Attwood and other leading rod holder mounting patterns.

Order No.	Mfg. No. / Description	Price
2350091	(5011-7) Side Mount Base, Black	$7.98 H

©2014 Donovan Marine, Inc.

Fish-On! Mr. Crappie Pro Series Rod Holder System Combo



- Allows the use of up to 4 rods per unit while slow trolling for crappie.
- Full adjustability for rod angle, both vertically and horizontally.
- Set up and break down with NO TOOLS REQUIRED.
- The kit includes: (4) Fish-On! Light tackle rod holders, (1) 4 position gang mount and (1) locking surface mount.

Order No.	Mfg. No. / Description	Price
500979	(73000) Black	$84.98 F

Fish-On! Rail Adapter Kit



- Works with the side mount to allow you to mount on any 7/8" or 1" rail.
- Includes all necessary hardware for mounting.

Order No.	Mfg. No. / Description	Price
500982	(71465) Black	$15.98 Q

Marpac Triple Rod Holder



- Black ABS plastic.
- Foam insert holds up to three rods.
- Stainless steel fasteners included.
- Sold per pair.

Order No.	Description	Price
7-0963	7-3/4" L x 2-1/4" W x 2-13/16" H	$11.98 G

Rod Saver Pro Model Stretch Rod Savers



- At 14" and 12", they are longer than the Original.
- Double elastic gives twice the strength and durability.
- The elastic allows for the Rod Saver to wrap over many more rods.

Order No.	Mfg. No. / Description	Price
2003800	(PM12) 12" Single Strap, Holds Up to 7 Rods	$10.98 H
2003805	(PM12/6) 12" and 6" Set of Straps, Holds Up to 8 Rods	$14.98 H
2003810	(PM14) 14" Single Strap, Holds Up to 7 Rods	$11.98 H
2003815	(PM14/8) 14" and 8" Set of Straps, Holds Up to 8 Rods	$15.98 H

Fish-On! Light Tackle Rod Holder



- Perfect for use in smaller boats or for fishermen who target panfish.
- Fits all Fish-On! Mounting systems.
- Full adjustability both horizontally and vertically.
- Includes side mount.

Order No.	Mfg. No. / Description	Price
500980	(73002)	$23.98 Q

Fish-On! Rod Holder



- Supremely adjustable with 360° horizontal adjustment and 110°.
- Sliding locking ring to secure the rod.
- Includes side mount.

Order No.	Mfg. No. / Description	Price
500978	(72026)	$28.98 F


Fish-On! Side Mount - Black



- Allows additional mounts to be installed wherever necessary.
- Standard 12 position mount installs with 4 self tapping screws to any flat vertical surface or to a 7/8" or 1" rail with the optional rail mount adapter.

Order No.	Mfg. No. / Description	Price
500981	(71460)	$12.98 Q

T-H Marine Rod Storage Holder Rack



- Stores 6 rods neatly and securely.
- Mount horizontally or vertically.
- Foam grip pads.
- Great for boats, RVs or garages.
- Economical for boat rod lockers.
- Corrosion proof.
- Durable and lightweight.

Order No.	Mfg. No. / Description	Price
6400159	(FRH-1)	$14.98 H

Rod Saver "Originals"



- Designed to mount rod and reel combo to the deck of the boat.
- Stainless steel mounting hardware included.

Order No.	Mfg. No. / Description	Price
337375	(10 RS) 10" Single Strap, Holds Up to 5 Rods	$12.98 G
2003750	(10/6RS) 10" and 6" Set of Straps, Holds Up to 5 Rods	$12.98 H

TACO Rod Hanger Racks



- Marine grade 316 polished stainless steel.
- Patent-pending rod tip holder with spring lock design.
- Rod hangers feature concealed fasteners.
- Polymer mounting with pre-drilled, recessed mounting holes.
- Vertical and horizontal mounting options.
- Great for use on bridge overheads, under gunnels or in rod lockers.

Order No.	Mfg. No. / Description	Price
444300	(F16-2751-1) Holds Up to 2 Rods	$84.98 F
444302	(F16-2752-1) Holds Up to 4 Rods	$181.98 F

Boater Sports Pole Light Storage Clips



- Fits your standard 3/4" pole lights.

Order No.	Mfg. No. / Description	Price
1-54096	(54096)	$6.25 H

Marpac Adjustable Spring Clamps



- Stainless steel.
- Excellent for boat hooks, flashlights, oars, fishing rods, charts, etc.
- Uses #6 fasteners.
- 2 per card.
- Minimum ID 5/8", maximum ID 1-1/4", projection 1-1/2", clamp width 1/2".

Order No.	Description	Price
7-0099		$5.98 G

- Minimum ID 1", maximum ID 1-3/4", projection 2-1/4", clamp width 5/8".

Order No.	Description	Price
7-0100		$7.98 G

T-H Marine Overflow Tube Storage Clips



- Offers convenient storage for drain tubes and other items of similar diameter.
- Can hold items form 1" to 1-1/2" in diameter.
- Offers great storage option for fish gaffs, nets and other items as well.
- 2 per card.

Order No.	Mfg. No. / Description	Price
642372	(UC-1)	$4.98 H

TACO Rod Hanger Set



- Polished stainless steel.
- Spring design securely locks rods in position and hidden installation screws.
- Accepts the rod butts up to 1-1/2" diameter.

Order No.	Mfg. No. / Description	Price
444290	(F16-2700-1) Sold In Sets	$45.98 F

Lee's Single Rod Rack Set



- Marine grade anodized aluminum with satin silver finish.
- Vinyl insert protects the rod butt.
- Can be mounted horizontally, vertically or overhead.
- Tip of rod is placed into locking end of set and nylon locking ring is rotated to lock it in.

Order No.	Mfg. No. / Description	Price
444909	(MC-70) Sold In Sets	$21.98 E

T-H Marine Aqua Utility Clips



- Holds any item securely.
- Rugged poly resists sun and salt.
- Stainless steel spring.
- Fits standard 7/8" rail.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
247607	(AUC-2) White	$10.98 H

Perko Fig. 502 Spring Clamps



- Stainless steel.
- Uses #6 fasteners.
- Minimum ID 5/8", maximum ID 1-1/4", projection 1-1/2", clamp width 1/2".

Order No.	Mfg. No. / Description	Price
539582	(502 DP1 STS)	$10.98 R

- Minimum ID 1", maximum ID 1-3/4", projection 2-1/4", clamp width 5/8".

Order No.	Mfg. No. / Description	Price
539570	(502 DP2 STS)	$11.98 R

Perko Fig. 492 Boat Hook Holders



- Stainless steel.
- Maximum pole OD 1-1/2".
- Uses #6 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
538922	(492 DP0 STS) 3-1/2" L x 1" W	$11.98 R

©2014 Donovan Marine, Inc.

Handi-Man Rhino Grip™ Multi-Purpose Tarp Clips



- Heavy duty fiberglass filled nylon construction is strong and tough.
- Tooth design provides impressive gripping strength.
- Adjustable jaw tension.
- Fasten via hook, using 1/2" webbing or up to 1/2" rope.

Order No.	Mfg. No. / Description	Price
731525	(4010) Four Per Pack	$31.98 I
731530	(984010) Counter Box	$377.98 I

T-H Marine Designer Series Access Hatches



642293

- Cam style locks hold lid securely.
- Positive lid seal for watertight fit.
- Hidden fasteners in frame.
- Stainless steel hinges allow full 180 degree opening.
- Structurally engineered "Walk On" lids.

Order No.	Mfg. No. / Description	Price
642279	(HDS-0714-2) 7" x 14", Polar White	$55.98 H
642291	(HDS-1115-2) 11" x 15", Polar White	$69.98 H
642297	(HDS-1115-1) 11" x 15", Black	$79.98 H
642293	(HDS-1119-2) 11" x 19", Polar White	$74.98 H
642300	(HDS-1317-2) 13" x 17", Polar White	$92.98 H
642307	(HDS-1324-2) 13" x 24", Polar White	$99.98 H
642314	(HDS-1330-2) 13" x 30", Polar White	$119.98 H

- Rope locker hatches.

Order No.	Mfg. No. / Description	Price
642320	(HDS-1119-2-R) 11" x 19", Polar White	$102.98 H
642327	(HDS-1317-2-R) 13" x 17", Polar White	$112.98 H

T-H Marine Drop-In Box



- Store gear and tackle secure and dry.
- Vacuum formed storage boxes.
- For Sure-Seal Hatches.
- Easily drops into frame.
- Easy to remove.

Order No.	Mfg. No. / Description	Price
642338	(BOX-1324-12) For 13" x 24" Hatch, 12" Deep	$57.98 H

T-H Marine Hatch Spacer/Retainer Clip



- Durable molded piece acts as a spacer for hatches when hole size is too large.
- Can be used with T-H Marine Designer Series Hatches as well as other brands.

Order No.	Mfg. No. / Description	Price
642370	(HDS-RETC)	$11.98 H

T-H Marine Utility Light Clip



- Secure and stow navigation lights.
- Fits all standard 7/8" navigation light poles.
- White.

Order No.	Mfg. No. / Description	Price
237215	(ULC-2)	$3.98 H

Marpac Access Hatches - White





- Watertight - lid overlapping frame.
- Two separate seals on frame and lid.
- Corrosion free integrated hinges allow 180° opening.
- No visible fasteners.

Order No.	Description	Price
7-0617	11" x 15"	$74.98 G
7-0618	13" x 24" (Two Handles)	$115.98 G

T-H Marine Designer Series Locking Hatches



- Lock holds lid securely, keeping contents safe.
- Positive lid seal for watertight fit.
- Hidden fasteners in frame.
- Stainless steel hinges allow full 180° opening.
- Structurally engineered "Walk On" lids.

Order No.	Mfg. No. / Description	Price
642309	(HDSL-1115-2) 11" x 15", Polar White	$79.98 H
642310	(HDSL-1324-2) 13" x 24", Polar White	$115.98 H

T-H Marine Designer Series Tackle Centers



- It is a flush mount hatch and storage box.
- This would be a great addition to any anglers vessel.
- Positive lid seal for watertight fit.
- Hidden fasteners in the frame.
- Cam style locks hold lid securely.
- Stainless steel hinges.

Order No.	Mfg. No. / Description	Price
642340	(TDS-0714-2T-2P) 7" x 14", 2 Trays	$139.98 H
642342	(TDS-1115-3T-2P) 11" x 15", 3 Trays	$175.98 H

T-H Marine Designer Series Glove Box



- Positive lid seal for water tight fit.
- Stainless steel hinges.
- Size: 7" x 14", cut out: 5-1/2" H x 12" L.
- Hidden fasteners in frame size: Outside 7-1/2" x 14-1/4".

Order No.	Mfg. No. / Description	Price
642278	(GDS-0714-2) Polar White	$119.98 H

Marpac Deck Plates





- Watertight.
- O-ring seal concealed in the lid.
- Size shown is the plate hole I.D., add approximately 2" for flange O.D.

Order No.	Description			Price
7-0632	Diameter 6"	Black	Pry Out	$12.98 G
7-0633	Diameter 6"	White	Pry Out	$12.98 G
7-0627	Diameter 8"	Black	Pry Out	$25.98 G
7-0628	Diameter 8"	White	Pry Out	$25.98 G
7-0620	Diameter 4"	Black	Screw Out	$10.98 G
7-0621	Diameter 4"	White	Screw Out	$10.98 G
7-0623	Diameter 6"	Black	Screw Out	$11.98 G
7-0624	Diameter 6"	White	Screw Out	$11.98 G
7-0635	Diameter 8"	Black	Screw Out	$25.98 G
7-0636	Diameter 8"	White	Screw Out	$25.98 G

- Screw out deck plates with smooth lids.

Order No.	Description	Price
7-0622	Diameter 4", White	$12.98 G
7-0625	Diameter 6", White	$11.98 G

T-H Marine Quick Release Deck Plates



- Cam latch holds secure.
- Hidden fasteners in ring.
- Easy to open and close.
- Textured finish.
- Polar white.

Order No.	Mfg. No. / Description	Price
641392	(DPCAM-6) Diameter 6"	$20.98 H
641393	(DPCAM-8) Diameter 8"	$28.98 H

TACO Polyboard



- UV-stabilized marine-grade polymer specifically designed to withstand harsh marine environment.
- Excellent resistance to sun and salt water.
- Ideal wood replacement for cabinets, dock, step boxes and more.
- Individually shrink-wrapped.

Order No.	Mfg. No. / Description		Price
840005	(P105024WHA27) 24" x 27" x 2"	White	$68.98 E
840010	(P105024WHA54) 24" x 54" x 1/2"	White	$126.98 E
840307	(P105012SFM27) 12" x 27" x 1/2"	Seafoam	$35.98 E
840510	(P102524WHA27) 24" x 27" x 1/4"	White	$36.98 E

Lifesafe Weatherseal Tape



- Non-moisture absorbing.

Order No.	Mfg. No. / Description	Price
228299	(RE3943) 1/8" x 3/8" x 10' Roll	$6.98 H

Boater Sports Deck Plates



- Easy to open.
- Screw in/out design for inspections of and general access.
- Made of high impact ABS material.

Order No.	Mfg. No. / Description	Price
1-54729	(54729) Diameter 4", Black	$8.30 H
1-54730	(54730) Diameter 4", White	$8.30 H
1-54732	(54732) Diameter 6", White	$10.19 H
1-54733	(54733) Diameter 6", Black	$10.19 H

T-H Marine Sure-Seal Deck Plates





- Features a fully overlapping lid and a positive o-ring seal insuring a watertight fit.
- Dual sealing functionality.
- No visible mounting fasteners.
- Total UV and chemical stability.
- Requires no tools for opening.

Order No.	Mfg. No. / Description				Price
247735	(DPP-6S-2)	Diameter 6"	White	Pry Out	$25.98 I
247756	(DPP-6S-1)	Diameter 6"	Black	Pry Out	$25.98 I
247762	(DPP-8S-2)	Diameter 8"	White	Pry Out	$42.98 I
247622	(DPS-4S-1)	Diameter 4"	Black	Screw Out	$11.98 I
247658	(DPS-6S-1)	Diameter 6"	Black	Screw Out	$17.98 I
6400126	(DPS-6-2)	Diameter 6"	White	Screw Out	$13.98 Q
247710	(DPS-8S-1)	Diameter 8"	Black	Screw Out	$29.98 I
247723	(DPS-8S-2)	Diameter 8"	White	Screw Out	$29.98 I

Perko Fig. 526 Regular Deck Plates



- Plain cast bronze.
- Deck plate key included.

Order No.	Mfg. No. / Description	Price
540179	(526 003 PLB) 3" ID, 5-3/8" OD	$152.98 H
540181	(526 004 PLB) 4" ID, 7-1/16" OD	$229.98 H
540206	(526 006 PLB) 6" ID, 9-3/8" OD	$459.98 H

Resilient Textured PVC Traction Tape



- Resilient PVC texture.
- Semi-flexible surface.
- Deeply embossed.
- Non-abrasive.
- Virtually water-proof.
- Mop compatible surface.

Order No.	Mfg. No. / Description	Price
360444	(PFX2301K) 1" x 60', Black	$19.98 G
360470	(PFX2302K) 2" x 60', Black	$38.98 G
360507	(PFX2304K) 4" x 60', Black	$75.98 G

©2014 Donovan Marine, Inc.

TACO Hatch Tape



- Medium density closed cell foam with self adhesive for convenient installation.
- Provides anti-rattle seal.
- Length 8'.
- Black.

Order No.	Mfg. No. / Description	Price
751215	(V30-0744B8-2) Height 1/8", Width 3/4"	$17.98 I
751227	(V30-0748B8-2) Height 1/4", Width 3/4"	$21.98 I


Lifesafe Vinyl Foam Hatch Tape



- Closed-cell foam tape seals out moisture, weather, sound and fumes
- PVC foam tape is ideal for cushioning window and doors
- Absorbs shock and eliminates vibration
- Prevents metal to metal contact.

Order No.	Mfg. No. / Description	Price
228271	(RE3870) 1/8" x 3/4" x 7' Roll	$8.98 H
228301	(RE3945) 1/4" x 3/4" x 7' Roll (Extra Thick)	$7.98 H

Trim-Lok Trim Lock

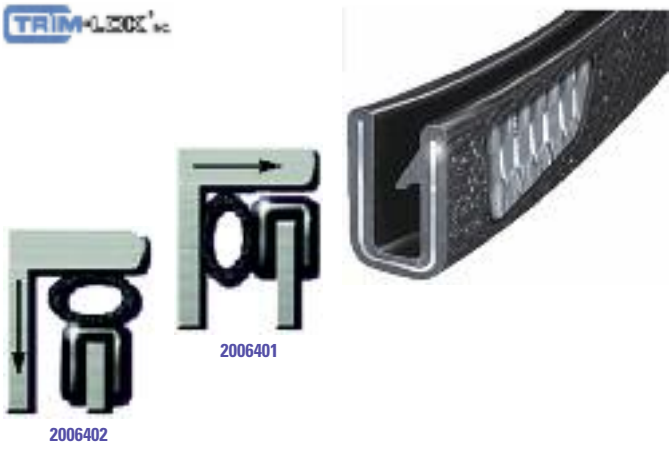

2006401

2006402

- The original "Trim Lok" gives a beautiful finished look! Just push it on and its on to stay...no stapling or glue... Saves on labor...grips on difficult materials, compound curves, etc..
- Rubber-Lok has individual metal clips inside that provide a secure grip.
- Comes with an aluminum inner core for corrosion resistance, light weight and easy to install.
- Finish is textured for appearance.
- Accommodates edges up to 3/16".
- Sold by the linear foot.
- Cut to order.

Order No.	Mfg. No. / Description	Price
2006401	(6100A) Black with Side Seal	$3.35 H
2006402	(6100C) Black with Top Seal	$3.59 H
2006403	(TL) Black, No Seal	$1.29 H
2006404	(TL-W) White, No Seal	$1.59 H


TACO Edge Moulding



- Polished, clear anodized.
- Drilled and countersunk for #5 screws on 6" centers.
- Height 3/4", width 1/4".
- Length 12'.

Order No.	Mfg. No. / Description	Price
748270	(A50-0275TAL12)	$61.98 I

TACO T-Hatch Trim



- Polished, clear anodized.
- Height 3/4", width 1-1/8".
- Length 12'.

Order No.	Mfg. No. / Description	Price
748460	(A50-0304TAL12)	$95.98 I

TACO Solid Half Oval Aluminum Moulding



- Polished, clear anodized.
- Drilled and countersunk for #5 screws on 6" centers.
- Height 3/4", width 3/16".
- Length 12'.

Order No.	Mfg. No. / Description	Price
748129	(A50-0195TAL12)	$69.98 I

TACO Overlap Rub Rails




748206

748181

- Polished, clear anodized.
- Drilled & countersunk for #8 screws on 6" centers.
- Length 12'.

Order No.	Mfg. No. / Description	Price
748181	(A11-0151TAL12) 3/4" H x 3/8" W	$79.98 I
748206	(A11-0152TAL12) 1" H x 7/16" W	$89.98 I

TACO Rub Rail Kit



- Flexible and durable.
- Continuous coils for one-piece installation without seams.
- Offered with stainless steel and flexible inserts - 70' x 1-5/8" x 3/4".
- Use insert V12-9809.

Order No.	Mfg. No. / Description	Price
749200	(V119811WCM70)	$658.98 E

TACO Stainless Steel Hollow Back Rub Rail



- Type 304 marine grade stainless steel.
- Polished mirror finish.
- Drilled and countersunk on 6" centers.
- Gauge .077".
- Length 12'.

Order No.	Mfg. No. / Description	Price
747709	(S11-4510P12) 3/4" W, Screw #8	$81.98 I
747723	(S11-4650P12) 1" W, Screw #10	$96.98 I

TACO Rub Rail Kits



- All-in-one kits include: Rub rail, insert, end caps, screws and installation guide.
- Continuous coil for one-piece, seamless installation.
- Note: Refer to the illustrations on the right for correct shapes.

Flexible vinyl.

Order No.	Mfg. No. / Description	Price
751001	(V11-0809BWK50) 1-1/16" H x 11/16" W x 50' L, White Insert	$271.98 G
751025	(V11-3447BWK50) 1-1/4" H x 15/16" W x 50' L, White Insert	$343.98 G
751013	(V11-2423BBK50) 1-7/8" H x 1-1/16" W x 50' L, Black Insert	$403.98 F
751030	(V11-3426BBK70) 1-7/8" H x 1-3/8" W x 70' L, Black Insert	$609.98 G

Semi-Rigid vinyl.

Order No.	Mfg. No. / Description	Price
751037	(V11-4135BKA30-3) 1-7/8" H x 3/4" W x 30' L, Black	$234.98 F

TACO Nylon Rub Rail End Caps



750720



750718

- Durable black nylon.
- Rub rail end caps finish ends of rub rail.
- Screws #8.
- Ensures inserts stay intact.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
750718	(F90-0002BKN) For Rub Rail 750326	$26.98 I
750720	(F90-0001BKN) For Rub Rail 750340 and 750376	$35.98 I

TACO Flexible Black Vinyl Rub Rails



750302



750326



750340

- Resists sun and sea damage, very rugged and durable.
- These rub rails are popular on bass boats, runabouts and open fisherman models.
- Can be used with either vinyl insert or rope.

Order No.	Mfg. No. / Description	Price
750302	(V11-0809BKA50) Length 50', Use with V12-0810 or 3/8" Rope	$210.98 I
750326	(V11-3447BKA50) Length 50', Use with 750542 or 1/2" Rope	$261.98 I
750340	(V11-2423BKA70) Length 70', Use with 750542 or 1/2" Rope	$634.98 I


TACO Flexible Vinyl Inserts for Vinyl Rub Rails



Order No.	Mfg. No. / Description	Price
750530	(V12-0003WHA70) White, Length 70'	$137.98 I
750542	(V12-0003BKA70) Black, Length 70'	$121.98 I

©2014 Donovan Marine, Inc.

TACO Aluminum Rub Rails

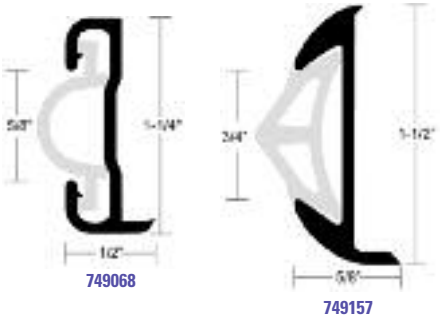

- Designed for us with flexible vinyl inserts.
- Drilled and countersunk for #8 screws on 6" centers.
- Polished, clear anodized.

Order No.	Mfg. No. / Description	Price
749068	(A11-0317TAL12) Length 12', Use Vinyl Insert 749311	$92.98 I
749157	(A11-0638TAL12) Length 12', Use Vinyl Insert 749373	$94.98 I

T-H Marine Rub Rail End Caps



- Molded black plastic.
- Designed to fit both aluminum and rubber rail molding.
- This unit attaches with screw through the vinyl or rope trim to prevent trim from slipping out.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
640064	(ECR-1) For 1-1/2" Molding	$7.98 G
6400139	(ECR-2) For 1-3/4" Molding	$7.98 G

TACO Flexible Vinyl Trim - Self-Locking



- Packaged 25' length per box.
- Covers the unfinished edge and follows almost any contour or radius.
- Flexible PVC trim with individual internal aluminum clips and gripping tongue.

Order No.	Mfg. No. / Description		Price
623635	(V30-1005B25-1) Black	Opening 3/16", Depth 9/16"	$78.98 I
623636	(V30-1005W25-1) White	Opening 3/16", Depth 9/16"	$78.98 I
623637	(V30-1008B25-1) Black	Opening 1/4", Depth 1/2"	$78.98 I
623638	(V30-1008W25-1) White	Opening 1/4", Depth 1/2"	$73.98 I
623639	(V30-1312B25-1) Black	Opening 3/8", Depth 5/8"	$91.98 I

Standard Products Vinyl Trim - Self-Locking



- Flexible embossed vinyl aluminum core QuickEdge trim.
- Standard single lip.
- Length 400'.
- Please note: Priced by the foot. For cut lengths see to the left.

Order No.	Mfg. No. / Description	Price
623643	(75000346) White	$3.37/ft. I
623644	(75000348) Black	$3.48/ft. I

TACO Flexible Black Vinyl Inserts for Aluminum Rub Rails



- Designed for us with flexible vinyl inserts.
- Drilled and countersunk for #8 screws on 6" centers.
- Polished, clear anodized.

Order No.	Mfg. No. / Description	Price
749311	(V12-0317BKA50) Length 50', For Rub Rail 749068	$93.98 I
749347	(V12-0334BKA50) Length 50', For Rub Rail A11-0334	$82.98 I
749373	(V12-0338BKA50) Length 50', For Rub Rail 749157	$137.98 I
749400	(V12-0342BKA50) Length 50', For Rub Rail A11-0340/0342	$107.98 I

T-H Marine Rub Rail Splice



- Design to fit both aluminum and rubber rail molding.
- Non-corrosive molded ends.
- Butt splice for 1-1/4" to 1-1/2" rub rail, 2-1/4" long.

Order No.	Mfg. No. / Description	Price
6400278	(SR-1)	$4.79 H

Trim-Lok U-Channel Edging



- The original "Trim Lok" gives a beautiful finished look! Just push it on and its on to stay...no stapling or glue... Saves on labor...grips on difficult materials, compound curves, etc..
- Rubber-Lok has individual metal clips inside that provide a secure grip.
- Comes with an aluminum inner core for corrosion resistance, light weight and easy to install.
- Finish is textured for appearance.
- Accommodates edges up to 3/16".
- Sold by the linear foot.
- Cut to order.

Order No.	Mfg. No. / Description	Price
2006401	(6100A) Black with Side Seal	$3.35 H
2006402	(6100C) Black with Top Seal	$3.59 H
2006403	(TL) Black, No Seal	$1.29 H
2006404	(TL-W) White, No Seal	$1.59 H

TACO Stainless Steel Rub Strake



- Type 304 marine grade stainless steel.
- Designed to prevent chafing of dock, fender and anchor lines.
- Ideal for yachts and larger boats with heavy lines.
- Screws #8.

Order No.	Mfg. No. / Description	Price
747610	(S11-1700P18) Dimensions: 18" L x 3/4" W	$23.98 I

Perko Figs. 918 Latch and Lock Set



- Chrome plated zinc alloy.
- Locks by turn button from inside or keyfrom outside.
- For door thickness: 5/8" to 1-3/8".
- Dimensions case: 3-7/8" x 2".
- Dimensions escutcheon: 4-3/8" x 1-1/4".
- Uses #6 fasteners.
- Complete with two keys.
- Regular bevel with box strike.

Order No.	Mfg. No. / Description	Price
543517	(918 DP0 CHR)	$169.98 R

Perko Fig. 567 Tubular Latch Set



- Chrome plated zinc alloy.
- Sliding lock button.
- For door thickness 1" to 1-3/8".
- Dimensions case: 4-3/8" x 1-1/4".
- Tube OD 3/4".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
540977	(567 DP0 CHR)	$110.98 R

Phoenix Lock Door Latch with Padlock Eye



- Cast solid burnished brass.
- Bar length: 4-1/4".
- Knob diameter: 2".
- Uses #5 fastener for escutcheon and #8 for eyes.

Order No.	Mfg. No. / Description	Price
546931	(134-B)	$74.98 I

Perko Figs. 931 and 932 Flush Lock and Latches



- Chrome plated zinc alloy.
- Black polymer with stainless steel stem and lock nut.
- For door thickness 1/4" to 1-1/8".
- Installs in a 2" diameter hole.
- Face plate dimensions: 2-1/2" x 2-1/2".
- Adjustment cam bar: 3/8" to 3".
- With offset cam bar and flexible polymer strike.

Order No.	Mfg. No. / Description	Price
543632	(932 DP1 BLK) Latch, Non-Locking	$41.98 R
543648	(931 DP1 BLK) Lock with 2 Keys	$47.98 R

- With offset adjustable cam bar.


Order No.	Mfg. No. / Description	Price
543640	(932 DP1 BLK) Latch, Non-Locking	$41.98 R
5315155	(931 DP2 BLK) Lock with 2 Keys	$48.98 R

- Replacement cam bars.

Order No.	Mfg. No. / Description	Price
543649	(931 001 99A) Offset Cam Bar	$18.98 Q
5315151	(931 002 99A) Offset Adjustable Cam Bar	$23.98 H
5315152	(931 003 99A) Straight Cam Bar	$17.98 H

Perko Figs. 928 and 930 Rim Latch Sets





- Chrome plated zinc alloy.
- Sliding lock button.
- For door thickness: 5/8" to 1-3/8".
- Dimensions case: 2-1/8" x 1-3/4".
- Dimensions escutcheon: 4-3/8" x 1-1/4".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
543618	(928 DP0 CHR) Regular Bevel with Box Strike	$96.98 R
543644	(930 DP0 CHR) Regular Bevel with Flush Strike	$96.98 R

Perko Fig. 927 Mortise Lock Set



- Chrome plated zinc alloy.
- Locked by turn button from inside or key from outside.
- Bevel can be reversed during installation.
- For door thickness: 1" to 1-3/8".
- Dimensions case: 2-3/4" x 2".
- Dimensions escutcheon: 4-3/8" x 1-1/4".
- Uses #6 fasteners.
- Complete with two keys.

Order No.	Mfg. No. / Description	Price
543606	(927 DP0 CHR)	$151.98 R

Perko Fig. 960 Mortise Latch Set



- Chrome plated zinc alloy.
- Turn button lock.
- Bevel can be reversed during installation.
- For doors thickness: 1" to 1-3/8".
- Dimensions case: 2-1/4" x 1-13/16".
- Dimensions escutcheon: 4-3/8" x 1-1/4".
- Uses #6 fasteners.
- Sold each per display pack. Standard pack 5.

Order No.	Mfg. No. / Description	Price
543973	(0960 DP0 CHR)	$98.9.8 R

Perko Fig. 1081 Flush Lock and Latch



- Black polymer.
- Lock with 2 keys and gasket.
- For smooth or carpeted surfaces - includes gasket for smooth surface applications.
- Stainless steel "D" ring handle, stem and lock nut.
- Two O-rings for increased water resistance.
- Face plate dimensions: 2-7/8" x 2-7/8".
- Position indicators shows open or closed position.

Order No.	Mfg. No. / Description	Price
5315030	(1081 DP1 BLK) Cam Bar Adjusts 3/8" to 3"	$54.98 H

©2014 Donovan Marine, Inc.

T-H Marine Recessed Lock and Recessed Latches



- For aluminum, fiberglass and composite lids.
- Watertight O-ring seal.
- Molded from tuff engineering grade black nylon.
- Stainless steel lift ring.
- Rotates 360° right or left.
- Mounts in a 2-3/8" diameter hole.

Order No.	Mfg. No. / Description	Price
639849	(RL-1) Locking	$33.98 H
641084	(NRL-1) Latch, Non-Locking	$29.98 H
6400104	(CAP-RL) Cap for 639849 (RL-1) Recessed Lock	$1.50 G

White Cap T-Handle Latches



- Black nylon with chrome plated zamac T-handle.
- Diameter 3".
- Cut-out: 2-1/2".
- Surface depth: 1/8" - 3/4".
- Includes: Neoprene O-ring and key.
- Fastener included.

Note: Must order cam bar separately! (See Below)

Order No.	Mfg. No. / Description	Price
2011596	(S-226B) Locking, No Cam Bar	$25.98 H
2011603	(S-230B) Non-Locking, No Cam Bar	$20.98 H

White Cap T-Handle Latches



- Black nylon T-handle.
- Diameter 3".
- Cut-out: 2-1/2".
- Surface depth: 1/8" - 3/4".
- Includes: Neoprene O-ring and key.
- Fastener included.

Note: Must order cam bar separately! (See Below)

Order No.	Mfg. No. / Description	Price
2011610	(S-3226B) Locking, No Cam Bar	$25.98 H
2011611	(S-3230B) Non-Locking, No Cam Bar	$19.98 H

White Cap T-Handle Cam Bars



- Zinc cam bar.
- Cam ONLY!
- Order T-handle latches separately. For T-Handle Latches listed above.

Order No.	Mfg. No. / Description	Price
2011597	(S-226OL) Offset, Long, Diameter 2-7/8"	$5.00 H
2011598	(S-226OLS) Offset, Long Star with Opening, Dia. 2-7/8"	$5.00 G
2011599	(S-226OS) Offset, Short, Diameter 2-1/4"	$3.50 H
2011600	(S-226SL) Straight, Long, Diameter 2-5/8"	$124.98 H
2011601	(S-226SLS) Straight, Long Star with Opening, Dia. 2-5/8"	$6.98 H
2011602	(S-226SS) Straight, Short, Diameter 1-7/8"	$3.50 H

Perko Fig. 921 Flush Lock and Latch



- Chrome plated zinc alloy.
- Lock with 2 keys.
- For door thickness 1/2" to 3/4".
- Installs in a 1-5/8" diameter hole.
- Face plate dimensions: 2-1/4" x 2".

Order No.	Mfg. No. / Description	Price
543531	(921 DP0 CHR)	$53.98 R

Perko Fig. 1091 Surface Mount Locks and Latches



- For smooth and carpeted surfaces.
- Black polymer body.
- Chrome plated zinc alloy "T" handle.
- Stainless steel stem.
- Lock with 2 keys.
- Diameter adjustment: 3".

Order No.	Mfg. No. / Description	Price
536520	(1091 DP1 BLK) Cam Bar Adjusts 3/4" to 2-3/8"	$53.98 R
5315033	(1091 DP3 BLK) Cam Bar Adjusts 1-1/4" to 1-7/8"	$49.98 H

Perko Fig. 1092 Surface Mount Lock sand Latches



- For smooth and carpeted surfaces.
- Black polymer body.
- Chrome plated zinc alloy "T" handle.
- Stainless steel stem.
- Latch (non-locking).
- Diameter adjustment: 3".

Order No.	Mfg. No. / Description	Price
5315035	(1092 DP1 BLK) Cam Bar Adjusts 3/4" to 2-3/8"	$45.98 H
5315036	(1092 DP3 BLK) Cam Bar Adjusts 1-1/4" to 1-7/8"	$45.98 H

Marpac Push to Close Latches



- Flush mount - Pull to open.
- Single, round-hole installation.
- Inside actuation when locked or unlocked.
- Stainless steel face/pull, with corrosion resistant materials in body.

Order No.	Description	Price
7-2270	2", Non-Locking Latch	$29.98 G
7-2271	2", Locking Latch	$34.98 G

Marpac Lift Handles



- Cast stainless steel.
- Latches/non-locking hatch.

Order No.	Description	Price
7-1370	3"	$59.98 G
7-1371	2-1/2"	$39.98 G

T-H Marine Nautical Slam Latch



- Ovaltop, nautical design.
- Low profile.
- Totally corrosion resistant.
- UV stable.
- Simple installation in a 2" round hole.
- Fits 1-1/16" to 7/8" lids.
- Resistant to chemicals including acetone, alcohol, gasoline, etc.
- Stainless steel pawl catch and mounting hardware.

Order No.	Mfg. No. / Description	Price
641085	(NFSL-5-1) Black	$19.98 H

Perko Fig. 1177 Door Stop



- Chrome plated zinc alloy.
- Rubber bumper.
- Length 1".
- Uses #4 fasteners.

Order No.	Mfg. No. / Description	Price
532906	(1177 DP0 CHR) 1-1/4" OD	$9.98 Q

T-H Marine Anti-Rattle Pontoon Gate Door Stops





- Injection molded pontoon gate door stop.
- Stops gate rattle.
- Designed to fit 1-1/4" square tubing.
- Requires no welding.
- Simple installation with one #10 screw.
- Gray.

Order No.	Mfg. No. / Description		Price
6400127	(DS-1L) With Ribs for 1-1/4" Tubing	Left Hinge	$4.49 H
6400128	(DS-1R) With Ribs for 1-1/4" Tubing	Right Hinge	$4.49 H
6400129	(DS-2L) Without Ribs, Universal Fit	Left Hinge	$3.98 H
6400130	(DS-2R) Without Ribs, Universal Fit	Right Hinge	$3.98 H

Perko Fig. 1056 Elbow Catch



- Chrome plated zinc alloy with stainless steel spring.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
531675	(1056 DP0 CHR) Dimensions: 1-1/8" x 9/16"	$16.98 R

Marpac Push to Close Latch



- Flush pull - Pull to open.
- Corrosion resistant materials.
- Single, round-hole installation.

Order No.	Description	Price
7-2265	Black Plastic, 2"	$24.98 G

T-H Marine Anchor Handle Locks



- Fits aluminum, fiberglass and carpeted lids.
- Toothed and Double-D shaped mounting for carpeted lids.
- Sure grip two-finger handle.
- Gasket included for smooth surface applications.
- Waterproof O-ring seal.
- Stainless steel stem.
- Powder coated steel pawls-straight and offset.
- Single hex nut installation.
- Mounts in lids up to 3/4" thick.
- Installs into a 2-3/8" to 2-1/2" hole.
- Universal replacement for all T-H Marine or Perko.

Order No.	Mfg. No. / Description	Price
639802	(ALC-2-DP) White Base with Chrome Handle	$34.98 H
639804	(ALC-1-DP) Black Base with Chrome Handle	$33.98 H
639806	(AL-1-DP) Black Base with Black Handle	$29.98 H

Perko Fig. 574 Door Stop and Holder



- Chrome plated bronze.
- Rubber bumper.
- Dimensions: 3-1/4" L x 1-3/4" O.D.
- Dealer package 5 cards, 1 piece per card.

Order No.	Mfg. No. / Description	Price
534068	(574 DP2 CHR)	$118.98 R

Phoenix Lock Door Stops and Holders



- Cast solid brass with white rubber cushion.
- Base diameter 1-3/4".
- Projection 3-3/4".

Order No.	Mfg. No. / Description	Price
546943	(150-2-B) Burnished Brass	$41.98 I
546955	(150-2-C) Polished Chrome	$63.98 I
546967	(150-W) White Rubber Cushion	$3.98 I

Perko Fig. 1216 Door Button



- Chrome plated zinc alloy.
- Black polymer button.
- Phosphor bronze tension spring under knobs holds button against the plate.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
533364	(1216 DP0 CHR) 1-3/4" OD	$14.98 R

©2014 Donovan Marine, Inc.

Marpac Door Latch



- Set includes one male and one female.
- Uses #6 fasteners.
- Sold 3 sets per card.

Order No.	Description	Price
7-0220	Plastic	$7.98 G

Perko Fig. 554 Door Catch



- White polymer.
- Stainless steel mounting and keeper screws.
- Catch dimensions: 1-1/4" x 5/8".
- Catch screw size 3/4" x #8.
- Uses #4 fasteners.
- Sold 2 per pack.

Order No.	Mfg. No. / Description	Price
540837	(554 DP)	$11.98 R

Perko Fig. 1199 Cabin Door Hooks



- Chrome plated zinc alloy.
- Lightweight design.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Hook Length	Price
533263	(1199 DP1 CHR)	1-3/4"	$13.98 R
533249	(1199 DP2 CHR)	2-1/4"	$13.98 R
533251	(1199 DP3 CHR)	3"	$14.98 R


Perko Fig. 1287 Cabin Door Hooks



- Chrome plated zinc alloy.
- Modern design.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Hook Length	Price
534037	(1287 DP1 CHR)	2"	$12.98 R
534051	(1287 DP2 CHR)	2-1/2"	$13.98 R
534063	(1287 DP3 CHR)	3"	$13.98 R

Perko Fig. 1102 Cupboard Catches



- Chrome plated zinc alloy.
- Overall dimensions: 1-1/2" x 1-7/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
531942	(1102 DP1 CHR) With Box Strike	$33.98 H
531954	(1102 002 CHR) With 3/8" Offset Box Strike	$33.98 H
531957	3/16" Spacers for 531954	$4.12 F

Marpac Ball Catch



- Heavy duty.
- Dimensions: 2" x 3/8".

Order No.	Description	Price
7-0221	Type 316 Cast Stainless Steel	$8.98 G

Perko Fig. 559 Door Catch



- Black polymer ball stud and socket.
- Stud dimensions: 1-1/8" x 3/8".
- Socket dimensions: 1-3/8" x 7/8".
- Uses #4 fasteners.
- Sold 2 per pack.

Order No.	Mfg. No. / Description	Price
540838	(559 DP)	$7.98 R

Perko Fig. 1065 Door Holder



- Stainless steel clip has 1-3/8" x 7/16" base.
- Chrome plated zinc alloy arrow has 1-5/8" x 3/4" base.
- Projects 1-3/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
531764	(1065 DP0 CHR)	$27.98 R

Phoenix Lock Cabin Door Hooks



- Cast solid polished brass.

Order No.	Mfg. No. / Description	Length	Fasteners	Price
547387	(220)	2-1/2"	Uses #6	$18.98 I
547399	(220)	3"	Uses #6	$18.98 I
547402	(220)	4"	Uses #6	$23.98 I
547426	(220)	6"	Uses #8	$28.98 I

- Polished chrome plated brass.

Order No.	Mfg. No. / Description	Length	Fasteners	Price
547337	(220)	3"	Uses #6	$21.98 I
547349	(220)	4"	Uses #6	$27.98 I
547363	(220)	6"	Uses #8	$36.98 I


Perko Fig. 1101 Cupboard Bolt



- Chrome plated zinc alloy.
- Black polymer slide and knob.
- Overall dimensions: 2-1/8" x 1-1/2".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
531928	(1101 DP0 CHR)	$26.98 R

Marpac Barrel Bolts



- Precision cast stainless steel.

Order No.	Description	Price
7-0409	Dimensions: 3-1/2" x 1-1/2"	$17.98 G
7-0410	Dimensions: 4-1/2" x 1-1/2"	$18.98 G

Perko Fig. 947 Barrel Bolt



- Chrome plated bronze body and keeper.
- 3/8" Diameter bolt.
- Bulkhead keeper easily installs in a 5/8" hole.
- Includes friction pad to eliminate rattle and provide smooth operation.
- Includes both styles of keepers.

Order No.	Mfg. No. / Description	Price
543808	(947 DP2 CHR) Overall Dimensions: 4-5/16" x 1-7/16"	$48.98 R
543535	(947 DP3 CHR) Overall Dimensions: 5-1/4" x 1-7/16"	$59.98 R

Perko Fig. 1051 Flush Ring Catch



- Chrome plated zinc alloy.
- Phosphor bronze spring.
- Dimensions: 2-1/4" x 1-3/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
531637	(1051 DP0 CHR)	$27.98 Q

Marpac Lift Ring



- Polished, stamped type 304 stainless steel.
- Surface mount.
- Dimensions: 2-1/8" x 1-15/16".

Order No.	Description	Price
7-0084	Lift Ring	$6.98 G

Marpac Flush Lifting Handle



- Stainless steel, recessed.
- Dimensions: 2-1/4" x 3".
- Uses #8 fasteners.

Order No.	Description	Price
7-0085	Flush Lifting Handle	$7.98 G

Perko Fig. 1220 Flush Lifting Handle



- Chrome plated zinc alloy.
- Face plate dimensions: 3" x 2-1/4".
- Inside handle dimensions: 1-7/8" x 1".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
533427	(1220 DP0 CHR)	$21.98 R

Phoenix Lock Barrel Bolts



- Cast solid burnished brass.

Order No.	Mfg. No. / Description	Length	Fasteners	Price
547262	(191-3-B)	3"	Uses #5	$19.98 I

- Polished chrome plated brass.

Order No.	Mfg. No. / Description	Length	Fasteners	Price
547298	(191-3-C)	3"	Uses #5	$30.98 I
547301	(191-4-C)	4"	Uses #5	$31.98 I

Perko Fig. 1053 Ship Bolt



- Chrome plated bronze.
- Includes brass friction spring to eliminate rattle and provide detented operation.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
531649	(1053 DP0 CHR) Overall Dimensions: 2-5/8" x 1-1/4"	$55.98 R

Marpac Locking Lift Ring



- Stainless steel.
- Double cam.
- Dimensions: 2-1/8" x 1-7/8".

Order No.	Description	Price
7-0681	Locking Lift Ring	$25.98 G

White Cap Lift Handle



- Constructed of 304 marine stainless steel.
- The lift handles mount with four #8 screws (Not included).

Order No.	Mfg. No. / Description	Price
2011594	(S-222C) Dimensions: 2-1/4" x 2-5/8"	$9.98 H

Perko Fig. 776 Flush Lifting Handles



- Chrome plated bronze.
- Uses #8 fasteners.
- Sold each per display pack. Standard pack 5.

Order No.	Mfg. No. / Description	Price
542185	(0776 DP1 CHR)	$68.98 R

- Face plate dimensions: 3-3/4" x 2-3/4".
- Inside handle dimensions: 2-13/16" x 1-13/16".
- All mounting holes at corners.

Order No.	Mfg. No. / Description	Price
542197	(776 DP2 CHR)	$81.98 R

©2014 Donovan Marine, Inc.

White Cap Large Lift Ring



- This large lifting ring allows a full grip.
- Provides strength for lifting large and heavy hatch covers.
- Maintains a flush appearance and is neatly recessed for safety.
- Constructed of chrome-plated brass for years of service.
- Overall dimensions: 3" x 2".
- Handle size: 2" L x 3/4" I.D. lift ring.
- Installs with four #8 screws.

Order No.	Mfg. No. / Description	Price
2011620	(S-3364C)	$10.98 H

White Cap Flush Pull Rings



- These flush rings are all chrome plated.
- Maintains a flush appearance and recessed for safety.

Order No.	Mfg. No. / Description	Price
2011618	(S-3360C) Dimensions: 1-1/2" x 1-3/4"	$6.98 H
2011619	(S-3362C) Dimensions: 2" x 2-1/2"	$8.98 H

Perko Fig. 1232 Flush Ring Pull



- Chrome plated zinc alloy.
- Face plate 1-5/8" OD.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
533618	(1232 DP1 CHR)	$15.98 R

T-H Marine Lid Lift Pulls



- Injection molded and large enough to get your fingers in.
- The bottom cup prevents water from entering box.
- Strong material will flex but will not break when stepped on.
- Mount with four #6 screws.
- Large lid lifts have a 2-3/4" square top and require a 2-1/8" diameter hole for mounting.
- Small lid lifts have a 2-1/4" square top and require a 1-3/4" diameter hole for mounting.

Order No.	Mfg. No. / Description	Price
642277	(LL-1) Large Lid Lift, Black	$3.98 H
6400216	(LL-2) Large Lid Lift, White	$3.76 H
6400217	(LLM-1) Small Lid Lift, Black	$3.47 H
6400218	(LLM-2) Small Lid Lift, White	$3.47 H

Perko Fig. 1103 Flush Ring Pull



- Chrome plated bronze.
- Face plate dimensions: 2-9/16" x 2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
531978	(1103 DP0 CHR)	$47.98 R

Perko Fig. 575 Flush Ring Pull



- Chrome plated bronze.
- Face plate dimensions: 2-5/8" x 2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
541044	(575 DP0 CHR)	$48.98 R

Perko Fig. 841 Flush Ring Pull



- Chrome plated zinc alloy.
- Face plate dimensions: 1-3/4" x 1-3/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
542490	(841 DP0 CHR)	$15.98 R

Marpac Hatch Cover Pull



- Type 304 stainless steel with attractive electro-polished finish.
- Stainless steel washer and keep ring.
- Lays flat - easy to use.
- Lifting disc: 1-1/4".
- Stem diameter: 3/16".

Order No.	Description	Price
7-0651	Hatch Cover Pull	$4.98 G

Perko Fig. 1016 Flush Pull



- Black polymer.
- Easily installs in a 1-3/4" diameter hole.
- Face plate dimensions: 2-1/4" x 2-1/4".
- Depth 15/16".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
531550	(1016 DP0 BLK)	$4.32 H

Perko Fig. 958 Drawer Pull



- Chrome plated zinc alloy.
- Overall width 3-7/16", inside width 2-5/16".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
543961	(958 DP0 CHR)	$15.98 R

Marpac Drawer Knob



- Cast 316 stainless steel with 1" screw.

Order No.	Description	Price
7-0408	Diameter 1"	$7.98 G

Perko Fig. 925 Drawer Knob



- Chrome plated brass.
- Stainless steel screw.
- For panels up to 1-1/8" thickness.
- Knob 1" OD.

Order No.	Mfg. No. / Description	Price
543593	(925 DP0 CHR)	$17.98 I

Marpac Push to Close Latch



- Pull the knob to open, simply push the door to close.
- Quick, round-hole installation.
- Knob stores flush; pops out at a touch.
- Corrosion and UV resistant.

Order No.	Description	Price
7-2285	Chrome	$29.98 G

Marpac Swivel Lock Hasps



- Stainless steel.
- A strong versatile utility hasp with a swivel head.

Order No.	Description	Price
7-0216	1-7/8" x 7/8"	$9.98 G
7-0218	3" x 1-1/8"	$13.98 G

Perko Fig. 1198 Safety Hasps



- Chrome plated zinc alloy.
- Width 1".
- Padlock clearance 1/4".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
533237	(1198 DP2 CHR) Closed Length 3"	$22.98 R
533227	(1198 DP3 CHR) Closed Length 3-3/4"	$22.98 R

Phoenix Lock Safety Hasp



- Cast solid burnished brass with standard eye.
- Padlock eye diameter 3/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
547197	(184-3-B) 1" W x 3" L (Closed)	$21.98 I

Marpac 90° Angle Bracket



- Polished stainless steel.
- Leg length 2-3/8" and width 9/16".
- Sold per pair.

Order No.	Description	Price
7-0411	90° Angle Bracket	$5.98 G

Marpac Push to Close Latch



- Glass reinforced black nylon.
- Corrosion resistant.
- Locking.
- Pull tab in line with latching pawl.

Order No.	Description	Price
7-2280	Push-Button Style	$26.98 G

Perko Fig. 1194 Swivel Safety Lock Hasp



- Width 1".
- Closed length 3".
- Chrome plated zinc alloy.
- Padlock eye swivels to act as a latch.
- Padlock clearance 11/32".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
533173	(1194 DP0 CHR)	$24.98 R
533174	(1194 DP0 99A) Spare Keeper, 1 Per Card	$13.98 R

Perko Fig. 998 Safety Hasp



- Chrome plated bronze.
- Width 1".
- Closed length 3".
- Padlock clearance 9/32".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
544329	(998 DP2 CHR)	$51.98 R

Attwood Swivel Hasp



- Zamak swivel hasps have a chrome finish.
- They accommodate padlocks with 1/4" diameter or smaller shackle.
- The easy-swivel eye turns to secure the hasp and keep the compartment shut, even without use of a padlock.
- 90° mount.
- Dimensions: 3-3/4" x 1-3/16".
- Uses four #8 fasteners.

Order No.	Mfg. No. / Description	Price
2351054	(2013B1)	$31.98 H

©2014 Donovan Marine, Inc.

Marpac Butt Hinges



- Polished, stamped type 304 stainless steel.
- .060 gauge.
- Sold per pair.

Order No.	Description		Price
7-1007	Open Width 2", Pin Length 2"	Uses #8 Fasteners	$10.98 G
7-1008	Open Width 2", Pin Length 3"	Uses #8 Fasteners	$12.98 G
7-1009	Open Width 3", Pin Length 3"	Uses #10 Fasteners	$14.98 G

Perko Fig. 1293 Loose Pin Butt Hinges



- Chrome plated zinc alloy.
- Stainless steel removable pin.
- Uses #8 fasteners, except 534176 uses #10 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description		Price
534126	(1293 DP2 CHR) 1-1/2" x 1-1/2"	4 Screws Per Hinge	$24.98 R
534138	(1293 DP3 CHR) 1-1/2" x 2"	4 Screws Per Hinge	$24.98 R
534188	(1293 DP4 CHR) 2" x 2"	4 Screws Per Hinge	$25.98 R
534176	(1293 DP9 CHR) 3" x 3"	6 Screws Per Hinge	$32.98 R

Guden Tight Pin Butt Hinges



- Square type 304 stainless steel.
- Pin spun on both ends.
- Standard hole pattern and countersunk holes.
- Both halves half swagged for tight closure.
- Sold per pair.

Order No.	Description		Price
377475	3" x 3", .078" Gauge	6 Screws Per Hinge	$35.98 Q
377487	4" x 4", .125" Gauge	8 Screws Per Hinge	$77.98 Q

Marpac Utility Hinge



- Stamped stainless steel.
- Open width 3".
- Pin length 1-1/2".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Description	Price
7-0457	Utility Hinge	$10.98 G

Attwood Hinge



- Die-cast zamak with chrome finish.
- Mounting holes are widely spaced for easy installation.
- Rounded.
- Dimensions: 2-7/8" x 1-1/2".
- Uses six #8 fasteners.

Order No.	Mfg. No. / Description	Price
2350027	(12000-3)	$10.98 H

Marpac Butt Hinges



- Stainless steel.
- Uses #8 fasteners.
- Sold per pair.

Order No.	Description	Price
7-0686	1-5/16" W (Open) x 1-1/2" L	$9.98 G

- Heavy duty, cast stainless steel.
- Uses #10 fasteners.
- Sold per pair.

Order No.	Description	Price
7-0970	1-1/2" x 1-1/2"	$20.98 G

Phoenix Lock Loose Pin Butt Hinge



- Heavy duty.
- Sold per pair.
- Solid extruded burnished brass.
- 3" x 3".
- 6 Screws per hinge.

Order No.	Mfg. No. / Description	Price
547008	(160-12-B)	$49.98 I

White Cap Butt Hinges



- Stamped 304 stainless steel.

Order No.	Mfg. No. / Description		Price
2011621	(S-3416C) 2" H x 1-1/2" W, Per Pair	Uses #8 Fasteners	$12.98 H
2011623	(S-3421C) 3" H x 3" W, Per Pair	Uses #8 Fasteners	$16.98 H

- Chrome plated zamac.

Order No.	Mfg. No. / Description		Price
2011591	(S-1497C) 2" H x 2" W, Per Pair	Uses #8 Fasteners	$XXX Q

Perko Fig. 951 Hinge



- Chrome plated bronze.
- Open width 3", pin height 1-1/2".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
543858	(951 DP1 CHR)	$78.98 R

Perko Fig. 808 Hinge



- Chrome plated zinc.
- Open width 3", pin height 1-1/2.
- Uses #8 fasteners.
- Sold per pair per display pack. Standard pack 10.

Order No.	Mfg. No. / Description	Price
542325	(0808 DP0 CHR)	$30.98 R

White Cap Hinge



- Chrome plated zamak.
- All hinges are attractively packaged for display.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
2011589	(S-1492C) 3" H x 1-1/2" W	$8.98 H

Marpac Utility Hinge



- Open width 2".
- Stamped stainless steel.
- Pin length 1-1/2".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Description	Price
7-0458	Utility Hinge	$9.98 G

White Cap Shortside Hinge



- 1-1/2" H x 2-1/4" W.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
2011485	(6007C)	$26.98 H

Perko Fig. 988 Offset Shortside Hinge



- Chrome plated bronze.
- Open width 2-1/4", pin height 1-1/2".
- Shortside width 3/4".
- Offset 3/8".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
544230	(988 DP1 CHR)	$73.98 R

Perko Fig. 942 Offset Hinge



- Chrome plated zinc alloy.
- Open width 1-1/2", pin height 1-1/2".
- Offset 3/8".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
543746	(942 DP0 CHR)	$24.98 R

Perko Fig. 924 Hinge



- Chrome plated stamped brass.
- Open width 3", pin height 1-1/2".
- Uses #6 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
543581	(924 DP0 CHR)	$32.98 R

Marpac Utility Hinge



- Stainless steel.
- Flush mount.
- Dimensions: 2.664" x 1.5".
- Sold per pair

Order No.	Description	Price
7-1010	Utility Hinge	$16.98 G

Perko Fig. 1213 Shortside Hinge



- Chrome plated zinc alloy.
- Open width 2-1/2", shortside width 3/4".
- Pin height 1-1/2".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
533338	(1213 DP1 CHR)	$24.98 R

Marpac Offset Shortside Hinge



- Polished, stamped type 304 stainless steel.
- Thickness .060 gauge.
- Open width 2", pin length 1-1/2", offset 3/8".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Description	Price
7-1005	Offset Shortside Hinge	$11.98 G

Perko Fig. 1214 Offset Shortside Hinge



- Chrome plated zinc alloy.
- Open width 2-1/2", pin height 1-1/2".
- Shortside width 3/4", offset 3/8".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
533340	(1214 DP1 CHR)	$22.98 R

White Cap Offset Hinge



- Heavy duty stamped 304 stainless steel.
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
2011625	(S-3425) 1-3/8" H x 1-1/2" W	$20.98 G

©2014 Donovan Marine, Inc.

Phoenix Lock Port Hinge



- Cast solid burnished brass.
- Open length 4" L (Open) x 3-1/8" W.
- Uses #10 fasteners (5 screws per hinge).
- Sold per pair.

Order No.	Mfg. No. / Description	Price
547161	(170-4-B)	$41.98 I

Marpac Strap Hinges



- Polished, stamped type 304 stainless steel.
- Uses #8 fasteners.
- Sold per pair.

Order No.	Description	Price
7-0455	Dimensions: 4" x 1-3/16"	$10.98 G
7-0456	Dimensions: 6" x 1-3/16"	$14.98 G

White Cap Strap Hinges



- Heavy duty stamped 304 stainless steel.
- Uses #8 fasteners.
- All hinges are attractively packaged for display.
- Sold each.

Order No.	Mfg. No. / Description		Price
2011626	(S-3428) 4" L x 1-1/8" W	Flathead	$19.98 G
2011627	(S-3430) 6" L x 1-1/8" W	Flathead	$17.98 G

Perko Fig. 271 Inset Hinge



- Chrome plated stamped brass.
- Semi-concealed for inset doors.
- Dimensions: 2-3/4" x 2-1/2".
- Inset 3/8".
- Uses #4 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
536613	(271 DP0 CHR) Display Pack	$29.98 R
536601	(271 000 CHR) Bulk	$28.98 Q

Perko Fig. 957 Non-Mortised Hinge



- Chrome plated stamped brass.
- Easily installs without mortising.
- Closed width 7/8".
- Pin height 3-3/8".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
543959	(957 DP0 CHR)	$36.98 R

Marpac Hatch Hinge



- Chrome plated cast brass.
- Length 2-7/8".
- Width 2-1/2".

Order No.	Description	Price
7-0212	Hatch Hinge	$18.98 G

Marpac Strap Hinges



- Polished stainless steel.
- Uses #10 fasteners.
- 4 screw holes.
- Sold per pair.

Order No.	Description	Price
7-0500	Dimensions: 1" x 4"	$17.98 G
7-0501	Dimensions: 1" x 6"	$22.98 G

White Cap Strap Hinges



- Chrome plated brass.
- Uses #10 fasteners.
- All hinges are attractively packaged for display.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
2011637	(S-604C) 4" L x 1" W	$15.98 H
2011638	(S-605C) 6" L x 1-1/8" W	$16.98 H

Marpac Flush Mount Concealed Hinge



- Stamped type 304 stainless steel with satin finish.
- Dimensions: 2-3/4" x 1-7/8".
- Sold per pair.

Order No.	Description	Price
7-0105	Flush Mount Concealed Hinge	$9.98 G

Marpac Motor Box Hinge



- Chrome plated cast brass.
- Removable.
- Length 3-3/4".
- Width at pin 2".

Order No.	Description	Price
7-0211	Motor Box Hinge	$13.98 G

Continuous "Piano" Hinges



- Aluminum.
- Mill finish.
- 3/16" holes punched on 4" centers.
- Sold in 6' lengths only.

Order No.	Description		Price
740515	Open Width 1-1/2"	.040" Gauge	$15.98 I
740527	Open Width 2"	.040" Gauge	$23.98 I
740539	Open Width 3"	.060" Gauge	$45.98 I

- Type 304 stainless steel bright annealed.
- .040" gauge.
- Drilled and countersunk on 2" centers.
- Sold in 6' lengths only.

Order No.	Description		Price
740565	Open Width 1-1/4"	Uses #5 Fasteners	$36.98 I
740577	Open Width 1-1/2"	Uses #6 Fasteners	$37.98 I
740589	Open Width 2"	Uses #6 Fasteners	$48.98 I

Piano Hinges



- Sold in 18" lengths only.
- Aluminum.
- .040 gauge.

Order No.	Mfg. No. / Description	Price
2000931	(A040150-18) Open Width 1-1/2"	$2.10 H
2000932	(A040200-18) Open Width 2"	$2.25 H

- Stainless steel.
- .040 gauge.

Order No.	Mfg. No. / Description	Price
2000934	(SS040125-18) Open Width 1-1/4"	$4.90 H
2000935	(SS040150-18) Open Width 1-1/2"	$5.98 H
2000936	(SS040200-18) Open Width 2"	$6.98 H

Lenco Marine Electric Hatch Lifts



- Hatch lift includes: Vandar mounting brackets and stainless steel pull pins.
- Hatch lift features: New - Clear anodized aluminum tubing.
- Complete with 2' lead and Deutsch plug (actuator extension harnesses are available in lengths of 7', 14', 20', 26', 32' and 45').
- Clutchless ball screw design will not drift, never binds and runs in sync on dual lift applications.
- Inline motor design delivers over 500 lbs. of force.
- Completely submersible, made entirely of non corrosive materials.
- Ball screw spins freely when hatch is fully opened or closed eliminating limit switches and burned out motors.
- Powdered metal gears for strength and precision.
- Stainless steel ram locks in any position.
- Amp draw 10 amps at 12 volt and 5 amps at 24 volt.
- CE-certified and ABYC compliant.
- O-ring sealed at 100 psi.
- Switch kits sold separately. Optional accessories available.

Order No.	Mfg. No.	L.O.A. Retracted	Approximate Stroke	L.O.A. Extended	Price
252803	(20760-001)	15"	4"	19"	$278.98 D
252805	(20764-001)	20"	8"	28"	$296.98 D
252748	(20768-001)	25"	12"	37"	$319.98 D
252749	(20770-001)	29"	12"	41"	$319.98 D
252750	(20774-001)	29"	16"	45"	$369.98 D
252762	(20776-001)	33"	16"	49"	$369.98 D
252774	(20778-001)	33"	20"	53"	$399.98 D
252786	(20780-001)	37"	20"	57"	$399.98 D
252798	(20782-001)	37"	24"	61"	$419.98 D
252799	(20784-001)	41"	24"	65"	$419.98 D

Lenco Marine Hatch Lift Slide Bracket



- Optional stainless steel non-locking slide bracket for hatch lifts.
- In case of power failure, this bracket allows you to pull the hatch open 4" in order to remove pull pin for access.
- Includes: Stainless steel hardware.

Order No.	Mfg. No. / Description	Price
252721	(70381-001)	$54.98 D

Lenco Marine Hatch Lift Switch



- Single rocker switch for hatch lifts with two 30" non-terminated power leads.
- For single hatch lift applications.
- Clamshell packaged.

Order No.	Mfg. No. / Description	Price
252577	(15096-001)	$49.98 D

Lenco Marine Dual Hatch Lift Switch



- Single rocker switch for hatch lifts with two 30" non-terminated power leads.
- For dual hatch lift applications.
- Clamshell packaged.

Order No.	Mfg. No. / Description	Price
252580	(15098-001)	$71.98 D

Uflex AV Series Electrical Hatch Lifter




- According to the load required, the AV hatch lifter can be mounted individually or in twin cylinder installations for heavier loads. It is also possible to install more than two AV actuators in multiple applications.
- Maximum load: Single installations - 265 lbs. not to be exceeded.
- Supplied with all mounting hardware.
- Stainless steel telescopic ram for manual operation in case of emergency.
- Available on request without manual emergency opening device for high performance boats.
- Circuit breaker to stop accidental overloading of the system and electronic stop at closed or full open position.
- IP 65 protection rated.
- Speed: 25mm/sec no load applied, 17 mm/sec maximum load.
- Current absorption in single installations: 10A at 12V, 5A at 24V.
- 12 volt models are Ignition Protected. UL1500 - ISO8846 approved.

Order No.	Mfg. No. / Description	Price
2006630	(AV-6012) 12 volt, Stroke: 24" Full Closed Actuator: 38.4" L	$640.98 D

©2014 Donovan Marine, Inc.

Marpac Gas Spring Hatch Lifts

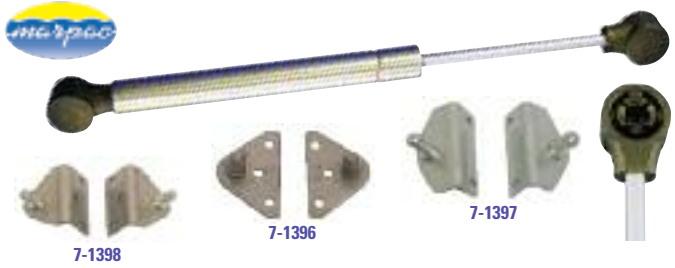

- Stainless steel.
- The ideal solution for lifting, lowering and counterbalancing weight.
- The gas spring is a self-contained, nitrogen-driven counterbalance product which provides uniform handle forces, non-catastrophic failure, and many years of service.
- Because energy is provided through gas pressure, our gas springs give you repeatable, unvarying performance which is superior to mechanical, spring or damper type products.

DMI #	End Style	Retracted Length	Approximate Stroke	Extended Length	Output Force	Price
7-1387	Socket Style	7"	3"	10"	40 lbs.	$36.98 G
7-1388	Socket Style	7"	3"	10"	60 lbs.	$32.98 G
7-1390	Socket Style	9.5"	5.5"	15"	40 lbs.	$36.98 G
7-1392	Socket Style	10.2"	7"	17.2"	20 lbs.	$36.98 G
7-1394	Socket Style	12"	8"	20"	60 lbs.	$39.98 G

- Brackets for gas spring hatch lifts.

Order No.	Description	Price
7-1396	Flat	$15.98 G
7-1397	2 x .65	$18.98 G
7-1398	2 x 1.2	$18.98 G

Attwood Mounting Brackets for Gas Springs



- All quality Attwood "Spring-Lift" mounting brackets are constructed of zinc plated steel with a black painted finish.

Order No.	Mfg. No. / Description		Price
2350214	(SL50BP3-1) Pem Direction: Forward	Single	$4.30 H
2350216	(SL58BP3-1) Pem Direction: Forward	Single	$4.30 H
2350217	(SL65BP3-1) Pem Direction: Forward	Single	$4.30 H
2350218	(SL69BS-1) Threaded Stud, 5/16" Threads x 9/16" L		$6.98 H

Perko Fig. 762 Hatch Support Brace



- Chrome plated brass.
- Open length 14".
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
542111	(762 DP3 CHR)	$152.98 R

White Cap Lid-Lift Gas Springs



- Heavy duty steel coated with heat cured paint.
- O-ring insures proper sealing to force oil towards the orifice piston.
- Piston assembly provides precise control during the extension stroke.
- Sold individually.

Order No.	Mfg. No. / Description			Price
2011540	(G-3120) Extended 7.5"	Compressed 5.5"	Supports 20 lbs.	$19.98 H
2011541	(G-3140) Extended 7.5"	Compressed 5.5"	Supports 40 lbs.	$19.98 H
2011536	(G-3020) Extended 10"	Compressed 7"	Supports 20 lbs.	$19.98 H
2011538	(G-3040) Extended 10"	Compressed 7"	Supports 40 lbs.	$19.98 H
2011555	(G-3520) Extended 12"	Compressed 8.5"	Supports 20 lbs.	$19.98 H
2011556	(G-3530) Extended 12"	Compressed 8.5"	Supports 30 lbs.	$19.98 H
2011542	(G-3320) Extended 15"	Compressed 9.5"	Supports 20 lbs.	$19.98 H
2011543	(G-3330) Extended 15"	Compressed 9.5"	Supports 30 lbs.	$19.98 H
2011544	(G-3340) Extended 15"	Compressed 9.5"	Supports 40 lbs.	$19.98 H
2011546	(G-3360) Extended 15"	Compressed 9.5"	Supports 60 lbs.	$19.98 H
2011558	(G-3620) Extended 17"	Compressed 10.25"	Supports 20 lbs.	$19.98 H
2011559	(G-3630) Extended 17"	Compressed 10.25"	Supports 30 lbs.	$19.98 H
2011560	(G-3640) Extended 17"	Compressed 10.25"	Supports 40 lbs.	$19.98 H
2011562	(G-3660) Extended 17"	Compressed 10.25"	Supports 60 lbs.	$19.98 H
2011563	(G-3690) Extended 17"	Compressed 11"	Supports 90 lbs.	$19.98 H
2011548	(G-3420) Extended 20"	Compressed 12"	Supports 20 lbs.	$19.98 H
2011549	(G-3430) Extended 20"	Compressed 12"	Supports 30 lbs.	$19.98 H
2011550	(G-3440) Extended 20"	Compressed 12"	Supports 40 lbs.	$19.98 H
2011551	(G-3460) Extended 20"	Compressed 12"	Supports 60 lbs.	$19.98 H
2011553	(G-3480) Extended 20"	Compressed 12"	Supports 80 lbs.	$19.98 H
2011554	(G-3490) Extended 20"	Compressed 12"	Supports 90 lbs.	$19.98 H
2011547	(G-34120) Extended 20"	Compressed 12"	Supports 120 lbs.	$19.98 H


- Zinc plated brackets - pairs.

Order No.	Mfg. No. / Description	Price
2011531	(G-1015)	$5.98 H
2011532	(G-1020)	$7.98 H
2011534	(G-1060)	$6.98 H
2011530	(G-1005C) Threaded Ball Stud	$4.50 G

- End fittings, black composite - pairs.

Order No.	Mfg. No. / Description	Price
2011533	(G-1030) Spring Retainer	$7.98 H
2011535	(G-1130) Snap-On Cap	$6.98 H

T-H Marine Lid and Hatch Supports



- Features a stainless steel spring that moves to a support position when opened.
- The stainless steel spring then supports the lid in the open position. When closing simply deflect the spring which allows spring to bend and rotate at the mounting positions.
- Molded black nylon ends for mounting.

Order No.	Mfg. No.	Diameter	Length	Supports Up to	Price
641060	(LS-2)	7/16"	8-1/2"	10 lbs. Lids	$15.98 H
642368	(HS-1)	5/8"	12"	20 lbs. Lids	$27.98 H

Perko Fig. 797 Hatch Adjuster



- Chrome plated brass and zinc alloy with black polymer knob
- Arm length 10" with 9-1/2" length adjustment.
- Slide length 10-3/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
542301	(797 DP0 CHR)	$123.98 R

T-H Marine Gate Latches



- Nylon molded part - prevents rattle.
- Entire unit installs on gate only.
- Operates on right or left hinged gates.
- Fits 1", 1-1/8" and 1-1/4" square tubing.
- Not designed as a safety or load bearing device.

Order No.	Mfg. No. / Description	Price
247750	(GL-1-DP) Black	$13.98 Q
247751	(GL-2-DP) Gray	$13.98 Q

Perko Fig. 967 Hatch Fastener or Windshield Keeper



- Chrome plated bronze.
- Keeper: 1-7/8" x 7/8".
- Bracket: 1-9/16" x 1".
- Bolt length 1-1/2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
544040	(967 DP0 CHR) Display Pack	$90.98 R
544037	(0967 000 CHR) Bulk	$88.98 Q

Perko Fig. 1116 Windshield Adjuster



- Chrome plated brass and zinc alloy.
- Black polymer knob.
- Rod: 3/8" OD x 12" L.
- Uses #8 fasteners.
- Sold each.

Order No.	Mfg. No. / Description	Price
532108	(1116 DP3 CHR)	$88.98 R

Perko Fig. 935 Sliding Window Stop



- Chrome plated zinc alloy with polymer cover on stopping plate.
- Stopping plate length 1-1/2".
- Mounting plate dimensions: 1-7/8" x 3/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
543668	(935 DP0 CHR)	$18.98 R

Perko Fig. 770 Hatch Fastener



- Chrome plated bronze with black polymer knob.
- Overall dimensions: 3-1/2" x 1-5/8".
- Adjustment thread 7/8".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
542135	(770 DP0 CHR)	$81.98 R

Perko Fig. 769 Hatch Fastener or Windshield Keeper



- Chrome plated brass and zinc alloy with black polymer handle.
- Base dimensions: 1-1/2" x 5/8".
- Length overall 4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
542123	(769 DP0 CHR)	$63.98 R

Phoenix Lock Windshield Keeper



- Polished chrome plated brass.
- Base dimensions: 5/8" x 1-5/8".
- Bolt dimensions: 5/16" x 1-3/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
546929	(131-C)	$35.98 I

T-H Marine Windshield Fastener



- The base mounts with two screws to the boat and the quick twist fastener passes thru the windshield.
- Great for preventing broken windshields in shipping, installation and for cleaning.

Order No.	Mfg. No. / Description	Price
642374	(WSH-1PR-DP)	$10.98 H

Perko Figs. 1290 and 1291 Windshield Adjusters

Note: Illustration is port side.





- Chrome plated zinc alloy with black polymer knob.
- Length overall 12" with 9-1/2" adjustment.
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
534087	(1290 DP0 CHR) Side Mount	$95.98 R
534102	(1291 DP0 CHR) Offset Mount	$95.98 R

©2014 Donovan Marine, Inc.

Taylor Made Windshield Support Bars



- Used as original equipment on many fine walk-thru windshields.
- Made from anodized aluminum tubing with nylon fittings.
- The fittings allow for pivot in almost every direction for easy installation.

Order No.	Mfg. No. / Description	Price
723535	(1632) Length 11"	$21.98 G
723537	(1634) Length 12"	$21.98 G
723536	(1636) Length 13"	$21.98 G

Marpac Brass Hold Down Clamp



- Chrome plated brass.
- Base dimensions: 1-3/4" x 2-3/4".

Order No.	Description	Price
7-0214	4" Long	$11.98 G

Perko Fig. 1112 Hold Down Clamp



- Chrome plated bronze.
- Flat mounting.
- Dimensions: 1-1/2" W x 3" L.
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
532057	(1112 DP0 CHR)	$91.98 R

Marpac T-Handle Latch



- Flexible.
- Non-corrosive, non-conductive, UV resistant materials.
- Compensates for misalignment in 3 planes.
- Built-in drag keeps latch stationary when unlatched.

Order No.	Description	Price
7-2255	Length 4.81"	$12.98 G


White Cap Chrome Plated Rail Stanchion



- These patented rail stanchions are ideal for top, bow, side, stern or hand rails.
- Accommodates 7/8" OD tubing.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011585	(S-1487C) Forward	$7.98 H
2011586	(S-1488C) Aft	$7.98 H
2011587	(S-1489C) Center	$7.98 H


Handi-Man Windshield Support Tubes

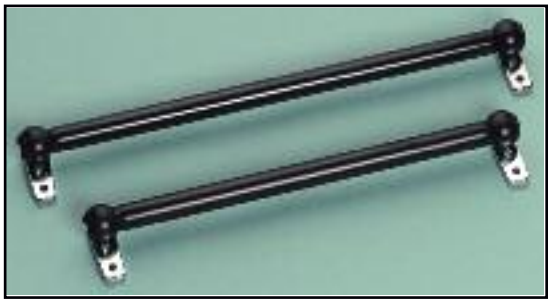

- Designed to fit many bow rider style boats, with walk through windshield.
- Black anodized aluminum tube resists corrosion.

Order No.	Mfg. No. / Description	Price
7270021	(01617) Overall Length 10"	$21.98 H
7270022	(01619) Overall Length 11"	$22.98 H
7270023	(01621) Overall Length 12"	$23.98 H
7270024	(01623) Overall Length 13"	$25.98 H
7270025	(01625) Overall Length 14"	$26.98 H

Marpac Stainless Steel Hold Down Clamps

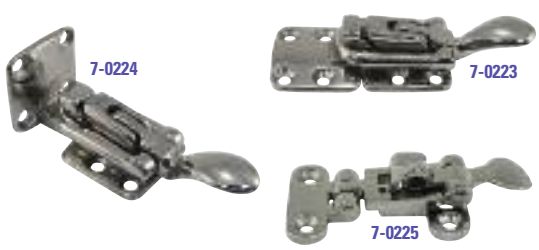

Order No.	Description	Price
7-0223	3" L x 1-1/2" W	$23.98 G
7-0225	4" L x 1-7/8" W x 1" H	$16.98 G
7-0224	90° Angle Mounting, 2-1/2" L x 1-1/2" W	$22.98 G

Marpac Draw Latch



- Soft latch, small size.
- Non-corrosive materials.
- Over-center latching.
- Cushions impact, absorbs vibration, tolerates misalignment.
- Concealed keeper style.

Order No.	Description	Price
7-2250	Thermoplastic Elastomer, Black	$25.98 G

Marpac Hand Rail Bases



- 316 stainless steel hand rail bases.
- Fittings for 7/8" OD tubing have 1-1/2" base.
- Fittings for 1" OD tubing have 1-3/4" base.
- Have no set screw.

Order No.	Description		Price
7-0187	Forward 120°	For 7/8" OD Tubing	$11.98 G
7-0188	Center 60°	For 7/8" OD Tubing	$9.98 G
7-0189	Aft 60°	For 7/8" OD Tubing	$10.98 G
7-0987	Forward 120°	For 1" OD Tubing	$13.98 G
7-0988	Center 60°	For 1" OD Tubing	$12.98 G
7-0989	Aft 60°	For 1" OD Tubing	$12.98 G

Perko Fig. 380 Grab Rail Posts



- Chrome plated bronze.
- Hollow, for 1" OD tubing.
- Height 3-3/8".
- Base OD 2-1/2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
537994	(380 000 CHR) End Post	$96.98 Q
538009	(380 A00 CHR) Center Post	$97.98 Q

Marpac Cast Stainless Steel Rail Fittings - 60° Round Bases



- Skin packed.

Order No.	Description	Price
7-0179	7/8" OD Tubing, 2-5/8"	$17.98 G
7-0979	1" OD Tubing, 2-3/16"	$15.98 G

White Cap Die Case Zamak 60° Round Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011583	(S-1467C)	$8.98 H

Marpac Cast Stainless Steel Rail Fittings - 30° Rectangular Bases



- Skin packed.

Order No.	Description	Price
7-0181	7/8" OD Tubing, 2-5/8"	$14.98 G

Marpac Cast Stainless Steel Rail Fittings - 60° Rectangular Bases



- Skin packed.

Order No.	Description	Price
7-0182	7/8" OD Tubing	$16.98 G
7-0982	1" OD Tubing	$15.98 G

White Cap Die Case Zamak 60° Rectangular Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011581	(S-1465C)	$8.98 H

Marpac Cast Stainless Steel Rail Fittings - 30° Round Bases



- Skin packed.

Order No.	Description	Price
7-0178	7/8" OD Tubing, 2-5/8"	$14.98 G
7-0978	1" OD Tubing, 2-7/8"	$14.98 G

White Cap Stainless Steel 45° Round Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011486	(6014C)	$25.98 G

Marpac Cast Stainless Steel Rail Fittings - 90° Round Bases



- Skin packed.

Order No.	Description	Price
7-0180	7/8" OD Tubing, 2-5/8"	$17.98 G
7-0980	1" OD Tubing, 2-3/4"	$15.98 G

White Cap Die Case Zamak 90° Round Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011584	(S-1468C)	$8.98 H

White Cap Stainless Steel 45° Rectangular Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011487	(6015C)	$25.98 H

Marpac Cast Stainless Steel Rail Fittings - 90° Rectangular Bases



- Skin packed.

Order No.	Description	Price
7-0183	7/8" OD Tubing	$17.98 G
7-0983	1" OD Tubing	$15.98 G

White Cap Die Case Zamak 90° Rectangular Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011582	(S-1466C)	$8.98 H

©2014 Donovan Marine, Inc.

Marpac Cast Stainless Steel Rail Fittings - 60° Tees



Order No.	Description	Price
7-0202	7/8" OD Tubing	$13.98 G
7-1002	1" OD Tubing	$13.98 G

White Cap 60° Rail Tees



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description		Price
2011577	(S-1441C) Die Cast Zamak	Left Hand	$8.98 H
2011578	(S-1442C) Die Cast Zamak	Right Hand	$8.98 H
2011597	(6044C) Stainless Steel	Left Hand	$5.00 H
2011598	(6045C) Stainless Steel	Right Hand	$5.00 H

Marpac Cast Stainless Steel Rail Fittings - 90° Elbows



Order No.	Description	Price
7-0192	7/8" OD Tubing	$12.98 G
7-0992	1" OD Tubing	$12.98 G

White Cap Die Cast Zamak 90° Elbow



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011588	(S-1491C)	$7.98 H

White Cap Chrome Plated Zamak 5-1/2" Blend Base



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011590	(S-1495C)	$9.98 H

Marpac Cast Stainless Steel Rail Fittings - 90° Tees



Order No.	Description	Price
7-0186	7/8" OD Tubing	$15.98 G
7-0986	1" OD Tubing	$14.98 G

White Cap Die Cast Zamak 90° Rail Tees



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011579	(S-1443C)	$8.98 H

White Cap Stainless Steel 3-Way Corner



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011499	(6046C)	$26.98 G

Marpac Cast Stainless Steel Rail Fitting - 110° Bow Form



Order No.	Description	Price
7-0190	7/8" OD Tubing	$13.98 G

White Cap Stainless Steel 125° Bow Form



- Fits 7/8" tubing.
- Set screws included.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011509	(6086C)	$36.98 G

White Cap Set Screws



- These headless socket set screws are 1/4"-28 x 3/16".
- Hex drive.
- For die-cast rails.
- 10 per pack.

Order No.	Mfg. No. / Description	Price
2011524	(6249C)	$4.90 H

TACO Tubing for Rail Fittings



- Aluminum tubing. Brite anodized finish.

Order No.	Description		Price
741909	7/8" x 6'	Wall Thickenss .058"	$46.98 I
741911	7/8" x 20'	Wall Thickenss .058"	$109.98 I

- Stainless steel tubing. High polished, type 304.

Order No.	Description		Price
741935	7/8" x 6'	Wall Thickenss .049"	$49.98 I
741947	7/8" x 20'	Wall Thickness .065"	$235.98 I
741973	1" x 6'	Wall Thickness .049"	$52.98 I
741985	1" x 20'	Wall Thickness .065"	$270.98 I

T-H Marine Grab Handles



- Molded, UV resistant.
- Textured for sure grip.
- Hidden fasteners.

Order No.	Mfg. No. / Description	Price
327318	(GHB-1) Black	$10.98 H
327319	(GHB-1FW) White	$10.98 H
327320	(GHB-1G) Gray	$11.98 I

Detmar Soft Grip Grab Handle



- This functionally styled grab handle may be used as an economical safety device throughout passenger areas.
- Leather grained for a comfortable, no-slip grip.
- Grab handle mounts using two 1/4" machine or wood screws.
- Once installed, decorative caps snap over mount holes to hide fasteners.
- Dimensions: 9-1/4" L x 2-1/4" H x 1-3/16" W with 1-5/8" finger clearance.

Order No.	Mfg. No. / Description	Price
2000537	(12-1132) Black	$9.98 H

White Cap Hand Rail Stanchion



- 304 stainless steel.

Order No.	Mfg. No. / Description	Price
2011651	(S-7091P) Length 12", Includes 1/4-20 Studs	$35.98 H
2011652	(S-7092P) Length 18", Includes 1/4-20 Studs	$42.98 G
2011653	(S-7094) Length 12", without Studs, Requires 1/4" Fastener	$15.98 H

Perko Fig. 775 Handle



- Chrome plated bronze.
- Length overall 5-3/4".
- Inside dimensions: 3-5/8" L x 1-3/8" H.
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
542161	(775 DP2 CHR)	$97.98 R

White Cap Aluminum Tubing



- Ideal for hand rail repairs.
- Rugged anodized tubing.
- 5' lengths.
- .058" wall thickness.
- Diameter 7/8".

Order No.	Mfg. No. / Description	Price
2001406	(8078)	$23.98 H

Attwood Flexible Grab Handle



- Flexible grab handle for flush, flexible mounting.
- Can be mounted to a variety of irregular surfaces and angles on swim platform, in the cockpit and companionway.
- Constructed from soft polypropylene webbing over a semi-rigid core.
- Because of the soft, pliable webbing in these handles and the absence of any sharp edges, they are safe in areas where occupants might come in contact with them.
- Meets the ABYC H-41 standard for strength: "withstand a load of 400 lbs. in any direction."
- All materials are non-corrosive, UV stable and mildew-resistant.
- Four holes for required #12 fasteners.

Order No.	Mfg. No. / Description	Price
2350189	(2061-1)	$8.98 H

Detmar Snap Cover Grab Handle



- Attractively styled, this hard grip handle has integrated, hinged caps which snap over the mount holes so no fasteners are visible after mounting.
- No loose caps make installation handling easier and eliminate cap loss.
- Textured to blend with any interior or exterior application.
- 2-hole for 1/4" machine or wood screws.
- Dimensions: 9" L x 2-3/16" H x 1-1/8" W with 1-1/2" finger clearance.

Order No.	Mfg. No. / Description	Price
2000538	(12-1300) Black	$6.98 H

Marpac Utility Transom Handle



- Heavy duty cast marine grade stainless steel.
- Use #10 fasteners.
- Dimensions: 5-7/8" L x 1-15/16" W x 1-13/16" H.

Order No.	Description	Price
7-0648	Utility Transom Handle	$11.98 G

Perko Fig. 1222 Handle



- Chrome plated zinc alloy.
- Length overall 5-3/4".
- Inside dimensions: 3-5/8" L x 1-1/4" H.
- Uses #8 fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
533439	(1222 DP0 CHR)	$17.98 Q

©2014 Donovan Marine, Inc.

Perko Fig. 1231 Handle



- Chrome plated zinc alloy.
- Length overall 6".
- Inside dimensions: 3-1/2" L x 1-5/16" H.
- Uses 1/4" fasteners.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
533617	(1231 DP0 CHR)	$24.98 R

Phoenix Lock Handle



- Polished chrome plated brass.
- Overall length 4-1/4".
- Base width 1-3/16".

Order No.	Mfg. No. / Description	Price
547452	(83-4-C)	$18.98 I

Perko Fig. 975 Coat and Hat Hooks



- Chrome plated zinc alloy.
- Uses #6 fasteners.

Order No.	Mfg. No.	Base Width	Projection	Price
544139	(975 DP1 CHR)	1-1/8"	2"	$7.98 R
544141	(975 DP2 CHR)	1-1/4"	3"	$8.98 R

Marpac Deluxe Pull Up Cleats



- Use only a drill or hole saw for installation
- Closed position only 1/2" above deck.
- Water resistant O-ring included.
- Wider finger grip for ease of use.
- Eliminates standing water on base.

Order No.	Description	Price
7-1017	Length 4", Slim Line Design	$59.98 G
7-1018	Length 6", Wide Base Design	$69.98 G

Attwood Stern Handle



- Sturdy die-cast zinc with chrome finish.
- Overall length 6".
- Grip length 3-1/4".
- Height 1-13/16".
- Four holes for #10 screws.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
587220	(12012-3)	$18.98 Q

Perko Fig. 344 Folding Step



- Chrome plated manganese bronze.
- Stainless steel spring holds step in open or closed position.
- Step dimensions: 4-1/8" x 2-1/4".
- Bracket dimensions: 4-1/4" x 1-3/4".
- Folded projection 1-3/8".
- Uses 5/16" fasteners.

Order No.	Mfg. No. / Description	Price
537603	(344 DP0 CHR)	$181.98 R

Perko Fig. 610 Wardrobe or Utility Hook



- Chrome plated zinc alloy.
- Base width 1-1/8".
- Projection 1-3/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
541195	(610 DP0 CHR)	$6.98 R

White Cap E-Z Push-Up Cleats



- No saw needed to install these cleats.
- Just drill and drop into place.
- No special socket lengths needed to affix nuts when installing as threads are of standard length.

Order No.	Mfg. No. / Description		Price
2011526	(6804C) Length 4-1/2"	Bulk	$71.98 H
2011527	(6809C) Length 6"	Packaged	$94.98 H

Marpac Hollow Base Cleats - Yacht Design



- Polished stainless steel.
- Fastens with 1/4" screws.

Order No.	Description	Price
7-0169	Length 4"	$9.98 G
7-0170	Length 6"	$13.98 G
7-0171	Length 8"	$20.98 G
7-0172	Length 10"	$32.98 G

Buck Algonquin Stainless Steel Open Base Cleat



- Polished 316 stainless steel.
- Predrilled with four holes.
- Base dimensions: 1-3/8" W x 4" L.
- Overall length 14-7/8".
- Overall height 3-15/16".

Order No.	Mfg. No. / Description	Price
263378	(70COBS1500)	$237.98 Q

Perko Fig. 545 Aluminum Plain Finished Cleats



- Pressure cast aluminum.

Order No.	Mfg. No. / Description	Price
540725	(545 DP6 ALU) Length 6", Closed Base	$17.98 R
540737	(545 DP8 ALU) Length 8", Open Base	$24.98 R

Marpac Galvanized Standard Dock Cleats



- Hot dipped galvanized gray iron.
- Measured from tip to tip.

Order No.	Mfg. No. / Description	Price
7-2290B	Length 4"	$2.49 I
7-2292B	Length 6"	$2.98 I
7-2294B	Length 8"	$5.98 I
7-2296B	Length 10"	$8.98 I
7-2298B	Length 12"	$14.98 I

Perko Fig. 1210 Open Base Cleats



- Chrome plated zinc alloy.
- Stainless steel studs, nuts and washers.
- Length overall 4", base dimensions 2-1/8" x 1-1/2", maximum rope size 5/16".

Order No.	Mfg. No. / Description	Price
5315046	(1210 004 CHR)	$20.98 H

- Length overall 6", base dimensions 3" x 1-3/4", maximum rope size 7/16".

Order No.	Mfg. No. / Description	Price
5315047	(1210 006 CHR)	$30.98 H

Perko Fig. 530 Aluminum Open Base Cleats



- Heavy duty aluminum.

Order No.	Mfg. No. / Description	Price
540472	(530 008 ALU) Length 8"	$42.98 Q
540484	(530 010 ALU) Length 10"	$64.98 Q
540496	(530 012 ALU) Length 12"	$107.98 Q

Sea Dog Chrome Zamak Hollow Base Cleats



- Die cast zinc chrome plated.
- Predrilled with four holes.

Order No.	Mfg. No. / Description	Price
239598	(044104-1) Length 4-1/2"	$5.98 Q
239601	(044106-1) Length 6"	$13.98 Q

Perko Fig. 1306 Chromalex® Open Base Cleats



- Chrome plated zinc alloy with black polymer base.

Order No.	Mfg. No. / Description	Price
534277	(1306 DP1 CHR) Length 4-1/2", Sold Per Pair	$24.98 R
534289	(1306 DP2 CHR) Length 6", Sold Each	$23.98 R

©2014 Donovan Marine, Inc.

Perko Fig. 1326 Open Base Cleat



- Chrome plated zinc alloy with black polymer base.
- Length overall 5-3/4", base dimensions 3-5/8" x 7/8", maximum rope size 1/2".

Order No.	Mfg. No. / Description	Price
5315076	(1326 DP2 CHR)	$18.98 H

Marpac High Impact Nylon Cleats



- Open base cleat.
- Black.

Order No.	Description	Price
7-0340B	Length 4-1/2"	$2.98 I
7-0341B	Length 6"	$2.98 I
7-0338B	Length 8"	$4.97 I
7-0339B	Length 10"	$7.98 I

Marpac Cleats - Yacht Design



- Durable high impact black nylon yacht cleats.
- Sold 2 per card.

Order No.	Description	Price
7-0340	Length 4-1/2"	$4.02 G
7-0341	Length 6"	$4.21 G
7-0338	Length 8"	$6.98 G
7-0339	Length 10"	$9.98 G

Marpac Bucket of Savings - Cleats - Yacht Design



- Durable high impact black nylon yacht cleats.
- Sold 24 cleats per bucket.

Order No.	Description	Price
7-0340S	Length 4-1/2"	$27.98 G
7-0341S	Length 6"	$35.98 G

Perko Fig. 1223 Skene Bow Chock



- Chrome plated zinc alloy.
- Maximum rope size: 1/2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
533453	(1223 DP0 CHR) 3-1/2" L x 7/8" W	$13.98 R

Perko Fig. 1057 Rope Deck Pipe



- High impact black polymer.
- UV stabilized, fiber reinforced.
- Hinged, snap-down cover.
- Maximum rope size: 7/8".
- Flange OD 3-3/4".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
531585	(1057 DP0 BLK)	$21.98 R

Marpac Bow Chock



- Polished 316 stainless steel.
- Uses #10 fasteners.

Order No.	Description	Price
7-0173	Length 4-1/2"	$28.98 G

Marpac Straight Chock



- Stainless steel.

Order No.	Description	Price
7-0940	Length 5"	$27.98 G

Marpac Rope Deck Pipe



Order No.	Description	Price
7-0941	Cast Stainless Steel	$82.98 G

Perko Fig. 757 Rope Deck Pipe



- Chrome plated zinc alloy.
- Maximum rope size: 1".
- Flange OD 3-3/8".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
542009	(757 DP0 CHR)	$33.98 R

Perko Fig. 752 Oval Hawse Hole Plate



- Chrome plated bronze.
- Eliminate deck and rope chaffing when cleats are mounted on a vertical surface inside cockpits.
- Outside dimensions: 4-1/4" x 6".
- Inside dimensions: 2-1/8" x 4-1/8".
- Spigot length 1-1/4".
- Uses 1/4" fasteners.

Order No.	Mfg. No. / Description	Price
541967	(752 000 CHR)	$149.98 Q

Marpac Lifting Eye with Cleat



- Threaded for 5/8" - rod.

Order No.	Description	Price
7-0176	Polished 316 Stainless Steel	$48.98 G

Marpac Adjustable Keel Plate



- Shank dimensions: 3/8" x 3".
- Uses 5/8" threaded rod.

Order No.	Description	Price
7-0125	Stainless Steel	$39.98 G

Attwood Single Shank Bow Eye



- Die cast zamak eye with chrome finish and plated steel shank.
- Inside eye diameter: 1".
- Maximum straight axis pull weight: 2,500 lbs.
- Not for side loading or transom mounting.
- Do not use for lifting.
- 1/2" stud.
- Cadmium plated nuts and washers included.

Order No.	Mfg. No. / Description	Price
239461	(3457-3)	$21.98 H

EPCO Lifting Eye



- Polished 316 stainless steel.
- Tapped for 5/8" connecting rods.
- Large 1-1/2" inside diameter eye.
- Lifting eye with O-ring.

Order No.	Mfg. No. / Description	Price
368034	(552)	$84.98 Q

T-H Marine Rugged Duty Unilok Mount



Order No.	Mfg. No. / Description	Price
642480	(EM-1205-DP) 5"	$53.98 H

©2014 Donovan Marine, Inc.

Marpac Premier Elite Domed Gauges with Stainless Bezel

- Made in USA.
- CE Certified.
- All gauges perimeter lighted.
- Stylish graphics.
- Contoured pointers.
- Domed glass lens.
- Fully sealed construction with Fog-Resistant Lens, built to military specifications.
- Easy installation.
- Fit standard 2-1/16" and 3-3/8" gauge mounting holes.
- OEM replacements are also available.

Marpac Premier Speedometer

- 15 - 65 MPH

7-1982
$54.98 G



Marpac Premier Tachometer

- 0 - 7,000 RPM

7-1980
$81.98 G



Marpac Premier Trim Gauges

- Johnson/Evinrude

7-1998
$29.98 G

- Mercury

7-1996
$29.98 G



Marpac Premier Fuel Gauge

- E - 1/2 - F

7-1986
$29.98 G



Marpac Premier Hourmeter

7-1988
$69.98 G



Marpac Premier Oil Pressure

- 0 - 80 PSI

7-1990
$29.98 G



Marpac Premier Voltmeter

- 8 - 18 Volts

7-1984
$29.98 G



Marpac Premier O/B Water Pressure Gauge Kit

- 30 PSI

7-1994
$73.98 G



Marpac Premier Water Temperature

- I/O

7-1992
$29.98 G



Marpac Premier Elite Domed Gauges

- Made in USA.
- CE Certified.
- All gauges perimeter lighted.
- Stylish graphics.
- Contoured pointers.
- Domed glass lens.
- Fully sealed construction with Fog-Resistant Lens, built to military specifications.
- Easy installation.
- Fit standard 2-1/16" and 3-3/8" gauge mounting holes.
- OEM replacements are also available.

Marpac Premier Speedometer

- 15 - 65 MPH

7-2015
$46.98 G



Marpac Premier Tachometer

- 0 - 7,000 RPM

7-2010
$66.98 G



Marpac Premier Trim Gauges

- Johnson/Evinrude

7-2044
$24.98 G

- Mercury

7-2042
$24.98 G



Marpac Premier Fuel Gauge

- E - 1/2 - F

7-2025
$23.98 G



Marpac Premier Hourmeter

7-2035
$59.98 G



Marpac Premier Oil Pressure

- 0 - 80 PSI

7-2066
$24.98 G



Marpac Premier Voltmeter

- 8 - 18 Volts

7-2020
$23.98 G



Marpac Premier O/B Water Pressure Gauge Kit

- 30 PSI

7-2040
$69.98 G



Marpac Premier Water Temperature

- I/O

7-2067
$24.98 G



Marpac Premier Performance Domed Gauges

- Made in USA.
- CE Certified.
- All gauges perimeter lighted.
- Stylish graphics.
- Contoured pointers.
- Domed glass lens.
- Fully sealed construction with Fog-Resistant Lens, built to military specifications.
- Easy installation.
- Fit standard 2-1/16" and 3-3/8" gauge mounting holes.
- OEM replacements are also available.

Marpac Premier Speedometer

- 15 - 65 MPH

7-2055 **$46.98** G



Marpac Premier Tachometer

- 0 - 7,000 RPM

7-2050 **$66.98** G



Marpac Premier Trim Gauges

- Johnson/Evinrude

7-2084 **$24.98** G

- Mercury

7-2082 **$24.98** G



Marpac Premier Fuel Gauge

- E - 1/2 - F

7-2065 **$24.98** G



Marpac Premier Hourmeter

7-2075 **$59.98** G



Marpac Premier Oil Pressure

- 0 - 80 PSI

7-2036 **$24.98** G



Marpac Premier Voltmeter

- 8 - 18 Volts

7-2060 **$24.98** G



Marpac Premier O/B Water Pressure Gauge Kit

- 30 PSI

7-2080 **$69.98** G



Marpac Premier Water Temperature

- I/O

7-2037 **$24.98** G



Marpac Premier Red Series Gauges

- Made in USA.
- CE Certified.
- All gauges perimeter lighted.
- Stylish graphics.
- Contoured pointers.
- Domed glass lens.
- Fully sealed construction with Fog-Resistant Lens, built to military specifications.
- Easy installation.
- Fit standard 2-1/16" and 3-3/8" gauge mounting holes.
- OEM replacements are also available.

Marpac Premier Speedometer

- 15 - 60 MPH

7-2088 **$45.98** G



Marpac Premier Tachometer

- 0 - 7,000 RPM

7-2086 **$72.98** G



Marpac Premier Trim Gauges

- Johnson/Evinrude

7-2097 **$25.98** G

- Mercury

7-2096 **$25.98** G



Marpac Premier Fuel Gauge

- E - 1/2 - F

7-2098 **$25.98** G



Marpac Premier Ammeter

- 60 - 0 - 60

7-2091 **$25.98** G



Marpac Premier Oil Pressure

- 0 - 80 PSI

7-2095 **$25.98** G



Marpac Premier Voltmeter

- 8 - 18 Volts

7-2090 **$25.98** G



Marpac Premier O/B Water Pressure Gauge Kit

- 30 PSI

7-2094 **$62.98** G



Marpac Premier Water Temperature

- I/O

7-2092 **$25.98** G

- O/B

7-2093 **$25.98** G



©2014 Donovan Marine, Inc.

Faria Professional Red Gauges



- Perimeter-lighted black dial with stylish red and white graphics, black aluminum bezel, teardrop white pointer, and flat glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

Order No.	Mfg. No. / Description	Price
3511705	(14631) Ammeter, 60-0-60	$37.98 G
3511710	(14652) Clock, Quartz, Analog	$98.98 G
3511675	(14606) Cylinder Head Temperature with Sender, 60° - 220° F	$61.98 G
3511655	(14601) Fuel Level Gauge, E - 1/2 - F	$42.98 H
3511700	(14613) Hourmeter, 10,000 hrs., 12 - 32 VDC	$69.98 G
3511660	(14602) Oil Pressure Gauge, 80 PSI	$42.98 G
3512145	(34610) Speedometer, Mechanical, 35 MPH	$57.98 G
3512150	(34611) Speedometer, Mechanical, 60 MPH	$57.98 G
3512160	(34619) Speedometer, Mechanical, 80 MPH	$57.98 H
3512165	(34620) Speedometer, Mechanical, 100 MPH	$58.98 G
3512140	(34607) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$112.98 H
3512155	(34617) Tachometer, All Outboard, 7,000 RPM	$112.98 H
3512175	(34650) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$187.98 H
3511720	(14690) Trim Gauge, Yamaha, 1997 thru 2000	$44.98 G
3511690	(14609) Trim Gauge, J/E and Suzuki Outboard	$44.98 H
3511680	(14607) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$42.98 H
3511685	(14608) Trim Gauge, OMC Cobra, Volvo SX	$44.98 G
3511670	(14605) Voltmeter, 10 - 16 VDC	$42.98 H
3511695	(14612) Water Pressure Gauge Kit, 30 PSI	$72.98 H
3511715	(14675) Water Pressure Gauge Kit, 60 PSI	$72.98 H
3511665	(14604) Water Temperature Gauge, 100° - 250° F	$42.98 H

Faria Dress White Gauges



351009

- Perimeter-lighted white dial with bold black graphics, white aluminum bezel, contoured black pointer, and flat glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

Order No.	Mfg. No. / Description	Price
3511340	(13149) Ammeter, 60-0-60	$37.98 G
3511350	(13152) Clock, Quartz, Analog	$98.98 G
3511305	(13113) Cylinder Head Temperature with Sender, 60° - 220° F	$50.98 G
3511285	(13101) Fuel Level Gauge, E - 1/2 - F	$37.98 H
3511315	(13121) Hourmeter, 10,000 hrs., 12 - 32 VDC	$69.98 G
3511290	(13102) Oil Pressure Gauge, 80 PSI	$37.98 H
3511335	(13145) Oil Pressure Gauge, 100 PSI	$39.98 G
3511955	(33122) Speedometer, Mechanical, 35 MPH	$57.98 G
3511945	(33112) Speedometer, Mechanical, 55 MPH	$57.98 H
3511950	(33113) Speedometer, Mechanical, 80 MPH	$57.98 H
3511355	(13153) SystemCheck Indicator	$126.98 G
3511935	(33103) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$112.98 H
3511940	(33104) Tachometer, All Outboard, 7,000 RPM	$112.98 H
3511975	(33150) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$187.98 G
3511375	(13189) Trim Gauge, Honda	$108.98 G
3511380	(13190) Trim Gauge, Yamaha, 1997 thru 2000	$38.98 G
3511370	(13188) Trim Gauge, Yamaha, to 1997	$38.98 G
3511325	(13123) Trim Gauge, J/E and Suzuki Outboard	$37.98 G
3511320	(13122) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$37.98 H
3511330	(13124) Trim Gauge, OMC Cobra, Volvo SX	$38.98 G
3511310	(13120) Voltmeter, 10 - 16 VDC	$37.98 H
3511295	(13108) Water Pressure Gauge Kit, 30 PSI	$72.98 H
3511365	(13175) Water Pressure Gauge Kit, 60 PSI	$72.98 G
3511300	(13110) Water Temperature Gauge, 100° - 250° F	$37.98 H

- Inboard Boxed Set: Inboard Speedometer (55 MPH) (Mech), Tachometer (6,000 RPM), Fuel Level Gauge, Voltmeter (10 - 16 VDC), Water Temperature Gauge (100° - 250° F) and Oil Pressure Gauge (80 PSI).

Order No.	Mfg. No. / Description	Price
351009	(KT9797) Inboard Boxed Set	$282.98 F

- Outboard Boxed Set: Outboard Speedometer (55 MPH) (Mech), Tachometer (7,000 RPM), Fuel Level Gauge and Voltmeter (10 - 16 VDC).

Order No.	Mfg. No. / Description	Price
351005	(KT9794) Outboard Boxed Set	$225.98 F

Faria Euro White Gauges



351010

- Perimeter-lighted white dial with bold black graphics, black aluminum bezel, contoured black pointer, and flat glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

- Inboard Boxed Set: Inboard Speedometer (55 MPH) (Mech), Tachometer (6,000 RPM), Fuel Level Gauge, Voltmeter (10 - 16 VDC), Water Temperature Gauge (100° - 250° F) and Oil Pressure Gauge (80 PSI).

Order No.	Mfg. No. / Description	Price
351010	(KT9798) Inboard Boxed Set	$282.98 F

- Outboard Boxed Set: Outboard Speedometer (55 MPH) (Mech), Tachometer (7,000 RPM), Fuel Level Gauge and Voltmeter (10 - 16 VDC).

Order No.	Mfg. No. / Description	Price
351006	(KT9795) Outboard Boxed Set	$225.98 F

Order No.	Mfg. No. / Description	Price
3511135	(12912) Ammeter, 60-0-60	$34.98 G
3511160	(12923) Clock, Quartz, Analog	$95.98 G
3511125	(12910) Cylinder Head Temperature with Sender, 60° - 220° F	$47.98 G
3511105	(12901) Fuel Level Gauge, E - 1/2 - F	$35.98 H
3511140	(12913) Hourmeter, 10,000 hrs., 12 - 32 VDC	$69.98 H
3511110	(12902) Oil Pressure Gauge, 80 PSI	$35.98 H
3511165	(12945) Oil Pressure Gauge, 100 PSI	$36.98 G
3511865	(32908) Speedometer, Mechanical, 35 MPH	$56.98 G
3511870	(32909) Speedometer, Mechanical, 55 MPH	$56.98 H
3511875	(32910) Speedometer, Mechanical, 80 MPH	$56.98 H
3511880	(32911) Speedometer, Mechanical, 20 - 100 MPH	$57.98 G
3511170	(12953) SystemCheck Indicator	$119.98 G
3511855	(32904) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$110.98 H
3511860	(32905) Tachometer, All Outboard, 7,000 RPM	$110.98 H
3511890	(32950) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$185.98 H
3511885	(32932) Tachometer with Hourmeter, Gas, Inboard, 6,000 RPM	$178.98 G
3511195	(12990) Trim Gauge, Yamaha, 1997 thru 2000	$38.98 G
3511185	(12988) Trim Gauge, Yamaha, thru 1996	$36.98 G
3511145	(12915) Trim Gauge, J/E and Suzuki Outboard	$35.98 G
3511150	(12916) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$35.98 H
3511155	(12917) Trim Gauge, OMC Cobra, Volvo SX	$36.98 G
3511130	(12911) Voltmeter, 10 - 16 VDC	$35.98 H
3511175	(12970) Warning Light Indicator	$72.98 G
3511115	(12903) Water Pressure Gauge Kit, 30 PSI	$70.98 H
3511180	(12975) Water Pressure Gauge Kit, 60 PSI	$70.98 G
3511120	(12904) Water Temperature Gauge, 100° - 250° F	$34.98 H

Faria Euro Gauges



351012

- Perimeter-lighted black dial with bold white graphics, black aluminum bezel, contoured white pointer, and flat glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

- Inboard Boxed Set: Inboard Speedometer (55 MPH) (Mech), Tachometer (6,000 RPM), Fuel Level Gauge, Voltmeter (10 - 16 VDC), Water Temperature Gauge (100° - 250° F) and Oil Pressure Gauge (80 PSI).

Order No.	Mfg. No. / Description	Price
351012	(KT9799) Inboard Boxed Set	$282.98 F

- Outboard Boxed Set: Outboard Speedometer (55 MPH) (Mech), Tachometer (7,000 RPM), Fuel Level Gauge and Voltmeter (10 - 16 VDC).

Order No.	Mfg. No. / Description	Price
351008	(KT9796) Outboard Boxed Set	$225.98 F

Order No.	Mfg. No. / Description	Price
3511035	(12822) Ammeter, 60-0-60	$34.98 G
3511050	(12825) Clock, Quartz, Analog	$95.98 G
3511025	(12819) Cylinder Head Temperature with Sender, 60° - 220° F	$47.98 G
3511000	(12801) Fuel Level Gauge, E - 1/2 - F	$35.98 H
3511045	(12824) Hourmeter, 10,000 hrs., 12 - 32 VDC	$69.98 H
3511005	(12803) Oil Pressure Gauge, 80 PSI	$35.98 H
3511815	(32808) Speedometer, Mechanical, 35 MPH	$56.98 G
3511820	(32810) Speedometer, Mechanical, 55 MPH	$56.98 H
3511825	(32812) Speedometer, Mechanical, 80 MPH	$56.98 H
3511830	(32814) Speedometer, Mechanical, 20 - 100 MPH	$57.98 G
3511075	(12853) SystemCheck Indicator	$119.98 H
3511805	(32804) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$110.98 H
3511810	(32805) Tachometer, All Outboard, 7,000 RPM	$110.98 H
3511845	(32850) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$185.98 H
3511835	(32832) Tachometer with Hourmeter, Gas, Inboard, 6,000 RPM	$178.98 G
3511095	(12890) Trim Gauge, Yamaha, 1997 thru 2000	$36.98 G
3511090	(12888) Trim Gauge, Yamaha, to 1997	$36.95 G
3511055	(12827) Trim Gauge, J/E and Suzuki Outboard	$35.98 G
3511060	(12828) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$35.98 H
3511065	(12829) Trim Gauge, OMC Cobra, Volvo SX	$36.98 G
3511030	(12821) Voltmeter, 10 - 16 VDC	$35.98 H
3511080	(12870) Warning Light Indicator	$72.98 G
3511010	(12810) Water Pressure Gauge Kit, 30 PSI	$70.98 H
3511085	(12875) Water Pressure Gauge Kit, 60 PSI	$70.98 H
3511015	(12812) Water Temperature Gauge, 100° - 250° F	$34.98 H

©2014 Donovan Marine, Inc.

Faria Chesapeake Black Stainless Steel Gauges

- Perimeter-lighted black dial with stylish blue and white graphics, polished stainless steel bezel, contoured white pointer, and domed glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

Order No.	Mfg. No. / Description	Price
3511440	(13736) Ammeter, 60-0-60	$43.98 G
3511475	(13791) Clock, Quartz, Analog	$109.98 G
3511410	(13706) Cylinder Head Temperature with Sender, 60° - 220° F	$58.98 G
3511385	(13701) Fuel Level Gauge, E - 1/2 - F	$46.98 H
3511435	(13713) Hourmeter, 10,000 hrs., 12 - 32 VDC	$78.95 H
3511390	(13702) Oil Pressure Gauge, 80 PSI	$46.98 H
3511395	(13703) Oil Pressure Gauge, 100 PSI	$48.98 G
3511995	(33703) Speedometer, Mechanical, 35 MPH	$74.98 G
3512000	(33704) Speedometer, Mechanical, 60 MPH	$74.98 G
3512005	(33705) Speedometer, Mechanical, 80 MPH	$73.98 H
3512020	(33720) Speedometer, Mechanical, 20 - 100 MPH	$76.98 G
3511450	(13753) SystemCheck Indicator	$137.98 G
3512010	(33710) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$139.98 H
3512015	(33718) Tachometer, All Outboard, 7,000 RPM	$139.98 H
3512035	(33750) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$211.98 H
3511465	(13789) Trim Gauge, Honda	$116.98 G
3511470	(13790) Trim Gauge, Yamaha, 1997 thru 2000	$48.98 G
3511460	(13788) Trim Gauge, Yamaha, thru 1996	$48.98 G
3511425	(13709) Trim Gauge, J/E and Suzuki Outboard	$46.98 G
3511415	(13707) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$46.98 H
3511420	(13708) Trim Gauge, OMC Cobra, Volvo SX	$48.98 G
3511405	(13705) Voltmeter, 10 - 16 VDC	$46.98 H
3511430	(13712) Water Pressure Gauge Kit, 30 PSI	$76.98 H
3511455	(13775) Water Pressure Gauge Kit, 60 PSI	$78.98 G
3511400	(13704) Water Temperature Gauge, 100° - 250° F	$46.98 H



351003

- Inboard Boxed Set: Inboard Speedometer (60 MPH) (Mech), Tachometer (6,000 RPM), Fuel Level Gauge, Voltmeter (10 - 16 VDC), Water Temperature Gauge (100° - 250° F) and Oil Pressure Gauge (80 PSI).

Order No.	Mfg. No. / Description	Price
351003	(KTF003) Inboard Boxed Set	$314.98 F

- Outboard Boxed Set: Outboard Speedometer (60 MPH) (Mech), Tachometer (7,000 RPM), Fuel Level Gauge and Voltmeter (10 - 16 VDC).

Order No.	Mfg. No. / Description	Price
351004	(KTF004) Outboard Boxed Set	$251.98 F

Faria Chesapeake White Stainless Steel Gauges

- Perimeter-lighted white dial with stylish blue and black graphics, polished stainless steel bezel, contoured black pointer, and domed glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

Order No.	Mfg. No. / Description	Price
3511540	(13831) Ammeter, 60-0-60	$43.98 G
3511575	(13891) Clock, Quartz, Analog	$108.98 G
3511510	(13806) Cylinder Head Temperature with Sender, 60° - 220° F	$58.98 G
3511485	(13801) Fuel Level Gauge, E - 1/2 - F	$46.98 H
3511535	(13813) Hourmeter, 10,000 hrs., 12 - 32 VDC	$78.98 H
3511490	(13802) Oil Pressure Gauge, 80 PSI	$46.98 H
3511495	(13803) Oil Pressure Gauge, 100 PSI	$48.98 G
3512050	(33810) Speedometer, Mechanical, 35 MPH	$74.98 G
3512055	(33811) Speedometer, Mechanical, 60 MPH	$74.98 H
3512065	(33819) Speedometer, Mechanical, 80 MPH	$74.98 H
3512070	(33820) Speedometer, Mechanical, 20 - 100 MPH	$76.98 G
3511550	(13853) SystemCheck Indicator	$137.98 H
3512045	(33807) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$139.98 H
3512060	(33817) Tachometer, All Outboard, 7,000 RPM	$139.98 H
3512085	(33850) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$211.98 H
3511565	(13889) Trim Gauge, Honda	$116.98 H
3511570	(13890) Trim Gauge, Yamaha, 1997 thru 2000	$48.98 G
3511560	(13888) Trim Gauge, Yamaha, thru 1996	$48.98 G
3511525	(13809) Trim Gauge, J/E and Suzuki Outboard	$46.98 H
3511515	(13807) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$46.98 H
3511520	(13808) Trim Gauge, OMC Cobra, Volvo SX	$48.98 G
3511505	(13805) Voltmeter, 10 - 16 VDC	$46.98 H
3511530	(13812) Water Pressure Gauge Kit, 30 PSI	$76.98 H
3511555	(13875) Water Pressure Gauge Kit, 60 PSI	$78.98 H
3511500	(13804) Water Temperature Gauge, 100° - 250° F	$46.98 H



351001

- Inboard Boxed Set: Inboard Speedometer (60 MPH) (Mech), Tachometer (6,000 RPM), Fuel Level Gauge, Voltmeter (10 - 16 VDC), Water Temperature Gauge (100° - 250° F) and Oil Pressure Gauge (80 PSI).

Order No.	Mfg. No. / Description	Price
351001	(KTF001) Inboard Boxed Set	$314.98 F

- Outboard Boxed Set: Outboard Speedometer (60 MPH) (Mech), Tachometer (7,000 RPM), Fuel Level Gauge and Voltmeter (10 - 16 VDC).

Order No.	Mfg. No. / Description	Price
351002	(KTF002) Outboard Boxed Set	$251.98 F

Faria Coral Gauges

- Perimeter-lighted black dial with stylish white and blue graphics, black aluminum bezel with burnished leading edge, contoured white pointer, and flat glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.



Order No.	Mfg. No. / Description	Price
3511230	(13011) Ammeter, 60-0-60	$34.98 G
3511240	(13014) Clock, Quartz, Analog	$95.98 G
3511220	(13009) Cylinder Head Temperature with Sender, 60° - 220° F	$47.98 H
3511200	(13001) Fuel Level Gauge, E - 1/2 - F	$3598 H
3511235	(13013) Hourmeter, 10,000 hrs., 12 - 32 VDC	$69.98 H
3511205	(13002) Oil Pressure Gauge, 80 PSI	$35.98 H
3511905	(33009) Speedometer, Mechanical, 55 MPH	$54.98 G
3511910	(33010) Speedometer, Mechanical, 80 MPH	$54.98 H
3511915	(33011) Speedometer, Mechanical, 20 - 100 MPH	$55.98 G
3511260	(13053) SystemCheck Indicator	$119.98 H
3511895	(33004) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$110.98 H
3511900	(33005) Tachometer, All Outboard, 7,000 RPM	$110.98 H
3511930	(33050) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$185.98 H
3511925	(33032) Tachometer with Hourmeter, Gas, Inboard, 6,000 RPM	$178.98 G
3511280	(13090) Trim Gauge, Yamaha, 1997 thru 2000	$38.98 G
3511275	(13088) Trim Gauge, Yamaha, thru 1996	$38.98 G
3511245	(13016) Trim Gauge, J/E and Suzuki Outboard	$35.98 H
3511250	(13017) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$35.98 H
3511255	(13018) Trim Gauge, OMC Cobra, Volvo SX	$38.98 G
3511225	(13010) Voltmeter, 10 - 16 VDC	$35.98 H
3511265	(13070) Warning Light Indicator	$72.98 G
3511210	(13003) Water Pressure Gauge Kit, 30 PSI	$70.98 G
3511270	(13075) Water Pressure Gauge Kit, 60 PSI	$70.98 H
3511215	(13004) Water Temperature Gauge, 100° - 250° F	$34.98 H

Faria Signature Gold Gauges



- Perimeter-lighted gray dial with stylish gold and black graphics, premium gold bezel, light-piped white pointer, domed glass lens.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.

Order No.	Mfg. No. / Description	Price
3511630	(14531) Ammeter, 60-0-60	$60.98 G
3511580	(14501) Fuel Level Gauge, E - 1/2 - F	$69.98 H
3511620	(14513) Hourmeter, 10,000 hrs., 12 - 32 VDC	$95.98 G
3511585	(14502) Oil Pressure Gauge, 80 PSI	$69.98 H
3512105	(34511) Speedometer, Mechanical, 55 MPH	$95.98 G
3512115	(34519) Speedometer, Mechanical, 80 MPH	$95.98 G
3512120	(34520) Speedometer, Mechanical, 20 - 100 MPH	$95.98 G
3512100	(34507) Tachometer, Gas, Inboard and I/O, 6,000 RPM	$158.98 H
3512110	(34517) Tachometer, All Outboard, 7,000 RPM	$158.98 H
3512135	(34550) Tachometer with SystemCheck Indicator, Gas, J/E Outboard, 7,000 RPM	$234.98 G
3512125	(34532) Tachometer with Hourmeter, Gas, Inboard, 6,000 RPM	$228.98 G
3511610	(14509) Trim Gauge, J/E and Suzuki Outboard	$69.98 G
3511600	(14507) Trim Gauge, Mercury, Mariner, Mercruiser, Volvo DP, Yamaha, 2001 and Newer	$69.98 G
3511605	(14508) Trim Gauge, OMC Cobra, Volvo SX	$72.98 G
3511645	(14589) Trim Gauge, Honda	$125.98 H
3511595	(14505) Voltmeter, 10 - 16 VDC	$69.98 H
3511615	(14512) Water Pressure Gauge Kit, 30 PSI	$95.98 H
3511590	(14504) Water Temperature Gauge, 100° - 250° F	$69.98 G

Faria Kronos Inboard Boxed Set



- Polished stainless steel bezel, domed fog-resistant lens, perimeter lighted spun aluminum dial with gold and black graphics. Gold increments and logo on dial are embossed. All instruments include two piece Newport Pointer with white hub.
- Fit standard 2" and 4" gauge mounting holes.
- Made in USA.
- CE Certified.
- Easy installation.
- Inboard Boxed Set: Inboard Speedometer (60 MPH) (Mech), Tachometer (6,000 RPM), Fuel Level Gauge, Voltmeter (10 - 16 VDC), Water Temperature Gauge (100° - 250° F) and Oil Pressure Gauge (80 PSI)

Order No.	Mfg. No. / Description	Price
351014	(KTF024) Inboard Boxed Set	$270.98 F

©2014 Donovan Marine, Inc.

SeaStar Solutions Premier Pro Black Gauges



- White and blue graphics on a black dial background makes Premier a smart choice for all modern and traditional boats.
- With Premier Fog resistant* range for peace of mind in any conditions. *(meets or exceeds SAE J-1810).
- Instruments available for most outboards, stern drives and gasoline-powered inboards.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: Through-dial and perimeter lighting for excellent readability at night.
- Low-range speedometers.
- U.S. and metric scales, with ISO symbols, where appropriate.

Order No.	Mfg. No. / Description	Price
8020274	(62720P) Oil Pressure Gauge, 80 PSI	$49.98 G
8020277	(62723P) Speedometer, 20 - 80 MPH, Pitot Type	$100.98 G
8020278	(62724P) Tachometer, Outboard and 4 Stroke Gas Engines, 6,000 RPM	$108.98 H
8020287	(63531P) Trim Gauge, Honda Outboard	$104.98 G
8020280	(62726P) Trim Gauge, Suzuki 4 Stroke, 2002 to Date	$48.98 G
8020281	(62727P) Trim Gauge, Yamaha, 2001 and On	$48.98 G
8020282	(62728P) Trim Gauge, Yamaha Outboards, pre 2001	$48.98 G
8020285	(62748P) Water Temperature Kit, Outboard, Cold - Hot, For All Electric-Start Outboards	$48.98 G
8020283	(62729P) Water Temperature Gauge, I/O, I/B, 100° - 240° F	$48.98 G

SeaStar Solutions Sahara Gauges



- With crisp tan dials and fire-orange pointer tip, Sahara instruments provide a unique look for your dash. Combined red through-dial and white perimeter lighting provide great readability at night. Domed glass sheds water and resists scratching.
- Instruments available for most outboards, stern drives and gasoline-powered inboards.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: Through-dial and perimeter lighting for excellent readability at night.
- Low-range speedometers.
- U.S. and metric scales, with ISO symbols, where appropriate.

Order No.	Mfg. No. / Description	Price
8020260	(59707P) Fuel Gauge, E - 1/2 - F	$30.98 H
8020258	(59705P) Oil Pressure Gauge, 80 PSI	$30.98 H
8020267	(61826P) Speedometer, 5 - 35 MPH, Pitot Type	$66.98 G
8020263	(61163P) Speedometer, 10 - 50 MPH, Pitot Type	$66.98 G
8020257	(59704P) Speedometer, 10 - 65 MPH, Pitot Type	$66.98 G
8020286	(63076P) Speedometer, 20 - 80 MPH, Pitot Type	$66.98 G
8020300	(66956P) Systems Check, Evinrude/Johnson, 2"	$120.98 G
8020269	(61901P) Systems Check, Evinrude/Johnson, 3"	$251.98 G
8020256	(59703P) Tachometer, Outboard and 4 Stroke Gas Engines, 7,000 RPM	$83.98 H
8020271	(62369P) Trim Gauge, Honda Outboard	$82.98 G
8020270	(61908P) Trim Gauge, Suzuki 4 Stroke, 2002 to Date	$30.98 H
8020262	(59709P) Trim Gauge, Yamaha, 2001 and On	$30.98 H
8020261	(59708P) Voltmeter, 12 volt	$30.98 H
8020268	(61870P) Water Pressure Kit, Outboard, 30 PSI	$66.98 H
8020259	(59706P) Water Temperature Gauge, I/O, I/B, 120° - 240° F	$30.98 H

SeaStar Solutions Eclipse Gauges



- Smart white and blue graphics on a black dial background, these very low profile bezels follow the curve of the lens to eliminate water trapping. Design with domed glass sheds water and resists scratching.
- Instruments available for most outboards, stern drives and gasoline-powered inboards.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: Through-dial and perimeter lighting for excellent readability at night.
- Low-range speedometers.
- U.S. and metric scales, with ISO symbols, where appropriate.

Order No.	Mfg. No. / Description	Price
8020316	(68389P) Ammeter, 60-0-60	$31.98 G
8020333	(68409P) Battery Condition Indicator, 12 volt	$29.98 G
8020318	(68391P) Hourmeter	$55.98 G
8020320	(68393P) Oil Pressure Gauge, 100 PSI	$28.98 G
8020334	(68410P) Systems Check, Evinrude/Johnson, 2"	$117.98 G
8020335	(68411P) Systems Check, Suzuki	$94.98 G
8020329	(68404P) Trim Gauge, Honda Outboard	$80.98 G
8020331	(68406P) Trim Gauge, Yamaha Outboard, pre 2001	$29.98 G
8020327	(68402P) Water Temperature Kit, Outboard, Cold-Hot	$63.98 G

SeaStar Solutions Amega Gauges





- Smart white and red graphics on a black dial background, these very low profile bezels follow the curve of the lens to eliminate water trapping. Design with domed glass sheds water and resists scratching.
- Instruments available for most outboards, stern drives and gasoline-powered inboards.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: Through-dial and perimeter lighting for excellent readability at night.
- Low-range speedometers.
- U.S. and metric scales, with ISO symbols, where appropriate.

Order No.	Mfg. No. / Description	Price
8020314	(68361P) Battery Condition Indicator, 12 volt	$29.98 G
8020249	(57929P) Oil Pressure Gauge, 100 PSI	$28.98 G
8020251	(58342P) Speedometer, 5 - 35 MPH, Pitot Type	$60.98 G
8020241	(57898P) Speedometer, 10 - 50 MPH, Pitot Type	$60.98 G
8020289	(65205P) Systems Check, Evinrude/Johnson, 2"	$117.98 G
8020254	(58935P) Systems Check, Evinrude/Johnson, 3"	$242.98 G
8020313	(68359P) Trim Gauge, Honda Outboard	$80.98 G
8020265	(61748P) Trim Gauge, Yamaha Outboard, pre 2001	$29.98 H
8020264	(61238P) Water Pressure Kit, Outboard, 30 PSI	$63.98 H
8020312	(68357P) Water Pressure Kit, Outboard, 40 PSI	$63..98 H

SeaStar Solutions Amega 4 Gauge Kit

- Amega 4 gauge kit includes: Instrument display box, 58255P Tachometer, 57900P Speedometer, 57901P Voltmeter and 57902P Fuel Gauge.

Order No.	Mfg. No. / Description	Price
818774	Amega 4 Gauge Kit	$149.98 F

SeaStar Solutions Lido Gauges



- Stylish stainless steel bezel design, black on white graphics, accurate and reliable, these tough instruments look good on all types of boats. Domed glass sheds water and resists scratching. Lido instruments feature crisp white dials and fire-orange pointer tips. Red through-dial and white perimeter lighting is provided for great night readability.
- Instruments available for most outboards, stern drives and gasoline-powered inboards.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: Through-dial and perimeter lighting for excellent readability at night.
- Low-range speedometers.
- U.S. and metric scales, with ISO symbols, where appropriate.

Order No.	Mfg. No. / Description	Price
818825	(65496P) Fuel Gauge, E - 1/2 - F	$28.98 F
818837	(65497P) Hourmeter, 10,000 Hours	$54.98 F
8020292	(65501P) Oil Pressure Gauge, 80 PSI	$30.98 Q
818801	(61752P) Speedometer, 10 - 50 MPH, Pitot Type	$58.98 F
8020298	(65510P) Speedometer, 10 - 65 MPH, Pitot Type	$66.98 Q
816642	(64477FP) Systems Check, Evinrude/Johnson	$217.98 F
818813	(65693P) Tachometer, Outboard and 4 Stroke Gas Engines, 7,000 RPM	$72.98 F
818814	(65129P) Tachometer/Hourmeter, Outboard and 4 Stroke Gas Engines, 7,000 RPM	$124.98 F
818875	(65503P) Trim Gauge, Honda Outboard	$87.98 F
818887	(65504P) Trim Gauge, Mercury, Yamaha	$28.98 F
818863	(65502P) Trim Gauge, Evinrude/Johnson, Suzuki	$28.98 F
818849	(65506P) Voltmeter, 12 volt	$28.98 F
818851	(65507P) Water Pressure Kit, Outboard, 30 PSI	$74.98 F
8020296	(65508P) Water Temperature Kit, For All Electric-Start Outboards, Cold-Hot	$53.98 Q
8020297	(65509P) Water Temperature Gauge, I/O, I/B, 120° - 240° F	$30.98 Q

SeaStar Solutions Lido Gauge Kit

- Lido gauge kit includes: Instrument display box, 818813 (65693P) Tachometer, 818801 (61752P) Speedometer, 818849 (65506P) Voltmeter and 818825 (65496P) Fuel Gauge.

Order No.	Mfg. No. / Description	Price
818768	Lido Gauge Kit	$168.98 F

©2014 Donovan Marine, Inc.

SeaStar Solutions Black Sterling Gauges

- With its rich luster and polish, Black Sterling instruments convey a look of utmost sophistication and add elegance to any dash. These instruments have fire-orange pointer tips and stainless graphics for a contemporary, ultra stylish look. Black Sterling instruments have clean, crisp black dials which highlight the stainless accents.
- Instruments available for most outboards, stern drives and gasoline-powered inboards.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: Through-dial and perimeter lighting for excellent readability at night.
- Low-range speedometers.
- U.S. and metric scales, with ISO symbols, where appropriate.



Order No.	Mfg. No. / Description	Price
8020303	(67021P) Fuel Gauge, E - 1/2 - F	$30.98 Q
8020304	(67022P) Oil Pressure Gauge, 80 PSI	$30.98 Q
8020306	(67283P) Speedometer, 0 - 35 MPH, Pitot Type	$69.98 Q
8020336	(68960P) Speedometer, 0 - 50 MPH, Pitot Type	$69.98 Q
8020307	(67285P) Speedometer, 0 - 70 MPH, Pitot Type	$69.98 Q
8020308	(67363P) Tachometer, Outboard and 4 Stroke Gas Engines, 7,000 RPM	$87.98 Q
8020309	(67365P) Trim Gauge, Evinrude/Johnson, Suzuki 4 Stroke, 2002 to Date	$87.98 Q
8020305	(67023P) Trim Gauge, Mariner/Mercury, Yamaha, 2001 to Date	$32.98 G
8020301	(67019P) Voltmeter, 8 - 18 VDC	$32.98 Q
8020310	(67382P) Water Pressure Kit, Outboard, 40 PSI	$70.98 Q
8020302	(67020P) Water Temperature Gauge, Electric, 100° - 240° F	$32.98 Q

SeaStar Solutions Blue Vector 3" Speedometers



- White and blue graphics on a black dial background.
- Pointers are white with a black hub.
- Perimeter lighting is provided for nighttime operation.
- Black bezels are high profile, with flat glass scratch resistant lens.

Order No.	Mfg. No. / Description	Price
816643	(56929P) 10 - 60 MPH	$59.98 H
816655	(56928P) 20 - 80 MPH	$59.98 H

Marpac Pitot Tube



- Calibrated for standard marine speedometers like SeaStar Solutions, Faria, Marpac and others.
- Consistent pressure for accurate readings.
- Stable, yet flexible design prevents impact damage.
- Resists barnacle growth.
- Works from 5 - 80 mph.

Order No.	Description	Price
7-0893		$6.98 G

Faria Pitot Tube Assembly Kits



- Complete transom mount speedometer pick-up with escutcheon plate and mounting hardware (two choices of tubing length) for use with all marine speedometers.

Order No.	Mfg. No. / Description	Price
3512325	(91106) Universal, 20' Tubing	$19.98 H
3512330	(91109) Universal	$12.98 H

SeaStar Solutions Red International Gauges - High Profile



- The red and white graphics are easy to read against the black dial background.
- White pointer.
- Perimeter lighting for nighttime operation.
- Flat scratch resistant glass lens with high profile bezels.

Order No.	Mfg. No. / Description	Price
816045	(53930P) 2" Ammeter, Direct Reading, Force, 0 - 8,000 RPM	$31.98 H
815932	(53210P) 3" Speedometer, 10 - 60 MPH	$56.98 H
815944	(53211P) 3" Speedometer, 20 - 80 MPH	$52.98 H


SeaStar Solutions Pack O'Pitots



- Universal speedometer pick-ups.
- Unique slotted design replaces most brands without drilling.
- Automatic kick-up feature.
- For speeds up to 80 MPH.
- Package of 12.

Order No.	Mfg. No. / Description	Price
8020255	(59677P)	$67.98 H

MPI Products Speedometer Pitot Tubing



- Black PVC tubing for connection between speedometer pickup and gauge.
- Size ID: 4 mm. Size OD: 6.2 mm.

Order No.	Mfg. No. / Description	Price
7680033	(151-0405) Length 25'	$9.98 H
772207	(151-0407) Length 100'	$58.98 M

SeaStar Solutions Outboard Tachometer Harness



- Mercury/Mariner, 5-Wire Plug
- Permits fast installation of tachometers.
- Eliminates field wiring problems.
- BIA color-coded harness.

Order No.	Mfg. No. / Description	Price
815499	(IH15105)	$62.98 F

Cole Hersee Temperature Switch



- Heavy duty, corrosion resistant construction.
- Red light - Hot - On at 194° F to 206° F.
- For operation of one (hot) indicator light, self-grounding.
- Mounting stem 1/2" - 14, length 9/16".

Order No.	Mfg. No. / Description	Price
300828	(84218)	$25.98 F

Sierra Temperature Senders



- Single station.
- Terminal type: 10-32 stud.
- Temperature: 450 Ohms at 100° F and 46 Ohms at 220° F.

Order No.	Mfg. No. / Description	Price
367525	(TS26611) 1/4" - 18 NPT	$15.86 H
367549	(TS26621) 3/8" - 18 NPT	$16.33 H
367587	(TS26631) 1/2" - 14 NPT	$17.04 H

Cole Hersee Oil Pressure Switch



- Heavy duty construction.
- Weather resistant, plated steel case.
- Molded, moisture repellent insulators.
- Self-grounding, S.P.S.T. Normally ON (contacts closed).
- Contacts open at rising pressure, contacts close at lowering pressure.
- Operates at 4.5 to 7.5 PSI.
- Mounting stem 1/8" - 27, length 3/8".

Order No.	Mfg. No. / Description	Price
300830	(8610)	$8.98 F

Faria Oil Pressure Senders



- 1/8" NPTF thread.
- American resistance.
- Single station.
- Ground: Standard.

Order No.	Mfg. No. / Description	Price
3512290	(90512) 80 PSI	$41.98 H
3512295	(90519) 100 PSI	$41.98 H


SeaStar Solutions Water Pressure/Temperature Kit



- Yamaha.

Order No.	Mfg. No. / Description	Price
815108	(61886P)	$58.98 I

SeaStar Solutions Gauge Light Kit



- Fits all SeaStar Solutions gauges except Heavy Duty and 2" Mechanical Units.
- Includes: 12 volt clear 2-CP bulb with wedge base socket.
- OEM #6299573.

Order No.	Mfg. No. / Description	Price
815209	(IA62995) Gauge Light Kit	$8.98 I
219483	(194) Spare Wedge Base Bulb, Standard Pack 10	$0.98 I

Faria Temperature Sender and Bushing Kits



- Single station, 10-32 stud.
- American resistance.
- Ground: Standard.

Order No.	Mfg. No. / Description	Price
3512265	(90401) 1/8" NPTF Thread	$11.98 H

- Bushing Kits.

Order No.	Mfg. No. / Description	Price
3512300	(90601) 1/8" x 1/4" NPTF and 1/8" x 3/8" NPTF	$11.98 H
3512305	(90602) 1/8" x 1/2" NPTF and 1/8" x 5/8" NPTF	$11.98 H

SeaStar Solutions Oil Pressure Sender - Dual Station



- For 80 PSI gauge.
- 1/8" - 27 NPT thread.

Order No.	Mfg. No. / Description	Price
815160	(OP24891)	$41.98 I

Gauge Hole Plugs



- Snap-in design installs easily.
- Black plastic with attractive textured finish.

Order No.	Mfg. No. / Description	Price
2000069	(9656-B) Fits Standard 2" Gauge Hole	$2.95 H
2000070	(9703-B) Fits Standard 4" Gauge Hole	$4.50 R

©2014 Donovan Marine, Inc.

World-Class Instrumentation for Modern Electronic Engines

High-Resolution Display

A large display provides immediate viewing of critical engine data.



Enhanced Gauge Readout

A quick glance and you have all the details.

Call for Prices and Availability

The PowerView

- For modern electronic engines and equipment applications using the SAW J1939 Controller Area Network.
- Displays over 30 standard SAW J1939 paraments broadcast by engine and transmission Electronic Control Units (ECU's).
- Graphical display features wide operating temperature range for viewing (-40 to 167° F/75° C).
- Displays active and ECU-Stored faults with text description for diagnosing equipment malfunctions.
- Simple connection to optional components.

The PowerView Gauges

- Display SAE J1939 parameters broadcast by the PowerView System.
- Feature cutting-edge, stepper motor technology and robust functionality.
- Microprocessor-driven for high accuracy.
- Simple installation and wiring design.

Frank W. Murphy EG Series Temperature Senders



- 1-wire-to-ground sender.

Order No.	Mfg. No. / Description	Price
772497	(10702009-EST-250-1/2) 250°/300° F, 1/2-14 NPT	$21.98 H
772500	(10702010-EST-250-1/8) 250° F, 1/8-27 NPT	$21.98 H

- 2-wire ungrounded sender.

Order No.	Mfg. No. / Description	Price
772512	(10702013-ES2T-250-1/2) 250°/300° F, 1/2-14 NPT	$29.98 H

Frank W. Murphy EG Series Pressure Senders



- The ESPM Series recommends mounting off-equipment.

Order No.	Mfg. No. / Description	Price
772396	(05701860-ESP-80) 1-wire-to-ground, 80 psi	$36.98 H
772409	(05701867-ES2P-80) 2-wire ungrounded, 80 psi	$41.98 H
772411	(05701857-ESP-100) 1-wire-to-ground, 100 psi	$36.98 H
772423	(05701858-ES2P-100) 2-wire ungrounded, 100 psi	$38.98 H
772430	(05701748-ES2PM-200) 2-wire ungrounded, 200 psi	$127.98 H
772428	(05701751-ESPM-300) 1-wire-to-ground, 300 psi	$106.98 H
772432	(05701750-ES2PM-300) 2-wire ungrounded, 300 psi	$127.98 H
772435	(05702566-ESPMK-400) 1-wire-to-ground, 400 psi	$202.98 H
772447	(05702565-ES2PMK-400) 2-wire ungrounded, 400 psi	$223.98 H

Frank W. Murphy EG21 Series Electric Gauges



EG21 Series EGS21 Series

- Case: Polyester (PBT), impact and weather resistant with screw-on mounting clamp.
- Lens: Clear polycarbonate and UV stabilized.
- Bezel: Polished 316 stainless steel.
- Dial: Black with white markings; back-lite; dual scale with mirror band to reduce parallax reading errors.
- Air core movement: Silicon dampened pointer.
- Fits standard 2-1/16" opening.

Order No.	Mfg. No. / Description	Price
772330	(05702381-EG21P-80-12) Oil Pressure, 80 psi, 12 volt	$42.98 H
772332	(05702397-EG21P-100-12) Oil Pressure, 100 psi, 12 volt	$36.98 H
772334	(05702429-EG21P-300-12) Oil Pressure, 300 psi, 12 volt	$37.98 H
772336	(05702445-EG21P-400-12) Oil Pressure, 400 psi, 12 volt	$36.98 H
772338	(10701286-EG21T-250-12) Temperature, 250° F, 12 volt	$36.98 H
772344	(65700106-EG21AM-60-12) Ammeter, 0-60, 12 volt	$36.98 H
772346	(65700112-EG21AM-100-12) Ammeter, 0-100, 12 volt	$60.98 H
777415	(65700259) Ammeter, 0-60, 12 volt	$22.98 H
772348	(65700118-EG21VM-12) Voltmeter, 12 volt	$36.98 H
772350	(65700124-EG21VM-24) Voltmeter, 24 volt	$38.98 H
772351	(EG21-24) Wire/Connector Assembly, 24 volt	$45.98 H

- Indicating only.

Order No.	Mfg. No. / Description	Price
772342	(10701290) Temperature, 250° F	$41.98 H
772389	(05702385) Oil Pressure, 80 psi	$41.98 H
772394	(05702401) Oil Pressure, 100 psi	$41.98 H
772343	(05702421) Oil Pressure, 200 psi	$66.98 H

Frank W. Murphy EGS21 Series Electric Swichgages®



EG21 Series EGS21 Series

- Has all of the features of the EG21 Series Gauge plus an adjustable set point PowerHall Effect switch output for operating alarms or equipment shutdown.
- The trip point is adjustable over 90% of the scale and has a set point indicator visible from the gauge face.
- Pressure, fuel, volts set on decreasing scale.
- Temperature and amps set on increasing scale.
- Fits standard 2-1/16" opening.

Order No.	Mfg. No. / Description	Price
772352	(05702389-EGS21P-80-12) Oil Pressure, 0-80 psi, 12 volt	$76.98 H
772354	(05702405-EGS21P-100-12) Oil Pressure, 0-100 psi, 12 volt	$72.98 H
772356	(05702437-EGS21P-300-12) Oil Pressure, 0-300 psi, 12 volt	$105.998 H
772358	(05702451-EGS21P-400-12) Oil Pressure, 0-400 psi, 12 volt	$72.98 H
772360	(10701292-EGS21T-250-12) Temperature, 100-250° F, 12 volt	$72.98 H
772362	(10701304-EGS21T-300-12) Temperature, 140-300° F, 12 volt	$72.98 H
772370	(65700121-EGS21VM-12) Voltmeter, 12 volt	$72.98 H
772371	(EGS21-24) Wire/Connector Assembly, 24 volt	$32.98 H

Frank W. Murphy 2" Temperature Swichgages®



- Temperature instruments for: Water, oil and cylinder head.
- These direct action, mechanical gauges accurately sense and indicate temperatures by means of a sealed capillary tube.
- Plated steel case with polycarbonate, high-impact lens.
- Bezel: Polished stainless steel.
- Dial: Black with white markings.
- Fits standard 2-1/16" opening.
- 1/2" N.P.T.

Order No.	Mfg. No. / Description	Price
772302	(10702524-20BTG-250-6) Indicating Only, 6'	$72.98 H
772303	(10702525-20BTG-250-8) Indicating Only, 8'	$74.98 H
772304	(10702527-20BTG-250-12) Indicating Only, 12'	$77.98 H
772306	(10702571-20BTG-250-20) Indicating Only, 20'	$90.98 H
772308	(10702581-20BTG-250-30) Indicating Only, 30'	$100.98 H
772309	(10702586-20BTG-250-35) Indicating Only, 35'	$118.98 H
772310	(10702569-20BTG-250-50) Indicating Only, 50'	$129.98 H
772316	(10702043-20T-250-6) Swichgage, 6'	$78.98 H
772318	(10702046-20T-250-12) Swichgage, 12'	$85.98 H
772320	(10702050-20T-250-20) Swichgage, 20'	$92.98 H
772322	(10702055-20T-250-30) Swichgage, 30'	$104.98 H
772323	(10702056-20T-250-35) Swichgage, 35'	$120.98 H
772324	(10702058-20T-250-50) Swichgage, 50'	$133.98 H

Frank W. Murphy 2" Temperature Swichgages®



- Polished stainless steel.
- Dial: Black with white markings.
- 130° - 250° F.
- Comes with built-in electrical switches for tripping alarms and/or shutdown devices.
- Gauge pointer makes with an adjustable contact to complete a pilot-duty circuit.
- Glass filled/polycarbonate, corrosion resistant case with high-impact lens.

Order No.	Mfg. No. / Description	Price
772313	(10703160-A20T-250-6) 6'	$140.98 H
772314	(10703163-A20T-250-12) 12'	$147.98 H
772315	(10703167-A20T-250-20) 20'	$156.98 H
772321	(10703221-A20T-OS-250-25) 25', Oil Sealed	$210.98 H

Frank W. Murphy 2-1/2" Temperature Swichgage®

Order No.	Mfg. No. / Description	Price
772347	(10703697-A25T-25-30) 30'	$158.98 H

Frank W. Murphy 2" Temperature Swichgages®

- Heavy duty rated.
- Environment sealed.
- Pressure models up to 400 psi.
- Temperature models up to 440° F (220° C).

Order No.	Mfg. No. / Description	Price
772311	(10702501) 4' Cap	$71.98 H
772312	(10702502) 6' Cap	$72.98 H
772340	(10702504) 10' Cap	$79.98 H
772341	(10701323) 16' Cap	$85.98 H

Frank W. Murphy Temperature Switch



- Limit switch for critical temperature.
- Operate alarms or shutdown equipment.
- SPDT snap-acting switch.
- Fits most engine applications.

Order No.	Mfg. No. / Description	Price
772317	(10705294)	$212.98 H

Frank W. Murphy 2" Pressure Swichgages®



- Diaphragm-actuated, pressure-indicating gages, with built-in electrical switches for tripping alarms and/or shutdown devices.
- Glass filled/polycarbonate, corrosion resistant case with polycarbonate, high-impact lens.
- Bezel: Polished stainless steel.
- Dial: Black with white markings.

Order No.	Mfg. No. / Description	Price
772337	(05704254-A20P-75) 0-75 psi	$105.98 H
772335	(05704255-A20P-100) 0-100 psi	$98.98 H
772331	(05702525-A20P-400) 0-400 psi	$177.98 H

Frank W. Murphy Temperature Swichgage®



- Combination indicating gauge and limit switch.
- Contact grounds through case.
- Critical/high temperature limit switch is visible and adjustable (most models).
- Switch can activate alarms and/or shut down equipment.

Order No.	Mfg. No. / Description	Price
772714	(10702113)	$105.98 H

Frank W. Murphy Temperature Swichgages®



- Combination indicating gauge and limit switch.
- Critical/high temperature limit switch is visible and adjustable (most models).
- Switch can activate alarms and/or shut down equipment.
- Contact grounds through case.

Order No.	Mfg. No. / Description	Price
772314	(10703163) 12' Cap	$147.98 H
772325	(10702042) 12' Cap, Lighted	$76.98 H
772327	(10702481) 6' Cap	$60.98 H

Frank W. Murphy 2" Pressure Swichgages®



- Diaphragm-actuated, pressure-indicating gages, with built-in electrical switches for tripping alarms and/or shutdown devices.
- Plated steel case with polycarbonate, high-impact lens.
- Bezel: Polished stainless steel.
- Dial: Black with white markings.

Order No.	Mfg. No. / Description	Price
772651	(05703115-20P-100) 0-100 psi	$55.98 H
772663	(05703122-20P-200) 0-200 psi	$62.98 H
772675	(05703124-20P-300) 0-300 psi	$62.98 H
772684	(05703161-20BPG-100) Indicating Only, 0-100 psi	$47.98 H
772687	(05703164-20BPG-300) Indicating Only, 0-300 psi	$53.98 H

©2014 Donovan Marine, Inc.

Frank W. Murphy 2" Pressure Gauges

- Heavy duty rated.
- Environment sealed.
- Pressure models up to 400 psi.
- Temperature models up to 440° F (220° C).

Order No.	Mfg. No. / Description	Price
772677	(05703160)	$47.98 H
772679	(05702501)	$120.98 H

Frank W. Murphy Pressure Swichgages®

- Corrosion resistant polycarbonate case.
- Indicating gauge and limit switch.
- Critical pressure limit switch is visible and adjustable (most models).
- Switch can activate alarms and/or shut down equipment.
- Contact(s) isolated from ground (two wire connection).

Order No.	Mfg. No. / Description	Price
772329	(10703254) 0-400 psi	$168.98 H
772691	(05702526) 0-400 psi	$147.98 H

Frank W. Murphy Model WO149 Customized Version of Panel

Prices On Request



Frank W. Murphy Pressure Transmitters



- 4-20 mA output signal.
- 0.25% accuracy.
- High stability.
- Precision etched silicon sensor.
- Corrosion resistant construction.

Order No.	Mfg. No. / Description	Price
772391	(05707356) 100 psi	$841.98 H

Frank W. Murphy Speed Switch



- A single set point speed switch with SPDT relay dry contact output.
- The trip point is set by a potentiometer.
- An LED indicates when the signal source is present. A second LED turns on when the trip point is reached.
- For installation within a weatherproof enclosure to protect it from rain, dust, etc.
- 12 volt.

Order No.	Mfg. No. / Description	Price
772396	(05701860)	$36.98 H

Frank W. Murphy Pressure Swichgages®

- Combination indicating gauge and limit switch.
- Critical pressure limit switch is visible and adjustable (most models).
- Switch can activate alarms and/or shutdown equipment.
- Exceeds SAE standards.

Order No.	Mfg. No. / Description	Price
772333	(05703205) 0-50 psi	$63.98 H
772650	(05703110) 0-75 psi	$55.98 H
772652	(05090101)	$73.98 H

Frank W. Murphy Clamp Lite Assembly

Order No.	Mfg. No. / Description	Price
772301	(05702176) 12 volt	$16.98 H

Frank W. Murphy Model PSB Direct Mount Pressure Switches



- A direct mount switch for critical pressure points.
- Ideal when reading is not desired, but pressure is critical to operational efficiency.
- Pressure connection: 1/8-27 NPT, brass.
- Maximum pressure: 75 psi.
- It has one limit contact that can be used to activate an alarm, actuate indicator lights or shut down equipment.
- Set to trip 15.

Order No.	Mfg. No. / Description	Price
772388	(05704427) 0-75 psi	$98.98 H
772345	(05704428) 0-100 psi	$98.98 H
772390	(PSB-400-F180) 0-400 psi	$122.98 H
772386	(PSB-50-F9) 0-50 psi	$711.98 H

Frank W. Murphy Direct Mount Temperature Swichgages®



- The SDB Series are direct-mounting Temperature Swichgage devices.
- They provide an accurate direct-reading gauge with an adjustable limit switch to activate alarms and/or shutdown.
- A knob on front of the Swichgage allows you to adjust the limit switch trip point.
- Pointer movement is actuated by a bi-metallic sensing element.

Order No.	Mfg. No. / Description	Price
772637	(10701198-SDB1000-3) 200° to 1,000°, 3/4" NPT Thermowell	$869.98 H
772634	(10701038-SDB500) 100° to 500°, without Thermowell	$433.98 H
772648	(10050025) 1/2" NPT Thermowell	$282.98 H

- Enclosure is explosion-proof and CSA listed for Class I, Group C and D hazardous locations.
- When the temperature rises to the preset trip point, the pointer engages an internal SPDT snap-switch to close/open circuits.

Order No.	Mfg. No. / Description	Price
772636	(10701071-SDB500EX-F-3) 100° to 500°, 3/4" NPT Thermowell	$1,013.98 H
772635	(10701040-SDB500EX) 100° to 500°, without Thermowell	$717.98 H

Frank W. Murphy 2" Temperature Swichgage®



- A combination liquid level gauge and low limit switch; each unit includes a chamber with pivotal float, an indicating dial with pointer and a low level contact.
- When properly installed and maintained, the float operates the pointer which, in turn, both indicates level during normal operation, and closes a switching circuit if the level falls to the low-limit set point.
- Die cast aluminum, poly-urethane coated case with polycarbonate lens.
- Brass float.
- Built for low pressure systems with max of 25 psi
- Snap-switch: SPDT rated 10 amps @ 125V AC.

Order No.	Mfg. No. / Description	Price
772380	(15700116-EL150K1)	$137.98 H

Frank W. Murphy Level Control for Scrubbers



- BUOYGLAS float operates to 0.5 specific gravity.
- Stainless steel models meet NACE requirements and carry Canadian registration numbers.
- Models rated for 2,000 psi (13.8 MPa) [138 bar] vessels.
- Models listed for Class I, Division 1 Locations.

Order No.	Mfg. No. / Description	Price
772382	(15700060)	$296.98 H

Frank W. Murphy Level Maintainers



- Maintains proper oil level.
- Manual float switch test.
- Shutdown on low level, or high and low level.
- Low level alarm before shutdown.
- High visibility "Frog Eye" lens.
- Optional pipe or universal mounting brackets.
- Optional inlet orifices for low to high pressure applications.
- Explosion-proof models available.

Order No.	Mfg. No. / Description	Price
772383	(15700172)	$560.98 H

- Fluid level monitoring for coolant, oil, diesel fuel and hydraulic fluid.
- Gauge face and pointer indicates fluid level.
- Float operated low level switch, triggers alarm or shutdown protection.
- Float adjustment knob for operator test of alarm or shutdown.

Order No.	Mfg. No. / Description	Price
772386	(1500121)	$711.98 H

Frank W. Murphy Shock and Vibration Switch



- Fully adjustable.
- Designed to detect shock/vibration in 3-planes of motion.
- Includes magnetic latching feature.
- Manual or electric reset.

Order No.	Mfg. No. / Description	Price
772385	(20700049)	$540.98 H

Frank W. Murphy Lube Level Swichgage® Instruments



772381



772379

- A combination lube level indicating gauge and adjustable low and high limit switches.
- It provides protection against low oil level or high level caused by overfill or fuel or water seepage into the crankcase.
- A 6-3/4" deep sight gauge allows you check the condition and level of your oil without shutting down the equipment.
- Fingertip adjustable limit contacts, thru 4-7/8" range, make it simple to set high and low limit contacts.
- If the float touches the high or low limit contact, a normally open circuit will be completed which can activate alarms and/or shutdown the equipment.
- Use on engines, pumps and compressors.
- Designed for grounded, low voltage electrical systems.
- It features a one-wire-to-ground electrical circuit.

Order No.	Mfg. No. / Description	Price
772379	(15700104-L129)	$157.98 H

- Designed for applications requiring a three-wire, above ground electrical circuit.
- It features ungrounded contacts and a conduit hub to protect electrical wiring.

Order No.	Mfg. No. / Description	Price
772381	(15700107-L129CK1)	$200.98 H

Frank W. Murphy Tattletale® Annunciators and Magnetic Switch



- The nerve centers that translate Swichgage contact operations into decisions and operate the alarm or shutdown device.
- They are the electrical load carrying devices for the alarm or shutdown device.
- Allows for Swichgage and/or N.C. contacts to be wired "Closed Loop" (in series).
- Any contact open or Swichgage contact close in the circuit shunt trips the switch.
- 14 amp fuse, 12 volt.

Order No.	Mfg. No. / Description	Price
772395	(25700147)	$66.98 H

- Use for distributor ignition or diesel.
- Time delay lockout of Swichgage contacts on start-up only; customer wired for delayed or immediate trip on shutdown.
- Breaks and makes circuits when tripped.
- 14 amp fuse, 12 volt.

Order No.	Mfg. No. / Description	Price
777409	(25700169-760A-30-12) Resets Automatically, 30 Seconds Time Delay	$149.98 H
777411	(25700198-761APH-60-12) Manual Reset, 60 Seconds Time Delay	$126.98 H
772300	(25700071) 12 volt, Manual Indicating, No Delay	$55.98 H
772560	(25700415) 120 VAC, Manual Indicating, No Delay	$60.98 H

©2014 Donovan Marine, Inc.

Frank W. Murphy Selectronic® Tattletale® Remote Alarm Annunciators

772374



772376



- A simple and inexpensive answer to your remote alarm annunciator needs.
- General purpose alarms suitable for a variety of applications.
- These compact Tattletale annunciators tell you by a flashing LED which variable malfunctioned.
- Many feature a pulsating Mini-Siren to audibly alert you to the malfunction.
- The audible alarm is silenced by depressing the Alarm Silence push button, but the visual signal remains in operation until the fault is corrected and the contacts are cleared.
- Use individually or gang for multiple applications.
- Flange mount.
- Accepts N.O. and/or N.C. contacts.
- Input voltage 8-32V AC or 8-40V DC.

Order No.	Mfg. No. / Description	Price
772374	(25700001-ST5ASF) 5 Alarm Point	$548.98 H
772376	(25700009-ST10ASF) 10 Alarm Point	$699.98 H

Frank W. Murphy Tachometers and Tachometer/Hourmeters



- A rugged, transistorized instrument with solid-state circuitry for indication of engine revolutions per minute.
- They are equipped with a bracket for mounting into a standard 3-3/8" dash mounting hole.
- A full 270° sweep of the pointer gives an accurate indication on a large easy-to-read scale and the dial can be illuminated for night reading.
- Bright stainless steel bezel.
- Designed to function from pulses generated by an alternator with 4, 8, 12, 14 or 16 poles on the rotor.
- 3,000 RPM.
- 3-27 pulses.
- 12V DC.

Order No.	Mfg. No. / Description	Price
772586	(20700175-ATA-30-12) Tachometer Only	$130.98 H
772588	(20700137) Tachometer/Hourmeter	$175.98 H

- The pulses can also be obtained from the ring gear of an engine by means of an electromagnetic sensor.
- Designed to function with flywheels having anywhere from 70 to 225 teeth.
- 3,000 RPM.
- 70-225 pulses.

Order No.	Mfg. No. / Description	Price
772582	(20700227) Tachometer Only	$130.98 H
772594	(20700142) Tachometer/Hourmeter	$175.98 H

Frank W. Murphy Magnetic Pickups

Order No.	Mfg. No. / Description	Price
772601	(20700227) Threaded 3" L, Thread Size 5/8-18	$91.98 H
772613	(20700142) Threaded 4-1/2" L, Thread Size 3/4-16	$99.98 H

Frank W. Murphy Time Delay Elements for Tattletale Annunciators

- Single point time delays inhibit sensor input to ST Series annunciators.
- Compensators for momentary contact operation due to vessel movement, etc.

Order No.	Mfg. No. / Description	Price
772377	(20700001-TDST3-5) 3 - 5 Second Time Delay	$304.98 H
772375	(20700002-TDST8-10) 8 - 10 Second Time Delay	$173.98 H

Frank W. Murphy Bilge Switch System



- Operates bilge pumps or alarms.
- Uses proven "air cell" actuated system.
- Remote switch and moving parts kept unaffected by corrosion.
- Aluminum body and cover.
- Includes 3 assemblies: Bilge level switch, 4' tube kit (sensor line and fittings) and "air cell" (volume cell).

Order No.	Mfg. No. / Description	Price
772378	(15700193-BLSK-1)	$403.98 H

Frank W. Murphy Hydrostatic Head Level Switch



- A pressure sensitive diaphragm operates a snap-switch that can be wired directly to electric pilot circuits to control pumps at predetermined levels.
- Aluminum case.
- Maximum pressure rating: 25 psi
- The typical application is to start and stop electric driven pump(s) to maintain tank levels.
- It is also applicable to engine driven pumps.
- Suitable for atmospheric tanks in a non-hazardous area.

Order No.	Mfg. No. / Description	Price
772384	(15700001-DF755)	$400.98 H

Frank W. Murphy Digital Tachometer/Hourmeter



- Tachometer/hourmeter with overspeed shutdown or alarm switch.
- Reads RPM data from a magnetic pickup or battery charging alternator.
- Powered by 8-40V DC.
- Large 5-digit LCD display.
- Front panel programming.
- When reading from flywheel ring gear use 772601 (MP3298) or 772613 (MP7905) Magnetic Pickups.

Order No.	Mfg. No. / Description	Price
772574	(20700158-MTH6)	$513.98 H

Frank W. Murphy Selectronic Digital Tachometer



- Offers high accuracy and dependability resulting from use of a quartz crystal time based and digital, solid-state electronics.
- Back-lighting for easy readings in low lit areas; this lighting requires a battery power source.
- Easy calibration.
- Power supplied by magnetic pickup or 12, 24 or 32V DC battery system.
- Input source can be a magnetic pickup or engine alternator.
- Mounting hole: 3-7/16".

Order No.	Mfg. No. / Description	Price
772562	(20700019-MT90-1)	$465.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Cole Hersee Engine Warning System Kit

Cole Hersee Co.



- The engine warning system kit includes: Dual alarm, temperature switch and oil pressure switch.
- Dual Alarm Module.
- Smooth red lens.
- Combination warning light and buzzer operate simultaneously, providing two way warning of unsafe or hazardous conditions.
- Heavy gauge steel case, plated to resist corrosion.
- 5/8" diameter.
- Body size: 1-7/8" long x 1" wide x 1-3/8" high.
- Mounting stem: 11/16" diameter, 17/32" long.
- Includes miniature bayonet bulb.

Order No.	Mfg. No. / Description	Price
630497	Engine Warning System Kit, 12 volt	$66.98 F
630992	(4112-RC) Dual Alarm Module - Light and Buzzer	$35.98 F

Aqualarm Remote Fire Detector

aqualarm



- A normally open, two terminal, nonpolarity switch which closes at a set fixed temperature set at 135° F.
- Multi-voltage, works with 12, 24 and 32 volts.
- Not recommended for the engine room because of high ambient temperatures.

Order No.	Mfg. No. / Description	Price
228684	(20112)	$44.98 G

Aqualarm Engine Overheat Detectors

aqualarm



228711



228723

- A two terminal, non polarity, normally open detector that closes when engine temperature reaches 200° F and activates a visual and/or audible device.
- Multi-voltage, works with 12, 24 and 32 volts.
- It is 1/2" MPT that installs into a 1/2" FPT plugged hole in the engine.

Order No.	Mfg. No. / Description	Price
228723	(20118)	$33.98 G

- The detector is a bolt-on type that bolts on the engine block or engine head using the engine or head bolts.
- It is ideal for metric applications that can not use the 228723 (20118) Engine Overheat Detector.

Order No.	Mfg. No. / Description	Price
228711	(20116)	$33.98 G

Raritan Rudder Angle Indicator

RARITAN



- Useful aid for docking or close maneuvering.
- Economical steering aids and rudder position monitors.
- Constant monitoring of rudder angle position from 0 to 45 degrees.
- Ready for installation with all necessary components needed - meter, calibration box and sending unit.
- Easy to read panoramic meters.

Order No.	Mfg. No. / Description	Price
564117	(MK5) Dimensions: 5-1/8" W x 4" H	$681.98 F
564155	(MKSII) Replacement Transmitter	$256.98 F

Aqualarm Cooling Water Flow Detectors

aqualarm



- Monitors Raw Water Flow to prevent engine damage due to overheating.
- It is a two wire, non- polarity switch that is normally closed and opens 1.5 to 12 GPM, depending on adjustment, raw water flow.
- It stays open until flow slows or ceases and then actives any audible or visual boat alarm.

Order No.	Mfg. No. / Description	Price
228734	(10233) 1" FPT	$95.98 G
228696	(10271) 1-1/2" FPT	$92.98 G

Aqualarm Low Oil Pressure Detector

aqualarm



- A normally closed switch that opens at 10 psi of oil pressure and closes if the oil pressure drops below 10 psi and activates a visual and/or audible warning device.
- Multi-voltage, works with 12, 24 and 32 volts.
- This boat alarm installs into an existing 1/8" MPT pipe plug in the oil line or it can be installed by adding a tee fitting to the oil line that will accommodate the 1/8" MPT if there is not an existing pipe plug.
- Rated at a maximum sustained pressure of 1,500 psi.

Order No.	Mfg. No. / Description	Price
228672	(20111)	$34.98 G

Aqualarm Bilge Water Level Warning System

aqualarm

Bilge Water Level Detector





Red Enamel Bell

- System includes: Red enamel 6" bell and bilge water level detector.
- The Bilge Water Level Detector monitors bilge water level and sends a signal to the loud Bell and Bilge Alarm Red Light Warning Panel, when water reaches a predetermined level - indicating Bilge High Water.

Order No.	Mfg. No. / Description	Price
228658	(20131) 12 volt	$119.98 G
228665	(20100) Red Enamel Bell Only	$84.98 G

Aqualarm Bilge Water Level Detector

aqualarm

- A two lead, non polarity, normally open detector that closes when water rises and activates a visual and/or audible device.
- It makes an excellent Boat Alarm Detector for bilge high water alarms.

Order No.	Mfg. No. / Description	Price
228709	(20120)	$48.98 G

Wagner Model 150 Rudder Angle Indicators

WAGNER



- This 3" diameter indicator is enclosed in a standard SAE housing for flush mount in consoles or pedestals.
- The front face of the indicator is completely watertight.
- The indicator draws less current than a pilot light and may be run off any boat's 12 to 40 volt DC current supply.
- Up to six stations may be used by simply connecting them in series.
- The indicator is fitted with internal, indirect illumination.

Order No.	Mfg. No. / Description	Price
677623	(510-132) Master Meter	$764.98 E
677635	(510-733) Extra Meter	$410.98 E
677672	(510-058) Universal Follow-Up Sender	$556.98 E

©2014 Donovan Marine, Inc.

Davis Illuminated Hand Bearing Compass



- This precision marine Hand Bearing Compass lets you easily obtain quick magnetic bearings on shore or floating objects.
- Simply align front and rear sights on an object and read off bearing.
- Use to take a quick bearing or position set, determine angular gain or loss on the competition while racing, check distance offshore, establish lee-bow set while cruising or racing in currents, determine drift vector, and plot a line of position.
- Made of high impact, grey plastic housing.
- The stable, liquid-damped compass card is graduated in 5° segments.
- Bold graduations every 15° for easy reading.
- Large, contoured handle designed for sure, steady grip and angled forward for added control.
- Lightweight design for easier bearing.
- Lanyard and instructions included.
- Solid-state LED illumination system floods the compass capsule and sight vane with soft light.
- The LED will last for the lifetime of the compass.
- Batteries, which are included, will last up to 10 times longer than with regular bulbs.
- Average LED “half-life” is approximately 10 years if operated continuously.
- Positive “push-on” switching action, with vinyl boot water protection.
- Battery housing has high watertight integrity.
- Named "BEST BUY" by PRACTICAL SAILOR (August, 2002): "Both simple and absolutely foolproof, especially when you need an accurate bearing in a hurry." "Proven, simple, cheap, accurate…what a bargain!"

Order No.	Mfg. No. / Description	Price
322611	(00215) Hand Bearing Compass - Illuminated	$64.98 R

Ritchie Trek Bracket Mount Compasses



- Ideal for Runabouts, Center Consoles, Ski Boats, Flats Boats, Bass Boats, Cars, Trucks, RV's and ATV's.
- 2-1/4 Direct Reading Dial with large numerals for easy reading.
- Strong directive force magnets and composite dial for fast performance.
- Built-in compensators to correct for deviation.
- Extra large diaphragm and rugged construction provide extended operating temperature range.
- High-impact rubber accent strip.
- Built-in, 12 volt Green NiteVu Lighting.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
573902	(TR-31) Traditional Black	$53.98 F
573905	(TR-31B) Breakup Camo	$56.98 F
573907	(TR-31S) Shadowgrass Camo	$56.98 F
573914	(TR-31G) No-Glare Gray with High-Visibility Blue Dial	$53.98 F
573926	(TR-31W) Designer White	$53.98 F
574942	(EX-0005-2) Replacement Light Bulb - 12 volt	$13.98 F

RitchieSport® X-21WW and X21BU Dash Mount Compasses



- 2" Direct Reading Dial.
- View adjusts up to 30.
- Exclusive built-in green NiteVu lighting.
- High temperature composite construction for extended operating range.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- DirectiveForce magnets.
- Easily installed, fits standard 2-1/16" instrument hole.
- Exclusive 5-year Ritchie warranty.
- Note: Does not have built-in compensators.

Order No.	Mfg. No. / Description	Price
574043	(X-21WW) Designer White with White Dial	$48.98 F
574055	(X-21BU) Traditional Black with High-Visibility Blue Dial	$48.98 F

Ritchie V-527 Explorer™ Dash Mount Compass



- 2-3/4" Direct Reading Dial.
- For small powerboats.
- Easily installed, fits 3" installation hole.
- Bezels styled to match popular gauge packages.
- Viewing is adjustable to 30.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Exclusive built-in NiteVu lighting.
- Built-in compensators.
- Hi-Temperature construction.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574168	(V-527) Traditional Black	$77.98 F
574942	(EX-0005-2) Replacement Light Bulb - 12 volt	$13.98 F

RitchieSport® X-10-M Bracket Mount Compasses



- Designed for powerboats up to 16'.
- Easy-to-install on windshield or dash.
- Two-sided, self-adhesive mounting pads included.
- Reversible bracket adjusts through 300°.
- 2" Direct Reading, High-Visibility dials.
- Internal green night lighting.
- High temp composite construction for extended operating range.
- Hardened steel pivot and sapphire jewel movement.
- Built-in compensators.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574005	(X-10-M) No-Glare Gray with High-Visibility Blue Dial	$37.98 F
574017	(X-10B-M) Traditional Black	$37.98 F
574029	(X-10W-M) Designer White	$37.98 F

Ritchie Helmsman™ Compasses


574322


574308


574360


574346

- Designed for power or sailboats 25' to 35'.
- Exclusive built-in green NiteVu night illumination.
- Built-in compensators to easily adjust for deviation.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Powerful DirectiveForce magnets for fast heading lock-on.
- Movable sun shield.
- 45 Degree lubber lines.
- High temperature composite construction for extended operating range.
- Custom fitted protective covers available.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574308	(HB-741) 3-3/4" CombiDamp Dial Traditional Black	$212.98 E
574322	(HD-745) Deck Mount, Traditional Black	$227.98 E
574346	(HF-742) PowerDamp Dial, Flush Mount, Traditional Black	$221.98 F
574360	(HF-743) CombiDamp Dial, Flush Mount, Traditional Black	$221.98 F
574904	(SH-0029XSP) Red LED and Wire Assembly	$18.98 F

Ritchie DNW-200 Navigator Binnacle Mount Compass



- Designed for power or sailboats 28' to 45'.
- 4-1/2" dial with large numerals.
- Exclusive built-in green NiteVu night illumination.
- Built-in compensators to easily adjust for deviation.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Internal gimbal systems for maximum stability during adverse pitch and roll conditions.
- Powerful DirectiveForce magnets for fast heading lock-on.
- Movable sun shield.
- 45 Degree lubber lines.
- High temperature construction for extended operating range.
- Custom fitted protective covers available.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574523	(DNW-200) Designer White	$444.98 F

RitchieAngler Compasses


574093


574081

- Designed for powerboats up to 24'.
- 2-3/4" Direct Reading Dial.
- No-Glare Gray Finish with High-Visibility Blue Dial.
- Distinctive RitchieAngler Graphics.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Internal green night lighting built-in compensators to easily adjust for deviation.
- DirectiveForce magnets.
- Movable sun shield.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574093	(RA-93)	$72.98 F
574081	(RA-91) Bracket Mount, No-Glare Gray	$72.98 F
574942	(EX-0005-2) Replacement Light Bulb - 12 volt	$13.98 F

Ritchie Explorer™ Compasses


574120


574106

574110


574118

574119


574144

574132

- Designed for powerboats up to 24'.
- 2-3/4" Direct Reading Dial.
- Exclusive built-in NiteVu lighting.
- Bezels styled to match popular gauge packages.
- Viewing is adjustable to 30.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Built-in compensators.
- High temperature construction.
- Easily installed, fits installation hole.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574120	(D-55) Deck Mount, Traditional Black	$74.98 F
574106	(B-51) Bracket Mount, Traditional Black	$72.98 F
574110	(B-51W) Bracket Mount, Designer White	$72.98 F
574118	(S-53) Surface Mount, Traditional Black	$72.98 F
574119	(S-53W) Surface Mount, Designer White	$72.98 F
574144	(F-50) Flush Mount, Traditional Black	$74.98 F
574132	(F-50W) Flush Mount, Designer White	$74.98 F
574942	(EX-0005-2) Replacement Light Bulb - 12 volt	$13.98 F

©2014 Donovan Marine, Inc.

Ritchie Voyager® Compasses


574170


574245


574257


574233

- Designed for powerboats up to 28'.
- Exclusive built-in green NiteVu night illumination.
- Built-in compensators to easily adjust for deviation.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Powerful DirectiveForce magnets for fast heading lock-on.
- Movable sun shield.
- 45 Degree lubber lines.
- High temperature composite construction for extended operating range.
- Custom fitted protective covers available.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574170	(S-87) Surface Mount, Traditional Black	$149.98 F
574245	(F-82) PowerDamp Dial, Traditional Black	$149.98 F
574257	(F-83) CombiDamp Dial, Traditional Black	$149.98 F
574233	(F-83W) CombiDamp Dial, Designer White	$149.98 F
574904	(SH-0029XSP) Red LED and Wire Assembly	$18.98 F

Ritchie B-81 Voyager® Bracket Mount Compasses



- Designed for powerboats up to 28'.
- Exclusive built-in green NiteVu night illumination.
- Built-in compensators to easily adjust for deviation.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Powerful DirectiveForce magnets for fast heading lock-on.
- Movable sun shield.
- 45 Degree lubber lines.
- High temperature composite construction for extended operating range.
- Custom fitted protective covers available.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574208	(B-81) 3" CombiDamp Dial, Traditional Black	$156.98 F
574209	(B-81) Traditional Black, Wheelmark	$156.98 F
574904	(SH-0029XSP) Red LED and Wire Assembly	$18.98 F

Ritchie SuperSports® Flush Mount Compasses


574586


574590


574562


574563

- PowerDamp Plus, High-Visibility Blue Dial with extra large white numerals.
- Exclusive built-in green NiteVu night illumination.
- Built-in compensators to easily adjust for deviation.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Internal gimbal systems for maximum stability during adverse pitch and roll conditions.
- Powerful DirectiveForce magnets for fast heading lock-on.
- Movable sun shield.
- 45 Degree lubber lines.
- High temperature composite construction for extended operating range.
- Custom fitted protective covers available.
- Easily installed, fits 4" mounting hole.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574562	(SS-1002) 3-3/4" Dial, Mounting Hole 4"	$232.98 E
574563	(SS-1002W) 3-3/4" Dial, Mounting Hole 4", White	$232.98 E
574574	(SS-2000) 4-1/2" Dial, Mounting Hole 4-3/4"	$404.98 E
574577	(SS-2000w) 4-1/2" Dial, Mounting Hole 4-3/4", White	$404.98 E
574586	(SS-5000) 5" Dial, Mounting Hole 6-1/4"	$628.98 D
574590	(SS-5000W) 5" Dial, Mounting Hole 6-1/4", White	$628.98 D

Ritchie FNW-203 Navigator Flush Mount Compasses



- Designed for power or sailboats 28' to 45'.
- 4-1/2" CombiDamp Dial with large numerals.
- Exclusive built-in green NiteVu night illumination.
- Built-in compensators to easily adjust for deviation.
- Scientifically matched sapphire jewel and hardened steel pivot dial movement.
- Powerful DirectiveForce magnets for fast heading lock-on.
- Movable sun shield.
- 45 Degree lubber lines.
- High temperature composite construction for extended operating range.
- Easily installed, fits 4-3/4" mounting hole.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574548	(FNW-203) Designer White	$382.98 F

Ritchie HB-845 Helmsman™ Steel Boat Compass



- 3-3/4" PowerDamp Dial.
- Exclusive built-in green NiteVu lighting.
- Special reinforced bracket with quadrantal correctors.
- Hardened steel pivot and sapphire jewel movement.
- 45 Degree lubber lines.
- Full internal gimbals.
- Built-in standard compensators and booster magnets on base.
- Movable sun shield.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574396	(HB-845) Traditional Black	$486.98 F
574904	(SH-0029XSP) Red LED and Wire Assembly	$18.98 F

Ritchie Globemaster® Shock-Mounted Binnacle Compasses



- PowerDamp Performance Dial.
- A practical combination of compass and special mounting bracket is offered in this model.
- Special one piece cast bronze bracket mount model with black finish.
- Includes quadrantal correction spheres.
- Bracket mount steel boat. 5° increments.
- Built-in semi-circular compensators.
- Full internal gimbals.
- Night lighting - 12 volt.
- High capacity roller diaphragm for extended temperature operating ranges.
- Hardened steel pivot and sapphire jewel movement.
- 90° lubber lines for easy reading of reciprocal headings.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574649	(B-453) 5" Dial, Base Diameter 8-7/16" x 19" x 7-3/8"	$1,418.98 F
574651	(B-463) 6" Dial, Base Diameter 9-1/2" x 20-1/2" x 8-3/8"	$1,557.98 F
573609	(GM-0023-ASY) Repl. Lamp Assembly without Bracket	$26.98 F

Ritchie Globemaster® Shock-Mounted Binnacle Compasses



- PowerDamp Performance Dial.
- A practical combination of compass and special mounting bracket is offered in this model.
- Special one piece cast bronze bracket mount model with black finish.
- Includes quadrantal correction spheres.
- Bracket mount steel boat. 5° increments.
- Built-in semi-circular compensators.
- Full internal gimbals.
- Night lighting - 12 volt.
- High capacity roller diaphragm for extended temperature operating ranges.
- Hardened steel pivot and sapphire jewel movement.
- 90° lubber lines for easy reading of reciprocal headings.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574601	(YB-500) 5" Dial, Base Diameter 6-7/8" x 19" x 8-1/4"	$1,080.98 F
574613	(YB-600) 6" Dial, Base Diameter 8" x 20-1/2" x 9-5/8"	$1,290.98 F
573609	(GM-0023-ASY) Repl. Lamp Assembly without Bracket	$26.98 F

Ritchie Globemaster® Shock-Mounted Binnacle Compasses



- PowerDamp High Performance Dial.
- Black krinkle finish metal binnacle.
- Should be installed in enclosed bridge decks or pilot houses.
- 5° increments.
- Built-in semi-circular compensators.
- 90° lubber lines for easy reading.
- Night lighting - 12 volt.
- Special anti-vibration mount isolates dials to protect pivot and jewel.
- Hardened steel pivot and sapphire jewel movement.
- 100% repairability.
- Exclusive 5-year Ritchie warranty.

Order No.	Mfg. No. / Description	Price
574675	(C-453) 5" Dial, Base Diameter 8-7/16"	$1,016.98 F
574676	(C-463) 6" Dial, Base Diameter 9-1/2"	$1,237.98 F
573609	(GM-0023-ASY) Repl. Lamp Assembly without Bracket	$26.98 F

©2014 Donovan Marine, Inc.

Ritchie Compass Displays



Order No.	Mfg. No. / Description	Price
101993	(DP12-M) Holds Up to Six Explorer™ Compasses	$454.98 G
101991	(SA-003NC) Holds Up to Six Compasses	Price On Request

Ritchie Clear Bulb - 12 volt



- For Explorer and RitchieAngler (except Model V-57).
- Package of 2.

Order No.	Mfg. No. / Description	Price
574942	(EX-0005-2) Replacement Light Bulb - 12 volt	$13.98 F

Ritchie Lamp Assembly without Bracket - 12 volt



- For Globemaster.

Order No.	Mfg. No. / Description	Price
573609	(GM-0023-ASY) Repl. Lamp Assembly without Bracket	$26.98 F

Ritchie Red L.E.D. and Wire Assembly



- For Voyager sunshade lights and Helmsman sunshade lights and top lights (Bulkhead models).

Order No.	Mfg. No. / Description	Price
574904	(SH-0029XSP) Red LED and Wire Assembly	$18.98 F

SeaStar SSX-176 XTREME™ NFB Steering Kits



- Smoothest and lowest steering effort mechanical helm offered in the market place yet still offers easy installation.
- Complete steering system including new helm, high efficiency XTREME steering cable design and new style bezel.
- Quick connect feature on both steering cable and spent travel tube for easy quick installation.
- Installs in same mounting pattern and bracket location as current Teleflex Marine steering systems.
- Smallest footprint possible to accommodate small/tight dash helm stations.
- Made, designed and assembled in the USA.

Order No.	Description	Price
836210	11' System	$334.98 Q
836212	12' System	$334.98 Q
836214	13' System	$334.98 Q
836216	14' System	$334.98 Q
836218	15' System	$334.98 Q
836220	16' System	$334.98 Q
836222	17' System	$334.98 Q
836224	18' System	$334.98 Q
836226	19' System	$334.98 Q
836228	20' System	$334.98 Q

SeaStar No-Feedback Steering Systems



- Consist of:
  (1) 7-0250 - Steering Wheel - Destroyer Type (Ships Separately, Not Part of SeaStar Solutions Kit).
  (1) 836666 (SH-4910P) No-Feedback 4.2 Single Helm
  (1) 836811 (SB-27150P) 90° Bezel
  (1) SSC-62 - Quick-Connect Cable

Order No.	Description	Price
835605	14' System	$298.98 F
835606	16' System	$298.98 F
835607	18' System	$298.98 F
835608	20' System	$298.98 F

SeaStar SSX-177 XTREME™ Tilt NFB Steering Kits



- Smoothest and lowest steering effort mechanical helm offered in the market place yet still offers easy installation.
- Complete steering system including new helm, high efficiency XTREME steering cable design and new style bezel.
- Quick connect feature on both steering cable and spent travel tube for easy quick installation.
- Installs in same mounting pattern and bracket location as current Teleflex Marine steering systems.
- Smallest footprint possible to accommodate small/tight dash helm stations.
- Made, designed and assembled in the USA.

Order No.	Description	Price
836230	11' System	$444.98 Q
836232	12' System	$444.98 Q
836234	13' System	$444.98 Q
836236	14' System	$444.98 Q
836238	15' System	$444.98 Q
836240	16' System	$444.98 Q
836242	17' System	$444.98 Q
836244	18' System	$444.98 Q
836246	19' System	$444.98 Q
836248	20' System	$444.98 Q

SeaStar SS-147 No-Feedback Rotary Steering Systems



- Patented No-Feedback feature in a rugged 4.2 turns lock-to-lock system…has the highest mechanical advantage of any rotary cable system available, giving you welcomed added muscle at the wheel.
- Single system suitable for most single station boats with non-power-assisted outboard engines up to V6 and minimal engine flutter or steering instability.
- Boats up to 24', steering wheels up to 16".
- Consist of:
  (1) 836666 (SH-4910P) No-Feedback 4.2 Single Helm
  (1) 836811 (SB-27150P) 90° Bezel
  (1) SSC-62 - Quick-Connect Cable

Order No.	Description	Price
835504	10' System	$261.98 F
835528	12' System	$261.98 F
835530	13' System	$261.98 F
835542	14' System	$261.98 F
835554	15' System	$261.98 F
835566	16' System	$261.98 F
835578	17' System	$261.98 F
835580	18' System	$261.98 F
835592	20' System	$261.98 F

SeaStar SS-132 No-Feedback Safe-T II Steering Systems



- Compact but rugged patented No-Feedback version of the most popular marine steering system in history.
- Direct replacement for all Safe-T systems.
- Available in single cable version, 3 turn response, perfect for boat speeds up to 50 m.p.h. where quick response is desired.
- Consist of:
  (1) 836621 (SH-5150P) No-Feedback Safe-T II Single Helm
  (1) 836811 (SB-27150P) 90° Bezel
  (1) SSC-62 - Quick-Connect Cable

Order No.	Description	Price
835101	10' System	$244.98 G
835113	11' System	$246.98 G
835126	12' System	$250.98 G
835138	13' System	$252.98 G
835147	14' System	$255.98 G
835153	15' System	$256.98 G
835163	16' System	$261.98 G
835175	17' System	$263.98 G
835187	18' System	$266.98 G
835202	20' System	$271.98 G

SeaStar SS-148 Dual No-Feedback Rotary Steering Systems



- Patented No-Feedback feature in a rugged 4.2 turns lock-to-lock system…has the highest mechanical advantage of any rotary cable system available, giving you welcomed added muscle at the wheel.
- Boats up to 24', steering wheels up to 16".
- Dual system recommended for speeds above 50 m.p.h. where removal of motion from system is desired to help control engine flutter.
- Consist of:
  (1) 836671(SH-4920P) No-Feedback 4.2 Dual Helm
  (1) 836811 (SB-27150P) 90° Bezel
  (2) SSC-62 - Quick-Connect Cable

Order No.	Description	Price
835720	12' System	$610.98 F
835732	13' System	$620.98 F
835744	14' System	$630.98 F
835756	15' System	$640.98 F
835768	16' System	$650.98 F

©2014 Donovan Marine, Inc.

SeaStar SS-157 No-Feedback Tilt Steering Systems



- Attractive, rugged design.
- 5 adjustment positions in 12° increments.
- Standard 3/4" tapered steering shaft.
- Consist of:
  (1) SH-91526P - Tilt Helm
  (1) SH-91599P - Tilt Mechanism
  (1) SSC-62 - Quick-Connect Cables

Order No.	Description	Price
836200	11' System	$339.98 F
836201	12' System	$344.98 F
836202	13' System	$347.98 F
836203	14' System	$349.98 F
836204	15' System	$352.98 F
836205	16' System	$354.98 F
836206	17' System	$356.98 F
836207	18' System	$359.98 F
836208	19' System	$362.98 F
836209	20' System	$365.98 F

Marpacages Quick Connect Steering Packages



- Marpac Steering Wheel ships separate from Teleflex Box (Not part of SeaStar Solutions Kit).
- Kit includes: SS137 system and 7-0253 steering wheel.

Order No.	Description	Price
834985	8' System	$191.98 Q
834986	9' System	$191.98 Q
834987	10' System	$191.98 Q
834988	11' System	$191.98 Q
834989	12' System	$191.98 Q
834990	13' System	$191.98 Q
834991	14' System	$191.98 Q
834992	15' System	$191.98 Q
834993	16' System	$191.98 Q
834994	17' System	$191.98 Q
834995	18' System	$191.98 Q
834996	20' System	$191.98 Q

Marpacages Safe-T NFB Steering Packages



- Marpac Stainless Steel Steering Wheel - Destroyer Type ships separate from SeaStar Solutions Items (Not part of SeaStar Solutions Kit).
- Includes: SS132 system and 7-0250 steering wheel

Order No.	Description	Price
835205	10' System	$305.98 G
835206	11' System	$307.98 G
835207	12' System	$310.98 G
835208	13' System	$313.98 G
835209	14' System	$315.98 G
835210	15' System	$318.98 G
835211	16' System	$322.98 G
835212	17' System	$325.98 G
835213	18' System	$327.98 G
835214	20' System	$333.98 G

SeaStar SS-137 Safe-T Quick-Connect Steering Systems



- Compact, lightweight, rugged rotary helm.
- Patented, No-tools-required cable connection.
- 3 turns lock-to-lock.
- Standard 3/4" tapered shaft.
- Stainless steel telescopic ram.
- Exceeds NMMA Certification Requirements and ABYC Standards.
- Fits boats up to 24', steering wheels up to 16".
- Consist of:
  (1) 836555 (SH-5094P) Safe-T Quick-Connect Single Helm
  (1) 836859 (SB-27484) Safe-T Quick-Connect Bezel - 90°
  (1) SSC-62 - Quick-Connect Steering Cable

Order No.	Description	Price
834855	8' System	$176.98 Q
834867	9' System	$176.98 Q
834879	10' System	$176.98 Q
834881	11' System	$176.98 Q
834893	12' System	$176.98 Q
834906	13' System	$176.98 Q
834918	14' System	$176.98 Q
834920	15' System	$176.98 Q
834932	16' System	$176.98 Q
834944	17' System	$176.98 Q
834956	18' System	$176.98 Q
834968	19' System	$176.98 Q
834970	20' System	$176.98 Q

Marpac Rotary Steering Systems for Saltwater



- 2 Year Warranty.
- First of its kind, designed for the Saltwater Environment.
- Exclusively packaged by Teleflex for Marpac.



- Patent Pending non-magnetic type 316 marine grade cast stainless steel bezel to compliment stainless steel wheels.
- The Teleflex Quick Connect (QC) cable for fast and easy snap-in Quick Connect cable connection.
- Quick response of 3 turns lock-to-lock.
- Stainless steel cable end construction for durability in the marine environment.
- Basic Saltwater Steering Kit includes: Stainless steel bezel, helm and cable.

Basic Saltwater Steering Kits: Prepackaged with Marpac Stainless Steel Bezel.

Order No.	Description	Price
7-7710	10' System	$180.98 Q
7-7711	11' System	$180.98 Q
7-7712	12' System	$180.98 Q
7-7713	13' System	$180.98 Q
7-7714	14' System	$180.98 Q
7-7715	15' System	$180.98 Q
7-7716	16' System	$180.98 Q
7-7717	17' System	$180.98 Q
7-7718	18' System	$180.98 Q
7-7719	19' System	$180.98 Q
7-7720	20' System	$180.98 Q

Saltwater Steering Kits: Includes: 13-1/2" Steering Wheel, S/S Destroyer Type with Knob.



- Ships separately from Basic Kit.

Order No.	Description	Price
7-7740	10' System	$252.98 H
7-7741	11' System	$252.98 H
7-7742	12' System	$252.98 H
7-7743	13' System	$252.98 H
7-7744	14' System	$252.98 H
7-7745	15' System	$252.98 H
7-7746	16' System	$252.98 H
7-7747	17' System	$252.98 H
7-7748	18' System	$252.98 H
7-7749	19' System	$252.98 H
7-7750	20' System	$252.98 H

Saltwater Steering Kits: Includes: 15-1/2" Steering Wheel, S/S Destroyer Type with Knob.

- Ships separately from Basic Kit.

Order No.	Description	Price
7-7770	10' System	$275.98 H
7-7771	11' System	$275.98 H
7-7772	12' System	$275.98 H
7-7773	13' System	$275.98 H
7-7774	14' System	$275.98 H
7-7775	15' System	$275.98 H
7-7776	16' System	$275.98 H
7-7777	17' System	$275.98 H
7-7778	18' System	$275.98 H
7-7779	19' System	$275.98 H
7-7780	20' System	$275.98 H

SeaStar SS-151 Rack & Pinion No-Feedback Steering Systems



- Patented No-Feedback technology in our new backmount rack and pinion system.
- 4 turns lock-to-lock NFB feature means wheel loads are locked out until you turn the wheel.
- Direct replacement for most older rack systems (no drilling).
- Consist of:
  (1) 836592 - (SH-5230P) No-Feedback Rack Single Helm
  (1) 836809 - (SB-39526P) Rack No-Feedback Bezel - 90°
  (1) SSC-134 - Rack Single Cable

Order No.	Description	Price
835910	11' System	$286.98 F
835922	12' System	$288.98 F
835934	13' System	$286.98 F
835946	14' System	$287.98 F
835958	15' System	$288.98 F
835960	16' System	$289.98 F
835972	17' System	$306.98 F
835984	18' System	$311.98 F
836001	20' System	$316.98 F


Uflex M66 Steering Cables



- The M66 Universal Rotary Steering Cable.
- Directly replaces Uflex, SSC6200 and 290 steering cables with no adapters.
- This cable features solid stainless steel engine output fittings for enhanced longevity and durability.

Order No.	Description	Price
2006910	8' Cable	$150.98 Q
2006915	9' Cable	$150.98 Q
2006920	10' Cable	$150.98 Q
2006925	11' Cable	$150.98 Q
2006930	12' Cable	$150.98 Q
2006935	13' Cable	$150.98 Q
2006940	14' Cable	$150.98 Q
2006945	15' Cable	$150.98 Q
2006950	16' Cable	$150.98 Q
2006955	17' Cable	$150.98 Q
2006960	18' Cable	$150.98 Q
2006965	20' Cable	$150.98 Q

SeaStar SSC-219 Jet Boat Steering Cable Assemblies



- SeaStar Solutions JBS is recommended for use in all jet boat applications powered by Mercury Sport Jet or OMC Turbo Jet drives up to 175 HP.

Order No.	Description	Price
837560	10' Cable	$138.98 Q
837572	11' Cable	$142.98 Q
837584	12' Cable	$145.98 Q
837596	13' Cable	$150.98 Q

SeaStar SS-152 NFB Pro Rack Steering Systems - Dual Cable



- Patented No-Feedback feature in a dual rack and pinion allows removal of most engine flutter from lost motion.
- Recommended for most high performance outboards with 115 HP or larger outboards capable of top speeds in excess of 50 m.p.h.
- Consist of:
  (1) 836592 (SH-5230P) No-Feedback Rack Single Helm
  (1) 836809 (SB-39526P) Rack No-Feedback Bezel - 90°
  (1) SSC-135 - Rack Dual Cable

Order No.	Description	Price
836127	12' System	$594.98 F
836139	13' System	$599.98 F
836141	14' System	$604.98 F
836153	15' System	$639.98 F
836165	16' System	$649.98 F

SeaStar SSC-62 QC-II Steering Cable Assemblies



- Now one cable fits most SeaStar Solutions rotary systems from 1968 to present.
- Reduces inventory requirements and the need to stock complete kits for steering service.

Order No.	Description	Price
838089	8' Cable	$124.98 G
838093	9' Cable	$124.98 G
838106	10' Cable	$124.98 G
838118	11' Cable	$124.98 G
838120	12' Cable	$124.98 G
838132	13' Cable	$124.98 G
838144	14' Cable	$124.98 G
838156	15' Cable	$124.98 G
838168	16' Cable	$124.98 G
838170	17' Cable	$124.98 G
838182	18' Cable	$124.98 G
838194	19' Cable	$124.98 G
838207	20' Cable	$124.98 G
838221	22' Cable	$195.98 Q
838245	24' Cable	$209.98 G
838269	26' Cable	$222.98 G
838283	28' Cable	$236.98 G
838307	30' Cable	$249.98 G
838347	34' Cable	$303.98 G
838409	40' Cable	$384.98 G

SeaStar QC-II Converter



- Upgrades older SeaStar Solutions rotary helms to quick-connect cable interface.
- For helms with threaded spigots.

Order No.	Mfg. No. / Description	Price
838032	(SA-27620P)	$21.98 G

SeaStar SS-141 Backmount Rack Steering Systems



- Direct replacement for most older rack systems (no drilling).
- Precision rack and pinion steering.
- Pre-assembled rack and cable.
- 4 turns lock-to-lock.
- Standard 3/4" tapered shaft.
- Stainless steel telescopic ram.
- Exceeds NMMA Certification Requirements and ABYC Standards.
- Fits boats up to 24', steering wheels up to 16".
- Consist of:
  (1) 836520 (SH-5210P) Back Mount Rack Single Helm
  (1) 836809 (SB-39526P) Back Mount Bezel - 90°
  (1) SSC-134 Back Mount Rack Single Cable

Order No.	Description	Price
834689	8' System	$177.98 Q
834691	9' System	$177.98 Q
834704	10' System	$177.98 Q
834716	11' System	$177.98 Q
834728	12' System	$177.98 Q
834730	13' System	$177.98 Q
834742	14' System	$177.98 Q
834754	15' System	$177.98 Q
834766	16' System	$177.98 Q
834778	17' System	$177.98 Q
834780	18' System	$177.98 Q

SeaStar SSC-134 Backmount Rack Steering Repl. Cables



- SSC-134 Single Cable Replacement.

Order No.	Description	Price
8020207	9' Cable	$153.98 F
838411	10' Cable	$163.98 F
838423	11' Cable	$166.98 F
838435	12' Cable	$135.98 F
838447	13' Cable	$137.98 F
838459	14' Cable	$140.98 F
838461	15' Cable	$142.98 F
838473	16' Cable	$144.98 F
838485	17' Cable	$147.98 F
838497	18' Cable	$150.98 F
838498	19' Cable	$153.98 F
838500	20' Cable	$156.98 F
838505	21' Cable	$198.98 F

SeaStar SSC-135 Dual Cable Replacement



Order No.	Description	Price
8020213	10' Cable	$400.98 F
8020214	11' Cable	$477.98 G
838562	12' Cable	$442.98 F
838574	13' Cable	$448.98 F
838586	14' Cable	$452.98 F
838598	15' Cable	$457.98 F
838602	16' Cable	$462.98 F
8020605	17' Cable	$518.98 G

©2014 Donovan Marine, Inc.

SeaStar SSC-130 Replaces Morse Cable Steering Rack



- Replaces Morse Control 300619 or 300620 Series.

Order No.	Description	Price
8020201	9' Cable	$150.98 D
8020202	10' Cable	$139.98 D
8020584	11' Cable	$143.98 F
8020585	12' Cable	$147.98 F
8020586	13' Cable	$151.98 F
8020587	14' Cable	$155.98 F
8020588	15' Cable	$159.98 F
8020589	16' Cable	$163.98 F
8020590	17' Cable	$168.98 F
8020203	18' Cable	$172.98 D
8020204	20' Cable	$180.98 D

SeaStar SSC-124 Replacement Cables



- For Old Style "The Rack"Rack and Pinion Steering System.

Order No.	Description	Price
837457	9' Cable	$165.98 F
837469	10' Cable	$144.98 F
837471	11' Cable	$149.98 F
837483	12' Cable	$153.98 F
837495	13' Cable	$157.98 F
837501	14' Cable	$161.98 F
837510	15' Cable	$165.98 F
837522	16' Cable	$169.98 F
837534	17' Cable	$173.98 F
837546	18' Cable	$177.98 F
8020200	19' Cable	$172.98 D
8020583	20' Cable	$173.98 D

Uflex M86 Steering Cables



- For older Morse Rack & Pinion.
- Will work with SSC124 and 300619 Rack.

Order No.	Description	Price
2006515	9' Cable	$145.98 G
2006520	10' Cable	$145.98 G
2006525	11' Cable	$145.98 G
2006530	12' Cable	$145.98 H
2006535	13' Cable	$145.98 H
2006540	14' Cable	$145.98 H
2006545	15' Cable	$145.98 G
2006550	16' Cable	$145.98 H
2006555	17' Cable	$145.98 G
2006560	18' Cable	$145.98 G
2006565	19' Cable	$145.98 G
2006570	20' Cable	$145.98 G
2006575	22' Cable	$223.98 G

SeaStar Sport Series Tilt Steering



- Preloaded dual taper bearings ensures minimal excess free play.
- Shaft seals to prevent water ingress.
- 48° of tilt articulation.
- 5 positive lock positions.
- Fits most styled and formed dashes.
- Mechanical Tilt mechanism only.
- Flexible rubber bellows.
- Fits most Teleflex mechanical helms.

Order No.	Mfg. No. / Description	Price
836678	(SH91800P)	$152.98 F

SeaStar Safe T Quick Connect Tilt Helms



- For inboards and power-assisted stern drives.
- Requires SH91800P Tilt Mechanism.

Order No.	Mfg. No. / Description	Price
8020572	(SH91523P) Single Helm	$117.98 F
8020193	(SH91524P) Dual Helm	$304.98 F

SeaStar No-Feedback Rack Steering Helm



- 4 turns lock-to-lock.
- Standard 3/4" tapered steering shaft.

Order No.	Mfg. No. / Description	Price
836592	(SH5230P) Single Helm	$157.98 F

SeaStar No-Feedback 4.2 Steering Helms



- The 4.2 turn lock-to-lock NFB helm features a rugged design with the highest mechanical advantage of any helm giving you welcomed added muscle in a single version.

Order No.	Mfg. No. / Description	Price
836666	(SH4910P) Single Helm	$149.98 F
836671	(SH4920P) Twin Helm	$278.98 F
836811	(SB27150P) Bezel	$24.98 F

SeaStar No-Feedback Safe-T II Steering Helm



- Safe-T II is the next generation of the most popular helm in history.
- The patented NFB design prevents unwanted torque at the wheel in a compact 3 turn lock-to-lock response for boat speeds under 50 mph.
- Bolts to existing Teleflex Safe-T dash cutout.

Order No.	Mfg. No. / Description	Price
836621	(SH5150) Single Helm	$143.98 F
836811	(SB27150P) Bezel	$24.98 F

SeaStar Big-T Rotary Steering Helm





- The heavy duty helm unit incorporates a rugged steel pinion and diecast gears and added bearing support for the shaft.
- The helical-wound cable provides greater flexibility for applications such as single or dual station push-pull.
- 3 turns lock-to-lock for standard travel.
- For boats up to 34' in length using single or twin engines up to 235 HP and wheels up to 20".

Order No.	Mfg. No. / Description	Price
649965	(SH5000P) Big-T Single Helm	$300.98 F
649662	(SB27265P) 90°/20° Bezel, Black	$154.98 F

SeaStar Safe-T Rotary Steering Helms



- Precision die-cast gears driving helical-wound cable provides control with minimum lost motion.
- Compact rotary helm unit with 3/4" tapered shaft occupies minimum space behind dashboard.
- 3 turns lock-to-lock for standard travel.
- Stainless steel cable output ends.
- For boats up to 24' in length using single engines and steering wheels up to 16" diameter.
- Twin cable system recommended for boats that exceed 50 mph or experience steering instability from engine flutter.

Order No.	Mfg. No. / Description	Price
836520	(SH5210P) Single Helm	$71.98 F
649977	(SH5023P) Single Helm, Safe-T "TS"	$153.98 F
836555	(SH5094P) Single Helm, Safe-T Quick-Connect	$76.98 F
836582	(SH5294P) Dual Helm, Safe-T Quick-Connect	$333.98 F
836859	(SB27484P) Safe-T Quick-Connect Bezel, 90°	$19.98 F
836847	(SB27483P) Safe-T Quick-Connect Bezel, 20°	$30.98 F

Ezy-Glide "Stik II" Stick Steering - Model 840



- A mechanical steering system designed so the operator may be positioned in the front for better visibility and convenience.
- A one piece stainless steel drive spool along with a durable high impact housing provide a superior single lever steering platform for todays fisherman.
- The slower ratio provides the added mechanical advantage needed for higher horsepower as well as 4 stroke engines.
- This system is rated for outboard engines not to exceed 70 H.P.
- Jet Drives not to exceed 90 H.P.
- Total handle travel: 58"/206°.
- Ratio: 6.4/1.

Order No.	Description	Price
336203	Cable Length 8'	$371.98 F
336215	Cable Length 9'	$371.98 F
336227	Cable Length 10'	$371.98 F
336239	Cable Length 11'	$371.98 F
336241	Cable Length 12'	$371.98 F
336253	Cable Length 13'	$371.98 F
336265	Cable Length 14'	$371.98 F
336277	Cable Length 15'	$371.98 F

Buck-Algonquin Threaded Ball



- Stainless steel.
- 1/2" x 2" threaded ball with two lock nuts.

Order No.	Mfg. No. / Description	Price
261405	(70THDBALL)	$46.98 Q

SeaStar Backmount Rack Steering Helm



- 4 turns lock-to-lock.
- Standard 3/4" tapered steering shaft.

Order No.	Mfg. No. / Description	Price
836520	(SH5210P) Single Helm	$71.98 F
836809	(SB39526P) Backmount Bezel, 90°	$20.98 F

Ezy-Glide "Stik III" Stick Steering - Model 870



- The Ezy-Stik III has incorporated many of the outstanding and time proven features of the Model 840. Such as a one piece stainless steel drive spool and reinforced composite housing.
- The Model 870 has been developed due to the increased demand for a system with quicker response and shorter lock-to-lock travel distance.
- Model 870 also has higher horsepower ratings.
- Not to exceed 70 HP maximum.

Order No.	Description	Price
336281	Cable Length 12'	$402.98 F
336284	Cable Length 13'	$402.98 F
336285	Cable Length 14'	$402.98 F
3362029	Cable Length 15'	$468.98 H

Ezy-Glide Replacement Cables for "Stik II" and "Stik III"

Order No.	Mfg. No. / Description	Price
336660	(RC-1000) Length 10', Reach 112"	$184.98 F
336300	(RC-1100) Length 11', Reach 124"	$184.98 F
336301	(RC-1200) Length 12', Reach 136"	$184.98 F
336302	(RC-1300) Length 13', Reach 148"	$184.98 F
336661	(RC-1400) Length 14', Reach 160"	$184.98 F
336662	(RC-1500) Length 15'	$184.98 F
3362054	(RC-1700) Length 17'	$217.98 G

Ezy-Glide Stik Steering Accessories

Order No.	Mfg. No. / Description		Price
3362034	(DC-212)	Dress Cover	$6.98 G
3362035	(EG-LPK)	Fresh-Water Engine Connection Kit	$171.98 G
3362036	(H-260)	Replacement Lever	$25.98 F
3362038	(HP-900)	Mounting Hardware Pack	$6.98 G
3362039	(K-060)	Replacement Knob	$5.98 G

Buck-Algonquin Swivel Socket




- Manganese bronze.
- Accommodates ball type steerers.
- Tapped for 3/4" pipe size.

Order No.	Mfg. No. / Description	Price
261393	(SWS-75)	$134.98 Q

©2014 Donovan Marine, Inc.


SeaStar Steering Connection Kit - Tilt Tube Mounting - Hinge Pin



- This is the most popular steering cable-to-engine connection method for outboards with an ABYC standard tilt tube.
- Link arm kits for outboards.
- Johnson/Evinrude 70 HP and up.
- All Mercury and Mariner, except 70 HP and V6.

Order No.	Mfg. No. / Description	Price
649523	(SA27361P)	$102.98 F

SeaStar Steering Connection Kit - Transom Support Mounting



- This cable connection is used for older model outboards without tilt tubes, low HP outboards or applications where transom design interferes with standard tilt tube mounting.
- Universal for all inboard and most outboard motor installations.
- Corrosion resistant.

Order No.	Mfg. No. / Description	Price
649434	(SA27256P)	$163.98 F

SeaStar Clamp Block Assembly - Ski Board Inboard



- Heavy duty with black metal flake finish.
- 2-1/4" stand-off.

Order No.	Mfg. No. / Description	Price
649478	(SA27578P)	$100.98 F

SeaStar Clevis Kit



- Stainless steel.
- With short bolt.

Order No.	Mfg. No. / Description	Price
649509	(SA27314P)	$46.98 F

SeaStar Plastic Spent Travel Tube



- For Safe-T QC, Safe-T "TS" and Big-T Helms.

Order No.	Mfg. No. / Description	Price
649547	(SA35680P)	$10.98 F


Uflex Engine Connection Kits



- WARNING: A73SS and A74SS tiller arms are recommended for mechanical steering systems.

Order No.	Mfg. No. / Description	Price
2006635	(A73SS) Stainless Steel Tiller Arm f/Some Mercury Engines	$90.98 F
2006636	(A74SS) Stainless Steel Tiller Arm f/Some J/E, BRP Engines	$85.98 F
2006637	(A75) Clevis	$35.98 F

SeaStar Steering Connection Kits - Splashwell Mounting



- This cable connection is used on boats where standard tilt tube or transom support mounting methods are precluded by a splashwell box or lack of engine tilt tube.
- Universal for most outboard motor installations.

Order No.	Mfg. No. / Description	Price
649424	(SA27254P) 90°	$112.98 F
649410	(SA27253P) 15°	$168.98 F


SeaStar Clamp Block Assemblies - Outboard



- This cable connection is used on boats where standard tilt tube or transom support mounting methods are precluded by a splashwell box or lack of engine tilt tube.
- Universal for most outboard motor installations.

Order No.	Mfg. No. / Description	Price
649371	(SA27055P) Corrosion Resistant	$109.98 Q
649383	(SA27149P) Stainless Steel	$157.98 Q

SeaStar Rod End Kit



- Corrosion resistant.
- 3/8"-20 thread.


Order No.	Mfg. No. / Description	Price
649460	(SA27276P)	$68.98 F

SeaStar Support Tubes



Order No.	Mfg. No. / Description	Price
649447	(SA27274P) Aluminum	$25.98 F
649458	(SA27275P) Stainless Steel	$84.98 F

T & R Marine Standard Steering Link Arm



- Stainless steel construction with adjustable ball joint and nylon lock nuts to insure vibration proof locking.
- Johnson/Evinrude and Mercury up to 100 HP, 1972 and newer.
- Exceeds BIA specifications.
- Diameter 3/8".

Order No.	Mfg. No. / Description	Price
633304	(SLA-9000)	$120.98 G

T & R Marine Steering Link Arms



- Plated steel construction with adjustable ball joint and nylon lock nuts to insure vibration proof locking.
- Diameter 3/8".

Order No.	Mfg. No. / Description	Price
633306	(SLA-940F) Johnson/Evinrude, 60-120 HP	$57.98 R
633307	(SLA-950F) Mercury, 60-120 HP	$64.98 R

T & R Marine Steering Link Arm, Clamp Mount - Freshwater Kit



- This kit fits under engine clamps and is designed to prevent motor from jumping off the transom.
- Also prevents damage to the transom by the clamps.
- All parts furnished for simple hook up.
- Constructed of aluminum and plated steel.
- Mariner 9.9, 15 HP. 1982 and newer; Suzuki 9.9, 15, 16, 25 HP. 1982 and newer; Johnson/Evinrude 9.9, 15, 25, 30, 35, 40 HP. 1977 and newer; Yamaha 9.9, 15 HP. 1984 and newer.

Order No.	Mfg. No. / Description	Price
633607	(FWK-3475)	$154.98 R

T & R Marine Steering Tube Cleaning Brush



- Cleans corroded engine tilt tubes.
- Constructed of steel wire with 8" shaft.
- For use with electric drill motor.

Order No.	Mfg. No. / Description	Price
642580	(TB-10)	$24.98 R

T-H Marine Steering Console Mount



- Aluminum console features welded construction, plywood reinforced face for steering wheel mounting, adjustable height, space for mounting switches and instruments and a flat top for depth finder mounting.
- Adaptable to most aluminum or fiberglass boats.
- Manufactured from .090 thick material.
- Dimensions: 24" L x 10-1/2" W x 10" - 20" H (adjustable).

Order No.	Mfg. No. / Description	Price
640905	(SCM-2)	$239.98 R

Marpac Steering Cable Protector



- Protects fuel lines, wires and cables.
- Gas and oil resistant.
- Adjustable fit.

Order No.	Description	Price
7-0678	Steering Cable Protector	$8.98 G

T & R Marine Super Steering Link Arm



- Stainless steel construction with adjustable ball joint for centering engine.
- A castle nut and cotter pin prevent vibration from loosening the nut on steering rod.
- Johnson/Evinrude V4/V6.
- Diameter 1/2".

Order No.	Mfg. No. / Description	Price
633316	(SLA-9501)	$165.98 G

T & R Marine Dual Steering Connection Kits




- Dual cable kit for cables installed down same side of boat (port or starboard).
- Steering tube is provided with grease fitting and O-ring.
- All parts provided for simple hook up.
- Stainless steel and aluminum makes these kits corrosion resistant.
- Note: Steering link arm not included in these kits.
- Yamaha 115-220 HP, 1984 and newer.

Order No.	Mfg. No. / Description	Price
634003	(OSM-3792)	$143.98 G

- Mercury 1980 and newer Black Max; Mariner 1980 and newer; Fits all Mercury/ Mariner 2.4; Suzuki 150, 150SS, 200 HP. 1986 and newer; Suzuki 115-140 HP. 1987 and newer.

Order No.	Mfg. No. / Description	Price
634053	(OSM-3798)	$143.98 R

Ezy-Glide Side Mounting Bracket



- The Rigger's Pal is for port mounting installation adjacent to the operator seat.
- Can be used for mounting throttle box controls.
- Height 12".

Order No.	Mfg. No. / Description	Price
336657	(RP-12)	$90.98 F

Moeller Tiller Rope Grommet



- Durable, high density polyethylene won't rot or mildew.
- Prevents damage to tiller cables and control cables.
- Recessed holes allow grommets to be riveted in place or secured with #6 fasteners.
- 2-7/8" ID.
- Fits 3" hull opening, 1/4" under flange.
- Sold per pair.
- Black.

Order No.	Mfg. No. / Description	Price
486568	(20101-10)	$6.98 R

©2014 Donovan Marine, Inc.

Marpac Motorwell Boots


7-0674 & 7-0675


7-0677

- Protects fuel lines, wires and cables.
- Gas and oil resistant.
- Adjustable fit.

Order No.	Description	Price
7-0677	For 3" Hole	$5.98 G
7-0674	For 3-1/2" Hole	$3.10 G
7-0675	For 4-1/2" Hole	$3.95 G

MPI Products Outboard Cable Cover Transom Mounting Flange



- Ideal for securing outboard hose and cable conduit to transom.
- Threaded molded plastic grips conduit securely.
- ID 2".
- Black.

Order No.	Mfg. No. / Description	Price
641806	(747-2000)	$27.98 M

Marpac Utility Grommets



- Black.
- Sold per pair.

Order No.	Description	Price
7-0615	2-3/4"	$9.98 G
7-0614	3-3/8"	$11.98 G

MPI Products Outboard Hose and Cable Cover



- High quality, crush resistant plastic offers excellent flexing properties and abrasion resistance.
- Material is resistant to bilge acids, fuel solutions and ultra violet rays.
- For all bracket mounted outboard motors.
- ID 2".
- Bend radius 3".
- Black.

Order No.	Mfg. No. / Description	Price
641818	(127-2006) Length 50'	$392.98 M
641819	(127-2003) Length 10'	$83.98 M

T-H Marine Cable Boots



- Constructed of black vinyl that resists ultraviolet rays, gasoline and oil.
- When rigging is complete simply pull cable tie snug around wires and cable to complete installation.

Order No.	Mfg. No. / Description	Price
641906	(CB-2) 2"	$5.98 H
641921	(CB-4) 4.5"	$9.98 H

T-H Marine Reinforcing Rings for Cable Boots



Order No.	Mfg. No. / Description	Price
641909	(CBR-1) 3", Black	$3.29 H
641912	(CBR-2) 2", Black	$2.98 H
641914	(CBR-4) 4.5", Black	$3.49 H

T-H Marine Utility Grommets



- Flexible marine vinyl.
- Protects rod tips or butts.
- Also great for boat hooks, gaffs, etc.
- Black.
- Sold by pair.

Order No.	Mfg. No. / Description	Price
641781	(UG-1) 3-3/8" OD, Max. Hole Size: 2-3/8"	$9.98 H
641767	(UG-2) 2-3/4" OD, Max. Hole Size: 1-3/4"	$9.98 H
641793	(UG-3) 4" OD, Max. Hole Size: 3"	$13.98 H

T-H Marine Zippered Rigging Sleeve



- Protects wire, cables and hoses.
- Made of rugged Sunbrella fabric, this sleeve will withstand the elements and resist fading.
- Easily zips on and off to access cables or hoses when needed.
- Ends are secured by cable ties sewn into pockets.

Order No.	Mfg. No. / Description	Price
640950	(ZRS-1) Length 48"	$58.98 H

T-H Marine Black Flex Sleeving - Mesh Rigging Conduit

- Lightweight jacketing for bundling and protecting wires, cables and hoses.
- Braided from high temperature yarns.
- Easy to slip on.
- Sold in spools.

Order No.	Mfg. No. / Description	Price
6400156	(FLX-25) Diameter 1/4", Length 100'	$38.98 H
642352	(FLX-50) Diameter 1/2", Length 100'	$82.98 H
642365	(FLX-75) Diameter 3/4", Length 100'	$110.98 H
6400154	(FLX-125) Diameter 1-1/4", Length 50'	$77.98 H
642389	(FLX-150) Diameter 1-1/2", Length 50'	$103.98 H



T-H Marine Rigging Flange with Fuel Hose Port and Hose Union


640961


640970


Typical Fuel Hose Assembly

- Completes professional rigging installation.
- Complies with ABYC - NMMA Specs.
- Split design allows installation on pre-rigging boats.
- Fuel hose port fits type "A" hose and hose union fits Type "B" hose.
- Installs with T-H Marine Rigging Hose.

Order No.	Mfg. No. / Description	Price
640961	(RFFHP-1) Rigging Flange with Fuel Hose Port	$15.98 H
640970	(RFHU-1) Rigging Flange Hose Union	$12.98 H

Perko Fig. 565 Tiller Rope Pulley



- Stainless steel with white plastic sheave.
- Swivel type with strap.
- Maximum rope size 1/4".
- Sheave OD 2-5/16".
- Overall length 3-3/4", strap length 1-5/8".
- Uses #10 RH fasteners.
- Sold 2 per display pack.

Order No.	Mfg. No. / Description	Price
540887	(565 DP)	$26.98 R

Perko Fig. 1226 Tiller Rope Clamp



- Chrome plated zinc.
- For 1/8" or 3/16" diameter cable.
- Width 11/16", overall length 1-1/4".
- Sold 2 per display pack.

Order No.	Mfg. No. / Description	Price
533554	(1226 DP CHR)	$8.98 R

T-H Marine Rigging Flange and Hose





- Protects cables, hoses and wiring from the elements.
- Molded polypropylene flange threaded to retain hose.
- Vinyl cap provides closure for the engine end of the hose.
- Kit includes: Black flange and 4' of hose.

Order No.	Mfg. No. / Description	Price
6400252	(RF-1) Rigging Flange, Fits 2" Rigging Hose, Black	$17.98 H
6400255	(RFH-1) Rigging Hose, 2" x 50', Black	$158.98 H
6400257	(RFK-1) Riggin Flange Kit, Rigging Flange with 4' Hose	$39.98 H

T-H Marine Brite Plate Chrome Plated Rigging Flange



- Look of stainless - price of plastic.
- Strong plating process strengthens parts.
- Five step metal bonding process.
- Won't flake, chip or easily scratch.

Order No.	Mfg. No. / Description	Price
641957	(RF-1CP)	$25.98 H

Perko Fig. 634 Tiller Rope Pulley



- Stainless steel with white plastic sheave.
- Swivel snap hook type.
- Maximum rope size 1/4".
- Sheave OD 2-5/16".
- Overall length 4-5/8", opening snap throat 1/2".
- Sold 2 per display pack.

Order No.	Mfg. No. / Description	Price
541372	(0634 DP)	$34.98 R

Clear Vinyl Jacketed Tiller Cable



- Clear vinyl jacketed.
- Steel tiller cable.
- Diameter 3/16".
- Minimum break strength 920 lbs.
- Meets all BIA requirements.
- Sold in 500' spools only.

Order No.	Mfg. No. / Description	Price
553518	(GT0947703)	$173.98 H

Uflex Hydraulic Steering Package



- Hytech steering system is an easy and affordable outboard hydraulic steering solution for boats with up to 150 horsepower. The kit features the unique split tilt tube rod that allows for installation of the cylinder without removing the engine. Coupled with the composite UP20 helm, the Hytech offers effortless steering with 5 turns lock-to-lock. Applicable to almost all 2 and 4 stroke outboard engines.
- Includes: the UP20 helm, UC94 cylinder, two quarts of OIL 15 and 40' of cut to length tubing.
- WARNING: Depending on the applications, the UC94-OBF is available in 2 versions:
  UC94-OBF/1 and UC94-OBF/3.
  UC94-OBF/1 cylinder is not suitable for Honda BF115 and BF130 engines and Mercury Optimax 75, 90, 115.
- For these engines UC94-OBF/3 is available.

Order No.	Mfg. No. / Description	Price
2006825	(HYTECH 1.0)	$750.98 E

©2014 Donovan Marine, Inc.

SeaStar Baystar Hydraulic Steering Package



- BayStar allows you to install all of the safety, reliability and comfort of hydraulic steering onto your 150 HP max. (or less) outboard powered boats.
- Manufactured in the tradition of the whole SeaStar family of products - for applications that exceed BayStar's HP rating please purchase one of our SeaStar products.
- BayStar kits come complete with everything needed for an install.
- Package includes:
  - 799885 (HH4314) BayStar Plus Helm
  - 800616 (HC4645H) - BayStar Cylinder
  - 800587 (HT4420) - BayStar 20' Tubing Kit
  - 799784 (HA5438) - Filler Kit
  - 799779 (HA5430) - 2 Bottles of Hydraulic Steering Fluid

Order No.	Mfg. No. / Description	Price
799114	(HK4200)	$728.98 E

SeaStar Baystar Hydraulic Steering Cylinders



Order No.	Mfg. No. / Description	Price
800616	(HC4645H)	$416.98 E
800619	(HC4648H) Short	$416.98 E

SeaStar Baystar Hydraulic Steering Components

Order No.	Mfg. No. / Description	Price
800587	(HT-4420) 20' Tubing Kit	$141.98 E
800577	(HP-4600) Seal Kit, Fits New Style Cylinders	$87.98 E
801387	(HS-5147) Seal Kit, Baystar Helm	$13.98 E

Marpacages Baystar Hydraulic Steering Package



- All the same features of our 799114 (HK4200) Baystar Package, but with the convenience of a tilt helm.
- Package includes:
  - 799899 - BayStar Tilt Helm
  - 800616 (HC4645H) - BayStar Cylinder
  - 804422 - Steering Hose 20'
  - 7-1087 - Hydraulic Fluid, Quart

Order No.	Description	Price
799102		$1,244.98 E

SeaStar Baystar Hydraulic Steering Helms



Order No.	Mfg. No. / Description	Price
799885	(HH4314) Baystar Helm	$367.98 E
799001	(HH4514) Baystar Plus 1.4 Front Mount	$433.98 E
799899	(HH4315) Baystar Tilt Helm	$587.98 E

SeaStar Gland Kit for Baystar Cylinder

- Requires two kits to completely re-seal the cylinder, both port and starboard (sold separately).
- For old style cylinders.

Order No.	Mfg. No. / Description	Price
800580	(HP5607) Port Side	$92.98 E
800582	(HP5608) Starboard Side	$92.98 E

SeaStar Baystar Outboard Compact Application Guide

Baystar Compact Cylinders HC4645/47/48/58

Manufacturer	Year	Model	Cylinder	Notes
Force	1985 To Date	90-150 HP	HC4645H	
Honda	1992 To Date	30-90 HP	HC4645H	
	1998 To 2009	115-130 HP	HC4647H	
	2001 To Date	150 HP	HC4645H	
	2003 To Date	BF135 HP	HC4645H	
Johnson/Evinrude	1977 To 1989	65-150 HP	HC4648H	
NOTICE: Johnson 115 HP 2-stroke engines, required the pivot plate to be flipped.	1991 To Date	40-150 HP	HC4645H	
	1997 To Date	115 HP FIGHT	HC4658H	4
	1997 To Date	75-150 HP FIGHT	HC4645H	
	1998 To Date	40-140 HP 4-Stroke	HC4658H	1, 4
Mercury/Mariner	1984 To Date	75-150 HP	HC4645H	
Nissan	1990 To Date	120-140 HP	HC4645H	
Suzuki	1986 To Date	150 HP	HC4645H	
	1996 Only	115-140 HP	N/A	
	1987 To 2002	115-140 HP	HC4645H	1
	1990 To 2000	90-100 HP	HC4645H	
	1998 To Date	40-70 HP 4-Stroke	HC4645H	1, 4
	2001 To Date	115-140 HP 4-Stroke	HC4658H	
Tohatsu	1990 To Date	140 HP	HC4645H	
Yamaha	1998 To Date	40-50 HP	HC4645H	2
	1998 To Date	60 HP	HC4645H	3
	1986 To Date	70-90 HP	HC4645H	1
	1997 To Date	80-150 HP 4-Stroke	HC4645H	
	2000 To Date	25-60 HP 4-Stroke	HC4648H	1
Yanmar	1990 To Date	27-36 HP	HC4645H	



HA4640
Use with cylinder HC4645H



HA4642
Use with cylinder HC4648H



HA4643
Use with cylinder HC4658H



HA4641
Use with cylinder HC4647H

1. Requires Spacer Kit part #HO5090.
2. Engine clamp brackets must be cut or ground, and the engine through bolted onto the transom, or interference will occur, restricting engine trim and tilt.
3. Steering hook Yamaha Part #63D-48511-004D must be installed.
4. Cylinder HC4645 may be used in these applications. The pivot plate will need to be flipped before installation. Instructions provided with Owner's Manual

- This engine application is current through the revision date of March 10, 2006. For up-to-date engine applications go to: www.seastarsteering.com
- NOTICE: HC4645H compact cylinder is included in the BayStar Steering Kits. If your engine requires the use of a cylinder other than HC4645H or HC4658H then please refer to the figure below for additional replacement pivot plate.
- Available Special Order Only

SeaStar Hydraulic Steering Packages

- SeaStar hydraulic steering systems use oil to transmit force from the steering wheel to the outboard motor or rudder.
- Instead of the push-pull cable of a mechanical system, the SeaStar system uses a "liquid cable" which is many times more efficient.
- Hydraulic steering is the most comfortable and efficient approach to steering a boat.
- It is available in several outboard, configurations to fit most boats.
- The helm pump is the heart of a hydraulic steering system.
- The ultimate in efficiency, safety and reliability, yet it is easy to install and maintain.
- SeaStar helms feature maximum steering comfort engineered into a compact, stylish design incorporating easy-access filling.

SeaStar Front Mount O/B Hydraulic Steering Packages



- Provides easier and smoother steering than any other competitive systems.
- Standard 3/4" tapered steering wheel shaft.
- Precision built and easy to install.
- Suitable for most major outboard engine brands.
- Single engine, threaded tilt tube 300 HP maximum.
- Dual engines, threaded tilt tube 450 HP maximum combined. (Order tie bar separately.)
- Consist of: Helm (HH-5271), Front Mount Cylinder (HC-5345), Hose Kit, (2) Hydraulic Fluid (HA-5430) and fittings for most applications.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses ship separately from SeaStar Solutions Kit.
- Please refer to a cylinder application chart when ordering.

Order No.	Mfg. No. / Description	Price
799166	16'	$1,268.98 E
799187	18'	$1,274.98 E
799200	20'	$1,274.98 E
799222	22'	$1,259.98 E
799244	24'	$1,259.98 E
799126	(HK6400) SeaStar Kit without Hoses	$1,108.98 E

SeaStar Pro Front Mount O/B Hydraulic Steering Packages



- For Performance Boats
- High-speed straight course running with instant steering response.
- Stops wheel walk and chatter of high speed.
- High power/speed (50 mph/ 150 HP and up) outboard boats.
- Typical applications: Bass, Ski and other high speed outboard powered boats.
- Designed for long life in a marine environment.
- Precision built and easy to install.
- Suitable for most major outboard engine brands.
- Single engine, threaded tilt tube 300 HP maximum.
- Consist of: Helm (HH-5770), Front Mount Cylinder (HC-5345), Hose Kit, 2 Hydraulic Fluids (HA-5430) and fittings for most applications.
- Please refer to cylinder application chart when ordering.

Order No.	Mfg. No. / Description	Price
798144	14'	$1,275.98 E
798162	16'	$1,273.98 E
798188	18'	$1,272.98 E
798190	20'	$1,271.98 E
798124	(HK7400) SeaStar Pro Kit without Hoses	$1,108.98 E
798225	(HK7445S) SeaStar Pro Kit with Silver Cyl. w/o Hoses	$1,402.98 E

Marpacages SeaStar Packages with S/S Steering Wheel with Knob



- Kits include: HC5345 front mount cylinder, HC5271 Helm, 2 quarts hydraulic fluid, your choice of hose size and a steering wheel.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses Kits and Marpac Stainless Steel Wheels ship separately from SeaStar Solutions Items.
- Includes: Marpac 13" Stainless Steel Steering Wheel.

Order No.	Mfg. No. / Description	Price
799300	(HKSSW1316) 16' Hose Kit	$1,398.98 E
799301	(HKSSW1320) 20' Hose Kit	$1,405.98 E
799302	(HKSSW1324) 24' Hose Kit	$1,389.98 E

- Includes: Marpac 15-1/2" Stainless Steel Steering Wheel.

Order No.	Mfg. No. / Description	Price
799305	(HKSSW1516) 16' Hose Kit	$1,379.98 E
799306	(HKSSW1520) 20' Hose Kit	$1,387.98 E
799307	(HKSSW1524) 24' Hose Kit	$1,371.98 E

Marpacages SeaStar Packages with Aluminum Steering Wheel with Knob



- Kits include: HC5345 front mount cylinder, HC5271 Helm, 2 quarts hydraulic fluid, your choice of hose size and a steering wheel.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses Kits and Marpac Aluminum Wheels ship separately from SeaStar Solutions Items.
- Includes: Marpac 13" Aluminum Steering Wheel.

Order No.	Mfg. No. / Description	Price
799310	(HKALW1316) 16' Hose Kit	$1,366.98 E
799311	(HKALW1320) 20' Hose Kit	$1,494.98 E
799312	(HKALW1324) 24' Hose Kit	$1,479.98 E

- Includes: Marpac 15-1/2" Aluminum Steering Wheel.

Order No.	Mfg. No. / Description	Price
799315	(HKALW1516) 16' Hose Kit	$1,369.98 E
799316	(HKALW1520) 20' Hose Kit	$1,497.98 E
799317	(HKALW1524) 24' Hose Kit	$1,482.98 E

©2014 Donovan Marine, Inc.

SeaStar Sport Tilt Helm O/B Hydraulic Steering Packages



- Teleflex tilt steering's strong design and versatility mean style, durability and comfort for almost any boat!
- 5 positions allow adjustment to the most comfortable steering position.
- 48° tilt range (18 down - 30 up).
- Standard 3/4" tapered steering wheel shaft.
- Consist of: Sport Tilt Helm (HH-5291), Front Mount Cylinder (HC-5345), MP Hose Kit and (2) Hydraulic Fluid (HA-5430).
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses ship separately from SeaStar Solutions Kit.

Order No.	Mfg. No. / Description	Price
799287	16' Hose Kit	$1,454.98 E
799289	20' Hose Kit	$1,582.98 E
799290	24' Hose Kit	$1,567.98 E

SeaStar Tilt Steering Kit - Sport Helm - without Hose

- The kit contains the following:
  (1) HH6191 SeaStar Tilt Helm, Sport, 1.7 Remote Fill
  (1) HC5345 SeaStar Pivot Cylinder
  (2) HA5430 1 Liter Hydraulic Oil

Order No.	Mfg. No. / Description	Price
799140	(HK6400TS)	$1,73.98 E

SeaStar Tilt Steering Kit - Classic Helm - Yamaha Kit without Hose

- The kit contains the following:
  (1) HH6541 SeaStar Tilt Helm, Classic, 1.7 Remote Fill
  (1) HC5358 Outboard Front Mount PP Cylinder (225 HP Four Stroke Yamaha).
  (2) HA5430 1 Liter Hydraulic Oil

Order No.	Mfg. No. / Description	Price
799148	(HK6500YTC)	$1,365.98 E

SeaStar Tilt Steering Kit - Classic Helm - without Hose

- The kit contains the following:
  (1) HH6541 SeaStar Tilt Helm, Classic, 1.7 Remote Fill
  (1) HC5345 SeaStar Pivot Cylinder
  (2) HA5430 1 Liter Hydraulic Oil

Order No.	Mfg. No. / Description	Price
799146	(HK6400TC)	$1,373.98 E

SeaStar Front Mount O/B Hydraulic Steering Package - Yamaha Kit

- The kit contains the following:
  (1) HH5271 SeaStar Helm 1.7cu (27.80cc)
  (1) HC5358 Outboard Front Mount PP Cylinder (225HP Four Stroke Yamaha)
  (2) HA5430 1 Liter Hydraulic Oil

Order No.	Mfg. No. / Description	Price
799142	(HK6500Y)	$1,108.98 E

SeaStar Traditional Tilt Helm O/B Hydraulic Steering Packages



- Teleflex tilt steering's strong design and versatility mean style, durability and comfort for almost any boat!
- 5 positions allow adjustment to the most comfortable steering position.
- 48° tilt range (18 down - 30 up).
- Standard 3/4" tapered steering wheel shaft.
- 2 year limited warranty.
- Consist of: Traditional Tilt Helm (HH-5741), Front Mount Cylinder (HC-5345), MP Hose Kit and (2) Hydraulic Fluid (HA-5430).
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses ship separately from SeaStar Solutions Kit.
- Please refer to cylinder application chart when ordering.

Order No.	Mfg. No. / Description	Price
799293	16' Hose Kit	$1,455.98 E
799291	20' Hose Kit	$1,462.98 E
799295	24' Hose Kit	$1,448.98 E

SeaStar Pro Tilt Helm Packages



- Consist of: Pro Tilt Helm (HH-5290), Front Mount Cylinder (HC-5345) and (2) Hydraulic Fluid (HA-5430) and hose kits.

Order No.	Mfg. No. / Description	Price
798197	(HK-7514) 14' Hose Kit	$1,532.98 E
798198	(HK-7516) 16' Hose Kit	$1,530.98 E
798199	(HK-7518) 18' Hose Kit	$1,529.98 E
798200	(HK-7520) 20' Hose Kit	$1,529.98 E

SeaStar Dual Front Mount O/B Hydraulic Steering Package



Must Order Tie Bar Separately. See Page 443.

- Provides easier and smoother steering than any other competitive system.
- Standard 3/4" tapered steering wheel shaft.
- Designed for long life in a marine environment.
- Suitable for most major outboard engine brands.
- Dual engines, threaded tilt tube 600 HP maximum combined.
- Consist of: (1) Helm (HH-5272), (2) Front Mount Cylinders (HC-5345), (1) 2' Hose Kit (HO-5102), (1) 4' Hose Kit (HO-5104), (1) 20' MP Hose Kit, (1) Bag/3 3/8" Tee and (3) Hydraulic Fluid (HA-5430) for most applications.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- MP hoses kit ships separately from SeaStar Solutions items.
- Please refer to cylinder application chart when ordering.

Order No.	Description	Price
799405	20' Hose Kit	$2,220.98 E

Uflex Protech Front Mount Outboard Hydraulic Steering Packages



- The Protech Front Mount Outboard Hydraulic Kit delivers unmatched performance and durability. Featuring the UP28FM helm with a stainless steel shaft and heavy duty seals, this system offers an incredibly efficient 4.25 turns lock to lock. The UC128 cylinder completes the system with a heavy duty cylinder rod, and a 304 electropolished and passivated stainless steel link assembly. Kit includes: UP28FM Helm, UC128 cylinder, and 2 quarts of oil. Kit OB hoses are optional.
- Recommended for:
  Single Engine/Single Cylinder - Up to 300 HP.
  Twin Engine/Single Cylinder - Up to 300 HP – non counter rotating engines, Up to 500 HP – counter rotating engines.
  Twin Engine/Dual Cylinder - Up to 500 HP – non counter rotating engines, Up to 600 HP – counter rotating engines.
- Please see cylinder application guide on the **Next Page.**

Order No.	Mfg. No. / Description	Price
8033000	(PROTECH 1.0) Includes: UC128-OBF/1 Cylinder	$983.98 E
8033005	(PROTECH 2.0) Includes: UC128-OBF/2 Cylinder	$983.98 E

Uflex SilverSteer Tilt Hydraulic Steering Packages



- Designed for high performance applications with extreme rudder torque loads, the SilverSteer is the perfect solution. Bass boats, flats boats, tournament fishing boats will steer effortlessly with the UP25T-SVS-X70 1500 Psi helm and UC128SVS cylinder. The cylinder is specially designed to minimize lost motion for premium response. Kit includes: UP25T-SVS-X70 helm, UC128SVS cylinder on 2 quarts of oil. The Kit OB-SVS hoses are optional and required for the SilverSteer system.
- Recommended for:
  Single Engine/Single Cylinder - Up to 350 HP.
  Twin Engine/Single Cylinder - Up to 350 HP – non counter rotating engines, Up to 600 HP – counter rotating engines.
  Twin Engine/Dual Cylinder - Up to 600 HP – non counter rotating engines, Up to 700 HP – counter rotating engines.
- Please see cylinder application guide on the **Page 436.**

Order No.	Mfg. No. / Description	Price
2007110	(SILVERSTEER 1T) Includes: UC128-SVS 1 Cylinder	$1,269.98 E
2007120	(SILVERSTEER 2T) Includes: UC128-SVS 2 Cylinder	$1,269.98 E

Uflex SilverSteer Hydraulic Steering Packages



- Designed for high performance applications with extreme rudder torque loads, the SilverSteer is the perfect solution. Bass boats, flats boats, tournament fishing boats will steer effortlessly with the UP25F-SVS 1500 Psi helm and UC128SVS cylinder. The cylinder is specially designed to minimize lost motion for premium response. Kit includes: UP25F-SVS helm, UC128SVS cylinder on 2 quarts of oil. The Kit OB-SVS hoses are optional and required for the SilverSteer system.
- Recommended for:
  Single Engine/Single Cylinder - Up to 350 HP.
  Twin Engine/Single Cylinder - Up to 350 HP – non counter rotating engines, Up to 600 HP – counter rotating engines.
  Twin Engine/Dual Cylinder - Up to 600 HP – non counter rotating engines, Up to 700 HP – counter rotating engines.
- Please see cylinder application guide on the **Page 436.**

Order No.	Mfg. No. / Description	Price
2007105	(SILVERSTEER 1) Includes: UC128-SVS 1 Cylinder	$1,089.98 E
2007115	(SILVERSTEER 2) Includes: UC128-SVS 2 Cylinder	$1,089.98 E

Uflex Front Mount Steering Helms



- Built in 1,000 psi check valve.
- 3/4" tapered anodized aluminum shaft.
- Corrosion proof composite housing.
- Easy accessible shaft seal for replacement.
- Includes 90° adjustable fittings for 3/8" tube.
- For use with UC94-OBF cylinder only.
- Uflex front mount helms feature a stainless steel shaft for increased seal longevity and are a direct "drop in" replacement. Compatible with competing cylinders, hoses, fittings and oil, the UP series helms come in 1.5, 1.7, 2.0 and 2.4 cubic inch displacements. The standard UP series helms feature a 1000 Psi relief valves.

Order No.	Mfg. No. / Description	Price
2007210	(UP20FM) 1.2 cubic inch	$431.98 D
2007220	(UP25FM) 1.5 cubic inch	$555.98 D
8033355	(UP28FM) 1.7 cubic inch	$495.98 E
8033365	(UP33FM) 2.0 cubic inch	$550.98 E

Uflex Tilt for MasterDrive



- Tilt mechanism for Mercury Verado and Uflex MasterDrive.
- Tilt range of 48° and five locking positions.

Order No.	Mfg. No. / Description	Price
8020183	(X66)	$148.98 E

Uflex Tilt Steering Helms



- Ball bearing piston race.
- Built-in lock valve for positive rudder lock.
- Integral relief valve for over-pressure protection.
- 3/4" tapered stainless steel shaft.
- Easily accessible lock valve and shaft seal for replacement.
- Cast iron rotor for greater durability and longer life.
- Includes 90° adjustable fittings for 3/8" tube.
- Tilt range of 48º and five locking positions.
- NOTE: X52 tilt mechanism fits standard Ultraflex tilt mount rotary and rack and pinion steering helms as well as standard Ultraflex tilt mount hydraulic pumps except SilverSteer and MasterDrive steering systems.

Order No.	Mfg. No. / Description	Price
8033360	(UP28T-X52) 1.7 cubic inch	$704.98 E
8033370	(UP33T-X52) 2.0 cubic inch	$764.98 E

©2014 Donovan Marine, Inc.

Uflex UC128-OBF Front Mount Cylinder Applications



Engine	Model	Year	Clinder	P. No.	Packaged
Mercury Mariner	75-90-115-125 Optimax 2 Stroke	2004 to date	UC128-OBF/3	39967 T	PROTECH 3
	135-150-175 Optimax 2 Stroke	1999 to date	UC128-OBF/1	39423 Z	PROTECH 1
	200-225-250 Optimax 2 Stroke	1999 to date	UC128-OBF/1	39423 Z	PROTECH 1
	RACING 300 Optimax 2 Stroke	1999-2011	UC128-OBF/1	39423 Z	PROTECH 1
	100-115 EFI 4 Stroke	2007 to date	UC128-OBF/1	39423 Z	PROTECH 1
	115-125-150 EFI 2 Stroke	1990-2007	UC128-OBF/1	39423 Z	PROTECH 1
	225-250 EFI 2 Stroke	2000-2007	UC128-OBF/1	39423 Z	PROTECH 1
	250 Saltwater EFI 4 Stroke	2007-2011	UC128-OBF/1	39423 Z	PROTECH 1
	135 Verado L4 4 Stroke	2004-2006	UC128-OBF/1	39423 Z	PROTECH 1
	150-175-200 Verado L4 4 Stroke	2004 to date	UC128-OBF/1	39423 Z	PROTECH 1
Evinrude	E75-E90 2 Stroke	2004 to date	UC128-OBF/2	39966 R	PROTECH 2
	E115-E130-E135 2 Stroke V4	1995 to date	UC128-OBF/2	39966 R	PROTECH 2
	E150-E175-E200 2 Stroke V6	1995 to date	UC128-OBF/2	39966 R	PROTECH 2
	E200 HO- E225-E250 2 Stroke V6	1995 to date	UC128-OBF/2	39966 R	PROTECH 2
	E250 HO- E300 2 Stroke V6		UC128-OBF/2	39966 R	PROTECH 2
Yamaha	75C-90 2 Stroke	1998-2008	UC128-OBF/2	39966 R	PROTECH 2
	115C-130B 2 Stroke	1990-2008	UC128-OBF/2	39966 R	PROTECH 2
	150F-200F-250G 2 Stroke	1996-2007	UC128-OBF/2	39966 R	PROTECH 2
	150 HPDI VMAX 2 Stroke	2000-2008	UC128-OBF/2	39966 R	PROTECH 2
	175-200-225-250-300 HPDI VMAX 2 St.	2000-2008	UC128-OBF/2	39966 R	PROTECH 2
	F70 4 Stroke	2010 to date	UC128P-OBF/1	40106U	
	F90-F100-F115-F150 EFI 4 Stroke	1999-2007	UC128-OBF/1	39423 Z	PROTECH 1
	F200-F225-F250 4 Stroke	2002-2007	UC128-OBF/2	39966 R	PROTECH 2
	F115-F150	2004 to date	UC128-OBF/1	39423 Z	PROTECH 1
	F200-F225-F250-F300 4 Stroke	2006 to date	UC128-OBF/2	39966 R	PROTECH 1
	F350 4 Stroke	2008 to date	See UC128-SVS SilverSteer		
Honda	BF75-90 4 Stroke	1995 to date	UC128-OBF/1	39423 Z	PROTECH 1
	BF115D	1998-2009	UC128-OBF/3	39967 T	PROTECH 3
	BF115A	2009 to date	UC128-OBF/1	39423 Z	PROTECH 1
	BF130A	1998-2005	UC128-OBF/3	39967 T	PROTECH 3
	BF135-150 4 Stroke	2005 to date	UC128-OBF/1	39423 Z	PROTECH 1
	BF90-BF150 V-TEC 4 Stroke	2008 to date	UC128-OBF/1	39423 Z	PROTECH 1
	BF175-200-225 4 Stroke	2001 to date	UC128-OBF/1	39423 Z	PROTECH 1
Suzuki	DF70-80-90 4 Stroke	1998 to date	UC128-OBF/2	39966 R	PROTECH 2
	DF100-115-140 4 Stroke	1998-2008	UC128-OBF/1	39423 Z	PROTECH 1
	DF100-115-140 4 Stroke new model	2008 to date	UC128-OBF/1	39423 Z	PROTECH 1
	DF150-175 4 Stroke	2006 to date	UC128-OBF/1	39423 Z	PROTECH 1
	DF200-DF225-DF250-DF300		UC128-OBF/2	39966 R	PROTECH 2
Tohatsu	115-120-140 2 Stroke	2004 to date	UC128-OBF/2	39966 R	PROTECH 2
	70-90-115 TLDI 4 Stroke	2004 to date	UC128-OBF/1	39423 Z	PROTECH 1
Selva	80 Portofino/Tigershark 2 Stroke	1995 to date	UC128-OBF/1	39423 Z	PROTECH 1
	150 White Shark 2 Stroke				
	100EFI Marlin -115 EFI Narwhal-	2001-2007	UC128-OBF/2	39966 R	PROTECH 2
	150EFI Killer Whale 4 Stroke	2000 to date	UC128-OBF/1	39423 Z	PROTECH 1
Johnson	BJ90-115-140 4 Stroke	2001-2007	UC128-OBF/1	39423 Z	PROTECH 1
	J90-115 V4 2 Stroke	1995-2007	UC128-OBF/2	39966 R	PROTECH 2
	J150-175 V6 2 Stroke	1995-2007	UC128-OBF/2	39966 R	PROTECH 2
	J200-225 V6 4 Stroke	2004-2007	UC128-OBF/2	39966 R	PROTECH 2

- WARNING: These recommendations should be used as a general reference only. Final selection should be made with the assistance of a qualified installation technician.
- For higher horsepower applications, high performance SilverSteer cylinder is recommended.

Uflex UC128-SVS Front Mount Cylinder Applications



Engine	Model	Year	Clinder	P. No.	Packaged
Mercury Mariner	115-125-150 EFI 2 Stroke	1990-2007	UC128/1-SVS	41281 U	Silversteer 1
	225-250 EFI 2 Stroke	2000-2007	UC128/1-SVS	41281 U	Silversteer 1
	135-150-175 Optimax	1999 to date	UC128/1-SVS	41281 U	Silversteer 1
	200-225-250 Optimax	1999 to date	UC128/1-SVS	41281 U	Silversteer 1
	RACING 300 Optimax	1999-2011	UC128/1-SVS	41281 U	Silversteer 1
	250 Saltwater EFI 4 Stroke	2007-2011	UC128/1-SVS	41281 U	Silversteer 1
	135 Verado L4 4 Stroke	2004-2006	UC128/1-SVS	41281 U	Silversteer 1
	150-175-200 Verado L4 4 Stroke	2004 to date	UC128/1-SVS	41281 U	Silversteer 1
Evinrude	E115-E130-E135 2 Stroke V4	1995 to date	UC128/2-SVS	41282 W	Silversteer 2
	E150-E175-E200 2 Stroke V6	1995 to date	UC128/2-SVS	41282 W	Silversteer 2
	E200 HO- E225-E250 2 Stroke V6	1995 to date	UC128/2-SVS	41282 W	Silversteer 2
	E250 HO- E300 2 Stroke V6		UC128/2-SVS	41282 W	Silversteer 2
Yamaha	115C-130B 2 Stroke	1998-2008	UC128/2-SVS	41282 W	Silversteer 2
	150F-200F-250G 2 Stroke	1996-2007	UC128/2-SVS	41282 W	Silversteer 2
	150 HPDI VMAX 2 Stroke	2000-2008	UC128/2-SVS	41282 W	Silversteer 2
	175-200-225-250-300 HPDI VMAX 2 St.	2000-2008	UC128/2-SVS	41282 W	Silversteer 2
	F115-F150 EFI 4 Stroke	1999-2007	UC128/1-SVS	41281 U	Silversteer 1
	F200-F225-F250 4 Stroke	2002-2007	UC128/2-SVS	41282 W	Silversteer 2
	F115-F150	2004 to date	UC128/1-SVS	41281 U	Silversteer 1
	F200-F225-F250-F300-F350 4 Stroke	2006 to date	UC128/1-SVS	41281 U	Silversteer 1
Honda	BF135-150 4 Stroke	2005 to date	UC128/1-SVS	41281 U	Silversteer 1
	BF90-BF150 V-TEC 4 Stroke	2008 to date	UC128/1-SVS	41281 U	Silversteer 1
	BF175-BF200-BF225 4 Stroke	2001 to date	UC128/1-SVS	41281 U	Silversteer 1
Suzuki	DF100-115-140 4 Stroke	1998-2008	UC128/1-SVS	41281 U	Silversteer 1
	DF100-115-140 4 Stroke	2008 to date	UC128/1-SVS	41281 U	Silversteer 1
	DF150-175 4 Stroke	2006 to date	UC128/1-SVS	41281 U	Silversteer 1
	DF200-DF225-DF250-DF300		UC128/2-SVS	41282 W	Silversteer 2
Tohatsu	115-120-140 2 Stroke	2004 to date	UC128/2-SVS	41282 W	Silversteer 2
	70-90-115 TLDI 4 Stroke	2004 to date	UC128/1-SVS	41281 U	Silversteer 1
Selva	80 Portofino/Tigershark 2 Stroke	1995-2008	UC128/2-SVS	41282 W	Silversteer 2
	150 White Shark 2 Stroke	2001-2007	UC128/1-SVS	41281 U	Silversteer 1
	100EFI Marlin -115 EFI Narwhal- 150EFI Killer Whale 4 Stroke	2000 to date	UC128/2-SVS	41282 W	Silversteer 2
Johnson	BJ90-115-140 4 Stroke	2001-2007	UC128/1-SVS	41281 U	Silversteer 1
	J90-115 V4 2 Stroke	1995-2007	UC128/2-SVS	41282 W	Silversteer 2
	J150-175 V6 2 Stroke	1995-2007	UC128/2-SVS	41282 W	Silversteer 2
	J200-225 V6 4 Stroke	2004-2007	UC128/2-SVS	41282 W	Silversteer 2

- WARNING: These recommendations should be used as a general reference only. Final selection should be made with the assistance of a qualified installation technician.

©2014 Donovan Marine, Inc.

Uflex Front Mount Outboard Cylinders



- Compatible with competing helms, hoses and oil, the UC128 cylinder is built to last with heavy duty stainless steel cylinder rod, seals and link assemblies. Constructed of top grade materials this cylinder is simple to install and fits almost every two and four stroke outboard engine in the market. See the application guide on **page 435** to choose the appropriate cylinder (UC128 OBF 1 or UC128 OBF 2) for your application.
- Recommended for:
  Single Engine/Single Cylinder - Up to 300 HP.
  Twin Engine/Single Cylinder - Up to 300 HP– non counter rotating engines, Up to 500 HP – counter rotating engines.
  Twin Engine/Dual Cylinder - Up to 500 HP – non counter rotating engines, Up to 600 HP – counter rotating engines.

Order No.	Mfg. No. / Description	Price
8033305	(UC128OBF-2) Starboard Side Link Arm	$595.98 E
8033300	(UC128OBF-1P) Port Side Link Arm	$595.98 E
8033310	(UC128OBF-2P) Port Side Link Arm	$595.98 E

Uflex Inboard Cylinders



- Aluminum.
- All balanced cylinders: the number of turns lock-to-lock is equal port to starboard and vice-versa.

Order No.	Mfg. No. / Description	Price
8033100	(UC116-1) Inside Dia.: 1.25", Stroke: 7"	$416.98 E
8033340	(UC168-1) Inside Dia.: 1.57", Stroke: 7"	$512.98 E
8033345	(UC215-1) Inside Dia.: 1.57", Stroke: 9"	$564.98 E

Uflex A94 Tie Bar



- Heavy duty twin engine/single cylinder tie bar kit for use with UC128 outboard cylinders.
- Suitable for use with Protech cylinders these 304 electropolished and passivated stainless steel tie bars are simple to install and allow for independent trimming of engines with minimal effect on engine alignment.
- Not recommended for applications exceeding 500 HP.

Order No.	Mfg. No. / Description	Price
2006640	(A94) Single Cylinder/Twin Engine/Cut to Length	$440.98 E

Uflex A90 Tie Bars



- Heavy duty twin engine/twin cylinder tie bar kit for use with UC128 and UC128P "Port" version outboard cylinders.
- Suitable for use with Protech and SilverSteer cylinders these 304 electropolished and passivated stainless steel tie bars are simple to install and allow for independent trimming of engines with minimal effect on engine alignment.

Order No.	Mfg. No. / Description	Price
2006638	(A90X26) Twin Cylinder/Twin Engine, 26" Engine Center	$516.98 E
2006639	(A90X28) Twin Cylinder/Twin Engine, 28" Engine Center	$516.98 E

Uflex Front Mount Outboard Cylinder



- Intended for single engine applications of 150 HP and under, the UC94 cylinder is compatible with competing helms, hoses and oil, and is built to last with heavy duty stainless steel cylinder rod, seals and link assemblies.
- Constructed of top grade materials this cylinder is simple to install and fits almost every two and four stroke outboard engine in the market.
- The UC94 is recommended for use with the UP20 series helm and pre-made hose kits (Kit OB and Kit OB-BHBR).

Order No.	Mfg. No. / Description	Price
8033350	(UC94OBF-1) Starboard Side Link Arm	$431.98 E

Uflex High Performance Front Mount Outboard Cylinders



- Specially designed for high performance, high torque applications the Silver Steer UC128 SVS cylinder is recommended for bass boats, flats boats and tournament fishing boat. Compatible with competing helms, hoses and oil, the UC128 SVS is built to last with heavy duty stainless steel cylinder rod, seals and link assemblies. Constructed of top grade materials this cylinder is simple to install and fits almost every two and four stroke outboard engine in the market. See the application guide **page 436** to choose the appropriate cylinder (UC128 OBF 1 or UC128 OBF 2) for your application.
- Recommended for:
  Single Engine/Single Cylinder - Up to 350 HP.
  Twin Engine/Single Cylinder - Up to 350 HP – non counter rotating engines, Up to 600 HP – counter rotating engines.
  Twin Engine/Dual Cylinder - Up to 600 HP – non counter rotating engines, Up to 700 HP – counter rotating engines.

Order No.	Mfg. No. / Description	Price
8033315	(UC128-SVS 1) Starboard Side Link Arm	$737.98 E
8033325	(UC128-SVS 2) Starboard Side Link Arm	$737.98 E
8033320	(UC128-SVS 1P) Port Side Link Arm	$737.98 E
8033330	(UC128-SVS 2P) Port Side Link Arm	$737.98 E

Uflex Outboard/Sterndrive Side Mount Cylinder



- UC132-OBS side mount cylinder features a turning nut for fast and easy installation to the engine tube (PATENTED).

Order No.	Mfg. No. / Description	Price
8033335	(UC132-OBS)	$366.98 E

Uflex High Performance Hose Kits



- Two high pressure flexible hoses with pre-crimped nickel plated brass fittings and bend restrictors on both ends.
- Recommended for use with all Uflex SilverSteer and MasterDrive helms with 1500 psi relief valves.

Order No.	Mfg. No. / Description	Price
8031005	(KITOBSVS-14) Length 14'	$168.98 E
8031010	(KITOBSVS-16) Length 16'	$168.98 E
8031015	(KITOBSVS-18) Length 18'	$168.98 E
8031020	(KITOBSVS-20) Length 20'	$168.98 E

SeaStar Inboard Steering Application Guide



- Warning: Many factors influence steering loads.
- These recommendations are provided only as a general guideline.
- SeaStar may be used on any size vessel as long as steering system working pressures do not exceed 500-600 psi/35-40 bar and periodic maximum peak pressures do not exceed 800 psi/56 bar.
- SeaStar Capilano System Recommended.

Boat Length Up To		26' (8m)	32' (10m)	38' (11.5m)	44' (13.5m)	50' (15m)
Planing Hull						
Single Engine	Pleasure	System 1	System 2	System 3	System 5	*
	Work	System 4	System 4	System 5	*	*
Twin Engine	Pleasure	System 1	System 1	System 2	System 3	System 5
	Work	System 4	System 4	System 5	System 5	*
Displacement Hull						
Single Engine	Pleasure	System 2	System 3	System 5	*	*
	Work	System 4	System 4	System 5	*	*
Twin Engine	Pleasure	System 2	System 3	System 3	System 5	*
	Work	System 4	System 4	System 5	*	*

SeaStar Inboard Steering Order Guide

System 1*
- Includes: 1 Each SeaStar Helm 800000 (HH-5271)
  1 Each BA125-7ATM Cylinder 800804 (HC-5312)
  2 Each Oil Hydraulic Fluid 799779 (HA-5430)

System 2*
- Includes: 1 Each SeaStar Helm 800000 (HH-5271)
  1 Each BA135-7ATM Cylinder 800816 (HC-5313)
  2 Each Oil Hydraulic Fluid 799779 (HA-5430)

System 3*
- Includes: 1 Each SeaStar Helm 800000 (HH-5271)
  1 Each BA150-7ATM Cylinder 800828 (HC-5314)
  2 Each Oil Hydraulic Fluid 799779 (HA-5430)

System 4*
- Includes: 1 Each SeaStar Helm 800013 (HH-5272)
  1 Each BA150-7TM Cylinder 800866 (HC-5318)
  2 Each Oil Hydraulic Fluid 799779 (HA-5430)

System 5*
- Includes: 1 Each SeaStar Helm 800013 (HH-5272)
  1 Each BA175-7TM Cylinder 800878 (HC-5319)
  2 Each Oil Hydraulic Fluid 799779 (HA-5430)

Order No.	Description	Price
799604	System 1	$1,086.98 E
799617	System 2	$1,086.98 E
799623	System 3	$1,086.98 E
799638	System 4	$1,436.98 E
799643	System 5	$1,490.98 E

*All systems may use:
1) SeaStar Solutions Outboard Hydraulic Hose Kits (Series HO-51_ _) on runs up to 30'.
2) SeaStar Solutions Nylon Tubing on runs up to 50' for systems 1, 2 and 3. or.
3) 3/8" Copper Tubing and appropriate connection kits.

SeaStar Side Mount O/B Hydraulic Steering Package



- Alternative to front mount cylinder where space allows.
- Unbalanced cylinder design means lock-to-lock turns are slightly different between center to hard over left and center to hard over right.
- Suitable for installation in shallow splashwells.
- Suitable for use on most engines with tilt tube steering or fitted with power steering.
- Single engine, threaded tilt tube 300 HP maximum.
- Dual engines, threaded tilt tube 300 HP maximum combined.
- Order tie bar separately.
- Consist of: Helm (HH-5271), Side Mount Cylinder (HC-5370), MP Hose Kit, (2) Hydraulic Fluid (HA-5430) and fittings for most applications.
- MP Parts Hydraulic Hose Kit exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses ship separately from SeaStar Solutions Items.

Order No.	Description	Price
799354	20' Hose Kit	$1,180.98 E

SeaStar Splashwell Mount O/B Hydraulic Steering Package



- Light duty alternative to front and side mount cylinder.
- Unbalanced cylinder design means lock-to-lock turns are slightly different between center to hard over left and center to hard over right.
- Suitable for installation in shallow splashwells.
- Suitable for use on most engines with/without tilt tube steering.
- Consist of: Helm (HH-5271), Splashwell Mount Cylinder (HC-5380), MP Hose Kit, (2) Hydraulic Fluid (HA-5430) and fittings for most applications.
- MP Parts Hydraulic Hose Kit exclusively manufactured by Parker Hannifin and Uflex.
- MP Hoses ship separately from SeaStar Solutions Items.

Order No.	Description	Price
799382	20' Hose Kit	$1,318.98 E

SeaStar MerCruiser Hydraulic Steering Package



- Kit includes: (1) Seastar Helm, (1) HC-5332 Cylinder and (2) Quarts Hydraulic Fluid.
- Hoses and hose kits must be ordered separately.

Order No.	Mfg. No. / Description	Price
799366	(HKMER01)	$1,139.98 E

©2014 Donovan Marine, Inc.

SeaStar I, II Sterndrive Hydraulic Steering Systems

Power Assist

- MerCruiser, OMC , Volvo (Gas), BMW and Yamaha
- Order:
  1 Each SeaStar I Helm 800000 (HH-5271)
  1 Each BA125-8EM Cylinder 800744 (HC-5328)
  2 Each Hydraulic Fluid 799779 (HA-5430)
  *Order Hose Kit Separately

*All systems may use:

1) SeaStar Solutions Outboard Hydraulic Hose Kits (Series HO-51_ _) on runs up to 30'.

2) SeaStar Solutions Nylon Tubing on runs up to 50' for systems 1, 2 and 3. or.

3) 3/8" Copper Tubing and appropriate connection kits.

Non Power Assist

- MerCruiser 1984 to Date, Alpha/Bravo
- Order:
  1 Each SeaStar I Helm 800000 (HH-5271)
  1 Each BA150-7EM Cylinder 800731 (HC-5332)
  2 Each Hydraulic Fluid 799779 (HA-5430)
  *Order Hose Kit Separately
- OMC Cobra, King Cobra
- Order:
  1 Each SeaStar I Helm 800000 (HH-5271)
  1 Each BA135-8EM Cylinder (HC-5326)
  2 Each Hydraulic Fluid 799779 (HA-5430)
  *Order Hose Kit Separately

SeaStar Front Mount Steering Helms



- For all SeaStar cylinders.
- Convenient front of dash fill.
- Small 3.0" hole cutout on dash.
- Available in 1.7, 2.0 and 2.4 cubic inch displacements.

Order No.	Mfg. No. / Description	Price
800000	(HH-5271) 1.7 cubic inch	$512.98 E
800013	(HH-5272) 2.4 cubic inch	$631.98 E
800015	(HH-5273) 2.0 cubic inch	$661.98 E

SeaStar Rear Mount Steering Helms



- Behind dash mounting configuration.
- Top of dash fill point.

Order No.	Mfg. No. / Description	Price
802510	(HH-5261) 1.7 cubic inch	$627.98 E
802512	(HH-5262) 2.4 cubic inch	$760.98 E

SeaStar Commercial Helm



- Designed to be used on smaller fishing vessels involved in the Lobster and Crabbing Industries.
- Designed with a stainless steel shaft and heavy duty shaft seal and wiper.
- This new shaft and seal help protect the Helm Pump from the abrasive effects of sediment that is brought on board by the operator handling traps or pots.

Order No.	Mfg. No. / Description	Price
800048	(HH-5217) 1.7 cubic inch	$615.98 E

SeaStar Pro Sport Tilt Steering Helm

- 5 wheel positions allow adjustment to most comfortable steering position.
- 48° tilt range.
- Remote fill point.

Order No.	Mfg. No. / Description	Price
800018	(HH6190) 2.0 cubic inch	$778.98 E

SeaStar Pro Front Mount Steering Helm



- Designed for high speed outboard boats.

Order No.	Mfg. No. / Description	Price
799900	(HH-5770) 2.0 cubic inch	$606.98 E

SeaStar Sport Tilt Steering Helms



- 5 wheel positions allow adjustment to most comfortable steering position.
- 48° tilt range.
- Remote fill point.

Order No.	Mfg. No. / Description	Price
800020	(HH6191) 1.7 cubic inch	$844.98 E
800032	(HH6192) 2.4 cubic inch	$946.98 E

SeaStar Classic Tilt Steering Helms



- Pre loaded dual taper bearings ensures minimal excess free play.
- Smooth operation and feel.
- Shaft seals to prevent water ingress.
- 48° of tilt articulation.
- 5 positive lock positions.
- Compact footprint.

Order No.	Mfg. No. / Description	Price
800045	(HH6541) 1.7 cubic inch	$760.98 E
800050	(HH6542) 2.4 cubic inch	$879.98 E

SeaStar Replacement Helm Seal Kits



- Kit includes:

SeaStar #	Description	Qty.
747521	Nut 5/8NF JAM Nylk CP Yel	1 each
067424	Nut 1/4"	4 each
201429	Washer 1/4"	4 each
260130	Woodruff Key	1 each
225226	Quad Ring .210 70DUR N	1 each
763721	Mld Plate Seal New SS	1 each

Order No.	Mfg. No. / Description	Price
801298	(HP-6032)	$9.98 E

SeaStar Replacement Helm Seal Kits

- For models: HH-5271, HH-5272, HH-5741, HH-5742, HH-5291, HH-5292 and HH-5770 Helms.

Order No.	Mfg. No. / Description	Price
801399	(HS-5176)	$54.98 E
801400	(HS-5151) For Models: HH-5201 and HH-5202 Old Helms	$38.98 E

SeaStar Filler Kit



- Nozzle for filling your Hydraulic SeaStar Systems.
- For use on SeaStar's Helm I/O, O/B, and I/B engine pumps for boats up to 40 foot.
- Includes: Tube and pushpin to vent and re-seal SeaStar HA5430 Oil bottle (Not included).

Order No.	Mfg. No. / Description	Price
799784	(HA-5438)	$18.98 E

SeaStar Round Bezel



- Reduces the distance the helm protrudes from the front of the dash to 3.75".

Order No.	Mfg. No. / Description	Price
799835	(HA-5417)	$142.98 E

SeaStar Kit to Adapt SeaStar Helm to Hynautic Lines



Order No.	Mfg. No. / Description	Price
401543	(HF-05)	$47.98 E

SeaStar Replacement Helm Seal Kit



- Kit includes:

SeaStar #	Description	Qty.
747521	Nut 5/8NF Jam NYLK CP Yel	1 each
225226	Quad Ring .210 70DUR N	1 each
260130	Key #606 PM 304LSC	1 each
793687	Plate Seal M/C Alum	1 each
798567	O Ring N06745329 70DUR N	1 each
827926	B/U Ring 8-018 90DN0300	1 each
798676	O Ring N06745102 70DUR N	3 each
826025	FHMS # 8-32X 3/8 SS + UC	3 each
067424	Nut 1/4"	4 each
210429	Washer 1/4 Flat BS/USS ZP	4 each

Order No.	Mfg. No. / Description	Price
801325	(HP-6037)	$64.98 E

SeaStar Helm Mounting Adapter



- Backplate kit is used with a SeaStar front mount helm to: Retrofit a new SeaStar standard helm in the old 4.5" diameter hole or reduce the helm protrusion from the dash by the thickness of the dash or into hole cutouts for mechanical or hydraulic steering systems.

Order No.	Mfg. No. / Description	Price
799847	(HA-5418)	$36.98 E

SeaStar Helm Mounting with 20° Wedge Kit



- This kit is designed to mount a SeaStar front mount helm at a 20° angle to the mounting surface.
- Four possible mountings by varying wedge position.
- No helm modifications are needed.

Order No.	Mfg. No. / Description	Price
799811	(HA-5419)	$75.98 E

SeaStar Plus Vent for SeaStar Helms



- Refer to SeaStar Solutions catalog for application.

Order No.	Mfg. No. / Description	Price
801220	(HP-6126)	$33.98 E

SeaStar Bolt and Nylock Nut

Order No.	Mfg. No. / Description	Price
799852	(HA-5822)	$17.98 E

©2014 Donovan Marine, Inc.

SeaStar Front Mount Outboard Cylinders





- No adapter plate required for installation.
- Unique pivoted tiller connection allows full engine articulation with independent tilt and trim on twin engines.
- Small footprint fits virtually all splashwells.
- Meets A.B.Y.C. standards/N.M.M.A. requirements.
- Some installations require spacer kit 800575 (HO-5090).

Order No.	Mfg. No. / Description	Price
800655	(HC-5375) With Heavy Duty Piston Seal	$820.98 E
800639	(HC-5345)	$608.98 E
800622	(HC-5347) 1998 to Date - 115-130 Honda	$738.98 E
800643	(HC-5348)	$738.98 E
800735	(HC-5358) Yamaha 4 Stroke - 225 HP	$620.98 E
800688	(HC-5345) Outboard, Silver Version	$773.98 E
800690	(HC-5358) Yamaha, Silver Version	$803.98 E

- Replacement SeaStar Front Mount.
- Some applications require additional cylinder mounting hardware.
- Single engine - 300 HP maximum.
- Dual engine - 450 HP maximum combined with tie bar.
- For replacement use only.
- For new installation use 800639 (HC-5345).

Order No.	Mfg. No. / Description	Price
800094	(HC-5342)	$1,018.98 E

SeaStar Side Mount Outboard Cylinder



- Alternative to front mount cylinder where space allows.
- Unbalanced cylinder design means lock-to-lock turns are slightly different between center to hard over left and center to hard over right.
- Suitable for installation in shallow splashwells.
- Suitable for use on most engines with tilt tube steering or fitted with power steering.
- Single or Dual engines - 300 HP maximum combined with tie bar.
- (Not for use with SeaStar Pro helms).

Order No.	Mfg. No. / Description	Price
800652	(HC-5370)	$499.98 E
801503	(HS-5153) Cylinder Seal Kit	$49.98 E

SeaStar Splashwell Mount Outboard Cylinder



- Light duty alternative to front and side mount cylinder.
- Unbalanced cylinder design means lock-to-lock turns are slightly different between center to hard over left and center to hard over right.
- Suitable for use on most engines with or without tilt tube steering.
- Single or Dual engines - 300 HP maximum combined with tie bar.
- (Not for use with SeaStar Pro Helms).

Order No.	Mfg. No. / Description	Price
800676	(HC-5380)	$650.98 E

SeaStar Pro Front Mount Outboard Cylinders



- Suited for all those critical high speed, single outboard boats like Bass, Flats, combo Race/Ski and other performance oriented boats capable of speeds in excess of 65 mph.
- Before ordering it is necessary to determine the proper cylinder and helm pump for the application.
- All SeaStar PRO systems require the use of a SeaStar PRO helm and SeaStar PRO (1,500 psi) reinforced Kevlar hoses ONLY!

Order No.	Mfg. No. / Description	Price
801034	(HC-6345) Pro Outboard, Silver Version	$862.98 E
800753	(HC-6753) Pro Yamaha, Starboard	$1,099.98 E
800766	(HC-6754) Pro Yamaha, Port	$1,099.98 E

SeaStar Tournament Series Tie Bar Cylinders



Order No.	Mfg. No. / Description	Price
800746	(HC-6750) Honda, Starboard	$1,099.98 E
800747	(HC-6751) Honda, Port	$1,099.98 E
800749	(HC-6752) Honda, Center	$1,099.98 E
800756	(HC-6755) Evinrude	$1,099.98 E

SeaStar Front Mount Outboard Tournament Series Cylinder





- Suitable for use with all SeaStar Helms and SeaStar Power Assist.
- Heavy duty universal cylinder.
- Bolt on stainless steel tie bar plates, also reversible (patent pending).
- Robust design with heavy duty support brackets, barrel, shaft & seals.
- Superior corrosion resistance.
- New pivot plate design provides smooth articulation and a sealed joint (patent pending).
- Heavy duty adjustable tie bar (patent pending).
- Equipped with stainless steel adjustable o-ring sealed elbow fittings which can be easily orientated in any direction.
- Important Information: Each configuration requires a hardware kit and tie bar kit(s), with the exception of the single engine configuration.

Order No.	Mfg. No. / Description	Price
800780	(HC-6845) Cylinder	$866.98 E
802450	(HA-6801) Hardware Kit, Single Engine, Single Cylinder	$73.98 E
802452	(HA-6802) Hardware Kit, Twin Engine, Single Cyl. STBD	$471.98 E
802454	(HA-6804) Hardware Kit, Twin Engine, Dual Cylinder	$335.98 E
802456	(HA-6806) Hardware Kit, Triple Engine, Dual Cylinder	$628.98 E
802458	(HA-6811) Hardware Kit, Quad Engine, Dual Cylinder	$890.98 E
801782	(HF-6005) ORB Tee Fitting Kit	$50.98 E
802430	(HO-6820) Tie Bar, Small	$352.98 E
802432	(HO-6821) Tie Bar, Medium	$346.98 E
802434	(HO-6822) Tie Bar, Large	$397.98 E
802436	(HO-6823) Tie Bar, X-Large	$471.98 E

SeaStar Front Mount Outboard Cylinder Application Guide

Engine Manufacturer	Year	Model	Single Engine Cyl.	Twin Engine Cyl.	Twin Eng. Single Cyl. Tie Bar Kit	Twin Eng. Dual Cyl. Tie Bar Kit	Engine Adapter Plates for use w/OEM Tie Bars	Triple Engine Dual Cyl.	Port To Drive Cyl. Tie Bar	Starboard to Drive Cyl. Tie Bar	Notes
Honda	1996 TO DATE	75-90 HP	HC5345	HC5345	HO6001	HO6002	HO5044A - S/O	HC5345x2	HO6001	HO6002	Note 3
	1998 TO DATE	115-130 HP	HC5347	HC5347	HO5063	HO5064	HO5044A - S/O				
	1998 TO DATE	30-50 HP	HC5345	HC5345	HO6001	HO6002					Note 1
	2001 TO DATE	150 HP 4-Stroke	HC5345	HC5345	HO6003	HO6002					
	2001 TO DATE	135-225 HP 4-Stroke	HC5345	N/A							
	2001 TO DATE	225 HP 4-Stroke	HC5345	HC5345	HO6001	HO6002					
	2003 TO DATE	BF135 HP	HC5345	HC5345	HO6003	HO6002					
J/E	1997 TO 1990	65-300 HP	HC5348	HC5348	HO6003	HO56002					
	1988 TO 1997	250-300 HP V8	HC5342	HC5342	HO5001A	HO5030					Note 7
	1991 TO DATE	90-175 HP						HC5345x2	HO5080	HO5080	
	1991 TO DATE	250-300 HP						HC5345x2	HO6001	HO6002	
	1991 TO DATE	200-225 HP						HC5345x2	HO6003	HO6002	
	1991 TO DATE	90-225 HP Ficht						HC5345x2	HO5080	HO5080	Note 8
	1991 TO DATE	40-250 HP	HC5345	HC5345	HO6003	HO6002					Note 9
	1996 TO DATE	75-250 HP Ficht	HC5345	HC5345	HO6003	HO6002	HO5072A - **802240**				
	1998 TO DATE	40-140 HP 4-Stroke	HC5358	HC5358	HO6003	HO6002					Note 1
	1998 TO DATE	65-70 HP 4-Stroke						HC5345x2	HO6003	HO6002	Note 1
	2000 TO DATE	115 HP FICT	HC5358	HC5358	HO6003	HO6002					Note 1
	2002 TO DATE	200-225 HP 4-Stroke	HC5345	HC5345	HO6003	HO6002	HO5072A - **802240**				
	2005 TO DATE	E250 DXP Vindicator	HC5348	HC5348	HO6003	HO6002		HC5348x2	HO6003	HO6002	
M/M	1984 TO 1994	2.4/2.5 HP EFI	HC5345	HC5345	HO6001	HO6002					Note 4
	1989 TO DATE	75-300 HP	HC5345	HC5345	HO6001	HO6002	HO5038A - **802276**				Note 3
	1989 TO DATE	75-275 HP						HC5345x2	HO5080	HO5080	
	1996 TO DATE	75-225 HP 4-Stroke	HC5345	HC5345	HO6001	HO6002					
	1998 TO DATE	30-60 HP	HC5345	HC5345	HO6001	HO6002					Note 1
	2002 TO DATE	225 HP 4-Stroke		HC5358	HO6001	HO6002					
	2003 TO DATE	250-300 HP XS	HC6345								Note 5
	2003 TO DATE	250 HP XS		HC5345	N/A	HO6002		HC5345x2	HO6002	HO6002	Note 6
Nissan/Tohatsu	1990 TO DATE	90-140 HP	HC5345	HC5345	HO6001	HO6002					
Suzuki	1986 TO DATE	100 HP	HC5345	HC5345	HO6003	HO6002					
	1986 TO 2002	115-140 HP	HC5345	HC5345	HO6001	HO6003	NOT 1996				
	1986 TO DATE	150-250 HP 2&4-Stroke	HC5345	HC5345	HO6003	HO6002	HO5072A - **802240**	HC5345x2	HO6003	HO6002	
	1996 Only	115-140 HP	HC5348	HC5348	HO6001	HO6002		HC5345x2	HO6003	HO6002	
	1998 TO DATE	65-70 HP 4-Stroke						HC5345x2	HO6001	HO6002	Note 1
	1998 TO DATE	40-140 HP 4-Stroke	HC5358	HC5358	HO6003	HO6002					Note 1
	2003 TO DATE	90 HP 4-Stroke	HC5358	HC5358	HO6003	HO6002					Note 1
US Marine/Force	1996 TO DATE	90-120 HP	HC5345	HC5345	HO6001	HO6002	HO5038A - **802276**	HC5345x2	HO6001	HO6002	
Yamaha	1990 TO DATE	40-90 HP	HC5345	HC5345	HO6003	HO6002					
	1990 TO DATE	100-200 HP						HC5345x2	HO6001	HO6002	
	1990 TO DATE	225-250 HP 4-Stroke						HC5358x2	HO5080	HO5080	
	1986 TO DATE	100-250 HP 2-Stroke	HC5345	HC5345	HO6001	HO6002					
	1997 TO DATE	80-225 HP 4-Stroke	HC5345	HC5358	HO6001	HO6002					Note 2
	1998 TO DATE	80-100 HP 4-Stroke						HC5358x2	HO6001	HO6002	
	2000 TO DATE	150-250 HPDI	HC5345	HC5358	HO6001	HO6002					Note 2
	2002 TO DATE	300 HPDI	HC5358	HC5358	HO6001	HO6002					
	2003 TO DATE	25-60 HP 4-Stroke	HC5348	HC5348	HO6003	HO6002					Note 1
	2006 TO DATE	350 HP	HC5358	**MUST Use Tournament Cylinders**							
Yanmar	1994 TO DATE	27 & 36 HP	HC5345	HC5345	HO6001	HO6002					

Note 1: Requires Spacer Kit HO5090

Note 2: HC5345 is optional for Single Engine Only applications - Do not use HC5345 for twin engines in this application.

Note 3: Minimum Engine Center = 27".

Note 4: May require extensive cowling modifications.

Note 5: Must use Mercury supplied tiller bolt for installation.

Note 6: One Cylinder per engine, Must use Mercury supplied tiller bolt for installation.


Note 7: HO5030 and HO5064 comes without tie bar.

Note 8: Minimum Engine Ceter = 29".

Note 9: Includes Etech Engines.


©2014 Donovan Marine, Inc.

SeaStar Front Mount Cylinder Parts - HC-5345

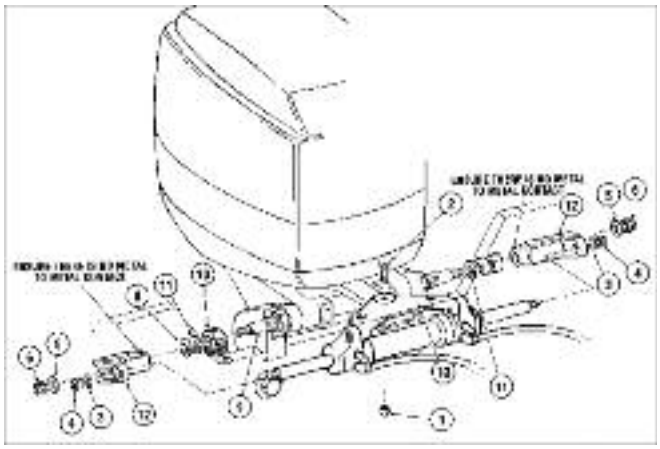

Item	DMI #	MFG #	Quantity	Description	Price
2	796290	(HP6001)	1	S/S Bolt & Nut	$19.98 E
5	796358	(HP6134)	2	S/S Washer	$7.98 E
6	796346	(HF6008)	2	FCP Nut - 1/2"	$24.98 E
9	796409	(730229)	1	Support Rod	$70.98 E
11	796372	(HP6017)	2	FCP Washer	$6.98 E
12	796485	(HP6018)	2	S/S Support Brk.	$139.98 E

SeaStar Outboard Cylinder Grounding Strap



- The grounding strap kit is designed to provide added protection against corrosion caused by stray current.
- This is designed for use on SeaStar and BayStar front mounting outboard cylinders.

Order No.	Mfg. No. / Description	Price
799850	(HA-5477)	$16.98 E

SeaStar Tie Bar Kits - Complete



- No adapters are required.

Order No.	Mfg. No. / Description	Price
802363	(HO-6001) Single Cylinder	$421.98 E
802378	(HO-6003) Single Cylinder	$426.98 E
802384	(HO-6002) Dual Cylinder	$446.98 E
802428	(HA-6701) Center Engine Bracket	$375.98 E
802416	(HO-6700) Tie Bar Kit	$335.98 E

SeaStar Tie Bar Adapter Kits

- Only for OEM Tie Bars.
- Adapter plates only.
- For use with OEM tie bar from the engine manufacturer.

Order No.	Mfg. No. / Description	Price
802240	(HO-5072A) J/E	$197.98 E
802290	(HO-5036A) Yamaha	$235.98 E

SeaStar Seal Kits for Cylinders HC-5342 and HC-5345



Order No.	Mfg. No. / Description	Price
801464	(HS-5157) With Wrench Also Fits HC5340/42 with Screw In End Glands	$124.98 E
801490	(HS-5167) Without Wrench	$104.98 E
801452	(HS-5152) HC-5340, Old	$57.98 E

SeaStar Cylinder Service Kit

Order No.	Mfg. No. / Description	Price
801286	(HP-6031)	$237.98 E

SeaStar Hydraulic Steering Cylinder Spacer Kit

- Spacer kit for: HC5345, HC5358 and HC5345.
- For low HP outboard engines.

Order No.	Mfg. No. / Description	Price
800575	(HO-5090)	$25.98 E

SeaStar Cylinder Spacers

Order No.	Mfg. No. / Description	Price
801301	(HP-6033) O/B Pivot Plate Mounting Hardware	$42.98 E
801313	(HP-6036) Space Kit O/B Front Mount Cylinder	$28.98 E

SeaStar Tie Bar Kit for Side Mount Cylinder



Order No.	Mfg. No. / Description	Price
802125	(HO-5009) Side Mount Cylinder	$270.98 E

T & R Marine Tie Bar Kits - Complete



- Adjustable to 31" centers.
- Stainless steel makes this kit corrosion resistant.
- Yam 115-225 1984 and newer, J/E 50-235 HP, Mer 40-225 HP, Mar 40-225 HP, Suz 150-150SS-200 HP 1986 and newer.

Order No.	Mfg. No. / Description	Price
633289	(DEL-9805)	$259.98 G

SeaStar Hydraulic Tie Bar Valve



- Allows for the periodic required realignment of two outboard motors or rudders that are linked together with a hydraulic tie bar as opposed to a solid link or a mechanical tie bar.
- A standard helm and SeaStar hoses may be used on vessels not exceeding speeds of 55 mph.
- For vessels exceeding speeds of 55 mph a SeaStar Pro helm and Pro hoses must be used.

Order No.	Mfg. No. / Description	Price
802404	(HA-5471-2)	$341.98 E

SeaStar Inboard ATM Cylinders - Aluminum



Order No.	Mfg. No. / Description	Price
800804	(HC-5312-3) Body Diameter 1.25"	$579.98 E
800816	(HC-5313-3) Body Diameter 1.375"	$597.98 E
800828	(HC-5314-3) Body Diameter 1.50"	$571.98 E

SeaStar Inboard TM Cylinders - Bronze



Order No.	Mfg. No. / Description	Price
800866	(HC-5318) Body Diameter 1.50"	$832.98 E
800878	(HC-5319) Body Diameter 1.75"	$938.98 E

SeaStar Power Assist - 12 volt



- Experience the 'automotive style' comfort hydraulic steering can achieve with the innovative SeaStar Power Assist.
- Designed for difficult and hard to steer boats.
- Perfect addition for all O/B, I/O, I/B powered boats, equipped with standard hydraulic steering.

Order No.	Mfg. No. / Description	Price
797906	(PA1200-2) SeaStar Power Assist Unit	$1,657.98 D

- Specifically designed for high torque single engine outboard applications such as performance bass boats that are fitted with SeaStar Pro steering helms (not suitable for use with any other SeaStar helm type).

Order No.	Mfg. No. / Description	Price
797912	(PA1315-2) SeaStar Power Assist PRO Unit	$1,798.98 D

SeaStar Sterndrive Cylinders



- These cylinders attach directly to the sterndrive unit.
- Aluminum construction, stainless steel shaft with 7" travel.
- For non power assist engines.
- Requires cylinder rod end adaptor, available from manufacturer.

Order No.	Mfg. No. / Description	Price
800731	(HC-5332) 1.375", Merc Alpha/Bravo, '84 to Date	$598.98 E

- For engines with power assist.

Order No.	Mfg. No. / Description	Price
800744	(HC-5328-3) 1.25", Merc, OMC, BMW, Volvo, Gas Models	$501.98 E

SeaStar Cylinder Seal Repair Kits



Order No.	Mfg. No. / Description	Price
801411	(HS-5154) 1.25" Aluminum Cylinder	$38.98 E
801426	(HS-5155) 1.35" Aluminum Cylinder	$38.98 E
801433	(HS-5156) 1.50" Aluminum Cylinder	$38.98 E
803230	(HS-5182) 1.50" Bronze Cylinder	$45.98 E
803242	(HS-5183) 1.75" Bronze Cylinder	$49.98 E
803255	(HS-5184) 2.00" Bronze Cylinder	$49.98 E

Uflex Power Steering System



- Just like in your car, the MasterDrive 12 volt power assist steering system delivers effortless steering with fingertip control regardless of speed or torque conditions.
- It completely eliminates torque at the steering wheel, while providing the safety of functional manual hydraulic steering in the event of a loss of power.
- Patented features include 3 selectable levels of power to give the desired feeling at the wheel.
- The ignition protected, high-efficiency, low amp draw motor automatically reverts to manual mode in case of power loss and is equipped with an on/off safety switch.
- Fully compatible with autopilot and dual station steering installations.
- Includes: Helm, power unit with 15' wiring harness, and user interface.
- Note: Tie bars (A90 or A94) for dual engine installations, Kit-OBSVSxx hydraulic hoses (helm to cylinder) or (helm to power unit), & Kit-OB-DBR-SVSxx hose kit (for dual cylinder installations) must be ordered separately.

Order No.	Mfg. No. / Description	Price
8031190	(MD32T)	$2,498.98 D

©2014 Donovan Marine, Inc.

MP Parts Hydraulic Hose Kits



- Pre-cut with brass fittings (installed).
- High burst flexible hose designed for splashwell/transom conditions.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- Sold by pair.

Order No.	Description	Price	Order No.	Description	Price
804394	Length 2'	$85.98 F	804408	Length 14'	$145.98 F
804396	Length 3'	$103.98 F	804422	Length 20'	$153.98 F
804398	Length 4'	$113.98 F	804428	Length 22'	$156.98 F
804400	Length 6'	$120.98 F	804434	Length 24'	$163.98 F
804402	Length 8'	$129.98 F	804436	Length 26'	$172.98 F
804404	Length 10'	$134.98 F	804438	Length 30'	$185.98 F
804406	Length 12'	$139.98 F			

Uflex Hydraulic Hose Kits



- Two high pressure flexible hoses with pre-crimped brass fittings, bulkhead fittings and bend restrictors.
- Restrictors on both ends for 5' and under.
- Recommended for helms with 1,500 psi relief valves or less.

Order No.	Mfg. No. / Description	Price	Order No.	Mfg. No. / Description	Price
8033375	(KITOB-02) 2'	$120.98 E	8033415	(KITOB-16) 16'	$120.98 E
8033380	(KITOB-03) 3'	$120.98 E	8033420	(KITOB-18) 18'	$120.98 E
8033385	(KITOB-04) 4'	$120.98 E	8033425	(KITOB-20) 20'	$120.98 E
8033390	(KITOB-06) 6'	$120.98 E	8033430	(KITOB-22) 22'	$163.98 E
8033395	(KITOB-08) 8'	$120.98 E	8033435	(KITOB-24) 24'	$177.98 E
8033400	(KITOB-10) 10'	$120.98 E	8033440	(KITOB-26) 26'	$191.98 E
8033405	(KITOB-12) 12'	$120.98 E	8033445	(KITOB-30) 30'	$233.98 E
8033410	(KITOB-14) 14'	$120.98 E			

SeaStar Pro Hose Kits



- Kevlar Reinforced, pre-cut kits with factory installed brass fittings.
- High burst strength flexible hose designed for splashwell and transom bracket environments.
- Determine length by measuring along the intended path round up to next even foot and add 2 feet.
- 1,500 psi.

Order No.	Mfg. No. / Description	Price
800246	(HO-5714) 14'	$205.98 E
800261	(HO-5716) 16'	$223.98 E
800284	(HO-5718) 18'	$243.98 E
800297	(HO-5720) 20'	$260.98 E

T-H Marine Bulkhead Strain Relief Hose Kit



- Distributes strain from bends in hose.
- Water tight gripper fitting - no leaks.
- Great for hydraulic steering hose.
- Bulkhead fitting has flange for protection.
- Flange is 2-3/4" diameter and requires 1-1/4" installation hole.

Order No.	Mfg. No. / Description	Price
641341	(BSR-1K)	$16.98 H

SeaStar Hose Kits






801678

- Pre-cut kits supplied with factory installed brass fittings.
- Special high burst strength flexible hose designed for splashwell and transom bracket environments.
- Determine length by measuring along the intended path, round up to next even foot and add 2 feet.
- 1,000 psi.
- Sold per pair only.

Order No.	Mfg. No. / Description	Price	Order No.	Mfg. No. / Description	Price
800400	(HO-5102) 2'	$123.98 E	800493	(HO-5118) 18'	$139.98 E
800412	(HO-5103) 3'	$123.98 E	800506	(HO-5120) 20'	$150.98 E
800422	(HO-5104) 4'	$123.98 E	800519	(HO-5122) 22'	$168.98 E
800435	(HO-5106) 6'	$123.98 E	800522	(HO-5124) 24'	$178.98 E
800448	(HO-5108) 8'	$123.98 E	800535	(HO-5126) 26'	$221.98 E
800451	(HO-5110) 10'	$123.98 E	800549	(HO-5130) 30'	$247.98 E
800464	(HO-5112) 12'	$123.98 E	801678	(HF-5527) 3/8" Union Coupling Fitting	$14.98 E
800477	(HO-5114) 14'	$117.98 E			
800480	(HO-5116) 16'	$128.98 E			

MP Parts Hydraulic Hose Kits





- Complete with fittings these hose kits mount through a splashwell bulkhead.
- Use on: Bass boats, offshore fishing or runabouts.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- Sold per pair.

Order No.	Description	Price	Order No.	Description	Price
804444	Length 16'	$166.98 F	804450	Length 22'	$182.98 F
804446	Length 18'	$169.98 F	804452	Length 24'	$187.98 F
804448	Length 20'	$167.98 F			

SeaStar Bulkhead Hose Kits



- Assures a tidy hydraulic steering installation on virtually any type of outboard.
- The integral bulkhead fitting allows neat routing of hoses through a splashwell bulkhead, helping to eliminate excess loose hose, kinking or chafing.
- They install faster than hoses used with conventional bulkhead fitting kits.
- These hoses can be used on Offshore fishing boats, Bass boats, and Runabouts.
- Determine length by measuring along the intended path to the center of engine, round up to next even foot and add 2 feet.


Order No.	Mfg. No. / Description	Price
800184	(HO-8116) 16' Hose with Bulkhead Fittings	$205.98 E
800198	(HO-8118) 18' Hose with Bulkhead Fittings	$216.98 E
800200	(HO-8120) 20' Hose with Bulkhead Fittings	$230.98 E
800210	(HO-8122) 22' Hose with Bulkhead Fittings	$242.98 E
800223	(HO-8124) 24' Hose with Bulkhead Fittings	$255.98 E
800256	(HO-8130) 30' Hose with Bulkhead Fittings	$290.98 E

SeaStar Pro Bulkhead Hose Kits



Order No.	Mfg. No. / Description	Price
800312	(HO-8816) 16' Hose with Bulkhead Fittings	$214.98 E
800323	(HO-8818) 18' Hose with Bulkhead Fittings	$228.98 E

MP Parts Reinforced Nylon Tubing



- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- Sold in full rolls only.

Order No.	Description	Price
402002	5/16" x 50'	$98.98 F
402014	5/16" x 100'	$187.98 F

SeaStar Nylon Tubing



- Flexible 3/8" nylon tubing is recommended for inboard, sterndrive and seadrive steering systems with SeaStar I helms only.
- The maximum recommended total tubing run is 100'.
- Not designed for use with outboard applications.
- Sold in full rolls only.

Order No.	Mfg. No. / Description	Price
801102	(HT-5092) 25'	$71.98 E
801115	(HT-5095) 50'	$104.98 E
801128	(HT-5100) 100'	$210.98 E

Marpro Premium Synthetic Hydraulic Fluid



- For use in all hydraulic steering systems.

Order No.	Description	Price
7-1087	Quart, 12 per case	$18.98 F
7-1086	Gallon, 4 per case	$63.98 F

Uflex BubbleBuster



- Motor pump with safety valve, switch and 1 gallon tank included, it allows the purging of 2 hydraulic steering systems before refilling.
- 12V electric motor with thermal protection; current absorption 8 amp.
- 13' electric harness with alligator clips for fast connection with the battery.
- Double spiralled hose to connect to helm pump-extended length: 19.6'.
- Double spiralled hose to connect to cylinder-extended length: 19.6'.
- Utility tray.

Order No.	Mfg. No. / Description	Price
8020709	(BUBBLBUSTER)	$1,017.98 E

Fittings for Bulk Hose

Order No.	Mfg. No. / Description	Price
401961	5/16" Hydraulic Hose Fitting (Fits Hynautic)	$8.98 F
401997	Reusable Fitting (Fits Hynautic)	$13.98 F
401999	Reusable Fitting with O-ring (Fits SeaStar)	$18.98 F

MP Parts Nylon Tubing



- For use with inboard, sterndrive or seadrive steering systems with SeaStar I helms only.
- Not recommended for tubing runs in excess of 100'.
- MP Parts Hydraulic Hose Kits exclusively manufactured by Parker Hannifin and Uflex.
- Sold in full rolls only.

Order No.	Mfg. No. / Description	Price
804460	3/8" x 25'	$28.98 F
804462	3/8" x 50'	$48.98 F
804464	3/8" x 100'	$84.98 F

SeaStar Hydraulic Fluid



- Formulated to provide the best performance for your steering system.
- A perfect blend of viscosity stabilizers, anti-wear ingredients defoaming agents and corrosion inhibitors will ensure maximum steering life and performance.

Order No.	Mfg. No. / Description	Price
799779	(HA-5430) Quart	$23.98 E
799760	(HA-5440) Gallon	$93.98 E
799784	(HA-5438) Filler Kit	$18.98 E

Uflex Hydraulic Fluid



- Hydraulic oil: ISO VG 15.

Order No.	Mfg. No. / Description	Price
2007030	(OIL 15) Quart	$26.98 H

SeaStar BayStar Power Purge Jr.



- The quickest way to bleed a SeaStar and BayStar system in the field and assure a rock-solid steering feel every time!
- Reduces installation and warranty costs while enhancing the quality of the boat to the end user.
- A typical manual fill and purge takes the average experienced installer or service technician about 30 minutes per boat - by using the Power Purge Jr. this can be reduced to 10 minutes or less.
- Advantages: Steering feel is solid every time. Complete fill & purge in 10 minutes or less. Fast and efficient. Easy to operate. Screens contaminants from oil. Quick connect fittings. Convenient portable size. Convenient electrical hook-up utilizing your 12 volt boat battery.
- Optional Dual Cylinder Purging Kit HA 5461 available.

Order No.	Mfg. No. / Description	Price
797792	(HA5445)	$1,000.98 E
797805	(HA5461) Dual Cylinder Purge Hose	$257.98 E

©2014 Donovan Marine, Inc.

Uflex Remote Fill Adapter



- Through-dash remote fill kit.

Order No.	Mfg. No. / Description	Price
8030025	(KIT F)	$41.98 E

SeaStar Fittings and Accessories



- Refer to SeaStar Solutions catalog for applications.

Order No.	Mfg. No. / Description	Price
801605	(HF-5520) (2 ea.) BJ - Cylinder Horizontal Bleeder Tee	$62.98 E
801617	(HF-5521) (2 ea.) EM - Cylinder Vertical Bleeder Tee	$59.98 E
797615	(HP-6003) S/S Ball Joint, 1/2" x 3/8"	$79.98 E
801270	(HP-6013) S/S Ball Joint, 5/8" x 5/8"	$112.98 E
801224	(HA-5432) Non-Vent Plug	$11.98 E
801666	(HF-5526) (6 ea.) 3/8" Nylon Tube Nut	$17.98 E
801680	(HF-5528) (3 ea.) Str. Fit., 1/4" NPT to 3/8" Nylon Tube	$17.98 E
801707	(HF-5529) (3 ea.) Elbow, 1/4" NPT to 3/8" Nylon Tube	$28.98 E

- Tee fittings (3 each).

Order No.	Mfg. No. / Description	Price
801706	(HF-5530) 3/8" Nylon Tube	$29.98 E
801717	(HF-5531) 1/4" NPT to 3/8" Nylon Tube, 90°	$34.98 E
801767	(HF-5536) 1/4" NPT to 3/8" Nylon Tube, 180°	$33.98 E

SeaStar Add-A-Station/Auto Pilot Kits



- Contains fittings for adding either a steering station or an auto pilot system to an existing SeaStar System.
- Can be used with outboard hose kit, nylon tubing or copper tubing installations.
- Available with or without 25' of nylon tubing.

Order No.	Mfg. No. / Description	Price
800901	(HF-5501) With Tubing	$126.98 E
800914	(HF-5502) Without Tubing	$60.98 E

SeaStar Bulkhead Fitting Kits



- Use for outboard hose kits.
- Provides a watertight routing of hose kits through bulkheads and splashwells up to 3/4" thick.

Order No.	Mfg. No. / Description	Price
800969	(HF-5512) 3/4" Bulkhead Fitting Kit, Single Cylinder	$72.98 E
800979	(HF-5513) 3" Bulkhead Fitting Kit, Single Cylinder	$77.98 E
801010	(HF-5515) 3" Bulkhead Fitting Kit, Dual Cylinder	$159.98 E

SeaStar Accessories



Order No.	Mfg. No. / Description	Price
795659	(409620) Bleeder Tee	$29.98 E
795837	(736028) Bottom Washer	$6.98 E
795851	(742724) Hex Screw, 5/16 x 3/4	$1.98 E

Uflex Fitting Kit



- Fitting kit for a second steering station or for an autopilot installation.
- It includes all necessary fittings for 3/8" nylon or copper tube.

Order No.	Mfg. No. / Description	Price
8030020	(KIT95-2S)	$56.98 E

SeaStar Copper Tubing Kit



- 3/8" soft refrigeration copper tubing must be used with SeaStar I with runs over 100 ft. and SeaStar II inboard and sterndrive installation with runs over 50 ft.
- Cylinder hose kits are included.

Order No.	Mfg. No. / Description	Price
800956	(HF-5508) For SeaStar II	$94.98 E


SeaStar Stainless Steel Hex Bolt and Nut



Order No.	Mfg. No. / Description	Price
795558	(HP-6007)	$39.98 E

SeaStar Capilano Variable Turns Hydraulic Steering System

- The helm pump features variable displacement enabling the helmsman to adjust the steering wheel turns to suit various maneuvering and weather conditions.
- Meets ABS, Lloyd and Det Norske Veritas specifications.
- Systems are not air-pressurized; no air leaks or pressure drops.
- Each helm is its own reservoir; separate reservoir not needed.
- For most inboard powered boats with single or twin engines from 30 to 55 feet in length.
- This application guide should be used with discretion.
- It is the final responsibility of the boat designer-builder to specify maximum expected steering loads.

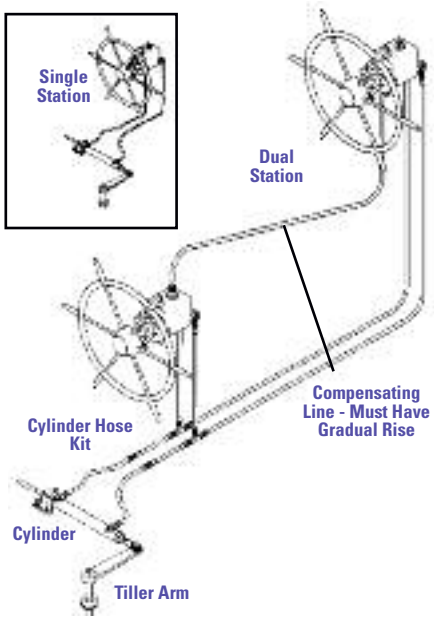

SeaStar Helm Pumps



- A unique variable displacement feature allows the number of steering wheel turns to be adjusted by the helmsman within a predetermined range.
- Shaft is 3/4" standard taper with 5/8 NF threads.
- Protected by built-in 1000 PSI pressure relief valves.

Order No.	Mfg. No. / Description	Price
802505	(HH-5250) 1250V Helm Pump	$1,201.98 E
802517	(HH-5275) 1275V Helm Pump	$1,235.98 E

SeaStar Trunion Mount Cylinders



- All bronze and stainless steel construction.
- Comes with bronze rod and clevises and 7" standard travel, except 802644 (HC-5379) which has 11" standard travel.
- All models feature special engineered bleed fittings.
- Single cylinder may be used for single rudder or dual rudder with tie bar.
- Balanced cylinders.

Order No.	Mfg. No. / Description	Price
802606	(HC-5355) BA150-7TMC, 7,117 in. lbs., 1250V	$883.98 E
802618	(HC-5356) BA175-7TMC, 9.569 in. lbs., 1250V	$999.98 E
802632	(HC-5357) BA200-7TMC, 13,200 in. lbs., 1250V	$1,034.98 E
802644	(HC-5379) BA200-11TMC, 19,900 in. lbs., 1275V	$1,193.98 E

SeaStar Inboard Cylinder Seal Kit



Order No.	Mfg. No. / Description	Price
803266	(HS-5185) For BA200-11	$49.98 E

SeaStar Helm Seal Kit



Order No.	Mfg. No. / Description	Price
803204	(HS-5161) 1250V/1275V, 250V/275V	$42.98 E

SeaStar Capilano Cylinder Hose Kit

- This hose kit contains two (2) 18" hoses for single-cylinder installations.

Order No.	Mfg. No. / Description	Price
802808	(HA-5731)	$69.98 E


SeaStar Fitting Kits



- Tubing fitting kit to install the SeaStar Capilano Inboard Steering System on your vessel.
- Kit to fit a hydraulic steering station.

Order No.	Mfg. No. / Description	Price
801779	(HF-5592) 5/8"	$57.98 E

SeaStar Fill and Vent Plug Kit



Order No.	Mfg. No. / Description	Price
802997	(HA-5450) Fill and Vent Plug Kit	$56.98 E

SeaStar Wheel Bushing



Order No.	Mfg. No. / Description	Price
803014	(HB-0573) 3/4" to 1", Straight	$31.98 E

©2014 Donovan Marine, Inc.

Hynautic Hy-Trac Outboard Hydraulic Steering Systems

Hynautic



- System includes all necessary hardware and 50 ft. of hose with attached helm fittings and cylinder fittings so you can custom cut the hose at the cylinder end to the exact length you need.
- Ultra sleek cylinder design requires less space around the engine and improves the appearance of your boat.
- Cylinder remains stationary eliminating the chafing and wear of hoses associated with other systems.
- Accepts port or starboard hose connections.
- Helm mounts in front of or behind dash and is powder coated for extra corrosion resistance and longer life.
- Stainless steel helm shaft.
- Unique no-mess purge kit. Bypass tube easily connects to cylinder, fill-tube connects to helm, then just rotate wheel to purge.
- Neatly mounts to most V4 and V6 engines without using the tilt tube.
- Eliminates torque feedback from the engine for effortless steering.
- Package includes: "Glide-free" HH-5273 smooth-action helm, ultra-sleek, low-profile K-6 cylinder, all mounting hardware for helm and cylinder, hose fittings kit, half gallon of hydraulic fluid, complete purging kit and installation and owner's manual.

Order No.	Mfg. No. / Description	Price
402090	(OB-300-11) Without Marine Steering Hose	$1,537.98 E
402104	(OB300-11K) With 20' Marine Steering Hose	$1,684.98 E

Hynautic Manufal Hydraulic Steering for Inboards Only

Tugs Boats and Net Haulers to 30'

- Work and Pleasure Boats to 40'
- Planing Hulls to 50'

Order the Following Components

1	Each Helm (3/4" Tapered Shaft)	H-25 or
1	Each Helm (1" Straight Shaft)	H-21
1	Each Helm Fitting	HF-10
1	Each Relief Valve	MSV-21
1	Each Relief Fitting	MSVF-07
1	Each Reservoir	R-06
1	Each Cylinder	HC-5369HYC
1	Each Cylinder Fitting	KF-05
1	Each Hydraulic Oil 1/2 Gallon	MCO-01

Tugs Boats and Net Haulers to 35'

- Work and Pleasure Boats to 45'
- Planing Hulls to 50'

Order the Following Components

1	Each Helm (3/4" Tapered Shaft)	H-25 or
1	Each Helm (1" Straight Shaft)	H-21
1	Each Helm Fitting	HF-10
1	Each Relief Valve	MSV-21
1	Each Relief Fitting	MSVF-07
1	Each Reservoir	R-06
1	Each 1/2" Copper Fitting	MSRF-01
1	Each Cylinder	HC-5373HYC
1	Each Cylinder Fitting	KF-05
1	Each Hydraulic Oil 1/2 Gallon	MCO-01

Tugs Boats and Net Haulers to 40'

- Work and Pleasure Boats to 55'
- Planing Hulls to 60'

Order the Following Components

1	Each Helm (3/4" Tapered Shaft)	H-42-02
1	Each Helm Fitting	HF-21
1	Each Relief Valve	MSV-21
1	Each Relief Fitting	MSVF-13
1	Each Reservoir	R-06
1	Each 1/2" Copper Fitting	MSRF-01
1	Each Cylinder	HC-5802HYC
1	Each Cylinder Fitting	KF-60
1	Each Hydraulic Oil 1/2 Gallon	MCO-01

Tugs Boats and Net Haulers to 45'

- Work and Pleasure Boats to 65'
- Planing Hulls to 65'

Order the Following Components

1	Each Helm (3/4" Tapered Shaft)	H-41-02
1	Each Helm Fitting	HF-21
1	Each Relief Valve	MSV-21
1	Each Relief Fitting	MSVF-13
1	Each Reservoir	R-06
1	Each 1/2" Copper Fitting	MSRF-01
2	Each Cylinders	HC-5373HYC
2	Each Cylinder Fittings	KF-60
2	Each Hydraulic Oil 1/2 Gallon	MCO-01

Tugs Boats and Net Haulers to 50'

- Work and Pleasure Boats to 75'
- Planing Hulls to 70'

Order the Following Components

1	Each Helm (3/4" Tapered Shaft)	H-41-02
1	Each Helm Fitting	HF-21
1	Each Relief Valve	MSV-21
1	Each Relief Fitting	MSVF-13
1	Each Reservoir	R-06
2	Each Cylinders	HC-5802HYC
2	Each Cylinder Fittings	KF-60
2	Each Hydraulic Oil 1/2 Gallon	MCO-01

Hynautic Engine Mount Aluminum Cylinder - Balanced

Hynautic



- Cylinders with aluminum barrels and end caps are designed for boats up to 38 ft. where steering loads are less than 10,000 in. lbs. of torque.
- Cylinder barrel and ends are anodized T-6061 aluminum.
- Cylinder rods are 303 stainless steel.
- All cylinders have replaceable wiper seals.

Order No.	Mfg. No. / Description	Price
401769	(K-6) 1-1/2" Bore, 7-3/4" Stroke	$867.98 E

Hynautic Reservoir

Hynautic



- Made of T-6061 aluminum, reservoirs are pressure tested for a minimum of 100 hours and shipped complete with front reading pressure gauge, fluid level indicator and return line filter.

Order No.	Mfg. No. / Description	Price
401624	(R-06) Capacity: 2 Quart	$579.98 E

Hynautic Heavy Duty Helm Units



- Hynautic standard helm units combine one or two bidirectional axial piston pumps with pilot check and makeup check valving.
- The result is a unit which prevents rudder feedback, is very efficient (even at low r.p.m.) and is immediately adaptable to multi-station use.
- For boats up to 70 feet.

Order No.	Mfg. No. / Description	Price
401404	(H-21) 2.75 cu. in. Displ., 1" Straight Shafts	$915.98 E
401428	(H-25) 2.75 cu. in. Displ., 3/4" Tapered Shafts	$915.98 E
401442	(H-42-02) 4.0 cu. in. Displ., 3/4" Tapered Shafts	$1,587.98 E
401579	(HS-01) Seal Kit, H-20 Series with External Seal	$34.98 E
401593	(HS-02) Seal Kit, H-20 Series with Internal Seal	$34.98 E
401606	(HS-04) Seal Kit, H-40 Series with Internal Seal	$34.98 E

Hynautic Relief Valve



- They are intended to protect the system's components and assist in purging air.
- Port size: 1/4 - 20 NPT.

Order No.	Mfg. No. / Description	Price
401620	(MSV-21) Relief Setting: 950 PSI	$224.98 E

Hynautic Brass Cylinder with Ball Joint



- Brass cylinders are for use on larger boats (to 70 ft. approx.).
- Tubes, ends and external tie rods are brass, cylinder rods are 303 stainless steel and mounts are manganese bronze.
- Cylinder types: Fixed mount.

Order No.	Mfg. No. / Description	Price
401822	(K-22) 1-1/2" Bore, 10" Stroke	$783.98 E

Hynautic Seal Kit for Aluminum Cylinders

Order No.	Mfg. No. / Description	Price
402026	(KS-01) For K-11 thru K-17 Cylinders	$33.98 E

Hynautic Accessories for Brass Cylinders

Order No.	Mfg. No. / Description	Price
401985	(KS-06) Seal Kit, K-21 - K-29 (After 1983)	$31.98 E
402052	(KS-12) Seal Kit, K-2	$31.98 E
402015	(670030) Ball Joint, K-22 and K-29	$220.98 E

Hynautic Miscellaneous Parts

Order No.	Mfg. No. / Description	Price
401961	(108MS-6-5B) 5/16" Hose Fitting	$8.98 F
401656	(HP6004) 0-60 PSI Gauge	$28.98 E
401543	(HF-05) Fitting Kit for SeaStar Helm to Hynautic	$47.98 E

Hynautic to SeaStar Cross Reference

Hynautic		SeaStar		
Part No.	Description	Part No.	Description	Remark
H-116	1.6 Rear Mount Helm	HH5260	1.7 SeaStar Rear Mount Helm	Advisory Notice 764618
H-120	2.0 Rear Mount Helm	HH5261	2.4 SeaStar Rear Mount Helm	Advisory Notice 764618
H-124	2.4 Rear Mount Helm	HH5262	2.4 SeaStar Rear Mount Helm	Advisory Notice 764618
H-21	2.75 Remote Reservior Helm w/1" Straight Shaft	N/A		Will continue to manufacture 20 Series Helms
H-22	2.0 Cid/Rev. 1" Straight Shaft	N/A		Will continue to manufacture 20 Series Helms
H-216	1.6 Tilt Helm	HH5741	1.7 SeaStar Traditional-Tilt Helm	Advisory Notice 764619
H-220	2.0 Tilt Helm	HH5743	2.0 SeaStar Traditional-Tilt Helm	Advisory Notice 764619
H-22-2	Helm Pump	N/A		Will continue to manufacture 20 Series Helms
H-224	2.4 Tilt Helm	HH5742	2.4 SeaStar Traditional-Tilt Helm	Advisory Notice 764619
H-25	2.75 Remote Reservior Helm with 3/4" Tapered Shaft	N/A		Will continue to manufacture 20 Series Helms
H-26	2.0 Remote Reservior Helm with 3/4" Tapered Shaft	N/A		Will continue to manufacture 20 Series Helms
H-29				Designed for Auto Pilot Drive
H-316	Marol 1.6 Helm	HH5271	1.7 SeaStar Helm	Advisory Note 764621
H-320	Marol 2.0 Helm	HH5273	2.0 SeaStar Helm	Advisory Note 764621
H-324	Marol 2.4 Helm	HH5272	2.4 SeaStar Helm	Advisory Note 764621
H-38	H-25 With Shorter Shaft. (Special)	???		
H-41	5.5 Remote Reservior Helm with 1" Straight Shaft	N/A		Will continue to manufacture 40 Series Helms
H-41-2	5.5 Remote Reservior Helm with 3/4" Tapered Shaft	N/A		Will continue to manufacture 40 Series Helms
H-42	4.0 Remote Reservior Helm with 1" Straight Shaft	N/A		Will continue to manufacture 40 Series Helms
H-42-02	4.0 Remote Reservior Helm with 3/4" Tapered Shaft	N/A		Will continue to manufacture 40 Series Helms
H-42-04	40 Series Helm	N/A		Will continue to manufacture 40 Series Helms
H-50	2.0 Remote Reservior Helm	HH5273 with HA5418	SeaStar 2.0 Front Mnt. Helm w/a Back Mnt Kit	H-50 Series Helms will stay-for alternatives
H-51	2.75 Remote Reservior Helm	HH5272 with HA5418	SeaStar 2.4 Front Mnt. Helm w/a Back Mnt Kit	see Advisory Notice 764623
H-52	1.65 Remote Reservior Helm	HH5271 with HA5418	SeaStar 1.7 Front Mnt. Helm w/a Back Mnt Kit	
H-702-4	Tilt Helm DF 3/4" Spline	???		Product for the Industrail Market
H-816	1.6 80 Series Compact Helm w/Int.Reservior & Relief	HH5271	1.7 SeaStar Helm	Advisory Note 764622
H-820	2.0 80 Series Compact Helm w/Int.Reservior & Relief	HH5273	2.0 SeaStar Helm	Advisory Note 764622
H-824	2.4 80 Series Compact Helm w/Int.Reservior & Relief	HH5272	2.4 SeaStar Helm	Advisory Note 764622


©2014 Donovan Marine, Inc.

Hynautic to SeaStar Cross Reference (cont.)

Hynautic Part No.	Hynautic Description	SeaStar Part No.	SeaStar Description	Remark
HyDyne-1000	O/B Power Assist Cylinder	N/A		This steering has been oboleted.
K-1-B	I/B Universal Mount 150 - 9" Cyl.	HC5369HY	BA150-9TM	Advisory Notice 764624
K-1-C	I/B Universal Mount 150 - 9" Cyl. w/Clevis	HC5369HYC	BA150-9TM with Clevis	Advisory Notice 764624
K-10	O/B Slide Plate Cylinder	HC5345HY, HC5347HY, HC5348HY, HC5358HY,	O/B Pivot Plate Cylinder	Advisory Notice 764624
K-11	I/B Ball Mount 125 - 9" Stroke Cylinder	HC5380HY	Splashwell Mount 125 - 9" Cyl.	Advisory Notice 764613
K-11S	I/B Ball Mount 125 - 9" Stroke Cylinder	HC5380HY	Splashwell Mount 125 - 9" Cyl.	Advisory Notice 764613
K-12	I/B Ball Mount 125 - 7" Stroke Cylinder	HC5380HY	Splashwell Mount 125 - 9" Cyl.	2" Longer Stroke - Advisory Notice 764613
K-13	O/B Side Mount Cylinder	HC5370HY	O/B Side Mount Cylinder 125 - 8"	1" Shorter Stroke - Advisory Notice 764614
K-14	I/O Tube Mount 125 - 7" Cylinder	HC5370HY. HC5328HY. HC5329HY.	O/B Side Mount Cylinder I/O 125 - 8EM Cylinder I/O 125 - 8VEM Cylinder	See Application for details for Specific Cyl. - Advisory Notice 764614
K-18	I/B Ball Mount 125 - 7" Stroke Cylinder	HC5370HY	Side Mount 125 - 8" Cylinder	Stroek & Mount Differ (HC5312 might be an Option)
K-19	I/B Ball Mount 125 - 9" Stroke Cylinder	HC5370HY	Side Mount 125 - 8" Cylinder	Stroek & Mount Differ (HC5313 might be an Option)
K-2-B	I/B Universal Mount 175 - 9" Cylinder	HC5373HY	BA175 - 9" Stroke	Advisory Note 764625
K-2-C	I/B Universal Mount 175 - 9" Cyl. w/Clevis	HC5373HY	BA175 - 9" Stroke with Clevis	Advisory Note 764625
K-22	I/B Fixed Mount 150 - 10" Cylinder	K-22		The Hynautic Version will stay as is.
K-27	I/B Fixed Mnt. 150 - 10" Cyl. Rod Ends on both ends	K-27		The Hynautic Version will stay as is.
K-28	I/B Fixed Mount 150 - 12" Cylinder	K-22		Only Difference is the Stroke
K-29	I/B Fixed Mnt. 150 - 12" Cyl. Rod Ends on both ends	K-27		Only Difference is the Stroke
K-3-B	I/B Universal Mount 200 - 9" Cyl. Ball Joint	HC5802HY	BA200-9 Cylinder (P/S add on Cyl.)	Retracted Length is ~ 3.5" Longer on the HC5802HY Cly. - Advisory Notice 764615
K-3-C	I/B Universal Mount 200 - 9" Cyl. Clevis	HC5802HYC	BA200-9 Cyl. (P/S add on Cyl.) w/Clevis	Retracted Length is ~ 3.5" Longer on the HC5802HY Cly. - Advisory Notice 764615
K-31	I/B Fixed Mount 200 - 10" Cylinder	K-31		The Hynautic Version will stay as is.
K-33	I/B Fixed Mount Cylinder	?		None
K-4-B	I/B Universal Mount 200 - 12" Cylinder	HC5378HY	BA200-11 Cylinder	1" Shorter Stroke - Advisory Notice 764616
K-4-C	I/B Universal Mount 200 - 12" Cylinder	HC5379HY	BA200-11 Cylinder with Clevis	1" Shorter Stroke - Advisory Notice 764616
K-5	I/B Unbalanced 150 - 9" Cylinder			Hynautic K-5 Program will stay as is.
K-51	I/B BA150-7 Cylinder	HC5314HY	I/B BA150-7ATM Cylinder	Advisory Notice 764626
K-59	I/B Tube Mount Unbalanced 125 - 7" Cyl.	HC5370HY, HC5328HY, HC5329HY	O/B Side Mount Cylinder I/O 125-8EM Cylinder I/O 125-8VEM Cylinder	HC Versions are Unbalanced, K-59 is a Balanced Cylinder See Application for details for Specific Cylinder
K-6	O/B Front Mount, Drag Link Cylinder	K-6		HyTrac kits will remain in some form.
K-6S	I/O K-6 Cylinder (Non Power-Assist)	HC5332	I/O Merc/Volvo SX 135-7EM Cyl.	
K-8	I/B Universal Mount 250 - 9.5" Cyl.	K-8		
K-9	I/B Universal Mount 250 - 14.5" Cyl.	K-9		
PSK-10	Servo Cylinder	HC5801HY	SeaStar P/S 9" Cylinder	Replaces PSK-10 and Power Cylinder
PSK-11	Open Center Servo Cylinder	HC5803HY	SeaStar P/S 11" Cylinder	Replaces PSK-11 and Power Cylinder
PSK-12	Closed Center Servo Cylinder	N/A		No Equivalent Product

Wagner Hydraulic Steering Helm Pumps



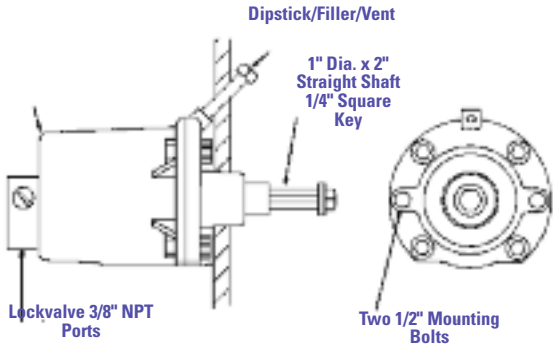

- Model B helm pumps are constructed of high strength aluminum castings, which include the following exceptional features: Front and back bearings, lockvalve and manifold or in-line with optional relief valve.
- High overall output efficiency.

Order No.	Mfg. No. / Description	Price
677508	(119-0002) Seal Kit for 701 Helm Pump	$34.98 C
677520	(119-0085) Seal Kit for B1 and B2 Helm Pumps	$33.98 C

Jastram Jog Lever


677746



- Jog "non follow-up" power steering lever offers an economical and effective means of steering your vessel with minimal effort.
- Just by moving the handle you send an electric signal to the directional valve on the hydraulic power unit.
- This, in turn, sends fluid to your steering cylinder, causing the vessel to turn to port or starboard as desired.
- Jog levers, unlike full follow-up loevers, have a spring loaded handle that always returns to center when released.
- For replacement of old style Wagner Job Switch, 677746 adapter plate is required.

Order No.	Mfg. No. / Description	Price
677745	(JA-701005-1)	$528.98 E
677746	(JA-950078-1) Adapter Plate Kit	$61.98 E
677750	(JB605-001) Replacement Spring	$35.98 B

Wagner Cylinder Kit

Order No.	Mfg. No. / Description	Price
677456	(119-0083) Cylinder Kit for N50-190/300	$138.98 C

Wagner Cylinder Part

Order No.	Mfg. No. / Description	Price
677611	(510-047AC) Mini Tiller Amplifier	$1,022.98 E

Marpac Stainless Steel Steering Wheels with Knob



- Steering wheel with turning knob.
- Solid investment cast hub.
- No set screw required.
- Units include cap nut.
- Fits a standard 3/4" tapered shaft helm.
- Includes: 1/2" stainless steel cap nut for mechanical steering.

Order No.	Description	Price
7-0709	Diameter 13" - Steering Wheel Kit	$156.98 G
7-0708	Diameter 15" - Steering Wheel Kit	$169.98 G
7-0706	Spare 1/2" Nut	$18.98 G

- Includes: 5/8" stainless steel cap nut for Seastar hydraulic steering.

Order No.	Description	Price
7-0705	Diameter 13" - Steering Wheel Kit	$156.98 G
7-0704	Diameter 15" - Steering Wheel Kit	$169.98 G
7-0707	Spare 5/8" Nut	$18.98 G

White Cap Stainless Steel Steering Wheels



2011658



2011655

- Non magnetic type 304 stainless steel.
- 5 Spoke Destroyer type steering wheel with black plastic center cap.
- Each wheel has a 22° of dish with 3/8" diameter spokes and fits a standard 3/4" tapered shaft helm.

Order No.	Mfg. No. / Description		Price
2011655	(S-9001C) Diameter 13-1/2"		$85.98 H
2011657	(S-9002) Diameter 15"		$98.98 H
2011658	(S-9003) Diameter 13-1/2"	With Foam	$99.98 H
2011659	(S-9004) Diameter 15"	With Foam	$109.98 H

Schmitt Stainless Steel Sailboat Wheels



- Oval section rings provide a comfortable grip for easy steering.
- The basic construction is TIG welded, highly polished nonmagnetic stainless steel with Pakkawood Trim.
- Tubular spokes welded at hub and ring.
- 6 spokes.
- Solid hub length is 2-1/8".
- Diameter is 2-1/4".

Order No.	Mfg. No. / Description	Price
602056	(53220900) Dia. 20", 1" Straight Bore, Spoke Dia. 3/8"	$287.98 I
602070	(53224900) Dia. 24", 1" Straight Bore, Spoke Dia. 3/8"	$318.98 I


Marpac Steering Wheel Control Knob



- Heavy duty cast marine grade stainless steel.
- Fits most oval shaped Destroyer type steering wheels.

Order No.	Description	Price
7-0255	Steering Wheel Control Knob	$32.98 G

Marpac Destroyer Type Steering Wheels with Control Knob



- Non magnetic type 304 stainless steel.
- 5 Spoke Destroyer type steering wheel with finger grips and control knob.
- Each wheel has a 22° of dish with 1/2" diameter spokes and fits a standard 3/4" tapered shaft helm.

Order No.	Description	Price
7-0687	Diameter 13-1/2"	$120.98 G
7-0688	Diameter 15-1/2"	$122.98 G

Marpac Destroyer Type Steering Wheels



- Non magnetic type 304 stainless steel.
- 5 Spoke Destroyer type steering wheel with black plastic center cap.
- Each wheel has a 22° of dish with 3/8" diameter spokes and fits a standard 3/4" tapered shaft helm.

Order No.	Description	Price
7-0248	Diameter 13-1/2"	$60.98 G
7-0250	Diameter 15"	$70.98 F
7-9063	Replacement Center Cap	$5.98 F

Schmitt Destroyer Type Wheels



- Oval section rings provide a comfortable grip for easy steering.
- The basic construction is TIG welded, highly polished nonmagnetic stainless steel with Pakkawood Trim.
- Black plastic center cap.
- 6 Spokes. 10° dish.

Order No.	Mfg. No. / Description	Price
602753	(15218111) Diameter 18", 3/4" Taper, Spoke Diameter 3/8"	$158.98 I
602765	(15220111) Diameter 20", 3/4" Taper, Spoke Diameter 3/8"	$184.98 I
602121	(15320117) Diameter 20", 1" Straight, Spoke Diameter 1/2"	$257.98 I
602789	(15224111) Diameter 24", 3/4" Taper, Spoke Diameter 3/8"	$224.98 I
7-0255	Knob Fits Most Destroyer Type Wheels	$32.98 G

Uflex Stainless Steel Steering Wheels



- 5 Spoke stainless steel wheel.
- Fits a 3/4" tapered shaft.

Order No.	Mfg. No. / Description	Price
2007275	(V42) Diameter 15-1/2", 2-1/2" Deep	$116.98 G
2007300	(V47) Diameter 18-1/2", 3" Deep	$175.98 G

Boater Sports Steering Wheel Knob



- Stainless steel.

Order No.	Mfg. No. / Description	Price
1-55208	(55208)	$27.45 H

©2014 Donovan Marine, Inc.

Uflex Stainless Steel Destroyer Steering Wheels with Black Foam Grip



- 5 Spoke steering wheel.
- Fits a 3/4" tapered shaft.
- Black foam grip.

Order No.	Mfg. No. / Description	Price
8020186	(V43BFC) Diameter 15.5"	$131.98 F
8020189	(V48BFC) Diameter 13.5"	$112.98 F

Schmitt Destroyer Type Model 170 Foam Grip Wheel



- Made of highly polished non-magnetic stainless steel, which is T.I.G. welded for maximum strength.
- Foam grip for a soft and comfortable feel.
- Black center cap included.
- 5 spokes.
- Hub size: 1"/ft. taper (3/4" shaft) or straight.

Order No.	Mfg. No. / Description	Price
602791	(1721521F2) Diameter 15-1/2"	$130.98 I

Schmitt Contemporary Captain's Wheels



- Oval section rings provide a comfortable grip for easy steering.
- The basic construction is TIG welded, highly polished nonmagnetic stainless steel with Pakkawood Trim.
- Woodgrain Pakkawood handles and center cap.
- Handle flare of 2-1/4". 10° dish.
- Fits standard 3/4" taper shafts.

Order No.	Mfg. No. / Description	Price
602652	(21118111) 18" Tip to Tip, 5 Spoke, Spoke Dia. 3/4"	$286.98 I
602676	(22224111) 24" Tip to Tip, 6 Spoke, Spoke Dia. 3/8"	$363.98 I

Schmitt Corsica Steering Wheel



- Steering wheels are CE marked.
- The standard hub is 3/4" tapered.
- Black Soft Grip with Silver Spokes.

Order No.	Mfg. No. / Description	Price
838687	(PU0130101) Diameter 13.8"	$72.98 F

Uflex Corse Steering Wheel



- 3 Spoke steering wheel.
- Fits a 3/4" tapered shaft.
- Aluminum frame.
- Stoft black PVC grip.

Order No.	Mfg. No. / Description	Price
8020180	(CORSE B/S) Diameter 13.8", Black Grip with Silver Spokes	$122.98 F

Uflex Stainless Steel Steering Wheel



- All ULTRAFLEX steering wheels meet the EEC directive 94/25 requirements about pleasure boats.
- All steering wheels are CE marked in conformity with the EN 28848 - EN 29775 and ABYC P22 Safety Standards.

Order No.	Mfg. No. / Description	Price
8020184	(V06) Diameter 13.8"	$106.98 E

Edson Character Wheels

SPECIAL ORDER ONLY



- Fig. 688 character wheels are designed and finished with "character".
- Patterned after the traditional heavy cast iron wheels, these lightweight wheels are cast in corrosion resistant anodized aluminum, heated treated to T-6 hardness.
- They are coated in tan polyurethane and feature varnished teak handles.
- Furnished with 1" straight bore.
- Available in sizes 20", 25", 30" and 35" spoke to spoke on special order.

Edson Teak Yacht Wheels

SPECIAL ORDER ONLY



Fig. 603C



Fig. 601C

- These beautifully crafted wheels will give years of service and pleasure to the owner who wants the best workmanship on his yacht, work boat or fishing boat.
- Hand made from seasoned stock selected for matching grain and color.
- Highly polished chrome bronze hub.
- Furnished with 1" straight bore.
- Available in sizes from 20" to 38" on special order.
- Fig. 601C teak yacht wheels are spoked wheels.
- Fig. 603C teak wheels come with a laminated 1" diameter natural teak rim installed.

Detmar Daytona Steering Wheel



- The classic sport wheel design features hard grip rim with leather grain appearance.
- Black with center cap.
- Dish: 3-1/8".

Order No.	Mfg. No. / Description	Price
7-0252	(2281) Diameter 13"	$20.98 H

Detmar Viper Steering Wheel



- The highly styled Viper wheel series provides a distinctive, clean appearance from front and rear viewing angles.
- Soft grip rim with leather grain, stitching and finger grips.
- Dish: 4".

Order No.	Mfg. No. / Description	Price
2000539	(122502) Diameter 13.5"	$39.98 H

Marpac Plastic Steering Wheel



- Equidistant three spoke design.
- Heavy duty, non-magnetic, UV resistant, high impact plastic.
- Meets ABYC P-22 and ISO 8848 standards.
- 4" dish.
- Fits all standard 3/4" tapered shafts.

Order No.	Mfg. No. / Description	Price
7-0253	Diameter 13-1/4"	$27.98 G

SeaStar Champion Steering Wheel



- Black rugged construction.
- Fits 3/4" standard tapered helms.

Order No.	Mfg. No. / Description	Price
838601	(SW59291B) Diameter 13"	$51.98 Q

Uflex Antigua Style Steering Wheels



2007310 2007320 2007315

- Thermoplastic anti-shock material.
- Standard 3/4" taper.
- Hub included.
- All Antigua steering wheels are provided with an exclusive hub that easily allows the steering wheel to always be aligned properly.

Order No.	Mfg. No. / Description			Price
2007310	(V60)	Diameter 13.8"	Black	$64.98 H
2007320	(V60G)	Diameter 13.8"	Grey	$64.98 H
2007315	(V60BRC)	Diameter 13.8"	Black with Burl Wood Cap	$82.98 G

Uflex Steering Wheels



2007285 2007265 2007270

- Thermoplastic antishock material.
- Standard 3/4" taper.
- Complete with hub.
- Flat, no dish.

Order No.	Mfg. No. / Description			Price
2007265	(V33G)	Diameter 13.4"	Grey	$32.98 G
2007270	(V33)	Diameter 13.4"	Black	$32.98 H
2007285	(V45)	Diameter 11"	Black, Soft Touch Grip	$57.98 H

SeaStar Steering Wheel Hardware Kit

- Kit consist of 1/2" NFT locknut, flat washer and woodruff key (half moon).
- For all mechanical helms with tapered shaft.


Order No.	Mfg. No. / Description	Price
649538	(SA-27454)	$10.98 F

SeaStar Steering Wheel Bushing

- Solid brass construction, adapts 1" straight steering wheel hub to 3/4" tapered helm shaft.

Order No.	Mfg. No. / Description	Price
803014	(HB-0573)	$31.98 E

T-H Marine Hot Foot™ - Slide Mount



- This sliding mount allows easy adjustment of the Hot Foot throttle position for different drivers or driving conditions.
- Mount allows over 5" of adjustment.
- All aluminum and stainless steel construction.

Order No.	Mfg. No. / Description	Price
640361	(HFM-1)	$82.98 R

T-H Marine Hot Foot™ - Foot Throttle



- Original marine foot throttle for O/B, I/O and inboard engine applications.
- A stainless steel spring returns engine to idle position when released.
- Equipped with toe clip for additional safety in extreme operating conditions.
- Uses standard control cables.
- Mounts directly to floor of boat with four screws.

Order No.	Mfg. No. / Description	Price
640309	(HF-1) Fits OMC and Mercury	$145.98 H
640310	(HFS-1) Hot Foot Replacement Spring (All Models)	$17.98 H

T-H Marine Top Load Foot Throttles



- Cables load from the top safety out of the way.
- Safely returns throttle idle.
- Nylon and teflon bushings on pivot points.
- Stainless steel return spring.

Order No.	Mfg. No. / Description	Price
640322	(HF-1T) Fits OMC and Mercury	$138.98 F
640335	(HF-1CT) Fits Chrysler and Yamaha	$139.98 F

©2014 Donovan Marine, Inc.

Marpac International Controls



- Cast stainless steel.
- Single and dual lever/single action.
- Includes: Hardware for 33C and 43C cables.

Order No.	Description	Price
7-0114	Single	$132.98 D
7-0115	Dual	$179.98 D

SeaStar MT-3 Dual-Function, Single-Lever Controls



- Used for outboard, sterndrive, diesel and gasoline inboard engines with hydraulic gears.
- One lever operates both clutch and throttle.
- Built-in friction drag helps prevent slippage and throttle creep while underway.
- Control features: Neutral safety switch prevents starting in gear, engine warm-up provision and forward neutral reverse detents.
- Uses 33C and 33C Supreme Cables.

Order No.	Mfg. No. / Description	Price
490007	(CH5310P) Single Control	$395.98 Q
490019	(CH53300P) Twin Control	$719.98 Q
490526	(35232-001) Red Ball Knob	$14.98 Q
490538	(35232-004) Black Ball Knob	$14.98 Q
490499	(305499) Neutral Safety Switch	$30.98 Q
490425	(308742) Conversion Kit	$99.98 Q

Uflex Top Mount Controls



- Single lever/dual action control to operate both throttle and shift.
- Suitable for any type of boats with outboard, inboard or I/O power plants.
- Enables easy and safe shifting by preventing accidental gear engagement unless engine is idling.
- Made of marine aluminum with chrome plated lever and black dome.
- Pull-out handle disengages shift for warm up.
- Includes X12 neutral safety switch which prevents in-gear starting.
- Power trim switch conveniently located in the handle grip enables for easy tilting of the engine.
- For use with all Ultraflex engine control cables except C22, C4, C36 and MACH36.
- Uflex C5, C16 and MACH5 cables require K35 kit.
- Single lever control for one engine.

Mfg. No. / Description	Price
2006685 (B73) Without Trim	$295.98 G
2006700 (B77) With Trim	$415.98 H

- Twin lever control for two engines.

Mfg. No. / Description	Price
2006690 (B74) Without Trim	$519.98 G
2006705 (B79) With Trim	$643.98 G

Marpac International Dual Control



- Stainless steel.
- Single and dual lever/single action.
- Includes: Hardware for 33C cables.
- Not for use with 43C cables.

Order No.	Mfg. No. / Description	Price
7-0113	International Dual Control	$178.98 D

Uflex Top Mount Controls



- Single lever/dual action control to operate both throttle and shift.
- Suitable for any type of boats with outboard, inboard or I/O power plants.
- Made of chrome plated marine aluminum.
- Pull-out handle disengages shift for warm-up.
- Neutral safety switch prevents in-gear starting.
- Built-in friction to avoid throttle creep.
- For use with C2, C8 and CO Uflex engine control cables.

Order No.	Mfg. No. / Description	Price
490036	(B103) Single-Lever Control for One Engine	$508.98 F
490042	(B104) Single-Lever Control for Two Engines	$821.98 F

Uflex Top Mount Controls



- Compact single lever controls offering a unique low profile style compared to other controls available on the market.
- Enables easy and safe shifting by preventing accidental gear engagement unless engine is idling.
- Made of marine aluminum, chrome plated or powder coat finish.
- Push in button disengages shift for warm-up.
- Includes X12 neutral safety switch which prevents in-gear starting.
- For use with all Uflex control cables except C4:
  C14 and MACH14 cables require no kit
  For C2, C8 and MACHZero cables the connection kit K59.
  C5, C16 and MACH5 cables require K60 Kit.
  C36 and MACH36 cables require K62 Kit.
  C22 cable requires K61 Kit.

Mfg. No. / Description		Price
2006667 (B301CR) Single Control	Chrome	$454.98 Q
2006668 (B302CR) Dual Control	Chrome	$736.98 Q

SeaStar SL3 Dual-Function, Single-Lever Controls



- Modern styling, dual action, top and side mount controls.
- Black satin finish available in single or twin engine versions, with or without trim and/or tilt switches.
- Suits 33C, OMC and Merc cables.

Order No.	Mfg. No. / Description	Price
490328	(309475-002) Side Mount	$502.98 Q
490332	(309478-002) Top Mount	$522.98 Q

SeaStar Premium Engine Controls - Model CH1700/CH7500



- Single-lever top mount plus side mount with and without cut-off switch.
- Precise, smooth, positive action.
- Ergonomically designed handle with Soft Touch Grip and intuitive positioning of shift interlock, trim switch and other features.
- Power tilt when needed for trailering.
- Neutral interlock and start-in-gear protection switch.
- "Easy-On" cable design accepts virtually every type of OEM and 3300 type cable.
- Comes with Tilt and Trim for O/B.

Order No.	Mfg. No. / Description	Price
490297	(CH1752P) Side Mount, Chrome Finish	$494.98 F
490300	(CH7542P) Top Mount, Chrome Finish	$469.98 F

- Comes with Tilt only for I/O.

Order No.	Mfg. No. / Description	Price
490312	(CH1751P) Side Mount, Chrome Finish	$401.98 F

SeaStar MV-3 Dual-Function Side Mount Control



- Provides single-lever control of both shift and throttle.
- Neutral safety switch prevents starting in gear, has a pullout clutch disengagement feature for warm-up, neutral interlock to prevent accidental shifting, built-in friction drag helps reduce throttle creep, engine warm-up provision and forward neutral reverse detents.
- Uses 33C and 33C Supreme Cables.

Order No.	Mfg. No. / Description	Price
402153	(CH2920) Side Mount	$334.98 E
490526	(35232-001) Red Ball Knob	$14.98 Q
490538	(35232-004) Black Ball Knob	$14.98 Q

Uflex Single-Lever Side Mount Controls



- Single lever/dual action control to operate both throttle and shift.
- Suitable for any type of boats with outboard, inboard or I/O power plants.
- Enables easy and safe shifting by preventing accidental gear engagement unless engine is idling.
- Can be installed horizontally or vertically, on the starboard or port side of the boat.
- Provided with a brake tension release system adjustable from outside.
- Pull-out handle disengages shift for warm-up.
- Includes X12 neutral safety switch which prevents in-gear starting.
- Provided with positive lockin neutral to prevent accidental gear engagement.
- For use with: All Uflex control cables except C4, C36 and MACH36. Mercury/current BRP (OMC)/Yamaha/Suzuki/Honda/Volvo style cables 33C style cables.
- Uflex C5, C16, MACH5 and Mercury cables require K35. Uflex C22 and C23 cables require KB1.

Mfg. No. / Description		Price
2006645 (B183)	Without Trim Switch	$255.98 H
2006650 (B184)	With Trim Switch	$321.98 H
2006655 (B184MERC) For Mercury	With Trim Switch	$317.98 R

Uflex Single-Lever Side Mount Controls



- The new B310 controls combine elegance, functionality and versatility.
- The universal control design allows for the connection of 33C Universal style cable and OMC (Johnson/Evinrude) cables with adapters included.
- Mercury Gen I cables can be easily connected with the addition of the K35 connection kit.
- Enables easy and safe shifting by preventing accidental gear engagement unless engine is idling.
- Can be installed horizontally or vertically, on the starboard or port side of the boat.
- Provided with a brake tension release system adjustable from outside.
- Includes X50 neutral safety switch which prevents in-gear starting.
- Provided with positive lock-in neutral to prevent accidental gear engagement.

Mfg. No. / Description	Price
2006665 (B310B) With Throttle and Shift	$394.98 F
2006670 (B310CH) With Throttle and Shift	$495.98 Q

Uflex Single-Lever Side Mount Controls



- Single lever/dual action control to operate both throttle and shift.
- Suitable for any type of boats with outboard, inboard or I/O power plants.
- Enables easy and safe shifting by preventing accidental gear engagement unless engine is idling.
- Can be installed horizontally or vertically, on the starboard or port side of the boat.
- Made of painted marine aluminum.
- Pull-out handle disengages shift for warm-up.
- Includes X12 neutral safety switch which prevents in-gear starting.
- Provided with a positive lock-in neutral to prevent accidental gear engagement.
- For use with:
  All Uflex control cables except C22, C4, C36 and MACH36
  Mercury/current BRP (OMC)/Yamaha/Suzuki/Honda/Volvo style cables
  33C style cables
- Uflex C5, C16, MACH5 and Mercury cables require K35.
- To connect C14 and MACH14 cables and current BRP (OMC) cable to engine, use K51.

Mfg. No. / Description	Price
2006707 (B89) White	$284.98 Q
2006710 (B90) Black	$277.98 H

©2014 Donovan Marine, Inc.

SeaStar SLT Single-Function Top Mount Control



- For single or dual stations with single or twin engines
- One control per engine per station.
- Using a patented self-locking throttle clutch (SLT), the CH5600P control fights throttle creep without friction devices, for a smoother feel.
- Polished stainless steel levers and cover.
- Positive detents for shift.
- Push or pull to operate throttle and/or shift.
- Includes: Hardware for two 33C type cables.
- Optional neutral safety switch kit.

Order No.	Mfg. No. / Description	Price
839007	(CH5600P)	$440.98 F
839045	(CA-69009) Neutral Safety Switch Kit	$59.98 H

SeaStar SR Twin Single-Function, Two Lever Control



- Ideal for inboards and multiple station boats.
- Polished stainless steel cover, marine grade chrome levers and rugged cast hanger plate.
- Removable cover enables easy access to the mechanism.
- Adjustable brakes and stops.
- Accepts universal control cables.
- Uses 33C and 33C Supreme Cables.
- An adapter kit is required for 43C type cable.

Order No.	Mfg. No. / Description	Price
402141	(CH5400P) Twin Control	$349.98 Q
490526	(35232-001) Red Ball Knob	$14.98 Q
490538	(35232-004) Black Ball Knob	$14.98 Q
490413	(40090) Adapter Kit for Each 43C Cable	$60.98 H
402165	(60991) Hardware Bag, Twin	$54.98 E

Uflex Two-Lever Top Mount Control



- Two lever/single action control; each lever operates separately either the throttle or shift.
- Suitable for use with outboard, inboard or I/O power plants.
- Flush mount suitable for exposed positions such as flying bridge.
- Made of marine aluminim with chrome plated lever.
- Throttle lever is provided with adjustable brake tension release system and shift lever with forward, reverse and neutral detents.
- Both the brake tension release and detents can be installed and adjusted from the outside.
- Neutral safety switch X12 included prevents in-gear starting.
- Connects to standard 33C universal cables.

Mfg. No. / Description	Price
2006678 (B46) With Throttle and Shift	$360.98 Q

SeaStar S and Twin S Single-Function, One or Two Lever Controls





- Single function, one or two lever versions.
- Highly polished corrosion resistant stainless steel covers and handle.
- Adjustable throttle brake,adjustable travel stops and applicable for dual stations.
- Uses 33C or 33C Supreme Cables.
- An adapter kit is required for 43C type cable (1/4"-20 thread).
- Note: An Accessory detent kit 490588 (022328) can be used for clutch control applications (except for dual station).
- This kit provides detent feel at forward, neutral and reverse.

Order No.	Mfg. No. / Description	Price
489650	(CH5210P) Single Control	$244.98 Q
489662	(CH5200P) Twin Control	$305.98 Q
490588	(022328) Clutch Detent Kit	$27.98 F
490526	(35232-001) Red Ball Knob	$14.98 Q
490538	(35232-004) Black Ball Knob	$14.98 Q
490401	(042152) Heavy Duty Cable Attachment Kit	$37.98 Q
490350	(061001) Mounting Hardware Kit, Twin	$52.98 H
490933	(047307) Neutral Safety Kit	$78.98 Q

SeaStar ST Side Mount Control



- Durable heavy chrome finish.
- Single-function, single lever control simple trouble free design.
- Without throttle brake.
- Uses 33C and 33C Supreme Cables.

Order No.	Mfg. No. / Description	Price
489749	(CH2400P)	$219.98 Q
490526	(35232-001) Red Ball Knob	$14.98 Q
490538	(35232-004) Black Ball Knob	$14.98 Q

Uflex Two-Lever Side Mount Control



- Suitable for all outboard engines.
- Made of nylon fiberglass with anodized aluminim levers.
- Left or right side mount installation.
- For use with Ultraflex engine control cables:
  C14 and MACH14 with K23.
  C4 with K24.
  C2, C8, MACHZero and all 33C style cables with K25.
  C5 and MACH5 without connection kit
  Mercury no connection kit needed, OMC pre 1979 with K24, BRP (OMC) post 1979 with K23, Yamaha/Honda/Suzuki with K25.

Mfg. No. / Description	Price
2006680 (B49) Black Finish	$167.98 H

SeaStar Stainless Steel Shift Lever



- Stainless steel throttle knobs fit most controls with 3/8-24 threaded levers.
- Stainless steel replacement lever fits Teleflex CH5600 SLT and Morse Twin SR controls only.

Order No.	Mfg. No. / Description	Price
402178	(CA69060P)	$86.98 Q

SeaStar Dual Station Transfer Unit



- For single function controls only - such as Twin S and Twin SR
- Ideal for parallel dual station installations when two-lever single function controls are used.
- The transfer unit allows two clutch or two throttle cables to be connected to a single cable leading aft to the engine.
- These units are recommended for installations with long or difficult cable paths to eliminate undesirable cable bends that cause cable backlash and reduced efficiency.

Order No.	Mfg. No. / Description	Price
491895	(061371)	$280.98 Q

Uflex Neutral Safety Switch




Mfg. No. / Description	Price
2007350 (X12) Neutral Safety Switch to Prevent In-gear Starting	$43.98 G

Uflex Accessories for Single Lever Controls



Mfg. No. / Description	Price
2006845 (K35) Kit to Connect C5, C16, MACH5 and Mercury Style Cables	$23.98 H

Uflex Accessories for B301 and B302 Controls



8030015



8030010

Mfg. No. / Description	Price
8030010 (K60) Kit to Connect C5, C16, MACH5 and Mercury (Except Gen II) Cables	$13.98 Q
8030015 (K62) Kit to Connect C36, MACH36 and Mercury Gen II Cables	$20.98 Q


SeaStar T-Handle DC Control



- Can be mounted flush on the dashboard or the side of the wheel box.
- Recommended for throttle, choke, air or fuel shutdown requiring up to 3" of travel.
- Chrome plated T-handle and adjustable stop locking knurled nut.
- Uses standard 33C cable with 3/16" thread.
- Optional mounting bracket is available for side of console mounting.

Order No.	Mfg. No. / Description	Price
489509	(301916) DC Control	$105.98 Q
489511	(048210) Mounting Bracket	$51.98 Q

SeaStar Bowden Wire Pivot




- Can be used with wire control to trip levers, choke handles, choke knobs, etc.
- Brass with stainless steel locking screw.

Order No.	Mfg. No. / Description	Price
494067	(47641)	$28.98 Q


Uflex Accessories for B47 and B49 Controls



2006840




2006830



2006835

Mfg. No. / Description	Price
2006830 (K23) Kit to Connect C14, MACH14 and BRP (OMC) Type "OS" Cables	$18.98 H
2006835 (K24) Kit to Connect C4 and BRP (OMC) Type "O" Cables	$39.98 H
2006840 (K25) Kit to Connect C2, C8, MACHZero and all 33C Style Cables	$13.98 G

Uflex Accessory for B89 and B90 Controls



Mfg. No. / Description	Price
2006850 (K51) Kit to Connect C14, MACH14 and OMC Type "OS" Cables to Engine for Use with B89 and B90	$9.98 H

T-H Marine Throttle Control Mount



- This bracket provides a simple installation of mounting control box on aluminum and some fiberglass boats.
- Made of high quality aluminum for a long lasting good appearance.
- Easily installed on side of boat.

Order No.	Mfg. No. / Description	Price
640943	(TCM-1)	$38.98 H

©2014 Donovan Marine, Inc.

Kobelt Medium Duty, Single Lever Control Heads



- Single station use only.
- They provide a pullout handle for overriding throttle, roller detents and enumerable options.
- The clutch travel is maximum 3" and throttle travel is maximum 1-5/8".
- The 2048 consists of two 2046's jointed on a common frame and dome.

Order No.	Mfg. No. / Description	Price
441004	(2046-KU) Single	$774.98 G
441016	(2048-KU) Twin	$1,504.98 G
441511	(2046-0901) 33C Cable Kit	$26.98 F
441509	(2046-0902) 43C Cable Kit	$34.98 F

Kobelt Two Station Single Lever Control Heads



- The 2091 and 2092 master control heads feature a pullout handle for overriding throttle.
- All models are entirely made of die cast silicon bronze and stainless steel hardware.
- Maximum clutch stroke is 2-3/4" and the maximum throttle stroke is 2-1/4".

Order No.	Mfg. No. / Description	Price
441129	(2091-KY) Single Engine/Master	$993.98 G
441131	(2093-KY) Single Engine/Remote	$668.98 G
441181	(2092-KY) Twin Engine/Master	$1,893.98 G
441193	(2094-KY) Twin Engine/Remote	$1,218.98 G
441511	(2046-0901) 33C Cable Kit	$26.98 F
441509	(2046-0902) 43C Cable Kit	$34.98 F
441117	(2090-1012) Replacement Chain Assembly	$137.98 G

Kobelt Two Handle Push Pull Control Heads



- This control incorporates all the features of the Kobelt standard Push Pull Control: 3" stroke, all bronze and stainless steel, and is extremely heavy duty construction.
- The cable support bracket has been shortened to improve cable attachment access to the Control head.
- Chrome finish cover and handles with one detent and one friction.

Order No.	Mfg. No. / Description	Price
440987	(2015-DK) Long Handles	$654.98 G
440999	(2015-DKU) Long Curved Handles	$654.98 G

Kobelt Control Head Connection Kits



- These kits are designed for attaching a push-pull cable to the control head.
- Since the cables are either 33 series or 43 series, you need to have the kit that matches the control head and the cable series being used.

Order No.	Mfg. No. / Description	Price
441507	(2015-0902) For 43 Series Cables	$34.98 F
441508	(2015-0901) For 33 Series Cables	$26.98 F

Kobelt Control Cables in Interconnect 2090 Series Control Heads




Order No.	Mfg. No. / Description	Price
350102	(45808) 16' Cable	$141.98 Q
350126	(45808) 20' Cable	$187.98 Q
350140	(45808) 24' Cable	$198.98 Q
350164	(45808) 28' Cable	$214.98 Q
350188	(45808) 32' Cable	$235.98 Q
350190	(45808) 34' Cable	$241.98 Q
350203	(45808) 36' Cable	$256.98 Q
350215	(45808) 56' Cable	$416.98 Q

SeaStar KE-4 Electronic Control Systems


489167


489155


489143


Actuator

KE-4 Is The Ideal Electronic Solution For:

- Dual station, three station, and flybridge applications.
- Long distances from controls to engines, such as houseboats.
- Complex routings from controls to engines.
- Replacement of mechanical, hydraulic, or pneumatic controls.

The SeaStar KE-4 Control System Provides:

- Control Of Shift And Throttle In One Lever.
- Easy Operation With No Shift Or Throttle Feedback.
- 'Creep-Free' Performance.
- Quick, Easy Installation.
- Reliable Overload Protection.
- Station Select Switch On Control Head.
- Neutral Warm Up Function.
- Complete Self-Diagnostic System.
- Longer Life Than Mechanical Systems.
- Freedom From Control Adjustment Headaches

Order No.	Mfg. No. / Description	Price
489132	(NM0511-00) Gold, Left Hand, Single	$502.98 E
489134	(NM0510-00) Gold, Left Hand, Twin	$615.98 E
489143	(NM0534-00) Chrome, Left Hand, Single	$502.98 E
489155	(NM0533-00) Chrome, Left Hand, Twin	$712.98 E

Accessories and Parts

Order No.	Mfg. No. / Description	Price
489167	(NM0477-00) Control Unit, 12 Volt	$1,492.98 E
489181	(NM0165-00) Actuator	$827.98 E
489193	(NM0619-05) Comm. Harness 5M	$66.98 E
489212	(NM0616-14) Remote Control Harness, 14m	$98.98 E
489220	(NM0616-08) Remote Control Harness, 8m	$88.98 E
489244	(NM0414-33) Power Harness, 10m	$64.98 E
330794	(30055-20) Circuit Breaker, 20 amp	$8.98 F
489268	(NJ0251-00) Buzzer, 12 Volt	$22.98 E
489333	(NJ0524-00) Switch	$107.98 E

SeaStar Power Takeoff Cable Assembly



- The power takeoff cable assembly consist of the following items.

Order No.	Mfg. No. / Description	Price
494120	(CPTOX30) 30' Cable	$653.98 I
649509	(SA-27314) Clevis Kit	$46.98 F
649371	(SA-27055) Clamp Block Assembly	$109.98 Q
649447	(SA-27274) Support Tube, Aluminum	$25.98 F


©2014 Donovan Marine, Inc.

Components for SeaStar KE-4 Electronic Control System

Needed to Install KE-4 System

Name	Part No.	Required Single Engines No. of Station 1st	2nd	3rd	4th	Two Engines No. of Station 1st	2nd	3rd	4th	Note
Control Head - Gold	NM0511-00	1	2	3	4	-	-	-	-	
	NM0510-00	-	-	-	-	1	2	3	4	
Control Head - Chrome	NM0534-00	1	2	3	4	-	-	-	-	
	NM0533-00	-	-	-	-	1	2	3	4	
Control Unit										
24V Model	NM0478-00	1	1	1	1	2	2	2	2	
12V Model	NM0477-00	1	1	1	1	2	2	2	2	
Actuator	NM0165-00	1	1	1	1	2	2	2	2	
Communication Harness										
5m	NM0619-05	-	-	-	-	1	1	1	1	
Harness Remote Control										
4m	NM0616-04	1	2	3	4	2	4	6	8	For length other than those listed in the left, consult your dealer.
6m	NM0616-06	1	2	3	4	2	4	6	8	
8m	NM0616-08	1	2	3	4	2	4	6	8	
10m	NM0616-10	1	2	3	4	2	4	6	8	
12m	NM0616-12	1	2	3	4	2	4	6	8	
14m	NM0616-14	1	2	3	4	2	4	6	8	
16m	NM0616-16	1	2	3	4	2	4	6	8	
18m	NM0616-18	1	2	3	4	2	4	6	8	
20m	NM0616-20	1	2	3	4	2	4	6	8	
22m	NM0616-22	1	2	3	4	2	4	6	8	
24m	NM0616-24	1	2	3	4	2	4	6	8	
26m	NM0616-26	1	2	3	4	2	4	6	8	
28m	NM0616-28	1	2	3	4	2	4	6	8	
30m	NM0616-30	1	2	3	4	2	4	6	8	
32m	NM0616-32	1	2	3	4	2	4	6	8	
34m	NM0616-34	1	2	3	4	2	4	6	8	
36m	NM0616-36	1	2	3	4	2	4	6	8	
38m	NM0616-38	1	2	3	4	2	4	6	8	
40m	NM0616-40	1	2	3	4	2	4	6	8	
50m	NM0616-50	1	2	3	4	2	4	6	8	
Harness Power Supply										
5m	NM0414-28	2	2	2	2	4	4	4	4	
10m	NM0414-33	2	2	2	2	4	4	4	4	
Circuit Breaker										Option
20A	NJ0514-00	2	2	2	2	4	4	4	4	
Buzzer										Option
24V Model	NJ0515-00	1	2	3	4	2	4	6	8	
12V Model	NJ0251-00	1	2	3	4	2	4	6	8	
Cable	33C	2	2	2	2	4	4	4	4	Specify the Length
	33C	2	2	2	2	4	4	4	4	
	Supreme	2	2	2	2	4	4	4	4	
Mechanical Control Head	Use Teleflex Standard Control Head	1	1	1	1	2	2	2	2	
Cable (Cable for Manual Operation)	33C	2	2	2	2	4	4	4	4	Option
	33C	2	2	2	2	4	4	4	4	Specify the Length
	Supreme	2	2	2	2	4	4	4	4	

SeaStar i6300 Electronic Control Systems



Dual Station Dual Engine | Single Station Single Engine | Single Station Triple Engine

Control Head Styling:

- The i6300 control heads are ergonomically designed for maximum comfort and control.
- Available with or without trim switches, they each also include easily adjustable drag and detent to suit the operators preference.
- The new i6300 delivers precise control of a boat's shift and throttle functions, thanks to Teleflex's responsive and robust Shift and Throttle Actuators.
- Available in 12 or 24 volt versions, these actuators are linked to the control head with a single 1/4" CANbus cable - for easy routing and installation.
- With a single small cable connecting all control stations to the smart actuators, there is no longer a need for heavy, complex wiring harnesses associated with other electronic control systems.

Applications:

- Suitable for all engines with mechanical shift and mechanical throttle.
- Single, Twin, Triple and Quad engine combinations.
- Inboards, OI's and Outboards. One or two station set-ups.

Features:

- Multiple control head options/styles.
- Optional trim switch(es) on TE control heads.
- Drag adjustment standard on TE control heads.
- 12 and 24 volt versions available.
- Up to four engine capability.
- Light coded diagnostic information.
- Utilizes standard 33c type control cables - TFXtreme type recommended.
- Full power train synchronization standard on multi-engine applications.
- Built-in start in-gear protection.
- Neutral warm-up.
- Mechanical override “get home” feature.
- Meets or exceeds all applicable standards.

Information Required to Spec a System:

- Number of Engines (1, 2, 3 or 4)
- Number of Stations
- Voltage (12 or 24 volt)
- Choice of Control Head Type (TE or KE)
- Choice of Control Head Color
- Trim Switch Required (yes or no) - not available on KE type
- Maximum distance from Actuators to Control Heads (in feet).

Select Appropriate Harness and Cable Lengths in feet for each Station and Engine (See diagrams):

CE107XX	Control Head to ECU
CE101XX	Shift Harness (ECU to Actuator)
CE648XX	Shift Cable (Actuator to Transmission)
CE101XX	Throttle Harness (ECU to Actuator)
CE648XX	Throttle Cable (Actuator to Transmission)
i1001-XX	Power Harness (Battery to ECU)
CE201XX	Battery Cable (Battery to ECU)
CM100XX	Communication Cable (ECU to ECU)

SeaStar i6300 Electronic Control Systems - Single Station

Order No.	Mfg. No. / Description	Price
489751	(i6311)1 Station, 1 Engine	$3,468.98 E
489763	(i6351) 1 Station, 1 Engine with Trim	$3,548.98 E
489775	(i6312) 1 Station, 2 Engines	$5,679.98 E
489787	(i6352) 1 Station, 2 Engines with Trim	$5,743.98 E
489799	(i6313) 1 Station, 3 Engines	$7,658.98 E
489802	(i6353) 1 Station, 3 Engines with Trim	$9,166.98 E

SeaStar i6300 Electronic Control Systems - Add-A-Station

Order No.	Mfg. No. / Description	Price
489838	(i6311A) Add-A-Station, 1 Engine	$1,182.98 E
489840	(i6351A) Add-A-Station, 1 Engine with Trim	$1,257.98 E
489852	(i6312A) Add-A-Station, 2 Engines	$1,134.98 E
489864	(i6352A) Add-A-Station, 2 Engines with Trim	$1,198.98 E
489876	(i6313A) Add-A-Station, 3 Engines	$130.98 E
489888	(i6353A) Add-A-Station, 3 Engines with Trim	$1,638.98 E

SeaStar i6300 Electronic Control Systems - Control Head Kits



Single Top Mount



Dual Top Mount

Order No.	Mfg. No. / Description	Price
490057	(CHKCB67650B) Single Top Mount, Black	$1,051.98 E
490069	(CHKCB67651B) Single Top Mount, Black with Trim	$1,125.98 E
490095	(CH67551B) Dual Top Mount, Black with Trim	$1,068.98 E
490111	(CHKCB67581B) Dual Top Mount, Black for Triples with Trim	$1,507.98 E

SeaStar i6300 Electronic Control Systems - Accessories

Order No.	Mfg. No. / Description	Price
489915	(i1003) Power Module	$117.98 E
489927	(CE20425) Power Harness, 25'	$214.98 E
489939	(CM10030) Communication Cable, Ext., M/F 30'	$96.98 E
489941	(CM10003) Micro Cable, Ext, M/F, 3'	$36.98 E
489953	(CM10060) Micro-Tee Adapter	$33.98 E
489965	(CM20001) NMEA Micro-Tee Kit f/Dual Engine	$89.98 E
489977	(AC67051P) Actuator, Port (Single) Throttle, Canbus	$905.98 E
489989	(AC67052P) Actuator, Port (Single) Shift, Canbus	$905.98 E
489991	(AC67051S) Actuator, Starboard Throttle, Canbus	$905.98 E
489995	(AC67052S) Actuator, Starboard Shift, Canbus	$905.98 E
489999	(AC67051C) Actuator, Center Throttle, Canbus	$1,277.98 E
490021	(AC67052C) Actuator, Center Shift, Canbus	$1,277.98 E
490147	(I5600TOOL) Diagnostic Scan Tool	$580.98 E
490148	(MANIN6300M02) Installation Manual	$43.98 E
490149	(MANOP6300SEM) Operations Manual, Single	$12.98 E
490150	(MANOP6300DEM) Operations Manual, Dual	$19.98 E
490151	(MANOP6300TEM) Operations Manual, Triple & Quad	$12.98 E
490152	(QR6300SE) Quick Reference, Single Engine	$5.98 E
490153	(QR6300DE) Quick Reference, Dual Engines	$6.98 E
490154	(QR6300TE) Quick Reference, Triple Engine	$5.98 E
490155	(QR6300QE) Quick Reference, Quad Engine	$5.98 E

©2014 Donovan Marine, Inc.

SeaStar i6300 Standard Systems - Single Station Kits and Add-A-Station Kits

DMI #	Teleflex #	Standard Systems - Single Station Kits	489751 (i6311) Single Engine	489763 (i6351) Single Engine w/Trim	489775 (i6312) Dual Engine	489787 (i6352) Dual Engine w/Trim	489799 (i6313) Triple Engine	489802 (i6353) Triple Engine w/Trim	(i6314) Quad Engine	(i6354) Quad Engine w/Trim
Actuators										
489989	AC67052P	Actuator, Port (Single) Shift, Canbus	1	1		1	1	1	1	1
489977	AC67051P	Actuator, Port (Single) Throttle, Canbus	1	1	1	1	1	1	1	1
489995	AC67052S	Actuator, Starboard Shift, Canbus			1	1	1	1	1	1
489991	AC67051S	Actuator, Starboard Throttle, Canbus			1	1	1	1	1	1
490021	AC67052C	Actuator, Center Shift, Canbus					1	1	1	1
489999	AC67051C	Actuator, Center Throttle, Canbus					1	1	1	1
Control Heads										
490057	CHKCB67650B	Single Top Mount, Control Head Kit (Black)	1							
490069	CHKCB67651B	Single Top Mount, Control Head Kit with Trim (Black)		1						
490083	CH67550B	Dual Top Mount Control Head (Black)			1					
490095	CH67551B	Dual Top Mount Control Head with Trim (Black)				1				
490111	CHKCB67581B	Dual Top Mount Control kit for Triples with Trim (Black)						1		
Spec. Ord.	CHKCB67590B	Dual Top Mount Control kit for Quads (Black)							1	
Spec. Ord.	CHKCB67591B	Dual Top Mount Control kit for Quads with Trim (Black)								1
Power Module (i1003)										
489915	i1003	Power Module	1	1	2	2	3	3	4	4
Harnesses/Tees										
489927	CE20425	Power Harness, 25'	1	1	2	2	3	3	4	4
489965	CM20001	NMEA Micro-Tee Kit for Dual Engine	1	1	1	1	1	1	1	1
489953	CM10060	Micro-Tee Adapter	1	1	3	3	5	5	7	7
489939	CM10030	Communication Cable, Extension, M/F 30'	1	1	1	1	1	1	1	1
489941	CM10003	Micro Cable, Ext, M/F, 3'			1	1	2	2	3	3
Manuals										
490149	MANOP6300SEM01	Operations Manual - Single	1	1						
490150	MANOP6300DEM01	Operations Manual - Dual			1	1				
490151	MANOP6300TEM01	Operations Manual - Triple & Quad					1	1	1	1
490152	QR6300SE	Quick Reference - Single Engine	1	1						
490153	QR6300DE	Quick Reference - Dual Engines			1	1				
490154	QR6300TE	Quick Reference - Triple Engine					1	1		
490155	QR6300QE	Quick Reference - Quad Engine							1	1
490148	MANIN6300M02	Installation Manual	1	1	1	1	1	1	1	1

DMI #	Teleflex #	Add-A-Station Kits	489838 (i6311A) Single Engine	489840 (i6351A) Single Engine w/Trim	489852 (i6312A) Dual Engine	489864 (i6352A) Dual Engine w/Trim	489876 (i6313A) Triple Engine	489888 (i6353A) Triple Engine w/Trim	(i6314A) Quad Engine	(i6354A) Quad Engine w/Trim
Control Heads										
490057	CHKCB67650B	Single Top Mount, Control Head Kit (Black)	1							
490069	CHKCB67651B	Single Top Mount, Control Head Kit with Trim (Black)		1						
490083	CH67550B	Dual Top Mount Control Head (Black)			1					
490095	CH67551B	Dual Top Mount Control Head with Trim (Black)				1				
490111	CHKCB67581B	Dual Top Mount Control kit for Triples w/Trim (Black)						1		
Spec. Ord.	CHKCB67590B	Dual Top Mount Control kit for Quads (Black)							1	
Spec. Ord.	CHKCB67591B	Dual Top Mount Control kit for Quads w/Trim (Black)								1
Harnesses/Tees										
489953	CM10060	Micro-Tee Adapter	1	1	1	1	1	1	1	1
489939	CM10030	Communication Cable, Extension, M/F 30'	1	1	1	1	1	1	1	1

ZF Mathers MicroCommander Electronic Engine Controls



455232


455243


455226


455239


455231



- Cost competitive with hydraulic systems and the price is lower than pneumatic systems.

Controls any engine:
- Gas or diesel inboards, I/O's or outboards.
- Dual control available for twin engine boats.
- Easy to install or retrofit.
- Step-by-step instructions are available.
- Each system consist of: One actuator per engine, one single or dual control lever per station, one multiconductor cable per station, per engine, one power unit: 12 VDC 10 amp circuit per shaft and standard 33C push-pull cable and brackets for throttle and clutch connections.

Multi-station control:
- One to five stations can be installed per actuator and stations can be added at any time.

Easy station transfer:
- Only one station is active at a time.
- However, you can move from station to station & take control simply by pushing a transfer button.
- Each station has one.

Control indicator lights:
- When the light is on, it indicates that particular station has control.
- The light at all other stations will be off.

High and low idle settings:
- Low is ideal for slow trolling.
- High, which is adjustable to as much as 10% of the full speed range, enhances starting and warming up the engine or docking and maneuverability in tight quarters.

Built-in detents:
- These indicate "Neutral", "Ahead" and "Astern" lever positions.
- They are spring loaded, rolling detents that last a lifetime and provide a firm, smooth feel.

Double interlocked controls:
- To start the engine, operator must have controls in "on" mode, lever must be in neutral and it can be moved thru the ahead speed range to start and warm-up engine without engaging the clutch.
- Fast reversals are sequenced to protect the drive train and engine.

Engine room actuator:
- The actuator is located in the engine area, is water resistant against water spray and can be mounted in any attitude.
- It houses the electronics and two servo motors, one for throttle and one for shift.
- It is connected to the engine throttle and shift levers by short 33C type cables.
- It is connected to the controls by an 8-conductor shielded electric cable.

Top Mount Controls

Order No.	Mfg. No. / Description	Price
455239	(450-3R) Black T Handle, Single	$318.00 D
455226	(460-4) Black T Lever, Dual	$489.00 D
455228	(463-4) Black with Chrome Lever, Dual	$680.00 D
455243	(760) Black Watertight Dual Control	$3,043.00 D
455232	(MC2000-1) Black Powder Coated, Dual	$1,175.00 D
455234	(MC2000-4) Black with Chrome Lever	$1,200.00 D
455231	(MC2000-2) Chrome, Dual	$1,350.00 D

Connection Cable

- Sold per foot, full spool 500'

Order No.	Mfg. No. / Description	Price
455252	(350) 8-Conductor Connection Cable	$1.77/ft. D

Control Actuator

- Order connection cable and 33C type cables separately.

Order No.	Mfg. No. / Description	Price
455214	(91100) Actuator, MicroCommander	$2,500.00 D

Accessories

Order No.	Mfg. No. / Description	Price
455283	(1114) Relay 24 Volt	$306.00 A
455484	(810) Circuit Breaker, 10 amp	$110.00 A
698021	10 amp Circuit Breaker	$14.98 E

ZF Mathers Accessories

Order No.	Mfg. No. / Description	Price
455164	(12280) Cable Grip, 3/4"	$4.30 A
455176	(NP-11) Cable Grip Nut, 3/4"	$0.98 A
455224	(453-3L) Single Chrome Handle with Knob	$409.00 D
455249	(11811) 8 Conductor Cable, 1,000'	$1.60 D
455265	(00349) Power Supply Wire, 14/2 Red and Black	$2.60 A
455302	(12285) Station Transfer Switch Button	$24.00 A
483317	(AT11-1001) Air Treatment Component Service Kit	$88.00 B
483367	(AD12-5001) Air Drive Service Kit	$205.00 B
455407	(10232) Regulator	$447.00 B
455495	(CH12168) Potentiometer Sub Assembly	$795.00 B
455491	(CH08164) Rubber Button Pad	$35.00 B
483521	(PA3-4201) Actuator Service Kit	$138.00 B

Order No.	Mfg. No. / Description	Price
453565	(SB06595) Alignment Disc	$61.00 A
453574	(SB12261) Retractor Pin Kit	$445.00 A
453578	(SB07385) Brake Tool	$50.00 A
455596	(MS12390) Interface Circuit DAC	$897.00 B
455643	(COMP-4-SAFT) Lithium Battery	$20.00 A
483468	(MG20-0200) Gauge Assembly, 0-100 Speed	$167.00 B
483470	(MG21-0200) Gauge Assembly, 0-200 Ahead	$167.00 B
483482	(MG21-0300) Gauge Assembly, 0-200 Astern	$167.00 B
483494	(MG21-0400) Gauge Assembly, 0-200 Brake	$167.00 B
483299	(6259-218) Microswitch for Press SW	$36.00 A
483418	(CH5-5406) Overhaul Kit	$300.00 B
483444	(CI-1074) Overhaul Kit Booster	$279.00 B

©2014 Donovan Marine, Inc.

ZF Mathers CruiseCommander



- CruiseCommand is a revolutionary control system for vessels with electronic engines and solenoid gears.
- CruiseCommand offers single lever control, four station capability and easy station transfer, station-in-command indicators, speed/shift sequence protection, neutral start interlock, high and low idle speed and audible and visual indicators.
- CruiseCommand features plug-in connections and an external keypad setup.
- The watertight enclosure never needs opening, making this a maintenance-free system.
- Built-in features include an LED troubleshooting display, synchronization and troll.
- Pluggable connections make installation nearly effortless.
- Determine cable length, engine and gear requirements, then plug in the system.
- Customized kits are provided to meet specific needs for production builders.
- An external keypad setup on the CruiseCommand enclosure makes configuring the controls easier then ever.
- Punch in a code and the processor makes the correct adjustments.
- Configurations can be changed at any time to meet new specifications.
- CruiseCommand's self-diagnostic software operates a multifunction LED display located on the front panel of each processor.
- This display allows for uncomplicated checking of battery voltage and clutch status for each engine, lever positions on each control head and multi-station transfer button status.
- CruiseCommand packs a lot of features into a small processor, including built-in troll and engine synchronization


Order No.	Mfg. No. / Description	Price
455205	(785CE) CruiseCommand Control Processor	$2,200.00 D
700434	(APS) Automatic Power Selector	$134.98 E

ZF Mathers 9000 Series MicroCommander and ClearCommand

Example of Twin Screw - 2 Station Electronic Throttle Mechanical Shift

Note: Multi Engine applications, consult factory for specific needs and requirements.



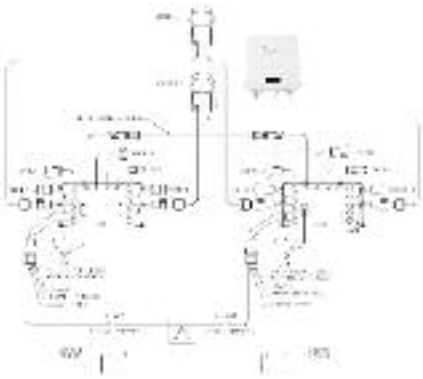

Contact Your Salesman or Donovan Marine for Your Specific Needs.

- A single-lever electronic control system designed for precise, instant control of mechanical engines and gears on yachts and commercial vessels.
- Designed for vessels utilizing mechanical and electronic throttle and shift combinations.
- Standard features on both products include an LED display which utilizes self diagnostic software.
- The LED display codes for setup or system status.
- All system functions are incorporated on one circuit board, allowing easy customization of features.
- Increased vessel efficiency is achieved with engine synchronization, standard on every 9000 Series processor.
- One lever synchronization is programmed into all processors and allows multi-engine control with one lever.
- The circuit board is conformal coated to protect against humidity, contamination, dust and dirt.
- Meets EMC, CE and current environmental standards as well as UL 1500 with built in ignition protection.
- IP rating 44.

Requirements:

(2) Power/Start Interlock Wire Harness
(4) Control Head Wire Harness
(1) Serial Wire Harness - On Twin Engine Applications
(2) Tachometer Feedback Wire Harness - Synch Applications Only
(2) 92102 Processors
(1) APS - Automatic Power Selector
(2) 10 AMP Circuit Breaker
(2) 33C Push-Pull Cable (Supplied by Others)
(2) Throttle Harness


Order No.	Mfg. No. / Description	Price
455219	(96200) Engine, Electronic, Clutch, Solenoid	$2,860.00 C
455229	(95200) Engine, Servo 2, Clutch, Servo 1	$2,922.00 D
455238	(450-3L) Single Black T-Lever Control	$318.00 D
455475	(96204-ACB) Electronic Throttle/Shift	$3,250.00 D
645756	(E1H-GH500) Pressure Switch	$195.98 B
455217	(92100) ClearCommand, Electronic Throttle, Mechanical	$2,512.00 D
455222	(96204) ClearCommand, 4st Plugable	$3,239.00 C
455478	(96204-ABS) ClearCommand, Electronic Throttle/Shift	$4,275.00 D

ZF Mathers Accessories

Order No.	Mfg. No. / Description	Price
483503	(14512) Transfer Panel Dimmer ABS	$490.00 A
483519	(PA1-1501) Positioner Service Kit	$73.00 B
483533	(PA3-4101) Service Kit	$148.00 B
483537	(RV5-1500-2) Relay Valve	$1,040.00 B
483545	(RV5-1601) Relay Valve Service Kit	$50.00 B
483557	(RV8-1601) Relay Valve Service Kit	$68.00 B
483560	(SB20-1601) Repair Kit	$690.00 B
483569	(SB06652) Reline Kit, Caliper	$636.00 B
483570	(SB12260) Piston Kit	$400.00 B
483608	(SRK-QE45) Quick Exhaust Service Kit	$44.00 B

Order No.	Mfg. No. / Description	Price
483646	(VS2-1001) Service Kit for Shuttle	$19.00 B
483634	(VS2-1000) Shuttle Valve	$50.00 B
483329	(AD12-2101) Spool Valve Clutch	$365.00 B
483420	(CI-1038) Spool Valve Service Kit	$50.00 B
483610	(SV2-3501) Spool Valve Service Kit	$38.00 B
483331	(AD12-2201) Spool Valve Supply	$430.00 B
483498	(MS568-13838) Throttle ClearCommand ABS	$2,025.00 A
453566	(15719-40) Wire Harness	$258.00 A
483505	(13322-20) Wire Harness	$223.00 A
483501	Wire Harness	$145.00 A
483500	(13408-10) Wire Harness	$125.00 A

ZF Mathers Propeller Shaft Brakes

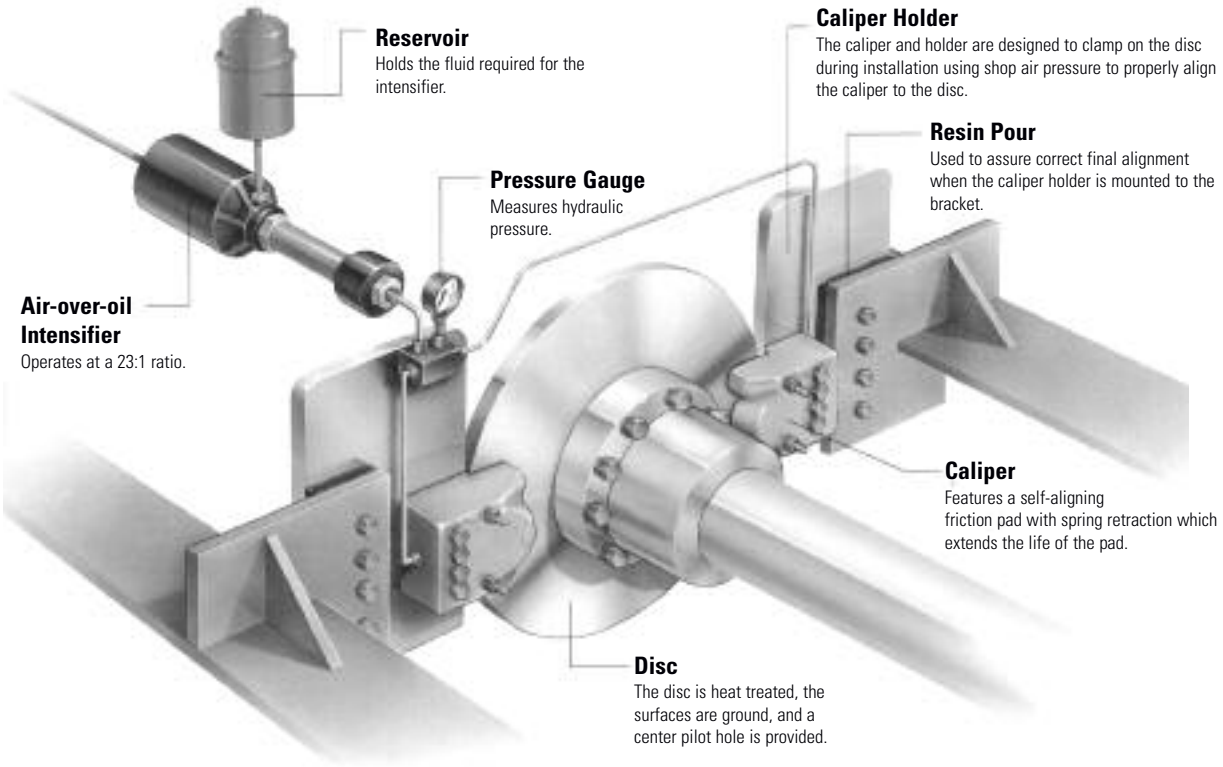

Brake Model	Disc Size	Number of Calipers	Torque
SB30-06612	1-3/8" x 24" Dia.	1	110,000 lbs.
SB31-06613	1-3/8" x 24" Dia.	2	220,000 lbs.
SB32-07390	1-3/8" x 30" Dia.	1	145,000 lbs.
SB32-06614	1-3/8" x 30" Dia.	2	290,000 lbs.
SB33-06615	1-3/8" x 36" Dia.	2	355,000 lbs.
SB36-07638	1-3/8" x 42" Dia.	2	425,000 lbs.
SB34-07126	1-3/8" x 36" Dia.	3	530,000 lbs.
SB35-06616	1-3/8" x 36" Dia.	4	710,000 lbs.
SB36-06617	1-3/8" x 42" Dia.	4	850,000 lbs.
SB37-06618	1-3/8" x 48" Dia.	4	990,000 lbs.
SB38-07454	1-3/8" x 54" Dia.	4	1,200,000 lbs.
SB37-06619	1-3/8" x 48" Dia.	6	1,500,000 lbs.

Price On Request

- Mathers ShaftBrakes are designed to provide maximum drive train protection and faster, more precise maneuvering and control.
- Masters ShaftBrakes are recommended for use with any marine propulsion system using engines over 500 horsepower with reduction ratios of 4:1 or greater.

Consider these benefits:

- Reduces vessel maneuvering time. A vessel's forward velocity will slow faster with a stopped propeller.
- Added life for reduction gears and clutches. ShaftBrakes stop the propeller shaft with every change of direction, automatically. ShaftBrakes absorb the load which would normally be transmitted to the engaging clutch, thus extending clutch life.
- When used with Mathers propulsion controls, will help prevent engine stall. Certain types of marine engines tend to stall during high speed maneuvers or emergency reversals. Mathers ShaftBrakes and Mathers Controls can prevent that from happening.
- Superior to drum type brakes. Both installation and servicing are easier and calipers can be relined for considerably less cost than can drum brake components. Also, calipers do not have boots, which are costly to replace on drum brakes.
- Mathers propeller ShaftBrakes use hydraulic actuated calipers which are self-adjusting and spring retracting to alleviate unnecessary pad wear.
- A complete ShaftBrake package consists of the disc, caliper holder(s), caliper(s), and control kit.

©2014 Donovan Marine, Inc.

MPI Products Outboard Hose and Cable Cover



- High quality, crush resistant plastic offers excellent flexing properties and abrasion resistance.
- Material is resistant to bilge acids, fuel solutions and ultra violet rays.
- For all bracket mounted outboard motors.
- ID 2", bend radius 3".
- Black.

Order No.	Mfg. No. / Description	Price
641819	(127-2003) Length 10'	$83.98 M
641818	(127-2006) Length 50'	$392.98 M

7 x 19 Aircraft Quality Cable - Running Rigging



- Preformed stainless steel aircraft cable.
- Corrosion resistant steel.
- Very flexible.
- Used when flexibility and fatique are concerns.
- Diameter 1/8".

Order No.	Mfg. No. / Description	Price
553328	(SC12579) Length 250'	$445.98 H

SeaStar CC170 Clutch and Throttle Control Cables



- Control cables specifically made for the marine environment to meet or exceed all industry standards are offered in a broad selection to fit all popular engine and boat requirements.
- Shift and throttle cables are measured overall in inches and roundup to next foot.
- **(Pre-1979) OMC 400. Stainless steel and brass fittings with stainless steel core.**

Order No.	Description	Price	Order No.	Description	Price
8020353	6'	$28.98 Q	648141	13'	$33.98 Q
648088	7'	$29.98 Q	648153	14'	$36.98 Q
648090	8'	$30.98 Q	648165	15'	$35.98 Q
648103	9'	$30.98 Q	648177	16'	$35.98 Q
648115	10'	$31.98 Q	648189	17'	$36.98 Q
648127	11'	$31.98 Q	648191	18'	$37.98 Q
648139	12'	$32.98 Q			

SeaStar CC210 Clutch and Throttle Control Cables



- Control cables specifically made for the marine environment to meet or exceed all industry standards are offered in a broad selection to fit all popular engine and boat requirements.
- Shift and throttle cables are measured overall in inches and roundup to next foot.
- Stainless steel cable wire.
- **(1992 and Earlier Mariner 40 HP and Below) Mariner 630. Stainless steel and brass fittings.**

Order No.	Description	Price	Order No.	Description	Price
650724	10'	$41.98 G	650730	16'	$49.98 G
8020404	11'	$43.98 H	8020410	17'	$50.98 H
650726	12'	$43.98 G	650732	18'	$52.98 G
8020406	13'	$45.98 H	650734	20'	$56.98 G
650728	14'	$46.98 G	650736	22'	$61.98 G
8020408	15'	$48.98 H			

MPI Products Split Conduit Tubing



- Corrugated split polyethylene provides excellent conduit for multiple wire or cable routings.
- Creates quality appearance in wiring systems.
- 1-1/2".

Order No.	Mfg. No. / Description	Price
772043	(125B-1126) Length 50'	$144.98 M

SeaStar CC205 Clutch and Throttle Control Cables



- Control cables specifically made for the marine environment to meet or exceed all industry standards are offered in a broad selection to fit all popular engine and boat requirements.
- Shift and throttle cables are measured overall in inches and roundup to next foot.
- Engine connection kit included, attached to output end.
- **(1979 and Later) OMC 479. Stainless steel and brass fittings.**

Order No.	Description	Price	Order No.	Description	Price
648521	10'	$27.98 R	648608	18'	$33.98 R
648533	11'	$28.98 R	648610	19'	$33.98 R
648545	12'	$28.98 R	648622	20'	$34.98 R
648557	13'	$30.98 R	648634	22'	$53.98 R
648569	14'	$30.98 R	648636	24'	$54.98 R
648571	15'	$31.98 R	495506	26'	$69.98 Q
648583	16'	$31.98 R	495508	28'	$71.98 Q
648595	17'	$32.98 R			

SeaStar CCX205 Xtreme Control Cables



- Unique design incorporates a patent-pending splined-core which allows easy movement and minimum lost motion.
- Designed for complex and/or long cable runs (or to simply create a superior feel) Simply the best cable in the business.
- Ideal for foot throttle applications on performance boats/bass boats.
- **For (1979 - current) BRP, OMC and Johnson/Evinrude Controls and Engines.**

Order No.	Description	Price	Order No.	Description	Price
495440	6'	$39.98 Q	495463	14'	$50.98 Q
495442	7'	$41.98 Q	495475	16'	$53.98 Q
495444	8'	$42.98 Q	495487	18'	$55.98 Q
495446	9'	$44.98 Q	495499	20'	$58.98 Q
495449	10'	$45.98 Q	495502	22'	$62.98 Q
495451	12'	$48.98 Q			

SeaStar CCX214 Xtreme Control Cables

- Unique design incorporates a patent-pending splined-core which allows easy movement and minimum lost motion.
- Designed for complex and/or long cable runs (or to simply create a superior feel). Simply the best cable in the business.
- **OMC/Volvo Side Mount Control Cables.**

Order No.	Description	Price	Order No.	Description	Price
8020431	10'	$51.98 G	8020436	15'	$58.98 H
8020432	11'	$52.98 G	8020437	16'	$59.98 H
8020433	12'	$54.98 G	8020438	17'	$61.98 G
8020434	13'	$55.98 G	8020439	18'	$62.98 G
8020435	14'	$56.98 H	8020440	20'	$64.98 G

SeaStar CC179 Clutch and Throttle Control Cables



- Control cables specifically made for the marine environment to meet or exceed all industry standards are offered in a broad selection to fit all popular engine and boat requirements.
- Shift and throttle cables are measured overall in inches and roundup to next foot.
- Stainless steel cable wire.
- **Mercury/MerCruiser 600A. Stainless steel and brass fittings.**

Order No.	Description	Price	Order No.	Description	Price
648684	10'	$26.98 R	648759	17'	$33.98 R
648696	11'	$27.98 R	648761	18'	$34.98 R
648709	12'	$28.98 R	648773	19'	$35.98 R
648711	13'	$29.98 R	648785	20'	$36.98 R
648723	14'	$30.98 R	648797	22'	$48.98 R
648735	15'	$31.98 R	648800	24'	$49.98 R
648747	16'	$32.98 R			

SeaStar 33C Red-Jaket Cables



- Industry standard. 3" travel, 10-32 threads, 8" minimum bend radius.
- Clamp connection on both ends.
- CC332.

Order No.	Description	Price	Order No.	Description	Price
492568	10'	$35.98 Q	492630	17'	$42.98 Q
492571	11'	$36.98 Q	492643	18'	$43.98 Q
492584	12'	$37.98 Q	492656	19'	$44.98 Q
492597	13'	$38.98 Q	492669	20'	$45.98 Q
492601	14'	$39.98 Q	492672	22'	$46.98 Q
492614	15'	$40.98 Q	492685	24'	$48.98 Q
492627	16'	$41.98 Q			


SeaStar Standard 3300 Cables



- Standard 3300 - CC230 - Control cables specifically made for the marine environment to meet or exceed all industry standards are offered in a broad selection to fit all popular engine and boat requirements.
- Stainless steel core wire/brass fittings. 1 0-32" threads.
- For I/O's, inboards and outboards.
- 3" travel.
- Clamp connection both ends.

Order No.	Description	Price	Order No.	Description	Price
647783	10'	$29.98 R	647858	17'	$34.98 Q
647795	11'	$30.98 R	647860	18'	$35.98 Q
647808	12'	$30.98 R	647872	19'	$36.98 Q
647810	13'	$31.98 R	647884	20'	$36.98 R
647822	14'	$31.98 R	647896	22'	$41.98 R
647834	15'	$33.98 R	647909	24'	$42.98 R
647846	16'	$33.98 R			

SeaStar CCX179 Xtreme Control Cables



- Unique design incorporates a patent-pending splined-core which allows easy movement and minimum lost motion.
- Designed for complex and/or long cable runs (or to simply create a superior feel) Simply the best cable in the business.
- Ideal for foot throttle applications on performance boats/bass boats.
- **For 600A Mercury Gen I Series Controls and Engines.**

Order No.	Description	Price	Order No.	Description	Price
495150	6'	$39.98 Q	495184	16'	$53.98 Q
495151	7'	$41.98 Q	495196	18'	$56.98 Q
495152	8'	$42.98 Q	495209	20'	$58.98 Q
495153	9'	$43.98 Q	495212	22'	$61.98 Q
495158	10'	$45.98 Q	495214	24'	$64.98 Q
495160	12'	$48.98 Q	495216	26'	$67.98 Q
495172	14'	$50.98 Q	495218	30'	$75.98 Q

SeaStar CC189 Mercury Generation II Control Cables



- **Mariner/Mercury/MerCruiser (2003 to Date) 4000 Series Controls.**

Order No.	Description	Price	Order No.	Description	Price
8020379	9'	$35.98 G	647618	18'	$39.98 R
647610	10'	$34.98 R	8020389	19'	$39.98 G
8020381	11'	$34.98 H	647620	20'	$40.98 R
647612	12'	$36.98 R	647622	22'	$51.98 R
8020383	13'	$35.98 H	647624	24'	$56.98 R
647614	14'	$37.98 R	647626	26'	$69.98 R
8020385	15'	$37.98 H	647630	30'	$77.98 R
647616	16'	$38.98 R	495508	28'	$71.98 Q
8020387	17'	$38.98 H			

SeaStar 3300CC XTREME Control Cables



- Unique design incorporates a patent-pending splined-core which allows easy movement and minimum lost motion.
- Designed for complex and/or long cable runs (or to simply create a superior feel) Simply the best cable in the business.
- Ideal for foot throttle applications on performance boats/bass boats.
- CCX633 - Universal type for Yamaha, Honda, Nissan, Suzuki, Tohatsu and other controls and engines with 10-32 threaded connection on both ends.

Order No.	Description	Price	Order No.	Description	Price
649093	4'	$36.98 G	649124	24'	$58.98 G
649094	5'	$37.98 G	649125	25'	$63.98 G
649096	6'	$37.98 G	649126	26'	$65.98 G
649098	7'	$38.98 G	649136	28'	$69.98 G
649101	8'	$39.98 G	649138	30'	$74.98 G
649103	9'	$40.98 G	649141	32'	$91.98 G
649105	10'	$41.98 G	649145	34'	$103.98 G
649106	11'	$42.98 G	649149	36'	$113.98 G
649109	12'	$44.98 G	649150	38'	$124.98 G
649110	13'	$45.98 G	649154	40'	$136.98 G
649112	14'	$46.98 G	649157	42'	$146.98 G
649113	15'	$47.98 G	649162	44'	$157.98 G
649116	16'	$48.98 G	649166	46'	$168.98 G
649117	17'	$49.98 G	649169	48'	$179.98 G
649118	18'	$51.98 G	649173	50'	$191.98 G
649120	20'	$54.98 G	649184	52'	$201.98 G
649122	22'	$56.98 G	649191	56'	$224.98 G
649123	23'	$57.98 G	649199	60'	$247.98 G

©2014 Donovan Marine, Inc.


Uflex MACHZero Control Cables



- MACHZero (3300 style).
- High efficiency for smooth operation.
- High flexibility for reduced bend radius.
- Ideal for long complex cable routings.
- Maintenance free.
- Stainless steel cables end fittings.
- High resistance blue outer jacket against abrasion, UV and chemicals.
- Stroke: 3.4". 10-32 thread.

Order No.	Description	Price	Order No.	Description	Price
8031050	8'	$34.98 G	8031120	22'	$62.98 G
8031055	9'	$36.98 G	8031125	23'	$64.98 G
8031060	10'	$38.98 G	8031130	24'	$66.98 G
8031065	11'	$40.98 G	8031135	25'	$68.98 G
8031070	12'	$42.98 G	8031140	26'	$70.98 G
8031075	13'	$44.98 G	8031145	27'	$72.98 G
8031080	14'	$46.98 G	8031150	28'	$74.98 G
8031085	15'	$48.98 G	8031155	29'	$76.98 G
8031090	16'	$50.98 G	8031160	30'	$78.98 G
8031095	17'	$52.98 G	8031165	32'	$89.98 G
8031100	18'	$54.98 G	8031170	34'	$93.98 G
8031105	19'	$56.98 G	8031175	36'	$98.98 G
8031110	20'	$58.98 G	8031180	38'	$103.98 G
8031115	21'	$60.98 G	8031185	40'	$108.98 G

SeaStar 63C XL Red-Jaket Cables



- Incorporates a 7/32" stranded, armored inner core that combines longitudinal stiffness and fatigue resistance.
- 3" travel, 5/16"-24 threads, 8" minimum bend radius.
- Clamp connection on both ends.
- CCX643.

Order No.	Description	Price
493700	10'	$162.98 Q
493724	12'	$172.98 Q
493748	14'	$177.98 Q

SeaStar 33LV Vernier Cables



- Just push the button for fast easy setting of approximate position, then turn the knob for micro adjustment.
- Positive, adjustable brake maintains settings regardless of vibration or governor back pressure.
- Release button for quick adjustment and fast shutdown.
- Ideal for throttles or other applications where precise control is desired.
- Cable only (Fig. 307141-000), order head below (Fig. 307941-003).

Order No.	Description	Price
494006	(CC34505) 5', 33LV Cable Only	$40.98 G
494030	(CC34510) 10', 33LV Cable Only	$48.98 G
494056	(CC34520) 20', 33LV Cable Only	$74.98 G

- Order one head for each cable ordered for new application.

Order No.	Description	Price
493992	(317310) Head Only	$77.98 Q

Uflex C22 Standard Control Cables



- C22 Universal Engine Control Cable (4300 style).
- Stainless steel clamp fittings.
- Recommended for heavy duty applications.
- Stroke: 3.1".
- 1/4-28 thread.

Order No.	Description	Price	Order No.	Description	Price
8020106	6'	$77.98 G	8020132	32'	$136.98 G
8020108	8'	$81.98 G	8020134	34'	$150.98 G
8020110	10'	$84.98 G	8020136	36'	$165.98 G
8020112	12'	$88.98 G	8020138	38'	$180.98 G
8020114	14'	$92.98 G	8020140	40'	$194.98 G
8020116	16'	$95.98 G	8020142	42'	$209.98 G
8020118	18'	$99.98 G	8020144	44'	$224.98 G
8020120	20'	$102.98 G	8020146	46'	$238.98 G
8020122	22'	$106.98 G	8020148	48'	$253.98 G
8020124	24'	$110.98 G	8020150	50'	$268.98 G
8020126	26'	$113.98 G	8020152	52'	$282.98 G
8020128	28'	$117.98 G	8020156	56'	$312.98 G
8020130	30'	$121.98 G	8020160	60'	$341.98 G


SeaStar 4300CC Supreme Control Cables



- 4300CC Supreme - CCX433 - Unique breakthrough design assures incredible smoothness and efficiency - with hardly any lost motion - even in the longest and most complex cable routings!
- This means superior feel at the control, in any boat...performance that until now was considered impossible.
- 3" travel, 1/4"-28 threads.
- Replaces 43C supreme cables.

Order No.	Description	Price	Order No.	Description	Price
648848	6'	$78.98 G	648975	32'	$132.98 G
648850	8'	$82.98 G	648989	34'	$136.98 G
648862	10'	$86.98 G	648999	36'	$142.98 G
648874	12'	$93.98 G	649004	38'	$145.98 G
648888	14'	$96.98 G	649016	40'	$149.98 G
648898	16'	$100.98 G	649029	42'	$154.98 G
648901	18'	$104.98 G	649030	44'	$158.98 G
648913	20'	$108.98 G	649043	46'	$162.98 G
648926	22'	$112.98 G	649054	48'	$167.98 G
648937	24'	$115.98 G	649067	50'	$171.98 G
648948	26'	$118.98 G	649078	52'	$185.98 G
648951	28'	$118.98 G	649081	56'	$204.98 G
648962	30'	$129.98 G	649092	60'	$228.98 G

SeaStar Cable Fittings

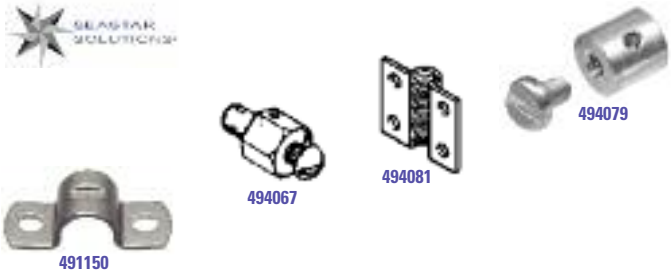

Order No.	Description	Price
491150	(032010) Adapter Clamp for 30 Series	$6.98 Q
494067	(47641) Stop Pivot	$28.98 Q
494081	(37664) Conduit Clamp	$8.98 Q
494079	(37693) Stop Collar for 30 Series	$13.98 Q

SeaStar Connection Kits for Engine Controls and Cables



- These kits provide control cable connection hardware, either for cable to engine/ transmission or for cable to control unit.
- Engine-specific connection kits for OEM cables.
- For 1973 - 1978 OMC OEM ("400" type) cables with bare wire ends.
- Note: Included clip is not used on stern drives.

Order No.	Description	Price
649220	(CA27208P) E/J O/B Kit, 35 HP and Less	$66.98 Q
649232	(CA27247P) E/J O/B Kit, Over 35 HP & OMC Sterndrive - All	$22.98 Q

- Engine-specific connection kits for 3300 cables.

Order No.	Description	Price
649244	(CA27320P) E/J O/B Kit, 1979 - Date	$23.98 Q
649256	(CA27321P) E/J O/B Kit, Pre 1979	$33.98 Q

SeaStar Pre-Engineered Clutch Connection Kits

Transmission Model	Dual station 33C cable	Dual station 43C cable	Convert from 33C Dual stn. to 43C Dual stn. add:
Borg Warner			
70, 71 and 72 in. line with red gear, rear entry	301474	301474	300665
71C & 72C drop center front entry	35627	35627	300665
Capital			
12400	36680	36680	40773
2, 3 and 4 HD and HE	36680	36680	40773
Paragon			
HF-7	36680	36680	40773
Twin Disc			
MG 508, 509, 510, 510A, 512, 514C, 514CHP, 518, 521, 527, 530 and 540	42577	N/A	300665
MG502, 506 and 507	63696	N/A	300665

SeaStar Adapter Kits



Order No.	Description	Price
491706	(301729) J/E 33C Adapter Kit	$38.98 Q
491720	(CA27319P) Mercury 33C Adapter Kit	$26.98 Q

SeaStar Outboard and I/O Cable Connection Kits

	Kit Number	Cable
Chrysler		
1975 and later	300465	33C (Two Cables)
Evinrude/Johnson		
55-235 hp, 1978 to date	301729	33C (Two Cables)
25 thru 40 hp, up thru '85	041652	Type "O" (Two Cables)
	035640	33C (Two Cables)
50 hp and over, 1973 and later	068086	Type "O" (Two Cables)
9.9 and 15 hp, 1974 and later	301543, plus OMC kit also required	33C (Two Cables)
Mercury		
40-300 hp	301901	33C (Two Cables)
MerCruiser and OMC Sterndrive		
MerCruiser	302123	33C (Two Cables)
OMC Sterndrive	300557	33C (Two Cables)

SeaStar Special Ordered Pre-Engineered Throttle Connection Kits

Engine Model	Single station 33C cable	Dual station 33C cable	Convert from 33C Dual stn. to 43C Dual stn. add:
Caterpillar			
334, 3304 and 3306	36680	36680	40773
3406 and 343	36680	36680	40773
3408	36680	36680	40773
Cummins			
All with MVSGOV AFC Fuel Pump V504M, V555M, V903M, VT903M	36680	36680	40773
VTA903M, NT855M VT1710M, VTA1710M KT and KTA 1150M KT and KTA 2300M 1975 and later	300580	300580	300665
General Motors			
3, 4 and 6-71 with var. sp. gov.	41736	41736	300665
6, 8 and 12 V-71	41489	41489	300665
6 and 8 V92 (NA & TA) with var. sp. gov.	41489	41489	300665
2, 3 and 4-53 with left and right hand gov.	36680	36680	40773
GV-53 rear and front entry	36680	36680	40773
6 and 8V-71 front entry shutdown kit (use with DC control)	36680	36680	40773
Perkins			
4,236M	48931	48931	300665
3544M	302026	302026	N/A
4,108 with shut off	303878	N/A	N/A
Universal			
Atomic 4	36680	36680	40773
Atomic 1 and 2 clutch & throttle (63C clutch-33C throttle)	36680	36680	40773

These Connection Kits are Special Order Only!

©2014 Donovan Marine, Inc.

SeaStar Control Cable Fittings and Hardware

Ball Joints (Complete with Nut and Lockwasher)



DMI #	MFG #	Description	Series	A	B	C	Price
490678	(031126)	Quick-Release Type	30	31/32"	9/16"	1/4"-28	$15.98 Q
490665	(031799)	Quick-Release Type	30	29/32"	7/16"	10-32	$16.98 Q
490688	(035242)	Quick-Release Type	30	1-1/8"	7/8"	5/16"-24	$55.98 Q
490729	(029104)	Quick-Release Type	40	31/32"	9/16	1/4"-28	$24.98 Q
490716	(032267)	Quick-Release Type	40	31/32"	7/8"	5/16"-24	$26.98 Q
490751	(029108)	Quick-Release Type	60	1-1/8"	7/8"	5/16"-24	$44.98 Q
490766	(029031)	Solid Type	60	1-1/8"	3/4"	5/16"-24	$19.98 Q

Clamps, Fasteners and Shims



DMI #	MFG #	Description	Series	A	B	C	Price
491163	(031509)	Cable Clamp	30	1"	1/2"	3/16"	$2.04 Q
491150	(032010)	Cable Clamp	30	7/8"	1/2"	3/16"	$6.98 Q
491187	(021227)	Cable Clamp	40	1"	1-1/4"	3/4"	$15.98 Q
491175	(031532)	Cable Clamp	40	1"	1/2"	7/32"	$2.12 Q
491214	(031538)	Shim for 491163 & 491175	30/40	1"	1/2"	3/16"	$3.15 Q
491249	(036174)	Single Cable Hook Clip	30	1/2"	3/8"	7/32"	$36.98 Q
491251	(035531)	Dual Cable Hook Clip	30	3/4"	3/8"	7/32"	$36.98 Q
491198	(037885)	Clamp and Shim Kit	60				$10.98 Q
		Clamp		1-1/4"	5/8"	9/32"	
		Shim		1-1/4"	5/8"	9/32"	

Clevis




DMI #	MFG #	Description	Series	A	B	C	Price
490828	(031125)	Clevis	30	2"	9/32"	1/4"	$18.98 Q
490817	(031800)	Clevis	30	1-9/16"	3/16"	3/16"	$18.98 Q
490855	(029025)	Clevis	40	2"	9/32"	1/4"	$20.98 Q
490919	(029132)	Clevis	60	2-1/4"	11/32"	5/16"	$20.98 Q
490932	(042034)	Clevis	60	2-1/2"	7/16"	3/8"	$38.98 Q

Pivots




DMI #	MFG #	Description	Series	A	B	C	Price
490983	(031029)	Pivot	30	1/4"	7/16"	5/8"	$12.98 Q
490994	(031539)	Pivot	30	1/4"	7/16"	3/4"	$14.98 Q
491011	(039890)	Pivot	30	1/4"	7/16"	15/16"	$22.98 Q
491047	(031537)	Pivot	40	1/4"	1/2"	7/8"	$15.98 Q
491036	(039110)	Pivot	40	1/4"	1/2"	3/4"	$13.98 Q

Terminal Eyes




DMI #	MFG #	Description	Series	A	B	C	Price
491100	(300646)	Nylon	30	1"	5/16"	1/2"	$6.98 Q
491113	(037639)		40				$13.98 Q
491136	(301456)	Includes: 300965 plus retaining ring, nut & washer	30				$15.98 Q

Uflex Accessories for Engine Controls



- Adapts C2, C8, MACHZero and all 33C style cables for use with Mercury engines.

Order No.	Description	Price
8030000	(K56)	$29.98 Q



- Adapts C2, C8, MACHZero and all 33C style cables for use with BRP - Evinrude engines.

Order No.	Description	Price
8030005	(K57)	$29.98 Q

Uflex Cable End Fitting



- Fits C2, C8, MACHZero and all 33C style cables.

Order No.	Description	Price
2006865	(L12)	$12.98 H

Uflex Clevis



- 10-32 UNF.
- Fits C2, C8, MACHZero and all 33C style cables.

Order No.	Description	Price
2006870	(L25)	$22.98 Q

- 1/4" x 28 threaded.
- Fits C22 and 4300 series cables.

Order No.	Description	Price
2006875	(L26)	$22.98 Q

OMC® Systematched™ T & T Switch



- J/E, 40-Thru H.P. vary year.
- Trim switch, cowl, lower engine pan. Replaces: 583803, 584841, 585146.
- O.E. No. 585146.

Order No.	Mfg. No. / Description	Price
B766481	(766481)	$64.97 H

OMC® Systematched™ T & T Switch



- J/E, 40-Thru H.P. vary year.
- T & T switch assembly control binnacle with pin connector. Replaces: 586449.
- O.E. No. 586449

Order No.	Mfg. No. / Description	Price
B766482	(766482)	$54.13 H

Marpac Transom Trim Switch



- Puts tilt & trim control anywhere.
- Can also operate power jack plates.
- Weatherproof.
- 50 amp.

Order No.	Description	Price
7-1165	Transom Trim Switch	$35.98 G

SeaStar Pro Trim Controls



- Trim control where it belongs – at your fingertips!
- Revolutionary trim control allows fingertip adjustment of engine trim or jack plate while keeping both hands on the wheel!
- Great for performance boats.
- Single switch version allows control of trim or jack plate.
- Dual version lets you control both functions.

Order No.	Mfg. No. / Description	Price
839502	(PT1000P) Single	$79.98 G
839540	(PT2000P) Dual	$149.98 G

T-H Marine Transom Mounted Trim Control



- Molded black plastic.
- Provides a weatherproof tilt control system at the stern of your boat.
- May be mounted on the splashwell or directly to the engine cowling.

Order No.	Mfg. No. / Description	Price
640210	(TTC-1) Transom Trim Control	$37.98 H

T-H Marine Steering Trim Control Unit



- Mounts easily to steering wheel spokes.
- The weatherproof, rubber booted, push button switches combined with a black urethane coiled cord provide a unit which will provide trim control without removing hands from steering wheel.

Order No.	Mfg. No. / Description	Price
640133	(ST-1)	$85.98 H

T-H Marine Ceacap Bulkhead Pass-Thru Fittings



- Watertight seal for cables, tubing or wires.
- Self-attaching - no hardware needed.
- Turn down washer included.
- Fits 3/4" holes - slot is 1/4" diameter.

Order No.	Mfg. No. / Description	Price
642100	(TH-CC-1) Black	$10.98 H
642112	(TH-CC-2) White	$10.98 H

T-H Marine FingerFlex™



- The ultimate in trim control for hydraulic helms.
- Wrap around bracket installs in minutes.
- PosiClik technology for positive touch.
- Also operates power jack plates.
- Bezel mount, single.

Order No.	Mfg. No. / Description	Price
640246	(FFTB-1) FingerFlex	$6298 H

T-H Marine Trim Handle



- Mounted directly on throttle and shift lever for maximum safety and ease of operation.
- The switches are push button, weatherproof and have a 50 amp rating.
- Pre 1979 OMC.

Order No.	Mfg. No. / Description	Price
640156	(EJT-1) Trim Handle	$51.98 H

Boater Sports Up/Down Trim Switch Panel



- This switch is constructed of a rugged black panel and a momentary toggle switch with a protective boot.
- It allows you to control your trim from the stern area of the boat.
- Can be mounted on any flat surface.

Order No.	Mfg. No. / Description	Price
1-51380	(51380)	$14.05 H

T-H Marine Hot Trim



- Attractive black matte unit comes prewired with wiring instructions to connect it to existing trim wiring.
- Mounts in floor of boat under console allowing operator to trim engine with foot.

Order No.	Mfg. No. / Description	Price
640703	(HT-1) Hot Trim	$58.98 H


Marpac Lanyard Kill Switch



- Designed with six different heads, it will fit Honda, Yamaha, OMC, and Mercury/Mariner kill switches.
- The swivel snap hook eliminates tangles, and the stainless steel crimps won't rust.

Order No.	Description	Price
7-0495	Lanyard Kill Switch	$9.98 G

Boater Sports Kill Switch Lanyard - Merc Style



- Replacement kill switch lanyard for Merc style switch.
- Coiled cord with brass crimps.
- Stainless steel clip and plastic safety release.

Order No.	Mfg. No. / Description	Price
1-51301	(51301)	$8.25 H

Boater Sports Kill Switch Lanyard - 7 Key



- Universal kill switch lanyard fits replacement lanyards.
- Coiled cord.
- Plastic safety vest clip.
- Has 7 keys to fit all BRP, Johnson, Evinrude, Mercury, Yamaha, Honda, Tohatsu, Nissan and Suzuki kill switches.

Order No.	Mfg. No. / Description	Price
1-51302	(51302)	$14.25 H

©2014 Donovan Marine, Inc.

Boater Sports Universal Kill Switch Lanyard



- Dual circuitry allows kill switch to be wired for either ignition kill or magneto kill.
- WARNING: Test switch for proper function before each use.
- Replace lanyard if worn, cut or frayed.

Order No.	Mfg. No. / Description	Price
1-51303	(51303)	$20.70 H

T-H Marine Saf-T-Stop Cut-Off Switches



- Black matte finish.
- For safe emergency stops.
- Mounts in a 1-1/2" diameter hole.
- An extra strong coiled lanyard with snap and swivel is included.
- Switch housing overall dimensions: 2-3/4" x 2".

Order No.	Mfg. No. / Description	Price
640068	(KS-1) Single Outboard	$32.98 H
640069	(KS-1) Single I/O	$33.98 H
640082	(L-4) Spare Lanyard	$11.98 H

Jet Logic Ultimate Lanyard™ PWC Safety Lanyards



- 3 keys to fit all brands: SeaDoo, Yamaha, Kawasaki, Polaris, Tiger Shark and Wet Jet.
- Super comfortable floating detachable wrist band, floating vest lanyard and high pitch pearless whistle for emergencies.
- A swivel snap hook keeps the cord from tangling.

Order No.	Mfg. No. / Description	Price
598423	(UL-1) Purple/Yellow	$17.98 G
598435	(UL-2) Red/Black	$17.98 G

Airhead Boat Kill Switch Keys with Lanyard



- This lanyard has 7 keys to fit all BRP, Johnson, Evinrude, Mercury, Yamaha, Honda, Tohatsu, Nissan and Suzuki kill switches.
- It's equipped with a swivel snap hook to prevent tangles, and rust-free stainless steel crimps.
- Don't leave the dock without it!

Order No.	Mfg. No. / Description	Price
5960226	(BKS-6)	$12.98 I

Sea Dog Kwik-Stop



- Bass Tournament Approved four prong kill switch.

Order No.	Mfg. No. / Description	Price
2004253	(LS500M)	$17.98 T

Garelick EEz-In Aluminum Outbound Motor Brackets



- For 2 Stroke Motors.
- Tough alloy anodized aluminum with stainless steel springs and bolts.
- 4-position locking height adjustment.
- Fits all style motors - extra wide 11-1/2" black poly mounting board.
- Transom mount locks and holds motor up or swings down for propulsion.
- Designed to accommodate the width dimensions of newer, wider style motor locking clamps.
- Mounting board dimensions: 11-1/2" W x 10-3/4" H x 2" T.
- Mounting bracket dimensions: 5-1/4" W x 9" H.
- 11-1/4" travel for 7-1/2 to 20 HP motors not exceeding 115 lbs.
- Recommended for motors with standard shaft length.

Order No.	Mfg. No. / Description	Price
360658	(71057) Motor Bracket	$179.98 G

- 14-1/4" travel for 7-1/2 to 12 HP motors not exceeding 82 lbs.

Order No.	Mfg. No. / Description	Price
360660	(71042) Motor Bracket	$207.98 G


Marpac Stainless Steel Auxiliary Motor Bracket



- Use with most outboards up to 20 hp.
- Maximum weight: 120 lbs.
- Ideal for short or long shaft motors.
- Manual lift and/or lower of engine.
- Structurally reinforced resin mounting board size: 10-3/4" x 11-1/2".
- Stainless steel construction and components ensure years of use.
- Mounting size requirements: 8" x 8-5/8".

Order No.	Description	Price
7-2362	Motor Bracket	$219.98 Q

Marpac Aluminum Auxiliary Motor Bracket



- Use with most outboards up to 20 hp.
- Maximum weight: 120 lbs.
- Ideal for short or long shaft motors.
- Manual lift and/or lower of engine.
- Structurally reinforced resin mounting board size: 10-3/4" x 11-1/2".
- Stainless steel components ensure years of use.
- Mounting size requirements: 5-1/4" x 9".

Order No.	Description	Price
7-2360	Motor Bracket	$189.98 Q

Marpac Bracket Board



- Replacement motor board for Marpac Auxiliary Motor Brackets.

Order No.	Description	Price
7-2365	Small	$36.98 G

Garelick EEz-In Stainless Steel Outboard Motor Bracket



- For 2 Stroke Motors.
- Made of tough 304 stainless steel.
- Wide track body for added stability.
- Easier to lift and lower - stainless springs help counterbalance motor weight.
- Transom mount locks and holds motor up or swings down for propulsion.
- Built-in transom angle adjustment allows optimum motor performance.
- Fits all style motors - extra wide black poly mounting board for newer, wider style motor locking clamps.
- Mounting bracket dimensions: 7-5/8" W x 7-7/8" H.
- 4 position locking height adjustment.
- Mounting pad: 2" thick x 11-1/2" wide x 10-3/4" height.
- 11-1/4" travel for 7-1/2 to 20 HP motors not exceeding 115 lbs.
- Recommended for use with motors equipped with long shafts and electric starts.

Order No.	Mfg. No. / Description	Price
360640	(71056) Motor Bracket	$199.98 G

Garelick EEz-In Outboard Motor Bracket for 4 Stroke Motors



- For 4 Stroke Motors.
- Black satin anodized aluminum body resists corrosion.
- Accommodates long or short shaft motors.
- With 5 vertical running position lock bar to compensate for water surface and boat load conditions.
- 2 positive safety locks secure bracket in up position.
- Aircraft type stainless steel hardware.
- Mounting board dimensions: 11-1/2" W x 10-3/4" H x 2" T.
- Mounting bracket dimensions: 8-1/8" W x 9" H.
- 9-1/2" travel for 7-1/2 to 30 HP motors not exceeding 169 lbs.
- Includes: Motor safety cable.

Order No.	Mfg. No. / Description	Price
360662	(71090) Motor Bracket	$307.98 G

T-H Marine Transom Wedges



- Fits newer model OMC and Mercury engines.
- Bolt-on engines with factory installed tilt and trim.
- 15°.
- Cast aluminum construction allows for full, positive contact between engine bracket and transom.
- Sold per pair on skin packed card.

Order No.	Mfg. No. / Description	Price
640652	(TW-2)	$45.98 H
640653	(TW-3) Reverse	$50.98 H

CMC Transom Washer Plates



- Made of strong 3/8" 6061 T6 alloy aluminum (not cast aluminum).
- The CMC transom washer can eliminate bolts "biting" into transoms and can more evenly distribute loads on high performance engines.

Order No.	Mfg. No. / Description	Price
303973	(20022) Top Washer Plate, Hole Centers: 12-7/8"	$30.98 D
303975	(20032) Bottom Washer Plate, Hole Centers: 9-7/8"	$27.98 D

Garelick EEz-In Outboard Motor Bracket for 4 Stroke Motors



- For 4 Stroke Motors.
- Built especially for new 4-Stroke, heavier, high torque motors (Rated up to 25 HP, 175 lbs.)
- Extra wide track body for added stability.
- Accommodates long or short shaft motors.
- Mounting plate dimensions: 10-1/4" W x 9-3/4" H.
- With 5 vertical running position lock bar to compensate for water surface and boat load conditions hard coated for added resistance to wear.
- Twist lock safety knobs secure bracket in place.
- Black satin anodized aluminum body resists corrosion.
- 2" thick, extra wide black poly mounting board.
- Aircraft type stainless steel hardware - for increased durability with nylon friction resistant washers.
- Mounting board dimensions: 11-1/2" W x 12" H x 2" T.
- HP Rating: Over 7-1/2 to 25.
- Motor weight not to exceed 175 lbs.
- Vertical travel: 15-1/2".
- Includes: Motor safety cable.

Order No.	Mfg. No. / Description	Price
360723	(71091) Motor Bracket	$447.98 G

Garelick EEz-In Adjustable Stationary Outboard Motor Bracket



- Vertical transom mount.
- Fixed height for auxiliary or trolling motor.
- Adjustable plus or minus 7° to 35° transoms.
- 304 stainless brackets and hardware.
- 1-1/2" black poly mounting board, 8" width.
- For motors up to 15 HP or 15 lbs.

Order No.	Mfg. No. / Description	Price
360696	(71075) Motor Bracket	$134.98 G

T-H Marine Transom Support Plate



- Made of high quality cast aluminum.
- This plate distributes the stress of the motor mounting bolts to protect the transom.

Order No.	Mfg. No. / Description	Price
640222	(TSP-1) Support Plate	$25.98 H

Garelick EEz-In Extra Tough Motor Display Stand



- Extra tough storage stand for most motors not exceeding 180 lbs.
- Utilizes tough alloy 1" aluminum tubing.
- Folds flat for easy storage.
- 36" height.

Order No.	Mfg. No. / Description	Price
360638	(30400) Motor Display Stand	$112.98 G

©2014 Donovan Marine, Inc.

Garelick EEz-In Motor Carrier



- High tensile alloy reinforced aluminum tube.
- Tough alloy drawn aluminum up to 25% stronger than extruded tube.
- 1/2" steel plated axle.
- Black recycled plastic mounting board.
- Accepts long shaft motors.
- Handles motors to 15 HP not exceeding 85 lbs.
- Two semi-pneumatic 7" x 1.5" rubber tired wheels.
- Height 35".

Order No.	Mfg. No. / Description	Price
360040	(31400) Motor Carrier	$86.98 G

Garelick EEz-In Motor Carrier



- High tensile alloy reinforced aluminum tube.
- Tough alloy drawn aluminum up to 25% stronger than extruded tube.
- 1/2" steel plated axle.
- Accepts long shaft motors.
- For motors not exceeding 130 lbs.
- Black recycled plastic mounting board.
- Two semi-pneumatic 8" x 1.5" rubber tired wheels.
- Has gas can holder.
- Folds for storage.

Order No.	Mfg. No. / Description	Price
360052	(31600) Motor Carrier Height 36-3/4".	$109.98 G

Garelick EEz-In Motor Tilter



- Leverage tool for use with manual lift motors.
- Tilts motors back easier with less strain.
- Adjustable to fit shroud of outboards with hand holds.
- Made of heavy gauge 1" diameter anodized aluminum tubing with aluminum castings.
- All contact points are cushioned to prevent marring.
- Handles motors to 40 HP.

Order No.	Mfg. No. / Description	Price
360634	(71036) Motor Tilter	$93.98 G

T-H Marine Atlas Series™ Hydraulic Jacking Plates



- Self contained hydraulic pump system - No reservoir or lines to install.
- Bottom to top in less than 8 seconds.
- Rods made from self lubricating material.
- Rod and slot lifting design - Trouble free lifting action.
- Hi-tech engineered polymer rods - 6 times more abrasion resistant than steel.
- Easy two-pin pump removal.
- Installs in half the time of comparable jack plates.

Order No.	Mfg. No. / Description	Price
640808	(AHJ-4) Setback: 4"	$1,087.98 D
640810	(AHJ-6) Setback: 6"	$1,122.98 D
640817	(AHJ-8V-DP) Setback: 8"	$1,289.98 D
640814	(AHJ-10) Setback: 10"	$1,293.98 D

CMC Hydraulic Jacking Plates



- Constructed of 6061 T6 extruded aluminum alloy with 18-8 stainless steel fasteners.
- The motor bracket moves up and down on the transom bracket by use of rollers machined from aluminum-bronze alloy.
- 5.5" setback, 5" lift stroke.
- Designed for V6 and smaller engines.

Order No.	Mfg. No. / Description	Price
303500	(65002) Model PL-65, without Gauge	$926.98 D
303501	(65001) Model PL-65, with Gauge	$1,128.98 D
303970	(7014G) Relay Assembly - Main Wire Harness f/PM Motor	$97.98 D
303972	(7493) 80 amp Relay	$11.98 D

T-H Marine High Speed Hydraulic Jacking Plate



- High speed - top to bottom in 7-9 seconds.
- High tensile aluminum for strength - Full 7/8" thick at critical point.
- Top grade 316 stainless steel SAE fittings on hydraulic lines.
- Stainless steel cylinder ram.
- 5" vertical lift plus 2-1/2" built in rise for total of 7-1/2".
- Uses standard automotive 5W30 oil.
- Self bleeding pump for easy installation.
- Complete kit with reservoir, pump bracket hydraulic lines, switch and wiring harness.
- Setback: 6"

Order No.	Mfg. No. / Description	Price
640845	(HYJ-6HSC) Hydraulic Jacking Plate	$1,024.98 D

T-H Marine High Speed Hydraulic Jack Plate



- Made of 6061 T6 alloy aluminum extrusions and fastened with stainless steel fasteners.
- Ideal for fresh or salt water use.
- No welds or castings to break.
- The dependable, self-contained and waterproof hydraulic actuator has a maximum lifting capacity of 7853 pounds of thrust
- Rated for V-6 motors and smaller and gives you 5" of vertical travel with 1-1/2" of adjustment on the motor bracket and 1-1/2" of adjustment on the transom bracket.
- A total of 8 of possible adjustment.

Order No.	Mfg. No. / Description	Price
303963	(65302) 5 1/2 in. Without Gauge	$931.98 D
303960	(65301) 5 1/2 in. With Gauge	$1,089.98 D
303965	(61301) 10 in. With Gauge	$1,169.98 D

T-H Marine Pro Hi-Jacker Jacking Plate - Aluminum



- This rugged plate features a solid one-piece design that allows quick and easy adjustment of plate height with the turn of a single bolt from the top.
- Our unique locking bars inside allow the side locking bolts to be adjusted from the outside with a single wrench.
- Manufactured from 3/8" aircraft aluminum stock, this plate can handle the stresses from all V6 outboards up to a max of 175 HP.
- Our new "Wide Side" design adds a full 2" of material to the adjustment slot areas on the side of the plate for additional strength.
- Unit features all stainless hardware with brass nuts to prevent galling.
- Full 4" of vertical adjustment.

Order No.	Mfg. No. / Description	Price
640741	(JP-6PW) Pro Hi-Jacker	$310.98 F

T-H Marine Atlas™ Micro Jacker



- Great for Shallow Water Boats, Gheenoes, River Runners, Jon Boats and Skiffs.
- Lightweight - Only 23 lbs.
- Small footprint - Only 14-5/8" W x 11-1/2" H.
- Strong, fast actuator - 8 seconds top to bottom.
- For 90 HP and under outboards.
- Optional clamp-on motor adapter available.

Order No.	Mfg. No. / Description	Price
640811	(AHJM-4-DP) Small Outboard Hydraulic Jack	$799.98 D

T-H Marine Digital Position Gauge Kit for Atlas™ Hydraulic Jack Plates



- All digital readout.
- Numbers indicate a 1/4" rise.
- Numbered from 0 to 20.
- All Atlas Jacks are pre-drilled to fit.
- Black face and stainless steel face gauges available.

Order No.	Mfg. No. / Description	Price
640160	(FAGK-1-DP) Fits 4" and 8" Models - Black Face	$269.98 G
640162	(FAGK-2-DP) Fits 6" - 10" & 12" Models - Black Face	$269.98 G
640164	(FAGK-1SS-DP) Fits 4" & 8" Models - Stainless Steel Face	$269.98 G
640166	(FAGK-2SS-DP) Fits 6" - 10" & 12" Models - Stainless Steel Face	$269.98 G

T-H Marine 5" Hydraulic Actuator



- Hydraulic Actuators are completely self contained with their own fluid reservoir.
- They incorporate the pump, motor, reservoir and cylinder all in the same body.
- This eliminates the need for multiple hydraulic components such as hoses, pumps and cylinders.
- Actuator can be utilized in almost any type of environment.
- Made of 100% non-ferrous materials and are totally submersible.
- They contain a no-leak seal and wiper that keeps dirt and water out of the working parts.

Order No.	Mfg. No. / Description	Price
6400032	(7050)	$495.98 G

T-H Marine Hydro-Jacker™ Hydraulic Jacking Plates



- Full self contained hydraulic pump, notched to allow for full engine tilt, full 5" vertical rise and anodized for protection from salt corrosion.

Order No.	Mfg. No. / Description	Price
640842	(HYJ-6) Setback: 6"	$983.98 D
640880	(JPHSP-6H) Fits 6" Hydro-Jacker, Plate Only	$64.98 G
640844	(HYJ-10) Setback: 10"	$1,086.98 D
640882	(JPHSP-10) Fits 10" Hydro-Jacker, Plate Only	$69.98 H

T-H Marine Gauge Kit for Hydro-Jacker™ Jacks



- Safe and convenient position indicator.
- Dash mount gauge and toggle switch.
- Weatherproof gauge.
- Fits all Hydro-Jacker Models 2010 and later.

Order No.	Mfg. No. / Description	Price
6400018	(6077)	$294.98 H

CMC Accessories for Hydraulic Jack Plates

- High Speed Power-Lift Actuator.
- Replacement high speed hydraulic actuator for: CMC Power-Lift Hydraulic Jack Plates (Models: 61301, 61302, 65301, 65302), T-H Marine Hydro-Jacker Jack Plates (models: HYJ-6HSC-DP, HYJ-10HSC-DP), T-H Marine ATLAS Micro Jacker (model: AHJM-4-DP).
- This actuator will fit all late model CMC Power-Lift HS (high speed) hydraulic jack plates, and T-H Marine Hydro-Jacker HS (high speed) hydraulic plates that have the one piece motor/hydraulic actuator assembly.
- Not for "standard" versions of hydraulic jack plates - but can be used to retrofit standard versions to higher speed version.

Order No.	Mfg. No. / Description	Price
303974	(ELCT0163)	$372.98 D

- Standard Power-Lift Actuator.
- Replacement hydraulic actuator for: CMC Power-Lift hydraulic jack plates (models: 61001, 61002, 65001, 65002, 65201),T-H Marine Hydro-Jacker hydraulic jack plates (models: HYJ-6C-DP, HYJ-10C-DP), CMC Power Tilt & Trim Units (PT-35 & PT-130 models: 13001, 13002, 52100), ATLAS Tilt & Trim Units (models: THT-35C-DP, THT-130C-DP, THT-130CGK-DP).
- This actuator will fit all late model CMC Tilt & Trims, ATLAS Tilt & Trims, CMC Power-Lift hydraulic plates, and T-H Hydro-Jacker hydraulic plates that have the one piece motor/hydraulic actuator assembly.

Order No.	Mfg. No. / Description	Price
303976	(ELCT0078)	$481.98 D

- For use with: PL-65, PL-65 H.S., PL-65-10, PL-65SS Hydraulic Power Lifts; PT-35 Power Tilt & Trim; PT-130 Tilt & Trim.

Order No.	Mfg. No. / Description	Price
303977	(7123) Toggle Switch	$6.98 D
303979	(6009) Spring Pin - 1/2" x 3-1/2", 304 Stainless Steel	$71.98 D

- Circuit breaker.
- For use with: PL-65 H.S., PT-130 Tilt & Trim.

Order No.	Mfg. No. / Description	Price
303981	(7186)	$9.98 D

©2014 Donovan Marine, Inc.

Bob's Machine Shop Standard Series Hydraulic Jack Plates



- Remote mounted 'mercruiser' pump mounted inside boat makes favorite choice for harsh saltwater environments and commercial applications.
- Pump has 5 year warranty and jack plate has lifetime to original end purchaser.
- All BIA mounting pattern engines up to 300 hp with max weight of 625 lbs.
- Complete with hoses (7' set), switch, wiring harness, pump and jack plate.

Order No.	Mfg. No. / Description	Price
304001	(100-106000) Standard Series, 6" Setback	$958.98 D
304003	(100-104100) Heavy Duty Standard Series, 4" Setback	$952.98 D

Bob's Machine Shop Standard Series Gauge for Jack Plate



- Standard series black gauge for jack plate.
- Comes with 16' of wiring, if longer needed, extension kits are available.
- Complete with gauge, sending unit, and new 'pointer'.
- Also available in white and polished stainless steel bezel can be added to either color.
- Also available for Action series jack plates.

Order No.	Mfg. No. / Description	Price
304015	(LP-GAUGE-BLK) Black	$231.98 D

Detwiler D1000 Series Manual Jack Plate s

DETWILER



- Comes in 4", 6", 8", and 10" setbacks to help find the best match for the boat and optimize performance.
- The interlocking slide guides offer enhanced strength while providing smooth, bind-free travel.
- The lead screw assembly sets the plate height and the Side Locks are used to hold the position.
- The stainless steel lead screw is resistant to corrosion and pre-greased for smooth operation.
- The maximum supported engine weight of 585 lbs is capable of handling the most demanding outboard engines including the latest generation of 4-strokes.
- Standard B.I.A. mounting pattern for simplified installation.
- Aircraft grade 6061-T6 aluminum alloy providing light-weight, high-tensile strength and corrosion resistance.
- Precision machining from work-hardened, extruded billet for increased strength.
- Military standard anodized surfaces for corrosion resistance and increased life in saltwater applications.
- Stainless steel hardware for corrosion resistance.
- Made in the USA.
- 2 year warranty coverage.

Order No.	Mfg. No. / Description	Price
841000	(JP1040) 4" Setback with Side Locks	$347.98 E
841005	(JP1060) 6" Setback with Side Locks	$422.98 E
841010	(JP1080) 8" Setback with Side Locks	$438.98 E
841015	(JP1100) 10" Setback with Side Locks	$450.98 E

Bob's Machine Shop Action Series Hydraulic Jack Plate



- All in one unit, pump built into the plate, easier/faster rigging, just need to pull control and power wires, no hoses.
- Faster pump/motor that competitors.
- 3 year warranty on pump and lifetime on structure to original end purchaser.
- Includes jack plate, wiring harness, switch.
- All BIA bolt pattern motors up to 300 hp with a 625 lbs max weight.

Order No.	Mfg. No. / Description	Price
304006	(100-106010) 6" Action Series	$1,064.98 D

Bob's Machine Shop Hydraulic Jack Plate Pump Assembly

- Hydraulic jack plate pump assembly for Standard Series Jack Plates.
- Pump, motor, reservoir, cap, solenoids, wiring harness, 2 new stainless steel fittings, etc.
- Complete unit.

Order No.	Mfg. No. / Description	Price
304018	(120-100000) For Standard Series Jack Plates	$430.98 D

Bob's Machine Shop Jack Plate Solenoid



- Standard series jack plate solenoid, single replacement solenoid.

Order No.	Mfg. No. / Description	Price
304010	(SOLENOIDS) For Standard Series Jack Plates	$19.98 D

Detwiler D2000 Series Manual Jack Plate s

DETWILER



- Comes in 6", 8", and 10" setbacks to help find the best match for the boat and optimize performance.
- It is adjustable on the water so there is no need to hoist the engine to make a change.
- The simple lead screw and nut assembly allows for quick and easy height adjustment. The position is held with a single locking nut.
- The stainless steel lead screw is corrosion resistant and pre-greased for smooth operation.
- Integrated grease fittings allow for easy maintenance and long life.
- The heavy-duty slide mechanism with internal bearings allows for smooth travel and a strong resistance to binding.
- The maximum supported engine weight of 585 lbs is capable of handling the most demanding outboard engines including the latest generation of 4-stroke engines.
- Standard B.I.A. mounting pattern for simplified installation.
- Aircraft grade 6061-T6 aluminum alloy providing light-weight, high-tensile strength and corrosion resistance.
- Precision machining from work-hardened, extruded billet for increased strength.
- Military standard anodized surfaces for corrosion resistance and increased life in saltwater applications.
- Stainless steel hardware for corrosion resistance.
- Made in the USA.
- 2 year warranty coverage.

Order No.	Mfg. No. / Description	Price
841020	(JP2060) 6" Setback with EZ-Adjust	$501.98 E
841025	(JP2080) 8" Setback with EZ-Adjust	$516.98 E
841030	(JP2100) 10" Setback with EZ-Adjust	$533.98 E

Detwiler D3000 Series Hydraulic Jack Plates


Gauge & Pro Trim Control


D3000 Series Hydraulic Jack Plate


EX-Zact Dial Control


Rocker Switch Control

- Comes in 4", 6", and 8" setbacks and provides an integrated hydraulic actuator to give you complete control of the plate.
- Optimize performance while under way.
- The maximum supported engine weight of 625 lbs. is capable of handling the most demanding outboard engines including the latest generation of 4-strokes.
- Choose from 3 different control options: Rocker Switch, Pro Trim and EX-Zact Dial. An optional position gauge is also available.
- The fully integrated hydraulic actuator, with self-purging reservoir, provides smooth powered height adjustment. With the actuator unit integrated into the plate, there is no need to sacrifice boat space for a pump or hydraulic lines.
- Optimized lift speed provides precise positioning that will not overshoot.
- A heavy-duty slide mechanism with internal bearings provides smooth, bind-free travel with a strong resistance to torque lock.
- Fully captured slide mechanism prevents over-extension of the plate.
- Integrated grease fittings allow for easy maintenance and long life.
- The stainless steel guide rods with wipers are corrosion resistant and self-cleaning for low maintenance and high reliability.
- Up to 6 inches of stroke depending on control method.
- Standard B.I.A. mounting pattern for simplified installation.
- Aircraft grade 6061-T6 aluminum alloy providing light-weight, high-tensile strength and corrosion resistance.
- Precision machining from work-hardened, extruded billet for increased strength.
- Military standard anodized surfaces for corrosion resistance and increased life in saltwater applications.
- Made in the USA.
- 2 year warranty coverage.

- D3000 Series with Gauge and Pro Trim Control.
- Adjust your jack plate where you need it with fingertip control.

Order No.	Mfg. No. / Description	Price
841050	(JP3060T) 6" Setback with Gauge & Pro Trim Control	$1,283.98 E
841055	(JP3080T) 8" Setback with Gauge & Pro Trim Control	$1,418.98 E

- D3000 Series with EX-Zact Dial Control.
- Maximizes your precision. Dial in the perfect setting every time with the easy to use EX-Zact Dial.

Order No.	Mfg. No. / Description	Price
841060	(JP3060X) 6" Setback with EX-Zact Dial Control	$1,375.98 E
841065	(JP3080X) 8" Setback with EX-Zact Dial Control	$1,527.98 E

- D3000 Series with Rocker Switch Control.
- Quick and easy adjustment of your jack plate with the flick of a switch.

Order No.	Mfg. No. / Description	Price
841035	(JP3040R) 4" Setback with Rocker Switch Control	$1,130.98 E
841040	(JP3060R) 6" Setback with Rocker Switch Control	$1,130.98 E
841045	(JP3080R) 8" Setback with Rocker Switch Control	$1,266.98 E

Detwiler Pro Trim & Gauge Kit



- Upgrade to Pro Trim Control with gauge for all hydraulic jack plates.

Order No.	Mfg. No. / Description	Price
841080	(DK3200) Pro Trim & Gauge Kit	$242.98 E

Detwiler Gauge & Sender Kit



- Gauge add-on for rocker switch control.

Order No.	Mfg. No. / Description	Price
841075	(DK3100) Gauge & Sender Kit	$198.98 E

Detwiler Gauge Sender



- Replacement 2-wire sender for rocker switch and Pro Trim control systems with gauge.

Order No.	Mfg. No. / Description	Price
841110	(DK3005) Gauge Sender	$86.98 E

Detwiler Ex-Zact Dial Control Kit



- Upgrade to EX-Zact dial control for all hydraulic jack plates.

Order No.	Mfg. No. / Description	Price
841085	(DK3300) Ex-Zact Dial Control Kit	$428.98 E

Detwiler Ex-Zact Sender



- Replacement 3-wire sender for EX-Zact Dial control systems.

Order No.	Mfg. No. / Description	Price
841115	(DK3006) Ex-Zact Sender	$135.98 E

Detwiler Ex-Zact Dial Control Knob



- Replacement knob for EX-Zact Dial.
- Includes brass set screw.

Order No.	Mfg. No. / Description	Price
841145	(DK3013) Ex-Zact Dial Control Knob	$4.65 E

©2014 Donovan Marine, Inc.

Detwiler Electric Motor



- Replacement electric motor for all pumps from 2002 - current.
- Includes: Reservoir, cap and mounting hardware.

Order No.	Mfg. No. / Description	Price
841100	(DK3003) Electric Motor	$183.98 E

Detwiler Fill Cap



- Replacement reservoir cap for all hydraulic pumps and actuators.

Order No.	Mfg. No. / Description	Price
841105	(DK3004) Fill Cap	$0.67 E

Detwiler Manual Bracket Bolts



- Stainless steel flat head cap screw for manual jack plate maintenance.

Order No.	Mfg. No. / Description	Price
841170	(DK2005) 5 Pack	$4.52 E

Detwiler 3-1/2" Jack Plate Mounting Kit



- Stainless steel bolts, brass nylock nuts and stainless steel washers.
- Bolts are 1/2-13 UNC x 3-1/2" L.

Order No.	Mfg. No. / Description	Price
841185	(DK6135) 4 Pack	$29.98 E

Detwiler 4-1/2" Jack Plate Mounting Bolts Kit



- Stainless steel bolts, brass nylock nuts and stainless steel washers.
- Bolts are 1/2 - 13 UNC x 4-1/2" L.

Order No.	Mfg. No. / Description	Price
841190	(DK6145) 4 Pack	$47.98 E

Detwiler Ex-Zact Dial Control Module



- Replacement control module for EX-Zact Dial.

Order No.	Mfg. No. / Description	Price
841120	(DK3007) Ex-Zact Dial Control Module	$207.98 E

Detwiler O-Ring Seal Kit



- Replacement seals for jack plates with integrated cylinders up to 2008.

Order No.	Mfg. No. / Description	Price
841150	(DK3014) O-Ring Seal Kit	$34.98 E

Detwiler Tie Rod Kit



- Stainless steel tie rod kit for integrated cylinder maintenance.
- Size: 1/4-20 UNC x 10-3/16" L.

Order No.	Mfg. No. / Description	Price
841165	(DK6002) 4 Pack	$22.98 E

Detwiler Stabilizer Clips



- 4" long stabilizer clips for SeaStar Pro Cylinders.

Order No.	Mfg. No. / Description	Price
841070	(HYCL-001) 2 Pack	$8.98 E

Detwiler Hydraulic Bracket Bolts



- Stainless steel flat head cap screw for hydraulic jack plate maintenance.

Order No.	Mfg. No. / Description	Price
841175	(DK3015) 5 Pack	$13.98 E

T-H Marine Z-Lock™ Manual Jack Plates



- Z-Lock Jack Plate design eliminates side slippage.
- Matching slotted extrusions LOCK side plates in place.
- Strong aircraft grade aluminum.
- Full 1/2" material for strength.
- Handles all V6 outboards to 300 HP.
- Easy to adjust from top of jack.

Order No.	Mfg. No. / Description	Price
640753	(JPZ-6) Setback: 6"	$377.98 F
640852	(JPZ-8) Setback: 8"	$393.98 D
640765	(JPZ-10) Setback: 10"	$517.98 F

T-H Marine Hi-Jacker™ Fixed Jack Plate



- This tough 3/8" thick aluminum bracket provides an inexpensive solution to mounting a long shaft outboard to a short transom.
- Also great as a fixed jack plate for all V6 outboards.
- Handles all outboards up to 150 HP.
- Three engine mounting holes and two transom mounting holes combined with a 3" designed lift allows a total of 5-1/2" of lift with a full 4" of setback.

Order No.	Mfg. No. / Description	Price
6400196	(JP-4FA)	$125.98 E

T-H Marine Hi-Jacker Jacking Plate



- Not for Ficht Motors.
- This plate is constructed of tough 3/8" aircraft aluminum and features a design that allows full tilt with dual steering.
- Natural aluminum finish resists corrosion.
- All bolts are stainless steel with brass nuts to prevent galling.
- Fits all V4 and V6 engines up to a maximum of 150 HP.
- Provides 4" of vertical adjustment.
- Setback: 6"

Note: 1976 to 1979 model Mercury engines may require some special drilling.

Order No.	Mfg. No. / Description	Price
640727	(JP-1A) Hi-Jacker Jacking Plate	$207.98 F

T-H Marine Bolt Kit for Jacking Plates



- Bolt kit for mounting outboard engine to jacking plates.
- Kit contains: (4) 1/2" - 13 x 3" long bolts - stainless steel, (4) 1/2" - 13 lock nuts - brass with nylon insert and (8) 1/2" - flat washers - stainless steel.

Order No.	Mfg. No. / Description	Price
640804	(BK-1) Bolt Kit	$30.98 R

T-H Marine One Piece Manual Jack Plate



- One piece design.
- Made of 6061 T6 extruded aluminum alloy.
- Stainless steel fasteners for maximum strength and durability.
- Centrally located adjustment screw for positive alignment.
- 5" vertical adjustment.
- Designed to fit standard B.I.A. bolt pattern.
- Rated for up to V6 outboards.

Order No.	Mfg. No. / Description	Price
303456	(ML-65) Setback: 5-1/2"	$315.98 D

CMC Two Piece Manual Jack Plate



- Made of 6061 T6 extruded aluminum alloy.
- Stainless steel fasteners for maximum strength and durability.
- 5-1/2" Set backs from transom are available.
- 5" of slot adjustment at the motor mounting bracket.
- 1-1/2" of adjustment at the transom bracket.

Order No.	Mfg. No. / Description	Price
303980	(55012)	$219.98 D

CMC Static Jack Plate



- Allows the motor to be mounted 5" higher than the standard mounting height on the transom.
- A must for conversion from prop to jet drive.
- Another application includes mounting the 5" vertical extension on a hydraulic jack plate to raise the motor higher on shallow running boats that are equipped with tunnel extensions.
- Constructed of Extruded 6061-T6 Aluminum alloy.

Order No.	Mfg. No. / Description	Price
303978	(50012)	$171.98 D

T-H Marine Mini-Jacker



- Cast aluminum offset type jack plate is designed for clamp-on mount outboard motors up to 35 HP.
- It allows mounting of long shaft motors to shorter shaft transom boats.
- The engine mounting surface is 11-1/2" wide x 10" high and features a vertical offset of 3".
- The overall width of transom mounting flanges is 17".

Order No.	Mfg. No. / Description	Price
640602	(MJ-1) Setback: 4"	$134.98 R

©2014 Donovan Marine, Inc.

T-H Marine Break Away Mount



- Designed for duck hunters and/or fisherman that use their boat in shallow stumpy areas.
- It allows small boats and motors to slide over submerged logs or debris at low speeds to get to a downed bird or your favorite fishing hole.
- Rated for outboard motors up to a maximum of 130 H.P.
- The unit is mounted between the boat transom and the outboard motor.

Order No.	Mfg. No. / Description	Price
303969	(13003) Break Away Mount	$403.98 D

T-H Marine Electric Hydraulic Tilt and Trim



- Constructed of 6061 T6 extruded aluminum construction with stainless steel fasteners.
- 6" set back to enhance boat stability and performance.
- 20° of trim and a total of 90° of tilt and trim.
- Standard B.I.A. bolt hole pattern.

Order No.	Mfg. No. / Description	Price
6400052	(13001) Rated Up to 130 HP, with Gauge	$866.98 S
303420	(13002) Rated Up to 130 HP, without Gauge	$734.98 D

- Constructed of 6061 T6 extruded aluminum construction with stainless steel fasteners.
- 5-1/2" set back to enhance boat stability and performance.
- 84° of tilt and trim.

Order No.	Mfg. No. / Description	Price
303444	(52100) Rated Up to 35 HP, without Gauge	$620.98 D

T-H Marine Atlas Series™ Tilt and Trim



- Rated for 130 HP and smaller outboard motors.
- 1/2" 6061 T6 extruded aluminum construction with stainless steel fasteners.
- 6" set back to enhance boat stability and performance.
- 20° of trim and a total of 90° of tilt and trim.
- Standard B.I.A bolt hole pattern.

Order No.	Mfg. No. / Description	Price
640824	(THT-130) Atlas Tilt and Trim	$776.98 D

T-H Marine Atlas Series™ Tilt and Trim



- Rated for 35 HP and smaller clamp-on outboard motors.
- 1/4" 6061 T6 extruded aluminum construction with stainless steel fasteners.
- 5-1/2" set back to enhance boat stability and performance.
- 84° of trim and tilt.

Order No.	Mfg. No. / Description	Price
640820	(THT-35C) Atlas Tilt and Trim	$646.98 D


T-H Marine Transom Clamp Motor Adapter



- For installation of motors mounted with transom clamps.
- For use with 303420 (13002).

Order No.	Mfg. No. / Description	Price
303545	(13022) Motor Adapter	$82.98 D

Lenco Marine Drive 164 Trolling Systems

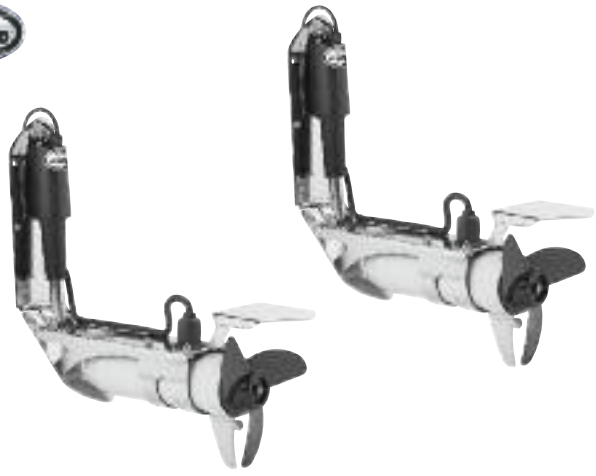

- The system utilizes two 82 lb. thrust trolling motors mounted to thetransom, and incorporates a digital, infinite variable speed foot pedal to operate both motors in unison, for a total of 164 pounds of forward and reverse thrust.
- The motors are extremely corrosion resistant, and mounted in 7-gauge electropolished stainless steel housings.
- There are no shafts, no "mounts" and no extra parts required to make the system "heavy duty," it already is.
- Only 4 inches of width and 13 inches of height (per side) are required to mount the motors, and everything you need (excluding batteries) is included with the kit.
- An anticavitation feature is also included, to help maintain silence in rough or shallow waters.
- The Lenco Drive 164 gives new meaning to the word convenience.
- At the touch of a button, both motors are fully deployed or retracted in less than 5 seconds using Lenco's proven extreme duty actuators.
- The foot pedal control gives you the power of TWO trolling motors at the same time, from virtually any location on the boat.
- Just plug in the pedal, and you're ready to go.
- Each kit is pre-assembled and contains two (2) extreme duty 2-1/2" stroke actuators, two (2) 24 volt digital trolling motors with prop's, digital control box, foot pedal, anti-cavitation plates, all mounting hardware and complete instructions.

Order No.	Mfg. No. / Description	Price
252534	Complete System	$1,565.98 B
252577	(125) Single Rocker Switch	$49.98 D



REPLACEMENT ACTUATORS
FOR SKI BOATS & TOW BOATS

REPLACEMENT LENCO ACTUATORS 12-Volt

Follow these simple steps to find your 12 Volt Replacement Actuator


A Find the code on face of the actuator below the Lenco label. The second digit from the left identifies the Actuator Type. Follow the arrow from step A on the chart below.

B The first digit to the left represents either 3 or 5 lobes in the motor.
1-4 from code = 3 Lobes
5-8 from code = 5 Lobes
Follow the arrow from step B on the chart below.

C The last digit to the far right of the code identifies the hole size(s) for mounting. Follow the arrow from step C on the chart below.

All actuators include 6' wire leads & Deutsch connectors.

BRANDING CODE (see example to right)

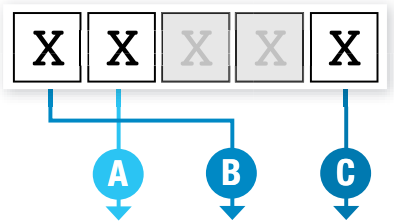

Location of the imprinted branding code [XXXXX]



Your existing actuator

DM Order #	Lenco Part #	Type	First digit of code	Hole	Lobes	Actuator Type	Stroke Length	Top Hole	End Hole
252596	15055-001	C	5-8	2	5	101XD Actuator	2.25"	5/16"	5/16"
252259	15117-001	E	1-4	2	3	101XDS Actuator	2.25"	5/16"	5/16"
252586	15057-001	E	5-8	2	5	101XDS Actuator	2.25"	5/16"	5/16"
252594	15059-001	F	5-8	1	5	102S Actuator	4.25"	5/16"	5/16"
252261	15118-001	P,I,J	1-4	2	3	102HD Actuator	4.25"	5/16"	5/16"
252592	15060-001	P,I,J	5-8	2	5	102HD Actuator	4.25"	5/16"	5/16"
252263	15119-001	T,L	1-4	2	3	1.25 XDS Actuator	1.25"	5/16"	5/16"
252265	15120-001	T,L	5-8	2	5	1.25 XDS Actuator	1.25"	5/16"	5/16"
252267	15121-001	N,L	1-4	4	3	1.25 XDS Actuator	1.25"	5/16"	3/8"
252269	15122-001	N,L	5-8	4	5	1.25 XDS Actuator	1.25"	5/16"	3/8"

IMPORTANT! - YOU MUST CHOOSE THE CORRECT LOBE VERSION TO MAINTAIN TRACKING ACCURACY!
All 3 lobe actuators were manufactured 2011 and prior. All 5 lobe actuators were manufactured 2012 and later.

OEM Quick Reference

Ski / Tow Boat	Actuators used
Correct Craft / Nautique	15060-001
Calabria	15117-001, 15057-001
Epic Boats	15117-001, 15057-001, 15060-001
Fineline / Centurion	15119-001, 15120-001, 15055-001
Malibu	15118-001, 15060-001, 15059-001 (Surf Gate)
MasterCraft	15117-001, 15057-001, 15119-001, 15120-001
MB Sports / TOMCAT / B52	15117-001
Skier's Choice / Supra / Moomba	15121-001, 15122-001



REPLACEMENT CONTROL BOXES
FOR SKI BOATS & TOW BOATS

REPLACEMENT LENCO CONTROL BOXES

Follow these simple steps to find your Replacement Control Box

A Locate the part number on the Existing / Inoperable Control Box.

B Find the same part number located on chart below.

C Locate your Replacement Control Box # in the center column to the right.



A The part # is located on the control box as shown in both examples.



B Existing / Inoperable Control Box	C Lenco Replacement Control Box #	Donovan Order #
30047-004	30047-004D	252808
30047-005	30047-005D	SPECIAL ORDER
30054-001	15123-001*	SPECIAL ORDER
30074-001	30074-001D	SPECIAL ORDER
30203-001	30203-001D	SPECIAL ORDER
30221-001	30271-006D	SPECIAL ORDER
30224-004	30271-001D	252811
30226-001	30271-002D	252817
30226-002	30271-003D	252823
30231-001	30271-004D	SPECIAL ORDER
30232-001	30271-005D	252829
30271-001	30271-001D	252811
30271-0015	30271-0015D	252814

* Contains control box and actuator. Both need to be replaced.

B Existing / Inoperable Control Box	C Lenco Replacement Control Box #	Donovan Order #
30271-002	30271-002D	252817
30271-0025	30271-0025D	252820
30271-003	30271-003D	252823
30271-0035	30271-0035D	252826
30271-004	30271-004D	SPECIAL ORDER
30271-005	30271-005D	252829
30271-006	30271-006D	SPECIAL ORDER
30271-008	30271-008D	252832
30271-009	30271-009D	252835
30271-0105	30271-0105D	SPECIAL ORDER
30271-0115	30271-0115D	SPECIAL ORDER
30271-0125	30271-0125D	SPECIAL ORDER
30271-0135	30271-0135D	252838
30275-001	30275-001D	SPECIAL ORDER

Lenco Marine Auto Glide Automatic Trim Tab Systems



- The Auto Glide Boat Control System is the most advanced automatic trim tab control ever developed. Easily retro-fits to your existing Lenco trim tabs.
- For Lenco Marine Single-Actuator Trim Tab Systems Only.

Order No.	Mfg. No. / Description	Price
251908	(15500-101)	$1,524.98 D

- For Lenco Marine Dual-Actuator Trim Tab Systems Only.

Order No.	Mfg. No. / Description	Price
252910	(15501-101)	$1,839.98 D

Lenco Marine Standard and Edge Mount Trim Tab Kits without Switch

With Electro-Polished Blades



- Fast response electric actuators for precise control.
- Fully submersible.
- All plug and play Deutsch connections.
- Electro-Polished blades are constructed of 12-gauge 304 stainless steel.
- Kits include: (2) 12-gauge stainless steel Electro-Polished blades, (2) 15054-001 actuator with 6' leads and Deutsch connectors, (2) 30133-103 20' actuator extension wiring harnesses, (2) 15085-001 upper mounting brackets with gland seal, (2) 50014-001 lower mounting brackets, Lenco owners/installation manual and stainless steel mounting hardware.

Order No.	Mfg. No. / Description	Price
252440	(15113-101) 9" x 12" Standard Trim Tab Kit	$503.98 D
252445	(15114-101) 12" x 12" Standard Trim Tab Kit	$551.98 D
252450	(15115-101) 12" x 9" Edge Mount Trim Tab Kit	$535.98 D
252455	(15116-101) 12" x 12" Edge Mount Trim Tab Kit	$561.98 D

Lenco Marine Edge Mount Trim Tab Kits without Switch

With Standard Finish Blades



- Instant response electric actuators for precise control.
- Self-locking ball screw will not drift, even while backing down.
- 12-gauge laser cut stainless steel trim tab planes 2" hinge height.
- Stainless steel rams will stand up to any sea conditions.
- High-impact corrosion-proof mounts look great through years of abuse.
- Sizes available to fit any boat with 12 or 24 volt actuators.
- Kit includes: (2) actuators with 6' leads and Deutsch plugs, (2) 12-gauge stainless steel trim tab blades, (2) 20' actuator extension wiring harnesses,(2) upper mounting brackets with gland seal, (2) lower mounting brackets, Lenco owners/installation manual and stainless steel mounting hardware.

Order No.	Mfg. No. / Description	Min. Transom Height	Boat Length	Price
252350	(15013-101) 9" L x 9" W	13.5"	14' - 18'	$477.98 D
252342	(15014-101) 9" L x 12" W	13.5"	16' - 25'	$507.98 D
252344	(15015-101) 12" L x 9" W	11"	14' - 18'	$508.98 D
252356	(15016-101) 12" L x 12" W	11"	17' - 30'	$526.98 D
252355	(15017-101) 12" L x 18" W	11"	26' - 36'	$577.98 D

Lenco Marine Auto Glide Automatic Trim Tab System Component Parts



Order No.	Mfg. No. / Description	Price
251912	(15503-101) 15' GPS Antenna Extension Kit	$74.98 D
251938	(30260-003) 20' Extension Cable for Engine Adapter Cable, CAN 1 and CAN 2	$74.98 D
251942	(30262-001) CANBUS #2 GPS/NMEA 2000 Network Adapter Cable Assembly - 2.5'	$61.98 D
251914	(30246-001) Adapter Cable for Smartcraft/Mercury - 2.5'	$76.98 D
251920	(30252-001) Adapter Cable for Command Link/Yamaha - 2.5'	$47.98 D

Lenco Marine Standard Mount Trim Tab Kits without Switch

With Standard Finish Blades



- Instant response electric actuators for precise control.
- Self-locking ball screw will not drift, even while backing down.
- 12-gauge laser cut stainless steel trim tab planes.
- Stainless steel rams will stand up to any sea conditions.
- High-impact corrosion-proof mounts look great through years of abuse.
- Minimum transom height: 14".
- 12 volt.
- Kit includes: (2) 12 volt actuators with 6' leads and Deutsch plugs, (2) 12-gauge stainless steel trim tab blades, (2) 20' actuator extension wiring harnesses,(2) upper mounting brackets with gland seal, (2) lower mounting brackets, Lenco owners/installation manual and stainless steel mounting hardware.

Order No.	Mfg. No. / Description	Hinge Height	Boat Length	Price
252293	(15000-101) 9" L x 9" W	2"	14' - 18'	$457.98 D
252306	(15001-101) 9" L x 12" W	2"	16' - 25'	$470.98 D
252318	(15002-101) 9" L x 18" W	2"	22' - 30'	$499.98 D
252320	(15003-101) 9" L x 24" W	1"	26' - 40'	$573.98 D
252340	(15007-101) 12" L x 12" W	2"	17' - 30'	$478.98 D
252341	(15008-101) 12" L x 18" W	2"	26' - 36'	$530.98 D
252337	(15009-101) 12" L x 24" W	1"	30' - 44'	$613.98 D
252338	(15010-101) 12" L x 30" W	1"	34' - 54'	$695.98 D

Lenco Marine Standard Mount Trim Tab Kits with Switch



- Includes 252576 (10222-211) Rocker Switch.

Order No.	Mfg. No. / Description	Price
252508	9" L x 12" W	$546.98 D
252510	9" L x 18" W	$576.98 D
252522	9" L x 24" W	$649.98 D

©2014 Donovan Marine, Inc.

Lenco Marine Standard Performance Trim Tab Kits without Switch



- All Trim Tab Kits Sold without Switches! Order Switch Separately.
- Blades are electro-polished 12-gauge 304 stainless steel with 1" turned up edges (252394 - has an 85° inside taper.
- 12 volt standard actuator with 5/16" stainless steel through bolts.
- 1/4" diameter hinge pin, 2" hinge height.
- Kits include: (2) 12 volt actuators with 6' leads and Deutsch plugs, (2) 12-gauge stainless steel trim tab blades, (2) 20' actuator extension wiring harnesses, upper mounting bracket with gland seal, lower mounting bracket, Lenco owners/installation manual and stainless steel mounting hardware.
- NOTE: Must order switch separately!

Order No.	Mfg. No. / Description	Min. Transom Height	Boat Length	Price
252368	(15034-101) 9" L x 9" W	13.5"	13' - 20'	$532.98 D
252370	(15035-101) 9" L x 12" W	13.5"	16' - 26'	$607.98 D
252382	(15037-101) 12" L x 12" W	11"	18' - 32'	$638.98 D
252394	(15039-101) 16" L x 12" W	11"	19' - 34'	$710.98 D

Lenco Marine High Performance Trim Tab Kits - Single Actuator



- Features electro-polished 7-gauge 304 stainless steel blades and 3.75" sacrificial anodes.
- 12 volt extreme duty actuator with 3/8" stainless steel bolts, full transom back plate, mechanical strain relief cable seal and adjustable C-channel mounting brackets.
- 3/8" diameter hinge pin.
- Kits include: (2) 12 volt XD extreme duty actuators with 6' leads and Deutsch plugs and (2) stainless steel trim tab planes.
- Actuator extension harnesses sold separately in lengths of 7', 14', 20', 26' and 32'.
- Minimum transom height: 10.5".
- NOTE: Customer supplied mounting hardware.
- NOTE: Must order switch separately!
- When using the LED Indicator Switch Kits, 252572 must be used for the single actuator systems.

Order No.	Mfg. No. / Description	Boat Length	Price
252398	(15048-101) 14" L x 12" W	16' - 32'	$1,251.98 D
252419	(15049-101) 18" L x 12" W	20' - 40'	$1,249.98 D

Lenco Marine Bennett RetroFit Kit



- (2) Bennett Electric Actuators with 6' leads.
- (2) Upper style mounting brackets.
- Switch wiring kit.
- All mounting hardware.
- 12 volt.
- Does not include switch; can either purchase separately or use existing.

Order No.	Mfg. No. / Description	Price
252698	(15064-001) Retro Kit	$314.98 D

Lenco Marine Heavy Duty Performance Trim Tab Kits without Switch



- Blades are electro-polished 12-gauge 304 stainless steel with 1" turned up edges, 85° inside taper and 1/4" diameter hinge pin.
- 12 volt extreme duty actuator with 5/16" stainless steel bolts.
- Full transom back plate, mechanical strain relief cable seal, adjustable C-channel mounting brackets and 3.75" sacrificial anodes.
- Minimum transom height: 10.5".
- Kits include: (2) 12 volt XD extreme duty actuators with 6' leads and Deutsch plugs, (2) 12-gauge stainless steel trim tab blades, (2) 20' actuator extension wiring harnesses and Lenco owners/installation manual, pre-assembled.
- NOTE: Customer supplied mounting hardware.
- NOTE: Must order switch separately!

Order No.	Mfg. No. / Description	Boat Length	Price
252339	(15041-101) 12" L x 12" W	18' - 34'	$906.98 D
252396	(15043-101) 16" L x 12" W	20' - 38'	$893.98 D
252397	(15044-101) 18" L x 14" W	22' - 42'	$1,042.98 D

Lenco Marine Limited Space Trim Tab Kit without Switch



- Ideal for boats with a ladder/swim platform.
- Blades are electro-polished 12-gauge 304 stainless steel with front of blade folded to provide a smooth trailing edge and 1/8" diameter hinge pin.
- Kit includes: (2) 12 volt XD actuators with 6' leads and Deutsch plugs, (2) 12-gauge stainless steel trim tab blades, (2) 20' actuator extension wiring harnesses, upper mounting bracket with gland seal, lower mounting bracket, Lenco owners/installation manual and stainless steel mounting hardware.
- NOTE: Must order switch separately!

Order No.	Mfg. No. / Description	Boat Length	Price
252281	(15088-101) 4" L x 12" W	14' - 25'	$490.98 D

Lenco Marine Airboat Trim Tab Kit



- The new 14" wide planing surface provides greater lift and less drag.
- The hydrodynamically designed side protrusions will not "dig in" during a hard turn which will result in a safer ridge.
- The bent-up rear lip provides lateral strength across the entire trim tab blade.
- Blade is 12-gauge 304 stainless steel with 2" hinge height and 1/8" diameter hinge pin.
- The adjustable actuator mounting bracket on the blade allows for proper fit on many different transom angles.
- In the retracted position, the airboat tab is safely protected when running dry.
- Kit includes: (1) 12-gauge stainless steel standard finish blade, (1) XD Extreme Duty 12 volt actuator, (1) 14' actuator extension wiring harness, (1) upper mounting bracket with gland seal and stainless steel mounting hardware.

Order No.	Mfg. No. / Description	Price
252407	(15112-101) 9" L x 12" W	$299.98 D

Lenco Marine Replacement Actuators



- Corrosion proof Vandar cap and mount.
- Stainless steel ram won't flex.
- Double O-ring for maximum protection.
- Ball screw rotates freely on 12 ball bearings at both ends of its stroke so there's no need for complicated limit switches or clutches.
- Self-locking ball screw locks into position and will not drift.
- Precision molded, powdered metal, high alloy gears provide high accuracy.
- Tough, high-torque motor easily transfers 750 lbs.
- High-impact, ultraviolet resistant nylon 66, 50% glass fiber reinforced thermoplastic housing.
- 6' leads with Deutsch connectors.
- 12 volt.

Order No.	Mfg. No. / Description			Price
252584	(15054-001) 101 Standard	2-1/4" Stroke	5/16" Hole	$169.98 D
252596	(15055-001) 101 XD	2-1/4" Stroke	5/16" Hole	$209.98 D
252590	(15056-001) 101 XD	2-1/4" Stroke	3/8" Hole	$209.98 D
252586	(15057-001) 101 XDS Short	2-1/4" Stroke	5/16" Hole	$209.98 D
252594	(15059-001) 102 Standard	4-1/4" Stroke	5/16" Hole	$199.98 D
252592	(15060-001) 102 XD	4-1/4" Stroke	5/16" Hole	$239.98 D

Lenco Marine Standard Switch Kit



- Totally waterproof, maintenance-free, easy-to-install tactile switches.
- Kit contents: Keypad, control box and 36" power pigtail.

Order No.	Mfg. No. / Description	Price
252575	(15069-001) 124SSR - Complete Switch Kit	$157.98 D
252611	(30134-001) Control Box Only	$125.98 D
252732	(30006-001D) Replacement Keypad Only	$42.98 D
252697	(30140-001D) Power Pigtail Only	$18.98 D

Lenco Marine L.E.D. Indicator Switch Kits



- With built-in retractor and self-check features.
- 12 and 24 volt applications.
- Totally waterproof, maintenance-free, easy-to-install tractile switches.
- (2) High-intensity LED indicator displays show the exact position of the trim tabs at all times.
- A photo eye reads ambient light and adjusts the indicator intensity for optimum viewing in all light conditions.
- A backlit keypad automatically illuminates graphics for night viewing.
- Single Actuator Systems Only.

Order No.	Mfg. No. / Description	Price
252572	(15070-001) 123SC - Complete Switch Kit	$325.98 D
252623	(30072-001) Control Box Only, Single Actuator	$297.98 D
252734	(30007-001D) LED Replacement Keypad	$75.98 D
252697	(30140-001D) Power Pigtail Only	$18.98 D

- Dual Actuator Systems Only.

Order No.	Mfg. No. / Description	Price
252574	(15071-001) 123DRSC - Complete Switch Kit	$442.98 D
252734	(30007-001D) LED Replacement Keypad	$75.98 D
252700	(10249-001) Power Pigtail Only	$56.98 D

Lenco Marine Replacement Actuators for Ski Boats and Tow Boats



- Important! You must choose the correct lobe version to maintain tracking accuracy!
- All 3 lobe actuators were manufactured 2011 and prior.
- All 5 lobe actuators were manufactured 2012 and later.

Order No.	Mfg. No. / Description	Price
252259	(15117-001) Lobes 3, 101 XDS Actuator, Stroke Length 2.25", Top Hole 5/16", End Hole 5/16"	$222.98 D
252261	(15118-001) Lobes 3, 102 HD Actuator, Stroke Length 4.25", Top Hole 5/16", End Hole 5/16"	$252.98 D
252263	(15119-001) Lobes 3, 1.25 XDS Actuator, Stroke Length 1.25", Top Hole 5/16", End Hole 5/16"	$229.98 D
252265	(15120-001) Lobes 5, 1.25 XDS Actuator, Stroke Length 1.25", Top Hole 5/16", End Hole 5/16"	$229.98 D
252267	(15121-001) Lobes 3, 1.25 XDS Actuator, Stroke Length 1.25", Top Hole 5/16", End Hole 3/8"	$229.98 D
252269	(15122-001) Lobes 5, 1.25 XDS Actuator, Stroke Length 1.25", Top Hole 5/16", End Hole 3/8"	$229.98 D

Lenco Marine Replacement Control Boxes for Ski Boats and Tow Boats



Order No.	Mfg. No. / Description	Price
252808	(30047-004D) Current Existing/Inoperable Control Box 30047-004	$271.98 D
252811	(30271-001D) Current Existing/Inoperable Control Box 30224-004, 30271-001	$336.98 D
252814	(30271-0015D) Current Existing/Inoperable Control Box 30271-0015	$287.98 D
252817	(30271-002D) Current Existing/Inoperable Control Box 30226-001, 30271-002	$336.98 D
252820	(30271-0025D) Current Existing/Inoperable Control Box 30271-0025	$287.98 D
252823	(30271-003D) Current Existing/Inoperable Control Box 30226-002, 30271-003	$336.98 D
252826	(30271-0035D) Current Existing/Inoperable Control Box 30271-0035	$294.98 D
252829	(30271-005D) Current Existing/Inoperable Control Box 30232-001, 30271-005	$325.98 D
252832	(30271-008D) Current Existing/Inoperable Control Box 30271-008	$325.98 D
252835	(30271-009D) Current Existing/Inoperable Control Box 30271-009	$325.98 D
252838	(30271-0135D) Current Existing/Inoperable Control Box 30271-0135	$333.98 D

Lenco Marine Double Rocker Switch Kit



- For single actuator systems, 12 and 24 volt.
- Does not have built-in retractor feature.
- Hole cut-out 2-1/4", overall size 2-3/4" x 2-3/4".
- Includes: Deutsch connectors, 36" power pigtail and mounting hardware.

Order No.	Mfg. No. / Description	Price
252576	(10222-211D) Double Rocker Switch Kit	$92.98 D

©2014 Donovan Marine, Inc.


Lenco Marine Airboat Single Rocker Switch



- Single rocker switch with Deutsch connector and (2) 30" non-terminated power leads.
- Recommended for use with Airboat Trim Tab Kit (252578), sold separately.

Order No.	Mfg. No. / Description	Price
252578	(15095-001) Switch	$54.98 D

Lenco Marine Flybridge Kits

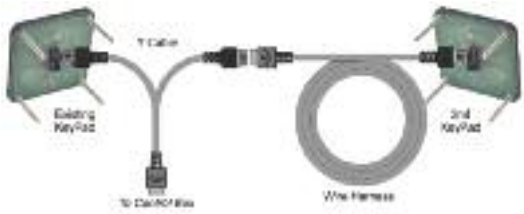

- Includes: 20' Wire harness, Y Cable and keypad.

Order No.	Mfg. No. / Description	Price
252635	(30041-102) For Standard Tactile Switch	$139.98 D
252647	(30041-002) For LED Indicator Tactile Switch	$179.98 D

Lenco Marine Replacement Trim Tab Blades



- 304 Stainless steel blades.
- 12-gauge.

Order No.	Mfg. No. / Description	Price
252729	(20140-001) 9" x 9" Standard Blade	$106.98 D
252722	(20141-001) 9" x 12" Standard Blade	$115.98 D
252724	(20149-001) 12" x 12" Standard Blade	$129.98 D
252726	(20160-001) 12" x 12" Edgemount Blade	$157.98 D
252727	(20161-001) 12" x 18" Edgemount Blade	$172.98 D

Lenco Marine Universal Actuator Mounting Bracket Replacement Kit



- Universal actuator mounting bracket replacement kit (for 1 actuator).
- Kit includes: 15085-001 - Upper mounting bracket with gland seal, 50015-001D - Standard upper mounting bracket, 50014-001D - Standard lower mounting bracket, stainless steel hardware and Delrin Pin.
- Clam Shell Packaged.

Order No.	Mfg. No. / Description	Price
252582	(15099-001) Replacement Kit (for 1 Actuator)	$29.98 D

Lenco Marine Delrin Mounting Pin



- For 101 and 102 actuator - 1.5".
- Pack of 2.

Order No.	Mfg. No. / Description	Price
252720	(15087-001)	$9.98 D

Lenco Marine Actuator Extension Harnesses



- Deutsch connectors.
- Completely waterproof, quick-easy installation.
- One required per actuator.
- Sold each.

Order No.	Mfg. No. / Description		Price
252655	(30133-001D)	Length 7'	$22.98 D
252659	(30133-002D)	Length 14'	$29.98 E
252661	(30133-103D)	Length 20'	$36.98 E
252673	(30142-001)	Length 26'	$65.98 E

Lenco Marine Replacement 36" Power Pigtail for Control Box



- 36" Power pigtail used in 252575 (15069-001) Standard Switch Kit, 252572 (15070-001) LED Indicator Switch Kit and 252576 (10222-211D) Double Rocker Switch Kit.
- 14 AWG wires with Deutsch plug.

Order No.	Mfg. No. / Description	Price
252697	(30140-001D)	$18.98 D

Lenco Marine Deutsch Plug - Electrical Repair Kit



- Total of 16 pieces.
- Contains: 4 sets of Deutsch plug and wedge for actuator and actuator extension harness (Orange/Grey) and 4 sets of Deutsch receptacle and wedge for actuator extension harness (Green/Grey).

Order No.	Mfg. No. / Description	Price
252712	(15086-001) Deutsch Plug - Electrical Repair Kit	$19.98 E

Lenco Marine Accessories



252714



252718



252716

Order No.	Mfg. No. / Description	Price
252714	(15085-001) Standard Upper Mounting Bracket - Vandar	$13.98 F
252718	(50015-001D) Standard Upper Mounting Bracket - Vandar	$13.98 F
252716	(50014-001D) Standard Lower Mounting Bracket - Vandar	$13.98 F
252719	(15097-001) Upper Mounting Bracket - 10-Gauge SS	$52.98 F

Bennett Marine Self-Leveling Tabs



- Good things come in small packages.
- Now you can have the durability of a Bennett trim tab system with a quick and easy installation.
- There is nothing to do inside the boat only the mounting of two actuators and two tabs at the transom.
- It's an affordable, simple solution for small boats from 10 to 18 feet.
- The SLT uses some of the same high-quality, proven materials and superior design used in Bennett standard systems for more than 50 years.
- Your SLT kit includes: Two 14-gauge stainless steel trim tab assemblies with Bennett's exclusive interlocking hinge, two strong and durable actuators, and all stainless steel hardware no plastic! Plus Bennett's no-hassle 5-year warranty on All Components.
- With the SLT, you can plane at lower speeds, improve your hole shot, reduce engine laboring, improve fuel efficiency and eliminate porpoising.
- The SLT reacts instantly to boat speed and water pressure by adding trim when it's needed.
- You get a better ride while the SLT does all the work.

Order No.	Mfg. No. / Description		Price
252980	(SLT6) 6" x 8"	For Boats from 10' to 14'	$154.98 E
252982	(SLT10) 10" x 10"	For Boats from 14' to 18'	$172.98 E

Bennett Hydraulic Power Unit



- A compact powerhouse that creates hydraulic pressure to lower and raise the trim tabs.
- It employs two solenoid valves to direct the flow of fluid to the actuators.
- The solenoid valves lock tightly to secure the tabs in place.
- Lexan cover protects electrohydraulic unit from occasional wash down and translucent reservoir allows fluid check at a glance.
- Measures 4" x 7-1/2" x 5-1/2".
- Includes: Pump, solenoid valves, reservoir and cover.
- 12 volt.

Order No.	Mfg. No. / Description	Price
253029	(V351HPU) Hydraulic Power Unit	$322.98 E

Bennett Mounting Plates Only

- Includes: Backing plate and hinge.

Order No.	Mfg. No. / Description	Price
253269	(MP12) 12 Hinge Only	$45.98 E
253271	(MP18) 18 Hinge Only	$54.98 E
253295	(MP30) 30 Hinge Only	$63.98 E

Bennett Auto Tab Retractor



- 12 volt.
- Automatically retracts tabs when boat's ignition is turned off.
- Trailered or dry storage boats have added defense from trim tab damage with them "full-up" during hauling, trailering and storage.
- Ensures trim tabs are all the way up every time boat is started if boat is not equipped with trim tab indicators.
- Easily installed under the instrument panel, the ATR connects to the trim tab control and engine ignition switch.

Order No.	Mfg. No. / Description	Price
252801	(AR512) Auto Tab Retractor	$82.98 F

Bennett Standard Trim Tabs without Controls



- Bennett trim tabs are two independent, stainless steel adjustable afterplanes attached to the bottom edge of the transom.
- The action is gentle, making it easy to adjust a boats trim precisely & safely.
- Maximum efficiency is obtained by using the longest span tabs possible.
- Measure transom from centerline to chine or turn of the bilge allowing 3-4" leeway.
- Outdrive or outboard applications require minimum 8" clearance from lower unit to tabs.
- All our kits are supplied with transom mount hinges for convex, concave or lifting strake bottom designs as well as any other style.
- All kits are standard 12 volt with thru-transom actuators.
- 5 year limited warranty.
- Note: Control switch not included. See next page for control switch selection.

Order No.	Mfg. No. / Description	Price
252915	12" x 9", Recommend 15' to 19' Boat Length	$576.98 E
252927	18" x 9", Recommend 19' to 24' Boat Length	$626.98 E
252939	24" x 9", Recommend 22' to 27' Boat Length	$689.98 E
252941	30" x 9", Recommend 25' to 30' Boat Length	$683.98 E
252953	36" x 9", Recommend 28' to 34' Boat Length	$754.98 E
252965	42" x 9", Recommend 32' to 38' Boat Length	$796.98 E
252977	48" x 9", Recommend 36' to 44' Boat Length	$854.98 E

Bennett Actuator Assemblies



- Bennett actuators are strong but flexible nylon/fiberglass hydraulic cylinders.
- The piston-like arms push tabs into position.
- Fluid flows through a concealed hole in the upper hinge at the top of the actuator - thus eliminating external hoses subject to damage.

Order No.	Mfg. No. / Description	Price
252899	(A1101A) Standard	$102.98 F
252902	(A1101EX) External Line	$102.98 F

- The A1200S measures 11-3/4" and is designed for installations where space is limited.

Order No.	Mfg. No. / Description	Price
252914	(A1200S) Short "Three-Ring" Actuator	$102.98 F

Bennett Trim Plane Only



- 304 Grade stainless steel.
- Transom mount.

Order No.	Mfg. No. / Description	Price
253194	(TPO129) 12 x 9 Trim Plane Only	$89.98 E
253207	(TPO189) 18 x 9 Trim Plane Only	$96.98 E
253219	(TPO249) 24 x 9 Trim Plane Only	$107.98 E
253221	(TPO309) 30 x 9 Trim Plane Only	$122.98 E
253233	(TPO369) 36 x 9 Trim Plane Only	$136.98 E
253245	(TPO429) 42 x 9 Trim Plane Only	$149.98 E

Bennett Actuator Parts

Order No.	Mfg. No. / Description	Price
253246	(A1113) Lower Hinge	$7.98 E
253275	(A1115) Lower Hinge Pin	$1.71 E

©2014 Donovan Marine, Inc.

Bennett Tab Position Indicator Kit



- The TPI helm display accurately shows deflection percentage of each trim tab and the LED brightness is adjustable for any lighting condition.
- Works with all Bennett Trim Tabs.
- Kit includes: Tab position indicator helm display, hardware kit, actuator upper hinge with coil - port (red) 30' and actuator upper hinge with coil - starboard (green) 30'.

Order No.	Mfg. No. / Description	Price
253019	(TPI20000) Tab Position Indicator Kit	$249.98 E

Bennett Marine Euro-Style Rocker Switch Control



- This Bennett control is waterproof, ergonomically designed and fits a single 2-1/2" hole.
- Comes with a 5 year warranty.
- Measures 2-3/4" x 2-3/4" and retro-fits with existing Bennett controls.

Order No.	Mfg. No. / Description	Price
252864	(ES2000) Rocker Switch Control	$95.98 E

StingRay Classic Hydrofoil



- On plane up to 50% faster!
- Reduced bow rise. Eliminates chinewalking.
- Stops porpoising. Wipes out cavitation.
- Delivers true stabilization.
- 30% - 40% fuel efficiency increase.
- Aids in pulling skiers.

Order No.	Mfg. No. / Description	Price
408219	(SR-1)	$59.98 E

StingRay XRIII Hydrofoil



- Designed with a radical new way to attach it, so that NO DRILLING OF HOLES is required!
- The wingtips curve down closer to the prop and are sculpted along the leading edges to decrease resistance, keeping the drag co-efficient to a minimum.
- For outboards and most stern drives from 75 HP up to 300+ HP.

Order No.	Mfg. No. / Description	Price
408221	(SR-XRIII-1)	$159.98 E

StingRay Stealth 1 Hydrofoil



- Utilizes the same Hydrofoil design technology as fighter jets.
- With the sleekest hydrodynamic profile available, the Stealth keeps you on plane for a smooth ride and greatly improved fuel efficiency.
- Wings with a dual angle of attack get you on plane fast and reduce top-end drag during the hole shot.
- Virtually eliminates cavitation, porpoising, chine walking, and instability.
- NO-DRILL mounting design.

Order No.	Mfg. No. / Description	Price
2001310	(STEALTH-1)	$145.98 Q

Bennett Marine Auto Tab Control



- The first and still the most affordable way to automatically trim the boat.
- Bennett pioneered the Auto Tab Control (ATC) to be easy to install and use for the boater.
- The ATC monitors and maintains your boats perfect attitude, automatically correcting out-of-trim conditions.
- Maximize trim tab efficiency and increase your boating safety and enjoyment with the Auto Tab Control.
- It is like cruise control for your boat.

Order No.	Mfg. No. / Description	Price
253044	(AC3000-SV) Auto Tab Control	$381.98 E

Bennett Wire Harness



- 22' wire harness.

Order No.	Mfg. No. / Description	Price
253031	(WH1000) Wire Harness	$37.98 E

Bennett Trim Tab Accessories

Order No.	Mfg. No. / Description	Price
252988	(T1125) Hydraulic Tubing	$2.04 E
252991	(T1127) Nut with Ferrule	$2.46 E
253055	(VP1135R) Solenoid Valve - Red Wire	$58.98 E
253067	(VP1135G) Solenoid Valve - Green Wire	$58.98 E

StingRay Stealth 2 Hydrofoil



- Best top-end speed in the industry.
- Best fuel efficiency in the industry.
- Worlds only dual angle of attack hydrofoil.
- Hidden NO-DRILL attachment.
- Exclusive fast-finish material provides lowest hydrodynamic drag.
- Faster hole shot than competition.
- Two-toned, upgraded styling.

Order No.	Mfg. No. / Description	Price
408225	(STEALTH 2-1) Black	$147.98 F
408230	(STEALTH 2-2) White	$147.98 F
408235	(STEALTH 2-3) Gray	$147.98 F


StingRay StarFire Hydrofoil



- The StarFire sports a swept back Delta-wing profile and has a unique, inverted trailing edge designed to relieve drag.
- Fits 40 HP and higher.
- No drill installation, only 2 set screws needed.
- Swept back wings help save fuel.
- Get up on plane in less than half the time it normally takes.

Order No.	Mfg. No. / Description	Price
408240	(STARFIRE-1) Black	$93.98 F
408246	(STARFIRE-2) White	$93.98 F
408250	(STARFIRE-3) Gray	$93.98 F

SkegShield™ Skeg Guards

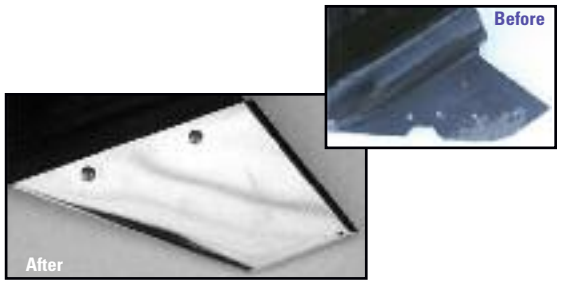

- Guards from reefs, coral head, lake bed rocks, boat ramps and submerged floating debris.
- Protects as well as repairs the damaged skeg and helps save your prop.
- Made from high quality polished marine grade stainless steel.
- No welding required, no epoxies an easy do-it-yourself 10 minute application.
- Drainage hole at the lower backside for when motor is not tilted (storage/boat dock) and will drain from front/top when motor is tilted, protecting from water retention.

- J/E: 85-140 HP, 2 Stroke 1980-2001.
- OMC: Cobra 4 Cylinder Stern 1986-1994 (No King Cobra).

Order No.	Mfg. No. / Description	Price
4830042	(SS00506)	$142.98 H

- Evinrude: 150-225 HP, 2 Stroke 1986-2003, 150 HP DBX & DPL (E-TEC) 2 Stroke 2004-2009, 175-200 HP DPL, 2 Stroke Blue (E-TEC) 2004-2009 and 225-250 DCX, DCZ, DPX (E-TEC) 2 Stroke 2004-2009.
- Johnson: 150-225 HP, 2 Stroke 1986-2003.
- OMC: Cobra 6 and 8 Cylinder Stern 1986-1994.
- Suzuki: 300 HP, 4 Stroke 2009-2012.

Order No.	Mfg. No. / Description	Price
990083	(SS00508)	$149.98 R

- Evinrude: 150-200 HP ETEC, 2 Stroke 25'' and 30" Shaft 2004-2013.

Order No.	Mfg. No. / Description	Price
4830057	(SS00523)	$142.98 H

- Evinrude: (Does not fit HO concave skegs) 40-50 HP, 4 Stroke 1999-2003 (by Suzuki).
- Mercury/Mariner: 40-60 HP, 2 and 4 Stroke 2003-2013.

Order No.	Mfg. No. / Description	Price
4830047	(SS00513)	$142.98 H

- J/E: (Does not fit HO concave skegs) 60-140 HP 1999-2003.
- Suzuki: 90-140 HP 2003-2013 (no DFA).

Order No.	Mfg. No. / Description	Price
4830052	(SS00518)	$142.98 H

- Force: 75-90 HP 1998-2002.
- Mercury/Mariner: 40-60 HP 2 and 4 Stroke (Big Foot) 2003-2013, 70-125 HP, 2 and 4 Stroke 1983-2013 (Including Optimax).
- Nissan/Tohatsu: 70-140 HP, 2 Stroke 1981-2013.

Order No.	Mfg. No. / Description	Price
990022	(SS00504)	$149.98 R

- Force: 70-75 HP, 2 Stroke 1991-1997.
- Honda: 35-50 HP, 4 Stroke 1991-2013, 90 HP, 4 Stroke 2008-2012.
- Mercury/Mariner: 40-60 HP, 2 Stroke 1986-2002.
- Suzuki: 40-70 HP, 4 Stroke 2003-2013.
- Nissan/Tohatsu: 35-50 HP, 2 Stroke 1993-2013.
- Yamaha (Does not fit Vmax concave skegs) 40-48, 50-85 HP, 2 Stroke 1984-2000.

Order No.	Mfg. No. / Description	Price
4830051	(SS00517)	$142.98 H

- Honda: 135-225 HP, 4 Stroke 2004-2013.

Order No.	Mfg. No. / Description	Price
4830054	(SS00520)	$142.98 H

- Volvo Penta SX Single Prop 2007-2013 (no SXA).

Order No.	Mfg. No. / Description	Price
4830045	(SS00511)	$142.98 H

- Volvo Penta Marine SX Single Prop Drives 1995-2006.

Order No.	Mfg. No. / Description	Price
4830044	(SS00510)	$142.98 H

- Mercruiser: I Drives 1973-1984.

Order No.	Mfg. No. / Description	Price
4830036	(SS00500)	$142.98 H

- Mercruiser: I and Alpha I Drives 1973-1984.

Order No.	Mfg. No. / Description	Price
990019	(99001)	$201.58 H

- Mercruiser: Alpha I Drives 1985-1090.

Order No.	Mfg. No. / Description	Price
990021	(SS00501)	$149.98 R

- Mercruiser: Alpha I Generation II 1991-2013.

Order No.	Mfg. No. / Description	Price
990033	(SS00502)	$149.98 R

- Mercruiser: Bravo 1 and 3 Drives 1990-2013.

Order No.	Mfg. No. / Description	Price
990057	(SS00503)	$149.98 R

- Mercury/Mariner: 135-200 HP, 2 and 4 Stroke 1978-2004, 225 HP, 2 Stroke 1978-1995.

Order No.	Mfg. No. / Description	Price
990069	(SS00505)	$149.98 R

- Mercury/Mariner: 150-300 HP, 2 and 4 Stroke 2005-2013 Verado & Optimax, 225 HP, 2 Stroke 1996-2004.

Order No.	Mfg. No. / Description	Price
990092	(SS00514)	$149.98 R

- Mercury/Mariner: PRO XS.

Order No.	Mfg. No. / Description	Price
4830055	(SS00521)	$142.98 H

- Suzuki: 150-225 HP, 2 Stroke 1986-2002, 150-225 HP, 4 Stroke 2003-2010.

Order No.	Mfg. No. / Description	Price
4830053	(SS00519)	$142.98 H

- Yamaha: 115-130 HP, 2 Stroke 1984-2002, 150 HP, 2 and 4 Stroke 1984-2013, 150-350 HP, 4 Stroke 2004-2013, 175-250 HP, 2 Stroke 1984-2002 and Stern Drives 1989-1993.
- Suzuki: 250 SS and 300 SS HP, 4 Stroke 2006-2012.

Order No.	Mfg. No. / Description	Price
990015	(SS00512)	$149.98 R

- Yamaha: 115-130 HP, 2 Stroke 2003-2013, 115-130 HP, 4 Stroke 2000-2013.

Order No.	Mfg. No. / Description	Price
990098	(SS00516)	$149.98 R

- Yamaha: 60-100 HP, 2 and 4 Stroke 2002-2013.

Order No.	Mfg. No. / Description	Price
990095	(SS00515)	$149.98 R

- Yamaha: VMAX 200 1998-2005, 225 1998-2004, 250 2002-2004.

Order No.	Mfg. No. / Description	Price
4830056	(SS00522)	$142.98 H

©2014 Donovan Marine, Inc.

SkegShield™/Keelshield™ Display



- Display includes:
  482022 (KS-7BLK) Black, Length 7'
  482016 (KS-5WHT) White, Length 5'
  482020 (KS-6WHT) White, Length 6'
  482028 (KS-7WHT) White, Length 7'
  990015 (SS00512) Yamaha SkegShield
  990021 (SS00501) MerCruiser SkegShield
  990022 (SS00504) Mercury/Mariner/Force/Nissan/Tohatsu SkegShield
  990033 (SS00502) MerCruiser SkegShield
  990057 (SS00503) MerCruiser SkegShield
  990069 (SS00505) Mercury/Mariner SkegShield
  990083 (SS00508) J/E/OMC/Suzuki SkegShield
  Header Card
  (2) Wide Base Sign Holder

Order No.	Mfg. No. / Description	Price
990099	Keelshield Display	$1,886.98 G

Doel-Fin Hydrofoil Stabilizer



- DOEL-FIN is the original hydrofoil developed by an aeronautical engineer to improve overall performance on any boat with an outboard motor or outdrive unit.
- Use Doel-Fin on ALL boats, from small dinghies to large ocean cruisers!
- Doel-Fin was designed to produce maximum lift while minimizing drag.
- Creating lift in the stern compensates for motor weight for smoother turns, better gas mileage and less stern drag.
- Molded in 2 pieces of guaranteed unbreakable, high-strength plastic, each foil is designed to flex independently to absorb shock.
- The positive effects include greater stability, consistent planing at lower RPM, faster out-of-the-hole performance, steadier turns, higher top-end speeds and lower bow rise at all speeds.
- Doel-Fin improves overall performance, even on boats with well-designed hulls.
- Save up to 30% on fuel consumption.
- Faster out-of-the-hole means happier water skiers.
- Maintain lower planing speeds without constant throttle adjustments for wakeboarding, tubing or beginning skiers.
- Less bow rise improves visibility and increases safety.
- Simple 15-minute installation; hardware included.
- Doel-Fin is designed for use with small motors, big motors, and inflatable dinghies.
- Boats with small motors no longer "porpoise" with the bow-up when the throttle is applied and achieve planing at lower engine speeds.
- Big motors benefit from less stern suction, faster planing times and steadier turns.
- The Doel-Fin stabilizer is sold in sets of left and right fins.
- Black.

Order No.	Mfg. No. / Description	Price
322017	(440)	$39.98 E

Skeg Depot Replacement Skegs



- Manufactured to truly match the original size and shape.
- Polished to a smooth finish ready to prime and paint.
- The strongest and most labor and time saving "Replacement" skegs available.
- Skegs available for: Chrysler/Force, Evinrude/Johnson, Honda, Late Model Force, Mercury/Mariner, Mercruiser, OMC, Suzuki, and Yamaha.

Order No.	Mfg. No. / Description	Price
2004540	(S-E11) J/E, 10-15 HP	$35.98 Q
2004545	(S-E23) J/E, 25-35 HP, Older Models	$35.98 Q
2004550	(S-E23L) J/E, 25-35 HP, Later Models	$35.98 Q
2004555	(S-E46) J/E, 40 HP 1996, 60 HP 1985	$35.98 H
2004570	(S-E70) J/E, 60 HP 1986 & Up, 70 HP 1996 & Up	$35.98 Q
2004575	(S-EV4) J/E, OMC, O/B V4, Some Later Model I/O OMC 4 Cyl. Cobra	$35.98 H
2004560	(S-E64) J/E, OMC, O/B V6 1984 - Earlier, Some Later OMC Stern Drive I/O's	$35.98 Q
2004565	(S-E65) J/E, OMC, O/B V8 1985 & Up, Later Model V6, I/O Cobra V6 and V8	$35.98 H
2004665	(S-OV6) OMC, 1984 & Earlier	$35.98 Q
2004595	(S-M12) Mercury/Mariner, 18-25 HP & Earlier	$35.98 Q
2004605	(S-M1825) Mercury/Mariner, 18-25 HP 1986 & Later	$35.98 Q
2004625	(S-M47) Mercury/Mariner, 40-70 HP	$35.98 H
2004630	(S-M56) Mercury/Mariner, 50-60 HP 1991 & Up	$35.98 H
2004635	(S-M79) Mercury/Mariner, 70-90 HP 1987 & Up, 3 & 4 Cyl.	$35.98 H
2004640	(S-M84) Mercury/Mariner, 80-140 HP & Some Higher 1984 & Later V6	$35.98 H
2004650	(S-M98) Mercury/Mariner, 150 HP & Up 1983 & Older, 200 HP EFI, 150 HP XR6 1999 & Later	$35.98 H
2004620	(S-M225) Mercury/Mariner, 225 HP Nitro, 200 HP Optimax 1999 & Up	$35.98 H
2004600	(S-M126) Mercruiser, 120-160 HP	$35.98 Q
2004610	(S-M1991) Mercruiser, Alpha I 1991-1999	$35.98 H
2004615	(S-M2000) Mercruiser, Alpha I 2000 & Later	$35.98 H
2004645	(S-M88-90) Mercruiser, Alpha I Mid 1980-1990	$35.98 H
2004660	(S-MBR1-90) Mercruiser, Bravo I, Bravo III 1990 & Later	$60.98 H
2004655	(S-MBR1) Mercruiser, Bravo III 1988-1989	$60.98 G
2004670	(S-SV6) Suzuki, 150 HP & Up	$35.98 H
2004675	(S-V28) Volvo, 280 Units	$35.98 Q
2004680	(S-V29DP) Volvo, 290 Units, Duoprop 1997 & Earlier	$35.98 Q
2004685	(S-VP99) Volvo, Volvo-Penta, Duoprop 1998 & Later	$49.98 H
2004690	(S-Y45) Yamaha, 40-50 HP	$35.98 H
2004695	(S-Y79-88) Yamaha, 70-90 HP 1988 & Later	$35.98 Q
2004700	(S-YV6) Yamaha, 115-200 HP	$35.98 H
2004535	(S-C71) Chrysler, 75-140 HP Older Models	$35.98 Q
2004580	(S-F150) Force, 85, 125, 150 HP 1989 & Up	$35.98 H
2004585	(S-F82) Force, 85-125 HP Earlier Models	$35.98 Q
2004590	(S-F90) Force, Newer 90 HP with 70-90 HP Mercury Cases	$35.98 Q

SE Sport Turbo Hydrofoils



- Faster starts/cuts plane time in half.
- Blasts out of shallow water.
- Defeats cavitation and prop blow out.
- Stops porpoising.
- Curved shape for maximum thrust.
- Built-in tracking/stability control.
- Narrow profile. New molded in decal.
- Exclusive site gauge for a perfect fit.
- Made in the USA with a lifetime warranty.

Order No.	Mfg. No. / Description		Price
2004260	(SE200B) Black	8 - 35 HP	$57.98 R
2004265	(SE300B) Black	35 - 350 HP	$69.98 H
2004270	(SE200B) Gray	35 - 350 HP	$69.98 H


T-H Marine Hydro-Tail™



- Total performance stabilizer.
- Fits all outboards and sterndrives boats.
- Provides a one-piece unit that will fit outboard or I/O lower units.
- The unique design means simple installation and superior strength to provide boats with the ultimate in total performance.
- Instructions and mounting hardware are included.
- Black.

Order No.	Mfg. No. / Description	Price
641246	(HYD-1) Hydro-Tail	$28.98 H

T-H Marine Replacement Skegs



- A cast aluminum direct replacement skeg for outboard and I/O lower units.
- Welds to existing lower unit to bring back original performance and appearance.

Order No.	Mfg. No. / Description	Price
642428	(RS-1) For Bombardier & Yamaha V6	$27.98 H
642431	(RS-2) For 85 to 140 HP	$27.98 H
642404	(RS-4) For Mercury V6 and Stern Drives	$27.98 H

Marpac Universal Motor Flusher - Rectangular Cup



- Fits most engines with side water inlets.
- Installs easily - No tools needed.
- Flush away sand, silt, salt and alkali to prevent clogging and corrosion to extend engine life.

Order No.	Description	Price
7-0574		$5.98 G
7-0574S	Display Box of 24 Motor Flushers	$119.98 I

Marpac Universal Motor Flusher - Round Cup



- Fits most engines with side water inlets.
- Installs easily - No tools needed.
- Flush away sand, silt, salt and alkali to prevent clogging and corrosion to extend engine life.

Order No.	Description	Price
7-0576		$4.98 G
7-0576S	Display Box of 24 Motor Flushers	$125.98 G

Boater Sports Basic Motor Flusher



- Motor flusher fits most outboards and I/O outdrives.
- Flush contaminants from cooling system and allows idling for engine adjustments.
- Install in seconds using a garden hose.
- Needs no tools.

Order No.	Mfg. No. / Description	Price
1-53300	(53300)	$5.99 H

T-H Marine Torque Tab



- A simple solution to eliminate right hand steering torque caused by directional rotation of propeller.
- The Torque Tab is inexpensive, simple to install and does not reduce speed.
- Cast aluminum construction comes with installation hardware and instructions.

Order No.	Mfg. No. / Description	Price
641353	(TAB-1) Torque Tab	$23.98 H

T-H Marine Nose Cone



- This cast aluminum cone is made to fit the front gearcase housing.
- This lengthens the transition from the gearcase nose to its trailing edge, thus reducing the chance of vacuum pocket in the side of the gearcase. Cone can be attached to lower unit housing with epoxy, bondo or similar adhesive.
- One cone fits all lower units.

Order No.	Mfg. No. / Description	Price
641324	(NC-1) Nose Cone	$41.98 H

Moeller Universal Rectangular Cup Motor Flusher



- Ideal in low-pressure conditions prevalent around marinas
- Improved water flow with rectangular cups will virtually eliminate water leakage for higher-pressure flushing.
- For use on all lower units with side water inlets; includes Volvo's SX.

Order No.	Mfg. No. / Description	Price
808716	(099077-00) Universal Motor Flusher	$8.98 F

Moeller Universal Motor Flusher



- No tools required.
- Easy-to-use.
- For use on all lower units with side water inlets.

Order No.	Mfg. No. / Description	Price
808720	(099076-00) Motor Flusher	$5.98 F

Boater Sports Larger Motor Flusher



- Designed for larger outboards.
- Flush contaminants from cooling system and allows idling for engine adjustments.
- Install in seconds using a garden hose.
- Needs no tools.

Order No.	Mfg. No. / Description	Price
1-53302	(53302)	$8.99 R

©2014 Donovan Marine, Inc.


Marpac Dual Water Feed Motor Flusher



- Flush sand, silt and saltwater.
- Ideal for larger horsepower engines.
- Rectangular inlet cups create a better seal.
- For use with all lower units that have side water inlets.

Order No.	Mfg. No. / Description	Price
7-0573	Motor Flusher	$19.98 G

Moeller Dual Feed Motor Flusher



- A customer-favorite for all engines over 50 horsepower.
- Improved water flow with rectangular cups will virtually eliminate water leakage for higher-pressure flushing.
- For use on all lower units with side water inlets; includes Volvos.

Order No.	Mfg. No. / Description	Price
808717	(099082-00) Motor Flusher	$27.98 F

Boater Sports Inboard Motor Flusher



- Designed for larger outboards.
- Flush contaminants from cooling system and allows idling for engine adjustments.
- Install in seconds using a garden hose.
- Needs no tools.

Order No.	Mfg. No. / Description	Price
1-53299	(53299)	$19.99 H

Perko Flushpro Engine Flushing Systems



- Flush your boat engine safely and easily.
- Durable check valve system activated by water pressure from a garden hose.
- Check valve automatically shuts off hull intake when water pressure is applied.

Order No.	Mfg. No. / Description	Price
539467	(456 DP6) 1"	$113.98 R
539481	(456 DP7) 1-1/4"	$113.98 R

T-H Marine Quick Flush O/B Engine Flush Kits



- Makes flushing salt or sand quick, easy and painless.
- Slide valve replaces flushing port plug.
- Kit includes: Slide valve, hose quick connector and washer.

Order No.	Mfg. No. / Description	Price
641274	(QF-1K-DP) For Johnson/Evinrude, Except ETEC	$22.98 H
641262	(QF-2K-DP) For Mercury and Most Other O/B	$22.98 H

Boater Sports Dual Flow Motor Flusher



- Universal dual flow motor flusher.
- Works on most outboards and I/O's.
- Great way to test run a motor before heading to the water.

Order No.	Mfg. No. / Description	Price
1-53304	(53304)	$14.95 H

Marpac Adjustable Length Inboard Engine Flusher



- Installs easily without tools.
- Check, tune and flush your inboard engine anywhere on dry land.
- Adjusts from 18" to 30" with just a twist.
- For use on gas or diesel inboard engines with thru-hull water intakes.

Order No.	Mfg. No. / Description	Price
7-0579	(FP0500010)	$11.98 G

Moeller Inboard Engine Adjustable Motor Flusher



- No tools required; Telescoping flusher installs in minutes.
- Large cup prevents water blow-by or fall-off during usage.
- Telescoping tube allows precise alignment for hard-to-reach areas.

Order No.	Mfg. No. / Description	Price
808719	(099081-00) Adjustable Motor Flusher	$28.98 H

Marpac Dual Water Feed Motor Flusher



- An eye appealing, free standing floor display with a colorful "product-in-action" header.
- Comes with 22 universal, round-cup motor flushers.
- The highly visible display puts this popular product within easy reach of the customer.

Order No.	Mfg. No. / Description	Price
808725	(099076-50) Display	$139.98 F

MPI Products Series 100 "Flex" Premium Water Hose - Hardwall



- A premium water hose that is resilient to sea water, mild acids, toilet effluent, hot engine water and external abrasion.
- Constructed with helical wire imbedded between 2 plies of rayon cord for maximum flexibility.
- Green Stripe.
- Sold in 12-1/2' lengths.
- Hose clamps sold separately.

DMI #	MFG #	Size	Size & DMI # f/Hose Clamp		Price
770001	(100-0584)	5/8"	7/16" - 1-1/16"	276053	$125.98 M
770013	(100-0344)	3/4"	7/16" - 1-1/16"	276053	$127.98 M
770025	(100-1004)	1"	7/16" - 1-1/4"	276067	$130.98 M
770037	(100-1184)	1-1/8"	1/2" - 1-1/2"	276079	$140.98 M
770049	(100-1144)	1-1/4"	3/4" - 1-3/4"	276089	$153.98 M
770051	(100-1384)	1-3/8"	1" - 2"	276091	$177.98 M

MPI Products Series 250/252 Certified Wet Exhaust Hose - Hardwall



- Certified wet exhaust, heavy wall with helical wire reinforcement between 4 plies of Rayon fabric.
- Resists heat, ozone and all exhaust by-products.
- Meets or exceeds USCG and ABYC standards for wet exhaust service.
- Recommended for all exhaust hose applications.
- Series 252.
- Corrugated Exhaust available for severe bend applications.
- Blue stripe.
- Sold in 12-1/2' lengths.
- Hose clamps sold separately.

DMI #	MFG #	Size	Size & DMI # f/Hose Clamp		Price
770063	(250-1124)	1-1/2"	1" - 2"	276091	$164.98 M
770075	(250-1584)	1-5/8"	1-1/4" - 2-1/4"	276104	$188.98 M
770087	(250-1344)	1-3/4"	1-1/2" - 2-1/2"	276116	$199.98 M
770099	(250-1784)	1-7/8"	1-1/2" - 2-1/2"	276116	$208.98 M
770102	(250-2004)	2"	1-1/2" - 2-1/2"	276116	$213.98 M
770126	(250-2384)	2-3/8"	2" - 3"	276130	$257.98 M
770138	(250-2124)	2-1/2"	2" - 3"	276130	$293.98 M
770152	(250-3004)	3"	2-1/2" - 3-1/2"	276142	$357.98 M
770176	(250-3124)	3-1/2"	3" - 4"	276154	$421.98 M
770188	(250-4004)	4"	3-1/2" - 4-1/2"	276166	$518.98 M
770215	(250-6004)	6"	5-1/2" - 6-1/2"	276205	$875.98 M
770239	(252-2004)	2" Corr.	1-1/2" - 2-1/2"	276116	$305.98 M
770241	(252-3004)	3" Corr.	2-1/2" - 3-1/2"	276142	$431.98 M

T-Bolt Exhaust Hose Clamps



- Constructed of 18-8 stainless steel.
- .025" thick x .75" wide.
- With a nylon insert lock nut.
- The extra long t-bolt complies with most exhaust hose requirements.

Order No.	Mfg. No. / Description	Price
769105	(720-2000) Hose ID 2", Dia. Range 2.10" - 2.75"	$21.98 M
769107	(720-2120) Hose ID 2-1/2", Dia. Range 2.75" - 3.40"	$21.98 M
769109	(720-3000) Hose ID 3", Dia. Range 3.20" - 3.85"	$22.98 M
769110	(720-3120) Hose ID 3-1/2", Dia. Range 3.65" - 4.30"	$22.98 M
769111	(720-4000) Hose ID 4", Dia. Range 4.15" - 4.80"	$22.98 M
769115	(720-4120) Hose ID 4-1/2", Dia. Range 4.75" - 5.40"	$24.98 M
769123	(720-5000) Hose ID 5", Dia. Range 5.30" - 5.95"	$24.98 M
769135	(720-6000) Hose ID 6", Dia. Range 6.40" - 7.05"	$25.98 M
769147	(720-8000) Hose ID 8", Dia. Range 8.40" - 9.05"	$25.98 M

MPI Products Series 120 "Flex" Premium Water Hose - Softwall



- A premium water hose that is resilient to sea water, mild acids, toilet effluent, hot engine water and external abrasion.
- 2 ply construction where wire helix is not necessary for tight bends.
- Green Stripe.
- Sold in 12-1/2' lengths.
- Hose clamps sold separately.

DMI #	MFG #	Size	Size & DMI # f/Hose Clamp		Price
770304	(110-0584)	5/8"	7/16" - 1-1/16"	276053	$116.98 M
770316	(110-0344)	3/4"	7/16" - 1-1/16"	276053	$119.98 M
770328	(110-1004)	1"	7/16" - 1-1/4"	276067	$144.98 M
770330	(110-1184)	1-1/8"	1/2" - 1-1/2"	276079	$162.98 M
770342	(110-1144)	1-1/4"	3/4" - 1-3/4"	276089	$174.98 M
770354	(110-1384)	1-3/8"	1" - 2"	276091	$177.98 M

MPI Products Series 200 Certified Wet Exhaust Hose - Softwall



- Certified wet exhaust, heavy wall.
- Resists heat, ozone and all exhaust by-products.
- Meets or exceeds USCG and ABYC standards for wet exhaust service.
- Recommended for short straight connections.
- Blue stripe.
- Sold in 12-1/2' lengths.
- Hose clamps sold separately.

DMI #	MFG #	Size	Size & DMI # f/Hose Clamp		Price
770366	(200-1124)	1-1/2"	1" - 2"	276091	$182.98 M
770378	(200-1584)	1-5/8"	1-1/4" - 2-1/4"	276104	$188.98 M
770380	(200-1344)	1-3/4"	1-1/2" - 2-1/2"	276116	$197.98 M
770392	(200-1784)	1-7/8"	1-1/2" - 2-1/2"	276116	$206.98 M
770405	(200-2004)	2"	1-1/2" - 2-1/2"	276116	$215.98 M
770418	(200-2144)	2-1/4"	2" - 3"	276130	$280.98 M
770429	(200-2384)	2-3/8"	2" - 3"	276130	$324.98 M
770431	(200-2124)	2-1/2"	2" - 3"	276130	$325.98 M
770443	(200-2784)	2-7/8"	2-1/2" - 3-1/2"	276142	$346.98 M
770455	(200-3004)	3"	2-1/2" - 3-1/2"	276142	$377.98 M
770479	(200-3124)	3-1/2"	3" - 4"	276154	$412.98 M
770481	(200-4004)	4"	3-1/2" - 4-1/2"	276166	$461.98 M
770493	(200-4124)	4-1/2"	4" - 5"	276178	$663.98 M
770506	(200-5004)	5"	4-1/2" - 5-1/2"	276180	$648.98 M
770518	(200-6004)	6"	5-1/2" - 6-1/2"	276205	$854.98 M
770520	(200-8004)	8"	5-1/2" - 6-1/2"	276205	$1,152.98 M

MPI Exhaust Flappers



Order No.	Mfg. No. / Description	Price
184456	(201-3000C) 3"	$27.98 I
184457	(201-4000C) 4"	$29.98 I
184458	(201-6000) 5" or 6"	$55.98 I

©2014 Donovan Marine, Inc.

Buck-Algonquin Transom Exhausts



Order No.	Mfg. No. / Description	Price
260719	(TE-300) Cast Bronze	$125.98 Q
260733	(TE-400) Cast Bronze	$207.98 Q

DMI #	MFG #	Hose Shank OD	Length	Flange OD	Flange Angle
260719	TE-300	3"	5"	5"	8°
260733	TE-400	4"	4-3/4"	7"	16°

Centek Vernatone Round Mufflers



- Application: All Inboards.
- Fuel type: Gas/Diesel.
- Waterline: Above only.
- Sound rating: Good.
- NOTE: For V-Block engines where twin exhaust lines are desired, divide the H.P. by two and then match to the appropriate size.

Order No.	Mfg. No. / Description	Price
675100	(1000108) 5" Inlet/Outlet O.D., 38.75" L x 11" Diameter	$489.98 Q
675112	(1000111) 6" Inlet/Outlet O.D., 41.5" L x 12.2" Diameter	$669.98 Q
675124	(1000119) 8" Inlet/Outlet O.D., 52.75" L x 16.21" Diameter	$1,230.98 Q

Centek Vernalift Muffler



- Side angle in/top out.
- Applications: Inboards, sailboats & generators.
- Fuel type: Gas/Diesel.
- Waterline: Above or below.
- Sound rating: Better.

Order No.	Mfg. No. / Description	Price
675133	(1500223) 1.5" Inlet/Outlet O.D., 8" Height x 8.36" Diameter	$228.98 Q

Centek Centubular Mufflers

- Centubular wet exhaust mufflers incorporate the features of the Vernatone muffler into one long slender tube.
- Due to its minimal baffling, this muffler is recommended only where severe space restrictions mandate its use.
- Typical installations include sportfish boats where most space is allocated to increased fuel carrying capacity.
- Applications: Inboard power vessels with space restrictions.
- Fuel type: Gas or diesel.
- Above Waterline installation only.
- Sound rating: Fair.

Order No.	Mfg. No. / Description	Price
675148	(1060600) 6" Inlet/Outlet O.D., Length 42"	$1,577.98 Q
675150	(1060800) 8" Inlet/Outlet O.D.	$2,147.98 Q

Fiberglass Tubing



- Priced by the foot.
- Sold in 10' lengths only.

Order No.	Mfg. No. / Description	Price
375382	(1100502) 3" x 10'	$19.98 Q
675398	(1100506) 5" x 10'	$29.98 Q

Centek Vernalift Mufflers



- Application: All Inboards.
- Fuel type: Gas/Diesel.
- Waterline: Above only.
- Sound rating: Better.
- NOTE: For V-Block engines where twin exhaust lines are desired, divide the H.P. by two and then match to the appropriate size.

Order No.	Mfg. No. / Description	Price
675162	(1400006) 5" Inlet/Outlet O.D., 31.5" L x 10.04" Diameter	$596.98 Q
675175	(1400007) 6" Inlet/Outlet O.D., 38" L x 12.5" Diameter	$788.98 Q
675189	(1400008) 8" Inlet/Outlet O.D., 50.5" L x 16.25" Diameter	$1,387.98 Q
675198	(1400009) 10" Inlet/Outlet O.D., 63" L x 18.5" Diameter	$1,933.98 Q

Centek Gen-Sep™ Gas/Water Separation Muffler



- Separation systems are very effective where engines are located amidships or well forward in the hull and extremely effective in reducing exhaust noise.
- Used in conjunction with a Vernalift muffler on generator sets.
- The water drain from the Gen-Sep can be located below the waterline to eliminate irritating water splash during overnight moorings.

Order No.	Mfg. No. / Description	Price
675136	(1020200) 2" Inlet/Outlet O.D., 1.5" Water Drain	$349.98 Q

Hotshield Commercial Fiberglass Muffler/Manifold Wrap



- Each roll is quality heat resistant fiberglass wrap and includes a 10' coil of stainless locking wire to secure the tape in place.
- Temperature limit 750° F.
- 1/8" x 3" x 100'.

Order No.	Mfg. No. / Description	Price
380167	(20003) 1/8" x 3" x 100'	$48.98 F

Centek Vernatube



- It is a resin-impregnated glass filament wound tubing wound exclusively with a fire retardant resin formulated for high temperature applications.
- Used to fabricate many of the basic components used to manufacture our wet marine exhaust systems.
- The smooth, resin-rich I.D. assures minimal restriction to exhaust gases and cooling water flowing through the tubing.
- Precise control of the outside diameter ensures ease of connecting mating ports with marine exhaust hose.
- Warning: Vernatube should never be installed in an exhaust system where structural loads from the boat/vessel might be transferred to the tube producing stress.
- Such stress could result in damage or failure of the tube or other components of the system.
- Sold in 10' lengths, pricing is per foot.

Order No.	Mfg. No. / Description	Price
675368	(1100525) Nominal O.D. 1", Nominal Wall .104"	$12.98 Q
675390	(1100507) Nominal O.D. 6", Nominal Wall .148"	$34.98 Q
675403	(1100508) Nominal O.D. 8", Nominal Wall .154"	$62.98 Q
675415	(1100509) Nominal O.D. 10", Nominal Wall .160"	$89.98 Q

Trident Marine Silicone and Rubber Elbows and Hump Hose Bellows



45° Rubber Elbow



Hump Hose


- Provide the ultimate flexible connectors for marine wet exhaust systems.
- They offer much greater tolerance to heat, misalignment, engine movement and vibration, with significant savings in cost, parts, labor and space.
- Highest max. continuous operating temps.
- Molded black hi-temp: EPDM Rubber 250° F (121° C).

Order No.	Mfg. No. / Description	Price
768101	(TRL690C)90° Rubber Elbow, 6"	$97.98 I
768119	(TRL890C) 90° Rubber Elbow, 8"	$305.98 I
768121	(TRL645C) 45° Rubber Elbow, 6"	$74.98 I
768133	(TRL845C) 45° Rubber Elbow, 8"	$329.98 I
768169	(THH5C) Hump Hose Bellow, 5"	$55.98 I
768171	(THH6C) Hump Hose Bellow, 6"	$67.98 I
768183	(THH8C) Hump Hose Bellow, 8"	$260.98 I
768195	(THH10C) Hump Hose Bellow, 10"	$307.98 I
768234	(THHR65C) Hump Hose Reducer, 6" to 5"	$61.98 I
768246	(THHR86C) Hump Hose Reducer, 8" to 6"	$228.98 I
768258	(THHR108C) Hump Hose Reducer, 10" to 8"	$303.98 I

- Blue very hi-temp: Silicone 350° F (177° C).

Order No.	Mfg. No. / Description	Price
768145	(290V6000C) 90° Silicone Elbow, 6"	$305.98 I
768157	(240V6000C) 45° Silicone Elbow, 6"	$245.98 I
768208	(272V6000C) Hump Hose Bellow, 6"	$264.98 I
768210	(272V8000C) Hump Hose Bellow, 8"	$523.98 I
768222	(272V10000C) Hump Hose Bellow, 10"	$778.98 I

Centek Fittings

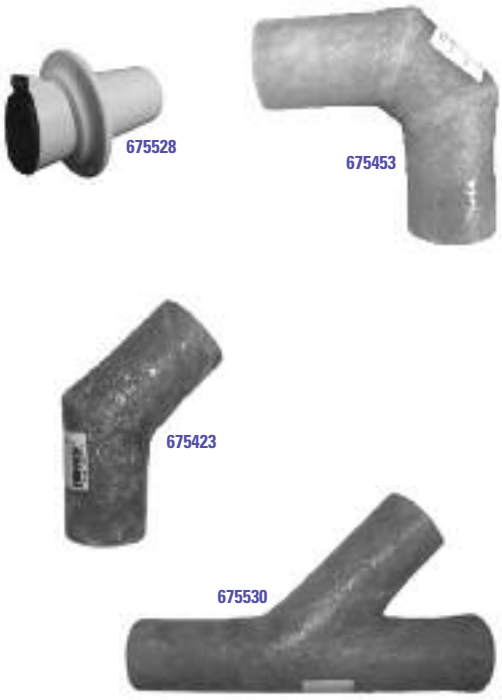

- Exhaust systems fittings are made of the same fiberglass and fire retardant resins used to produce Vernatube, our UL listed tubing line.
- The fittings are light-weight, strong, non-corroding, and durable.
- Fittings are easy to install and OD's are compatible with approved marine rubber exhaust hose.

45° Standard Elbows.

Order No.	Mfg. No. / Description	Price
675423	(1200192) Nominal O.D. 2", Length 6.75"	$38.98 Q
675427	(1200113) Nominal O.D. 5", Length 13.63"	$89.98 Q
675439	(1200114) Nominal O.D. 6", Length 15.38"	$125.98 Q
675441	(1200216) Nominal O.D. 8", Length 19.31"	$306.98 Q

90° Standard Elbows.

Order No.	Mfg. No. / Description	Price
675453	(1200200) Nominal O.D. 2", Length 5.75"	$54.98 Q
675465	(1200175) Nominal O.D. 5", Length 12.25"	$139.98 Q
675477	(1200162) Nominal O.D. 6", Length 14.00"	$192.98 Q
675489	(1200197) Nominal O.D. 8", Length 18.12"	$391.98 Q

Reducer Couplings.

Order No.	Mfg. No. / Description	Price
675491	(1200148) Nominal O.D. 5" to 6", Length 14"	$104.98 Q
675504	(1200166) Nominal O.D. 6" to 8", Length 18"	$205.98 Q
675516	(1200259) Nominal O.D. 8" to 10", Length 22"	$306.98 Q

90° Standard Elbows.

Order No.	Mfg. No. / Description	Price
675530	(1200364) Nominal O.D. 5", 21.50" L x 13.50" H	$346.98 Q
675542	(1200365) Nominal O.D. 6", 25" L x 15.90" H	$382.98 Q
675554	(1200366) Nominal O.D. 8", 32" L x 20.75" H	$446.98 Q
675566	(1200367) Nominal O.D. 10", 39" L x 25.56" H	651.98 Q

Thru Hull Fitting with Flapper

Order No.	Mfg. No. / Description	Price
675528	(1200342) Nominal O.D. 5", 9.06" L x 7.50" Dia.	$129.98 Q

Moon American Angle Valve

- Plain brass.
- Female IPT x Male IPT.

Order No.	Mfg. No. / Description	Price
380321	(170-1511MSPH) 1-1/2 Angle VLV	$126.98 F

©2014 Donovan Marine, Inc.

Attwood Portable Fuel Tanks



- Automotive Grade multi-layer Co-extruded HDPE/EVOP tank material prevents the evaporation of gasoline saving gas and money
- Compatible with 1/4" NPT fuel fittings
- Exclusive no-joint injection molded tank interfaces ensure leak free performance in severe conditions
- Ratcheting cap with tether ensures proper tank closure and prevents accidental cap loss.
- Cap includes automatic vacuum valve that eliminates the traditional manual thumb screw and prevents water from leaking into tank.
- Cap includes industry leading high-flow automatic vacuum valve with ultra-low fuel restriction (less than 1kpa restriction at 50 liters/hour) ensuring proper fuel flow and reducing fuel pump stress.
- True liquid fuel capacity
- Additional tank capacity for 1:16 2 cycle oil blend (.75 gallons) plus 5% vapor space for fuel thermal expansion.
- UV and ozone resistant.
- EPA and CARB Certified.
- Built and tested to ABYC H25, ASTM F852 and USCG Standards.
- Compatible with Ethanol blended fuels.
- 2 year warranty.
- 100% leak tested prior to delivery.

- **Includes impact resistant, high visibility UV protected fuel gauge.**

Order No.	Mfg. No. / Description		Price
333630	(8803LPG2) 3 Gallon	16.6" L x 11.45" W x 7.3" H	$56.98 F
333635	(8806LPG2) 6 Gallon	19.82" L x 13.5" W x 9.16" H	$66.98 G
333645	(8812LPG2) 12 Gallon	22.75" L x 14.25" W x 14.36" H	$129.98 F
333644	(8812LLPG2) 12 Gallon	24" L x 18" W x 11.61" H (Low Profile)	$129.98 F

- **Does not include fuel gauge.**

Order No.	Mfg. No. / Description		Price
2350144	(8803LP2) 3 Gallon	16.6" L x 11.45" W x 7.3" H	$51.98 F
2350146	(8806LP2) 6 Gallon	19.82" L x 13.5" W x 9.16" H	$59.98 H
333644	(8812LPG2) 12 Gallon	24" L x 18" W x 11.61" H (Low Profile)	$129.98 F

Sceptor Portable Fuel Tanks - EPA/CARB Compliant Ultra Tanks



- Includes 90° fuel withdrawal assembly that rotates 360° to reduce fuel line kinks and a direct sight fuel gauge with glass lens for years of clear viewing.
- Seamless one-piece polyethylene construction, 2-stage self-venting fuel cap required by EPA/CARB for 2011.
- Non-corrosive and light-weight with a built-in fuel reserve capacity.
- Complies with industry requirements.
- Meets ABYC standards.

Order No.	Mfg. No. / Description		Price
482088	(8667) 9 Gallon	22.9" L x 14.3" W x 11.75" H	$137.98 F
482019	(8668) 12 Gallon, Tall	24.3" L x 18.1" W x 10.75" H	$151.98 F
482021	(8669) 12 Gallon, Low	22.9" L x 14.3" W x 13.6" H	$150.98 F

Moeller Portable Fuel Tanks - EPA/CARB Compliant Ultra Tanks



- Includes: 90° fuel withdrawal assembly that rotates 360° to reduce fuel line kinks and a direct sight fuel gauge with glass lens for years of clear viewing.
- Seamless one-piece polyethylene construction, 2-stage self-venting fuel cap required by EPA/CARB for 2011.
- Non-corrosive and light weight with a built-in fuel reserve capacity.
- Complies with industry requirements.
- Meets ABYC standards.

Order No.	Mfg. No. / Description		Price
482076	(620009LP) 9 Gallon	22.9" L x 14.3" W x 11.75" H	$109.98 F
482115	(630012LP) 12 Gallon	20-3/8" L x 13-3/4" W x 14-3/4" H	$113.98 F
482127	(630013LP) 12 Gallon	24-1/4" L x 18" W x 11" H	$113.98 F

Moeller Portable Fuel Tanks - EPA/CARB Compliant Ultra Tanks



- Includes 90° fuel withdrawal assembly that rotates 360° to reduce fuel line kinks and a direct sight fuel gauge with glass lens for years of clear viewing.
- Seamless one-piece polyethylene construction, 2-stage self-venting fuel cap required by EPA/CARB for 2011.
- Non-corrosive and light-weight with a built-in fuel reserve capacity.
- Complies with industry requirements.
- Meets ABYC standards.

Order No.	Mfg. No. / Description		Price
481981	(620003LP) 3 Gallon	17" L x 9" W x 10" H	$62.98 F
482002	(620049LP) 6 Gallon	21.18" L x 13.5" W x 10" H	$64.98 F
482015	(620048LP) 6 Gallon	4 Pack	$247.98 F
482075	(630014LP) 9 Gallon	11.25" L x 14.25" W x 11.25" H w/cap	$110.98 F

Scepter Neptune Portable Fuel Tanks



Order No.	Mfg. No. / Description	Price
481984	(8590) 3 Gallon	$69.98 F
482007	(8592) 6 Gallon	$69.98 F

BluSkies Portable Fuel Tanks



- Comfort grip handle with rear handle assist for easy carry.
- Tie down grooves for extra security in transport or under way.
- Molded rear standoffs for vertical tank standing.
- Underside recesses for multi-directional non-slip action.

Order No.	Mfg. No. / Description	Price
2000080	(BS-3GAS) 3 Gallon	$48.98 E
2000081	(BS-6GAS) 6 Gallon	$58.98 F

Moeller Topside Fuel Tanks



- Provides positive seal with Moeller-exclusive injection molded 2-1/4" fill neck.
- Mechanically vented fuel cap ensures easy gripping with exclusive ribbed design that floats.
- Features 90°, 1/4 NPT fuel withdrawal elbow that rotates 360° eliminating a kinked fuel line hose.
- Includes mechanical direct-sight gauge with easy-to-read indicator.
- Tested to industry standards.
- Specifically designed for use in Boston Whalers, Carolina Skiff and Key West bench style, center console, pontoon, deck and jon boat designs.
- Ok for use with Ethanol based fuels.

Order No.	Mfg. No. / Description		Price
806313	(031615) 15 Gallon	43" L x 15" W x 6.87" H	$260.98 F
806325	(031818) 16 Gallon	43" L x 15" W x 7.87" H	$269.98 F
806387	(031620) 20 Gallon	28" L x 15" W x 12.37" H	$269.98 F
806440	(031526) 26 Gallon	29.25 " L x 19" W x 12.25" H	$299.98 F


Moeller Topside White Fuel Tank



- Durable rotomold white topside tank.
- Manufactured in high density polyethylene with UV-stabilized resin.
- E10 Ethanol compliant. Will not delaminate, rust, or experience galvanic corrosion.
- Specifically designed for use in Boston Whaler Montauk 15' and 17' consoles.
- Molded fill neck with side angle orientation for ease of access.
- Exclusive PL3 pickup design with 360 degree swivel.
- Includes: 395009 - 12" Kelch fuel cap with site gauge and vent.
- CE Certified and both ABYC and NMMA compliant.

Order No.	Mfg. No. / Description	Price
806570	(031626) 24 Gallon, 29.25" L x 20.50" W x 12.25" H	$329.98 F

Moeller Permanent Fuel Tanks

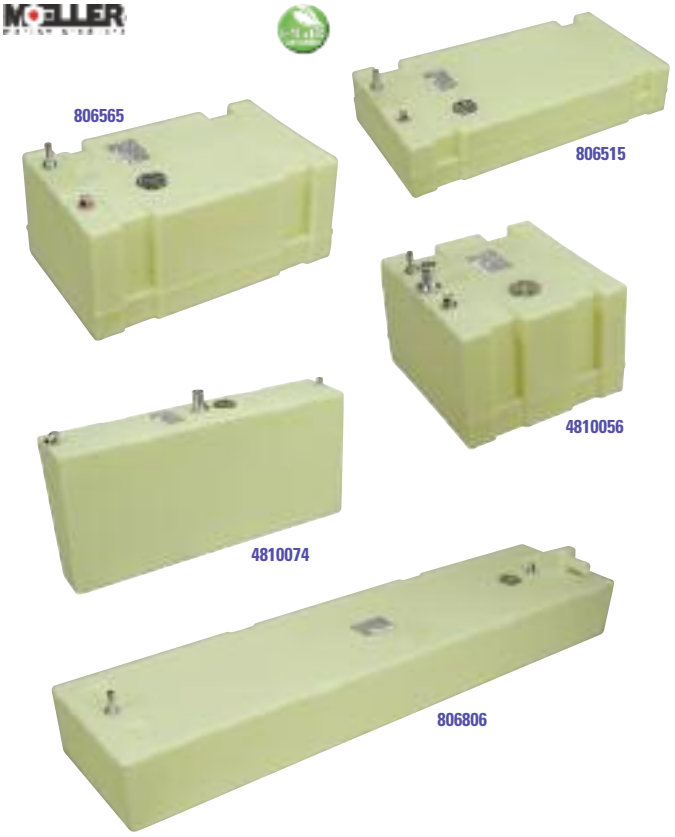

- Corrosion/pit resistance and exclusive Moeller Tite pioneering.
- Each tank is complete with Hose Tite, fill spouts, withdraw, and vent fittings molded directly into the shell.
- Utilizes rotationally molded, cross-linked polyethylene plastic, allowing for complex shape designs beyond conventional and restricted aluminum tanks.
- Our fittings hold the highest O.D. and I.D. tolerances in the industry, ensuring you the highest level of input flow available during tank refueling.
- Machined aluminum 3/8" withdraw fitting has 360° rotational capability for hook-up convenience.
- Convenient hold down grooves molded directly into tank shell work great with Moeller's Permanent Fuel Tank Hold Down Kit (Order No. 808925).
- Conforms to all ABYC, NMMA and U.S. Coast Guard regulations.

Order No.	Mfg. No. / Description		Price
806503	(32512) 12 Gallon	18.5" W x 24.5" L x 7.25" H	$229.98 F
806553	(32612) 12 Gallon	14" W x 20" L x 11.75" H	$219.98 F
4810054	(32513) 13 Gallon	10.19" W x 32" L x 10.19" H	$252.98 Q
806604	(32514) 14 Gallon	11.75" W x 18" L x 16.25" H	$229.98 F
4810056	(32515) 15 Gallon	18.5" W x 17.5" L x 12.5" H	$280.98 Q
806515	(32518) 18 Gallon	18.25" W x 36.5" L x 7.25" H	$269.98 F
4810074	(32718) 18 Gallon	8.25" (T), 5.25" (B) W x 39" L x 17.75" H With Starboard Side Withdrawal	$327.98 Q
806781	(32618) 18 Gallon	8.25" (T), 5.25" (B) W x 39" L x 17.75" H With Port Side Withdrawal	$245.98 F
806565	(32519) 19 Gallon	16" W x 26" L x 11.75" H	$249.98 F
4810070	(32619) 19 Gallon	14" W x 18.5" L x 18" H	$293.98 H
4810075	(32719) 19 Gallon	10.25" W x 47" L x 10.19" H	$320.98 Q
4810076	(32818) 19 Gallon	6" W x 58" L x 14.75" H	$356.98 Q
806616	(32520) 20 Gallon	11.75" W x 26" L x 16.25" H	$249.98 F
4810071	(32624) 24 Gallon	8.75" (T), 5.25" (B) W x 51" L x 17.88" H	$380.98 Q
806527	(32525) 25 Gallon	18.03" W x 47" L x 7.5" H	$333.98 F
806577	(32527) 27 Gallon	16" W x 36.5" L x 11.75" H	$289.98 F
806628	(32627) 27 Gallon	11.81" W x 36" L x 16.28" H	$289.98 F
4810063	(32528) 28 Gallon	24.5" W x 49" L x 7.88" H	$478.98 Q
4810064	(32529) 29 Gallon	25.75" W x 43" L x 8.63" H	$412.98 Q
4810065	(32534) 34 Gallon	26.5" W x 60.25" L x 7.38" H	$512.98 Q
806806	(32535) 35 Gallon	16" W x 69.5" L x 8" H	$389.98 F
806844	(32550) 50 Gallon	12.5" W x 45" L x 22" H	$409.98 F
482052	(32552) 52 Gallon	24" W x 60" L x 10" D	$530.98 F

©2014 Donovan Marine, Inc.

Moeller Cap Assembly



Order No.	Mfg. No. / Description	Price
482505	(621501-10) Cap with Dipstick for 6 Gallon Fuel Tanks	$14.98 R

Moeller Fuel Caps for Moeller Portable Fuel Tanks



- Replacement caps for 12 gallon tanks.
- Includes fuel gauge.

Order No.	Mfg. No. / Description	Price
4810081	(395008) For Low-Profile Fuel Tanks	$37.98 H
4810082	(395009) For Tall Fuel Tanks	$37.98 H

Moeller Withdrawal Assemblies



Order No.	Mfg. No. / Description	Price
482515	(621002-10) For Ultra 3/6 Fuel Tanks	$8.98 R
482540	(621007-10) For PBW12 Fuel Tanks	$12.98 R
482550	(621009-10) For LPT12 Fuel Tanks	$17.98 R

T-H Marine Fuel Tank Hold Down



- Superior strength poly straps with quick release buckle makes it simple to remove and replace container.
- Comes complete with (2) 62" straps, 4 footman loops, and mounting hardware for securing system to boat.

Order No.	Mfg. No. / Description	Price
640253	(FCH-1)	$16.98 H

Moeller Permanent Fuel Tank Hold Down Kit



- Stainless steel permanent fuel tank hold down kit.

Order No.	Mfg. No. / Description	Price
808925	(035710) Sold 4 Brackets Per Kit	$25.98 F

Moeller Gauge/Float Assembly



Order No.	Mfg. No. / Description	Price
482510	(621001-10) For Ultra 3/6 Fuel Tanks	$16.98 R
482535	(621006-10) For PBW12 Fuel Tanks	$17.98 R

Moeller Mod Plate Gasket and Screw Kit



Order No.	Mfg. No. / Description	Price
482530	(621005-10)	$21.98 R

Moeller Mod Plate Gauge/Float/Withdrawal Assembly



Order No.	Mfg. No. / Description	Price
482520	(621003-10) For 6Bow/9Gas Fuel Tanks	$43.98 R
482525	(621004-10) For LPT12 Fuel Tanks	$43.98 R

Moeller Fuel Tank Installation Kit



- Tank installation kit includes: Gas deck fill, 18" of fill hose (1-1/2"), 36" of vent hose (5/8"), (4) 2-1/4" hose clamps and (1) 5/8" fuel vent.

Order No.	Mfg. No. / Description	Price
808455	(035723)	$69.98 F

Marpac Fuel Tank Pick-Ups



- Rigid polyethylene fuel tube is formulated for today's fuels.
- 1/4" NPT aluminum fitting.
- 3/8" I.D. pick up tube.

Order No.	Description	Price
7-0947	Length 12"	$18.98 G
7-0948	Length 24"	$22.98 G

Faria Digital Fuel Management System



Fuel Flow Sender
- **Easily installs in fuel line.**
- **Includes mounting hardware.**



- 2-1/16" hole, 3" deep.
- 12 volt.
- For use with gas engines only.
- Monitors fuel flow from 1/2 gallon to 34 gallons per hour.
- Trip fuel log displayed in gallons or litres.
- Includes: Selectable low fuel audible alarm.

Order No.	Mfg. No. / Description	Price
351697	(FFM009) Red Backlight with White Face, 20' Cord	$317.98 F

Moeller Gas Walker Wheeled Fuel Transport



- 3.5 gallons per minute (average flow rate).
- Durable cross-linked polyethylene construction with UV inhibitors.
- Built in handle makes maneuvering a fully loaded Gas Walker to the dock easy.
- Brass shut off valve safely controls fuel flow.
- Includes 10' of 3/4" hose.
- Locking plate prevents accidental discharge or theft of fuel.
- Manual vented fuel cap has easy-to-grip ribs.
- Molded-hose storage compartment helps keep your storage area neat and safe.
- Electric static discharge grounding wire is included.
- Safe for use with gasoline, diesel & kerosene - DO NOT MIX!
- Meets US requirements for transporting gasoline.

Order No.	Mfg. No. / Description	Price
808715	(730025) 29 Gallon	$499.98 F

Scepter DuraMax Flo n' Go Wheeled Fuel Transport



- Composed of a durable, high-density polyethylene in vibrant red for use with gasoline, diesel or kerosene fuels.
- Comes complete with a patented Flo n' Go hand pump and pump holder handle.
- 14 gallon volume capacity and a long 10' long fuel hose.
- Quickly refuels, using a UL approved, mechanically vented fill cap.
- Sturdy, 6" wheels.
- Ergonomically designed, heavy-duty top handle with extra deep base unit handholds for transport.
- Dual mechanical shut-off valves, at both tank and hose, for spill-proof Flo n' Go disconnection.
- Meets D.O.T. and UN transportation Requirements.

Order No.	Mfg. No. / Description	Price
481970	(06792) 14 Gallon	$179.98 F

Scepter Jerry Cans



- Ecologically friendly, they provide 100% compliance with California's Air Resource Board (CARB) emission and spill control regulations.
- Manufactured using patented technology that provides permeation levels well below the CARB .40 gram/gal/day threshold.
- Feature CRC's and a patented automatic shut-off spout that stops overflows, closes automatically and self-seals to guard against unwanted vapor emissions when not is use.

Order No.	Mfg. No. / Description	Price
481950	(007450) 1.25 Gallon	$19.98 F
481951	(007378) 2.5 Gallon	$23.98 F
481952	(005096) 5 Gallon	$31.98 F
481953	(005086) 5 Gallon, Square Red/Military Style	$38.98 F
481954	(005898) 5 Gallon, Diesel, Yellow	$29.98 F
481948	(004933) 5 Gallon, Water, Blue/Military Style	$23.98 F

Marpac Domed Glass Fuel Gauges



- Made in USA.
- CE Certified.
- Perimeter lighted.
- Contoured pointers.
- Fully sealed with Fog-resistant lens, built to military specifications.
- Fit standard 2-1/16" and 3-3/8" gauge mounting holes.
- OEM replacements are also available.

Order No.	Description	Price
7-1986	Elite Domed with Stainless Bezel	$29.98 G
7-2025	Elite Domed	$23.98 G
7-2065	Performance Domed	$24.98 G
7-2098	Red Series	$25.98 G

Teleflex Lido 2" Fuel Gauge - White Face



- Lido instruments feature crisp white dials and fire-orange pointer tips.
- Scratch-resistant domed glass lenses.
- Enhanced illumination: through-dial and perimeter lighting for excellent readability at night.

Order No.	Mfg. No. / Description	Price
818825	(65496P)	$28.98 F

Teleflex Sahara 2" Fuel Gauge - Tan Face



- Tan dial and retainer, black graduations and numerals, black pointer with fire-orange tip.
- Scratch resistant curved glass lenses, with black matte, near-flush bezels.
- White perimeter and red thru-dial lighting.
- U.S. and metric scales, with ISO symbols, where appropriate.
- Optional add-on square bezels for modular appearance.

Order No.	Mfg. No. / Description	Price
8020260	(59707P)	$30.98 H

©2014 Donovan Marine, Inc.

Moeller Electric Fuel Gauge



- Dash mounted electric fuel gauge.
- 33 to 240 Ohm's.

Order No.	Mfg. No. / Description	Price
808482	(035727-10)	$36.98 F

Faria Dress White Fuel Gauge



- Perimeter-lighted white dial with bold black graphics, white aluminum bezel, contoured black pointer and flat glass lens.

Order No.	Mfg. No. / Description	Price
3511285	(13101)	$37.98 H

Faria Euro and Euro White Fuel Gauges





- Perimeter-lighted dial with bold graphics, aluminum bezel, contoured pointer and flat glass lens.

Order No.	Mfg. No. / Description	Price
3511000	(12801) Black Dial with White Graphics and White Pointer	$35.98 H
3511105	(12901) White Dial with Black Graphics and Black Pointer	$35.98 H

Faria Coral Fuel Gauge



- Perimeter-lighted black dial with stylish white and blue graphics, black aluminum bezel with burnished leading edge, contoured white pointer and flat glass lens.

Order No.	Mfg. No. / Description	Price
3511200	(13001)	$35.98 H

Teleflex Black Sterling 2" Fuel Gauge - Black Face



- Scratch resistant domed glass lenses.
- Perimeter lit dial.
- Elite stainless steel bezel.
- Black pointer with fire orange tip.
- White graphics and black background on spun aluminum dial.
- Fits most stern drive and outboard applications.
- U.S. and metric scales, where appropriate.

Order No.	Mfg. No. / Description	Price
8020303	(67021P)	$30.98 Q

Faria Professional Red Fuel Gauge



- Perimeter-lighted black dial with stylish red and white graphics, black aluminum bezel, tear-drop white pointer and flat glass lens.

Order No.	Mfg. No. / Description	Price
3511655	(14601)	$42.98 H

Faria Chesapeake Stainless Steel Fuel Gauges





- Perimeter-lighted dial with stylish graphics, polished stainless steel bezel, contoured pointer and domed glass lens.

Order No.	Mfg. No. / Description	Price
3511385	(13701) Black Dial with Blue/White Graphics & White Pointer	$46.98 H
3511485	(13801) White Dial with Blue/Black Graphics & Black Pointer	$46.98 H

Faria Signature Gold Series Fuel Gauge



- Perimeter-lighted gray dial with stylish gold and black graphics, premium gold bezel, light-piped white pointer and domed glass lens.

Order No.	Mfg. No. / Description	Price
3511580	(14501)	$69.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topsdie Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Marpac Universal Electric Fuel Senders



- Calibrated for 33 to 240 ohms-an industry standard.
- 100% pre-inspected to ensure full range of calibrated reading from empty to full.
- For use with gasoline or diesel (with separate return line) applications.
- Not for use in water.
- Complete kit includes gasket and screws.
- Made in USA.

Order No.	Description	Price
7-2030	Fits Tank Depth: 4" to 24"	$40.98 G
7-6960	Fits Tank Depth: 6" to 12"	$27.98 G
7-6961	Fits Tank Depth: 6" to 24"	$31.98 G

Marpac Universal Electric Fuel Sender Gasket



Order No.	Description	Price
7-6959	Universal Electric Fuel Sender Gasket	$9.98 G

Moeller Electric Sending Units



- Swingarm Electric Sending Units gather fuel level information the same way as the mechanical sending units. It does, however, connect to a dash mounted gauge without a conversion capsule. They are also a DIY product, letting the consumer measure their tank depth and make the swingarm the correct length.
- Internal components will not rust or corrode.
- Float rotates easily in 90 degree increments for tanks wall and baffle clearance.

Order No.	Mfg. No. / Description	Price
808675	(035722-10) 6" - 12" Electric Sending Unit Tank Depth	$34.98 F
808680	(035729-10) 6" - 24" Electric Sending Unit Tank Depth	$34.98 F
808685	(035725-10) 4" - 28" Electric Sending Unit Tank Depth	$34.98 F
808690	(035726-10) 4" - 28" Complete Electric Sending Unit Kit with Dash Mounted Gauge	$57.98 F

Moeller Reed Switch Sending Units



- 316 Type, stainless steel construction provides efficient performance.
- A Direct Original Equipment Manufactured sender replacement by WEMA USA.

Order No.	Mfg. No. / Description	Price
808723	(035761-10) Fits Tank Depth: 9"	$79.98 F
808735	(035762-10) Fits Tank Depth: 11"	$80.98 F
808747	(035764-10) Fits Tank Depth: 13"	$89.98 F
808759	(035765-10) Fits Tank Depth: 15"	$89.98 F
4810038	(035767-10) Fits Tank Depth: 18.5"	$124.98 H

Teleflex Fuel Gauge Sender



- Stainless steel, aluminum and brass construction.
- Injection-molded blade terminals stop leaks.
- Stainless steel float arm.
- Closed-cell fuel resistant float.
- 33-240 Ohm's, an industry standard.
- Adjustable for 4" to 24" tank depth.

Order No.	Mfg. No. / Description	Price
815297	(90424P)	$40.98 I

Moeller Swingarm Mechanical Switch Sending Units



- With a direct site gauge or with the conversion capsule gathers fuel level information with the float.
- While accurate, the gauge will fluctuates as the fuel in the tank "slosh" around the tank when boating because of the moving parts - the float.
- Calibrated to 33 to 240 Ohm's.

Order No.	Mfg. No. / Description	Price
808569	(035750-10) Fits Tank Depth: 7.5"	$74.98 F
808571	(035751-10) Fits Tank Depth: 8"	$74.98 F
808595	(035752-10) Fits Tank Depth: 10"	$74.98 F
808608	(035753-10) Fits Tank Depth: 11.75"	$74.98 F
808610	(035754-10) Fits Tank Depth: 12"	$74.98 F
808622	(035755-10) Fits Tank Depth: 14"	$74.98 F
808646	(035756-10) Fits Tank Depth: 16.25"	$74.98 F
808658	(035757-10) Fits Tank Depth: 17.75"	$74.98 F
808672	(035758-10) Fits Tank Depth: 22"	$74.98 F


Moeller 5 Hole Replacement Gasket



- For Electric and Mechanical Sending Units.
- Screws included.

Order No.	Mfg. No. / Description	Price
808494	(035728-10)	$10.98 F

Moeller Conversion Capsule



- Converts fuel level reading from standard direct site gauge to electric dash mounted gauge (33 - 240 Ohm's).

Order No.	Mfg. No. / Description	Price
808711	(035760-10)	$67.98 F

Moeller Replacement Direct Site Gauge



Order No.	Mfg. No. / Description	Price
808709	(035759-10)	$19.98 F

©2014 Donovan Marine, Inc.

OEM Fuel Line Assembly Cross Reference Chart

Manufacturer	Style	Replaces OEM No	Marpac Premier	Marpac	BRP	Attwood	Moeller	Sierra
Yamaha	Clip Style	6Y2-24306-05-00	7-6708			333675	807368	188017EP1
Johnson/Evinrude	Clip Style	398549, 176667, 174513	7-6702		B766489	333655	807362	188009EP1
Johnson/Evinrude	Blank on Tank Side	174509			B766490			188014EP1
Mercury	Clip Style	32-827927A	7-6706	7-6826		333665	807356	188016EP1
Mercury	Bayonet Style, Cast	32-80188A 2		7-6825			807364	188010EP1
Mercury	Bayonet Style, Plastic	32-80188A-2				333650		
Mercury	Hose Barb, Tank Side	32-858104Q08, 32-858104K08						188024EP1
Mercury	Hose Barb, Both Ends	32-858114Q08, 32-858114K08						188012EP1
Mercury	Bayonet Style (Plastic), Clip Style						807372	
Honda						333660		
Chrysler/Force							807366	
Universal	3/8" x 8' Long		7-6709	7-6829	B766491	333670		188015EP1
Univ.	3/8" x 12' Long			7-6830			807360	
Universal	5/16" x 8' Long						807370	188013EP1
Universal	5/16" x 12' Long							188032EP1

Marpac Fuel Line Assemblies



- Meets EPA low permeation mandates.
- Ethanol resistant, 3/8" double walled hose.
- E10 and E85 compatible.
- Kink-free performance.
- Double check valves.
- Stainless steel clamps.

Limited Supply

Order No.	Description	Price
7-6825	Mercury Bayonet Style Connectors	$37.98 G
7-6829	Universal	$25.98 G
7-6830	Universal, Extra Long	$38.98 G

Moeller Low Permeation Fuel Line Assemblies


807240

Limited Supply

- Uses a compounded, tough and pliable UV-resistant hose.
- 3/8" I.D. hose promotes maximum fuel flow.
- Includes: Fittings built to OEM Specifications for replacement parts.
- Uses O-ring construction on all fittings for tight, leak-free connections.

Order No.	Mfg. No. / Description	Price
807240	(034399-10LP) Mercury/Mariner Bayonet Style Tank Connector And Clip Style Engine Connector	$57.98 F
807187	(034385-10LP) Mercury Clip Style, 1998 and Newer Engines	$40.98 F
807202	(034388-10LP) Mercury Bayonet Style, Cast Aluminum Fittings	$55.98 F
807226	(034392-10LP) Mercury Bayonet Style, Plastic Fittings	$42.98 F
807163	(034391-10LP) Johnson/Evinrude	$39.98 F
807264	(034394-10LP) Yamaha	$39.98 F
807288	(034393-10LP) Chrysler/Force	$44.98 F
807149	(034390-10LP) Universal, 80" Long	$26.98 F
807125	(033389-10LP) Universal, 12' Long	$35.98 F

Moeller Fuel Line Assembly

Limited Supply

- Alcohol resistant fuel hose also resists ozone degradation.
- Internal spiral braids in the hose prevent hose collapse while maintaining flexibility, kink free resistant to set.
- Stainless steel clamps are used throughout the assemblies.

Order No.	Mfg. No. / Description	Price
807120	(180110T) Mercury/Mariner, 3/8" I.D. hose x 7' L, Bayonet Style Tank Connector & Clip Style Engine Connector	$22.98 G

Marpac Premier Fuel Line Assemblies



- Meets EPA low permeation mandates and the stringent requirements of SAE J1527 B1-15 and ISO 8469.
- Specifically designed for use with ethanol enriched fuels.
- 3/8" fuel line provides kink free performance.
- Rapid prime with dual big bore check valves.
- Viton® balls and stainless steel components for greater longevity and a better prime every time.
- Stainless steel clamps.
- Bulb stays pliable even in cold weather.

Order No.	Description	Price
7-6702	Johnson/Evinrude, Replaces OEM No. 398549	$54.98 G
7-6706	Mercury Two Prong, Replaces OEM No. 32-8279257A	$57.98 G
7-6708	Yamaha, Replaces OEM No. 6Y2-24306-05-00	$57.98 G
7-6709	Universal (Connectors Not Included)	$48.98 G

Sierra Silverado 4000 Complete Fuel Line Assemblies



- Premium rubber fuel line - polyester braid.
- Weather resistant CPE cover.
- Flexible THV.
- Length 8'.

Order No.	Mfg. No. / Description		Price
188009EP1	(18-8009EP-1)	Johnson/Evinrude, Clip Style	$63.82 H
188014EP1	(18-8014EP-1)	Johnson/Evinrude, Clip On Engine End, No Fitting Tank End	$55.40 H
188010EP1	(18-8010EP-1)	Mercury/Mariner Bayonet Fittings	$65.60 H
188012EP1	(18-8012EP-1)	Mercury/Mariner Threaded Barbs	$56.05 H
188016EP	(18-8016EP)	Mercury/Mariner Clip Style	$41.48 H
188016EP1	(18-8016EP-1)	Mercury/Mariner Clip Style	$60.50 H
188024EP1	(18-8024EP-1)	Mercury/Mariner Threaded Barb Tank End, Clip Style Engine End	$54.13 H
188011EP	(18-8011EP)	Chrysler/Force	$36.48 H
188017EP1	(18-8017EP-1)	Suzuki, Fits: DF25-140 HP (2000-2005)	$64.32 H
188015EP1	(18-8015EP-1)	Universal, 3/8", Length 8'	$50.95 H
188032EP	(18-8032EP)	Universal, 3/8", Length 12'	$35.98 H
188032EP1	(18-8032EP-1)	Universal, 5/16", Length 12'	$63.03 H

Sierra Silverado 3000 Premium Fuel Line Assemblies



- 8' length complete fuel line assemblies.

Order No.	Mfg. No. / Description	Price
188009EP	(18-8009EP) Fits All V8, 1984 & Later, V6, 1985 & Later 120 HP Outboards, 2 HP (1 Cyl.) - 75 HP (3 Cyl.) 1976-02	$55.75 H
188010EP	(18-8010EP) Bayonet Style Connectors	$42.98 H
188013EP	(18-8013EP) Universal, 5/16"	$45.18 H
188015EP	(18-8015EP) Universal, 3/8"	$46.95 H
188017EP	(18-8017EP) Fits F75-F250 and 115-300 HP	$43.98 H
188024EP	(18-8024EP) Hose Barb Tank Connector, Clip Style Engine Connector	$49.88 H

OMC® Systematched™ Johnson/Evinrude Fuel Line Assemblies



- All H.P., all year.

Order No.	Mfg. No. / Description	Price
B766489	(766489) 8' x 3/8" Hose I.D., Engine Connector	$57.47 H
B766490	(766490) 8' x 5/16" Hose I.D., Engine Connector	$52.47 H
B766491	(766491) 10' x 3/8" Hose I.D., No Connectors	$58.30 H
B766494	(766494) 8' x 3/8" Hose I.D., Tank and Engine Connector	$61.63 H

Moeller EPA/CARB Compliant Fuel Line Assemblies



- Assemblies use a compounded, tough and pliable UV-resistant hose.
- Promotes maximum fuel flow. Includes fittings built to OEM Specifications for replacement parts.
- Uses O-ring construction on all fittings for tight, leak-free connections.
- Low permeation fuel line is EPA/CARB compliant.

Order No.	Mfg. No. / Description	Price
807362	(034391-10LPA) Johnson/Evinrude, 3/8 I.D.	$57.98 F
807356	(034385-10LPA) Mercury, 3/8 I.D., Clip Style, 1998 & Newer	$53.98 F
807368	(034394-10LPA) Yamaha, 3/8 I.D.	$54.98 F



Order No.	Mfg. No. / Description	Price
807358	(034388-10LPA) Mercury, 3/8 I.D., Bayonet Style, Cast Alum.	$55.98 F



Order No.	Mfg. No. / Description	Price
807364	(034392-10LPA) Mercury, 3/8 I.D., Bayonet Style, Plastic Fittings	$52.98 F



Order No.	Mfg. No. / Description	Price
807372	(034399-10LPA) Mercury/Mariner, 3/8 I.D. Bayonet Style Tank Connector and Clip Style Engine	$55.98 F



Order No.	Mfg. No. / Description	Price
807366	(034393-10LPA) Chrysler/Force, 3/8 I.D.	$54.98 F



Order No.	Mfg. No. / Description	Price
807370	(034395-10LPA) Universal, 5/16 I.D., Length 80"	$47.98 F
807360	(034390-10LPA) Universal, 3/8 I.D., Length 80"	$46.98 F

Attwood Fuel Line Kits



- Attwood's new low-permeation fuel line assemblies set the new standard in performance, safety and value.
- Includes Attwood's exclusive Award Winning Universal Sprayless Connector (hose and tank fittings), Attwood's exclusive Multi-layer low-permeation Primer Bulb and fiber reinforced, low permeation, high performance fuel line.
- Compatible with all fuel tanks with standard 1/4" NPT output.
- Use thread sealant when connecting to tank.
- Attwood Universal Sprayless Connector replaces traditional tank fittings and eliminates spray when connecting or disconnecting fuel fittings.
- Includes 3/8" low-permeation fiber reinforced fuel hose designed to prevent kinking and hardening when used with Ethanol blended fuels.
- High strength fiber reinforced fuel hose rated up to 100C and 600 psi.
- Stepless 360° stainless steel clamps and engineered hose barbs designed for use in pressurized fuel systems and guaranteed to be leak free.
- Compatible with Ethanol blended fuels.
- Compatible with all OEM brand engines (1 HP - 350 HP).
- 2 Year Warranty.

- Includes: 3/8" Universal Sprayless Connector and Fuel Demand Valve.

Order No.	Mfg. No. / Description		Price
333655	(93806EUSD7) Evinrude	Length 6'	$69.98 F
333675	(93806YUSD7) Yamaha	Length 6'	$69.98 F
333660	(93806HUSD7) Honda	Length 6'	$68.98 F
333670	(93806UUSD7) Universal/Non-Marine	Length 6'	$66.98 F
2350168	(93812UUSD7) Universal/Non-Marine	Length 12'	$79.98 F
333650	(93806AUSD7) Mercury, Pre-1998	Length 6'	$70.98 F
333665	(93806MUSD7) Mercury	Length 6'	$69.98 F



- Includes: 3/8" Universal Sprayless Connector.

Order No.	Mfg. No. / Description		Price
333656	(93806EUS7) Evinrude	Length 6'	$50.98 F
333667	(93806MUS7) Mercury	Length 6'	$51.98 F
333677	(93806YUS7) Yamaha	Length 6'	$50.98 F
333662	(93806HUS7) Honda	Length 6'	$49.98 F
333672	(93806UUS7) Universal/Non-Marine	Length 6'	$46.98 F

Marpac FuelAid™ Kit



- Allows the safe management of pressurized fuel systems.
- Reduces dangerous fuel spray on both engine side and tank side.
- Prevents the engine from flooding due to fuel tank pressure.
- Fuel when the engine demands it.
- Easy to install.
- Thread sealant and stainless steel hose clamps included.
- Designed for above deck, portable systems only.
- Fits industry standard 1/4" NPT fuel tank fittings and 3/8" fuel hose.
- EPA Compliant for today's fuel systems (E10 & E85 compatible).

Order No.	Description	Price
7-6970	3/8"	$59.98 F

©2014 Donovan Marine, Inc.

Attwood Fuel Demand Valve



- Attwood's exclusive Fuel Demand Valve ensures pressurized fuel does not reach the engine preventing engine flooding and fuel spillage.
- New EPA portable fuel tanks are required to remain sealed up to a minimum of 5 psi.
- The valve provides fuel to the engine only when demanded by the engine during start up or engine operation.
- Designed in partnership with OEM engine manufacturers the Attwood Fuel Demand Valve is compatible with all OEM Engine brands and helps to ensure proper engine start up and function.
- Prevents fuel spray down stream from the Fuel Demand Valve. Use the Attwood Universal Sprayless Connector to prevent spraying at the fuel tank (8838US6).
- Made of high-strength composite material designed to withstand harsh abuse of marine environment.
- Compatible with 3/8" and 5/16" fuel hose.
- Installs between the fuel tank and the primer bulb.
- Low vacuum restriction helps ensure proper engine function during startup and engine operation (less than 2 kPa at 125 liters/hour) 20 psi max. nominal input pressure. Protected for 40 psi pressure spike.
- Built-in manual override.
- Compatible with Ethanol blended fuels
- Compatible with all OEM brand engines (1 HP - 350 HP).
- OEM quality and performance at a fraction of the price.
- 2 Year Warranty.

Order No.	Mfg. No. / Description	Price
333685	(9300FDV7) Fuel Demand Valve	$32.98 E

Attwood Universal Sprayless Connector



- The Universal Sprayless Connector is a safe way to eliminate the spraying of fuel when connecting and disconnecting pressurized fuel hoses during fueling or maintenance. Includes male and female connectors for use with all standard marine fuel tanks in (6.4 mm) NPT fittings. (Always use threaded sealant.)
- Replaces traditional tank fittings and eliminates spray when connecting or disconnecting fuel fittings.
- Includes both Male Tank and Female Hose Connectors
- High strength body engineered to withstand abuse in harsh marine environment.
- Female hose fitting compatible with 3/8" and 5/16" fuel lines.
- Male tank fitting compatible with standard 1/4" NPT fuel tank output. Use thread sealant.
- Male and female connectors include check valves that automatically close upon disconnecting.
- High fuel flow fitting (less than .25 kpa restriction at 50 liters/hour)
- Connectors designed to automatically seal if accidentally ripped apart.
- Compatible with Ethanol blended fuels
- All Attwood portable fuel components are designed to exceed OEM engine fuel flow requirements.
- Compatible with all OEM brand engines (1 HP - 350 HP).
- Meets all EPA and CARB requirements.
- 2 Year Warranty.

Order No.	Mfg. No. / Description	Price
333680	(8838US6) Universal Sprayless Connector	$11.98 E

Marpac Premier Primer Bulbs are specifically designed for use with E10 and E85 fuel blends. The materials used to produce also make the bulbs more resistant to heat and chemicals improving the tear strength but still allow the bulb to stay pliable in cold weather environments. The Viton check balls are more resistant to Ethanol and the stainless steel springs and dual big bore check valves allows the bulb to prime more rapidly.

Marpac Premier Uniflow Primer Bulbs



- Meets EPA Low Permeation Mandates and the Stringent Requirements of SAE J1527 B1-15 and ISO 8469.
- Specifically designed for use with ethanol E10 and E85 fuel blends.
- Works with both gasoline or diesel fuels.
- Rapid prime with dual big bore check valves.
- Viton® balls and stainless steel springs for greater longevity and better prime every time.
- Stainless steel clamps.
- Specially formulated blue material stays pliable, even in cold weather.

Order No.	Description	Price
7-6728	3/8"	$24.98 G
7-6732	5/16"	$24.98 G
7-6730	1/4"	$24.98 G

Marpac Uniflow Primer Bulbs



- Meets EPA low permeation mandates.
- Long life and dependable.
- Ethanol resistant, use with ethanol enriched fuels.
- Prevents back flow with built-in check valve.

Order No.	Description	Price
7-6718	3/8"	$22.98 G
7-6722	5/16"	$22.98 G

Attwood EPA Certified Primer Bulbs



- The Attwood multi-layer primer bulb allows you to prime with almost half the strokes of the leading competitor.
- It is designed for high performance priming in harsh marine environments.
- Non permeation material prevents fuel evaporation saving fuel and money.
- It is engineered to maintain flexibility in cold temperatures and prevent collapse or bursting in hot conditions.
- Compatible with ethanol blended fuels.

Order No.	Mfg. No. / Description	Price
333615	(93014LP7) EPA Certified, 1/4" I.D. Primer Bulb	$20.98 F
333624	(93516LP7) EPA Certified, 5/16" I.D. Primer Bulb	$20.98 F
333620	(93038LP7) EPA Certified, 3/8" I.D. Primer Bulb	$22.98 R

Sierra Primer Bulbs



- Meets current EPA Regulations in effect 1/1/2011 of 15 g/m2/24 hrs.
- Both EPA/CARB Certified.
- Utilizes Floroelastomer (FKM) material for traditional look and operation.

Order No.	Mfg. No. / Description	Price
188002EP1	(18-8002EP-1) 1/4"	$22.50 H
188004EP1	(18-8004EP-1) 5/16"	$23.27 H
188005EP1	(18-8005EP-1) 3/8"	$23.27 H

Moeller Primer Bulbs



- Gasoline and solvent-resistant construction, stainless steel clamps, and dual internal check valves to ensure a more rapid prime while preventing fuel flow back.
- EPA and CARB compliant.

Order No.	Mfg. No. / Description	Price
807354	(034790-10L) 1/4"	$23.98 F
807352	(034690-10L) 5/16"	$23.98 F
807350	(034590-10L) 3/8"	$23.98 F

Marpac Premier Blue Fuel Hose



- Meets EPA low permeation mandates and the stringent requirements of SAE J1527 B1-15 and ISO 8469.
- Ethanol E10 and E85 compatible.
- Flexible, kink-free performance.

Order No.	Description		Price
7-6791	1/4" (6.35mm)	Length 50'	$94.98 G
7-6795	5/16" (8mm)	Length 50'	$94.98 G
7-6799	3/8" (9mm)	Length 10'	$27.98 G
7-6801	3/8" (9mm)	Length 50'	$107.98 G
7-6797	3/8" (9mm)	Length 250'	$507.98 G

Moeller Topside Fuel Line Hose



- Hose is compounded to meet the needs of today's gasoline.
- Designed to be used above the deck.
- Sold by the foot in a 100' reel box.
- Bulk Package.

Order No.	Mfg. No. / Description	Price
807062	(034313) 5/16" ID	$118.98 F
807075	(034375LP) 3/8" ID	$198.98 F

BluSkies Primer Bulbs



- High volume rated for maximum flow efficiency.
- Approved for use on all outboard motors.
- Works in all weather conditions.
- Meets or exceeds all ABYC, USCG, CARB and EPA standards and regulations.

Order No.	Mfg. No. / Description	Price
2000078	(BK0243801) 3/8"	$29.98 H
2000079	(BK0245161) Universal	$31.98 H

OMC® Systematched™ Primer Bulbs



- Johnson/Evinrude - All HP, all years.

Order No.	Mfg. No. / Description	Price
B766492	(766492) 5/16", Replaces: 174511	$23.30 H
B766488	(766488) 3/8"	$23.30 H

Marpac Grey Fuel Hose



- Meets EPA low permeation mandates.
- Ethanol resistant, double walled hose.
- E10 and E85 compatible.
- Kink-free performance.

Order No.	Description		Price
7-6790	1/4" (6.35mm)	Length 50'	$92.98 G
7-6794	5/16" (8mm)	Length 50'	$92.98 G
7-6798	3/8" (9mm)	Length 10'	$25.98 G
7-6800	3/8" (9mm)	Length 50'	$90.98 G
7-6796	3/8" (9mm)	Length 250'	$445.98 G

Marpac Type "A" Fuel Hose



- Premium quality tube, thermoplastic barrier and cover with braided reinforcement for added strength and flexibility.
- Resists vapor permeation, heat, cold, fire, ozone and premature aging caused by gas, diesel and alcohol-enhanced fuels.
- Meets or exceeds all requirement of ISO 7840 and SAE J1527 standards required by USCG, ABYC (H-24 and H-33) and NMMA.

Order No.	Description	Price
7-2810	3/8" x 10'	$48.98 G
7-2825	5/8" x 10'	$56.98 G

©2014 Donovan Marine, Inc.

MPI Products Type B Marine Fuel Hose - Series 315



- Excellent quality standard fuel hose meets or exceeds all requirements of new ISO 7469 and SAE J5127.
- For use in non-enclosed engine compartments.
- Resistant to gasoline and alcohol-enhanced fuels.
- Braided reinforcement provides excellent flexibility and bend radius.

Order No.	Mfg. No. / Description	Price
771332	(315-0586) 5/8" x 50'	$236.98 M

MPI Products Type A and A2 Marine Fuel Hose - Series 350



- Premium quality fire-retardant fuel hose meets or exceeds all requirements of new ISO 7840 and SAE J5127 standards required by USCG, ABYC and NMMA.
- Inner tube material provides extraordinary resistance to gasoline, diesel and alcohol-enhanced fuels.
- Braided reinforcement provides excellent flexibility and bend radius.

Order No.	Mfg. No. / Description	Price
771217	(350-0566) Type A, 5/16" x 50'	$221.98 M
771229	(350-0386) Type A, 3/8" x 50'	$225.98 M
771231	(350-0126) Type A, 1/2" x 50'	$294.98 M
771243	(350-0586) Type A, 5/8" x 50'	$298.98 M
771116	(350-1123) Type A, 1-1/2" x 10'	$149.98 M
771130	(350-1783) Type A, 1-7/8" x 10'	$253.98 M
771142	(350-2003) Type A, 2" x 10'	$269.98 M
771104	(352-1123) Type A, 1-1/2" x 10', Corrugated	$207.98 M
771118	(350-1120) Type A2, 1-1/2" x 50'	$742.98 M
7680052	(350-1126) 1-1/2", Sold Per Foot	$8.98 H
7680053	(350-2006) 2", Sold Per Foot	$16.98 H
8655566	(RL772571) 5/32" Braided, Sold Per Foot	$1.37 H

Sierra Bleeder Hose




- Replaces: Mercury 32-99130122 and 32-892024122.

Order No.	Mfg. No. / Description	Price
188048	(18-8048) .090 I.D. x .220 O.D., Length 50'	$76.00 H

- Replaces: Mercury 32-99387-79.

Order No.	Mfg. No. / Description	Price
188050	(18-8050) .0625 I.D. x .190 O.D., Length 50'	$55.00 H

MPI Products C.A.R.B. Compliant Fuel Line - Series 360



- MPI barrier fuel line hose is certified SAE J1737, SAE J1527 Type A1-15, ISO 7840 and CE.
- It is recommended for applications where low permeation C.A.R.B. compliance is required.
- Used for marine gasoline engines and fuel tanks.
- Inner tube provides extraordinary resistance to gasoline, ethanol, diesel and alcohol-enhanced fuels.
- Excellent flexibility and bend radius.
- Please note: Permeation levels tested below 5 grams.
- Payout box.

Order No.	Mfg. No. / Description	Price
771246	(360-0146) 1/4" x 50'	$218.98 M
771250	(360-0566) 5/16" x 50'	$221.98 M
771252	(360-0386) 3/8" x 50'	$238.98 M
771255	(360-0126) 1/2" x 50'	$317.98 M

Sierra Fuel Hose - Series No. 368



- Low permeation marine fuel hose has a plastic barrier veneer with an NBR outer layer tube to limit permeation.
- Complies with EPA and CARB very low permeation requirements.
- Weather and UV resistant.
- Primarily used for fuel feed.

Order No.	Mfg. No. / Description	Price
772223	(116-368-0566) 5/16" x 50'	$123.98 F
772224	(116-368-0386) 3/8" x 50'	$126.98 F

Sierra Silverado 3000 Outboard Fuel Line - Series No. 331



- Resistant to Ethanol blend fuels and is CARB compliant for small engine use.
- This EPA compliant outboard fuel line has a thermoplastic construction resists UV and the barrier layer prevents permeation.
- Primarily used for above deck primer bulb assemblies.

Order No.	Mfg. No. / Description	Price
772222	(116-331-0566) 5/16" x 50'	$89.98 F
772225	(116-331-0386) 3/8" x 50'	$97.98 F

Sierra Fuel Line Hose



- Johnson/Evinrude.
- Replaces: OMC 322656.

Order No.	Mfg. No. / Description	Price
188051	(18-8051) Length 50'	$128.50 H

AWAB 316 Stainless Steel Hose Clamps



- Features rolled band edges to eliminate the risk of damage to the hose.
- The extra wide threads of the band are stamped, leaving the unperforated band smooth on the inside.
- Sold 10 per box.

Order No.	Mfg. No. / Description	Price
275506	(316017) SAE Size: 4, 7/16" - 11/16"	$35.98 I
275518	(316020) SAE Size: 6, 1/2" - 13/16"	$37.98 I
275520	(316024) SAE Size: 8, 5/8" - 15/16"	$37.98 I
275532	(316028) SAE Size: 10, 3/4" - 1-1/8"	$39.98 I
275544	(316032) SAE Size: 12, 7/8" - 1-1/4"	$39.98 I
275556	(316038) SAE Size: 16, 1-1/16" - 1-1/2"	$41.98 I
275568	(316044) SAE Size: 20, 1-1/4" - 1-3/4"	$42.98 I
275570	(316050) SAE Size: 24, 1-1/2" - 2"	$45.98 I
275582	(316057) SAE Size: 28, 1-1/4" - 2-1/4"	$46.98 I
275594	(316064) SAE Size: 32, 1-1/2" - 2-1/2"	$52.98 I
275619	(316076) SAE Size: 40, 2" - 3"	$57.98 I
275621	(316083) SAE Size: 44, 2-1/4" - 3-1/4"	$60.98 I
275645	(316095) SAE Size: 52, 2-3/4" - 3-3/4"	$61.98 I
275671	(316114) SAE Size: 64, 3-1/2" - 4-1/2"	$73.98 I
275695	(316140) SAE Size: 80, 4" - 5-1/2"	$81.98 I
275710	(316165) SAE Size: 96, 5" - 6-1/2"	$95.98 I

T-H Marine Oetiker Stepless Ear Clamp Kit



- Great for shop or rigging work.
- Contains 10 each of the most needed sizes.
- Complete with connection tool.

Order No.	Mfg. No. / Description	Price
642656	(18500000)	$169.98 H

T-H Marine Oetiker® Clamp Installation Tools



6400061



6400062

Order No.	Mfg. No. / Description	Price
6400061	(14100083) Side Jaw Pincers	$74.98 F
6400062	(14100118) Standard Jaw Pincers	$63.98 H

AWAB Hose Clamps





- Mini clamps have an unbroken band with rounded edges.
- The band is folded over to retain the nut, and together with the small screw-thread pitch, gives the clamp self locking characteristics.
- Sold 20 per box.

Order No.	Mfg. No. / Description	Price
275811	(306008) 19/64" - 21/64"	$42.98 I
275823	(306010) 3/8" - 7/16"	$43.98 I
275859	(306013) 31/64" - 35/64"	$44.98 I
275861	(306014) 17/32" - 19/32"	$45.98 I
275873	(306015) 37/64" - 5/8"	$45.98 I
275885	(306016) 19/32" - 43/64"	$47.98 I
275897	(306017) 5/8" - 45/64"	$47.98 I
275900	(125010) Flexible Clamp Driver	$24.98 I

T-H Marine Oetiker® Stepless Ear Hose Clamps



- Stainless steel.
- Forms a full 360° circle.
- Tongue and groove interlock design.
- Fast clamping with tool.
- No leaks around hose.

Order No.	Mfg. No. / Description		Price
247805	(16700001) 5.8 - 7.0 mm	100 Per Bag	$59.98 H
247808	(16700004) 7.8 - 9.5 mm	100 Per Bag	$59.98 H
247810	(16700006) 8.8 - 10.5 mm (3/8")	100 Per Bag	$59.98 H
247818	(16700011) 11.0 - 13.8 mm (1/2")	100 Per Bag	$55.98 H
247821	(16700017) 14.5 - 17.0 mm (5/8")	100 Per Bag	$64.98 H
247829	(16700024) 17.8 - 21.00 mm (3/4")	100 Per Bag	$70.98 H
247836	(16700031) 22.4 - 25.6 mm (1")	100 Per Bag	$74.98 H
247842	(16705000) 34.9 - 38.1 mm (1-1/2")	100 Per Bag	$83.98 H

T-H Marine Oetiker® Hose Clamps



- All stainless steel.
- Clamp on - quick and secure.
- Full size range for all marine hose.

Order No.	Mfg. No. / Description		Price
6400064	(15500007) Nominal Size: 9/16"	100 Per Bag	$45.98 H
6400065	(15500008) Nominal Size: 5/8"	100 Per Bag	$40.98 H
6400066	(15500009) Nominal Size: 11/16"	100 Per Bag	$48.98 H

2 Ear Crimp Hose Clamp



- Nominal size 3/4".
- Width .335".
- Closed/open .669/.787".

Order No.	Mfg. No. / Description	Price
645768	(4E589) Stainless Steel	$3.98 B

©2014 Donovan Marine, Inc.

Marpac Premier Johnson/Evinrude Fuel Connectors


7-6912


7-6910

- Plated brass for corrosion protection.
- Viton balls and stainless steel springs for long life.
- Specifically designed for use with Ethanol E10 & E85 fuel blends.
- Color coded for easier identification.

Order No.	Description	Price
7-6910	Male Tank, 1/4" NPT	$11.98 G
7-6911	Red Female Fuel Line, 5/16" Barb	$6.98 G
7-6912	Red Female Fuel Line, 3/8" Barb	$8.98 G

Marpac Premier Honda Fuel Connectors


7-6886


7-6888


7-6890

- Plated brass for corrosion protection.
- Viton balls and stainless steel springs for long life.
- Specifically designed for use with Ethanol E10 & E85 fuel blends.
- Color coded for easier identification.

Order No.	Description	Price
7-6888	Male Tank, 1/4" NPT	$9.98 G
7-6886	Female Fuel Line Fitting, 3/8" Barb	$16.98 G
7-6890	Female, Grey Square Peg Hole, 3/8" Barb	$8.98 G

Marpac Premier Suzuki Large (75 HP & Up) Fuel Connectors


7-6934


7-6936

- Plated brass for corrosion protection.
- Viton balls and stainless steel springs for long life.
- Specifically designed for use with Ethanol E10 & E85 fuel blends.
- Color coded for easier identification.

Order No.	Description	Price
7-6936	Male Tank, 1/4" NPT	$9.98 G
7-6934	Female Fuel Line Fitting, 3/8" Barb	$12.98 G

Marpac Quick Fuel Connectors for Johnson/Evinrude


7-0912


7-0910

Order No.	Description	Price
7-0910	Male Tank, Brass, 1/4" NPT	$8.98 G
7-0911	Female Fuel Line, 5/16" Barb	$7.98 G
7-0912	Female Fuel Line, 3/8" Barb	$7.98 G

Marpac Premier Mercury Fuel Connectors


7-6914


7-6913

- Plated brass for corrosion protection.
- Viton balls and stainless steel springs for long life.
- Specifically designed for use with Ethanol E10 & E85 fuel blends.
- Color coded for easier identification.

Order No.	Description	Price
7-6913	Male Tank, 1/4" NPT	$15.98 G
7-6914	Black Female Fuel Line, 3/8" Barb	$10.98 G

Marpac Premier Yamaha Fuel Connectors


7-6926


7-6924

- Plated brass for corrosion protection.
- Viton balls and stainless steel springs for long life.
- Specifically designed for use with Ethanol E10 & E85 fuel blends.
- Color coded for easier identification.

Order No.	Description	Price
7-6924	Male Tank, 1/4" NPT	$9.98 G
7-6925	Blue Female Fuel Line, 5/16" Barb	$13.98 G
7-6926	Blue Female Fuel Line, 3/8" Barb	$13.98 G

Marpac Premier Tohatsu Fuel Connectors


7-6896



7-6898

- Plated brass for corrosion protection.
- Viton balls and stainless steel springs for long life.
- Specifically designed for use with Ethanol E10 & E85 fuel blends.
- Color coded for easier identification.

Order No.	Description	Price
7-6898	Male Tank, 1/4" NPT	$9.98 G
7-6896	Female Fuel Line Fitting, 3/8" Barb	$12.98 G

Marpac Quick Fuel Connectors for Yamaha, Mer, Mariner


7-0925


7-0924

Order No.	Description	Price
7-0924	Male Tank, Brass, 1/4" NPT	$8.98 G
7-0925	Female Fuel Line, 5/16" Barb	$7.98 G
7-0926	Female Fuel Line, 3/8" Barb	$7.98 G

Marpac Quick Fuel Connectors for Mercury (Newer Larger Style)


7-0914


7-0913

Order No.	Description	Price
7-0913	Male Tank, Brass, 1/4" NPT	$10.98 G
7-0914	Female Fuel Line, 3/8" Barb	$5.98 G

Marpac Quick Fuel Connectors for Chrysler, Force


7-0922


7-0920

Order No.	Description	Price
7-0920	Male Tank, 1/4" NPT	$8.98 G
7-0921	Female Fuel Line, 5/16" Barb	$16.98 G
7-0922	Female Fuel Line, 3/8" Barb	$17.98 G

Moeller Fuel Line Connectors for Chrysler, Force


807686


807656


807644

- Chrome plated brass.

Order No.	Mfg. No. / Description	Price
807644	(033461-10) 1/4" NPT, Male	$8.98 F
807656	(033464-10) 5/16" Barb, Female	$14.98 F
807668	(033484-10) 3/8" Barb, Female	$14.98 F

Moeller Fuel Line Connectors for Tohatsu, Nissan


807784


807795


807771

- Chrome plated brass.

Order No.	Mfg. No. / Description	Price
807771	(033450-10) 1/4" NPT, Male, Engine Size to 90 H.P.	$13.98 F
807784	(033491-10) 1/4" NPT, Male	$13.98 F
807795	(033451-10) 3/8" Barb, Female, Engine Size to 90 H.P.	$18.98 F
807808	(033492-10) 3/8" Barb, Female	$16.98 F

Moeller Fuel Line Connectors for Honda


807757


807733


807721


807745

Order No.	Mfg. No. / Description	Price
807721	(033501-10) 1/4" NPT Tank Fitting, 1991 & Newer	$14.98 F
807745	(033502-10) 3/8" Barb, Female, Engine Size to 90 H.P.	$19.98 F
807733	(033496-10) 1/4" NPT Tank Fitting	$9.98 F
807757	(033498-10) 3/8" Barb, Female, 1991 & Newer	$19.98 F
807769	(033497-10) 3/8" Barb, Female	$8.98 F

Marpac Bayonet Quick Fuel Connectors for Mercury


7-0915

Order No.	Description	Price
7-0915	Female Tank, Aluminum, 1/4" NPT	$14.98 G
7-0918	Male Fuel Line, Aluminum, 3/8" Barb	$11.98 G
7-0919	Female Fuel Line, Aluminum, 3/8" Barb	$12.98 G

Marpac Quick Fuel Connectors for Suzuki


7-0933


7-0935

Order No.	Description	Price
7-0933	Male Tank, 1/4" NPT (Small)	$7.98 G
7-0935	Female Fuel Line, 5/16" Barb (Small)	$16.98 G

Moeller Fuel Line Connectors for Mercury


807492


807531


807567

Order No.	Mfg. No. / Description	Price
807492	(033419-10) 1/4" NPT Tank Fitting	$16.98 F
807505	(033420-10) 1/4" NPT Tank Fitting with 90° Elbow	$16.98 F
807531	(033421-10) 3/8" NPT 90° Elbow Tank Fitting	$11.98 F
807579	(033418-10) 3/8" Barb, Female, Die Cast, Bayonet Style	$14.98 F
807517	(033472-10) 1/4" NPT Tank Fitting, Plastic	$8.98 F
807555	(033473-10) 5/16" Barb, Male, Plastic, Bayonet Style	$9.98 F
807593	(033475-10) 5/16" Barb, Female, Plastic, Bayonet Style	$8.98 F
807567	(033486-10) 3/8" Barb, Female, Clip Style, 1998 & Newer	$7.98 F
807606	(033482-10) 3/8" Barb, Female, Lg. Clip Style, 1998 & Newer	$9.98 F

Moeller Fuel Line Connectors for Suzuki


807670


807694


807707


807719

- Chrome plated brass.

Order No.	Mfg. No. / Description	Price
807670	(033463-10) 1/4" NPT, Male	$8.98 F
807694	(033488-10) 3/8" Barb, Female	$15.98 F
807707	(033467-10) 5/16" Barb, Female	$14.98 F
807719	(033487-10) 3/8" Barb, Female	$15.98 F

©2014 Donovan Marine, Inc.

Sierra Fuel Connectors for Johnson/Evinrude



Order No.	Mfg. No. / Description	Price
188092	(18-8092) 3/8", Female	$6.20 H
188056	(18-8056) 5/16", Female	$5.95 H
188063	(18-8063) 5-75 HP, 1/4" NPT, Replaces: 502867, 772681	$8.47 H

Sierra Fuel Connector for Yamaha



Order No.	Mfg. No. / Description	Price
188077	(18-8077-1) 1/4", Male	$11.77 H
188085	(18-8085) 5/16" Barb, Mates with 18-8077-1	$9.50 H
1880413	(18-80413) 1/4", Replaces: 6Y1-24305-04, 6G1-24305-04	$18.77 H
1880414	(18-80414) 5/16", Replaces: 6Y1-24305-05, 6G1-24305-04	$17.15 H
1880415	(18-80415) 3/8", Replaces: 6E5-24305-05, 6Y2-24305-05	$18.63 H

Sierra Fuel Connectors for Nissan/Tohatsu



Order No.	Mfg. No. / Description	Price
188088	(18-8088) Engine Connector, 3/8" Barb	$15.70 H
188089	(18-8089) Metric Threads, 5/16" Hose, Fits: 5-90 HP 2 Stroke and TLDI Models, Mates with 18-8088, Engine End, Replaces: 3B2-70260-0	$10.70 H

Sierra Fuel Connectors for Mercury



Order No.	Mfg. No. / Description	Price
188069	(18-8069) 5/16", Female	$12.32 H
188084	(18-8084) 3/8", Male	$11.83 H
188070	(18-8070) 5/16", Bayonet Style Male, Replaces: 30185Q3, 30185A3	$10.93 H
188082	(18-8082) Tank Connector, Straight Fitting, 1/4" FNPT Female	$14.77 H

Sierra Fuel Connectors for Mercury



Order No.	Mfg. No. / Description	Price
188040	(18-80402) 1/4" NPT	$14.82 H
188076	(18-8076) 3/8", Female	$6.15 H
188075	(18-8075) 1/4" Barb, 2 Prong, Replaces: 22-14213M, 22-14213Q	$14.27 H
188083	(18-8083) Engine Connector, 3/8" Male, Replaces: 22831Q3, 22831A3	$11.35 H
188085	(18-8085) 5/16" Barb,	$9.50 H
188091	(18-8091) 2 Prong, Replaces: 22-13563Q7, 22-13563T7	$11.88 H

Sierra Fuel Connector for Suzuki




Order No.	Mfg. No. / Description	Price
188079	(18-8079) 5/16", Tank End, Female	$13.20 H
188062	(18-8062) Replaces: 65750-98505	$14.00 H
1880404	(18-80404) 2 Prong	$18.35 H
1880405	(18-80405) Female, 3/8" Barb	$17.88 H
1880409	(18-80409) Replaces: 65720-94401	$15.70 H
1880418	(18-80418) Replaces: 65750-94404	$12.98 H
1880419	(18-80419) 2 Prong, Replaces: 65750-87J10	$17.07 H
188078	(18-8078) Tank, Male, 1/4" NPT, Replaces: 65740-95500, 99105-00193	$12.33 H
188087	(18-8087) Metric Threads, Replaces: 65720-94411	$15.35 H

Sierra Fuel Connector for Chrysler/Force/Suzuki



Order No.	Mfg. No. / Description	Price
188071	(18-8071) 1/4" NPT, Male	$6.88 H
188062	(18-8062) Replaces: 197787-3	$14.00 H

Marpac Fuel Hose Barbs

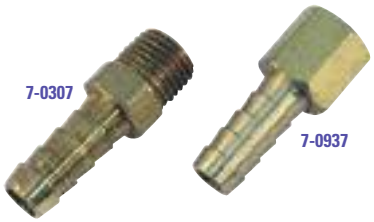

- Machined brass.
- Male connection fits Tempo valves and fuel tank withdrawal tube assemblies.
- The female connection fits Tempo valves.

Size	Type	1 Per Card Order No.	1 Per Card Price	2 Per Card Order No.	2 Per Card Price
1/8" NPT x 5/16"	Male	7-7307	$4.98 G	7-0307	$4.97 G
1/8" NPT x 3/8"	Male	7-7308	$4.98 G	7-0308	$4.98 G
1/4" NPT x 1/4"	Male	7-7313	$4.98 G		
1/4" NPT x 5/16"	Male	7-7314	$4.98 G	7-0314	$4.98 G
1/4" NPT x 3/8"	Male	7-7315	$4.98 G	7-0315	$4.98 G
3/8" NPT x 5/16"	Male	7-7323	$4.98 G	7-0323	$9.08 G
3/8" NPT x 3/8"	Male	7-7316	$4.98 G	7-0316	$4.98 G
1/4" FNPT x 1/4"	Female	7-7337	$4.98 G	7-0937	$4.98 G
1/4" FNPT x 5/16"	Female	7-7338	$4.98 G	7-0938	$4.97 G
1/4" FNPT x 3/8"	Female	7-7339	$4.98 G	7-0939	$5.98 G
3/8" NPT x 3/8"	Male, Aluminum			7-6816	$7.98 G

Marpac Fuel Elbows



- Solid machined brass.
- Excellent for use in tight spaces.

Order No.	Description	Price
7-1646	1/4" NPT x 5/16" Barb	$6.98 G
7-1647	1/4" NPT x 3/8" Barb	$6.98 G
7-1648	3/8" NPT x 5/16" Barb	$6.98 G
7-1649	3/8" NPT x 3/8" Barb	$7.98 G

Sierra 90° Hose Barbs



- 3/8" Barb.
- 90°.

Order No.	Mfg. No. / Description	Price
188067	(18-8067) 1/4" NPT	$7.25 H
188072	(18-8072) 3/8" NPT	$7.37 H

Universal Tank Elbows



Order No.	Mfg. No. / Description	Price
2001335	(28-157) Fits 1/4" NPT Threads, Bulk	$4.07 H
2001336	(28-158) Fits 3/8" NPT Threads, Bulk	$6.98 G

Straight Brass Hose Barbs



Order No.	Mfg. No. / Description			Price
2001338	(32-004) 1/4" Hose	1/8" NPT	Bulk	$1.65 I
2001339	(32-005) 1/4" Hose	1/4" NPT	Bulk	$2.19 H
2001362	(SM32-005) 1/4" Hose	1/4" NPT	Package	$3.30 H
2001340	(32-006) 1/4" Hose	3/8" NPT	Bulk	$2.74 H
2001363	(SM32-006) 1/4" Hose	3/8" NPT	Package	$3.85 H
2001341	(32-008) 5/16" Hose	1/8" NPT	Bulk	$1.42 I
2001364	(SM32-008) 5/16" Hose	1/8" NPT	Package	$2.53 H
2001342	(32-009) 5/16" Hose	1/4" NPT	Bulk	$2.31 H
2001343	(32-010) 5/16" Hose	3/8" NPT	Bulk	$2.62 H
2001344	(32-011) 3/8" Hose	1/8" NPT	Bulk	$1.90 I
2001365	(SM32-011) 3/8" Hose	1/8" NPT	Package	$2.97 H
2001345	(32-012) 3/8" Hose	1/4" NPT	Bulk	$2.11 J
2001346	(32-013) 3/8" Hose	3/8" NPT	Bulk	$2.46 H
2001366	(SM32-013) 3/8" Hose	3/8" NPT	Package	$3.63 H

Sierra Hose Barb



- 3/8" Barb.
- 1/4" NPT.
- Replaces: OMC 173312.

Order No.	Mfg. No.	Price
188074	(18-8074)	$4.95 H

90° Brass Elbows



Order No.	Mfg. No. / Description			Price
2001347	(32-036) 5/16" Hose	1/8" NPT	Bulk	$4.12 H
2001367	(SM32-036) 5/16" Hose	1/8" NPT	Package	$5.98 Q
2001348	(32-038) 1/4" Hose	1/8" NPT	Bulk	$3.82 H
2001368	(SM32-038) 1/4" Hose	1/8" NPT	Package	$4.95 Q
2001349	(32-039) 1/4" Hose	1/4" NPT	Bulk	$4.79 H
2001369	(SM32-039) 1/4" Hose	1/4" NPT	Package	$5.98 H
2001350	(32-040) 5/16" Hose	1/4" NPT	Bulk	$4.18 H
2001370	(SM32-040) 5/16" Hose	1/4" NPT	Package	$5.98 H
2001351	(32-041) 3/8" Hose	1/4" NPT	Bulk	$4.29 H
2001371	(SM32-041) 3/8" Hose	1/4" NPT	Package	$5.98 H
2001352	(32-042) 3/8" Hose	3/8" NPT	Bulk	$5.98 H
2001372	(SM32-042) 3/8" Hose	3/8" NPT	Package	$6.98 G

Marpac Elbow - Male/Female



- Brass.
- 1/4" NPT.

Order No.	Description	Price
7-0320	Elbow	$7.98 G

©2014 Donovan Marine, Inc.

Marpac Hose Splicers



- 2" long.
- Machined brass.
- Sold 2 per pack.

Order No.	Description	Price
7-0318	5/16"	$3.98 G
7-0319	3/8"	$3.98 G

Brass Hose Menders



Order No.	Mfg. No. / Description		Price
2001353	(32-093) 1/4"	Bulk	$1.86 I
2001373	(SM32-093) 1/4"	Package	$2.86 H
2001354	(32-094) 5/16"	Bulk	$1.65 H
2001374	(SM32-094) 5/16"	Package	$3.08 H
2001355	(32-095) 3/8"	Bulk	$1.65 I
2001375	(SM32-095) 3/8"	Package	$2.97 H

Marpac Aluminum Plug

- Aluminum.
- 2 Per card.



Order No.	Description	Price
7-6820	3/8" NPT, Male Thread	$7.98 G

Marpac Fuel Depot Display

- Increase sales when you educate your customers on the realities of fuel blends.



Order No.	Description	Price
7-8989	*(Includes items listed to the right)*	$1,828.98 I

Marpac Replacement Fuel/Water Separator
(2) 7-0842 Racor Inside Kit with Stainless Steel Head
(2) 7-0843 Racor Inside, Canister with Sight Bowl
(4) 7-0844 Racor Inside, Replacement Canister
(2) 7-0845 Racor Inside, Replacement Clear Bowl
(3) 7-0871 MarPlate Head Kit
(6) 7-0847 Composite Head Kit
(12) 7-0860 Filter

Marpac Qwick View Filter System
(2) 7-6854 Filter Assembly with Drain (No Head)
(2) 7-6858 Replacement Filter
(2) 7-6862 Nichronium Head Kit with Drain

Marpac Premier Fuel Line Assembly
(2) 7-6702 Johnson/Evinrude
(2) 7-6706 Mercury, Two Prong
(2) 7-6708 Yamaha
(2) 7-6709 Universal

Marpac Premier Primer Bulb
(2) 7-6728 3/8" (2) 7-6732 5/16"

Marpac Premier Fuel Line Connectors, Tank
(2) 7-6910 Johnson/Evinrude, Male, 1/4" NPT
(2) 7-6913 Mercury, Male, 1/4" NPT
(2) 7-6924 Yamaha, Male, 1/4" NPT
(2) 7-6936 Suzuki, Large (75 HP & Up), Male, 1/4" NPT
(2) 7-6888 Honda, Male, 1/4" NPT
(2) 7-6898 Tohatsu, Male, 1/4" NPT

Marpac Premier Fuel Line Connectors, Fuel Line
(2) 7-6911 Johnson/Evinrude, Red, Female, 5/16" Barb
(2) 7-6912 Johnson/Evinrude, Red, Female, 3/8" Barb
(2) 7-6914 Mercury, Black, Female, 3/8" Barb
(2) 7-6925 Yamaha, Blue, Female, 5/16" Barb
(2) 7-6926 Yamaha, Blue, Female, 3/8" Barb
(2) 7-6934 Suzuki, Large (75 HP & Up), Female, 3/8" Barb
(2) 7-6886 Honda, Female, 3/8" Barb
(2) 7-6890 Honda, Female, Square Peg Hole, 3/8" Barb
(2) 7-6896 Tohatsu, Female, 3/8" Barb

Display
(1) 101120 Header Card (2) 101129 Sign Holder

Marpac Fuel Line Assortments, Standard

Marpac Quick Connectors
(6) 7-0910 J/E, Male Tank, 1/4" NPT, Brass
(6) 7-0912 J/E, Female Fuel Line Fitting, 3/8" Barb
(3) 7-0924 Yam/Mer/Mariner, Male Tank, 1/4" NPT, Brass
(9) 7-0926 Yam/Mer/Mariner, Female Fuel Line, 3/8" Barb
(3) 7-0933 Suzuki, Male Tank, 1/4" NPT (Small)
(3) 7-0936 Suzuki, Female Fuel Line Fitting, 3/8" Barb

Marpac Quick Connectors, Aluminum
(3) 7-0915 Mercury, Bayonet, Female Tank, 1/4" NPT
(3) 7-0918 Mercury, Bayonet, Male Fuel Line, 3/8" Barb

Marpac Fuel Hose Barbs
(6) 7-0938 Female Thread, 1/4" FNPT x 5/16"

Marpac Premier Quick Connectors
(3) 7-6886 Honda , Female Fuel Line Fitting, 3/8" Barb
(6) 7-6913 Mercury, Male Tank, 1/4" NPT
(3) 7-6914 Mercury, Female Fuel Line Fitting, 3/8" Barb

Order No.	Description	Price
7-6991	Standard B	$392.98 G

Marpac Quick Connectors
(6) 7-0910 J/E, Male Tank, 1/4" NPT, Brass
(6) 7-0912 J/E, Female Fuel Line Fitting, 3/8" Barb
(3) 7-0924 Yam/Mer/Mariner, Male Tank, 1/4" NPT, Brass
(9) 7-0926 Yam/Mer/Mariner, Female Fuel Line, 3/8" Barb

Marpac Quick Connectors, Aluminum
(3) 7-0915 Mercury, Bayonet, Female Tank, 1/4" NPT
(3) 7-0918 Mercury, Bayonet, Male Fuel Line, 3/8" Barb

Marpac Fuel Hose Barbs
(6) 7-0938 Female Thread, 1/4" FNPT x 5/16"

Marpac Premier Quick Connectors
(6) 7-6913 Mercury, Male Tank, 1/4" NPT

Order No.	Description	Price
7-6992	Standard C	$295.98 G

Marpac Fuel Line Assortments, Premier

Marpac Premier Fuel Line Connectors, Tank
(6) 7-6910 Johnson/Evinrude, Male, 1/4" NPT
(6) 7-6913 Mercury, Male, 1/4" NPT
(3) 7-6924 Yamaha, Male, 1/4" NPT
(3) 7-6936 Suzuki, Large (75 HP & Up), Male, 1/4" NPT

Marpac Premier Fuel Line Connectors, Fuel Line
(6) 7-6912 Johnson/Evinrude, Red, Female, 3/8" Barb
(3) 7-6914 Mercury, Black, Female, 3/8" Barb
(9) 7-6926 Yamaha, Blue, Female, 3/8" Barb
(3) 7-6934 Suzuki, Large (75 HP & Up), Female, 3/8" Barb
(3) 7-6886 Honda, Female, 3/8" Barb

Marpac Quick Connectors, Aluminum
(3) 7-0915 Mercury, Bayonet, Female Tank, 1/4" NPT
(3) 7-0918 Mercury, Bayonet, Male Fuel Line, 3/8" Barb

Marpac Fuel Hose Barbs
(6) 7-0938 Female Thread, 1/4" FNPT x 5/16"

Order No.	Description	Price
7-6994	Premier B	$428.98 G

Marpac Premier Fuel Line Connectors, Tank
(6) 7-6910 Johnson/Evinrude, Male, 1/4" NPT
(6) 7-6913 Mercury, Male, 1/4" NPT
(3) 7-6924 Yamaha, Male, 1/4" NPT

Marpac Premier Fuel Line Connectors, Fuel Line
(6) 7-6912 Johnson/Evinrude, Red, Female, 3/8" Barb
(9) 7-6926 Yamaha, Blue, Female, 3/8" Barb

Marpac Quick Connectors, Aluminum
(3) 7-0915 Mercury, Bayonet, Female Tank, 1/4" NPT
(3) 7-0918 Mercury, Bayonet, Male Fuel Line, 3/8" Barb

Marpac Fuel Hose Barbs
(6) 7-0938 Female Thread, 1/4" FNPT x 5/16"

Order No.	Description	Price
7-6995	Premier C	$325.98 G

Marpac Teflon Tape



- 100% pure PTFE thread seal tape.
- A naturally lubricated tape that is clean to use and does not harden.
- For use in all threaded connections and fittings.
- Seals tight for professional results

Order No.	Description	Price
7-0305	Teflon Tape	$3.08 G

Marpac Tank Vent



- Brass.
- For use in attaching 5/8" ID vent hose to the fuel tank for thru hull ventilation.

Order No.	Description	Price
7-0310	3/8" NPT	$5.98 G

Marpac Aluminum Anti-Syphon Valve



- Meets USCG/Industry standards for anti-siphoning on gas powered boats.
- Anti-siphon protection with hose barb simplicity.

Order No.	Description	Price
7-6952	1/4" NPT x 3/8" Hose Barb	$8.98 G

Brass T-Handle Drain Cocks



Order No.	Mfg. No. / Description		Price
2001357	(46-080) 1/8"	Bulk	$13.98 R
2001378	(SM46-080) 1/8"	Package	$15.98 G
2001358	(46-081) 1/4"	Bulk	$11.98 R
2001379	(SM46-081) 1/4"	Package	$12.98 G

Marpac 2-Way Ball Valve




- Made of brass with stainless steel screw stem.
- 1/4" MNPT x 3/8" barb.

Order No.	Description	Price
7-6938	2-Way Ball Valve	$5.98 G

Marpac Shut-Off Valves





- NMMA Fire Test Approved.
- Brass.
- Connects motor to one permanent tank.

Order No.	Description	Price
7-6940	1/4" NPT x 1/4" FNPT	$24.98 G
7-6942	1/4" FNPT	$24.98 G

Pipe Thread Tape



- 100% pure PTFE thread seal tape.
- Seals tight for pro results.
- For use in all threaded connections and fittings.
- A naturally lubricated tape that is clean to use and does not harden.
- Sold in bulk.

Order No.	Mfg. No. / Description	Price
512144	(M22 1/2X520) 1/2" x 520"	$1.98 F

Marpac Tank Vent Elbow



- Designed for use with the 205 TVF-10 tank vent where vertical space is limited.
- Replaces 3/8" plug on fuel tanks.

Order No.	Description	Price
7-0321	Brass, 3/8" NPT	$8.98 G

Marpac Bulk Head Fitting



- Brass.
- Ideal for routing fuel lines safely through motor wells or bulk heads.

Order No.	Description	Price
7-0306	3/8" to 3/8" Hose ID, Straight	$10.98 G

Marpac 3-Way and 4-Way Valves



- NMMA Fire Test Approved.
- Brass.
- 3-Way connects motor to two permanent tanks.
- 4-Way connects motor to three permanent tanks.
- Withdrawals from one tank at a time.

Order No.	Description	Price
7-6944	3-Way, 1/4" FNPT	$25.98 G
7-6946	3-Way, 1/4" FNPT, with Easy Clicks	$27.98 G
7-6948	3-Way, 3/8" FNPT	$27.98 G
7-6950	4-Way, 1/4" FNPT	$28.98 G

Fuel Selector



- Selector valve for changing between fuel tanks.

Order No.	Mfg. No. / Description	Price
2003610	(100FSV)	$70.98 H

©2014 Donovan Marine, Inc.

Attwood 90° P-Trap Fuel Tank Vents - Black



- Help prevent water from entering the fuel tank, yet allow air to vent freely.
- Eliminates need for an anti-syphon loop in the vent hose, allowing more direct hose routing to the fuel tank and shorter hose length.
- Meets ABYC Standard.
- Maximum hull thickness: 9/16".
- Installation hole size: 3/4" diameter.
- Requires 1-1/2" height clearance for anti-siphon feature.

Order No.	Mfg. No. / Description	Price
237445	(1670-3) With Black Vent Head, For 5/8" ID Hose	$15.98 R
237455	(66419-3) With Stainless Steel Trim Cover, For 5/8" ID Hose	$14.98 R

Perko Fig. 570 Fuel Tank Vent



- Chrome plated zinc cowl with black plastic cap and removable 30 mesh, stainless steel wire screen flame arrester.
- Hose size 5/8".
- Maximum hull thickness 3/4".

Order No.	Mfg. No. / Description	Price
540989	(570 DP4 BLK)	$13.98 R

Perko Fig. 561 Fuel Tank Vent with Swivel Elbow



- Chrome plated zinc cap with zinc elbow, black plastic splash guard and removable 30 mesh, stainless steel wire screen flame arrester.
- Design allows elbow to be rotated to any position.
- Hose size 5/8".
- Maximum hull thickness 1".

Order No.	Mfg. No. / Description	Price
541020	(561 DP4 CHR)	$17.98 R


Moeller Thru-Hull Vent



- Plated finish.
- Vent hose to the fuel tank for thru-hull ventilation.
- For hulls up to 1/2" thick and accommodates 5/8" vent hose.

Order No.	Mfg. No. / Description	Price
808317	(035732-10)	$11.98 F

Marpac Fuel Vents

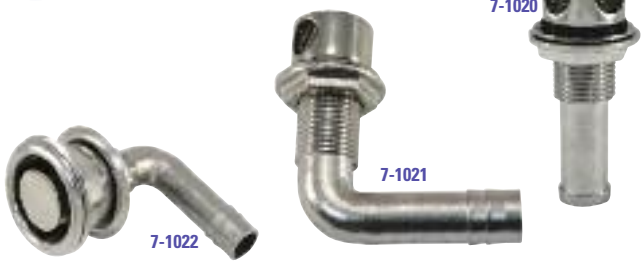

- 5/8" hose ID.
- Includes stainless steel nut.

Order No.	Description	Price
7-1020	Straight	$16.98 G
7-1021	90° With Protective Cover	$18.98 G
7-1022	90°, Flush Mount Design	$24.98 G

Perko Fig. 506 Fuel Tank Vent



- Chrome plated zinc with black plastic splash guard and removable 30 mesh, stainless steel wire screen flame arrester.
- Hose size 5/8".
- Maximum hull thickness 3/4".

Order No.	Mfg. No. / Description	Price
539645	(506 DP4 CHR)	$17.98 R

Perko Fig. 503 90° Fuel Tank Vent



- Chrome plated bronze with removable 30 mesh, stainless steel wire screen flame arrester.
- Thread size 3/8".
- Maximum hull thickness 7/8".

Order No.	Mfg. No. / Description	Price
539594	(503 DP3 CHR)	$62.98 R

Buck Algonquin "Tuff-Lite" Nylon Hose Adapter



- Hexed for easy installation.

Order No.	Mfg. No. / Description	Price
354679	(60tn200) 1-1/2" NPT, Hose 1-1/2" ID, 2-3/4" L	6.98 F

Marpac Deck Fills with Color Coded Caps



- Heavy duty cast type 316 marine grade stainless steel.
- Color coded cap and symbol for easier identification and less confusion.
- The keyless cap design makes filling easier since no tools are needed.
- Designed for use with 1-1/2" hose.

Order No.	Description	Price
7-1640	Diesel with Green Nylon Cap	$31.98 G
7-1641	Gas with Red Nylon Cap	$29.98 G
7-1642	Water with Blue Nylon Cap	$31.98 G
7-9036	Replacement Green Nylon Cap	$5.98 G
7-9037	Replacement Red Nylon Cap	$5.98 G
7-9038	Replacement Blue Nylon Cap	$4.98 G
7-0896	Replacement Cap for 7-1641	$16.98 G

Marpac Flanged Gas Deck Fill with Spill Guard



- Stamped stainless steel.
- Designed for use with 1-1/2" hose.

Order No.	Description	Price
7-0892	Flanged Gas Deck Fill	$25.98 G

White Cap Gas Deck Fill with Splash Guard



- 1-1/2" chrome plated zamak fuel fill has a 3-1/8" flange.
- Fastener: #10.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
2011639	(S-7021P)	$14.98 H
2011640	(S-7022P) Replacement Cap	$5.98 H

Attwood Replacement Cap and Chain



- Highly polished finish.
- Flush cap is slotted for separate key and features an O-ring that seals the cap watertight.
- Cap is attached by a stainless steel, beaded chain.

Order No.	Mfg. No. / Description	Price
333628	(66061-3) 1-1/2" Deck Fills, Enhanced 316 Stainless Steel	$26.98 Q

Marpac Gas Deck Fill with Key



- 316 investment cast stainless steel with CNC machined threads
- O-ring seal for leak prevention.
- Manufactured with sealant groove on back side for positive deck seal.
- Uses #10 fasteners.
- Includes: Chain and key.

Order No.	Description	Price
7-0894	Flange OD 3-1/8", for 1-1/2" Hose	$36.98 G
7-0896	Replacement Cap	$16.98 G

Moeller Plated Zimac Deck Plate Fill for Gasoline



- Conveniently designed with screw mount and splash lip.
- Ideal for use with 1-1/2" ID fill hose.
- Chrome plated zimac.
- Comes complete with cap and key.
- Packaged for display.

Order No.	Mfg. No. / Description	Price
4810080	(35740)	$27.98 H

White Cap Hose Deck Fills with Key



- Fuel fill fits 1-1/2" fill hose.
- 316 stainless steel.
- Flange: 3".
- Fastener: #10.
- Complete with cap and key.

Order No.	Mfg. No. / Description	Price
2011514	(6123C)	$37.98 H
2011513	(6123A) 30° Angle	$76.98 G
2011501	(6061C) Replacement Cap	$17.98 H

Perko Fig. 1270 Deck Plates for Hose



- Chrome plated zinc with black plastic cap.
- Caps have a slot between the holes.
- Hose size 1-1/2".
- Flange OD 3-1/2".
- Neck length 2-1/2".
- Uses #8 fasteners.
- Complete with key, O-ring and integral retainer on cap.

Order No.	Mfg. No. / Description	Price
544343	(1270 DPG CHR) Gas	$43.98 R
544355	(1270 DPW CHR) Water	$43.98 R
5315060	(1270 DPG 99A) Repl. Gas Cap with O-ring and Retainer	$19.98 H

©2014 Donovan Marine, Inc.

Buck Algonquin Deck Plates



- 316 stainless steel with polished finish.
- Furnished with a beaded chain, cap, O-ring and key.
- Uses #10 fasteners.
- Marked "Diesel" on flange plate.

Order No.	Mfg. No. / Description	Price
260555	(70pdps150D) Pipe Size 1-1/2", Flange OD 3-3/4"	$104.98 Q
260567	(70pdps200D) Pipe Size 2", Flange OD 4-5/8"	$132.98 Q

- Marked "Gas" on flange plate.

Order No.	Mfg. No. / Description	Price
260593	(70pdps150G) Pipe Size 1-1/2", Flange OD 3-3/4"	$104.98 Q

- Cast bronze.
- Shank OD 1-3/4".
- No markings.

Order No.	Mfg. No. / Description	Price
260630	(00pdp125NM) Pipe Size 1-1/4", Flange OD 3-1/8"	$57.98 Q


Perko Fig. 537 Retaining Cable for Deck Plates



- Stainless steel cable and fittings with 1-3/8" stainless steel ring and self tapping screw.

Order No.	Mfg. No. / Description	Price
540624	(537 DP) Cable Length 7"	$8.98 R

Perko Fig. 826 Adjustable Deck Plate Key



- Chrome plated zinc with hardened steel pins.
- Adjustable up to 8" diameter.
- Length overall 8-1/2".

Order No.	Mfg. No. / Description	Price
542438	(826 DP CHR)	$31.98 R

Perko Fig. 1248 Spare Deck Plate Keys



- Plain zinc alloy.
- 533768 is for 1-1/4" and 1-1/2" deck plates.
- 533782 is for 2" deck plate.

Order No.	Mfg. No. / Description	Price
533768	(1248 7-8 DP) 1-1/8" Pin Center to Center	$5.98 R
533782	(1248 009 DP) 1-11/16" Pin Center to Center	$6.98 R

Perko Fig. 528 Deck Plates for Pipe



- Perko Figure 528 Deck Plate - Marked
- Chrome plated bronze.
- Comes complete with key and O-ring.
- 1-1/2" cap have a slot between the holes.

Order No.	Mfg. No. / Description		Marked	Price
540395	(528 DPD CHR) 1-1/2" IPT	Flange OD 3-5/8"	Diesel	$140.98 R
540408	(528 D09 CHR) 2" IPT	Flange OD 4-1/4"	Diesel	$227.98 H
540458	(528 DPW CHR) 1-1/2" IPT	Flange OD 3-5/8"	Water	$140.98 R
540422	(528 DPG CHR) 1-1/2" IPT	Flange OD 3-5/8"	Gas	$140.98 R

- Perko Figure 528 Deck Plate - Unmarked
- Plain bronze straight pipe thread no markings.
- Comes complete with key and O-ring.

Order No.	Mfg. No. / Description		Price
540282	(528 008 PLB) 1-1/2" IPT	Flange OD 3-5/8"	$119.98 H
540307	(528 009 PLB) 2" IPT	Flange OD 4-1/4"	$185.98 H
540321	(528 011 PLB) 3" IPT	Flange OD 5-3/8"	$346.98 H

- Perko Spare Caps for Figure 528 Deck Plates
- Complete with O-ring.

Order No.	Mfg. No. / Description	Price
540357	(528 P09 99A) 2" IPT, Plain Bronze	$114.98 H

Marpac Deck Plate Key



- Stainless steel.
- Not only fits deck plates, but also doubles as a screw drive and bottle opener.

Order No.	Description	Price
7-0889	Deck Plate Key	$6.98 G

Perko Fig. 1247 Slotted Fuel Fill Key



- Black plastic.

Order No.	Mfg. No. / Description	Price
5315055	(1247 DP BLK)	$6.98 H

Perko Fig. 525 Locking Fuel Fill Insert



- System for the Most Popular Perko Fuel Fills of all times.
- Dual purpose key, handle also opens cap, opposite end is your key for the insert.
- Simple as open the cap, insert lock, remove key!
- Fits the following models, without any additional tools: 540, 541, 590, 591, 1318 and 1319's. (Fuel fill not included.)

Order No.	Mfg. No. / Description	Price
5315131	(525 DP)	$38.98 H

Perko Fig. 1399 "Chromalex" Gas Fill with Locking Cap



- Chrome plated zinc alloy.
- Black polymer flange and cap with strap.
- Complete with grounding screw, cap retainer and gasket.
- Locking cap has a cover for the key hole.
- Hose size 1-1/2".
- Flange OD 3-1/8".
- Neck length 1-7/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
534671	(1399 DP0 CHR)	$56.98 R
534506	(1324 DP0 BLK) Replacement Locking Cap with 2 Keys	$33.98 R

Perko Fig. 1324 Fuel System Locking Caps for 1-1/2" Non-Vented Fills



- Black polymer with gasket.
- Built-in lock cylinder.

Order No.	Mfg. No. / Description	Price
534506	(1324 DP0 BLK) Fits 1-15/32" OD	$33.98 R
5315074	(1324 DP1 BLK) Fits 1-7/8" OD	$36.98 H

Perko Fig. 542 Vented Fill for 1-1/2" Hose - Angled Neck



- Black polymer cap with black polymer body.
- Black polymer strap.
- Integral tank vent with flame arrestor and anti surge valve.
- Deck plate key included.
- For hose size: 1-1/2".
- For vent hose: 5/8".
- Neck length: 2-7/16".
- Screw size: #8.

Order No.	Mfg. No. / Description	Price
534685	(542 DPG BLK)	$37.98 R

Perko Fig. 1318 Vented Fill for 1-1/2" Hose - 35° Angled Neck



- 35° angled neck.
- Integral tank vent with flame arrestor.
- Flip top cap.
- No deck plate key or ground wire required.
- Marked "Gas".
- Fuel hose size 1-1/2", vent hose size 5/8".
- Neck length 2-7/16".
- Uses #10 fasteners.

Order No.	Mfg. No. / Description	Price
5315071	(1318 DPG BLK)	$28.98 H

Perko Fig. 1313 "Chromalex" Gas Fill with Non-Locking Cap



- Chrome plated zinc alloy.
- Black polymer flange and cap with strap.
- Complete with grounding screw, cap retainer and gasket.
- Hose size 1-1/2".
- Flange OD 3-1/8".
- Neck length 1-7/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
534431	(1313 DP0 CHR)	$22.98 R
533845	(126 DP0 BLK) Replacement Non-Locking Cap	$11.98 R

Perko Fig. 541 Vented Fill for 1-1/2" Hose - Straight Neck



- Chrome plated bronze cap with black polymer body.
- Marked "Gas".
- Integral tank vent with flame arrestor and anti surge valve.
- Deck plate key included.
- Straight neck and stainless steel bead chain.
- Fuel hose size 1-1/2".
- Vent hose size 5/8".
- Neck length 2-7/16".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
534683	(541 DPG CHR)	$57.98 R
534680	(540 DPG 99A) Replacement Gas Cap, O-ring and Retainer	$49.98 H

Perko Fig. 1319 Vented Fills for 1-1/2" Hose - Straight Neck





- Straight neck.
- Black or white polymer.
- Flip top cap.
- Integral tank vent with flame arrestor.
- Marked "Gas".
- Fuel hose size 1-1/2", vent hose size 5/8".
- Neck length 2-7/16".
- Uses #10 fasteners.

Order No.	Mfg. No. / Description	Price
534467	(1319 DPG BLK) Black Polymer	$26.98 R
5315073	(1319 DPG WHT) White Polymer	$28.98 H

Perko Fig. 1613 Polymer Gas Fill



- Fiber reinforced, UV stabilized black polymer.
- Easy grip cap.
- No deck plate key or ground wire required.
- Complete with O-ring and cap retainer.
- Hose size 1-1/2".
- Overall OD 3-1/16".
- Neck length 2-7/16".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
535130	(1613 DP0 BLK)	$16.98 R
5315101	(1613 000 99A) Replacement Gas Cap, O-ring and Retainer	$17.98 H

©2014 Donovan Marine, Inc.

Marpac Qwick View Filter Systems



- Designed for use with Portable Marine Fuel Systems.
- Clear bowl for quick checks on fuel quality, remove water or change filter before there is a problem.
- 10 Micron filter cartridge is replaceable (Order # 7-6858) and disposable.
- Ethanol fuel compatible with Viton® Seals that won't shrink.
- Red float indicates water that needs to be drained (on drain models).

Order No.	Description	Price
7-6854	Filter Assembly with Drain, No Head	$47.98 G
7-6856	Filter Assembly without Drain, No Head	$40.98 G
7-6858	Replacement Filter	$12.98 G
7-6862	Nichronium Head and Filter Assembly Kit with Drain	$63.98 G
7-6864	Composite Head and Filter Assembly Kit without Drain	$47.98 G

Marpac Premier Fuel/Water Separating Filter Kit with Racor Filter



- 10 Micron filtration ensures fuel arrives at the outboard engine(s) clean of contaminants and water.
- Stainless steel filter head.
- High flow filter head design with 3/8" NPT ports.
- Clear contaminate collection bowl with drain valve included.
- Can be used with all 2 and 4 stroke engines.
- Kit includes: Universal filter head, hose barbs, plugs, thread sealant, clear contaminate collection bowl and 10 Micron water separating fuel filter.
- For portable fuel systems only.

Order No.	Description	Price
7-0879	Fuel/Water Separating Filter Kit	$150.98 G

Marpac Racor® Inside Fuel/Water Separator Kits with Bowl



- For all 2 and 4 Cycle engines.
- Kits includes: Filter head, hose barbs, plugs, thread sealant and fuel filter.
- 10 Micron media filters out 99% of water and 98% of contaminates.
- Clear bowl extends the life of the filter by allowing water to be drained from the fuel system.
- 3/8" NPT ports provides high fuel flow.
- Maximum media surface area for high dirt holding capacity.
- Filter media sheds water instead of absorbing it.
- For Vacuum (Suction Side) Applications.
- Water collecting bowl is reusable.
- For Portable Marine Fuel System Only.

Order No.	Description	Price
7-0842	With Stainless Steel Head	$129.98 G
7-0846	With Composite Head	$69.98 G
7-6879	With Nichronium Head	$78.98 G
7-0843	Filter with Clear Bowl	$59.98 G
7-0844	Replacement Filter	$26.98 G
7-0845	Replacement Clear Bowl	$33.98 G

Marpac Fuel/Water Separator Filter Kits



- Corrosion resistance filter head choices.
- High flow filter head design with 3/8" NPT ports.
- 10 Micron filtration ensures fuel arrives at the outboard engine(s) clean of contaminants and water.
- E-10 ethanol compatible.
- Will not separate 2-cycle oil from gasoline.
- Can be used with all 2 and 4 stroke engines.
- Kits includes: Universal filter head, hose barbs, plugs, thread sealant and one or two 10 Micron water separating fuel filter.

Order No.	Description	Price
7-0878	With Stainless Steel Head, 1 Filter	$69.98 G
7-0874	With Stainless Steel Head, 2 Filter Value Pack	$71.98 G
7-0871	With MarPlate Head, 1 Filter	$38.98 G
7-0873	With MarPlate Head, 2 Filter Value Pack	$45.98 G
7-0847	With Composite Head, 1 Filter	$29.98 G
7-0858	With Composite Head, 2 Filter Value Pack	$35.98 G
7-6874	With Nichronium Head, 2 Filter Value Pack	$45.98 G

Marpac Replacement Universal Filter Brackets


7-6876


7-0859


7-0870


7-6877

- 11/16" threads.
- 3/8" ports for maximum fuel flow.

Order No.	Description	Price
7-0859	Composite Filter Bracket	$23.98 G
7-0870	MarPlate Filter Bracket	$27.98 G
7-6876	Stainless Steel Filter Bracket	$49.98 G
7-6877	Nichronium Filter Bracket	$39.98 G

Sierra Fuel/Water Separating Filter with Bracket



- Heavy wall filter canister with epoxy coating improves protection against corrosion.
- Designed and recommended for all 2 & 4 cycle gasoline engines.
- 28 micron filter element shaped into 66 pleats.
- Meets OEM specifications.
- Filter materials will not separate 2 cycle oil from gasoline.
- Do not use with diesel fuel.
- Replaces: Mercury 35-805269A4 and 35-60494A4, Suzuki 99105- 20001, Yamaha ABB-SEPAR-AT-OR.

Order No.	Mfg. No. / Description	Price
187852	(18-7852) Fuel/Water Separator Kit	$38.68 H
187844	(18-7844) Replacement Filter	$8.27 H
187845	(18-7845) Replacement Filter, Long	$8.27 H
187846	(18-7846) Replacement Filter, OMC	$10.37 H

Sierra Fuel/Water Separating Filter



- Replaces: Mercury 35-18458Q4.
- Includes: Sensor.

Order No.	Mfg. No. / Description	Price
187968	(18-7968)	$20.00 H

Racor Par Fit Spin-On Gasoline Filter/Water Separator



- Replaces standard fuel filters found on most Mercury, Mercruiser, Yamaha, Suzuki, Honda and Tohatsu marine gasoline applications.
- 11/16"-16 center threads for the most popular applications.
- High contaminant capacity and 96% @ 10 micron particle removal efficiency makes this filter suitable for all low or high pressure injection systems.
- Performance xceeds OEM specifications.

Order No.	Mfg. No. / Description	Price
314795	(PFF5510)	$8.98 G

Marpac Fuel/Water Separator Filter



- 10 Micron filtration.
- Will not separate 2-cycle oil from gasoline.
- For all 2 and 4 stroke engines.
- For portable fuel systems only.
- 11/16"-16 center threads.

Order No.	Description	Price
7-0860	Sold in Display Package	$6.98 G
7-0860S	Case of 48 Filters	$319.98 G

Sierra Fuel/Water Separating Filter with Bracket



- 1/4" ports, aluminum head, short filter.
- Heavy wall filter canister with epoxy coating improves protection against corrosion.
- Designed and recommended for all 2 & 4 cycle gasoline engines.
- Filter materials will not separate 2 cycle oil from gasoline.
- Replaces: Mercury 35-805269A4, 35-80289304, 35-60494A4, 35-604944, 35-802893A4 and 32-80289304, Suzuki 99105- 20001, Yamaha ABB-SEPAR-AT-OR.

Order No.	Mfg. No. / Description	Price
187848	(18-7848-2) Kit with 2 Filters	$45.63 H
1878481	(18-7848-1) Kit	$38.57 H

Sierra Replacement Filter for Yamaha Outboard Motors



- Fits: All Yamaha 2 & 4 Stroke, EFI and HPDI outboard motors.
- Universal design.
- 10 micron.

Order No.	Mfg. No. / Description	Price
187866	(18-7866)	$18.73 H

Sierra Replacement Filter for OMC Sterndrive/Cobra Sterndrive



- Replaces: OMC 502905.
- Universal design.
- 10 micron.
- 1"-12 center threads.

Order No.	Mfg. No. / Description	Price
187946	(18-7946)	$10.37 H

©2014 Donovan Marine, Inc.

Racor OEM Spin-On Gasoline Filter/Water Separators



- Now, owners of inboard or outboard engines can get smoother operation and longer life - all in one easy spin onto their existing engine filter heads.
- There's a choice of rugged, reusable clear bowl with a self-venting drain or a metal bowl with drain plug for inboard applications.
- Metal bowls are UL-listed and USCG accepted, clear bowls are for outboard applications only.
- These filters also feature high capacity Aquabloc II element that removes 99% of free water, and sediment down to 10 micron.
- These OEM spin-on gasoline filters were designed to fit most Quicksilver, MerCruiser and OMC applications.

- For Outboard Applications Only.
- With clear bowl.
- 60 GPH, height 7.2", diameter 3.8".

Order No.	Mfg. No. / Description	Price
314498	(B32013) Fits 11/16"-16 Quicksilver Heads	$66.98 G
314505	(S3213) Replacement Filter for 314498	$24.98 F
314499	(B32014) Fits 1"-12 OMC Heads	$66.98 G
314506	(S3214) Replacement Filter for 314499	$25.98 G
314502	(RK30475) Replacement Clear Bowl Kit for 314498 & 314499	$45.98 G

- For Inboard or Outboard Applications.
- With metal bowl.
- 3/8" metal plug.
- 60 GPH, height 6.5", diameter 3.8".

Order No.	Mfg. No. / Description	Price
314501	(B32020MAM) Fits 11/16"-16 MerCruiser Heads	$72.98 F
314503	(S3220 UL) Replacement Filter for 314501	$28.98 G

Racor In-Line Gasoline Filter/Water Separator



- 25 GPH.
- Head port size: 1/4"-18 NPTF.
- Anodized die cast aluminum head with clear, reusable plastic bowl.
- Features a high capacity Aquabloc II filter element that removes sediment down to 10 micron and 99% of water.
- For outboard engines, personal watercraft.
- Do not use with inboard engines or sterndrive boats.

Order No.	Mfg. No. / Description	Price
314423	(025-RAC-02)	$96.98 F
314515	(S2502) Replacement Filter	$24.98 G

Racor Gasoline Spin-On Filter/Water Separators



- Designed for high performance applications and with flow rates between 30 and 120 GPH.
- Coated with a durable electrostatically applied powder coating for superior corrosion resistance.
- Features a high capacity Aquabloc II filter element that removes sediment down to 10 micron and 99% of water.
- This spin-on filter design is simple to replace and the reuseable clear plastic or metal contaminant collection bowls feature a self-venting drain, or metal plug, for removing unwanted muck and water.

- For outboard applications only with clear bowl.

Order No.	Mfg. No. / Description	Price
314447	(120R-RAC-01) 30 GPH, Head Port: 1/4"-18 NPTF	$97.98 F
314523	(S3240) Replacement Filter for 314447	$21.98 G
314511	(RK10222) Replacement Clear Bowl for 314447	$49.98 F
314497	(320R-RAC-01) 60 GPH, Head Port: 1/4"-18 NPTF	$103.98 F
314516	(S3227) Replacement Filter for 314497	$24.98 G
314502	(RK30475) Replacement Clear Bowl for 314497	$44.98 G
314465	(490R-RAC-01) 90 GPH, Head Port: 3/8"-18 NPTF, Includes Primer Pump	$137.98 F
314516	(S3227) Replacement Filter for 314465	$24.98 G
314473	(660R-RAC-01) 90 GPH, Head Port: 3/8"-18 NPTF	$133.98 F
314520	(S3232) Replacement Filter for 314473	$33.98 G
314502	(RK30475) Replacement Clear Bowl for 314473	$45.98 G

- For inboard or outboard applications with metal bowl.
- UL Marine Listed.

Order No.	Mfg. No. / Description	Price
314450	(120R-RAC-02) 30 GPH, Head Port: 1/4"-18 NPTF	$125.98 F
314500	(320R-RAC-02) 60 GPH, Head Port: 1/4"-18 NPTF	$131.98 G
314518	(S3228 UL) Replacement Filter for 314500	$23.98 G
314521	(S3232 UL) Replacement Filter for 660R-RAC-02	$34.98 G

Racor 110 Series Replacement Fuel Filter/Water Separator Element



- Maximum flow rate: 15 GPH.
- Aquabloc II Filter Element: 10 Micron, Color code: Blue.
- Style: Paper cartridge with gasket, fuel type: Diesel or gasoline.
- Used in Model 110A Filter Assembly.

Order No.	Mfg. No. / Description	Price
314803	(R11T)	$22.98 G

Racor Diesel Spin-On Fuel Filter/Water Separator



- All units feature 1/4"-18 NPTF inlet and outlet fuel ports and a unitized mounting bracket.
- Features spin on, high capacity Aquabloc II replaceable filter elements which stop water and remove solid contamination.
- Has a replaceable spin on filters and contaminant collection bowl.
- Also have a spin on contaminant collection bowl.

Order No.	Mfg. No. / Description	Price
314435	(120AS) 15 GPH with 2 Micron Element	$112.98 G
314814	(R12P) Replacement Filter, 30 Micron	$20.98 G
314815	(R12S) Replacement Filter, 2 Micron	$20.98 G
314816	(R12T) Replacement Filter, 10 Micron	$20.98 G

Racor Diesel Spin-On Fuel Filter/Water Separators



- All units feature 1/4"-18 NPTF inlet and outlet fuel ports and a unitized mounting bracket.
- They also include an in-head primer pump which allows the operator to hand prime the filter and simplifies service procedures.
- Features spin on, high capacity Aquabloc II replaceable filter elements which separate water and remove solid contamination.
- Also have a spin on contaminant collection bowl.

Order No.	Mfg. No. / Description	Price
314457	(230R30) 30 GPH with 30 Micron Element	$163.98 G
314459	(230R2) 30 GPH with 2 Micron Element	$159.98 F
314827	(R20S) Replacement Filter, 2 Micron for 314459	$27.98 G
314461	(245R2) 45 GPH with 2 Micron Element	$168.98 F
314840	(R25S) Replacement Filter, 2 Micron for 314461	$29.98 G

Racor Fuel Filter/Water Separator Replacement Element Assemblies

Order No.	Mfg. No. / Description	Price
314817	(R15S) 15 GPH, 2 Micron, For Model 215R	$45.98 G
314818	(R15T) 15 GPH, 10 Micron, For Model 215R	$34.98 G
314826	(R20P) 30 GPH, 30 Micron, For Model 230R	$27.98 G
314828	(R20T) 30 GPH, 10 Micron, For Model 230R	$27.98 G
314837	(R24T) 30 GPH, 10 Micron, For Model 220RMAM	$30.98 G
314838	(R24P) 30 GPH, 30 Micron, For Model 220R	$30.98 G
314842	(R26T) 45 GPH, 10 Micron, For Model 225R	$33.98 G
314843	(R26P) 45 GPH, 30 Micron, For Model 225R	$33.98 G
314850	(R60S) 60 GPH, 2 Micron, For 400 & 600 Series	$42.98 G
314851	(R60T) 60 GPH, 10 Micron, For 400 & 600 Series	$42.98 G
314854	(R90P) 90 GPH, 30 Micron, For 400 & 600 Series	$35.98 G
314855	(R90S) 90 GPH, 2 Micron, For 400 & 600 Series	$45.98 G
314857	(R120P) 120 GPH, 30 Micron, For 400 & 600 Series	$38.98 G

Racor Diesel Fuel Filter/Water Separators



314756



314755



314757

- Maximum flow rate: 240 GPH (908 LPH).
- Filter rating: 10 Micron.
- Port/connection size 1" NPT.
- 100% all steel construction.

Order No.	Mfg. No. / Description	Price
314755	(804MA10) Single Filter	$1,929.98 F

- Maximum flow rate: 480 GPH (1817 LPH)
- Filter rating: 10 Micron.
- Port/connection size 1-1/4" NPT.
- Duplex Assembly, 100% all steel construction.

Order No.	Mfg. No. / Description	Price
314756	(75804MA10) Dual Filter	$4,290.98 F

- Maximum flow rate: 720 GPH (2725 LPH).
- Filter rating: 10 Micron.
- Port/connection size 1-1/4" NPT.
- Triplex Assembly, 100% all steel construction.

Order No.	Mfg. No. / Description	Price
314757	(79804MA10) Triple Filter	$6,758.98 F

- 4 port, die-cast aluminum unitized head.
- Filters gasoline, diesel, and gasoline/oil blended fuels.
- Flow rates up to 35 GPH (132 LPH) with gasoline applications.
- Compact design.
- Heavy duty construction.
- Easy to service.

Order No.	Mfg. No. / Description	Price
314411	(110A) Fuel Filter/Water Separator	$129.98 F

©2014 Donovan Marine, Inc.

Racor Fuel Filter/Water Separators - Turbine Series


314696


314722


314684

- Designed to be installed on the vacuum side of the fuel transfer pump for best efficiency and protect precision engine components from dirt, rust, algae, asphaltines, varnishes and especially water, which is prevalent in engine fuels.
- They remove contaminates from fuel using the following legendary three stage process: Separation, Coalescing and Filtration.
- Clear collection bowl.
- Self-venting water drain.

- Model 500.
- 60 GPH, height 11.5", width 5.8", depth 4.8".
- Standard fuel ports: 3/4"-16.

Order No.	Mfg. No. / Description	Price
314696	(500FG2) 2 Micron, Uses 2010SM-OR Filters	$247.98 F

- Model 900.
- 90 GPH, height 17", width 6", depth 7".
- Standard fuel ports: 7/8"-14.

Order No.	Mfg. No. / Description	Price
314722	(900FH2) 2 Micron, Uses 2040SM-OR Filters	$367.98 F
314723	(900FH30) 30 Micron, Uses 2040PM-OR Filters	$356.98 F

- Model 1000.
- 180 GPH, height 22", width 6", depth 7".
- Standard fuel ports: 7/8"-14.

Order No.	Mfg. No. / Description	Price
314684	(1000FH2) 2 Micron, Uses 2020SM-OR Filters	$396.98 F
314685	(1000FH30) 30 Micron, Uses 2020PM-OR Filters	$396.98 F

Racor Pipe Fittings


314762


314784

- For 500FG (MAX) Series.

Order No.	Thread 1	Thread 2	Tube/Hose Size		Price
314762	3/4"-16	1/4"-18	4	(911-08-F4)	$7.98 G
314764	3/4"-16	3/8"-18	6	(911-08-F6)	$7.98 D
314766	3/4"-16	1/2"-14	8	(911-08-F8)	$15.98 G
	Thread 1	Hose ID	Tube/Hose Size		Price
314784	3/4"-16	3/8"	6	(913-08-H6)	$49.98 G
314786	3/4"-16	1/2"	8	(913-08-H8)	$26.98 G

- For 900FG (MAX) and 1000FG (MAX) Series.

Order No.	Thread 1	Thread 2	Tube/Hose Size		Price
314775	7/8"-14	3/8"-18	6	(911-010-F6)	$6.98 G
314776	7/8"-14	1/2"-14	8	(911-010-F8)	$8.98 G
	Thread 1	Hose ID	Tube/Hose Size		Price
314780	7/8"-14	1/2"	6	(911-010-H6)	$28.98 G
314789	7/8"-14	3/8"	6	(913-010-H6)	$40.98 G
314791	7/8"-14	1/2"	8	(913-010-H8)	$40.98 H

Racor Fuel Filter/Water Separators - Marine Turbine Series


314702


314752

- Designed to be installed on the vacuum side of the fuel transfer pump for best efficiency and protect precision engine components from dirt, rust, algae, asphaltines, varnishes and especially water, which is prevalent in engine fuels.
- They remove contaminates from fuel using the following legendary three stage process: Separation, Coalescing and Filtration.
- Although the turbine has no moving parts, over 30% of the contaminants are removed here.

- 60 GPH, height 11.5", width 5.8", depth 4.8".
- Standard fuel ports: 3/4"-16.

Order No.	Mfg. No. / Description	Price
314702	(500MA2) 2 Micron, Uses 2010SM-OR Filters	$305.98 F
314703	(500MAM30) 30 Micron, Metal Bowl, Uses 2010PM-OR Filters	$341.98 F

- 90 GPH, height 17", width 6", depth 7".
- Standard fuel ports: 7/8"-14.

Order No.	Mfg. No. / Description	Price
314726	(900MA2) 2 Micron, Uses 2040SM-OR Filters	$458.98 F

- 180 GPH, height 22", width 6", depth 7".
- Standard fuel ports: 7/8"-14.

Order No.	Mfg. No. / Description	Price
314687	(1000MA2) 2 Micron, Uses 2020SM-OR Filters	$507.98 G
314704	(1000MAM30) 30 Micron, Metal Bowl, Uses 2010PM-OR Filters	$493.98 F

- 120 GPH, height 11.5", width 14.5", depth 9.5".
- Standard fuel ports: 3/4"-16.

Order No.	Mfg. No. / Description	Price
314750	(75500MAX30) 30 Micron, Uses 2010SM-OR Filters	$1,187.98 G

- 360 GPH, height 22", width 18.8", depth 11".
- Standard fuel ports: 7/8"-14.

Order No.	Mfg. No. / Description	Price
314752	(75100MAX2) 2 Micron, Uses 2020SM-OR Filters	$1,682.98 G

- Maximum flow rate: 120 GPH (454 LPH).
- Filter rating: 2 Micron.
- Port/connection size 3/4"-16.
- Includes metal bowl.

Order No.	Mfg. No. / Description	Price
314751	(75500MAXM2) 2 Micron	$1,317.98 F

Racor Fuel Filter/Water Separator - Dual Valve Turbine Series



- Maximum flow rate 360/540 GPH.
- Height 22", width 21.5", depth 11.8".
- Standard fuel ports: 3/4"-14.

Order No.	Mfg. No. / Description	Price
314748	(791000MAV2) 2 Micron	$2,573.98 F

Racor Replacement Filter Elements - Turbine Series

Order No.	Mfg. No. / Description	Price
314524	(2000SM-OR) 2 Micron, For 200FG	$20.98 G
314526	(2000TM-OR) 10 Micron, For 200FG	$20.98 G
314528	(2000PM-OR) 30 Micron, For 200FG	$20.98 G
314548	(2010TM-OR) 10 Micron, For 314702 and 314750	$9.98 F
314560	(2010PM-OR) 30 Micron, For 314702 and 314750	$9.98 F
314562	(2010SM-OR) 2 Micron, For 314702 and 314750	$9.98 F
314583	(2020PM-OR) 30 Micron, For 314687 and 314752	$10.98 F
314586	(2020TM-OR) 10 Micron, For 314687 and 314752	$10.98 F
314598	(2020SM-OR) 2 Micron, For 314687 and 314752	$10.98 F
314613	(2040TM-OR) 10 Micron, For 314726	$9.98 F
314618	(2040PM-OR) 30 Micron, For 314726	$9.98 F
314625	(2040SM-OR) 2 Micron, For 314726	$9.98 F

Racor T-Handle Vacuum Gauge Kit



- For 900 and 1000 Turbine Series Filters.
- 1/4" NPT threads.
- 9/16"-18 UNF fitting included.
- Red tell-tale pointer follows black restriction pointer to highest reading.

Order No.	Mfg. No. / Description	Price
314740	(RK11-1669)	$163.98 F

Racor Vacuum Gauge Kit with Fittings



- Includes: Gauge (RK11233) and 1 (7232-4) and 1 (7234-4) fitting instrument panel installation.

Order No.	Mfg. No. / Description	Price
314741	(1606B)	$117.98 F

Racor DL Series Master Control



- The DL Series Master Control is the same as the D Series except all units feature larger ports and greater fuel flow capacity.
- 10 lbs. oil setting without override.
- 1/2" inlet/outlet ports.

Order No.	Mfg. No. / Description	Price
314758	(DL-10V)	$380.98 F

Racor Fuel Filter/Water Separator Accessories

Order No.	Mfg. No. / Description	Price
314514	(RK30488) Replacement Drain Assembly Kit for 1000FG	$44.98 G
314716	(RK15405) Clear Bowl Kit with Water Probe Port/Plug for 314696	$75.98 G
314718	(RK15211) Assy. Seal Service Kit for 314696	$44.98 G
314721	(RK11341) Bowl Drain Gasket Kit for 500 Series	$8.98 F
314724	(RK11028B) Check Ball & Seal for 900 and 1000 Series	$22.98 G
314728	(RK11-1404) Seal Service Kit for 900 and 1000 Series	$38.98 G
314729	(RK 11734) Bowl Kit for 900, 1000FF and FGMA Series	$95.98 G
314732	(RK11-1606) See-Thru Bowl with Water Probe Port/Plug for 900FG2	$69.98 F
314733	(11040) Fitting, Drain for 900 and 1000FG	$17.98 G
314734	(11007) Gasket, Bowl for 900 and 1000FG	$4.37 F
314735	(RK11-1938) Repl. Bowl for 900 and 1000 Series	$80.98 G
314736	(RK 11037A) Bowl Ring for 900 and 1000F Series	$79.98 F

Racor Replacement Diesel Filter Elements

Order No.	Mfg. No. / Description	Price
314839	(R24S) 2 Micron, Element for 220	$30.98 G
314841	(R26S) 2 Micron, Element for 225	$33.98 G
314480	(S3201P) 30 Micron, 1"-14 Center Thread	$37.98 G
314482	(S3201TUL) 10 Micron, Element for 490MAM and 4120MAM	$47.98 G
314484	(S3204TUL) 10 Micron, Element for 445MAM	$41.98 G
315134	(RK 8023S/CM) Includes Two Element Types and O-rings - 14 Elements Total	$1,143.98 G

Racor UL Listed Marine Shut-Off Valve Kit



- May be retrofitted to fit most Racor Marine Fuel Filter/Water Separators to simplify draining contaminants from the collection bowl.
- Simple open/close valve for easy contaminant evacuation.
- 1/4" NPT threads on valve and plug.
- Coast Guard accepted in most diesel applications with use of supplied plug.

Order No.	Mfg. No. / Description	Price
314738	(RK-19492)	$62.98 F

Racor D Series Master Controls



- Provides positive fuel shutoff (complete shutdown) with manual override at the control to allow the operator to manually override the valve each time the engine is started.
- Primary oil setting: 5 to 25 PSI (as required and specified).
- Standard fuel flow coefficient (CV): approx. 2.85 GPM (10.7 LPM) diesel powered units.
- Fuel inlet/outlet port: 3/8" NPT.

Order No.	Mfg. No. / Description	Price
314770	(D10) 10 lbs. Oil Setting with Manual Override	$386.98 G
314753	(D15) 15 lbs. Oil Setting with Manual Override	$396.98 G
314771	(MB-1) Master Control Mounting Bracket	$30.98 F

©2014 Donovan Marine, Inc.

Racor Heat Sensors



- Work in conjunction with the Master Control to protect the engine from abnormally high coolant, transmission oil or crankcase oil temperature.
- Temperature actuation settings of 180° to 260° F (82° F to 127° C) can be specified as required for engine coolant and lubricating oil, transmissions, driven compressors, and more.
- The heat sensor must be monitoring moving fluid.

Order No.	Mfg. No. / Description	Price
314754	(H-218) 218° Fahrenheit, 1/2" NPT	$201.98 F
314760	(HA-212) 212° Fahrenheit, 3/8" NPT	$212.98 G

Racor Coolant Pressure Valve



- Monitors coolant system pressure to prevent expensive diesel engines from over heating by sudden loss of coolant.
- Allows smoother activation and the CPV will not cycle when the pilot pressure is low.
- Because unnecessary open-and-close cycling causes wear to the Master Control quad rings, this new operation feature means additional service life for Master Controls and a more positive shutdown.
- Made of fiberglass-filed nylon with an aluminum base.
- These corrosion resistant materials are particularly important in underground, marine and hazardous environment applications.

Order No.	Mfg. No. / Description	Price
314759	(CPV) Includes One CPV Valve	$265.98 G

Sierra Oil Filters



- Fits: F & T 9.9 (1990-03).

Order No.	Mfg. No. / Description	Price
187901	(18-7901)	$14.07 H

- Fits: F15 (00-03) F & T25 (00-03) F30 (01-03) F40 (01-03) F & T50 (00-03) F60/T60 (02-03) F75/90 (03) F80/100 (00-02) F115 (01-03).

Order No.	Mfg. No. / Description	Price
187911	(18-7911-1)	$11.63 H

- Replaces: Suzuki 16510-87J00, OMC 778885, OMC 5031411.

Order No.	Mfg. No. / Description	Price
187915	(18-7915-1)	$9.82 H

- Replaces: Yamaha 69J-13440-00-00.

Order No.	Mfg. No. / Description	Price
187906	(18-7906-1)	$9.98 H

- Replaces: OMC 434839.

Order No.	Mfg. No. / Description	Price
187916	(18-7916)	$9.83 H

- Replaces: Honda 15400-POH-305PE and 15400-POH-305.

Order No.	Mfg. No. / Description	Price
187910	(18-7910)	$8.85 H

- Replaces: Yamaha 5GH-13440-00-00 and Mercury 35-822626Q04.

Order No.	Mfg. No. / Description	Price
187914	(18-7914)	$8.55 H

- Fits: F15 (1998-99) F40 (1999-00) F25 (1998-99) F & T50 (1995-99) F80/100 (1999).

Order No.	Mfg. No. / Description	Price
187902	(18-7902)	$13.67 H

Racor Versatile RVFS Series



- Racor RVFS Series filter vessel applications include removing liquid and solid contaminants from diesel fuel, gasoline, kerosene, aviation gas, jet fuel and other lubricating or hydraulic oils.
- RVFS vessels utilize proven filter design technology and can be used as coalescers, pre-filters or separators by changing internal components, flow direction or by selecting optional filter cartridges when ordering.
- The vessels are fabricated from carbon steel with an exterior primer coating of Gavlon suede gray and the interior is epoxy coated to meet MIL-C-4556E.
- Element choices include coalescers, separators, particulate, clay bags, pre-filters or water absorbing cartridges.
- Completely dressed factory filter vessels can be specified with differential pressure gauges, water sight glasses, air eliminators, and manual or automatic drains.
- Wall mount units can be special ordered.
- Consult factory for other options.
- Fuel ports: 2. Maximum flow rate 50 GPM. Maximum working pressure: Jet A, AV Gas Flow Rates.
- Clear pressure drop: 50 GPM.
- Temperature rating: Diesel Fuel Flow Rates, 25 GPM.
- Design pressure: 245 PSI.
- Design temperature: 250 F.
- Replacement elements: RK 22610.
- Height 39. Width 13.75. Depth 13.5.
- Dry weight 68 lbs.
- Minimum overhead space required for element change: 16.

Order No.	Mfg. No. / Description	Price
314902	(RVFS W/LEGS) 25 Gallon Filter	$5,172.98 G
314513	(RK22610) Replacement Element Kit	$169.98 G

Pennzoil Sterndrive and Inboard Oil Filters



- Help remove damaging dirt and grit from oil, enabling it to clean, cool and lubricate the engine more effectively.

Order No.	Mfg. No. / Description	Price
2000875	(PZ-1) Long Ford Style Filter, 5.22"	$4.07 J
2000876	(PZ-29) V6 GM Style Filter, 4.75"	$4.45 K
2000878	(PZ-45) Long GM Style Filter, 5.22"	$5.98 H

Redline 4-Cycle Outboard Oil Filters

2000879



2000880



- Yamaha 3FV-13440-00-00. Fits: F15 (1998-01), F40 (1999-01), F25 (1998-99), F & T50 (1995-98), F80 (1999-01), F100 (1999-01).

Order No.	Mfg. No. / Description	Price
2000879	(RL7902)	$12.98 H

- Honda 15400-P0H-305PE, 15400-POH-30. Fits: BF75, 90, AT, AW, AX, AY, Series #14ZV00E1M BF115, 130, AX, AY, A1, Series #14ZW5E1M 75 H.P. and up.

Order No.	Mfg. No. / Description	Price
2000880	(RL7910)	$9.98 H

Sierra Fuel Filter for Mercury/Mariner Outboard Motors



- Replaces: Mercury 881540.

Order No.	Mfg. No. / Description	Price
187979	(18-7979)	$14.77 H

Sierra Replacement Cannister and Filter



- Replaces: OMC 981911.

Order No.	Mfg. No. / Description	Price
187861	(18-7861)	$31.28 H

Sierra Fuel Filter



- Replaces: OMC 910139 and 983870, Mercury 1397-2150, Rochester 17068453.

Order No.	Mfg. No. / Description	Price
187855	(18-7855)	$5.42 H

Sierra Fuel Filter

- For filter housing marked "6D8" ONLY.
- Replaces: Yamaha 6D8-WS24A-00-00, F50-F115 after April 2006.

Order No.	Mfg. No. / Description	Price
1879799	(18-79799)	$19.37 H


Marpac E.Z. View Universal In-Line Fuel Filter



- Superior filtering.
- Transparent housing.
- Easy do-it-your-self installation.
- For portable fuel systems only.
- Fits all boats, cars and trucks using carbureted fuel systems.
- Replaces any 1/4", 5/16" and 3/8" inline filter.

Order No.	Description	Price
7-0875	In-Line Fuel Filter	$11.98 G
7-0876	Replacement Filter Elements	$6.98 G

Marpac Disposable Fuel Filters



- Filters dirt and other particles.
- More filtration per square inch.
- Easy viewing through clear vial.
- For portable fuel systems only.

Order No.	Description	Price
7-6965	3/8"	$4.98 G
7-6966	1/4" and 5/16"	$4.98 G

Sierra Fuel Filter Element



- Replaces: Suzuki 1512-93J00, Mercury 35-888289T2.

Order No.	Mfg. No. / Description	Price
187936	(18-7936)	$22.05 H

Racor Replacement Filters for FBO-10 Fuel Filter/Water Separator



- Water separator filters remove water and contaminants from hydrocarbon fuel streams and are the most popular filters.

Order No.	Mfg. No. / Description	Price
314890	(FBO 60329) 25 Micron	$161.98 G

- Silicone treated fuel filters remove particle contaminants down to one micron.
- Silicone filters can also be used upstream, before a fuel filter/water separator, to extend filter life.

Order No.	Mfg. No. / Description	Price
314895	(FBO 60354) 10 Micron	$114.98 G

Groco Gasoline and Diesel Fuel Filter



- Inlet and outlet are 3/8" NPT.
- Maximum flow rate 3.5 GPM.
- Maximum pressure 50 PSI.
- Separates dirt, sediment and water from fuel; 2 to 5 micron filtration.
- Use with gasoline or diesel fuel.
- Drain dirt, sediment and water by removing drain plug at bottom of filter body.
- Piping is not disturbed when changing element.
- Pressure tested bronze castings and adjustable mount bracket.
- Marine UL Listed.

Order No.	Mfg. No. / Description	Price
375053	(GF-376)	$67.98 I

Sierra In-Line Fuel Filters



- Replaces: Mercury 35-16494, 35-816296T, 35-816296.

Order No.	Mfg. No. / Description	Price
187829	(18-7829) 1/4"	$5.32 H

- Replaces: Mercury 35-16494-1, 35-816296-1, 35-816296-T1, OMC 398327.

Order No.	Mfg. No. / Description	Price
187830	(18-7830) 5/16"	$5.73 H

- Replaces: Mercury 35-802128A1, OMC 398319.

Order No.	Mfg. No. / Description	Price
187831	(18-7831) 3/8"	$7.48 H

©2014 Donovan Marine, Inc.

Sierra In-Line Fuel Filter For Mercury/Mariner



- Replaces: Mercury 35-879885T.

Order No.	Mfg. No. / Description	Price
187718	(18-7718)	$11.30 H

Sierra Yamaha VST Filter Kits



Order No.	Mfg. No. / Description	Price
1879907	(18-79907)	$92.17 H
1879950	(18-79950)	$91.67 H
1879951	(18-79951)	$51.85 H
1879952	(18-79952)	$75.68 H
1879953	(18-79953)	$59.85 H

Sierra Fuel Filter for Honda Outboard Motors



- Replaces: Honda 16900-SR3-004.

Order No.	Mfg. No. / Description	Price
187720	(18-7720)	$16.73 H

Racor Replacement Filter for Mercury Engines



- Fits Mercury outboard engines.
- Legendary Aquabloc II, 2 micron filter media, removes up to 100% of free water and protects sensitive fuel system components from particulates.
- Sold two filters per pack.

Order No.	Mfg. No. / Description	Price
314510	(31871)	$54.98 F

Marpac Replacement Filter for Mercury Engines



- Fits Mercury outboard engines.
- Direct OEM replacement.
- 2 Micron.

Order No.	Description	Price
4-7981	Replacement Filter	$29.98 M

Scepter 18" Flex Funnel



- Made from a tough, high-density polypropylene.
- Great for gas/oil mix 2-cycle engines need.
- Stabilizing handle on all standard funnels conveniently allows for smooth steady pouring.

Order No.	Mfg. No. / Description	Price
237507	(003603)	$9.98 I

Sierra Fuel Filter



- Replaces: Suzuki 15410-96J00.

Order No.	Mfg. No. / Description	Price
187711	(18-7711)	$11.55 H

Sierra Fuel Filter



- Replaces: OMC 5032323, Suzuki 15410-87J10.

Order No.	Mfg. No. / Description	Price
187716	(18-7716)	$8.90 H

Racor Replacement Filters for Closed Crankcase Ventilation (CCV)



- High density filter replacement for CCV systems.

Order No.	Mfg. No. / Description	Use With	Price
315108	(CCV55222-08)	CCV8000	$74.98 G
315110	(CCV55248-08)	CCV4500	$41.98 G
315122	(CCV55274-08)	CCV6000	$59.98 G
315109	(CCV55222-12-08)	CCV12000	$113.98 G

Racor Marine Air Filter Assembly



- Reduces noise up to 10 db.
- Can integrate Racor CCV systems.
- Corrosion resistant.
- Cleanable air filter.
- No tools needed for servicing.
- Compact design.
- 1600 CFM.
- Outlet diameter: 6", length 12", hose barb: 1.25", diameter 12".

Order No.	Mfg. No. / Description	Price
314869	(AFM601212)	$466.98 G

Racor Filter Funnels



- Heavy duty, fast-flow, filter-in-a-funnel that separates damaging free water and contaminants from gasoline, diesel, heating oil and kerosene.
- Rugged construction.
- PTFE coated stainless steel filter.

Order No.	Mfg. No.	GMP / Micron	Price
314859	(RFF1C)	2.7 / 127	$28.98 G
314860	(RFF3C)	3.9 / 127	$33.98 G
314861	(RFF8C)	5.0 / 127	$64.98 G
314862	(RFF15C)	15 / 74	$91.98 G

Jabsco Flangemount Blowers



- Tough reinforced plastic housing.
- Mount to any surface.
- Slip-on inlet and outlet ducting connection.
- Corrosion resistant materials throughout.
- Note: 413904 (34744-0000) is not ignition protected and is not intended for bilge ventilation with gasoline engines.

Order No.	Mfg. No. / Description	Price
413904	(34744-0000) 100 CFM, Inlet Port 3", 115V AC	$194.98 F
413916	(35115-0020) 105 CFM, Inlet Port 3", 12V DC	$87.98 F
413928	(34739-0010) 150 CFM, Inlet Port 3", 12V DC	$152.98 F
413966	(35400-0000) 250 CFM, Inlet Port 4", 12V DC	$194.98 F

Bilge Blower



- Injection molded ABS housing.
- Hose diameter 3".
- Uses 1/4" fasteners.
- 12 volt.

Order No.	Mfg. No. / Description	Price
336481	(5475) 100 CFM	$49.98 G

Attwood Turbo In-Line Blowers



- The first vane axial-flow fan bilge blowers designed using aerospace technology to maximize performance.
- Patented in-line design - provides ventilation for engine compartments, galleys, bilges, and heads.
- Nickel-plated motor can for corrosion resistance.
- Stiffening ribs to reduce housing distortion.
- Motor cap to seal wires and motor for water resistance.
- Five-blade fan maximize airflow and efficiency.
- Tabs in intake and exhaust hold ventilation hose/clamp firmly in place.
- Low amp draw motor for longer blower and battery life.
- Built-in mounting feet allow easy vertical or horizontal install.
- All are CE certified, 16-gauge tinned and caulked copper wire leads.

Order No.	Mfg. No. / Description	Price
2350045	(1731-4) 3" White, Standard, 12 volt	$28.98 H
2350047	(1747-4) 4" White, Standard, 12 volt	$32.98 H
235110	(1733-4) 3" White, Water Resistant, 12 volt	$29.98 Q
235113	(1749-4) 4" White, Water Resistant, 12 volt	$35.98 Q

Rule In-Line Blowers



- Efficient high volume air flow.
- Quiet operation.
- Slip on inlet and outlet ducting connections.
- Sealed motor shaft for moisture protection.
- Corrosion resistant nickel plated motor housing.
- ABYC-H2. ISO 9097:8846. IMCI (CE). N.M.M.A. type accepted.
- USCG 183.410 Compliant Ignition Protected.

Order No.	Mfg. No. / Description	Price
237001	(140) 3" Blower	$30.98 G
237013	(240) 4" Blower	$38.98 G

Jabsco Flexmount Blowers



- Tough reinforced plastic housing.
- Slip-on inlet and outlet ducting connection.
- Universal flexmount bracket permits outlet to face any direction.
- Corrosion resistant materials throughout.
- Low current draw.
- Inlet port 3".
- ISO 9097, USCG 183.410 Compliant ignition protected.
- 12V DC.

Order No.	Mfg. No. / Description	Price
414019	(35515-0010) 105 CFM	$97.98 F
414021	(36740-0000) 150 CFM	$170.98 F

Johnson Pump Remote Mount Blower



- Heavy-duty blowers use a "squirrel cage" type blower wheel to produce a substantial output at relatively low rpm's.
- Lowest noise levels on the market make it ideal for heads and galleys as well as engine compartments.
- Long life is assured by the massive 3" diameter motor virtually idles at 3100 rpm's.
- Tough molded housing shrugs off shock and vibration.
- Remote mount model attaches to 3" hose on both the inlet and the outlet for versatility.

Order No.	Mfg. No. / Description	Price
4610083	(54154)	$99.98 Q

Johnson Pump Flange Mount Blower



- Heavy duty blowers use a "squirrel cage" type blower wheel to produce a substantial output at relatively low rpm's.
- Lowest noise levels on the market make it ideal for heads and galleys as well as engine compartments.
- Long life is assured by the massive 3" diameter motor virtually idles at 3100 rpm's.
- Tough molded housing shrugs off shock and vibration.
- Flange mount model is designed to mount directly to exhaust opening in the hull.
- USCG 183.410 Compliant Ignition Protected.

Order No.	Mfg. No. / Description	Price
4610082	(54124)	$99.98 Q

DetMar In-Line Bilge Blowers



- Detmar blowers are reliable, efficient and have the highest capacity on the market.
- Detmar pioneered design features like its five-blade, bullet-nosed impeller and chambered vanes.
- Produces 170 cfm, 25% more than the competition!
- Tested by independent labs.

Order No.	Mfg. No. / Description	Price
2000543	(7-5-4C) 3"	$26.98 H
2000542	(7-5-1C) 4"	$26.98 H

©2014 Donovan Marine, Inc.

Marpac Blower Vent Hose



- For use in venting bilge gases and fumes.
- Strong, flexible construction of wire supported vinyl.
- Will not support a flame.
- Resistant to ozone, weather and sunlight.
- Meets UL, MVSS, ABYC & NMMA standards.

Order No.	Description	Price
7-2835	3" x 10'	$26.98 G

Perko Fig. 330 Locker Ventilators



- Chrome plated brass.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
537425	(330 DP1 CHR) Diameter 2-1/2"	$7.98 R
537437	(330 DP2 CHR) Diameter 3-1/4"	$10.98 R

Attwood Stainless Steel Louvered Vents



- Attwood hull-mounted vents are designed to install by fastening as a complete unit from either inside or outside the hull.
- Ventilation hose (not included) twists into the bottom of the box to form a raised water barrier.
- All collector boxes and vents are designed for intake or exhaust and meet ABYC H-2 cross sectional area requirements.
- All-welded 304 stainless steel construction with polished finish.
- Install with #8 screws.
- Requires collector box 1487A for 3" system or 1487B for 4" system.

Order No.	Mfg. No. / Description	Price
2350038	(1488-5) Dimensions: 3-1/4" x 10-3/8"	$49.98 H

- Install with #6 screws.
- For use with 3" systems and require a 1343 collector box.

Order No.	Mfg. No. / Description	Price
2350039	(1493-5) Open Hole Size: 2-1/16" x 15-15/16", Depth 9/16"	$41.98 H

DetMar Louvered Vents



- Made of tough ABS plastic to prevent corrosion and discoloration.
- Length 14", height 5-3/4", depth 1" with 1/2" flush height.
- Cut out is 12-1/4" by 3-3/4".

Order No.	Mfg. No. / Description	Price
327557	(7-2-1) White	$14.98 F


MPI Products Series 400 Blower Vent Hose



- For use in venting bilge gases and fumes.
- Strong, flexible construction of wire supported vinyl.
- Resistant to ozone, weather and sunlight.
- Will not support a flame.
- White.

Order No.	Mfg. No. / Description	Price
771609	(400-3003) 3" x 10' Package	$18.98 M
771610	(400-4003) 4" x 10' Package	$19.98 M
771611	(400-3006) 3" x 50' Box	$70.98 M
771623	(400-4006) 4" x 50' Box	$75.98 M

T-H Marine Louvered Vent Covers



- Chrome plated brass.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
6400219	(LV-1) Black	$5.98 H
6400220	(LV-1FW) Fish White	$5.98 H

Marpac 5 Louvered Vent



- Polished stainless steel.
- Cut out: 3-3/8" x 12".
- Overall dimensions: 4-5/16" x 12-5/8".

Order No.	Description	Price
7-0092	5 Louvered Vent	$23.98 G

Attwood Plastic Louvered Vent



- Attwood hull-mounted vents are designed to install by fastening as a complete unit from either inside or outside the hull.
- Ventilation hose (not included) twists into the bottom of the box to form a raised water barrier.
- All collector boxes and vents are designed for intake or exhaust and meet ABYC H-2 cross sectional area requirements.
- Constructed of corrosion-resistant ABS plastic with no sharp edges.
- For 3" I.D. ventilation system with 1345 collector box.
- Install with #8 screws.

Order No.	Mfg. No. / Description	Price
2350042	(1495-B5) Black, Open Hole Size: 2-1/4" x 16"	$40.98 H

Attwood Venturi Vents



- Attwood hull-mounted vents are designed to install by fastening as a complete unit from either inside or outside the hull.
- Ventilation hose (not included) twists into the bottom of the box to form a raised water barrier.
- All collector boxes and vents are designed for intake or exhaust and meet ABYC H-2 cross sectional area requirements.
- Clean, contemporary, louver design.
- Corrosion-resistant ABS plastic.
- For 3" or 4" I.D. ventilation system.
- Requires (1341) collector box for 3" system or (1342) for 4" system.
- Install with #8 screws.
- Sized for installation even on highly-contoured decks.

Order No.	Mfg. No. / Description	Price
333614	(1494-5) Chrome	$37.98 R
2350041	(1494-A5) Black	$21.98 H

Perko Fig. 336 Louver Ventilators



- Chrome plated brass.
- Louvers length 3".
- Uses #4 fasteners.

Order No.	Mfg. No. / Description	Price
5315123	(336 04A DP) Dimensions: 4" x 4-3/8"	$29.98 R
537467	(336 05A DP) Dimensions: 4" x 5-3/8"	$37.98 R

Perko Fig. 550 Transom or Locker Ventilator



- Chrome plated brass.
- Dimensions: 7" x 2-1/2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
5315135	(550 DP CHR)	$23.98 H

Perko Fig. 870 Cowl Vent



- Chrome plated zinc alloy cowl with black PERKO•KOTE base.
- 3" duct threads into neck.
- Length 5-1/8", width 4", height 3-7/8".
- Cowl opening square 7-1/3".
- Uses #10 fasteners.
- Note: Hose clamps not required.

Order No.	Mfg. No. / Description	Price
542779	(870 DPO CHR)	$40.98 R

Marpac Louvered Vent



- Polished 304 stainless steel.
- Dimensions: 5" H x 2-5/8" W.
- Uses #6 fasteners.

Order No.	Description	Price
7-1400	Louvered Vent	$5.98 G

Perko Fig. 335 Louver Ventilators



- Chrome plated brass.
- Louvers length 3".
- Uses #4 fasteners.
- Height 3-1/2".

Order No.	Mfg. No. / Description	Price
537451	(335 03A DP) Width 4"	$27.98 R
537463	(335 09A DP) Width 11"	$44.98 R

Perko Fig. 1271 Transom or Locker Ventilator



- Chrome plated zinc with anodized aluminum expanded mesh screen.
- Dimensions: 6" x 2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
533960	(1271 DPO CHR)	$17.98 R

Perko Fig. 1238 Transom or Locker Ventilator



- Dimensions: 8-3/8" x 2-1/4".
- Uses #8 fasteners.
- Chrome plated zinc with anodized aluminum grill-type screen.

Order No.	Mfg. No. / Description	Price
533679	(1238 DPO CHR)	$15.98 R

Perko Fig. 1312 Cowl Vent



- Chrome plated zinc alloy cowl with black polymer base.
- 3" duct threads into neck.
- Length 5-3/4", width 4-3/8", height 2-5/8.
- Cowl opening square 8".
- Uses #8 fasteners.
- Note: Hose clamps not required.

Order No.	Mfg. No. / Description	Price
534417	(1312 DPO CHR)	$32.98 R

©2014 Donovan Marine, Inc.

Marpac Clam Shell Vents



- Made of 18-8 stainless steel and polished, this streamlined midget ventilator has many uses, including shielding gas tank vents.

Order No.	Description	Price
7-0089	1-3/4" x 1-5/8"	$1.95 G
7-0090	2" x 2"	$2.45 G

Perko Fig. 339 Clam Shell Vent



- Chrome plated brass.
- Width opening 2-1/2", height opening 1-5/8".
- Base dimension 4" x 3-3/4".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
537487	(339 DP0 CHR)	$40.98 R

White Cap Clam Shell Vents



- Clam shell vents provide a seal and splash protection for wires or hoses.
- They can also function as locker vents.
- All are attractively packaged for display.

Order No.	Mfg. No. / Description	Price
2011573	(S-1387) 6-3/16" L x 5-7/8" W x 2-3/4" H	$34.98 G
2011575	(S-1389) 7-5/8" L x 6-7/8" W x 2-13/16" H	$34.98 G

Jabsco Reversible Vane Pump



- Ideal for transferring diesel fuel.
- Self-priming to about three feet and can pump against a discharge head of up to twenty feet.
- Flow rate: 6 GPM.
- With its integral on-off reversing switch, it is ideal for moving fuel between port and starboard fuel tanks.
- Port type: 1/2" NPT female or 1" hose barb.
- Duty cycle: 30 minutes at 10' at 86° F (30° C).
- 12 volt.

Order No.	Mfg. No. / Description	Price
417053	(18680-1000)	$382.98 G

Reverso Oil Change System



- For larger oil sumps.
- Reversible flow, drains and fills engine.
- Self-priming.
- Flow rate: 3 GPM.
- With 3 valves.
- Dimensions: 11.5" x 9.5" x 4.5".
- 12 volt.
- Available in 24 volt.

Order No.	Mfg. No. / Description	Price
512295	(GPC-3023-12)	$1,362.98 Q

Perko Fig. 315 Midget Clam Shell Vents



- Chrome plated brass.
- .040 thickness.
- Sold each per display pack. Standard pack 10.
- Height opening 7/16", width opening 7/8".
- Uses #4 fasteners.

Order No.	Mfg. No. / Description	Price
537247	(0315 DP1 CHR) Base: 1-5/8" x 1-1/2"	$6.98 R

- Height opening 9/16", width opening 1-7/8".
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
537261	(315 DP2 CHR) Base: 2" x 2"	$9.98 R

T-H Marine Clam Shell Vent



- UV and weather resistant.
- Opening 9/16" H x 1-7/8" W.

Order No.	Mfg. No. / Description	Price
640806	(CS-1) 2" x 2", Black	$7.98 H

Jabsco Vane Pump



- Ideal for pumping light oil or transferring diesel fuel.
- Flow rate: 7.9 GPM.
- Self-priming with a suction lift of up to five feet and can pump against a discharge head of up to twenty feet.
- Continuous duty - 30 minutes maximum.
- Port type: 1/2" NPT female or 1" hose barb.
- 6' power cord.
- ISO 9097, USCG 183.410 Complaint ignition protected.
- 115V AC.

Order No.	Mfg. No. / Description	Price
414463	(18685-0000)	$684.98 Q

Reverso Oil Change System



- Ideal for diesel, oil or water.
- Flow rate: 3 GPM.
- Reversible: Transfers hot or cold oil quickly and cleanly to and from the oil pan.
- 3 Position switch (On-Off-On).
- Ports: (Ext) 3/4" male hose, (Int) 3/8" female NPT.
- Self-priming.
- "CE" certified.
- 12 volt.
- Available in 24 volt.

Order No.	Mfg. No. / Description	Price
512233	(OP-6-12) Dimensions: 9.46" x 4.29" x 3.5"	$411.98 Q
512245	(SPK-360) Repair Kit: 1 Oil/Water Impeller/Gasket	$35.98 Q
512257	(360010) Impeller Nitrile	$29.98 Q
512269	(360014) Impeller Chemical Resistant, Diesel	$29.98 Q
512283	(97361-2) Rebuild Kit: 2 Oil/Water Impeller/Gasket/Seal	$104.98 Q

Marpac Fluid Xtractor and Discharge Pump



- 2 in 1 pump-extracts and discharges at the same time.
- Easy to use, no power required.
- Huge capacity.
- Easy pour spout ensures mess-free pouring and transporting.
- Worldwide patented design.

Order No.	Description	Price
7-0949	Holds 18 Liters or 12.68 Quarts or 4.75 Gallons	$328.98 G

Marpac Universal Hand Pump



- Self-priming design, great for pumping oil, water and other fluids.
- Siphons tank contents for quick and easy removal of large liquid quantities.
- Small size stores practically anywhere, such as tackle boxes.
- Not for use with gasoline or diesel.

Order No.	Description	Price
7-2232	Universal Hand Pump	$23.98 G

Johnson Pump Gear Oil Change Pump



- All in one complete oil change kit.
- Can run dry!
- Light and compact gear pump with pump body and gears made of PTFE.
- In cold weather, the gears move the oil more easily than impeller pumps.
- Comes complete with oil dip stick, extraction tube, connection wires and battery clamps.
- Flow 2.6 GPM.
- 6 foot hose length. Big seller!

Order No.	Mfg. No. / Description	Price
470090	(80-47508-81) 12 volt, Fuse Size: 8 amp	$161.98 G
470091	(80-47508-02) 24 volt, Fuse Size: 6 amp	$161.98 G
470747	(65000) 12 volt, On Bucket, with reinforced flange face design	$178.98 F

Jabsco Porta Quick Oil Changer



- Makes quick, clean and easy oil changes on-board any boat, because it uses the vessel's own power supply to operate the powerful oil reservoir mounted flexible impeller pump.
- Includes: Reversible pump, 14 quart holding container, 8' power cord with alligator clips, 4' neoprene hose with 40" Teflon dipstick probe and female garden hose connector.
- 12 volt.

Order No.	Mfg. No. / Description	Price
415326	(17800-2000)	$283.98 F
418601	(9200-0023) Impeller	$44.98 E

Marpac Fluid Xtractors



- Portable fluid extractor empties in 16 pumps or less.
- No power source needed.
- Warm or cold fluid extraction.
- Includes: Extraction tube kit.

Order No.	Description	Price
7-0950	Holds 6.5 Liters or 6.9 Quarts or 1.7 Gallons	$119.98 G
7-0951	Holds 4.0 Liters or 4.2 Quarts or 1.1 Gallons	$96.98 G

Moeller Fluid Extractor



- Dual action vacuum pump works with both the upstroke and downstroke.
- Extracts warm or cold oil.
- No electric or air power required.
- Automatic shut-off float eliminates overflow.
- Manual Pressure relief valve delivers gulp-free, mess-free performance!
- Thread-on extraction tube kit and garden hose adapter kit included!

Order No.	Mfg. No. / Description	Price
807124	(035330) 5.0 Liter	$110.98 F

Moeller Economy Fluid Extractor Kit



- Universal self priming hand pump.
- Ideal for oil, water, and other fluids.
- Kit includes: Two 3/8" dipstick tubes and 40" tubing and a self priming pump.

Order No.	Mfg. No. / Description	Price
807122	(033331-10)	$38.98 F

Jabsco Economy Engine Oil Changer



- Will extract up to 50 weight of oil at a temperature of 70° F through the engine's dip stick tube, usually in less than 5 minutes.
- The oil changer includes: Powerful suction pump with integral on/off switch, 10 quart bucket oil receiver with pouring spout, 7' power cord with alligator clips and 8' oil and heat resistant suction tube.
- 12 volt.

Order No.	Mfg. No. / Description	Price
415338	(17850-1012)	$200.98 G

Jabsco Flat Tank Economy Engine Oil Changer



- Will extract up to 50 weight of oil at a temperature of 70° F through the engine's dip stick tube, usually in less than 5 minutes.
- The oil changer includes: Powerful suction pump with integral power switch, 14 quart holding container, 7' power cord with alligator clips and 8' oil and heat resistant suction tube.
- 12 volt.

Order No.	Mfg. No. / Description	Price
415340	(17860-0012)	$189.98 G

©2014 Donovan Marine, Inc.

Jabsco Drill Pump



- Provide a very versatile means of transferring fluid almost anywhere an electric drill with 1/4" to 3/8" chuck can be operated.
- Pumps up to 3.5 gpm.
- Self-priming to 3'.
- Includes: 3.5 GPM self-priming drill pump that chucks into standard 1/4" or 3/8" drill, (2) 3/4" garden hose thread port adaptors, 3' of 1/2" hose, probe adaptor and 1/4" x 40" dipstick probe.
- Note: Not for pumping gasoline or flammable liquids.

Order No.	Mfg. No. / Description	Price
415275	(17215-0000) Complete Kit	$58.98 G
415287	(17250-0003) Drill Pump Only	$43.98 G
415353	(17255-0003) Repl. Impeller/Shaft Assembly	$30.98 G

Shurflo Oil Change System



- Ignition protected.
- Buna impeller.
- 5' cable with battery clips.
- Hose kit included and 3.5 gallon storage container.
- Flow rate: 3.75 GPM.
- 12 volt.

Order No.	Mfg. No. / Description	Price
353235	(8050-305-426)	$185.98 F

Gold Eagle Sta-Bil Fuel Stabilizer



- America's top selling fuel stabilizer keeps fuel fresh for quick, easy starts after storage.
- Removes water to prevent corrosion and cleans carburetors and fuel injectors.
- Protects engine from gum, varnish, rust, and corrosion.
- Prolongs engine life.
- Eliminates the need to drain fuel before storage.
- For all 2-cycle and 4-cycle gasoline engines.
- Recommended by over 125+ OEMS, Including: Marine Engines - Marine Manufactures OPE Engines - Lawn & Garden Equipment - Generators - Car Trucks RV ATV UTV - Motorcycles Snowmobiles.

Order No.	Mfg. No. / Size	Treats Up To	Price
289454	(22204) 4 oz.	10 Gallons	$5.98 F
289466	(22206) 10 oz.	25 Gallons	$7.98 F
289478	(22214) 32 oz.	80 Gallons	$17.98 F
289480	(22213) Gallon	320 Gallons	$62.98 F

Johnson Pump Reversible Impeller Oil Change Pump



- Reversible impeller pump with integrated quick reversing switch.
- Designed to remove old oil from the engine/fill new oil back into the engine.
- 4 GPM.
- Connection 3/8" NPT.
- 12 volt.

Order No.	Mfg. No. / Description	Price
462000	(10-24760-03) F3B-19	$291.98 G

Jabsco Permanent Oil Drain Kit



- Includes drain plug fitting, oil drain hose, cap and hose hanger clamp.
- It is an ideal oil drain kit for use in conjunction with a 415287 (17250-0000) drill pump or 415249 (34060-0010) hand pump.
- Drain plug fitting size is 1/2" - 20.

Order No.	Mfg. No. / Description	Price
415299	(18080-0000)	$76.98 F

Gold Eagle Marine Formula Sta-Bil



- America's #1 selling marine fuel additive brand!
- BEST Ethanol problem fighter.
- More than four times the fuel system cleaner than in regular Sta-Bil.
- Double the corrosion preventer than in regular Sta-Bil.
- Prevents corrosion from moisture and ethanol-induced water attraction.
- Improves marine engine performance year round, not just for seasonal storage.
- Only Fuel Additive Brand endorsed by over 125+ OEMS.

Order No.	Mfg. No. / Size	Treats Up To	Price
289492	(22241) 10 oz.	100 Gal. in Season (50 Gal. for Storage)	$9.98 F
289505	(22240) 32 oz.	320 Gal. in Season (160 Gal. for Storage)	$25.98 F
289517	(22250) Gallon	1280 Gal. in Season (640 Gal. for Storage)	$97.98 F

Gold Eagle Sta-Bil Displays



- Display contains:
  (12) 32 oz. Marine Formula Sta-Bil (22240)
  (24) 8 oz. Marine Formula Sta-Bil (22239)

Order No.	Mfg. No. / Description	Price
289529	(22244) Display	$415.98 F
289543	(22262) 4 oz. Display	$49.98 F
289531	(22253) 8 oz. Display	$80.98 F

CRC Marine Fuel Stabilizer - Gas



- A concentrated, high-potency formula that keeps stored gas fresh for easy start-up next season and optimum performance year round.
- Prevents harmful fuel separation caused by Ethanol-blended gasoline.
- Protects against gum and resin build-up.

Order No.	Mfg. No. / Description		Price
289303	(06161) 8 fl. oz.	Treats 40 Gallons	$6.98 H
289315	(06162) 16 fl. oz.	Treats 80 Gallons	$8.98 H
289327	(06163) 32 fl. oz.	Treats 160 Gallons	$12.98 H
289339	(06164) Gallon	Treats 640 Gallons	$42.98 R

Marykate Fuel Treatment and Stabilizer



- For all engines.
- Stabilizes fuel up to 8 months.
- Improves MPG and performance.
- Treats up to 100 gallons of gasoline or 72 gallons of diesel.
- Cleans combustible chamber deposits and port fuel injectors.

Order No.	Mfg. No. / Description	Price
216445	(MK4908) 8 fl. oz.	$14.98 G

OMC® SysteMatched™ Fuel System Cleaner



- High concentrate fuel system cleaner helps to maintain smooth running engines by keeping injectors and carburetors free of deposits.
- For use in 2 cycle and 4 cycle gasoline engines.

Order No.	Mfg. No. / Description	Price
B765728	(765728) 12 oz.	$9.99 H

OMC® SysteMatched™ Fuel Conditioner



- Formulated to protect fuel system components and extends the useful life of fresh gasoline.
- Recommended year-round use and off-season storage.
- Protects fuel system in a number of ways: Slows the chemical breakdown of gasoline; Protects metal fuel system components from corrosion; Ethanol Protection Formula.

Order No.	Mfg. No. / Description	Price
B765732	(765732) 8 oz.	$7.49 H
B765733	(765733) 16 oz.	$13.99 H

Star Brite Ez-To-Store Gas Storage Additive



- Unique formula combines gas stabilizers which prevent fuel from breaking down for up to 2 years with a polymer coating that acts like fogging oil.
- Completely corrosion proofs all internal engine surfaces, even places that traditional fogging oil can't reach.
- Great for inboard and outboard winter storage.
- One ounce treats 5 gallons of gas.

Order No.	Mfg. No. / Description		Price
460880	(84308) 8 fl. oz.	Treats 40 Gallons	$9.98 G
460882	(84316) 16 fl. oz.	Treats 80 Gallons	$12.98 G
460884	(84332) 32 fl. oz.	Treats 160 Gallons	$17.98 G

MDR Stor-N-Start Gas Stabilizer



- Contains a powerful anti-oxidant, degummers, inhibitors and metal deactivators.
- Keeps gasoline and diesel fuel refinery-fresh.
- Contains NO alcohol or methanol.
- Also helps prevent octane loss during storage.

Order No.	Mfg. No. / Description		Price
460797	(MDR-549) 4 fl. oz.	Treats 20 Gallons	$9.98 I

CRC Gas Additive for Gas Tanks



- Isopropanol based formula that removes water from gasoline.
- Prevents fuel line freeze while protecting and cleaning the fuel system year round.
- Protects down to -50° F.
- Assures quicker starting and faster pick-up.
- Recommended use 3-4 times a year.

Order No.	Mfg. No. / Description	Price
290546	(05343) 12 fl. oz.	$5.98 H

Sea Foam Motor Treatment



- 100% pure petroleum, use in all engines, in all seasons.
- 2 cycle and 4 cycle engines.
- Treats three critical areas: Fuel tank, fuel systems and crankcase.
- Cleans fuel injectors.
- Cleans carburetor jets.
- Cleans carbon.
- Stabilizes fuels.
- Upper cylinder lube.
- Removes moisture in fuel.
- Restores power.
- Smooths rough idle.

Order No.	Mfg. No. / Description	Price
289404	(SF16) 16 oz. Can	$11.98 H

©2014 Donovan Marine, Inc.

Star Brite Star Tron Tank Cleaner



- Exceptional in cleaning sludge and algae from gasoline and diesel tanks.
- Removes water that encourages microbial growth in diesel fuel.
- Cleans tanks better than any tank cleaning service.
- Exceptional at eliminating varnish and gum "gel" from E-10 gas after a water phase-separation occurrence.

Order No.	Mfg. No. / Description	Price
675852	(93664) 64 fl. oz.	$37.98 G

OMC® SysteMatched™ Carb X™



- Formulated minimize carbon deposit build up in 2-cycle and 4-cycle marine engines.
- Protects engine parts.
- Helps keep valves free of carbon.
- Increases engine life.
- Reduces the possibility of piston ring sticking.
- Allows better overall engine performance.

Order No.	Mfg. No. / Description	Price
B765735	(765735) 12 oz.	$18.99 H

Star Brite Star Tron



- Each bottle treats up to 6 gallons.
- Cures and prevents ethanol fuel problems.
- Helps prevent phase separation; improves performance.
- Compact size.
- Works in all 2 and 4 cycle engines.

Order No.	Mfg. No. / Description	Price
431328	(14301) (2) 1 fl. oz.	$5.98 G

Star Brite Star Tron Mini Counter Top Display



- Contains: (6) 675848 (93008) Star Tron Gas Additive.

Order No.	Mfg. No.	Price
431327	(93615)	$72.98 G

Penray Starting Fluid



- For gasoline and diesel engines; gives upper cylinder lubrication.
- Assures safe, smoother starting under any conditions.
- Gives fast, easy starts in seconds; saves on batteries, towing and engine wear.

Order No.	Mfg. No. / Description	Price
483141	(5301) 11 oz.	$4.99 Q

Star Brite Star Tron Gas Additive



- Reduces all emissions.
- Prevents fuel oxidation and stabilizes fuel chemistry for at least 1 year.
- Lowers fuel system maintenance.
- Eliminates carbon build-up in fuel delivery system and on exhaust components.
- Increases fuel economy.

Order No.	Mfg. No. / Description		Price
675848	(93008) 8 fl. oz.	Treats 128 Gallons	$12.98 G
675849	(93016) 16 fl. oz.	Treats 256 Gallons	$20.98 G
675851	(93032) 32 fl. oz.	Treats 512 Gallons	$31.98 G
675847	(93625) Star Tron Counter Top Display, Gas Only		$266.98 G

Star Brite Star Tron Counter Top Display



- Contains: (18) 675848 (93008) Star Tron Gas Additive and (6) 675846 (93108) Star Tron Diesel Additive.

Order No.	Mfg. No.	Price
431321	(93624)	$280.98 G

Star Brite Star Tron Shooter Counter Top Display



- Contains: (24) Star Tron 1 fl. oz. Enzyme Fuel Treatment "Shooter" bottles.
- Each bottle treats 6 gallons of fuel.
- Header card features selling points.

Order No.	Mfg. No.	Price
431329	(014324)	$57.98 G

Star Brite Star Tron Floor Display



- Contains: (18) 675848 (93008) Star Tron Gas Additive, (8) 675849 (93016) Star Tron Gas Additive, (6) 675846 (93108) Star Tron Diesel Additive and (4) 675850 (93116) Star Tron Diesel Additive.

Order No.	Mfg. No.	Price
431324	(93636)	$514.98 G

Star Brite Star Tron A-Frame Marine Formula Display



- Includes: 48 (93008) Gas Additive, 8 fl. oz., 24 (93016) Gas Additive, 16 fl. oz.
- One display cures and prevents ethanol problems.
- Unique eye-catching design features scannable QR codes for more information.
- Compact design requires minimal floor area.
- Display can be placed anywhere in store.
- Pods are easily refillable.

Order No.	Mfg. No.	Price
431323	(093672)	$968.98 G

Star Brite Star Tron Small Display - Gas Only



- Contains: (24) 675848 (93008) Star Tron Gas Additive and (12) 675849 (93016) Star Tron Gas Additive.

Order No.	Mfg. No.	Price
431326	(93637)	$485.98 G

Star Brite Ez-To-Store Crankcase



- Stabilizes oil chemistry during storage - prevents oxidation and formation of resins and varnish.
- Protects cylinder walls, connecting rods, crankshaft and other internal metal engine components from rust and corrosion.

Order No.	Mfg. No. / Descriptions		Price
460886	(84708) 8 fl. oz.	Treats 5 Quarts	$14.98 G

MDR Crankcase Stor-N-Start



- Winterizing motor oil additive protects against rust on pistons, rings and lower cylinder walls during winter storage.
- During storage, motor oil eventually drains off cylinder walls, pistons, rings, bearings, and all other internal metal engine parts, exposing them to corrosion.
- Forms a protective shield on all internal parts, preventing rusting during storage.

Order No.	Mfg. No. / Description	Price
460820	(MDR-600) 8 fl. oz.	$15.98 I

Briter Engine Check Up Test Strips



- By analyzing one drop of oil, you can determine the type and degree of contamination present in your engine.
- Enable you to schedule maintenance exactly when it is needed.
- Contents: Six complete tests.
- Each test will fully analyze the range of contaminants in your engine, including: Dirt/Grime, Carbon/Oxide, Water, Glycol and Fuel.

Order No.	Mfg. No. / Description	Price
350025	(ECU-6)	$26.98 L

©2014 Donovan Marine, Inc.

Star Brite Ez-To-Store Diesel Storage Additive



- Protects fuel and engine components during storage.
- Prevents corrosion of fuel tank and fuel delivery system.
- Stops formation of gum and sludge, insures quick starts after storage.
- One product does it all - stabilizes and fogs in one step.
- Concentrated formula - 1 fl. oz. treats 10 gallons.

Order No.	Mfg. No. / Description		Price
460892	(84408) 8 fl. oz.	Treats 80 Gallons	$9.98 G
460894	(84416) 16 fl. oz.	Treats 160 Gallons	$12.98 G
460896	(84432) 32 fl. oz.	Treats 320 Gallons	$18.98 G

Gold Eagle Diesel Formula Sta-Bil



- Prevents sludge and sediment formation.
- Cleans and lubricates fuel injectors to improve performance.
- Helps remove water that microbes and algae require for growth.
- Recommended for use at every fill up.
- Safe for all diesel fuels and all diesel engines.

Order No.	Mfg. No. / Description		Price
289555	(22254) 32 oz.	Treats Up to 320 Gallons	$29.98 F
289567	(22255) Gallon	Treats Up to 1,280 Gallons	$107.98 F

MDR Stor-N-Start Diesel Stabilizer



- Stor-N-Start stabilizer contains a powerful antioxidant, degummers, inhibitors and metal deactivators.
- Keeps gasoline and diesel fuel refinery-fresh.
- Contains NO alcohol or methanol.
- Also helps prevent octane loss during storage.

Order No.	Mfg. No. / Description		Price
460812	(MDR-561) 16 fl. oz.	Treats 192 Gallons	$21.98 I
460817	(MDR-554) 32 fl. oz.	Treats 384 Gallons	$34.98 I

Penray Fuel Prep™ 1000 Diesel Fuel Conditioner



- Combats sludge formation and disperses exiting sludge in fuel tanks.
- Combats bacterial and fungal growth, cleans injectors, lubricates fuel system.
- Prevents corrosion and prepares fuel tanks for winter conditions and storage.
- Conditions less stable diesel fuels by allowing them to burn cleaner and more completely, thus improving emissions and injector spray patterns.
- Reduces accumulation of unburned carbon particles so engines stay cleaner.

Order No.	Mfg. No. / Description	Price
603919	(100012) 12 fl. oz.	$6.98 Q

Star Brite LPC Multifunctional Diesel Fuel Additive



- Improves diesel fuel in 3 ways: enhances lubricity; lowers pour point for cold weather use;
- Treats of diesel fuel.
- Helps extend engine life and improve performance.
- Ideal for use with Star Tron Diesel Formula Enzyme Fuel Treatment.

Order No.	Mfg. No. / Description		Price
675843	(95532) 32 fl. oz.	Treats 192 Gallons	$20.98 G

CRC Marine Fuel Stabilizer - Diesel



- A concentrated, high-potency formula that keeps stored gas fresh for easy start-up next season and optimum performance year round.
- Protects against gum and resin build-up.
- Protects internal engine components and fuel system from corrosion.

Order No.	Mfg. No. / Description		Price
289416	(06171) 12 fl. oz.	Treats 80 Gallons	$6.98 H
289428	(06172) 16 fl. oz.	Treats 160 Gallons	$8.98 H

Star Brite Star Tron Diesel Additive



- Eliminates algae and fungal growth without the use of poisons.
- Reduces all emissions, including carcinogenic, particulate smoke.
- Prevents fuel oxidation and stabilizes diesel chemistry for at least 2 year.
- Lowers fuel system maintenance.
- Eliminates carbon build-up from burners, injectors and exhaust components.
- Increases fuel economy.

Order No.	Mfg. No. / Description		Price
675846	(93108) 8 fl. oz.	Treats 256 Gallons	$14.98 G
675850	(93116) 16 fl. oz.	Treats 512 Gallons	$25.98 G
675863	(93132) 32 fl. oz.	Treats 1,024 Gallons	$42.98 G
675861	(93100) Gallon	Treats 4,096 Gallons	$157.98 G

Penray Fuel Prep™ 2012 Diesel Fuel Conditioner



- Highly concentrated version of Fuel Prep 1000.
- Combats sludge formation and disperses exiting sludge in fuel tanks.
- Combats bacterial and fungal growth, cleans injectors, lubricates fuel system.
- Prevents corrosion and prepares fuel tanks for winter conditions and storage.
- Reduces accumulation of unburned carbon particles so engines stay cleaner.
- Note: One gallon of Fuel-Prep 2012 treats 12,500 - 25,000 gallons.


Order No.	Mfg. No. / Description	Price
604226	(201201) Gallon	$70.98 Q
604238	(201205) 5 Gallon	$353.98 Q

Alphabetical Index for Johnson/Evinrude

Alphabetical Index	Page No.
Bearings, Internal	549
Carburetor Kits	567-569
Carburetor Repair Chart	566
Coils	599-600
Control Box Parts	634
Diagnostics	644-646
Electrical Application Charts	578-588
Fuel Filter	571-572
Fuel Pumps	569-570
Gaskets	555-565
Gasket Kits	550-552
Hardware	574, 600, 637-640
Head Gaskets	552-554
Ignition Switch	589
Impeller	605-607
Impeller Chart	604
Lower Unit Parts	621-633
Model Designaion Chart	538-540
Piston	541-546
Power Packs	589-594
Primer Bulbs	572
Prop Hardware	640-641
Rectifier/Regulator	597-599
Spark Plug Wire	601-602
Starter Chart	617
Starter Motors	617-620
Starter Rope	635
Stator	594-596
Thermostat	610-611
Thermostat Cover	611-613
Timer Base	596-597
Tools	641-646
Trim & Tilt Chart	614
Trim Motors	614-615
Trim & Tilt Parts	616-617
Tune Up Kits	600-601
Water Pump Kits	607-609

Model Number Designation - Outboards


Model Years 2002 and Up

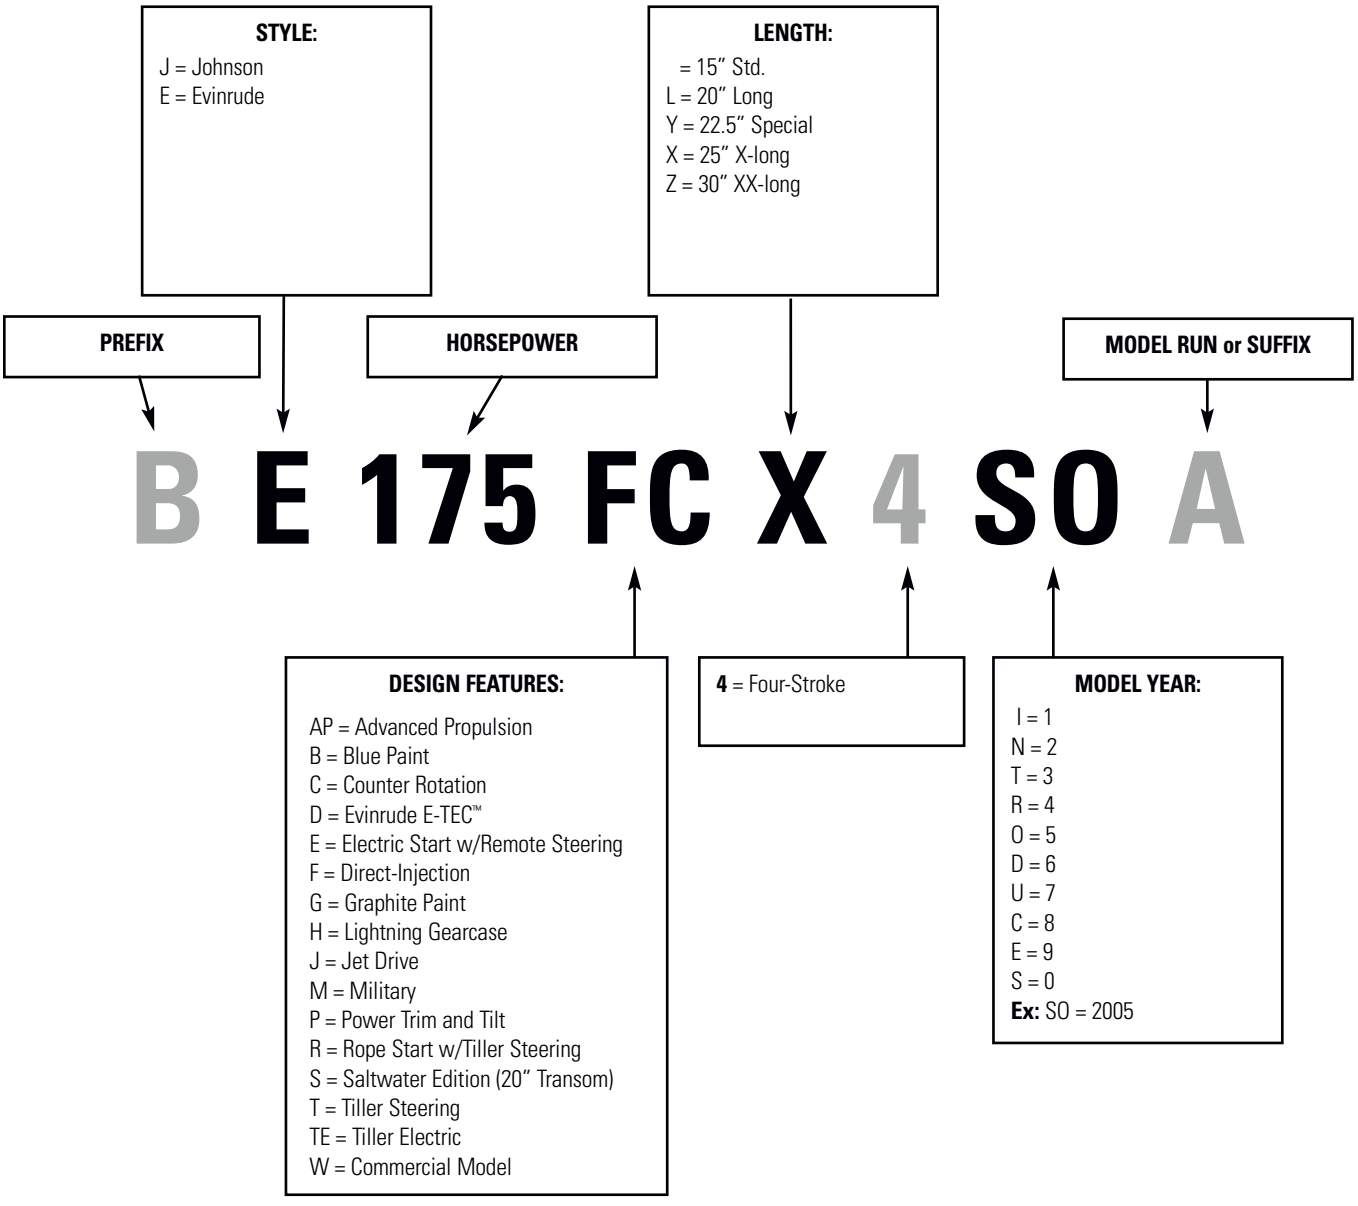

©2014 Donovan Marine, Inc.

Model Number Designation - Outboards

Model Years 1999-2001

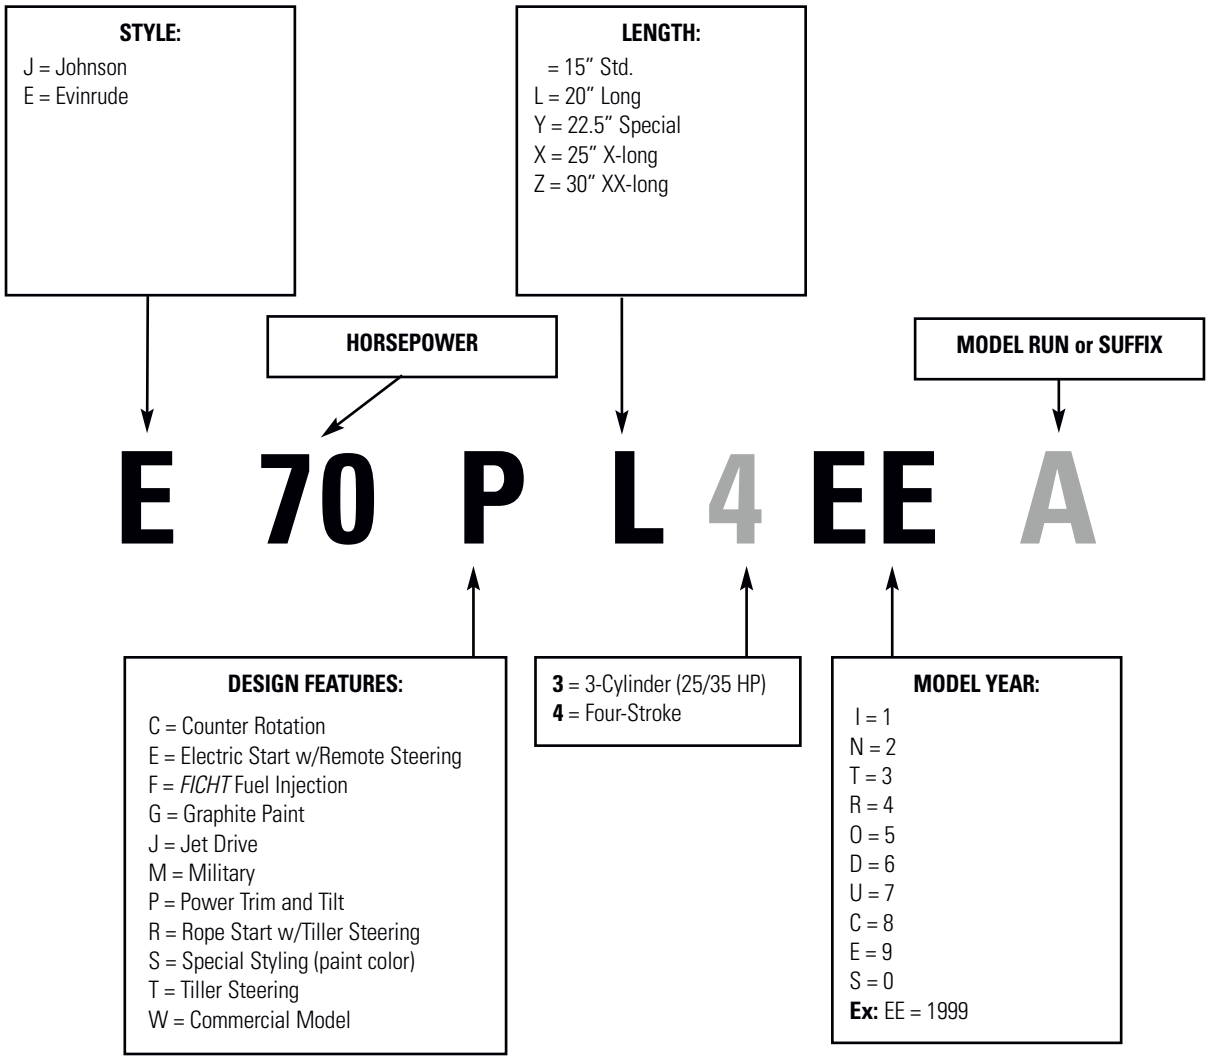

Model Number Designation - Outboards

Model Years 1980-1998

MODEL VARIATION
A = Australia
B = Belgium
C = Canada
H = Hong Kong
S = South America
T = Tracker Model
V = Boat Builder

STYLE:
J = Johnson
E = Evinrude
= Commercial
V = Quiet Rider®

LENGTH:
= 15" Std.
L = 20" Long
Y = 22.5" Special
X = 25" X-long
Z = 30" XX-long

HORSEPOWER

MODEL RUN or SUFFIX

V E 70 T L ED A

DESIGN FEATURES:

AE = Alaska - Electric Start
AR = Alaska - Rope Start
BA = AC Lighting - Rope Start
BE = Belgium Derated - Electric Start
BF = Belgium Derated - Rope Start
BG = Belgium Derated - Rope Start
BI = Belgium Derated - Rope Start
BR = Euro Rope Start
C = Counter Rotation
CE = Canada Derated - Electric Start
CR = Canada Derated - Rope Start
D = Remote Electric
DE = Derated - Electric Start
DR = Derated - Rope Start
DT = Derated - Electric Start/Trim and Tilt
E = Electric Start
ER = Electric Start - Sport Styling
ES = Electric Start - Special
FA = 4-Stroke, Rope Start - AC Lighting
FE = 4-Stroke, Electric Start/Tiller
FP = Commercial with Program Tilt
FR = 4-Stroke, Rope Start
FRE = 4-Stroke, Electric Start/Remote
FS = *FICHT*™, Trim and Tilt
FT = *FICHT*, Trim and Tilt/Special Styling
G = Special Styling
H = Less Integral Tank/Hydraulic Steering
I = *FICHT* Fuel Injection
IE = Italy - Electric Start
IK = Italy - Electric Start
J = Jet Drive
K = 3-Cylinder 25/35 HP
KC = Kerosene - Rope Start
KG = Kerosene/Gasoline
KS = Kerosene - Rope Start
M = Manual Tilt - Electric Start
MS = Manual Tilt - Electric Start / Special
N = Counter Rotation
P = Power Steering
Q = 3-Cylinder 25/35 HP - Trim and Tilt
R = Rope Start
RA = Rope Start - Australia
RC = Rope Start - Commercial/CD Ignition
RD = Rope Start - Deluxe
RE = Remote Electric
RP = Commercial with Program Tilt
RS = Rope Start - Commercial
RW = Commercial with Interlock
S = Sail - Special Styling
SC = Special Styling - Counter Rotation
SE = Sail - Electric Start, Non-Tilt
SI = Special Derated - Italy
SL = 60° V, Trim and Tilt
SP = Special Styling
SR = Sail - Rope Start, Non-Tilt
ST = Special Styling - Trim and Tilt
T = Trim and Tilt - Electric Start
TE = Tiller Electric
TR = Trim and Tilt - Sport Styling
TT = Tiller - Trim and Tilt (Backtroller)
U = Manual Tilt
V = Special Gearcase
W = 110° Angle Drive - Rope Start
WM = Electric Commercial - Manual Tilt
WMP = **WM** with Chrome Pump
WT = Electric Commercial - Trim and Tilt
WTP = **WT** with Chrome Pump

MODEL YEAR:
I = 1
N = 2
T = 3
R = 4
O = 5
D = 6
U = 7
C = 8
E = 9
S = 0
Ex: ED = 1996

©2014 Donovan Marine, Inc.

Crankshaft



185-300 H.P. 1984-2008
Pin Crankcase Alignment

O.E. No. 331095

Order No.	Mfg. No. / Brand	Price
B778366	(778366) BRP OMC® SysteMatched™	$3.99 H

Crankshaft



40-200 H.P. 1968-2010
Pin Crankcase Alignment, 4 Pack

O.E. No. 305070

Order No.	Mfg. No. / Brand	Price
B778279	(778279) BRP OMC® SysteMatched™	$1.99 H

Crankshaft



40-300 H.P. 1968-2009
Keyway, Woodriff, Flywheel to Crankshaft, 5 Pack

O.E. No. 307480

Order No.	Mfg. No. / Brand	Price
B766438	(766438) BRP OMC® SysteMatched™	$4.99 H

Crankshaft



6-55 H.P. 1968-2006
Keyway, Woodriff, Flywheel to Crankshaft

O.E. No. 120395

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766437	(766437)	$5.99 H

Lower Cap



40-200 H.P. 1991-2010
Lower Cap without Seal, V60V and E-Tec

O.E. No. 340559

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778417	(778417)	$8.99 H

OMC Piston Application Guide

Model	Year	Standard DMI	Standard O.E.	.020 O.S. DMI	.020 O.S. O.E.	.030 O.S. DMI	.030 O.S. O.E.	.040 O.S. DMI	.040 O.S. O.E.	Port/Starboard
2 Cylinder										
9.9-15	1993-2005	B778442	5006692	B778447	5006693	- -	-	-	-	
20-25-30-35	1984-2005	778488	5006657	-	-	B778468	5006664	-	-	-
25-35	1976-1980	778514	5006654	-	-	B778496	5006663	-	-	-
40-48-50	1984-1994	B778462	5006655	-	-	B778389	5006665	-	-	-
40-50	1995-2005	B778519	5006683	-	-	B778409	5006689	-	-	-
3 Cylinder										
25	1995-2001	B778513	5006686	-	-	B778481	5006699	-	-	-
35	1995-2001	B778499	5006698	-	-	-	-	-	-	-
50	1995-1998	B778476	5006694	B778426	5006707	B778397	5006695	-	-	-
60 (49 cubic inches)	1986-1988	-	-	-	-	B778444	5006666	-	-	-
60 ("C" & "S" suffix)	1989-1994	B778428	5006701	-	-	B778352	5006702	-	-	-
70 ("C" & "S" suffix)	1986-1994	B778428	5006701	-	-	B778352	5006702	-	-	-
60-70 ("V" suffix & later)	1994	B778476	5006694	B778426	5006707	B778397	5006695	-	-	-
65 (49 cubic inches)	1984-1986	-	-	-	-	B778444	5006666	-	-	-
70-75 (49 cubic inches)	1976-1985	-	-	-	-	B778444	5006666	-	-	-
Crossflow V4-V6										
88-140 H.P. All Cross Flow with 3.500 Bore	1979-1998	B778348	5006658	B778321	5006703	B778217	5006669	778502	5006710	-
150-200 H.P. All Cross Flow with 3.500 Bore	1978-1991	B778348	5006658	B778321	5006703	B778217	5006669	778502	5006710	-
175 Big Bore 3.625	1986-1991	778487	5006656	B778517	5006705	B778509	5006668	-	-	-
235 Big Bore 3.625	1980-1985	778487	5006656	B778517	5006705	B778509	5006668	-	-	-
60° V4-V6 Carbureted										
90-115 V4 60° All Carb Model	1995-2005	B778388	5006687	B778363	5006708	B778381	5006714	-	-	Port
90-115 V4 60° All Carb Model	1995-2005	B778394	5006688	B778362	5006715	B778378	5006716	-	-	Starboard
150-175 H.P. Early V6 60°	1991-1993	778510	5006681	-	-	B778505	5006679	-	-	Port
150-175 H.P. Early V6 60°	1991-1993	778504	5006682	-	-	B778485	5006680	-	-	Starboard
150-175 H.P. All Carb Model V6 60°	1994-2006	B778388	5006687	B778363	5006708	B778381	5006714	-	-	Port
150-175 H.P. All Carb Model V6 60°	1994-2006	B778394	5006688	B778362	5006715	B778378	5006716	-	-	Starboard
90° V4-V6 Carbureted										
120-140 H.P. Looper 2.0 Liter 3.685 Bore	1988-1994	-	-	-	-	B778470	5006677	-	-	Port
120-140 H.P. Looper 2.0 Liter 3.685 Bore	1988-1994	-	-	-	-	B778495	5006678	-	-	Starboard
130 H.P. Looper 2.0 Liter 3.685	1995-2001	B778506	5006684	-	-	B778493	5006696	-	-	Port
130 H.P. Looper 2.0 Liter 3.685	1995-2001	B778512	5006685	-	-	B778489	5006697	-	-	Starboard
185-225 Looper 3.0 Liter with 3.685 Bore w/o Finger Ports	1988-1992	778515	5006671	-	-	B778475	5006673	-	-	Port
185-225 Looper 3.0 Liter with 3.685 Bore w/o Finger Ports	1988-1992	B778516	5006672	-	-	B778477	5006674	-	-	Starboard
200-225 H.P. Looper 3.0 Liter 3.685 Bore with Finger Ports	1993-2001	B778401	5006691	B778435	5006706	B778449	5006711	-	-	Port
200-225 H.P. Looper 3.0 Liter 3.685 Bore with Finger Ports	1993-2001	B778413	5006690	B778492	5006712	B778445	5006713	-	-	Starboard
90° V8 Carbureted										
250-300 H.P. V8 4.0 Liter 3.685 Bore without Finger Ports	1991-1998	-	-	-	-	B778470	5006677	-	-	Port
250-300 H.P. V8 4.0 Liter 3.685 Bore without Finger Ports	1991-1998	-	-	-	-	B778495	5006678	-	-	Starboard

Piston



9.9-15 H.P. 1993-2005
Piston and Ring Kit, Standard, 2.375

O.E. No. 5006692

Order No.	Mfg. No. / Brand	Price
B778442	(778442) BRP OMC® SysteMatched™	$79.99 H

Piston



9.9-15 H.P. 1993-2005
Piston and Ring Kit, .020" O.S. 3.395 Bore

O.E. No. 5006693

Order No.	Mfg. No. / Brand	Price
B778447	(778447) BRP OMC® SysteMatched™	$124.99 H

Piston



20-35 H.P. 1985-2005
Piston and Ring Kit, with Rings .030" O.S. 3.030 Bore.
Replaces: 390679, 396576, 392910

O.E. No. 5006664

Order No.	Mfg. No. / Brand	Price
B778468	(778468) BRP OMC® SysteMatched™	$128.99 H

Piston



25-35 H.P. 1976-1980
Piston and Ring Kit, with Rings, Crossflow .030" O.S. 3.030 Bore.
Replaces: 396575, 387708, 389163

O.E. No. 5006663

Order No.	Mfg. No. / Brand	Price
B778496	(778496) BRP OMC® SysteMatched™	$113.99 H

Piston



25-35 H.P. 1995-2001
Piston and Ring Kit, with Rings, .030" O.S. Fits 3 Cylinder Small Bore 2.350

O.E. No. 5006699

Order No.	Mfg. No. / Brand	Price
B778481	(778481) BRP OMC® SysteMatched™	$184.99 H

Piston



25-35 H.P. 1995-2001
Piston and Ring Kit, with Rings, Standard, Fits 3 Cylinder Small Bore 2.500

O.E. No. 5006698

Order No.	Mfg. No. / Brand	Price
B778499	(778499) BRP OMC® SysteMatched™	$129.99 H

Piston



25-35 H.P. 1995-2001
Piston and Ring Kit, with Rings, Standard, Fits 3 Cylinder Small Bore 2.350

O.E. No. 5006686

Order No.	Mfg. No. / Brand	Price
B778513	(778513) BRP OMC® SysteMatched™	$147.99 H

Piston



40-50 H.P. 1984-1994
Piston and Ring Kit, with Rings, Standard, Top Ring 30° Taper, Bore 3.187

O.E. No. 5006655

Order No.	Mfg. No. / Brand	Price
B778462	(778462) BRP OMC® SysteMatched™	$102.99 H

Piston



40-50 H.P. 1995-2005
Piston and Ring Kit, with Rings, Standard, Bore 3.187

O.E. No. 5006683

Order No.	Mfg. No. / Brand	Price
B778519	(778519) BRP OMC® SysteMatched™	$109.99 H

Piston



40-55 H.P. 1981-2004
Piston and Ring Kit, with Rings, Only 2 Cylinder Engines, Bore 3.187

O.E. No. 5006701

Order No.	Mfg. No. / Brand	Price
B778428	(778428) BRP OMC® SysteMatched™	$121.99 H

Piston



40-55 H.P. 1985-1994
Piston and Ring Kit, .030". Replaces: 396581

O.E. No. 5006665

Order No.	Mfg. No. / Brand	Price
B778389	(778389) BRP OMC® SysteMatched™	$106.99 H
184105	(18-4105) Sierra	$106.58 H

Piston



40-55 H.P. 1994-2005
Piston and Ring Kit, .030, 2 Cylinder

O.E. No. 5006689

Order No.	Mfg. No. / Brand	Price
B778409	(778409) BRP OMC® SysteMatched™	$100.99 H

Piston



40-55 H.P. 1994-2005
Piston, STD/45X, Standard

O.E. No. 435546

Order No.	Mfg. No. / Brand	Price
B778414	(778414) BRP OMC® SysteMatched™	$87.99 H

Piston



40-75 H.P. 1986-2001
Piston and Ring Kit, with Rings, .020", 3.207, Only 3 Cylinder Engine

O.E. No. 5006707

Order No.	Mfg. No. / Brand	Price
B778426	(778426) BRP OMC® SysteMatched™	$114.99 H

Piston



60-75 H.P. 1976-1986
Piston and Ring Kit, .030", 3.030 for 49 C.I. Small Bore.
Replaces: 396583

O.E. No. 5006666

Order No.	Mfg. No. / Brand	Price
B778444	(778444) BRP OMC® SysteMatched™	$173.99 H
184104	(18-4104) Sierra	$106.88 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Piston

60-75 H.P. 1976-1988
Piston and Ring Kit, with Rings .020" O.S. 3.020 Bore Top Ring 30° Bottom Rectangle.
Replaces: 387285



O.E. No. 5006653

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778471	(778471)	$209.99 H

Piston

60-75 H.P. 1994-2001
Piston and Ring Kit, 3 Cylinder, .030" O.S.



O.E. No. 5006695

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778397	(778397)	$117.99 H

Piston

60-75 H.P. 1995-2001
Piston and Ring Kit, Standard, with Rings, 3.187 Both Rings 7° Taper.
Replaces: 436976



O.E. No. 5006694

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778476	(778476)	$115.99 H
Sierra	184063	(18-4063)	$141.03 H

Piston

65-75 H.P. 1986-1994
Piston and Ring Kit, .030" O.S. Top Ring 30° Taper. Replaces: 435351, 437410, 437412



O.E. No. 5006702

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778352	(778352)	$121.99 H

Piston

85-175 H.P. 1980-1998
Piston and Ring Kit, .030" All V4 and V6 Crossflow, 3.530 and Small Bore 175 HP.
Replaces: 396585, 396588



O.E. No. 5006667

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778440	(778440)	$102.99 H
Sierra	184100	(18-4100)	$111.13 H

Piston

85-200 H.P. 1978-1998
Piston and Ring Kit, .030" All Crossflow.
Replaces: 396588, 386329



O.E. No. 5006669

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778217	(778217)	$102.99 H
Sierra	184100	(18-4100)	$111.13 H

Piston

88-115 H.P. 1982-1998
Piston and Ring Kit, .020" All Crossflow V4 and V6 Small Bore



O.E. No. 5006703

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778321	(778321)	$99.99 H

Piston

88-115 H.P. 1982-1998
Piston and Ring Kit, Standard All Crossflow V4 and V6 3.5". Replaces: 393271, 386300



O.E. No. 5006658

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778348	(778348)	$102.99 H
Sierra	184120	(18-4120)	$111.15 H

Piston

88-175 H.P. 1980-2006
Piston and Ring Kit, .040 O.S., Standard All Crossflow V4 and V6 3.540



O.E. No. 5006710

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778502	(778502)	$97.47 H

Piston

88-200 H.P. 1982-1998
Piston and Ring Kit, .020" All Crossflow V4 and V6 Small Bore 3.520 and S/B Loop



O.E. No. 5006709

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778375	(778375)	$100.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Piston



90-175 H.P. 1991-2006
Piston and Ring Kit, Starboard, .020" O.S.
All V4 and V6 60°. Replaces: 439520

O.E. No. 5006715

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778362	(778362)	$128.99 H

Piston



90-175 H.P. 1991-2006
Piston and Ring Kit, Port, .020" O.S.
All V4 and V6 60°. Replaces: 439027

O.E. No. 5006708

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778363	(778363)	$128.99 H

Piston



90-175 H.P. 1991-2006
Piston and Ring Kit, Starboard, .030" O.S.
All V4 and V6 60°. Replaces: 439521

O.E. No. 5006716

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778378	(778378)	$128.99 H

Piston



90-175 H.P. 1991-2006
Piston and Ring Kit, Port, .030" O.S.
All V4 and V6 60°. Replaces: 439519

O.E. No. 5006714

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778381	(778381)	$132.99 H
Sierra	184059	(18-4059)	$107.98 H

Piston



90-175 H.P. 1994-2006
Piston and Ring Kit, Port, Standard 3.600,
All V4 and V6 60° Both Rings 7° Taper

O.E. No. 5006687

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778388	(778388)	$128.99 H

Piston



90-175 H.P. 1994-2006
Piston and Ring Kit, Starboard, Standard
3.600, All V4 and V6 60° Both Rings 7° Taper

O.E. No. 5006688

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778394	(778394)	$132.99 H

Piston



90-175 H.P. 1997-1999
Piston and Ring Kit, with Rings for Fitch
.030" O.S. 3.630 Bore, Early Style

O.E. No. 5006717

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778500	(778500)	$125.99 H

Piston



120-300 H.P. 1988-1992
Piston and Ring Kit, Port, with Rings .030" O.S.
3.705 No Fingerports, Top Ring 7° Bottom
Rectangle. Replaces: 433003, 431845

O.E. No. 5006677

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778470	(778470)	$121.99 H
Sierra	184065	(18-4065)	$106.55 H

Piston



120-300 H.P. 1988-1992
Piston and Ring Kit, Starboard, with Rings
.030" O.S. 3.705 No Fingerports, Top Ring 7°
Bottom Rectangle

O.E. No. 5006674

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778477	(778477)	$124.99 H

Piston



120-300 H.P. 1988-1992
Piston and Ring Kit, Starboard, with Rings,
3.685 Bore No Fingerports, Top Ring 7° Bottom
Rectangle

O.E. No. 5006672

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778516	(778516)	$124.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Piston



120-300 H.P. 1988-1994
Piston and Ring Kit, Port, with Rings, .030" O.S. 3.705 No Fingerports, Top Ring 7° Bottom Rectangle

O.E. No. 5006673

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778475	(778475)	$124.99 H

Piston



120-300 H.P. 1988-1994
Piston and Ring Kit, Starboard, with Rings, .030" O.S. 3.705 No Fingerports, Top Ring 7° Bottom Rectangle. Replaces: 433004, 431846

O.E. No. 5006678

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778495	(778495)	$114.99 H
Sierra	184066	(18-4066)	$106.55 H

Piston



120-300 H.P. 1993-2001
Piston and Ring Kit, Starboard, with Finger Ports 3.705 Bore, Will Fit Any 2.0, 3.0, 4.0 Litre Carb

O.E. No. 5006713

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778445	(778445)	$120.99 H

Piston



120-300 H.P. 1993-2001
Piston and Ring Kit, Port, with Finger Ports 3.705 Bore, Will Fit Any 2.0, 3.0, 4.0 Litre Carb

O.E. No. 5006711

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778449	(778449)	$120.99 H

Piston



120-300 H.P. 1993-2001
Piston and Ring Kit, Starboard, with Rings, .020" O.S. 3.705 with Fingerports, Both Rings Same 7°. Replaces: 439516

O.E. No. 5006712

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778492	(778492)	$120.99 H

Piston



120-300 H.P. 1995-2001
Piston and Ring Kit, Starboard, with Rings, .030" O.S. 3.705 No Fingerports, Both Rings Same 7°. Replaces: 437112

O.E. No. 5006697

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778489	(778489)	$123.99 H
Sierra	184068	(18-4068)	$106.55 H

Piston



120-300 H.P. 1995-2001
Piston and Ring Kit, Port, with Rings, .030" O.S. 3.705 No Fingerports, Both Rings Same 7°. Replaces: 437111

O.E. No. 5006696

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778493	(778493)	$123.99 H

Piston



120-300 H.P. 1995-2001
Piston and Ring Kit, Starboard, with Rings 3.685 No Fingerports, Both Rings Same 7°. Replaces: 435576

O.E. No. 5006684

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778506	(778506)	$120.99 H

Piston



120-300 H.P. 1995-2001
Piston and Ring Kit, Port, with Rings, 3.685 No Fingerports, Both Rings Same 7°. Replaces: 435575

O.E. No. 5006685

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778512	(778512)	$120.99 H

Piston



150-175 H.P. 1991-1993
Piston and Ring Kit, Starboard, .030" O.S. 3.630 Bore Top Ring 7° Bottom Ring Rectangle

O.E. No. 5006680

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778485	(778485)	$133.99 H

Note: Product shipped may not match the item pictured.

Piston



150-175 H.P. 1991-1993
Piston and Ring Kit, Port, .030" O.S.
Top Ring 7° Bottom Ring Rectangle

O.E. No. 5006679

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778505	(778505)	$133.99 H

Piston



175-235 H.P. 1980-1991
Piston and Ring Kit, .030" O.S. 3.655 Bore
Fits All Big Bore Crossflow. Replaces: 396587, 394066, 394137, 390511

O.E. No. 5006668

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778509	(778509)	$128.99 H

Piston



175-235 H.P. 1980-1991
Piston and Ring Kit, with Rings, .020" O.S.
3.645 Bore Top Ring 30° Bottom Rectangle Big Bore Crossflow. Replaces: 439012

O.E. No. 5006705

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778517	(778517)	$119.99 H

Piston



185-225 H.P. 1993-2001
Piston and Ring Kit, Port, Standard,
3.0 Litre Finger Ports

O.E. No. 5006691

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778401	(778401)	$117.99 H

Piston



185-225 H.P. 1993-2001
Piston and Ring Kit, Starboard, with Finger Ports, 3.685, Will Work In Any B.B Looper

O.E. No. 5006690

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778413	(778413)	$117.99 H

Piston



185-250 H.P. 1994-2001
Piston and Ring Kit, with Rings, .020" O.S.
Bore 3.705 Finger Port Both Rings the Same 7°

O.E. No. 5006706

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778435	(778435)	$120.99 H

Piston



200-250 H.P. 2006-2012
Piston and Ring Kit, Port, Standard,
with Rings, 3.3 Litre 3.854 for E-Tec.
Replaces: 5006532, 5005910

O.E. No. 5006737

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778466	(778466)	$147.47 H

Rings



2-4 H.P. 1985-1996
Piston Ring Set, Standard Bore

O.E. No. 395596

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778454	(778454)	$45.99 H

Rings



2-8 H.P. 1969-1984
Piston Ring Set, Standard

O.E. No. 383920

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778312	(778312)	$24.99 H

Rings



5-8 H.P. 1980-2005
Piston Ring Set, Standard

O.E. No. 390082

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778380	(778380)	$18.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Rings



6 H.P. 1968-1979
Piston Ring Set, Standard

O.E. No. 378432

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778344	(778344)	$21.99 H

Rings



9.5 H.P. 1968-1973
Piston Ring Set, Standard, 3 Rings Per Pack

O.E. No. 379360

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778443	(778443)	$31.99 H

Rings



9.9-15 H.P. 1974-1992
Piston Ring Set, Standard. Replaces: 386015

O.E. No. 386279

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778333	(778333)	$35.99 L
Sierra	183931	(18-3931)	$20.80 H

Rings



9.9-15 H.P. 1974-1992
Piston Ring Set, .030" for 2.218 Bore (Standard Bore 2.188)

O.E. No. 386280

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778439	(778439)	$29.99 L

Rings



9.9-15 H.P. 1994-2006
Piston Rings, Rings Only, Standard

O.E. No. 435218

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778398	(778398)	$25.99 H

Rings



18 H.P. 1968-1970
Piston Ring Set, Standard

O.E. No. 378412

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778419	(778419)	$28.30 H

Rings



20-35 H.P. 1986-2005
Piston Ring Set, Standard. Replaces: 384250

O.E. No. 396377

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778328	(778328)	$33.99 H
Sierra	183910	(18-3910)	$32.85 H

Rings



40-75 H.P. 1975-1994
Piston Ring Set, 30° Top Ring 3.187 Standard Bore 2 and 3 Cylinder Not Early 3 Cylinder. Replaces: 391170, 434107

O.E. No. 434107

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778452	(778452)	$33.99 H
Sierra	183913	(18-3913)	$34.47 H

Rings



40-75 H.P. 1986-1994
Piston Ring Set, Standard 3.187 30° Top Ring. Replaces: 434107, 385810

O.E. No. 391170

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778347	(778347)	$33.99 H
Sierra	183913	(18-3913)	$34.47 H

Rings



40-75 H.P. 1986-1995
Piston Ring Set, .030" for 1.875 Bore Top Ring 30° Taper. Replaces: 391416, 434109

O.E. No. 391416

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778433	(778433)	$33.99 H
Sierra	183915	(18-3915)	$35.40 H

Note: Product shipped may not match the item pictured.

Rings



40-75 H.P. 1994-2005
Piston Ring Set, Standard 3.187, Both Rings 7°

O.E. No. 436731

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778385	(778385)	$39.99 H

Rings



40-75 H.P. 1994-2006
Piston Ring, Standard 3.187, Both Rings the Same 7° Taper

O.E. No. 436972

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778356	(778356)	$51.99 H

Rings



85-300 H.P. 1985-2006
Piston Ring Set, Standard 3.5" All C/F and Small Bore Loop. Replaces: 384539

O.E. No. 394930

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778204	(778204)	$33.99 H
Sierra	183904	(18-3904)	$32.85 H

Rings



90-175 H.P. 1994-2006
Piston Ring Set, V4/V6/COM, Standard 3.600" All V4 and V6 60° Both Rings 7°

O.E. No. 436353

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778213	(778213)	$36.99 H
Sierra	184088	(18-4088)	$39.00 H

Rings



88-200 H.P. 1982-1998
Piston Ring Set, .030 All Crossflow V4 and V6 Small Bore 3.530 and S/B Loop

O.E. No. 396504

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778382	(778382)	$35.99 H
Sierra	183905	(18-3905)	$35.63 H

Rings



120-300 H.P. 1988-1992
Piston Ring Set, Standard 3.685 Non Fingerport Piston Top Ring 7° Bottom Rectangle

O.E. No. 431870

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778376	(778376)	$39.99 H
Sierra	183975	(18-3975)	$41.90 H

Rings



120-300 H.P. 1993-1998
Piston Ring Set, .030" O.S. 3.705 Bore Both Rings 7° Taper and 3.0 Litre FFI

O.E. No. 431844

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778446	(778446)	$30.99 H

Rings



150-175 H.P. 1991-1993
Piston Ring Set, Standard, 3.600, V6 60° Top Ring 7° Bottom Ring Rectangle

O.E. No. 433096

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778421	(778421)	$43.99 H

Rings




150-175 H.P. 1993-2006
Piston Ring Set, .030" O.S. Both Rings 7° Taper Bore 3.630, Fits V60° Carb and FFI

O.E. No. 436354

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778456	(778456)	$35.99 H

Rings



185-225 H.P. 1993-2001
Piston Ring Set, Standard, for Finger Ports Pistons, Both Rings 7° Taper

O.E. No. 436254

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778286	(778286)	$46.99 H
Sierra	183901	(18-3901)	$50.22 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Rod Bearings



25-125 H.P. 1966-2006
Rod Bearings, All 2 and 3 Cylinder and 1966-72 V4.
Replaces: 388344, 347088

O.E. No. 437088

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777359	(777359)	$37.99 L
Sierra	181378	(18-1378)	$30.38 H

Rod Bearings



85-235 H.P. 1977-2012
Rod Bearing All V4 and V6 C/F and All V4, V6 60°, 2008-12 25-90 H.P. E-Tec. Replaces: 378154

O.E. No. 387787

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777358	(777358)	$70.99 I
Sierra	181361	(18-1361)	$64.88 H

Rod Bearings



185-300 H.P. 1984-2010
Rod Bearings, All V4 and V6 Loop, E-Tec

O.E. No. 396041

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777362	(777362)	$79.99 L
Sierra	181360	(18-1360)	$71.18 H

Split Bearing Liner



40-140 H.P. 1968-2005
Split Bearing Liner, Center Main Race Only, Small Diameter. Replaces: 307828

O.E. No. 310433

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777366	(777366)	$86.99 L

Wrist Pin Bearing with Washers



120-300 H.P. 1985-2010
Wrist Pin Bearing with Washers, Caged

O.E. No. 348495

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778411	(778411)	$34.99 L

Wrist Pin Bearing with Washers



20-235 H.P. 1985-2006
Wrist Pin Bearing with Washers, Loose. Replaces: 329541

O.E. No. 395627

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777357	(777357)	$25.99 L
Sierra	181374	(18-1374)	$20.50 H

Wrist Pin Bearing



OMC Wrist Pin Bearing.
Replaces: 434844

O.E. No. 434844

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181376	(18-1376)	$38.02 H

Center Main Bearing



OMC Center Main Bearing.
Replaces: 387041

O.E. No. 387041

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181353	(18-1353)	$56.53 H

Ball Bearing



MRC/OMC/JE Ball Bearing.
Replaces: 377139, 30-63742, 30-63742T

O.E. No. 30-63742T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181154	(18-1154)	$22.95 H

Water Deflector



85-235 H.P. 1977-2006
Water Deflector, All Crossflow, 10 Pack

O.E. No. 322411

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777839	(777839)	$4.99 L
Sierra	180892	(18-0892)	$3.45 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

OMC Gasket Application Guide

Model HP	Year	Head Gasket DMI / OMC	Head Gasket O.E. BRP	Head Gasket Sierra	Gasket Kit DMI / OMC	Gasket Kit Sierra
2 Junior / Colt	1974-1988	777431	313782	18-2884	-	-
2.5 / 3 /4 / 4.5 / Ultra, Excel 4	1981-1993	777443	332010	18-2888	-	-
4	1974-1980	B777405	203130	18-3841-1	-	-
5 / 5.5 / 6	1959-1973	B777397	329103	18-2961	-	-
6 (8.84 cubic inch, 145 cc)	1974-1979	B777397	329103	18-2961	-	-
6 / 7.5 / 8 (10 cubic inch, 164 cc)	1980-2005	B777424	325273	18-3800	-	-
9.9	1964-1973	B777455	309612	18-2950	-	-
9.9 / 15 (13 cubic inch, 216 cc)	1974-1992	B777389	330818	18-2963	B777457	18-4306
18 / 35	1979-2003	B777390	329419	18-3803	B777454	18-4307
9.9 / 15 (15 cubic inch, 255 cc)	1993-2006	B778195	338222	-	-	-
25 (22 cubic inch, 361 cc)	1974-1976	B777413	322332	18-2962	-	-
25 (32 cubic inch, 521 cc)	1977-1978	B777428	319633	18-2954	-	-
35 (32 cubic inch, 521 cc)	1977-1978	B777428	319633	18-2954	-	-
20 / 25 / 28 / 30 / 35 (32 cubic inch, 521 cc)	1979-2005	B777390	765012	18-3803	B777454	18-4307
33	1965-1970	777471	304720	18-2951	-	-
50 2 Cylinder (42 cubic inch, 680 cc)	1974-1975	B777461	315539	18-2958	-	-
40	1960-1973	777447	307069	18-2957	-	-
40 / 48 / 50 / 55 / 60 (45 cubic inch, 737 cc)	1979-2005	B777395	335359	18-3802	B777423	18-4305
45 / 55 Commercial (45 cubic inch, 737 cc)	1979-2005	B777395	335359	18-3802	B777423	18-4305
55 / 60 / 65	1968-1973	B777401	313413	18-2960	-	-
60 3 Cylinder (49 cubic inch, 814 cc)	1974-1988	B777401	313413	18-2960	B777460	18-4302
60 3 Cylinder (56 cubic inch, 913 cc)	1986-2001	B777401	313413	18-2960	B777421	18-4321
70 3 Cylinder (49 cubic inch, 814 cc)	1984-1988	B777408	329836	18-3836	B777460	18-4302
70 3 Cylinder (56 cubic inch, 913 cc)	1986-2001	B777408	329836	18-3836	B777421	18-4321
75 Cylinder (49 cubic inch, 814 cc)	1975-1988	B777401	313413	18-2960	B777460	18-4302
75 / 80 / 85 / 90 / 100 / 115	1960-1970	777448	306048	18-2959	-	-
85 / 88 / 90 / 100 / 110 / 112 / 115 (Crossflow V4)	1978-1998	B777379	318358	18-2956	B777398	18-4303-1
115 / 135	1973	B777379	318358	18-2956	-	-
115 / 135 / 140 (Crossflow V4)	1973-1978	B777379	318358	18-2956	-	18-4303
90 / 115 V4 60° 90 / 115 V4 60°	1995-2006	B765554	335523	18-7110	-	18-4402
90 / 115 V4 60° FFI	1998-2006	B765554	335523	18-7110	-	18-4421
140 (Crossflow V4)	1977-1984	B777379	318358	18-2956	B777398	18-4303-1
120 / 140 (Small Bore Loop V4)	1985-1987	777463	328623	18-3837	-	18-4310
120 / 130 / 140 (Loop V4, 2 Liter)	1988-2001	B777430	340115	18-3866	B777466	18-4322
150 / 155 / 175 / 185 / 200 (Crossflow V6)	1976-1992	B777392	335360	18-2964	B777449	18-4304-1
150 / 175 V6 60°	1992-2006	B765554	335523	18-7110	B778369	18-4406
150 / 175 V6 60° FFI	1997-2005	B765554	335523	18-7110	-	18-4420
175 (Crossflow V6) Big Bore 3.625"	1986-1992	B777433	335361	18-3801	-	18-4309
200 / 225 (Small Bore Loop V6)	1986-1987	777470	331211	18-3838	-	-
200 / 225 Loop Charged (Loop V6, 3 Liter) Open Deck	1988-1992	B777420	333670	18-3839	B777469	18-4323
200 / 225 / 250 (Loop V6, 3 Liter) Closed Deck	1993-2001	,B778206	340919	18-0492	B778407	18-4428
200/250/ V6 3.3 Liter	2000-2010	B778268	346007	18-0491	-	-
235 (Crossflow V6) Small Bore 3.5"	1978-1979	B777392	335360	18-2964	-	-
235 (Crossflow V6) Big Bore 3.625"	1980-1985	B777433	335361	18-3801	-	18-4309
250 / 275 / 300 (Loop V8, 4 Liter)	1988-1998	777478	340116	18-3885	-	-

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Gasket Set



10-15 H.P. 1984-1992
Power Head Gasket Set with Seals, 2 Cylinder

O.E. No. 394546

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777457	(777457)	$38.99 J
Sierra	184306	(18-4306)	$32.63 H

Gasket Set



20-35 H.P. 1990-2005
Power Head Gasket Set with Seals, 2 Cylinder.
Replaces: 433941, 392567, 392615

O.E. No. 433941

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777454	(777454)	$72.99 J
Sierra	184307	(18-4307)	$66.42 H

Gasket Set




40-60 H.P. 1988-2005
Power Head Gasket Set with Seals, 2 Cylinder

O.E. No. 439083

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777423	(777423)	$135.99 J

Gasket Set



60-75 H.P. 1979-1988
Power Head Gasket Set, 2 Pieces, Exhaust with Seals, 3 Cylinder Early.
Replaces: 390078

O.E. No. 439084

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777460	(777460)	$119.99 J
Sierra	184302	(18-4302)	$114.80 H

Gasket Set



60-75 H.P. 1997-2001
Power Head Gasket Set with Seals, 3 Cylinder

O.E. No. 438904

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777421	(777421)	$71.99 J

Gasket Set



120-140 H.P. 1988-2001
Power Head Gasket Set with Seals, V4 Loop Big Bore

O.E. No. 432570

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777466	(777466)	$149.99 J
Sierra	184322	(18-4322)	$132.40 H

Gasket Set




150-175 H.P. 1991-2006
Power Head Gasket Set with Seals, V6 V60V

O.E. No. 437155

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778369	(778369)	$214.99 J

Gasket Set




150-200 H.P. 1978-1991
Power Head Gasket Set with Seals, V6 Crossflow Small Bore

O.E. No. 391988

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777449	(777449)	$156.99 J
Sierra	184304	(18-4304-1)	$140.02 H

Gasket Set



185-225 H.P. 1988-2001
Power Head Gasket Set with Seals, V6 Loop with Open Deck 3.0 Liter

O.E. No. 436891

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777469	(777469)	$179.99 J
Sierra	184323	(18-4323)	$169.58 H

Gasket Set



185-225 H.P. 1993-2001
Power Head Gasket Set with Seals, V6 Loop with Closed Deck 3.0 Liter


O.E. No. 437725

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778407	(778407)	$206.99 J
Sierra	184428	(18-4428)	$172.47 H

Note: Product shipped may not match the item pictured.

Gasket Set

85-140 H.P. 1977-1998
Power Head Gasket Set with Seals, All V4 Crossflow




O.E. No. 439085

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777398	(777398)	$152.99 J

Gasket Set

OMC Gasket Set, 90-115 H.P. FFI 1998-2006




O.E. No. 5000400

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184421	(18-4421)	$91.63 H

Gasket Set


OMC Gasket Set, 2000-2011 3.3 FFI



Brand Name	DMI No.	Mfg. No.	Price
Sierra	184429	(18-4429)	$171.07 H

Gasket Set

OMC Gasket Set, 150-175 H.P. FFI 1998-2006




O.E. No. 439202

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184420	(18-4420)	$94.13 H

Gasket Set

V4 60° 1996-2006
OMC Power Head Gasket Set




O.E. No. 437779

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184402	(18-4402)	$155.80 H

Gasket Set

V6 60° 1992-2006
OMC Power Head Gasket Set



O.E. No. 437155

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778369	(778369)	$214.99 J
Sierra	184406	(18-4406)	$179.13 H

Head Gasket

4-8 H.P. 1968-1980
Head Gasket



O.E. No. 203130

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777405	(777405)	$5.99 L
Sierra	183841	(18-3841-2)	$4.33 H

Head Gasket

5.5-6 H.P. 1959-1979
Head Gasket



O.E. No. 329103

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777397	(777397)	$36.99 M
Sierra	182961	(18-2961)	$12.35 H

Head Gasket

5-8 H.P. 1980-2005
Head Gasket



O.E. No. 325273

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777424	(777424)	$36.99 M
Sierra	183800	(18-3800)	$15.60 H

Head Gasket

9 H.P. 1968-1973
Head Gasket



O.E. No. 309612

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777455	(777455)	$19.99 L
Sierra	182950	(18-2950)	$16.90 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Head Gasket

9.9-15 H.P. 1985-1992
Head Gasket



O.E. No. 330818

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777389	(777389)	$16.99 M
Sierra	182963	(18-2963)	$12.30 H

Head Gasket

9.9-15 H.P. 1993-2007
Head Gasket



O.E. No. 338222

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778195	(778195)	$33.99 L

Head Gasket

20-25 H.P. 1968-1976
Head Gasket. Replaces: 306163



O.E. No. 322332

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777413	(777413)	$38.99 L
Sierra	182962	(18-2962)	$31.97 H

Head Gasket

20-35 H.P. 1979-1997
Head Gasket



O.E. No. 765012

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777390	(777390)	$28.99 M
Sierra	183803	(18-3803)	$20.35 H

Head Gasket

25-35 H.P. 1976-1978
Head Gasket



O.E. No. 319633

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777428	(777428)	$29.31 L
Sierra	182954	(18-2954)	$24.08 H

Head Gasket

40-50 H.P. 1977-2005
Head Gasket.
Replaces: 327795, 335359



O.E. No. 335359

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777395	(777395)	$47.99 L
Sierra	183802	(18-3802)	$30.75 H

Head Gasket

40-60 H.P. 1971-1975
Head Gasket, Small Bore Early



O.E. No. 315539

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777461	(777461)	$29.31 L
Sierra	182958	(18-2958)	$23.75 H

Head Gasket

55-75 H.P. 1968-1988
Head Gasket, Early Style, 3" Bore



O.E. No. 313413

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777401	(777401)	$31.99 L
Sierra	182960	(18-2960)	$24.37 H

Head Gasket

60-75 H.P. 1988-2001
Head Gasket, 3 Cylinder,
Late Style



O.E. No. 329836

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777408	(777408)	$30.99 L
Sierra	183836	(18-3836)	$24.63 H

Head Gasket

88-140 H.P. 1975-1998
Head Gasket, Crossflow V4, 3.5"



O.E. No. 318358

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777379	(777379)	$24.99 L
Sierra	182956	(18-2956)	$17.98 H

Note: Product shipped may not match the item pictured.

Head Gasket



120-140 H.P. 1993-2001
Head Gasket, V4 Loop Big Bore

O.E. No. 340115

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777430	(777430)	$70.99 L
Sierra	183866	(18-3866)	$22.35 H

Head Gasket



150-235 H.P. 1977-1991
Head Gasket, V6 Crossflow Small Bore 3.5". Replaces: 320745

O.E. No. 335360

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777392	(777392)	$32.96 L
Sierra	182964	(18-2964)	$27.12 H

Head Gasket



175-235 H.P. 1982-1990
Head Gasket,V6 Crossflow Big Bore 3.625". Replaces: 325647

O.E. No. 335361

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777433	(777433)	$37.96 L
Sierra	183801	(18-3801)	$33.87 H

Head Gasket



185-225 H.P. 1988-1992
Head Gasket, Open Deck Loop V6, 3 Liter

O.E. No. 333670

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777420	(777420)	$66.99 M
Sierra	183839	(18-3839)	$29.68 H

Head Gasket



185-225 H.P. 1993-2001
Head Gasket, Close Deck Loop V6 3.0 Litre. Replaces: 340919

O.E. No. 345257

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778206	(778206)	$53.99 L
Sierra	180492	(18-0492)	$41.63 H

Head Gasket



200-250 H.P. 2000-2010
Head Gasket, V6, 3.3 Litre

O.E. No. 346007

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778268	(778268)	$53.99 L
Sierra	180491	(18-0491)	$43.30 H

Head Gasket O-Ring



150-175 H.P. 1992-2012
Head Gasket O-Ring, All V4 and V6 60°

O.E. No. 335523

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765554	(765554)	$9.99 M
Sierra	187110	(18-7110)	$7.00 H

Water Pump Base Gasket



4-8 H.P. 1980-2005
Water Pump Base Gasket

O.E. No. 325040

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778154	(778154)	$3.99 L

Fuel Pump to Intake Mount Gasket



10-235 H.P. 1972-2007
Fuel Pump to Intake Mount Gasket, 5 Pack

O.E. No. 303615

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777737	(777737)	$2.99 L
Sierra	180850	(18-0850)	$2.03 H

Base Gasket



10-15 H.P. 1981-2006
Base Gasket, 5 Pack

O.E. No. 325721

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777384	(777384)	$3.99 L
Sierra	182907	(18-2907)	$2.43 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Base Adapter Gasket

20-30 H.P. 1985-2005
Base Adapter Gasket



O.E. No. 330621

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777412	(777412)	$9.99 L
Sierra	182852	(18-2852)	$7.68 H

Inner Leaf Plate Gasket

9.9 and 15 H.P.
OMC Leaf Plate Gasket.
Replaces: 318924




O.E. No. 318924

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180959	(18-0959)	$2.32 H

Base Gasket

OMC Base Gasket, 90-115 H.P.
All V4 60° and 1996-2006 V4 60°




O.E. No. 339601

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180692	(18-0692)	$19.97 H

Base Gasket

OMC Base Gasket, 150-175 H.P. FFI
and Carb Models 1992-2011 V6 60°




O.E. No. 344386

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778326	(778326)	$8.99 L
Sierra	180691	(18-0691)	$6.03 H

Intake Manifold Gasket

OMC Intake Manifold Gasket



O.E. No. 329718

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180148	(18-0148)	$8.85 H

Intake Manifold Gasket

OMC Intake Manifold Gasket,
For: 3 Cylinder.
Replaces: 326926



O.E. No. 326926

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181212	(18-1212)	$6.85 H

Intake Gasket

OMC Intake Gasket,
Starboard V4 60°



O.E. No. 336389

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180695	(18-0695)	$25.80 H

Intake Gasket

OMC Intake Gasket,
Port V4 60°



O.E. No. 336388

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180696	(18-0696)	$24.97 H

Intake Gasket

OMC Intake Gasket,
Starboard V6 60°



O.E. No. 336227

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180693	(18-0693)	$24.47 H

Intake Gasket

OMC Intake Gasket,
Port V6 60°



O.E. No. 336226

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180694	(18-0694)	$26.63 H

Note: Product shipped may not match the item pictured.

Air Silencer Gasket



40-55 H.P. 1995-2005
Air Silencer to Carb Gasket

O.E. No. 330910

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778220	(778220)	$2.99 L

Air Silencer Gasket



60-75 H.P. 1978-2001
Air Silencer to Carb Gasket, 3 Cylinder

O.E. No. 333008

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777758	(777758)	$2.99 L
Sierra	180975	(18-0975)	$2.13 H

Air Silencer Gasket



OMC Air Silencer Gasket,
70/75 H.P. Replaces: 314115

O.E. No. 314115

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180933	(18-0933)	$4.18 H

Air Silencer Gasket



OMC Air Silencer Gasket. 3 Cylinder
Replaces: 321794

O.E. No. 321794

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180989	(18-0989)	$8.88 H

Air Silencer Gasket



150-235 H.P. 1976-1991
Air Silencer Gasket

O.E. No. 321183

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777458	(777458)	$8.99 L
Sierra	180979	(18-0979)	$6.97 H

Base to Cover Gasket



OMC Base to Cover Gasket, 70/75 H.P.
Replaces: 314322

O.E. No. 314322

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180935	(18-0935)	$7.00 H

Carburetor to Air Box Twin Gasket



OMC Carburetor to Air Box
Twin Gasket. Replaces: 321497

O.E. No. 321497

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180983	(18-0983)	$2.80 H

Inner Exhaust Cover Gasket




OMC Inner Exhaust Cover Gasket

O.E. No. 326264

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180126	(18-0126)	$4.37 H

Exhaust Plate Gasket




OMC Exhaust Plate Gasket

O.E. No. 317955

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180117	(18-0117)	$11.20 H

Adapter to Powerhead Gasket



OMC Adapter to Power Head Gasket

O.E. No. 328590

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180138	(18-0138)	$20.47 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Shift Housing Gasket

OMC Shift Housing Gasket



O.E. No. 324670

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180110	(18-0110)	$1.75 H

Rectifier Mounting Gasket

OMC Rectifier Mounting Gasket




O.E. No. 330412

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180155	(18-0155)	$5.22 H

Cylinder Cover Gasket

10-15 H.P. 1984-1987
Cylinder Cover Gasket, 5 Pack



O.E. No. 329920

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777393	(777393)	$2.99 L
Sierra	182905	(18-2905)	$1.62 H

Cylinder Cover Gasket

25-35 H.P. 1982-2005
Cylinder Cover Gasket



O.E. No. 327674

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777388	(777388)	$6.99 L
Sierra	183899	(18-3899)	$4.62 H

Cylinder Cover Gasket

40-55 H.P. 1971-1992
Cylinder Cover Gasket



O.E. No. 315538

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777414	(777414)	$4.99 L
Sierra	180941	(18-0941)	$3.95 H

Cylinder Cover Gasket

85-140 H.P. 1977-1998
Cylinder Cover Gasket



O.E. No. 318335

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777394	(777394)	$3.99 L
Sierra	182873	(18-2873)	$3.07 H

Primer Solenoid Gasket

40-300 H.P. 1988-2006
Primer Solenoid Gasket.
Replaces: 333448, 511808



O.E. No. 341297

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778216	(778216)	$15.99 L

Fuel Pump Cover Gasket

40-235 H.P. 1972-2007
Fuel Pump Cover Gasket, 5 Pack.
Replaces: 312679, 332694



O.E. No. 338879

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777749	(777749)	$7.99 L
Sierra	182900	(18-2900)	$6.17 H

Carb to Flange Gasket

25-75 H.P. 1979-2005
Carb to Flange Gasket,
5 Pack



O.E. No. 325092

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777747	(777747)	$1.99 L
Sierra	180118	(18-0118)	$1.03 H

Carb to Flange Gasket

85-235 H.P. 1982-1998
Carb to Flange Gasket, V4,
V6 Crossflow, 5 Pack



O.E. No. 327707

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777751	(777751)	$1.99 L
Sierra	180134	(18-0134)	$1.18 H

Note: Product shipped may not match the item pictured.

Power Head Base Adapter Gasket




40-60 H.P. 1980-2002
Power Head Base Adapter Gasket, 3 Cylinder.
Replaces: 326468

O.E. No. 351018

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778187	(778187)	$9.99 L
Sierra	180128	(18-0128)	$7.38 H

Base Adapter Gasket



60-75 H.P. 1968-1988
Base Adapter Gasket

O.E. No. 313763

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777429	(777429)	$4.99 L
Sierra	182865	(18-2865)	$4.77 H

Base Adapter Gasket




60-75 H.P. 1986-2001
Base Adapter Gasket

O.E. No. 329828

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777416	(777416)	$8.99 L
Handi-Man Marine Co.	181205	(181205)	$7.07 H

Base Adapter Gasket




85-140 H.P. 1973-1977
Base Adapter Gasket, V4 Early

O.E. No. 318373

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777947	(777947)	$15.99 L
Sierra	180957	(18-0957)	$13.68 H

Power Head Base Adapter Gasket




88-140 H.P. 1977-1998
Power Head Base Adapter Gasket, V4 Crossflow

O.E. No. 342513

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777391	(777391)	$23.99 L
Sierra	182864	(18-2864)	$10.40 H

Power Head Base Adapter Gasket



150-200 H.P. 1978-1991
Power Head Base Adapter Gasket, V6 Crossflow

O.E. No. 323214

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777437	(777437)	$14.99 L
Sierra	182550	(18-2550)	$12.47 H

Power Head Base Adapter Gasket



185-225 H.P. 1988-2001
Power Head Base Adapter Gasket, 3.0 Litre V6

O.E. No. 333879

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777409	(777409)	$26.99 L
Sierra	180965	(18-0965)	$16.43 H

Power Head Gasket



200-250 H.P. 2004-2010
Power Head Gasket, 3.3 Litre

O.E. No. 351535

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778302	(778302)	$26.99 L
Sierra	180690	(18-0690)	$20.80 H

Inner Exhaust Gasket




60-75 H.P. 1986-1988
Inner Exhaust Gasket, 3 Cylinder

O.E. No. 331916

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777426	(777426)	$13.99 L
Sierra	182913	(18-2913)	$11.88 H

Exhaust Gasket



85-90 H.P. 1973-1998
Exhaust Gasket, Flat Back, 2 Required

O.E. No. 317914


Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777396	(777396)	$9.99 L
Sierra	182866	(18-2866)	$7.67 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Exhaust Cover Gasket



150-235 H.P. 1978-1991
Exhaust Cover Gasket, Flat Back, 2 Required

O.E. No. 321182

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777440	(777440)	$9.99 L
Sierra	182545	(18-2545)	$8.13 H

Impeller Housing Gasket




OMC Impeller Housing Gasket
Replaces: 319586

O.E. No. 319586

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180969	(18-0969)	$2.58 H

Intake Gasket



85-140 H.P. 1974-1998
Intake Gasket, V4 Crossflow

O.E. No. 319174

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777406	(777406)	$5.99 L
Sierra	182867	(18-2867)	$4.28 H

Thermostat Gasket



6 H.P. 1968-1979
Thermostat Gasket

O.E. No. 311145

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778235	(778235)	$3.99 L
Sierra	180679	(18-0679)	$2.68 H

Thermostat Gasket



8-30 H.P. 1984-2005
Thermostat Gasket

O.E. No. 329319

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765632	(765632)	$4.28 H

Thermostat Gasket



40-300 H.P. 1986-2005
Thermostat Gasket, Will Not Fit V60V, 5 Pack

O.E. No. 329830

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777385	(777385)	$1.99 L
Sierra	181202	(18-1202)	$1.07 H

Thermostat Housing Gasket



85-140 H.P. 1977-1998
T-Stat Housing Gasket, V4 Crossflow, 2 Required, 10 Pack. Replaces: 321897

O.E. No. 332369

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777894	(777894)	$1.99 L
Sierra	180977	(18-0977)	$0.83 H

Thermostat Gasket




85-140 H.P. 1977-1998
Thermostat Gasket, Seal Cork, V4 Crossflow, 5 Pack

O.E. No. 321932

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777382	(777382)	$1.99 L

Thermostat Gasket



150-235 H.P. 1978-1991
Thermostat Gasket, V6 Crossflow, 5 Pack

O.E. No. 321184

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777383	(777383)	$1.99 L
Sierra	182546	(18-2546)	$1.18 H

Thermostat Gasket



185-225 H.P. 1993-2001
Thermostat Gasket, V6 Loop, 5 Pack

O.E. No. 337068

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777851	(777851)	$2.99 L
Sierra	180412	(18-0412)	$1.97 H

Note: Product shipped may not match the item pictured.

Water Pump Gasket



85-300 H.P. 1980-2010
Water Pump Gasket, Wear Plate to Gear Case, 5 Pack.
Replaces: 324071

O.E. No. 338484

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777844	(777844)	$2.99 L
Sierra	182557	(18-2557)	$2.27 H

Bypass Gasket



85-140 H.P. 1968-1998
Bypass Gasket, V4 and V6 Crossflow, 5 Pack

O.E. No. 307133

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777386	(777386)	$2.99 L
Sierra	182876	(18-2876)	$1.70 H

Rectifier Gasket



90-175 H.P. 1991-2006
Rectifier Gasket, Paper, V60V.
Replaces: 342291

O.E. No. 350357

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778297	(778297)	$2.99 L

Shift Rod Gasket




100-300 H.P. 2004-2010
Shift Rod Gasket, 5 Pack

O.E. No. 352165

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777530	(777530)	$2.99 L

Intake Gasket



120-300 H.P. 1985-2005
Intake Gasket, V4, V6, V8

O.E. No. 328622

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777417	(777417)	$15.99 L
Sierra	180142	(18-0142)	$13.78 H

Throttle Body to Intake Gasket



120-300 H.P. 1986-2001
Throttle Body to Intake Gasket

O.E. No. 332319

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777744	(777744)	$2.99 L
Sierra	180987	(18-0987)	$4.87 H

Reed Block Gasket



40-55 H.P. 1989-2005
Reed Block Gasket

O.E. No. 335633

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777434	(777434)	$8.99 L
Sierra	180963	(18-0963)	$7.08 H

Reed Plate Gasket



120-300 H.P. 1986-2005
Reed Plate Gasket, V4, V6, V8 Loop

O.E. No. 332266

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777411	(777411)	$3.99 L
Sierra	180130	(18-0130)	$2.37 H

Cylinder Head Cover Gasket



150-235 H.P. 1977-1991
Cylinder Head Cover Gasket, V6 Crossflow

O.E. No. 321028

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777422	(777422)	$5.99 L
Sierra	182544	(18-2544)	$4.83 H

Base to Lower Unit Gasket



4-8 H.P. 1980-2005
Base to Lower Unit Gasket

O.E. No. 324637

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766422	(766422)	$6.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Manifold Gasket




Vary H.P. Vary Year
Manifold Gasket, Fuel Tank, Cork

O.E. No. 302557

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777342	(777342)	$6.99 H

Portable Fuel Tank Gasket



Vary H.P. 1993-1996
Portable Fuel Tank Gasket, Pick Up

O.E. No. 127093

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778336	(778336)	$11.99 H

Carb Gasket



H.P. 1994-2001 Year
Carb Gasket, Idle Circuit, V4, V6, V8 Loop V90°

O.E. No. 341287

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778416	(778416)	$7.99 L

Air Box to Carb Gasket



85-235 H.P. 1982-1998
Air Box to Carb Gasket, V4, V6 Crossflow, 5 Pack.
Replaces: 386573

O.E. No. 319771

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777755	(777755)	$2.99 L
Sierra	182857	(18-2857)	$1.85 H

Gasket



Vary H.P. Vary Year
Gasket, 5 Pack

O.E. No. 344037

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765622	(765622)	$3.99 L

Bowl Gasket



40-75 H.P. 1982-2005
Bowl Gasket, 2 and 3 Cylinder Carb

O.E. No. 384409

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778311	(778311)	$5.99 L

Float Bowl Gasket



85-235 H.P. 1976-1998
Float Bowl Gasket, Crossflow Carb.
Replaces: 333418

O.E. No. 338884

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777748	(777748)	$9.99 L
Sierra	182906	(18-2906)	$7.33 H

Fuel Bowl Gasket



90-175 H.P. 1991-2006
Float Bowl Gasket, V60V

O.E. No. 335070

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765605	(765605)	$13.99 L

Float Bowl Gasket



120-300 H.P. 1984-2001
Float Bowl Gasket, Carb V4, V6 and V8 Loop.
Replaces: 326830

O.E. No. 338813

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777761	(777761)	$9.99 L
Sierra	182582	(18-2582)	$1.77 H

Fuel Filter Gasket



15-175 H.P. 1987-2006
Fuel Filter Gasket

O.E. No. 327270

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766423	(766423)	$5.99 H

Note: Product shipped may not match the item pictured.

O-Ring

4-50 H.P. 1991-2006
Seal Vent Screw O-Ring




O.E. No. 336982

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778205	(778205)	$0.99 L

O-Ring

70-250 H.P. 1976-2010
Trim Motor Base O-Ring, 5 Pack



O.E. No. 321163

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777899	(777899)	$4.99 L
Sierra	187510	(18-7510)	$3.45 H

O-Ring

85-300 H.P. 1969-2010
O-Ring, SS 314728, Upper Bearing Housing and Water Pressure. Replaces: 314728



O.E. No. 354731

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777532	(777532)	$3.99 L

O-Ring

90-175 H.P. 1991-2010
O-Ring, Head to Cylinder Block, Fits 3.600 Bore V4, V6 60° and 40, 50 H.P. E-Tec



O.E. No. 335523

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765554	(765554)	$9.99 M

O-Ring

25-200 H.P. 1976-2005
O-Ring, Vary Application, 5 Pack



O.E. No. 319662

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778153	(778153)	$1.99 L

O-Ring

60-300 H.P. 1976-2010
Shift Shaft O-Ring, 5 Pack



O.E. No. 318372

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777526	(777526)	$1.99 L
Sierra	187137	(18-7137)	$0.97 H

O-Ring

75-300 H.P. 1979-2012
O-Ring, Used in Various Places (Throttle Link and Trim and Tilt)



O.E. No. 324678

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765566	(765566)	$3.99 L

O-Ring

85-300 H.P. 1976-2010
Seal, IMP HSG PL, O-Ring Seal Water Pump to Wear Plate



O.E. No. 321120

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777875	(777875)	$8.99 L
Sierra	182536	(18-2536)	$6.35 H

O-Ring

90-175 H.P. 1997-2006
Seal, Carb BDY/BRWN, Carb to Throttle Body with Idle Screw



O.E. No. 343613

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778292	(778292)	$3.99 L

O-Ring

Vary H.P. 1979-2006
O-Ring, Fits Various Motors



O.E. No. 324677

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778467	(778467)	$4.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

O-Ring

35-300 H.P. 1976-2010
O-Ring



O.E. No. 301967

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777904	(777904)	$3.99 L

O-Ring

40-300 H.P. 1984-2010
O-Ring, Oil Tank Seal Pick Up



O.E. No. 126793

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778289	(778289)	$11.99 H

O-Ring

10-300 H.P. 1987-2001
O-Ring, Gearcase Fill Screw, 10 Pack



O.E. No. 333572

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777518	(777518)	$1.99 L

O-Ring

35-235 H.P. 1971-2006
O-Ring, Early Gearcase with Snap Ring, 10 Pack



O.E. No. 317178

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777520	(777520)	$1.99 L

O-Ring

25-35 H.P. 1963-1993
Lower Bearing Cap O-Ring



O.E. No. 307239

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777387	(777387)	$2.99 L
Sierra	187170	(18-7170)	$1.58 H

O-Ring

85-235 H.P. 1968-2006
Upper and Lower O-Ring, V4 and V6 Crossflow, 10 Pack



O.E. No. 305123

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777380	(777380)	$2.99 M
Sierra	187133	(18-7133)	$2.03 H

O-Ring

15-40 H.P. 1971-2007
Shift Bushing O-Ring, 5 Pack



O.E. No. 301877

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777522	(777522)	$2.99 L

O-Ring

10-35 H.P. 1968-2005
Retaining O-Ring, Hold Roller to Shaft



O.E. No. 308776

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766457	(766457)	$4.99 H

Seal

40-150 H.P. 1983-2006
Prop Shaft and Lower Crank Seal, 2 and 3 Cylinder, 5 Pack



O.E. No. 330137

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777519	(777519)	$11.99 L
Sierra	182001	(18-2001)	$8.45 H

Seal

85-250 H.P. 1976-2010
Upper Exhaust Housing Seal



O.E. No. 320936

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777897	(777897)	$15.99 L
Sierra	180540	(18-0540)	$12.30 H

Note: Product shipped may not match the item pictured.

Seal



90-115 H.P. 1995-2006
Throttle Body to Intake Manifold Seal, Starboard

O.E. No. 335819

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778360	(778360)	$8.99 H

Seal



90-115 H.P. 1995-2006
Throttle Body to Intake Manifold Seal, Port

O.E. No. 335818

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778358	(778358)	$9.99 H

Seal



150-175 H.P. 1991-2006
Throttle Body to Intake Manifold Seal, Starboard

O.E. No. 335404

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778338	(778338)	$12.99 H

Seal



150-175 H.P. 1991-2006
Throttle Body to Intake Manifold Seal, Port

O.E. No. 335403

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778339	(778339)	$13.99 H

Thermostat Seal



10-50 H.P. 1989-1994
Thermostat Seal

O.E. No. 334742

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778364	(778364)	$8.99 H

Thermostat Seal



15-225 H.P. 1968-2001
Thermostat Seal, 4 Pack

O.E. No. 310058

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777381	(777381)	$1.99 L

Thermostat and Pressure Relief Seal



150-225 H.P. 1991-2006
Thermostat and Pressure Relief Seal

O.E. No. 335981

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765628	(765628)	$4.99 L

Thermostat Seal



200-250 H.P. 1999-2010
Thermostat Seal

O.E. No. 339299

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765618	(765618)	$8.99 H

Seal



10-15 H.P. 1977-2007
Drive Shaft Oil Seal, 2 Required

O.E. No. 321480

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777541	(777541)	$16.99 L
Sierra	182028	(18-2028)	$13.12 H

Seal



40-75 H.P. 1976-1996
Drive Shaft Seal

O.E. No. 321467

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777527	(777527)	$13.99 L
Sierra	182060	(18-2060)	$10.63 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Seal

10-15 H.P. 1976-1995
Prop Shaft Seal, 2 Required, 5 Pack



O.E. No. 321481

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777525	(777525)	$14.99 L
Sierra	182029	(18-2029)	$11.12 H

Seal

90-300 H.P. 1991-2010
Prop Shaft Seal, 2 Required



O.E. No. 334950

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777538	(777538)	$16.99 L
Sierra	188367	(18-8367)	$13.12 H

Seal

130-250 H.P. 1994-2001
Seal, Loop Carb to Throttle Body, Adjustable Idle



O.E. No. 341258

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778223	(778223)	$5.99 L

Cowl

88-115 H.P. 1983-1998
Seal MTR CVR V4, Engine Cowl



O.E. No. 329548

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766473	(766473)	$38.99 H

Seal

90-175 H.P. 1995-2006
Carb to Manifold Seal, V60° V4 and V6



O.E. No. 344046

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778291	(778291)	$4.99 L

Seal

85-250 H.P. 1976-2010
Seal, G/C-INNR HSG, Lower Exhaust Housing



O.E. No. 320961

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777896	(777896)	$12.99 L
Sierra	188353	(18-8353)	$9.82 H

Low Speed Knob

10-15 H.P. 1976-1992
Low Speed Knob, Idle Adjustment, Plastic Knob



O.E. No. 319152

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766452	(766452)	$10.99 H

Cooling

85-300 H.P. 1976-300
Wear Plate and Cup Only, All V4, V6 and V8



O.E. No. 435027

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777878	(777878)	$16.99 H
Sierra	183346	(18-3346)	$16.93 H

Note: Product shipped may not match the item pictured.

Carburetor Cross-Reference

Carburetor Repair Kits

Model HP	Year	OMC Systematched	BRP O.E.	Sierra
1.5 / 2 Junior®	1970-1990	B778152	398532	-
Ultra / Excel 4 + 2.5	1987-1990	B778250	439070	-
3	1952-1967	B777721	439071	18-7043
3	1968	B778152	398532	-
3	1989-1997	B778250	439070	-
4	1965-1967	B777721	439071	18-7043
4	1968-1978	B778152	398532	-
4	1979-1980	B777725	439072	18-7223
4	1981-1984	B778250	439070	-
4 BRH / 4 Deluxe	1984-1998	B777725	439072	18-7223
4.5 (Integral Fuel Tank)	1980-1983	B778250	439070	-
4.5 (Auxiliary Fuel Tank)	1980-1983	B777725	439072	18-7223
5	1965-1967	B777721	439071	18-7043
5.5 / 6	1954-1967	B777721	439071	18-7043
6	1969-1979	B777721	439071	18-7043
7.5	1956-1958	B777721	439071	18-7043
6 / 7.5 / 8	1980-1985	B777725	439072	18-7223
6 / 8	1986-2005	B777722	439073	18-7219
9.5	1964-1973	B765630	382048	-
9.9	1974-1988	B765574	398453	-
9.9	1989-1992	B777722	439073	18-7219
9.9	1993	B777722	439073	18-7219
10	1954-1963	B777722	439073	18-7219
10	1954-1963	B777721	439071	18-7043
15	1956	B777721	439071	18-7043
15	1974-198	B765574	398453	-
15 (13 Cubic inches)	1989-1992	B777722	439073	18-7219
15	1993	B777722	439073	18-7219
15 Big Bore	1994-2006	B777722	439073	18-7219
20 (32 Cubic inches)	1969-1990	B777717	396701	18-7222
18 / 20	1957-1968	B777721	439071	18-7043
20	1991-1998	B777722	439073	18-7219
18 / 20 / 25	1969-2005	B777717	396701	18-7222
28	1962-1964	B777726	439074	18-7010
33	1965-1970	B777726	439074	18-7010
35	1959	B777726	439074	18-7010
28 / 30 / 35	1976-2005	B777717	396701	18-7222
25 / 35 (3 Cylinder)	1995-2001	B778301	437911	-
40	1960	B777726	439074	18-7010
40 (Manual & Electric Start)	1961-1962	B777726	439074	18-7010
40	1963	B777726	439074	18-7010
40	1964-1970	B777727	439075	18-7024
40	1971	B777726	439074	18-7010
40	1972-1978	B777727	439075	18-7024
40 Commercial	1979-2004	B777717	396701	18-7222
50 V4 Crossflow	1958-1959	B777728	436959	18-7026
40 / 45 / 48 / 50 / 55 (2 Cyl.)	1971-2005	B777717	396701	18-7222
55 (3 Cylinder)	1968-1969	B777717	396701	18-7222
60 (V4 Crossflow)	1964-1967	B777728	436959	18-7026
60 (3 Cylinder)	1970-1971	B777717	396701	18-7222
60 (2 Cylinder)	1980-1985	B777717	396701	18-7222
65 (V4 Crossflow)	1968	B777728	436959	18-7026
50 / 60 / 65 / 70 (3 Cyl.)	1972-2001	B777717	396701	18-7222
75 (V4 Crossflow)	1960-1965	B777728	436959	18-7026
75 (3 Cylinder)	1975-1988	B777717	396701	18-7222
80 / 85 (V4 Crossflow)	1966-1968	B777728	436959	18-7026
V4 Crossflow, All	1969-1998	B777718	439076	18-7046
90-115 60° V60V, All	1995-2006	B777719	438996	18-7247
V6 Crossflow, All	1976-1992	B777718	439076	18-7046
150-175 60° V60V, All	1991-2006	B777719	438996	18-7247

Carburetor Repair Kits (Cont.)

Model HP	Year	OMC Systematched	BRP O.E.	Sierra
120-140 and V8	1985	B777724	439078	18-7248
120 and 200 TX	1986-1994	B777724	439078	18-7248
130 (1995 with P Suffix)	1995-1999	B777723	437327	18-7248
200 Commercial	1991	B777724	439078	18-7248
140-225 and All V8 (Fixed Idle)	1986-1995	B777720	439078	187220
185-250 All Loop (with Adjustable Idle)	1993-Thru	B777723	437327	18-7248

Fuel Pump Assembly

Model HP	Year	OMC Systematched	BRP O.E.	Sierra
5-8	1977-1983	B765597	388685	-
10-15	1977-1980	B765637	391667	-
10-15	1987-1992	B777750	397839	18-7350
10-15	1997-2007	B777779	438562	18-7351
25-35 Block Mounted Pulse	1997-2005	B777764	438555	18-7353
25-35 and V4 105 Comm with 2 Pumps	1997-2005	B765591	438559	-
50-75 Non VRO	1973-1983	B765591	438559	-
88-115 (V4 Crossflow)	1984-1998	B777735	438556	18-7352

Fuel Pump Repair Kits - Outboard

Model HP	Year	OMC Systematched	BRP O.E.	Sierra
2.5	1987-1988	B777754	393088	18-7823
4	1981-1998	B777754	393088	18-7823
4.5	1981-1984	B777754	393088	18-7823
6	1977-2005	B777754	393088	18-7823
7.5	1981-1983	B777754	393088	18-7823
8	1984-2005	B777754	393088	18-7823
9.9 Rope	1981-1992	B777754	393088	18-7823
9.9 Electric	1987-1989	B777774	398514	18-7821
9.9 Electric	1990-2006	B777760	438616	18-7800
15 Rope	1981-1992	B777754	393088	18-7823
15 Electric	1988-1989	B777774	398514	18-7821
15 Electric	1990-2006	B777760	438616	18-7800
20 / 25	1977-1986	B777753	393103	18-7820
20 thru 30	1987	B777774	398514	18-7821
20 thru 30	1988-1989	B777780	432962	18-7822
20 thru 30	1990-2005	B777760	438616	18-7800
28	1962-1963	B777771	379777	18-7801
30 / 35	1976-1986	B777753	393103	18-7820
35	1959	B777771	379777	18-7801
40	1987	B777774	398514	18-7821
40	1988-1989	B777780	432962	18-7822
40	1990-2005	B777760	438616	18-7800
40	1960-1963	B777771	379777	18-7801
40 / 50	1970-1978	B777753	393103	18-7820
45 / 50	1958-1959	B777771	379777	18-7801
45 / 48 / 50	1987	B777774	398514	18-7821
45 / 48 / 50	1989	B777780	432962	18-7822
45 / 48 / 50	1990-2005	B777760	438616	18-7800
55 thru 75	1970-1978	B777753	393103	18-7820
60	1964-1967	B777771	379777	18-7801
75	1960-1965	B777771	379777	18-7801
80	1966-1967	B777771	379777	18-7801
90	1964-1965	B777771	379777	18-7801
85 thru 140	1978-1983	B777753	393103	18-7820
100	1966	B777771	379777	18-7801
88 / 100 / 125	1990-2001	B777760	438616	18-7800
60° V Vapor Pumps	All	B777754	393088	18-7823

©2014 Donovan Marine, Inc.

Carburetor Repair Kit

2-4 H.P. 1987-1990
Carburetor Repair Kit, Adjustable High Speed.
Replaces: 382045, 382046, 382047



O.E. No. 398532

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778152	(778152)	$23.99 L
Sierra	187043	(18-7043)	$18.28 H

Carburetor Repair Kit

4 H.P. 1998-2001
Carburetor Repair Kit, Complete with Float



O.E. No. 439070

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778250	(778250)	$24.99 L

Carburetor Repair Kit

4-10 H.P. 1954-1967
Carburetor Repair Kit, Complete with Float.
Replaces: 382045, 382046, 382047



O.E. No. 439071

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777721	(777721)	$26.99 L
Sierra	187043	(18-7043)	$18.28 H

Carburetor Repair Kit

4-8 H.P. 1979-1985
Carburetor Repair Kit, Complete with Float.
Replaces: 398452, 391305, 398453



O.E. No. 439072

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777725	(777725)	$25.99 L
Sierra	187223	(18-7223)	$20.12 H

Carburetor Repair Kit

6-15 H.P. 1997-2004
Carburetor Repair Kit, Complete with Float



O.E. No. 439504

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778282	(778282)	$29.99 L

Carburetor Repair Kit

8-35 H.P. 1986-2005
Float with Arm



O.E. No. 396514

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766419	(766419)	$12.99 H

Carburetor Repair Kit

9.5 H.P. 1964-1973
Carburetor Repair Kit, Complete with Float



O.E. No. 382048

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765630	(765630)	$31.99 L

Carburetor Repair Kit

9.9-15 H.P. 1978-1988
Carburetor Repair Kit, Complete with Float.
Replaces: 398452, 391305, 391937



O.E. No. 398453

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765574	(765574)	$26.99 L
Sierra	187223	(18-7223)	$20.12 H

Carburetor Repair Kit

9.9-20 H.P. 1986-2006
Carburetor Repair Kit, Complete with Float.
Replaces: 431897



O.E. No. 439073

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777722	(777722)	$37.99 M
Sierra	187219	(18-7219)	$27.47 H

Carburetor Repair Kit

15-35 H.P. 1996-2001
Carburetor Repair Kit, Complete with Float



O.E. No. 437911

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778301	(778301)	$33.99 L

Note: Product shipped may not match the item pictured.

Carburetor Repair Kit

28-35 H.P. 1976-2005
Carburetor Repair Kit, Complete with Float.
Replaces: 392061, 398729



O.E. No. 396701

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777717	(777717)	$30.99 M
Sierra	187222	(18-7222)	$22.72 H

Carburetor Repair Kit

28-40 H.P. 1964-1971
Carburetor Repair Kit, Complete with Float. Replaces: 382050, 382051, 382054



O.E. No. 439074

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777726	(777726)	$32.99 L
Sierra	187010	(18-7010)	$25.43 H

Carburetor Kit without Float

28-70 HP 1976-2005
Complete Kit without Float.
Replaces: 392061, 398729, 396701



O.E. No. 392061

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187042	(18-7042)	$23.38 H

Carburetor Repair Kit

40 H.P. 1964-1978
Carburetor Repair Kit, Complete with Float.
Replaces: 382053, 382052, 385356



O.E. No. 439075

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777727	(777727)	$29.99 L
Sierra	187024	(18-7024)	$23.82 H

Carburetor Repair Kit

60-85 H.P. 1960-1968
Carburetor Repair Kit, Complete with Float, Early V4, Down Draft. Replaces: 382057



O.E. No. 436959

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777728	(777728)	$78.99 L
Sierra	187026	(18-7026)	$66.88 H

Carburetor Repair Kit

85-140 H.P. 1970-1998
Carburetor Repair Kit, Complete with Float, All V4 and V6 Crossflow. Replaces: 398526, 435443, 434888, 392550



O.E. No. 439076

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777718	(777718)	$30.99 M
Sierra	187046	(18-7046)	$21.75 H

Carburetor Repair Kit

90-175 H.P. 1991-2006
Carburetor Repair Kit, Complete with Float, All V4 and V6 60°.
Replaces: 435442, 436852



O.E. No. 438996

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777719	(777719)	$27.99 L
Sierra	187247	(18-7247)	$21.35 H

Carburetor Repair Kit

120-300 H.P. 1985-1992
Carburetor Repair Kit, Complete with Float, All V4 and V6 90° Loop, Fixed Idle.
Replaces: 435678, 435752



O.E. No. 439079

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777720	(777720)	$30.99 L
Sierra	187220	(18-7220)	$22.18 H

Carburetor Repair Kit

120-300 H.P. 1985-1992
Carburetor Repair Kit, Complete with Float, All V4 and V6 90° Loop, Fixed Idle. Replaces: 435678, 435752



O.E. No. 439078

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777724	(777724)	$29.99 L
Sierra	187220	(18-7220)	$22.18 H

Carburetor Repair Kit

130, 185-250 H.P. 1993-2001
Carburetor Repair Kit, Complete with Float, All V4 and V6 90° Loop, Adjust Idle



O.E. No. 437327

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777723	(777723)	$26.99 L
Sierra	187248	(18-7248)	$21.93 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Needle and Seat



6-250 H.P. 1986-2006
Float Valve and Seat, Large Hole, C/F Carb and V60° VST, Same as 396520, 5 Pack

O.E. No. 396521

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765555	(765555)	$8.99 L
Sierra	187093	(18-7093)	$6.33 H

Needle and Seat



6-250 H.P. 1986-2006
Float Valve and Seat, Small Hole, For Single Carb

O.E. No. 396522

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765561	(765561)	$8.99 L
Sierra	187094	(18-7094)	$6.55 H

Needle and Seat



85-200 H.P. 1980-2006
Float Valve and Seat, Needle and Seat, All Crossflow and 2000 175 H.P., Big Hole

O.E. No. 396520

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777756	(777756)	$8.99 L
Sierra	187038	(18-7038)	$7.25 H

Fuel Pump



5-8 H.P. 1977-1985
Fuel Pump, Square with Screws, No Gasket

O.E. No. 388685

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765597	(765597)	$104.99 H

Fuel Pump



6-15 H.P. 1977-1998
Fuel Pump, Square with Mounting Gasket and Screws

O.E. No. 391667

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765637	(765637)	$97.99 L

Fuel Pump



6-15 H.P. 1988-1998
Fuel Pump, Square with Screws, No Gasket

O.E. No. 388833

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766421	(766421)	$115.99 H

Fuel Pump



6-8 H.P. 1992-2005
Fuel Pump, Square with Screws, No Gasket. Replaces 397275

O.E. No. 388684

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766420	(766420)	$115.99 H

Fuel Pump



10-15 H.P. 1987-1992
Fuel Pump with Screw and Gasket. Replaces: 397839, 391638, 395091, 397274

O.E. No. 397839

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777750	(777750)	$84.99 L
Sierra	187350	(18-7350)	$64.65 H

Fuel Pump



10-15 H.P. 1997-2007
Fuel Pump

O.E. No. 438562

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777779	(777779)	$105.99 L
Sierra	187351	(18-7351)	$71.55 H

Fuel Pump



25-115 H.P. 1997-2005
Fuel Pump, Non VRO

O.E. No. 438557

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766461	(766461)	$128.99 H

Note: Product shipped may not match the item pictured.

Fuel Pump



25-30 H.P. 1997-2005
Fuel Pump. Replaces: 433386

O.E. No. 438555

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777764	(777764)	$105.99 L
Sierra	187353	(18-7353)	$67.68 H

Fuel Pump



25-115 H.P. 1997-2005
Fuel Pump, Non VRO

O.E. No. 438559

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765591	(765591)	$107.99 H

Fuel Pump



70-235 H.P. 1978-2006
Fuel Pump, Block Mount Pulse, Non VRO.
Replaces: 394543, 382354, 395713, 398338

O.E. No. 438556

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777735	(777735)	$111.99 L
Sierra	187352	(18-7352)	$69.78 H

Fuel Pump Repair Kit



25-50 H.P. 1988-1990
Fuel Pump Repair Kit, Fuel Pump Rebuild Kit

O.E. No. 432962

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777780	(777780)	$27.99 L
Sierra	187822	(18-7822)	$22.75 H

Fuel Pump Repair Kit



40-55 H.P. 1990-2006
Fuel Pump Repair Kit, Fuel Pump Rebuild Kit. Replaces: 433519

O.E. No. 438616

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777760	(777760)	$26.99 L
Sierra	187800	(18-7800)	$20.63 H

Fuel Pump Repair Kit



40-100 H.P. 1960-1967
Fuel Pump Repair Kit, Fuel Pump Rebuild Kit

O.E. No. 379777

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777771	(777771)	$28.99 L
Sierra	187801	(18-7801)	$22.98 H

Fuel Pump Repair Kit



40-115 H.P. 1987-1990
Fuel Pump Repair Kit, Fuel Pump Rebuild Kit

O.E. No. 398514

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777774	(777774)	$32.99 L
Sierra	187821	(18-7821)	$26.27 H

Fuel Pump Kit



40-235 H.P. 1977-1998 Year
Fuel Pump Kit, Cap, Fuel Cover, without Rings, Replaces Old Gasket

O.E. No. 433518

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766440	(766440)	$14.99 H

Fuel Pump Repair Kit



55-140 H.P. 1978-1983
Fuel Pump Repair Kit, Rebuild Kit, 3 Cylinder to V6 Early Style Pump

O.E. No. 393103

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777753	(777753)	$19.99 L
Sierra	187820	(18-7820)	$15.58 H

Fuel Filter



3-4 H.P. 1987-2001
Fuel Filter, for Engine Mounted Tank

O.E. No. 397607

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778276	(778276)	$9.99 L

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Fuel Filter

25-70 H.P. 2000-2007
Fuel Filter, 4 Stroke, Same As Suzuki



O.E. No. 5032238

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778228	(778228)	$11.99 L
Sierra	187719	(18-7719)	$9.03 H

Fuel Filter

J/E Fuel Filter E-Tec. For: E-Tec 40, 50, 60, 75, 90, 115, 150, 175 and 200DPL.
Replaces: 5005266



O.E. No. 5005266

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187722	(18-7722)	$8.83 H

Fuel Filter

45-175 H.P. 1987-2010
Fuel Filter, 5/16"



O.E. No. 397715

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765611	(765611)	$24.99 H

Fuel Filter

115-250 H.P. 1998-2010
Fuel Filter, Fuel/Water Separator, Engine Mount, 10 Micron



O.E. No. 502906

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777713	(777713)	$10.99 L
Sierra	187989	(18-7989)	$7.73 H

Fuel Filter

200-225 H.P. 2004-2006
Fuel Filter, 4 Stroke, Same As Suzuki



O.E. No. 5035695

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778162	(778162)	$20.99 H

Fuel Filter

25-140 H.P. 2002-2007
Fuel Filter, 4 Stroke, Same As Suzuki



O.E. No. 5032323

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765573	(765573)	$12.99 M

Fuel Filter

40-115 H.P. 1993-2005
Fuel Filter, 5/16" in, 3/8" out



O.E. No. 435918

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765595	(765595)	$8.99 L

Fuel Filter

90-175 H.P. 1991-2006
Fuel Filter, 65 Micron, Filter V60V Filter to VST



O.E. No. 433190

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765553	(765553)	$14.99 L

Fuel Filter

150-175 H.P. 1997-1998
Fuel Filter, SCV RPL, with Sensor at Bottom



O.E. No. 438645

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778237	(778237)	$16.99 H

Fuel Filter Kit

All H.P. All Year
Fuel Filter Kit, Fuel/Water Separator, with Aluminum Bracket



O.E. No. 174176

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765633	(765633)	$54.99 L

Note: Product shipped may not match the item pictured.

Fuel Filter



All H.P. All Year
Fuel Filter, Fuel/Water Separator, All Sterndrive and Outboard

O.E. No. 502905

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765543	(765543)	$13.99 L

Fuel Filter



Vary H.P. Vary Year
Fuel Filter, 3/8", Inline White Plastic

O.E. No. 398319

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777715	(777715)	$8.99 L
Sierra	187831	(18-7831)	$7.48 H

Fuel Filter



Vary H.P. Vary Year
Fuel Filter, 5/16", Inline White Plastic

O.E. No. 398327

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777714	(777714)	$8.99 L
Sierra	187830	(18-7830)	$5.73 H

Primer Bulb Hose Kit



All H.P. All Year
Primer Bulb Hose Kit, 8' Engine Connector 5/16"

O.E. No. 5008607

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766490	(766490)	$53.99 H

Primer Bulb Hose Kit



All H.P. All Year
Primer Bulb Hose Kit, 8' Engine Connector 3/8". Replaces: 174509

O.E. No. 5008609

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766489	(766489)	$59.99 H
Sierra	188014EP1	(18-8014EP-1)	$55.40 H

Primer Bulb and Hose



All H.P. All Year
Pimer Bulb and Hose, 10' without Connector 3/8"

O.E. No. 5008585

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766491	(766491)	$60.99 H

Primer Bulb Hose Kit



All H.P. All Year
Hose and Bulb Connector, Fuel Line Assembly 3/8" with Primer Bulb and Connectors, 8'

O.E. No. 5008589

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766494	(766494)	$64.99 H

Primer Bulb



All H.P. All Year
Primer Bulb Kit, 3/8". Replaces: 174512

O.E. No. 5008586

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766488	(766488)	$25.99 H
Sierra	188005EP1	(18-8005EP-1)	$23.27 H

Primer Bulb



All H.P. All Year
Primer Bulb Kit, 5/16". Replaces: 174511

O.E. No. 5008605

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766492	(766492)	$25.99 H
Sierra	188004EP1	(18-8004EP-1)	$23.27 H

Oil Primer Bulb

All H.P. All Year
Oil Primer Bulb, 1/4"



O.E. No. 5008620

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766493	(766493)	$22.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Clip

25-235 H.P. 1968-2005
Retainer, Plastic Clip to Hold Choke Rod and Throttle Link, 5 Pack



O.E. No. 313329

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766463	(766463)	$6.99 H

Float and Arm

30-40 H.P. 1968-1976
Float and Arm



O.E. No. 375792

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766417	(766417)	$12.99 H

Float Bowl

90-175 H.P. 1991-2006
Float Chamber, Float Bowl, V4, V6, 60°



O.E. No. 433000

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766418	(766418)	$22.99 H

Roller and Sleeve

30-55 H.P. 1986-1997
Roller and Sleeve, Cam Follower to Throttle Link



O.E. No. 397499

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766465	(766465)	$14.99 H

Seat Idle

5-50 H.P. 1969-2005
Retainer, Packing, Idle Seat, Adjusting Screw, 5 Pack



O.E. No. 315232

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777743	(777743)	$1.99 L
Sierra	187296	(18-7296)	$1.42 H

Check Valve

Vary H.P. Vary Year
Check Valve, One Way, Intake Manifold



O.E. No. 436194

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778181	(778181)	$25.99 H

Check Valve

185-250 H.P. 1994-2001 Year
Check Valve, One Way, Cylinder Case Front Half



O.E. No. 436385

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778342	(778342)	$23.99 H

Service Valve Kit

OMC Service Valve Kit
Fits: All Johnson/Evinrude with Primer Valve (Except 1993 9.9 and 15 H.P.)



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187044	(18-7044)	$16.10 H

Choke Cover with Gasket

10-300 H.P. 1980-2006
Choke Cover with Gasket



O.E. No. 437228

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765567	(765567)	$17.99 L
Sierra	180993	(18-0993)	$14.13 H

Choke Cover

10-300 H.P. 1980-2006
Choke Cover, Primer SOL, Choke Cover Only, No Gasket



O.E. No. 341071

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765635	(765635)	$9.99 L

Note: Product shipped may not match the item pictured.

Choke Valve



10-300 H.P. 1980-2006
Choke Valve

O.E. No. 175158

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765749	(765749)	$7.99 H
Sierra	180871	(18-0871)	$7.23 H

Fuel Connector



5-75 H.P. All Year
Fuel Tank Connector, 1/4" NPT.
Replaces: 502867, 772681

O.E. No. 772681

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777741	(777741)	$9.13 H
Sierra	188063	(18-8063)	$8.47 H

Fuel Connector



All H.P. All Year
Fuel Connector Kit, Engine and Remote Tank, 5/16". Replaces: 174508, 775640

O.E. No. 775640

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777346	(777346)	$7.99 H
Sierra	188056	(18-8056)	$5.95 H

Fuel Connector



All H.P. All Year
Fuel Connector Kit, Engine and Remote Tank, 3/8". Replaces: 176445, 775641

O.E. No. 775641

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777352	(777352)	$3.99 H
Sierra	188092	(18-8092)	$6.20 H

Fuel Fitting



All H.P. All Year
Fuel Fitting, 90° Brass, 1/4" NPT, 3/8" Hose Barb

O.E. No. 778776

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765643	(765643)	$12.99 L

Fuel Fitting



All H.P. All Year
Anti Siphon, 1/4" NPT, 5/16" Hose Barb, Brass

O.E. No. 173273

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765655	(765655)	$13.99 L

Fuel Fitting



All H.P. All Year
Anti Siphon, 1/4" NPT, 3/8" Hose Barb, Brass

O.E. No. 173274

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765654	(765654)	$13.99 L

Fuel Connector



5-50 H.P. 1996-2007
Fuel Connector Kit, Lower Cowling

O.E. No. 438793

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766442	(766442)	$42.99 H

Carburetor Gasket



25-175 H.P. 1996-2006
Carburetor Gasket, Nozzle, 5 Pack

O.E. No. 343512

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765552	(765552)	$3.99 L

Nipple



Vary H.P. 1996-Thru
Threaded Nipple

O.E. No. 343576

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778259	(778259)	$13.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Manifold to Intake O-Ring

90-175 H.P. 1991-2006
Manifold to Intake O-Ring



O.E. No. 335362

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765577	(765577)	$3.99 L

O-Ring

Vary H.P. 1968-2005 Year
O-Ring, Used As A Clip, Choke, 5 Pack



O.E. No. 307529

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766459	(766459)	$2.99 H

Primer, Choke

10-300 H.P. 1980-2006
Choke Valve O-Ring



O.E. No. 331365

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766458	(766458)	$4.99 H

Primer, Choke

10-300 H.P. 1987-2006
Primer Solenoid Kit, Not Used On V4, V6 60°



O.E. No. 5007356

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766447	(766447)	$196.99 H

Check Valve

40-115 H.P. 2004-2008
Check Valve, Fuel Lift Pump



O.E. No. 335334

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777783	(777783)	$4.99 L

Cap Fuel Inlet (Round)

10-140 H.P. 1990-2008
Cap and Screw Fuel Pump Cover



O.E. No. 335335

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766404	(766404)	$7.99 H

Cap Fuel Inlet (Square)

6-9.9 H.P. 1985-2008
Cap, Square Fuel Pump



O.E. No. 329972

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766405	(766405)	$3.99 H

Tee

All H.P. All Year
Tee, Plastic 3/16"



O.E. No. 313537

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778171	(778171)	$5.99 H

Reed Valve

60-75 H.P. 1985-2001
Reed Valve, Most 3 Cylinder



O.E. No. 313420

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778341	(778341)	$15.99 L

Check Valve

90-250 H.P. 1982-1998
Check Valve Intake, Bleeding System, 5 Pack



O.E. No. 392988

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765619	(765619)	$34.99 L

Note: Product shipped may not match the item pictured.

VST

90-175 H.P. 1991-2006
Seal, O-Ring VST, Fuel Bracket, V4, V6, 60°



O.E. No. 335236

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766472	(766472)	$10.99 H

VST

All H.P. 1991-2006
Fuel Pump Repair Kit, Vapor Pump, All V60°



O.E. No. 393088

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777754	(777754)	$15.99 L
Sierra	187823	(18-7823)	$13.52 H

Diaphragm

All Years
Diaphragm



O.E. No. 302563

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778323	(778323)	$9.99 H

Roller

100-250 H.P. 1998-2006 Year
Roller and Sleeve, Cam Follower, Throttle Linkage



O.E. No. 432639

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765547	(765547)	$8.99 L

Roller

10-15 H.P. 1986-1992
Roller and Cam Follower



O.E. No. 396236

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765609	(765609)	$20.99 L

Cam Follower

4-15 H.P. 1978-2008
Cam Follower, Carb



O.E. No. 323327

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766402	(766402)	$8.99 H

Cam and Screw

9.9-15 H.P. 1985-1992
Cam and Screw, Cam Throttle, Under Flywheel



O.E. No. 396740

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766403	(766403)	$11.99 H

Oil Filter

9.9-15 H.P. 1995-2001
Oil Filter, 4 Stoke, Johnson, Suzuki



O.E. No. 434839

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765599	(765599)	$12.99 L
Sierra	187916	(18-7916)	$9.83 H

Oil Filter

25-70 H.P. 2000-2007
Oil Filter, 4 Stoke, Johnson, Suzuki. Replaces: 5031411



O.E. No. 778885

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765560	(765560)	$11.99 H
Sierra	187915	(18-7915-1)	$9.82 H

Oil Filter

90-115 H.P. 2000-2007
Oil Filter, 4 Stoke, Johnson, Suzuki. Replaces: 5033539



O.E. No. 778886

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765598	(765598)	$13.99 L
Sierra	187896	(18-7896)	$10.98 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Oil Filter



140 H.P. 2002-2007
Oil Filter, 4 Stoke, Johnson, Suzuki.
Replaces: 5033919

O.E. No. 778887

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765600	(765600)	$10.99 H
Sierra	187897	(18-7897)	$10.18 H

Oil Filter



150-250 H.P. 2004-2010
Oil Filter, Suzuki, V6. Replaces: 16510-93J00, 5035703

O.E. No. 778888

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778287	(778287)	$13.99 L
Sierra	187895	(18-7895)	$10.93 H

Inline Oil Filter



115-250 H.P. 2002-2010
Inline Oil Filter, E-Tec

O.E. No. 5004958

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778161	(778161)	$7.99 H

Oil Filter Element



10-15 H.P. 2002-2008
Oil Filter Element, 4 Stroke.
Replaces: 5033102

O.E. No. 763364

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778158	(778158)	$9.99 H

Oil Tank Filter



40-300 H.P. 1985-1998
Oil Tank Filter, Remote

O.E. No. 174377

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765615	(765615)	$9.99 H

Note: Product shipped may not match the item pictured.

CDI Electronics Application Chart

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
4	-	1981-1984	2	-	Magetno	-	Points	-	183-4477
4	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
4	Comm	1994-1996	2	113-2285	173-1670	-	133-3387	-	183-2508
4	Deluxe	1995	2	113-2285	173-1670	-	133-3387	-	183-2508
4	-	1977-1980	2	113-2453	173-1670	-	133-3387	-	183-2366
4	RDH	1989	2	113-4488	173-1670	-	133-3387	-	183-2508
4	-	1993	2	113-4489	173-1670	153-1778	133-3387	-	183-3740
4.5	-	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
5	RS, RL	2000	2	-	R5030217*	-	-	-	**584451
5	4 Stroke	1997	2	-	R445016*	-	-	-	**584451
5	4 Stroke	2000	2	**440211	R445128*	-	**445018	-	**584451
5	Electric Start	1985	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
5	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
5	-	1993-1997	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
5	DR, RE, RL, SR	1997	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
5	DR	1998	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
5	DR, RC, RL, BA	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508
5	-	1991-1992	2	113-4488	173-1670	R173692*	133-3387	-	183-2508
6	4 Stroke	2000	2	**440211	R445128*	-	**445018	-	**584451
6	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
6	Electric Start	1985	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
6	-	1994-2000	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
6	-	1977-1984	2	113-2453	173-1670	-	133-3387	-	183-2366
6	-	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508
6	-	1991-1992	2	113-4488	173-1670	R173692*	133-3387	-	183-3740
6.5	Comm	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508
8	4 Stroke, Electric Start	1995	2	-	R584821*	193-4890	IN PACK	-	**584451
8	4 Stroke, Manual Start	1996	2	-	R445016*	-	IN PACK	-	**584451
8	4 Stroke	1996	2	-	R445016*	R445114*	IN PACK	R445099*	**584451
8	Manual Start	1996	2	-	R445016*	-	IN PACK	-	**584451
8	4 Stroke	1997	2	-	R445016*	R445114*	IN PACK	R445099*	**584451
8	4 Stroke	2000	2	**440211	R445128*	-	**445018	-	**584451
8	Manual Start	85	2	113-2285	173-1670	-	133-3387	-	183-2508
8	DR, RE, RL, SR	1994-1997	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
8	RE, RL, RS	1998-2003	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
8	RV, RX	1998-2003	2	113-2285	173-1670	R173692*	133-3387	-	183-3740
8	Comm	1994-2001	2	113-2285	173-1670	-	133-3387	-	183-3740
8	-	1984	2	113-2474	173-1670	153-1778	133-3387	-	183-2508
8	Electric Start	1985	2	113-3241	173-1670	153-1778	133-3387	-	183-2508
8	-	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508
8	-	1991-1992	2	113-4488	173-1670	R173692*	133-3387	-	183-3740
9.9	4 Stroke, Manual Start	1995-2001	2	**586136	173-4954	-	IN PACK	R585235*	**584451
9.9	4 Stroke	1995-2001	2	**586505	173-4954	193-4890	IN PACK	R586141*	**584451
9.9	Electric Start	1985	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
9.9	-	1988	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
9.9	Manual Start	1977-1982	2	113-2453	173-1670	-	133-3387	-	183-2366
9.9	Electric Start	1977-1983	2	113-2453	173-1651	153-1778	IN STATOR	-	183-2366
9.9	Manual Start	1983-1984	2	113-2453	173-1670	153-1778	133-3387	-	183-2366
9.9	Manual Start	1985-1987	2	113-2453	173-1670	-	133-3387	-	183-2366
9.9	Electric Start	1984	2	113-2453	173-1670	153-1778	133-3387	-	183-2366
9.9	-	1989-1991	2	113-4488	173-1670	153-1778	133-3387	R584067*	183-3740
9.9	-	1992	2	113-4488	173-1670	153-1778	133-3387	R584382*	183-3740
9.9	-	1993	2	113-4783	173-1651	153-4597	IN STATOR	-	183-3740
9.9	-	1994	2	113-4783	173-1670	-	133-3387	-	183-3740
9.9	Manual Start	1995	2	113-4783	173-1670	-	**584716	-	183-3740
9.9	Electric Start	1995	2	113-4783	173-1651	153-4597	IN STATOR	-	183-3740
9.9	Manual Start	1996-2005	2	113-4783	173-1670	-	**584716	-	183-3740
9.9	Electric Start	1996-2005	2	113-4783	173-1651	153-4597	IN STATOR	R586025*	183-3740
10	4 Stroke	1996-1998	2	**586560	173-4954	193-4890	IN PACK	R586141*	**584451
10	-	1985-1988	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
10	Comm	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508
10	Comm	1994	2	113-4783	173-1670	-	133-3387	-	183-2508
11	Comm	1987	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
14	-	1988	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
14	-	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508

©2014 Donovan Marine, Inc.

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
15	4 Stroke	1995	2	**586650	R584614*	-	In Pack	-	**584451
15	4 Stroke	1995	2	**586650	173-4954	153-5081	In Pack	-	**584451
15	4 Stroke	1996-1998	2	**586650	R584614*	-	In Pack	-	**584451
15	4 Stroke	1996-1998	2	**586650	173-4954	153-5081	In Pack	R586141*	**584451
15	4 Stroke	2000	2	**586650	173-4954	-	In Pack	-	**584451
15	4 Stroke	2000	2	**586650	173-4954	153-5081	In Pack	-	**584451
15	-	1985-1988	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
15	Manual Start	1977-1982	2	113-2453	173-1670	-	133-3387	-	183-2508
15	Electric Start	1977-1983	2	113-2453	173-1651	153-1778	IN STATOR	-	183-2508
15	Manual Start	1983-1984	2	113-2453	173-1670	-	133-3387	-	183-2508
15	Sail	1983	2	113-2453	173-1670	153-1778	133-3387	R389399*	183-2508
15	Electric Start	1984	2	113-2453	173-1670	153-1778	133-3387	-	183-2366
15	-	1989-1991	2	113-4488	173-1670	153-1778	133-3387	R584067*	183-2508
15	-	1992	2	113-4489	173-1670	153-1778	133-3387	R584382*	183-3740
15	-	1993	2	113-4783	173-1651	153-4597	IN STATOR	-	183-3740
15	-	1994	2	113-4783	173-1670	-	**584716	-	183-3740
15	Electric Start	1995	2	113-4783	173-1651	153-4597	In Stator	-	183-3740
15	BA	1995-2005	2	113-4783	173-1670	-	133-3387	-	183-3740
15	Manual Start	1995-2005	2	113-4783	173-1670	-	**584716	-	183-3740
15	Electric Start	1996-1997	2	113-4783	173-1651	153-4597	In Stator	R586025*	183-3740
15	Comm	2000-2005	2	113-4783	173-1670	-	**584716	-	183-3740
18	Jet, 25JRE	1995-1997	2	113-4767	173-1670	-	133-3387	-	183-3740
20	Manual Start	1985-1988	2	113-2285	173-1670	-	133-3387	-	183-2508
20	Electric Start	1985-1988	2	113-2285	173-1670	153-1778	133-3387	R582524*	183-2508
20	Manual Start	1977-1984	2	113-2453	173-1670	-	133-3387	-	183-2366
20	Electric Start	1977-1981	2	113-2453	173-1651	153-1778	In Stator	413-9914	183-2366
20	Electric Start	1982-1984	2	113-2453	173-1670	153-1778	133-3387	413-1818	183-2366
20	Manual Start	1989-1991	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
20	Electric Start	1989-1992	2	113-4489	173-1670	153-1778	133-3387	R583648*	183-2508
20	EE, EL, IE, SE	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-2508
20	Manual Start	1993-1997	2	113-4767	173-1670	-	133-3387	-	183-2508
20	Electric Start	1993-1995	2	113-4767	173-1670	153-1778	133-3387	R584881*	183-2508
20	Electric Start	1996-1997	2	113-4767	173-1670	153-1778	133-3387	413-0016	183-2508
20	Jet	2000-2005	2	113-4767	173-1670	-	133-3387	413-0016	183-2508
25	TNT	1996	3	**586472	173-4954	193-4890	-	R586043*	**584826
25	TEL/TNT	1997-2001	3	**586472	173-4954	193-4890	-	R586043*	**584826
25	Manual Start	1996-1997	3	**586472	R176278*	**584952	**584824	-	**584826
25	AC, Manual Start	1996-1997	3	**586472	173-4954	**584952	**584824	R586091*	**584826
25	Electric Start	1996-1997	3	**586472	173-4954	193-4890*	**584824	R586044*	**584826
25	A, R, RL	2000	3	**586472	173-4954	-	**584824	R586091*	**584826
25	E, EL, PL, TEL	2000	3	**586472	173-4954	193-4890	**584824	R586044*	**584826
25	Manual Start	1985-1988	2	113-2285	173-1670	-	133-3387	-	183-2508
25	Electric Start	1985-1987	2	113-2285	173-1670	153-1778	133-3387	R582524*	183-2508
25	Electric Start	1988	2	113-2285	173-1670	153-1778	133-3387	R583601*	183-2508
25	H25FP Comm	1995-1997	2	113-2285	173-1670	-	133-3387	-	183-2508
25	Electric Start	1977	2	113-2453	173-1651	153-1778	In Stator	413-9914	183-2366
25	Manual Start	1977-1984	2	113-2453	173-1670	-	-	-	183-2366
25	Electric Start	1978-1981	2	113-2453	173-1651	153-1778	In Stator	413-9914	183-2366
25	Electric Start	1982-1984	2	113-2453	173-1670	153-1778	133-3387	413-1818	183-2366
25	Comm	1982	2	113-2453	173-1670	-	133-3387	-	183-2366
25	Comm	1983-1984	2	113-2474	173-1670	-	133-3387	-	183-2366
25	Comm	1985-1988	2	113-3241	173-1670	153-1778	133-3387	-	183-2508
25	Comm	1992-1997	2	113-3241	173-1670	-	**585072	-	183-2508
25	Comm	1995	2	113-3241	173-1670	-	133-3387	-	183-2508
25	Comm	1999-2005	2	113-3241	173-1670	-	133-3387	-	183-2508
25	Comm	1989-1990	2	113-4488	173-1670	153-1778	133-3387	-	183-2508
25	Manual Start	1989-1992	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
25	DR, DE, DT	1989	2	113-4489	173-1670	153-1778	133-3387	R583705*	183-2508
25	EE, EL, IE, SE	1989-1991	2	113-4489	173-1670	153-1778	133-3387	R583648*	183-2508
25	TL	1990	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-2508
25	TE, TTL	1990	2	113-4489	173-1670	153-1778	133-3387	R584082*	183-2508
25	TE, TTL	1991	2	113-4489	173-1670	153-1778	133-3387	R584216*	183-2508
25	TL	1991	2	113-4489	173-1670	153-1778	133-3387	R584218*	183-2508
25	TL, M, EI	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
25	EE, EL, IE, SE	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
25	TE, TTL (M), EI	1992	2	113-4489	173-1670	153-1778	133-3387	R584216*	183-3740
25	Comm	1991	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
25	Manual Start	1993-1997	2	113-4767	173-1670	-	133-3387	-	183-2508
25	Electric Start	1993-1995	2	113-4767	173-1670	153-1778	133-3387	R584881*	183-2508
25	TE	1993-1997	2	113-4767	173-1670	153-1778	133-3387	-	183-2508
25	TE	2000-2005	2	113-4767	173-1670	153-1778	133-3387	-	183-2508
25	D, TL, Electric Start	1993-1995	2	113-4767	173-1670	R585035	**585072	413-4398	183-2508
25	Manual Start	1996	2	113-4767	173-1670	-	133-3387	-	183-2508
25	Electric Start	1996	2	113-4767	173-1670	153-1778	133-3387	413-0016	183-2508
25	Manual Start	1997	2	113-4767	173-1670	-	133-3387	-	183-2508
25	Electric Start, 2 Stroke	1997-2005	2	113-4767	173-1670	153-1778	133-3387	413-0016	183-2508
25	Manual Start	2000-2005	2	113-4767	173-1670	-	133-3387	413-0016	183-2508
25	Comm	1994	2	113-4767	173-1670	153-1778	133-3387	-	183-2508
25	Comm	1997	2	113-4767	173-1670	-	133-3387	-	183-2508
25	SIK, SIL, SIT	1994-1995	3	113-4808	173-4560	193-4476	-	413-4401	183-2508
25	TL, J	1992	2	113-5316	173-4560	193-4476	133-5386	413-4686	183-3740
25	TTL, TE (J), EI	1992	2	113-5316	173-4560	193-4476	133-5386	413-4695*	183-3740
28	Electric Start	1985-1987	2	113-2285	173-1670	153-1778	133-3387	R582524*	183-2508
28	-	1988	2	113-2285	173-1670	153-1778	133-3387	R583601*	183-2508
28	Electric Start	1985-1987	2	113-2285	173-1670	153-1778	133-3387	R582524*	183-2508
28	Manual Start	1986-1988	2	113-2285	173-1670	-	133-3387	-	183-2508
28	Manual Start	1989	2	113-4489	173-1670	-	133-3387	-	183-2508
28	Electric Start	1989-1991	2	113-4489	173-1670	153-1778	133-3387	R583648*	183-2508
28	SPL	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-2508
28	Manual Start	1991	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
28	-	1993-1995	2	113-4767	173-1670	153-1778	133-3387	R584881*	183-2508
28	ES	1996	2	113-4767	173-1670	153-1778	133-3387	413-0016	183-2508
28	Jet, 40JRE	1995-1998	2	113-4767	173-1670	-	133-3387	-	183-3740
30	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
30	Electric Start	1985-1986	2	113-2285	173-1670	153-1778	133-3387	R582524*	183-2508
30	Electric Start	1987-1988	2	113-2285	173-1670	153-1778	133-3387	R583601*	183-2508
30	Manual Start	1988	2	113-2285	173-1670	-	133-3387	-	183-2508
30	Manual Start	1984	2	113-2453	173-1670	-	133-3387	-	183-2366
30	Electric Start	1984	2	113-2453	173-1670	153-1778	133-3387	413-1818	183-2366
30	Jet	2000-2005	2	113-3241	173-1670	-	133-3387	-	183-2508
30	Manual Start	1989-1992	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
30	Electric Start	1989-1991	2	113-4489	173-1670	153-1778	133-3387	R583648*	183-2508
30	TE	1992	2	113-4489	173-1670	-	133-3387	-	183-2508
30	EE, EL, IE, SE	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-2508
30	Manual Start	1993-1997	2	113-4767	173-1670	-	133-3387	-	183-2508
30	TE	1993-1997	2	113-4767	173-1670	153-1778	133-3387	-	183-2508
30	Electric Start	1993-1995	2	113-4767	173-1670	153-1778	133-3387	R584881*	183-2508
30	Electric Start	1996-2005	2	113-4767	173-1670	153-1778	133-3387	413-0016	183-2508
30	Manual Start	2000-2005	2	113-4767	173-1670	-	133-3387	413-0016	183-2508
35	-	1976	2	-	-	-	POINTS	R386720*	-
35	Manual Start	1996-1997	3	**586472	173-4954	R584952*	-	-	**584826
35	Electric Start	1996-1997	3	**586472	173-4954	193-4890	-	R586044*	**584826
35	TEL	1996-1997	3	**586472	173-4954	193-4890	-	R586045*	**584826
35	TNT	1996-1997	3	**586472	173-4821	193-4890	-	R586043*	**584826
35	A, R, RL	2000	3	**586472	173-4954	-	**584824	R586091*	**584826
35	E, EL	2000	3	**586472	173-4821	193-4890	**584824	R586044*	**584826
35	PL	2000	3	**586472	173-4821	193-4890	**584824	R586043*	**584826
35	TEL	2000	3	**586472	173-4821	193-4890	**584824	R586045*	**584826
35	Manual Start	1985-1988	2	113-2285	173-1670	-	133-3387	-	183-2508
35	Electric Start	1985-1987	2	113-2285	173-1670	153-1778	133-3387	R582524*	183-2508
35	Electric Start	1987-1988	2	113-2285	173-1670	153-1778	133-3387	R583601*	183-2508
35	Electric Start	1977-1981	2	113-2453	173-1651	153-1778	In Stator	413-9914	183-2366
35	Manual Start	1977-1984	2	113-2453	173-1670	-	133-3387	-	183-2366
35	Electric Start	1982-1984	2	113-2453	173-1670	153-1778	133-3387	413-1818	183-2366
35	Manual Start	1989-1992	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
35	Electric Start	1989-1991	2	113-4489	173-1670	153-1778	133-3387	R583648*	183-2508
35	TE	1992	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
35	Jet, TL, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
35	Manual Start	1992	2	113-4489	173-1670	-	133-3387	-	183-3740
35	JET, TE, TTL, M	1992	2	113-4489	173-1670	153-1778	133-3387	-	183-3740

©2014 Donovan Marine, Inc.

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
35	Manual Start	1993-1997	2	113-4767	173-1670	-	133-3387	-	183-2508
35	Jet, EL, TL	1993-1995	2	113-4767	173-1670	193-4476	133-3387	413-4695	183-3740
35	Jet	1997	2	113-4767	173-1670	-	133-3387	-	183-3740
35	Jet, TL, J, Electric Start	1992-1993	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
35	Jet, TE, TTL, M	1993-1995	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
35	-	1995	2	113-5316	173-4560	193-4476	133-5386	R584686*	183-3740
35	Jet, EL, TL, TTL	1996	2	113-5316	173-4560	193-4476	133-5386	R586020*	183-3740
35	Jet, Electric Start	1997	2	113-5316	173-4560	193-4476	133-5386	R586020*	183-3740
40	Lark	1969-1970	2	-	-	-	POINTS	413-3326	-
40	Big Twin	1969-1970	2	-	-	-	POINTS	413-3325	-
40	-	1971	2	-	-	-	POINTS	R383324*	-
40	-	1972	2	-	-	-	POINTS	R385126*	-
40	-	1973	2	-	-	-	POINTS	R385895*	-
40	-	1974-1976	2	-	-	-	POINTS	413-6336	-
40	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
40	Electric Start	1985	2	113-2285	173-1670	153-1778	133-3387	R583099*	183-2508
40	-	1986-1987	2	113-2285	173-1670	153-1778	133-3387	R583211*	183-2508
40	-	1988	2	113-2285	173-1670	153-1778	133-3387	413-3602	183-2508
40	Manual Start	1984	2	113-2453	173-1670	-	133-3387	413-9915	183-2366
40	Electric Start	1984	2	113-2453	173-1670	153-1778	133-3387	413-9915	183-2366
40	Comm	1983-1984	2	113-2474	173-1670	-	133-3387	-	183-2366
40	Comm	1986	2	113-3241	173-1670	-	133-3387	-	183-2508
40	Comm, Electric Start	1985	2	113-3241	173-1670	153-1778	133-3387	R583099*	183-2508
40	Comm, Manual Start	1985	2	113-3241	173-1670	-	133-3387	-	183-2508
40	Comm	1993	2	113-3241	173-1670	-	133-3387	-	183-3740
40	Comm	1996	2	113-3241	173-1670	-	133-3387	-	183-3740
40	Comm	1997	2	113-3241	173-1670	-	133-3387	-	183-3740
40	Comm, Manual Start	1994-1995	2	113-3241	173-1670	-	133-3387	-	183-3740
40	Comm	1990	2	113-4488	173-1670	-	133-3387	-	183-3740
40	BA, EC, EL, RC, RL	1989	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-3740
40	TE, TL, TTL	1989	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-3740
40	TL	1990	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-3740
40	TE, TTL	1990	2	113-4489	173-1670	153-1778	133-3387	R584082*	183-3740
40	TE, TTL	1991	2	113-4489	173-1670	153-1778	133-3387	R584216*	183-3740
40	TL	1991	2	113-4489	173-1670	153-1778	133-3387	R584218*	183-3740
40	BA, EE, EL	1992	2	113-4489	173-1670	153-1778	133-3387	413-4686	183-3740
40	RE, RL, J	1992	2	113-4489	173-1670	153-1778	133-3387	413-4686	183-3740
40	BA, EE, EL (M)	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
40	RE, RL (M)	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
40	Manual Start	1992	2	113-4489	173-1670	153-1778	133-3387	-	183-3740
40	TE, TTL, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	R584216*	183-3740
40	TE	1992	2	113-4489	173-1670	153-1778	133-3387	-	183-3740
40	TL, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
40	Manual Start	1993	2	113-4767	173-1670	-	133-3387	-	183-3740
40	Manual Start	1994-1995	2	113-4767	173-1670	153-1778	133-3387	-	183-3740
40	Manual Start	1996	2	113-4767	173-1670	153-1778	133-3387	-	183-3740
40	Manual Start	1997	2	113-4767	173-1670	-	133-3387	-	183-3740
40	Manual Start	2000-2005	2	113-4767	173-1670	-	133-3387	-	183-3740
40	JPL	1999	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-3740
40	TE, TTL, J	1992	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
40	EL, TL, (J)	1992-1994	2	113-5316	173-4560	193-4476	133-5386	413-4686	183-3740
40	TE, TTL	1993-1995	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
40	TE, TL, Elct	1995	2	113-5316	173-4560	193-4476	133-5386	413-4686	183-3740
40	EL, TL, TTL, TE	1996	2	113-5316	173-4560	193-4476	133-5386	R586020*	183-3740
40	Electric Start	1997	2	113-5316	173-4560	193-4476	133-5386	R586020*	183-3740
40	2 Stroke, Electric Start	2000-2005	2	113-5316	173-4560	193-4476	133-5386	R585015*	183-3740
45	SS	1988	2	113-2285	173-1670	153-1778	133-3387	413-3602	183-2508
45	-	1988	2	113-2285	173-1670	-	133-3387	-	183-2508
45	SS	1989-1990	2	113-2285	173-1670	-	133-3387	-	183-2508
45	Comm	1986	2	113-2285	173-1670	-	133-3387	-	183-2508
45	Comm	1987	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
45	Comm	1985	2	113-3241	173-1670	-	133-3387	-	183-2508
45	Comm	1992	2	113-3241	173-1670	-	133-3387	-	183-3740
45	Comm	1993-2000	2	113-3241	173-1670	-	133-3387	-	183-3740
45	Comm, Manual Start	1989-1990	2	113-4489	173-1670	153-1778	133-3387	-	183-2508

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
45	Comm, Electric Start	1989-1990	2	113-4489	173-1670	153-1778	133-3387	R583948*	183-2508
45	Comm, Electric Start	1991	2	113-4489	173-1670	153-1778	133-3387	R584386*	183-3740
45	Comm, Manual Start	1991	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
48	SPL	1987	2	113-2285	173-1670	153-1778	133-3387	413-3211	183-2508
48	-	1988	2	113-2285	173-1670	153-1778	133-3387	413-3602	183-2508
48	-	1989-1990	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-2508
48	-	1991	2	113-4489	173-1670	153-1778	133-3387	R584218*	183-3740
48	-	1992-1993	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
48	-	1994-1995	2	113-4767	173-1670	R585035*	R585072*	413-4398	183-3740
48	ES	1996	2	113-4767	173-1670	R585035*	R585072*	R586020*	183-3740
50	-	1971	2	113-1397	173-1232	153-3408	133-0875K1	R384164*	183-4632
50	Electric Start	1972	2	113-1397	173-1232	153-3408	133-0875K1	R384164*	183-4632
50	Manual Start	1972	2	113-1397	R581730*	-	133-0875K1	-	183-4632
50	-	1973	2	113-1397	173-1232	153-3408	133-0875K1	413-5776	183-4632
50	-	1974-1975	2	113-1397	173-1232	153-3408	133-0875K1	413-1742	183-4632
50	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
50	Electric Start	1985	2	113-2285	173-1670	153-1778	133-3387	R583099*	183-2508
50	-	1986-1987	2	113-2285	173-1670	153-1778	133-3387	413-3211	183-2508
50	-	1988	2	113-2285	173-1670	153-1778	133-3387	413-3602	183-2508
50	Electric Start	1979-1983	2	113-2453	173-1651	153-1778	In Stator	413-9915	183-2366
50	Manual Start	1979-1982	2	113-2453	173-1670	-	133-3387	-	183-2366
50	Manual Start	1984	2	113-2453	173-1670	-	133-3387	413-9915	183-2366
50	Electric Start	1984	2	113-2453	173-1670	153-1778	133-3387	413-9915	183-2366
50	BE, TE, TL, RN	1989-1990	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-2508
50	TL	1990	2	113-4489	173-1670	153-1778	133-3387	413-3649	183-3740
50	TE, TTL	1990	2	113-4489	173-1670	153-1778	133-3387	R584082*	183-3740
50	TE, TTL	1991	2	113-4489	173-1670	153-1778	133-3387	R584216*	183-3740
50	TL	1991	2	113-4489	173-1670	153-1778	133-3387	R584218*	183-3740
50	BE, J, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4686	183-3740
50	BE, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
50	TE, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	R584216*	183-3740
50	TL, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
50	TL, J, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4686	183-3740
50	JE, M, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4398	183-3740
50	JE, J, Electric Start	1992	2	113-4489	173-1670	153-1778	133-3387	413-4686	183-3740
50	EI, TL	1993	2	113-4767	173-1670	193-4476	133-3387	413-4686	183-3740
50	Manual Start	1995	2	113-4767	173-1670	-	133-3387	-	183-3740
50	Manual Start	1999	2	113-4767	173-1670	-	133-3387	-	183-3740
50	TTL	1995	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
50	DT, JL, EL, TL	1995	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
50	TTL	1996	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
50	DT, JL, EL, TL	1995-1998	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
50	TTL	1997	3	113-4808	173-4560	193-4476	133-4804	R583601*	183-2508
50	TE, J	1992	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
50	TE, TTL	1993-1994	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
50	EL, TL	1993-1994	2	113-5316	173-4560	193-4476	133-5386	413-4686	183-3740
50	TE, TL, Electric Start	1995	2	113-5316	173-4560	193-4476	133-5386	413-4686	183-3740
50	TE, TLL, Electric Start	1995	2	113-5316	173-4560	193-4476	133-5386	413-4695	183-3740
50	EL, TL, TTL, TE	1996	2	113-5316	173-4560	193-4476	133-5386	R586020*	183-3740
50	Electric Start	1997-1999	2	113-5316	173-4560	193-4476	133-5386	R586020*	183-3740
50	2 Stroke, Electric Start	2000-2005	2	113-5316	173-4560	193-4476	133-5386	R585015*	183-3740
55	-	1976-1977	2	113-1397	173-1232	153-3408	133-0875K1	413-1742	183-4632
55	-	1988	2	113-2285	173-1670	-	133-3387	-	183-2508
55	Comm	1986	2	113-2285	173-1670	-	133-3387	-	183-2508
55	Comm	1987	2	113-2285	173-1670	153-1778	133-3387	-	183-2508
55	-	1978	2	113-2453	173-1651	153-1778	In Stator	413-9913	183-2366
55	Electric Start	1979-1983	2	113-2453	173-1651	153-1778	In Stator	413-9915	183-2366
55	Manual Start	1979-1982	2	113-2453	173-1670	-	133-3387	-	183-2366
55	Comm	1982	2	113-2453	173-1670	-	133-3387	-	183-2508
55	Comm	1983-1984	2	113-2474	173-1670	-	133-3387	-	183-2366
55	Comm	1985	2	113-3241	173-1670	-	133-3387	-	183-2508
55	Comm	1992-1995	2	113-3241	173-1670	-	133-3387	-	183-3740
55	Comm, Manual Start	1993-2000	2	113-3241	173-1670	-	133-3387	-	183-3740
55	Comm, Electric Start	1996-1997	2	113-3241	173-1670	153-1778	133-3387	413-4398	183-3740
55	Comm, Electric Start	1989-1991	2	113-4489	173-1670	153-1778	133-3387	R583948*	183-2508

©2014 Donovan Marine, Inc.

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
55	Comm, Manual Start	1989-1991	2	113-4489	173-1670	153-1778	133-3387	-	183-2508
55	-	1968	3	113-7123	173-0726	153-0705	POINTS	413-9901	183-2382
55	-	1969	3	113-7123	173-0726	153-0705	POINTS	413-9902	183-2382
60	VX	1967	-	-	R580650*	153-0656	POINTS	R381626*	-
60	EL, TL	1986-1987	3	113-2115	173-3724	153-3408	133-3378	413-3082	183-2508
60	TTL	1988	3	113-2115	173-3724	153-3408	133-4558	-	183-2508
60	EL, TL	1988	3	113-2115	173-3724	153-3408	133-3378	413-3444	183-2508
60	SST	1989	3	113-2115	173-3724	153-3408	133-3378	413-3771	183-2508
60	SST	1990	3	113-2115	173-3724	153-3408	133-3378	413-3771	183-2508
60	Manual Start	1985	2	113-2285	173-1670	-	133-3387	-	183-2508
60	Electric Start	1985	2	113-2285	173-1670	153-1778	133-3387	R583099*	183-2508
60	Electric Start	1979-1984	2	113-2453	173-1651	153-1778	133-3387	413-9915	183-2366
60	Manual Start	1979-1984	2	113-2453	173-1670	-	133-3387	-	183-2366
60	-	1989	3	113-3748	173-4766	153-3408	133-3378	413-3771	183-2508
60	TTL	1989	3	113-3748	173-4766	R583940*	133-3378	R583937*	183-2508
60	EL, TL	1990	3	113-3748	173-4766	153-3408	133-3378	413-3771	183-2508
60	TTL	1990	3	113-3748	173-4766	R583940*	133-4558	R584155*	183-2508
60	EL, TL, TX	1991	3	113-3748	173-4766	153-3408	133-3378	R584169*	183-2508
60	TTL	1991	3	113-3748	173-4766	R583940*	133-4558	R584170*	183-2508
60	EL, TL, TX	1992	3	113-3748	173-4560	193-4476	133-3378	413-4401	183-2508
60	TTL	1992	3	113-3748	173-4560	193-4476	133-4558	413-4401	183-2508
60	EL, TL, TX	1993	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
60	TTL	1993	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
60	EL, TL, TX	1994	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
60	TTL	1994	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
60	EL, TL, TX	1994	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
60	TTL	1994-1995	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
60	DT, JL, EL, TL	1995	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
60	TTL	1996	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
60	DT, JL, EL, TL	1996	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
60	TTL	1997	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
60	-	1997-2001	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
60	-	1970-1971	3	113-7123	173-0744	153-3408	POINTS	413-9903	183-2382
65	-	1972	3	113-1726	173-1235	153-3408	133-1251	413-9912	183-2303
65	-	1973	3	113-1726	173-1235	153-3408	133-1251	413-9916	183-2303
65	Comm	1984	3	113-2556	173-3724	153-3408	133-3378	R394508*	183-2366
65	Comm	1985-1986	3	113-3122	173-3724	153-3408	133-3378	413-3082	183-2508
65	Comm	1987	3	113-3122	173-3724	153-3408	133-3378	R582756*	183-2508
65	Comm	1988	3	113-3122	173-3724	153-3408	133-3378	R583559*	183-2508
65	-	1989	3	113-3748	173-4766	153-3408	133-3378	413-3771	183-2508
65	Comm, Manual Start	1989-1990	3	113-3748	173-4766	153-3408	133-4558	-	183-2508
65	Comm, Electric Start	1989-1990	3	113-3748	173-4766	153-3408	133-3378	413-3771	183-2508
65	Comm, Electric Start	1990	3	113-3748	173-4766	153-3408	133-3378	413-3771	183-2508
65	Comm, Electric Start	1991	3	113-3748	173-4766	153-3408	133-3378	R584169*	183-2508
65	Comm, Manual Start	1991-1995	3	113-3748	173-4766	R583940*	133-4558	-	183-2508
65	Comm, Manual Start	1992-1995	3	113-3748	173-4766	-	133-4558	-	183-2508
65	Comm, Electric Start	1992	3	113-3748	173-4560	193-4476	133-4558	413-4401	183-2508
65	Comm without VRO	1995	3	113-3748	173-4766	193-4476	133-4558	413-4401	183-2508
65	Jet	1995	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
65	Comm, Electric Start	1993-1994	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
65	Comm with VRO	1995	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
65	Comm	1996-1999	3	113-5274	173-4560	193-4476	133-3378	R586021*	183-2508
65	-	1968	3	113-7123	173-0726	153-0705	POINTS	413-9904	183-2382
70	-	1973	3	113-1726	173-1235	153-3408	133-1251	413-9916	183-2303
70	-	1974-1977	3	113-1726	173-1235	153-3408	133-1251	413-1886	183-2303
70	-	1978	3	113-1726	173-1235	153-3408	133-1251	R581974*	183-2303
70	EL, TL without Trim	1986	3	113-2115	173-3724	153-3408	133-3378	R582756*	183-2508
70	EL, TL with Trim	1986	3	113-2115	173-3724	153-3408	133-3378	R582970*	183-2508
70	EL, TL without Trim	1987	3	113-2115	173-3724	153-3408	133-3378	R582756*	183-2508
70	EL, TL with Trim	1987	3	113-2115	173-3724	153-3408	133-3378	R582970*	183-2508
70	without Trim	1988	3	113-2115	173-3724	153-3408	133-3378	R583559*	183-2508
70	with Trim	1988	3	113-2115	173-3724	153-3408	133-3378	413-3560	183-2508
70	-	1979-1984	3	113-2138	173-3724	153-3408	133-3378	413-1377	183-2366
70	-	1985	3	113-2705	173-3724	153-3408	133-3378	R395186*	183-2508
70	-	1989-1990	3	113-3748	173-4766	153-3408	133-3378	413-3771	183-2508

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
70	EL, TL, TX	1991	3	113-3748	173-4766	153-3408	133-3378	R584169*	183-2508
70	TTL	1991	3	113-3748	173-4766	R583940*	133-4558	R584170*	183-2508
70	EL, TL, TX	1992	3	113-3748	173-4560	193-4476	133-3378	413-4401	183-2508
70	TTL	1992	3	113-3748	173-4560	193-4476	133-4558	413-4401	183-2508
70	EL, TL, TX	1993	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
70	TTL	1993	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
70	EL, TL, TX	1994	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
70	TTL C & S	1994	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
70	EL, TL, TX	1994	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
70	TTL	1994-1995	3	113-4808	173-4560	193-4476	133-4804	413-4603	183-2508
70	DT, JL, EL, TL	1995	3	113-4808	173-4560	193-4476	133-4804	413-4401	183-2508
70	DT, JL, EL, TL	1996	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
70	RNLB	1996	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
70	-	1997-2001	3	113-4808	173-4560	193-4476	133-4804	R586021*	183-2508
75	-	1965-1966	4	-	-	R380076	POINTS	413-9900	-
75	-	1975-1977	3	113-1726	173-1235	153-3408	133-1251	413-1886	183-2303
75	-	1978	3	113-1726	173-1235	153-3408	133-1251	R581974*	183-2303
75	EC	1986-1987	3	113-2115	173-3724	153-3408	133-3378	413-3082	183-2508
75	-	1988	3	113-2115	173-3724	153-3408	133-3378	413-3444	183-2508
75	-	1979-1984	3	113-2138	173-3724	153-3408	133-3378	413-1377	183-2366
75	-	1985	3	113-2705	173-3724	153-3408	133-3378	R395186*	183-2508
80	SPEEDIFOUR	1967	4	-	R580650*	153-0656	POINTS	413-1645	-
80	STARFLITE	1967	4	-	-	R380076	POINTS	R381638*	-
80	Jet	1992	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
80	Jet	1993-1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
80	Jet Tiller	1995	4	113-4030	173-3536	R583940*	133-3379	R584356*	183-2508
80	Jet	1996	4	113-4030	173-3536	193-4204	133-3379	413-6027	183-2508
80	Jet	2000	4	113-6292	173-4849	193-6048	133-6343	413-4762	-
85	-	1970-1972	4	113-1731	173-0744	153-3408	POINTS	413-9907	183-2382
85	6 amp	1973	4	113-1731	173-1225	153-3408	133-1900	413-5501	183-4632
85	12 amp	1973	4	113-1731	173-2099	153-3408	133-1900	413-5501	183-4632
85	6 amp	1974-1976	4	113-1731	173-1225	153-3408	133-1900	413-9918	183-4632
85	12 amp	1974-1976	4	113-1731	173-2099	153-3408	133-1900	413-9918	183-4632
85	6 amp	1977	4	113-1731	173-1225	153-3408	133-1900	413-1721	183-4632
85	12 amp	1977	4	113-1731	173-2099	153-3408	133-1900	413-1721	183-4632
85	-	1978-1979	4	113-2125	173-3672	153-3408	133-3376	413-1975	183-2366
85	-	1980-1982	4	113-2125	173-3672	153-3408	133-3376	413-2161	183-2366
85	-	1983	4	113-2125	173-3672	153-3408	133-3376	R393290*	183-2366
85	TTL	1991	4	113-4028	173-3536	R583940*	133-3379	R584356*	183-2508
85	TTL	1992-1995	4	113-4028	173-3536	193-4204	133-3379	R584604*	183-2508
85	TTL	1995	4	113-4028	173-3536	193-4204	133-3379	R584356*	183-2508
85	Jet 115 JLE	1997	4	113-4030	173-3536	193-4204	133-3379	413-6027	183-2508
85	TTL without Trim	1994	4	113-4030	173-3536	R583940*	133-3379	413-4390	183-2508
85	TTL with Trim	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
85	V4S Speedi 4	1968	4	113-7123	173-0726	153-0705	POINTS	413-9910	183-2382
85	V4A Starflite	1968	4	113-7123	173-0726	153-0705	POINTS	413-9905	183-2382
85	-	1969	4	113-7123	173-0744	153-0705	POINTS	413-9906	183-2382
85	-	1970-1972	4	113-7123	173-0744	153-3408	POINTS	413-9907	183-2382
88	-	1988	4	113-3101	173-3536	153-3408	133-3379	413-4004	183-2508
88	-	1987	4	113-3110	173-3672	153-3408	133-3376	413-5253	183-2508
88	without Trim	1989-1991	4	113-4028	173-3536	153-3408	133-3379	413-4004	183-2508
88	with Trim	1989-1991	4	113-4028	173-3536	193-4204	133-3379	413-4004	183-2508
88	-	1992-1993	4	113-4028	173-3536	153-3408	133-3379	R584389*	183-2508
88	TS with 20 IN	1994-1995	4	113-4028	173-3536	153-3408	133-3379	R584389*	183-2508
88	TS with 25 IN	1994-1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
88	MS	1995-1996	4	113-4028	173-3536	153-3408	133-3379	R584389*	183-2508
88	TS with 20 IN	1996	4	113-4028	173-3536	153-3408	133-3379	413-6027	183-2508
88	TS with 25 IN	1996	4	113-4028	173-3536	193-4204	133-3379	413-6027	183-2508
88	without Trim	1994	4	113-4030	173-3536	153-3408	133-3379	R584389*	183-2508
88	with Trim	1994	4	113-4030	173-3536	193-4204	133-3379	R584389*	183-2508
90	6 amp	1981-1982	4	113-2125	173-3672	153-3408	133-3376	413-2161	183-2366
90	10 amp	1981-1982	4	113-2125	173-3672	193-5204	133-3376	413-2161	183-2366
90	6 amp	1983	4	113-2125	173-3672	153-3408	133-3376	R583290*	183-2366
90	10 amp	1983	4	113-2125	173-3672	153-5204	133-3376	R583290*	183-2366
90	6 amp	1984	4	113-2125	173-3672	153-3408	133-3376	413-4495	183-2366

©2014 Donovan Marine, Inc.

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
90	10 amp	1982-1984	4	113-2125	173-3672	193-5204	133-3376	413-4495	183-2366
90	without Trim	1985	4	113-2811	173-3672	153-3408	133-3376	413-5253	183-2508
90	with Trim	1985	4	113-2811	173-3672	193-5204	133-3376	413-5253	183-2508
90	-	1988	4	113-3101	173-3536	153-3408	133-3379	413-4004	183-2508
90	without Trim	1986-1987	4	113-3110	173-3672	153-3408	133-3376	413-3036	183-2508
90	with Trim	1986-1987	4	113-3110	173-3672	193-5204	133-3376	413-3036	183-2508
90	without Trim	1989-1990	4	113-4028	173-3536	153-3408	133-3379	413-4004	183-2508
90	with Trim	1989-1990	4	113-4028	173-3536	193-4204	133-3379	413-4004	183-2508
90	-	1991	4	113-4028	173-3536	193-4204	133-3379	R584211*	183-2508
90	-	1992-1993	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
90	JLE	1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
90	20 IN	1996-1997	4	113-4028	173-3536	153-3408	133-3379	413-6027	183-2508
90	25 IN	1996-1997	4	113-4028	173-3536	193-4204	133-3379	413-6027	183-2508
90	without Trim	1994	4	113-4030	173-3536	153-3408	133-3379	413-4390	183-2508
90	with Trim	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
90	JE TurboJet	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
90	TurboJet	1995	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
90	EL, EX, SL, 60 Deg.	1995	4	113-6292	173-4849	193-4847	133-6343	413-5085	183-3740
90	60 Deg.	1996-2006	4	113-6292	173-4849	193-6048	133-6343	413-4762	183-3740
100	-	1965-1966	4	-	-	193-0076	POINTS	413-9900	-
100	with Alt	1968	4	-	-	-	POINTS	413-9911	-
100	Comm	1984	4	113-2684	173-3672	193-5204	133-3376	413-4495	183-2366
100	Comm	1985	4	113-2704	173-3672	193-5204	133-3376	413-5253	183-2508
100	Comm	1988	4	113-3101	173-3536	193-4204	133-3379	413-4004	183-2508
100	Comm	1986	4	113-3116	173-3672	193-5204	133-3376	413-3036	183-2508
100	Comm	1987	4	113-3116	173-3672	153-3408	133-3376	413-3036	183-2508
100	without Trim	1990	4	113-4028	173-3536	153-3408	133-3379	413-4004	183-2508
100	with Trim	1990	4	113-4028	173-3536	193-4204	133-3379	413-4004	183-2508
100	-	1991	4	113-4028	173-3536	193-4204	133-3379	R584211*	183-2508
100	-	1992-1993	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
100	without Trim	1994	4	113-4030	173-3536	153-3408	133-3379	413-4390	183-2508
100	with Trim	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
100	Comm	1989	4	113-4030	173-3536	193-4204	133-3379	413-4004	183-2508
100	Comm, without Trim	1990	4	113-4030	173-3536	153-3408	133-3379	413-4004	183-2508
100	Comm, with Trim	1990	4	113-4030	173-3536	193-4204	133-3379	413-4004	183-2508
100	Comm	1991	4	113-4030	173-3536	193-4204	133-3379	R584211*	183-2508
100	Comm	1992-1993	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
100	Comm WM	1994	4	113-4030	173-3536	193-4204	133-3379	R584389*	183-2508
100	Comm WT	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
100	Comm WT, WL	1995	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
100	Comm	1996-1997	4	113-4030	173-3536	193-4204	133-3379	413-6027	183-2508
100	Comm	2000-2006	4	113-6292	173-4849	193-6048	133-6343	413-4762	183-3740
100	-	1971	4	113-7123	173-0744	153-3408	POINTS	413-9907	183-2382
100	Starflite	1967	4	113-8362	R580648*	153-3408	R580668*	413-9908	183-2382
100	Starflite	1968	4	113-8362	173-0725	153-3408	133-5008	413-9909	183-2382
100	-	1972	4	113-8362	173-0744	153-3408	133-5008	413-9907	183-2382
105	Jet without VRO	1994	6	113-4985	173-4981	193-4093	133-6343	R584579*	183-2508
105	Jet with VRO	1994	6	113-4985	173-4981	193-4093	133-6343	R584674*	183-2508
105	Jet	2000-2006	6	113-4985	173-4981	193-6048	133-6343	R586028*	183-2508
105	Comm, Manual Start	2000	4	113-6292	173-4849	193-6048	133-6343	-	183-3740
105	Comm WE	2000	4	113-6292	173-4849	193-6048	133-6343	R586332*	183-3740
105	Comm WP	2000	4	113-6292	173-4849	193-6048	133-6343	413-4762	183-3740
110	TLCDF, without Trim	1986	4	113-2811	173-3672	153-3408	133-3376	413-3036	183-2508
110	TLCDF, with Trim	1986	4	113-2811	173-3672	193-5204	133-3376	413-3036	183-2508
110	without Trim	1988	4	113-3101	173-3536	153-3408	133-3379	413-4004	183-2508
110	with Trim	1988	4	113-3101	173-3536	153-3408	133-3379	413-4004	183-2508
110	without Trim	1986-1987	4	113-3110	173-3672	153-3408	133-3376	413-3036	183-2508
110	with Trim	1986-1987	4	113-3110	173-3672	193-5204	133-3376	413-3036	183-2508
110	without Trim	1989	4	113-4028	173-3536	153-3408	133-3379	413-4004	183-2508
110	with Trim	1989	4	113-4028	173-3536	193-4204	133-3379	413-4004	183-2508
112	20 IN	1994-1995	4	113-4028	173-3536	153-3408	133-3379	R584389*	183-2508
112	25 IN	1994-1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
112	20 IN	1996	4	113-4028	173-3536	153-3408	133-3379	413-6027	183-2508
112	25 IN	1996	4	113-4028	173-3536	193-4204	133-3379	413-6027	183-2508
115	6 amp	1973	4	113-1731	173-1225	153-3408	133-1900	413-5501	183-4632

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
115	12 amp	1973	4	113-1731	173-2099	153-3408	133-1900	413-5501	183-4632
115	6 amp	1974-1976	4	113-1731	173-1225	153-3408	133-1900	413-9918	183-4632
115	12 amp	1974-1976	4	113-1731	173-2099	153-3408	133-1900	413-9918	183-4632
115	6 amp	1977	4	113-1731	173-1225	153-3408	133-1900	413-1721	183-4632
115	12 amp	1977	4	113-1731	173-2099	153-3408	133-1900	413-1721	183-4632
115	-	1978-1979	4	113-2125	173-3672	153-3408	133-3376	413-1975	183-2366
115	-	1980-1982	4	113-2125	173-3672	153-3408	133-3376	413-2161	183-2366
115	-	1983	4	113-2125	173-3672	153-3408	133-3376	R393290*	183-2366
115	6 amp	1984	4	113-2125	173-3672	153-3408	133-3376	413-4495	183-2366
115	10 amp	1984	4	113-2125	173-3672	193-5204	133-3376	413-4495	183-2366
115	35 amp	1984-1987	4	113-2125	173-4291	193-5204	133-3376	413-4495	183-2366
115	without Trim	1985	4	113-2811	173-3672	153-3408	133-3376	413-5253	183-2508
115	with Trim	1985	4	113-2811	173-3672	193-5204	133-3376	413-5253	183-2508
115	without Trim	1990	4	113-4028	173-3536	153-3408	133-3379	413-4004	183-2508
115	with Trim	1990	4	113-4028	173-3536	193-4204	133-3379	413-4004	183-2508
115	without Trim	1991	4	113-4028	173-3536	193-4204	133-3379	R584211*	183-2508
115	with Trim	1991	4	113-4028	173-3536	193-4204	133-3379	R584211*	183-2508
115	without Trim	1992-1993	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
115	with Trim	1992-1993	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
115	ML, TL, TX, without Trim	1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
115	ML, TL, TX, with Trim	1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
115	JLE without Trim	1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
115	JLE with Trim	1995	4	113-4028	173-3536	193-4204	133-3379	413-4390	183-2508
115	JKL 80 Jet	1995	4	113-4028	173-3536	R583940*	133-3379	R584356*	183-2508
115	-	1996	4	113-4028	173-3536	193-4204	133-3379	413-6027	183-2508
115	20 IN	1997-1998	4	113-4028	173-3536	153-3408	133-3379	413-6027	183-2508
115	25 IN	1997-1998	4	113-4028	173-3536	193-4204	133-3379	413-6027	183-2508
115	without Trim	1994	4	113-4030	173-3536	153-3408	133-3379	413-4390	183-2508
115	with Trim	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
115	JKL without Trim	1994	4	113-4030	173-3536	R583940*	133-3379	413-4390	183-2508
115	JKL with Trim	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
115	JE TurboJet	1994	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
115	TurboJet	1996	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
115	TurboJet	1997-1998	4	113-4030	173-3536	193-4204	133-3379	413-4390	183-2508
115	60 Deg.	1995	4	113-6292	173-4849	193-4847	133-6343	413-5085	183-374019
115	60 Deg.	1996	4	113-6292	173-4849	193-6048	133-6343	413-4762	183-3740
115	60 Deg.	1997-2006	4	113-6292	173-4849	193-6048	133-6343	413-4762	183-3740
115	-	1969	4	113-8362	173-0744	153-3408	133-5008	413-9906	183-2382
115	-	1970	4	113-8362	173-0744	153-3408	133-5008	413-9907	183-2382
120	35 amp	1984-1987	4	113-2125	173-4291	193-5204	133-3376	413-4495	183-2366
120	-	1985	4	113-3072	173-3669	193-4205	133-3379	413-3590	183-2508
120	-	1986-1987	4	113-3101	173-3669	193-4205	133-3379	413-3145	183-2508
120	LOOPER	1988-1990	4	113-4041	173-3410	193-4205	133-3508	413-3284	183-2508
120	35 amp	1988-1995	4	113-4041	173-4288	193-3689	133-3508	413-4406	183-2508
120	10 amp	1992-1994	4	113-4041	173-3410	193-4205	133-3508	413-4406	183-2508
125	Comm, Manual Start	1996-1998	4	113-4032	R583548*	-	133-3379	-	183-2508
125	-	1991	4	113-4041	173-3410	193-4205	133-3508	R584183*	183-2508
125	-	1992-1994	4	113-4041	173-3410	193-4205	133-3508	413-4406	183-2508
125	Comm, Electric Start	1989-1993	4	113-4041	173-3410	193-4205	133-3508	413-3284	183-2508
125	Comm, Electric Start	1994-1995	4	113-4041	173-3410	193-4205	133-3508	413-4406	183-2508
125	-	1971-1972	4	113-8362	173-0744	153-3408	133-5008	413-9907	183-2382
130	35 amp	1988-1994	4	113-4041	173-4288	193-3689	133-3508	413-4406	183-2508
130	-	1995	4	113-4041	173-3410	193-4205	133-3508	413-4406	183-2508
130	35 amp	1995	4	113-4041	173-4288	193-3689	133-3508	413-4406	183-2508
130	-	1996-2000	4	113-4041	173-3410	193-4205	133-3508	R586022*	183-2508
130	35 amp	1996-2000	4	113-4041	173-4288	193-5204	133-3508	R586022*	183-2508
135	12 amp	1973	4	113-1731	173-2099	153-3408	133-1900	413-5501	183-4632
135	6 amp	1974-1976	4	113-1731	173-1225	153-3408	133-1900	413-9918	183-4632
135	12 amp	1974-1976	4	113-1731	173-2099	153-3408	133-1900	413-9918	183-4632
135	6 amp	1973	4	113-1731	173-1225	153-3408	133-1900	413-5501	183-4632
135	12 amp	1973	4	113-1731	173-2099	153-3408	133-1900	413-5501	183-4632
135	6 amp	1974-1976	4	113-1731	173-1225	153-3408	133-1900	413-9918	183-4632
135	12 amp	1974-1976	4	113-1731	173-2099	153-3408	133-1900	413-9918	183-4632
135	-	2001	4	113-4041	173-3410	193-4205	133-3508	R586022*	183-2508
135	-	2001	4	113-4041	173-3410	193-4205	133-3508	R586022*	183-2508

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
140	6 amp	1977	4	113-1731	173-1225	153-3408	133-1900	413-1721	183-4632
140	12 amp	1977	4	113-1731	173-2099	153-3408	133-1900	413-1721	183-4632
140	-	1978	4	113-2125	173-3672	153-3408	133-3376	413-1975	183-2366
140	-	1979	4	113-2125	173-3672	153-3408	133-3376	413-2053	183-2366
140	-	1980-1982	4	113-2125	173-3672	153-3408	133-3376	413-2161	183-2366
140	-	1983	4	113-2125	173-3672	153-3408	133-3376	R393290*	183-2366
140	6 amp	1984	4	113-2125	173-3672	153-3408	133-3376	413-4495	183-2366
140	10 amp	1984	4	113-2125	173-3672	193-4204	133-3376	413-4495	183-2366
140	35 amp	1984-1987	4	113-2125	173-4291	193-5204	133-3376	413-4495	183-2366
140	-	1985	4	113-3072	173-3669	193-4205	133-3379	413-3590	183-2366
140	-	1986-1987	4	113-3101	173-3669	193-4205	133-3379	413-3145	183-2508
140	LOOPER	1988-1990	4	113-4041	173-3410	193-4205	133-3508	413-3284	183-2508
140	LOOPER	1991	4	113-4041	173-3410	193-4205	133-3508	R584183*	183-2508
140	LOOPER	1992-1995	4	113-4041	173-3410	193-4205	133-3508	413-4406	183-2508
140	35 amp	1988-1995	4	113-4041	173-4288	193-3689	133-3508	413-4406	183-2508
150	-	1978	6	113-1726	173-1867	153-3408	133-1486	413-9917	183-2303
150	-	1979-1983	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
150	TL, TX	1984	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
150	AN, ST, 10 amp	1984	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
150	AN, ST, 35 amp	1984	6	113-2138	173-3668	193-5204	133-3377	413-2866	183-2366
150	TL, TX	1985	6	113-2651	173-3672	193-5204	133-3377	413-6409	183-2508
150	ST, 10 amp	1985	6	113-2651	173-3672	193-5204	133-3377	413-6409	183-2508
150	ST, 35 amp	1985	6	113-2651	173-3668	193-5204	133-3377	413-6409	183-2508
150	TL, TX, 10 amp	1986-1987	6	113-3114	173-3672	193-5204	133-3377	413-3035	183-2508
150	ST, 35 amp	1986-1987	6	113-3114	173-3668	193-5204	133-3377	413-3035	183-2508
150	TL, TX, 10 amp	1988	6	113-3114	173-3537	193-4204	133-3377	413-3294	183-2508
150	ST, 35 amp	1988	6	113-3114	173-3668	193-5204	133-3377	413-3294	183-2508
150	SL, ST	1989-1990	6	113-3865	173-4292	193-5204	133-3853	413-3852	183-2508
150	ST	1990	6	113-3865	173-4292	193-5204	133-3853	413-3852	183-2508
150	SL, ST	1991	6	113-3865	173-4292	193-5204	133-3853	413-4221	183-2508
150	GL, EL, EX, NX 600	1991	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-2508
150	-	1992	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
150	-	1993	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
150	without VRO	1994	6	113-4985	173-4981	193-4093	133-6343	R584579*	183-3740
150	with VRO	1994	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
150	-	1995	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
150	-	1996-2006	6	113-4985	173-4981	193-6048	133-6343	R586028*	183-3740
150	Comm, without VRO	1993	6	113-4985	173-4981	193-4093	133-6343	R584579*	183-3740
150	Comm, with VRO	1993	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
150	Comm, without VRO	1995	6	113-4985	173-4981	193-4093	133-6343	R585251*	183-3740
150	Comm, with VRO	1995	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
150	Comm	2000-2006	6	113-4985	173-4981	193-6048	133-6343	R586028*	183-3740
150	Quiet Rider	1993-1994	6	113-4986	173-4981	193-4993	133-6343	R584855*	183-3740
150	TL, TX	1989	6	R584044*	173-3837	193-4204	133-3715	R584016*	183-2508
150	TL, TX	1990	6	R584044*	173-3837	193-4204	133-3715	R584016*	183-2508
150	TL, TX, CX, JL	1991	6	R584044*	173-3837	193-4204	133-3715	R584220*	183-2508
155	Comm, 35 amp	1984	6	113-2138	173-3668	193-5204	133-3377	413-2866	183-2366
155	Comm	1985	6	113-2651	173-3668	193-5204	133-3377	R582915*	183-2508
155	Comm	1986-1987	6	113-3114	173-3668	193-5204	133-3377	413-3035	183-2508
155	Comm	1988	6	113-3114	173-3668	193-5204	133-3377	413-3294	183-2508
155	Comm, 35 amp	1989-1990	6	113-3865	173-4292	193-5204	133-3853	R584016*	183-2508
155	Comm	1991	6	113-3865	173-4292	193-5204	133-3853	413-4221	183-2508
155	Comm	1992	6	113-3865	173-4292	193-5204	133-3853	R584414*	183-2508
155	Comm, 10 amp	1989-1990	6	R584044*	173-3837	193-4204	133-3715	R584016*	183-2508
175	-	1977-1978	6	113-1726	173-1867	153-3408	133-1486	413-9917	183-2303
175	-	1979-1983	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2508
175	TL, TX	1985	6	113-2651	173-3668	193-5204	133-3377	413-6409	183-2508
175	TL, TX	1986-1987	6	113-3114	173-3668	193-5204	133-3377	413-3035	183-2508
175	TL, TX, ST	1988	6	113-3114	173-3537	193-5204	133-3377	413-3294	183-2508
175	-	1989-1990	6	113-3865	173-4292	193-5204	133-3853	413-3852	183-2508
175	GL, EL, EX, NX, TX	1991-1993	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
175	105 Jet	1992-1995	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
175	without VRO	1994-1995	6	113-4985	173-4981	193-4093	133-6343	R584579*	183-3740
175	with VRO	1994-1995	6	113-4985	173-4981	193-4093	133-6343	413-5240	183-3740
175	GL, EL, EX, NX, TX	1996-2005	6	113-4985	173-4981	193-6048	133-6343	R586028*	183-3740

CDI Electronics Application Chart *Continued*

HP	Model	Year	Cylinder	Ignition Pack	Stator	Rect/Reg	Trigger	Harness	Ignition Coil
175	105 Jet	1996-1998	6	113-4985	173-4981	193-6048	133-6343	R586028*	183-3740
175	Quiet Rider	1993-1994	6	113-4986	173-4981	193-4093	133-6343	R584855*	183-3740
185	-	1977-1978	6	113-1726	173-1867	153-3408	133-1486	413-9917	183-2303
185	-	1979-1983	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
185	TL, TX	1984	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
185	TL, TX	1985	6	113-2651	173-3668	193-5204	133-3377	413-6409	183-2508
185	-	1990	6	113-4037	173-4287	193-3689	133-3533	413-3282	183-2508
185	-	1991	6	113-4037	173-4287	193-3689	133-3533	413-4171	183-2508
185	-	1992	6	113-4037	173-4287	193-3689	133-3533	413-4404	183-2508
200	-	1976-1978	6	113-1726	173-1867	153-3408	133-1486	413-9917	183-2303
200	-	1979-1983	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
200	-	1986-1987	6	113-3605	173-3117	193-3689	133-3048	413-3047	183-2508
200	-	1988-1990	6	113-4037	173-4287	193-3689	133-3533	413-3282	183-2508
200	-	1991	6	113-4037	173-4287	193-3689	133-3533	413-4171	183-2508
200	-	1992	6	113-4037	173-4287	193-3689	133-3533	413-4404	183-2508
200	-	1993-1994	6	113-6212	173-4643	193-4641	133-3533	413-4645	183-2508
200	-	1995	6	113-6212	173-4643	193-4641	133-3533	413-5241	183-2508
200	-	1996	6	113-6212	173-4643	193-4641	133-3533	413-6023	183-2508
200	-	1997-1999	6	113-6212	173-4643	193-4641	133-3533	413-6023	183-2508
200	-	2000	6	113-6212	173-4643	193-4641	133-3533	R586243*	183-2508
200	Comm	1994	6	113-6212	173-4643	193-4641	133-3533	413-4645	183-2508
200	Comm	2000	6	113-6212	173-4643	193-4641	133-3533	R586243*	183-2508
225	-	1986-1987	6	113-3605	173-3117	193-5204	133-3048	413-3047	183-2508
225	-	1988-1990	6	113-4037	173-4287	193-3689	133-3533	413-3282	183-2508
225	-	1991	6	113-4037	173-4287	193-3689	133-3533	413-4171	183-2508
225	-	1992	6	113-4037	173-4287	193-3689	133-3533	413-4404	183-2508
225	-	1993-1994	6	113-6212	173-4643	193-4641	133-3533	413-4645	183-2508
225	-	1995	6	113-6212	173-4643	193-4641	133-3533	413-5241	183-2508
225	-	1996	6	113-6212	173-4643	193-4641	133-3533	413-6023	183-2508
225	-	1997-1999	6	113-6212	173-4643	193-4641	133-3533	413-6023	183-2508
225	-	2000	6	113-6212	173-4643	193-4641	133-3533	R586243*	183-2508
235	-	1978	6	113-1726	173-1867	153-3408	133-1486	413-9917	183-2303
235	-	1979	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
235	-	1980-1983	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
235	ST. Port, 10 amp	1984	6	113-2138	173-3672	193-5204	133-3377	413-2866	183-2366
235	ST. Port, 35 amp	1984	6	113-2138	173-3668	193-5204	133-3377	413-2866	183-2366
235	ST. Starboard, 10 amp	1984	6	113-2556	173-3672	193-5204	133-3377	413-2866	183-2366
235	ST. Starboard, 35 amp	1984	6	113-2556	173-3668	193-5204	133-3377	413-2866	183-2366
235	TL, TX	1985	6	113-2651	173-3668	193-5204	133-3377	413-6409	183-2508
235	ST, 10 amp	1985	6	113-2651	173-3672	193-5204	133-3377	413-6409	183-2508
235	ST, 35 amp	1985	6	113-2651	173-3668	193-5204	133-3377	413-6409	183-2508
250	-	1991-1992	8	113-4035	173-4287	193-3689	133-3531	R584224*	183-2508
250	-	1993-1994	8	113-4642	173-4643	193-4641	133-3531	413-2866	183-2508
250	-	1995	8	113-4642	173-4643	193-4641	133-3531	R585242*	183-2508
250	-	1997	8	113-4642	173-4643	193-4641	133-3531	R586024*	183-2508
250	-	2000	6	113-6212	173-4643	193-4641	133-3533	R586243*	183-2508
275	-	1985	8	113-3072	173-3117	193-3689	**583375	413-1483	183-2508
275	3.6L	1986-1987	8	113-3101	173-3117	193-3689	**583375	R583033*	183-2508
275	-	1988-1989	8	113-4035	173-4287	193-3689	133-3531	R583283*	183-2508
300	3.6L	1985	8	113-3072	173-3117	193-3689	**583375	413-1483	183-2508
300	3.6L	1986-1987	8	113-3101	173-3117	193-3689	**583375	R583033*	183-2508
300	-	1988-1989	8	113-4035	173-4287	193-3689	133-3531	R583283*	183-2508
300	-	1990	8	113-4035	173-4287	193-3689	133-3531	R583283*	183-2508
300	-	1991-1992	8	113-4035	173-4287	193-3689	133-3531	R584224*	183-2508
300	-	1993-1994	8	113-4642	173-4287	193-4641	133-3531	R584886*	183-2508
300	-	1995	8	113-4642	173-4287	193-4641	133-3531	R585242*	183-2508

©2014 Donovan Marine, Inc.

Ignition Switch



All H.P. Vary Year
Ignition Switch, 6 Screw Tab/Push to Choke

O.E. No. 508180

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765549	(765549)	$34.99 M

Key Switch



40-90 H.P. 2004-2009 Year
Ignition Switch, Key Switch Tiller Handle

O.E. No. 5005800

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778254	(778254)	$57.99 H

Ignition Switch and Key



All H.P. Vary Year
Ignition Switch and Key,
6 Pin Potted Push to Choke

O.E. No. 5005801

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765562	(765562)	$61.99 H

Power Pack



6-8 H.P. 2003-2005
Power Pack, 2 Cylinder Late 2 Stroke.
Replaces: 586800

O.E. No. 586800

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777652	(777652)	$102.99 L

Power Pack



4-60 H.P. 1977-1984
Power Pack, CD2, 2 Cylinder. Replaces:
582453, 583380, 582452

O.E. No. 582452

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777625	(777625)	$104.99 L
Sierra	185758	(18-5758)	$80.80 H
CDI Electronics	207793	(113-2453)	$96.98 K

Power Pack



6-60 H.P. 1985-1988
Power Pack, CD2, 2 Cylinder with No Rev. Limits.
Replaces: 396141, 582281, 582285, 582205,
582787, 582880, 583168, 583169, 583170,
583604, 586697, 586800

O.E. No. 396141

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777649	(777649)	$106.99 L
Sierra	185765	(18-5765)	$92.73 H
CDI Electronics	207781	(113-2285)	$99.98 K

Power Pack



8-55 H.P. 1978-1984
Power Pack, Commercial. Replaces: 582474,
582864, 582901, 586690, 586692, 753790

O.E. No. 582474

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207799	(113-2474)	$142.98 K

Power Pack



9.9-15 H.P. 1993-2007
Power Pack, CD2, 2 Cylinder Late 2 Stroke
No RPM Limit. Replaces: 584783, 586798

O.E. No. 586798

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777656	(777656)	$112.99 L
Sierra	185767	(18-5767)	$100.68 H
CDI Electronics	207642	(113-4783)	$120.98 K

Power Pack



25 H.P. 1989-1990
Power Pack, CD2USL61, 2 Cylinder Under
Flywheel P.P. Replaces: 584489, 584329, 583896,
584331

O.E. No. 584489

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777629	(777629)	$173.99 L
Sierra	185794	(18-5794)	$157.37 H
CDI Electronics	207957	(113-4489)	$203.98 K

Power Pack Conversion Kit



1988-1992 2 Cylinder Engines Using the
Under Flywheel Ignition and No RPM Limiter.
Replaces: 583663, 583667, 584488

O.E. No. 583663

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207955	(113-4488)	$194.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Power Pack



25-35 H.P. 2000-2002
Power Pack, 3 Cylinder Small Loop

O.E. No. 586472

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778244	(778244)	$449.99 H

Power Pack



40-50 H.P. 1992-2005
Power Pack, CD2SL2T67, 2 Cylinder with S.L.O.W and 6700 RPM Limit. Replaces: 585261, 585262,

O.E. No. 175316

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778232	(778232)	$180.99 L
Sierra	185785	(18-5785)	$147.05 H
CDI Electronics	207970	(113-5316)	$168.98 K

Power Pack



50-55 H.P. 1971-1977
Power Pack and Cover, 2 Cylinder, Screw in Pack with Cover. Replaces: 581397, 754708

O.E. No. 764708

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777636	(777636)	$165.99 L
Sierra	185755	(18-5755)	$133.08 H
CDI Electronics	207729	(113-1397)	$148.98 K

Power Pack



55, 60, 65, 85 H.P. 1971, 100 H.P., 1968-1972
Replace Battery CD with Points, No Tach Output. Replaces: 389549, 389550, 397123, 389551, 6CB2001, 04, 07, 09

O.E. No. 389549

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207983	(113-7123)	$432.98 K

Power Pack



60-70 H.P. 1989-1997
Power Pack, CD3SL267, 3 Cylinder 6700 RPM Limit with S.L.O.W. Replaces: 583748, 583786, 763801

O.E. No. 583748

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777628	(777628)	$165.99 L
Sierra	185766	(18-5766)	$132.48 H
CDI Electronics	207894	(113-3748)	$146.98 K

Note: Product shipped may not match the item pictured.

Power Pack



25-50 H.P. 1992-2005
Power Pack, 2 Cylinder with S.L.O.W. and 6100 RPM Limit. Replaces: 584908, 5001344, 585224, 585260

O.E. No. 5001344

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777641	(777641)	$137.99 L
Sierra	185768	(18-5768)	$110.10 H
CDI Electronics	207969	(113-4767)	$129.98 K

Power Pack



40-50 H.P. 1992-2005
Power Pack, CD2SL2T67, 2 Cylinder with 3 Wire Trigger 6700 RPM Limit. Replaces: 175316, 585261, 585262,

O.E. No. 585261

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778248	(778248)	$182.99 L

Power Pack



55, 60, 65, 85 H.P. 1971, 100 H.P., 1968-1972
Amplifier, Replace Battery CD with Points, No Tach Output. Replaces: 389549, 389550, 397123, 389551, 6CB2001, 04, 07, 09,

O.E. No. 777647

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765990	(765990)	$402.99 H

Power Pack



60-70 H.P. 1986-1987
Power Pack, CD3, 3 Cylinder with No Rev. Limits. Replaces: 582115, 583125, 583143

O.E. No. 582115

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777650	(777650)	$124.99 L
Sierra	185762	(18-5762)	$103.58 H
CDI Electronics	207755	(113-2115)	$112.98 K

Power Pack



1993-2001 60, 70 H.P. and 40 Jet 3 Cylinder Carbureted 2 Stroke Engines.
Replaces: 584808, 585145, 585189, 5004532, 5004533

O.E. No. 585145

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185774	(18-5774)	$307.28 H
CDI Electronics	207666	(113-4808)	$336.98 K

©2014 Donovan Marine, Inc.

Power Pack

1984 65 H.P. 3 Cylinder, 1984 155 H.P. 6 Cylinder and 1985 150 and 235 H.P. 6 Cylinder Engines.
Replaces: 582556, 582642, 582712



O.E. No. 582556

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207806	(113-2556)	$148.98 K

Power Pack

65 H.P. 1985-1986
Power Pack with 5800 RPM Limit.
Replaces: 582537, 583122, 583320



O.E. No. 583122

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207869	(113-3122)	$142.98 K

Power Pack

65 H.P. 1996-2001
Power Pack, 3 Cylinder with 6700 RPM Limit and S.L.O.W. Replaces: 585274



O.E. No. 585274

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207972	(113-5274)	$192.98 K

Power Pack

65 and 150-235 H.P. 1973-1978
Power Pack without CVR, 3 Cylinder and V6 Screw in Pack without Cover. Replaces: 581334, 581493, 581551, 581726, 581925, 582057



O.E. No. 582057

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777633	(777633)	$150.99 L
Sierra	185757	(18-5757)	$131.93 H

Power Pack

65 and 150-235 H.P. 1973-1978
Power Pack, CVR and Decal, 3 Cylinder and V6 Srew in Pack with Cover. Replaces: 581334, 581493, 581551, 581726, 581925, 582057



O.E. No. 581726

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777640	(777640)	$157.99 L
Sierra	185754	(18-5754)	$126.77 H
CDI Electronics	207731	(113-1726)	$146.98 K

Power Pack

65 and 150-235 H.P. 1985 Only
Power Pack, Commercial. Replaces: 582510, 582537



O.E. No. 582510

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207800	(113-2537)	$146.98 K

Power Pack

70-235 H.P. 1985-1986
Power Pack, 3/6 Cylinder 5800 RPM, 2 Required for V6 Crossflow. Replaces: 582651, 763792



O.E. No. 763792

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777644	(777644)	$162.99 L
CDI Electronics	207818	(113-2651)	$142.98 K

Power Pack

1979-1984 70, 75 H.P. 3 Cylinder Engines and 150, 175, 200, 235 H.P. 6 Cylinder Engines.
Replaces: 582138, 582400



O.E. No. 581933

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185760	(18-5760)	$127.42 H
CDI Electronics	207779	(113-2138)	$142.98 K

Power Pack

85-135 H.P. 1973-1978
Power Pack, CVR and Decal, V4 Screw in Pack with Cover. Replaces: 581311, 581552, 581709, 581731



O.E. No. 581731

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777639	(777639)	$199.99 L
Sierra	185753	(18-5753)	$147.47 H
CDI Electronics	207743	(113-1731)	$157.98 K

Power Pack

85-140 C/F H.P. 1980-1985
Power Pack, CD4, V4 Cross Flow with Two P.P.
Replaces: 581805, 582125, 582454



O.E. No. 582125

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777627	(777627)	$113.99 L
Sierra	185759	(18-5759)	$96.23 H
CDI Electronics	207767	(113-2125)	$109.98 K

Note: Product shipped may not match the item pictured.

Power Pack

85-140 C/F H.P. 1980-1985
Power Pack, CD4, V4 Cross Flow with Two P.P. with 5700 RPM Rev Limits.
Replaces: 581805, 582125, 582455



O.E. No. 582684

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207801	(113-2684)	$116.98 K

Power Pack

85-140 H.P. 1973-1978
Power Pack, V4 with Screw in Terminals
1 Pack Required. Replaces: 581311, 581552, 581709, 581731, 582056,



O.E. No. 582056

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777634	(777634)	$167.99 L
Sierra	185756	(18-5756)	$147.48 H

Power Pack

1988-1989 88, 90, 100, 110 H.P. and 1990-1996 85, 88, 90, 100, 112, 115 H.P.
Replaces: 583777, 584029, 584030



O.E. No. 583777

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207920	(113-4030)	$157.98 K

Power Pack

88-110 H.P. 1986-1987
Power Pack, V4 Crossflow No RPM Limit.
Replaces: 583110



O.E. No. 583110

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777642	(777642)	$139.99 H
Sierra	185784	(18-5784)	$121.85 H
CDI Electronics	207856	(113-3110)	$136.98 K

Power Pack

88-115 C/F H.P. 1988-1996
Power Pack, CD4L, V4 Cross Flow One P.P. No Limit. Replaces: 583773, 584027, 584028



O.E. No. 584028

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777630	(777630)	$143.99 L
Sierra	185770	(18-5770)	$126.95 H
CDI Electronics	207919	(113-4028)	$136.98 K

Power Pack

90-115 H.P. 1985-1986
Power Pack, V4 C/F with No Rev Limits
2 Required. Replaces: 582811



O.E. No. 763794

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777653	(777653)	$149.99 H
Sierra	185783	(18-5783)	$116.78 H
CDI Electronics	207802	(113-2811)	$127.98 K

Power Pack

90-115 H.P. 1995-2006
Power Pack, CD4AOL64, V60V Pack without Sensor 6400RPM Limit. Replaces: 586015, 586098, 586292, 765386



O.E. No. 586292

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778263	(778263)	$317.99 L
CDI Electronics	207885	(113-6292)	$292.98 K

Power Pack

90-115 H.P. V60V 1995-2006
Power Pack and Sensor, Fits All V4 60° with Optical Sensor and Spark Leads



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207888	(113-6292K1)	$423.98 K

Power Pack

1985-1988, 1993-2000 2 Cylinder Commercial Engines Requiring A 5800 RPM Limiter. Replaces: 396077, 582261, 582504, 582714, 582800, 582889, 583172, 583174, 583175, 583241, 584508, 584528, 584746, 586633, 586634, 586689, 586691, 586693, 586695, 586696, 586697



O.E. No. 396077

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207870	(113-2141)	$105.98 K

Power Pack

120-140 Loop H.P. 1988-2001
Power Pack, CD4AL67, V4 Looper with Quickstart and S.L.O.W. Replaces: 583489, 584040, 584041



O.E. No. 584041

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777631	(777631)	$265.99 L
Sierra	185772	(18-5772)	$219.93 H
CDI Electronics	207933	(113-4041)	$257.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Power Pack

120-140/275-300 H.P. 1986-1987
Power Pack, CD4, V4 and V8 with 2 P.P. 6700 RPM Limit. Replaces: 581404, 583041, 583103, 583037



O.E. No. 582262

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777645	(777645)	$180.99 L
Sierra	185892	(18-5892)	$161.55 H
CDI Electronics	207844	(113-3101)	$173.98 K

Power Pack

150-175 H.P. 1986-1988
Power Pack, CD6/58L, V6 Crossflow with 5800 RPM Limit. Replaces: 583114



O.E. No. 583114

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777637	(777637)	$153.99 L
Sierra	185761	(18-5761)	$143.97 H
CDI Electronics	207868	(113-3114)	$153.98 K

Power Pack

150-175 V60V H.P. 1991-2006
Power Pack and Sensor (BLU SLV), V6 engines with optical sensor and Blue sleeve on power pack. Do not use with gray sleeved stator. Replaces: 436367, 584122



O.E. No. 436367

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777638	(777638)	$356.99 L
Sierra	185886	(18-5886)	$323.12 H
CDI Electronics	207890	(113-6367K 1)	$375.98 K

Power Pack

185-225 H.P. 1993-2001
Power Pack, CD6AL, V6 Looper Carb 6700 RPM. Replaces: 584636, 586212, 586661



O.E. No. 584636

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777632	(777632)	$347.99 L
CDI Electronics	207971	(113-6212)	$323.98 K

Power Pack

250, 275 and 300 H.P. 1993-1998 Loop Charged 8 Cylinder Engines. Replaces: 584642



O.E. No. 584642

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207960	(113-4642)	$357.98 K

Power Pack

150-175 v60v H.P. 1993-2003
Power Pack and Shield Assembly. For: V6 Engines with optical sensor and GRAY sleeve on power pack. Do not use with black sleeved stator. Replaces: 584985



O.E. No. 584985

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777626	(777626)	$278.99 L
Sierra	185887	(18-5887)	$234.93 H
CDI Electronics	207973	(113-4985)	$268.98 K

Power Pack

150-175 H.P. 1988-1991
Power Pack, CD6AL, V6 C/F with Quick 5800 RPM 1 Required. Replaces: 583865



O.E. No. 583865

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777635	(777635)	$311.99 L
Sierra	185885	(18-5885)	$245.87 H
CDI Electronics	207907	(113-3865)	$277.98 K

Power Pack

185-225 H.P. 1988-1992
Power Pack, CD6AL67, V6 Looper Carb 6700 RPM. Replaces: 586667, 584037, 586217, 583476



O.E. No. 583476

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777643	(777643)	$266.99 L
CDI Electronics	207921	(113-4037)	$257.98 K

Power Pack

1986-1987 200 and 225 H.P. 6 Cylinder Engines.
Replaces: 583030, 583605, 763800



O.E. No. 583030

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207882	(113-3605)	$179.98 K

High Performance Ignition Kit

185-225 H.P. 1988-Thru V6 Loop
High Performance, Includes: Stator and Timer Base No Rev Limiter



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208780	(213-6665K1)	$682.98 K

Note: Product shipped may not match the item pictured.

Battery CD Module

100, 115 H.P. 1968-1970, 125 H.P. 1971 and 100, 125 H.P. 1972. Battery Ignition.
Replaces: 381884, 382478, 3832989, 384522, 385034, 385036, 385038, 398362, 398363, IDD3001, IDD3070, IDD3077, IDG3001A, IDG3001B, IDG3001C



O.E. No. 381884

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	207990	(113-8362)	$481.98 K

Stator

1972-1977 2 Cylinder Engines.
Replaces: 580809, 581232, 775530



O.E. No. 580809

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208363	(173-1232)	$231.98 K

Stator

1992-1996 40-50 H.P. 2 Cylinder and 1993-2001 40, 50, 60 and 70 H.P. 3 Cylinder Electric Start Engines. Replaces: 584560, 763763



O.E. No. 584560

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208480	(173-4560)	$299.98 K

Stator

1977-1984, 1993-2006, 2 Cylinder Electric Start Engines. Replaces: 581651, 584755, 585087, 763770



O.E. No. 581651

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208380	(173-1651)	$345.98 K

Stator

1993-1998 10, 15 H.P. 4 Stroke, 25, 35 H.P. 2 Stroke 3 Cylinder Engines with Optical Ignition Systems. Replaces: 584821, 584548



O.E. No. 584548

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208494	(173-4821)	$279.98 K

Stator

1989-1991 60, 65 Comm, 70 H.P. 3 Cylinder Engines. Replaces: 583779, 584236, 584766, 763762



O.E. No. 583779

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208485	(173-4766)	$343.98 K

Stator

1978-1988 3 Cylinder Engines.
Replaces: 581957, 582506, 582730, 583119, 583644, 582636, 583724, 583729, 583830



O.E. No. 581957

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208428	(173-3724)	$231.98 K

Stator

1973-1977 3 Cylinder Engines.
Replaces: 510839, 581235, 763771



O.E. No. 580950

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208365	(173-1235)	$273.98 K

Stator

1973-1977 12 amp 4 Cylinder Engines.
Replaces: 581303, 581860, 582099



O.E. No. 581303

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208390	(173-2099)	$455.98 K

Stator

1994-2006 90 and 115 H.P. 60° Engines with Optical Ignition Systems.
Replaces: 584849, 763760



O.E. No. 584849

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208496	(173-4849)	$448.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Stator

1973-1977 6 amp 4 Cylinder Engines.
Replaces: 581046, 581225, 763772



O.E. No. 581046

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209075	(173-1225)	$471.98 K

Stator

1990-1997 4 Cylinder Cross Flow Engines.
Replaces: 583340, 583536



O.E. No. 583340

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208396	(173-3536)	$318.98 K

Stator

1988-2001 120, 125, 130, 135 and 140 H.P.
4 Cylinder Loop Charged Engines.
Replaces: 583410, 763769



O.E. No. 583410

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208393	(173-3410)	$336.98 K

Stator

1985-1987 120, 140 H.P. 4 Cylinder Cross
Flow Engines. Replaces: 583013, 583118,
583669, 763766



O.E. No. 583013

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208399	(173-3669)	$325.98 K

Stator

120-140 H.P. 1998-1999
Stator V4 Loop 90°. Replaces: 583561,
584288



O.E. No. 583561

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208471	(173-4288)	$351.98 K

Stator

1984-1987 V4 Engines with 35 amp Upgrade Kit.
Replaces: 582654, 584291



O.E. No. 582654

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208472	(173-4291)	$331.98 K

Stator

1991-2006 150 and 175 H.P. 60° Engines
with Optical Ignition Systems.
Replaces: 584109, 584981, 763759



O.E. No. 584109

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208498	(173-4981)	$429.98 K

Stator

1978-1987 4 and 6 Cylinder Engines.
Replaces: 173-3104, 581830, 581865,
581987, 582016, 582023, 582404, 582497,
582867, 583023, 583104, 583671, 583672



O.E. No. 581830

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208416	(173-3672)	$314.98 K

Stator

1988-1991 150, 155 and 175 H.P. Crossflow
Engines with QuickStart. Replaces: 583710,
584292, 763764



O.E. No. 583710

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208474	(173-4292)	$525.98 K

Stator

150-175 H.P. 1984-1988
Stator, 35A, V6 Crossflow with
2 Power Pack. Replaces: 582574, 583050,
583274, 583668



O.E. No. 583668

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777657	(777657)	$438.99 H
CDI Electronics	208398	(173-3668)	$475.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Stator



1988-1992 185, 200, 225 H.P. Engines and 1988-1992 250, 275, 300 H.P. Engines.
Replaces: 583415, 584287, 763765

O.E. No. 583415

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208470	(173-4287)	$432.98 K

Stator



200-300 H.P. 1985-1987
Stator, V6, V8 Loop 35 amp.
Replaces: 582847, 583117, 583670

O.E. No. 583670

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777658	(777658)	$389.14 H
CDI Electronics	208392	(173-3117)	$469.98 K

Stator



1993-2001 185, 200, 225 H.P. and 1993-2000 250, 275, 300 H.P. Loop Charged Engines.
Replaces: 18-5862, 584643, 763779

O.E. No. 584643

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208482	(173-4643)	$497.98 K
Sierra	185877	(18-5877)	$457.97 H

Timer Base



4-50 H.P. 1978-2005
Sensor, (CD-2), 2 Cylinder Under Flywheel.
Replaces: 583387, 584716

O.E. No. 583387

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778233	(778233)	$33.99 H
CDI Electronics	208214	(133-3387)	$37.98 K

Timer Base



40-50 H.P. 1992-2005
Timer Base, 2 Cylinder Engine.
Replaces: 175386, 763808

O.E. No. 763808

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778431	(778431)	$252.99 H
CDI Electronics	208233	(133-5386)	$266.98 K

Timer Base



50-70 H.P. 1993-1999
Timer Base, 3 Cylinder Loop with Quick Start and S.L.O.W. Replaces: 584804, 763773

O.E. No. 763773

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778384	(778384)	$225.99 H
CDI Electronics	208232	(133-4804)	$244.98 K

Timer Base



65-75 H.P. 1979-1990
Timer Base, 3 Cylinder Engine.
Replaces: 581949, 582724, 583060, 583131, 583378, 584269, 584562

O.E. No. 583378

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778438	(778438)	$260.99 H
CDI Electronics	208215	(133-3378)	$288.98 K

Timer Base



85-115 H.P. 1985-1998
Timer Base, V4 Crossflow with Single Pack.
Replaces: 582514, 583289, 583379

O.E. No. 763776

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778460	(778460)	$270.99 H
CDI Electronics	208216	(133-3379)	$296.98 K

Timer Base



85-140 H.P. 1973-1978
Timer Base, V4 Crossflow with Screw in Lead.
Replaces: 385433, 581300, 581900

O.E. No. 763778

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778459	(778459)	$364.99 H
CDI Electronics	208210	(133-1900)	$394.98 K

Timer Base



85-140 H.P. 1978-1987
Timer Base, V4 Crossflow with 2 Plug Connections. Replaces: 581812, 582041, 583127, 583128

O.E. No. 583376

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778448	(778448)	$301.99 H
CDI Electronics	208212	(133-3376)	$325.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Timer Base



90-175 V60V H.P. 1991-2006
Sensor, OIS, Sensor V60V Optical for Carb.
Replaces: 584265, 584914, 586343

O.E. No. 586343

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777662	(777662)	$79.99 H
Sierra	185884	(18-5884)	$87.47 H
CDI Electronics	208235	(133-6343)	$92.98 K

Timer Base



150-175 H.P. 1988-1991
Timer Base, CV6, V6 Crossflow 35 amp.
Replaces: 583853, 584363, 763774

O.E. No. 763774

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778391	(778391)	$117.99 H
CDI Electronics	208230	(133-3853)	$468.98 K

Timer Base



185-225 H.P. 1988-2000
Timer Base, V6 Loop 90° Engine.
Replaces: 583533, 584586, 763775

O.E. No. 763775

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778353	(778353)	$464.99 H
CDI Electronics	208220	(133-3533)	$497.98 K

Rectifier



4-60 H.P. 1977-2005
Rectifier, 4-6 amp, 3 Yellow and 1 Red Lead.
Replaces: 175692

O.E. No. 581778

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777675	(777675)	$52.99 L
Sierra	187905	(18-7905)	$18.78 H
CDI Electronics	208282	(153-1778)	$51.98 K

Rectifier



40-70 and 105 H.P. 1994-2001
Rectifier/Regulator, 4/12A, Fits 2 and 3 Cylinder and 105 Tiller. Replaces: 584476

O.E. No. 585001

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777676	(777676)	$224.99 L
Sierra	185827	(18-5827)	$183.30 H
CDI Electronics	208745	(193-4476)	$233.98 K

Timer Base



120-140 H.P. 1988-1999
Timer Base, V4 Loop with Quick Start and S.L.O.W. Replaces: 583508, 763773, 763782

O.E. No. 763782

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778479	(778479)	$300.99 H
CDI Electronics	208225	(133-3508)	$321.98 K

Timer Base



1979-1985 150, 155, 175, 185, 200, 235 H.P. 6 Cylinder Engines. Replaces: 581985, 582122, 582356, 582357, 582371, 582394, 583129, 583377

O.E. No. 581985

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208213	(133-3377)	$377.98 K

Timer Base



1986-1987 200 and 225 H.P. 6 Cylinder Engines. Replaces: 583048

O.E. No. 583048

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208211	(133-3048)	$334.98 K

Rectifier



9.9-15 H.P. 1993 and 1995-2005
*Do Not Use Maintenance Free Battery. Over-Voltage Will Occur. Replaces: 584597

O.E. No. 584597

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208284	(153-4597)	$59.98 K

Rectifier



50-235 H.P. 1967-1996
Rectifier, Fits 2, 3 Cylinder, V4 and V6 C/F 6-10 amp. Replaces: 580795, 581603, 582307, 582399

O.E. No. 583408

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777670	(777670)	$51.99 L
Sierra	185708	(18-5708)	$33.78 H
CDI Electronics	208290	(153-3408)	$53.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Rectifier



55-85 H.P. 1968-1969
*Do Not Use Maintenance Free Battery. Over-Voltage Will Occur.
Replaces: 580698, 580705, 580771

O.E. No. 580698

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208283	(153-0705)	$86.98 K

Rectifier



60-80 H.P. 1967
*Do Not Use Maintenance Free Battery. Over-Voltage Will Occur.
Replaces: 580656

O.E. No. 580656

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208281	(153-0656)	$107.98 K

Rectifier



88-175 H.P. 1988-1998
Rectifier/Regulator, 3/10, V4 and V6 C/F 10 amp Water Cooled W/O. Replaces: 583529, 584204, 585129, 585195

O.E. No. 585195

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778330	(778330)	$114.99 L
CDI Electronics	208719	(193-4204)	$111.98 K

Rectifier



90-175 H.P. 1986-1991
Rectifier/Regulator, Fits V4 and V6 C/F, 35 amp. Replaces: 395391, 582904, 583076, 583268, 584423

O.E. No. 395204

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777671	(777671)	$308.99 L
Sierra	185825	(18-5825)	$239.07 H
CDI Electronics	208769	(193-5204)	$288.98 K

Rectifier



150-175 H.P. 1991-1995
Rectifier/Regulator and Gasket, V60V Water Cooled with Gasket. Replaces: 439561, 584093, 585219

O.E. No. 439561

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778334	(778334)	$283.99 H
Sierra	185828	(18-5828)	$271.73 H
CDI Electronics	208707	(193-4093)	$318.98 K

Rectifier



185-225 H.P. 1993-2001
Rectifier/Regulator, Fits V6 Loop 35 amp without Gasket. Replaces: 584641, 585595, 878333

O.E. No. 586271

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777672	(777672)	$287.99 H
Sierra	185831	(18-5831)	$275.27 H
CDI Electronics	208610	(193-4641)	$327.98 K

Note: Product shipped may not match the item pictured.

Voltage Regulator



90-115 H.P. 1995
Rectifier/Regulator and Gasket, V60V Water Cooled with Gasket. Replaces: 584847

O.E. No. 584847

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208615	(193-4847)	$222.98 K

Voltage Regulator



1985-1987 120, 140 H.P., 1990-1994 120, 140 H.P., and 1995-2001 125, 130, 135 H.P. Loop Charged Engines. Replaces: 193-2907, 582907, 583512, 584205, 584675, 585192, 878332

O.E. No. 582907

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208725	(193-4205)	$109.98 K

Voltage Regulator



1996-2006 150, 175 H.P. V6 Optical Engines.
Replaces: 586048, 586075

O.E. No. 586048

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208770	(193-6048)	$299.98 K
Sierra	185830	(18-5830)	$259.60 H

Rectifier



185-300 H.P. 1988-1992
Rectifier/Regulator, Fits V6 and V8 Loop 35 amp with Gasket. Replaces: 583266, 583689, 584424, 586000, 586272

O.E. No. 583689

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777674	(777674)	$272.99 H
Sierra	185832	(18-5832)	$264.97 H
CDI Electronics	208694	(193-3689)	$327.98 K

©2014 Donovan Marine, Inc.

Coil



1.2-4 H.P. 1981-1990
Coil and Laminated, with Grommet, Coil Laminated Under Flywheel.
Replaces: 582995, 584477

O.E. No. 584477

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777659	(777659)	$31.99 L
Sierra	185181	(18-5181)	$27.00 H
CDI Electronics	209050	(183-4477)	$31.98 K

Coil



1977-2005 4, 4.5, 5, 6, 6.5, 8, 9.9, 10, 11, 14, 15, 18, 20, 25, 28, 30, 35, 40, 45, 48, 50, 55, 60 H.P. Engines. Replaces: 581670, 584504, 584840, 585073, 5000611

O.E. No. 581670

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208389	(173-1670)	$31.98 K

Ignition Coil



9.9-15 H.P. 1974-1976
Ignition Coil, Coil with 2 Bolt and Clip Connection. Replaces: 581407, 502880

O.E. No. 502880

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777665	(777665)	$46.99 L
Sierra	185196	(18-5196)	$42.73 H

Ignition Coil



18-25 H.P. 1973-1976
Ignition Coil, Coil with 2 Bolt and Clip Connection. Replaces: 581786

O.E. No. 502881

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777666	(777666)	$54.99 L
Sierra	185172	(18-5172)	$48.40 H

Ignition Coil Cover



All H.P. 1980-Thru Year
Ignition Coil Cover, Coil Boot, Small, 10 Pack. Replaces: 512478

O.E. No. 512478

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765621	(765621)	$3.99 L

Ignition Coil Kit



4-40 H.P. 1971-1977
Ignition Coil Kit, Coil with 2 Bolt and Screw On Lead. Replaces: 582091, 582091

O.E. No. 502888

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777667	(777667)	$49.99 L
Sierra	185192	(18-5192)	$42.83 H

Ignition Coil



4-225 H.P. 1989-Thru
Ignition Coil, Coil Dual Style Various Models. Replaces: 583740, 586854, 879614

O.E. No. 583740

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777664	(777664)	$53.99 L
Sierra	185170	(18-5170)	$51.92 H
CDI Electronics	208670	(183-3740)	$55.98 K

Driver Coil



18-25 H.P. 1973-1976
Driver Coil with Laminate Under Flywheel. Replaces: 581130, 763809

O.E. No. 763809

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777669	(777669)	$58.30 H
Sierra	185163	(18-5163)	$44.45 H

Ignition Coil



85-140 H.P. 1973-1978
Ignition Coil, V4 with Low Voltage, Lead Attached. Replaces: 582160, 584632

O.E. No. 502890

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777663	(777663)	$58.30 L
Sierra	185194	(18-5194)	$42.62 H
CDI Electronics	209095	(183-4632)	$44.98 K

Ignition Coil Kit



2-300 H.P. 1978-Thru
Ignition Coil Kit, Late Style with Wire. Replaces: 582106, 582366, 581998

O.E. No. 584561

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777660	(777660)	$52.99 L
Sierra	185176	(18-5176)	$38.77 H
CDI Electronics	208605	(183-2366)	$48.98 K

Note: Product shipped may not match the item pictured.

Ignition Coil



2-300 H.P. 1985-Thru
Ignition Coil, Late Style without Lead.
Replaces: 582508

O.E. No. 582508

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777661	(777661)	$35.99 L
Sierra	185179	(18-5179)	$299.40 H
CDI Electronics	208656	(183-2508)	$38.98 K

Ignition Coil Kit



Most 1978-2006 2, 3, 4 and 6 Cylinder Carbureted 2 Stroke Engines. Replaces: 502882, 502884, 502890, 580688, 580730, 580847, 582106, 582160, 582366, 582382, 582508, 583737, 584632, 584561, 802365, 802373.

O.E. No. 583737

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209060	(183-3737)	$46.98 K

Ignition Coil



1973-1978 3 and 6 Cylinder Engines.
Replaces: 502886, 582303

O.E. No. 502886

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209065	(183-2303)	$46.98 K

Sensor Coil Replacement



1971-1978 2 Cylinder Engines.
Replaces: 385454, 581508, 763805, 580875, 581585

O.E. No. 385454

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208203	(133-0875K1)	$11.98 K

Coil Terminal



All H.P. 1980-Thru
Coil Terminal, PIN 481817-AE44, Small, 10 Pack. Replaces: 512256

O.E. No. 512256

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765581	(765581)	$2.99 L

Amphenol Pin



All H.P. Male Amphenol Pins
Amphenol Pin Connector Male, PIN 44-100-1414, 10 Pack. Replaces: 511469

O.E. No. 511469

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765594	(765594)	$0.99 L
CDI Electronics	209020	(973-1469)	$14.98 K

Female Amphenol Sockets



All H.P. Female Amphenol Pins.
Replaces: 581656

O.E. No. 581656

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209030	(973-1656)	$25.98 K

Ignition Tune Up



1.5-2 H.P. 1976-1990
Ignition Tune Up, Contains 580321, 580148

O.E. No. 172521

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777685	(777685)	$14.99 L
Sierra	185011	(18-5011)	$11.70 H

Ignition Tune Up



3-6 H.P. 1976-1990
Ignition Tune Up, Contains 2 Each 581321, 581148

O.E. No. 172522

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777679	(777679)	$29.99 L
Sierra	185006	(18-5006)	$24.15 H

Igntion Tune Up



10-40 H.P. 1974-1979, 1983
Ignition Tune Up, Contains 2 Each 581419, 581207

O.E. No. 172806

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777683	(777683)	$39.99 L
Sierra	185003	(18-5003)	$32.48 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Ignition Tune Up



25 H.P. 1975-1976
Ignition Tune Up, Contains 2 Each 581419, 580148

O.E. No. 172523

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777681	(777681)	$28.99 L
Sierra	185002	(18-5002)	$23.32 H

Ignition Tune Up



40-100 H.P. 1964-1975
Ignition Tune Up, Contains 2 Each 580148 and 1 Each 580321

O.E. No. 172525

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777686	(777686)	$50.99 L
Sierra	185006	(18-5006)	$24.15 H

Condenser



3-40 H.P. 1968-1990
Condenser, 5 Pack

O.E. No. 580321

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777678	(777678)	$5.99 L
Sierra	185199	(18-5199)	$4.33 H

Condenser



10-40 H.P. 1974-1976, 1983
Condenser

O.E. No. 581419

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777680	(777680)	$5.99 L
Sierra	185205	(18-5205)	$4.67 H

Breaker Points



3-40 H.P. 1968-1990
Breaker Points, Breaker or Points

O.E. No. 580148

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777677	(777677)	$11.99 L
Sierra	185156	(18-5156)	$9.13 H

Starter Solenoid



10-15 H.P. 1990-1992
Starter Solenoid, 3 Pole

O.E. No. 584128

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778025	(778025)	$34.99 L
Sierra	185813	(18-5813)	$31.45 H

Starter Solenoid



150-225 H.P. 2005-2006
Starter Solenoid, 4 Pole

O.E. No. 586842

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778209	(778209)	$30.99 L

Starter Solenoid



9.9-15 H.P. 1974-1976
Starter Solenoid

O.E. No. 378444

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777700	(777700)	$53.99 L
Sierra	185807	(18-5807)	$33.78 H

Spark Plug Wire



2-300 H.P. 1981-Thru Year
Spark Plug to Coil Lead Double Ended 9-1/2" Long

O.E. No. 582365

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777703	(777703)	$14.99 J
CDI Electronics	209085	(931-2365)	$14.98 K

Spark Plug Wire



150-300 H.P. 1991-Thru Year
Lead, H/T-SUPP, 7 MM Grey with Boots, 14.5" Long

O.E. No. 5005806

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778262	(778262)	$10.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Spark Plug Wire



OMC Spark Plug Wire, 9" Long

O.E. No. 582365

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185231	(18-5231-1)	$12.73 H

Spark Plug Wire



150-300 H.P. 1991-Thru Year
Lead, H/T-SUPP, 7 MM Grey with Boots, 15.5" Long

O.E. No. 5005805

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778272	(778272)	$10.99 L

Spark Plug Wire



All H.P. All Year
Ignition Wire, 100', 7 MM Role of Spark Plug Wire. Replaces: 510883, 772584

O.E. No. 772584

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777701	(777701)	$1.99 L
Sierra	185226	(18-5226)	$100.00 H

Spark Plug Boot



All H.P. All Year
Spark Plug Boot, Black, Sold in 10 Pack Spark Plug End

O.E. No. 581027

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765551	(765551)	$4.99 L
Sierra	185750	(18-5750)	$3.47 H

Coil Boot



All H.P. All Year
Coil Boot, Black, Sold in 10 Pack Coil End

O.E. No. 580339

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765557	(765557)	$3.99 J

Joint Kit



All H.P. All Year
Joint Kit, Ball and Socket Stator, 5 Pack

O.E. No. 395448

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765565	(765565)	$6.99 J

Bullet Connector Kit



Vary H.P.
Bullet Connector Kit with Sheild, 10 Male and 10 Female

O.E. No. 512947

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209005	(911-9783)	$20.98 K

Terminal End Boot



Vary H.P.
Terminal End Boot, Coil Low Voltage, 10 Per Pack

O.E. No. 512478

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209025	(913-2478)	$43.98 K

Terminal End



Vary H.P.
Terminal End, Coil Low Voltage, 10 Per Pack

O.E. No. 512256

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209015	(913-2256)	$19.98 K

Engine Harness



40-50 H.P. 1979-1984
Engine Harness. Replaces: 582061, 583005

O.E. No. 582061

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209100	(413-9915)	$155.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Engine Adapter Harness



40-300 H.P. 1996-2010
Adapts 1996 and Newer J/E Controls to Older Controls (Engine Side)

O.E. No. 176349

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209080	(423-6349)	$127.98 K

Electronic Switch Assembly



Electronic Switch Assembly
Replaces: 984051

O.E. No. 984051

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209070	(933-4051)	$151.98 K

Electronic Shift Assist



Electronic Shift Assist
Replaces: 987400, 987564, 987571, 987700, 987704, 987876, 763788

O.E. No. 987400

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209145	(123-7571)	$136.98 K

Wiring Harness



1978-1981 25-35 H.P., 1988-2000 20-35 H.P. Rope Start and 1982-2000 20-35 H.P. Remote Start Engines.
Replaces: 387872, 389269, 389764

O.E. No. 387872

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208808	(413-9914)	$192.98 K

Wiring Harness



1982-1984 25 and 35 H.P. Engines.
Replaces: 391818

O.E. No. 391818

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208784	(413-1818)	$162.98 K

Note: Product shipped may not match the item pictured.

Water Pump Cross Reference Guide

		Complete Water Pump Kits			Impeller Only		
Model & H.P.	Year	OMC Systematched	BRP O.E.	Sierra	OMC Systematched	Impeller O.E.	Impeller Sierra
5.5-6	1954-1979	B778166	763758	-	B777819	434424	18-3001
7.5	1954-1958	B778166	763758	-	B778225	436137	-
8 (4 Stroke) 211 cc	1995-2004	B777801	394711	18-3327	B777817	386084	18-3050
9.5	1964-1973	B777811	382296	18-3402	B777833	775519	18-3003
10	1953-1957	B777806	382468	18-3377	B777829	375638	18-3002
10	1958-1963	B777811	382296	18-3402	B777833	775519	18-3003
9.9-15	1974-2006	B777801	394711	18-3327	B777817	386084	18-3050
18-20	1957-1973	B777806	382468	18-3377	B777829	775518	18-3002
20-25	1985-2005	B777803	393630	18-3382	B777818	395289	18-3051
25 Commercial	1998-2001	B777803	393630	18-3382	B777818	395289	18-3051
25	1969-1978	B777806	382468	18-3377	B777829	775518	18-3002
25	1979-1984	B777809	395270	18-3383	B777818	395289	18-3051
25-28 Commercial	1985-1997	B777809	395270	18-3383	B777818	395289	18-3051
35	1978-1979	B777814	391631	18-3238	B777818	395289	18-3051
40	1974-1976	B777815	391741	18-3379	B777835	390286	18-3366
40 Commercial	1981-1987	B777815	391741	18-3379	B777836	390286	18-3366
40 Commercial (RS)	1995-2001	B777805	438592	18-3394	B777820	396725	18-3053
40 Recreational	1984-1985	B777808	439077	18-3378	B777828	777214	18-3368
40-50	1986-1988	B777808	439077	18-3378	B777828	777214	18-3368
40-48-50	1989-2005	B777805	438592	18-3394	B776435	437059	18-3104
40 Commercial (RP, RW)	1993-1994	B777808	439077	18-3378	B777828	777214	18-3368
45-55 Commercial	1986-1994	B777808	439077	18-3378	B777828	777214	18-3368
48	1987-1988	B777808	439077	18-3378	B777828	777214	18-3368
50	1971-1978	B777812	389133	18-3325	B777821	777213	18-3083
50	1979-1985	B777808	439077	18-3378	B777828	777214	18-3368
55 Recreational	1976-1978	B777812	389133	18-3325	B777821	777214	18-3083
55 Recreational & Commercial	1979-1985	B777808	439077	18-3378	B777828	777214	18-3368
60	1980-1985	B777808	439077	18-3378	B777828	777214	18-3368
70-75	1974-1978	B777810	438579	18-3388	B777824	382547	18-3082
60	1986-1988	B778274	438602	-	B777820	396725	18-3053
65 Commercial	1986-1987	B778274	438602	-	B777820	396725	18-3053
70-65 Commercial	1979-1985	B778274	438602	-	B777820	396725	18-3053
75	1979-1988	B778275	438602	-	B777820	396725	18-3053
60	1989-2005	B777804	432955	18-3389	B777820	396725	18-3053
65 Commercial	1989-2005	B777804	432955	18-3389	B777820	396725	18-3053
70	1989-2005	B777804	432955	18-3389	B777820	396725	18-3053
60-70 Commercial	1989-2005	B777804	432955	18-3389	B777820	396725	18-3053
85 20"	1973-1977	B777807	439140	18-3384	B777823	777212	18-3043
85 25"	1977	B777813	395073	18-3393	B777823	777212	18-3043
85	1978	B777814	395073	18-3393	B777823	777212	18-3043
85-90	1979-1981	B777800	5001594	18-3392	B777816	5001593	18-3059
100	1979-1980	B777800	5001594	18-3392	B777816	5001593	18-3059
105 Commercial	1998-2001	B777802	5001595	18-3315	B777816	5001593	18-3059
115 20"	1973-1977	B777807	439140	18-3384	B777823	777212	18-3043
115 25"	1977-1978	B777813	395073	18-3393	B777823	777212	18-3043
90-115 All 20" Models	1979-2012	B777800	5001594	18-3392	B777816	5001593	18-3059
90-115 All 25" Models	1979-2012	B777802	5001595	18-3315	B777816	5001593	18-3059
135	1973-1976	B777807	439140	18-3384	B777823	777212	18-3043
140-235 Crossflow	1976-1978	B777813	395073	18-3393	B777823	777212	18-3043
140-250 All 20" Loop with Weep Hole	1979-2012	B777800	5001594	18-3392	B777816	5001593	18-3059
140-250 All 25" Loop without Weep Hole	1979-2012	B777802	5001595	18-3315	B777816	5001593	18-3059

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Impeller

2-4 H.P. 1970-1984
Impeller



O.E. No. 382221

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766433	(766433)	$13.99 H

Impeller

2-6 H.P. 1976-1990
Impeller, Woodruff Style. Replaces: 387361, 763735



O.E. No. 763735

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777831	(777831)	$24.99 L
Sierra	183090	(18-3090)	$19.73 H

Impeller

4-6 H.P. 1968-1982
Impeller and Key. Replaces: 277181, 434424



O.E. No. 434424

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777819	(777819)	$20.99 L
Sierra	183001	(18-3001)	$16.42 H
MP Parts	4-3001B	(47-00585-10)	$16.98 M

Impeller

4-8 H.P. 1980-2004
Impeller



O.E. No. 389576

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777822	(777822)	$20.99 L
Sierra	183091	(18-3091)	$15.90 H

Impeller

6-8 H.P. 1993-2005
Impeller



O.E. No. 436137

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778225	(778225)	$20.99 L

Impeller

8-15 H.P. 1974-2007
Impeller



O.E. No. 386084

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777817	(777817)	$18.99 L
Sierra	183050	(18-3050)	$13.38 H
MP Parts	4-3050B	(47-00587-10)	$14.98 M
MP Parts - 10 Pack	4-3050-10	(47-00587MP)	$148.98 N

Impeller

9 H.P. 1968-1973
Impeller, Split Gear Case. Replaces: 377178



O.E. No. 775519

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777833	(777833)	$21.99 L
Sierra	183003	(18-3003)	$17.23 H

Impeller

9.9-15 H.P. 2002-2007
Impeller, 4 Stroke (Same as Suzuki)



O.E. No. 5033112

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766431	(766431)	$20.99 L
Sierra	183099	(18-3099)	$16.42 H

Impeller

25-50 H.P. 1989-1994
Impeller and O-Ring, Wedge Type. Replaces: 432941, 437059



O.E. No. 765350

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766435	(766435)	$43.99 L
Sierra	183104	(18-3104)	$42.22 H
MP Parts	4-3104B	(47-02028BR10)	$33.98 N

Impeller

25-50 H.P. 1998-2007
Impeller, Woodruff Style



O.E. No. 5031417

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778296	(778296)	$30.99 L

Note: Product shipped may not match the item pictured.

Impeller

15-25 H.P. 1970-1978
Impeller, Woodruff Style. Replaces: 375638



O.E. No. 775518

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777829	(777829)	$22.99 L
Sierra	183002	(18-3002)	$17.08 H
MP Parts	4-3002B	(47-00586-10)	$19.98 N

Impeller

20-30 H.P. 1989-2005
Impeller and Key



O.E. No. 395289

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777818	(777818)	$21.99 L
Sierra	183051	(18-3051)	$17.67 H
MP Parts	4-3051B	(47-01865-10)	$18.98 M
MP Parts - 10 Pack	4-3051-10	(47-01865MP)	$189.98 N

Impeller

33-40 H.P. 1968-1977
Impeller, Split Gear Case. Replaces: 378891



O.E. No. 775521

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777834	(777834)	$23.99 L
Sierra	183006	(18-3006)	$18.87 H
MP Parts	4-3006B	(47-13142-10)	$18.98 L

Impeller

35-55 H.P. 1986-1994
Impeller, Wedge Style. Replaces: 396809



O.E. No. 777214

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777828	(777828)	$29.99 L
Sierra	183368	(18-3368)	$23.82 H

Impeller

40-55 H.P. 1968-1978
Impeller. Replaces: 377230, 777213



O.E. No. 777213

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777821	(777821)	$35.99 L
Sierra	183083	(18-3083)	$23.53 H

Impeller

40 H.P. 1983-1986
Impeller, Split Gear Case



O.E. No. 390286

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777835	(777835)	$27.99 L
Sierra	183366	(18-3366)	$24.05 H

Impeller

40-50 H.P. 1989-1994
Impeller. Replaces: 432941, 437059



O.E. No. 432941

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777825	(777825)	$51.99 L
Sierra	183104	(18-3104)	$42.22 H

Impeller

55-75 H.P. 1968-1978
Impeller with Slotted Key (Not Included)



O.E. No. 382547

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777824	(777824)	$52.96 L
Sierra	183082	(18-3082)	$26.90 H

Impeller

50-60 H.P. 1979-1985
Impeller, 2 Cylinder.
Replaces: 389589, 777129



O.E. No. 777129

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777827	(777827)	$29.99 L
Sierra	183055	(18-3055)	$23.80 H

Impeller

60-70 H.P. 1998-2006
Water Pump Impeller, Woodruff Style



O.E. No. 5030723

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778306	(778306)	$26.90 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Impeller



80-90 H.P. 1968-1970
Impeller, Woodruff Style. Replaces: 377992

O.E. No. 377992

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777830	(777830)	$58.99 L
Sierra	183005	(18-3005)	$35.95 H

Impeller



85-200 H.P. 1973-1978
Impeller, with Woodruff Key (Not Included). Replaces: 389642

O.E. No. 777212

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777823	(777823)	$52.99 L
Sierra	183043	(18-3043)	$42.47 H
MP Parts	4-3043B	(47-00008-10)	$40.98 M

Impeller

90-140 H.P. 2003-2006
Impeller, 4 Stroke (Same as Suzuki)



O.E. No. 5033542

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766432	(766432)	$49.99 H

Impeller



88-300 H.P. 1985-2010
Impeller, with O-Ring and Wedge Style Keyway

O.E. No. 5001593

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777816	(777816)	$40.99 L
Sierra	183059	(18-3059)	$24.98 H
MP Parts	4-3059B	(47-00010-10)	$27.98 M
MP Parts - 10 Pack	4-3059-10	(47-00010MP)	$279.98 N

Water Pump Kit



4-8 H.P. 1986-2005
Water Pump Repair Kit, Water Pump without Housing

O.E. No. 396644

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765603	(765603)	$34.99 H

Water Pump Kit



6 H.P. 1967
Water Pump Kit, Complete Repair Kit with Housing. Replaces: 391391

O.E. No. 763758

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778166	(778166)	$57.99 H

Water Pump Kit



9-10 H.P. 1964-1973
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 382296

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777811	(777811)	$78.99 H

Water Pump Kit



10-15 H.P. 1984-2007
Water Pump Kit, Complete Repair Kit with Housing. Replaces: 394711, 386697, 391698

O.E. No. 394711

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777801	(777801)	$47.99 H
Sierra	183327	(18-3327)	$47.38 H

Water Pump Kit



10-15 H.P. 2002-2006 Year
Water Pump Kit, Repair Kit, 4 Stroke (Same as Suzuki)

O.E. No. 5033106

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766485	(766485)	$22.99 H

Water Pump Kit



20-30 H.P. 1997-2001
Water Pump Kit, Repair Kit with Housing for Jet Pump

O.E. No. 391631

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777814	(777814)	$50.99 H

Note: Product shipped may not match the item pictured.

Water Pump Kit



20-35 H.P. 1983-2005
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 393630

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777803	(777803)	$53.99 L
Sierra	183382	(18-3382)	$50.43 H

Water Pump Kit



25-28 H.P. 1985-1997
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 395270

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777809	(777809)	$41.99 H
Sierra	183383	(18-3383)	$44.70 H

Water Pump Kit



25-35 H.P. 1975-1978
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 382468

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777806	(777806)	$70.99 H

Water Pump Kit



25-50 H.P. 1997-2005
Water Pump Kit, Repair Kit with Housing for Jet Pump

O.E. No. 438592

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777805	(777805)	$72.99 H
Sierra	183454	(18-3454)	$75.52 H

Water Pump Kit



40-50 H.P. 2000-2002
Water Pump Kit, Repair Kit without Housing, 4 Stroke

O.E. No. 5031744

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778317	(778317)	$42.99 L

Water Pump Kit



40-60 H.P. 1980-1985
Water Pump Kit, Complete Repair Kit with Housing. Replaces: 391635

O.E. No. 439077

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777808	(777808)	$94.99 H
Sierra	183378	(18-3378)	$96.30 H

Impeller and Key



50-70 H.P. 1986-2005
Impeller and Key

O.E. No. 396725

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777820	(777820)	$49.99 L
Sierra	183053	(18-3053)	$25.42 H
MP Parts	4-3053B	(47-01750-10)	$24.98 K

Water Pump Kit



55 H.P. 1976-1978
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 389133

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777812	(777812)	$92.99 H

Water Pump Kit



60-75 H.P. 1986-2001
Water Pump Kit, Completer Kit with Housing Wedge Type. Replaces: 436957

O.E. No. 438602

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778274	(778274)	$84.99 H
Sierra	183389	(18-3389)	$73.62 H

Water Pump Kit



60-75 H.P. 1989-2001
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 432955

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777804	(777804)	$80.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Water Pump Kit



70-75 H.P. 1975-1976
Water Pump Kit, Complete Repair Kit with Housing. Replaces: 386533

O.E. No. 438579

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777810	(777810)	$77.99 H
Sierra	183393	(18-3393)	$90.93 H

Water Pump Kit



85-135 H.P. 1975-1976
Water Pump Kit, Repair Kit with Housing Dual Water P/U. Replaces: 386124

O.E. No. 439140

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777807	(777807)	$102.99 H

Water Pump Kit



88-250 H.P. 1979-2001
Water Pump Kit, Complete Kit with Housing, with Weep Hole. Replaces: 434421

O.E. No. 5001594

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777800	(777800)	$74.99 H
Sierra	183392	(18-3392)	$65.23 H

Water Pump Kit



88-300 H.P. 1985-Thru
Water Pump Kit, Complete Repair Kit with Housing. Replaces: 435929, 5001595

O.E. No. 5001595

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777802	(777802)	$74.99 H
Sierra	183315	(18-3315-2)	$72.75 H

Water Pump Kit



90-140 H.P. 2003-2006
Water Pump Kit without Housing, 4 Stroke

O.E. No. 5033541

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778241	(778241)	$50.99 H

Water Pump Kit



150-200 H.P. 1976-1978
Water Pump Kit, Complete Repair Kit with Housing

O.E. No. 395073

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777813	(777813)	$86.99 H

Impeller Repair Kit



OMC Water Pump Repair Kit, V4-V8
Contains: 18-3059 - Impeller O.E. #395864, 397131, 435821 Qty. 1, 18-2536 - Rubber Seal O.E. #321120 Qty. 1, 18-2557 - Impeller Gasket O.E. #324701, 338484 Qty. 1, 18-3299 - Impeller Key O.E. #331107 Qty. 1, 18-7158 - O-Ring O.E. #310967, 310585 Qty. 1, 18-3138 - Impeller Key O.E. #334897 Qty. 1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183211	(183211)	$42.37 H

Housing



5-8 H.P. 1980-2005
Impeller Housing Only

O.E. No. 389577

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778264	(778264)	$16.99 H

Housing



8-15 H.P. 1993-2007
Housing and Seal, Impeller, Housing with Bolts and Drive Shaft Seal

O.E. No. 435390

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778236	(778236)	$27.99 H

Housing



40-55 H.P. 1976-1994
Impeller Housing, Housing Only, 2 Cylinder

O.E. No. 384087

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778450	(778450)	$17.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Housing



40-50 H.P. 1996-2005
Impeller Housing Only

O.E. No. 438544

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778383	(778383)	$10.99 H

Housing



60-75 H.P. 1998-2001
Impeller Housing Only

O.E. No. 438543

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778390	(778390)	$16.99 H

Thermostat



6-55 H.P. 1990-1994
Thermostat, 2 Cylinder

O.E. No. 433379

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765625	(765625)	$40.99 L

Thermostat



25-140 H.P. 1993-2007
Thermostat, 143° Vernatherm Only

O.E. No. 436195

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777837	(777837)	$17.99 L
Sierra	183561	(18-3561)	$14.47 H

Thermostat



40-250 H.P. 2004-Thru
Thermostat, 140° S.S. Replaces: 393659, 434841, 508626, 378065

O.E. No. 5005440

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777260	(777260)	$26.99 L
Sierra	183543	(18-3543)	$22.57 H

Thermostat



60-75 H.P. 1968-1988
Thermostat, 143°. Replaces: 396987, 382385

O.E. No. 396987

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778261	(778261)	$32.99 L
Sierra	183557	(18-3557)	$27.27 H

Thermostat



70 and 120-300 H.P. 1990-1993
Thermostat, Bullet Style with Small Holes, with Vernatherm

O.E. No. 434137

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765580	(765580)	$33.99 L
Sierra	183500	(18-3500)	$26.27 H

Thermostat



90-175 H.P. 1993-2006
Thermostat, 143° Salt Shaker Style

O.E. No. 435491

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765559	(765559)	$33.99 L
Sierra	183544	(18-3544)	$21.88 H

Thermostat



90-175 H.P. 1993-2006
Thermostat Kit with Cover, Spring and O-Ring

O.E. No. 435597

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765610	(765610)	$38.99 L

Thermostat



150-250 H.P. 1995-2001
Thermostat Assembly, Stainless Steel, 143°

O.E. No. 437090

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765585	(765585)	$25.99 L
Sierra	183545	(18-3545)	$21.15 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Thermostat

200-250 H.P. 2000-2004
Thermostat, Stainless Steel D.I.



O.E. No. 5001036

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765620	(765620)	$27.99 L
Sierra	183546	(18-3546)	$21.17 H

Thermostat Kit

OMC Thermostat Kit, V-6 Crossflow



O.E. No. 435491

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183674	(18-3674)	$30.37 H

Thermostat Kit

1979-1986
Fits Early Style 3 Cylinder, 143°



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183669	(18-3669)	$29.92 H

Thermostat Kit

1978-1998
Fits All V4 Crossflow



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183673	(18-3673)	$34.98 H

Vernatherm 143°

10-300 H.P. 1985-1995
Vernatherm Only, 143°



O.E. No. 394411

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778199	(778199)	$19.99 H

Seat for Vernatherm

150-300 H.P. 1976-1993
Rubber Seat to Vernatherm, 5 Pack



O.E. No. 320880

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778200	(778200)	$3.99 L
Sierra	181219	(18-1219)	$2.49 H

Thermostat Housing

5-140 H.P. 1991-2007
Thermostat Housing



O.E. No. 336178

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778180	(778180)	$9.99 L

Thermostat Cover

40-175 H.P. 1989-1997
Thermostat Cover



O.E. No. 332944

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778332	(778332)	$1.99 H

Thermostat Cover

185-225 H.P. 1993-2001
Thermostat Cover



O.E. No. 337486

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778377	(778377)	$11.99 H

Cover Nut

25-300 H.P. 1985-2006
Cover Temp Switch (Sensor) Cylinder Head



O.E. No. 329562

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766411	(766411)	$6.99 H

Note: Product shipped may not match the item pictured.

Keyway



3-6 H.P. 1991-2006 Year
Keyway D/S to Impeller, Plastic Wedge

O.E. No. 335956

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778437	(778437)	$6.99 H

Thermostat Gasket



70-250 H.P. 1993-2009
Thermostat Gasket

O.E. No. 339044

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765579	(765579)	$1.99 L

Gasket



120-300 H.P. 1986-1993
Diaphragm, Rubber Screw in Thermostat

O.E. No. 394408

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777842	(777842)	$16.99 L
Sierra	181222	(18-1222)	$13.12 H

Hose



88-115 H.P. 1982-2006
Hose, Port Cylinder Head to Thermostat, All V4 C/F

O.E. No. 340976

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766430	(766430)	$16.99 H

Hose



88-140 H.P. 1977-1996
Hose, Thermostat to Cylinder Head Starboard. Replaces: 321724

O.E. No. 340975

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778219	(778219)	$21.99 L

Water Tube



20-35 H.P. 1980-2005
Spacer, Long, Water Tube Extention, 8" Over All

O.E. No. 326693

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778308	(778308)	$16.99 H

Indicator



185-250 H.P. 1993-Thru
Plug and Nozzle, Overboard Indicator

O.E. No. 436726

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778253	(778253)	$12.99 L

Nipple



6-200 H.P. 1978-1998
Nipple, MC LWR, Overboard Indicator, Nipple Cowling, 5 Pack

O.E. No. 321885

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765569	(765569)	$5.99 J

O-Ring



10-Thru H.P. 1986-Thru
O-Ring, Thermostat and Water Pump Cup

O.E. No. 331188

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765563	(765563)	$3.99 L

Seal



4-15 H.P. 1991-2006
Seal to Cover Thermostat Housing

O.E. No. 336947

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766474	(766474)	$5.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Washer

4-140 H.P. 1991-2007
Washer to Thermostat



O.E. No. 336185

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766484	(766484)	$2.99 L

Seal

8-35 H.P. 1978-1983
Seal to Thermostat



O.E. No. 323582

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778251	(778251)	$5.99 L

Spring

15-300 H.P. 1997-2007
Spring to Thermostat, Stainless Steel



O.E. No. 336179

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778210	(778210)	$5.99 L

Grommet

20-70 H.P. 1971-1994
Grommet Relief Valve, Various Model



O.E. No. 316132

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766425	(766425)	$5.99 H

Valve and Washer

60-75 H.P. 1971-1986
Valve and Washer, Relief Valve Thermostat with 3 Piece Exhaust




O.E. No. 397958

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766483	(766483)	$10.99 H

Spring

90-175 H.P. 1992-2006
Spring to Thermostat, Stainless Steel



O.E. No. 338174

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778243	(778243)	$4.99 L

Spring

150-250 H.P. 1993-2004
Spring to Thermostat, Stainless Steel



O.E. No. 337067

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778242	(778242)	$10.99 H

Diaphragm

10-250 H.P. 1993-2005
Diaphragm and Cup, Various Model



O.E. No. 435957

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765631	(765631)	$17.99 H

Thermostat Cover

40-200 H.P. 1993-2009
Cover Thermostat, V60V and 2 Cylinder E-tec



O.E. No. 338632

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765636	(765636)	$9.99 L

O-Ring

200-300 H.P. 2008-2010
Thermostat O-Ring



O.E. No. 301917

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765613	(765613)	$0.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Trim and Tilt Motors Cross Reference Guide

Model	Year	OMC Systematched	MP Parts	BRP O.E.	Sierra
30-60	2004-2009	-	4-2445	5005831	-
40-50 Two Wire Female Spade Ends	1982-1995	-	4-6280	435532	18-6280
40-50 Two Wire Male Spade Ends	1982-1995	-	4-6285	433226	18-6285
40-135 with External Trim & Tilt	1974-1989	-	4-1257	172850	18-6767-1
50 HP 3 Cylinder	1995-2001	B778266	4-1260	5005374	18-6780
60-70	1991-2001	B778266	4-1260	5005374	18-6780
60 V4 90 - 115	1995-2001	B778266	4-1260	5005374	18-6780
85-200 Early with 3 Wire	1976-1979	-	4-6761	387277	-
75-250 FFI with Small Female Spade	1998-2011	-	4-6281	5005254	18-6281
90-115 Crossflow (with Fastrak Midsection)	1991-1996	B778284	4-1260	5005376	18-6780
100-155	1991	B778247	4-1250	394176	18-6759
120-140	1991-1994	B778284	4-1260	5005376	18-6780
130	1995-2001	B778284	4-1260	5005376	18-6780
150-175 All V60° Plastic Body Female Spade	1991-2001	B778266	4-1260	5005374	18-6780
115-225 All V90° Plastic Body Short Leads	1992-1998	B778284	4-1260	5005376	18-6780
200-225 All	1991-2001	B778284	4-1260	5005376	18-6780
150-250 FFI with Small Female Spade	1998-2011	-	4-6281	5005254	18-6281

Trim and Tilt Motor



20-40 H.P. 1982-1998
Electric Motor for Power Tilt Kit, 20, 25, 28, and 30 (2 Cylinder)

O.E. No. 173944

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1259	(TRM0033)	$158.98 G

Trim and Tilt Motor



30-60 H.P. 2004-2009
Trim and Tilt Motor, Late Style

O.E. No. 5005831

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-2445	(TRM0086)	$149.98 G

Trim and Tilt Motor



40-50 H.P. 1989-2006
Trim and Tilt Motor, All 2 Stroke, 2 Wire with Male Spade

O.E. No. 433226

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6285	(TRM0070)	$123.98 G
Sierra	186285	(18-6285)	$259.33 H

Trim and Tilt Motor



40, 48, 50 H.P. 1992-2006
Trim and Tilt Motor, Heavy Duty, OMC J Suffix, 2 Wire Connection and Hollow Hex Drive

O.E. No. 437801

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6280	(TRM0040)	$121.98 G
Sierra	186280	(18-6280)	$273.73 H

Trim and Tilt Motor



40-135 H.P. 1974-1989
Trim and Tilt Motor, with External Trim and Tilt

O.E. No. 172850

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1257	(TRM0016)	$232.98 G

Trim and Tilt Motor



60-250 H.P. 1991-Thru, Most Models, Johnson, Evinrude, Yamaha, Suzuki, Tohatsu
Complete Trim and Tilt, Show Design 2 Wire Motor

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1265	(TRM0067)	$1,810.98 G

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Trim and Tilt Motor



70-135 H.P. 1982-1985
Models with Hydraulic Engine Lifts for Pump Assembly, External Mount

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1261	(TRM0038)	$248.98 G

Trim and Tilt Motor



70-300 H.P. 1984-1992
Trim and Tilt Motor, 2 Wire 3 Bolt Early

O.E. No. 394176

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778247	(778247)	$159.99 F
Sierra	186759	(18-6759)	$162.97 H
MP Parts	4-1250	(TRM0004)	$96.98 G

Trim and Tilt Motor



75-300 H.P. 1998-2012
Trim and Tilt Motor, All FFI Model, with Long Leads, Female Spade

O.E. No. 5005254

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186281	(18-6281)	$162.97 H
MP Parts	4-6281	(TRM0075)	$152.98 G

Trim and Tilt Motor



90-250 H.P. 1991-2006
Trim Motor and O-Ring, with Plastic Housing, Spade Terminal and 3.0' Leads, Fast Strike, O-Ring Included

O.E. No. 5005374

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778266	(778266)	$207.99 F
Sierra	186780	(18-6780)	$239.83 H
MP Parts	4-1260	(TRM0039)	$135.98 G

Solenoid Starter



25-250 H.P. 1985-1993
Solenoid Starter, 4 Post, No Mounting Bracket. Replaces: 395419, 582708

O.E. No. 586180

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777698	(777698)	$39.99 L
Sierra	185808	(18-5808)	$23.82 H
MP Parts	4-1204	(SMR6003)	$14.98 G

Trim and Tilt Motor



70-300 H.P. 1983-2001
Trim and Tilt Motor with Cable, 2 Wire 3 Bolt Extra Long Lead

O.E. No. 393988

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777785	(777785)	$213.99 L
Sierra	186759	(18-6759)	$162.97 H
MP Parts	4-1250	(TRM0004)	$96.98 G

Trim and Tilt Motor



70-300 H.P. 1992-1994
Tilt and Trim Motor, 2 Wire, 3 Cylinder thru V8

O.E. No. 434795

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-2455	(TRM0091)	$156.98 G

Trim and Tilt Motor



85-200 H.P. 1976-1979
Trim and Tilt Motor, Early Model with 3 Wire

O.E. No. 387277

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6761	(TRM0013)	$126.98 G

Trim and Tilt Motor



90-250 H.P. 1991-2007
Trim Motor and O-Ring, with Plastic Housing, Spade Terminal and 3.5' Leads, Fast Strike, O-Ring Included. Replaces: 439937, 438787

O.E. No. 5005376

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778284	(778284)	$207.99 F
Sierra	186780	(18-6780)	$239.83 H
MP Parts	4-1260	(TRM0039)	$135.98 G

Trim and Tilt Solenoid



70-235 H.P. 1976-1981
Trim and Tilt Solonoid. Replaces: 581528, 172869

O.E. No. 581528

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777699	(777699)	$27.99 H
Sierra	185814	(18-5814)	$26.98 H

Note: Product shipped may not match the item pictured.

Relay

40-300 H.P. 1985-Thru
Relay for All 2 Wire Trim Motor.
Replaces: 582472, 584416, 586224



O.E. No. 586224

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777702	(777702)	$20.99 J
Sierra	185705	(18-5705)	$16.75 H

Bushing

40-50 H.P. 1989-2009
Bushing, Tilt Cylinder to Bracket



O.E. No. 332436

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766400	(766400)	$5.99 H

Bushing

70-250 H.P. 1978-2001
Bushing, Tilt Cylinder, Upper, 2 Required



O.E. No. 322481

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778288	(778288)	$9.99 H

Bushing

70-250 H.P. 1991-2009
Bushing, Tilt Cylinder, Upper and Lower Mount



O.E. No. 335479

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765614	(765614)	$6.99 H

Bushing

70-300 H.P. 1976-2001 Year
Bushing, Tilt Cylinder, 2 Required



O.E. No. 321035

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778226	(778226)	$7.99 L

Bushing

185-300 H.P. 1985-1998
Bushing, Tilt Cylinder



O.E. No. 331010

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778425	(778425)	$6.99 H

Cable Assembly

40-50 H.P. 1993-2009
Cable Assembly, Tilt Assist



O.E. No. 436202

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766408	(766408)	$92.99 H

Seal Kit

35-55 H.P. 1986-1989
O-Ring Kit Trim and Tilt Cylinder,
1 Kit Per Cylinder



O.E. No. 174520

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766439	(766439)	$28.99 H

Seal Kit

40-50 H.P. 1989-2009
O-Ring and Seal Kit, Trim Assembly



O.E. No. 435567

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766446	(766446)	$78.99 H

Seal Kit

70-250 H.P. 1991-2009
O-Ring and Seal Kit, Trim Assembly



O.E. No. 434519

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778218	(778218)	$76.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Seal

70-300 H.P. 1976-1998
Wiper, Rod, Wiper Seal Trim Cylinder, Early Style



O.E. No. 122494

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766486	(766486)	$6.69 H

Coupler

70-250 H.P. 1991-2009
Coupler, Trim and Tilt Motor to Pump



O.E. No. 914053

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778484	(778484)	$11.99 H

Starter Motors - Outboard

Model	Year	OMC Systematched	MP Parts	BRP O.E.	SIERRA
9.9-15	1974-1992	B777697	4-1180	763454	18-5617
8	1997-2001	B777697	4-1180	763454	18-5617
20	1985-1988	B777691	4-1118	586278	18-5645
20-30	1993-2005	B777691	4-1118	586278	18-5645
25-35	1977-1988	B777691	4-1118	586278	18-5645
20-30	1989-1992	B777687	4-5627	778991	18-5627
40-50	1980-1988	B777692	4-1112	778993	18-5646
55	1978	B777692	4-1112	778993	18-5646
60	1985	B777692	4-5624	778993	18-5646
40-50	1989-2005	B777696	4-5624	586279	18-5624
55	1969	B777689	4-1110	586281	18-5648
50 3 Cylinder	1995-2006	B777689	4-1110	586281	18-5648
60-65	1986-2001	B777689	4-1110	586281	18-5648
70-75	1980-2001	B777689	4-1110	586281	18-5648
85-115 V4 Cross	1973-1998	B777688	4-1114	586283	18-5647
120-140 Loop	1985-1994	B777694	4-1116	778994	18-5628
V6 Cross	1976-1992	B777693	4-2076	778992	18-5640
150-175 V60°	1991-2006	B777690	4-1106	586287	18-5612
75 / 90 / 115 V4 DI	1999-2005	B777690	4-1106	586287	18-5612
135 / 150 / 175 V6 DI	1997-2005	B777690	4-1106	586287	18-5612
115-300 All E-Tec	2006-2012	B778265	4-1108	586890	-
90° V6-V8 Loop, Standard Rotation	1986-2001	B777695	4-1108	586890	18-5619

Starter Motor

9.9-15 H.P. 1993-Thru
Starter Motor, 2 Stroke, No E-Tec, 2 Cylinder 10 Tooth. Replaces: 586274, 584613



O.E. No. 763454

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777697	(777697)	$278.99 H
Sierra	185617	(18-5617)	$285.08 H
MP Parts	4-1180	(SAB0140)	$149.98 G

Starter Motor

9.9-15 H.P. 1974-2001
Starter Motor, 2 Stroke, 10 Tooth Drive Gear



O.E. No. 586274

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185617	(18-5617)	$285.08 H
MP Parts	4-5617	(SAB0110)	$135.98 G

Starter Motor

9.9-15 H.P. 1995-2000
Starter Motor, All 4 Stroke, 10 Tooth Drive Gear



O.E. No. 586275

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5623	(SAB0103)	$112.98 G

Starter Motor

20-30 H.P. 1988-2002
Starter Motor, 2 Cylinder, 9 Tooth. Replaces: 583473, 585059, 585459



O.E. No. 778991

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777687	(777687)	$193.99 H
Sierra	185627	(18-5627)	$192.48 H

Note: Product shipped may not match the item pictured.

Starter Motor



20-30 H.P. 1998-2005
Starter Motor, 2 Cylinder, Late Model.
Replaces: 585061, 385401

O.E. No. 586278

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777691	(777691)	$245.99 H
Sierra	185629	(18-5629)	$190.13 H
MP Parts	4-1118	(SAB0109)	$103.98 G

Starter Motor



25-35 H.P. 1996-2001
Starter Motor, All Small 3 Cylinder Engines,
10 Tooth Drive Gear

O.E. No. 586277

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5631	(SAB0104)	$135.98 G

Starter Motor



40-60 H.P. 1978-1992
Starter Motor, 2 Cylinder, 9 Tooth.
Replaces: 384163, 389275, 585063

O.E. No. 778993

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777692	(777692)	$286.96 L
Sierra	185646	(18-5646)	$288.53 H
MP Parts	4-1112	(SAB0040)	$108.98 G

Starter Motor



60-75 H.P. 1976-2001
Starter Motor, All 3 Cylinder, 2 Stroke

O.E. No. 586281

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185635	(18-5635)	$257.00 H
MP Parts	4-1120	(SAB0115)	$139.98 H

Starter Motor



85-125 H.P. 1964-1978
Starter Motor, Early V4, 10 Tooth Drive
Large GEar

O.E. No. 384914

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5634	(SPL0009)	$158.98 G

Note: Product shipped may not match the item pictured.

Starter Motor



20-35 H.P. 1988-1992
Starter Motor, All 2 Stroke, 9 Tooth Drive
Gear

O.E. No. 585459

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185627	(18-5627)	$192.48 H
MP Parts	4-5627	(SAB0036)	$140.98 G

Starter Motor



40-60 H.P. 1999-2009
Starter Motor, 2 Stroke, No E-Tec,
2 Cylinder. Replaces: 583482, 585056

O.E. No. 586279

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777696	(777696)	$262.99 L
Sierra	185624	(18-5624)	$234.55 H
MP Parts	4-5624	(SAB0078)	$110.98 G

Starter Motor



40-90 H.P. 2004-2010
Starter Motor, All E-Tec 2 and 3 Cylinder

O.E. No. 586768

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1121	(SAB0147)	$149.98 G

Starter Motor



60-75 H.P. 1981-2001
Starter Motor, Fits All 3 Cylinder, Loop.
Replaces: 585058, 586281, 386657, 391735

O.E. No. 586281

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777689	(777689)	$275.99 H
Sierra	185635	(18-5635)	$257.00 H
MP Parts	4-1110	(SAB0039)	$107.98 G

Starter Motor



85-115 H.P. 1975-1998
Starter Motor, Fits All V4 Crossflow
10 Tooth. Replaces: 585057, 585051,
385529, 388954

O.E. No. 586283

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777688	(777688)	$209.99 F
Sierra	185634	(18-5634)	$227.20 H
MP Parts	4-1114	(SAB0062)	$99.98 G

©2014 Donovan Marine, Inc.

Starter Motor



90-115 H.P. 1997-2006
Starter Motor, All V60° V4, Carburetor and FFI, Motor Only without Drive Gear

O.E. No. 586287

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185632	(18-5632)	$223.62 H
MP Parts	4-5632	(SAB0075)	$131.98 G

Starter Motor



90-175 H.P. 1991-2006
Starter Motor, V4, V6 60° Fuel Injection, V6 Carb. Replaces: 432925, 586287, 586286

O.E. No. 586287

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777690	(777690)	$175.99 F
Sierra	185612	(18-5612)	$218.33 H
MP Parts	4-1106	(SAB0019)	$147.98 G

Starter Motor



90-200 H.P. 2006-2012
Starter Motor, 10 Tooth, E-Tech V4, V6 and V6 Loop, Same As 586890. Replaces: 584799, 396235, 391511, 586731

O.E. No. 586957

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778265	(778265)	$359.99 H
Sierra	185619	(18-5619)	$266.73 H
MP Parts	4-1108	(SAB0029)	$126.98 G

Starter Motor



120-140 H.P. 1985-1994
Starter Motor, V4 Looper, All Models 10 Tooth. Replaces: 393570, 585060

O.E. No. 778994

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777694	(777694)	$254.99 H
Sierra	185628	(18-5628)	$227.20 H
MP Parts	4-1116	(SAB0066)	$130.98 G

Starter Motor



150-235 H.P. 1976-1991
Starter Motor, All Crossflow V6, 8 Tooth Drive Gear

O.E. No. 585062

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777693	(777693)	$294.99 H
Sierra	185640	(18-5640)	$217.42 H
MP Parts	4-5600	(SAB0003)	$101.98 G

Starter Motor



185-300 H.P. 1985-2006
Starter Motor, V6, V8 Loop, All Models, Same as 586957. Replaces: 584799, 396235, 391511, 586731

O.E. No. 586890

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777695	(777695)	$311.99 F
Sierra	185619	(18-5619)	$266.73 H
MP Parts	4-1108	(SAB0029)	$126.98 G

Brush Kit



25-130 H.P. 1974-2005
Bush and Spring Rebuild Kit

O.E. No. 385952

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777704	(777704)	$25.99 L
Sierra	185697	(18-5697)	$26.58 H

Drive Gear



40-75 H.P. 1973-1994
Drive Gear, 9 Tooth, 2 and 3 Cylinder

O.E. No. 384781

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777707	(777707)	$33.99 H
Sierra	185671	(18-5671)	$27.05 H

Drive Gear



85-140 H.P. 1973-1994
Drive Gear Only, 10 Tooth, V4 C/F and V4 Loop

O.E. No. 385949

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777705	(777705)	$32.99 H

Drive Gear



88-140 H.P. 1995-2001
Drive Gear Kit, 10 Tooth, Late Style, All V4 C/F and V4 Loop, 25-35 H.P. 3 Cylinder. Replaces: 585267

O.E. No. 586100

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777710	(777710)	$60.99 H
Sierra	185679	(18-5679)	$55.27 H

Note: Product shipped may not match the item pictured.

Drive Gear



150-235 H.P. 1976-1991
Drive Gear Kit, Pinion, Starter All V6 Crossflow 8 Tooth

O.E. No. 387683

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777709	(777709)	$39.99 H
Sierra	185674	(18-5674)	$27.05 H

Drive Gear



90-175 H.P. 1991-2006
Pinion and Shaft, V60V Models Only, Drive and Shaft. Replaces: 434517

O.E. No. 434517

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778281	(778281)	$124.99 H

Clamp



10-30 H.P. 1990-2007
Clamp Screw, Clamp Bracket

O.E. No. 433675

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778182	(778182)	$36.99 L

Grommet



6-15 H.P. 1978-1984
Grommet Upper Water Tube

O.E. No. 324045

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766428	(766428)	$7.99 H

Grommet



6-15 H.P. 1985-2007
Grommet Upper Water Tube

O.E. No. 330426

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766426	(766426)	$7.99 H

Motor Mount



25-35 H.P. 1976-2005
Rubber Motor Mount, Lower Front

O.E. No. 321469

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766466	(766466)	$38.99 H

Motor Mount



25-35 H.P. 1979-2005
Rubber Motor Mount, Side, 2 Required

O.E. No. 325974

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778211	(778211)	$27.99 H

Tilt Pin



4-15 H.P. 1989-2010
Tilt Pin, Clamp Bracket

O.E. No. 432453

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778197	(778197)	$35.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.


©2014 Donovan Marine, Inc.

Gear Case O-Ring and Seal Kits

Model	Year	OMC Systematched	BRP O.E. P#	SIERRA P#
9.9/15	1974-2006	B777568	396350	18-2656
9.9/15 4 Stroke	1994-2001	B777568	396350	18-2656
25	1984	777574	396352	18-2657
25 Commercial 28SPL, 30SPL	1985-1996	777574	396352	18-2657
20/25	1985-2005	B777559	396351	18-2658
30/35	1977-2005	B777559	396351	18-2658
40/48/50/55/60 (2 Cylinder), 75 Small Gear Case	1976-1988	B777562	396355	18-2659
40/48/50 2-Stroke	1989-2005	B777551	433550	18-2694
60/65/70/75 (3 Cylinder)	1978-2001	B777558	5000309	18-2660
50 (3 Cylinder)	1995-2001	B777558	5000309	18-2660
V4	1978-1984	B777521	5006373	18-2623
88/90/110/115	1985-2001	B777521	5006373	18-2623
1.6L/OMC SeaDrive®		B777521	5006373	18-2623
120/140	1985-2001	B777521	5006373	18-2623
100 Commercial	1984-1990	B777521	5006373	18-2623
125 Commercial	1990	B777521	5006373	18-2623
V6	1979-1990	B777521	5006373	18-2623
155 Commercial	1984-1990	B777521	5006373	18-2623
2.5L/2.6L/OMC SeaDrive® V8	1985-1990	B777521	5006373	18-2623
V6/V8 Counter Rotation	1991	B777521	5006373	18-2623
Single Lip Seals-90/115 Looper/V6	1991-1994	B777521	5006373	18-2623
Double Lip Seals-90/115 Looper/V6	1994-2006	B777521	5006373	18-2623
100/125 Commercial	1991-1993	B777521	5006373	18-2623
V6/V8 Commercial	1991-1993	B777521	5006373	18-2623
V6/V8 Counter Rotation	1992	B777521	5006373	18-2623

Gear Set

40-50 H.P. 1989-2005
Gear Set, 2 Cylinder, All Late Style, 3 Dogs, 12:29 Ratio



O.E. No. 397627

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777495	(777495)	$451.99 H
Sierra	182310	(18-2310)	$465.22 H

Gear Set

40-60 H.P. 1978-1988
Gear Set, 2 Cylinder, Early Style, Complete FWD, Pinion, Reverse. Replaces 397128



O.E. No. 433570

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777500	(777500)	$598.99 H
Sierra	182289	(18-2289)	$597.52 H

Gear Set

70-115 H.P. 1980-2010
Gear Set, V4 and Late 3 Cylinder E-Tec, 6 Spline Pinion and 3 Dog Gear 13:26. Replaces: 434063, 989966, 985050



O.E. No. 436746

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777493	(777493)	$496.99 H
Sierra	182218	(18-2218)	$521.30 H

Gear Set

70-115 H.P. 1980-2010
Gear Set, V4 and Late 3 Cylinder E-Tec, Reverse Gear 13:26. Replaces: 317838, 340490, 333077



O.E. No. 345992

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777499	(777499)	$185.99 H
Sierra	182219	(18-2219)	$211.25 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Gear Set



100-140 H.P. 1993-2001
Gear Set, V4, Foward and Pinion 6 Dogs 19 Sline, 12:27 Ratio Large Case. Replaces: 433841, 398095

O.E. No. 435123

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778420	(778420)	$449.99 H

Gear Set



150-250 H.P. 1991-2010
Gear Set, .54, V6, Reverse Gear 6 Dogs, Not for Magnum Late Style Case

O.E. No. 336561

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777492	(777492)	$312.99 H

Gear Set



150-250 H.P. 1990-2010
Gear Set, V6, Forward and Pinion, All Standard Case, Not Magnum, 19 Spline, 6 Dogs. Replaces: 5004216, 435020

O.E. No. 5004938

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777494	(777494)	$374.99 H

Pinion Gear



20-35 H.P. 1984-2003
Pinion Gear, Floating, No Pinion Nut

O.E. No. 328313

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778379	(778379)	$229.99 H
Sierra	181288	(18-1288)	$221.00 H

Forward Gear



20-35 H.P. 1984-2005
Forward Gear and Bushing

O.E. No. 392475

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778359	(778359)	$246.99 H
Sierra	181287	(18-1287)	$298.75 H

Reverse Gear



20-35 H.P. 1984-2005
Reverse Gear, with 3 Dogs, 13:28 Ratio

O.E. No. 327655

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778461	(778461)	$218.99 H

Reverse Gear



40-50 H.P. 1989-2005
Reverse Gear, with 3 Dogs

O.E. No. 332489

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777497	(777497)	$213.99 H
Sierra	182309	(18-2309)	$209.00 C

Reverse Gear



100-140 H.P. 1993-2001
Reverse Gear, V4, 6 Dogs, 12:27 Ratio Large Case

O.E. No. 336574

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778451	(778451)	$242.99 H

Reverse Gear



150-225 H.P. 1988-1990
Reverse Gear, V6, 6 Dogs

O.E. No. 910994

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777506	(777506)	$254.99 H

Gear Set




Contain:
- Forward Gear Set: 435020, 434026, 983141, 391289
- Reverse Gear: 336561
- 18-2216 Sliding Clutch: 337774, 334516, 336562, 910795, 337772

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182290	(18-2290)	$833.12 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Gear Set



Contains:
- 18-2310 Forward Gear Set: 397627
- 18-2309 Reverse Gear: 332489
- 18-2308 Sliding Clutch: 332491

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182315	(18-2315)	$600.52 H

Gear Set



Contains:
- 18-2218 Forward Gear: 434063
- 18-2219 Reverse Gear: 333077
- 18-2220 Sliding Clutch: 323664

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182221	(18-2221)	$592.32 H

Clutch Dog



20-35 H.P. 1992-2005
Clutch Dog with 3 Dogs

O.E. No. 337020

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778404	(778404)	$159.99 H

Clutch Dog



40-50 H.P. 1989-2005
Clutch Dog, Shifter with 3 Dogs Both Sides

O.E. No. 332491

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777498	(777498)	$75.99 H
Sierra	182308	(18-2308)	$81.22 H

Seal Kit



10-15 H.P. 1985-2007
Complete Seal Kit

O.E. No. 396350

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777568	(777568)	$44.99 L
Sierra	182656	(18-2656)	$42.17 H

Drive Pin



6-35 H.P. 1968-1979
Drive Pin, for Early Style Propeller, 10 Pack

O.E. No. 307949

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765545	(765545)	$1.99 L

Drive Pin



10-18 H.P. 1956-1959
Drive Pin

O.E. No. 203663

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778316	(778316)	$2.99 L

Gear Case Seal



40-70 H.P. 1976-1996
Seal, Driveshaft, 5 Pack

O.E. No. 321466

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777531	(777531)	$12.29 L
Sierra	182059	(18-2059)	$10.05 H

Retainer



100-300 H.P. 1991-2012
Drive Shaft Retainer

O.E. No. 338504

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765634	(765634)	$3.99 L

Pin



100-300 H.P. 1991-2012
Drive Shaft Retainer Pin

O.E. No. 311538

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765638	(765638)	$3.99 L

Note: Product shipped may not match the item pictured.

Detent



115-250 H.P. 2002-2008
Detent, Shifter All Magnum Gear Case.
Replaces: 356754

O.E. No. 347377

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778424	(778424)	$75.80 H

Screw



115-250 H.P. 1978-2010
Screw, Holds in Bearing Carrier 5/16 x 18 x 1.
Replaces: 333955, 341541

O.E. No. 350271

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778168	(778168)	$7.99 L

Thrust Washer



115-250 H.P. 1982-2008
Thrust Washer, Upper Pinion, Under Bearing Housing. Replaces: 314729

O.E. No. 327656

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777578	(777578)	$12.99 L

Shift Housing



115-300 H.P. 2002-2008
Shift Housing, Forward Cluster, Magnum Case

O.E. No. 5001601

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778415	(778415)	$87.99 H

Thrust Washer



115-300 H.P. 2002-2010
Thrust Washer, Reverse Gear, Magnum Case

O.E. No. 349193

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778400	(778400)	$22.99 H

Retaining Tab



150-250 H.P. 1988-2009
Retaining Tab, Bearing Carrier, All Gearcase Except Magnum

O.E. No. 333957

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778455	(778455)	$27.99 H

Nipple



150-250 H.P. 1991-2008
Nipple, Pitot Tube, Speed Pick Up, All V6

O.E. No. 336535

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778156	(778156)	$3.99 L

Propshaft Seal



150-300 H.P. 1976-1991
Propshaft Seal, 2 Required, 5 Pack

O.E. No. 320862

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778172	(778172)	$13.99 M
Sierra	182002	(18-2002)	$9.52 H

Prop Shaft



OMC O/B and I/O Prop Shaft
Replaces: 435022, 433017, 436740

O.E. No. 433017

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182251	(18-2251)	$367.85 H

Propshaft



150-300 H.P. 1985-1990
Propshaft Only, V6, 90°

O.E. No. 395209

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777507	(777507)	$396.99 H
Sierra	182187	(18-2187)	$395.97 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Intake Screen



150-300 H.P. 1981-2001
Water Pick Up Screen, All V6 with 4 Hole Intake and V8, Internal

O.E. No. 321123

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778164	(778164)	$8.99 L

Retaining Tab



150-300 H.P. 2006-2012
Retaining Tab, Bearing Carrier, For Magnum Case

O.E. No. 352741

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778327	(778327)	$16.99 H

Prop Nut



150-300 H.P. 1987-2010
Prop Nut with Keeper and Cotter.
Replaces: 5008966

O.E. No. 398042

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778165	(778165)	$9.96 L

Coupler



20-35 H.P. 1980-2005
Coupler, Plastic to Shift Rod

O.E. No. 325625

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766436	(766436)	$5.99 H

Washer



18-225 H.P. 1968-1987
Washer, O-Ring, Small, Various Models, 10 Pack

O.E. No. 307853

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765640	(765640)	$1.99 L

Intake Screen



20-35 H.P. 1995-2002
Water Intake Screen

O.E. No. 336206

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766468	(766468)	$10.99 H

Seal Kit



20-35 H.P. 1985-2005
Complete Seal Kit, 2 Cylinder, Long Case with Snap Ring Carrier

O.E. No. 396351

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777559	(777559)	$55.99 L
Sierra	182658	(18-2658)	$43.52 H

Drive Pin



2-3 H.P. 1991-2006
Drive Pin, 5 Pack

O.E. No. 115193

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778198	(778198)	$0.99 L

Drive Pin



2-5 H.P. 1998-2007
Drive Pin, 10 Pack

O.E. No. 5030084

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778267	(778267)	$2.99 L

Drive Pin



30-40 H.P. 1968-1986
Drive Pin, 10 Pack

O.E. No. 304575

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778190	(778190)	$4.99 L

Note: Product shipped may not match the item pictured.

Driveshaft Seal



25-300 H.P. 1976-2005
Seal Lower Unit, 5 Pack

O.E. No. 321453

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765583	(765583)	$15.99 L

Drive Pin



3-4 H.P. 1987-1990
Pin Drive, for Early Style Propeller, 10 Pack

O.E. No. 333513

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765570	(765570)	$1.99 L

Seal Kit



35-75 H.P. 1985-1998
Complete Seal Kit

O.E. No. 396355

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777562	(777562)	$64.99 H
Sierra	182659	(18-2659)	$63.08 H

Drive Pin



4 H.P. 168-1971
Drive Pin, 5 Pack. Replaces: 331692

O.E. No. 203230

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778159	(778159)	$2.99 L

Shift Lever



40-115 H.P. 1979-2010
Shift Lever, All 2 and 3 Cylinder and V4 60° 75-115 E-Tec

O.E. No. 324037

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778329	(778329)	$16.99 H

Prop Nut



30-40 H.P. 1968-1986
Prop Nut Only, Cone Type for Split Case

O.E. No. 305294

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778283	(778283)	$9.99 H

Shift Cradle



40-250 H.P. 1988-2010
Shift Cradle

O.E. No. 334163

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765617	(765617)	$18.99 L

Ball



40-250 H.P. 1968-2009
Ball, Detent Shifter and Trim and Tilt

O.E. No. 160084

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778163	(778163)	$3.99 L

Prop Shaft



40-50 H.P. 1985-2005
Propshaft Only, 2 Cylinder Only. Replaces: 397541

O.E. No. 439138

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777509	(777509)	$418.99 H
Sierra	182288	(18-2288)	$530.00 H

Clutch Dog Pin



40-300 H.P. 1968-2010
Clutch Dog Pin, All V4 and V6 and Late 40-70 E-Tec

O.E. No. 313448


Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778196	(778196)	$3.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Seal Kit



40-50 H.P. 1989-2005
Complete Seal Kit, 2 Cylinder Short Case (X) Bolt In Carrier

O.E. No. 433550

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777551	(777551)	$40.99 L
Sierra	182694	(18-2694)	$32.03 H

Lower Unit Seal Kit



Contains: 18-0110 (Shift Housing Gasket) O.E. #314082 - Qty. 1, 18-2001 (Seal) O.E. #330137 - Qty. 2, 18-2002 (Seal) O.E. #320862 - Qty. 2, 18-2026 (Seal) O.E. #321453 - Qty. 2, 18-2061 (Seal) O.E. #329922 - Qty. 1, 18-2062 (Seal) O.E. #329923 - Qty. 1, 18-2377 (Screw) O.E. #316563 - Qty. 4, 18-2378 (Magnetic Drain Screw) O.E. #318544 - Qty. 1. Replaces: (OEM #): 5000411/439141, Fits Application: Most V-4/V-6

O.E. No. 439141

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182623	(18-2623)	$75.55 H

Retainer



40-50 H.P. 1989-2005
Tab Retainer, Bearing Carrier

O.E. No. 332495

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778372	(778372)	$74.99 H

Spring



40-50 H.P. 1989-2005
Spring Shifter

O.E. No. 332484

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778403	(778403)	$4.99 L

Shift Cradle



40-50 H.P. 1989-2005
Shift Cradle

O.E. No. 332507

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778405	(778405)	$52.99 H

O-Ring



40-50 H.P. 1989-2005
O-Ring, Bearing Housing

O.E. No. 553126

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777552	(777552)	$3.99 L

Shim



40-50 H.P. 1989-2005
Shim Pinion, .004 Thick

O.E. No. 313274

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778418	(778418)	$9.99 H

Shim



40-50 H.P. 1989-2005
Shim Pinion, .005 Thick

O.E. No. 313275

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778406	(778406)	$5.99 H

Lever



40-50 H.P. 1989-2005
Shift Lever

O.E. No. 332492

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778463	(778463)	$19.99 H

Shift Shaft



40-50 H.P. 1989-2005
Shift Shaft, Inside the Prop Shaft

O.E. No. 332503

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778457	(778457)	$49.99 H

Note: Product shipped may not match the item pictured.

Bearing Housing

40-50 H.P. 1992-2005
Upper Bearing Cap with Seals and Bearing



O.E. No. 435274

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778367	(778367)	$96.99 I

Driveshaft



40-50 H.P. 1997-2005
Driveshaft, 20" for Small Gear Case and 45X.
Replaces 435269

O.E. No. 438399

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778387	(778387)	$558.99 H

Seal Kit

40-50 H.P. 1998-2006
Complete Seal Kit, 2 Cylinder, Long Case with Snap Ring Carrier. Replaces: 396349



O.E. No. 5000309

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777558	(777558)	$55.99 H
Sierra	188383	(18-8383)	$69.37 H

Shift Cover

40-50 H.P. 1993-2002
Cover Shift Rod with Bushing and O-Ring.
Replaces: 435543, 333781



O.E. No. 434588

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778373	(778373)	$20.99 H

Intake Screen

40-75 H.P. 1968-2005
Water Intake Screen



O.E. No. 314175

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766467	(766467)	$8.99 H

Clutch Dog

40-75 H.P. 1978-1988
Clutch Dog, 2 and 3 Cylinder, 3 Dogs, Early



O.E. No. 319895

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777502	(777502)	$165.99 H
Sierra	182287	(18-2287)	$163.75 H

Shim

40-75 H.P. 1972-2005
Shim, Pinion, .005 Thick



O.E. No. 317232

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777936	(777936)	$1.99 L

Clutch Dog

40-75 H.P. 1989-2005
Clutch Dog, 2 and 3 Cylinder, 3 Dogs, Late



O.E. No. 318303

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777503	(777503)	$165.99 H
Sierra	182209	(18-2209)	$106.23 H

Pin Clutch Dog

40-75 H.P. 1979-2005
Pin Clutch Dog, All 2 and 3 Cylinder



O.E. No. 320310

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778343	(778343)	$3.99 L

Drive Pin

4-8 H.P. 1983-2005
Drive Pin, for Late Style Propeller, 5 Pack



O.E. No. 324690

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765616	(765616)	$2.99 L

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Pinion Gear

5-8 H.P. 1973-1990
Pinion Gear



O.E. No. 318447

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766460	(766460)	$22.99 H

Gear Set

60-75 H.P. 1987-2001
Gear Set, 3 Cylinder, Forward and Pinion Only, 6 Spline



O.E. No. 397338

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777501	(777501)	$331.99 H
Sierra	182207	(18-2207)	$356.00 H

Grommet

6-35 H.P. 1968-2007
Grommet, Water Pump to Water Tube, 5 Pack



O.E. No. 302497

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777843	(777843)	$2.99 L
Sierra	183329	(18-3329)	$1.90 H

Propshaft

70-115 H.P. 1995-2006
Propshaft Only, Late Style Small Gear Case V4 60° and 3 Cylinder E-Tec. Replaces: 436834



O.E. No. 5006310

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778294	(778294)	$503.99 H
Sierra	181725	(18-1725)	$598.75 H

Driveshaft

75-115 H.P. 1995-2010
Lower Driveshaft, 3 Cylinder E-Tec and Late Style V4 60°. Replaces: 340489



O.E. No. 346004

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778354	(778354)	$322.99 H

Shift Housing

60-115 H.P. 1981-2008
Shift Housing with Bearing, Early 3 Cylinder and Late 3 and V4 E-Tec. Replaces: 389950



O.E. No. 391365

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778432	(778432)	$172.99 H

Reverse Gear

60-75 H.P. 1973-2001
Reverse Gear, with 3 Dogs



O.E. No. 318304

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777504	(777504)	$220.99 H
Sierra	182208	(18-2208)	$261.25 H

Propshaft



60-75 H.P. 1998-2001
Propshaft Only, 3 Cylinder. Replaces: 387879

O.E. No. 439185

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777510	(777510)	$394.99 H
Sierra	182250	(18-2250)	$414.67 H

Pinion Nut

40-75 H.P. 1968-2005
Pinion Nut, 2 and 3 Cylinder Gear Case



O.E. No. 313339

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778189	(778189)	$11.99 L

Gasket

8-115 H.P. 1998-2007
Drain Gasket, 4 Stroke



O.E. No. 5030071

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766416	(766416)	$1.99 H

Note: Product shipped may not match the item pictured.

Connector

8-35 H.P. 1968-2007
Shift Rod Connector



O.E. No. 303794

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766409	(766409)	$22.99 H

E-Tec Drain Screw with Magnet

60-300 H.P. 1974-2013
Allen Head



O.E. No. 318544

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777603	(777603)	$13.99 L
Sierra	184249	(18-4249)	$13.50 H

E-Tec Drain Screw

60-300 H.P. 1974-2013
Allen Head. Replaces: 307551



Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777602	(777602)	$4.99 L
Sierra	184255	(18-4255)	$3.60 H

Clutch Dog

85-140 H.P. 1978-2006 Year
Clutch Dog, All V4 with 3 Dogs, Except Late V4 60°. Replaces: 323664, 320630



O.E. No. 323664

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777496	(777496)	$106.99 H
Sierra	182220	(18-2220)	$114.07 H

Shift Shaft

85-140 H.P. 1978-2006
Shift Shaft, Inside the Prop Shaft, All V4 Crossflow Small Case



O.E. No. 322941

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778465	(778465)	$78.99 H

Intake Screen

85-140 H.P. 1978-2006 Year
Intake Screen, All V4 with Internal Screen, Small Case. Replaces: 314996



O.E. No. 323466

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778170	(778170)	$8.99 L

Pin



85-250 H.P. 1984-2008
Pin, Holds Shift Cluster

O.E. No. 331880

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778386	(778386)	$5.99 H

Pinion Nut



85-250 H.P. 1976-2010
Pinion Nut, All V4 and V6, 5/8 x18 Thread

O.E. No. 314730

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777604	(777604)	$13.99 L
Sierra	183719	(18-3719)	$4.02 H

Propshaft



88-115 H.P. 1980-1996
Propshaft Only, V4, 1.125" O.D. Replaces: 387818, 436888

O.E. No. 436888

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777508	(777508)	$498.99 H
Sierra	182187	(18-2187)	$395.97 H

Driveshaft



88-225 H.P. 1981-1991
Upper Driveshaft with Coupler and Pin, with O-Ring on D/S Early Style, 20"

O.E. No. 5000618

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778453	(778453)	$308.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Thrust Washer



9.9-15 H.P. 1977-2007
Thrust Washer, for Propeller Shaft Rear.
Replaces: 318959

O.E. No. 323942

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778315	(778315)	$3.99 L

Driveshaft Seal



90-205 H.P. 1984-2006
Driveshaft Lower Seal

O.E. No. 329923

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777554	(777554)	$9.99 L
Sierra	182062	(18-2062)	$7.38 H

Trim Tab



90-225 H.P. 1993-2010
Trim Fin (Tab)

O.E. No. 338742

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766477	(766477)	$43.99 H

Thrust Washer



90-225 H.P. 1991-2001
Thrust Washer, Reverse Gear

O.E. No. 336565

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778361	(778361)	$16.63 H

Shift Lever



90-250 H.P. 1978-2010
Shift Lever, All V4 and V6

O.E. No. 322938

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778176	(778176)	$44.99 L

Detent



90-250 H.P. 1978-2008
Detent, Shifter All V4 and V6.
Replaces: 323946, 322939

O.E. No. 915954

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778231	(778231)	$71.99 H

Driveshaft Seal



90-250 H.P. 1984-2006
Driveshaft Upper Seal

O.E. No. 329922

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777553	(777553)	$8.99 L
Sierra	182061	(18-2061)	$5.73 H

Pinion Bearing



90-250 H.P. 1979-2010
Pinion Bearing, Needle Roller, All Large Gear Case

O.E. No. 387817

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778255	(778255)	$53.99 M
Sierra	181117	(18-1117)	$41.65 H

Seal Kit



90-250 H.P. 1990-2009
Complete Seal Kit, V4 and V6 Large Gear Case.
Replaces: 5000411, 439141, 396353

O.E. No. 5006373

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777521	(777521)	$93.99 L
Sierra	188384	(18-8384)	$83.35 H

Bearing Housing



90-250 H.P. 1984-2010
Upper Bearing Cap with Seals and Bearing, All V4 and V6. Replaces: 435675, 437215, 438963, 338747

O.E. No. 439476

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778269	(778269)	$85.99 H

Note: Product shipped may not match the item pictured.

Driveshaft Lower



90-250 H.P. 1990-2010
Driveshaft Lower Only, All V4 and V6 Large Case, Except Magnum. Replaces: 335677

O.E. No. 345905

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777512	(777512)	$209.99 H

Driveshaft Upper



90-250 H.P. 1991-2006
Driveshaft Upper with Coupler and Pin, V4 Crossflow and All V90° Loop, 20". Replaces: 5000614, 436232, 435765, 337058

O.E. No. 5007671

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777516	(777516)	$260.99 H
Sierra	182326	(18-2326)	$317.50 H

Clutch Dog



90-250 H.P. 1993-2010
Clutch Dog, 6 Dogs Both Sides. Replaces: 337772, 337774, 334516, 336562

O.E. No. 337774

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777491	(777491)	$118.99 H
Sierra	182216	(18-2216)	$123.95 H

Grommet



90-250 H.P. 1993-2006
Grommet, Water Pump Extension

O.E. No. 338601

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778395	(778395)	$4.99 L

Keeper



90-300 H.P. 1976-2010
Keeper

O.E. No. 333079

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765550	(765550)	$3.99 H

Propshaft



90-250 H.P. 2002-2006
Propshaft Only, Late Model,Magnum Case, E-Tec

O.E. No. 5004765

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777511	(777511)	$329.99 H

Intake Screen



90-300 H.P. 1991-2010
Intake Screen, All V4 and V6 with External Screen

O.E. No. 337778

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778169	(778169)	$16.99 H

Carrier Bearing



90-300 H.P. 1994-2008
Carrier Bearing, Rear, Propshaft, Large Case

O.E. No. 436752

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778350	(778350)	$15.99 L

O-Ring



50-140 H.P. 1968-2010
O-Ring, Carrier Bearing, Small Gear Case, 20 Pack

O.E. No. 313446

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765593	(765593)	$3.99 L

O-Ring



5-8 H.P. 1980-2006
O-Ring, Bearing Housing

O.E. No. 322494


Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778273	(778273)	$4.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Pin



60-140 H.P. 1976-2006
Pin, Shift Lever, Small Gear Case

O.E. No. 320145

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778240	(778240)	$5.99 L

Bushing



50-300 H.P. 1968-Thru
Bushing, Shift Lever, Engine

O.E. No. 312708

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766401	(766401)	$3.99 H

Spacer



55-140 H.P. 1970-2010
Spacer, Plastic, Prop Small Propshaft, 5 Pack

O.E. No. 315810

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777991	(777991)	$4.99 L

Kill Lanyard Clip



All H.P. 1987-2007
Kill Lanyard Clip, Tiller, 5 Pack.
Replaces: 338885

O.E. No. 333499

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778191	(778191)	$3.99 H

Connector



25-50 H.P. 1989-2005
Connector to Shift, Threaded and Ball Socket

O.E. No. 334153

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766475	(766475)	$9.99 H

Control Cable



All H.P. 1973-1978
Control Cable, Guide

O.E. No. 385956

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778229	(778229)	$28.99 H

Control Cable End



All H.P. 1968-1970
Control Cable End, Control Box

O.E. No. 308034

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778246	(778246)	$8.99 L

Grommet



10-60 H.P. 1975-2005
Grommet, Choke Slide to Cowl

O.E. No. 320731

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766427	(766427)	$7.99 H

Horn



40-70 H.P. 1995-1997
Horn, Tiller Handle

O.E. No. 585992

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766444	(766444)	$85.99 H

Handle



25-60 H.P. 1989-2005
Handle, Pull Cord

O.E. No. 334633

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766476	(766476)	$17.99 H

Note: Product shipped may not match the item pictured.

Kill Lanyard

40-Thru H.P. 1996-2005
Kill Lanyard, Over The Key Style



O.E. No. 176288

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766412	(766412)	$16.99 H

Pin

6-50 H.P. 1983-2007
Guide Pin, Helix to Tiller Handle



O.E. No. 329879

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766429	(766429)	$6.99 H

Lock Out Lever

All H.P. 1982-2001
Lock Out Lever, Control Box



O.E. No. 325781

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778252	(778252)	$13.99 H

Roller

8-40 H.P. 1983-2007
Roller to Helix Pin



O.E. No. 329881

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766464	(766464)	$11.99 H

Roller

40-115 H.P. 1988-2005
Roller Kit, Throttle



O.E. No. 432572

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766449	(766449)	$16.99 H

Gear Shift

All H.P. 1974-1978
Gear Shift, Side Mount Wide Box



O.E. No. 386542

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778207	(778207)	$41.99 H

T & T Switch

40-Thru H.P. vary Year
T & T Switch, Cowl, Lower Engine Pan.
Replaces: 583803, 584841, 585146



O.E. No. 585146

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766481	(766481)	$66.99 H

T & T Switch

40-Thru H.P. Vary Year
T & T Switch, Control Binnacle with Pin Connector. Replaces: 586449



O.E. No. 586449

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766482	(766482)	$55.99 H

T & T Switch

40-300 H.P. 1999-2009
T & T Switch Consealed Side Mount.
Replaces: 176393



O.E. No. 586348

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778325	(778325)	$62.99 H

Throttle Lever

25-Thru H.P. Vary Year
Throttle Lever, Plastic, Black Side Mount



O.E. No. 336242

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778174	(778174)	$22.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Tiller Handle

5-40 H.P. 1994-2007
Tiller Handle, Grip and Helix, Contains: 1 Each
339722, 436544



O.E. No. 436275

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766424	(766424)	$22.99 H

Gear

9.9-15 H.P. 1974-1992
Pinion, Gear, Recoil Starter



O.E. No. 318940

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778167	(778167)	$15.99 L

Pawl

3-50 H.P. 1970-1989
Pawl, Recoil Starter, 5 Pack



O.E. No. 203698

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777487	(777487)	$3.99 L
Sierra	186513	(18-6513)	$2.43 H

Pawl

10-35 H.P. 1985-2007
Pawl, Recoil Starter, 5 Pack



O.E. No. 330525

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777485	(777485)	$3.99 L
Sierra	186512	(18-6512)	$2.47 H

Recoil

20-30 H.P. 1985-2005
Starter Pawl Spring



O.E. No. 330527

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765592	(765592)	$8.99 L

Rope

3-50 H.P. All Year
Starter Rope, 5/32" NY 100', Bulk.
Replaces: 322236



O.E. No. 772577

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777481	(777481)	$0.99 L
Sierra	184911	(18-4911)	$56.00 H

Rope

3-50 H.P. All Year
Starter Rope, 7/32" NY 100', Bulk.
Replaces: 316705



O.E. No. 772578

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777482	(777482)	$0.99 L
Sierra	184913	(18-4913)	$96.00 H

Rope

3-50 H.P. All Year
Starter Rope, 1/8" NYL 100', Bulk.
Replaces: 18-4913



O.E. No. 772579

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777483	(777483)	$0.99 L
Sierra	184914	(18-4914)	$50.00 H

Spring

2-4.5 H.P. 1970-1990
Rewind Spring



O.E. No. 312932

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777489	(777489)	$23.99 L
Sierra	186511	(18-6511)	$18.88 H

Spring

9.9-15 H.P. 1974-1978
Rewind Spring



O.E. No. 318944

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777488	(777488)	$38.99 L
Sierra	186503	(18-6503)	$31.18 H

Note: Product shipped may not match the item pictured.

Spring



18-35 H.P. 1970-1994
Rewind Spring. Replaces: 323653, 338534

O.E. No. 338534

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777486	(777486)	$31.99 L
Sierra	186522	(18-6522)	$25.43 H

Spring



20-35 H.P. 1985-2007
Rewind Spring, with Rivet Assemble.
Replaces: 307573

O.E. No. 395460

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777484	(777484)	$15.99 L
Sierra	186501	(18-6501)	$12.67 H

Latch



6-15 H.P. 1994-2005
Latch, Upper to Lower Cover

O.E. No. 435818

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766453	(766453)	$25.99 H

Knob Cowl



10-15 H.P. 1976-1975
Knob Idle Control, Cowl

O.E. No. 387272

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766451	(766451)	$26.99 H

Cover



1991-1999
Cover Assembly, Steering

O.E. No. 433267

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778222	(778222)	$25.99 H

Steering



1996-1999
Push Pull Cable, Foot Control, 5'

O.E. No. 116473

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778322	(778322)	$80.99 H

Steering



1988-1998
Steering Cable, with End, 5'

O.E. No. 432936

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778185	(778185)	$85.99 H

O-Ring



Vary H.P. 1980-2006
O-Ring for Carb, Trim, Midsection

O.E. No. 324660

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778270	(778270)	$3.99 L

Washer



Vary H.P. Vary Year
Washer 1/8 Spring, S.S.

O.E. No. 345998

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778303	(778303)	$4.99 L

Washer



Vary H.P. 1979-2012
Stainless Washer for Throttle Linkage and Other Use

O.E. No. 328702

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765571	(765571)	$1.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Screw



Vary H.P. Vary Year
Screw, 1/4-20 x 1, Hex Head

O.E. No. 328725

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765587	(765587)	$3.99 H

Screw



Vary H.P. Vary Year
Screw, 5/16-18 x 1, Hex Head, 5 Pack

O.E. No. 314417

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765601	(765601)	$1.99 L

Nut Nyloc



Vary H.P. Vary Year
Nut, Nyloc, 1/2-13, Stainless Steel, 4 Pack

O.E. No. 313623

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765639	(765639)	$2.99 L

Screw



Vary H.P. Vary Year
Screw, 1/4-20 x 1-5/8, Slotted Head

O.E. No. 317624

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765606	(765606)	$3.99 L

Screw



Vary H.P. Vary Year
Screw, 1/4-20 x 1/2, Hex Head with Slot

O.E. No. 304024

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766470	(766470)	$4.99 H

Lockwasher



Vary H.P. Vary Year
Lockwasher, 1/4, Stainless Steel

O.E. No. 301551

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766454	(766454)	$3.99 L

Nipple



1999-Thru
Nipple, 5/16 ID, 3/8 NPT x 5/16 Barb

O.E. No. 173311

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777353	(777353)	$5.99 L

Nipple



Vary H.P. Vary Year
Nipple, 90°, 3/8 to 3/8

O.E. No. 174177

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777738	(777738)	$9.99 L

Screw



10-300 H.P. 1978-2005
Screw, 5/16-18, Head Bolt

O.E. No. 322323

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766471	(766471)	$12.99 H

Washer



100-225 H.P. 1968-1989
Washer, Seal Screw to Retaining Ring, Early Style, 5 Pack

O.E. No. 332583

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777524	(777524)	$2.99 L

Note: Product shipped may not match the item pictured.

Screw



120-300 H.P. 1986-2010
Screw, 1/4-28 x 1-1/4, with Seal, Lower Cover

O.E. No. 332590

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778410	(778410)	$9.99 H

Nipple


150-200 H.P. 2002-2010
Nipple, 3/8 ID, 3/8 NPT x 3/8 Barb, E-Tec



O.E. No. 173312

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777351	(777351)	$7.99 L

Screw



20-300 H.P. 1968-2006
Screw, Rod Bolts, 5/16 Head, 12 Pack

O.E. No. 308186

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777787	(777787)	$4.99 L

Screw



150-250 H.P. 2000-Thru
Screw, 1/4-20 x 3/4, with 3/8 Hex with Slot

O.E. No. 916070

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778186	(778186)	$1.99 L

Washer



20-Thru H.P. 1983-Thru
Washer, 1/4" Fender and Thick, Stainless Steel

O.E. No. 328703

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778318	(778318)	$4.99 L

Star Washer



20-Thru H.P. 1968-Thru
Star Washer, 5/16", Stainless Steel

O.E. No. 306799

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778324	(778324)	$2.99 H

Nut Nyloc



20-Thru H.P. 1987-Thru
Nut Nyloc, Tilt Tube

O.E. No. 323599

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778310	(778310)	$13.99 H

Screw

20-Thru H.P. 1984-Thru
Screw, 1/4-20 x 5/8, Stainless Steel, with 5/16 Hex



O.E. No. 328694

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778319	(778319)	$5.99 H

Lock Washer



3-Thru H.P. 1968-Thru
Lock Washer, 1/4", Stainless Steel, 5 Pack

O.E. No. 302290

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778230	(778230)	$0.99 L

Screw



3-50 H.P. 1981-2006
Drain Screw for Gear Case

O.E. No. 309243

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765627	(765627)	$6.99 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Screw



3-Thru H.P. 1968-Thru
Screw, 1/4-20 x 1" Bolt 7/16 Hex Head, Stainless Steel, 5 Pack

O.E. No. 302325

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778374	(778374)	$3.99 L

Tee - 3/16



3-Thru H.P. 1986-Thru
Tee, Plastic, 3/16

O.E. No. 123553

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778193	(778193)	$5.99 H

Washer



3-Thru H.P. 1984-Thru
Fiber Washer, 1/4-20, Coil Mount, 6 Pack

O.E. No. 329176

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778365	(778365)	$0.99 L

Washer



3-Thru H.P. 1987-1986
Fiber Washer, 1/4"

O.E. No. 301814

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778275	(778275)	$3.99 H

Washer



4-300 H.P. 1968-Thru
Washer, Drain Plug, 10 Pack

O.E. No. 311598

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777517	(777517)	$0.99 L

Star Washer



4-300 H.P. 1968-Thru
Star Washer, 1/4, Stainless Steel, 5 Pack

O.E. No. 328701

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778179	(778179)	$0.99 L

Screw



40-Thru H.P. 1968-Thru
Screw, 7/16-14 x 1", Hex, Stainless Steel

O.E. No. 313715

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778290	(778290)	$8.99 L

Bolt



70-115 H.P. 1968-1998
Bolt, 5/16-18, Head

O.E. No. 307267

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766469	(766469)	$6.99 H

Screw



85-200 H.P. 1984-1998
Screw, 1/4-28 with Seal Lower Bearing Cap C/F, 4 Pack

O.E. No. 317763

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778331	(778331)	$3.59 L

Screw



8-175 H.P. 1971-Thru
Screw, 1/4-20, with Shank for Throttle Cam

O.E. No. 316037

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778335	(778335)	$8.99 H

Note: Product shipped may not match the item pictured.

Screw



88-250 H.P. 1995-2007
Screw, Anode

O.E. No. 341219

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778173	(778173)	$9.99 L

Washer



88-300 H.P. 1986-Thru
Washer, 5/16, Flat

O.E. No. 328743

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778192	(778192)	$4.99 L

Hose Clamp



All H.P. All Year
Hose Clamp, 2.5" to 3.50", S.S.

O.E. No. 912628

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778408	(778408)	$4.99 H

Screw



90-115 H.P. 1995-Thru
Screw, Water Screen Self Tap, Small Gear Case

O.E. No. 340665

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778430	(778430)	$4.99 L

Hub Kit



Vary H.P. Vary Year
Hub Kit, TBX Y/M/H/S V6

O.E. No. 177283

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765832	(765832)	$116.99 H

Hub Kit



Vary H.P. Vary Year
Hub Kit, TBX EVJO JEV V6

O.E. No. 177283

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B765831	(765831)	$67.99 H

Prop Hardware



Vary H.P. Vary Year
OMC Plastic Ring, 3-3/4"ID,

O.E. No. 332393

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766456	(766456)	$16.99 H

Prop Hardware



Vary H.P. Vary Year
Converging Ring

O.E. No. 332543

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766410	(766410)	$13.99 H

Prop Hardware



Vary H.P. Vary Year
Prop Nut with Washer and Cotter Pin for 13 Spline

O.E. No. 175267

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777994	(777994)	$11.99 L

Prop Hardware



Vary H.P. Vary Year
Prop Nut, Castle Style Small Gear Case

O.E. No. 314503

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777992	(777992)	$11.99 L

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Prop Hardware



Vary H.P. Vary Year
Prop Nut Kit, with Washer, Spacer and Cotter Pin

O.E. No. 175266

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777995	(777995)	$24.99 L

Prop Hardware



Vary H.P. Vary Year
Thrust Washer, Small Case

O.E. No. 320305

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B778002	(778002)	$48.99 H

Prop Hardware



Vary H.P. Vary Year
Thrust Washer, Big Case, Late Model

O.E. No. 126870

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B777996	(777996)	$31.99 H

Amphenol Socket Remover



All Years
Amphenol Socket Remover

O.E. No. 322699

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766515	(766515)	$32.99 E

Amphenol Installer Tool



All Years
Amphenol Installer Tool

O.E. No. 322697

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766517	(766517)	$42.99 E

Amphenol Pin Remover



All Years
Amphenol Pin Remover

O.E. No. 322698

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766516	(766516)	$30.99 E

Driveshaft Socket



All Years
Driveshaft Socket, 2 and 3 Cylinder

O.E. No. 334995

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766496	(766496)	$59.99 E

Driveshaft Socket



All Years
Driveshaft Socket, V4 and V6

O.E. No. 311875

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766495	(766495)	$66.99 E

Shift Rod Height Gauge



All Years
Shift Rod Height Gauge

O.E. No. 389997

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766497	(766497)	$239.99 E

Seal Protector



All Years
Seal Protector, 2 and 3 Cylinder

O.E. No. 312403

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766498	(766498)	$81.99 E

Note: Product shipped may not match the item pictured.

Seal Protector



All Years
Seal Protector, V4 and V6

O.E. No. 318674

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766499	(766499)	$64.99 E

Upper D/S Remover



All Years
Upper D/S Remover, 2 and 3 Cylinder

O.E. No. 387206

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766500	(766500)	$177.99 E

Upper D/S Remover



All Years
Upper D/S Remover, V4 and V6

O.E. No. 390706

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766501	(766501)	$103.99 E

Universal D/S Shim Tool Kit



All Years
Universal D/S Shim Tool Kit

O.E. No. 5005925

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766502	(766502)	$371.99 E

Wrench Pinion Nut Holder



All Years
Wrench Pinion Nut Holder

O.E. No. 334455

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766504	(766504)	$162.99 E

Bearing Housing Puller



All Years
HD GC Bearing Housing Puller, 2 Required

O.E. No. 353803

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766506	(766506)	$106.99 E

Retaining Ring Pliers



All Years
Retaining Ring Pliers

O.E. No. 331045

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766505	(766505)	$113.99 E

Rod Screw Socket



All Years
Rod Screw Socket, 5/16", 12 PT

O.E. No. 331638

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766508	(766508)	$49.99 E

Rod Screw Socket



All Years
Rod Screw Socket, 3/8", 12 PT

O.E. No. 346187

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766507	(766507)	$37.99 E

Gear Case Align Gage



All Years
Gear Case Align Gage

O.E. No. 5006349

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766509	(766509)	$834.99 E

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Torx Driver

All Years
Torx Driver, 5 Point



O.E. No. 351204

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766510	(766510)	$22.99 E

Torx Driver

All Years
Torx Driver 6 Point



O.E. No. 787134

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766511	(766511)	$29.99 E

Syringe

All Years
Syringe



O.E. No. 346936

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766512	(766512)	$6.99 E

Fuel Pressure Gauge

All Years
Fuel Pressure Gauge



O.E. No. 5007100

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766514	(766514)	$112.99 E

Orifice Plug Remover Screwdriver

All Years
Orifice Plug Remover Screwdriver (JETS)



O.E. No. 317002

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766513	(766513)	$41.99 E

Oetiker Pliers

All Years
Oetiker Pliers



O.E. No. 350860

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766520	(766520)	$112.99 E

Tie Strap Tool

All Years
Tie Strap Tool



O.E. No. 323716

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766519	(766519)	$46.99 G

Transom Drill Fixture

All Years
Transom Drill Fixture



O.E. No. 434367

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766522	(766522)	$260.99 E

Lifting Eye

All Years
Lifting Eye



O.E. No. 321537

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766521	(766521)	$74.99 E

Life Eye

All Years
Lift Eye, 60°



O.E. No. 342672

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766523	(766523)	$205.99 E

Note: Product shipped may not match the item pictured.

Life Eye



All Years
Lift Eye, 90°

O.E. No. 396748

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766524	(766524)	$172.99 E

Pinion Nut Wrench Holder



All Years
Pinion Nut Wrench Holder

O.E. No. 341438

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766503	(766503)	$51.99 E

Universal Flywheel Puller Kit



All Years
Universal Flywheel Puller Kit

O.E. No. 378103

Brand Name	DMI No.	Mfg. No.	Price
BRP OMC® SysteMatched™	B766525	(766525)	$95.99 E

Amphenol Pin Tool Set



Test Equipment and Accessories
Set Contains: 1 each of 553-2697, 533-2698 and 553-2699 Tools.
Replaces: 322697, 322698, 322699

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208980	(553-2700)	$107.98 K

Adapter Kit



Compatible with 551-33-1, 551-34PV and 551-34HA

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209110	(551-334K)	$57.98 K

Dielectric Grease



Used on all electrical connections.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209165	(991-9705)	$107.98 K

Digital Multimeter



Auto-ranging. DC & AC volts range 0.0001 to 1,000 volts. Diode. Continuity beeper. Milli and Micro ampere. Amps (10 amps max.). Ohms. Temperature. Auto shutdown. Back lighted display. Includes: Storage case, test leads and manual. Same as 208880, but with 208940 (511-9773NL) DVA adapter.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208890	(511-60A)	$353.98 K

Digital Multimeter



Auto-ranging. DC & AC volts range 0.0001 to 1,000 volts. Diode. Continuity beeper. Milli and Micro ampere. Amps (10 amps max.). Ohms. Temperature. Auto shutdown. Back lighted display.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208880	(511-60)	$308.98 K

DVA Adapter



DVA Adapter uses your meters test leads.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208940	(511-9773NL)	$107.98 K

DVA Adapter



DVA Adapter with built-in test leads has replaceable tips that fit most test clips.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208930	(511-9773)	$107.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Engine Adapter Harness

Mercury/Mariner, Mercruiser
Replaces: 84-93669A2



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208790	(421-4401)	$229.98 K

CDI Electronics Gear Case Filler

- Transluscent plastic container.
- Sturdy, tear-drop design with drip tray.
- Check valve venting system allows filter removal without losing lubricant.
- 3 gallon.
- Replaces: 551-33GF, S33 Gear Case Fillers.



Order No.	Mfg. No. / Description	Price
208950	(551-33-1)	$234.98 K

CDI Electronics Inductive Spark Plug Wire Set



- Quantity 6.
- Replaces: 584919 (5005805), 584920 (5005806), 584921 (5005807).
- O.E. No. 584919.

Order No.	Mfg. No. / Description	Price
209000	(931-4921)	$57.98 K

CDI Electronics Inductive Spark Plug Wire Set



- Quantity 4.
- Replaces: 584919 (5005805), 584920 (5005806).

Order No.	Mfg. No. / Description	Price
209010	(931-4922)	$37.98 K

CDI Electronics Inline Spark Tester



- Sealed design reduces possibility of fire.
- Can be used inline to the spark plug while engine is running or connected to engine ground for cranking speed tests.

Order No.	Mfg. No. / Description	Price
208900	(511-9764)	$27.98 K

CDI Electronics Metric Adapter



- Adapter for 551-33-1 gearcase filler.
- O.E. No. 551-33M.

Order No.	Mfg. No. / Description	Price
208960	(551-334M)	$18.98 K

CDI Electronics Piercing Probe Set



- Fully insulated probes with spring loaded clamp.
- Probes with stainless steel pin self-centers and punctures insulation.
- Set contains 1 Red and 1 Black test probe.

Order No.	Mfg. No. / Description	Price
208920	(511-9770)	$118.98 K

CDI Electronics Pressure and Vacuum Tester



- Combination tester does both pressure and vacuum testing.
- Replaces: S34, V34 Testers.

Order No.	Mfg. No. / Description	Price
208970	(551-34PV)	$308.98 K

CDI Electronics Optical Sensor Tester



- Used to test V4/V6 Optical Sensor on the engine or bench.
- Sounds an audible alert when setting the ignition timing, to allow an optional eyes free operation.
- Replaces 434017 OIS 200 Sensor Tester.
- O.E. No. 434017.

Order No.	Mfg. No. / Description	Price
208870	(511-4017)	$368.98 K

CDI Electronics Spark Tester



- Tester can divide in two sections for testing.

Order No.	Mfg. No. / Description	Price
209150	(519-S48)	$271.98 K

Note: Product shipped may not match the item pictured.

CDI Electronics Spark Tester



- Tester has adjustable open spark.

Order No.	Mfg. No. / Description	Price
209160	(519-S48H)	$137.98 K

CDI Electronics Spark Tester



- Sealed design reduces possibility of fire.
- Can be used to test 1 - 8 cylinders.
- O.E. No. 850439.

Order No.	Mfg. No. / Description	Price
208910	(511-9766)	$88.98 K

CDI Electronics Volvo Adapter



- Adapter for 551-33-1 Gearcase Filler.

Order No.	Mfg. No. / Description	Price
209115	(551-334V)	$17.98 K

CDI Electronics Trim/Tilt Relay Assembly



- Universal 2 wire tilt/trim relay assembly.
- Includes 2 replaceable relays, mounting box and harness.

Order No.	Mfg. No. / Description	Price
208990	(852-9810)	$107.98 K

Sierra Diagnostic Cable



- BRP T-IN Power Cable.

Order No.	Mfg. No. / Description	Price
180009	(18-ADC408)	$163.98 D

Sierra Diagnostic Cable



- J/E Diagnostic Cable

Order No.	Mfg. No. / Description	Price
180012	(18-ADC423)	$127.98 D

Sierra Diagnostic Cable



- BRP Diagnostic Cable.

Order No.	Mfg. No. / Description	Price
180007	(18-ADC404)	$163.98 D

Diagnostics

All
Compatible with Select Mercury, Mercruiser, Yamaha, Johnson/Evinrude and Suzuki Engines.



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208891	(531-0118T2)	$3,346.98 C

Diagnostics

All
Compatible with Select Mercury, Mercruiser, Yamaha, Johnson/Evinrude, Suzuki and Sterndrive Engines.



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208892	(531-0118T3)	$3,946.98 C

Diagnostics

All
Compatible with Select Mercury, Mercruiser, Yamaha and Johnson/Evinrude Engines.



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208889	(531-0118T1)	$5,771.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

OMC® SysteMatched™ Carb X™



- Formulated minimize carbon deposit build up in 2-cycle and 4-cycle marine engines.
- Protects Engine Parts.
- Helps keep valves free of carbon.
- Increases engine life.
- Reduces the possibility of piston ring sticking.
- Allows better overall engine performance.

Order No.	Mfg. No. / Description	Price
B765735	(765735) 12 oz.	$20.99 H

OMC® SysteMatched™ Fuel Conditioner



- Formulated to protect fuel system components and extends the useful life of fresh gasoline.
- Recommended year-round use and off-season storage.
- Protects fuel system in a number of ways: Slows the chemical breakdown of gasoline; Protects metal fuel system components from corrosion; Ethanol Protection Formula.

Order No.	Mfg. No. / Description	Price
B765732	(765732) 8 oz.	$7.99 H
B765733	(765733) 16 oz.	$14.99 H

OMC® SysteMatched™ Fuel Stabilizer



Order No.	Mfg. No. / Description	Price
B766214	(766214) 32 oz.	$24.49 H

OMC® SysteMatched™ Fuel Stabilizer



Order No.	Mfg. No. / Description	Price
B766215	(766215) Gallon	$91.93 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Alphabetical Index for Mercury, Mariner

Alphabetical Index	Page No.	Alphabetical Index	Page No.	Alphabetical Index	Page No.
Alternator	669-670	Fuel Pumps	653-654	Stator	663-667
Carburetor Kits	652-653	Gasket	650-652	Switch Box	661-663
Cooling Chart	672-676	Gasket Set	649	Trigger	667-668
Diagnostics	685-686	Head Gasket	649-650	Trim Motors	679-681
Distributor	671	Impeller	676-677	Water Pump Kits	677-679
Electrical Charts	657-661	Piston	648		
Filters, Fuel	655	Starter Motor	681-685		

Piston



30-140 H.P. 1973-1987
MRY Piston, I/L Standard, Bore 2.875

O.E. No. 774-9137A12, 776-8899A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184505	(18-4505)	$132.67 H

Piston



30-140 H.P. 1973-1987
MRY Piston, I/L O.S. .015, Bore 2.890

O.E. No. 774-9137A13, 776-8897A2, 776-8900A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184520	(18-4520)	$135.50 H

Piston



135-200 H.P. 1992-2000
MRY/MAR Piston, Port, Standard, Bore 3.500, Top Guided

O.E. No. 785-9737T9

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184635	(18-4635)	$152.27 H

Piston



135-200 H.P. 1992-2000
MRY/MAR Piston, Starboard, Standard, Bore 3.500, Top Guided

O.E. No. 785-9738T9

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184636	(18-4636)	$166.52 H

Ring Set



30-50 H.P. Early Inline
MRY/MAR Ring Set, Standard, Bore 2.565

O.E. No. 39-18653A12

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183966	(18-3966)	$31.53 H

Ring Set



70-115 H.P. 1987-1989
MRY/MAR Ring Set, Bore 3.375

O.E. No. 39-96170A12

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183979	(18-3979)	$26.90 H

Ring Set



70-115 H.P. 1987-1989
MRY/MAR Ring Set, .015 O.S, Bore 3.390

O.E. No. 39-822321A12

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183982	(18-3982)	$31.53 H

Ball Bearing



Ball Bearing, For: 135-225 H.P. V6.
Replaces: 30-67923T

O.E. No. 30-67923T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181345	(18-1345)	$122.98 H

Rod Bearing



Rod Bearing, For: 30-60 H.P. 2 and 3 Cylinder, Mag II, V-135-200 and XR4.
Replaces: 31-17514A1

O.E. No. 31-17514A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181194	(18-1194)	$52.33 H

Rod Bearing with Cage



Rod Bearing with Cage, For: 70, 75, 80, 90, 100, 115, L3, L4, 3.0L.
Replaces: 31-43012A1

O.E. No. 31-43012A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181195	(18-1195)	$77.37 H

Note: Product shipped may not match the item pictured.

Place Your Order with Donovan Today: ***800.347.4464***
©2014 Donovan Marine, Inc.

Needle Bearings with Retainers



Needle Bearings with Retainers, For: Merc V6 200/225/250 H.P. 3.0 and 3.4L, 2 Pieces. Replaces: 29-88258, 12-88263

O.E. No. 12-88263

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181186	(18-1186)	$18.92 H

Gasket Set



150-200 H.P. 1985-1991
MRY Powerhead Gasket Set, with Head Gaskets, 2.4 Litre

O.E. No. 27-11338A88, 27-89221A88

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184319	(18-4319)	$148.40 H

Gasket Set



40-50 H.P. 1968-1980
MRY/MAR Powerhead Gasket Set, Early 4 Cylinder

O.E. No. 27-85491A90

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184325	(18-4325)	$57.03 H

Gasket Set



50-60 H.P. 1972-1980
MRC Powerhead Gasket Set, Early 3 Cylinder

O.E. No. 27-43779A87

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184326	(18-4326)	$69.75 H

Gasket Set




50-60 H.P. 1968-1995
MRC Powerhead Gasket Set, 4 Cylinder

O.E. No. 27-72486A32

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184353	(18-4353)	$75.72 H

Gasket Set



70-85 H.P. 1987-1983
MRC Powerhead Gasket Set, 4 Cylinder

O.E. No. 27-73645A87

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184354	(18-4354)	$77.73 H

Gasket Set



40 H.P. 1972-1993
MRC Powerhead Gasket Set, 2 Cylinder, Will Not Fit Mariner

O.E. No. 27-78028A78

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184355	(18-4355)	$51.30 H

Gasket Set




150-200 1992-2002
MRY/MAR Powerhead Gasket Set, Early 2.5 No Head Gaskets, Bore 3.50

O.E. No. 27-815791A92

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184359	(18-4359)	$144.13 H

Head Gasket Set



MRY Head Gasket Set

O.E. No. 27-75611A03

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181254	(18-1254)	$22.95 H

Head Gasket



150-225 H.P. 1976-1982
MRY Head Gasket, 200-225 H.P., 2.4 Litre, 3.375 Early Style

O.E. No. 27-41245-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183872	(18-3872)	$44.50 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Head Gasket




For: Model 135, 150 and XR4
Head Gasket, for 2.0 Liter with Dowel Pins

O.E. No. 27-18785-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183861	(18-3861)	$34.98 H

Head Gasket



For: Model 135, 150 and XR2
Head Gasket, for 2.0 Liter without Dowel Pins

O.E. No. 27-96542-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183863	(18-3863)	$28.58 H

Head Gasket




150-225 H.P. 1983-1992
MRY Head Gasket, 2.4 Litre, Bore 3.375

O.E. No. 27-18786-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183871	(18-3871)	$40.10 H

Divider Plate Gasket




MRC Divider Plate Gasket, V6.
Replaces: 27-904841

O.E. No. 27-904841

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182502	(18-2502)	$8.47 H

Drive Shaft Housing to Exhaust Plate Gasket




MRC Drive Shaft Housing, V6.
Replaces: 27-99177-1, 27-99177-2

O.E. No. 27-99177-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182503	(18-2503)	$13.48 H

Exhaust Plate Gasket




MRC Exhaust Plate Gasket, V-175/V-200. Replaces: 27-99176-3, 27-99176-4

O.E. No. 27-99176-3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182506	(18-2506-1)	$10.20 H

Exhaust Plate Gasket




MRC Exhaust Plate Gasket, V-135/V-150.
Replaces: 27-997761

O.E. No. 27-997761

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182508	(18-2508-1)	$10.05 H

Exhaust Plate Gasket



MRC Exhaust Plate Gasket.
Replaces: 27-78069

O.E. No. 27-78069

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180934	(18-0934-1)	$38.98 H

Powerhead to Plate Gasket



MRC Powerhead to Plate Gasket.
Replaces: 27-628601

O.E. No. 27-628601

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180988	(18-0988)	$7.03 H

Reed Block Gasket



MRC Reed Block Gasket, V6.
Replaces: 27-935361

O.E. No. 27-935361

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182501	(18-2501)	$7.02 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Exhaust Plate Gasket

MRY Exhaust Plate Gasket, V6.
Replaces: 27-75909




O.E. No. 27-75909

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180369	(18-0369)	$10.13 H

Powerhead Base Gasket

MRY Powerhead Base Gasket.
Replaces: Mercury 27-796501



O.E. No. 27-796501

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180103	(18-0103)	$10.68 H

Baffle Plate Gasket

MRY Baffle Plate Gasket



O.E. No. 27-85492-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180137	(18-0137)	$6.68 H

Powerhead to Exhaust Plate Gasket

MRY Powerhead to Exhaust Plate Gasket



O.E. No. 27-884511

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180139	(18-0139)	$11.30 H

Thermostat Gasket

MRY Thermostat Gasket



O.E. No. 27-62386

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180182	(18-0182)	$1.48 H

Thermostat Gasket

200-250 H.P.
MRY Thermostat Gasket, 3.0 Litre, Late Style



O.E. No. 27-8503181

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183675	(18-3675)	$2.60 H

Adapter Plate Gasket

MRY Adapter Plate Gasket, 18 H.P.
Replaces: 27-41670-3, 27-41670-5



O.E. No. 27-41670-3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180336	(18-0336)	$7.63 H

Powerhead Base Gasket

MRY Powerhead Base Gasket, 4.5-9.8 H.P.
Replaces: 27-89937



O.E. No. 27-89937

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180385	(18-0385)	$3.02 H

Powerhead Base Gasket

MRY Powerhead Base Gasket.
Replaces: 27-39401



O.E. No. 27-39401

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180333	(18-0333)	$9.42 H

Powerhead Base Gasket

MRY/MAR Powerhead Base Gasket,
For: 30-60 H.P. 2 and 3 Cylinder.
Replaces: 27-828553



O.E. No. 27-828553

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180319	(18-0319)	$10.32 H

Note: Product shipped may not match the item pictured.

Divider Plate Gasket




MRY/MAR Divider Plate Gasket.
Replaces: 27-190503

O.E. No. 27-190503

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180642	(18-0642)	$20.25 H

Adapter Plate Gasket



MRY/MAR Adapter Plate Gasket,
Replaces: 27-167371

O.E. No. 27-167371

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180645	(18-0645)	$7.20 H

Fuel Pump Gasket



MRY Fuel Pump Gasket.
Replaces: 27-987691

O.E. No. 27-987691

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180970	(18-0970)	$1.52 H

Carburetor Gasket Kit



50-85 H.P.
With WM-13, 13A, 15, 15A, 16, 16A, 18

O.E. No. 1395-6200

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187004	(18-7004)	$2.93 H

Carburetor Gasket Kit



Gasket Kit for 2.0, 2.4,
Early Style

O.E. No. 1395-6452

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187005	(18-7005)	$6.82 H

Carburetor Gasket Kit



75-115 Inline
Replaces: 1399-1717, 1399-2015, 1399-3523, 1395-4808, 1395-8791994024, 879194024

O.E. No. 1399-1717

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187006	(18-7006-1)	$7.72 H

Carburetor Gasket Kit



75-115 Early Inline
For AJ, KA, KB, KC, KD Carburetor

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187013	(18-7013)	$22.78 H

Carburetor Gasket Kit



MRY/MAR Carburetor Gasket Kit,
For: WM, WMK

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187021	(18-7021)	$20.73 H

Carburetor Kit



8-25 H.P. WMC Style
MRY/MAR Carburetor Kit

O.E. No. 1395-97611

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187212	(18-7212)	$38.68 H

Carburetor Kit



25 H.P. 1996-1998
MRY/MAR Carburetor Kit

O.E. No. 809449A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187216	(18-7216)	$63.68 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Carburetor Kit

25-30 H.P. All 2 Stroke
MRY/YAM Carburetor Kit, Fits All Nissan Built Mercury



O.E. No. 84475M

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187291	(18-7291)	$28.98 H

Carburetor Kit

40-45 H.P. 1987-1990
MRY/MAR Carburetor Kit



O.E. No. 1395-9024

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187215	(18-7215)	$8.48 H

Carburetor Kit

65-125 H.P. Late Style
MRY/MAR Carburetor Kit, Gasket Only without Needle and Seat



O.E. No. 1395-8112231

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187211	(18-7211-1)	$6.48 H

Carburetor Kit

150-200 H.P. 1992-1995
MRY/MAR Carburetor Kit, Gasket Kit without Needle




O.E. No. 8107492

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187213	(18-7213)	$8.75 H

Carburetor Kit

150-200 H.P. 1995-2006
MRY/MAR Carburetor Kit, Gasket Kit without Needle



O.E. No. 8107493

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187214	(18-7214)	$19.15 H

Carburetor Kit

Fits: WME 1, 1A, 1B, 4, 5, 6, 6A, 7, 7B, 8, 9, 10, 10A, 11, 14, 15, 15A, 17, 18, 20, 20A, 21, 21A, 22, 22B, 23, 24, 26, 27, 28, 32, 32A, 33, 34, 35, 36, 36A, 37, 37A, 38, 39A, 40, 40A, 42, 42A, 43, 44, 45, 50, 52, 53, 57, 58, 63, 64, 65, 66, 67, 68, 69, 79, 81



O.E. No. 1395-8236354

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187750	(18-7750-1)	$30.12 H

Float

Mercury Float



O.E. No. 809569

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187380	(18-7380)	$15.93 H

Float

Mercury Float



O.E. No. 16253

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187381	(18-7381)	$31.28 H

Float

Mercury Float



O.E. No. 804184

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187382	(18-7382)	$26.97 H

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 23014A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187804	(18-7804)	$5.90 H

Note: Product shipped may not match the item pictured.

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 55278A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187807	(18-7807)	$4.40 H

Fuel Pump Kit

75-80 H.P. 1978-1983
MRY/MAR Fuel Pump Kit



O.E. No. 55278A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187808	(18-7808)	$4.40 H

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 55278A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187809	(18-7809)	$4.40 H

Fuel Pump Kit

150-200 H.P. 1980-1982
MRY/MAR Fuel Pump Kit



O.E. No. 90363A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187810	(18-7810)	$16.28 H

Fuel Pump Kit

115-140 H.P. 1978-1980
MRY/MAR Fuel Pump Kit, Inline Engines



O.E. No. 89031A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187811	(18-7811)	$8.75 H

Fuel Pump Kit

150-200 H.P. 1978-1990
MRY/MAR Fuel Pump Kit, Not Square



O.E. No. 89031A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187812	(18-7812)	$9.40 H

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 89031A3, 66599A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187813	(18-7813)	$9.40 H

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 89031A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187814	(18-7814)	$10.12 H

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 1399-5137

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187815	(18-7815)	$7.55 H

Fuel Pump Kit

Mercury Fuel Pump Kit



O.E. No. 42909A3, 42909A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187818	(18-7818-1)	$12.32 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Fuel Filter



Various Engines
Fuel Filter, In-Line, 1/4"

O.E. No. 35-16494, 35-816296, 35-816296Q

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187829	(18-7829)	$5.02 H

Fuel Filter



Various Engines
Fuel Filter, In-Line, 5/16"

O.E. No. 35-16494-1, 35-816296-1, 35-816296Q2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187830	(18-7830)	$5.73 H

Fuel Filter



Various Engines
Fuel Filter, In-Line, 3/8"

O.E. No. 802128A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187831	(18-7831)	$7.48 H

Fuel Filter



135-175 H.P. 2006 2010
MRY/MRC Fuel Filter, In-Line,
Fits Verado 4 Cylinder Quick Release

O.E. No. 35-879885T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187718	(18-7718)	$11.30 H

Fuel Filter



Various Engines
Replacement Filter with Sensor, Late Style

O.E. No. 35-18458Q4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187968	(18-7968)	$20.00 H

Fuel Filter



Verado Engines
Replaces All Verado and DFI

O.E. No. 35-884380T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-7981		$29.98 M
Sierra	187981	(18-7981)	$36.23 H

Fuel Line Assembly



Early Style, 8' Long
MRY Fuel Line Assembly, 4000

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188010EP1	(18-8010EP-1)	$65.60 H

Fuel Line Assembly



Hose and Bulb Only, 8' Long, 3/8"
MRY Fuel Line Assembly, 4000

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188012EP1	(18-8012EP-1)	$56.05 H

Fuel Line Assembly



Late Style, 8' Long, 3/8"
MRY Fuel Line Assembly with Connectors

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188016EP1	(18-8016EP-1)	$60.50 H

Fuel Line Assembly



Late Style, 8' Long, 3/8"
MRY/MAR Fuel Line Assembly with Connector,
Only on Engine Side

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188024EP1	(18-8024EP-1)	$54.13 H

Note: Product shipped may not match the item pictured.

Fuel Connector

Late Style Tank End
MRY Fuel Connector



Brand Name	DMI No.	Mfg. No.	Price
Sierra	188040	(18-80402)	$14.82 H

Fuel Connector

Early Style Male Connector
MRY/MAR Fuel Connector, 3/8"



O.E. No. 30185A3, 30185Q3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188084	(18-8084)	$11.83 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

CDI Electronics Mercury Application Guide

HP	Model	Cyl.	Year	Serial Number	Switch Box	Stator	Trigger	Rectifier/Regulator	Harness
2	-	1	90-06	0T884302-UP	R8203034T*	R823030 1*	Self	-	-
2.5	-	1	90-06	0A855097-UP	R8203034T*	R823030 1*	Self	-	-
3	-	1	90-06	0A855097-UP	R8203034T*	R823030 1*	Self	-	-
3.3	-	1	90-06	0T884302-UP	R8203034T*	R823030 1*	Self	-	-
4	-	1	70-71	2498136-3296136	IN STATOR	174-3996	POINTS	-	-
4	40	1	72-75	3296137-4107219	R336-4516*(a)	174-4469LS 174-4470 HS	POINTS	-	-
4	40	2	76-80	5589202-5595531	114-6222	174-6120K 1	-	-	-
4	-	2	80-89	5595532-A855096	R336-4516*	174-4469LS 174-4470 HS	POINTS	-	-
4.5	-	2	75-80	4107220-5595531	R336-4516*	174-4469LS 174-4470 HS	POINTS	-	-
6	-	2	86-96	0A197112-0G289100	114-7452K1	174-6617K 1	R98450A10*	-	-
6	-	2	97-05	0G760300-0G800999	114-5713	174-5721(b)	R98450A10*	-	R84-12334A 4*
7.5	75	2	70-71	2810637-3274632	IN STATOR	174-3996	POINTS	-	-
7.5	75	2	72-73	3274633-3801457	R336-4516*	174-4469LS 174-4470 HS	POINTS	-	-
7.5	75	2	74-86	3801458-A197111	114-6222	174-6120K1	R338-5286A 6	154-6770	-
8	-	2	86-96	0A197112-0G289100	114-7452K1	174-6617K 1	R98450A5*	-	-
8	-	2	97-05	0G760300-0G800999	114-5713	174-5721(b)	R98450A10*	-	R84-12334A 4*
9.8	110	2	66-71	1865779-3263262	IN STATOR	174-3996	POINTS	-	-
9.8	110	2	72-73	3263263-3795658	R336-4516*	174-4469LS 174-4470 HS	POINTS	-	-
9.8	110	2	74-78	3795659-5206549	114-6222	174-6120K1	338-7283A2	154-6770	-
9.8	-	2	79-85	5206550-6620196	114-6222	174-6120K1	338-7283A2	-	
9.9	-	2	86-96	0A197112-0G289100	114-7452K1	174-6617K 1	R98450A5*	-	-
9.9	-	2	97-05	0G760300-0G800999	114-5713	174-5721K1	R98450A10*	-	R84-12334A 4*
10	-	2	86-96	0A197112-0G289100	114-7452K1	174-6617K 1	R98450A10*	-	-
10	-	2	97-05	0G760300-0G800999	114-5713	174-5721(b)	R98450A10*	-	R84-12334A 4*
15	-	2	88-97	0A197112-0G760299	114-7452K 1	174-6617K 1	R98450A10*	-	-
15	XD/S15	2	94-96	0G044365-0G437999	114-4952A30	174-6617A17	R98450A10*	154-6770	-
15	XD/S15	2	96-97	0G438000-0G760299	114-7452K1	174-6617K 1	R98450A10*	154-6770	-
15	Sea Pro	2	96-97	0G438000-0G760299	114-7452K1	174-6617K 1	R98450A10*	154-6770	-
15	Comm	2	97-06	0G760300-0G800999	114-5713	174-5721(b)	R98450A10*	154-6770	R84-12334A 4*
15	2 Stroke	2	97-06	0G760300-1B000299	114-5713	174-5721(b)	R98450A10*	154-6770	R84-12334A 4*
18	-	2	80-84	5837437-6443972	114-7452A3	174-6617K 1	R98450A10*	-	R84-88891A1*
18	XD	2	79-87	5837437-0B238463	114-7452A3	174-6617K 1	R98450A10*	-	R84-88891A1*
20	200	2	70-71	2827677-3226957	IN STATOR	174-3996	POINTS	-	-
20	200	2	72-73	3226958-3537530	R336-4516*	174-4469LS 174-4470 HS	POINTS	-	-
20	200	2	73-77	3537531-4709592	114-4911	174-4638K1	R338-4996A1*	-	414-2770
20	-	2	77-81	4709593-5837436	114-6222	174-6120K1	R74324A3*	-	414-3369
20	XD	2	79-87	5837437-B114230	114-7452A3	174-6617K 1	R98450A10*	-	R84-92436A5*
20	-	2	80-87	5705532-B238463	114-7452K1	174-6617K 1	R98450A10*	-	-
20	-	2	80-87	5705532-B238463	114-7452A3	174-6617K 1	R98450A10*	-	-
20	-	2	88-94	B238464-0G044026	114-7452K1	174-6617K 1	R98450A10*	-	R84-88891A1*
20	-	2	94-96	0G044027-0G437999	114-4952A30	174-6617A17	R98450A10*	154-6770	-
20	Sea Pro	2	96-97	0G438000-0G760299	114-7452K1	174-6617K 1	R98450A10*	154-6770	-
20	-	2	97-98	0G438000-0G760299	114-4952A30	174-6617A17	R98450A10*	154-6770	R84-92436A5*
20	Comm	2	98-06	0G760300-0T979999	114-5713	174-5721(b)	R98450A10*	154-6770	R84-92436A 9*
20	-	2	98-06	0G760300-0T979999	114-5713	174-5721(b)	R98450A10*	154-6770	R84-92436A 9*
25	XD	2	79-87	5837437-B114230	114-7452A3	174-6617K 1	R98450A10*	-	R84-88891A1*
25	-	2	79-87	5705532-0B238463	114-7452A3	174-6617K 1	R98450A10*	-	-
25	-	2	79-87	5705532-0B238463	114-7452K1	174-6617K 1	R98450A10*	-	-
25	-	2	88-93	0B238464-0G044365	114-7452K1	174-6617K 1	R98450A10*	-	-
25	Sea Pro	2	96-97	0G438000-0G760299	114-7452K1	174-6617K 1	R98450A10*	154-6770	-
25	XD	2	98-06	0G760300-0T979999	114-5713	174-5721(b)	R98450A10*	154-6770	R84-92436A 9*
25	Jet 20	2	94-97	0G044027-0G437999	114-4952A30	174-6617A17	R98450A10*	154-6770	-
25	Elec Str 4 Stk	2	98	0G590000-0G760299	**856482 2	174-2387	-	194-5279	R84-830279A 4*
25	Man. Str. 4 Stk	2	98	0G590000-0G760299	**856482 2	174-2386	-	-	R84-850162A 2*
25	Elec Str 4 Stk	2	99-01	0G760300-0T178499	**8478433A 3	174-2387	-	194-2115K 1	R84-859202T 1*
25	Elec Str 4 Stk	2	2001	0T178500-0T408999	**8478433A 3	174-2387	-	194-2115K 1	R84-859202T 2*
25	Man. Str. 4 Stk	2	2001	0G760300-0G960499	**8478433A 3	174-2386	-	-	R84-850167A 7*
25	Man. Str. 4 Stk	2	2001	0G960500-0T408999	**8478433A 3	174-2386	-	-	R84-850167A 7*
25	Elec Str 4 Stk	2	02-05	0T409000-1B344298	**87843301S	174-2387	-	194-2115K 1	R84-859202T 2*
25	Man. Str. 4 Stk	2	02-05	0T409000-1B344298	**87843301S	174-2386	-	-	R84-859201T 1*
30	Elec Str	2	95-96	0G055314-0G380074	114-7509K1 144-3251A 5 (TPM)	174-2075K 1	134-9021-2	194-5279	R84-824477A 4*
30	Man. Str.	2	95-96	0G055314-0G380074	114-7509K1 144-3251A 5 (TPM)	R398-832074A 5*	134-9021-2	194-5279	R84-824456A 2*
30	Elec Str.	2	96-99	0G380075-0G589999	114-7509K1 144-3251A 6 (TPM)	174-2075K 2	134-9021-2	194-5279	R84-830574A2*

Note: Product shipped may not match the item pictured.

CDI Electronics Mercury Application Guide – *Continued*

HP	Model	Cyl.	Year	Serial Number	Switch Box	Stator	Trigger	Rectifier/Regulator	Harness
30	Man. Str	2	96-99	0G380075-0G589999	114-7509K1 144-3251A 6 (TPM)	R398-832074A 5*	134-9021-2	-	R84-854323A 2*
30	Man. Str.	3	98-99	0G590000-0G760299	114-7509	R398-832074A 5*	134-3960-2	-	R84-824456A 2*
30	Elec Str.	3	98-99	0G590000-0G760299	114-7509	174-2075K 2	134-3960-2	194-5279	R84-824477A 4*
30	Man. Str.	3	99-06	0G760300-0T979999	114-7509	R398-832074A 5*	134-3960-2	-	R84-854323A 2*
30	Elec Str.	3	99-06	0G760300-0T979999	114-7509	174-2075K 2	134-3960-2	194-5279	R84-854322A 2*
30	Jet	4	89-97	C159200-0G589999	114-5772	174-5454K 1	134-6452(c)	154-6770	414-8672
30	Jet	3	98-01	0G590000-0T408999	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
30	Elec Str 4 Stk	3	02-05	0T178500-0T178499	**87843302S	174-2387	-	194-2115K 1	R84-859197T 3*
30	Man. Str. 4 Stk	3	02-05	0T178500-0T178499	**87843302S	174-2386	-	-	R84-859196T 1*
30	4 Stroke EFI	3	02-05	0T409000-0T800999	-	R398-878143T 3*	-	194-2115K 1	R84-878132T 3*
30	4 Stroke EFI	3	02-05	0T801000-1B344298	-	R398-878143T05*	-	194-2115K 1	R84-878132T04*
35	350	2	68	1960827-2874703	-	**398-2568A 1 Magneto	-	-	R84-34229*
35	-	2	84-86	6445653-0B110788	114-7452A3	174-6617K 1	R98450A10	154-6770	414-6219A 2
35	-	2	84-86	6445653-0B110788	114-7452K1	174-6617K 1	R98450A10	-	414-6219A 5
35	-	2	87-89	0B110789-0B393190	114-7452K1	174-6617K 1	R92431A 6	154-6770	414-6219A 5
40	400 Elec Str.	2	70-71	2874704-3336237	R332-4172	174-4424	-	154-6770	414-2770
40	400 Man. Str.	2	70-71	2874704-3336237	R332-4172	174-4424	-	-	-
40	402 Elec Str.	2	72-74	3336258-3859434	114-4911	174-5255	R338-4731A6*	154-6770	414-2770
40	402 Man. Str.	2	72-74	3336258-4117709	114-4911	174-5255	R338-4731A6*	-	-
40	402 Elec Str.	2	75-77	4117710-4860102	114-4911	174-5255	R338-4731A6*	154-6770	414-2770
40	Man. Str.	2	75-81	4117710-5823917	114-4911	174-5255	R338-4731A6*	-	-
40	Elec Str.	2	78-81	4860103-5823917	114-4911	174-5255	R338-4731A6*	154-6770	414-2770
40	Elec Str.	2	81-84	5823918-6052942	114-7452A3	174-6617K 1	R92431A1*	154-6770	414-6219A 2
40	Elec Str.	2	81-84	6052943-6999999	114-7452A3	174-6617K 1	R92431A1*	154-6770	414-6219A 2
40	Man. Str.	2	81-84	5823918-6999999	114-7452A3	174-6617K 1	R92431A1*	-	-
40	Elec Str.	4	89-91	C159200-D055047	114-5772	174-5454K 1	134-6452(c)	154-6770	414-8672A 8
40	Man. Str.	4	89-91	C159200-D055048	114-5772	174-5454K 1	134-6452(c)	-	-
40	Elec Str.	4	91-97	D055048-0G589999	114-5772	174-9710K 1	134-6452(c)	194-5279	414-8672A 8
40	Elec Str.	2	95-96	0G055314-0G380074	114-7509K 1 144-3251A 5 (TPM)	174-2075K 1	134-9021-2	194-5279	R84-824477A 4*
40	Man. Str.	2	95-96	0G055314-0G380074	114-7509K 1 144-3251A 5 (TPM)	R398-832074A 5*	134-9021-2	194-5279	R84-824456A 2*
40	Elec Str.	2	96-99	0G380075-0G589999	114-7509 144-3251A 6 (TPM)	174-2075K 1	134-9021-2	194-5279	R84-854322A 2*
40	Man. Str.	2	96-99	0G380075-0G589999	114-7509 144-3251A 6 (TPM)	R398-832074A 5*	134-9021-2	-	R84-854323A 2*
40	Elec Str.	2	00-05	0G590000-0T999999	114-7509	174-2075K 1	134-3960-2	194-5279	R84-854322A 2*
40	Man. Str.	2	00-05	0G590000-0T999999	114-7509	R398-832074A 5*	134-3960-2	-	R84-854323A 2*
40	Elec Str.	3	97-05	0G590000-0T999999	114-7509	174-2075K 1	134-4512-3	194-5279	414-0220
40	Man. Str.	3	97-05	0G590000-0T999999	114-7509	R398-832074A 5*	134-4512-3	-	-
40	Elec Str. 4 Stk	3	02-05	0T178500-1B344298	**87843302S	174-2387	-	194-2115K 1	R84-854322A 2*
40	Man. Str. 4 Stk	3	02-05	0T178500-1B344298	**87843302S	174-2386	-	-	R84-854323A 2*
40	Elec Str. 4 Stk	4	02-05	0T178500-0T598999	**878433A 3	174-2387	-	194-2115K 1	R84-857111T 2*
40	Jet	4	89-97	C159200-0G589999	114-5772	174-5454K 1	134-6452(c)	154-6770	414-8672A 8
40	Jet	3	98-01	0G590000-0T408999	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
40	Jet Elec Str.	3	02-05	0T178500-0T979999	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
40	Jet Man Str.	3	02-05	0T178500-0T979999	114-7509	R398-832074A 5*	134-4512-3	-	-
45	Elec Str.	4	81-89	5531630-B393190	114-5772	174-5454K 1	134-6452(c)	154-6770	414-6277
45	Man.Start	4	81-89	5531630-B393190	114-5772	R76314A3	134-6452(c)	-	-
45	Jet	3	91-99	D000750-0G589999	114-9052	174-9710K 1	134-9021-3	194-5279	414-9061
50	500	4	67	2116318-2305100	114-2986	R398-2996	R393-2918A1*	154-6770	414-2770
50	Elec Str.	4	70-75	2858814-4357639	R333-3213*	174-3175 (Red) 174-3176 (Blue)	IGN DRIVER	154-6770	414-2770
50	Elec Str.	4	76-79	4357640-5531629	114-5772	174-5454K 1	134-6452(c)	154-6770	414-3369
50	Man. Str.	4	76-79	4357640-5531629	114-5772	R76314A3*	134-6452(c)	-	-
50	Elec Str.	4	80-85	5531630-A912477	114-5772	174-5454K 1	134-6452(c)	154-6770	414-6277
50	Man. Str.	4	80-85	5531630-A912477	114-5772	R76314A3*	134-6452(c)	-	-
50	-	3	84-90	6428681-D000749	114-7778	174-5454K 1	134-6453	154-6770	414-4614
50	-	3	91-97	D000750-0G589999	114-9052	174-9710K 1	134-9021-3	194-5279	R84-19061A 4*
50	Man. Str.	3	97-06	0G531301-0T999999	114-7509	R398-832074A 5*	134-4512-3	-	-
50	Elec Str.	3	97-06	0G531301-0T999999	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
50	Jet	3	98-05	0G590000-0T408999	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
50	Elec Str. 4 Stk	4	02-05	0T178500-0T598999	**878433A 3	174-2387	-	194-2115K 1	R84-857111T*
50	EFI 4 Stk	4	2005	0T409000-0T800999	-	R398-878143T 3*	-	194-2115K 1	R84-877804T 3*
50	EFI 4 Stk	4	2006	0T801000-1B344306	-	R398-878143T05*	-	194-2115K 1	-
50	EFI 4 Stk	4	06-07	1B344306-1C050252	-	R398-878143T05*	-	194-2115K 1	-
55	Elec Str.	3	92-97	0D000750-0G589999	114-9052	174-9710K 1	134-9021-3	194-5279	R84-19061A 4*
55	Man.Start	3	96-97	0G290585-0G589999	114-9052	R398-832074A 5*	134-9021-3	-	-

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

CDI Electronics Mercury Application Guide – *Continued*

HP	Model	Cyl.	Year	Serial Number	Switch Box	Stator	Trigger	Rectifier/Regulator	Harness
55	Elec Str.	3	98-07	0G590000-0T980000	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
60	-	3	84-90	6428681-D000749	114-7778	174-5454K 1	134-6453	154-6770	414-4614
60	-	3	91-97	D000750-0G589999	114-9052	174-9710K 1	134-9021-3	194-5279	R84-19061A 4*
60	-	3	97-00	0G531301-0G833000	114-7509	174-2075K 1	-	194-5279	414-0220
60	Elec Str.	3	98-07	0G590000-0T980000	114-7509	174-2075K 2	134-4512-3	194-5279	414-0220
60	Elec Str. 4 Stk	4	02-05	0T178500-0T598999	**878433A 3	174-2387	-	194-2115K 1	R84-857111T 2*
60	EFI 4 Stk	4	2005	0T409000-0T800999	-	R398-878143T 3*	-	194-2115K 1	R84-877804T 3*
60	EFI 4 Stk	4	2006	0T801000-1B344306	-	R398-878143T05*	-	194-2115K 1	-
60	EFI 4 Stk	4	06-07	1B344306-1C050252	-	R398-878143T05*	-	194-2115K 1	-
65	650	4	67	2119749-2309310	114-2986	R398-2997*	R393-2918A1*	154-6770	414-2770
65	650	4	68	2309311-2505592	R333-3213*	174-3175 (Red) 174-3176 (Blue)	IGN DRIVER	154-6770(2 Req'd)	414-2770
65	-	4	69-71	2503993-3293183	114-2986	174-4793	R393-2918A1*	154-6770	414-2770
65	-	3	72-75	3293184-4382056	114-4796	R398-4634*	R332-4797	154-6770	R84-60795*
65	-	3	76-79	4382057-4571651	114-7778	174-5454K 1	134-6453	154-6770	R84-73204*
65	Jet Elec Str.	3	94-96	D283222-0G760299	114-4953	174-9710K 1	134-9021-3	194-5279	414-1591
65	Jet Man Str.		94-96	0D283222-0G437999	114-4953	R398-9873A33*	134-9021-3	-	-
65	Jet	3	96-06	0G760300-1B000001	114-7509	174-2075K 2	134-4512-3	194-5279	414-0043
70	-	3	77-87	4571652-A730815	114-7778	174-5454K 1	134-6453	154-6770	R84-73204*
70	9 Amp	3	87-93	0A996142-0D283221	114-7778	174-8778K 1	134-9021-3	154-6770	414-1591
70	16 Amp	3	87-93	0A996142-0D283222	114-7778	174-9710K 1	134-9021-3	194-5279	414-1591
75	-	4	84-88	6432901-0C221499	114-5772	174-5454K 1	134-6454(d)	154-6770	414-6233A 2
75	9 Amp	3	89-93	0C221500-0D283221	114-7778	174-8778K 1	134-9021-3	154-6770	414-1591
75	16 Amp	3	87-93	0A996142-0D283221	114-7778	174-9710K 1	134-9021-3	194-5279	414-1591
75	Elec Str.	3	94-96	0D283222-0G437999	114-4953	174-9710K 1	134-9021-3	194-5279	414-1591
75	Man.Str.	3	94-96	0D283222-0G437999	114-4953	R398-9873A33*	134-9021-3	-	-
75	2 Stk.	3	96-06	0G438000-1B000001	114-7509	174-2075K 2	134-4512-3	194-5279	414-0043
80	800	4	69	2559001-2991033	114-2986	174-4793	134-3736	154-6770	414-2770
80	800	4	70	3051041-3052380	114-2986K1	174-4793	134-3736	154-6770	414-2770
80	800	4	70	3052381-3059820	114-2986	174-4793	134-3736	154-6770	414-2770
80	800	4	71	3144219-3192962	114-2986K1	174-4793	134-3736 €	154-6770	414-2770
80	800	4	71-72	3307347-3493912	114-2986	174-4793	134-3736	154-6770	414-2770
80	-	4	78-79	4831999-5582561	114-5772	174-5454K 1	134-6452(c)	154-6770	414-3369
80	-	4	80-83	5582562-6432900	114-5772	174-5454K 1	134-6454	154-6770	414-6233A 2
80	9 Amp	3	87-93	0A996142-0D283221	114-7778	174-8778K 1	134-9021-3	154-6770	414-1591
80	16 Amp	3	87-93	0A996142-0D283221	114-7778	174-9710K 1	134-9021-3	154-6770	414-1591
80	Jet	4	94-96	0D283222-0G437999	114-5772	174-9710K 1	134-9021-4	194-5279	414-0043
80	Jet	4	96-06	0G438000-1B000001	114-7509	174-2075K 2	134-4513-4	194-5279	414-0043
85	850	4	73-75	3493913-4366801	114-2986	174-4793	134-3736	154-6770	414-2770
85	850	4	76-77	4366802-4831998	114-5772	174-5454K 1	134-6452(c)	154-6770	414--3369
90	Inline	6	78-79	4845301-5299505	114-2986	174-4793	134-3736	154-6770	414-2770
90	Inline	6	79	5299506-5595646	114-7778	174-5456	134-6456	154-6770	414-5532
90	Inline	6	79-81	5594657-6026608	114-7778	174-5456	134-6456	154-6770	414-9564
90	Inline	6	82-86	6026609-0B110053	114-7778	174-5456	134-6456	154-6770	R84-96188A 4*
90	Elec Str.	3	87-92	0A996142-0C221999	114-7778	174-8778K 1	134-9021-3	154-6770	414-1591
90	Elec Str.	3	92-94	0C222000-0D283221	114-7778	174-9710K 1	134-9021-3	194-5279	414-1591
90	Elec Str.	3	94-96	0D283222-0G437999	114-4953	174-9710K 1	134-9021-3	194-5279	414-1591
90	Man.Str.	3	94-96	0D283222-0G437999	114-4953	R398-9873A33*	134-9021-3	-	-
90	Elec Str.	3	96-06	0G438000-1B000299	114-7509	174-2075K 2	134-4512-3	194-5279	414-0043
90	SportJet	3	93-95	0E021000-0E095087	114-7778	174-8778K 1	134-7029-3	194-5279	414-6075
90	SportJet	3	95-96	0E080400-0E145579	114-4953	174-8778K 1	134-7029-3	194-5279	414-6075
95	950 Inline	6	66-67	1869776-2101742	114-2803	R398-2188*	POINTS	-	414-2770
95	950	6	66-67	2101743-2318585	114-2986	R398-2188*	134-3736	154-6770	414-2770
95	XRSprtJet	3	95-97	0E141089-0E315900	114-4953	174-9710K 1	134-7029-3	194-5279	R84-828297A 2*
100	1000 Inline	6	67-69	2641855-3253111	114-2986	R398-3633*	393-2918A1*	154-6770	414-2770
100	-	4	88-93	0B209468-0D283221	114-5772	174-8778K 1	134-9021-4	194-5279	414-3443
100	9 Amp	4	94-96	0D283222-0G437999	114-5772	174-8778K 1	134-9021-4	194-5279	414-3443
100	16 Amp	4	94-96	0D283222-0G437999	114-5772	174-9710K 1	134-9021-4	194-5279	414-3443
100	-	4	96-00	0G438000-0G965520	114-7509	174-2075K 2	134-4513-4	194-5279	414-0043
105	Jet	6	92-95	0D082000-0G201874	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16
105	Jet	6	96-00	0G303046-0G760500	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
110	1100 Inline	6	66-67	1962462-2103722	114-2803	R398-2188*	POINTS	R32177A1*	R29999*
110	1101 Inline	6	67	2113898-2314955	114-2986	R398-2188*	134-3736	154-6770	R29999*
115	150 SS Inline	6	70-79	2836019-5314655	114-2986	174-4793	134-3736	154-6770	414-2770

Note: Product shipped may not match the item pictured.

Fast & Easy Ordering on Our E-Commerce Site: ***DonovanMarineParts.com***

CDI Electronics Mercury Application Guide – *Continued*

HP	Model	Cyl.	Year	Serial Number	Switch Box	Stator	Trigger	Rectifier/Regulator	Harness
115	Inline	6	79-80	5314656-5600966	114-7778	174-5456	134-6456	154-6770	414-5532
115	Inline	6	80-82	5600967-6051525	114-7778	174-5456	134-6456	154-6770	414-9564
115	Inline	6	82-89	6051526-0C10000	114-7778	174-5456	134-6456	154-6770	R84-96188A 2*
115	9 Amp	4	89-93	0C100000-0D252460	114-5772	174-8778K 1	134-9021-4	194-5279	414-3443
115	16 Amp	4	89-97	0C100000-0G437999	114-5772	174-9710K 1	134-9021-4	194-5279	414-3443
115	-	4	96-06	0G438000-1B000001	114-7509	174-2075K 2	134-4513-4	194-5279	414-0043
120	Sport	4	95-96	0E080400-0E145579	114-6866	174-9710K 1	134-7029-4	194-5279	414-6075
120	XRSportJet	4	95-00	0E141089-0E379999	114-7509	174-2075K 2	134-8303-4	194-5279	R84-828297A 2*
125	1250 Inline	6	68-69	2314956-3253111	114-2986	R398-3587*	R393-2918	154-6770	414-2770
125	9 Amp	4	94-96	0D283222-0G437999	114-5772	174-8778K 1	134-9021-4	194-5279	414-3443
125	16 Amp	4	94-96	0D283222-0G437999	114-5772	174-9710K 1	134-9021-4	194-5279	414-3443
125	-	4	96-06	0G438000-1B000001	114-7509	174-2075K 2	134-4513-4	194-5279	414-0043
135	1350 Inline	6	70-71	2839369-3293233	114-2986	R398-3587*	134-3736	154-6770	414-2770
135	-	6	85-88	0A904646-0C100860	114-7778	174-5456-16	134-6456	154-8825K 1	414-6220A 4
135	-	6	89-90	0C100861-0C239552	114-7778	174-9610K 2	134-6456	194-1873(f)	414-6220A12
135	16 Amp	6	90-91	0C239553-0D081999	114-7778	174-5456-16	134-6456	154-8825K 1	414-6220A 4
135	40 Amp	6	90-91	0C239553-0D081999	114-7778	174-9610K 2	134-6456	194-1873(f)	414-6220A12
135	41 Amp	6	92-95	0D082000-0G201874	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16
135	42 Amp	6	96-99	0G303046-0G960499	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
135	-	6	00-05	0G960500-UP	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-857166T 1*
140	1400 Inline	6	72	3293234-3502805	114-2986	174-4793	134-3736	154-6770	414-2770
140	Inline	6	78-79	4855153-5314655	114-2986	174-4793	134-3736	154-6770	414-2770
140	Inline	6	79	5327663-5625107	114-7778	174-5456-16	134-6456	154-8825K 1 (g)	414-5532
140	-	6	80-81	5625108-5669999	114-7778	174-5456	134-6456	154-6770	414-9564
140	Jet	6	92-95	0D082000-0G201874	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16
140	Jet	6	96-99	0G303046-0G960499	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
140	Jet	6	00-05	0G960500-UP	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-857166T 1*
150	1500 Inline	6	73-77	3502806-4868997	114-2986	174-4793	134-3736	154-6770	414-2770
150	XR2 Mag	6	78-86	04868998-0A904645	114-7778	174-5456	134-6456	154-6770	414-6220A 4
150	-	6	85-88	0A904646-0C100860	114-7778	174-5456-16	134-6456	154-8825K 1 (g)	414-6220A 4
150	-	6	89-90	0C100861-0C239552	114-7778	174-9610K 2	134-6456	194-1873 (f)	414-6220A12
150	16 Amp	6	90-91	0C239553-0D081999	114-7778	174-5456-16	134-6456	154-8825K 1 (g)	414-6220A 4
150	40 Amp	6	90-91	0C239553-0D081999	114-7778	174-9610K 2	134-6456	194-1873 (f)	414-6220A12
150	40 Ano	6	92-95	0D082000-0G303045	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16
150	2 Stk.	6	96-99	0G303046-0G960499	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
150	3 Stk.	6	00-05	0G960500-0T408999	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-857166T 1*
175	Black Max	6	76-79	4301235-5593736	114-7778	174-5456	134-6456	154-6770	414-6220A 4
175	Black Max	6	79-84	5593737-6618750	114-7778	174-5456	134-6456	154-6770	414-6220A 4
175	9 Amp	6	85-88	6618751-0C100860	114-7778	174-5456	134-6456	154-6770	414-6220A 4
175	15 Amp	6	85-88	6618751-0C100860	114-7778	174-5456-16	134-6456	154-8825K 1 (g)	414-6220A 4
175	40 Amp	6	89-90	0C100861-0C239552	114-7778	174-9610K 2	134-6456	194-1873 (f)	414-6220A12
175	16 Amp	6	90-91	0C239553-0D081999	114-7778	174-5456-16	134-6456	154-8825K 1	414-6220A 4
175	40 Amp	6	90-91	0C239553-0D081999	114-7778	174-9610K 2	134-6456	194-1873 (f)	414-6220A12
175	Xri EFI	6	92-95	0D082000-0G303045	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16
175	Xri EFI	6	96-00	0G303046-0G840500	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
175	2 Stk.	6	96-99	0G303046-0G960499	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
175	3 Stk.	6	00-05	0G960500-0T408999	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-857166T 1*
175	XR2 Sp. Jet	6	97-05	0E151580-0E433133	114-4953-32	174-9873-16	134-6456-15	194-5279	R84-832102A 2*
200	Black Max	6	78-79	4839034-5363917	114-7778	174-5456	134-6456	154-6770	414-6220A 4
200	Black Max	6	79-81	5363918-6073191	114-7778	174-5456	134-6456	154-6770	R84-87266A1*
200	15 Amp	6	82-90	6073192-0C239553	114-7778	174-5456-16	134-6456	194-8825K 1(g)	414-6220A 4
200	16 Amp	6	85-90	6625221-0C239553	114-7778	174-5456-16	134-6456	194-8825K 1(g)	414-6220A 4
200	Xri 40 Amp	6	89-91	0C100861-0G303045	114-7778	174-9610K 2	134-6456	194-1873 (f)	414-6220A 12
200	16 Amp	6	89-91	0D082000-0G201874	114-7778	174-5456-16	134-6456	194-8825K 1	414-6220A16
200	40 Amp	6	89-91	0G201875-0G30345	114-7778	174-9610K 2	134-6456	194-1873(f)	R84-826730A 4*
200	2 Stk.	6	92-00	0G303046-0G960499	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	R84-826730A 4*
200	2 Stk.	6	00-05	0G960500-1B226999	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-857166T 1*
200	2.5L EFI	6	92-99	0D082000-0G840500	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16
200	EFI	6	00-05	0G960500-0T408999	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-857166T 1*
210	Sp Jet	6	97-99	0E370318-0E433133	114-4953-32	174-9873-16	134-6456-15	194-5279 (2 Req'd)	R84-832102A 2*
220	-	6	87-88	0B117316-0C100860	114-7778	174-5456-16	134-6456	194-8825K 1(g)	R84-92432A 6*
225	-	6	81-93	5628028-0D280812	114-7778	174-5456-16	134-6456	194-8825K 1	-
225	2.5L EFI	6	95-00	0D935638-0G569900	114-7778	174-9610K 2	134-6456	194-5279 (2 Req'd)	414-6220A16

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

CDI Electronics Mercury Application Guide – *Continued*

HP	Model	Cyl.	Year	Serial Number	Switch Box	Stator	Trigger	Rectifier/Regulator	Harness
225	3.0L	6	93-94	0D280813-0G129221	114-7509K1	R821935A 3*	-	Alternator	R84-825433A 7*
225	3.0L	6	94-95	0G129222-0G303045	114-7509K1	R821935A 5*	-	Alternator	-
225	3.0L	6	96-01	0G303046-0T408999	114-7509	R821935A 5*	-	Alternator	-
240	Sp Jet	6	00-05	0E373939-0E406399	114-7509	R398-858404T*	134-6456-18	194-2115K 1	R84-877614A 2*
250	3.0L	6	94-95	0G129222-0G303045	114-7509K1	R821935A 5*	-	Alternator	-
250	3.0L	6	96-00	0G303046-0G840500	114-7509	R821935A 5*	-	Alternator	-
250	XB 3.0L	6	00-02	0G980600-0T408999	114-7509	R821935A 5*	-	Alternator	R84-825433A11*
300	ProMax	6	98-01	0G980600-0T408999	114-7509	R821935A 5*	-	Alternator	R84-825433A11*

Switch Box



Switch Box, Fits Most 1967-1977 4 and 6 Cylinder Engines. Replaces: 817029A3, 817029A9

O.E. No. 332-2986
332-2986A21, 332-2986A22, 332-2986A25

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208025	(114-2986)	$423.98 K
Sierra	185779	(18-5779)	$459.07 H

Switch Box



Switch Box, Fits Most 1967-1977 4 and 6 Cylinder Engines. Replaces: 817029A4

O.E. No. 337-4406

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208030	(114-2986K 1)	$762.98 K

Switch Box



Switch Box, Fits 1972-1975 65 H.P. (Model 650) Engines, 3 Cylinder. Replaces: 828302A1, 855745A11

O.E. No. 332-4796

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208032	(114-4796)	$377.98 K

Switch Box



Switch Box, Fits 1972-1977 20 H.P. (Model 200), 1972-1980 40 H.P. (Model 402) and 1981 40 H.P., 2 Cylinder. Replaces: 828303A1, 855745A22

O.E. No. 332-4911A 2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208036	(114-4911)	$357.98 K

Switch Box



Switch Box, Fits 1992-1995 40 and 50 H.P. Engines, 2 Cylinder. Replaces: 510301, F510301, 300-F510301

O.E. No. 18495A 4

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208047	(114-4952)	$331.98 K

Switch Box



Switch Box, Fits 1994-1997 15, 20 and 25 H.P. Engines, 2 Cylinder. Replaces: 99021A3, 99021A5, 99021A9, 99021A13, 99021A15, 99021A16

O.E. No. 114-4952K 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208048	(114-4952A30)	$364.98 K

Switch Box



Switch Box, Fits 1994-1995 65 Jet, 75 and 90 H.P. Engines, 3 Cylinder. Replaces: 99021A2, 99021A6, 99021K2

O.E. No. 18495A10, 18495A26

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208050	(114-4953)	$364.98 K
Sierra	185790	(18-5790)	$344.08 H

Switch Box



Switch Box, Fits 1997-1999 175 and 210 H.P. Sport Jet Engines, 6 Cylinder. Replaces: 819527A1

O.E. No. 18495A22

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208049	(114-4953-32)	$375.98 K

Note: Product shipped may not match the item pictured.

Switch Box

Switch Box, Fits: 1997-2005 6, 8, 10, 15, 20 and 25 H.P. Engines, 2 Cylinder. Replaces: 821889A20, 821889A27, 821889A30, 144-1889-55



O.E. No. 855713A 3

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208060	(114-5713)	$249.98 K

Switch Box

Switch Box, Fits: 1976-1997, 4 Cylinder Engines. Replaces: 821889A19, 821889A40, 821889A42, 821889A51, 821889A22, 821889A45, 821889A29, 821889A46, 821889A34, 821889A50



O.E. No. 332-5772, 332-5772A7

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208062	(114-5772)	$327.98 K
Sierra	185881	(18-5881)	$262.13 H

Switch Box

Switch Box, Fits: 1976-1980 4 H.P. (Model 40), 1974-1986 7.5 H.P., 1973-1985 9.8 H.P. (Model 110), 1977-1981 20 H.P. Engines, 2 Cylinder. Replaces: 821889A2, 821889A14, 821889A15, 821889A32, 821889A36, 821889A52, 821889T 24, 821889A6, 821889A18, 821889A36, 821889A8, 821889A24, 821889A44, 821889A12, 821889A31, 821889A48



O.E. No. 899883229

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208074	(114-6222)	$279.98 K

Switch Box

Switch Box, Fits: 1995-1996 120 H.P. Sport Jet Engines, 4 Cylinder. Replaces: 821889A54, 821889A55



O.E. No. 332-826866A 2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208090	(114-6866)	$358.98 K

Switch Box

MRC Switch Box, 2 Cylinder



O.E. No. 332-7452A2, A3

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208098	(114-7452A3)	$279.98 K

Switch Box

MRC Switch Box, 2 Cylinder



O.E. No. 339-7452A8, thru A21, 339-7452A14, 339-7452A21

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208101	(114-7452K1)	$245.98 K
Sierra	185778	(18-5778)	$201.42 H

Switch Box

Switch Box, Fits: Most 1996-2005 Mercury and Force Engines, 2 Cylinder. Replaces: 14857A4, 14857A10, 14857A15, 14857, 14857A6, 14857A11, 14857A16, 148571, 14857A7, 14857A12, 14857A2, 14857A8, 14857A13, 14857A3, 14857A9, 14857A14



O.E. No. 827509A 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208110	(114-7509)	$92.98 K

Switch Box

Switch Box, Fits: 1994-1995 30 and 40 H.P. 2 Cylinder and 1994-1996 225/250 3.0L Engines 2/6 Cylinder



O.E. No. 822779A 2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208112	(114-7509K 1)	$150.98 K

Switch Box

Switch Box, Fits: 1978-1995 3 Cylinder Engines, 1979-1986 L6 and 1976-1999 V6 Engines, 3/6 Cylinder



O.E. No. 332-5524, 332-7778A12, 332-7778A6, 332-7778A9

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208113	(114-7778)	$227.98 K
Sierra	185775	(18-5775)	$206.55 H

Switch Box

Switch Box, Fits: 1991-1997 45 Jet, 50, 55 and 60 H.P. Engines, 3 Cylinder. Replaces: 332-2910, 332-2910A1, 332-2910A2, 62351, 62351A1, 62351A2, 78614, 78614A1, 816770, 816770T



O.E. No. 19052A 1, 19052A8

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208125	(114-9052)	$353.98 K
Sierra	185791	(18-5791)	$317.57 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Switch Box

Switch Box, Fits: Most 1967-1977 4 and 6 Cylinder Engines. Replaces: 817029A3, 817029A9



O.E. No. 332-2986, 332-2986A21, 332-2986A22, 332-2986A25

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208025	(114-2986)	$423.98 K
Sierra	185779	(18-5779)	$459.07 H

Switch Box

Switch Box, Fits: 1972-1977 20 H.P. (Model 200), 1972-1980 40 H.P. (Model 402) and 1981 40 H.P. Replaces: 828303A1, 855745A22



O.E. No. 332-4911A8, 332-4911A 2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185787	(18-5787)	$485.22 H
CDI Electronics	208036	(114-4911)	$357.98 K

Mercury Stator Cross Reference Guide

			Trigger			Stator		
Mercury HP	Beg. S/N	End S/N	Sierra	DMI	CDI	Sierra	DMI	CDI
6	A197112	G760299				18-5864	185864	174-6617K 1
7.5	2810637	3274632				18-5855	185855	174-3996
8	A197112	G760299				18-5864	185864	174-6617K 1
9.8	2798057	3263262				18-5855	185855	174-3996
9.9	A197112	G760299				18-5864	185864	174-6617K 1
XR10, 10 MAG & SEA PRO	D038000	G760299				18-5864	185864	174-6617K 1
15	A197112	G760299				18-5864	185864	174-6617K 1
15 SEA PRO, SUPER 15	G044365	G437999				18-5863	185863	174-6617A17
15 SEA PRO, SUPER 15	G438000	G760299				18-5864	185864	174-6617K 1
18	5837437	6443972				18-5864	185864	174-6617K 1
18XD	6443973	B238463				18-5864	185864	174-6617K 1
20	2827677	3226957				18-5855	185855	174-3996
20	6443973	G044026				18-5864	185864	174-6617K 1
20, 20 JET	G044027	G437999				18-5863	185863	174-6617A17
20, 20 JET	G438000	G760299				18-5864	185864	174-6617K 1
20XD	6443973	B238463				18-5864	185864	174-6617K 1
25	5705532	6443972				18-5864	185864	174-6617K 1
25, 25 SEA PRO & Marathon	B238464	G044026				18-5864	185864	174-6617K 1
25, 25 SEA PRO & Marathon	G044027	G437999				18-5863	185863	174-6617A17
25, 25 SEA PRO & Marathon	G438000	G760299				18-5864	185864	174-6617K 1
25XD	5705532	G044026				18-5864	185864	174-6617K 1
30 2 Cyl. Electric Models	G055314	& Up				18-5870	185870	174-2075K 2
30 Jet 3 Cyl. Electric Models	G590000	T408999				18-5870	185870	174-2075K 2
30 Jet 4 Cyl. Electric Models	C159200	D055047				18-5874	185874	174-8778K 1
35 2 Cyl.	6445653	B110788				18-5864	185864	174-6617K 1
40 2 Cyl.	3859435	5823917				18-5856	185856	174-5255
40 2 Cyl. Electric Start	G055314	& Up				18-5870	185870	174-2075K 2
40 3 Cyl. Electric Start	G531301	& Up				18-5870	185870	174-2075K 2
40 3 Cyl. Electric Start (Belgium)	9973100	& Up				18-5874	185874	174-8778K 1
40 4 Cyl. Electric Start	C159200	D055047				18-5874	185874	174-8778K 1
40 Jet Electric Start	T178500	& Up				18-5874	185874	174-8778K 1
45 4 Cyl. Manual Start Only	5531630	B110788				18-5866	185866	174-5454K 1
45 4 Cyl. Electric Models	5531630	& Up				18-5870	185870	174-2075K 2
45 Jet Electric Models	G590000	T129554				18-5874	185874	174-8778K 1
50 4 Cyl. Manual Start Only	4357640	& Up				18-5866	185866	174-5454K 1
50 4 Cyl. Electric Models	4357640	& Up				18-5870	185870	174-2075K 2
50 3 Cyl.	6428681	D000749	18-5797	185797	134-6453	18-5865	185865	174-5454K 1
50, 55 3 Cyl. Electric Start	G590000	& Up				18-5870	185870	174-2075K 2
50 3 Cyl. Electric Models (Belgium)	9973100	& Up				18-5870	185870	174-2075K 2
55 3 Cyl. Electric Models	D000750	G589999				18-5870	185870	174-2075K 2
55 3 Cyl. Electric Models (Belgium)	9741042	9973088				18-5870	185870	174-2075K 2
60 3 Cyl.	6428681	D000749	18-5797	185797	134-6453	18-5865	185865	174-5454K 1
60 3 Cyl. Electric Models	G590000	& Up				18-5870	185870	174-2075K 2
60 3 Cyl. Electric Models (Belgium)	9973100	& Up				18-5870	185870	174-2075K 2
60 3 Cyl. Bigfoot	G590000	G760299				18-5874	185874	174-8778K 1
65 (650) 3 Cyl.	4382057	4571651				18-5865	185865	174-5454K 1
70 3 Cyl.	4571652	A996141	18-5797	185797	134-6453	18-5865	185865	174-5454K 1
75 4 Cyl.	6432901	& Up				18-5859	185859	174-5454K 1
75 3 Cyl. Electric Models	G438000	& Up				18-5870	185870	174-2075K 2
80 (80, 800) 4 Cyl.	4831999	6432900				18-5859	185859	174-5454K 1
80 Jet	G438000	& Up				18-5870	185870	174-2075K 2

Mercury Stator Cross Reference Guide

Mercury HP	Beg. S/N	End S/N	Trigger Sierra	DMI	CDI	Stator Sierra	DMI	CDI
85 (850) 4 Cyl	4366802	4831998				18-5859	185859	174-5454K 1
90 6 Cyl.	5299506	& Up	18-5798	185798	134-6456	18-5854	185854	174-5456
90 3 Cyl. Electric Models	G438000	& Up				18-5870	185870	174-2075K 2
90 3 Cyl. (Belgium) Electric Models	9927000	& Up				18-5870	185870	174-2075K 2
100 4 Cyl.	G438000	& Up				18-5870	185870	174-2075K 2
100 4 Cyl.	9927000	& Up				18-5870	185870	174-2075K 2
100 4 Cyl. with Voltage Reg.	B209468	G437999				18-5873	185873	174-8778K 1
100 4 Cyl. with Voltage Reg. (Belgium)	9523024	9926999				18-5873	185873	174-8778K 1
105 Jet	D082000	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
115 6 Cyl.	5314656	& Up	18-5798	185798	134-6456	18-5854	185854	174-5456
115 4 Cyl. Electric Models	G438000	& Up				18-5870	185870	174-2075K 2
115 4 Cyl. Electric Models (Belgium)	9927000	& Up				18-5870	185870	174-2075K 2
115 4 Cyl. with Voltage Reg.	C10000	G437999				18-5873	185873	174-8778K 1
115 4 Cyl. with Voltage Reg. (Belgium)	9559771	9926999				18-5873	185873	174-8778K 1
125 4 Cyl.	G438000	& Up				18-5870	185870	174-2075K 2
125 4 Cyl. (Belgium)	9927000	& Up				18-5870	185870	174-2075K 2
125 4 Cyl. with Voltage Reg.	D283222	G437999				18-5873	185873	174-8778K 1
125 4 Cyl. with Voltage Reg. (Belgium)	9793577	9926999				18-5873	185873	174-8778K 1
V135	A904646	C100860	18-5798	185798	134-6456	18-5860	185860	174-5456-16
V135	A904646	C100860	18-5798	185798	134-6456	18-5871	185871	174-5456-16
V135	C100861	C239552	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V135	C239553	D081999	18-5798	185798	134-6456	18-5860	-	-
V135	C239553	D081999	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V135	C239553	D081999	18-5798	185798	134-6456	18-5867	185867	174-9873-16
V135	D082000	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
140	5327663	& Up	18-5798	185798	134-6456	18-5854	185854	174-5456
140 Jet	Up to	G760299	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V150	4868998	A904645	18-5798	185798	134-6456	18-5857	185857	174-5456
V150	A904646	C100860	18-5798	185798	134-6456	18-5860	-	-
V150	A904646	C100860	18-5798	185798	134-6456	18-5871	185871	174-5456-16
V150	C100861	C239552	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V150	C239553	D081999	18-5798	185798	134-6456	18-5860	-	-
V150	C239553	D081999	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V150	C239553	D081999	18-5798	185798	134-6456	18-5867	185867	174-9873-16
V150	D082000	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V150 EFI	D082000	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V150 XRI EFI	D082000	G303045	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
150 XR-4	B242885	C100860	18-5798	185798	134-6456	18-5860	185860	174-5456-16
150 XR-4	C100861	C239552	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
150 XR-4	C239553	D081999	18-5798	185798	134-6456	18-5860	-	-
150 XR-4	C239553	D081999	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
150 XR-4	C239553	D081999	18-5798	185798	134-6456	18-5867	185867	174-9873-16
150 XR-4, MAG II	C239553	D081999	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
150 XR-4, MAG II	C239553	D081999	18-5798	185798	134-6456	18-5867	185867	174-9873-16
150 XR-6, MAG III	D082000	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V175	4301235	6618750	18-5798	185798	134-6456	18-5857	-	-
V175	6618751	C100860	18-5798	185798	134-6456	18-5871	-	-
V175	6618751	C100860	18-5798	185798	134-6456	18-5857	185857	174-5456
V175	6618751	C100860	18-5798	185798	134-6456	18-5860	185860	174-5456-16
V175	C100861	C239552	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V175	C239553	D081999	18-5798	185798	134-6456	18-5860	-	-
V175	C239553	D081999	18-5798	185798	134-6456	18-5867	185867	174-9873-16
V175	C239553	D081999	18-5798	185798	134-6456	18-5875	-	-
V175	D082000	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V175 MAG, EFI	D000750	D081999	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V175 EFI	D303046	G960499	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V175 XRI EFI	D000750	D081999	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V175 XRI EFI	D082000	G303045	18-5798	185798	134-6456	18-5876	185876	174-9610K 2
V200	4839034	6625220	18-5798	185798	134-6456	18-5857	-	-
V200	6618751	C100860	18-5798	185798	134-6456	18-5860	185860	174-5456-16
V200	C100861	D081999	18-5798	185798	134-6456	18-5860	-	-
V200	C100861	C291519	18-5798	185798	134-6456	18-5875	185875	174-9610K 2
V200	C100861	C291519	18-5798	185798	134-6456	18-5867	-	-

©2014 Donovan Marine, Inc.

Stator




Stator, Fits: 1966-1971 9.8 H.P. 2 Cylinder, 1970-1971 4 H.P. 1 Cylinder and 7.5, 20 H.P. 2 Cylinder Engines. Replaces: 11350A49, 849849A1

O.E. No. 336-3962, 336-3996A7

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208432	(174-3996)	$382.98 K
Sierra	185855	(18-5855)	$683.33 H

Stator



Stator, Fits: 1970-1971 40 H.P. 2 Cylinder Engines. Replaces: 11350A10, 11350A14, 11350A16, 11350A29, 849849A2

O.E. No. 398-3873

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208434	(174-4424)	$284.98 K

Stator



Stator, Fits: 1969-1971 65, 80 H.P., 1972 80 H.P., 1973-1975 85 H.P. 4 Cylinder and 1970-1979 115 H.P., 1972 140 H.P., 1973-1977 150 H.P., 1978-1979 90, 140 H.P. 6 Cylinder Engines. Replaces: 11350A63

O.E. No. 398-3587

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208492	(174-4793)	$397.98 K

Stator



Stator, Fits: 1972-1981 40 H.P. Engines. Replaces: 849849A11, 849849A13

O.E. No. 174-5256
398-5255

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208505	(174-5255)	$352.98 K
Sierra	185856	(18-5856)	$343.05 H

Stator



50-70 H.P.
For Early Style 3 Cylinder

O.E. No. 398-5704A7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185865	(18-5865)	$205.07 H

Stator



Stator, Fits: Most 1987-1997 45, 50, 55, 60, 65, 70, 75, 80, 90, 95 H.P. 3 Cylinder and 1989-1997 40, 80, 100, 115, 120, 125 H.P. 4 Cylinder Engines. Replaces: 84-93948A1, 84-96219A1, 84-96219A2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208582	(174-9710K1)	$356.98 K

Stator



Stator, Fits: 1978-1988 9 amp 6 Cylinder Engines. Replaces: 314-8949A 5

O.E. No. 398-5454A 2, 398-5454A17

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208529	(174-5456)	$255.98 K
Sierra	185854	(18-5854)	$216.60 H

Stator



Stator, Fits: 1980-1988 16 amp 6 Cylinder Engines. Replaces: 314-8949A 6

O.E. No. 398-5454A11, 398-5454A35

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208531	(174-5456-16)	$285.98 K
Sierra	185860	(18-5860)	$226.55 H

Stator



Stator, Fits: 1997-2005 6, 8, 10, 15, 20 and 25 H.P. Engines.
Replaces: 84-850043A2

O.E. No. 855721A 4

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208557	(174-5721)	$164.98 K

Stator



Stator, Fits: 1987-1993 70, 80 H.P., 1989-1993 75 H.P., 1987-1992 90 H.P., 1993-1993 90 H.P. 3 Cylinder Engines, 1988-1996 100 H.P., 1989-1993 115 H.P. and 1994-1996 125 H.P. 4 Cylinder Engines. Replaces: 84-14614A1

O.E. No. 398-81835A3, A5, A8, A10

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208581	(174-8778K1)	$330.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Stator



Stator, Includes: 174-9610K 2 and 174-8736K 1. Replaces: 34229, 47929, 57022, 84-85532, 84-85532A1

O.E. No. 398-9610A18

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208584	(174-9610A18)	$948.98 K

Stator



150-225 H.P.
For Early Style V6 with 9 amp Charging

O.E. No. 398-5454A7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185857	(18-5857)	$241.92 H

Stator



Stator, Fits: 1997-1999 210 H.P. and 1997-2005 175 H.P. 6 Cylinder Engines. Replaces: 84-96219A5, 84-96219A8

O.E. No. 398-9873A 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208590	(174-9873-16)	$296.98 K

Stator



Stator, Fits: 1995-1996 30, 40 H.P. and 1996-2005 40 H.P. 2 Cylinder Engines, 1997-2000 60 H.P. and 1997-2005 40 H.P. 3 Cylinder Engines. Replaces: 18736A8, 18736A11, 18736A21

O.E. No. 398-832075A13, 398-9873A13

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208578	(174-2075K1)	$302.98 K

Stator



Stator, Fits: 1994-1997 15, 20 and 25 H.P. Engines.
Replaces: 84-64997, 84-73369, 84-73369A1, 84-73447, 84-73447A1, 84-76295, 84-76295A1

O.E. No. 86617A17

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185863	(18-5863)	$173.38 H

Stator



Stator, Fits: 6-25 H.P. Replaces: 84-43443A3

O.E. No. 86617A20, 86617

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185864	(18-5864)	$152.55 H
CDI Electronics	208555	(174-6617K 1)	$172.98 K

Stator



Stator, Fits: 1976-1979 65 H.P., 1977-1987 70 H.P., and 1984-1990 50, 60 H.P. 3 Cylinder Engines; 1989-1997 30, 40 H.P., 1981-1989 45 H.P., 1976-1985 50 H.P., 1984-1988 75 H.P., 1978-1979 80 H.P., 1980-1983 80 H.P. and 1976-1977 85 H.P. 4 Cylinder Engines. Replaces: 849849A12, 849849A14

O.E. No. 398-5704A7, 398-5454A 4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185865	(18-5865)	$205.07 H
CDI Electronics	208517	(174-5454K 1)	$255.98 K

Stator



Stator, Fits: 1996-1999 30 H.P. 2 Cylinder, 1997-2007 30, 40, 50, 55, 60, 65, 75, 90 H.P. 3 Cylinder, 1996-2006 80, 115, 125 H.P. 4 Cylinder and 1995-2000 100, 120 H.P. 4 Cylinder Engines. Replaces: 194-3072K1, 883072T2, 854515T2, 893640-002, 883071T1, 883072T1

O.E. No. 398-832075A21, 398-832075A 3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185870	(18-5870)	$249.90 H
CDI Electronics	208579	(174-2075K 2)	$303.98 K

Stator



Stator, Fits: 1980-1988 V6 150-225 H.P. 16 amp 6 Cylinder Engines. Replaces: 314-8949A 6

O.E. No. 398-5454A32, 398-5454A11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185871	(18-5871)	$303.83 H
CDI Electronics	208531	(174-5456-16)	$285.98 K

Stator



Stator, Complete Kit, Fits: 1987-1993 70, 80 H.P., 1989-1993 75 H.P., 1987-1992 90 H.P. and 1993 90 H.P. 3 Cylinder Engines, Fits 1988-1996 100 H.P., 1989-1993 115 H.P. and 1994-1996 125 H.P. 4 Cylinder Engines. Replaces: 398-832075 A0

O.E. No. 398-832075A6, 749095

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185873	(18-5873)	$408.58 H
CDI Electronics	208581	(174-8778K 1)	$330.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Stator

Stator, Complete Kit, 30-50 H.P. 1989-Up.
Replaces: 398-832075A14-A20



O.E. No. 398-832075A14, 398-832075A20, 749095

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185874	(18-5874)	$408.50 H
CDI Electronics	208581	(174-8778K 1)	$330.98 K

Stator

Stator, Fits: Most 1989-2000 105, 135, 140, 150, 175, 200, 225 H.P. 6 Cylinder Engines.
Replaces: 84-826075A2



O.E. No. 398-9610A5, 398-9610A 3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185875	(18-5875)	$500.00 H
CDI Electronics	208583	(174-9610K 2)	$550.98 K

Trigger

Fits: 1998-2005 30 and 40 H.P. Engines.
Mercury Trigger, 2 Cylinder



O.E. No. 853960T, 855747A1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208237	(134-3690-2)	$90.98 K

Trigger

Fits: 1996-2005 30, 40, 50, 65, 75 and 90 H.P. 3 Cylinder Engines.
Replaces: 18495A10, 18495, A12, 18495A19, 18495A26



O.E. No. 854512 T

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208241	(134-4512-3)	$88.98 K

Trigger

Fits: 100, 115, 125 H.P., 80 Jet Mariner and Mercury Engines.
Replaces: 333-3176



O.E. No. 834821T

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208245	(134-4513-4)	$94.98 K

Trigger

Fits: 175, 210 SportJet Engines.
Replaces: 398-3587, 398-3618, 398-4792, 398-4793, 398-5232



O.E. No. 96455A15

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208247	(134-6456-15)	$160.98 K

Trigger

Fits: 135, 150, 175, 200, XR6 H.P. 2.5L and 240 H.P. SportJet CDM Ignition Engines.
Mercury Trigger, V6



O.E. No. 96455A18

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208248	(134-6456-18)	$135.98 K

Trigger

Fits: 30 Jet, 45, 50, 80, 85 H.P. Mariner and Mercury Engines.
Replaces: 398-3873, 398-3633, 398-4204, 398-4423, 398-4424



O.E. No. 73372A 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208239	(134-6452)	$103.98 K

Trigger

Fits: 45, 50, 80, 85 H.P. Mariner and Mercury Engines.
Replaces: 336-4468A1, 336-4470A1



O.E. No. 77000A 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208242	(134-6454)	$133.98 K

Trigger

Fits: 1991-1995 70 H.P., 1991-1994 90 H.P. Force Engines and 1993-1994 90 H.P. SportJet Engines



O.E. No. 817029A 3

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208254	(134-7029-3)	$101.98 K

Note: Product shipped may not match the item pictured.

Trigger

Fits: 70, 75, 80, 90 H.P. Mariner and Mercury Engines.
Replaces: 855721A4, 855721T 8



O.E. No. 99021A 3

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208260	(134-9021-3)	$116.98 K

Trigger

Fits: 100, 115, 125 H.P. Mariner and 80 Jet Engines.
Replaces: 339-5312A1, 339-5313A1, 339-5589A1, 339-5590A1, 339-6119A1, 339-6120A1



O.E. No. 99021A 2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208262	(134-9021-4)	$112.98 K

Trigger

Fits: 1996-1999 75, 90 H.P. Force Engines and 1993-1997 SportJet Engines.
Replaces: 398-5454A21, 398-5454A22, 398-5454A24, 398-5454A25, 398-5454A26, 398-5454A42, 398-5454A56, 398-5454A62, 398-5454A63, 398-5704A2, 398-5704A4, 398-5704A5, 398-5704A7, 398-5919A2, 398-5919A3, 398-5919A6, 398-5919A7, 398-5919A8, 398-5919A10, 398-818535A15



O.E. No. 828302A 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208249	(134-8302-3)	$96.98 K

Trigger

Fits: 1994 30 and 40 H.P. Engines.
Replaces: 398-5454A11, 398-5454A15, 398-5454A16, 398-5454A30, 398-5454A31, 398-5454A32, 398-5454A34, 398-5454A35, 398-5454A36, 398-5454A61, 398-5454A64



O.E. No. 99021A11, 99021A14

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208250	(134-9021-2)	$90.98 K

Trigger

Fits: 1977-1987 70 H.P., 1976-1979 65 H.P., and 1984-1990 50, 60 H.P. 3 Cylinder Engines.
Replaces: 336-4467A1, 336-4469A1



O.E. No. 96455A8, 68162A 3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185797	(18-5797)	$163.88 H
CDI Electronics	208240	(134-6453)	$188.98 K

Trigger

Fits: 45, 50, 80, 85 H.P. Mariner and Mercury Engines.
Replaces: 336-4468A1, 336-4470A1



O.E. No. 96455A9, 68162A 1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185798	(18-5798)	$176.45 H
CDI Electronics	208252	(134-6456)	$197.98 K

Rectifier

Fits: 1966-1997 7.5 Thru 200 H.P. Engines.
Replaces: Sierra 18-5708 and Mercury 332-2910, 62351, 78614, 816770



O.E. No. 816770, 78614

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185707	(18-5707)	$36.57 H
CDI Electronics	208315	(154-6770)	$51.98 K

Rectifier

Fits: 1999-2005 25 H.P. 2 Cylinder, 2002-2005 30, 40 H.P. 3 Cylinder, 2002-2007 40, 50, 60 H.P. 4 Cylinder, and 2000-2005 135, 140, 150, 175, 200, 240 H.P. 6 Cylinder Engines.
Replaces: 84-96220A16, 84-96220A17



O.E. No. 830179T 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208773	(194-2115K 1)	$216.98 K

Rectifier

Fits: Most 1992-2005 105, 135, 140, 150, 175, 200, 210 and 225 H.P. 6 Cylinder Engines.
Replaces: 84-89915A1, 84-96233A1, 84-96233A2



O.E. No. 815279, 815279-1, 815279A2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208771	(194-5279)	$196.98 K
Sierra	185741	(18-5741)	$145.73 H

Rectifier

Fits: Most 1992-2005 105, 135, 140, 150, 175, 200, 210 and 225 H.P. 6 Cylinder Engines.
Replaces: 84-96277A1, 84-96277A2, 84-96277A4, (NLA)



O.E. No. 18736

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208772	(194-5279R)	$201.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Rectifier



Regulator Kit with 2 Regulator/Rectifier, Includes Mounting Plate.
Replaces: 84-18672A2, 84-18672A4, 84-18672A6, 84-18672A8

O.E. No. 18736

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208776	(194-8736K 1)	$493.98 K

Rectifier



Fits Most Mercruiser Engines with a Water Cooled Regulator/Rectifier.
Replaces: 84-19061A2, 84-19061A4

O.E. No. 77305A 2

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208779	(194-9502)	$664.98 K

Rectifier



All Applications with Square, 3 Post Rectifier.
Replaces: 62351A1, 62351A2, 816770, 816770T

O.E. No. 816770

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185707	(18-5707)	$36.57 H

Voltage Regulator



150-225 H.P. 1992-2006
MRY/MAR Voltage Regulator, For 16 and 40 amp

O.E. No. 815279-3, 815279-5, 883072T, 815279

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185743	(18-5743)	$148.37 H
CDI Electronics	208771	(194-5279)	$196.98 K

Coil



Fits: 1968 65 H.P., 1970-1975 50 H.P., 4 Cylinder Engines.
Replaces: 88825A1, 88825A7, 816770

O.E. No. 333-3175

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208430	(174-3175)	$72.98 K

Coil



Fits: 1968 65 H.P., 1970-1975 50 H.P., 4 Cylinder Engines.
Replaces: 86255A3, 77305A2, 86255A2, 99502A4, 99502A7, 99502A8, 99502A9, 99502A12, 99502A13

O.E. No. 333-3176

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208431	(174-3176)	$59.98 K

Coil



150-225 H.P.
MRY Ignition Coil, DFI Only

O.E. No. 339-85699A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185187	(18-5187)	$133.07 H

Alternator



75-115 H.P. 2006-Thru
Alternator I/L 4 Verado Style Engine.
Replaces: 50-897755T, 897755T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1030	(ADR0313)	$224.98 G

Alternator



1999-2011 2.5 Litre and 2000 115 H.P.
MRCR Alternator, 2.5 Litre, 50 amp

O.E. No. 857006T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6454	(ADR0310)	$169.98 G

Alternator



2000-2011 3.0 Litre and 2001-2010 90-115 H.P. Optimax.
MRY/MAR Alternator, 1.5-3.0 Litre

O.E. No. 875286A1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6455	(ADR0318)	$178.98 G

Note: Product shipped may not match the item pictured.

Alternator

135-150 H.P. 1998 Optimax with Serpentine-Belt Non Rubber Mount.
Alternator, 12 volt, 60 amp



O.E. No. 834832T2

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1076	(ANA0253)	$163.98 G

Alternator

135-200 H.P. 2006-2011
Alternator, 12 volt, 70 amp, with Serpentine Pully



O.E. No. 892940T01

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5929	(ADR0294)	$131.98 G

Alternator

200-250 H.P. 1995-2000, All 3.0 Litre and Race V-Belt.
Alternator, 12 volt, 50 amp



O.E. No. 821663A1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1072	(ANA0171)	$173.98 G

Alternator

1.5-3.0 Litre, 200 DFI, 200 DFI/DTS, 225 EFI, 225 EFI, Sea Pro, 225 DFI/DTS, 250 EFI.
3/6 Replaces: 875286T, 875286A1, 881247A1



O.E. No. 875286A1, 875286T, 881247A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186455	(18-6455)	$419.93 H

Harness

Fits: Most 1970-1981 20, 40 H.P. 2 Cylinder, 1967-1975 50, 65, 80, 85 H.P. 4 Cylinder and 1966-1979 90, 95, 100, 115, 125, 135, 140, 150 H.P. 6 Cylinder Engines.
Replaces: 84-43442A3, 84-73446, 84-88721A1



O.E. No. 37628

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208822	(414-2770)	$192.98 K

Harness

Fits: 1977-1981 20 H.P., 1976-1979 50 H.P., 1978-1979 80 H.P., 1976-1977 85 H.P. Engines.
Replaces: 84-69738A1, 84-69738A7, 84-69739A1, 84-69739A2



O.E. No. 84-64997

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208834	(414-3369)	$192.98 K

Harness

1963-1983 35 H.P., 1971 20 H.P., 1976-1977 90 L6, 1979-1980 115 H.P. L6, 1979 140 H.P. L6 Engines.
Mercury Harness INT



O.E. No. 34229

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209105	(414-5532)	$192.98 K

Harness

Fits: Engines Using 414-2770, 414-3369, 414-5532 and OEM Harnesses Through 1978.
Harness Enters Through Cowling Side



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208850	(474-9550)	$299.98 K

Harness

Fits: Engines Using 1979-2006 8-pin Cannon Plug Harness.
Harness Enters Through Cowling Front.
Replaces: 398-852386A4, 398-852386T 6



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208860	(474-9560)	$299.98 K

Tilt/Trim Replay

Tilt/Trim Replay, 12 volt, 40 amp for Trim/Tilt.
Replaces: 828151A1



O.E. No. 9-15201, 87-19761

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208992	(852-9819)	$25.98 K
Sierra	185737	(18-5737)	$48.25 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Spark Plug Wire



Spark Plug Wire, Includes 6 Inductive Wires to Reduce RFI Interference and Ghost Problems.
Replaces: 398-3587, 398-3618, 398-4792, 398-4793, 398-5232

O.E. No. 815358A 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209035	(934-1945)	$103.98 K

Spark Plug Wire



CDM Spark Plug Wire

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209042	(934-7124)	$22.98 K

Ignition Coil Primary Wire Set



Mercury Ignition Coil Primary Wire Set, Includes 6 Wires: 2 Green, 2 Green & White and 2 Green & Red

O.E. No. 84-69738 (Set)

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209043	(934-9738)	$75.98 K

Distributor Rotor and Shaft



Fits: Most 1970-1979 4 and 6 Cylinder Outboard Engines.
Replaces: 393-4371, 393-4312

O.E. No. 393-4312

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209040	(994-4371)	$286.98 K

Distributor Cap



Fits: Most 1970-1979 6 Cylinder Outboard Engines with a Distributor.
Replaces: 393-4841A2

O.E. No. 134-4841

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209155	(994-4841)	$75.98 K

Key Switch



MRY Key Switch, Control Box Push to Choke

Brand Name	DMI No.	Mfg. No.	Price
Sierra	367630	(MP41070-2)	$26.23 H

Distributor Trigger Housing



Fits: Most 1970-1979 4 and 6 Cylinder Engines.
Replaces: 398-832075A3, 398-832075A4, 398-832075A5, 398-832075A6, 398-832075A12, 398-832075A17, 398-832075A21, 398-9873A19, 398-9873A22, 398-9873A28

O.E. No. 332-4177

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208236	(134-3736)	$501.98 K

Oil Warning Module



Mercury/Mariner, Mercruiser.
Replaces: 398-9710A11, 398-9710A12, 398-9710A14, 398-9710A15-49, 398-9873A9-35, 398-818535A17, 398-818535A18, F747095

O.E. No. 14857 1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208278	(144-4857-16)	$136.98 K

RPM Limiter



Mercury/Mariner, Mercruiser.
Replaces: 86617A14, 86617 A17

O.E. No. 821889A19

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208286	(144-1889-51)	$136.98 K

Note: Product shipped may not match the item pictured.

Sierra Mariner Cooling System Application Guide

Mariner Models	S/N Code	S/N	Impeller Sierra	Impeller MP Parts	Impeller Repair Kit Sierra	Complete Kit Sierra
2A	646	All	18-3072	4-3072B	-	-
2B	6A1	All	18-3072	4-3072B	-	-
4A	6	All	18-3073	-	-	-
5C	6000	All	18-3073	-	-	-
6C	6H8	All	18-3066	-	-	-
6D	6H6	All	18-3066	-	-	-
8A (M)	655	000000-000300	18-3063	-	-	-
8A (ML)	655	000000-300101	18-3063	-	-	-
8B (M)	677	000101 & Up	18-3063	-	-	-
8B (ML)	677	300101 & Up	18-3063	-	-	-
8C	6G1	All	18-3066	-	-	-
9.9C	682	All	18-3074	-	18-3148	-
15A (M)	651	000285 & Below	18-3063	-	-	-
15A (ML)	651	3000100 & Below	18-3063	-	-	-
15C	684	All	18-3074	-	18-3148	-
20C (M)	6A9	000101-005810	18-3067	4-3067B	18-3426	-
20C (ML)	6A9	300101-306542	18-3067	4-3067B	18-3426	-
20C (E)	6A9	250101-250819	18-3067	4-3067B	18-3426	-
20C (EL)	6A9	550101-550693	18-3067	4-3067B	18-3426	-
20C (M)	6A9	010112 & Up	18-3067	4-3067B	-	18-3427
20C (ML)	6A9	306543 & Up	18-3067	4-3067B	-	18-3427
20C (E)	6A9	250820 & Up	18-3067	4-3067B	-	18-3427
20C (EL)	6A9	550694 & Up	18-3067	4-3067B	-	18-3427
25C (M)	695	000101-014870	18-3067	4-3067B	-	18-3426
25C (ML)	695	000000-312185	18-3067	4-3067B	-	18-3426
25C (E)	695	000000-252290	18-3067	4-3067B	-	18-3426
25C (EL)	695	000000-553575	18-3067	4-3067B	-	18-3426
25C (M)	695	014871 & Up	18-3067	4-3067B	-	18-3427
25C (ML)	695	312186 & Up	18-3067	4-3067B	-	18-3427
25C (E)	695	252291 & Up	18-3067	4-3067B	-	18-3427
25C (EL)	695	553576 & Up	18-3067	4-3067B	-	18-3427
28	664	All	18-3067	4-3067B	-	-
30	689	All	18-3067	4-3067B	-	-
30A (M)	689	000366-014805	18-3067	4-3067B	-	18-3426
30A (ML)	689	301911-315315	18-3067	4-3067B	-	18-3426
30A (E)	689	100251-103275	18-3067	4-3067B	-	18-3426
30A (EL)	689	401216-407815	18-3067	4-3067B	-	18-3426
30A (M)	689	022059 & Up	18-3067	4-3067B	-	18-3427
30A (ML)	689	321377 & Up	18-3067	4-3067B	-	18-3427
30A (E)	689	105325 & Up	18-3067	4-3067B	-	18-3427
30A (EL)	689	411947 & Up	18-3067	4-3067B	-	18-3427
48/48W	670	All	18-3069	4-3069B	18-3425	-
55/W55	663	All	18-3069	4-3069B	18-3425	-
60	675, 6F0	All	18-3069	4-3069B	18-3425	-

Sierra Mercury Cooling System Application Guide

HP	Beginning Serial #	Ending Serial #	Impeller Sierra	Impeller MP Parts	Complete Kit with Lower Housing	Complete Upper Kit
3.3 (with shift)	D901217	& Up	18-3098	4-3098B	-	-
3.5	358136	6202172	18-3012	-	-	-
3.5	6202173	& Up	18-3054②	-	-	-
3.6	5404657	& Up	18-3054②	-	-	-
3.9 ❹	1655013	2498135	18-3012	-	-	-
4 (1 Cyl.)	2498136	4107219	18-3039③	4-3039B	-	18-3446
4 (2 Cyl.)	5589202	& Up	18-3054②	-	-	-
4 (Made in USA)	5595532	A809600	18-3054②	-	-	-
4 (Made in USA)	5595532	& Up	18-3039③	4-3039B	-	18-3446
4 (1 Cyl.)	A809601	& Up	18-3098	4-3098B	-	-
4.5	4107220	5595531	18-3039③	4-3039B	-	18-3446
4.5	5595532	& Up	18-3054②	-	-	-
4.5	5595532	& Up	18-3039③	4-3039B	-	18-3446
5	574128	786612	18-3012	-	-	-
5 (1 Cyl.)	A809601	& Up	18-3098	4-3098B	-	-
5 (4 Stroke)	R000001	& Up	18-3098	4-3098B	-	-

©2014 Donovan Marine, Inc.

Sierra Mercury Cooling System Application Guide – *Continued*

HP	Beginning Serial #	Ending Serial #	Impeller Sierra	Impeller MP Parts	Complete Kit with Lower Housing	Complete Upper Kit
6	888005	1916138	18-3012	-	-	-
6	1916139	2193817	18-3039③	4-3039B	-	-
6	A197112	OT800749	18-3062	-	-	-
6	1582403	1916138	18-3039	4-3039B	-	-
6	1916139	2193817	18-3039	4-3039B	-	-
6	2193818	2529894	18-3039	4-3039B	-	-
6	2385673	2387383	18-3039	4-3039B	-	-
7.5	2529895	4131609	18-3039③	4-3039B	-	18-3447
7.5	4131610	5226934	18-3039③	4-3039B	-	18-3446
7.5	5206550	& Up	18-3054②	-	-	-
7.5	5206550	& Up	18-3039③	4-3039B	-	18-3446
8	A197112	& Up	18-3062	-	-	-
8 (4 Stroke Bodensee)	G760300	& Up	18-3062	-	-	-
110 (9.8)	1865779	2196388	18-3039③	4-3039B	-	-
110 (9.8)	2196389	3795657	18-3039③	4-3039B	-	-
110 (9.8)	3795658	4126459	18-3039	4-3039B	-	-
110 (9.8) ③	4126460	5206549	18-3039	4-3039B	-	-
110	5206550	& Up	18-3054	-	-	-
9.8	5206550	& Up	18-3039③	4-3039B	-	18-3446
9.9	A197112	& Up	18-3062	-	-	-
9.9 (4 Stroke) Standard Case	G760300	T979999	18-3062	-	-	-
XR10 SeaPro	D038000	& Up	18-3062	-	-	-
10	500022	1057993	18-3008	-	-	-
15	B292414	& Up	18-3062	-	-	-
15 SeaPro	G044365	& Up	18-3062	-	-	-
16	700000	& Up	18-3008	-	-	-
18	5837437	& Up	18-3057	4-3057B	-	-
20	860970	1292909	18-3008	-	-	-
20	2827677	6443972	18-3052	4-3052B	-	18-3448
20	6443973	T800749	18-3057	4-3057B	-	-
22	1158546	1238089	18-3008	-	-	-
25, 25XD, 25 SeaPro	5705532	& Up	18-3057	4-3057B	-	-
25 (3 Cyl.)	E268781	& Up	18-3057	4-3057B	-	-
30	950250	1260724	18-3008	-	-	-
30	1271884	1448139	18-3007	4-3007B	-	18-3507
30 Jet	C159200	G589999	18-3007	4-3007B	18-3324	18-3507
30 Jet	G590000	& Up	18-3057	4-3057B	-	-
30 (2 Cyl.)	G053314	T598999	18-3057	4-3057B	-	-
35	1217222	1448139	18-3007	4-3007B	-	-
35	1571114	1960826	18-3007	4-3007B	-	18-3507
35	1960827	2453068	18-3007	4-3007B	-	18-3507
35	6445653	& Up	18-3007	4-3007B	18-3324	18-3507
40	941751	1224480	18-3008	-	-	-
40	1224481	1476509	18-3007	4-3007B	-	-
40	2874704	4362214	18-3007	4-3007B	18-3322	18-3507
40 (2 Cyl.) thru 1983	4860103	& Up	18-3057	4-3057B	18-3324	18-3507
40 (3 Cyl.)	G531301	& Up	18-3057	4-3057B	-	-
40 (4 Cyl.)	C159200	& Up	18-3007	4-3007B	-	-
40 (4 Stroke) 2:1 ratio	G760300	T408999	18-3057	4-3057B	-	-
40 (EFI 4 Stroke) 1.83:1 ratio	T409000	& Up	18-8900	-	-	-
40 (EFI 4 Stroke) 2.31:1 ratio	T409000	B344398	18-3056	4-3056B	-	-
40 (4 Stroke, 4 Cyl.) 2.31:1 ratio	T228405	T598999	18-3056	4-3056B	-	-
40 (4 Stroke, Std.)	G231123	T178499	18-3057	4-3057B	-	-
40 (4 Stroke, Carb, Bigfoot)	C033811	& Up	18-3056	4-3056B	-	-
40	1279685	1476509	18-3007	4-3007B	-	18-3507
45	5531630	& Up	18-3007	4-3007B	-	-
45 Jet (3 Cyl.)	D000750	& Up	18-8900	-	-	-
45 (4 Stroke, Std.) Bodensee	G231123	& Up	18-3057	4-3057B	-	-
45 (4 Stroke, Bigfoot) Bodensee	G231123	& Up	18-3056	4-3056B	-	-
50	1421113	1460498	18-3007	4-3007B	-	18-3507
50	1477910	1521913	18-3007	4-3007B	-	-
50	1521914	2305100	18-3007	4-3007B	-	18-3507
50 Aluminum W/P	2305101	2478119	18-3007	4-3007B	-	-
50 Plastic W/P	2305101	2478119	18-3007	4-3007B	-	-

Sierra Mercury Cooling System Application Guide – *Continued*

HP	Beginning Serial #	Ending Serial #	Impeller Sierra	Impeller MP Parts	Complete Kit with Lower Housing	Complete Upper Kit
500	2514919	4357639	18-3007	4-3007B	-	18-3507
50 (4 Cyl.)	4357640	5531629	18-3007	4-3007B	-	18-3507
50 (4 Cyl.)	5531630	& Up	18-3007	4-3007B	-	-
50 (4 Cyl.)	4962056	& Up	18-3007	4-3007B	-	18-3507
50 (3 Cyl.)	6428681	D000749	18-3007	4-3007B	-	-
50 (3 Cyl.)	D000750	G589999	18-8900	-	-	-
50 (3 Cyl.)	G590000	& Up	18-3057	4-3057B	-	-
50 (4 Stroke, Std.)	G231123	T178499	18-3057	4-3057B	-	-
50 (4 Stroke, 4 Cyl.) Standard	T178500	T598999	18-8900	-	-	-
50 (4 Stroke, 4 Cyl.) Bigfoot	T178500	& Up	18-3056	4-3056B	-	-
50 (EFI 4 Stroke) Standard	T409000	B344398	18-8900	-	-	-
50 (EFI 4 Stroke) Bigfoot	T409000	B344398	18-3056	4-3056B	-	-
55 (3 Cyl.)	D000750	& Up	18-8900	-	-	-
60	6428681	D000749	18-3007	4-3007B	18-3324	-
60 (3 Cyl.) Standard	D000750	& Up	18-3056	4-3056B	-	-
60 Marathon	D000750	& Up	18-3056	4-3056B	-	-
60 Bigfoot	D000750	& Up	18-3056	4-3056B	-	-
60 (3 Cyl.)	D000750	& Up	18-8900	-	-	-
60 (4 Stroke) Standard	OT178500	T598999	18-8900	-	-	-
60 (4 Stroke) Bigfoot	OT178500	T598999	18-3056	4-3056B	-	-
60 (4 Stoke EFI) Bigfoot	T409000	B344398	18-3056	4-3056B	-	-
65 (4 Cyl.) Aluminum W/P	1542745	280351	18-3017	4-3017B	18-3317	18-3507
65 (4 Cyl.) Plastic W/P	1542745	280351	18-3017	4-3017B	18-3317	-
65 (4 Cyl.)	2803562	2874263	18-3017	4-3017B	18-3317	-
65 (4 Cyl.)	2997439	3293183	18-3017	4-3017B	18-3317	-
65 (3 Cyl.)	3293184	4382056	18-3007	4-3007B	-	18-3507
65 (3 Cyl.)	4382057	4571651	18-3007	4-3007B	-	-
65 Jet	0D283222	& Up	18-3056		4-3056B	-
70	1413611	1436114	18-3017	4-3017B	-	18-3507
70 (6 Cyl.)	1482212	1503458	18-3017	4-3017B	-	-
700 E-2 (6 Cyl.)	1503459	1503958	18-3017	4-3017B	-	-
700 EL-2 (6 Cyl.)	1503459	1566239	18-3017	4-3017B	-	-
700 E-2 (6 Cyl.) ❶	1503959	1566239	18-3017	4-3017B	-	-
700 EL-2 (6 Cyl.) ❶	1505111	1566239	18-3017	4-3017B	18-3317	-
70 (3 Cyl.)	4571652	4977156	18-3007	4-3007B	-	18-3507
70	4977157	6428680	18-3007	4-3007B	-	-
70	B110054	& Up	18-3056	4-3056B	-	18-3517
70 (3 Cyl.) ⑥	A996142	C221999	18-3056	4-3056B	-	-
70 (3 Cyl.) ⑤	A996142	C221999	18-3056	4-3056B	-	-
75 (4 Cyl.)	6432901	& Up	18-3017	4-3017B	18-3317	-
75 (3 Cyl.)	A996142	C221999	18-3056	4-3056B	-	-
75 (3 Cyl.)	C222000	& Up	18-3056	4-3056B	-	-
75 (3 Cyl.)	C222000	& Up	18-3056	4-3056B	-	-
75 (3 Cyl.) Optimax	T980000	& Up	18-3056	4-3056B	-	-
75 (4 Stroke)	OG960500	B366822	18-3056	4-3056B	-	-
75 (4 Stroke)	B366823	& Up	18-3056	4-3056B	-	-
80	1355468	3493912	18-3017	4-3017B	-	18-3517
80 (6 Cyl.)	1335465	1398629	18-3017	4-3017B	-	-
80 (4 Cyl.)	4831999	6432900	18-3017	4-3017B	18-3317	-
80 (3 Cyl.) ⑥	A996142	C221999	18-3056	4-3056B	-	-
80 (3 Cyl.) ⑤	A996142	C221999	18-3056	4-3056B	-	-
80 Jet	D283222	& Up	18-3056	4-3056B	-	-
850 E and EL (6 Cyl.)	1460999	1567039	18-3017	4-3017B	-	18-3517
850 E-1 and EL-1 (6 Cyl.) ❶	1566240	1766823	18-3017	4-3017B	18-3317	-
85 (4 Cyl.)	4590512	& Up	18-3017	4-3017B	-	-
85 XS (4 Cyl.)	3493913	4831998	18-3017	4-3017B	18-3317	-
850 XS (4 Cyl.)	3493913	4831998	18-3017	4-3017B	18-3317	-
850, 850 XS (4 Cyl.)	3493913	4590511	18-3017	4-3017B	18-3317	-
900 (90 HP 6 Cyl.) ❶	1766824	1869775	18-3017	4-3017B	18-3317	18-3517
90 (6 Cyl.)	4845301	& Up	18-3017	4-3017B	18-3317	-
90 (3 Cyl.)	B110054	C221999	18-3056	4-3056B	-	-
90 (3 Cyl.)	A996142	& Up	18-3056	4-3056B	-	-
90 (3 Cyl.)	A996142	& Up	18-3056	4-3056B	-	-
90 (4 Stroke)	G960500	B366822	18-3056	4-3056B	-	-

©2014 Donovan Marine, Inc.

Sierra Mercury Cooling System Application Guide – *Continued*

HP	Beginning Serial #	Ending Serial #	Impeller Sierra	Impeller MP Parts	Complete Kit with Lower Housing	Complete Upper Kit
90 (4 Stroke)	B366823	& Up	18-3056	4-3056B	-	-
95	1869776	2318585	18-3017	4-3017B	18-3317	-
115 (3 Cyl.) Optimax	T801000	& Up	18-3056	4-3056B	-	-
950 (95 HP 6 Cyl.) ❶	1869776	2318585	18-3017	4-3017B	18-3317	-
1000 (6 Cyl.)	1464949	1503331	18-3017	4-3017B	-	-
1000 (6 Cyl.)	1503332	2318585	18-3017	4-3017B	18-3317	-
100 (4 Cyl.)	B209468	& Up	18-3056	4-3056B	-	-
100 (4 Cyl.)	B209468	& Up	18-3056	4-3056B	-	18-3517
1000 SS (6 Cyl.) ①	2318586	2413843	18-3017	4-3017B	18-3317	-
1000 SS (6 Cyl.) ③	2318586	2413843	18-3017	4-3017B	18-3317	-
1000 SS E-1 ①	2484633	2836018	18-3017	4-3017B	18-3317	-
1000 SS E-1 ③	2484633	2836018	18-3017	4-3017B	18-3317	-
1000 BP (6 Cyl.)	2399698	3253111	18-3017	4-3017B	-	-
105 Jet	D182000	& Up	18-3017	4-3017B	18-3317	-
110 ①	1870204	2314955	18-3017	4-3017B	18-3317	-
110 ③	1870204	2314955	18-3017	4-3017B	18-3317	-
115 (6 Cyl.)	2836019	4112634	18-3017	4-3017B	18-3317	18-3517
115 (6 Cyl.)	4112635	4394236	18-3017	4-3017B	18-3317	-
115 (6 Cyl.)	4394237	& Up	18-3017	4-3017B	18-3317	-
115 (4 Cyl.) ⑥	C100000	& Up	18-3056	4-3056B	-	-
115 (4 Cyl.) ⑤	C100000	& Up	18-3056	4-3056B	-	-
115 (4 Cyl.)	B209468	& Up	18-3056	4-3056B	-	-
115 (4 Stroke)	T178500	B366822	18-3056	4-3056B	-	-
115 (4 Stroke)	B366823	& Up	18-3056	4-3056B	-	-
115 (3 Cyl.) Optimax	T801000	& Up	18-3056	4-3056B	-	-
115 Pro XS	B751825	& Up	18-3056	4-3056B	-	-
125 (6 Cyl.) ②	2314956	2839368	18-3017	4-3017B	18-3317	-
125 (6 Cyl.) ④	2314956	2839368	18-3017	4-3017B	18-3317	-
125 (4 Cyl.) ⑥	D283222	& Up	18-3056	4-3056B	-	-
125 (4 Cyl.) ⑤	D283222	& Up	18-3056	4-3056B	-	-
125 (3 Cyl.) Optimax	B736885	& Up	18-3056	4-3056B	-	-
135	2839369	3293233	18-3017	4-3017B	18-3317	18-3517
V 135	904646	& Up	18-3017	4-3017B	-	-
135 (4 Stroke) Verado	B227000	& Up	18-3056	4-3056B	18-3407	-
140	3293234	3502805	18-3017	4-3017B	18-3407	18-3517
140	4865678	& Up	18-3017	4-3017B	18-3407	18-3517
140 Jet	D082000	& Up	18-3017	4-3017B	18-3407	-
150	3502806	4121434	18-3017	4-3017B	18-3407	18-3517
150 (6 Cyl.) ⑨	4121435	4865677	18-3017	4-3017B	18-3407	18-3517
150 (6 Cyl.) ⑩	4121435	4865677	18-3017	4-3017B	18-3407	-
1500 XS (6 Cyl.)	4868648	5327662	18-3017	4-3017B	18-3407	-
V 150	A904646	& Up	18-3017	4-3017B	18-3407	18-3517
V 150	A904645	& Below	18-3017	4-3017B	18-3407	18-3517
V 135 DFI	G590000	& Up	18-3017	4-3017B	18-3407	-
V 150 Carb ⑧	4868998	A904645	18-3017	4-3017B	18-3407	-
V 150 Carb ⑦	4868998	A904645	18-3017	4-3017B	18-3407	-
V 150 Carb, EFI, DFI	A904646	& Up	18-3017	4-3017B	18-3407	-
V 150 XR 2, 4, 6 - Magnum II, III ⑧	4868998	& Up	18-3017	4-3017B	18-3317	-
V 150 XR 2, 4, 6 - Magnum II, III ⑦	4868998	& Up	18-3017	4-3017B	18-3317	-
150 (4 Stroke) Verado (4 Cyl.)	B227000	& Up	18-3056	4-3056B	18-3407	-
V 175	6618751	& Up	18-3017	4-3017B	18-3317	18-3517
V 175	4301235	6618750	18-3017	4-3017B	18-3317	18-3517
V 175 Carb, EFI, DFI	6618751	& Up	18-3017	4-3017B	18-3317	-
V 175 (4 Stroke) Verado (4 Cyl.)	B227000	& Up	18-3056	4-3056B	18-3407	18-3406
V 200	6625221	& Up	18-3017	4-3017B	18-3317	18-3517
V 200 ⑧	4839034	6625220	18-3017	4-3017B	18-3317	-
V 200 ⑦	4839034	6625220	18-3017	4-3017B	18-3317	-
V 200 DFI (3.0L)	G386496	G589999	18-3056	4-3056B	-	18-3517
V 200 EFI (3.0L)	T750164	B504988	18-3056	4-3056B	-	-
V 200 Carb, EFI (2.5L)	6625221	& Up	18-307	4-3017B	18-3317	-
V 200 DFI (3.0L)	G590000	T598999	18-3056	4-3056B	-	-
V 200 DFI (3.0L)	T590000	B504988	18-3056	4-3056B	-	-
V 200 DFI (3.0L)	B504989	& Up	18-3056	4-3056B	18-3407	-
200 (4 Stroke) Verado (4 Cyl.)	B517159	& Up	18-3056	4-3056B	18-3407	18-3406

Sierra Mercury Cooling System Application Guide – *Continued*

HP	Beginning Serial #	Ending Serial #	Impeller Sierra	Impeller MP Parts	Complete Kit with Lower Housing	Complete Upper Kit
200 (4 Stroke) 4.8 Inch, Torpedo	T980000	& Up	18-3056	4-3056B	18-3407	18-3406
V 220 Laser	B117316	& Up	18-3017	4-3017B	-	-
V 225 (2.4L) ⑧	5628028	& Up	18-3017	4-3017B	-	-
V 225 (2.4L) ⑦	5628028	& Up	18-3017	4-3017B	-	-
V 225 (3.0L) Carb, EFI	D280813	G760299	18-3056	4-3056B	-	-
V 225 (3.0L) Carb, EFI	G760300	T408999	18-3056	4-3056B	-	-
V 225 (3.0L) EFI	T409000	B504988	18-3056	4-3056B	-	-
V 225 DFI	G590000	T598999	18-3056	4-3056B	-	-
V 225 DFI	T599000	B504988	18-3056	4-3056B	-	-
V 225 DFI	B504989	& Up	18-3056	4-3056B	18-3407	-
V 225 Pro XS	B104549	B752546	18-3056	4-3056B	-	-
V 225 Pro XS	B752547	& Up	18-3056	4-3056B	18-3407	-
225 (4 Stroke) Verado, 4.8" Torpedo	T980000	& Up	18-3056	4-3056B	18-3407	-
V 250 (3.0L) EFI	G129222	T408999	18-3056	4-3056B	-	-
V 250 (3.0L) EFI	T409000	B504988	18-3056	4-3056B	-	-
V 250 DFI	B528615	& Up	18-3056	4-3056B	18-3407	-
V 250 Pro XS	B426561	B752546	18-3056	4-3056B	-	-
V 250 Pro XS	B752547	& Up	18-3056	4-3056B	18-3407	-
250 (4 Stroke) Verado, 4.8" Torpedo	T980000	& Up	18-3056	4-3056B	18-3407	-
275 (4 Stroke) Verado, 4.8" Torpedo	T980000	& Up	18-3056	4-3056B	18-3407	-
300 (4 Stroke) Verado, 4.8" Torpedo	B517434	& Up	18-3056	4-3056B	18-3407	-
Mark 5	574128	786612	18-3012	-	-	-
Mark 6, 6A	888005	& Up	18-3012	-	-	-
Mark 50	All	& Up	18-3007	4-3007B	-	-
Mark 55	831021	& Up	18-3007	4-3007B	-	-
Mark 55A	1227131	& Up	18-3007	4-3007B	-	-
Mark 58 E, Mark 58A (M&E)	1139538	& Up	18-3007	4-3007B	-	-

① Models with aluminum upper pump housings.
② Models with aluminum water pumps.
③ Models with plastic upper pump housings.
④ Models with plastic water pumps.
⑤ Pump screws without insulators.
⑥ Pump screws with insulators.
⑦ Models with driveshaft retaining nut.
⑧ Models without driveshaft retaining nut.
⑨ Models with flush hole.
⑩ Models without flush hole.
❶ Models having plastic upper housing use #48752 inset up.
❷ Units already having a complete pump replacement using 46-46893A 6 should use the 2193818-2529894 serial group for components.
❸ Units already having a complete pump replacement using 46-46893A 6 should use USA 3795658-4126549 serial group for components.
❹ Units already having a complete pump replacement using 46-46893A 6 should use the "Early Mariner Impellers" chart for components.

Impeller



Impeller, 40-70 H.P.
Replaces: 47-89983, 47-89983T

O.E. No. 47-89983, 47-89983T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	**4-3007B**	(47-00002)	**$16.98** L
Sierra	**183007**	(18-3007)	**$18.68** H
MP Parts	**4-3007-10**	10 Pack	**$169.98** M

Note: Product shipped may not match the item pictured.

Impeller



Impeller, 65-225 H.P., 2-3/8" Diameter.
Replaces: 47-89984, 47-89984T4, 47-30221, 47-65960

O.E. No. 47-30221, 47-65960, 47-89984

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	**4-3017B**	(47-00001)	**$17.98** L
Sierra	**183017**	(18-3017)	**$19.07** H
MP Parts	**4-3017-10**	10 Pack	**$179.98** M

©2014 Donovan Marine, Inc.

Impeller

Impeller, 4-9.8 H.P., Inside Diameter .465.
Replaces: 47-89981



O.E. No. 47-89981

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3039B	(47-00014)	$12.98 M
Sierra	183039	(18-3039)	$12.98 H
MP Parts	4-3039-10	10 Pack	$129.98 N

Impeller

Impeller, 20 H.P.
Replaces: 47-89982



O.E. No. 47-89982

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183052	(18-3052)	$17.62 H
MP Parts	4-3052B	(47-00003)	$16.98 K

Impeller

Impeller, 60-300 H.P., Late Style.
Replaces: 47-43026-2, 47-43026T2



O.E. No. 47-43026-2, 47-43026-T2

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3056B	(47-01814)	$23.98 M
Sierra	183056	(18-3056)	$23.25 H
MP Parts	4-3056-10	10 Pack	$239.98 N

Impeller

Impeller, 18-50 H.P.
Replaces: 47-85089-3



O.E. No. 47-85089-3

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3057B	(47-00125)	$18.98 M
Sierra	183057	(18-3057)	$18.50 H
MP Parts	4-3057-10	10 Pack	$189.98 N

Impeller

Impeller, 3, 4 and 5 H.P.
Replaces: 47-161543



O.E. No. 47-161543

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183098	(18-3098)	$18.90 H
MP Parts	4-3098B	(47-02170)	$16.98 L

Impeller

MRY/MAR Impeller, 3 Cylinder.
Replaces: 47-19453



O.E. No. 47-19453

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188900	(18-8900)	$33.88 H

Impeller Kit

Impeller Kit without Base and Housing 60-225 H.P., 2-3/8" Diameter, Similar to: 46-96148A5



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183217	(18-3217)	$40.25 H

Impeller Kit

Impeller Kit without Housing, Late 60-300 H.P.
Replaces: 47-43026T6, 47-43026T8, 47-43026T11



O.E. No. 47-43026T11, 47-43026T6, 47-43026T8

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183214	(18-3214)	$43.88 H

Water Pump Kit

MRY/MAR Water Pump Kit with Housing.
Replaces: 689-W0078-04-00, 689-W0078-A4-00



O.E. No. 42431M, 97793M, 97793T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183426	(18-3426)	$162.42 H

Water Pump Kit

MRY/MAR Water Pump Kit with Housing.
Replaces: 689-W0078-A6-00



O.E. No. 95611M

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183427	(18-3427)	$65.70 H

Note: Product shipped may not match the item pictured.

Water Pump Kit

MRY/MAR Water Pump Kit with Housing.
Replaces: 46-70941A3



O.E. No. 46-70941A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183446	(18-3446)	$67.88 H

Water Pump Kit

MRY/MAR Water Pump Kit.
Replaces: 46-46893A6, 47-22748



O.E. No. 46-46893A6

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183447	(18-3447)	$78.63 H

Water Pump Kit

MRY/MAR Water Pump Kit with Housing.
For: 20 H.P. 1967-1980. Replaces: 46-48744A3



O.E. No. 46-48744A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183448	(18-3448)	$107.70 H

Water Pump Kit

MRY Water Pump Kit, Late Style.
Replaces: 817275A2, 817275A1



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183570	(18-3570)	$64.92 H

Water Pump Kit

Complete Water Pump Kit with Base, Base Diameter 2.355



O.E. No. 46-42579A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183319	(18-3319)	$44.17 H

Water Pump Kit

Complete Water Pump Kit with Base, Base Diameter 2.250
S/N 2495186-2763441



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183321	(18-3321)	$82.65 H

Water Pump Kit

Complete Water Pump Kit with Base, Base Diameter 2.250



O.E. No. 46-77177A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183324	(18-3324)	$82.37 H

Upper Water Pump Repair Kit

For: 135/150/175 4 Stroke Verado (S/N 1B227000 and Up), 200/225 4 Stroke Verado (S/N OT980000 and Up), 250/275 4 Stroke Verado (S/N OT801000 and Up).
Replaces: 817275A08



O.E. No. 817275A08

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183406	(18-3406)	$84.06 H

Upper Pump Housing

Upper Pump Housing, Inline 3, 4, 6 and V6 75-225 H.P.
Replaces: 46-96148A1



O.E. No. 46-96148A1, 46-96148T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183116	(18-3116)	$35.32 H
MP Parts	4-3116	(46-00043)	$33.98 L

Upper Pump Housing

MRY Upper Pump Housing.
Replaces: 46-77822A1



O.E. No. 46-77822A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183118	(18-3118)	$20.52 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Water Tube Coupler

MRY Water Tube Coupler.
Replaces: 816597



O.E. No. 816597

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183151	(18-3151)	$12.45 H

Impeller Drive Key

MRY Impeller Drive Key.
Replaces: 28-43037



O.E. No. 28-43037

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183293	(18-3293)	$3.27 H

Water Pump Base

MRC Water Pump Base.
Base Only with Seals, No O-Ring,
2.275" Diameter. Replaces: 46-96146A5



O.E. No. 46-96146A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183414	(18-3414)	$37.63 H

Water Pump Base

MRY Water Pump Base, 135-225 H.P.
Base Only with Seals, No O-Ring,
2.350" Diameter. Replaces 46-42579A3



O.E. No. 46-42579A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183419	(18-3419)	$26.20 H

Thermostat Kit

Fits: 200 3.0L DFI DTS (All), 200 3.0L EFI (2003 and Up) (OT750164 and Up), 200 DFI (1997 and Up) (OG386496 and Up), 225 3.0L EFI (1999 and Up) (OG760300 and Up), 225 3.0L EFI SeaPro (2004 and Up) (OT801000 and Up), 225 3.0L DFI DTS (2003 and Up) (OT599000 and Up), 225 DFI (1998 and Up) (OG590000 and Up), 250 3.0L EFI (1999 and Up) (OG760300 and Up), 250 Long 3.0L EFI (OT861319 and Up) Use Part #183606D for Display Packaging



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183606	(18-3606)	$176.97 H

Thermostat Kit

MRC Thermostat Kit.
Contains: 18-3553 - Thermostat (7569218-0182) and Thermostat Gasket (27-62386)



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183672	(18-3672)	$22.05 H

Thermostat Kit

MRY/MAR Thermostat Kit, 120°.
Replaces: 14586



O.E. No. 14586

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183549	(18-3549)	$24.97 H

Thermostat

MRY/MAR Thermostat, 120°.
Replaces: 803061T1



O.E. No. 803061T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183569	(18-3569)	$18.53 H

Trim and Tilt Motor

All Years Various, Trim Motors Oildyne
MRY Trim and Tilt Motor, 3 Wire Motor Only.
Replaces: 17649A1



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1252	(TRM0008)	$121.98 G

Trim and Tilt Motor

1995-2006 135-225 H.P., 2 Wire Motor
MRY Trim and Tilt Motor, 135-225 H.P.
Replaces: 828708, 878265A4



O.E. No. 828708, 878265A4

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1254	(TRM0009)	$141.98 G
Sierra	186773	(18-6773)	$286.78 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Trim and Tilt Motor



1985-1992 40-225 H.P., Motor and Valve Body, 3 Wire
MRY/MAR Trim and Tilt Motor, 2 Wire, Fill From Port Side. Replaces: 99186, 99186-1, 99186-T

O.E. No. 99186, 99186-1, 99186T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1266	(TRM0056)	$282.98 G
Sierra	186273	(18-6273-1)	$727.98 H

Trim and Tilt Motor



1994-2010 25-50 H.P., Bullet Connectors
MRY/MAR Trim and Tilt Motor.
Replaces: 827675A1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1267	(TRM0048)	$181.98 G
Sierra	186286	(18-6286)	$286.52 H

Trim and Tilt Motor



All Years Various, Trim Motors Oildyne
Mercury Trim Motor, Complete Trim Unit with Solenoids, Bulk Head Mount

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1272	(TRM0068)	$451.98 G

Trim and Tilt Motor



All Years Various, Trim Motors Oildyne
MRCR Trim and Tilt Motor, 3 Wire

O.E. No. 14336A20, 14336A8, 88183A5

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1284	(TRM0065)	$374.98 G
Sierra	186769	(18-6769-1)	$751.05 H

Trim and Tilt Motor



Various Years
MRY Trim and Tilt Motor, 225-275 H.P., Will Work for K Planes. Replaces: 823653A5, 92459A4, 823653A9

O.E. No. 823653A5, 823653A9, 92459A4

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6765	(TRM0026)	$383.98 G
Sierra	186765	(18-6765)	$654.70 H

Trim and Tilt Motor



All Years Various, Trim Motors Oildyne
MRCR Trim and Til Motor, 3 Wire.
Replaces: 14336A20

O.E. No. 14336A20

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6769	(TRM0027)	$383.98 G
Sierra	186769	(18-6274)	$751.05 H

Trim and Tilt Motor



Various Years
Mercury/Force Trim and Tilt Motor, Square Motor, Design 11, Aft Fill, 3-Ram Integral

O.E. No. 811628, 828708A1, 878265A6

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6774	(TRM0011)	$138.98 G
Sierra	186774	(18-6774)	$339.18 H

Trim and Tilt Motor



1995-1997 90-120 H.P., 3 Wire
MRY/MAR/Force Trim and Tilt Motor

O.E. No. 811673 1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6775	(TRM0035)	$270.98 G
Sierra	186775	(18-6775)	$547.97 H

Trim and Tilt Motor



All Years, Various Applications
Trim and Tilt Motor, Complete Trim and Tilt with Floor Mount Bracket and Solenoids

O.E. No. 88183A12

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1278	(TRM0066)	$519.98 G

Trim and Tilt Motor



3 Wire with Reservoir, Early Style
MRC Trim and Tilt Motor, OB/IO

O.E. No. 67914A2, 79271A4, 92975A28

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6763	(TRM0005)	$226.98 G
Sierra	186763	(18-6763)	$279.10 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Trim and Tilt Motor



1989-1994 40-150 H.P.
Late Style, Single Ram, Yellow Plug.
Replaces: 818903A1, 819762A4-A7, 819479A1, 819480A1, 81977A8-A9

O.E. No. 19217A1, 19217A5, 818903A1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6777	(TRM0047)	$251.98 G
Sierra	186777	(18-6777)	$393.72 H

Relay



12 volt, 40 amp, for Trim and Tilt Relay
Replaces: 582472, 584416, 586147, 586224, 87-18211

O.E. No. 582472, 87-18211

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	208991	(852-9809)	$20.98 K
Sierra	185729	(18-5729)	$19.92 H

Trim and Tilt Motor Reservoir



For: Motors with 4 Screw Attachments
MRY/MRC Trim and Tilt Motor Reservoir

O.E. No. 883166A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186778	(18-6778)	$58.80 H

Mercury Starter Application Guide

HP	Beginning Serial #	Ending Serial #	OEM #	Sierra	MP Parts	Drive Tooth Count
6	A197112	& Up	50-8M0033984/50-90983A1	18-5611	4-5611	10
7.5	3801458	4851692	50-73531	-	-	10
7.5	4851693	& Up	50-78011	-	-	10
8/9.9/15	A197112	& Up	50-8M0033984/50-90983A1	18-5611	4-5611	10
18	5837437	& Up	50-8M0033984/50-90983A1	18-5611	4-5611	-
20	4709593	6443973	50-76275	-	-	10
20	6443973	& Up	50-8M0033984/50-90983A1	18-5611	4-5611	10
25	5705532	& Up	50-8M0033984/50-90983A1	18-5611	4-5611	10
30 2 Cyl.	G053314	& Up	50-893890T/50-822462	18-5621	4-1142	10
30 Jet	G159200	G589999	50-898265005/50-73521	18-5605	-	10
30 Jet 3 Cyl.	G590000	T408999	50-893890T/50-822462	18-5621	4-1142	10
35 2 Cyl.	6445653	& Up	50-41583T/50-41583	-	-	10
35/40 2 Cyl.	6445652	& Down	50-55601A2/50-55601	18-5601	4-5601	9
40 2 Cyl.	G053314	& Up	50-893890T/50-822462	18-5621	4-1142	10
40 3 Cy;.	G590000	G760299	50-893890T/50-822462	18-5621	4-1142	10
40 3 Cyl.	G760300	& Up	50-893890T/50-822462	18-5621	4-1142	10
40 4 Cyl.	C159200	& Up	50-898265005/50-73521	18-5605	-	10
40 Jet	T178500	& Up	50-893890T/50-822462	18-5621	4-1142	10
45 4 Cyl.	5531630	& Up	50-898265005/50-73521	18-5605	-	10
45 Jet	D000750	G589999	50-44369A1/50-65436/50-60315	18-5606	-	-
45 Jet	G590000	T129554	50-893890T/50-822462	18-5621	4-1142	10
50 4 Cyl.	4357639	& Below	50-55601A2/50-38890A1	18-5601	4-5601	9
50 4 Cyl.	4357640	& Up	50-898265005/50-73521	18-5605	-	10
50 3 Cyl.	B122930	G589999	50-44369A1	18-5606	-	-
50 3 Cyl.	G590000	& Up	50-893890T/50-822462	18-5621	4-1142	10
55 3 Cyl.	D000750	G589999	50-44369A1	18-5606	-	-
55 3 Cyl.	G590000	& Up	50-893890T/50-822462	18-5621	4-1142	10
60 3 Cyl.	6428681	G589999	50-44369A1/50-65436/50-60315	18-5606	-	-
60 3 Cyl.	G590000	& Up	50-893890T/50-822462	18-5621	4-1142	10
60 3 Cyl. Bigfoot	G590000	G760299	50-893890T/50-822462T 1	18-5621	4-1142	10
65 4 Cyl.	2803822	3293183	50-57867A1/50-58788	18-5636	4-5636	10
65 3 Cyl.	3293184	4571651	50-44369A1/50-65436/50-60315	18-5606	4-5606	-
65 Jet	D283222	& Up	50-893891T/50-66015	18-5604	4-1140	10
70 3 Cyl.	457165	A996142	50-44369A1/50-65436/50-60315	18-5606	4-5606	-
80 4 Cyl.	2783253	3493912	50-57867A1/50-58788	18-5636	4-5636	10
80 4 Cyl.	4831999	& Up	50-893891T/50-66015	18-5604	-	10
85 4 Cyl.	3865694	& Below	50-58788A3/50-58788	18-5636	4-5636	10
85 4 Cyl.	3865695	4366801	50-67341	18-5602	-	10

Mercury Starter Application Guide – *Continued*

HP	Beginning Serial #	Ending Serial #	OEM #	Sierra	MP Parts	Drive Tooth Count
80 Jet	D283222	& Up	50-893892T/50-66015-1	18-5610	4-1144	8
90	4845301	& Up	50-72467/50-64975/50-57465A1	18-5636	4-5636	10
90 3 Cyl.	A996142	& Up	50-893891T/50-66015	18-5604	4-1140	10
100 4 Cyl.	B209468	G965520	50-893892T/50-66015-1	18-5610	4-1144	8
105 Jet	G760299	& Below	50-893893/50-44414/50-44415	18-5608	4-1104	8
115 6 Cyl.	4855153	& Up	50-72467/50-64975/50-57465A1	18-5636	4-5636	10
115 4 Cyl.	C100000	& Up	50-893892T/50-66015-1	18-5610	4-1144	8
125 4 Cyl.	D283222	& Up	50-893892T/50-66015-1	18-5610	4-1144	8
135 V6	A904646	G960499	50-893893/50-79472/50-77141	18-5608	4-1104	8
140 6 Cyl., Inline	4865678	& Up	50-72467/50-64975/50-57465A1	18-5636	4-5636	10
140 Jet	G960499	& Below	50-893893/50-44414/50-44415	18-5608	4-1104	8
150	4121435	& Up	50-72467/50-64975/50-57465A1	18-5636	4-5636	10
V150	4868998	G960499	50-793793/50-79472/50-77141	18-5608	4-1104	8
150 XR2	4868998	A904645	50-44414,50-44415	18-5608	4-1104	8
150 XR4	B242885	D819999	50-893893/50-79472/50-77141/50-44415	18-5608	4-1104	8
150 XR6	D082000	G960499	50-893893/50-79472/50-77141/50-44415	18-5608	4-1104	8
150 EFI	G303046	T408999	50-893893/50-79472/50-77141/50-44415	18-5608	4-1104	8
V175	4301235	G960499	50-893893/50-79472/50-77141	18-5608	4-1104	8
175 EFI, XRI, MAG	D000750	G960499	50-893893/50-44414/50-44415	18-5608	4-1104	8
200	4839034	G960499	50-893893/50-79472/50-77141	18-5608	4-1104	8
200 EFI, XRI	C100861	G960499	50-893893/50-44414/50-44415	18-5608	4-1104	8
2.4EFI/2.5EFI	All		50-893893/50-79472/50-77141/50-44415	18-5608	4-1104	8
2.5 Carb	All		50-893893/50-79472/50-77141/50-44415	18-5608	4-1104	8
3.4L/MOD VP	All		50-893893/50-79472/50-77141	18-5608	4-1104	8
V200	5363918	6435503	50-86976	18-5609	-	9
V225	5628028	D280812	50-86976	18-5609	-	9
225 3.0L Carb	D280813	T408999	50-898265009/50-818445-3	18-5620	4-5620	8
225/250 EFI 3.0L	G129222	& Up	50-898265009/50-818445-3	18-5620	4-5620	8
250XB	G980600	& Up	50-898265009/50-818445-3/50-818445-2	18-5620	4-5620	8

Starter Rope



MRY Starter Rope
Replaces: 50-12066A9,50-12066Q9

O.E. No. 50-12066A9

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184915	(18-4915)	$6.32 H

Starter Motor



9.9 H.P. 1996-1998
Starter Motor, 4 Stroke, 10 Tooth Drive Gear

O.E. No. 825991A2

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1119	(SAB0141)	$158.98 G

Starter Motor



9.9-15 H.P. 1999-2006
Starter Motor, 4 Stroke, 9 Tooth Drive Gear

O.E. No. 859168

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1122	(SAB0118)	$104.98 G

Starter Motor



30, 40 H.P. 1999-2011
Starter Motor, 4 Stroke, 9 Tooth Drive Gear

O.E. No. 893887T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1148	(SAB0114)	$144.98 G

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Starter Motor

35-40 H.P. 1980-1989
Starter Motor, All 2 Stroke, 10 Tooth Drive Gear



O.E. No. 41583

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1168	(SAB0083)	$126.98 G

Starter Motor

30-60 H.P. 1998-2006
Starter Motor, All 2 Stroke, 10 Tooth Drive Gear



O.E. No. 822462T1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1142	(SAB0031)	$119.98 G
Sierra	185621	(18-5621)	$211.97 H

Starter Motor

150-280 H.P. 1980-2013
Starter Motor, All 2.0, 2.4, 2.5 Liter, Counter Rotating Race Engines



O.E. No. 60594A1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1123	(SAB0170)	$171.98 G

Starter Motor

25-40 H.P. 2000-2006
Starter Motor, 4 Stroke, 9 Tooth Drive Gear



O.E. No. 859169T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1146	(SAB0111)	$124.98 G

Starter Motor

40, 50, 60 H.P. Carb and EFI 4 Stroke 4 Cylinder, 0P094500 and UP
Starter Motor. Replaces: 50-888161T, 50-884044T, 50-859677T



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1149	(SAB0168)	$161.98 G

Starter Motor

1966-83, 35-50 H.P. Most Models
MRY/MAR Starter Motor.
Replaces: 50-55601, 50-55601A2, 50-38890A1



O.E. No. 50-38890A1, 50-55601, 50-55601A2

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5601	(SAB0004)	$94.98 G
Sierra	185601	(18-5601)	$214.93 H

Starter Motor

65-125 H.P. 1966-1975
MRY/MAR Starter, 10 Tooth.
Replaces: 50-67341



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5602	(SAB0005)	$112.98 G

Starter Motor

40-60 H.P. 1978-1997
MRY/MAR Starter, Most Models.
Replaces: 50-73521, 50-73521T



O.E. No. 50-73521, 50-73521T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5606	(SAB0013)	$122.98 G
Sierra	185605	(18-5605)	$234.62 H

Starter Motor

9.9-25 H.P. 1992-2001
MRY/MAR Starter, Most Models, 10 Tooth.
Replaces: 50-90983A-1, 50-90983T1



O.E. No. 50-90983A1, 50-90983T1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5611	(SAB0053)	$103.98 G
Sierra	185611	(18-5611)	$158.02 H

Starter Motor

40-50 H.P. 1993-1994
MRY/FORCE Starter.
Replaces: 50-819271, 50-892193A1



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5614	(SAB0021)	$126.98 G

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Starter Motor



1994-2000 225-300 H.P. 3.0 Litre and 2000 200 H.P.
MRY/MAR Starter. Replaces: 50-818445-3, 50-818445-2, 50-818445 5

O.E. No. 50-818445-2, 50-818445-3, 50-818445b

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5620	(SAB0022)	$129.98 G
Sierra	185620	(18-5620)	$258.08 H

Starter Motor



1978-1983 90-150 H.P. 10 Tooth V6 and Inline
MRY/MAR Starter. Replaces: 50-57465A1, 50-57867, 50-64975, 50-72467, 50-58788A3

O.E. No. 50-57465A1, 50-57867, 50-58788A3
50-57465A1, 50-57867, 50-58788A3

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5636	(SAB0070)	$120.98 G
Sierra	185636	(18-5636)	$250.75 H

Starter Motor



1980-1985 150-175 H.P. V6 2.0 Litre and 1977 115 Inline
MRY Starter

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5649	(SAB0089)	$135.98 G
Sierra	185649	(18-5649)	$244.52 H

Starter Motor



1996-2008 Fits: Mercury V6 Jet 8 Tooth
MRY Starter, 2.5 Litre. Replaces: 50-8329972

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6282	(SAB0129)	$131.98 G

Starter Motor



2001-2005 135-150 H.P. and 2000-2001 3.0 Litre and Optimax 9 Tooth
MRY/MAR Starter. Replaces: 50-8331535

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6283	(SAB0081)	$137.98 G

Starter Motor



1998-1999 135-225 H.P. 2.5-3.0 Litre Optimax 9 Tooth
MRY Starter, 150-225 H.P. Optimax

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6284	(SAB0112)	$151.98 G

Starter Motor



50 H.P. 1995-2000
MRY/MAR Starter, 4 Stroke

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6436	(SAB0117)	$126.98 G

Starter Motor



115-300 H.P. 2000-2011 14 Tooth with Solenoid
Fits: 90, V135, V150, V175, V200, 2.5L DFI, 0T178500 and UP: 200,250HP,3.0L, 0T467442 and UP, and Inline 4 and 6 Cylinder Verados. Models with solenoid operated bendix.

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6440	(SDR0251)	$158.98 G

Starter Motor



40-100 H.P. with 10 Tooth
MRY Starter. Replaces: 50-44369, 50-60315, 50-44369A1

O.E. No. 50-44369, 50-44369A1, 50-60315

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1140	(SAB0011)	$101.98 G
Sierra	185604	(18-5604)	$247.65 H

Starter Motor



75-125 H.P. with 8 Tooth
MRY/MAR Starter. Replaces: 50-66015 1, 50-66015 3

O.E. No. 50-66015 3, 50-66015-1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1144	(SAB0079)	$135.98 G
Sierra	185610	(18-5610)	$251.92 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Starter Motor



135-225 H.P. 1978-2006 V6 2.0-2.5 Litre
MRY Starter. Replaces: 50-44415, 50-77141

O.E. No. 50-44414, 50-44415, 50-77141

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1104	(SAB0015)	$117.98 G
Sierra	185608	(18-5608)	$255.48 H

Solenoid



Various 4 Terminal Post
MRY Solenoid, 12 volt

O.E. No. 25661, 25661 1, 25661 T1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5836	(SMR6002)	$13.98 G
Sierra	185836	(18-5836)	$39.00 H

Solenoid



Various Models
MRCR Solenoid, 12 volt, 4 Terminal

O.E. No. 89-91975, 89-96054, 89-96054T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1200	(SMR6000)	$14.98 G
Sierra	185816	(18-5816)	$20.17 H

Solenoid



Various Models
MRCR Solenoid, 12 volt, 4 Terminal

O.E. No. 89-96158, 89-96158T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1202	(SMR6001)	$15.98 G
Sierra	185817	(18-5817)	$21.52 H

Test Harness



Mercury Test Harness, Test DVA Voltage from Stator to CDM Module

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208885	(511-5207A1)	$106.98 K

M.E.D.S.



M.E.D.S. Scan Engines
Compatible with Select Mercury, Mercruiser and Yamaha Engines.
*See M.E.D.S. Section for More Information

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208888	(531-0118T)	$3,885.98 K

M.E.D.S.



M.E.D.S. Scan Engines
Compatible with Select Mercury, Mercruiser, BRP and Yamaha Engines.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208889	(531-0118T1)	$5,771.98 K

M.E.D.S.



M.E.D.S. Scan Engines
Compatible with Select Mercury, Mercruiser, BRP, Suzuki and Yamaha Engines.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208891	(531-0118T2)	$3,346.98 C

M.E.D.S.



M.E.D.S. Scan Engines
Compatible with Select Mercury, Mercruiser, BRP, Suzuki, M.E.F.I. 1 thru 4 and Yamaha Engines.

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208892	(531-0118T3)	$3,946.98 C

Dongle



Dongle A Universal, All Brands Except Seadoo

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180005	(18-ADC400)	$91.98 D

Note: Product shipped may not match the item pictured.

Diagnostics Cable



Mercury
Diagnostics Cable

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180008	(18-ADC407)	$127.98 D

Diagnostics Cable



Stats
Power Cable,
All Brands

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180001	(18-ADC152)	$91.98 C

Diagnostics Cable



Stats USB Cable, All Brands

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180002	(18-ADC153)	$91.98 D

Diagnostics Complete Kit



Stats Complete Kit.
Mercury, BRP, Yamaha, Suzuki, Mercruiser, M.E.F.I.

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180014	(18-SD102)	$5,074.98 D

Diagnostics Cable



Mercury
O/B Cable

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180010	(18-ADC410)	$127.98 D

Diagnostics Cable



Stats Master Cable,
All Brands

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180004	(18-ADC300)	$413.98 D

Prop Wrench



MRC Prop Wrench, Made From Stamped Steel
O.E. No. 91-95830A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184444	(18-4444)	$44.75 H

Sleeve Installation Tool



Replace Mercury
Marine Sleeve
Installation Tool Part# 91-818162
O.E. No. 91-818162

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189870	(18-9870)	$37.72 H

Tapered Insert Tool



Tapered Insert Tool
O.E. No. 91-43579

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189844	(18-9844)	$28.08 H

Lock Nut



MRC S/S Lock Nut
3/8 x 24, 5 Per Pack
O.E. No. 11-34932, 11-826710

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183720	(18-3720)	$2.47 H

Anode



Fits 200, 225, 250 H.P., V-155-V-200 and All Bravos
MRY Anode Zinc. Replaces: 76214, 76214T3, 76214Q5
O.E. No. 76214, 76214 T3, 76214Q5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186016	(18-6016)	$19.95 H

Anode



Use On 3, 4, 6, Inline Motors
MRY Anode Zinc.
Replaces: 31640, 31640A1, 31640Q4
O.E. No. 31640A1, 31640Q4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186011	(18-6011)	$12.05 H

Anode



Use On 3, 4, 6, Inline Motors
MRY Anode Magnesium.
Replaces: 31640, 31640A1, 31640Q4
O.E. No. 31640, 31640Q4, 31640T6

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186241	(18-6241)	$16.62 H

Anode

Fits 200, 225, 250 H.P., V-155-V-200 and All Bravos MRY Anode Magnesium. Replaces: 76214, 76214T3, 76214Q5
O.E. No. 76214, 76214Q5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186244	(18-6244)	$19.95 H

Note: Product shipped may not match the item pictured.

Fun & Floatation | Anchor & Dock | Safety | Electronics | Trolling Motors | Lighting | Electrical | Topside Acc. | Cockpit & Deck | Instruments | Steering, Controls | Perform | Fuel System | Engine & Parts | Engine Care | Propellers | Seating & Pedestals | Tops & Covers | Pumps | Cleaning & Care | Paint & Paint Acc. | Hardware, Fasteners | Trailering | Misc. | Comm.

©2014 Donovan Marine, Inc.

Alphabetical Index for Yamaha

Alphabetical Index	Page No.	Alphabetical Index	Page No.	Alphabetical Index	Page No.
Anodes, Zinc	716	Gaskets	689	Piston	687
Carburetor Kits	691-693	Gasket Sets	688	Power Pack	699-700
Coil	700	Head Gaskets	688-689	Prop Hardware	713
Diagnostics	715-716	Impeller	704-705	Stator	699-700
Electrical Guide	696-698	Impeller Chart	701-703	Starter Motor	711-713
Engine Variation Code	687	Lower Unit Parts	714-715	Thermostat	708-709
Filter, Fuel	693-694	Oil Filter	695	Trim Motor	709-710
Fuel Pump Diaphragm	694-695	Oil Seals	715	Water Pump Kits	706-708

Special Model Variation Code

Model Description	Horse-power	Trim & Tilt/Starting Method	Shaft Length	Control Method	Model Year	(Used on 25HP engines)
B = Inshore series	Example:	T = Power tilt or trim/tilt (1984-1990)	S = 15"	R = Remote control	N = 1984	2 = 3 Cyl. 1997
C = C series model	6	P = Power tilt with electric start	L = 20"	H = Tiller handle	K = 1985	3 = 3 Cyl.
CV = C series	9.9	E = Electric start (1984-1990)	X = 25"	J = Jet drive unit	J = 1986	
D = Twin rotating propellers	200	M = Manual tilt with manual start	U = 30"		H = 1987	
DX = Twin rotating propellers OX66 EFI	250				G = 1988	
E = Enduro series model					F = 1989	
F = Four stroke engine model					D = 1990	
LF = Left hand four stroke					P = 1991	
L = Left hand engine model					Q = 1992	
LX = Left hand OX66 EFI					R = 1993	
LZ = Left hand HPDI					S = 1994	
P = Pro series model					T = 1995	
PX = Pro series OX66 EFI					U = 1996	
S = Saltwater series model					V = 1997	
SX = Saltwater series OX66 EFI					W = 1998	
T = Four stroke engine with high thrust					X = 1999	
V = V max series model					Y = 2000	
VX = V max OX66 EFI					Z = 2001	
VZ = V max HPDI					A = 2002	
Z = HPDI series					B = 2003	
					C = 2004	
					D = 2005	

Starting in April 2005 (2006 Model Year and newer) Yamaha no longer designated model years at the end of the model number identification. Beginning at this time any subsequent "new model" will have a letter designation between the Horsepower and the Control / Tilt Method.

Example:
VZ300TLRD = 2005 VZ300TLR = New model after April 2005. VZ300BTLR = Newest Model and direct replacement for previous models.

Example:
SX150TLRY - Saltwater EFI, 150 HP, Trim & Tilt w/electric start, 20", Remote control, 2000 model

Connecting Rod



2 and 3 Cylinder 55-90 H.P. 1994-2006
Connecting Rod
O.E. No. 688-11650-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181756	(18-1756)	$189.07 H

Rod Bearing



C55, 75-90 H.P. 1986-2008
Rod Bearing. Replaces: 93310-730V8-00
O.E. No. 93310-730V8-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184077	(18-4077)	$82.15 H

Rod Bearing



115-225 H.P. All 90° V4 and V6
Rod Bearing. Replaces: 93310-836V2-00
O.E. No. 93310-836V2-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184078	(18-4078)	$106.07 H

Piston Kit



115-200 H.P. 1993-2008, 90°
Piston Kit, Port, Piston with 23 mm Wrist Pin, 3.544 Standard Bore
O.E. No. 6R5-11642-11-93

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184080	(18-4080)	$64.25 H

Powerhead Gasket Set




225-250 H.P. 1990-1995 3.1 Litre, Carb Only
Powerhead Gasket Set. Replaces: 61A-W0001-01-00, 61A-W0001-A1-00

O.E. No. 61A-W0001-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184400	(18-4400)	$263.02 H

Powerhead Gasket Set




150-200 H.P. 1984-1989, 90° 2.6 Litre, Carb Only
Powerhead Gasket Set. Replaces: 6G5-W0001-03-00, 6G5-W0001-A3-00

O.E. No. 6G5-W0001-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184404	(18-4404)	$150.40 H

Powerhead Gasket Set




90 H.P. 1984-1990
Powerhead Gasket Set. Replaces: 6H1-W0001-00-00, 6H1-W0001-01-00, 6H1-W0001-A0-00

O.E. No. 6H1-W0001-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184405	(18-4405)	$104.33 H

Powerhead Gasket Set




115-130 H.P. 1986-2006, 90° V4
Powerhead Gasket Set. Replaces: 6N6-W0001-03-00, 6N6-W0001-A3-00

O.E. No. 6N6-W0001-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184411	(18-4411)	$292.93 H

Powerhead Gasket Set




150-200 H.P. 1984-2002, 90° V6 2.6 Litre
Powerhead Gasket Set. Replaces: 6R3-W0001-03-00, 6R3-W0001-A3-00

O.E. No. 6R3-W0001-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184412	(18-4412)	$267.53 H

Powerhead Gasket Set




40-50 H.P. 1984-1994, 3 Cylinder
Powerhead Gasket Set. Replaces: 6H4-W0001-02-00, 6H4-W0001-A2-00

O.E. No. 6H4-W0001-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184419	(18-4419)	$193.73 H

Powerhead Gasket Set



60-70 H.P. 1984-1998, 3 Cylinder
Powerhead Gasket Set. Replaces: 6H3-W0001-A0-00

O.E. No. 6H3-W0001-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184427	(18-4427)	$132.05 H

Drain Fill Washer



15-350 H.P. All
Drain Fill Washer

O.E. No. 90430-08020-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184698	(18-4698)	$1.95 H

Head Gasket



25 H.P. 1984-1987
Head Gasket. Replaces: 689-11181-A1-00, 689-11181-02

O.E. No. 689-11181-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183804	(18-3804)	$34.13 H

Head Gasket



85-90 H.P. 1984-1993
Head Gasket. Replaces: 688-11181-02-00, 688-11181-A1-00

O.E. No. 688-11181-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183805	(18-3805)	$42.35 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Head Gasket



9.9-15 H.P. 1988-1993
Head Gasket. Replaces: 6E7-11181-00-00, 6E7-11181-A1-00

O.E. No. 6E7-11181-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183828	(18-3828)	$16.93 H

Head Gasket



40-50 H.P. 1984-1994, 3 Cylinder
Head Gasket. Replaces: 6H4-W0001-01-00, 6H4-W0001-A1-00

O.E. No. 6H4-11181-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183830	(18-3830)	$37.08 H

Head Gasket



60-70 H.P. 1997-2006
Head Gasket. Replaces: 6H3-11181-01-00, 6H3-11181-A1-00

O.E. No. 6H3-11181-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183831	(18-3831)	$39.57 H

Head Gasket



115-130 H.P. 1986-2006
Head Gasket. Replaces: 6E5-11181-02-00, 6E5-11181-A0

O.E. No. 6E5-11181-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183832	(18-3832)	$34.93 H

Head Gasket



225-250 H.P. 1990-1998 3.1 Litre
Head Gasket. Replaces: 61A-11181-A0-00, 61A-11181-A1-00

O.E. No. 61A-11181-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183891	(18-3891)	$59.33 H

Head Gasket



C 40 H.P. 1990-1996, 2 Cylinder
Head Gasket. Replaces: 676-11181-A0-00, 676-11181-A1-00

O.E. No. 676-11181-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183892	(18-3892)	$40.27 H

Head Gasket



150-200 H.P. 1984-2006, 90° 2.6 Litre
Head Gasket. Replaces: 6G5-11181-00-00, 6G5-11181-A0-00

O.E. No. 6G5-11181-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183894	(18-3894)	$41.28 H

Float Bowl Gasket



V4 and V6 with Dual Float 1984-1995
Float Bowl Gasket

O.E. No. 6E5-14384-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182592	(18-2592)	$17.95 H

Outer Plate Gasket



3 Cylinder T50-F70 H.P. 1984-2006
Outer Plate Gasket Under Water Pump Base

O.E. No. 6H3-44324-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180757	(18-0757)	$2.35 H

Water Jacket Cover Gasket



3 Cylinder 90 H.P. 1994-2006
Water Jacket Cover Gasket Cylinder Head

O.E. No. 688-11193-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180767	(18-0767)	$16.28 H

Note: Product shipped may not match the item pictured.

Water Jacket Cover Gasket



V6 150-200 H.P. 1984-2006
Water Jacket Cover Gasket
Cylinder Head

O.E. No. 6G5-11193-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180779	(18-0779)	$23.42 H

Water Jacket Cover Gasket



V4 115-130 H.P. 1984-2006
Water Jacket Cover Gasket
Cylinder Head

O.E. No. 6E5-11193-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180781	(18-0781)	$32.40 H

Carburetor Mounting Gasket



V4 115-225 H.P. 1984-2006
Carburetor Mounting Gasket, Carb to Intake 2 Stroke

O.E. No. 6E5-14198-A1-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180785	(18-0785)	$7.82 H

Float Chamber Gasket



V4 and V6 115-225 H.P. 1984-1986
Float Chamber Gasket, Single Float

O.E. No. 6E5-14384-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180786	(18-0786)	$8.10 H

Valve Cover Gasket




V4 and V6 115-225 H.P. 1984-2006
Poppit Valve Cover Gasket

O.E. No. 6G5-11382-A1-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180808	(18-0808)	$3.25 H

Powerhead Base Gasket



V4 and V6 115-225 H.P. 1984-2006
Powerhead Base Gasket, 90°

O.E. No. 6G5-45113-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180813	(18-0813)	$16.77 H

Thermostat Cover Gasket



3 Cylinder and V6 3.1 Litre
Thermostat Cover Gasket

O.E. No. 61A-12414-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180829	(18-0829)	$3.73 H

Thermostat Cover Gasket



V4 and V6 90° 1984-2006
Thermostat Cover Gasket

O.E. No. 688-12414-A1-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180844	(18-0844)	$3.40 H

Thermostat Housing Gasket



Yamaha S/D Gasket

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180164	(18-0164)	$1.60 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Sierra Carburetor Kit Parts List

HP	Year	Carburetor Kits	Per Engine
2	1984-88	18-7293	1
3	1988-02	18-7765	1
F4	1999-03	18-7736	1
6	1984-96	18-7765	1
8	1984-96	18-7765	1
9.9	1987-94	18-7769	1
15	1985-92	18-7769	1
F15	1998-04	18-7738	1
20	1996-97	18-7739	1
25	1984-87	18-7770	1
25	1988-04	18-7739	1
C25	1990-97	18-7770	1
30	1984-86	18-7770	1
C30	1990-92	18-7770	1
C30	1993-97	18-7737	1
40	1984-88	18-7767	3
40	1989-04	18-7768	3
C40	1990-94	18-7740	1
C40	1995-98	18-7741	1
C40	1997-02	18-7768	3
P40	1998	18-7768	3
E48	1995-00	18-7290 ①	2
50	1984-88	18-7767	3
50	1989-04	18-7768	3
C50	1998-01	18-7768	3
P50	1991-96	18-7768	3
C55	1990-95	18-7290①	2
C60	1996-01	18-7766	3
P60	1991	18-7766	3
E60	1995-00	18-7766	3
70	1984-92	18-7766	3
C70	2000-01	18-7766	3
C75	1994-96	18-7291	3
C75	1998-99	18-7742	3
E75	1995-00	18-7291	3
C80	1997	18-7742	3
F80	1999-02	18-7743	4
C85	1989-96	18-7291	3
90	1993-97	18-7291	3
F100	1999-02	18-7743	4
115	1990-91	18-7744	1
150	1985-86	18-7747	1
150	1990-91	18-7759	1
150	1996-01	18-7756	1
D150	1997-98	18-7756	1
L150	1996-01	18-7756	1
P150	1996-99	18-7756	1
V150	2000-01	18-7756	1
175	1985-86	18-7747	1
175	1990-91	18-7759	1
175	1996-01	18-7756	1
P175	1996-99	18-7756	1
V175	2000	18-7756	1
200	1985-86	18-7747	1
200	1990-91	18-7759	1
200	1996-99	18-7756	1
L200	1996-99	18-7756	1
P200	1991-92	18-7759	1
P200	1996-99	18-7756	1
225 2.6L	1996-99	18-7756	1
225 3.1L	1990-96	18-7772	1
250 3.1L	1990-96	18-7772	1
V6 Excel	1987-89	18-7759	1

① Kit contains enough components to rebuild 2 carburetors

Sierra Diaphragm Kit Parts List

HP	Year	Diaphragm Kits
3	1988-90	18-7833
4	1984-90	18-7834
5	1984-85	18-7834
6	1986-90	18-7833
8	1984-90	18-7833
9.9	1984-90	18-7797
15	1984-90	18-7797
25	1984-87	18-7798
25	1988-89	18-7837
CV25	1990	18-7798
25	1990	18-7837
30	1984-85	18-7798
30	1987-90	18-7841
CV30	1990	18-7798
40	1984-90	18-7798
50	1984-90	18-7798
55	1990	18-7798
70	1984-90	18-7798
85	1990	18-7798
90	1984-90	18-7798
115	1984-90	18-7799
130	1988-90	18-7799
150	1984-90	18-7799
PRO 150H	1987	18-7798
175	1984-90	18-7799
200	1984-90	18-7799
225	1990	18-7799
250	1990	18-7799
V6 Special	1984-85	18-7799
V6 Excel	1987-89	18-7799

Carburetor Kit



115-200 H.P. 1986-1996
Carburetor Kit, Dual Bowl, Sold as Single Kit

O.E. No. 6E5-W0093-06-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187002	(18-7002)	$33.9 H

Carburetor Kit



C48-55 H.P. 1989-2004 2 Cylinder
Carburetor Kit, One Kit is for Both Carbs

O.E. No. 696-W0093-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187290	(18-7290)	$150.05 H

Carburetor Kit



75-90 H.P. 1984-1990
Carburetor Kit, Complete Kit with Float and Needle

O.E. No. 6H1-W0093-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187291	(18-7291)	$28.78 H

Carburetor Kit



9.9-15 H.P. 2002-2010, 4 Stroke
Carburetor Kit. Replaces: 802706A1

O.E. No. 66M-W0093-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187738	(18-7738)	$48.52 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Carburetor Kit

25 H.P. 1988-2006
Carburetor Kit. Replaces: 6L2-W0093-00-00



O.E. No. 6L2-W0093-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187739	(18-7739)	$37.50 H

Carburetor Kit

75-80 H.P. 1997-1999, 2 Stroke
Carburetor Kit, with Needle and Seat.
Replaces: 6H0-W0093-00-00



O.E. No. 6H0-W0093-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187742	(18-7742)	$31.95 H

Carburetor Kit

80-100 H.P. 1999-2002, 4 Stroke
Carburetor Kit, for One Carb, with Needle, Seat and Float.
Replaces: 67F-W0093-00-00



O.E. No. 67F-W0093-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187743	(18-7743)	$107.73 H

Carburetor Kit

115-130 H.P. 1990-1991
Carburetor Kit, for Two Carbs, Complete Kit with Float and Needle



O.E. No. 6N6-W0093-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187744	(18-7744)	$111.05 H

Carburetor Kit

150-225 H.P. 1985-1986, Single Bowl
Carburetor Kit, for All Three Carbs, Complete Kit with Floats and Needles



O.E. No. 6G5-W0093-08-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187747	(18-7747)	$132.83 H

Carburetor Kit

150-200 H.P. 1996-2001
Carburetor Kit, Single Kit without Float



O.E. No. 64D-W0093-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187756	(18-7756)	$63.03 H

Carburetor Kit

150-225 H.P. 1987-1991
Carburetor Kit, for All Three Carbs, Complete Kit with Floats and Needles



O.E. No. 6K7-W0093-09-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187759	(18-7759)	$169.55 H

Carburetor Kit

3-8 H.P. 1984-2002
Carburetor Kit, with Float and Needle.
Replaces: 6G1-W0093-00-00



O.E. No. 6G1-W0093-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187765	(18-7765)	$37.07 H

Carburetor Kit

60 H.P. 1996-2001
Carburetor Kit, with Float, Order One Kit Per Carb



O.E. No. 6H3-W0093-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187766	(18-7766)	$36.98 H

Carburetor Kit

40-50 H.P. 1984-1988
Carburetor Kit, with Float, Order One Kit Per Carb



O.E. No. 6H4-W0093-01-00


Brand Name	DMI No.	Mfg. No.	Price
Sierra	187767	(18-7767)	$35.73 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Carburetor Kit

40-50 H.P. 1988-2008 3 Cylinder
Carburetor Kit, with Float,
Order One Kit Per Carb



O.E. No. 6H4-W0093-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187768	(18-7768)	$51.03 H

Carburetor Kit

9.9-15 H.P. 1988-1991
Carburetor Kit, with Float,
Order One Kit Per Carb



O.E. No. 6E7-W0093-04-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187769	(18-7769)	$29.62 H

Carburetor Kit

25-30 H.P. 1984-1997
Carburetor Kit, with Float.
Replaces: 689-W0093-02-00



O.E. No. 689-W0093-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187770	(18-7770)	$30.00 H

Carburetor Kit

225-250 H.P. 1991-1996 3.1 Litre
Carburetor Kit, with Float,
Order One Kit Per Carb



O.E. No. 61A-W0093-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187772	(18-7772)	$32.33 H

Fuel Filter

9.9-225 H.P. 1984-1993
Fuel Filter, Element Only



O.E. No. 6F5-24563-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187780	(18-7780)	$16.03 H

Fuel Filter

9.9-225 H.P. 1994-2008
Fuel Filter, Element Only



O.E. No. 61N-24563-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187781	(18-7781)	$7.60 H

Fuel Filter

225-250 H.P. 1990-1999 and C 115 H.P. 1997-1999
Fuel Filter, Element Only



O.E. No. 61A-24563-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187782	(18-7782)	$34.07 H

Fuel Filter (Inline)

F6-F10 H.P. 2001-2010
Fuel Filter (Inline), Strainer.
Replaces: 68T-24251-00-00



O.E. No. 68T-24251-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187710	(18-7710)	$14.75 H

Fuel Filter (Inline)

Filter Various Oil and Fuel
Fuel Filter (Inline), Strainer.
Replaces: 646-24251-02-00



O.E. No. 646-24251-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187713	(18-7713)	$15.43 H

Fuel Filter

150-300 H.P. 2005-2011
Yamaha HPDI High Pressure Fuel Filter,
Canister



O.E. No. 60V-24251-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879907	(18-79907)	$92.17 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fuel Filter

2000-2010
Yamaha LZ150-Z300 VST



Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879953	(18-79953)	$59.85 H

Fuel Filter

2004-2012
Yamaha 150 H.P.,
All 4 Stroke, VST Filter Kit



Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879950	(18-79950)	$91.67 H

Fuel Filter

Fits: F150 - F225 H.P.
(2006 - Current), F250
H.P. (2005 - Current)
10 Micron Fuel Filter



O.E. No. 69J-24501-10-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879905	(18-79905)	$29.17 H

Fuel Filter

2000-2011
Yamaha 115-225
H.P., ALL 4 Stroke,
VST Filter Kit



Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879951	(18-79951)	$51.85 H

Fuel Filter

1999-2004
Yamaha 150-250
H.P., All OX 66
Models, VST Filter Kit



Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879952	(18-79952)	$75.68 H

Fuel Filter

Fits: 150 H.P. - 300
H.P. 2004-2006
Models Z, VZ, LZ
10 Micron Fuel Filter Element



O.E. No. 68F-24563-10-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187955	(18-7995)	$20.98 H

Fuel Filter



O.E. No. 68V-24563-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187979	(18-7979)	$14.77 H

Fuel Filter

F50-F115 H.P. After
April 2006
For filter housing
marked "6D8" ONLY!



O.E. No. 6D8-WS24A-00-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879799	(18-79799)	$19.37 H

Fuel Filter

Fits: F30 (2013), F40
(2008-13), F50 (2005-13),
F60 (2005-13), F70 (2010-13),
F75 (2005-13), F90 (2005-13),
T50 (2005-13), T60 (2005-13)



O.E. No. 6P3-WS24A-00-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1879809	(18-79809)	$20.02 H

Fuel Pump Diaphragm

3-8 H.P. 1984-2008
Fuel Pump Diaphragm, Outer Pump Diaphram



O.E. No. 6G1-24471-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187833	(18-7833)	$10.03 H

Fuel Pump Diaphragm

9.9-25 H.P. 1984-2008
Fuel Pump Diaphragm, Inner Pump Diaphram



O.E. No. 677-24411-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187837	(18-7837)	$10.25 H

Fuel Pump Diaphragm

25-70 H.P. 1984-1995
Fuel Pump Diaphragm



O.E. No. 648-24411-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187839	(18-7839)	$19.68 H

Fuel Pump Diaphragm

25-75 H.P. 1984-2006
Fuel Pump Diaphragm



O.E. No. 663-24411-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187840	(18-7840)	$8.47 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Fuel Pump Diaphragm



30 H.P. 1987-2002
Fuel Pump Diaphragm

O.E. No. 6J8-24471-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187841	(18-7841)	$11.65 H

Fuel Pump Diaphragm



115-300 H.P. 1984-2004
Fuel Pump Diaphragm

O.E. No. 6E5-24411-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187843	(18-7843)	$12.52 H

Fuel Pump Kit



Contains: #18-7840 - Diaphragm (Front), O.E. No. 663-24411-00-00.
For: 40-90 H.P.

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187787	(18-7787)	$7.68 H

Fuel Pump Kit



Contains: #18-7843 - Gasket (Rear), O.E. No. 6E5-24411-00-00 and 18-7842 - Diaphragm (Top), O.E. No. 6E5-24471-00-00. For: V4 and V6.

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187788	(18-7788)	$9.60 H

Oil Filter



F9.9 H.P. 1990-2010
Oil Filter, 4 Stroke

O.E. No. 6G8-13440-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187901	(18-7901)	$14.07 H

Oil Filter



F15-F100 H.P. 1995-2000
Oil Filter, 4 Stroke

O.E. No. 3FV-13440-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187902	(18-7902)	$13.67 H

Oil Filter



F150-F250 H.P. 2002-2010
Oil Filter, 4 Stroke

O.E. No. 69J-13440-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187906	(18-7906-1)	$9.98 H

Fuel Connector



3-15 H.P. All Years
Fuel Connector, 1/4" Hose Female Connector.
Replaces: 6Y1-24305-04

O.E. No. 6G1-24305-04

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1880413	(18-80413)	$18.77 H

Fuel Connector



25-75 H.P. All Years
Fuel Connector, 5/16" Hose Female Connector.
Replaces 6G1-24305-05-00, 6G1-24305-04

O.E. No. 6G1-24305-04

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1880414	(18-80414)	$17.15 H

Fuel Connector



75-300 H.P. All Years
Fuel Connector, 3/8" Hose Female Connector.
Replaces 6E5-24305-05, 6Y2-24305-05

O.E. No. 6E5-24305-05

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1880415	(18-80415)	$18.63 H

Note: Product shipped may not match the item pictured.

CDI Electronics Yamaha Electronic Guide

HP	Year	Stroke	Model	Cyl.	Ign. Pack	Stator	Trigger	Rectifier	Ign. Coil
2	95-99	2	MSH	1	R6A1-85540-01-00	R6A1-85520-00-00*	Self Triggered	-	6A1-85570-00-00**
2	2000	2	MSH	1	R6A1-85540-01-00	R6A1-85520-00-00*	Self Triggered	-	6A1-85570-00-00**
2.5	03-05	4	F2.5, ML, MS	1	69M-85640-00-00**	-	Self Triggered	-	In CD
3	88-02	2	LD, LF, LG, ML, MS, SD, SF, SG	1	R6L5-85540-M0-00	R6E0-85520-70-00*	R6L5-85592-M0* (A) R6L0-85595-M0* (B)	-	6L5-85570-M-00**
4	84-01	2	LD,LF,LG,LK,LN,ML,MS,SD,SF,SG,SK,SN	1	117-6E0-71	R6E0-85520-70-00* (C) R6E0-81303-80-00* (D)	6E0-85592-70* (A) 6E0-85595-70* (B)	157-664-61	6E0-85570-21-00**
4	99-05	4	F4, ML, MS	1	67D-85640-00-00**	-	Self Triggered	-	In CD
5	84-01	2	LD,LF,LG,LK,LN,ML,MS,SD,SF,SG,SK,SN	1	117-6E0-71	R6E0-85520-70-00* (C) R6E0-81303-80-00* (D)	R6E0-85592-70* (A) R6E0-85595-70* (B)	157-664-61	6E0-85570-21-00**
5	99-05	4	F5, ML, MS	1	67D-85640-00-00**	-	Self Triggered	-	In CD
6	84-99	2	LD,LF,LG,LK,LN,ML,MS,SD,SF,SG,SK,SN	2	117-696-12	R6E7-85520-70-00* (C) R6E7-81303-A0* (D)	R6E0-85580-70-00*	157-664-6	6G1-85570-00-00**
6	01-05	4	F6, ML, MS	2	68R-85540-00-00**	R68T-85520-00-00* (C) R68T-85533-00-00* (D)	68T-85580-01-00**	68T-81960-00-00*	680-85570-01-00**
8	84-04	2	LD,LF,LG,LK,LN,ML,MS,SD,SF,SG,SK,SN	2	117-696-12	R6E7-85520-70-00* (C) R6E7-81303-A0-00* (D)	R6E0-85580-70-00*	157-664-61	6G1-85570-00-00**
8	01-05	4	F8, ML, MS	2	68T-85540-00-00**	R68T-85520-00-00* (C) R68T-85533-10-00* (D)	68T-85580-01-00**	68T-81960-00-00**	680-85570-01-00**
9.9	84-95	2	EL,ES,LH,LJ,LK,LN,SH,SJ,SK,SN	2	117-695-11	R6E7-85520-70-00* (C) R6E7-81303-A0-00* (D)	6E0-85580-70-00**	157-664-61	6G1-85570-00-00**
9.9	86-04	4	F9.9, EL, ER, EX, X, ML, MX	2	R6G9-85540-22-00*	R6G8-85520-00-00* (C) R6G9-81303-F0-00* (D)	6G8-85580-02-00**	6G8-81960-A1-00**	680-85570-21-00**
9.9	92-05	4	T9.9, EL, EX	2	6G8-85540-23-00**	R6G8-85520-01-00* (C)	68T-85580-02-00**	6G8-81960-A1-00**	680-85570-21-00**
9.9	96-05	2	EL, ES, ML, MS, X, ML, MX	2	63V-85540-01-00**	R63V-85520-01-00* (C) R6G8-81303-J0-00* (D)	63V-85580-01-00**	6G8-81960-A1-00**	63V-85570-00-00**
9.9	2005	4	F9.9,ELR2D,MLH2D,MLR2D,MSH2D	2	66M-85540-01-00**	R66M-85520-00-00* (C) R66M-85533-00-00* (D) R66M-85533-10-00* (E)	66M-85580-00-00**	6G8-81960-A1-00**	66M-85570-00-00**
15	84-95	2	EL,ES,LH,LJ,LK,LN,SH,SJ,SK,SN	2	117-695-11	R6E7-85520-70-00* (C) R6E7-81303-A0-00* (D)	R6E0-85580-70-00*	157-664-61	6G1-85570-00-00**
15	96-05	2	EL, ES, ML, MS	2	63V-85540-01-00**	R63V-85520-01* (C) R63V-85533-00* (D)	63V-85580-01-00**	6G8-81960-A1-00**	63V-85570-00-00**
15	98-05	4	F15, EL, ES, ML, MS, PL	2	66M-85540-01-00**	R66M-85520-00* (C) R66M-85533-00* (D) R66M-85533-10* (E)	66M-85580-00-00**	6G8-81960-A1-00**	66M-85570-00-00**
20	94-05	2	EL, ES, ML, MS	2	R6L2-85540-23-00	R6L2-85520-11* (C) R6L2-85533-10* (D)	6L2-85580-10-00** 6L2-85580-20-00	157-664-61	61N-85570-10-00**
25	84-87	2	EL, ES, LH, SH	2	117-689-21	R689-81311-40* (C) R689-81303-A0* (D)	689-85580-40-00**	157-664-61	689-85570-20-00**
25	88-93	2	EL,ES,LD,LF,LG,ML,MS,SD,SF,SG	2	R6L2-85540-23-00*	R6L2-85520-11* (C)	6L2-85580-10-00**	157-664-61	61N-85570-10-00**
25	90	2	CV25, EL, EM	2	117-695-11	R695-85520-70* (C) R695-81303-A0* (D)	R695-85580-70-00*	157-664-61	6E7-85570-19-00**
25	91-97	2	C25, EL, ES, ML, MS	2	117-695-11	R695-85520-70* (C) R695-81303-A0* (D)	R695-85580-70-00*	157-664-61	6E7-85570-17-00
25	94-05	2	EL, ES, ML, MS	2	R6L2-85540-23-00*	R6L2-85520-11* (C) R6L2-85533-10* (D)	6L2-85580-10-00** 6L2-85580-20-00**	157-664-61	61N-85570-10-00**
25	97-98	2	EL, ES, ML, MS	3	117-6J8-H1	R6H4-85520-01* (C) R6H4-85533-A0* (D)	R6H4-85510-F1* (F)	-(F)	6H4-85570-20-00**
25	98-05	4	F25, EH, ER, TH	2	65W-85540-20-00**	R65W-85510-10*	R65W-85580-00* (I)	194-5279	65W-85570-01-00**
25	98-05	4	F25, MH	2	65W-85540-20-00**	R65W-85510-00*	R65W-85580-00* (I)	194-5279	65W-85570-01-00**
30	84-87	2	EL, ES, LH, SH	2	117-689-21	R689-81311-40* (C) R689-81303-A0* (D)	R689-85580-40-00*	157-664-61	689-85570-20-00**
30	88-99	2	EL, ES, ML, MS	3	117-6J8-H1	R6H4-85520-20* (F) R6J8-85520-00* (G)	R6H4-85510-F1* (F)	-(F)	6H4-85570-20-00**
30	89-90	2	CV30, EL	2	117-689-21	R689-81311-40* (C) R689-81303-A0* (D)	R689-85580-40-00*	157-664-61	689-85570-20-00**
30	91-97	2	C30, EL	2	61N-85540-13-00**	R61N-85541-09-00* (C)	R61N-85543-09-00*	157-664-61	61N-85570-10-00**
30	99-02	2	EL, ES, ML, MS	3	117-6J8-H2	R6H4-85520-20* (F) R6J8-85520-00* (G) R6H4-85533-A1* (D)	6H4-85510-F1-00** (F)	6J8-81960-00-00**	6H4-85570-20-00**
30	03-05	4	F30	2	67C-85540-01-00**	R65W-85510-10*	65W-85580-00-00**	194-5279	67C-85570-00-00**
40	84-88	2	ALL	3	117-6H4-21	R6H4-85520-00* (C) R6H4-81303-A0* (D)	6H4-85510-F0-00**	157-664-61	6H4-85570-20-00**
40	89-94	2	EL,EJ,ES,ETL,LD,LF,MJ,ML,MS,PL,SD,SF,TL	3	6H5-85540-02-00**	R63D-85520-00* (C) R6H5-85533-01* (D)	6H5-85580-00-00** 6H5-85580-10-00** 6H5-85580-20-00**	157-664-61	6H5-85570-00-00**

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

CDI Electronics Yamaha Electronic Guide – *Continued*

HP	Year	Stroke	Model	Cyl.	Ign. Pack	Stator	Trigger	Rectifier	Ign. Coil
40	90	2	CV40	2	117-689-21	R689-81311-40* (C) R689-81303-A0* (D)	689-85580-40-00**	157-664-61	689-85570-20-00**
40	95-05	2	EL, ES, MJ, ML, MS, TL	3	63D-85540-03-00**	R63D-85520-00* (C) R63D-85533-10* (D)	63D-85580-00-00**	6H2-81960-10**	6H5-85570-00-00**
48	95-00	2	E48	2	117-696-12	R6E7-85520-70-00* R696-81303-F0-00*	6E7-85580-70-00**	157-664-61	696-85570-11-00**
50	84-88	2	ALL	2	117-6H4-21	R6H4-85520-00* (C) R6H4-81303-A0* (D)	6H4-85510-F0-00**	157-664-61	6H4-85570-20-00**
50	89-94	2	EL,EJ,ES,ETL,LD,LF,MJ,ML,MS,PL,SD,SF,TL*	3	6H5-85540-02-00**	R63D-85520-00* (C) R6H5-85533-01*	6H5-85580-00-00** 6H5-85580-10-00** 6H5-85580-20-00**	157-664-61	6H5-85570-00-00**
50	95-05	2	EL, ES, MJ, ML, MS, TL	3	63D-85540-03-00**	R63D-85520-00* (C) R63D-85533-10* (D)	63D-85580-00-00**	6H2-81960-10*	6H5-85570-00-00**
50	2005	4	F50	4	6C1-8591A-10-00**	6C5-81410-00-00**	62Y-85580-00-00**	68V-81960-00-00**	63P-82310-01-00**
55	89	2	CV55	2	117-TIA02-12	R663-85541-A0* (C) R663-85565-A0* (H)	663-85580-10-00**	157-664-61	697-85570-11-00**
55	91-94	2	C60	2	117-TIA02-12	R663-85541-A0* (C) R663-85565-A0* (H)	663-85580-10-00**	157-664-61	697-85570-11-00**
60	96-01	2	C60, P60	3	6H2-85540-12-00**	R6H2-85520-01* (C) R6H2-85533-01* (D)	6H2-85580-01-00**	6H2-81960-10**	697-85570-00-00**
60	99	2	E60	3	117-6H3-11	R6H3-85520-00* (C) R6H3-85533-00* (D)	6H3-85510-A0-00**	157-664-61	697-85570-00-00**
60	01-05	2	TL	3	6H2-85540-A9-00**	R6H2-85520-01* (C) R6H2-85533-01* (D)	6H2-85580-01-00**	6H2-81960-10**	697-85570-00-00**
60	2005	4	F60	4	6C1-8591A-10-00**	6C5-81410-00-00**	62Y-85580-00-00**	68V-81960-00-00**	63P-82310-01-00**
70	84-91	2	ET, TLN	3	117-6H3-11	R6H3-85520-00* (C) R6H3-85533-A0* (D)	6H3-85510-A0-00**	157-664-61	697-85570-00-00**
70	92	2	TL	3	6H2-85540-A9-00**	R6H2-85520-00* (C) R6H2-85533-00* (D) 6H2-85895-00** (I)	6H2-85580-00-00** 6H2-81960-10-00**	6H2-85570-00-00**	
70	93-96	2	TL, TR	3	6H2-85540-B9-00**	R6H2-85520-00* (C) R6H2-85533-00* (D)	6H2-85580-00-00** 6H2-85895-00** (I)	6H2-81960-10-00**	6H2-85570-00-00**
70	97-05	2	TL, TR	3	6H2-85540-12-00**	R6H2-85520-00* (C) R6H2-85533-00* (D)	6H2-85580-00-00** 6H2-85895-00** (I)	6H2-81960-10-00**	6H2-85570-00-00**
70	96-01	2	C70, P70	3	6H2-85540-12-00**	R6H2-85520-01* (C) R6H2-85533-01* (D)	6H2-85580-01-00**	6H2-81960-10-00**	697-85570-00-00**
75	88-96	2	E75	3	117-688-15	177-688-11	688-85580-12-00**	197-6G5-A0	688-85570-11-00**
75	97-00	2	E75	3	117-688-15	177-688-11	688-85580-00-00**	6H0-81960-00	697-85570-00-00**
75	98-99	2	C75, P75	3	6H0-85540-06-00**	R6H0-85510-01-00	6H0-85580-01-00** 6H2-85895-00* (I)	6H0-81960-00**	6H2-85570-00-00**
80	97	2	C80	3	6H0-85540-06-00**	R6H0-85510-01*	6H0-85580-01-00** 6H2-85895-00** (I)	6H0-81960-00**	697-85570-00-00**
85	89-90	2	CV85	3	117-688-15	177-688-11	688-85580-12-00**	197-6G5-A0	688-85570-11-00**
85	91-96	2	C85	3	117-688-15	177-688-11	688-85580-12-00**	197-6G5-A0	688-85570-11-00**
90	84-87	2	ET	3	117-688-15	177-688-11	688-85580-12-00**	197-6G5-A0	697-85570-11-00**
90	88-91	2	ET	3	117-688-15	177-688-11	688-85580-12-00**	197-6G5-A0	697-85570-11-00**
90	92-93	2	ET	3	6H0-85540-A9-00**	R6H0-85510-00-00*	6H0-85580-00-00*	6H0-81960-00**	6H2-85570-00-00**
90	94-99	2	ET, TL	3	6H0-85540-06-00**	R6H0-85510-01-00*	6H0-85580-01-00** 6H2-85895-00* (I)	6H0-81960-00-00**	6H2-85570-00-00**
90	97-00	2	B90, C90	3	6H0-85540-06	R6H0-85510-01-00*	6H0-85580-01-00** 6H2-85895-00** (I)	6H0-81960-00**	697-85570-00-00**
90	2001	2	C115	3	6H0-85540-06**	R6H0-85510-03-00*	6H0-85580-01-00** 6H2-85895-00** (I)	6H0-81960-00**	697-85570-00-00**
100	99	4	F100	4	67F-855440-00**	67F-85510-00-00**	67F-85580-00-00**	67F-81960-00**	67F-85570-00-00**
115	84-89	2	ET	4	117-6E5-12	177-6E5-10	6E5-85580-11-00*	6E5-81960-12**	6E5-85570-11-00**
115	90-03	2	ET, TJ, TL	4	6N7-85540-01**	R6N7-85510-00-00*	6E5-85580-00-00*	6R3-81960-10**	6R3-85570-00-00**
115	04-05	2	ET, TJ, TL	4	6N7-85540-01-00**	R6N7-85510-00-00*	6E5-85580-10-00**	6R3-81960-10-00**	6R3-85570-00-00**
115	91-96	2	C115	4	117-6E5-12	177-6E5-10	R6E5-85580-11-00*	197-6G5-A0	6E5-85570-11-00**
115	97-98	2	C115	4	117-6E5-12	177-6E5-10	R6E5-85580-00-00*	6H0-81960-00-00**	6E5-85570-11-00**
115	98-99	2	B115, S115	4	6N7-85540-01-00**	R6N7-85510-00-00*	R6E5-85580-00-00*	6R3-81960-10-00**	6R3-85570-00-00**
130	88-89	2	ET	4	117-6E5-12	177-6E5-10	R6E5-85580-12-00*	197-6G5-A0	6E5-85570-11-00**
130	90-03	2	ET, TJ, TL	4	6N7-85540-01-00**	R6N7-85510-00-00*	R6E5-85580-10-00*	6R3-81960-10-00**	6R3-85570-00-00**
150	84-89	2		6	117-6G5-12	177-6G5-10	R6G5-85580-11-00*	197-6G5-A0	6E5-85570-11-00**
150	90	2		6	62H-85540-00-00**	R6R3-85510-00-00*	R6R3-85580-00-00*	6R3-81960-10-00**	6R3-85570-00-00**
150	91-95	2	P150	6	62H-85540-00-00**	R6R3-85510-00-00*	R6R3-85580-00-00*	6R3-81960-10-00**	6R3-85570-00-00**
150	96	2	TJRU	6	64D-85540-01-00**	R6R3-85510-00-00*	R64D-85580-00-00* R6R5-85895-01-00 (I)	6R3-81960-10-00**	6R3-85570-00-00**

Note: Product shipped may not match the item pictured.

CDI Electronics Yamaha Electronic Guide – *Continued*

HP	Year	Stroke	Model	Cyl.	Ign. Pack	Stator	Trigger	Rectifier	Ign. Coil
150	96-99	2	P150	6	64D-85540-01-00**	R6R3-85510-00-00*	R64D-85580-00-00* R6R5-85895-01-00 (I)	6R3-81960-10-00**	6R3-85570-00-00**
150	97	2		6	6G6-85540-00-00**	R6G6-85510-01-00*	6G6-85580-00-00**	197-6G5-A0	6R3-85570-00-00**
150	98-05	2		6	64D-85540-01-00**	R6R3-85510-00-00*	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
150	00-05	2	V150	6	64D-85540-10-00**	R6R3-85510-00-00*	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
150	00-03	2	Z150L (68H)	6	R68J-8591A-10-00*	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
150	00-03	2	Z150, LZ150X	6	68H-8591A-11-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
150	01-03	2	VZ150	6	68J-8591A-10-00**	R6R3-85510-00-00	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
150	04-03	2	VZ150	6	68J-8591A-20-00**	R6R3-85510-00-00	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
150	2004	2	Z150X	6	68H-8591A-30-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
150	2005	2	Z150X, VZ150	6	68H-8591A-30-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
175	84-89	2		6	117-6G5-12	177-6G5-10	6G5-85580-11-00**	197-6G5-A0	6E5-85570-11-00**
175	90	2		6	62H-85540-00-00**	R6R3-85510-00-00*	6R3-85580-00-00**	6R3-81960-10-00**	6R3-85570-00-00**
175	91-95	2	P175	6	62H-85540-00-00**	R6R3-85510-00-00*	6R3-85580-00-00**	6R3-81960-10-00**	6R3-85570-00-00**
175	96-99	2	P175	6	64E-85540-01-00**	R6R3-85510-00-00*	64D-85580-00-00** 61A-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
175	2000	2	V175	6	64E-85540-01-00**	R6R3-85510-00-00*	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
175	01-03	2	Z175X	6	68L-8591A-10-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
175	01-05	2	VZ175	6	68M-8591A-02-00**	R6R3-85510-00-00*	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
175	2004	2	Z175X	6	68L-8591A-20-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
175	2005	2	Z175X	6	68L-8591A-30-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
175	04-05	2	VZ175TL	6	68M-8591A-30-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
200	84-89	2	ET	6	117-6G5-12	177-6G5-10	6G5-85580-11-00**	197-6G5-A0	6E5-855707-11-00**
200	90-95	2	ET, TJ, TL, TX	6	62H-85540-00-00**	R6R3-85510-00-00*	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
200	96-99	2	TJ, TL, TX	6	64E-85540-01-00**	R6R3-85510-00-00*	64D-85580-00-00** 61A-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
200	96-99	2	P200	6	64E-85540-01-00**	R6R3-85510-00-00	64D-85580-00-00** 61A-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
200	98	2	V200	6	66X-85540-01-00**	R65L-85510-10-00	61A-85580-01-00**	61A-81960-01-00**	
200	2000	2	Z200L (68H)	6	68F-8591A-30-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
200	00-03	2	Z200, LZ150X	6	68F-8591A-21-00*	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
200	2001	2	VZ200	6	68F-8591A-30-00**	R6R3-85510-00-00*	64D-85580-00-00** 6R5-85895-01-00** (I)	6R3-81960-10-00**	6R3-85570-00-00**
200	04-05	2	VZ200	6	60F-8591A-21-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
200	2004	2	Z200X	6	68F-8591A-A0-00**	68F-81410-00-00**	60V-WS855-00-00** 61A-85895-01-00** (I)	68F-81960-01-00**	68F-82310-01-00**
200	2005	2	Z200X	6	68F-8591A-G0-00**	68F-81410-00-00**	60V-WS855-00-00**	68F-81960-01-00**	68F-82310-01-00**
225	84-89	2	EXCELL	6	117-6G5-12	177-6G5-10	6G5-85580-11-00** 61A-85895-01-00** (I)	197-6G5-A0	6K7-82590-00-00**

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Power Pack

115-130 H.P. 1988-1995
Yamaha Ignition Pack, Screw In Pack, 4 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208172	(117-6E5-12)	$684.98 K

Power Pack

150-225 H.P. 1984-1989
Yamaha Ignition Pack, Screw In Pack, 6 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208173	(117-6G5-12)	$812.98 K

Power Pack

60 H.P. 1995-2000 and 70 H.P. 1984-1991
Yamaha Ignition Module, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208175	(117-6H3-11)	$414.98 K

Power Pack

40-50 H.P. 1984-1988
Yamaha Ignition Module, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208177	(117-6H4-21)	$582.98 K

Power Pack

40-50 H.P. 1989-1994
Yamaha Ignition Module, with Adjustable Arm, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208179	(117-6H5-02)	$932.98 K

Power Pack

25-30 H.P. 1987-1997
Yamaha Ignition Module, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208181	(117-6J8-H1)	$532.98 K

Power Pack

25-30 H.P. 1992-2002
Yamaha Ignition Module, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208183	(117-6J8-H2)	$456.98 K

Power Pack

9.9-15 H.P. 1984-1995 and 25 H.P. 1990-1997
Yamaha Ignition Pack, 2 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208190	(117-695-11)	$207.98 K

Power Pack

55 H.P. 1989 and 1991-1994
MAR/YAM Ignition Pack, 2 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208191	(117-TIA02-12)	$471.98 K

Stator

75-90 H.P. 1988-2000
Yamaha Stator, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208598	(177-688-11)	$460.98 K

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Stator

115-130 H.P. 1984-1989
Yamaha Stator, 4 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208599	(177-6E5-10)	$499.98 K

Stator

150-225 H.P. 1984-1989
Yamaha Stator, 6 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208600	(177-6G5-10)	$555.98 K

Power Pack

40-50 H.P. 1995-1999
Yamaha Ignition Pack, with Adjustable Arm, 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209120	(117-63D-04)	$743.98 K

Power Pack

75-90 H.P. 1988-2000
Yamaha Term Block, Screw In Pack



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209125	(117-688-15)	$825.98 K

Power Pack

25-30 H.P. 1984-1987 and 30-40 H.P. 1989-1990
Yamaha Pack, 2 and 3 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209130	(117-689-21)	$229.98 K

Power Pack

8 H.P. 1984-2001 and 48 H.P. 1995-2000
Yamaha Pack, 2 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209135	(117-696-12)	$225.98 K

Power Pack

4-5 H.P. 1984-2001
Yamaha CD Module, 1 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209140	(117-6E0-71)	$94.98 K

Rectifier

Fits: 1980-1983 55 H.P., 1984-1985 60 H.P., 982-1986 85 H.P., 1983-1984 90 H.P., 1983-1984 115 H.P. and 1983-1986 125 H.P. Engines.
Replaces: F694029, F694029-2, 300-694029-2.

O.E. No. 664-81970-60



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208320	(157-664-61)	$85.98 K

Ignition Coil

115-130 H.P. 1985-1991
Ignition Coil. Replaces: 6E5-85570-11-00



O.E. No. 6E5-85570-11-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185110	(18-5110)	$74.10 H

Ignition Coil

115-250 H.P. 1992-2006
Ignition Coil. Replaces: 6R3-85570-01-00



O.E. No. 6R3-85570-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185128	(18-5128)	$70.77 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Spark Plug Wire Kit

Spark Plug Wire Kit, 25' of 7 mm Wire, Assorted Ends



O.E. No. 84-813706A26

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185225	(18-5225)	$40.57 H

Solenoid

25-40 H.P. 1998-2004
Solenoid, 4 Post Flat Base.
Replaces: 65W-81941-00-00



O.E. No. 65W-81941-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185819	(18-5819)	$34.47 H

Solenoid, Starter

9.9-F100 H.P. 1988-2002
Solenoid, Starter. Replaces: 6G1-81941-10-00



O.E. No. 6G1-81941-10-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185821	(18-5821)	$63.07 H

Sierra Yamaha Cooling Parts List

4 Stroke Models

HP\Model	Year	Impeller	Cup	Plate	Housing	Kit with Housing	Kit without Housing
F4	1999-09	18-3073	—	—	—	—	—
F6	2001-08	18-8910	18-3444	18-3142	—	18-3410	18-3450
F6	2009	18-3073	—	—	—	—	—
F8	2001-09	18-8910	18-3444	18-3142	—	18-3410	18-3450
T8	2001-02	18-3040	18-3444	18-3142	—	—	—
F9.9	1985-96	18-3074	—	—	—	18-3411	18-3148
F9.9	2005-06	18-3040	18-3444	18-3195	—	18-3412	18-3433
F9.9	2007-10	18-8910	18-3444	18-3142	—	18-3410	18-3450
FT9.9	1985-90	18-3074	—	—	—	18-3411	18-3148
T9.9	1991-96	18-3074	—	—	—	18-3411	18-3148
T9.9	2005-06	18-3040	18-3444	18-3195	—	18-3412	18-3433
F15	1998-05	18-3040	18-3444	18-3195	—	18-3412	18-3433
F15	2006-10	18-3040	18-3444	18-3142	—	—	—
F25	1998-05, 2009-10	18-3068	18-3443	18-3194	18-3185	18-3432	—
T25	2001-06, 2009	18-3068	18-3449	18-3196	—	18-3413	18-3440
F30	2001-05	18-3068	18-3449	18-3196	—	18-3413	18-3440
F40	1999	18-3069	18-3449	18-3186	—	18-3415	18-3434
F40	2000-08	18-3068	18-3449	18-3196	—	18-3413	18-3440
F40 2.6L	1999	18-3069	18-3449	18-3186	—	—	18-3434
F50	1995-09	18-3069	18-3449	18-3186	—	18-3415	18-3434
T50	1996	18-3069	18-3435	—	—	18-3461	18-3428-1
T50	1997-10	18-3069	18-3435	—	—	18-3466	18-3465
F60	2002-09	18-3069	18-3449	18-3186	—	18-3415	18-3434
T60	2003-10	18-3069	18-3435	—	—	18-3466	18-3465
F75	2003-10	18-3042	18-3162	18-3143	—	18-3409	18-3451
F80	1999-03	18-3042	18-3162	18-3143	—	18-3409	18-3451
F90	2003-10	18-3042	18-3162	18-3143	—	18-3409	18-3451
F100	1999-03	18-3042	18-3162	18-3143	—	18-3409	18-3451
F115/LF115	2000-10	18-3071	—	18-3521	—	—	18-3442
F150/LF150	2004-10	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
F200/LF200	2002-10	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
F225/LF225	2002-10	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
F250/LF250	2005	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
F250/LF250	2006-10	18-3071	18-3333	18-3518	—	—	18-3515

Note: Product shipped may not match the item pictured.

Sierra Yamaha Cooling Parts List – *Continued*

2 Stroke Models

HP\Model	Year	Impeller	Cup	Plate	Housing	Kit with Housing	Kit without Housing
2	1984-87	18-3072	18-3328	18-3357	—	18-3463	—
2	1988-02	18-3072	18-3328	18-3357	—	18-3462	—
4	1984-99	18-3073	—	—	—	—	—
5	1984-02	18-3073	—	—	—	—	—
6	1986-00	18-3066	18-3456	—	—	—	18-3460
8	1984-09	18-3066	18-3456	—	—	—	18-3460
9.9	1984-95	18-3074	—	—	—	18-3411	18-3148
9.9	1996-09	18-3040	18-3444	18-3195	—	18-3412	18-3433
15	1984-95	18-3074	—	—	—	18-3411	18-3148
15	1996-09	18-3040	18-3444	18-3195	—	18-3412	18-3433
20	1996-97	18-3065	—	—	—	—	18-3431
25	1984-85	18-3067	—	—	—	18-3426	—
25	1986-87	18-3067	—	—	—	18-3427	—
25 (2 Cyl.)	1988-09	18-3065	—	—	—	—	18-3431
25 (3 Cyl.)	1996-02	18-3068	—	—	—	—	—
C25	1990-97	18-3067	—	—	—	18-3427	—
CV25	1990	18-3067	—	—	—	18-3427	—
30	1984-85	18-3067	—	18-3436	—	18-3426	—
30	1986	18-3067	—	—	—	18-3427	—
30	1987-01	18-3068	18-3435	18-3436	—	—	18-3430
C30	1990-92	18-3067	—	18-3436	—	18-3427	—
C30	1993-97	18-3068	18-3443	18-3194	18-3185	18-3432	—
40	1984-87	18-3068	18-3435	18-3436	—	18-3408	18-3429
40	1988-94	18-3068	18-3435	18-3436	—	—	18-3429
40	1995-05	18-3069	18-3449	18-3186	—	18-3415	18-3434
C40	1990-91	18-3088	—	—	—	18-3375	18-3374
C40	1992-97	18-3088	—	—	—	18-3398	18-3397
C40	1997-03	18-3069	18-3449	18-3186	—	18-3415	18-3434
P40	1998	18-3069	18-3449	18-3186	—	18-3415	18-3434
50	1984-87	18-3068	18-3435	18-3436	—	18-3408	18-3429
50	1988-94	18-3068	18-3435	18-3436	—	—	18-3429
50	1995-09	18-3069	18-3449	18-3186	—	18-3415	18-3434
C50	1998-01	18-3069	18-3449	18-3186	—	18-3415	18-3434
PRO 50	1987	18-3068	18-3435	18-3436	—	18-3408	18-3429
PRO 50	1988-90	18-3068	18-3435	18-3436	—	—	18-3429
P50	1991-93	18-3068	18-3435	18-3436	—	—	18-3429
P50	1995-96	18-3069	18-3449	18-3186	—	—	18-3434
50 Jet	1986-89	18-3068	—	—	—	—	—
55	1991-94	18-3069	18-3435	18-3436	—	—	18-3425
CV55	1989	18-3069	18-3435	18-3436	—	—	18-3425
60	2001-03	18-3069	18-3435	—	—	—	18-3465
60	2004-05	18-3070	—	—	18-3171	18-3371	18-3370
C60	1996-01	18-3069	18-3435	—	—	18-3466	18-3465
E60	1995-96	18-3069	18-3435	—	—	18-3466	18-3465
E60	1997-00	18-3069	—	—	—	—	—
P60	1991	18-3069	18-3435	—	—	18-3461	18-3428-1
P60	1992-99	18-3069	18-3435	—	—	18-3466	18-3465
70	1984-91	18-3069	18-3435	—	—	18-3461	18-3428-1
70	1992-03	18-3069	18-3435	—	—	18-3466	18-3465
70	2004-09	18-3070	—	—	18-3171	18-3371	18-3370
C70	2000-01	18-3069	18-3435	—	—	18-3466	18-3465
C75	1994-99	18-3070	—	—	18-3171	18-3371	18-3370
E75	1995-00	18-3070	—	—	—	—	—
P75	1996-99	18-3070	—	—	—	—	—
C80	1997	18-3070	—	—	—	—	—
85	1985	18-3070	—	—	—	—	—
C85	1989-97	18-3070	—	—	18-3171	18-3371	18-3370
CV85	1989-91	18-3070	—	—	18-3171	18-3371	18-3370
90	1984-09	18-3070	—	—	18-3171	18-3371	18-3370
90 Jet	1986-89	18-3070	—	—	—	—	—
B90	1997-99	18-3070	—	—	—	—	—
C90	1997-01	18-3070	—	—	18-3171	18-3371	18-3370

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Sierra Yamaha Cooling Parts List – *Continued*

HP\Model	Year	Impeller	Cup	Plate	Housing	Kit with Housing	Kit without Housing
C115	1991-92	18-3071	—	18-3344	18-3170	18-3373	18-3372
C115	1993-00	18-3071	18-3333	18-3344	18-3173	18-3313	18-3312
P115 (62A)	1993-96	18-3071	18-3333	18-3344	18-3173	18-3313	18-3312
115 (6N6), (6E5)	1984-94	18-3071	—	18-3344	18-3170	18-3373	18-3372
115 (6N6)	1994	18-3071	18-3333	18-3344	18-3173	18-3313	18-3312
130 (6L1), (6N7)	1988-92	18-3071	—	18-3344	18-3170	18-3373	18-3372
130 (6N7)	1993-04	18-3071	18-3333	18-3344	18-3173	18-3313	18-3312
L130 (6L6), (6N4)	1989-92	18-3071	—	18-3344	18-3170	18-3373	18-3372
L130 (6N4)	1993-01	18-3071	18-3333	18-3344	18-3173	18-3313	18-3312
C150 (6E5)	1996-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
150 (6R2), (6G4)	1984-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
150 (6R2)	1992-09	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
L150 (6R0), (6K0)	1986-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
L150 (6R0)	1992-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
P150	1986-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
P150	1992-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
150/175/200ETLN	1984	18-3071	—	18-3344	18-3170	18-3311	18-3310
PRO V150 (6J9)	1986-89	18-3071	—	18-3344	18-3170	18-3311	18-3310
PRO V150D (6N9)	1990	18-3071	—	18-3344	18-3170	18-3311	18-3310
PX150	1999	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
SX150	1999-04	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
V150	2000-08	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
VZ150	2001-09	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
Z150/LZ150	2001-05	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
175 (6G5)	1984-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
175 (6R3)	1992-00	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
P175 (62H)	1994-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
VZ175	2001-09	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
Z175	2001-05	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
200 (6G6), (6R4)	1984-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
200 (6R4)	1992-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
L200 (6K1), (6R1)	1986-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
L200	1992-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
LX200	1999-02	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
P200	1991-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
SX200	1999-05	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
V200	1998-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
VZ200	2001-04	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
VZ200-VZ300 (3.3L)	2005-10	18-3071	18-3519	18-3520	—	—	18-3516
Z200/LZ200	2000-10	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
V6 Special (6G7)	1984-86	18-3071	—	18-3344	18-3170	18-3311	18-3310
V6 Excel (6K7)	1987-89	18-3071	—	18-3344	18-3170	18-3311	18-3310
225 (6R5)	1990-91	18-3071	—	18-3344	18-3170	18-3311	18-3310
225	1992-97	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
225/L225/S225	1994-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
LX225/SX225	2000-03	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
V225	1998-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
VX225	2000-04	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
250/L250	1990-96	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
L250/S250	1997-99	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395
VX250	2002-04	18-3071	18-3333	18-3345	18-3173	18-3396	18-3395

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Note: Product shipped may not match the item pictured.

Water Pump Base Gasket

Water Pump Base Gasket



O.E. No. 6E5-44315-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180244	(18-0244)	$4.63 H

Wave Washer Kit

Yamaha Wave Washer Kit, V4 and V6



Brand Name	DMI No.	Mfg. No.	Price
Sierra	189079	(18-9079)	$14.98 H

Impeller

Impeller



O.E. No. 6L5-44352-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188911	(18-8911)	$18.67 H

Impeller

8-15 H.P. and F9.9-F20 H.P. 1998-2006
Impeller



O.E. No. 63V-44352-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183040	(18-3040)	$19.38 H
MP Parts	4-3040B	(47-47222)	$21.98 M

Impeller

F70-F100 H.P. 1999-2006
Impeller



O.E. No. 67F-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183042	(18-3042)	$35.22 H

Impeller

Impeller



O.E. No. 662-44352-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183063	(18-3063)	$26.22 H

Impeller

25 H.P. 1988-2006
Impeller



O.E. No. 6L2-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183065	(18-3065)	$22.23 H
MP Parts	4-3065B	(47-02174)	$23.98 M

Impeller

6-8 H.P. 1984-2006
Impeller



O.E. No. 6G1-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183066	(18-3066)	$20.28 H

Impeller

25-30 H.P. Commercial 1984-1997
Impeller



O.E. No. 689-44352-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183067	(18-3067)	$26.18 H
MP Parts	4-3067B	(47-02008)	$25.98 N

Impeller

30-50 H.P. 1984-2000 and F25-F40 H.P. 2002-2006
Impeller



O.E. No. 6H4-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183068	(18-3068)	$27.25 H
MP Parts	4-3068B	(47-02005-10)	$29.98 M

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Impeller

40-70 H.P. 1984-2001 and F50-F60 H.P. 2002-2006
Impeller



O.E. No. 6H3-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183069	(18-3069)	$32.87 H
MP Parts	4-3069B	(47-02005B)	$30.98 M
MP Parts	4-3069-10	10-Pack	$309.98 N

Impeller

115-300 H.P. and 4 Stroke 1984-2006
Impeller



O.E. No. 6E5-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183071	(18-3071)	$26.87 H
MP Parts	4-3071B	(47-02275)	$28.98 M
MP Parts	4-3071-10	10-Pack	$289.98 N

Impeller

4-6 H.P. 1984-2006
Impeller



O.E. No. 6E0-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183073	(18-3073)	$16.37 H

Impeller

40 H.P. Commercial 1990-1997
Impeller



O.E. No. 6F5-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183088	(18-3088)	$19.93 H

Impeller

F6-F9.9 H.P. 2001-2010
Impeller. Replaces: 68T-44352-00-00



O.E. No. 68T-44352-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188910	(18-8910)	$28.45 H

Impeller

75-90 H.P. 1984-2006
Impeller



O.E. No. 688-44352-03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183070	(18-3070)	$25.22 H
MP Parts	4-3070B	(47-02006B)	$26.98 M
MP Parts	4-3070-10	10-Pack	$269.98 N

Impeller

2 H.P. 1984-2002
Impeller



O.E. No. 646-44352-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183072	(18-3072)	$14.80 H
MP Parts	4-3072B	(47-02171)	$16.98 M

Impeller

9.9-15 H.P. 1984-2003 and 4 Stroke
Impeller



O.E. No. 682-44352-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183074	(18-3074)	$24.07 H

Impeller

30-50 H.P. 1984-2000 and F25-F40 HP 2002-2006
Impeller



O.E. No. 6H4-44352-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183068	(18-3068)	$27.25 H
MP Parts	4-3068B	(47-02009-10)	$29.98 M

Water Pump Housing

Water Pump Housing



O.E. No. 61A-44311-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183173	(18-3173)	$27.25 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Water Pump Kit

V6 150-225 H.P. 1984-1991
Complete Pump Kit without Housing



O.E. No. 6G5-W0078-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183310	(18-3310)	$58.28 H

Water Pump Kit

V6 150-225 H.P. 1984-1991
Complete Pump Kit with Housing



O.E. No. 6G5-W0078-A1-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183311	(18-3311)	$67.12 H

Water Pump Kit

V4 115-130 H.P. 1993-2004
Complete Pump Kit without Housing



O.E. No. 6N6-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183312	(18-3312)	$61.75 H

Water Pump Kit

V4 115-130 H.P. 1993-2004
Complete Pump Kit with Housing



O.E. No. 6N6-W0078-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183313	(18-3313)	$87.88 H
MP Parts	4-3313	(46-46201)	$77.98 I

Insert Cup

V4 and V6 1992-2010
Insert Cup



O.E. No. 61A-44322-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183333	(18-3333)	$47.70 H

Wear Plate

V4 and V6 1992-2010
Wear Plate



O.E. No. 6G5-44323-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183345	(18-3345)	$24.05 H

Water Pump Kit

T9.9 and F 9.9-15 H.P. 1985-1996
Repair Kit Only without Gaskets and Housing



O.E. No. 682-W0078-A1-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183148	(18-3148)	$41.17 H

Water Pump Kit

3 Cylinder 85-90 H.P. 1984-2004
Complete Pump Kit without Housing




O.E. No. 692-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183370	(18-3370)	$39.38 H
MP Parts	4-3370	(46-02080)	$32.98 H

Water Pump Kit

3 Cylinder 85-90 H.P. 1984-2004
Complete Pump Kit with Housing



O.E. No. 692-W0078-A0-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183371	(18-3371)	$46.92 H
MP Parts	4-3371	(46-46004)	$43.98 H

Water Pump Kit

Water Pump Kit with Housing



O.E. No. 60X-W0078-00, 61A-44311-01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183522	(18-3522)	$98.95 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Water Pump Kit

Water Pump Kit with Housing



O.E. No. 68V-W0078-00, 61A-44311-01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183523	(18-3523)	$106.47 H

Water Pump Kit

V4 115-130 H.P. 1988-1992
Complete Pump Kit with Housing



O.E. No. 6E5-W0078-A1-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183373	(18-3373)	$74.87 H

Water Pump Kit

V6 150-225 H.P. 1992-2009
Complete Pump Kit without Housing, Except 3.3 Lilter



O.E. No. 61A-W0078-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183395	(18-3395)	$61.82 H
MP Parts	4-3395	(46-02346)	$57.98 H

Water Pump Kit

V6 150-225 H.P. 1992-2009
Complete Pump Kit with Housing, Except 3.3 Lilter



O.E. No. 61A-W0078-A2-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183396	(18-3396)	$65.70 H
MP Parts	4-3396	(47-46200)	$63.98 L
MP Parts	4-3396-3		$191.98 M

Water Pump Kit

3 Cylinder 40 H.P. 1992-1997
Complete Pump Kit without Housing



O.E. No. 679-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183397	(18-3397)	$44.18 H

Water Pump Kit

2 Cylinder 55 H.P. 1989-1994
Complete Pump Kit without Housing



O.E. No. 663-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183425	(18-3425)	$71.72 H

Water Pump Kit

2 Cylinder 25-30 H.P. 1984-1985
Complete Pump Kit with Housing



O.E. No. 689-W0078-04-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183426	(18-3426)	$162.42 H

Water Pump Kit

3 Cylinder 25-30 H.P. 1986-1997
Complete Pump Kit with Housing



O.E. No. 689-W0078-A6-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183427	(18-3427)	$65.70 H

Water Pump Kit

T50 H.P. 1996
Complete Pump Kit without Housing



O.E. No. 6H3-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183428	(18-3428-1)	$30.73 H

Water Pump Kit

3 Cylinder 40-50 H.P. 1994-1991
Complete Pump Kit without Housing



O.E. No. 6H4-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183429	(18-3429)	$34.07 H

Note: Product shipped may not match the item pictured.

Water Pump Kit

2 Cylinder 20-25 H.P. 1988-2009
Repair Kit Only without Gaskets and Housing



O.E. No. 6L2-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183431	(18-3431)	$35.48 H

Water Pump Kit

F25 H.P. 1998-2005
Complete Pump Kit with Housing



O.E. No. 61N-W0078-11-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183432	(18-3432)	$34.22 H

Water Pump Kit

T9.9 and F9.9-15 H.P. 1998-2006
Complete Pump Kit without Housing



O.E. No. 63V-W0078-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183433	(18-3433)	$36.13 H

Water Pump Kit

T40-50 and F40-60 H.P. 1995-2003
Complete Pump Kit without Housing




O.E. No. 63D-W0078-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183434	(18-3434)	$33.68 H

Water Pump Kit

T25 H.P. 2001-2004 and F30-40 H.P. 2001-2004
Complete Pump Kit without Housing



O.E. No. 66T-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183440	(18-3440)	$66.72 H

Water Pump Kit

F75-F100 H.P. 1999-2006
Complete Pump Kit without Housing



O.E. No. 67F-W0078-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183451	(18-3451)	$112.92 H

Water Pump Kit

6-8 H.P. 1984-2005
Complete Pump Kit without Housing



O.E. No. 6G1-W0078-A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183460	(18-3460)	$36.00 H

Water Pump Kit

T50-70 H.P. 1997-2005
Complete Pump Kit without Housing



O.E. No. 6H3-W0078-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183465	(18-3465)	$44.13 H

Thermostat

9.9-300 H.P. 1984-2006
Thermostat, 122° F, 50° C



O.E. No. 6E5-12411-30-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183540	(18-3540)	$24.20 H

Thermostat

9.9-300 H.P. 1984-2006
Thermostat, 140° F, 60° C



O.E. No. 66M-12411-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183541	(18-3541)	$34.82 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Thermostat Kit

Fits: 115 (1991-2002), C115 (1991-1999), P115 (1993-1996), S115 (1996-1999), 130 (1991-2002), L130 (1991-2000), S130 (1996-1999), 150 (1991-2002), C150 (1996-1999), L150 (1991-1999), P150 (1991-1999), S150 (1996-99), V150 (2000-2002), Z150 (2001-2002), 175 (1991-1995, 1997), P175 (1994-1999), V175 (2000), Z175 (2001-2002), 200 (1991-1998), L200 (1991-1999), P200 (1991-1999), S200 (1996-1999), V200 (1998-1999), Z200 (2001-02), 225 (1991-1997), V225 (1998-1999)



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183608	(18-3608)	$26.48 H

Thermostat Kit

Contains: 18-3540 (Thermostat) O.E. No. 6E5-12411-30-00, Qty. 1 & 18-0829 (Gasket) O.E. No. 61A-12414-A0-00, 6J8-12414-A0-00, Qty. 1.

Fits: 25 (1996-1998, 2001-2002), 40 (1991-1999, 2001), C40 (1997-2002), P40 (1998), 50 (1991-1997, (1999-2002), C50 (1998-2001), P50 (1991-1996), L225 (1994-1999), S225 (1996-1999), 250 (1991-1995), L250 (1991-1999), S250 (1996-1999)



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183609	(18-3609)	$25.68 H

Trim and Tilt Motor

60-90 H.P. 1987-1991
Trim and Tilt Motor, 3 Wire with O-Ring. Replaces: 6H1-43880-00-00



O.E. No. 6H1-43880-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186259	(18-6259)	$341.55 H

Trim and Tilt Motor

115-200 H.P. 1986-1996
Trim and Tilt Motor, 2 Wire. Replaces: 6G5-43880-02-00



O.E. No. 6G5-43880-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186760	(18-6760)	$349.75 H
MP Parts	4-1268	(TRM0010)	$151.98 G

Trim and Tilt Motor

2002-2009 4 Stroke and HPDI
Yamaha F200, F225, F250, LF200, LF225, LF250, LZ250, LZ300, Z250, Z300 H.P.



O.E. No. 60V-43880-00-00, 69J-43880-00-00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1292	(TRM0082)	$189.98 G

Trim and Tilt Motor

2005-2010
Yamaha F50 and F60 H.P.



O.E. No. 6C5-43880-00-00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1294	(TRM0083)	$165.98 G

Trim and Tilt Motor

1999-2003
Yamaha F75 H.P. 2003-2004, F80 H.P. 1999-2003, F90 H.P. 2003-2004, F100 H.P. 1999-2003, 4 Stroke Engines



O.E. No. 67F-42880-00-00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-2450	(TRM0087)	$237.98 G

Trim and Tilt Motor

1987-1991
Yamaha 115-225 H.P.



O.E. No. 6G5-43880-00-00, 6G5-43880-01-00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-2460	(TRM0094)	$180.98 G

Trim and Tilt Motor

F40-F100 H.P. 1999-2004
Trim and Tilt Motor, with 1.5 Longer Shaft than 4-1262 (Total Shaft Length 1.5"), 2 Wire



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1286	(TRM0071)	$124.98 G

Trim and Tilt Motor

40-100 H.P. 1995-2003
Trim and Tilt Motor, for Longer Shaft Use 4-1268, 2 Wire. Replaces: 62X-43880-00, 62X-43880-09



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1262	(TRM0060)	$119.98 G

Note: Product shipped may not match the item pictured.

Trim and Tilt Motor



40-90 H.P. 1992-2008
Trim and Tilt Motor, Early Style with 68 mm Base, 2 Wire. Replaces: 6HI-43880-02-00

O.E. No. 6H1-43880-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186781	(18-6781)	$328.58 H
MP Parts	4-6781	(TRM0025)	$135.98 G

Trim and Tilt Motor



50-115 H.P.
Trim and Tilt Motor, Early Style with 70.5 mm Base, 3 to 2 Wire Kit

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1271	(TRM0037)	$158.98 G

Trim and Tilt Motor



50-200 H.P. 1985-1986
Trim and Tilt Motor, Flange is 68.3 mm (2.68") Shaft is 4 mm (.157") Diameter, 3 to 2 Wire Kit

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1273	(TRM0053)	$167.98 G

Trim and Tilt Motor



225-250 H.P. 1990-2003 All V 76° 3.1 Litre
Trim and Tilt Motor, with 4 Wire. Replaces: 6IA-43880-01-00, 61A-43880-02-00

O.E. No. 61A-43880-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186782	(18-6782)	$481.93 H
MP Parts	4-1263	(TRM0044)	$181.98 G

Trim and Tilt Motor



115-225 H.P. 1997-2006
Trim and Tilt Motor, without Plastic Housing. Replaces: 64E-43880-00-00, 64E-43880-01-00

O.E. No. 64E-43880-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186783	(18-6783)	$243.78 H

Trim and Tilt Motor



115-225 H.P. 1997-2006
Trim and Tilt Motor, with Plastic Housing

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1264	(TRM0069)	$153.98 G

Trim and Tilt Motor



F75-F100 H.P. 1999-2004
Trim and Tilt Motor, 4 Bolt, 2 Wire. Replaces: 67F-43880-00-00

O.E. No. 67F-43880-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186787	(18-6787)	$961.95 H

Trim and Tilt Motor



40-50 H.P. 1985-1992
Trim and Tilt Motor. Replaces: 6H5-43880-02-00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1280	(TRM0059)	$171.98 G

Trim and Tilt Motor



40-100 H.P. 1995-2003
Trim and Tilt Motor, 3 Bolt, 2 Wire. Replaces: 62X-43880-09-00

O.E. No. 62X-43880-09-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186789	(18-6789)	$341.55 H

Trim and Tilt Motor



F200-Z300 H.P. 2002-2008
Trim and Tilt Motor. Replaces: 69J-43880-00-00, 60V-43880-00-00

O.E. No. 60V-43880-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186798	(18-6798)	$724.27 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Starter Parts List

HP / Model	Year	Sierra	MP Parts
9.9	1984-97	18-6420	4-6420
15	1984-97	18-6420	4-6420
25 (2 Cyl)	1984-87	18-6410	4-6410
25 (2 Cyl)	1988-09	18-6420	4-6420
C25	1991-97	18-6410	4-6410
CV25	1990	18-6410	4-6410
30	1984-86	18-6410	4-6410
30	1987-01	18-6421	-
C30	1991-97	18-6410	4-6410
CV30	1989-90	18-6410	4-6410
40	1984-88	18-6422	4-6422
40	1989-05	18-6421	-
C40	1991-97	18-6410	4-6410
P40	1998	18-6421	-
50	1984-88	18-6422	4-6422
50	1989-09	18-6421	-
C50	1998-01	18-6421	-
F50	1995-02	18-6413	4-1150
P50	1991-96	18-6421	-
T50	1996-02	18-6413	4-1150
C55	1991-95	18-6412	4-6412
CV55	1989-90	18-6412	4-6412
60	2001-05	18-6411	4-6411
C60	1996-01	18-6411	4-6411
P60	1991-99	18-6411	4-6411
70	1984-09	18-6411	4-6411
C70	2000-01	18-6411	4-6411
C75	1994-99	18-6423	4-6423
F75	2003-04	18-6425	4-1154
F75	2005-11	18-6427	-
P75	1996-99	18-6423	4-6423
C80	1997	18-6423	4-6423
F80	1999-03	18-6425	4-1154
C85	1991-96	18-6423	4-6423
CV85	1989-90	18-6423	4-6423
90	1984-09	18-6423	4-6423
B90	1997-99	18-6423	4-6423
C90	1997-01	18-6423	4-6423
F90	2003-04	18-6425	4-1154
F90	2006-11	18-6427	-
F100	1999-03	18-6425	4-1154
115	1984-96	18-6413	4-1150
115	2000-09	18-6415	4-1152
C115	1991-96	18-6413	4-1150
C115	2000	18-6415	4-1152
F115	2000-11	18-6427	-
LF115	2000-11	18-6427	-
P115	1993-96	18-6413	4-1150
S115	1996	18-6413	4-1150
130	1988-96	18-6413	4-1150
130	2000-04	18-6415	4-1152
L130	1989-96	18-6413	4-1150
L130	2000-01	18-6415	4-1152
S130	1996	18-6413	4-1150
150	1984-96	18-6413	4-1150
150	2000-09	18-6415	4-1152
C150	1996	18-6413	4-1150
DX150	1999-05	18-6415	4-1152
L150	1986-96	18-6413	4-1150
LX150	1999-01	18-6415	4-1152
LZ150	2000-05	18-6426	-
Z150	2000-05	18-6415	4-1152
P150	1991-96	18-6413	4-1150
PX150	1999	18-6415	4-1152
PRO V150	1986-90	18-6413	4-1150
S150	1996	18-6413	4-1150
SX150	2000-01	18-6415	4-1152
V150	2000-08	18-6415	4-1152
VX150	2000-04	18-6415	4-1152
VZ150	2000-11	18-6426	-
175	1984-95	18-6413	4-1150
175	2000	18-6415	4-1152
P175	1994-96	18-6413	4-1150
S175	1996	18-6413	4-1150
V175	2000	18-6415	4-1152
VZ175	2001-11	18-6426	-
Z175	2001-05	18-6426	-
200	1984-96	18-6413	4-1150
L200	1986-96	18-6413	4-1150
LX200	1999-01	18-6415	4-1152
LZ200	2002-11	18-6426	-
S200	1996	18-6413	4-1150
SX200	1999-05	18-6415	4-1152
V200	1998-99	18-6424	4-1162
VX200	2000-03	18-6424	4-1162
VZ200	2001-04	18-6426	-
Z200	2000-11	18-6426	-
V6 Special	1984-86	18-6413	4-1150
L225	1994-99	18-6424	4-1162
LX225	2000-03	18-6424	4-1162
S225	1996-99	18-6424	4-1162
SX225	2000-03	18-6424	4-1162
V225	1998-99	18-6424	4-1162
VX225	2000-03	18-6424	4-1162
250	1990-95	18-6424	4-1162
L250	1990-99	18-6424	4-1162
LX250	2000-03	18-6424	4-1162
S250	1996-99	18-6424	4-1162
SX250	2000-03	18-6424	4-1162

Starter

F9.9-F15 H.P. 2000-2010
Outboard Starter



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1125	(SAB0182)	$149.98 G

Starter

F50-F60 H.P. 2000-2006 4 Cylinder
Outboard Starter



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1171	(SHI0120)	$248.98 G

Starter

25-40 H.P. 1984-1997
Outboard Starter, 11 Tooth. Replaces:
Yamaha 689-81800-13-00, 689-81800-11,
689-81800-12



O.E. No. 689-81800-11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186410	(18-6410)	$492.50 H
MP Parts	4-6410	(SHI0085)	$171.98 G

Starter

60-70 H.P. 1986-2006
Outboard Starter, 9 Tooth. Replaces:
6H3-81800-11-00, 6H3-81800-10



O.E. No. 6H3-81800-10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186411	(18-6411)	$598.75 H
MP Parts	4-6411	(SHI0086)	$190.98 G

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Starter

C55 H.P. 1989-1995 2 Cylinder
Outboard Starter



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6412	(SHI0087)	$248.98 G

Starter

F40-F50 H.P. and 115-225 H.P. 1984-1996, 90°
Outboard Starter. Replaces: 6E5-81800-11-00, 6E5-81800-12-00



O.E. No. 6E5-81800-11-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186413	(18-6413)	$561.25 H
MP Parts	4-1150	(SHI0031)	$113.98 G

Starter

115-225 H.P. 1997-2006, All 90° V4 and V6
Outboard Starter. Replaces: 6N7-81800-10-00



O.E. No. 6N7-81800-10-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186415	(18-6415)	$498.25 H
MP Parts	4-1152	(SHI0088)	$247.98 G

Starter

9.9-25 H.P. 1984-2008
Outboard Starter. Replaces: 682, 6L2, 81800-12, 20, 11



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6420	(SHI0133)	$180.98 G

Starter

9.9-15 H.P. 1984-1997 and 25-50 H.P. 1988-2002 Outboard Starter.
Replaces: 68T, 6F5, 6G8, 6J4- 81800



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1156	(SHI0131)	$212.98 G

Starter

40-50 H.P. 1984-1988 3 Cylinder
Outboard Starter



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6422	(SHI0134)	$203.98 G

Starter

75-90 H.P. 1984-2006 3 Cylinder
Outboard Starter, 9 Tooth.
Replaces: 688-81800-12-00



O.E. No. 688-81800-12-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186423	(18-6423)	$611.25 H
MP Parts	4-6423	(SHI0135)	$225.98 G

Starter

F150 H.P. 2004-2008 Inline 4
Outboard Starter, 13 Tooth.
Replaces: 63P-81800-00-00



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1161	(SHI0122)	$260.98 G

Starter

F200-F225 H.P. 2002-2004 V6 90°
Outboard Starter. Replaces: 69J-81800-00-00



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1159	(SHI0121)	$262.98 G

Starter

225-250 H.P. 1990-2003 All V 76° 3.1 Litre
Outboard Starter. Replaces: 61A-818800-00, 61A-81800-01



O.E. No. 61A-81800-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186424	(18-6424)	$577.88 H
MP Parts	4-1162	(SHI0137)	$247.98 G

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Starter

F75-F100 H.P. 2001-2004
Outboard Starter, 13 Tooth.
Replaces: 67F-81800-02-00



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1154	(SHI0128)	$259.98 G

Starter

150-200 H.P. 2000-2008 HPDI 90°
Outboard Starter.
Replaces: 68F-81800-00, 01, 02



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1160	(SHI0136)	$260.98 G

Starter

250 H.P. 2003-2008 HPDI
Outboard Starter, 13 Tooth.
Replaces: 60V-81800-00



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1163	(SHI0123)	$262.98 G

Starter

F90-F115 H.P. 2001-2010
Outboard Starter



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1158	(SHI0132)	$261.98 G

Prop Spacer

115-300 H.P. 1984-2010
Prop Spacer. Replaces: 688-45997-01-00



O.E. No. 688-45997-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184274	(18-4274)	$38.70 H

Prop Nut

115-350 H.P. 1984-2010
Prop Nut Castle



O.E. No. 90171-18M04-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183726	(18-3726)	$7.22 H

Prop Nut

40-90 H.P. 1984-2010
Prop Nut Castle



O.E. No. 90171-16011-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183732	(18-3732)	$14.52 H

Prop Nut Kit

40-90 H.P. 1984-2010
Prop Nut Kit, All 3 Cylinder



O.E. No. 6H1-W4599-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183781	(18-3781)	$43.23 H

Prop Nut Kit

115-300 H.P. 1984-2010
Prop Nut Kit, All V4 and V6



O.E. No. 6G5-W4599-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183782	(18-3782)	$47.60 H

Drain Screw Gasket

Drain Screw Gasket, 40-90 H.P.
Replaces: 90430-14115-00-00



O.E. No. 90430-14115-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180826	(18-0826)	$1.17 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Lower Unit Seal Kit




25-30 H.P. 1984-1986
Lower Unit Seal Kit

O.E. No. 689-W0001-21-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182785	(18-2785)	$57.60 H

Lower Unit Seal Kit




70 H.P. 1984-1991
Lower Unit Seal Kit

O.E. No. 6H3-W0001-21-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182788	(18-2788)	$57.08 H

Lower Unit Seal Kit



40-50 H.P. 1986-1991
Lower Unit Seal Kit

O.E. No. 6H4-W0001-20-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182792	(18-2792)	$52.60 H

Lower Unit Seal Kit




115-130 H.P. 1986-1996
Lower Unit Seal Kit

O.E. No. 6E5-W0001-51-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182794	(18-2794-1)	$86.20 H

Lower Unit Seal Kit




85-90 H.P. 1984-1991 3 Cylinder
Lower Unit Seal Kit

O.E. No. 688-W0001-20-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182798	(18-2798)	$74.82 H

Lower Unit Seal Kit



225-250 H.P. 1990-1996 V6 3.1 Litre
Lower Unit Seal Kit

O.E. No. 61A-W0001-21-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182799	(18-2799)	$123.78 H

Prop Shaft



F115 H.P. 1984-2006, V4 and V6
Prop Shaft

O.E. No. 6E5-45611-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182385	(18-2385)	$455.00 H

Magnetic Drain Screw



40-250 H.P. 1984-2006, All
Magnetic Drain Screw

O.E. No. 688-45341-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182374	(18-2374)	$15.48 H

Drain Screw



40-250 H.P. 1984-2006, All
Drain Screw

O.E. No. 90340-08002-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182371	(18-2371)	$8.48 H

Oil Seal



150-250 H.P. 1986-2006, V4 and V6
Oil Seal, Upper Driveshaft, 2 Required

O.E. No. 93101-28M16-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180265	(18-0265)	$6.70 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Oil Seal

150-250 H.P. 1986-2006, V4 and V6
Oil Seal, Prop Shaft, 2 Required



O.E. No. 93101-30M17-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180266	(18-0266)	$7.00 H

Oil Seal

150-250 H.P. 1986-2006, V4 and V6
Oil Seal, Shift Shaft



O.E. No. 93106-09014-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180267	(18-0267)	$5.98 H

Oil Seal

25-50 H.P. 1984-2006, 2 and 3 Cylinder
Oil Seal, Prop Shaft, 2 Required



O.E. No. 93101-22067-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180296	(18-0296)	$6.50 H

Oil Seal

30-70 H.P. 1984-2006, 2 and 3 Cylinder
Oil Seal, Upper Driveshaft, 2 Required



O.E. No. 93101-23070-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180297	(18-0297)	$7.93 H

Oil Seal

50-F100 H.P. 1984-2006, 3 Cylinder
Oil Seal, Prop Shaft, 2 Required



O.E. No. 93101-25M03-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180587	(18-0587)	$4.50 H

Cotter Pin

Vary
Cotter Pin, 1-1/4 x 1/16, 10 Per Bag



O.E. No. 91490-30030-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182380	(18-2380)	$2.23 H

Dongle

Dongle A Universal, All Brands Except Seadoo



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180005	(18-ADC400)	$91.98 D

Diagnostics Cable

Stats Master Cable, All Brands



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180004	(18-ADC300)	$413.98 D

Diagnostics Cable

Stats Power Cable, All Brands



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180001	(18-ADC152)	$91.98 D

Diagnostics Cable

Stats USB Cable, All Brands



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180002	(18-ADC153)	$91.98 D

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Diagnostics Cable

Yamaha Diagnostics Cable



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180006	(18-ADC403)	$163.98 D

Anode

150-200 H.P. and F150 H.P. 1986-2006
Anode, Zinc. Replaces: 6J9-45371-01-00



O.E. No. 6J9-45371-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186035	(18-6035)	$24.53 H

Anode

150-200 H.P. 1986-2006
Anode. Replaces: 6G5-45251-01-00



O.E. No. 6G5-45251-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186090	(18-6090)	$24.83 H

Anode, Magnesium

150-200 H.P. and F150 H.P. 1986-2006
Anode, Magnesium



O.E. No. 6J9-45371-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186112	(18-6112)	$29.13 H

Anode

150-200 H.P. 1986
Anode. Replaces: 6K1-45371-00-00



O.E. No. 6K1-45371-00-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186034	(18-6034)	$48.25 H

Anode

70-90 H.P. 1986-2006
Anode. Replaces: 688-45371-02-00



O.E. No. 688-45371-02-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186070	(18-6070)	$15.00 H

Anode, Zinc

115-130 H.P. 1984-2004 and V6 Special 1984-1986
Anode, Zinc. Replaces: 6E5-45371-01-00



O.E. No. 6E5-45371-01-00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186097	(18-6097)	$31.68 H

Note: Product shipped may not match the item pictured.

Fun & Floatation | Anchor & Dock | Safety | Electronics | Trolling Motors | Lighting | Electrical | Topside Acc. | Cockpit & Deck | Instruments | Steering, Controls | Perform | Fuel System | Engine & Parts | Engine Care | Propellers | Seating & Pedestals | Tops & Covers | Pumps | Cleaning & Care | Paint & Paint Acc. | Hardware, Fasteners | Trailering | Misc. | Comm.

©2014 Donovan Marine, Inc.

Alphabetical Index for Suzuki

Alphabetical Index	Page No.	Alphabetical Index	Page No.	Alphabetical Index	Page No.
Anodes, Zinc	725	Filter, Fuel	718	Seal Kits	724
Carburetor Kits	717-718	Impeller	720-722	Starter Motor	723-724
Diagnostics	725	Impeller Chart	720	Trim Motors	723
Engine Variation Code	717	Key Switch	720	Water Pump Kits	721-722
Fuel Connector	719-720	Oil Filter	719		

Suzuki Model Verification

Model Description	Horsepower	Model Variation	Shaft Length	Model Year
DT = 2 Cycle	Examples:	E - Electric Start with Tiller Handle	S = 15"	D = 1983
DF = 4 Cycle	9.9	R - Electric Start with Remote Control	L = 20"	E = 1984
PU = Jet Drive	40	C - Oil Injection	X = 25"	F = 1985
	115	G - Counter Rotation		G = 1986
	250	N - High Thrust Propeller		H = 1987
		T - Power Tilt & Trim with Electric Start with Remote Control		J = 1988
		H - Power Tilt & Trim with Electric Start with Tiller Handle		K = 1989
		SF - Super Four		L = 1990
		SS - Super Six		M = 1991
		M - Manual Start with Tiller Handle		N = 1992
		V - Comlink Voice Caution System		P = 1993
				R = 1994
				S = 1995
				T = 1996
				V = 1997
				W = 1998
				X = 1999
				Y = 2000
				K1 = 2001
				K2 = 2002
				K3 = 2003
				K4 = 2004
				K5 = 2005
				K6 = 2006
				K7 = 2007
				K8 = 2008

Example:
DT40CRSN - 2 Cycle, 40 HP, Oil Injection, Electric Start with Remote Control, 15", 1992 Model Year

Head Gasket

DT 30 H.P. 1988-1989
Suzuki Head Gasket.
Replaces: 11141-95D90



O.E. No. 11141-95D90

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183819	(18-3819)	$30.47 H

Carburetor Kit

DT 25-30 H.P. 1986-1997
Suzuki Carburetor Kit, 13910-95D00




O.E. No. 13910-95D00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187755	(18-7755)	$36.50 H

Carb Kit

25, 30 H.P. 2000-2001, 2004 and Up
Suzuki Carburetor Kit, 13910-89J01



O.E. No. 13910-89J01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187773	(18-7773)	$48.15 H

Carb Kit

DT 40-140 H.P. Inline 1986-1998
Suzuki Carburetor Kit, 13910-94400



O.E. No. 13910-94400

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187753	(18-7753)	$24.68 H

Note: Product shipped may not match the item pictured.

Fast & Easy Ordering on Our E-Commerce Site: ***DonovanMarineParts.com***

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Carb Kit

DT 40-115 H.P. Inline 1986-1998
Suzuki Carburetor Kit, 13910-94701




O.E. No. 13910-94701

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187754	(18-7754)	$21.68 H

Carb Kit

DT V90-200 H.P. 1989-1998
Suzuki Carburetor Kit, 13910-87D00



O.E. No. 13910-87D00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187752	(18-7752)	$30.37 H

Fuel Filter

DF and DT 4-50 H.P. 1998-2010
J/E/Suzuki Fuel Filter, 15410-98500



O.E. No. 15410-98500

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187719	(18-7719)	$9.03 H

Fuel Filter

DF 25-115 H.P. 1998-2010
Suzuki Fuel Filter, 15410-87J10



O.E. No. 15410-87J10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187716	(18-7716)	$9.18 H

Fuel Filter

DF25, DF70, DF90, DF115, DF140 (Includes 140T and 140Z) 2006 and Newer
J/E Fuel Filter. Replaces: 15410-87J30



O.E. No. 15410-87J30

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187953	(18-7953)	$11.83 H

Fuel Filter

DT 30-60 H.P. 1985-2000
Suzuki Fuel Filter Kit. Replaces: 15410-94400



O.E. No. 15410-94400

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187735	(18-7735)	$9.60 H

Fuel Filter

75 H.P. 4 Stroke (2000 and Up), 90 H.P. 4 Stroke (2000 and Up), 115 H.P. EFI 4 Stroke (2001 and Up)
MRY/SUZ/HON Fuel Filter. Replaces: 15412-93J00



O.E. No. 15412-93J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187936	(18-7936)	$22.05 H

Fuel Filter

DF 150-175 H.P. 2006-2010
Suzuki Fuel Filter. Replaces: 1540-96J00



O.E. No. 15410-96J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187711	(18-7711)	$11.55 H

Oil Filter

DF9.9, DF15 H.P. 1996-2006
Suzuki Oil Filter. Replaces: 16510-05240



O.E. No. 16510-05240

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187903	(18-7903)	$6.62 H

Oil Filter

DF25-DF70 H.P.
Suzuki Oil Filter.
Replaces: 16510-87J00



O.E. No. 16510-87J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187915	(18-7915-1)	$9.82 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Oil Filter



90-115 H.P. EFI 2003-2005
Suzuki Oil Filter. Replaces:
778886, 5033539, 16510-61A20-MHL

O.E. No. 16510-31A20-MHL

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187896	(18-7896)	$10.98 H

Oil Filter



DF140 H.P. 2003-2005
Suzuki Oil Filter. Replaces:
778887, 5033919, 16510-82703

O.E. No. 16510-82703

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187897	(18-7897)	$10.18 H

Oil Filter



DF150-DF300 H.P.
Suzuki Oil Filter. Replaces: 16510-96J00

O.E. No. 16510-96J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187905	(18-7905)	$18.78 H

Oil Filter



200/225 H.P. 2004-2005
Suzuki Oil Filter. Replaces:
778888, 5035703

O.E. No. 16510-93J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187895	(18-7895)	$10.93 H

Fuel Connector



DT4-DT65 H.P., Motor Side Mates with 18-80418
Suzuki Fuel Connector. Replaces: 65720-94401

O.E. No. 65720-94401

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1880409	(18-80409)	$15.70 H

Fuel Connector



DT4-DT140 H.P., Mates with 18-80409 and 18-8087
Suzuki Fuel Connector. Replaces: 65750-94404

O.E. No. 65750-94404

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1880418	(18-80418)	$12.98 H

Fuel Connector



DF25-DF140 H.P. (5/16" Version of 18-80404)
Mates with 18-80425
Suzuki Fuel Connector. Replaces: 65750-87J10, 65750-87J11

O.E. No. 65750-87J10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1880419	(18-80419)	$17.07 H

Fuel Connector

Mates with 18-8071
Chrysler/Suzuki Fuel Line, Female.
Replaces: 65750-98505

O.E. No. 65750-98505

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188062	(18-8062)	$14.00 H

Fuel Connector



Mates with 18-8062
Chrysler/Suzuki Fuel Tank Connector,
1/4" NPT, .432 O.D. Replaces: 99105-00192

O.E. No. 99105-00192

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188071	(18-8071)	$6.88 H

Fuel Connector



Mates with 18-8079
Suzuki Fuel Tank Connector, 1/4" N.P.T, .508 O.D. Male. Replaces: 65740-95500, 99105-00193

O.E. No. 65740-95500

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188078	(18-8078)	$12.33 H

Note: Product shipped may not match the item pictured.

Fuel Connector

Mates with 18-8078
Suzuki Fuel Connector, Large Female, Tanks End, Fits All. Replaces: 65750-95510 ,65750-95500



O.E. No. 65750-95500

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188079	(18-8079)	$13.20 H

Fuel Connector

Mates with 18-80418
Tank Connector, Motor Side, DT75-DT140 H.P.
Replaces: 65720-94411



O.E. No. 65720-94411

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188087	(18-8087)	$15.35 H

Key Switch

2 and 4 Stroke Outboards
Suzuki Ignition Switch.
Replaces: 37110-99E00



O.E. No. 37110-99-E00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	364495	(MP51010)	$51.23 H

Sierra Suzuki Cooling Parts List

HP/Model	Year	Impeller	Gasket	Water Pump Kit
DT2/2.2	1983-97	18-3097	-	-
DT3.5	1983-84	18-3097	-	-
DT4	1984-98	18-3097	18-0480	18-3260
DF4	2003-10	18-3097	18-0761	18-3266
DT5	1977-83, 1999-02	18-3097	18-0480	18-3260
DT6	1984-02	18-3097	18-0477-9	18-3259
DF6	2003-10	18-3097	18-0761	18-3266
DT8	1980-87	18-3097	18-0477-9	18-3259
DT8	1988-97	18-3000	18-0479	18-3255
DF8	2010	18-3099	-	-
DT9.9	1977-82	18-3092	-	-
DT9.9	1983-87	18-3099	18-0478	18-3256
DT9.9	1988-97	18-3000	18-0479	18-2355
DF9.9	1997-10	18-3099	18-0478	18-3256
DT14	1977-80	18-3092	-	-
DT15	1983-97	18-3099	18-0478	18-3256
DT15C	1989-97	18-3099	18-0478	-
DF15	1997-10	18-3099	18-0478	18-3256
DT16	1977-82	18-3092	-	-
DT20	1986-88	18-3096	18-0461	18-3242
DT25	1980-82	18-3092	-	-
DT25	1983-88	18-3096	18-0461	18-3242
DF25	2000-06	18-3096	18-0461	18-3242
DF25 V-Twin	2006-10	18-3096	18-0461	-
DT30	1983-87	18-3096	18-0461	18-3242
DT30	1988-97	-	18-0461	-
DF30	2000-07	18-3096	18-0461	18-3242
DT35	1980-82	18-3094	18-0459	-
DT35	1987-89	18-3096	18-0461	18-3242
DT40	1980-82	18-3094	18-0459	-
DT40	1983	18-3096	18-0460	-
DT40/DT40C	1984-98	18-3096	18-0461	18-3242
DF40	1999-09	18-3096	18-0461	18-3242
DF40	2010	18-3096	18-0461	-
PU40 (Jet)	1989-94	18-3096	18-0461	-
DT50	1982-Prior	18-3094	18-0459	-
DT50	1983-84	18-3094	18-0460	18-3243
DT50M	1980-84	18-3094	18-0460	18-3243
DF50	1999-09	18-3096	18-0461	18-3242
DF50	2010	18-3096	18-0461	-
DT55	1985-97	18-3094	18-0460	18-3243
PU55 (Jet)	1989-94	18-3094	18-0460	-
DT60	1983	18-3094	18-0460	18-3243
DT60	1984	18-3095	18-0460	-
DF60	1998-09	18-3049	-	-
DF60	2010	18-3096	18-0461	-
DT65	1982-Prior	18-3094	18-0459	-
DT65	1985-97	18-3094	18-0460	18-3243
DF70	1989-09	18-3049	-	-
DF70	2010	18-3096	18-0461	-
DT75	1983-97	18-3095	18-0459	18-3244
DF80	2009-10	18-3049	-	-
DT85	1983-00	18-3095	18-0459	18-3244
PU85 (Jet)	1989-97	18-3095	18-0459	-
DT90	1989-97	18-3049	-	18-3254
DF90	2001-08	18-3023	-	-
DF90	2009-10	18-3049	-	-
DT100	1987-01	18-3049	-	18-3254
DF100	2009-10	18-3023	-	-
DT115	1986-01	18-3023	-	18-3257
DF115	2001-10	18-3023	-	18-3258
DT140	1986-01	18-3023	-	18-3257
DF140	2002-10	18-3023	-	-
DT150	1986-03	18-3023	-	18-3253
DF150	2006-10	18-3023	18-0778	-
DT175	1987-92	18-3023	-	18-3253
DF175	2006-10	18-3023	18-0778	-
DT200	1986-00	18-3023	-	18-3253
DF200	2004-10	18-3023	18-0778	-
DT225	1990-03	18-3023	-	18-3253
DF225	2004-10	18-3035	18-0778	18-3264
DF250	2004-10	18-3035	18-0778	18-3264
DF300	2007-10	18-3035	18-0651	18-3267

Impeller

DT3.5-6 H.P. 1977-1983
Suzuki Impeller. Replaces: 17461-98501



O.E. No. 17461-98501

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183097	(18-3097)	$14.82 H

Impeller

DT9.9-15 H.P. 1986-1988
Suzuki Impeller. Replaces: 17461-93901



O.E. No. 17461-93901

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183099	(18-3099)	$16.42 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Impeller

DT9.9 H.P. 1977-1982
Suzuki Impeller. Replaces: 17461-93001



O.E. No. 17461-93001

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183092	(18-3092)	$24.60 H

Impeller

DT25-35 H.P. 1983-1989
Suzuki Impeller. Replaces: 17461-96301



O.E. No. 17461-96301

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183096	(18-3096)	$20.78 H
MP Parts	4-3096	(47-09211-3)	$21.98 L

Impeller

DT35-65 H.P. 1982-1984
Suzuki Impeller. Replaces: 17461-94700



O.E. No. 17461-94700

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183094	(18-3094)	$22.75 H

Impeller

DT50-85 H.P. 1978-1985
Suzuki Impeller. Replaces: 17461-95300



O.E. No. 17461-95300

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183095	(18-3095)	$25.43 H

Impeller

DF60-70 H.P. 1998-2009
Suzuki Impeller. Replaces: 17461-87E11



O.E. No. 17461-87E11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183049	(18-3049)	$37.25 H

Impeller

DT150-225 H.P. 1998-2003
Suzuki Impeller. Replaces: 17461-90J00



O.E. No. 17461-94520

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183023	(18-3023)	$42.40 H
MP Parts	4-3023B	(47-09213-10)	$42.98 L

Impeller

DF200-300 H.P. 2004-2010
Suzuki Impeller. Replaces: 17461-93J00



O.E. No. 17461-93J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183035	(18-3035)	$30.75 H

Water Pump Kit

DT4 H.P. 1984-1998 and DT5 H.P. 1999-2002
Suzuki Water Pump Kit.
Replaces: 17400-98652



O.E. No. 17400-98652

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183260	(18-3260)	$20.88 H

Water Pump Kit

DT8-9.9 H.P. 1988-1997
Suzuki Water Pump Kit.
Replaces: 17400-92D01



O.E. No. 17400-92D01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183255	(18-3255)	$25.78 H

Water Pump Kit

DF9.9-15 H.P. 2004-2010
Suzuki Water Pump Kit.
Replaces: 17400-93951



O.E. No. 17400-93951

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183256	(18-3256)	$19.05 H

Note: Product shipped may not match the item pictured.

Water Pump Kit



DT25-40 H.P. 1983-1998
Suzuki Water Pump Service Kit.
Replaces: 17400-96350

O.E. No. 17400-96350

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183242	(18-3242)	$24.08 H

Water Pump Kit



DT55-65 H.P. 1985-1995
Suzuki Water Pump Service Kit.
Replaces: 17400-94700

O.E. No. 17400-94700

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183243	(18-3243)	$26.15 H

Water Pump Kit



DF60-70 H.P. 1998-2009
Suzuki Water Pump Kit.
Replaces: 17400-87E03

O.E. No. 17400-87E03

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183254	(18-3254)	$43.73 H

Water Pump Kit



DT75-85 H.P. 1983-1987
Suzuki Water Pump Kit.
Replaces: 17400-95550

O.E. No. 17400-95550

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183244	(18-3244)	$27.90 H

Water Pump Kit



DT150 H.P. 1987-1996
Suzuki Water Pump Kit.
Replaces: 17400-87D11

O.E. No. 17400-87D11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183253	(18-3253)	$49.87 H

Water Pump Kit



DT115/140 H.P. 1983-2001
Suzuki Water Pump Kit.
Replaces: 17400-94611

O.E. No. 17400-94611

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183257	(18-3257)	$46.87 H

Water Pump Kit



DF90-140 H.P. 2001-2010
Suzuki Water Pump Kit.
Replaces: 17400-90J11

O.E. No. 17400-90J11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183258	(18-3258)	$44.85 H

Water Pump Kit



DT6 H.P. 1984-2002 and DT8 H.P. 1986-1997
Suzuki Water Pump Kit.
Replaces: 17400-98551

O.E. No. 17400-98551

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183259	(18-3259)	$26.93 H

Water Pump Kit



DF200-250 H.P. 2004-2007
Suzuki Water Pump Kit.
Replaces: 17400-93-J00

O.E. No. 17400-93-J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183264	(18-3264)	$33.72 H

Water Pump Kit



DF300 H.P. 2007-Current
Suzuki Water Pump Kit.
Replaces: 17400-98J00

O.E. No. 17400-98J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183267	(18-3267)	$73.32 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Water Pump Gasket

DT and DF 25-55 H.P. 1983-2007
Suzuki Water Pump Gasket.
Replaces: 17472-96301



O.E. No. 17472-96301

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180461	(18-0461)	$2.15 H

Water Pump Gasket

DT35-85 H.P. 1979-2000
Suzuki Water Pump Gasket.
Replaces: 17472-95200



O.E. No. 17472-95200

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180459	(18-0459)	$1.88 H

Water Pump Gasket

DT55-65 H.P. 1978-1997
Suzuki Water Pump Gasket.
Replaces: 17472-95310



O.E. No. 17472-95310

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180460	(18-0460)	$2.00 H

Trim Motor

40, 50 H.P. 2002-2003
Honda/Suzuki Trim Motor.
Replaces: 36120-ZV5-822



O.E. No. 38100-87J11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186793	(18-6793)	$450.50 H

Trim Motor

Suzuki Trim Motor, 3 Wire, 3 Bolt Mounting, Used On Outboard Engines (V6). Replaces: Suzuki 38100-87D00-01T, 38100-87D00-02H, 38100-87E10-0ED



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6785		$187.98 G
Sierra	186786	(18-6786)	$460.80 H

Trim Motor

Suzuki Trim Motor, 2 Wire, Lester 10846, PIC 107-146. Replaces: Suzuki 38100-87D10-OED, 38100-87E20-OED, 38100-92E00-OED



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6786		$126.98 G

Trim Motor

Suzuki Trim Motor



O.E. No. 38100-87000-0IT

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186785	(18-6785)	$349.58 G

Starter

25 H.P. 2006-2011
Starter, 4 Stoke, 9 Tooth Drive Gear



O.E. No. 31100-95J00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1177	(SHI0186)	$158.98 G

Starter

Suzuki 30/35 H.P.
12 volt, CCW, 9 Tooth, Lester 18319, PIC 104-165, Used on 30, 35, 40 H.P. Engines. Replaces: Hitachi S108-94, -112, -120, Suzuki 31100-94400, -1, -2, 31100-96310, -1



O.E. No. 31100-94400

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6432		$135.98 G

Starter

40-70 H.P. 1999-2000
Starter, 4 Stroke, 8 Tooth Drive Gear



O.E. No. 31100-87500

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1175	(SHI0181)	$226.98 G

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Starter

C55 H.P. 1989-1995, 2 Cylinder
Outboard Starter



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6412	(SHI0087)	$248.98 G

Starter

55-65 H.P. 1980-1990
Starter, All 2 Stroke, 54.4 ci Engines



O.E. No. 31100-94702

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6429	(SHI0162)	$248.98 G

Starter

75-85 H.P. 1980-2000
Starter, All 2 Stroke, 9 Tooth Drive Gear



O.E. No. 31100-95312

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1167	(SHI0089)	$260.98 G

Starter

70-300 H.P. 2004-2013
Starter, All 4 Stroke, 9 Tooth Drive Gear



O.E. No. 31100-96J01

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1179	(SHI0188)	$158.98 G

Starter

Suzuki Starter 90-115 H.P.
12 volt, CW, 9 Tooth, Lester 19701, PIC 104-369, Used on Johnson, Suzuki 90-115 H.P. Outboard Engines 2001-2011. Replaces: Hitachi S114-837, S114-837A, OMC 5033799, Suzuki 31100-90J00, J01



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1165	(SHI0165)	$262.98 G

Starter

Suzuki 115-140 H.P.
12 volt, 9 Tooth, Lester 18307, PIC 104-189, -A, Used on 115, 140 H.P. Engines. Replaces: Hitachi S114-437, -673, Suzuki 31100-94600, -01, -10



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6416	(SHI0090)	$248.98 G

Starter

150-225 H.P. 1980-2002
Starter, All 2 Stroke V6, 8 Tooth Drive Gear



O.E. No. 31100-92E00

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6417	(SHI0091)	$237.98 G

Prop Nut

Fits All 75-300 H.P.
Suzuki Prop Nut, 18 mm



O.E. No. 09141-18005

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183726	(18-3726)	$7.22 H

Seal Kit

DT55 H.P. All Years
Suzuki Seal Kit. Replaces: 25700-94700



O.E. No. 25700-94700

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188339	(18-8339)	$20.67 H

Seal Kit

DT75-85 H.P. All Years
Suzuki Seal Kit. Replaces: 25700-95500



O.E. No. 25700-95500

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188340	(18-8340)	$30.83 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Lower Unit Seal Kit

DF90/115 H.P. All Years
Suzuki Lower Unit Seal Kit.
Replaces: 25700-90J01



O.E. No. 25700-90J01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188373	(18-8373)	$31.15 H

Lower Unit Seal Kit

DF140 H.P. All Years
Suzuki Lower Unit Seal Kit.
Replaces: 25700-92J00



O.E. No. 25700-92J00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188374	(18-8374)	$32.37 H

M.E.D.S.

M.E.D.S. Scan Engines
Compatible with Select Mercury, Mercruiser, BRP, Suzuki and Yamaha Engines.



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208891	(531-0118T2)	$3,346.98 C

M.E.D.S.

M.E.D.S. Scan Engines
Compatible with Select Mercury, Mercruiser, BRP, Suzuki, M.E.F.I. 1 thru 4 and Yamaha Engines.



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208892	(531-0118T3)	$3,946.98 C

Dongle

Dongle A Universal, All Brands Except Seadoo



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180005	(18-ADC400)	$91.98 D

Diagnostics Cable

Stats Master Cable, All Brands



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180004	(18-ADC300)	$413.98 D

Diagnostics Cable

Stats Power Cable, All Brands



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180001	(18-ADC152)	$91.98 D

Diagnostics Cable

Stats USB Cable, All Brands



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180002	(18-ADC153)	$91.98 D

Diagnostics Cable

Suzuki Diagnostics Cable



Brand Name	DMI No.	Mfg. No.	Price
Sierra D	180011	(18-ADC420)	$127.98

Anode, Zinc

150-200 H.P.
Suzuki Anode, Zinc. Replaces: 55125-87D00



O.E. No. 55125-87D00

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186033	(18-6033)	$24.92 H

Note: Product shipped may not match the item pictured.

Alphabetical Index for Chrysler, Force

Alphabetical Index	Page No.	Alphabetical Index	Page No.	Alphabetical Index	Page No.
Carburetor Kits	727	Ignition Pack	727-728	Stator	728-729
Coil	729	Impeller	730-731	Thermostat	731
Fuel Pump Kits	727	Seal Kit, Lower Unit	733-734	Trigger Sensor	728-729
Head Gasket	726	Starter Motor	733	Trim Motors	731-732

Thermostat Cover Gasket


Replaces: 27-F476067



Brand Name	DMI No.	Mfg. No.	Price
Sierra	180854	(18-0854)	$1.10 H

Head Gasket

Replaces: 27-F286529-3



O.E. No. 27-F286529-3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183851	(18-3851)	$13.75 H

Head Gasket

Replaces: 27-513529




O.E. No. 27-513529

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183852	(18-3852)	$24.02 H

Head Gasket

Replaces: 27-F691529-1



O.E. No. 27-F691529-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183853	(18-3853)	$28.62 H

Head Gasket

Replaces: 27-F658529



O.E. No. 27-F658529

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183854	(18-3854)	$27.52 H

Head Gasket

Replaces: 27-820438




O.E. No. 27-820438

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183855	(18-3855)	$39.38 H

Head Gasket

Replaces: 27-F201529-1



O.E. No. 27-F201529-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183856	(18-3856)	$37.63 H

Head Gasket

Replaces: 27-824615



O.E. No. 27-824615

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183857	(18-3857)	$41.78 H

Head Gasket

Replaces: 27-F694529-1



O.E. No. 27-F694529-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183858	(18-3858)	$84.00 H

Carburetor Kit

Replaces: FK10003



O.E. No. FK10003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187033	(18-7033)	$31.30 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Carburetor Kit

Replaces: FK10004



O.E. No. FK10004

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187037	(18-7037)	$16.57 H

Needle & Seat

Replaces: F010790



O.E. No. F010790

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187057	(18-7057)	$9.27 H

Fuel Pump Kit

Replaces: F2A24747-1



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187805	(18-7805)	$6.52 H

Fuel Pump Kit

Replaces: 21-42990-A10



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187817	(18-7817)	$15.60 H

Fuel Connector

Replaces: 197787-3

O.E. No. 197787-3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188062	(18-8062)	$14.00 H

Ignition Pack

9.9 and 15 H.P. 1989-1992.
Replaces: F653301, F653301-1, FFF00071E FK653301, 300-F817974A1



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208140	(116-2379K 2)	$279.98 K

Switch Pack

40 and 50 H.P. 1992-1995.
Replaces: 510301, F510301, 300-F510301



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208047	(114-4952)	$331.98 K

Ignition Pack

55 H.P. 1980-1983, 60 H.P. 1984-1985, 85 H.P. 1982-1986, 90 H.P. 1983-1984, 115 H.P. 1983-1984 and 125 H.P. 1983-1986, 2, 3 and 4 Cylinder.
Replaces: 332-2986A3, 332-2986A4, 332-2986A5, 332-2986A7, 332-2986A8, 332-2986A9, 332-2986A10, 332-2986A17, 332-2986A21, 332-2986A22, 332-2986A23, 332-2986A24, 332-2986A25, 332-2986A27



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208160	(116-5301)	$414.98 K

Ignition Pack

80 H.P. 1977-1984, 35 and 90 H.P. 1974-1977, 100 H.P. 1979-1984, 105 H.P. 1976-1983, 120 and 135 H.P. 1976-1977, 140 H.P. 1978-1984 and 50 H.P. 1987.
Replaces: F712475, F12379, 2, 3 and 4 Cylinder



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209090	(115-3301)	$405.98 K

Ignition Pack

85 and 125 H.P. 1986-1988, 3 and 4 Cylinder.
Replaces: 332-2803A3, 332-2803A4



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208150	(116-3301)	$405.98 K

Note: Product shipped may not match the item pictured.

Ignition Pack Blue

50 H.P. 1988-1992, L Drive 1989-1985, 85 H.P. 1988-1989, 90 H.P. 1990-1994, 120 H.P. L Drive 1990-1994, 125 H.P. L Drive 1989, 125 H.P. 1988-1989 and 150 H.P. 1989-1994.
Replaces: 332-4911A2, 332-4911A5, 332-4911A8



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208165	(116-8301)	$382.98 K

Ignition Pack

50 H.P. 1984-1988.
Replaces: 18495A4, 18495A5, 18495A6, 18495A8, 18495A11, 18495A13



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208170	(116-8475)	$318.98 K

Switch Box

Replaces: 332-5772A7



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185881	(18-5881)	$262.13 H

Switch Box

Replaces: 332-7778A6



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185775	(18-5775)	$206.55 H

Switch Box

Replaces: 18495A26



O.E. No. 18495A26

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185790	(18-5790)	$344.08 H

Stator

Fits: Most 55, 60, 80, 85, 90, 115, 125 H.P. 1981-1986.
Replaces: 828301, 828301T, 854509, 854509A9, 855744A2, 855744A11



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208596	(176-5095)	$375.98 K

Stator

Fits: Most 50, 85, 90, 120, 128, 150 H.P. 1986-1992.
Replaces: 854512T, 834520T, 855746A12



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208594	(176-3095)	$318.98 K

Stator

Replaces: 398-832075A4



O.E. No. 398-832075A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185870	(18-5870)	$249.90 H

Stator

Replaces: 398-832075A6



O.E. No. 398-832075A6

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185873	(18-5873)	$408.58 H

Trigger

30, 40, 50, 65, 75, 90 H.P. 1996-2005, 3 Cylinder.
Replaces: 18495A10, 18495, A12, 18495A19, 18495A26



O.E. No. F12181-1

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208241	(134-4512-3)	$88.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Trigger Sensor

125 H.P. 1981-1986 and 90, 115 H.P. 1983-1984.
Replaces: 332-5524, 332-7778, 332-7778A1, 332-7778A3, 332-7778A5, 332-7778A6, 332-7778A9, 332-7778A12



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208270	(136-5029-4)	$321.98 K

Trigger Sensor

50 H.P. 1984-1988.
Replaces: 19052A1, 19052A2, 19052A6, 19052A8, 19052A3, 19052A5



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208274	(136-6029-3)	$320.98 K

Contact Set

Replaces: 817764A2



O.E. No. 817764A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185150	(18-5150)	$43.15 H

Universal Rectifier

Replaces: 853960T, 855747A1



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208280	(152-9209)	$42.98 K

Ignition Coil

Fits: Most 50, 55, 60, 80, 85, 90, 115, 120, 125, 150 H.P. 1987-1992



Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	209055	(182-4475R)	$107.98 K

Ignition Coil

Replaces: 339-7370A13



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185186	(18-5186)	$39.23 H

Condensor

Replaces: F12181-1



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185241	(18-5241)	$14.00 H

Voltage Regulator

Replaces: 815279-4



O.E. No. 815279-4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185744	(18-5744)	$195.38 H

Solenoid

Replaces: F177917



O.E. No. F177917

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185803	(18-5803)	$33.78 H

Solenoid

Replaces: 89-817109A2



O.E. No. 89-817109A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185834	(18-5834)	$36.27 H

Note: Product shipped may not match the item pictured.

Solenoid

Replaces: 89-803822T



O.E. No. 89-803822T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185835	(18-5835)	$39.00 H

Impeller

For: Force Outboard, 85 H.P. 1975-1989 (Except 1989 D, F, G, H Models) and 125 H.P. (A, B, C Models) 1981-1988.
Replaces: 47-803630T



O.E. No. 47-803630T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183030	(18-3030)	$16.90 H

Impeller

Replaces: 47-85089-3



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183057	(18-3057)	$18.50 H
MP Parts	4-3057B		$18.98 M

Impeller

Replaces: 47-F40065-2



O.E. No. 47-F40065-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183084	(18-3084)	$32.13 H

Impeller

Replaces: 47-89984T4



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183017	(18-3017)	$19.07 H
MP Parts	4-3017B		$17.98 L

Note: Product shipped may not match the item pictured.

Impeller

85 H.P. 1975-1989 (Except 1989 D, F, G, H Models) and 125 H.P. 1981-1988



Brand Name	DMI No.	Mfg. No.	Price
Sierra	188903	(18-8903)	$13.87 H
MP Parts	4-8903B	(47-02088-10)	$12.98 K

Impeller

Replaces: 47-43026T2



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183056	(18-3056)	$23.25 H
MP Parts	4-3056B		$23.98 M

Impeller

Replaces: 47-42038-2



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183062	(18-3062)	$19.07 H

Impeller

Replaces: 47-F84065



O.E. No. 47-F84065

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183085	(18-3085)	$37.50 H

Impeller

Replaces: 47-19453



O.E. No. 47-19453

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188900	(18-8900)	$33.88 H

©2014 Donovan Marine, Inc.

Impeller

Replaces: 47-F462065



O.E. No. 47-F462065

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188901	(18-8901)	$38.12 H

Impeller

85 H.P. 1975-1989 (Except 1989 D, F, G, H Models) and 125 H.P. 1981-1988



O.E. No. 803630 T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183030	(18-3030)	$16.90 H
MP Parts	4-3030B	(47-09220-10)	$15.98 L

Thermostat

Replaces: F664068



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183553	(18-3553)	$13.97 H

Thermostat

Replaces: F97068-2



O.E. No. F97068-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183556	(18-3556)	$21.17 H

Thermostat

Replaces: F335068



O.E. No. F335068

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183557	(18-3557)	$27.27 H

Thermostat

Replaces: F528068



O.E. No. F528068

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183559	(18-3559)	$39.73 H

Tilt and Trim Motor

Late Model Force Outboards, with 2 Wire Connection. Replaces: 820545



O.E. No. 820545

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186279	(18-6279)	$447.57 H

Tilt and Trim Motor

Heavy Duty Late Model Mercury/Force 25-50 H.P. Outboards with 2 Wire Connection and Flatblade Shaft. Replaces: 827675A1



O.E. No. 827675A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186286	(18-6286)	$286.52 H
MP Parts	4-1267	(TRM0048)	$181.98 G

Tilt and Trim Motor

Replaces: 455541



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1256	(TRM0012)	$254.98 G

Tilt and Trim Motor

Contains: All Parts Necessary, a New 3 Wire Motor/Reservoir, Drive Shaft Coupler, Oil Seal, O-Ring and Hardware. Replaces: 824051



O.E. No. 824051

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186775	(18-6775)	$547.97 H
MP Parts	4-6775	(TRM0035)	$270.98 G

Note: Product shipped may not match the item pictured.

Tilt and Trim Motor

Contains: All Parts Necessary, a New 2 Wire Motor/Reservoir, Drive Shaft Coupler, Oil Seal, O-Ring and Hardware. Replaces: 19217A1



O.E. No. 19217A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186777	(18-6777)	$393.72 H
MP Parts	4-6777	(TRM0047)	$251.98 G

Tilt and Trim Motor

85-150 H.P. 1986-1991
All 2 Stroke Inline Engines



O.E. No. F694541-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186279	(18-6279)	$447.57 H
MP Parts	4-6279	(TRM0018)	$270.98 G

Outboard Starter

Replaces: 480955



O.E. No. 480955

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185613	(18-5613)	$234.62 H
MP Parts	4-1102	(SAB0010)	$96.98 G

Outboard Starter

Replaces: 50-819968-2



O.E. No. 50-819968-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185618	(18-5618)	$234.62 H
MP Parts	4-5618	(SAB0028)	$103.98 G

Outboard Starter

Replaces: 50-820193



O.E. No. 50-820193

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185622	(18-5622)	$239.83 H
MP Parts	4-5622	(SAB0032)	$131.98 G

Outboard Starter

Replaces: 480955



O.E. No. 480955

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185644	(18-5644)	$189.50 H
MP Parts	4-1102	(SAB0010)	$96.98 G

Outboard Starter

50 H.P. 1984-1992
Replaces: 50-803903T



O.E. No. 50-803903T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186439	(18-6439)	$277.37 H
MP Parts	4-6439	(SAB0051)	$115.98 G

Outboard Starter

25-35 H.P. 1983-1984, 1989, 30 H.P. 1979 and 35 H.P. 1976-1978, 1986-1991
All 2 Stroke, 10 Tooth Drive Gear



O.E. No. 50-803900T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6441	(SAB0082)	$135.98 G

Starter Drive Assembly

Replaces: 819222



O.E. No. 819222

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185673	(18-5673)	$27.05 H

Starter Drive Assembly

Replaces: 811902



O.E. No. 811902

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185677	(18-5677)	$33.04 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Brush and Spring Kit

Replaces: F15164



O.E. No. F15164

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185697	(18-5697)	$26.58 H

Carrier Bearing


Replaces: 19291A3



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182370	(18-2370)	$164.30 H

Lower Unit Seal Kit

Replaces: 26-85090A2




O.E. No. 26-85090A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182624	(18-2624)	$65.33 H

Lower Unit Seal Kit

Replaces: 26-43035A4



O.E. No. 26-43035A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182626	(18-2626)	$59.17 H

Lower Unit Seal Kit

Replaces: 26-85090A1




O.E. No. 26-85090A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182629	(18-2629)	$79.45 H

Lower Unit Seal Kit

Replaces: FK1061



O.E. No. FK1061

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182631	(18-2631)	$50.47 H

Lower Unit Seal Kit

Replaces: FK1063-2



O.E. No. FK1063-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182632	(18-2632)	$64.18 H

Lower Unit Seal Kit

Replaces: 26-814669A2



O.E. No. 26-814669A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182635	(18-2635)	$47.58 H

Lower Unit Seal Kit

Replaces: 26-820645A1



O.E. No. 26-820645A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182636	(18-2636)	$17.50 H

Lower Unit Seal Kit

Replaces: FK1065




O.E. No. FK1065

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182638	(18-2638)	$36.98 H

Note: Product shipped may not match the item pictured.

Lower Unit Seal Kit

Replaces: FK1068




O.E. No. FK1068

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182639	(18-2639)	$44.22 H

Lower Unit Seal Kit

Replaces: FK1203-1



O.E. No. FK1203-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182640	(18-2640)	$75.77 H

Lower Unit Seal Kit

Replaces: 26-41365A3



O.E. No. 26-41365A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1826971	(18-2697-1)	$45.50 H

O-Ring

Replaces: 25-F24278



O.E. No. 25-F24278

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187169	(18-7169)	$2.65 H

O-Ring

Replaces: 25-85594



O.E. No. 25-85594

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187100	(18-7100)	$1.73 H

O-Ring

Replaces: 25-F498618



O.E. No. 25-F498618

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187120	(18-7120)	$1.13 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Carburetor Kit

Kit Contains Enough Components to Rebuild 2 Carburetors
For: All 35/40C H.P. (1 Per Engine)



O.E. No. 345-87122-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187290	(18-7290)	$150.05 H

Carburetor Kit

For: All 25/30 H.P. (1 Per Engine), All 45A2, 50C, 60C, 70A2 H.P. (2 Per Engine)



O.E. No. 346-87122-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187291	(18-7291)	$28.78 H

Carburetor Kit

For: All 4/5 H.P. (1 Per Engine)



O.E. No. 369-87122-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187765	(18-7765)	$37.07 H

Fuel Connector

Fuel Tank Connector
1/4" NPT, .508 O.D. Nissan Tank Large Inlet
Fits: All Models Mates with 18-8079 (Male)



O.E. No. 3B2-70281-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188079	(18-8079)	$13.20 H

Fuel Connector

Fits: 5-90 H.P. 2 Stroke and TLDI Models, Mates with 18-8089
Engine End, 3/8" Hose. Replaces: 345-70250-0



O.E. No. 345-70250-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188088	(18-8088)	$15.70 H

Fuel Connector

Fits: 5-90 H.P. 2 Stroke and TLDI Models, Mates with 18-8088
Engine End (Metric Threads), 5/16" Hose. Replaces: 3B2-70260-0



O.E. No. 3B2-70260-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188089	(18-8089)	$10.70 H

Fuel Filter (Inline)

Fits: 4/5 H.P. 2 Cylinder 1999 and Up, 4/5/6 H.P. 4 Stroke 1999 and Up and 8/9.9 H.P. 4 Stroke 2005 and Up
Replaces: 369022300M



O.E. No. 369022300M

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187712	(18-7712)	$19.92 H

Ignition Pack

25 H.P. 1992-1997 2 Cylinder
Replaces: 34606-2602M, 34606-2602, 346-06260-2, 3A1062402M, 3A106-22402, 3A1-06240-2, 3A1062601M, 3A106-2601, 3A1-06260-1, 3A1062602M, 3A106-2602, 3A1-06260-2



O.E. No. 34606-2601

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208196	(119-2402)	$331.98 K

Ignition Pack

45, 50 H.P. 1988-1991, 35, 40, 45, 50 H.P. 1992 and 30 H.P. 1997-1997 2 Cylinder Engines
Replaces: 303062400M, 30306-2400, 303-06240-0, 353062600M, 35306-2600, 353-06260-0, 353062602M, 353-06260-2, 35306-2602M, 362060600M, 36206-0600, 362-06060-0, 3A3062400M, 3A306-2400, 3A3-06240-0.



O.E. No. 30306-2400

Brand Name	DMI No.	Mfg. No.	Price
CDI Electronics	208195	(119-2400)	$288.98 K

Impeller

Fits: 8 H.P. (8B Models), 9.8 H.P. (9.8B Model), 8 H.P. 4 Stroke (All) and 9.8 H.P. 4 Stroke (All)
Replaces: 3B2-50021-1



O.E. No. 3B2-50021-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188920	(18-8920)	$19.53 H

Note: Product shipped may not match the item pictured.

Impeller

Fits: 25 H.P. (25C Model), 25 H.P. 4 Stroke (All A Models, B Models with White Bushing), 30 H.P. (30A Model), 30 H.P. 4 Stroke (All A Models, B Models with White Bushing), 40 H.P. 2 Cylinder (40C Model)
Replaces: 345-65021-0



O.E. No. 345-65021-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188923	(18-8923)	$25.78 H

Impeller

Fits: 60 H.P. 3 Cylinder (B and C Models), 70 H.P. 3 Cylinder (B and C Models), MD70, MD90 H.P. (TLDI), 115, 140, 90 H.P. 2 Stroke
Replaces: 3B7-65021-2



O.E. No. 3B7-65021-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188924	(18-8924)	$47.13 H

Impeller

Fits: 9.9 H.P. (All), 15 H.P. (All), 18 H.P. (All), 9.9 H.P. 4 Stroke (All B Models), 15 H.P. 4 Stroke (All B Models), 18 H.P. 4 Stroke (All)
Replaces: 334-65021-0 18-8921 350



O.E. No. 334-65021-0

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188921	(18-8921)	$21.62 H

Impeller

Fits: 40 H.P. 3 Cylinder (D Models), 40 H.P. TLDI 2 Stroke (All), 50 H.P. 3 Cylinder (D Models), 50 H.P. TLDI 2 Stroke (All), 70 H.P. TLDI 2 Stroke (All) and 90 H.P. TLDI 2 Stroke
Replaces: 3C8-65021-2



O.E. No. 3C8-65021-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188922	(18-8922)	$25.25 H

Outboard Starter

25-30 H.P. 1992-2003
All 2 Stroke, 9 Tooth Drive Gear



O.E. No. 346-76010-0M

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1184	(SHI0164)	$332.98 G

Outboard Starter

70-140 H.P. 1992-2003
All 2 Stroke, 9 Tooth Drive Gear



O.E. No. 353-76010-4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186418	(18-6418)	$480.00 H
MP Parts	4-6418	(SHI0092)	$248.98 G

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Fuel Filter

Fuel Filter



O.E. No. 16900-SR3-004

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187720	(18-7720)	$16.73 H

Fuel Filter Kit

Fuel Filter Kit



O.E. No. 16900-SA5-004

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187786	(18-7786)	$7.70 H

Oil Filter

Replaces: 15400-POH-305PE, 15400-POH-305, 15400-ZJI-004, 15400-PLM-A01PE



O.E. No. 15400-PLM-A01PE

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187909	(18-7909)	$9.88 H

Fuel Line Assembly

Complete Fuel Line Assembly with Ends, 9' Length



O.E. No. 17700-ZW9-010

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188104	(18-81042)	$57.00 H

Honda Carb Gasket

Fits: BF9.9 and BF15 H.P. 2000 and Below
Replaces: 16221-ZV-610



O.E. No. 16221-ZV-610

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182470	(18-2470)	$2.30 H

Honda Carb Gasket

Fits: BF8-BF9.9 H.P. 2001 and Up
Replaces: 16221-ZW9-000



O.E. No. 16221-ZW9-000

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182471	(18-2471)	$2.75 H

Honda Carb Gasket

Fits: BF75-BF90 H.P. 1997-2006
Replaces: 16221ZW1-000



O.E. No. 16201-881-850

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182472	(18-2472)	$5.50 H

Honda Carb Gasket

Fits: BF8 H.P. 2000 and Below and BF75-BF100 H.P. 1996 and Below
Replaces: 16201-881-850



O.E. No. 16201-881-850

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182473	(18-2473)	$2.12 H

Honda Carb Gasket

Fits: BF8, 9.9, 15, 30-90 H.P. 1997-2006
Round Bowl. Replaces: 16010-ZV4-005




O.E. No. 16010-ZV4-005

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182480	(18-2480)	$13.67 H

Honda Carb Gasket

Fits: BF8, 9.9, 15, 20 H.P. 2002 and Up
Replaces: 16010-ZW9-003



O.E. No. 16010-ZW9-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182481	(18-2481)	$11.40 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Honda Carb Gasket



Fits: BF5, 8 H.P. 2000 and Below, BF50, 75, 100 H.P. 1996 and Below
Square Bowl. Replaces: 16010-881-003

O.E. No. 16010-881-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182482	(18-2482)	$12.05 H

Honda Needle Valve



Fits: BF8-BF90 H.P. 1997 and Up
Replaces: 16011-ZV4-005

O.E. No. 16011-ZV4-005

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187047	(18-7047)	$26.47 H

Honda Needle Valve



Fits: BF5, 8, 75, 100 H.P. 1997 and Below
Replaces: 16011-881-741

O.E. No. 16011-881-741

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187048	(18-7048)	$19.45 H

Honda Carb Kit



Fits: BF9.9 H.P. 2000 and Below, BF15 H.P. 2002 and Below

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187050	(18-7050)	$42.02 H


Honda Carb Kit



Fits: BF9.9 H.P. 2001 and Up, BF15 H.P. 2003 and Up

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187051	(18-7051)	$40.65 H

Honda Carb Kit



Fits: BF75, BF90 H.P. 1997 and Up

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187052	(18-7052)	$45.22 H

Honda Carb Kit



Fits: BF75, BF100 H.P. 1996 and Below

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187053	(18-7053)	$33.62 H

Impeller Gasket



70, 75, 80, 90, 100, 115 H.P.
Impeller Gasket, Face Plate to Water Pump Gasket. Replaces: 19232-ZW1-003

O.E. No. 19232-ZWI-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182563	(18-2563)	$2.53 H

Impeller Gasket



Impeller Gasket, Water Pump Base to Face Plate Gasket. Replaces: 19234-ZW1-003

O.E. No. 19234-ZW1-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182564	(18-2564)	$2.83 H

Impeller



For: 5, 7.5, 8, 10 H.P.
Replaces: 19210-881-A01, 19210-881-A02

O.E. No. 19210-881-A01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183245	(18-3245)	$17.25 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Impeller

For: 8, 9.9, 15 H.P.
Replaces: 19210-ZV4-651



O.E. No. 19210-ZV4-651

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183247	(18-3247)	$16.42 H

Impeller

For: BF9.9, BF15 H.P., AH, AK, AM, AW Series #14ZV40M
Replaces: 19210-ZV4-013



O.E. No. 19210-ZV4-013

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183246	(18-3246)	$20.13 H

Impeller

For: 20, 25, 30 H.P.
Replaces: 19210-ZV7-003



O.E. No. 19210-ZV7-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183249	(18-3249)	$25.40 H

Impeller

35-50 H.P. 1997-2010
Replaces: 19210-ZV4-651, 19210-ZV5-003



O.E. No. 19210-ZV5-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183248	(18-3248)	$20.10 H
MP Parts	4-3248B	(47-09125-10)	$18.98 K

Impeller

For: 75-90 H.P.
Replaces: 19210-ZW1-003



O.E. No. 19210-ZW1-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183056	(18-3056)	$23.25 H
MP Parts	4-3056B		$23.98 M

Impeller

For: 75, 90, 115, 130 H.P.
Replaces: 19210-ZW1-B04



O.E. No. 19210-ZW1-B04

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183250	(18-3250)	$36.00 H

Impeller

75-130 H.P. All Models



O.E. No. 19210-ZW1-B04

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183250	(18-3250)	$36.00 H
MP Parts	4-3250B	(47-09123-10)	$34.98 L

Impeller

Fits: BF200 and BF225 H.P. 2002 and Up
Replaces: 19210-ZY3-003



O.E. No. 19210-ZY3-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183031	(18-3031)	$38.13 H

Impeller Kit

For: BF70, BF90 H.P. 1996-1998



O.E. No. 19210-ZWL-303

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183214	(18-3214)	$43.88 H
MP Parts	4-3214B		$41.98 M

Note: Product shipped may not match the item pictured.

Water Pump Service Kit



Fits: BF35/45, BF40/50 H.P.
Water Pump Service Kit.
Replaces: 06192-ZV5-003

O.E. No. 06192-ZV5-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183282	(18-3282)	$24.70 H

Water Pump Service Kit




Fits: BF75-90 H.P. 1996-1998
Water Pump Service Kit.
Replaces: 06192-ZW1-305

O.E. No. 06192-ZW1-305

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183187	(18-3187)	$43.68 H

Water Pump Service Kit



Fits: BF115/130 H.P., BF75/90 H.P. AX and Later
Water Pump Service Kit.
Replaces: 06192-ZW1-000

O.E. No. 06192-ZW1-000

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183283	(18-3283)	$52.50 H

Water Pump Service Kit



Fits: BF200/225 H.P.
Water Pump Service Kit.
Replace: 06192-ZY3-000

O.E. No. 06192-ZY3-000

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183285	(18-3285)	$59.85 H

Tilt and Trim Motor



Fits: BF35, BF40, BF45, BF50 H.P. 1992 and Up
Replaces: 36120-ZV5-821

O.E. No. 36120-ZV5-821

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186258	(18-6258)	$286.78 H

Trim Motor



Fits: DF40, DF50 (2001-08)
Replaces: 38100-87J11, 38100-87J20

O.E. No. 36120-ZV5-822

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186793	(18-6793)	$450.50 H
MP Parts	4-1296	(TRM0085)	$180.98 G

Starter



Fits: 35-50 H.P. 1997-2010
Replaces: 32100-ZV5-003

O.E. No. 32100-ZV5-003

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6433	(SHI0093)	$219.98 G

Starter



Fits: 75-130 H.P. 1997-2010
Replaces: 32100ZW1-004

O.E. No. 32100ZW1-004

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1210	(SMT0311)	$194.98 G

Starter



Fits: 75-150 H.P. 2004-2010
All 4 Stroke, 9 Tooth Drive Gear

O.E. No. 31200-ZY9A0031

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1212	(SMT0370)	$226.98 G

Alternator



200-225 H.P. 2002-2010
Honda Alternator, V6

O.E. No. 31630-ZY3-003

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1034	(AND0538)	$199.98 G

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Forward Gear Inner Bearing

Forward Gear Inner Bearing



O.E. No. 91057-ZW1-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181157	(18-1157)	$14.95 H

Carrier Bearing

Carrier Bearing



O.E. No. 91053-ZW1-003

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181158	(18-1158)	$13.08 H

Anode

BF75-BF90 H.P. 1997-1998
Zinc. Replaces: 41107-ZW1-003ZA



O.E. No. 41107-ZW1-003ZA

Brand Name	DMI No.	Mfg. No.	Price
Sierra	186011	(18-6011)	$12.05 H

Anode

BF75-BF90 H.P. 1997-1998
Magnesium. Replaces: 41107-ZW1-003ZA



O.E. No. 41107-ZW1-003ZA


Brand Name	DMI No.	Mfg. No.	Price
Sierra	186241	(18-6241)	$16.62 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

LEHR®
Environmentally friendly technology

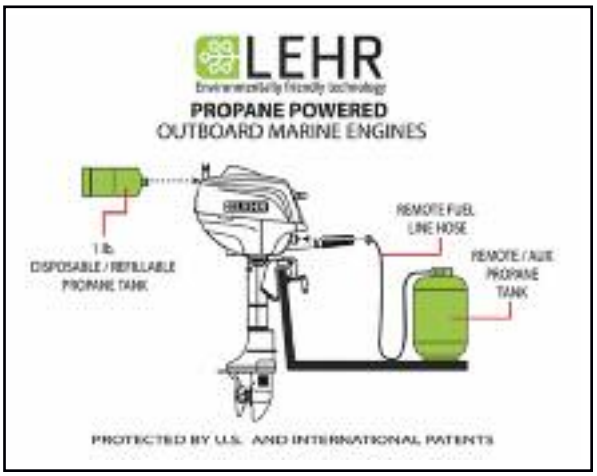

WARRANTY, REPAIRS and REPLACEMENTS

LEHR prides itself in good customer service. Each and every outboard engine is run tested at the factory and receives a final QC inspection by one or more of LEHR's quality control staff. If however, a fault should be found with a LEHR unit, please call LEHR customer service FIRST. (1-866-941-5347). This applies to ALL situations, including new not yet used units as well as those that have already been sold and used by the customer. We have found that most issues can be easily solved over the phone. For this reason, all sales persons should also make the customer aware that if they have any questions, or encounter any problems, there is a LEHR representative ready to help them by calling the toll free number on the tiller arm decal 7 days per week 8 a.m. to 8 p.m. Pacific Standard Time.

Complete Engine 2.5 H.P.



- Propane outboard
- 2.5 H.P.
- Shaft 15".
- Black.
- Manual start tiller.
- Weight: 37.4 lbs.

Order No.	Mfg. No. / Description	Price
468102	(LP2.5S)	$1,259.99 D

Complete Engine 5.0 H.P.





- Propane outboard.
- 5.0 H.P.
- Shaft 15".
- Black.
- Manual start tiller.
- Weight: 48 lbs.

Order No.	Mfg. No. / Description	Price
468104	(LP5.0S)	$2,039.99 D

- Propane outboard.
- 5.0 H.P.
- Shaft 20".
- Black.
- Manual start tiller.
- Weight: 52 lbs.

Order No.	Mfg. No. / Description	Price
468106	(LP5.0L)	$2,075.99 D

Complete Engine 9.9 H.P.



- Propane outboard
- 9.9 H.P.
- Black.
- Manual start tiller.

Order No.	Mfg. No. / Description	Price
468108	(LP9.9S) Shaft 15", Weight: 88 lbs.	$3,119.99 D
468110	(LP9.9L) Shaft 20", Weight: 92 lbs.	$3,155.99 D

- Electric start tiller.

Order No.	Mfg. No. / Description	Price
468112	(LP9.9ES) Shaft 15", Weight: 98 lbs.	$3,599.99 D
468113	(LP9.9ES-IB) Shaft 15", Weight: 100 lbs., With Built-in Battery	$3,959.98 D
468114	(LP9.9EL) Shaft 20", Weight: 102 lbs.	$3,635.99 D
468115	(LP9.9EL-IB) Shaft 20", Weight: 104 lbs., With Built-in Battery	$3,995.98 D

- Electric start remote.

Order No.	Mfg. No. / Description	Price
468116	(LP9.9ERS) Shaft 15", Weight: 96 lbs.	$3,563.99 D
468118	(LP9.9ERL) Shaft 20", Weight: 100 lbs.	$3,599.99 D

©2014 Donovan Marine, Inc.

Complete Engine 15 H.P.

- Propane outboard
- 15 H.P.
- Black.
- Manual start tiller.

Order No.	Mfg. No. / Description	Price
468119	(LP15S) Shaft 15", Weight: 110 lbs.	$3,515.98 D
468120	(LP15L) Shaft 20", Weight: 114 lbs.	$3,551.98 D

- Electric start tiller.

Order No.	Mfg. No. / Description	Price
468122	(LP15ES) Shaft 15", Weight: 120 lbs.	$3,995.98 D
468124	(LP15ES-IB) Shaft 15", Weight: 122 lbs., With Built-in Battery	$4,355.98 D
468126	(LP15EL) Shaft 20", Weight: 124 lbs.	$4,031.98 D
468128	(LP15EL-IB) Shaft 20", Weight: 126 lbs., With Built-in Battery	$4,391.98 D

- Electric start remote.

Order No.	Mfg. No. / Description	Price
468130	(LP15ERS) Shaft 15", Weight: 118 lbs.	$3,959.98 D
468132	(LP15ERL) Shaft 20", Weight: 122 lbs.	$3,995.98 D



Water Pump Repair Kit



Water Pump Repair Kit, 2.5 H.P.

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468172	(LPW2.5)	$29.99 D

Water Pump Repair Kit



Water Pump Repair Kit, 5.0 H.P.

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468176	(LPW5.0)	$49.99 D

Remote Fill Hose



Propane Connect Hose, Length 10'

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468144	(LPH10)	$34.99 D

Remote Fill Hose



Propane Connect Hose, Length 4'

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468148	(LPH4)	$29.99 D

Brass Remote Connector Plug



Brass Remote Connector Plug

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468140	(LPCP10)	$9.99 D

Safety Stop Switch Tether



Safety Stop Switch Tether

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468152	(LPK10)	$13.99 D

Rubber Propane Tank Plug



Rubber Propane Tank Plug

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468164	(LPTP10)	$29.99 D

Propeller



Propeller, 7-1/4" x 6", 2.5 H.P.

Order No.	Mfg. No. / Description	Price
468180	(LPP2.5) 7-1/4" x 6", 2.5 HP	$76.99 D
468184	(LPP5.0) 7-1/2" x 7", 5.0 HP	$79.99 D

Anode



Zinc Anode

Brand Name	DMI No.	Mfg. No.	Price
Lehr Inc.	468168	(OB 072.3-051)	$7.99 D


Note: Product shipped may not match the item pictured.

Alphabetical Index for OMC

Alphabetical Index	Page No.	Alphabetical Index	Page No.	Alphabetical Index	Page No.
Alternator	757	Fuel Pump	751	Shift Assist Module	758
Ball Gear	760	Gasket	748-749	Solenoid	756
Carburetor Repair Kits	750	Gearcase Seal Kit	757-758	Starter Motor	755-756
Drive Parts	759-763	Gimbal Bearing	759	Temp Sender	754
Elbow	747	Impeller	752-753	Transom Seal	761
Exhaust Bellow	746	Impeller Housing	753	Trim Motor	755
Exhaust Flapper	746	Model Designation Chart	744	Tune Up Kit	751-752
Exhaust Manifold	747	Outdrive Gasket	757-758		

Model Number Designation - Sterndrives

Model Years 1986-1993

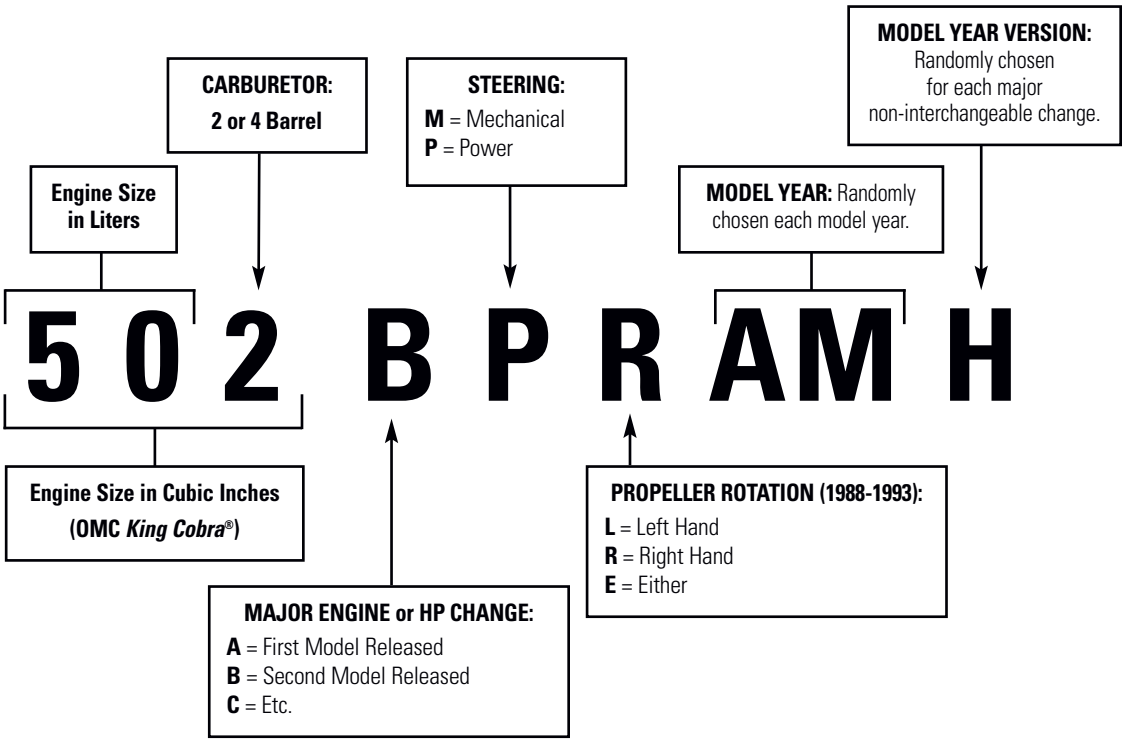

MODEL YEAR DESIGNATION	SALES YEAR
KWB, WXS	1986
ARJ, ARY, FTC, SRC, SRY	1987
GDE, GDP	1988
MED, MEF	1989
PWC, PWR, PWS	1990
RGD, RGF	1991
AMH, AMK	1992
JVB, JVN	1993

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

OMC Stern Drives 1964 – 1993

Model Number	Engine Design	Year
CU-12M / CUE-12M	110 HP	1964
CU-13E / CUE-13E	120 HP	1965
CU-14D / CUE-14D	120 HP	1966
CU-15S / CUE-15S	120 HP	1967
CU-16C / CUE-16C	120 HP	1967-68
CUFM-19E	120 HP	1970
CUFM-19EX	120 HP	1971
CUFM-20D	120 HP	1971
CUFM-69B / CUFM-69M	120 HP	1969
CUFR-19E	120 HP	1970
CUFR-19EX	120 HP	1971
CUFR-20D	120 HP	1971
CUFR-69B / CUFR-69M	120 HP	1969
CUTM-19E	120 HP	1970
CUTM-19EX	120 HP	1971
CUTM-20D	120 HP	1971
CUTM-69B / CUTM-69M	120 HP	1969
CUTR-19E	120 HP	1970
CUTR-19EX	120 HP	1969-70
CUTR-20D	120 HP	1969-70
CUTR-69B / CUTR-69M	120 HP	1969
DU-11A / DUE-11A	88 HP	1964
DU-12M / DUE-12M	90 HP	1965
DU-13B / DUE-13B	90 HP	1966
DU-14D / DUE-14D	90 HP	1967
DU-15S / DUE-15S	90 HP	1967-68
DU-10S	80 HP	1962
DU-11C / DU-11R	88 HP	1963-64
GUFM-10C / GUFM-10S	120 HP	1972
GUFP-10C	120 HP	1972
GUFR-10C / GUFR-10S	120 HP	1972
HU-12B / HUE-12B	150 HP	1964
HU-12M / HUE-12M	150 HP	1964
HU-13E / HUE-13E	150 HP	1965
HU-14D / HUE-14D	150 HP	1966
HU-15S / HUE-15S	155 HP	1967
HU-16C / HUE-16C	155 HP	1967-68
HU-13EM	150 HP	1965
HUFM-19E	155 HP	1970
HUFM-19EX	155 HP	1971
HUFM-20D	155 HP	1971
HUFM-21C / HUFM-21S	155 HP	1972
HUFM-69M	155 HP	1969
HUFP-21C / HUFP-21S	155 HP	1972
HUFR-19E	155 HP	1970
HUFR-19EB	155 HP	1970
HUFR-19EX	155 HP	1971
HUFR-20D	155 HP	1971
HUFR-21C / HUFR-21S	155 HP	1972
HUFR-69M	155 HP	1969
HUTM-19E	155 HP	1970
HUTM-19EX	155 HP	1971
HUTM-20D	155 HP	1971
HUTM-21C / HUTM-21S	155 HP	1972
HUTM-69M	155 HP	1969
HUTP-21C / HUTP-21S	155 HP	1972
HUTR-19E	155 HP	1970
HUTR-19EX	155 HP	1971
HUTR-20D	155 HP	1971
HUTR-21C / HUTR-21S	155 HP	1972
HUTR-69M	155 HP	1969
JUFM-10C / JUFM-10S	165 HP	1972
JUFP-10C / JUFP-10S	165 HP	1972
JUFR-10C / JUFR-10S	165 HP	1972
KU-15S / KUE-15S	185 HP	1967
KU-16C / KUE-16C	185 HP	1968
LUFM-10C / LUFM-10S	100 HP	1972
LUFP-10C	100 HP	1972
LUFR-10C / LUFR-10S	100 HP	1972
NU-10S / NUE-10S	80 HP	1968-69
NUFM-12A	90 HP	1970
NUFM-12AX	90 HP	1971
NUFM-13M	90 HP	1971
NUFM-69R	90 HP	1969
NUFR-12A	90 HP	1970
NUFR-12AX	90 HP	1971
NUFR-13M	90 HP	1971
NUFR-69R	90 HP	1969
SU-12M / SUE-12M	110 HP	1963-64
SU-13E / SUE-13E	120 HP	1965
TU-14D / TUE-14D	200 HP	1966
TU-15S / TUE-15S	200 HP	1967
TU-16C / TUE-16C	200 HP	1967-68
TU-17R / TUE-17R	210 HP	1968
TUFM-19E	210 HP	1970
TUFM-19EX	215 HP	1971
TUFM-20D	215 HP	1971
TUFM-21C / TUFM-21S	225 HP	1972
TUFM-69B / TUFM-69M	210 HP	1969-70
TUFR-19E	210 HP	1970
TUFR-19EB	210 HP	1970
TUFR-19EX	215 HP	1971
TUFR-20D	215 HP	1971
TUFR-69B	210 HP	1969-70
TUFR-69M	210 HP	1969
VUFM-10C / VUFM-10S	120 HP	1972
VUFP-10C	120 HP	1972
VUFR-10C / VUFR-10S	120 HP	1972
WUFM-10C	165 HP	1972
WUFP-10C	165 HP	1972
XUFM-20C / XUFM-20S	235 HP	1971
XUFM-21A / XUFM-21R	245 HP	1972

Note: Product shipped may not match the item pictured.

Exhaust Seal



Exhaust Flap Seal, Most Engines

O.E. No. 765166

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765590	(765590)	$25.99 H

Exhaust Seal



Fits: OMC Stern Drive 2.3-7.5L 1986-1988

O.E. No. 984467

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778183	(778183)	$30.99 H

Exhaust Bellows



Fits: OMC Stern Drive and Volvo Penta 2.3-7.5L 1989-1993
All Clutch Dog Cobra Models. Replaces: 914036

O.E. No. 914036

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778047	(778047)	$43.99 L
Sierra	182764	(18-2764)	$35.32 H

Exhaust Bellows



OMC/Volvo Exhaust Bellows
For: SX Drives, Includes: 302, 432, 434, 502, 572, 584, 744 1994-1998, Uses: 18-7314 Clamp, All Cone Clutch Models (1994 and Up), Not Using Exhaust Boot. Replaces: 3850426

O.E. No. 3850426

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181074	(18-1074)	$41.38 H

U-Joint Bellows



OMC Stern Drive U-Joint Bellows
All Clutch Dog Cobra Models. Replaces: 983973, 987467, 3854127

O.E. No. 983973

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778057	(778057)	$59.99 H
Sierra	182765	(18-2765)	$48.78 H

Exhaust Boot



Fits: 5.7L and 7.5L 1986 and Later
Replaces: 912374

O.E. No. 912374

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778085	(778085)	$26.99 H

Exhaust Hose



Fits: OMC Cobra
Exhaust Manifold to Pipe, 3.5" to 4.5"

O.E. No. 912374

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778260	(778260)	$36.99 H
Sierra	182745	(18-2745)	$32.33 H

Exhaust Hose



Fits: OMC Stern Drive and Volvo Penta 3.0-5.8L 1993-1998
For: 3.0L GL, GS, GI, GLM, GLP, GSM, GSP, GS, 4.3L GL, GS, GI, GXI, OSI, 5.0L FL, FI, GL, GXI, OSI, 5.7L GL, GI, GXI, OSI, OSXI, GIL, GXIL, 5.8L FL, FI, FSI, 7.4L GL, GI, GSI, 8.2L GSI.
Replaces: 3852741, 3863450

O.E. No. 3852741

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778067	(778067)	$30.99 H

Exhaust Hose



Fits: OMC Stern Drive and Volvo Penta 4.3-8.2L 1994-1998
Replaces: 3852696

O.E. No. 3852696

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778072	(778072)	$39.99 H

Exhaust Hose



Fits: OMC Stern Drive and Volvo Penta 5.0-7.4L 1994-1998
Replaces: 3852742

O.E. No. 3852742

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778066	(778066)	$34.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Manifold



OMC Manifold, Port and Starboard, For: GM Small Block V8 305-350 ci., Use with: Exhaust Manifold Gasket: 18-2949, Mounting Kit: 18-8502
Replaces: 3852374, 3857723

O.E. No. 3852374

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181986	(18-1986-1)	$276.10 H

Manifold



OMC/Cobra Manifold, Fits: 181 CID Model 140 and 3.0L 1973-1989, Use with: Exhaust Elbow Gasket: 18-1204
Replaces: 984054

O.E. No. 984054

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181901	(18-1901)	$761.20 H

Riser



OMC Manifold Center Riser, 4" Outlet 7° Fits: Many GM and Ford Center Rise Manifolds, Use with: Manifold: 18-1986, Riser Gasket: 18-0943, Mounting Kit: 18-8507
Replaces: OMC 913784, 3855270, 3850456, 3857944, Volvo 3855270-9, 3857944-7

O.E. No. 3857944-7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181909	(18-1909-1)	$248.62 H

Elbow



Fits: OMC Stern Drive 3.0-5.8L 1980-1990
Use with Manifold: 18-1902, 18-1903, Elbow Gasket: 18-0943, Mounting Kit: 18-8534

O.E. No. 909863

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778034	(778034)	$257.99 H

Elbow and Plug



Fits: OMC Stern Drive 3.0L 1994

O.E. No. 3850799

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778037	(778037)	$209.14 H

Plug Off Cap



OMC/Cobra Plug Off Cap
I.D. 1-1/4", For: V8 Model Stern Drives and Inboards, 1977 to Present. Replaces: 909830

O.E. No. 909830

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180550	(18-0550)	$9.00 H

Plug Off Cap



OMC Stern Drive Plug Off Cap
I.D. 1", For V8 Model Stern Drives and Inboards, 1977 to Present. Replaces: 909829

O.E. No. 909829

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180549	(18-0549)	$10.18 H

Exhaust Flapper Bushing



Fits: OMC Stern Drive 3.0-8.2L 1996-1998
Exhaust Flapper Bushing, Exhaust Pipe, Thicker Base

O.E. No. 3855517

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765626	(765626)	$1.99 L

Exhaust Flapper Bushing



Fits: OMC Stern Drive 3.0-7.4L 1994-1995
Exhaust Flapper Bushing, Exhaust Pipe, Thinner Base

O.E. No. 3853566

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765589	(765589)	$1.99 L

O-Ring



Fits: OMC, Johnson/Evinrude 90-260 H.P. 1968-1985
O-Ring, Upper Gearcase and Intermediate, 5 Pack

O.E. No. 308626

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B777523	(777523)	$2.99 L

Pictures May Not Match Engine Description

O-Ring



Fits: OMC Stern Drives 2.3-8.2L 1968-1993
O-Ring, Various Uses, 3.50 x 1.350

O.E. No. 911686

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778095	(778095)	$3.99 L

O-Ring



Fits: OMC Stern Drive and Mercury Marine 3.0-8.2L 1994-1998
O-Ring, Various Uses, .862 x .103

O.E. No. 3852565

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778060	(778060)	$1.99 L

O-Ring



Fits: OMC Stern Drives 4.3-8.2L 1996-1998
O-Ring

O.E. No. 955981

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778227	(778227)	$2.99 L

Oil Seal



Fits: OMC, Johnson/Evinrude and OMC Stern Drives 2.3-7.4L 100-250 H.P. 1973-1985
Oil Seal, Intermediate Housing, 2 Required.
Replaces: 313992

O.E. No. 764337

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B777914	(777914)	$15.99 L

Oil Seal



Fits: OMC Stern Drives 2.3-8.2L 1968-1993
Oil Seal, Various Uses, Shaft Diameter 1.375

O.E. No. 3852548

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778091	(778091)	$17.99 H

Exhaust Pipe Seal




Fits: 2.3-7.5L 1986-1989

O.E. No. 911831

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778277	(778277)	$12.99 H

Exhaust Elbow Gasket



Fits: OMC Stern Drive 3.0-8.2L 1978-1990
Used with: Riser: 18-1909.
Replaces: 909786, 3850496

O.E. No. 909786

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778055	(778055)	$6.99 L

Exhaust Elbow Gasket



Fits: OMC Stern Drive and Volvo Penta 3.0L 1994-1998
For: 3.0L GS, GL, GLM, GLP, GSM, GSP.
Replaces: 3850495

O.E. No. 3850495

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778045	(778045)	$9.99 L

Exhaust Elbow Gasket



OMC Exhaust Elbow Gasket
Replaces: 910113

O.E. No. 910113

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180673	(18-0673)	$2.78 H

Exhaust Elbow Gasket



OMC Stern Drive Exhaust Elbow Gasket
Replaces: 912477

O.E. No. 912477

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180430	(18-0430)	$7.37 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Carburetor Manifold Gasket



OMC, Cobra
Carburetor Base Gasket, 1/4"

O.E. No. 909758

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778087	(778087)	$5.02 L
Sierra	180434	(18-0434)	$5.62 H

Riser Gasket



Fits: OMC Stern Drive and Volvo Penta
Riser Gasket

O.E. No. 351325

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765602	(765602)	$9.99 L

Exhaust Manifold Gasket



For: 460 CID. Replaces: 118-614

O.E. No. 912405

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778105	(778105)	$14.99 L
Sierra	180956	(18-0956)	$11.40 H

Exhaust Manifold Gasket



Exhaust Manifold Gasket

O.E. No. 3852472

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778127	(778127)	$18.99 L
Sierra	180418	(18-0418)	$13.23 H

Gasket



Fits: OMC Stern Drives 5.8L 1994-1996

O.E. No. 3853761

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778157	(778157)	$1.61 L

Push Rod Gasket



Fits: OMC Stern Drives 3.0L
1994-1998
Push Rod Gasket

O.E. No. 3852693

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778102	(778102)	$36.99 H

Exhaust Gasket



Fits: OMC Stern Drive 4.3L 1994-1998

O.E. No. 3853412

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778257	(778257)	$9.99 L

Exhaust Manifold Gasket



Fits: OMC Stern Drives
2.5-3.0L 1972-1985
Replaces: 27-53354

O.E. No. 908079

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778121	(778121)	$12.99 L

Exhaust Manifold Gasket



For: OMC 5.0L and 5.8L 1993-1996
Replaces: 3853742, 3852455, 908717, 916262

O.E. No. 3852455

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778151	(778151)	$11.99 H
Sierra	180183	(18-0183)	$7.03 H

Manifold Head Gasket



Fits: OMC Cobra 3.0L 1994,
Mercury Marine and Volvo

O.E. No. 3853256

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778300	(778300)	$13.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Rochester Carburetor Kits

Model	Year	DMI #	O.E SysteMatched	Sierra
2.3L (Ford)	1987-1989	B778010	984487	18-7086
140 (3.0L) 1990 PWC 3.0	1973-1989	B778012	982384	18-7070
165	1972-1976	B778012	982384	18-7070
185	1978-1981	B778010	984487	18-7086
200 5.0L and 3.8L (2 BBL)	1979-1985	B778010	984487	18-7086
4.3L (2 BBL)	1986-1989	B778010	984487	18-7086
4.3L (4 BBL)	1986-1989	B778011	983864	18-7018
210	1969	B778011	983864	18-7018
230 5.0L (4 BBL) (GM)	1979-1989	B778011	983864	18-7018
260 5.7L/4.3L (4 BBL)	1979-1989	B778011	983864	18-7018
290 Jet	1974-1975	B778011	983864	18-7018
305 2V Inboard	1977-1979	B778010	984487	18-7086
305/350 4V Inboard	1977-1983	B778011	983864	18-7018

Holley Carburetor Kits

Model	Year	DMI #	O.E SysteMatched	Sierra
2.3L	1990	B778118	987485	18-7246
3.0L except "PWC"	1991-1993	B778118	987485	18-7246
3.0L H.O.	1991-1993	B778118	987485	18-7246
4.3L (2 BBL)	1991-1993	B778108	3854347	18-7238

Carburetor Repair Kit

Carburetor Repair Kit, Carburetor Rebuild Kit, 2 Barrel



O.E. No. 984487

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778010	(778010)	$45.99 L
Sierra	187086	(18-7086)	$36.95 H

Carburetor Repair Kit

OMC I/O Carburetor Repair Kit
Replaces: 987313



O.E. No. 987313

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187242	(18-7242)	$95.33 H

Carburetor Repair Kit

OMC I/O Carburetor Repair Kit
Replaces: 987317



O.E. No. 987317

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187244	(18-7244)	$68.70 H

Carburetor Repair Kit

Carburetor Repair Kit, OMC 3.0L, 2 Barrel



O.E. No. 987485

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778118	(778118)	$65.96 L
Sierra	187246	(18-7246)	$52.62 H

Carburetor Repair Kit

Carburetor Repair Kit, Carburetor Rebuild Kit, 4 Barrel Rodchester, 5.0, 5.7. Replaces: 383918



O.E. No. 983864

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778011	(778011)	$62.99 L
Sierra	187095	(18-7095)	$24.58 H

Carburetor Repair Kit

Carburetor Repair Kit, Carburetor Rebuild Kit, 2 Barrel. Replaces: 383615



O.E. No. 982384

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778012	(778012)	$33.99 L
Sierra	187070	(18-7070)	$26.37 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Fuel Pump

Replaces: OMC 982997



O.E. No. 982997

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778131	(778131)	$247.99 H
Sierra	187289	(18-7289)	$174.83 H

Fuel Pump

Fits: OMC Stern Drives 5.7L and GM 305, 307, 350, 400 V8, 5.25-6.5L PSI 1996-1997



O.E. No. 3855276

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778122	(778122)	$209.99 H
Sierra	187268	(18-7268)	$175.75 H

Electric Fuel Pump

Electric Fuel Pump



O.E. No. 3858261

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778147	(778147)	$239.99 H
Sierra	187326	(18-7326)	$240.73 H

Electric Fuel Pump

OMC, Volvo



O.E. No. 3857650

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778146	(778146)	$249.98 H
Sierra	187330	(18-7330)	$235.78 H

Fuel Filter

Fuel Filter #61038, with O-Ring



O.E. No. 982230

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778028	(778028)	$16.99 L
Sierra	187862	(18-7862)	$14.10 H

Distributor Cap Assembly

Distributor Cap Assembly, Prestolite



O.E. No. 3853815

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778234	(778234)	$35.99 L
Sierra	185352	(18-5352)	$22.33 H

Tune Up Kit

Fits: OMC Stern Drives 2.5L 1981



O.E. No. 987926

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778178	(778178)	$26.99 L
Sierra	185260	(18-5260)	$22.38 H

Tune Up Kit

Delco 4 and 6 Cylinder



O.E. No. 172527

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778245	(778245)	$46.99 L
Sierra	185250	(18-5250)	$23.22 H

Tune Up Kit



Contains:

18-5305	Contact Set	O.E. No. 243799, 1306169
18-5349	Condenser	O.E. No. 243460, 841262
18-5428	Rotor	O.E. No. 243903

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185284	(18-5284)	$34.42 H

Tune Up Kit

OMC Tune Up Kit, Mallory 8 Cylinder, Tall Cap



Contains:

18-5314	Contact Set	O.E. No. 391-5090
18-5338	Condenser	O.E. No. 391-5092
18-5404-1	Rotor	O.E. No. 391-7057

O.E. No. 173619

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185251	(18-5251)	$28.60 H

Note: Product shipped may not match the item pictured.

Ignition Module



P-Pack Optical

O.E. No. 586650

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778278	(778278)	$429.99 L

Ignition Coil



Ignition Coil, 12 volt, External Resistor and Breaker Points

O.E. No. 3852217

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778004	(778004)	$59.99 L

Rotor



Fits: 5.0L, 5.7L and 5.8L Cobra Models 1994-1997

O.E. No. 3853801

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778249	(778249)	$12.99 L
Sierra	185403	(18-5403)	$8.97 H

Spark Plug Wire Set



OMC Spark Plug Wire Kit
For: OMC Stern Drives/Cobra Stern Drives.
Replaces: OMC 503749

O.E. No. 503749

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188814	(18-8814-1)	$48.22 H

OMC I/O Water Pump Chart

IMPELLER ONLY				WATER PUMP KIT				IMPELLER HOUSING		
MODEL	YEAR	DMI #	O.E. OMC	SIERRA	DMI #	O.E. OMC	SIERRA	DMI #	O.E. OMC	SIERRA
100/260 SD	1968-1986	B777826	777130	18-3086	B778061	983218	18-3386			
2.5L/4.3L/5.0L	All Clutch	B778039	777128	18-3058	B765582	984461		B778042	984744	18-3206
2.3L	1987-1990							B778042	984744	18-3206
5.7L LE	1990-1991	B778039	777128	18-3058						

Impeller



Cobra 2.3L - Thru, 1965-1985
Impeller, Upper Housing. Replaces: 379475, 777130

O.E. No. 777130

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B777826	(777826)	$38.99 L
Sierra	183086	(18-3086)	$31.63 H

Impeller



OMC Stern Drive, Various Engines, Shaft Drive with 10 Vanes

O.E. No. 983895

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3058B	(47-02373-10)	$17.98 J
Sierra	183058	(18-3058)	$18.00 H

Impeller



OMC/Cobra Impeller
Replaces: 983895

O.E. No. 983895

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778039	(778039)	$23.99 L
Sierra	183058	(18-3058)	$18.00 H

Impeller and O-Ring



Fits: OMC and Volvo Penta Stern Drive

O.E. No. 3862567

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778184	(778184)	$53.99 H
Sierra	183276	(18-3276)	$44.62 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Impeller Housing Seal

Fits: OMC Stern Drive 2.3-7.5L 1986-1993
Replaces: 911704



O.E. No. 911704

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778071	(778071)	$7.99 L
Sierra	182541	(18-2541)	$5.005.70 H

Water Pump Repair Kit

OMC Water Pump Repair Kit
Contains:

18-3002	Impeller, Qty. 1	O.E. No. 375638
18-3103	Impeller Plate, Qty. 1	O.E. No. 303069



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183202	(18-3202)	$22.22 H

Water Pump Repair Kit

Fits: OMC Stern Drive, OMC Cobra 2.3-7.5L 1986-1993
Water Pump Repair Kit, Upper Housing



O.E. No. 984461

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765582	(765582)	$53.99 H
Sierra	183212	(18-3212)	$51.42 H

Water Pump Repair Kit

1964-1986, Except Cobra
Replaces: 983218



O.E. No. 983218

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778061	(778061)	$96.99 H
Sierra	183386	(18-3386)	$94.62 H

Water Pump Kit without Housing

Contains:

18-3059	Impeller, Qty. 1	O.E. No. 397131, 435821
18-2557	Imp. Gasket, Qty. 1	O.E. No. 324701, 338484
18-3299	Impeller Key, Qty. 1	O.E. No. 331107
18-7158	O-Ring, Qty. 1	O.E. No. 310967, 310585
18-3135	S/S Screw, Qty. 2	O.E. No. 306643
18-2703	Grommet, Qty. 1	O.E. No. 314008
18-2704	Grommet, Qty. 1	O.E. No. 320943



O.E. No. 395060

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183390	(18-3390)	$66.52 H

Note: Product shipped may not match the item pictured.

Impeller Kit

Impeller with Gasket Spline



O.E. No. 3862281

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765623	(765623)	$55.99 H
MP Parts	4-3277		$41.98 M
Sierra	185277	(18-5277)	$54.98 H

Water Pump Repair Kit

1964-1986, Except Cobra
Contains:

18-7135	O-Ring, Qty. 1	O.E. No. 310584
18-3141	Plate, Qty. 1	O.E. No. 313176
18-7129	O-Ring, Qty. 1	O.E. No. 314491
18-3111	Rubber Seal, Qty. 1	O.E. No. 907774
18-3086	Impeller, Qty. 1	O.E. No. 379475
18-7158	O-Ring, Qty. 1	O.E. No. 310585, 310967



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183286	(18-3286)	$59.17 H

Water Pump Repair Kit

1964-1986, Except Cobra
Replaces: 983218



O.E. No. 983218

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778061	(778061)	$96.99 H
Sierra	183386	(18-3386)	$94.62 H

Water Pump Kit without Housing

Contains:

18-2703	Grommet, Qty. 1	O.E. No. 314008
18-3053	Impeller, Qty. 1	O.E. No. 396725
18-2705	Seal, Qty. 1	O.E. No. 315748
18-3133	S/S Bolt, Qty. 4	O.E. No. 908158
18-7174	O-Ring, Qty. 1	O.E. No. 326649
18-7481	O-Ring, Qty. 1	O.E. No. 324981
18-2709	Wear Plate Gasket, Qty. 1	O.E. No. 336530
18-3126	Wear Plate, Qty. 1	O.E. No. 321940
18-3127	Impeller Plate	



O.E. No. 432956

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183387	(18-3387)	$57.18 H

Complete Water Pump Kit

All OMC Cobra Drives, 2.3L 1987-1990, 2.5L 1986, 3.0L 1986-1993, 4.3L 1986-1993, 4.6L 1989, 5.0L 1986-1993, 5.7L 1986-1993, 5.8L 1989-1993, 7.5L 1987-1989
Complete Water Pump Kit with Housing



O.E. No. 984461

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3348	(46-03638-3)	$51.98 M
Sierra	183348	(18-3348)	$52.98 H

Impeller Housing



Fits: OMC Cobra 2.3-7.5L 1987-1989

O.E. No. 984745

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778280	(778280)	$35.99 H

Water Pump Housing



Fits: OMC Stern Drive Cobra Drives 2.3-7.5L 1988-1993
Replaces: 984744

O.E. No. 984744

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778042	(778042)	$30.99 H
Sierra	183206	(18-3206)	$29.55 H

Thermostat



Thermostat 160°

O.E. No. 383307

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778056	(778056)	$23.99 L
Sierra	183554	(18-3554)	$18.85 H

Thermostat



Thermostat 160°

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183558	(18-3558)	$17.23 H

Thermostat Kit



Fits: 2.5L and 3.0L 1982-1988

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183670	(18-3670)	$19.27 H

Thermostat Kit



Thermostat 160°

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183653	(18-3653)	$21.67 H

Thermostat Gasket




Fits: OMC, Johnson/Evinrude 5 H.P. and OMC Stern Drive 2.3-8.2L 1987-1993
Thermostat Gasket

O.E. No. 312797

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765604	(765604)	$3.99 L
Sierra	182917	(18-2917)	$2.00 H

Thermostat Gasket



Thermostat Gasket, Thermostat Housing

O.E. No. 314809

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B777906	(777906)	$2.99 L

Temperature Sender



Fits: OMC, Johnson/Evinrude 2.3-7.4L and 100-250 H.P. 1968-1993
240° DS 1/2-14 10-32 Stud

O.E. No. 171960

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778412	(778412)	$20.99 H
Sierra	185898	(18-5898)	$17.42 H

Water Inlet Hose



Fits: OMC Stern Drive 2.3-7.5L 1986-1993

O.E. No. 911830

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778188	(778188)	$22.99 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Trim and Tilt Motor

Trim and Tilt Motor, Fits: Stern Drive, Except 2.5L and 3.0L, 3 Wire

Replaces: OMC 982058, 982706, Prestolite EVD 4001, EVD4002 (All Models Except 2.5L, 3.0L 1978-1985



O.E. No. 982706

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778018	(778018)	$285.99 H
MP Parts	4-1258	(TRM0006)	$110.98 G
Sierra	186755	(18-6755)	$222.27 H

Trim and Tilt Motor

Trim and Tilt Motor, Fits: All OMC Stern Drive Models, 1963-1977

Replaces: 382138 Prestolite ETK 4102, ETK 4001, ETK 4101 (All Models 1963-1977)



O.E. No. 382138

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778017	(778017)	$289.99 L
MP Parts	4-2284	(TRM0007)	$103.98 G
Sierra	186754	(18-6754)	$222.27 H

Trim and Tilt Motor

Trim and Tilt Motor, 1990 and 1994 King Cobra Trim System. Replaces: 986280, 3853945



O.E. No. 986280

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778026	(778026)	$299.99 H
MP Parts	4-6779	(TRM0030)	$123.98 G
Sierra	186779	(18-6779)	$271.97 H

Trim and Tilt Motor

Trim and Tilt Motor, 1986-1987, Most Models 3 Wire, Male Spade, Cobra Drive



O.E. No. 984356

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1277	(TRM0058)	$203.98 G

Trim and Tilt Motor

Trim and Tilt Motor, 2001-Thru, All SX Models SX Drives, Later Version, 2.3" Bolt Centers with Coarse Thread



O.E. No. 3861575

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1282	(TRM0061)	$108.98 G

Trim and Tilt Motor


Trim and Tilt Motor, 1968-1979 All OMC Stern Drive with 2 Wire



O.E. No. 382138

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6754	(TRM0007)	$110.98 G
Sierra	186754	(18-6754)	$222.27 H

Standard Rotation



If flywheel rotates to the left and distributor rotor turns clockwise

CCW Rotation

If flywheel rotates to the right and distributor turns counter clockwise

Starter

Merc/OMC/Volvo 6, 8 Cylinder

Heavy Duty, Clockwise, Small Block V6 and V8 GM Engines with 14-1/4" Flywheel and Bottom Mount, Offset Bolt Pattern. For: Standard Rotation Engines.



O.E. No. 984456

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1132	(SDR0032)	$164.98 G
Sierra	185910	(18-5910)	$227.88 H

Starter

For: 10MT Series, DD, 12 volt, 9 Tooth

Heavy Duty, No Core, Clockwise, Top Mount Rear Entry Starter. Will Not Replace Non-Starter Mounted Solenoids. For: Opposite Rotation GM and Ford Engines.



O.E. No. 981289

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1136	(SDR0065)	$180.98 G
Sierra	185901	(18-5901)	$198.93 H

Starter

For: 14MT Series, DD, 12 volt, 11 Tooth

Heavy Duty, No Core, Counter-Clockwise, Top Mount Rear Entry Starter. For: Standard Rotation GM and Ford Engines.



O.E. No. 981288

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1138	(SDR0105)	$169.98 G
Sierra	185902	(18-5902)	$218.63 H

Pictures May Not Match Engine Description

Starter

For: PG260 Series, 12 volt, 11 Tooth

Permanent Magnet Gear Reduction Starter. Inboard. 2 Long Bolt Offset Pattern. Clockwise Rotation. SAE J1171. Use with Late Model 3.0L Engines with 14" Flywheel. Fits: Volvo Penta, Mercruiser, Marine Power



O.E. No. 3857747

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6275	(SDR0253)	$112.98 G
Sierra	186275	(18-6275)	$228.72 H

Starter

For: PG260 Series, 12 volt, 11 Tooth

Permanent Magnet Gear Reduction Starter. Clockwise. Fits: Chevy Engines with 12-3/4" Flywheels. Straight Across Bolt Pattern



O.E. No. 988217

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1134	(SDR0272)	$115.98 G
Sierra	185919	(18-5919)	$211.98 H

Starter

For: Ford 4.5 Marine Engines, 12 volt, 9 Tooth, Used on Crusader and Other Marine Applications Equipped with Ford Engines

Clockwise, Bottom Mount, Two Bolt Pattern for Standard Rotation Ford Engines.



O.E. No. 980803

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5903	(SFD0025)	$148.98 G
Sierra	185903	(18-5903)	$210.28 H

Starter

For: Ford Marine Engines, DD, 12 volt, 9 Tooth, Used on Mercruiser and Cobra. Replaces: OMC 984536, 988013

Clockwise, Threaded Top Hole in Housing. 460 Ford, OMC King Cobra



O.E. No. 984536

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6276	(SFD0062)	$151.98 G
Sierra	186276	(18-6276)	$198.83 H

Starter

For: Ford MOD 4 Marine Engines, 12 volt, 9 Tooth, Used on Marine Applications Equipped with Ford Engines (Late Style)

Clockwise, 3 Bolt Mount, Late Style 4" Diameter Case. Standard Rotation Engines. For: Late Model Ford V8. Replacement Solenoid: 18-5801



O.E. No. 984628

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5917	(SFD0064)	$141.98 G
Sierra	185917	(18-5917)	$224.40 H

Starter

For: Ford Marine Engines, 12 volt, 10 Tooth (Late Style). Replaces: OMC 3854190, 987811, Volvo 3854190-0

Permanent Magnet Gear Reduction Starter. Clockwise. For: 5.0 and 5.8L Ford Engines. Replacement Solenoid: 18-6291



O.E. No. 987811

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5920	(SFD0066)	$158.98 G
Sierra	185920	(18-5920)	$200.70 H

Solenoid

12 volt, 4 Terminal

Replaces: Mercury 25661, 25661-1, 25661T1



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5836	(SMR6002)	$13.98 G
Sierra	185836	(18-5836)	$39.00 H

Solenoid

For: OMC, 12 volt, 4 Terminal, Isolated Base

Replaces: 172869, 581528



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1206	(SMR6004)	$14.98 G
Sierra	185814	(18-5814)	$26.28 H

Solenoid

Solenoid with 3 Stud and Flat Base, 12 volt, 3 Terminal, Used on OMC. (2) 5/16-18 Terminals, (1) 10-32 Terminal Grounded Base

Replaces: OMC 985063



O.E. No. 985063

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778014	(778014)	$32.99 L
MP Parts	4-5812	(SMR6006)	$14.98 G
Sierra	185812	(18-5812)	$25.95H

Solenoid

Solenoid, 12 volt, 3 Terminal, Used on OMC. (2) 5/16-24 Terminals, (1) 10-32 Terminal Grounded Base

Replaces: OMC 979774



O.E. No. 979774

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778021	(778021)	$58.99 L
MP Parts	4-5803	(SMR6007)	$14.98 G
Sierra	185803	(18-5803)	$33.78 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Solenoid

12 volt, 4 Terminal, Used on OMC. (2) 5/16-18 Terminals, (2) 10-32 Terminals Grounded Base. For all engines with flat solenoid bracket
Replaces: OMC 985064, R130001



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5801	(SMR6013)	$13.98 G
Sierra	185801	(18-5801)	$21.70 H

Alternator

For: 10SI Type 110 Series, 12 volt, 63 amp, Used on Mercruiser, OMC, Others. 1 Wire, No Core, Single Wire Connection
Replaces: 37-63A Marine Applications



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1050	(ADR0105)	$126.98 G
Sierra	185950	(18-5950)	$214.85 H

Alternator

Mando, Merc, 55 amp, Single Groove Pulley. SAE J1171
Replaces: 817119A4, 12449A1



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1054	(AMN0002)	$148.98 G
Sierra	185966	(18-5966)	$229.78 H

Alternator

For: Many Marine Applications, IR/EF, 12 volt, 65 amp. Fits: 3.0L, 4.3L, 5.7L, 7.4L 1995-1998, 5.0L, 5.8L, 8.2L 1993-1998. For: Delco
Replaces: 987774, 3857561, 3854182, 3854809, 3856600, 3860171



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6261	(AMN0011)	$148.98 G
Sierra	186261	(18-6261)	$286.52 H

Alternator

Replaces: Motorola and Similar Alternators
3 Wire, 68 amp, with Fan and Pulley with Adapter Plug

O.E. No. RA097006



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1052	(ADR0106)	$128.98 G
Sierra	185951	(18-5951)	$222.27 H

Alternator

High Output
12 volt, 105 amp



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1053	(ADR0334)	$130.98 G

Outdrive Gasket Set

Fits: OMC Stern Drive, Cobra Drive 3.0-5.8L 1992-1993
Replaces: 911836, 915840



O.E. No. 915840

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778038	(778038)	$9.99 M

Outdrive Gasket Set

Outdrive Gasket Set, Mounting Kit, Fits: All Clutch Dog Cobra



O.E. No. 508105

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765575	(765575)	$7.99 J
Sierra	182613	(18-2613)	$7.43 H

Lower Unit Seal Kit

OMC Stern Drive Housing Seal, All V6/V8 Cobra
Replaces: 984458, 985613, 439967



O.E. No. 439967

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778043	(778043)	$64.99 H
Sierra	182672	(18-2672)	$62.70 H

Upper Housing Seal Kit

Upper Housing Seal Kit, All Cobra 1986-1989



O.E. No. 987603

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778046	(778046)	$56.99 H
Sierra	182673	(18-2673(	$49.80 H

Note: Product shipped may not match the item pictured.

Upper Unit Seal Kit



All Stringer Unit, 1973-1986.
Replaces: 982949

O.E. No. 982949

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778068	(778068)	$67.99 H
Sierra	182667	(18-2667)	$65.72 H

Lower Unit Seal Kit



All 4 Cylinder Cobra 1986-1989.
Replaces: 985612

O.E. No. 985612

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778088	(778088)	$36.99 H
Sierra	182671	(18-2671)	$37.17 H

Outdrive Seal



OMC Outdrive Seal
Replaces: 911823, 3852560

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182996	(18-2996)	$2.62 H

Outdrive Seal



Fits: OMC Stern Drive and Volvo Penta 3.0-8.2L 1994-1998
Replaces: 911823, 3852560

O.E. No. 3852560

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778059	(778059)	$3.99 L

T&T Cobra Seal Kit



Fits: OMC, Johnson/Evinrude and Cobra 3.0-7.4L 65-175 H.P. 1986-1994

O.E. No. 985060

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778202	(778202)	$37.99 H

Gear Case Seal Kit



Fits: Volvo SX, All Through 2006

O.E. No. 3855275

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778351	(778351)	$31.99 H
Sierra	182598	(18-2598)	$33.27 H

Shift Cable Assembly



For: 1988-1993 OMC Cobra (Except King) without Cone Clutch. Replaces: 987661

O.E. No. 987661

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778040	(778040)	$189.99 H
Sierra	182245	(18-2245)	$129.43 H

Shift Cable Assembly with O-Ring



Fits: OMC Stern Drive Cobra Drives 3.2-8.2L 1992-1993
For: King Cobra. Replaces: 987678

O.E. No. 987678

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778130	(778130)	$191.99 H
Sierra	182246	(18-2246)	$194.42 H

Shift Assist Module Kit



Shift Assist Module Kit, 2.3-4.3L 1986-1990

O.E. No. 987740

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778015	(778015)	$151.99 L
Sierra	185890	(18-5890)	$116.55 H

Shift Assist Module Kit



Shift Assist Module Kit, GM 5.0-5.7L 1986-1990, Ford 460 C.C. 1987-1991

O.E. No. 987738

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778016	(778016)	$143.99 L
Sierra	185888	(18-5888)	$116.57 H
CDI Electronics	208202	(123-9898)	$136.98 K

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Gimbal Bearing

Gimbal Bearing, OMC 3.0L-7.4L 1994-1998, 5.8L 1994-1996, 8.2L 1998



O.E. No. 3853807

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765624	(765624)	$81.99 J
Sierra	182100	(18-2100)	$57.77 H

Pinion Bearing

OMC Pinion Bearing, 215 E/H 1970-1972, 225TRS, 280 TRS 1973-1976, II, TR 1973-1976, TR, TRS 1977-1993
Replaces: 31-54928, 382343



O.E. No. 31-54928

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181356	(18-1356)	$17.93 H

Pinion Bearing

OMC Pinion Bearing, Cobra
Replaces: 384195



O.E. No. 384195

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181357	(18-1357)	$20.95 H

Reverse Gear Bearing

OMC Reverse Gear Bearing, Cobra
Replaces: 389039



O.E. No. 389039

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181358	(18-1358)	$74.85 H

Lower Pinion Bearing

OMC/Cobra Lower Pinion Bearing
Replaces: 983892, 31-812767A1



O.E. No. 31-812767A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181170	(18-1170)	$59.00 H

Carrier Bearing

Carrier Bearing, For: 1986-1995 Cobra
Replaces: 983877



O.E. No. 983877

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778117	(778117)	$84.99 H
Sierra	181172	(18-1172)	$88.00 H

U-Joint Shaft Bearing

OMC/Cobra U-Joint Shaft Bearing
Replaces: 983878



O.E. No. 983878

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181171	(18-1171)	$54.37 H

Thrust Forward Bearing

OMC Thrust Forward Bearing, Cobra
Replaces: 385043



O.E. No. 385043

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181371	(18-1371)	$23.70 H

Thrust Forward Bearing

OMC Thrust Forward Bearing
Replaces: 389042



O.E. No. 389042

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181370	(18-1370)	$52.90 H

Thrust Bearing

OMC Thrust Bearing, Cobra Drive Shaft
Replaces: 387656



O.E. No. 387656

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181365	(18-1365)	$33.85 H

Note: Product shipped may not match the item pictured.

Thrust Bearing



OMC Thrust Bearing, Cobra Reverse Gear
Replaces: 382408

O.E. No. 382408

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181366	(18-1366)	$7.98 H

Drive Shaft Extension



Fits: OMC Stern Drive 3.0-8.2L 1978-1989
Replaces: 909753

O.E. No. 909753

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778048	(778048)	$184.98 H
Sierra	182185	(18-2185)	$193.27 H

Drive Shaft Pinion



OMC Cobra

O.E. No. 909121

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778052	(778052)	$249.99 H

Drive Shaft



OMC Bearing Carrier
Replaces: 909121

O.E. No. 909121

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182183	(18-2183)	$218.72 H

Cover and Seal



Fits: 2.3L OMC Models 1990

O.E. No. 986838

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778345	(778345)	$50.99 H

Ball Gear



Ball Gear, Intermediate Housing, 1973-1986
Replaces: 908063

O.E. No. 908063

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778049	(778049)	$164.99 H
Sierra	182176	(18-2176)	$167.05 H

Ball Gear



Fits: OMC Stern Drive 3.0-8.2L 1973-1985, Upper Gear Case, 1973-86
Replaces: 908069

O.E. No. 908069

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778051	(778051)	$181.99 H
Sierra	182177	(18-2177)	$162.52 H

Ball Gear Kit

OMC S/O Ball Gear, 1973-1986, Contains:

18-7121	O-Ring, Qty. 1	O.E. No. 308621
18-4251	Plug, Qty. 2	O.E. No. 908062
18-2176	Ball Gear, Qty. 1	O.E. No. 908063
18-2177	Ball Gear, Qty. 1	O.E. No. 908069
18-3725	Locknut, Qty. 2	O.E. No. 908064
18-7401	O-Ring, Qty. 1	O.E. No. 908383
18-2071	Oil Seal, Qty. 2	O.E. No. 981195
18-2072	Oil Seal, Qty. 2	O.E. No. 981196



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182178	(18-2178)	$264.98 H

Ball Gear Nut



Fits: OMC Stern Drive 2.3-8.2L 1973-1985
Replaces: 908064

O.E. No. 908064

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778073	(778073)	$9.99 L
Sierra	183725	(18-3725)	$6.98 H

Bearing Carrier Shim



Bearing Carrier Shim, 0.005", Blue

O.E. No. 911680

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778357	(778357)	$7.99 L

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Bearing Carrier Shim



Bearing Carrier Shim, 0.003", Green

O.E. No. 911678

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778368	(778368)	$7.99 L

Bearing Carrier Shim



Bearing Carrier Shim, 0.010", Brown
Fits: OMC Cobra Models, 1986-1993 without Cone and 2.3L Models

O.E. No. 911681

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778238	(778238)	$7.98 L

Transom Seal



Fits: OMC Cobra 1968-1977, For: 1967-1977 120 H.P. and Up
Replaces: 313080

O.E. No. 313080

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778371	(778371)	$149.99 H
Sierra	182767	(18-2767)	$135.97 H

Transom Seal



Fits: OMC 1978 Models 990242D-990243H, 1978-1986 All
Replaces: 909527

O.E. No. 909527

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778285	(778285)	$163.99 H
Sierra	182768	(18-2768)	$141.32 H

Transom Mount Seal Kit



All Cobra 1986-1989

O.E. No. 909527

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182674	(18-2674)	$135.60 H

Thrust Washer, Pinion



OMC Thrust Washer, For: V4 and V6
Replaces: 327656

O.E. No. 327656

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180200	(18-0200)	$10.93 H

Tilt Shaft



OMC Tilt Shaft,
I/O 1964-1986, Except Cobra
Replaces: 980183

O.E. No. 980183

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182156	(18-2156)	$22.17 H

Trim Sender



OMC Trim Sender, Fits: OMC Cobra
Replaces: 984748

O.E. No. 9484748

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187634	(18-7634)	$163.42 H

Prop Shaft



Fits: OMC Cobra SX and Volvo SX Drives

O.E. No. 3857675

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778393	(778393)	$599.99 H

Prop Shaft



OMC O/B and I/O Prop Shaft
Replaces: 435022, 433017, 436740

O.E. No. 433017

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182251	(18-2251)	$367.85 H

Note: Product shipped may not match the item pictured.

Lower Drive Shaft



For: Cobra Drives 262, 302, 350, 432, 434, 502, 504, 574, 584. Replaces: 911693

O.E. No. 911693

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778429	(778429)	$279.99 H

Reverse Gear and Shifter



Reverse Gear and Shifter, Reverse Gear and Clutch Dog, 3 Dog, Stringer Mount

O.E. No. 437297

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B777505	(777505)	$350.99 H

Forward and Pin Gearset



Fits: OMC Drives 3.0L 1992

O.E. No. 987670

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778346	(778346)	$508.99 H

Reverse Gear



Fits: OMC Cobra 1986-1993, 30 Teeth Gear

O.E. No. 915273

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778392	(778392)	$222.99 H

Reverse Gear



Fits: OMC Cobra 3.0-5.8L 1990-1991

O.E. No. 914726

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778441	(778441)	$216.99 H

Gear Set



OMC Gear Set, V6 O/B Cobra
Contains:

	NSS Forward Gear	O.E. No. 435020
	NSS Reverse Gear	O.E. No. 910994
18-2216	Sliding Clutch	O.E. No. 337772

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182217	(18-2217)	$934.12 H

Upper Gear Kit with Bearings



OMC Cobra, For: 5.7L, 5.8L V8 Cobra Drives (21:16 ratio) Replaces: 983825

O.E. No. 983825

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181600	(18-1600)	$1,014.40 H

Cobra Gear Kit



Fits: OMC Cobra 2.3L Model

O.E. No. 986979

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778423	(778423)	$525.99 H

Upper Gear Kit with Bearing



Fits: OMC Cobra 2.5-7.5L 1986-1993. For: 5.0L V8 Engines, Cobra Drives (21:18 ratio). Replaces: 983826

O.E. No. 983826

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778427	(778427)	$1,027.99 H

Upper Gear Kit



For: 4.3L V6 Engines, Cobra Drives (21:19 ratio). Replaces: 984012

O.E. No. 984012

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778474	(778474)	$992.99 H
Sierra	181602	(18-1602)	$963.08 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Gear and Pinion



Fits: OMC Stern Drives 2.3-4.3L 1987-1993

O.E. No. 984580

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778490	(778490)	$792.99 H

Thrust Plate



Fits: OMC Stern Drives 3.0-8.2L 1994-1998

O.E. No. 3852562

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778396	(778396)	$4.99 L

Thrust Plate



Fits: OMC Stern Drives 3.0-8.2L 1994-1998

O.E. No. 3852561

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778399	(778399)	$6.96 L

Plug-Gear Housing



Fits: OMC Stern Drives 3.0-5.8L 1992-1993

O.E. No. 912314

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778258	(778258)	$3.99 L

Detent Spring



Detent Spring

O.E. No. 911962

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778436	(778436)	$1.99 L

Belt



OMC Belt, .380 x 40.00. Replaces: 311606, Mercury Marine 57-69143T, 57-32850, Sierra 18-51400

O.E. No. 311606

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778309	(778309)	$27.99 L

Thrust Mount

Thrust Mount



O.E. No. 436469

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B766455	(766455)	$85.99 H

Pin



Fits: OMC Stern Drives 2.3L 1986

O.E. No. 911873

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778313	(778313)	$9.99 H

Pin



Fits: OMC Stern Drives 2.3-8.2L 1988-1993

O.E. No. 913663

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778155	(778155)	$10.99 L

Grommet



Fits: OMC Stern Drives 3-8.2L 1994-1998

O.E. No. 3853424

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778271	(778271)	$2.99 L

Pictures May Not Match Engine Description

Hose Clamp

Fits: All OMC Stern Drives



O.E. No. 3852604

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778221	(778221)	$6.99 L

Brass Drain Cock

1/4" NPT. Replaces: 379957



O.E. No. 379957

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778063	(778063)	$21.99 L

Anchor Cable



O.E. No. 126026

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778337	(778337)	$3.99 H

E-Clip

Fits: Stern Drives 3.0L 1998



O.E. No. 3857521

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778293	(778293)	$4.99 L

Lock Nut

Fits: OMC Stern Drives 3.0-8.2L 1994-1998, Volvo SX Drives Model. For: Cobra and King Cobra 1987-1994. Replaces: 3852648



O.E. No. 3852648

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778041	(778041)	$2.99 H

Renew Kit Assembly

Carb Kit, Complete 2 Barrel Holley 703-36



O.E. No. 3854347

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778108	(778108)	$47.47 H
Sierra	187238	(18-7238)	$45.82 H

Lock Nut

Fits: OMC Stern Drives, OMC Cobra 3.0-8.2L 1994-1998, 5 Pack



O.E. No. 3853329

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765578	(765578)	$2.99 L

Bushing

Fits: OMC Stern Drives 2.3-7.5L 1986-1993



O.E. No. 910855

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778175	(778175)	$10.99 H

Large Manifold Cap

Fits: OMC Stern Drives V8 Models 1977 to Present



O.E. No. 764799

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778033	(778033)	$11.99 L

Bushing

Fits: OMC Stern Drives 2.3-7.5L 1986-1988



O.E. No. 911842

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B765629	(765629)	$3.99 L

Bushing

Fits: OMC Stern Drives 3.0-8.2L 1994-1998



O.E. No. 3853423

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778256	(778256)	$3.99 L

Cap

Fits: OMC Stern Drives and Volvo Penta Stern Drives 3.0-8.2L 1998



O.E. No. 3857522

Brand Name	DMI No.	Mfg. No.	Price
OMC SysteMatched	B778214	(778214)	$2.99 L

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Volvo Impeller Kit




Impeller with Gaskets, 12 Fins, Neoprene
Replaces: 835874, Sherwood 10615K, Jabsco 18948-0001

O.E. No. 835874

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3047	(47-07219K-3)	$39.98 M
Sierra	183047	(18-3047)	$40.25 H

Impeller



Impeller with Gaskets and O-Rings
Various Engine, Spine Drive with 12 Vanes

O.E. No. 3858256

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3081	(47-07203K-3)	$27.98 H
Sierra	183081	(18-3081)	$31.12 H

Impeller



Impeller and O-Ring
Various Engines, Key Way with 12 Vanes

O.E. No. 835512-5

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3060B	(47-01312-10)	$24.98 L
Sierra	183060	(18-3060)	$25.43 H

Trim and Tilt Motor



All Sportsman Models
Motor, Pump and Reservoir, used on Power Pole Sportsman

O.E. No. Pump SPN-F

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6789	(TRM0089)	$398.98 G

Trim and Tilt Motor



Various Models
Motor Only, Replaces 2 Wire on 4-6770

O.E. No. 854525-3

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1270	(TRM0032)	$98.98 G

Trim and Tilt Motor



Various Models
New Motor, Reservoir and Pump, Designed to Look Like the Original, 3 Wire

O.E. No. 852928

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1274	(TRM0077)	$248.98 G

Trim and Tilt Motor



Older Model Volvo
Motor Only with Plug Connector

O.E. No. 839430

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1275	(TRM0057)	$126.98 G

Trim and Tilt Motor



All Models, All Years
Various Engines, 3 Wire Motor

O.E. No. 3857265-7

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1276	(TRM0049)	$383.98 G

Trim and Tilt Motor



Various Models
Early Volvo

O.E. No. 853520

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1288	(TRM0072)	$181.98 G

Trim and Tilt Motor



Various Models
Early Volvo with 3 Wire Male Spade

O.E. No. 897720-9

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1290	(TRM0073)	$158.98 G

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Trim and Tilt Motor

All Models, All Years
Various Engines, 3 Wire Motor



O.E. No. 852928

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6274	(TRM0041)	$225.98 G

Trim and Tilt Motor

Various Models
2 Wire



O.E. No. 850834

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6758	(TRM0020)	$108.98 G
Sierra	186758	(18-6758)	$217.27 H

Trim and Tilt Motor

Various Models
Oildyne, Early Version SX Drive with 2.5" Bolt Centers and Fine Threads



O.E. No. 854346

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6770	(TRM0023)	$360.98 G
Sierra	186770	(18-6770)	$636.28 H

Trim and Tilt Motor

All Pro Models
Motor, Pump and Reservoir, used on Power Pole Pro



O.E. No. Pump PRO-F

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6788	(TRM0088)	$429.98 G

Starter Motor

Various Models
12 volt, CCW rotation, with 9 Tooth Drive Gear



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1117	(SAB0085)	$102.98 G

Starter Motor

Various Ford Engines
12 volt, CCW, 9 Tooth Drive Gear, HSG Protrudes 2-3/8" into the Flywheel



O.E. No. 70604A3

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1170	(SFD0026)	$153.98 G

Starter Motor

Various Ford Engines
12 volt, CW, 9 Tooth Drive Gear, HSG Protrudes 2" into the Flywheel



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1172	(SFD0060)	$149.98 G

Starter Motor

Various Ford Engines
12 volt, CCW, 9 Tooth Drive Gear, HSG Protrudes 2" into the Flywheel



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1174	(SFD0061)	$149.98 G

Starter Motor

Various Ford Engines
12 volt, CCW, 9 Tooth Drive Gear, HSG has Top Mount Hole Threaded



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1176	(SFD0063)	$135.98 G

Starter Motor

G.M. and Ford 5.7L, 6.2L, 7.4L, 8.1L, 8.9L, 9.0L Engines
PMGR 12 volt, 9 Tooth Drive Gear



O.E. No. 808011A4

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5603	(SDR0252)	$124.98 G
Sierra	185603	(18-5603)	$276.62 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Starter Motor

Various Ford Engines
12 volt, CW, 9 Tooth Drive Gear, 2 Bolt Mount - Late Style 4" Diameter Case
Standard Rotation Engines For: Late Model Ford V8



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5916	(SFD0065)	$122.98 G

Starter Mounting Kit

Various Engines
Use When Replacing 10MT with a PG260, 2 Long Bolts

O.E. No. 808011A4



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1164	(HDW9301)	$5.98 G

Starter Mounting Kit

Various Engines
Use When Replacing 10MT with a PG260, 1 Long Bolts, 1 Short Bolt



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1166	(HDW9303)	$5.98 G

Alternator

Various Models with Bi-Directional Fan
12 volt, 105 amp



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1075	(AMO0072)	$226.98 G

Alternator

Used on Various Models with Perkins Engines
12 volt, 85 amp



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1067	(ALU0031)	$180.98 G

Alternator

Various Models
12 volt, 63 amp, 10 SI with Internal Regulator



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1064	(ADR0396)	$131.98 G

Alternator

Various Models
12 volt, 95 amp, 6 Groove Pulley

O.E. No. 8600002



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1065	(ADR0424)	$153.98 G

Alternator

Used on Various Mitsubishi and other Small Engines
12 volt, 40 amp

O.E. No. A7TA0171



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1083	(AMT0206)	$187.98 G

Alternator

4.3L, 5.0L, 5.7L 2000-2009
Volvo Penta with GM Engines

O.E. No. 3862612



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1036	(AVA0119)	$227.98 G

Alternator

3.0L, 4.3L, 5.7L GM Engines, 2000-2007
Volvo Penta Engines

O.E. No. 3862613



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1038	(AVA0120)	$227.98 G

Pictures May Not Match Engine Description

Alternator



3.0 GSM-A/B/C, 3.0 GSP-A/B/C, 3.0 GLM-A/B, 3.0 GLP-A/B, 4.3 GXi-A/B/BF/C.CF.D.DF, 4.3 OSi-B/BF/C
12 volt, 65 amp

O.E. No. 3860082

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1070	(AMN0018)	$176.98 G
Sierra	185979	(18-5979)	$320.68 H

Alternator



Various Models, 2-6 Cylinders 1970-1993, without Pulley
12 volt, 50 amp, Replaces: 35-50 amp Units

O.E. No. A13N147M

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1080	(APR0005)	$126.98 G
Sierra	185959	(18-5959)	$527.85 H

Alternator



Various Models, 4-6 Cylinders 1970-2000, without Pulley, Diesel
24 volt, 55 amp

O.E. No. 873771

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1082	(APR0017)	$170.98 G

Alternator



Various Models
12 volt, 63 amp, 10 SI with Internal Regulator

O.E. No. 3527502

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5954	(ADR0395)	$135.98 G
Sierra	185954	(18-5954)	$284.12 H

Alternator



Various Models
12 volt, 63 amp, Slightly Larger than Original

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1062	(ADR0394)	$131.98 G

Alternator



Various Models and Refrigeration Units
12 volt, 37 amp

O.E. No. 39049

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1071	(AMN00065)	$203.98 G

Alternator



Various Models
12 volt, 55 amp

O.E. No. 39200

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1069	(AMN0016)	$171.98 G

Alternator



Various Models and Refrigeration Units
12 volt, 70 amp, Spool Mount, 2-5/8" OD, 6 Groove Serpentine Pulley

O.E. No. RA097007B

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5984	(ADR0315)	$135.98 G

Alternator



Various Models
12 volt, 70 amp, Spool Mount, Single Groove V-Belt Pulley

O.E. No. 575010

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6288	(ADR0298)	$135.98 G
Sierra	186288	(18-6288)	$309.52 H

Alternator



8.1-12.5L, 6 Cylinder
12 volt, 90 amp

O.E. No. 102211-1180

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1078	(AND0435)	$187.98 G

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Alphabetical Index for Mercruiser

Alphabetical Index	Page No.
Alternator	794-795
Anode, Zinc	810
Carburetor Kits	776-780
Circulating Pump	787
Coupler	798-799
Diagnostics	809
Distributor Cap	782
Drive Parts	801-806
Exhaust Manifolds	773-774
Filter, Fuel	780-781
Fuel Pump	780
Gaskets	769-773
Gimbal Bearing	796-797
Gimbal Repair Kit	807-808
Impeller	783-784
Oil Pressure Sender	788
Riser	774
Solenoid	793
Spark Plug Wire	782
Starter & Alternator Chart	789-792
Starter Motor	792-793
Thermostat	785-786
Tools	808-809
Transom Seal Kit	795-796, 800
Trim Sender Kit	788
Tune Up Kit	781-782
U-Joint Bellow	796, 807
Water Pump Kit	784-785

2 Barrel Carburetor Mounting Gasket



MRY 2 Barrel Carburetor Mounting Gasket
Replaces: 27-70143-1

O.E. No. 27-70143-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180994	(18-0994)	$2.72 H

Drain Screw Gasket



MRY Drain Screw Gasket
Mercury 26-830749, For: All Verado

O.E. No. 26-830749

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182430	(18-2430)	$2.78 H

Exhaust Elbow Mounting Gasket



MRC Exhaust Elbow Mounting Gasket

O.E. No. 27-856705

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180113	(18-0113)	$11.53 H

Exhaust Manifold Gasket



MRC Exhaust Manifold Gasket
GM 5.0L and 5.7L, Use with: Manifold: 18-1950-1, 18-1951-1. Replaces: Mercruiser 27-33395

O.E. No. 27-33395

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180872	(18-0872)	$6.82 H

Exhaust Manifold Gasket



MRY Exhaust Manifold Gasket
Package of 2. Replaces: Mercruiser 27-96429, OMC 912164, 912164

O.E. No. 27-96429

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181204	(18-1204)	$12.52 H

Head Gasket Set



4 Cylinder, 3.7L Mercruiser 470
Contains: Intake Gasket 18-0158, Quadrajet Gasket 18-2848, Valve Grind Cover Gasket (NSS), Head Gasket 18-3878, Exhaust Manifold, Mounting Gasket 18-0956, Valve Seal (NSS).
NSS: Not Sold Separately

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181277	(18-1277)	$85.35 H

Heat Exchanger End Gasket



MRY Heat Exchanger End Gasket
Replaces: 27-99960

O.E. No. 27-99960

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180389	(18-0389)	$5.35 H

Heat Exchanger End Gasket




Heat Exchanger End Gasket
224 CID. Replaces: 27-75450

O.E. No. 27-75450

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180365	(18-0365)	$7.03 H

Note: Product shipped may not match the item pictured.

Fits GM Small Block V8 305 and 350 cu. in., Models 200, 228, 230, 260 and 898

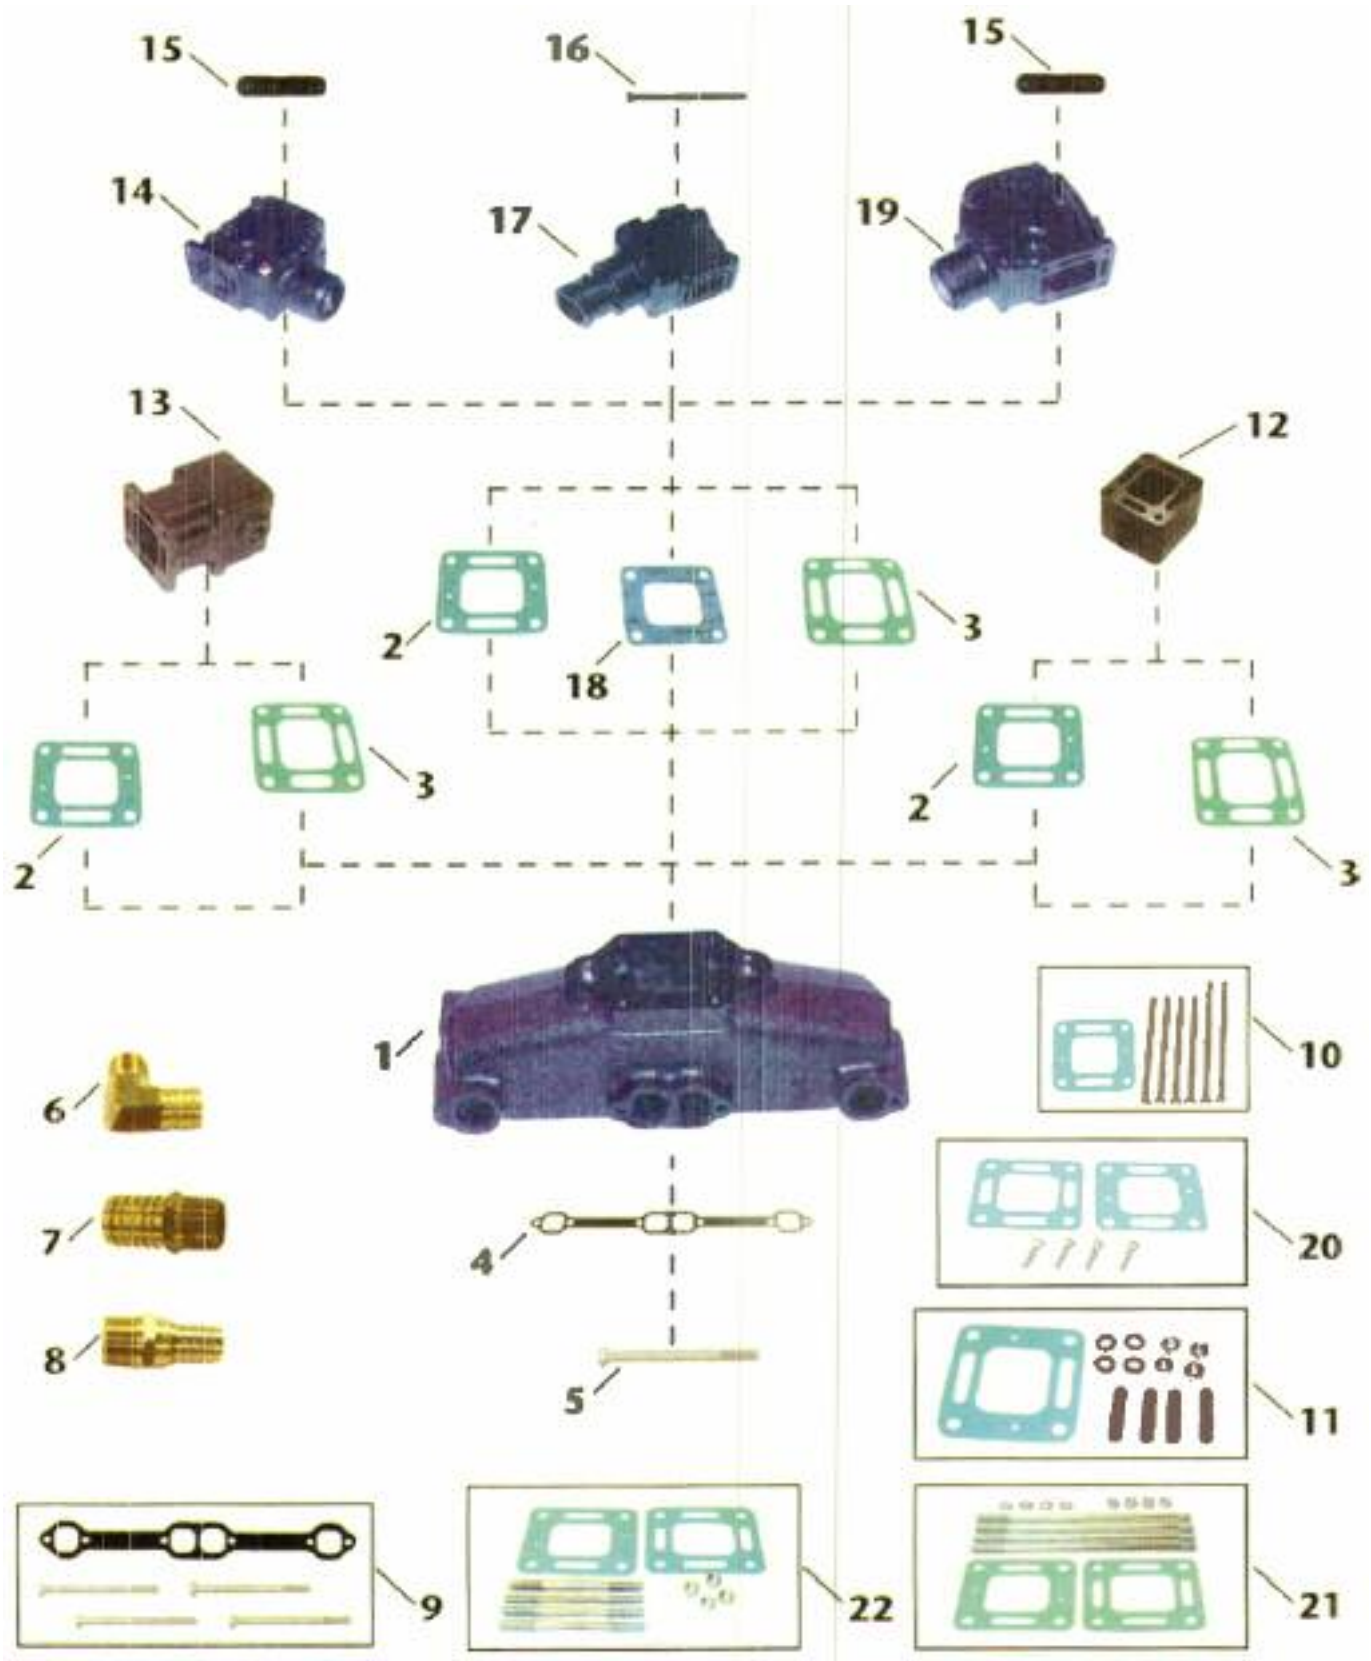

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Fits GM Small Block V8 305 and 350 cu. in., Models 200, 228, 230, 260 and 898

	Item No.	Description	O.E. No.	Application
1	18-1953-2	Manifold	87114A19	GM Small Block (V8) 305-350 cu.in. Models 200, 228, 230, 260 and 898
2	18-0897	Elbow Gasket (Restrictor)	27-41813	Fits Manifold: 18-1953-2; Manifold Spacers: 18-1985 and 18-1908; Elbows: 18-1970-1, 18-1976-1 and 18-1974-1
3	18-2849	Elbow Gasket (Open)	27-818832	Fits Manifold: 18-1953-2; Manifold Spacers: 18-1985 and 18-1908; Elbows: 18-1970-1, 18-1976-1, 18-1974-1
4	18-2949	Manifold Gasket	96306	Use with Manifold: 18-1953-2. Included in 18-8520 Mounting Kit
5	5NSS	Mounting Bolt	N/A	Included in 18-8520 Mounting Kit
6	18-8216	Hose Fitting	N/A	3/4" - 14 NPT x 1" Hose (Corrosion Resistant Brass Fitting)
7	18-4461	Hose Fitting	N/A	3/4" - 14 NPT x 1" Hose (Corrosion Resistant Brass Fitting)
8	18-8215	Hose Fitting	N/A	3/4" - 14 NPT x 3/4" Hose (Corrosion Resistant Brass Fitting)
9	18-8520	Mounting Kit	N/A	Use with Manifold: 18-1953-2. Includes 18-2949 Manifold Gasket
10	18-8505	Mounting Kit	N/A	Use with Riser: 18-1976-1. Includes 18-0897 Elbow Gasket
11	18-8529	Mounting Kit	N/A	Use with Risers: 18-1970-1 and 18-1974-1. Includes 18-0897 Elbow Gaskets
12	18-1908	Manifold Spacer	933220A12	3" Spacer for Manifold: 18-1953-2. Use with Mounting Kit 18-8554 with 18-1970-1 or Mounting Kit 18-8555 with 18-1976-1
13	18-1985	Manifold Spacer	93322	6" Spacer for Manifold: 18-1953-2. Use with Mounting Kit 18-8556. (Note to mount elbows to spacer a separate mounting kit is required)
14	18-1974-1	Manifold Elbow	98502A2	Fits Manifold: 18-1953-2. Use Elbow Gasket: 18-2849, 18-0897 or 18-0672; Use Mounting Kit: 18-8529. (Do not use with spacer)
15	NSS	Mounting Stud	N/A	Included in 18-8529 Mounting Kit
16	NSS	Mounting Bolt	N/A	Included in 18-8505 Mounting Kit
17	18-1976-1	Manifold Elbow	44354A3, 807914A1	Fits Manifold: 18-1953-2. Use Elbow Gasket: 18-2849, 18-0897 or 18-0672; Use Mounting Kit: 18-8505 or if spacer is included use 18-8555
18	18-0672	Elbow Gasket (Closed)	27-860231	Fits Manifold: 18-1953-2; Manifold Spacers: 18-1985 and 18-1908; Elbows: 18-1970-1, 18-1976-1 and 18-1974-1
19	18-1970-1	Manifold Elbow	98504A3	Fits Manifold: 18-1953-2. Use Elbow Gasket: 18-2849, 18-0897 or 18-0672; Use Mounting Kit: 18-8529 or if spacer is included use 18-8554
20	18-8556	Mounting Kit	N/A	Use with Manifold Spacer: 18-1985. Includes 18-0897 and 18-2849. (Note: To mount elbows to spacer a separate mounting kit is required.)
21	18-8555	Mounting Kit	N/A	Use with Riser Kit 18-1908K: Spacer 18-1908: Riser 18-1976-1: Manifold: 18-1952-1
22	18-8554	Mounting Kit	N/A	Use with Riser Kit 18-1908K: Spacer 18-1908: Riser 18-1970-1: Manifold: 18-1952-1

Intake Gasket Set



MRY Intake Gasket Set
For: MCM/MIE 454 Mag MPI, 7.4L/LX MPI and 8.2L MPI 1993-Up.
Replaces: 27-805403A1

O.E. No. 27-805403A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180404	(18-0404)	$74.53 H

Intake Manifold Gasket



MRY Intake Manifold Gasket

O.E. No. 27-70905

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180158	(18-0158)	$5.07 H

Intake Manifold Gasket Set



MRC/OMC Intake Manifold Gasket Set
For: Rectangular Port High Performance Big Block Chevy. For: Volvo 7.4L GL, GI, GSI, 8.2L GL. Replaces: Mercruiser 27-818188-1, OMC and Volvo 3854095

O.E. No. 27-818188-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181231	(18-1231)	$75.58 H

Marine Intake Gasket Set



MRY Marine Intake Gasket Set
Replaces: Mercury Marine 27-807473A1, Pleasurecraft RM0250

O.E. No. 27-807473A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180488	(18-0488)	$42.70 H

Pictures May Not Match Engine Description

Oil Pan Gasket



MRC Oil Pan Gasket
For: Mercruiser 3.0L G.M. 181, For: OMC 3.0L, For: Volvo 3.0L. Replaces: Mercruiser 27-810846T, Volvo 3853343, OMC 914820

O.E. No. 27-810846T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181239	(18-1239)	$100.72 H

Oil Pan Gasket Set



MRY Oil Pan Gasket Set
For: Mercruiser G.M. 350 CID (5.7L) Starboard Dipstick. Replaces: 27-90458A1

O.E. No. 27-90458A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180411	(18-0411)	$33.73 H

Oil Pan Gasket Set



MRC Oil Pan Gasket Set
For: Mercruiser G.M. 153/181 (2.5L and 3.0L). Replaces: Mercruiser 27-14901A1, OMC 393061, 3923440, 3921473

O.E. No. 27-14901A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180466	(18-0466)	$75.70 H

Thermostat Gasket



MRC Thermostat Gasket
Replaces: 835417

O.E. No. 27-530451

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180398	(18-0398)	$2.53 H

Timing Chain Cover Gasket



MRY/CRU Timing Chain Cover Gasket
Package of 2. Replaces: 20129, Mercruiser 27-14250, 27-14250

O.E. No. 27-14250

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180976	(18-0976)	$3.48 H

Timing Cover Seal



MERC Timing Cover Seal
Replaces: Mercruiser 26-79223, 26-97335, 26-59341, Crusader 7080310, OMC and Volvo 3853341, OMC 912989, 914817

O.E. No. 26-59341

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181213	(18-1213)	$25.43 H

Valve Cover Gasket



MRC Valve Cover Gasket
For: G.M. 305/350, 5.0L and 5.7L. Replaces: Mercruiser 27-17467, OMC 913270, OMC and Volvo 3852687, Crusader 7231330

O.E. No. 27-17467

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180664	(18-0664)	$18.55 H

Valve Cover Gasket



MRC Valve Cover Gasket
For: 224 CID (3.7L). Replaces: 27-73666

O.E. No. 27-73666

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180685	(18-0685)	$25.38 H

Valve Cover Gasket



MRY Valve Cover Gasket
For: G.M. 153 and 181 CID (2.5L and 3.0L). Replaces: Mercruiser 27-52145, Volvo and OMC 3852693, OMC 912981, 913277

O.E. No. 27-52145

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180347	(18-0347)	$10.27 H

Water Pump Mounting Gasket



Water Pump Mounting Gasket
For: G.M. 4.3L, 5.0L and 5.8L, Package of 2. Replaces: 3852477, 909835, YSG-37545-87-G0, 16.50-00078, Mercruiser 27-34897 ,Volvo and OMC 3852477, OMC 909835

O.E. No. 27-34897


Brand Name	DMI No.	Mfg. No.	Price
Sierra	180891	(18-0891)	$2.33 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Short Block Gasket Set



Chevy V8 305/5.0L Gen II, 1 Piece Rear Seal
Contains: Oil Pan Gasket 18-1237, Oil Drain Screw Gasket 18-0905, Oil Filter Gasket 18-0185, Forward Crankshaft Seal 18-1213, Rear Crankshaft Seal 18-0519, Rear Main Bearing Gasket 18-0322, Water Pump Mounting Gasket 18-0891, Water Pump Plate Gasket (NSS), Fuel Pump Plate Gasket 18-0976, Fuel Pump Mounting Gasket 18-0889. NSS: Not Sold Seaparately

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181268	(18-1268)	$92.57 H

Short Block Gasket Set



Chevy 4 Cylinder 153/2.5L 1965-1988
Contains: Oil Pan Gasket 18-0466, Forward Crankshaft Seals 18-1213, Rear Crankshaft Seals 18-1211, Push Rod Cover 18-0328, Water Pump Gasket 18-0327, Fuel Pump Mounting Gasket 18-0889, Fuel Pump Mounting Gasket (NSS), Cam Gear Cover Gasket 18-0887, Distributor Mounting Gasket 18-0948, Distributor Mounting Gasket 18-0874. Except models with cast push rod cover. For models with 1 piece rear main seal use 18-1206. NSS: Not Sold Separately

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181271	(18-1271)	$120.47 H

Intake Manifold Gasket Set



For: GM 262 CID Engine, 175, 185 and 205 HP, 4.3L
Includes 18-3879 Head Gasket

O.E. No. 27-11677A88, A92

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184388	(18-4388)	$265.03 H

Intake Manifold Gasket Set



For: GM 305 and 350 CID Engine, 898 (198 H.P.) 200, 228, 230/260 (Inboard) 230, 250, 255, 260, 280 and 5.7L Ski

O.E. No. 27-75611A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184392	(18-4392)	$201.52 H

Head Gasket Set



Chevy V8 305/5.0L Gen II, 1 Piece Rear Seal
Contains: Head Gasket 18-3876, 2 BBL Carb Mounting Gasket 18-0994, 4 BBL Carb Mounting Gasket 18-0463, 4 BBL Carb Mounting Gasket 18-0462, Intake Manifold Gasket Set 18-0868, Valve Cover Gasket (2) 18-0664, Valve Stem Seals (8) 18-4024, Valve Stem Seals (16) 18-0518, Distributor Mounting Gasket 18-0874. Does not include intake and/or exhaust manifold gaskets

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181267	(18-1267)	$233.18 H


Head Gasket Set



Chevy V8 305/5.0L, 2 Piece Rear Seal
Contains: Head Gasket 18-3876, 2 BBL Carb Mounting Gasket 18-0994, 4 BBL Carb Mounting Gasket 18-0463, 4 BBL Carb Mounting Gasket 18-0462, Intake Manifold Gasket 18-0868, Valve Cover Gasket (2) 18-2845, Valve Stem Seals (8) 18-4024, Valve Stem Seals (16) 18-0518, Distributor Mounting Gasket 18-0874. Does not include intake and/or exhaust maniflold gaskets

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181266	(18-1266)	$265.08 H

Head Gasket Set



Chevy 4 Cylinder 153/2.5L 1965-1988
Contains: Head Gasket 18-2946, Mer Carb Mounting Gasket 18-0994, Carb Mounting Gasket 18-0356, Thermostat Housing Gasket 18-0164, Valve Cover Gasket 18-0347, Valve Stem Seals (8) 18-0518. For models with 1 piece rear main seal use 18-1206

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181274	(18-1274)	$62.50 H

Head Gasket Set



Chevy V6 229/3.8L and 4.3L
Contains: Head Gasket 18-3879, 2 BBL Carb Mounting Gasket 18-0994, 4 BBL Carb Mounting Gasket 18-0463, Intake Manifold Gasket 18-4408, Valve Cover Gasket 18-0311, Valve Stem Seals (6) 18-4024, Valve Stem Seals (12) 18-0518, Distributor Mounting Gasket 18-0874

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181275	(18-1275)	$254.42 H

Head Gasket Set



Chevy V6 262/4.3L, 1 Piece Rear Seal
Contains: Head Gasket 18-3879, 2 BBL Carb Mounting Gasket 18-0994, 4 BBL Carb Mounting Gasket 18-0463, Valve Stem Seals (6) 18-4024, Valve Stem Seals (12) 18-0518, Distributor Mounting Gasket 18-0874, Intake Gasket Set 18-1238, Valve Cover Gasket (2) 18-0311

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181278	(18-1278)	$153.93 H

Manifold



Port and Starboard, Will fit either side. Fits: Most Mercruiser (GM) V8 Big Blocks with Center Riser. Use with: Exhaust Manifold Gasket 18-0418, Mounting Kit 18-8532
Replaces: 89011A8, 807078A6

O.E. No. 807078A 6

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181957	(18-1957-1)	$261.72 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Manifold




Port and Starboard. Will fit either side. Fits: Most Mercruiser (GM) Small Blocks with Center Riser. Supplied with Mounting Package and Gaskets. Use with: Mounting Kit 18-8520
Replaces: 87114A19, 86024A10

O.E. No. 860246A10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181953	(18-1953-2)	$212.95 H

Manifold



MRY Manifold, Port. Fits: Most Mercruiser (Ford) V8 small blocks. Supplied with Mounting Package. Use with: Mounting Kit 18-8509
Replaces: 65604A4, A12

O.E. No. 65604A12

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1819581	(18-1958-1)	$415.38 H

Elbow



Fits: Most Mercruiser V6 and V8 Applications 7° (4" O.D. Riser) Comes with 18-0897, 18-4263 and 18-4258. Use with: Manifold 18-1952-1, 18-1953-1, 18-1957-1, Riser Gasket 18-0897 Restrictor, 18-2849 Open, 18-0672 Blocked, Mounting Kit 18-8505
Replaces: 44354A3, 807914A1

O.E. No. 44354A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181976	(18-1976-1)	$145.42 H

Elbow



Fits: Late Model Mercruiser 4 Cylinder Engines. Use with: Manifold 18-1955-1, 18-1954-1, 18-1956-1, 18-1901, Riser Gasket 18-2833, Mounting Kit 18-8551, Bellow 18-2748
Replaces: 12076A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181975	(18-1975-1)	$217.08 H

Elbow



Fits: V6 and V8 applications 0° (3" O.D. Riser). Comes with 18-0897 Gasket and Brass Plugs
Replaces: 98502A2

O.E. No. 98502A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181974	(18-1974-1)	$301.15 H

Elbow



Mercruiser 4 Cylinder 224 cu. in. 3.7L (Models 165, 170, 180, 90). Use with: Exhaust Elbow Mounting Gasket 18-0881, Mounting Kit 18-8530
Replaces: 98562A6

O.E. No. 98562A6

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181937	(18-1937)	$354.10 H

Manifold Spacer



MRY Manifold Spacer, For: 229 and 262 V6, 305-350 Small Block V8, 454 Big Block V8. Used with: Manifold 18-1952-1, 18-1957-1, 18-1953-1
Replaces: 93322

O.E. No. 93322

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181985	(18-1985)	$156.30 H

Manifold Riser Spacer Kit



MERC Riser Spacer, Alpha/Bravo/Gen+/GenIV GM Small Block V8 305, 350, 4.3L, 454, 5.0L, 5.7L, 502, 7.4L, 8.2L, (3" Riser Kit). Complete with Mounting Hardware. Center Rise 3". Packaged as Set. Use with: Manifold 18-1952-1
Replaces: 807476A6, 93320A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181908K	(18-1908K)	$347.53 H

Riser Spacer



Manifold Riser Spacer, Fits: V6 and V8 applications

O.E. No. 93322

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181908	(18-1908)	$119.77 H

Exhaust Manifold Gasket



MRC Long Yoke Assembly
Replaces: Mercruiser 27-815528, Volvo 3853256, OMC 3853256, 914578

O.E. No. 27-815528

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180680	(18-0680)	$14.02 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Exhaust Elbow Gasket



MRC Elbow Gasket, Used with: Riser 18-1970-1, 18-1976-1
Replaces: 27-860231, 8637251

O.E. No. 27-860231

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180672	(18-0672)	$10.60 H

Exhaust Elbow Mounting Gasket



MRC Elbow Gasket, Included in 18-8530 Mounting Kit. Used with: Elbow 18-1937
Replaces: 27-18272

O.E. No. 27-18272

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180881	(18-0881)	$11.03 H

Exhaust Elbow Mounting Gasket



MRC Elbow Gasket, Fits: Manifolds 18-1957-1, 18-1952-1, 18-1958, 18-1962, 18-1953-1, Manifold Spacers 18-1985 and 18-1908, Elbows 18-1970-1, 18-1976-1 and 18-1974. Used with: Riser 18-1976-1, 18-1970-1
Replaces: 27-41813

O.E. No. 27-41813

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180897	(18-0897)	$6.03 H

Oil Pan



Mercury Oil Pan, For: Mercruiser 93476, 2 Piece Rear Main Seal, GM Small Block V8 (Right Handed Dipstick)

O.E. No. 93476

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180613	(18-0613)	$222.67 H

Motor Mount



MRY Motor Mount, Small Diameter, Upper Motor Mount, Includes: (1) Upper Motor Mount and (1) 1-1/4" O.D. x 1/2" I.D. Stainless Steel Washer
Replaces: 78687, 78687T

O.E. No. 76867

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182144	(18-2144)	$67.10 H

Oil Seal



MRY Oil Seal, Fits: 120/140 1978-1982, 165 1978-1981, 260 1978-1982, 470 1978-1982, 485 1980-1982, 898/228 1978-1982, Alpha I/Gen II 1991 and Up, Blackhawk 1994-1995, Bravo I/II/III 1988-1998, R/MR/Alpha One Sterndrive and Transom 1983-1990
Replaces: 26-88416

O.E. No. 26-88416

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182094	(18-2094)	$18.33 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Sierra Carburetor Kit/Float Application Guide for Mercuriser

Model and Serial #	Mercruiser Carburetor #	Mfg. Carburetor #	Carburetor Code and Model	Carburetor Kit①	Float
MCM 80 ALL	1346-2770	RBS-4394S	C1/RBS	18-7080	—
MCM 90					
3225967 & BELOW	1351-4263A1	7040082	R2/2GC	18-7746	18-7200
3225968 & ABOVE	1351-4263A2	7041369	R2/2GC	18-7746	18-7200
MCM110 ALL	1336-2076	7036543	R2/2GC	18-7070	18-7200
MCM 120/2.5L					
2520424 & BELOW	1336-2076	7036543	R2/2GC	18-7746	18-7200
2520425-3377340	1336-3594A1	7036543	R2/2GC	18-7746	18-7200
3377341-3770649	1351-4263A3	7041369	R2/2GC	18-7746	18-7200
3770650-4469865	1351-5202A1	7043182	R2/2GC	18-7746	18-7200
4469866-5192047	1351-6065A2	7044182	R2/2GC	18-7746	18-7200
5192048-6229717	1351-7354A1	17059054	R2/2GC	18-7746	18-7200
6229718 & ABOVE	1351-8480A2	17081060	R2/2GC	18-7746	18-7200
6229718 & ABOVE	1389-8490A2	N/A	M2/Mercarb	18-7097	18-7202
6229718 & ABOVE	1389-9350A2	N/A	M2/Mercarb	18-7097	18-7202
6229718 & ABOVE	1389-9562A1	N/A	M2/Mercarb	18-7098-1	18-7202
MCM 140/3.0L/3.0LX (4 Cylinder)					
2816416 & BELOW	1351-3635A1	7036646	R2/2GC	18-7746	18-7200
2816417-3332137	1351-4032A1	7040080	R2/2GC	18-7746	18-7200
3332138-3771644	1351-4293A1	7040084	R2/2GC	18-7746	18-7200
3771645-5157668	1351-5203A1	7043184	R2/2GC	18-7746	18-7200
5157669-6229717	1351-7355A1	17059052	R2/2GC	18-7746	18-7200
6229718-C856558	1351-8480A2	17081060	R2/2GC	18-7746	18-7200
6229718-C856558	1389-8490A2	N/A	M2/Mercarb	18-7097	18-7202
6229718-C856558	1389-9350A2	N/A	M2/Mercarb	18-7097	18-7202
6229718-C856558	1389-9562A1	N/A	M2/Mercarb	18-7098-1	18-7202
C856559 & ABOVE	1389-815396A2	N/A	M2/Mercarb	18-7098-1	18-7202
C856559 & ABOVE	1389-815397A2	N/A	M2/Mercarb	18-7098-1	18-7202
MCM 140 (6 Cylinder)					
ALL (BC)	1338-2161	7025638	R1/BC	18-7071	—
ALL (B)	1338-2166	7025662	R1/B	18-7071	—
MCM 150					
1823489 & BELOW	1338-2428	7024180	R1/BC	18-7071	—
1823489 & BELOW	1338-2431	7024181	R1/B	18-7071	—
1823490-1830151	1338-2608	7025183	R1/BC	18-7071	—
1823490-1830151	1338-2609	7025184	R1/B	18-7071	—
1830152 & ABOVE	1338-2633	7025188	R2/2GC	18-7070	18-7200
MCM 160					
2492035 & BELOW	1338-2991	7026088	R2/2GC	18-7746	18-7200
2492036 & ABOVE	1351-3635A1	7036646	R2/2GC	18-7746	18-7200
MCM 165 (6 Cylinder)					
3354701 & BELOW	1351-4282A1	7040083	R2/2GC	18-7746	18-7200
3354702-3774864	1351-4871A1	7042183	R2/2GC	18-7746	18-7200
3774865-5178958	1351-5204A1	7043183	R2/2GC	18-7746	18-7200
5178959 & ABOVE	1351-7356A1	17059050	R2/2GC	18-7746	18-7200
MCM 165/170/3.7L (4 Cylinder)					
6218037-6916778	1389-8489A5	N/A	M2/Mercarb	18-7097	18-7202
6916779 & ABOVE	1389-9564A1	N/A	M2/Mercarb	18-7098-1	18-7202
MCM 175/4.3L/185 (V6)	3304-9565A1	N/A	M2/Mercarb	18-7098-1	18-7202
(229 CID) ALL					
A221455-D714106	3300-8886A2	17083515	R4/4MV	18-7095	18-7201
185 (262 CID)					
A221455-B527954	3304-9353A2	N/A	M2/Mercarb	18-7097	18-7202
MCM 205 (262 CID)	3304-9354A2	—	R4/4MV	18-7095	18-7201
A331455-D714369	3304-9565A1	N/A	M2/Mercarb	18-7098-1	18-7202
MCM/MIE 470 ALL	1376-5990A1	17057132	R2/2GC	18-7076	18-7202
MCM 485 ALL	1376-5990A1	17057132	R2/2GC	18-7076	18-7202
MCM 488 ALL	1347-8460A3	17081299	R4/4ME	18-7077	18-7201
MCM 888					
ALL HOLLEY	1356-4642	D1JJ-9510-8	H2/2300	18-7081	18-7206
ALL ROCHESTER	1376-5659A1	7044185	R2/2GC	18-7075	18-7202

① Does not include metering rods

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Sierra Carburetor Kit/Float Application Guide for Mercuruiser - *Continued*

Model and Serial #	Mercruiser Carburetor #	Mfg. Carburetor #	Carburetor Code and Model	Carburetor Kit①	Float
MCM 180/190/3.7LX					
(4 Cylinder)	1347-9142A2	17083522	R4/4MV	18-7095	18-7201
MIE 198/200/5.0L					
6021383 & BELOW	1376-6491A1	17057139	R2/2GV	18-7075	18-7202
6021384 & ABOVE	1376-8295A3	17080350	R2/2GV	18-7075	18-7202
MCM 200 (6 Cylinder)					
2494935 & BELOW	1347-3237A2	7037082	R4/4MV	18-7072	18-7201
2494936 & ABOVE	1347-3237A4	7037082	R4/4MV	18-7072	18-7201
MCM 898/200/5.0L					
6218462 & ABOVE	1389-8488A2	N/A	M2/Mercarb	18-7097	18-7202
6218462 & ABOVE	1389-9563A1	N/A	M2/Mercarb	18-7098-1	18-7202
6218462 & ABOVE	1389-9670A2	N/A	M2/Mercarb	18-7098-1	18-7202
MCM 205/4.3LX (V-6 262 CID)					
A331455-D714369	3304-9354A2	17084516	R4/4MV	18-7095	18-7201
MCM/MIE 215 ALL	1356-4066	C9FF-9510-E	H4/4160	18-7096	18-7206
MCM/MIE 225 (FORD)					
ALL	1356-5155	D2JL-9510-C	H4/4160	18-7096	18-7206
MCM/MIE 225 (GM)	1337-2103	7025564	R4/4GC	18-7078	—
1536920-2694014	1337-2604	7025756	R4/4GC	18-7078	—
	1347-3353	7037082	R4/4MV	18-7072	18-7201
	1347-3237A3	7037082	R4/4MV	18-7072	18-7201
MCM 228					
5069430 & BELOW	1347-6427A1	17057282	R4/4MV	18-7072	18-7201
MCM 228TR/ MIE 228					
5069430 & BELOW	1347-6438A1	17057283	R4/4MV	18-7072	18-7201
MCM 228/230/5.0L					
5069431-6021783	1347-7361A1	17059292	R4/4MV	18-7095	
6021784-6218461	1347-8296A4	17080565	R4/4MV	18-7095	18-7201
6218462 & ABOVE	1347-9661A3	—	R4/4MV	18-7095	18-7201
MIE 228					
5067431-6040745	1347-7364A1	17059291	R4/4MV	18-7095	18-7201
6040746 & ABOVE	1347-8290A1	17080564	R4/4MV	18-7095	18-7201
MIE 230/5.0L ALL	1347-8290A1	17080564	R4/4MV	18-7095	18-7201
230/5.0LX	1347-9661A3	—	R4/4MV	18-7095	18-7201
MCM/MIE 233					
4465029 & BELOW	1376-5744A1	7044187	R2/2GC	18-7075	18-7202
4465030 & ABOVE	1376-6152A1	17056197	R2/2GC	18-7075	18-7202
MCM/MIE 250 AUTO. CHOKE					
4767999 & BELOW	1347-3353	7037082	R4/4MV	18-7072	18-7201
MCM/MIE 250 (EL. CHOKE)					
4767999 & BELOW	1347-3237A3	7037082	R4/4MV	18-7072	18-7201
MCM 250					
4768000 & ABOVE	1347-6492A1	17057298	R4/4MV	18-7072	18-7201
MCM/MIE 255 (GM)					
4924564 & BELOW	1347-5732A1	7044291	R4/4MV	18-7072	18-7201
4924565-5195908	1347-7062A1	17057295	R4/4MV	18-7072	18-7201
5195909-5907067	1347-7365A1	17059289	R4/4MV	18-7095	18-7201
5907068 & ABOVE	1347-8289A1	17080562	R4/4MV	18-7095	18-7201
MCM/MIE 255 (FORD)					
ALL	1356-5169	D2JL-9510E	H4/4160	18-7096	18-7206
MCM 260/5.7L BRAVO					
5060805 & BELOW	1347-6492A1	17057298	R4/4MV	18-7072	18-7201
5060806-6024393	1347-7362A1	17059288	R4/4MV	18-7095	18-7201
6024394-B525981	1347-8292A4	17080561	R4/4MV	18-7095	18-7201
B525982 & ABOVE	1347-9662A4	—	R4/4MV	18-7095	18-7201
MIE 260/5.7L 350 MAG					
A635178-D617327	1347-8289A1	17080562	R4/4MV	18-7095	18-7201
MIE 5.7 SKI					
A339533-F205099	1347-9415T	17085013	R4/4MV	18-7095	18-7201
MCM/MIE 270 ALL	1347-4180A1	7029285	R4/4MV	18-7072	18-7201

① Does not include metering rods

Note: Product shipped may not match the item pictured.

Sierra Carburetor Kit / Float Application Guide for Mercuruiser - *Continued*

Model and Serial #	Mercruiser Carburetor #	Mfg. Carburetor #	Carburetor Code and Model	Carburetor Kit①	Float
MCM 280					
4176468 & BELOW	1347-4179A2	7040283	R4/4MV	18-7072	18-7201
4176469 & ABOVE	1347-5981A1	7044290	R4/4MV	18-7072	18-7201
MCM 300 MR/TRS (GM)					
6668677 & ABOVE	1347-7498A7	—	R4/4MV	18-7095	18-7201
MCM/MIE 325 AUTO. CHOKE					
3042730 & BELOW	1347-3342	7027080	R4/4MV	18-7072	18-7201
3042731 & ABOVE	1347-4533A1	7041831	R4/4MV	18-7072	18-7201
MCM/MIE 325 EL. CHOKE					
2278747-378099	1347-3689A1	7029280	R4/4MV	18-7072	18-7201
MCM 330/454 MAGNUM (ALPHA ONE)					
5027230 & BELOW	1347-6493A1	17057287	R4/4MV	18-7072	18-7201
5027231-6083144	1347-7363A1	17059290	R4/4MV	18-7095	18-7201
6083145 & ABOVE	1347-8291A3	17080563	R4/4MV	18-7095	18-7201
MIE 330					
5226384 & BELOW	1347-6493A1	17057287	R4/4MV	18-7072	18-7201
5226385 & ABOVE	1347-7366A1	17059287	R4/4MV	18-7095	18-7201
MIE 340/7.4L					
ALL	1347-8288A1	17080560	R4/4MV	18-7095	18-7201
MCM 350 MAGNUM/5.7L BRAVO					
B525992-317327	1347-8289A1	—	R4/4MV	18-7095	18-7201
MIE 350 ALL	1347-5326A2	17065977	R4/4MV	18-7072	18-7201
MCM 370/400 ALL	1347-7498A2	17059280	R4/4MV	18-7095	18-7201
MCM 7.4L (BRAVO ONE)	1347-8291A3	17080563	R4/4MV	18-7095	18-7201
MCM 454 7.4L					
6083145-B816540	—	—	H4/4150, R6647A	18-7728	—
MCM 454 MAGNUM					
(BRAVO ONE)	1347-7498A2	17059280	R4/4MV	18-7095	18-7201
ALL	1347-9863A3	—	R4/4MV	18-7095	18-7201
MCM 502 MAGNUM (BRAVO ONE)					
C878221-D857199	1347-814623A2	—	R4/4MV	18-7095	18-7201
MCM 8.2L	1347-814623A2	—	R4/4MV	18-7095	18-7201

① Does not include metering rods

Sierra Fuel Pump Application Guide For Mercruiser

Model	Serial Number	Fuel Pump
120	1666601-3377340	18-7278
120	4469866 & Below	18-7278
120	4469866-4952700	18-7278
120	4952701 & Up	18-7278
120	5192049-6229717	18-7278
120/2.5L	6229718 & Up	18-7278
120/2.5L	6229718 & Up	18-7282
140 (4 Cylinder)	2508261-3332137	18-7278
140	4460664 & Below	18-7278
140	4460665-4918569	18-7278
140	4918570 & Up	18-7278
140 (4 Cylinder)	5157669-6229717	18-7278
140/3.0L	6229717 & Below	①18-7278
140/3.0L	6229718 & Up	18-7282
3.0L/3.0LX	C856559 & Up	18-7282
140 (6 Cylinder)	1538930-1725960	18-7256
150	1666495-2048046	18-7256
160	2048022-2770031	18-7278
165	4471566-4884834	18-7278
165	5178959 & Up	18-7278
165/3.7L (4 Cylinder)	6916779 & Up	18-7282
170 (4 Cylinder)	6916779 & Up	18-7282
180/3.7LX (4 Cylinder)	6916779 & Up	18-7282

Model	Serial Number	Fuel Pump
175/4.3L (262 CID)	B527955 & Up	18-7284
185 (229 CID)	6330183 & Up	18-7284
185 (262 CID)	A331455 & Up	18-7284
190 (4 Cylinder)	6916779 & Up	18-7282
200	2453769-2712072	18-7278
200 GM	6218462 & Up	18-7283
200/5.0L GM	B525982 & Up	18-7283
205 (262 CID)	A331455 & Up	18-7284
205/4.3L, LX (262 CID)	B527955 & Up	18-7284
215 Ford	3085036 & Below	18-7267
215 Ford	3258182 & Up	18-7267
225 Ford	3385721 & Up	18-7267
228 GM	4765100-5170008	18-7274
228 GM	5170009-6218461	18-7274
228 GM	6218462 & Up	18-7283
230 GM Inboard	5907058 & Up	18-7283
230/5.0L GM (IB)	B522506 & Up	18-7283
230 GM	6218462 & Up	18-7283
230/5.0L, LX GM	B525982 & Up	18-7283
233 FORD	4500860 & Up	18-7267
250 GM	4768000-4908849	18-7274
255 FORD	3258728 & Up	18-7267
255 GM	4175500-5195908	18-7274

① Old Design

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Sierra Fuel Pump Application Guide For Mercruiser - *Continued*

Model	Serial Number	Fuel Pump
255 GM	5195909 & Up	18-7274
260 GM	4908850-6218461	18-7274
260 GM	6218461 & Up	18-7283
260/5.7L GM	B525982 & Up	18-7283
260 GM Inboard	5907058 & Up	18-7283
260/5.7L GM (IB)	5907058 & Up	18-7283
5.7L GM	F025000 & Up	18-7283
280 GM	4176250 & Up	18-7274
300 MR/TRS GM	6668677 & Up	18-7283
325 GM	2278747-3640670	18-7275
330 GM	4623115 & Up	18-7275
330 GM/W.B.W.	6083145 & Up	18-7288-1
340/7.4L GM (IB)	5889914 & Up	18-7288-1
350 GM	3780450 & Up	18-7275
350 GM (MAGNUM)	A635178 & Up	18-7283
350 (MAG TOURNEY SKI)	D505450 & Up	18-7283
370 TRS GM	6721528 & Up	18-7288-1
390 GM	2781129-2825059	18-7275
420 GM	A398941 & Up	18-7288-1
425 GM	A398941 & Up	18-7288-1
454 GM (MAGNUM)	A631894 & Up	18-7288-1
454 MAG BRAVO GM	B840126 & Up	18-7288-1
470	5097479 & Below	18-7278
470	5097480 & Up	18-7278
470	5520115-6218036	18-7278
470	6218037 & Up	18-7278
485	5685394 & Up	18-7278
488	6170297 & Up	18-7278
888 Ford	3108723 & Up	18-7267
898/198 GM	4762210-6218461	18-7274
898 GM	6218462 & Up	18-7283
5.7L GM (SKI)	A338553 & Up	18-7283
5.7L GM (SKI)	B514627 & Up	18-7283
5.7L BRAVO GM 350	B525982 & Up	18-7283
7.4L BRAVO GM	B771113 & Up	18-7288-1
7.4L W/HURTH (IB)	C391564 & Up	18-7288-1

Carburetor

Mer Carb 2V Carburetor
Replaces: Mercruiser 3310-864941A01
2002-2004 4.3L Engines (s/n OM615000-OW300012)



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187615N	(18-7615N)	$830.00 H

Carburetor

Q-jet Carburetor
Replaces: 1347-816373A4, 1347-804624R1, 1347-804624R02

O.E. No. 3310-864941A01



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187373N	(18-7373N)	$631.67 H

Carburetor Kit

Replaces: 383615, 982384

O.E. No. 1397-2072




Brand Name	DMI No.	Mfg. No.	Price
Sierra	187070	(18-7070)	$27.37 H

Carburetor Kit

Replaces: 983864, 383918

O.E. No. 1397-7539



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187095	(18-7095)	$18.78 H

Carburetor Kit


MER Carburetor 2 Barrel, Side Fill Accelerator Pump 1986 and Up, MCM 4 Cylinder, V6 and V8
Replaces: 3302-804844002



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187098	(18-7098-1)	$64.37 H

Carburetor Kit

Replaces: 809065, 835076, 823728



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187749	(18-7749)	$127.33 H

Note: Product shipped may not match the item pictured.

Carburetor Kit

Replaces: 1397-5830, 1397-7099, 1397-8760, 1397-5831



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187075	(18-7075)	$40.93 H

Carburetor Kit


Replaces: 1397-6367, A1



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187076	(18-7076)	$51.57 H

Carburetor Kit

Replaces: 3302-9437, 3302-804845
Mer Carb 2 Barrel, Bottom Fill Accelerator Pump 1983-1986 MCM 120, 140, 470, 185, 200 and 898



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187097	(18-7097)	$58.25 H

Fuel Pump

Flange I.D. #60032. For: GM (4 and 6 Cylinder) 153, 181, 250, 224 and 225

O.E. No. 86234A4



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187278	(18-7278)	$222.58 H

Fuel Pump

Flange I.D. # M60600. For: GM (V8) 305, 350
Replaces: 97401A2, 97401A2A8, 861678A1

O.E. No. 861678A1



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187283	(18-7283)	$124.65 H

Electric Fuel Pump

For: 1992-1993, 1996 F.I. and Carbureted 4.3L with Inline Electric Pump
Replaces: 805656A2

O.E. No. 805656A2



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187326	(18-7326)	$240.73 H

Replacement Filter for Mercury Engines

Fits: Mercury Outboard Engines, Direct OEM Replacement, 2 Micron



Brand Name	DMI No.	Mfg. No.	Price
Marpac	4-7981	(FF020100)	$29.98 M

Fuel Filter

MRY/MRC Fuel Filter, Inline



O.E. No. 35-879885T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187718	(18-7718)	$11.30 H

Fuel/Water Separator Filter and Bracket

MRY/MRC Fuel/Water Separator
Replaces: Mercury 35-60494A4, Suzuki 99105- 20001, Yamaha ABA-SEPAR-AT-OR

O.E. No. 35-807172



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187844	(18-7844)	$8.27 H

Fuel/Water Separator Filter

MRY/MRC Fuel Water Separator
ABB-FUEL F-IL-TR

O.E. No. 35-802893Q



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187845	(18-7845)	$8.27 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Fuel/Water Separator Filter

Short, 3.875", 10 Micron Replacement Filters



O.E. No. 35-802893Q

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187944	(18-7944)	$6.98 H

Fuel/Water Separator Filter

Long, 4.35", 10 Micron Replacement Filters



O.E. No. 35-802893Q

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187945	(18-7945)	$6.98 H

Fuel Filter

Mercruiser/Mercury/Mariner
Replaces: Mercury 35-18458Q4



O.E. No. 35-18458Q4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187968	(18-7968)	$20.00 H

Fuel/Water Separator Kit

1/4 Aluminum (Short Filter)
Includes: 18-7853-1 Fuel Water Separator Bracket - 1/4" and 18-7845 21 Micron Replacement Filter, Universal Design. Replaces: Mercury 35-805269A4, Suzuki 99105-20001, Mercury 35-802893Q4, Mercury 35-60494A4, Yamaha ABA-SEPAR-AT-OR, Mercury 35-604944, Mercury 35-802893A4 and Mercury 32-80289304.



O.E. No. 32-802893Q

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1878481	(18-7848-1)	$38.57 H

Fuel/Water Separator Kit

1/4 Aluminum (Short Filter)
Includes: 18-7853-1 Fuel Water Separator Bracket - 1/4 and 18-7844 21 Micron Replacement Filter (2), Universal Design



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187848	(18-7848-2)	$45.63 H

Fuel/Water Separator Kit

MRY/MAR/SUZ Fuel/Water Separator Kit
Replaces: Mercury 35-60494A4, Suzuki 99105-20001, Yamaha ABA-SEPAR-AT-OR



O.E. No. 35-60494A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187852	(18-7852-1)	$38.68 H

Fuel Filter

Used in 18-7278 Fuel Pump. For: Inline 4 and 6 Cylinder Engines
Replaces: 35-49088A2, 35-49088Q2



O.E. No. 35-49088A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187860	(18-7860)	$7.78 H

Fuel Filter Element

MRY/SUZ/HON Fuel Filter Element
881540, 15412-93J00



O.E. No. 881540

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187936	(18-7936)	$22.05 H

Spark Plug Wire Kit

Kit Includes: 25 ft. Roll of 7 MM Hypalon Ignition Wire with a Metallic Core and a Large Assortment of Three Different End Fittings to Fit Outboard Motors
Replaces: Mercury 84-99215A26, 84-813706A26



O.E. No. 84-813706A26

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185225	(18-5225)	$40.57 H

Tune-Up Kit

For: Late Model V8 (Alpha/Bravo 350 Mag), 5.0L and MX 6.2L
Replaces: 898253T29



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185247	(18-5247)	$93.87 H

Pictures May Not Match Engine Description

Tune-Up Kit

Contains:

18-5303	Contact Set	O.E. No. 392-6325
18-5345	Condenser	O.E. No. 392-6324
18-5403	Rotor Prestolite, 8 Cyl.	O.E. No. 392-9767



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185260	(18-5260)	$22.38 H

Tune-Up Kit

GM 4 Cylinder, Single Point
Contains:

18-5311	Contact Set	O.E. No. 16.69-00049
18-5345	Condenser	O.E. No. 16.69-00050
18-5418	Rotor	O.E. No. 16.69-00051
18-5385	Distributor Cap	O.E. No. 16.69-00052



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185268	(18-5268)	$34.23 H

Tune-Up Kit

Mercury Thunderbolt HEI - V8.
Replaces: 805759T3, 805759Q3
Contains:

18-5431	Rotor	O.E. No. 13524A5
18-5395	Distributor Cap	O.E. No. 16457A4



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185273	(18-5273)	$37.43 H

Electronic Conversion Kit

For: Most Prestolite V8 Distributors. Use with 18-5403 Style Rotor, with Screw Down Cap. Replaces Points and Condensers for True Solid State Ignition. Uses Standard Coil, Cap and Rotor. Easy to install, one-piece, 2 wire hook-up. Accurate to within 1/4 timing accuracy 0 to 6000 RPM range. Can be used with Flame Thrower Coils 18-5466 and 18-5469



Brand Name	DMI No.	Mfg. No.	Price
Sierra	185299	(18-5299)	$162.17 H

Distributor Cap

V8. Replaces: 16457A4, 805759T, 805759T1



O.E. No. 16457A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185395	(18-5395)	$36.80 H

Rotor

Replaces: 982880



O.E. No. 392-9089

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185403	(18-5403)	$8.97 H

Rotor Assembly

V8. Replaces: 13524A5, T1



O.E. No. 13524A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185431	(18-5431)	$8.45 H

Ignition Coil

Replaces: 392-7803A4, 392-805570A2HEI



O.E. No. 392-7803A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185438	(18-5438)	$48.38 H

Ignition Coil

MRCR Ignition Coil



O.E. No. 392-863704T ss 8M0054588

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185465	(18-5465)	$331.85 H

Premium Marine Spark Plug Wire Set

Fits: 181 CID (3.0L) Conventional Ignition, 4 Cylinder



O.E. No. 84-813720A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1888001	(18-8800-1)	$38.03 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Premium Marine Spark Plug Wire Set



Fits: Model Ignition Type Cylinders 302/5.0L Conventional 8, 350/5.7L Conventional 8, 351/5.8L Conventional 8, 454/7.4L Conventional 8

O.E. No. 84-813720A10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188803	(18-8803-2)	$53.17 H

Premium Marine Spark Plug Wire Set



Fits: Mercruiser O.E. # Cylinders 84-813720A2, 84-816608Q61 8, 84-813720A3, 84-816761Q3 8, 84-813720A4, 84-816761Q4 8, 84-816761A4, 84-816761Q4 8

O.E. No. 84-813720A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188804	(18-8804-1)	$58.77 H

Premium Marine Spark Plug Wire Set



Fits: 262/4.3L EST, EFI 6 Cylinder

O.E. No. 84-813720A11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188810	(18-8810-1)	$48.37 H

Impeller



For All #1, R, MR, Alpha Units thru S/N D494568. Also for Raw Water Pump On: 190 IB S/N 1564539-1720903, 225 IB S/N 1539620-2278646
Replaces: 47-89984, 47-89984T4, 47-30221, 47-65960

O.E. No. 47-30221

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183017	(18-3017)	$19.07 H
MP Parts	4-3017B	(47-00001)	$17.98 L

Impeller



Replaces:
18-3039 ID .456" 47-89981
18-3054 ID .438" 47-89980

O.E. No. 47-89981

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183039	(18-3039)	$12.98 H
MP Parts	4-3039B	(47-00004)	$12.98 M

Impeller



Replaces:
18-3039 ID .456" 47-89981
18-3054 ID .438" 47-89980

O.E. No. 47-89980

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183054	(18-3054)	$14.98 H

Impeller



Replaces: 47-43026-2, 47-43026T2

O.E. No. 47-43026-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183056	(18-3056)	$23.25 H
MP Parts	4-3056B	(47-01814)	$23.98 M

Impeller



Replaces: 47-85089-3

O.E. No. 47-85089-3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183057	(18-3057)	$18.50 H
MP Parts	4-3057B	(47-00125)	$18.98 M

Impeller



Replaces 47-59362, 47-59362T

O.E. No. 47-59362

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183087	(18-3087)	$26.553 H
MP Parts	4-3087	(47-03908)	$25.98 L

Note: Product shipped may not match the item pictured.

Impeller

Replaces 47-42038-2



O.E. No. 47-42038-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183062	(18-3062)	$19.07 H

Impeller Kit

Impeller and Gasket
Various Engines, Spline Drive with 12 Vanes, Diameter 2-1/4", Width 1-15/16", Neoprene



O.E. No. 13554-0001

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-3306	(47-07205-3)	$40.98 L
Sierra	183306	(18-3306)	$52.92 H

Impeller Kit

Replaces: 47-862232A2
For: Late Model Bravo and High Performance. Includes: 350 MAG, 4.3L., 496 MAG, 5.0L., 8.1S and MX 6.2L



O.E. No. 47-862232A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183016	(18-3016-1)	$38.02 H

Impeller Kit

Fits: 1996-1997 7.4L MIE MPI (LH) Gen VI GM 454 V8, 1996-1997, 7.4L TBI MIE (LH) Gen VI GM 454 V8, 1996-1997 8.2L MIE MPI (LH) Gen VI GM 502 V8



O.E. No. 47-59362A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183216	(18-3216)	$43.68 H

Water Pump Kit

Impeller Repair Kit
50-250 H.P. Outboard 1994-2010 and Alpha Gen II with Long Vane without Housing



O.E. No. 43026 T11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183214	(18-3214)	$43.88 H
MP Parts	4-3214	(46-01811-3)	$39.98 H
MP Parts	4-3214-3	(46-01811MP)	$125.98 N

Water Pump Kit

Impeller Repair Kit
50-250 H.P. Outboard 1994-2010 and Alpha Gen II with Long Vane and Stainless Housing



O.E. No. 817275Q05

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183147	(18-3147)	$126.17 H
MP Parts	4-3147	(46-46502-3)	$128.98 L

Water Pump Kit

Complete Water Pump Kit with Base
All MR/Alpha I Later Style with Plastic Housing, Base Included



O.E. No. 44292A 4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183320	(18-3320)	$45.57 H
MP Parts	4-3320	(46-00048-3)	$41.98 H

Water Pump Kit

For: Gen II - Lower s/n D469859 and Up
Replaces: 817275T4



O.E. No. 817275T4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183147	(18-3147)	$126.17 H
MP Parts	4-3147P	(46-46502)	$128.98 L

Water Pump Kit

For: Bravo
Replaces: 46-807151A14



O.E. No. 46-807151A14

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183150	(18-3150)	$87.72 H

Impeller Repair Kit

Outboard and Alpha I - Generation IIS/N D494569 and Above Mercruiser Vazer
Replaces: 47-43026T6, T8, T11



O.E. No. 47-43026T11

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183214	(18-3214)	$43.88 H
MP Parts	4-3214B	(46-01811)	$41.98 M

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Impeller Repair Kit

For: Bravo I, II, III (1988 and Up) B664190 and Up. Fits: Bravo Drives with 1 Piece Housing



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183237	(18-3237)	$47.25 H

Water Pump Kit

Includes: Impeller, Seal, Gasket, End and Cover Screws, Use with 18-3587 Pump
Replaces: Johnson Pump 09-45825



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183089	(18-3089)	$81.45 H

Impeller Repair Kit

Similar to: 46-96148A5 without Base or Housing
Contains:

18-3109 Water Tube, Qty. 1 O.E. No. 23-29804
18-3017 Impeller, Qty. 1 O.E. No. 47-89984
18-2919 Water Pump Gasket, Qty. 1 O.E. No. 27-42631-1
18-3110 Grommet, Qty. 1 O.E. No. 26-38970
18-2945 Drain Gasket, Qty. 2 O.E. No. 12-20260,12-19183
18-2826 Water Pump Base to Gear Housing Gasket, Qty. 1 O.E. No. 27-85610



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183217	(18-3217)	$40.25 H
MP Parts	4-3217B	(46-00091)	$30.98 M

Impeller Repair Kit

For: 135/150/175 4 Stroke Verado (S/N 1B227000 and Up), 200/225 4 Stroke Verado (S/N OT980000 and Up), 250/275 4 Stroke Verado (S/N OT801000 and Up)
Replaces: Mercury 47-43026Q06



O.E. No. 47-43026Q06

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183265	(18-3265)	$42.67 H

Water Pump Kit

Models which have been retro-fitted with an Alpha Style Lower Unit (no pre-load pin in top of driveshaft) must use Alpha Style parts (18-3320 and 18-3420). For: #1/R Units without flush S/N 2763442-6854392



O.E. No. 46-96148A8

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183317	(18-3317)	$50.67 H
MP Parts	4-3317B	(46-00047)	$43.98 K

Water Pump Kit

Fits: Plastic 1 and 2 Piece Sea Water Pump Body
Replaces: 47-59362Q08



O.E. No. 47-59362Q08

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183318	(18-3318)	$77.78 H

Water Pump Kit without Base

Replaces: 46-96148A5, 46-60367A1, 46-96148A8



O.E. No. 46-60367A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183517	(18-3517)	$65.97 H

Thermostat

MRC Thermostat



O.E. No. 99155A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183555	(18-3555)	$18.00 H

Thermostat

MRC Thermostat 160D



O.E. No. 807252-2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183649	(18-3649)	$24.58 H

Thermostat Kit

MRC Thermostat Kit 140D



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183650	(18-3650)	$20.88 H

Note: Product shipped may not match the item pictured.

Thermostat Kit

MRC Thermostat Kit 143D



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183651	(18-3651)	$19.42 H

Thermostat Kit

MRC Thermostat Kit 160D



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183648	(18-3648)	$22.07 H

Thermostat Kit

MRC Thermostat Kit 160D



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183667	(18-3667)	$21.08 H

Thermostat Kit

MRC Thermostat Kit 160D



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183644	(18-3644)	$22.87 H

Thermostat Kit

MRC Thermostat Kit



O.E. No. 807252Q3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183646	(18-3646)	$20.35 H

Thermostat Kit

MRC Thermostat Kit



O.E. No. 807252Q5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183647	(18-3647)	$32.13 H

Thermostat Cover Gasket

MRC Thermostat Cover Gasket



O.E. No. 27-41812, 27-90556

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182554	(18-2554)	$5.33 H

Thermostat Gasket

MRC Thermostat Gasket



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182555	(18-2555)	$1.43 H

Thermostat Gasket

MRC Thermostat Gasket



O.E. No. 27-475901

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182831	(18-2831)	$1.58 H

Thermostat Gasket

MRC Thermostat Gasket, V8



O.E. No. 27-488181

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182844	(18-2844)	$1.53 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Water Pump

MRCR/Bravo Raw Water Pump



O.E. No. 46-72774A32

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183600	(18-3600)	$453.88 H

Water Pump

MRCR Sea Water Pump



O.E. No. 46-862914A13

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183160	(18-3160)	$260.37 H

Circulating Water Pump

Big Block GM Engines with Composite Timing Covers "Late Model" includes 482 and 502 CID



O.E. No. 3855991

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183574	(18-3574)	$185.40 H

Circulating Water Pump

(Bi-Directional) Replaces: 65142A1
For: GM Inline (4 and 6 Cylinder)



O.E. No. 880817

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183575	(18-3575)	$111.68 H

Circulating Water Pump

Bi-Directional, For: Big Block GM Engines with Stamped Steel Timing Covers
Replaces: 67859, 17670, 811573, 30103



O.E. No. 17670

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183577	(18-3577)	$184.98 H

Circulating Water Pump

Bi-Directional, For: GM V6 and V8 Engines with Stamped Steel Timing Covers
Replaces: 60658, 8503991, 17437



O.E. No. 17437

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183583	(18-3583)	$123.98 H

Circulating Water Pump

For: Late Model GM V6 and V8 Engines Using a Composite Timing Covers
Replaces: Mercruiser 811841, 850399, 8503991



O.E. No. 811841

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183599	(18-3599)	$117.35 H

Molded Hose



O.E. No. 32-871171

Brand Name	DMI No.	Mfg. No.	Price
Sierra	451822	(18-70932)	$28.23 H

Gimbal Housing Water Feed Hose



Diameter 5/8", Length 13-7/8"
Replaces: 32-32461

O.E. No. 32-32461

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183601	(18-3601)	$10.80 H

Water Intake Hose



Length 13-7/8", 3/4" I.D. For: MR, Alpha I, Gen II
Replaces: 32-4172533

O.E. No. 32-4172533

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183602	(18-3602)	$9.13 H

Pictures May Not Match Engine Description

Trim and Tilt Motor



For: Mercury and Mariner, 3 Wire
Replaces: Mercury 17649A1, 87828

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1252	(TRM0008)	$121.98 G

Oil Pressure Sender



Replaces: 700425

O.E. No. 90806

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185899	(18-5899)	$33.45 H

Trim Sender/Limit Kit



Fits: MC-I, R, MR, Alpha, Alpha Gen II, Bravo Drives
Replaces: 805320A03

O.E. No. 805320A03

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187633	(18-7633)	$102.97 H

©2014 Donovan Marine, Inc.

Mercruiser Starter and Alternator Application Guide (continued)

Model #	Cylinder	Years	Beg. S/N	End. S/N	Slave Solenoid	New Starter	MP Parts	New Alternator	MP Parts
110	GM 4	1963-1966	1538370	2044033	18-5836	18-5911	4-1134	-	
120	GM 4	1964-1975	1666601	4469865	18-5836	18-5911	4-1134	18-5957	4-1052
120	GM 4	1976-1982	4469866	6229717	18-5815	18-5911	4-1134	18-5957	4-1052
120/2.5L	GM 4	1983-1989	6229718	C853255	18-5817	18-5911	4-1134	18-5966 ④	4-1054
140	GM 4	1968-1975	2508261	4460664	18-5836	18-5911	4-1134	18-5957	4-1052
140	GM 4	1976-1981	4460665	6229717	18-5815	18-5911	4-1134	18-5957	4-1052
140/3.0L	GM 4	1982-1989	6229718	C856558	18-5817	18-5911	4-1134	18-5957	4-1052
140/3.0L	GM 4	1999-2001	OL382122	OM326292	18-5817	18-6275	N/A	18-5983**	
140/3.0L/3.0LX	GM 4	1990-1992	C856559	D831100	18-5817	18-5911	4-1134	18-5957	4-1052
140/3.0LX	GM 4	1992-1997	D831101	OK999999	18-5817	18-6275	N/A	18-5966 ④	4-1054
165/3.7L	Merc 4	1987-1989	B434941	C762299	18-5802	18-5907	4-1136	N/A	
170	Merc 4	1985-1986	6916779	B434940	18-5802	18-5907	4-1136	N/A	
180/3.7LX	Merc 4	1987-1989	B436391	C762299	18-5802	18-5907	4-1136	N/A	
190	Merc 4	1985-1986	6916779	B436390	18-5802	18-5907	4-1136	N/A	
470	Merc 4	1976-1984	4208730	6916778	18-5802	18-5907	4-1136	N/A	
470MIE	Merc 4	1980-1981	5520115	6218036	18-5802	18-5907	4-1136	N/A	
485	Merc 4	1980-1984	5685394	6916778	18-5802	18-5907	4-1136	N/A	
140	GM 6	1963	1538930	1725960	18-5836	18-5911	4-1134	-	
150	GM 6	1964-1966	1666495	2048046	18-5836	18-5911	4-1134	-	
160	GM 6	1967-1969	2048022	2768031	18-5836	18-5911	4-1134	-	
160	GM 6	1969	2768032	2770031	18-5836	18-5911	4-1134	18-5957	4-1052
165	GM 6	1970-1975	2770032	4471565	18-5836	18-5911	4-1134	18-5957	4-1052
165	GM 6	1976-1981	4471566	5813433	18-5815	18-5911	4-1134	18-5957	4-1052
200	GM 6	1969	2453769	2712072	18-5836	18-5911	4-1134	-	
175/4.3L	GM V6	1987-1992	B527955	D714106	18-5816	18-5913	4-1130	18-5966 ④	4-1054
185	GM V6	1983-1984	6330183	6919655	18-5816	18-5911	4-1134	18-5966 ④	4-1054
185	GM V6	1985-1987	A331455	B527954	18-5816	18-5913	4-1130	18-5966 ④	4-1054
205	GM V6	1985-1991	A331455	D714369	18-5816	18-5913	4-1130	18-5966 ④	4-1054
262 Mag EFI	GM V6	1996-1997	F803800	K999999	18-5817	18-5913	4-1130	18-5960	4-5946
262 Mag EFI	GM V6	1996-1997	F803800	K999999	18-5817	18-5913	4-1130	18-5960	4-5946
4.3L/LX/LXH	GM V6	1992-1997	D714107	K999999	18-5817	18-5913	4-1130	18-5967	4-1056
4.3L/LX/LXH	GM V6	1996-1997	F803000	K999999	18-5817	18-5913	4-1130	18-5967	4-1056
4.3L/LH	GM V6	1998-1999	L010044	OL618999	18-5817	18-5913	4-1130	18-5967	4-1056
4.3L/LH (Gen +)	GM V6	2000-2002	OL619000	OM320024	18-5817	18-5913	4-1130	18-6293**	
4.3L EFI	GM V6	1998-1999	L012009	OL618999	18-5817	18-5913	4-1130	18-5960	4-5946
4.3L EFI	GM V6	2000-2001	OL619000	OM299999	18-5817	18-5913	4-1130	18-6293**	
4.3L MPI	GM V6	2002	OM300000	OM320024	18-5817	18-5913	4-1130	18-6293**	
190	GM V8	1963-1964	1564539	1730903	18-5836	18-5911	4-1134	-	
200	GM V8	1985-1986	6218462	B525981	18-5816	18-5911 ①③	N/A	18-5966 ④	4-1054
200	GM V8	1985-1986	6218462	B525981	18-5816	18-5910 ②⑥	N/A	18-5966 ④	4-1054
200/5.0L	GM V8	1987-1995	B525982	F600999	18-5816	18-5910	N/A	18-5966 ④	4-1054
200/5.0L	GM V8	1987-1995	B525982	F600999	18-5817	18-5910	N/A	18-5966 ④	4-1054
215 MCM & MIE	Ford V8	1970-1972	2781153	3563181	18-5836	18-5908	4-1138	18-5957	4-1052
215 MCM & MIE	Ford V8	1970-1972	2781153	3563181	18-5836	18-5907	4-1136	18-5957	4-1052
225	Ford V8	1973-1974	3385721	4166999	18-5802	-	4-5903	18-5957	4-1052
225 MIE	Ford V8	1973-1974	3385721	4176999	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
225 MIE	Ford V8	1973-1974	3385721	4176999	18-5836	18-5907 ❺	4-1136	18-5957	4-1052
888	Ford V8	1971-1977	3108723	4612109	18-5802	- ❷	4-5903	18-5957	4-1052
888	Ford V8	1971-1977	4612110	and Up	18-5801	-	4-5903	18-5957	4-1052
225	GM V8	1963-1966	1539620	2278646	18-5836	18-5911	4-1134	-	
225 MIE	GM V8	1968	2278647	2694014	18-5836	18-5908 ❶	4-1138	-	
225 MIE	GM V8	1968	2278647	2694014	18-5836	18-5907 ❺	4-1136	-	
225	GM V8	1967-1969	2278647	2694014	18-5836	-	N/A	-	
228/230	GM V8	1977-1986	4765100	B525981	18-5816	18-5911 ①③	N/A	18-5966 ④	4-1054
228/230	GM V8	1977-1986	4765100	B525981	18-5816	18-5910 ②⑥	N/A	18-5966 ④	4-1054
228 MIE	GM V8	1977-1980	4765100	5907057	18-5815	18-5908 ❶	4-1138	18-5957	4-1052
228 MIE	GM V8	1977-1980	4765100	5907057	18-5815	18-5907 ❺	4-1136	18-5957	4-1052
230/5.0LX	GM V8	1987-1995	B525982	F600999	18-5816 ⑩	18-5910 ③	N/A	18-5966 ④	4-1054
230/5.0LX	GM V8	1987-1995	B525982	F600999	18-5817 ⑨	18-5910 ③	N/A	18-5966 ④	4-1054
230/5.0L MIE	GM V8	1987-1988	5907058	B788151	18-5816	18-5908 ❶	4-1138	18-5966 ④	4-1054
230/5.0L MIE	GM V8	1987-1988	5907058	B788151	18-5816	18-5907 ❺	4-1136	18-5966 ④	4-1054
5.0L (Gen +)	GM V8	1998-1999	L015751	L618999	18-5817	18-5913	4-1130	18-5967	4-1056
5.0L (Gen +)	GM V8	2000-2002	L619000	M320024	18-5817	18-5913	4-1130	18-6293**	
5.0L EFI	GM V8	1998-1999	L012052	L618999	18-5817	18-5913	4-1130	18-5960	4-5946

Mercruiser Starter and Alternator Application Guide (continued)

Model #	Cylinder	Years	Beg. S/N	End. S/N	Slave Solenoid	New Starter	MP Parts	New Alternator	MP Parts
5.0L EFI	GM V8	2000-2001	L619000	M299999	18-5817	18-5913	4-1130	18-6293**	
5.0L MPI	GM V8	2002	M300000	M320024	18-5817	18-5913	4-1130	18-6293**	
198 MIE	GM V8	1977	4762210	6218461	18-5815	18-5908 ❶	4-1138	18-5957	4-1052
198 MIE	GM V8	1977	4762210	6218461	18-5815	18-5907 ❺	4-1136	18-5957	4-1052
898	GM V8	1977-1982	4762210	6218461	18-5801	18-5911	4-1134	18-5957	4-1052
898	GM V8	1983-1984	621462	B525981	18-5816	18-5911 ①③	N/A	18-5966 ④	4-1054
898	GM V8	1983-1984	621462	B525981	18-5816	18-5910 ②⑥	N/A	18-5966 ④	4-1054
233	Ford V8	1975-1977	4173000	4902304	18-5801	-	4-5903	18-5957	4-1052
233 MIE	Ford V8	1975-1976	4173000	4775784	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
233 MIE	Ford V8	1975-1976	4173000	4775784	18-5836	18-5907 ❺	4-1136	18-5957	4-1052
250 MCM & MIE	GM V8	1968-1969	2314301	2639854	18-5836	18-5908 ❶	4-1138	-	
250 MCM & MIE	GM V8	1968-1969	2314301	2639854	18-5836	18-5907 ❺	4-1136	-	
250	GM V8	1977	4768000	4908849	18-5801	18-5911	4-1134	18-5957	4-1052
255	Ford V8	1973-1974	3258728	4175499	18-5802	-	4-5903	18-5957	4-1052
255 MIE	Ford V8	1973-1974	3258728	4178299	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
255 MIE	Ford V8	1973-1974	3258728	4178299	18-5836	18-5907 ❺	4-1136	18-5957	4-1052
255	GM V8	1975-1976	4175500	4767999	18-5815	18-5911	4-1134	18-5957	4-1052
255 MIE	GM V8	1975-1980	4175500	5907057	18-5815	18-5908 ❶	4-1138	18-5957	4-1052
255 MIE	GM V8	1975-1980	4175500	5907057	18-5815	18-5907 ❺	4-1136	18-5957	4-1052
260	GM V8	1978-1982	4908850	6218461	18-5801	18-5911	4-1134	18-5957	4-1052
260	GM V8	1982-1986	6218462	B525981	18-5816	18-5911 ①③	N/A	18-5966 ④	4-1054
260	GM V8	1982-1986	6218462	B525981	18-5816	18-5910 ②⑥	N/A	18-5966 ④	4-1054
260/5.7L	GM V8	1987-1995	B525982	F600999	18-5816 ⑩	18-5910 ⑥	N/A	18-5966 ④	4-1054
260/5.7L	GM V8	1987-1995	B525982	F600999	18-5817 ⑨	18-5910 ⑥	N/A	18-5966 ④	4-1054
260/5.7L MIE	GM V8	1987-1995	5907058	F746099	18-5816	18-5908 ❶	4-1138	18-5966 ④	4-1054
260/5.7L MIE	GM V8	1987-1995	5907058	F746099	18-5816	18-5907 ❺	4-1136	18-5966 ④	4-1054
5.7L/LX	GM V8	1996	F601000	K001526	18-5817	18-5913	4-1130	18-5966 ④	4-1054
5.7L/LX	GM V8	1997 and Up	K001527	and Up	18-5817	18-5913	4-1130	18-5967	4-1056
5.7L	GM V8	2000-2002	L619000	M320024	18-5817	18-5913	4-1130	18-6293**	
5.7L/LX EFI	GM V8	1995-1996	F225560	K001505	18-5816	18-5913	4-1130	18-5965	4-1058
5.7L/LX EFI	GM V8	1997	K001506	K999999	18-5816	18-5913	4-1130	18-5960	4-5946
5.7L EFI	GM V8	1998 and Up	L010035	and Up	18-5816	18-5913	4-1130	18-5960	4-5946
5.7L EFI	GM V8	2000-2001	L619000	M299999	18-5816	18-5913	4-1130	18-6293**	
5.7L MIE	GM V8	1994-1996	F622151	K040306	18-5816	18-5908 ❶	4-1138	18-5966 ④	4-1054
5.7L MIE	GM V8	1994-1996	F622151	K040306	18-5816	18-5907 ❺	4-1136	18-5966 ④	4-1054
5.7L MIE	GM V8	1997 and Up	K040307	and Up	18-5817	18-5908	4-1138	18-5967	4-1056
5.7L MIE	GM V8	1998-2001	L002003	L677226	18-5817	18-5908	4-1138	18-6293**	
5.7L EFI MIE	GM V8	1997	K040300	K999999	18-5816	18-5908	4-1138	18-5960	4-5946
5.7L Ski	GM V8	1985-1995	A338533	F775199	18-5816	18-5913 ❺	N/A	18-5966 ④	4-1054
5.7L Ski	GM V8	1985-1995	A338533	F775199	18-5816	18-5907 ❶	4-1136	18-5966 ④	4-1054
5.7L Ski	GM V8	1996	F775200	K040003	18-5817	18-5913	4-1130	18-5966 ④	4-1054
5.7L Ski	GM V8	1997	K040004	K999999	18-5817	18-5913	4-1130	18-5967	4-1056
5.7L Ski	GM V8	1998 and Up	L002005	and Up	18-5817	18-5913	4-1130	18-5967	4-1056
5.7L Ski	GM V8	2000-2001	L619000	L678784	18-5817	18-5913	4-1130	18-6293**	
350 Mag Alpha	GM V8	1986-1995	A635178	F600999	18-5816 ⑩	18-5910 ⑥	N/A	18-5966 ④	4-1054
350 Mag Alpha	GM V8	1987-1996	B525982	K001526	18-5817 ⑨	18-5910 ⑥	N/A	18-5966 ④	4-1054
350 Mag Alpha	GM V8	1997	K001527	K999999	18-5817	18-5913	4-1130	18-5967	4-1056
350 Mag EFI & MPI	GM V8	1995-1996	F415189	K001500	18-5816	18-5913	4-1130	18-5965	4-1058
350 Mag EFI & MPI	GM V8	1997 and Up	K001501	and Up	18-5816	18-5913	4-1130	18-5960	4-5946
350 Mag MPI	GM V8	2000-2001	L619000	M299999	18-5816	18-5913	4-1130	18-6293**	
350 Mag MPI/Horizon	GM V8	2002	M300000	M320024	18-5817	18-5913	4-1130	18-6293**	
350 Mag MPI MIE	GM V8	1998 and Up	L002008	and Up	18-5816	18-5902	4-1138	18-5960	4-5946
350 Mag MPI MIE/Horizon	GM V8	1999-2001	L304700	L678398	18-5816	18-5902	4-1138	18-6293**	
350 Mag Ski	GM V8	1991-1996	D505450	K040399	18-5816 ❽	18-5913	4-1130	18-5966 ④	4-1054
350 Mag Ski	GM V8	1991-1996	D505450	K040399	18-5817 ❾	18-5913	4-1130	18-5966 ④	4-1054
350 Mag Ski	GM V8	1997	K040400	K999999	18-5817	18-5913	4-1130	18-5967	4-1056
350 Mag EFI Ski	GM V8	1994-1997	F215561	K999999	18-5816	18-5913	4-1130	18-5965	4-1058
350 Mag MPI Ski	GM V8	1995-1996	F350583	F799999	18-5816	18-5913	4-1130	18-5965	4-1058
350 Mag MPI Ski	GM V8	1998 and Up	L002600	and Up	18-5817	18-5913	4-1130	18-5960	4-5946
350 Mag MPI Ski	GM V8	1998-2002	L002600	M310021	18-5817	18-5913	4-1130	18-6293**	
Black Scorpion	GM V8	1996	F800000	K040000	18-5816	18-5913	4-1130	18-5965	4-1058
Black Scorpion	GM V8	1997 and Up	K040001	and Up	18-5816	18-5913 ❸	N/A	18-5960	4-5946
Black Scorpion	GM V8	1997 and Up	K040001	and Up	18-5816	18-5913 ❹	N/A	18-5960	4-5946
Black Scorpion	GM V8	1997-2001	K040001	L678036	18-5816	18-5913	4-1130	18-6293**	

©2014 Donovan Marine, Inc.

Mercruiser Starter and Alternator Application Guide (continued)


Model #	Cylinder	Years	Beg. S/N	End. S/N	Slave Solenoid	New Starter	MP Parts	New Alternator	MP Parts
270 MCM & MIE	GM V8	1969-1972	2851074	3385720	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
270 MCM & MIE	GM V8	1969-1972	2851074	3385720	18-5836	18-5907 ❻	4-1136	18-5957	4-1052
280 TRS	GM V8	1975-1976	4176250	4770199	18-5815	18-5911	4-1134	18-5957	4-1052
300 TR TEMPEST	GM V8	1985-1986	6668677	B430367	18-5816	18-5902	4-1138	18-5966 ④	4-1054
300 MR TEMPEST	GM V8	1985-1986	6668677	B430367	18-5816	18-5919 ①	N/A	18-5966 ④	4-1054
300 MR TEMPEST	GM V8	1985-1986	6668677	B430367	18-5816	18-5913 ②	N/A	18-5966 ④	4-1054
320 EFI	GM V8	1987-1989	A543604	C622418	18-5816	18-5913	4-1130	18-5966 ④	4-1054
MX 6.2L MPI	GM V8	2000-2002	L680003	M320024	18-5817	18-5913	4-1130	18-6293	4-6293
MX 6.2L MPI Horizon	GM V8	2002	M300000	M320024	18-5817	18-5913	4-1130	18-6293	4-6293
MX 6.2L MPI Horizon MIE	GM V8	2002	M300000	M310099	18-5817	18-5603	N/A	18-6293	4-6293
MX 6.2L MPI MIE	GM V8	2002	M300000	M310099	18-5817	18-5603	N/A	18-6293	4-6293
MX 6.2L Black Scorpion	GM V8	2001	L670015	L678036	18-5816	18-5913	4-1130	18-6293	4-6293
325 MCM & MIE	GM V8	1968-1970	2278747	2761141	18-5836	18-5908 ❶	4-1138	-	
325 MCM & MIE	GM V8	1968-1970	2278747	2761141	18-5836	18-5907 ❻	4-1136	-	
325 MCM & MIE	GM V8	1970-1974	2761142	3780449	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
325 MCM & MIE	GM V8	1970-1974	2761142	3780449	18-5836	18-5907 ❻	4-1136	18-5957	4-1052
330	GM V8	1977-1981	4623115	6083144	18-5836 ❼	18-5913	4-1130	18-5957	4-1052
330	GM V8	1977-1981	4623115	6083144	18-5815 ❽	18-5913	4-1130	18-5957	4-1052
330	GM V8	1982-1987	6083145	B816540	18-5816	18-5908	4-1138	18-5966 ④	4-1054
330 MIE	GM V8	1977-1980	4623115	5889913	18-5836 ❼	18-5908 ❶	4-1138	18-5957	4-1052
330 MIE	GM V8	1977-1980	4623115	5889913	18-5815 ❽	18-5907 ❻	4-1136	18-5957	4-1052
340/7.4L MIE with BW	GM V8	1981-1992	5889914	D715493	18-5816	18-5908 ❶	4-1138	18-5966 ④	4-1054
340/7.4L MIE with BW	GM V8	1981-1992	5889914	D715493	18-5816	18-5907 ❻	4-1136	18-5966 ④	4-1054
7.4L	GM V8	1988-1991	B771113	D603117	18-5816	18-5910 ⑥	N/A	18-5966 ④	4-1054
7.4L	GM V8	1988-1996	B771113	F800699	18-5816 ⑩	18-5910 ⑥	N/A	18-5966 ④	4-1054
7.4L	GM V8	1992-1997	D603118	K999999	18-5817 ⑨	18-5913	4-1130	18-5966 ④	4-1054
7.4LX EFI & MPI	GM V8	1996-1997	F602010	K999999	18-5816	18-5913	4-1130	18-5965	4-1058
7.4L MPI	GM V8	1998 and Up	L010003	and Up	18-5817	18-5913	4-1130	18-6293	4-6293
7.4L MIE	GM V8	1989-1996	C391564	F820141	18-5816 ❽	18-5908	4-1138	18-5966 ④	4-1054
7.4L MIE	GM V8	1992-1997	D715494	K999999	18-5817 ❾	18-5908	4-1138	18-5966 ④	4-1054
7.4L EFI & MPI MIE	GM V8	1995-1997	F563052	K999999	18-5816	18-5908	4-1138	18-5965	4-1058
7.4L MPI MIE	GM V8	1998 and Up	L002006	and Up	18-5817	18-5908	4-1138	18-6293	4-6293
350 MIE	GM V8	1974-1976	3780450	4623109	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
350 MIE	GM V8	1974-1976	3780450	4623109	18-5836	18-5907 ❻	4-1136	18-5957	4-1052
370 TRS	GM V8	1978-1985	4179554	6721527	18-5815	18-5908	4-1138	18-5957	4-1052
370 TRS	GM V8	1978-1985	4179554	6721527	18-5815	18-5908	4-1138	18-5966 ④	4-1054
370 TRS	GM V8	1985-1987	6721528	B714586	18-5816	18-5908	4-1138	18-5966 ④	4-1054
390 MCM & MIE	GM V8	1969-1970	2781129	3042731	18-5836	18-5908 ❶	4-1138	18-5957	4-1052
390 MCM & MIE	GM V8	1969-1970	2781129	3042731	18-5836	18-5907 ❻	4-1136	18-5957	4-1052
400 TRS	GM V8	1980-1986	4179554	B457644	18-5815	18-5908	4-1138	18-5957	4-1052
400 TRS	GM V8	1980-1986	4179554	B457644	18-5815	18-5908	4-1138	18-5966 ④	4-1054
420	GM V8	1987-1989	A398941	B622418	18-5816	18-5908	4-1138	18-5966 ④	4-1054
425	GM V8	1990-1992	A398941	D937011	18-5816	18-5908	4-1138	18-5966 ④	4-1054
440 TRS	GM V8	1983-1986	4179554	B485220	18-5815	18-5908	4-1138	18-5957	4-1052
440 TRS	GM V8	1983-1986	4179554	B485220	18-5815	18-5908	4-1138	18-5966 ④	4-1054
450	GM V8	1995-1996	F347100	F347277	18-5820	18-5913	4-1130	-	
454 Mag	GM V8	1986-1994	A631894	F304999	18-5816	18-5913	4-1130	18-5966 ④	4-1054
454 Mag	GM V8	1995-1997	F305000	K999999	18-5817	18-5913	4-1130	18-5966 ④	4-1054
454 Mag MPI	GM V8	1994-1997	F115700	K999999	18-5816	18-5913	4-1130	18-5965	4-1058
454 Mag MPI	GM V8	1998 and Up	L010029	and Up	18-5816	18-5913	4-1130	18-6293	4-6293
454 Mag MPI MIE	GM V8	1996-1997	F820100	K999999	18-5816	18-5913	4-1130	18-5965	4-1058
454 Mag MPI MIE	GM V8	1998 and Up	L002200	and Up	18-5816	18-5908	4-1138	18-6293	4-6293
454 EFI Ski	GM V8	1995-1996	F215800	F820099	18-5816	18-5913	4-1130	18-5965	4-1058
460 TRS	GM V8	1983-1986	4179554	6181046	18-5815	18-5908	4-1138	18-5957	4-1052
460 TRS	GM V8	1983-1986	4179554	6181046	18-5815	18-5908	4-1138	18-5966 ④	4-1054
465	GM V8	1990-1994	C849992	F213244	18-5816 ❽	18-5913 ⑦	N/A	18-5966 ④⑤	4-1054
465	GM V8	1990-1994	C849992	F213244	-	18-5908 ⑩	4-1138	-	
500	GM V8	1994-1997	F213293	and Up	18-5820	18-5913 ⑦	N/A	-	
500	GM V8	1994-1995	F213293	and Up	18-5820	18-5908 ⑩	4-1138	-	
500 Bulldog	GM V8	1990-1996	C577254	and Up	18-5820 ❽	18-5913 ⑦	N/A	-	
500 Bulldog	GM V8	1990-1996	C577254	and Up	18-5816 ⑧	18-5908 ⑩	4-1138	18-5966 ④⑤	4-1054
502 Mag Bravo	GM V8	1990-1993	C878221	F114528	18-5816	18-5913	4-1130	18-5966 ④	4-1054
502 Mag MPI	GM V8	1993-1997	D840650	K999999	18-5816	18-5913	4-1130	18-5965	4-1058
502 Mag MPI	GM V8	1998 and Up	L017000	and Up	18-5816	18-5913	4-1130	18-6293	4-6293

Mercruiser Starter and Alternator Application Guide (continued)

Model #	Cylinder	Years	Beg. S/N	End. S/N	Slave Solenoid	New Starter	MP Parts	New Alternator	MP Parts
525 SC	GM V8	1991-1993	D456000	D763831	18-5816	18-5913 ⑦	N/A	18-5966 ④⑤	4-1054
525 SC	GM V8	1991-1993	D456000	D763831	18-5816	18-5908 ⑩	4-1138	-	
525 SC	GM V8	1993-1997	D763871	and Up	18-5820	18-5913 ⑦	N/A	18-5966 ④⑤	4-1054
525 SC	GM V8	1993-1997	D763871	and Up	18-5820	18-5908 ⑩	4-1138	-	
525 EFI	GM V8	2003-2010	M900146	and Up	-	-	N/A	18-6298	4-6298
575	GM V8	1986-1992	A677429	D763716	18-5816	18-5908	4-1138	18-5966 ④	4-1054
600 SC	GM V8	1991-1996	D456489	F877642	18-5816 ⑧	18-5908	4-1138	18-5966 ④⑤	4-1054
600 SC	GM V8	1991-1996	D456489	F877642	18-5820 ❽	18-5908	4-1138	-	
600 SC	GM V8	1997	K000227	and Up	18-5820	18-5913 ⑩	N/A	-	
600 Sci	GM V8	2005-2010	M952908	and Up	-	-	N/A	18-6298	4-6298
800 SC	GM V8	1993-1996	D763836	and Up	18-5820	18-5908 ⑩	4-1138	-	
8.2L MIE	GM V8	1990-1996	C878221	F819619	18-5816 ❽	18-5908	4-1138	18-5966 ④	4-1054
8.2L MIE	GM V8	1993-1996	D857200	F819619	18-5817	18-5908	4-1138	18-5966 ④	4-1054
8.2L MPI MIE	GM V8	1996-1997	F819620	K999999	18-5816	18-5908	4-1138	18-5965	4-1058


Notes:
① For 12-3/4" Diameter Flywheel
② For 14" Diameter Flywheel
③ For Permanent Magnet Models Use 18-5919
④ 55 amp Upgrade to 65 amp Use 18-5965
⑤ Black
⑥ For Permanent Magnet Models Use 18-5913
⑦ Bravo Drive
⑧ Firepower Ignition
⑨ Ignition Module Mounted On Distributor
⑩ Ignition Module Mounted On Elbow
❶ LH Rotation
❷ NLA for Models Prior to S/N 4167000
❸ PG260 (9-1/4" Long)
❹ PG260F1 (8-1/2" Long)
❺ RH Rotation
❻ Standard Ignition
❼ Thunderbolt Ignition
❽ Thunderbolt IV
❾ Thunderbolt V
❿ Transmission Models
** Delco Style

Standard Rotation



If flywheel rotates to the left and distributor rotor turns clockwise

CCW Rotation



If flywheel rotates to the right and distributor turns counter clockwise

Sterndrive/Inboard Starter



MRY Starter, Off Bolt, Merc/Cobra/Volvo
1.4 KW (CW)
Replaces: OEM #50806964A3, MES #5399M, Sierra #18-5913, Arco #30470

O.E. No. 50-812428A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185913	(18-5913)	$202.37 H

Starter



For: PG260 Series, PMGR, 12 volt, CW, 11 Tooth.
Lester 6409, PIC 140-571 (9-Tooth), Lester 6560, PIC 140-579 (3 Terminal), Lester 6562, PIC 140-577, -6043, -6068, Lester 6791, PIC 140-576 (9 Tooth), Lester 6423, PIC 140-0152, -A (10MT)
Replaces: 9-Tooth Versions Listed Above, 3 Terminal Solenoid Model Above, 10MT Versions as Noted. See Also SND0237 (OSGR Replacement). Used on Cobra, Mercruiser, Thermo Electron, Yamaha, Volvo-Penta, (Others), With a V6 or V8 Engine. Replaces Delco 9000762, -768, -789, -819, -821, -840, -885, -886. Also 1109482, 1998314, -566, 1998569, -70, 10455603 (10MT), Mercury 50-12177A2, -77328A1, -77328A3, -806964A2, -3, -4, 50-807904A1, -812428A3, 50-812604A2, -822330A2, 50-864340A2, -99418A2, OMC 984456, 986505, 3850525, 853982, -4751, -5177, -6004, Volvo 3854751-9, 3856004-1

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1130	(SDR0031)	$110.98 G
Sierra	185913	(18-5913)	$202.37 H

Pictures May Not Match Engine Description

Starter



For: PG260 Series, PMGR, 12 volt, CW, 11 Tooth.
Lester 6561, 6563 (PG260), PIC 140-581, -585 (PG260), Lester 3548, PIC 140-0254 (10MT), Lester 3550, PIC 140-0150 (10MT)
Replaces: 10MT Units as Noted. See Also SND0237 (OSGR Replacement). Used on Mercruiser, OMC, Thermo Electron, Volvo-Penta, (Others), With a 4, 6, or 8 Cylinder Engine. Replaces Delco 9000820, -22 (PG260), 1108477, -755, -756, 1109486, -87, -88, -89, -90 (10MT); Chris-Craft 16.61-00042; Mercury 50-32703, -45120, 50-46277, -46282, -59799, 50-69863A-, -69864A1, 50-79821A2, -79822A1, 50-79823A1, 806963A2, -A4, 50-806965A2, -A4, -99417A2; OMC 981078, 982121, 983444, 985966, 988217, 3850526, 3854750, 3855882, Volvo 855325-5, 855326-5, 3854750-1, 3856003-3

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1134	(SDR0059)	$115.98 G
Sierra	185919	(18-5919)	$211.98 H

©2014 Donovan Marine, Inc.

Starter

High Performance Offset Bolt Pattern
12 volt, 11 Tooth Drive Gear, 20mm Shorter than 4-6275



O.E. No. 8M8021116

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1181	(SDR0395)	$123.98 G

Starter

For: PG260 Series, PMGR, 12 volt, CW, 11 Tooth.
Lester 6792, PIC 140-6022. Used on Mercruiser, Volvo-Penta. Replaces: Delco 9000884, Mercury 50-863007A1, Volvo 3660566, 3860566



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6275	(SDR0253)	$112.98 G
Sierra	186275	(18-6275)	$222.72 H

Solenoid

For: All Engines with Flat Solenoid Bracket
Replaces: R130001



O.E. No. 89-76416A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185801	(18-5801)	$21.70 H

Solenoid

Replaces: 395419, 582708



O.E. No. 47886

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185808	(18-5808)	$28.32 H

Solenoid

Vertical Post
Replaces: 89-96158, 89-96158T



O.E. No. 89-96158

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185817	(18-5817)	$21.52 H

Solenoid

Replaces: 89-818997A1, 89-818997T1



O.E. No. 89-818997A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185819	(18-5819)	$34.47 H

Solenoid

Flat Bracket, For: Mercruiser, 12 volt, 4 Terminal
Replaces: 89-96054, 89-96054T, 89-91975



O.E. No. 89-91975

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1200	(SMR6000)	$14.98 G
Sierra	185816	(18-5816)	$20.17 H

Solenoid

Replaces: 25661, 256611, 25661T1



O.E. No. 25661

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185836	(18-5836)	$39.00 H

Solenoid

For: Mercury, 12 volt, 4 Terminal
Replaces: 89-68258



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1208	(SMR6005)	$14.98 G
Sierra	185815	(18-5815)	$28.57 H

Solenoid

For: Mercruiser and Kohler, 12 volt, 4 Terminal
Replaces: 89-96158



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1202	(SMR6001)	$15.98 G
Sierra	185817	(18-5817)	$21.52 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Alternator

Motorola Delco 10SI Type Replacement
12 volt, 95 amp, 1 Wire Hook Up



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1055	(ADR0397)	$135.98 G

Alternator

Various Models
12 volt, 50 amp



O.E. No. 882571

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1081	(AMT0204)	$180.98 G

Alternator

Motorola Delco 10SI Type Replacement
12 volt, 63 amp, 2 Wire Hook Up



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1057	(ADR0398)	$131.98 G

Alternator

Motorola Delco 10SI Type Replacement
12 volt, 94 amp, 2 Wire Hook Up



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1059	(ADR0399)	$135.98 G

Alternator

Various Models, 1985-Thru
12 volt, 65 amp, Serpentine Pulley



O.E. No. 807653T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5946	(AMN0005)	$148.98 G
Sierra	185960	(18-5960)	$276.62 H

Alternator

Motorola Delco 10SI Type Replacement
12 volt, 63 amp, with Single Top Ear



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1060	(ADR0120)	$135.98 G

Alternator

Various Models
12 volt, 70 amp, Hinge Mount, Serpentine Pulley, 1.97" Diameter



O.E. No. 863077T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6298	(ADR0316)	$135.98 G
Sierra	186298	(18-6298)	$266.73 H

Alternator

Various Models
12 volt, 70 amp, Hinge Mount, Single Groove Pulley



O.E. No. 862030T

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-5983	(ADR0317)	$135.98 G

Alternator

For: 7SI Series, 12 volt, 70 amp, Lester 8460, PIC 240-6319, 6 Groove Pulley. Used on Mercruiser and Other Marine Applications
Replaces: Delco 19020609



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-6293	(ADR0299)	$135.98 G
Sierra	186293	(18-6293)	$266.73 H

Alternator

For: Mando, Merc, 55 amp, SGL Pulley



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1054	(AMN0002)	$148.98 G
Sierra	185966	(18-5966)	$229.78 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Alternator

For: Mando, 12 volt, 65 amp, Lester 12176, PIC 293-13A, 1-V Pulley. Used on Mercury and Yamaha

Replaces: Mando AC165610, -616, Mercury 805447T, 805884, 805884P, -T



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1058	(AMN0012)	$148.98 G
Sierra	185965	(18-5965)	$279.10 H

Alternator

For: Mando, 12 volt, 55 amp, Lester 12174, PIC 293-18A, 6 Groove Pulley. Used on Mercury

Replaces: Mando AC155616, Mercury 807652, -T



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1056	(AMN0010)	$151.98 G
Sierra	185967	(18-5967)	$255.73 H

Lower Unit Seal Kit

For: 200 H.P. (T801000 and Up), 200 H.P. OPTIMAX DFI (G438000 and Up), 225 H.P. EFI (G438000 and Up), 225 H.P. OPTIMAX DFI (G590000-G960499), 250 H.P. EFI (G438000 and Up), Models with C-3 Casting: 200 H.P. OPTIMAX DFI (G386496-G437999), 225 H.P. (D280813-G437999), 225 H.P. EFI (G129222-G437999), 250 H.P. EFI (G129222-G437999)

Replaces: 26-816575A4



O.E. No. 26-816575A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188382	(18-8382)	$30.72 H

Lower Unit Seal Kit

For: Alpha Gen II. Replaces: 26-816575A3. Contains:

18-2599	Face Seal and Tool, Qty. 1	O.E. No. 26-818575A2
18-2945	Sealing Washer, Qty. 1	O.E. No. 12-19183
18-2564	Water Pump Base To Face Plate Gasket, Qty. 1	O.E. No. 27-43033-1
18-2566	Face Plate to Water Pump Cover Gasket, Qty. 1	O.E. No. 27-817277
18-2944	Seal	



O.E. No. 26-816575A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182646	(18-2646-1)	$62.58 H

Lower Unit Seal Kit

Replaces: 26-33144A2 S/N 1684188 and Up.
For: #1 Units (Including ALPHA). Contains:

18-2919	Water Pump to Gear Hsg. Gasket, Qty. 1	O.E. No. 27-42631-1
18-3110	Grommet, Qty. 1	O.E. No. 26-38970
18-2002	Oil Seal, Qty. 1	O.E. No. 26-76868
18-2013	Oil Seal, Qty. 2	O.E. No. 26-16977
18-2014	Oil Seal, Qty. 1	O.E. No. 26-89238
18-2826	Water Pump Base to Gear Hsg. Gasket	



O.E. No. 26-33144A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182652	(18-2652)	$57.93 H

Lower Unit Seal Kit

Replaces: 26-89238A2. Contains:

18-2155	Bushing Gasket, Qty. 1	O.E. No. 23-77631A2
18-2919	Gasket, Qty. 1	O.E. No. 27-42631-1
18-2002	Oil Seal, Qty. 2	O.E. No. 26-76868
18-2013	Oil Seal, Qty. 1	O.E. No. 26-16977
18-2014	Oil Seal, Qty. 1	O.E. No. 26-89238
18-2914	Water Pump Gasket, Qty. 1	O.E. No. 27-85608-1
18-2915	Water Pump Gasket	



O.E. No. 26-89238A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182655	(18-2655)	$60.78 H

Upper Unit Seal Kit

Replaces: 26-32511A1 S/N 1684188 and Up. For #1 Units (Including Alpha). Also Fits 888 Stern Drive S/N 3106717 and Up. Contains:

18-2945	Gear Hsg. Drain Screw Gasket, Qty. 2	O.E. No. 12-19183
18-0894	Water Pocket Cover Gasket, Qty. 1	O.E. No. 27-55810
18-2003	Oil Seal, Qty. 1	O.E. No. 26-68493
18-2049	Oil Seal, Qty. 1	O.E. No. 26-32511
18-2056	Oil Seal, Qty. 1	O.E. No. 26-96503
18-2944	Seal Ring Gasket	O.E. No. 26-45



O.E. No. 26-32511A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182648	(18-2648)	$39.40 H

Upper Unit Seal Kit

Alpha I Generation II

Replaces: 26-88397A1



O.E. No. 26-88397A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182644	(18-2644)	$27.68 H

Transom Seal Kit

Contains: 18-2619-1 Outdrive Gasket Set 27-64818A3, 27-94996A1, Q2 Qty. 1, 18-2100 Gimbal Bearing 30-60794A4 Qty. 1, 18-2161 Shift Arm 45518A2 Qty. 1, 18-2751 U-Joint Bellows 60932A4 Qty. 1, 18-2750 Exhaust Bellows 32734A3, 18654A1 Qty. 1, 18-2753

Replaces: 30-803097T1



O.E. No. 30-803097T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182601	(18-2601-1)	$172.77 H

Transom Seal Kit

For: Alpha 1 Gen II. Contains: 18-3602 Water Intake Hose 32-41725-33 Qty. 1, 18-7310 Hose Clamp Qty. 2, 18-7312 Hose Clamp Qty. 1, 18-2753-1 Shift Cable Bellows 74639 Qty. 1, 18-7321 Bellows Clamp 54-38863 Qty. 1, 18-2100 Gimbal Bearing 30-60794A4 Qty. 1, 18-2743 Drive Shaft Housing to Bell Housing

Replaces: 30-803099T1



O.E. No. 30-803099T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188206	(18-8206)	$220.73 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Transom Seal Kit

For: 1, R, MR, Alpha 1 with Exhaust Tube. Contains: 18-2100 Gimbal Bearing 30-60794A4 Qty. 1, 18-2751 U-Joint Bellows 60932A4 Qty. 1, 18-2760 Exhaust Tube 78458A1 Qty. 1, 18-3601 Water Intake Hose 32-32461 Qty. 1, 18-3602 Water Intake Hose 32-41725-33 Qty. 1, 18-2743 Drive Shaft Housing to Bell Housing
Replaces: 30-803098T1



O.E. No. 30-803098T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188205	(18-8205)	$232.67 H

Transom Seal Kit

For: All Bravos 1982 and Up. Contains: 18-2753-1 Shift Cable Bellow O.E. No. 74639 Qty. 1, 18-2100 Gimbal Bearing O.E. No. 30-60794A4 Qty. 1, 18-2756 U-Joint Bellows O.E. No. 86840A3 Qty. 1, 18-2750 Exhaust Bellows O.E. No. 32734A3 Qty. 1, 18-2760 Exhaust Tube O.E. No. 78458A1 Qty. 1, 18-3603 Water Hose O.E. No. 32-43437 Qty. 1, 18-2615 Outdrive Mounting Kit O.E. No. 16755A1



O.E. No. 30-803100T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188212	(18-8212-1)	$303.97 H

Transom Seal Kit

MRCR Transom Seal Kit



O.E. No. 30-803097T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188213	(18-8213)	$162.07 H

Transom Seal Kit

MRCR Transom Seal Kit



O.E. No. 30-803098T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188217	(18-8217)	$222.68 H

Transom Seal Kit

MRCR Transom Seal Kit



O.E. No. 30-803099T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188218	(18-8218)	$220.73 H

Transom Seal Kit

MRCR Transom Seal Kit



O.E. No. 30-803100T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188219	(18-8219)	$294.75 H

Transom Seal

For: Alpha Gen II, All Bravo



O.E. No. 3713

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182724	(18-2724)	$7.95 H

Heavy Duty Gimbal Bearing

Link Belt. Fits: Mercruiser 120/140 H.P. (2791957-6225576) with Gimbal Trim Sender, 165 H.P. (2763442 and Up), 225S (3856268-4200499), 228 H.P. (4782330 and Up), 233 H.P. (4200500 and Up), 250 H.P. (4791300 and Up)
Replaces: 30-60794A4



O.E. No. 30-60794A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182100	(18-2100)	$57.77 H

Gimbal Bearing

Fits: All Bravos, Alpha One Gen II (1998 and Up)
Replaces: 30-862540A3



O.E. No. 30-562540A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1821005	(18-21005)	$77.83 H

Gimbal Bearing

MRCR Gimbal Bearing



O.E. No. 30-879194A01

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1821006	(18-21006)	$83.63 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Gimbal Bearing



Gimbal Bearing Early Style. Fits: All Alpha 1974-1997, Alpha Gen II, Bravo I/II/III, OMC/Volvo 3.0L, 4.3L, 5.0L, 5.7L, 7.4L 1994-1998, 5.8L 1994-1996, 8.2L 1998

O.E. No. 879194A02

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-21001	(30-00803-5)	$74.98 M
MP Parts	4-21001-5	(30-00803MP)	$374.98 N

Gimbal Bearing



MRCR Gimbal Bearing

O.E. No. 30-879194A02

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1821001	(18-21001)	$69.52 H

Gimbal Bearing



MRC Gen II Power Trim Bearing
Replaces: 30-36418 (Link-Belt)

O.E. No. 30-36418

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182101	(18-2101)	$157.90 H

Seal and Gimbal Bearing Kit



Fits: Gen II 1998 and Up, All Bravo

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1821005K	(18-21005K)	$92.10 H

Seal and Gimbal Bearing Kit



Fits: 1, R, MR and Alpha 1974-1997

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182100K	(18-2100K)	$70.73 H

Tampered Roller Bearing



MRC Tampered Roller Bearing
Replaces: 31-36387A1

O.E. No. 31-36387A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181143	(18-1143)	$41.75 H

Tampered Roller Bearing



MRC Tampered Roller Bearing
Replaces: 31-78172A1

O.E. No. 31-78172A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181166	(18-1166)	$65.13 H

Tampered Roller Bearing



MRC Tampered Roller Bearing, For: Mercruiser Vazer
Replaces: 983891, 31-35990A1

O.E. No. 31-35990A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181161	(18-1161)	$36.80 H

Roller Bearing Kit



MRC Roller Bearing Kit
Replaces: 31-35988A2, 31-35988A12

O.E. No. 31-35988A12

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181160	(18-1160)	$141.37 H

Roller Bearing Kit



MRY Roller Bearing Kit, For: Alpha I, Gen II 1998 and Up, OL100040 and Up, Mercruiser Vazer
Replaces: 31-30894A5

O.E. No. 31-30894A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181182	(18-1182)	$137.92 H

Pictures May Not Match Engine Description

Heavy Duty U-Joint



Fits: OMC Cobra Drives 1986-1989. Includes Straight Grease Fitting and 90° Fitting (Rockwell)
Replaces: 912214, 915716

O.E. No. 75832A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182104	(18-2104)	$54.88 H

U-Joint



Heavy Duty, Fits: OMC Cobra and King Cobra Drives 1990 and Above. Includes Straight Grease Fitting and 90° Fitting (Rockwell)
Replaces: 915717, 3850812

O.E. No. 758321

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182174	(18-2174)	$51.15 H

U-Joint



For: Bravo One, Two, Three (All Ratios), Bravo One X, Two X, Three X (All Ratios), Bravo One XR/XZ (All Ratios), Bravo One XR Sportmaster (All Ratios) and Integrated Transom
Replaces: 862132T

O.E. No. 862132T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181711	(18-1711)	$165.53 H

U-Joint



Permalube, For: Generation II (F680000 and Up)
Replaces: 805536A2

O.E. No. 805536A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182097	(18-2097)	$77.15 H

Engine Coupler



For All GM Engines, Except MR/Alpha/Bravo with "Triangular", 3 Bolt Coupler
Replaces: 76850A2

O.E. No. 76850A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182171	(18-2171)	$225.12 H

Engine Coupler



For: Bravo
Replaces: 18311A17, 861523A9

O.E. No. 18311A17

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182412	(18-2412)	$542.15 H

Engine Coupler



For: 470, 485 (224 cu. in.) S/N 4208730-6218036, 1976-1982
Replaces: 69354A2

O.E. No. 69354A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182413	(18-2413)	$472.82 H

Engine Coupler



For: 165, 170, 470, 3.7L S/N 6170297 and Up, 1983-1989, 180, 190, 488, 3.7LX S/N 6170297 and Up, 1983-1989
Replaces: 97432A2

O.E. No. 97432A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182414	(18-2414)	$480.57 H

Engine Coupler



For: Ford Engines
Replaces: 59826A3

O.E. No. 59826A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182173	(18-2173)	$361.50 H

Engine Coupler



Used when replacing V6 or V8 2 piece rear main seal with 3-1/2" crankshaft bolt pattern to a newer 1 piece rear main seal engine with 3" bolt pattern. Replaces: 14505A2

O.E. No. 14505A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182172	(18-2172)	$346.27 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Engine Coupler

Flex Plate Style for GM 4 Cylinder Engines with Late Style, Small Crankshaft Bolt Pattern

Replaces: 12632A7



O.E. No. 12632A7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182195	(18-2195)	$432.18 H

Engine Coupler

Flex Plate Style for Late Model, Small Crankshaft Bolt Pattern, Style Engines

Replaces: 18643A7



O.E. No. 18643A7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182175	(18-2175)	$381.65 H

Engine Coupler

Same as 18-2195 without Yoke

Replaces: 12632A6



O.E. No. 12632A6

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182321	(18-2321)	$82.65 H

Engine Coupler

Same as 18-2175 without Yoke

Replaces: 18643A5



O.E. No. 18643A5

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182323	(18-2323)	$312.00 H

Universal Yoke Assembly

MRC Heat Exchanger Gasket, For: All Cobra 1986 and Up

Replaces: 912212, 3850815



O.E. No. 59830A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182146	(18-2146)	$118.55 H

Yoke Assembly

Fits All #1/Alpha Units S/N 1684188-OK999999

Replaces: 46020T



O.E. No. 46020T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182125	(18-2125)	$72.58 H

Shift Cable

For: AFT installation into bell housing. For use in applications using core wire with armored strand construction. (No Support Tube). 63" Conduit with hardware package.

Replaces: 19543A4, A10 Mercruiser 1 Drives S/N 6225577 and Up



O.E. No. 19543A10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182190	(18-2190)	$69.70 H

Shift Cable

MRC Bravo Shift Cable

Replaces: 815471, A3, A6 Bravo One, Two, Three (All Ratios), Bravo One X, Two X, Three X (All Ratios), Bravo One XR/XZ (All Ratios), Bravo One XR Sportmaster (All Ratios) and Integrated Transom



O.E. No. 815471

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182145	(18-2145)	$104.92 H

Shift Cable

MRC Tfxtreme Shift Cable

Replaces: 815471, A3, A6 Bravo One, Two, Three (All Ratios), Bravo One X, Two X, Three X (All Ratios), Bravo One XR/XZ (All Ratios), Bravo One XR Sportmaster (All Ratios) and Integrated Transom



O.E. No. 815471

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182145E	(18-2145E)	$111.68 H

Shift Cable

MRC Tfxtreme Shift Cable

Replaces: 19543A4, 19543A10 S/N 6225577 and Up. For AFT installation into bell housing. For use in applications using core wire with armored strand construction (No Support Tube). 63" Conduit with hardware package. Lower Shift Cable Alpha One (Gen II) 1991-1997



O.E. No. 19543A10

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182190E	(18-2190E)	$78.25 H

Pictures May Not Match Engine Description

Shift Cable Assembly

MRY Shift Cable Assembly, Mercruiser 1 Drives S/N 1562900-6225576. For forward installation into bell housing. Has new style armored strand construction. No support tube, 54" conduit with hardware package.
Replaces: 73723A1



O.E. No. 73723A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182248	(18-2248)	$63.05 H

Shift Cable Assembly

MRY Shift Cable Assembly, Mercruiser 1 Drives S/N 6225577 and Up. For AFT installation into bell housing. Has old style stranded core wire with soldered tip. Uses Support Tube
Replaces: 41951A1, 19543A4



O.E. No. 19543A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182157	(18-2157)	$73.90 H

Shift Cable Assembly

MRY Shift Cable Assembly, Mercruiser 1 Drives S/N 1562900-6225576. For forward installation into bell housing. Has old style stranded core wire with soldered tip. Uses support tube. 63" conduit



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182158	(18-2158)	$83.72 H

Lower Shift Cable Kit

Contains: 18-2619-1 Outdrive Gasket Set 27-94996A1 Qty. 1, 18-2753-1 Shift Cable Bellows 74639 Qty. 1, 18-2248 Shift Cable Assembly 73723A1 Qty. 1, 18-2162 Shift Slide and Screw 33981T Qty. 1, 18-2149 Shift Cable End Kit 43433 Qty. 1, 18-2163 Shift Slide Screw 10-31700 Qty. 1, 18-2743 Drive Shaft Housing to Bell Housing Gasket 27-94996-2 Qty. 1, 18-2820 Drive Shaft Housing to Bell Housing Gasket 27-64818 Qty. 1, 18-2843 Drive Shaft Housing to Bell Housing Gasket 27-94996 Qty. 1



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182600	(18-2600)	$143.60 H

Lower Shift Cable Kit

Alpha I Generation II. Contains: 18 2619-1 Outdrive Gasket Set 27-94996A1 Qty. 1, 18 2753-1 Shift Cable Bellows 74639 Qty. 1, 18-2190 Shift Cable Assembly 19543A4 Qty. 1, 18-2743 Drive Shaft Housing to Bell Housing Gasket 27-94996-2 Qty. 1. Replaces: 19543T-1



O.E. No. 19543-T-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182603	(18-2603)	$85.97 H

Lower Shift Cable Kit

Contains:
18-2145 Bravo Shift Cable 815471A3 Qty. 1
18-2149 Shift Cable End Kit 43433 Qty. 1
18-2753-1 Shift Cable Bellows 74639 Qty. 1
18-2615 Outdrive Gasket Set Qty. 1



O.E. No. 815471T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182604	(18-2604)	$164.23 H

Outdrive Gasket Set

Contains: 18-2820 Drive Shaft Housing to Bell Housing Gasket 27-64818 Qty. 1, 18-2840 Bell Housing Gasket 27-35982 Qty. 1, 18-7153 O-Ring 25-25439 Qty. 2, 18-7170 O-Ring 25-33504 Qty. 1
Replaces: 27-64818A1, 27-64818T4, 27-64818Q4



O.E. No. 27-64818A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182614	(18-2614)	$4.93 H

Outdrive Gasket Set

Contains: 18-2918 Outdrive Gasket 911836 Qty. 1, 18-2996 Outdrive Seal 911823 Qty. 1, 18-7153 O-Ring 911851 Qty. 2
Replaces: 508105



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182613	(18-2613)	$7.43 H

Outdrive Gasket Set (Bravo Unit)



For: All Bravo
Replaces: 16755A1, 16755Q1, 16755T1

O.E. No. 16755A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182615	(18-2615)	$6.32 H

Outdrive Gasket Set (Old Style)



For: IA/IB/IC and EZ Shift 1964-1966
18-2556 Drive Shaft Housing to 27-35996 Bell Housing Gasket, 18-2840 Bell Housing Gasket 27-35982, 18-7153 O-Ring 25-25439, 18-7170 O-Ring 25-33504

O.E. No. 27-35996A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182617	(18-2617)	$11.58 H

Outdrive Gasket Set



For: R, MR, Alpha I, Alpha Gen II (1983-Newer)
Replaces: 27-64818A3, 27-94996Q2, 27-94996T2

O.E. No. 27-64818A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182619	(18-2619-1)	$8.08 H

Pictures May Not Match Engine Description

Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.

Outdrive Seal



MRC Outdrive Seal, For Bravo
Replaces: 12708

O.E. No. 12708

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181240	(18-1240)	$8.98 H

Shift Shaft



MRC Shift Shaft, For: I and Alpha I
Replaces: 621041

O.E. No. 621041

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182322	(18-2322)	$50.63 H

Shift Shaft



MRC Shift Shaft, Stainless Steel
Replaces: 774811

O.E. No. 774811

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182150	(18-2150)	$38.13 H

Shift Rod Bushing Assembly



MRC Shift Rod Bushing Assembly
Replaces: 23-815921A21

O.E. No. 23-915921A21

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182353	(18-2353)	$25.07 H

Shift Arm



MRC Shift Arm
Replaces: 45518A2

O.E. No. 45518A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182161	(18-2161)	$26.47 H

Shift Arm



MRC Shift Arm
Replaces: 45589A3

O.E. No. 45589A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182169	(18-2169)	$72.07 H

Shift Shaft Housing Bushing



Mercruiser and Alpha 1 S/N 1684188 and Up
Replaces: 23-30617A2

O.E. No. 23-30617A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182154	(18-2154)	$18.98 H

Shift Shaft Spool Assembly



MRC Shift Shaft Spool Assembly
Replaces: 19755A2

O.E. No. 19755A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182286	(18-2286)	$86.80 H

Shift Arm Screw



MRC Shift Arm Screw
Replaces: 10-45590

O.E. No. 10-45590

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182170	(18-2170)	$2.10 H

Shift Cable Slide and Screw



MRC Shift Cable Slide with Screw
Replaces: 33981T

O.E. No. 33981T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182162	(18-2162)	$11.83 H

Pictures May Not Match Engine Description

Drive Shaft



For: All MR/ALPHA Units and older units which have been retro-fitted with MR/Alpha Lower Units
Replaces: 45-42634

O.E. No. 45-42634

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182180	(18-2180)	$542.13 H

Drive Shaft



For: All Alpha I Generation II Drives with New Style 18-3056 Impeller, Serial #D494569 and above
Replaces: 45-816919

O.E. No. 45-816919

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182261	(18-2261)	$526.42 H

Carrier Seal

Replaces: 821759A4



O.E. No. 821759A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182354	(18-2354)	$28.23 H

Carrier Assembly Oil Seal

Replaces: 66081A2



O.E. No. 66081A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180577	(18-2577)	$47.58 H

Rear Engine Mount

For: 120/140 H.P. S/N 6229717 and Up, All 224 CID Blocks, All 898, 200, 228, 230, 260, 300 and 320 H.P., All 350-454 Magnums
Replaces: Mercruiser 99297A1



O.E. No. 99297A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182193	(18-2193)	$37.07 H

Engine Mount Bolt Kit

For: R/MR/Alpha I/Gen II/Bravo
Replaces: Mercruiser 10-97934A1



O.E. No. 10-97934A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182141	(18-2141)	$15.53 H

Center Socket

Fits: All OMC Cobra
Replaces: 912213, 3850813



O.E. No. 39383 1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182128	(18-2128)	$66.78 H

Thermostat Housing

MRC Thermostat Housing, V6/V8, Stainless Steel, Use 18-1989K Thermostat Service Kit for Replacement Parts
Replaces: 87290A4, 861006A1



O.E. No. 861006A

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181989	(18-1989)	$253.50 H

Thermostat Housing

MRC Thermostat Housing, V8, For: Stainless Steel Version Use 18-1989
Replaces: 87290A4



O.E. No. 87290A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181994	(18-1994)	$187.62 H

Thermostat Housing

MRC Thermostat Housing, Fits: 225, GM 260, 228, 898/198, 185R, 898R, 228R and 2GR
Replaces: 47441A1



O.E. No. 47441A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181977	(18-1977-1)	$46.93 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Power Trim Cylinder



MRC Power Trim Cylinder, Fits: All Stern Drive Models with Internal Lines: 120, 140, 160, 165, 888, 898, 228, 225-S, 233, 250, 260, 470 and 485
Replaces: 45706A14

O.E. No. 45706A14

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182142	(18-2142)	$392.37 H

Power Trim Cylinder



MRC Power Trim Cylinder, For: Gen II (Port) S/N F680000 - Up
Replaces: 815935A7

O.E. No. 815935A7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182422	(18-2422)	$531.75 H

Power Trim Cylinder



MRC Power Trim Cylinder, For: Gen II (Starboard) S/N F680000 - Up
Replaces: 81595A7

O.E. No. 815954A7

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182423	(18-2423)	$531.75 H

Power Trim Cylinder



MRC Power Trim Cylinder, For: Bravo (Port)
Replaces: 98703A26

O.E. No. 98703A26

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182424	(18-2424)	$575.47 H

Power Trim Cylinder



MRC Power Trim Cylinder, For: Bravo (Starboard)
Replaces: 98704A17, 98704A26

O.E. No. 98704A17

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182425	(18-2425)	$551.75 H

Trim Cylinder Repair Kit



Fits: All Stern Drive Models: 120, 140, 160, 165, 888, 898, 228, 225-S, 233, 250, 260, 470 and 485
Replaces: 25-60342A2

O.E. No. 25-60342A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182291	(18-2291)	$48.85 H

Trim Cylinder Anchor Pin E-Ring



MRC Pivot Pin E-Ring, For: Gen II
Replaces: 53-815949

O.E. No. 53-815949

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182345	(18-2345)	$2.77 H

Trim Cylinder End Cap



MRC Trim Cylinder End Cap, 1.89 Cap Diameter, For: R/MR/Alpha/Gen II/Bravo
Replaces: 806191T

O.E. No. 806191T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182373	(18-2373)	$77.15 H

Trim Cylinder Rear R/MR/Alpha



Replaces: 26-816575A2

O.E. No. 26-816575A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182599	(18-2599)	$5.93 H

Power Trim Hose



Replaces: 32-86036, 32-86036Q

O.E. No. 32-86036

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182103	(18-2103)	$33.55 H

Pictures May Not Match Engine Description

Power Trim Hose



Replaces: 32-99904

O.E. No. 32-99904

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182116	(18-2116)	$39.20 H

Power Trim Hose

MRC Power Trim Hose, Fits: R/MR/Alpha/Alpha Gen II/Bravo I, II, III/Bravo X, XR, XZ. Serial number 0W099999 and below without quick connect fittings. OEM hose color is black.

Replaces: 32-861127, 32-95858



O.E. No. 32-861127

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182435	(18-2435)	$59.73 H

Power Trim Hose

MRC Power Trim Hose, Fits R/MR/Alpha/Alpha Gen II/Bravo I, II, III/Bravo X, XR, XZ. Serial number 0W099999 and below without quick connect fittings. OEM hose color is gray.

Replaces: 32-861128, 32-95859



O.E. No. 32-861128

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182436	(18-2436)	$61.83 H

Power Trim Hose

MRY Power Trim Hose, Starboard, Connector to bottom of trim cylinder MCM 120-260 and BRAVO, O.E. No. 32-99902-1, 32-864960, Trim Cylinder Casting 14034-1



O.E. No. 32-864960

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182114	(18-2114)	$47.92 H

Power Trim Hose

MRY Power Trim Hose
Replaces: 32-55816



O.E. No. 32-55816

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182107	(18-2107)	$52.85 H

Power Trim Hose

MRY Power Trim Hose
Replaces: 32-59841



O.E. No. 32-59841

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182108	(18-2108)	$63.97 H

Power Trim Hose

MRY Power Trim Hose
Replaces: 32-59842



O.E. No. 32-59842

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182109	(18-2109)	$55.40 H

Power Trim Hose

MRY Power Trim Hose, Small Diameter, 2 required per engine, For all power trim equipped, inline engines except models with power trim pump mounted between the engine clamp brackets

Replaces: 32-88005



O.E. No. 32-88005

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182110	(18-2110)	$60.42 H

Power Trim Hose

MRY Power Trim Hose, Large Diameter, 2 required per engine, For all power trim equipped, inline engines except models with power trim pump mounted between the engine clamp brackets

Replaces: 32-88006



O.E. No. 32-88006

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182111	(18-2111)	$65.00 H

Power Trim Hose

MRY Power Trim Hose, Starboard, Connector to bottom of trim cylinder MCM 120-260 and Bravo, O.E. No. 32-99903-1, 32-864959, Trim Cylinder Casting 14035-1



O.E. No. 32-864959

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182115	(18-2115)	$47.90 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Power Trim Hose

MRY Power Trim Hose
Replaces: 32-45973




O.E. No. 32-45973

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182105	(18-2105)	$48.25 H

Power Trim Hose

MRY Power Trim Hose
Replaces: 32-52951A1



O.E. No. 32-52951A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182126	(18-2126)	$25.52 H

Power Trim Bushing

For: Gen II. Standard package of 10 priced per piece
Replaces: 23-815950, 23-8159501



O.E. No. 23-815950

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182341	(18-2341-1-19)	$55.87 H

Propeller Shaft



MRC Propeller Shaft, For: All #1 and MR/Alpha Units, S/N 2791957 and Above. Also for 165 (6 Cylinder) S/N 2763442 and Above.
Replaces: 44-66060, 44-66060-3, 44-824110, 44-860308

O.E. No. 44-66060

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182166	(18-2166)	$523.13 H

Lower Gear Case - Alpha I R/MR

Lower Gear Case, Alpha I R/MR
For: MerCruiser R, MR and Alpha I Drives. GLM #18100. Merc #1623-8951A43.



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	499144	(ALPHA 1)	$1,499.98 F

Complete Lower Gear Case

MRY Complete Lower Unit, For: Ratios 1.47, 1.62, 1.81 and 1.94. Fits: Gen II 1998 and Up, 0L100040 and Up
Replaces: 1623-815822A53



O.E. No. 1623-815822A53

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182400	(18-2400)	$2,092.90 F

Complete Upper Gear Case

MRY Complete Upper Unit Assembly, 1.5:1/1.47:1
Replaces: 1547-9412A20



O.E. No. 10-97934A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182141	(18-2141)	$15.53 H

Upper Gear Kit

Contains: 18-2205 Gear Set 43-55778A3, 18-2648 Seal Kit 26-32511A2, 18-2619-1 Outdrive Gasket Set 27-94996A1, 18-2820 Drive Shaft Housing to Bell Housing Gasket 27-64818, 18-1160 Bearing 31-35988A2, 18-1161 Bearing 31-35990A1, 18-1165 Bearing 31-61100A1, 18-2743 Drive Shaft Housing to Bell Housing Gasket 27-94996-2. Replaces: 43-803101T1 120/140, 1.98:1 Ratio



O.E. No. 43-803101T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182259	(18-2259)	$634.25 F

Upper Gear Kit

Most V8 Drives, 1.5:1 Ratio. Contains: 18-2201 Upper Unit Gear Set 43-18410A2, 18-2648 Seal Kit 26-32511A2, 18-2619-1 Outdrive Gasket Set 27-94996A1, 18-2820 Drive Shaft Housing to Bell Housing Gasket 27-64818, 18-2743 Drive Shaft Housing to Bell Housing Gasket 27-94996-2, 18-1160 Bearing 31-35988A2, 18-1165 Bearing 31-61100A1, 18-1142 Bearing 31-35990A1. Replaces: 43-803116T1



O.E. No. 43-803116T1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182256	(18-2256)	$625.78 H

Upper Unit Gear Set

For: 120/140 (S/N 2791957 and Up) and Gen II (S/N K999999 and Below)
Replaces: 43-55778A3, 1.98:1 Ratio, Drive Gear = 20 Teeth Driven Gear = 24 Teeth



O.E. No. 43-55778A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182205	(18-2205)	$338.67 H

Pictures May Not Match Engine Description

Upper Unit Gear Set



Includes: (1) 18-1142 Mercruiser #31-32573A1 1.5:1 Ratio, Drive Gear = 22 teeth Driven Gear = 20 teeth, For Most V8 Drives and Gen II (S/N K999999 and below). Replaces: 43-18410A2, 43-18411A2

O.E. No. 43-18410A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182201	(18-2201)	$455.83 H

Upper Drive Unit Cap



Replaces: 94998A2, 94998A4, SN 6225577 and Later Alpha I, Except Gen II

O.E. No. 94998A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182381	(18-2381)	$111.27 H

Upper Drive Unit Cap



For: Gen II SN F680000 and Up
Replaces: 828692A1

O.E. No. 828692A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182382	(18-2382)	$196.08 H

Prop Nut Kit



Contains: 18-3200 (14-31210, 14-816629) Tab Washer, 18-3700 (11-52707) Prop Nut
Replaces: 11-52707A1, Q1

O.E. No. 11-52707A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183701	(18-3701)	$10.72 H

Drain Plug Magnet



Drain Plug Magnet, For: Alpha MR/Gen II Lower Units. Not to be used on #1/R lower units. (Package of 50 without Gasket)
Replaces: 10-14834A1, 22-67892A1

O.E. No. 10-14834A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182375	(18-2375)	$5.75 H

Shim Kit



MRC Shim Kit, For: Mercruiser Vazer, Upper Bearing, Contains (1) each .002, .003, .015 and (2) each .010
Replaces: 15-36178A1

O.E. No. 15-36178A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182293	(18-2293)	$10.45 H

Shim Kit



MRC Shim Kit, For: Mercruiser Vazer, Drive Gear, Contains (1) each .002, .003, .005, .006, .010 and .025
Replaces: 15-35980A1

O.E. No. 15-35980A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182292	(18-2292)	$14.03 H

Tab Washer



MRC Tab Washer
Replaces: 14-79447

O.E. No. 14-79447

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182299	(18-2299)	$7.53 H

Exhaust Water Shutter



Exhaust Water Shutter

O.E. No. 60930

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182727	(18-2727)	$27.05 H

Exhaust Water Shutter



Exhaust Water Shutter

O.E. No. 807166A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182732	(18-2732)	$32.83 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Exhaust Boot



4" Upper Tube
Replaces: 32-44348T

O.E. No. 32-44348T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182748	(18-2748)	$50.00 H

Exhaust Bellows



All #1 Units, Gen II, TRS and Bravo I, II, III, Includes 18-7314 Clamp
Replaces: 32734A3, 18654A1

O.E. No. 18654A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182750	(18-2750)	$33.73 H

U-Joint Bellows



Alpha 1, Gen II
Replaces: 816431A1

O.E. No. 816431A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182747	(18-2747)	$82.55 H

U-Joint Bellows



All #1 Units with Ridge S/N 3469428 and Up, Includes 18-7316 Clamp
Replaces: 60932A4

O.E. No. 60932A4

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182751	(18-2751)	$48.82 H

U-Joint Bellows



Fits: All Bravo and Blackhawk Models
Replaces: 86840A3, 86840A05

O.E. No. 86840A3

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182756	(18-2756)	$85.92 H

Shift Cable Bellows



All #1, #2 Units, Alpha, Bravo I, II, III, Includes 18-7321 Clamp
Replaces: 74639, 74639A2

O.E. No. 74639

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182753	(18-2753-2)	$22.98 H

Seal Ring Gasket (Quad Ring)



Replaces: 26-45577

O.E. No. 12-19183

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182945	(18-2945)	$0.87 H

Drain Fill Washer



Replaces: 27-81987M

O.E. No. 27-81987M

Brand Name	DMI No.	Mfg. No.	Price
Sierra	184698	(18-4698)	$1.95 H

Gimbal Housing Rebuild Kit



Fits: Alpha One

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188311	(18-8311)	$458.68 H

Gimbal Housing Rebuild Kit



Fits: Gen II

Brand Name	DMI No.	Mfg. No.	Price
Sierra	188312	(18-8312)	$534.13 H

Note: Product shipped may not match the item pictured.

Gimbal Housing Rebuild Kit

Fits: Bravo



Brand Name	DMI No.	Mfg. No.	Price
Sierra	188313	(18-8313)	$545.05 H

Bellows Expander Tool



Bellows Expander Tool
Installs exhaust bellows on MC-I, R-MR, Alpha I, Bravo I and II and Blackhawk Drive Units

O.E. No. 91-45497A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189847	(18-9847)	$62.77 H

Bearing Carrier Retainer Tool



Bearing Carrier Retainer Tool
Loosens and tightens bearing carrier retainer on Bravo II Drives

O.E. No. 91-17257

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189809	(18-9809)	$160.90 H

Bearing Carrier Retainer Wrench



Bearing Carrier Retainer Wrench
Removes and installs bearing carrier retainer nuts on Bravo I and II, MC-I, R-MR, Alpha I, Alpha I/Gen II, TRS Drive Units and Outboards.

O.E. No. 91-61069T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189858	(18-9858)	$115.00 H

Spanner Nut Wrench



Spanner Nut Wrench

O.E. No. 91-36235

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189803	(18-9803)	$91.13 H

Drive Shaft Retainer Wrench



Drive Shaft Retainer Wrench

O.E. No. 91-43506T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189842	(18-9842)	$43.67 H

Hinge Pin Tool



Hinge Pin Tool
Removes and installs hinge pins from all Mercury Marine Drive Units.

O.E. No. 91-78310

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189861	(18-9861)	$21.35 H

Shift Cable Tool



Shift Cable Tool
Installs and removes shift cables on MC-I, R-MR, Alpha I, Alpha I Gen II Drive Units. Use with 18-2190 and 18-2190E Cables.

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189806	(18-9806E)	$40.67 H

Shift Shaft Bushing Tool



Shift Shaft Bushing Tool
Removes and installs the shift shaft bushing in the Gear Case of MC-I, R-MR and Alpha I Drive Units and Outboards.

O.E. No. 91-31107T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189817	(18-9817)	$24.72 H

Oetiker Clamp Kit



Oetiker Clamp Kit

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189125	(18-9125)	$264.10 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Oil Filter Wrench



Oil Filter Wrench
Size: 3-5/16" thru 3-3/4"

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189790	(18-9790)	$14.78 H

Multi Meter/DVA Tester



Multi Meter/DVA Tester
Tests electrical and ignition systems. Consists of a VOA meter with built-in direct voltage adapter.

O.E. No. 91-99750A1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189801	(18-9801)	$127.90 H

Driver Head



Driver Head
Installs gimbal bearing in MC-I, R-MR, Alpha I, Alpha I/Gen II, Blackhawk and All Bravo Drive Units.

O.E. No. 91-32325T

Brand Name	DMI No.	Mfg. No.	Price
Sierra	189821	(18-9821)	$41.70 H

Dongle



Dongle A Universal, All Brands Except Seadoo

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180005	(18-ADC400)	$91.98 D

Diagnostics Cable



Stats Master Cable, All Brands

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180004	(18-ADC300)	$413.98 D

Diagnostics Cable



Stats Power Cable, All Brands

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180001	(18-ADC152)	$91.98 D

Diagnostics Cable



MRCR/MEFI Diagnostics Cable

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180013	(18-ADC424)	$127.98 D

Diagnostics Cable



All Brands, Stats USB Cable

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180002	(18-ADC153)	$91.98 D

Mercury / Mercruiser Aluminum Trim Tab Anode



OEM #31640T-4

Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620178	(CM31640KITA)	$11.98 H

Mercruiser Aluminum Anode Kit



Trim Tab Anode, Fits Bravo III Drive 2004-Present

Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620169	(CM762144KITA)	$15.98 H

Pictures May Not Match Engine Description

Mercruiser Aluminum Anode Kit

Alpha I Generation I Kit



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620164	(CMALPHAG1KIT)	$36.98 H

Short Mercury Tab

Base OD 3-1/2"
Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.



Brand Name	DMI No.	Mfg. No.	Price
Metal Distributors Ltd	269010	(31640)	$14.98 I

Mercury Plate

Base OD 3-1/2"
Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.



Brand Name	DMI No.	Mfg. No.	Price
Metal Distributors Ltd	269026	(76214)	$11.98 I

Drain Plug

Replaces 10-79953A2, Q2



O.E. No. 10-79953A2

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182244	(18-2244)	$2.42 H

Oil Filter - V6 GM

Thread Spec: 18mm x 1.5
Replaces: Chrysler: L-319, Mercruiser: 35-802884Q, 41815, 35-883702Q, KOMC: 173834, 502903, Volvo: 841750



O.E. No. 41815

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187879	(18-7879)	$6.78 H

Oil Filter - Long Ford

Thread Spec: 3/4" x 16 NPT
Replaces: Chris-Craft: 16.81-06536, Chrysler: 1851658, Crusader: 9002514, Mercruiser: 60565, 35-802886Q, OMC: 173231, 502900, Pleasurecraft: R077001, Yamaha: YSC-16231-20-0C



O.E. No. 60565

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187875	(18-7875)	$7.10 H

Mercruiser Aluminum Anode Kit

Bravo I Kit



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620162	(CMBRAVO1KITA)	$49.98 H

Mercruiser Aluminum Anode Kit

Bravo II and III Kit - Up to 2003



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620168	(CMBRAVO23KIT)	$42.98 H

Mercruiser Aluminum Anode Kit

Alpha I Generation II Kit



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620163	(CMALPHAKITA)	$59.98 G

Mercruiser Aluminum Anode Kit

Bravo III and Design II Kit - 2004 and Up



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620170	(CMBRAVO3KITA)	$57.98 H

Mercury Verado Aluminum Anode Kit

Fits: Verado 4 Engine



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620165	(CMVERADO4KIT)	$48.98 H

Mercury Verado Aluminum Anode Kit

Fits: Verado 6 Engine



Brand Name	DMI No.	Mfg. No.	Price
Martyr™	620167	(CMVERADO6KIT)	$62.98 H

Pictures May Not Match Engine Description

Fun & Floatation | Anchor & Dock | Safety | Electronics | Trolling Motors | Lighting | Electrical | Topside Acc. | Cockpit & Deck | Instruments | Steering, Controls | Perform | Fuel System | Engine & Parts | Engine Care | Propellers | Seating & Pedestals | Tops & Covers | Pumps | Cleaning & Care | Paint & Paint Acc. | Hardware, Fasteners | Trailering | Misc. | Comm.

©2014 Donovan Marine, Inc.

Alphabetical Index for Marine Power Parts

Alphabetical Index	Page No.	Alphabetical Index	Page No.	Alphabetical Index	Page No.
Alternator	817-818	Fuel Pump	813-814	Riser Spacer	811
Carburetor	813	Harness Extension	818	Spark Plug Wire Set	815
Coil	814	Mount Isolator, Motor Mount	819	Starter Motor	817
Damper Plate	820	Oil Cooler	814	Thermostat	817
Diagnostics	820	Oil Switch	818-821	Thermostat Hoses	816
Distributor	814-815	Power Steering Pump	820	Timing Tool	816
Exhaust Manifolds	811-812	Riser Gasket	811-812		

IR 3.0 Manifold

Merc Style
3.0 Marine Power/Post 92 Merc

O.E. No. 14957



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30090	(600333)	$324.98 N

4" IR S/B RI

Merc Style
3.0 Marine Power/Post 92 Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30091	(600033)	$164.98 D

4" IR Riser

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	957069	(601282)	$168.98 L

Oil Filter - Long GM

Thread Spec: 13/16" x 16 NPT
Replaces: Mercruiser: 35-16595T1, Q, 52731, 35-802885Q, 14957, OMC: 173233, 502901, Volvo: 3850559, Yamaha: YSC-10231-20-0C



Brand Name	DMI No.	Mfg. No.	Price
Sierra	187876	(18-7876)	$7.60 H

3" IR Riser Spacer

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30431	(601167)	$137.98 N

6" IR Riser Spacer

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30265	(612022)	$200.98 N

4" Aluminum Riser - Merc

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30114	(601307)	$200.98 N

Riser Block Off Plate Merc

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899083	(283678)	$7.98 E

Note: Product shipped may not match the item pictured.

Riser Gasket (RWC)

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899075	(283109)	$5.98 F

Riser Gasket (FWC)

Merc Style
4.3L, 5.0L, 5.7L, 7.4L, 8.2L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899077	(283135)	$8.98 E

IR S/B Manifold - Merc

Merc Style
5.0L, 5.7L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	955003	(0994-100)	$214.98 H

Aluminum S/B Manifold - Merc

Merc Style
5.0L, 5.7L Marine Power/Merc



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30127	(613136)	$265.98 N

IR S/B Manifold - Early Volvo

Early Volvo Style
5.0L, 5.7L Early Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30188	(613504)	$228.98 H

IR S/B Riser - Early Volvo

Early Volvo Style
5.0L, 5.7L Early Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	905015	(601484)	$161.98 H

IR S/B Riser - Late Volvo

Late Volvo Style
5.0L, 5.7L Late Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	905011	(601408)	$133.98 H

Riser Block Off Plate - Early Volvo (VR1)

Early Volvo Style
5.0L, 5.7L Early Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899086	(283705)	$17.98 E

Riser Block Off Plate - Late Volvo (VR2)

Late Volvo Style
5.0L, 5.7L Late Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899080	(283363)	$17.98 E

Riser Gasket - Early Volvo - FWC

Early Volvo Style
5.0L, 5.7L Early Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899092	(283301)	$6.98 E

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

IR S/B Manifold - Late Volvo

Late Volvo Style
5.0L, 5.7L Late Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	905019	(613605)	$230.98 J

Riser Gasket - Late Volvo - RWC

Late Volvo Style
5.0L, 5.7L Late Model Volvo



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899090	(283351)	$6.98 E

Exhaust 90° Turn Down 4" to 3"

Exhaust 90° Turn Down 4" to 3"



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M30556	(630207)	$37.98 F

S/B Intake Gasket Set

GM Vortec
5.0L, 5.7L GM Vortec



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899089	(287804)	$44.98 E

Thermostat Housing Gasket

Thermostat Housing Gasket, 4.3L,
5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890290	(280153)	$2.98 L

G-Force High Pressure Fuel Pump Filter

G-Force High Pressure Fuel Pump Filter,
All MPI Engines



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895501	(396007)	$36.98 F

4150 Certified Carburetor

Holley Carburetor, 4150 Certified 5.7



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895503	(426608)	$637.98 E

2" Carburetor Flame Arrestor

Holley Carburetor Flame Arrester, 2"



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895505	(427523)	$43.98 E

Electric Low Pressure Fuel Pump Carter

Electric Low Pressure Fuel Pump Carter



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895512	(438108)	$212.98 M

High Pressure GM Fuel Pump

High Pressure GM Fuel Pump



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895515	(438603)	$355.98 D

Note: Product shipped may not match the item pictured.

G-Force Fuel Pump Cannister

G-Force Fuel Pump Cannister



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895518	(442005)	$144.98 E

Cannister End Plate Cooling Cap

Cannister End Plate Cooling Cap, On Bottom of Cannister without Fittings



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895521	(442056)	$38.98 E

Crank Case Ventilation to Flame Arrester Hose

Crank Case Ventilation to Flame Arrester Hose



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895525	(278007)	$12.98 E

PH High Pressure Fuel Pump

PH High Pressure Fuel Pump, MPI Engines



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895528	(438704Z)	$432.98 F

Fuel Pump Kit - PH High Pressure Fuel Pump with Cannister

Fuel Pump Kit - PH High Pressure Fuel Pump with Cannister, EFI



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895533	(438704)	$394.98 F

Delco Ignition Coil (Carb)

Delco Ignition Coil (Carb), 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890003	(481503)	$46.98 E

Delco Ignition Coil (MPI)

Delco Ignition Coil (MPI), 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890005	(481553)	$178.98 B

Wire Lead: Coil-Dist - Filter

GM, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L, EST Ignition



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	M12104	(500428)	$7.98 F

Distributor Kit - V8 Delco EST

Distributor Kit, 5.0L, 5.7L, 7.4L, 8.2L, EST Ignition



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890000	(481111)	$330.98 C

Distributor Kit - V8 Delco EST RR

Distributor Kit, 5.7L, 7.4L, 8.2L, EST Ignition RR



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890001	(481159)	$501.98 E

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Distributor Gasket (Carb)

Distributor Gasket, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L (Carb)



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890007	(288426)	$1.98 C

Distributor Kit - V6 Delco EST

Distributor Kit, 4.3L, EST Ignition



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890017	(481058)	$254.98 C

Distributor Kit - 4 Cylinder

Distributor Kit, 3.0L, EST Ignition



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890029	(481034)	$244.98 C

Distributor - Delco EST RR

Distributor, 5.0L, 5.7L, 7.4L, 8.2L, EST RR



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890154	(480155)	$429.98 C

Distributor - Delco V8 EST

Distributor, 5.0L, 5.7L, 7.4L, 8.2L, EST LH



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890156	(480151)	$400.98 C

Distributor - Delco 4 Cylinder EST

Distributor, 3.0L, 4 Cylinder, EST



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890170	(480133)	$179.98 C

Distributor - Delco V6 EST

Distributor, 4.3L, V6, EST



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890168	(480140)	$140.98 C

Ignition Wire Set - 3.0 (Carb)

Ignition Wire Set, 3.0 (Carb)



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890139	(470300)	$31.98 Q

Ignition Wire Set - MPI

Ignition Wire Set, 4.3L, 5.0L, 5.7L, MPI



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890130	(470570)	$54.98 L

Ignition Wire Set (Carb)

Ignition Wire Set, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L (Carb)



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890135	(470511)	$49.98 E

Note: Product shipped may not match the item pictured.

Wirelead: Hobbs Switch (Carb)



Wirelead, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L (Carb)

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890010	(500101)	$22.98 E

Wirelead: Ignition Shift Interrupt (EST)



Wirelead, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L (EST)

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890012	(500492)	$9.98 E

Timing Tool - EST Dist



Timing Tool, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L, EST Dist

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890145	(9159)	$6.98 E

Oil Cooler to Seawater Pump Hose - 1-1/4



Cooling Hose Preformed
Oil Cooler to Seawater Pump Hose, with Wire, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890275	(272005)	$19.98 E

Seapump to Heat Exchanger Hose



Cooling Hose Preformed
Seawater Pump to Heat Exchanger Hose, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890280	(273007)	$24.98 F

Seawater Pump to Thermostat Housing Hose



Cooling Hose Preformed
Seawater Pump to Thermostat Housing Hose, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890282	(273401)	$27.98 F

Manifold to Thermostat Housing Hose



Cooling Hose Preformed
Manifold to Thermostat Housing Hose, 7.4L

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890285	(273704)	$30.98 E

Thermostat Housing Gasket



Thermostat Housing Gasket, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890290	(280153)	$2.98 L

Analog Water Sender - 3/8"



Analog Water Sender, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891013	(456409)	$13.98 M

Temperature Sensor MPI



Temperature Sensor MPI

Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891016	(456601)	$13.98 D

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Reservoir with Holder (FWC)

Reservoir with Holder, For FWC Overflow



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890203	(527070)	$18.98 E

Dual Oil Cooler 5 x 9

Dual Oil Cooler, 1-1/4, Cools Both Transmission and Engine Oil, All Engines



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890293	(513526)	$350.98 E

Transmission Oil Cooler 6 x 1-1/4

Single Oil Cooler, Cools Transmission Oil



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890296	(513615)	$139.98 E

160° Thermostat - Front Mount Fresh Water Tank

160° Thermostat, Tank Mount Housing, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890299	(515411)	$17.98 E

Starter - Top Mount Normal Rotation LH

Starter, Top Mount Normal Rotation



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891401	(475118)	$126.98 G

Starter - Bottom Mount

Starter, Bottom Mount, 14" Flywheel



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891413	(475447)	$126.98 D

Starter - Top Mount Reverse Rotation RH

Starter, Top Mount Reverse Rotation



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891422	(475219)	$204.98 Q

V-Belt S/B Alternator

V-Belt, Alternator, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890252	(260515)	$34.98 E

Alternator - 95 amp 2v Belt

Alternator, 95 amp 2v Belt, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891434	(475752A)	$241.98 Q

Alternator 95 amp Serpintine Belt

Alternator, 95 amp Serp Belt, 6.0L, 6.2L, 8.1L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891436	(475764A)	$211.98 F

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Alternator

Various Models, 12 volt, 95 amp, with 2-V Pulley



O.E. No. 8400111

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1032	(ADR0426)	$165.98 G

Alternator

Various Models, 12 volt, 70 amp, with 2-V Pulley



O.E. No. 19020614

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1051	(ADR0300)	$135.98 G

Water Temp Switch - 3/8"

Water Temp Switch, For Alarm On All Engines



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891026	(457083)	$29.98 E

Oil Pressure Switch

Oil Pressure Switch, For Alarm On All Engines



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891023	(457045)	$16.98 D

Circuit Board - Replacement For Mefi 4 Harness

Circuit Board, Replacement For Mefi 4 Harness



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899022	(472629)	$109.98 E

Wiring Harness

Wiring Harness, For Carbureted Engines, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899020	(472302)	$341.98 E

Harness Extension - 3'

Harness Extension, 3'



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899030	(473037)	$53.98 E

Harness Extension - 10'

Harness Extension, 10'



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899032	(473102)	$60.98 E

Harness Extension - 25'

Harness Extension, 25'



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899035	(473253)	$87.98 E

Instrument Panel

Instrument Panel



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899037	(473809)	$329.98 E

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Circulating Water Pump Pulley

Circulating Water Pump Pulley, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890255	(514516)	$124.98 F

2v Crankshaft Pulley

2v Crankshaft Pulley, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890260	(514693)	$73.98 C

Manifold Fitting - 3/4" NPT x 1" Hose 90 with Drain Plug

Manifold Fitting, 3/4" NPT x 1" Hose with Drain Plug, Plastic



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890270	(246896)	$3.98 E

Alternator Bracket - S/B

Alternator Bracket, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890932	(290205)	$64.98 F

Alternator Arm Tension Bracket

Alternator Arm Tension Bracket, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890935	(292956)	$12.98 C

Seawater Pump Bracket - S/B

Seawater Pump Bracket, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890937	(308711)	$39.98 C

Isolator Mount - 3/4" (DF216)

Isolator Mount, 3/4", All Front Mounts



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890940	(330200)	$26.98 E

Short Trunion Mount

Short Trunion Mount, Can Fit All Engines On Front



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890943	(330403)	$69.98 E

Trunion Pin - Short

Trunion Short Pin, 4.75"



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890946	(3311708)	$35.98 E

Trunion Pin - Long

Trunion Long Pin, 6"



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890950	(331722)	$34.98 F

Note: Product shipped may not match the item pictured.

Damper Plate - Single Stage S/B

Damper Plate, Single Stage, 3.0L, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895582	(702159)	$67.98 Q

Damper Plate - Single Stage B/B

Damper Plate, Single Stage, 6.0L, 6.2L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	895585	(702185)	$81.98 E

Power Steering V-Belt

Power Steering V-Belt, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890250	(260404)	$21.98 C

V-Belt Power Steering Pump Pulley

V-Belt Power Steering Pump Pulley



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899051	(514821)	$70.98 E

Power Steering Pump Reservoir

Power Steering Pump Reservoir



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899053	(521028)	$149.98 E

Power Steering Pump without Reservoir

Power Streeing Pump without Reservoir, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899055	(521030)	$218.98 E

Power Steering Pressure Hose

Power Steering Pressure Hose



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	899065	(387806)	$62.98 E

EFI Diacom


EFI Diacom



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891315	(9200)	$1001.98 E

Dipstick Indicator

Dipstick Indicator, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890980	(371663)	$24.98 E

Dipstick Tube - Enpac/Parpac

Dipstick Tube, Enpac/Parpac, without Power Steering, 4.3L, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890986	(373115)	$25.98 E

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Remote Oil System Adapter

Remote Oil System Adapter, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890983	(372158)	$22.98 E

Dipstick Tube - Inboard

Dipstick Tube, Sportpac, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890989	(373201)	$51.98 F

EZ Oil Drain

EZ Oil Drain, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890996	(386804)	$32.98 L

Field Single Remote Oil Kit

Field Single Remote Oil Kit, 5.0L, 5.7L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890993	(380004)	$139.98 E

Oil Filter - Inboard

Oil Filter, Inboard



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891003	(397578)	$7.98 M

Oil Filter - Enpac

Oil Filter, Enpac, I/O



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	890999	(397554)	$7.98 L

Hobbs Oil Switch

Hobbs Oil Switch, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L (Carb)



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891020	(457007)	$22.98 E

Analog Oil Sender

Analog Oil Sender, 3.0L, 4.3L, 5.0L, 5.7L, 7.4L, 8.2L



Brand Name	DMI No.	Mfg. No.	Price
Marine Power	891010	(456106)	$29.98 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Starter

Starter, Yanmar, CCW, 8 Tooth
Replaces: Hitachi: S114-414, -414A, -651, -651A, Yanmar: 114631-77011, 114632-77010, -1, 114399-77010



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1151	(SHI0067)	$107.98 G

Starter

Starter, Yanmar, CW, 9 Tooth
Replaces: Hitachi: S114-303, -A, Yanmar: 128170-77010, -D



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1153	(SHI0080)	$122.98 G

Starter

Starter, Yanmar, CW, 15 Tooth
Replaces: Hitachi: S114-257, -G, S114-483, -A, Yanmar: 129573-77010, 171008-77010



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1155	(SHI0082)	$176.98 G

Starter

Starter, Yanmar, CCW, 9 Tooth
Replaces: Hitachi: S114-194, Yanmar: 104211-77010, -1



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1157	(SHI0084)	$194.98 G

Starter

Starter, Yanmar Diesel
Replaces: Hitachi: S12-47, S114-815, -883, Case: VV12924277010, Yanmar: 121370-77010, 129242-77010, 129698-77010



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1178	(SHI0081)	$112.98 G

Starter

Starter, Yanmar, CW, 11 Tooth
Replaces: Hitachi: S13-68, -A, -C, -86, Yanmar: 123500-77010, 124610-77010, -9



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1209	(SND0586)	$226.98 G

Alternator

Alternator, Yanmar Diesel, 12 volt, 80 amp
Replaces: Hitachi: LR180-03A, - B, -C, Yanmar: 119573-77201, 129470-77200



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1066	(AHI0059)	$119.98 G

Alternator

Alternator, Yanmar Diesel, 12 volt, 35 amp
Replaces: Hitachi: LR135-105, Yanmar: 128270-77200



Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1068	(AHI0060)	$113.98 G

Alternator

Alternator, Yanmar, 12 volt, 80 amp
6 Cylinder 1997-2010



O.E. No. 101211-9940

Brand Name	DMI No.	Mfg. No.	Price
MP Parts	4-1074	(AND0192)	$180.98 G

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Impeller Kit

Volvo Impeller Kit
Replaces: Jabsco (1210-0001), 12 Splines, 12 Fins



Brand Name	DMI No.	Mfg. No.	Price
Sierra	183081	(18-3081)	$31.12 H

Impeller Kit

Volvo Impeller Kit, Fits: Volvo 1998 and Earlier, Johnson Pump 09-102 BB
Replaces: 3862281, Yanmar 192470-42530, 192470-42532



O.E. No. 192470-42530

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183277	(18-3277)	$41.03 H

Impeller Kit

Volvo/Sherwood Impeller Kit
Replaces: Sherwood 9959K with 18-3060 Impeller and Sherwood 9959



O.E. No. 22212

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183060	(18-3060)	$25.43 H

Temperature Sensor

1/8" NPT Heat Range, 239°
Replaces: 3862500



O.E. No. 3862500

Brand Name	DMI No.	Mfg. No.	Price
Sierra	187513	(18-7513)	$23.27 H

Thermostat Kit

For: 7.4L 1994-1998, 8.2L 1998, 140 H.P.
Contains:

18-7170	O-Ring	O.E. No. 3852071
18-2917	Thermostat Gasket	O.E. No. 3852111
	Thermostat	O.E. No. 3853983



O.E. No. 3853983

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183676	(18-3676)	$26.48 H

Thermostat Kit

For: 4.3L 1994-1997, 5.8L 1994-1997 4.3 H.P. 1991-1997, 5.8 H.P. (EFI) 1993-1997 5.0L H.P. 1994-1997
Contains:

18-7170	O-Ring	O.E. No. 3852071
18-2917	Thermostat Gasket	O.E. No. 3852111
	Thermostat	O.E. No. 3856961



O.E. No. 3856961

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183677	(18-3677)	$25.20 H

U-Joint Assembly

Volvo U-Joint Assembly, Fits: All Cobra 1994 and Up Except King Cobra
Replaces: 3852384



O.E. No. 3852384

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182339	(18-2339)	$453.12 H

Bellows Kit

For: OMC Cobra without Cone Clutch
Contains:

18-2613	Outdrive Gasket Set	
18-2764	Exhaust Bellows	O.E. No. 914036
18-2763	Shift Cable Bellows	O.E. No. 911826
18-2765	U-Joint Bellows	O.E. No. 983973, 987467
18-2100	Gimbal Bearing	O.E. No. 983937
18-7315	Hose Clamp	



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182771	(18-2771)	$192.48 H

Outdrive Gasket

For: SX Drives, Use 18-2362 Mounting Nuts
Contains:

18-7153	O-Ring, Qty. 2	O.E. No. 911851
18-2996	Outdrive Seal, Qty. 1	O.E. No. 911823



Brand Name	DMI No.	Mfg. No.	Price
Sierra	182699	(18-2699)	$3.80 H

Elbow with 3" Outlet

Crusader Elbow, 3" Hose, Use with: Manifold: 18-1925, 18-1926, 18-1933, 18-1929, Elbow Gasket: 18-0309, Mounting Kit: 18-8515
Replaces: Crusader 98068, Crusader GM Small Block V8 305-350 cu. in. (Models 220 and 270), GM Big Block V8 454 cu. in. (Models: CH350 and 454XL)



O.E. No. 98068

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181934	(18-1934)	$217.10 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Elbow Gasket



Crusader Exhaust Gasket, Use with: Exhaust Elbow: 18-1928, V6/V8
Replaces: 96562

O.E. No. 96562

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180309	(18-0309)	$4.00 H

Exhaust Manifold Gasket Set



Crusader Exhaust Manifold Gasket Set, For: GM 305/350 CID Engines, Use with: Manifold: 18-1997-1

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180604	(18-0604)	$25.03 H

Impeller Kit



Crusader Impeller Kit
Contains: 18-3061 Impeller

O.E. No. 835874

Brand Name	DMI No.	Mfg. No.	Price
Sierra	183047	(18-3047)	$40.25 H

Manifold



Crusader Manifold, Starboard, Use with: Exhaust Manifold Gasket: 18-0418, Mounting Kit: 18-8524
Replaces: Crusader 97992, 97114, Crusader GM Big Block V8 454 cu. in. (Models: CH350 and 454XL)

O.E. No. 97114

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181929	(18-1929)	$308.52 H

Manifold



Crusader Manifold, Port, Use with: Exhaust Manifold Gasket: 18-0418, Mounting Kit: 18-8524
Replaces: Crusader 97993, 97115 Crusader GM Big Block V8 454 cu. in. (Models: CH350 and 454XL)

O.E. No. 97115

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181933	(18-1933)	$310.48 H

Manifold



Crusader Manifold, Port and Starboard, Use: Exhaust Manifold Gasket: 18-0418, For: GM Big Block V8 454-502 ci
Replaces: Crusader 98125

O.E. No. 98125

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181982	(18-1982)	$405.27 H

Manifold Spacer



Crusader Manifold Spacer, Barr, Indmar and Marine Power Ford Small Block V8 302-351 cu. in., GM Small Block V8 305-350 cu. in., GM Big Block V8 454 cu. in., Used with: Manifolds: 18-1998-1, 18-1997-1 and 18-1898

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181949	(18-1949)	$137.98 H

4" Riser



Crusader Riser, Use with: Manifold: 18-1925, 18-1926, 18-1933, 18-1929, Riser Gasket: 18-0305, Mounting Kit: 18-8523
Replaces: Crusader 97772, Crusader Small Block V8 305-350 cu. in. (Models: 220 and 270), GM Big Block V8 454 cu. in. (Models: CH350 and 454XL)

O.E. No. 97772

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181927	(18-1927)	$229.27 H

Riser



Crusader Riser, Use with: Manifold: 18-1982, 18-1983, Riser Gasket: 18-0475, Mounting Kit: 18-8547
Replaces: Crusader 98126, RO29015 Crusader GM Small Block V8 305-350 cu. in. (Models: CM305, CM350XL and CM350HT), GM Big Block V8 454 cu. in. (Models: 454XL and 502XL)

O.E. No. RO29015

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181938	(18-1938)	$291.33 H

Manifold



Universal Center Riser, Port and Starboard, Fits: Ford 302 and 351 CID Engines, Use with: 18-0603 Exhaust Manifold Gasket Set
Replaces: Barr FM-1-83 Universal Center Riser Manifold

O.E. No. FM-1-83

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181998	(18-1998-1)	$275.58 H

Note: Product shipped may not match the item pictured.

©2014 Donovan Marine, Inc.

Drive Bellows Kit



Volvo Drive Bellows Kit
Replaces: 875826, 876294 (with Ridge), AQ200, 250, 270, 270T, 275, 280, 280T, PT, 290DP, Unit: 280, 290

O.E. No. 875826

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182744	(18-2744)	$67.40 H

Exhaust Bellows Kit



Volvo Exhaust Bellows Kit
Replaces: 875848, 876631, AQ200, 250, 270, 275, 280, 280DP, 290, 290DP

O.E. No. 875848

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182758	(18-2758)	$84.03 H

Elbow Gasket



Volvo Exhaust Gasket, Used with:
Riser/Elbow: 18-1945, 18-1946, 18-1913,
End Plate: 18-1941

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180472	(18-0472)	$8.42 H

Manifold



Volvo Manifold, Fits: Volvo AQ120B, 125A, 140A, 145A, BB140A, 145A, Supplied with Mounting Package, Use with: Exhaust Manifold Gasket: 18-2991, Mounting Kit: 18-8539
Replaces: 855387, 834438-4

O.E. No. 855387

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181930	(18-1930-1)	$680.20 H

Manifold



Volvo Manifold, Port and Starboard, For: 4.3L, Fits: AQ175, AQ430, AQ431A, AQ431B, AQ432, AQ434, Use with: Exhaust Manifold Gasket: 18-2909
Replaces: 856894

O.E. No. 856894

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181932	(18-1932)	$331.07 H

Riser



Indmar Riser, Use with: Manifold: 18-1997-1, 18-1998-1, Riser Gasket: 18-2854 open or 18-0476 blocked, Mounting Kit: 18-4364 open or 18-8535 blocked
Replaces: Barr 20-0102, Indmar 53-2009, 53-2018, Barr and Indmar Ford Small Block V8 302-351 cu. in.

O.E. No. 20-0100

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181907	(18-1907)	$168.45 H

Manifold



Barr/Marine Power Manifold, Port and Starboard, Fits 454 cu. in. GM Big Block V8 Engines, Use with: Exhaust Gasket: 18-0418, Riser Gasket: 18-2854 Open or 18-0476 Blocked.
Replaces: Barr CHVA-1-84, Marine Power 0991-110

O.E. No. 0991-110

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181898	(18-1898)	$312.23 H

Riser



Barr/Marine Power Riser, Use with: Manifold: 18-1997-1, 18-1998-1, 18-1898, Riser Gasket: 18-2854 Open or 18-0476 Blocked, Mounting Kit: 18-4364 Open or 18-8535 Blocked
Replaces: Barr 20-0100, Marine Power 0992-593
Barr, Indmar and Marine Power Ford Small Block V8 302-351 cu. in., GM Small Block V8 305-350 cu. in., GM Big Block V8 454 cu. in.

O.E. No. 20-0100

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181939	(18-1939)	$189.33 H

Intake Gasket Set



MRC/OMC/Volvo Intake Gasket Set, For: Mercruiser 4.3L/LX Models, pre SN F802999,
For: Volvo 4.3GL/GS 1994-1996, 4.3Gi 1995-1997, For: OMC 4.3L 1993-1996.
Replaces: Mercruiser 24-824326, OMC and Volvo 3850379, 912979

O.E. No. 24-824326

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181238	(18-1238)	$31.20 H

Exhaust Manifold Gasket



Volvo Manifold Gasket, V8.
Replaces: 835966, 856034AQ200, 225, 260, 271, 290, 311V-8

O.E. No. 835966

Brand Name	DMI No.	Mfg. No.	Price
Sierra	182949	(18-2949)	$15.13 H

Note: Product shipped may not match the item pictured.

Rubber Ring



Volvo Rubber Ring. For Clamp Ring, Fits: 230A/SP-A/MT, 250A/SP-A/MT, 500A, 501A, 571A, 740A, AQ100, AQ105, AQ110, AQ115A, AQ110B, AQ120A, AQ120B, AQ125A/B, AQ130A/B, AQ131A/D, AQ175A, AQ190A, AQ200A/C/D/F, AQ210A, AQ211A, AQ225A/B/C/D/E/F, AQ231A/B, AQ240A, AQ255A/B, AQ260A/B, AQ271A/B/C/D, AQ280A, AQ290A, AQ311A/B, AQ60F, AQ80, AQ90, AQ95, AQD19, AQD29/A, AQD32A. Replaces: 804190

O.E. No. 804190

Brand Name	DMI No.	Mfg. No.	Price
Sierra	180184	(18-0184)	$29.45 H

Contact Set



Volvo Contact Set. Replaces: 835705, 855846-2

O.E. No. 2421173

Brand Name	DMI No.	Mfg. No.	Price
Sierra	185303	(18-5303)	$16.42 H

Forward Crankshaft Seal



MRY/OMC/Crusader Timing Cover Seal. Replaces: Mercruiser 26-8219471, OMC 3860095, Crusader 7080130

O.E. No. 26-8219471

Brand Name	DMI No.	Mfg. No.	Price
Sierra	181233	(18-1233)	$26.00 H

Wire Set



Crusader Wire Set

Brand Name	DMI No.	Mfg. No.	Price
Sierra	1888441	(18-8844-1)	$56.83 H

Air Filter



MRY Air Filter. Replaces: Volvo 858488

O.E. No. 858488

Brand Name	DMI No.	Mfg. No.	Price
Sierra	197907	(18-7907)	$68.23 H

Note: Product shipped may not match the item pictured.

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

AUTHENTIC GM MARINE ENGINES
MARINE POWER®
THE FORCE BEHIND THE FUN.™



Fully built replacement engine with multiple option possibilities to match most Mercruiser, Volvo and OMC stern drive applications. Ideal replacement upgrade for old engines with outdated technology and weak horsepower. Offered with Delphi fuel injections, fresh water cooling, and power steering from the 3.0 Liter to 7.4 Liter engines.

Complete inboard engine configured for use with ZF and Velvet Drive marine transmissions. Perfect for repowering the weekend cruiser or wake and ski boats. Offered with Delphi fuel injection and fresh water cooling from the 3.0 Liter to 7.4 Liter engines. Includes dual remote oil filters for added filtration and service convenience plus top mount starters for better serviceability.*

*4.3l/262ci model does not include top mount starter or remote oil system.



New and complete GM long block engine from oil pan through valve covers; easily configurable for replacement of stern drive or inboard engines.

Save valuable rebuild and setup time with this ideal power-packed replacement for older pre-Vortec engines. Includes complete service base engine, carburetor, fuel line, electric fuel pump, aluminum intake manifold, electronic distributor, high-performance coil and ignition wire set.

Base

MarinePower — POWERED by GM



- This is a NEW General Motors Marine Base Engine.
- This 3.0L Marine engine is built strictly for marine use on GM production lines.
- All fresh water cooled engines are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- Block with All Internal Components.
- Circulating Water Pump.
- Spark Plugs.
- 14" Flywheel.
- Oil Pan.
- Harmonic Balancer.
- Electronic Distributor.
- High Output Ignition Coil.
- Timing Shunt.
- Power Tach. Lead.
- Valve Cover.
- Timing Chain Cover.
- Coil to Distributor Cable.
- One Piece Rear Main Seal.
- Mechanical Fuel Pump Pad.

Order No.	Mfg. No. / Description	Price
MP1303	(881301) 3.0L (181 ci) Base Carb 140 H.P.	$2,099.98 C

Base

MarinePower — POWERED by GM



- This is a NEW General Motors Marine Base Engine.
- This 4.3L Marine engine is built strictly for marine use on GM production lines.
- All fresh water cooled engines are Closed Loop Cooling. They willhave a Heat Exchanger.

Includes:

- Block with All Internal Components.
- 2 Barrel Intake Manifold.
- Vortec Cylinder Heads.
- Circulating Water Pump.
- Spark Plugs.
- 14" Flywheel with Ring Gear Towards Engine.
- Oil Pan.
- Harmonic Balancer.
- Valve Cover.
- Timing Chain Cover.

Order No.	Mfg. No. / Description	Price
MP1404	(881431) 4.3L (262 ci) V6 Long Block 210 H.P.	$2,700.98 B

Base

MarinePower — POWERED by GM



- This is a NEW General Motors Marine Base Engine.
- This 5.7L REVERSE rotation marine engine is built strictly for marine use on GM production lines.
- All fresh water cooled engines are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- Opposite Rotation Vortec Engine with High Flow Cylinder Heads.
- Circulating Water Pump.
- 14" Flywheel.
- Harmonic Balancer.
- Plastisol Coated Oil Pan for Protection Against Saltwater Corrosion.
- Valve Covers.
- Spark Plugs.

Order No.	Mfg. No. / Description	Price
MP1810	(881575) 5.7L (350 ci) V8 Reverse Rotation Long Block 310 H.P.	$4,329.98 C

Base

MarinePower — POWERED by GM



- This is a NEW General Motors Marine Base Engine.
- This 5.7L Marine engine is built strictly for marine use on GM production lines.
- All fresh water cooled engines are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- Vortec Engine with High Flow Cylinder Heads.
- Circulating Water Pump.
- 14" Flywheel.
- Harmonic Balancer.
- Plastisol Coated Oil Pan for Protection Against Saltwater Corrosion.
- Valve Covers.
- Spark Plugs.

Order No.	Mfg. No. / Description	Price
MP1808	(881571) 5.7L (350 ci) V8 Long Block 310 H.P.	$2,911.98 B

Parpac

Our Parpacs start with a Heavy Duty GM Vortec Marine Engine. Parpacs are held to the same quality standards as Marine Power's complete engines. Parpacs are ideal for numerous replacement situations and are the perfect solution for replacing Pre-Vortec Engine.

MarinePower — POWERED by GM



- All fresh water cooled engines are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 4.3L GM Complete Marine Base Engine.
- 4 Barrel GM Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Electronic Fuel Pump and Fuel Lines.
- Ignition System Including Wire Set.

Order No.	Mfg. No. / Description	Price
MP2880	(882434) 4.3L (262 ci) V6 4 Barrel Intake Manifold and Carburetor 225 H.P.	$3,733.98 B

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Parpac

MarinePower — POWERED by GM



- All fresh water cooled engines are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L Vortec GM Complete Marine Base Engine.
- Aluminum High Rise Intake Manifold with Coating for Protection Against Corrosion.
- Holley 4150 Marine Carburetor.
- Electric Fuel Pump.
- Ignition System.
- Dipstick and Tube.

Order No.	Mfg. No. / Description	Price
MP2886	(882575) 5.7L (350 ci) V8 310 H.P.	$4,266.98 B

Parpac

MarinePower — POWERED by GM



- All fresh water cooled engines are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L Vortec GM Complete Marine Base Engine.
- Aluminum High Rise Intake Manifold with Coating for Protection Against Corrosion.
- Holley 4150 Marine Carburetor.
- Electric Fuel Pump.
- Ignition System.
- Dipstick and Tube.

Order No.	Mfg. No. / Description	Price
MP2894	(882566) 5.7L (350 ci) V8 310 H.P. Opposite Rotation	$5,444.98 B

Enpac Sterndrive Package

MarinePower — POWERED by GM



- This is a NEW 3.0L complete sterndrive package.
- This 3.0L complete sterndrive package is ideal for replacing most Mercruiser, Marine Power and OMC 3.0L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- Complete 3.0L New Marine Base Engine.
- Mercruiser Style Cast Iron Exhaust Manifolds.
- Carburetor.
- No Raw Water Pump.
- Electric Fuel Pump.
- Fuel Lines.
- Ignition Wires.
- Alternator.
- High Torque Bottom Mount Starter.
- Engine Wiring Harness with Ten Pin Plug.
- Brass Fittings.
- Fuel Water Separator.
- Flame Arrestor.
- Single Sender Package.
- Superior Corrosion Resistant Urethane Paint.

Order No.	Mfg. No. / Description	Price
MPE30CF	(E181S) 3.0L (181 ci) 4 Cylinder Complete Carbureted, Fresh Water Cooled, Sterndrive Package	$5,258.98 C
MPE30CR	(E181S) 3.0L (181 ci) 4 Cylinder Complete Carbureted, Raw Water Cooled, Sterndrive Package	$4,399.98 C

Enpac Sterndrive Package

MarinePower — POWERED by GM



- This is a NEW 4.3L complete sterndrive package.
- This 4.3L complete sterndrive package is ideal for replacing most 1986 and later Mercruiser, Marine Power and OMC 4.3L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 4.3L GM Marine Base Engine.
- 4 Barrel G.M. Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Power Steering.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Mercruiser Style Center Rise Exhaust Manifolds with 4" Risers.
- 14" High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE43CF	(E4.3V-MR2) 4.3L (262 ci) V6 Complete Carbureted, Fresh Water Cooled, Sterndrive Package (Includes Power Steering)	$7,793.98 D
MPE43CR	(E4.3V-MR2) 4.3L (262 ci) V6 Complete Carbureted, Raw Water Cooled, Sterndrive Package (Includes Power Steering) without Raw Water Pump	$6,535.98 C

Pictures May Not Match Engine Description

Enpac Sterndrive Package

MarinePower — POWERED by GM



- This is a NEW 4.3L complete sterndrive package.
- This 4.3L complete sterndrive package is ideal for replacing most 1986 and later Mercruiser, Marine Power and OMC 4.3L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.


Includes:

- New 4.3L GM Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- Power Steering.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Mercruiser Style Center Rise Exhaust Manifolds with 4" Risers.
- 14" High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE43MF	(E43MPI) 4.3L (262 ci) V6 Complete Fuel Injected, Fresh Water Cooled, Sterndrive Package (Includes Power Steering)	$9,417.98 C
MPE43MR	(E43MPI) 4.3L (262 ci) V6 Complete Fuel Injected, Raw Water Cooled, Sterndrive Package (Includes Power Steering) without Raw Water Pump	$8,617.98 C

Enpac Sterndrive Package

MarinePower — POWERED by GM



- This is a NEW 5.7L complete sterndrive package.
- This 5.7L complete sterndrive package is ideal for replacing most 1987 and later Mercruiser, Marine Power, and OMC 5.0L and 5.7L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L GM Marine Base Engine.
- High Rise Aluminum Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- No Raw Water Pump.
- Power Steering.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Mercruiser Style Center Rise Exhaust Manifolds with 4" Risers.
- 14" High Torque Bottom Mount Starter.
- Mercruiser Style Coupler.
- 95 amp Alternator.
- Flame Arrestor Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE57MCF	(E5.7V-MR2) 5.7L (350 ci) V8 Complete Carbureted, Fresh Water Cooled, Sterndrive Package (Includes Power Steering)	$8,893.98 D
MPE57MCR	(E5.7V-MR2) 5.7L (350 ci) V8 Complete Carbureted, Raw Water Cooled, Sterndrive Package (Includes Power Steering) without Raw Water Pump	$7,570.98 C

Enpac Sterndrive Package

MarinePower — POWERED by GM



- This is a NEW 5.7L complete sterndrive package.
- This 5.7L complete sterndrive package is ideal for replacing most 1987 and later Mercruiser, Marine Power, and OMC 5.0L and 5.7L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L GM Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- No Raw Water Pump.
- Power Steering.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Mercruiser Style Center Rise Exhaust Manifolds with 4" Risers, Mercruiser Style Coupler.
- 14" High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE57MMF	(E5.7V-MR2) 5.7L (350 ci) V8 Fuel Injected, Fresh Water Cooled, Sterndrive Package (Includes Power Steering)	$9,868.98 D
MPE57MMR	(E5.7V-MR2) 5.7L (350 ci) V8 Fuel Injected, Raw Water Cooled, Sterndrive Package (Includes Power Steering) without Raw Water Pump	$9,019.98 D

Enpac Sterndrive Package

MarinePower — POWERED by GM



- This is a NEW 5.7L complete engine package.
- This 5.7L complete sterndrive package is ideal for replacing most 1991 and earlier Volvo Penta 5.0L and 5.7L Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L G.M. Marine Base Engine.
- High Rise Aluminum Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Volvo Penta Early Style Center Rise Manifolds and Risers.
- 12-3/4" Sterndrive Flywheel and Damper Plate.
- High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE57V1CF	(E5.7V-VR1) 5.7L (350 ci) V8 Carbureted, Fresh Water Cooled, Stern Drive Package	$8,550.98 D
MPE57V1CR	(E5.7V-VR1) 5.7L (350 ci) V8 Carbureted, Raw Water Cooled, Stern Drive Package	$7,246.98 C

©2014 Donovan Marine, Inc.

Enpac Sterndrive Package

MARINE POWER — POWERED by GM



- This is a NEW 5.7L complete engine package.
- This 5.7L complete sterndrive package is ideal for replacing most 1991 and earlier Volvo Penta 5.0L and 5.7L Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L G.M. Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Volvo Penta Early Style Center Rise Manifolds and Risers.
- 12-3/4" Sterndrive Flywheel and Damper Plate.
- High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE57V1MF	(E5.7V-VR1) 5.7L (350 ci) V8 Fuel Injected, Fresh Water Cooled	$9,524.98 D
MPE57V1MR	(E5.7V-VR1) 5.7L (350 ci) V8 Fuel Injected, Raw Water Cooled	$8,164.98 C

Enpac Sterndrive Package

MARINE POWER — POWERED by GM



- This is a NEW 5.7L complete engine package.
- This 5.7L complete engine package is ideal for replacing most 1992 and later Volvo Penta and OMC 5.0L and 5.7L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L G.M. Marine Base Engine.
- High Rise Aluminum Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Power Steering.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Volvo Penta Late Style Center Rise Manifolds and Risers.
- High Torque Bottom Mount Starter.
- 14" Sterndrive Flywheel and Volvo Penta or OMC Style Coupler.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE57V2CF	(E5.7V-VR2) 5.7L (350 ci) V8 Carbureted, Fresh Water Cooled	$8,893.98 D
MPE57V2CR	(E5.7V-VR2) 5.7L (350 ci) V8 Carbureted, Raw Water Cooled	$7,570.98 C

Enpac Sterndrive Package

MARINE POWER — POWERED by GM



- This is a NEW 5.7L complete engine package.
- This 5.7L complete engine package is ideal for replacing most 1992 and later Volvo Penta and OMC 5.0L and 5.7L Marine Engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L G.M. Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- Power Steering.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Volvo Penta Late Style Center Rise Manifolds and Risers.
- 14" Sterndrive Flywheel and Volvo Penta or OMC Style Coupler.
- High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPE57V2MF	(E5.7V-VR2) 5.7L (350 ci) V8 Fuel Injected, Fresh Water Cooled, Sterndrive Package (Includes Power Steering)	$9,868.98 D
MPE57V2MR	(E5.7V-VR2) 5.7L (350 ci) V8 Fuel Injected, Raw Water Cooled, Sterndrive Package (Includes Power Steering)	$9,019.98 D

Pictures May Not Match Engine Description

Enpac Sterndrive Package

MARINE POWER — POWERED by GM



- Full I/O Engine with MPI.
- Fresh Water Cooling.
- Power Steering.
- MP2K Aluminum Manifolds and Heads.
- Cast Iron Block.

Order No.	Mfg. No. / Description	Price
MPE60MF	(E60VVT) 6.0L I/O MPI FWC PS	$12,576.98 C

Sportpac Inboard

MarinePower — POWERED by GM



- This is a NEW 3.0L complete inboard package.
- This 3.0L complete inboard package is ideal for replacing most 3.0L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- Complete 3.0L New Marine Base Engine.
- Mercruiser Style Cast Iron Exhaust Manifolds.
- Carburetor, Electric Fuel Pump.
- Fuel Lines.
- Ignition Wires.
- Alternator.
- High Torque Top Mount Starter.
- Engine Wiring Harness with Ten Pin Plug.
- Brass Fittings.
- Fuel Water Separator.
- Flame Arrestor.
- Single Sender Package.
- Superior Corrosion Resistant Urethane Paint.

Order No.	Mfg. No. / Description	Price
MPS30CF	(S181S) 3.0L (181 ci) 4 Cylinder Carbureted, Fresh Water Cooled, Inboard Package	$5,988.98 C
MPS30CR	(S181S) 3.0L (181 ci) 4 Cylinder Carbureted, Raw Water Cooled, Inboard Package	$5,129.98 C

Sportpac Inboard

MarinePower — POWERED by GM



- This is a NEW 4.3L complete inboard package.
- This 4.3L complete inboard package is ideal for replacing most 4.3L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 4.3L GM Marine Base Engine.
- 4 Barrel GM Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Center Rise Exhaust Manifolds with 4" Risers.
- 14" High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPS43CF	(S4.3V) 4.3L (262ci) V6 Carbureted, Fresh Water Cooled, Inboard Package	$7,705.98 C
MPS43CR	(S4.3V) 4.3L (262ci) V6 Carbureted, Raw Water Cooled, Inboard Package	$6,905.98 C

Sportpac Inboard

MarinePower — POWERED by GM



- This is a NEW 4.3L complete inboard package.
- This 4.3L complete inboard package is ideal for replacing most 4.3L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 4.3L GM Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- Center Rise Exhaust Manifolds with 4" Risers.
- 14" High Torque Bottom Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- All Pulleys.
- Hoses and Belts.

Order No.	Mfg. No. / Description	Price
MPS43MF	(S43MPI) 4.3L (262 ci) V6 Fuel Injected, Fresh Water Cooled, Inboard Package	$9,093.98 C
MPS43MR	(S43MPI) 4.3L (262 ci) V6 Fuel Injected, Raw Water Cooled, Inboard Package	$8,294.98 C

Pictures May Not Match Engine Description

Sportpac Inboard

MarinePower — POWERED by GM



- This is a NEW 5.7 complete inboard package.
- This 5.7L complete inboard package is ideal for replacing most 5.7L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L GM Marine Base Engine.
- High Rise Aluminum Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- 14" Inboard Flywheel.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- 14" Top Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.
- Dual Remote Oil Filter Set Up.

Order No.	Mfg. No. / Description	Price
MPS57CF	(S5.7V) 5.7L (350 ci) V8 Carbureted, Fresh Water Cooled, Inboard Package	$8,235.98 C
MPS57CR	(S5.7V) 5.7L (350 ci) V8 Carbureted, Raw Water Cooled, Inboard Package	$7,435.98 C

©2014 Donovan Marine, Inc.

Sportpac Inboard

MarinePower — POWERED by GM



- This is a NEW 5.7 complete inboard package.
- This 5.7L complete inboard package is ideal for replacing most 5.7L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L GM Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- 14" Inboard Flywheel.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- 14" Top Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.
- Dual Remote Oil Filter Set Up.

Order No.	Mfg. No. / Description	Price
MPS57MF	(S5.7V) 5.7L (350 ci) V8 Fuel Injected, Fresh Water Cooled, Inboard Package	$9,724.98 D
MPS57MR	(S5.7V) 5.7L (350 ci) V8 Fuel Injected, Raw Water Cooled, Inboard Package	$8,353.98 C

Sportpac Inboard Reverse Rotation

MarinePower — POWERED by GM



- This is a NEW 5.7 complete inboard package.
- This 5.7L reverse rotation complete inboard package is ideal for replacing most 5.7L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L GM Marine Base Engine.
- Delphi MEFI 5 Fuel Injection.
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- 14" Inboard Flywheel.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- 14" Top Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.
- Dual Remote Oil Filter Set Up.

Order No.	Mfg. No. / Description	Price
MPSR57MF	(S5.7VR) 5.7L (350 ci) V8 Reverse Rotation Fuel Injected, Fresh Water Cooled, Inboard Package	$10,588.98 C
MPSR57MR	(S5.7VR) 5.7L (350 ci) V8 Reverse Rotation Fuel Injected, Raw Water Cooled, Inboard Package	$9,788.98 C

Pictures May Not Match Engine Description

Sportpac Inboard Reverse Rotation

MarinePower — POWERED by GM



- This is a NEW 5.7 complete inboard package.
- This 5.7L reverse rotation complete inboard package is ideal for replacing most 5.7L inboard marine engines.
- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.

Includes:

- New 5.7L GM Marine Base Engine.
- High Rise Aluminum Intake Manifold.
- Holley 4160 Carburetor (USCG Approved).
- Electronic Fuel Pump and Fuel Lines.
- Complete Ignition System.
- 14" Inboard Flywheel.
- Throttle Bracket.
- Clip and Quick Connect Ball Joint.
- 14" Top Mount Starter.
- 95 amp Alternator.
- Flame Arrestor.
- Weather Cover.
- Fuel Water Separator.
- Single Sender Package.
- EZ Oil Drain.
- Corrosion Resistant Black Urethane Paint.
- All Pulleys.
- Hoses and Belts.
- Dual Remote Oil Filter Set Up.

Order No.	Mfg. No. / Description	Price
MPSR57CF	(S5.7VR) 5.7L (350 ci) V8 Reverse Rotation Carbureted, Fresh Water Cooled, Inboard Package	$9,670.98 C
MPSR57CR	(S5.7VR) 5.7L (350 ci) V8 Reverse Rotation Carbureted, Raw Water Cooled, Inboard Package	$8,378.98 B

Sportpac Inboard

MarinePower — POWERED by GM



- All fresh water cooled engine are Closed Loop Cooling. They will have a Heat Exchanger.
- 6.0L Inboard MPI FWC.
- Full Inboard Engine with MPI.
- Variable Valve Timing.
- Fresh Water Cooling.
- MP2K Aluminum Manifolds.

Order No.	Mfg. No. / Description	Price
MPS60MF	(S60VVT) 6.0L (364 ci) V8 Standard Rotation Fuel Injection, Fresh Water Cooled, Inboard Package	$12,576.98 C

Marine Power Transmissions

MarinePower

Order No.	Description	Price
M81010	(750004) Gear VD 71C 1.00:1	$2,030.00 D
M82012	(751002) Gear VD 72C 1.00:1	$3,685.00 D
M82151	(751004) Gear VD 72C 1.50:1	$5,365.00 D
M82199	(751106) Gear VD 72C 1.88:1 RH	$7,225.00 D
M82290	(751112) Gear VD 72C 2.91:1	$5,680.00 D
M94017	(752100) Gear ZF 45C 1.00:1	$1,465.00 D
M94029	(752200) Gear ZF 45A 2.00:1	$2,665.00 D
M96023	(753200) Gear ZF 63A 2.00:1	$2,955.00 D

Generator Application Chart

Model 60 Hz	OEM	Fuel Filter	Impeller Kit	T-Stat Kit	Oil Filter	Anode	Air Filter
24CCFOZ, 4-6.5EFOZ, 5-8EOZ, 5CCOZ	Kohler	23-7751	②, ③	-	23-7822	-	23-1130 ④
9-10EOZ, 8-9EFOZ, 9CCOZ, 8CCFOZ	Kohler	-	②, ③	-	23-7824	-	23-1130
13-15.5EOZ, 11-13EFOZ, 13.5-14CCOZ, 11-11.5CCF	Kohler	23-7740 ⑤	23-3304	23-3665 ⑥	23-7824	-	-
15.5-24EOZ, 16-20EFOZ, 18.5-24CCOZ, 15-20CCFOZ	Kohler	23-7740 ⑦	23-3304	23-3665	23-7824	-	-
8-10EOZD, 6.5-9EFOZD	Kohler	23-7761 ⑧	23-3303	-	23-7824 ⑧	-	23-1130
11-20EFOZD, 13-24EOZD	Kohler	⑧, ⑦	23-3304	-	23-7824	-	-
23-27EFOZ, EFOZD, 23-32EOZ, EOZD	Kohler	23-7761 ⑧	23-3303	-	23-7824	-	-
33-80EFOZ, 33-50CFOZ, 40-99EOZ, 50-65COZ	Kohler	-	23-3308	23-3666 ⑨	-	-	-
4-6.5CZ, 3.5-5CFZ	Kohler	23-7771 ⑤	-	23-3663	23-7823	23-0809	-
4-6EF, 5-7.3E	Kohler	23-7762	-	-	23-7821	23-6400	-
8-12.5E	Kohler	23-7771 ⑤	②, ③	23-3664	23-7803	-	-
15-20C, 16CF	Kohler	-	23-3303	23-3664	23-7820	-	-
MDKAV, MDKBG, MDKAW, MDKAZ	Onan	23-7760	23-3300	-	23-7842	23-6401	-
MDKBD, MDKBE, MDKBF	Onan	23-7760	23-3300	-	23-7840	23-6401	-
MDKBK, MDKBL,MDKBM, MDKBN	Onan	-	23-3310	-	-	23-6401	-
MDDCA, B, C, D, E, F, G, H, I	Onan	-	23-3309	-	-	23-6402	-
3.0WMD	Westerbeke	23-7770	23-3305	-	23-7800	23-6400	-
3.0-12.5WMD, 3.8-10.0BCD, BCTD, BTD, BTDA	Westerbeke	23-7770	23-3307	23-3650	23-7800	23-6400	-
11.0-12.5BTD, 12.5BTDA	Westerbeke	23-7770	23-3307	23-3653	23-7825	-	-
15.0BTDA, 15.0BTDB	Westerbeke	23-7764	23-3313	23-3660	23-7825	-	-
15.0-25WTA, 20-25BED and BEDA, 25WTA	Westerbeke	23-7764	23-3301 ①	23-3660	23-7826	-	-
32.0BED, BEDA, BEDB and WTF	Westerbeke	23-7764	23-3301	-	23-7826	-	-
4.0BCG, 6.5BCG, 9.0BTG	Westerbeke	23-7720	23-3305	23-3651	23-7801	23-6400	-
4.5 and 7.0BCG, 7.0BCGA	Westerbeke	-	23-3305	23-3659	23-7801	23-6400	-
4.5 and 7.0BCGB, 4.5,7.2 & 9.6BCGTC	Westerbeke	-	23-3305	23-3654	23-7800	23-6400	-
5.0BCG & BCGA, 5.0 and 6.5SBCG, 7.0BCGC	Westerbeke	23-7770	23-3306	23-3655	23-7800	23-6400	-
6.5TWG, 8.5-15.0BTG	Westerbeke	-	23-3302	23-3652	23-7800	23-6400	-
8.0-15.0BEG	Westerbeke	23-7770	23-3302	23-3656	23-7800	23-6400	-
8.0-11.0TWG	Westerbeke	23-7720	23-3302	23-3651	23-7800	23-6400	-
20.0-25.0BEG	Westerbeke	-	23-3301	23-3661	23-7800	23-6400	-
8.0-14.0SBEG	Westerbeke	23-7770	23-3306	23-3657	23-7800	23-6400	-
20.0-22.5SBEG and SBEGA	Westerbeke	23-7770	23-3301	23-3662	23-7800	23-6400	-
5.5EDC and 7.6EDT	Westerbeke	23-7770	-	-	23-7800	23-6400	-
8.0-15.0EDT	Westerbeke	23-7770	-	-	23-7800	23-6400	23-1101

Notes:
① 15.0WTA, Use 23-3313
② s/n 296899 and Up 23-3303
③ s/n 296898 and Below 23-3304
④ Variation 4
⑤ Variation 2
⑥ Variation 1, 6
⑦ Variation 3, Use 23-7740
⑧ Variation 1, Use 23-7761
⑨ Variation 1

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Fuel Filter

Fuel Filter, Fits: Various 11-24 Kw Models and Variations



O.E. No. 252898

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7740	(23-7740)	$19.98 H

Impeller Kit

Impeller Kit, Fits: Various 4-32 Kw Models and Serial Numbers



O.E. No. 229826

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3303	(23-3303)	$40.07 H

Impeller Kit

Impeller Kit, Fits: Various 4-24 Kw Models and Serial Numbers



O.E. No. 229955

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3304	(23-3304)	$51.90 H

Impeller Kit

Impeller Kit, Fits: Various 33-99 Kw Models



O.E. No. 352122

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3308	(23-3308)	$86.30 H

Anode

Anode, 4-7.3 Kw, Fits: 4EF, 5E, 6EF and 7.3E



O.E. No. 260085

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-6400	(23-6400)	$5.80 H

Oil Filter

Oil Filter, 8-12 Kw, Fits: 8E, 10E and 12.5E



O.E. No. 326817

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7803	(23-7803)	$10.98 H

Oil Filter

Oil Filter, 12.5-20 Kw, Fits: 12.5CF, 15C, 16CF and 20C



O.E. No. 279449

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7820	(23-7820)	$10.98 H

Oil Filter

Oil Filter, 4-7.3 Kw, Fits: 4EF, 5E, 6EF and 7.3E



O.E. No. 359771

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7821	(23-7821)	$10.98 H

Oil Filter

Oil Filter, 4-8 Kw, Fits: 4CCFOZ, 4EFOZ, 5CCOZ, 5EOZ, 6.5EFOZ and 8EOZ



O.E. No. 229678

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7822	(23-7822)	$14.90 H

Oil Filter

Oil Filter, 3.5-6.5 Kw, Fits: 3.5CFZ, 3.5EFZ, 4CZ, 4ESZ, 5CFZ, 5EFZ, 6.5CZ and 6.5ESZ



O.E. No. 267714

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7823	(23-7823)	$13.70 H

Pictures May Not Match Engine Description

Oil Filter

Oil Filter, Fits: Various 8-32 Kw Models and Variation



O.E. No. GM47465

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7824	(23-7824)	$10.50 H

Fuel Filter

Fuel Filter, Fits: Various 5-15 Kw MDK Series



O.E. No. 149-2106

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7760	(23-7760)	$49.98 H

Impeller Kit

Impeller Kit, Fits: Various 9-27.5 Kw MDK Series



O.E. No. 132-0349

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3300	(23-3300)	$61.03 H

Impeller Kit

Impeller Kit, 7-9 Kw, Fits: MDKBK, MDKBL, MDKBM, MDKBN, MDKAL/A/B



O.E. No. 541-1519

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3310	(23-3310)	$66.45 H

Oil Filter

Oil Filter, 6-12 Kw, Fits: MDJB, MDJC, MDJE, MDJF, MJA, MJB, MJC



O.E. No. 122-0185

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7841	(23-7841)	$25.17 H

Anode

Anode, Fits: Various 9-32 Kw MDK Series



O.E. No. 130-4434

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-6401	(23-6401)	$16.57 H

Impeller Kit

Impeller Kit, 40-80 Kw, Fits: MDDCA, MDDCB, MDDCC, MDDCF, MDDCG, MDDCD, MDDCE, MDDCH and MDDCJ



O.E. No. 132-0436

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3309	(23-3309)	$189.88 H

Oil Filter

Oil Filter, 17-27.5 Kw, Fits: MDKBD, MDKBE, MDKBF, MDKBD, MDKBE, MDKAD/E/F



O.E. No. 122-0810

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7840	(23-7840)	$21.00 H

Oil Filter

Oil Filter, 9-13.5 Kw, Fits: MDKAV, MDKBG, MDKAW, MDKAZ, MDKAL/A/B



O.E. No. 185-5835

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7842	(23-7842)	$28.98 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Air Filter



Air Filter, Fits: Various 6-15 Kw BT and ED Series

O.E. No. 267709

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-1100	(23-1100)	$51.57 H

Thermostat Gasket



Fits: 5.0 BCG (60 Hz)/4.2 BCG (50 Hz), 5.0 BCGA (60 Hz)/5.2 BCGA (50 Hz), 7.0 BCGC (60 Hz)/5.9 BCGC (50 Hz), 5.0 SBCG (60 Hz)/4.2 SBEG (50 Hz), 6.5 SBCG (60 Hz)/5.4 SBCG (50 Hz)

O.E. No. 46124

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-0801	(23-0801)	$3.40 H

Thermostat Gasket



Fits: 4.0 BCG (60 Hz)/3.0 BCG (50 Hz), 6.5 BCG (60 Hz)/4.8 BCG (50 Hz), 8.0 TWG (60 Hz)/6.4 TWG (50 Hz), 9.0 BTG (60 Hz)/7.0 BTG (50 Hz), 11.0 TWG (60 Hz)/8.5 TWG (50 Hz), 6.0 BCD (60 Hz)/4.5 BCD (50 Hz), 8.0 BTD (60 Hz)/6.0 BTD (50 Hz), 10.0 BTD (60 Hz)/7.5 BTD (50 Hz), 11.0 BTD (60 Hz)/8.3 BTD (50 Hz), 12.5 BTD (60 Hz)/9.4 BTD (50 Hz), 12.5 BTDA (60 Hz)/9.4 BTDA (50 Hz), 12.6 BTD (60 Hz)/10.4 BTD (50 Hz)

O.E. No. 34196

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-0802	(23-0802)	$2.58 H

Thermostat Gasket



Fits: 6.5 TWG (60 Hz)/4.9 TWG (50 Hz), 8.0 BEG (60 Hz)/6.4 BEG (50 Hz), 8.5 BTG (60 Hz)/6.5 BTG (50 Hz), 10.0 BEG (60 Hz)/8.0 BEG (50 Hz),12.5 BEG (60 Hz)/10.0 BEG (50 Hz), 12.5 BTG (60 Hz)/10.0 BTG (50 Hz), 15.0 BEG (60 Hz)/12.0 BEG (50 Hz), 15.0 BTG/A (60 Hz)/12.0 BTG/A (50 Hz), 8.0 SBEG (60 Hz)/6.4 SBEG (50 Hz),10.0 SBEG (60 Hz)/8.0 SBEG(50Hz), 12.5 SBEG(60Hz)/10.0 SBEG (50 Hz), 14.0 SBEG (60 Hz)/11.6 SBEG (50 Hz)

O.E. No. 33417

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-0803	(23-0803)	$5.12 H

Thermostat Gasket



Fits: 4.4 BCD (60 Hz), 4.4 WMD (60 Hz)/3.3 WMD (50 Hz), 7.7 WMD (60 Hz)/5.8 WMD (50 Hz), 8.0 WMD (6 0Hz)/6.0 WMD (50 Hz), 11.0 WMD (60 Hz)/8.3 WMD (50 Hz), 12.5 WMD (60 Hz)/9.4 WMD (50 Hz)

O.E. No. 24323

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-0806	(23-0806)	$2.57 H

Thermostat Gasket



Fits: 15.0 BTD (60 Hz)/12.0 BTD (50 Hz)

O.E. No. 33966

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-0807	(23-0807)	$2.58 H

Thermostat Gasket



Fits: 4.5 BCG (60 Hz)/3.75 BCG (50 Hz), 7.0 BCG (60 Hz)/5.0 BCG (50 Hz), 7.0 BCGA (60 Hz)/5.0 BCGA (50 Hz)

O.E. No. 37922

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-0808	(23-0808)	$16.67 H

Thermostat



Temperature Rating: 140°, Fits: 6.5 BCG (60 Hz)/4.8 BCG (50 Hz), 6.5 TWG (60 Hz)/4.9 TWG (50 Hz), 8.0 TWG (60 Hz)/6.4 TWG (50 Hz), 8.5 BTG (60 Hz)/6.5 BTG (50 Hz), 9.0 BTG (60 Hz)/7.0 BTG (50 Hz), 11.0 TWG (60 Hz)/8.5 TWG (50 Hz), 12.5 BTG (60 Hz)/10.0 BTG (50 Hz), 15.0 BTG/A (60 Hz)/12.0 BTG/A (50 Hz), 20.0 BEG (60 Hz)/16.0 BEG (50 Hz), 25.0 BEG (60 Hz)/20.0 BEG (50 Hz)

O.E. No. 35736

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3601	(23-3601	$17.67 H

Thermostat



Temperature Rating: 180°, Fits: 3.0 WMD (60 Hz)/2.4 WMD (50 Hz), 4.4 BCD (60 Hz), 4.4 WMD (60 Hz)/3.3 WMD (50 Hz), 7.7 WMD (60 Hz)/5.8 WMD (50 Hz), 8.0 BTD (60 Hz)/6.0 BTD (50 Hz), 8.0 BTDA (60 Hz)/6.0 BTDA (50 Hz), 8.0 WMD (60 Hz)/6.0 WMD (50 Hz), 10.0 BTD (60 Hz)/7.5 BTD (50 Hz), 10.0 BTDA (60 Hz)/7.5 BTDA (50 Hz), 11.0 BTD (60 Hz)/8.3 BTD (50 Hz), 11.0 WMD (60 Hz)/8.3 WMD (50 Hz), 12.5 BTD (60 Hz)/9.4 BTD (50Hz), 12.5 BTDA(60Hz)/9.4 BTDA (50 Hz), 12.5 BTDB (60 Hz)/9.4 BTDB (50 Hz), 12.5 WMD (60 Hz)/9.4 WMD (50 Hz), 12.6 BTD (60 Hz)/10.4 BTD (50 Hz), 15.0 BTD (60 Hz)/12.0 BTD (50 Hz), 15.0 BTDC (60 Hz)/12.0 BTDC (50 Hz), 20.0 SBEG (60 Hz)/16.0 SBEG (50 Hz), 20.0 SBEGA (60 Hz)/16.0 SBEG (50 Hz), 22.5 SBEG (60 Hz)/18.7 SBEG (50 Hz), 22.5 SBEGA (60 Hz)/18.7 SBEGA (50 Hz)

O.E. No. 24688

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3600	(23-3600)	$14.07 H

Pictures May Not Match Engine Description

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Thermostat

Temperature Rating: 140°, Fits: 4.5 BCG (60 Hz)/3.75 BCG (50 Hz), 7.0 BCG (60 Hz)/5.0 BCG (50 Hz), 7.0 BCGA (60 Hz)/5.0 BCGA (50 Hz)



O.E. No. 37387

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3602	(23-3602)	$20.40 H

Thermostat

Temperature Rating: 160°, Fits: 4.5 BCGB (60 Hz)/3.75 BCGB (50 Hz), 4.5 BCGTC (60 Hz)/3.75 BCGTC (50 Hz), 5.0 BCG (60 Hz)/4.2 BCG (50 Hz), 5.0 BCGA (60 Hz)/5.2 BCGA (50 Hz), 7.0 BCGB (60 Hz)/6.0 BCGB (50 Hz), 7.0 BCGC (60 Hz)/5.9 BCGC (50 Hz), 7.2 BCGTC (60 Hz)/6.0 BCGTC (50 Hz), 5.0 SBCG (60 Hz)/4.0 SBEG (50 Hz), 6.5 SBCG (60 Hz)/ 5.4 SBCG (50 Hz)



O.E. No. 39378

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3603	(23-3603)	$13.13 H

Thermostat

Temperature Rating: 140°, Fits: 8.0 BEG (60 Hz)/6.4 BEG (50 Hz), 10.0 BEG (60 Hz)/8.0 BEG (50 Hz), 12.5 BEG (60 Hz)/10.0 BEG (50 Hz), 15.0 BEG (60 Hz)/12.0 BEG (50 Hz)



O.E. No. 46097

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3604	(23-3604)	$22.13 H

Thermostat

Temperature Rating: 180°, Fits: 8.0 SBEG (60 Hz)/6.4 SBEG (50 Hz), 10.0 SBEG (60 Hz)/8.0 SBEG (50 Hz), 12.5 SBEG (60 Hz)/10.0 SBEG (50 Hz), 14.0 SBEG (60 Hz)/11.6 SBEG (50 Hz), 15.0 BTDA (60 Hz)/12.0 BTDA (50 Hz), 15.0 BTDB (60 Hz)/12.0 BTDB (50 Hz), 20.0 BED (60 Hz)/16.0 BED (50 Hz), 20.0 BEDA (60 Hz)/16.0 BEDA (50 Hz), 20.0 WTA (60 Hz)/16.0 WTA (50 Hz), 25.0 BED (60 Hz)/20.0 BED (50 Hz)



O.E. No. 24690

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3605	(23-3605)	$26.23 H

Impeller Kit

Impeller Kit, Fits: Various 16-32 Kw BE, SB and WT Series



O.E. No. 11907

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3301	(23-3301)	$42.53 H

Impeller Kit

Impeller Kit, Fits: Various 6.5-16 Kw TW, BT and WT Series



O.E. No. 33112

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3302	(23-3302)	$46.27 H

Impeller Kit

Impeller Kit, Fits: Various 3-9.6 Kw WM and BC Series



O.E. No. 32620

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3305	(23-3305)	$38.57 H

Impeller Kit

Impeller Kit, 5-15 Kw, Fits: 5.0BCG, 5.0BCGA, 7.0BCGC, 7.0BCGD, 8.0BEG, 10.0BEG, 12.5BEG and 15.0BEG



O.E. No. 46622

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3306	(23-3306)	$53.97 H

Impeller Kit

Impeller Kit, Fits: Various 4-15 Kw BC, BT and WM Series



O.E. No. 34440

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3307	(23-3307)	$49.37 H

Thermostat Kit

Thermostat Kit, 4.4-12.5 Kw, Fits: 4.4BCD, 4.4WMD, 7.7WMD, 8.0WMD, 11.0WMD and 12.5WMD



O.E. No. 24688, 24323

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3650	(23-3650)	$19.17 H

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Oil Filter

Oil Filter, Fits: Various 7-15 Kw BC, BE, BT, ED, SB, TW and WM Series



O.E. No. 36918

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7800	(23-7800)	$14.18 H

Oil Filter

Oil Filter, 4-9 Kw, Fits: 4.0BCG, 6.5BCG and 9.0BTG



O.E. No. 35595

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7801	(23-7801)	$19.67 H

Oil Filter

Oil Filter, 3 Kw, Fits: 3.0BPMG



O.E. No. 48076

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-7802	(23-7802)	$17.60 H

Thermostat Kit

Thermostat Kit, 4-11 Kw, Fits: 4.0BCG, 6.5BCG, 8.0TWG, 9.0BTG and 11.0TWG



O.E. No. 35736, 34196

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3651	(23-3651)	$19.80 H

Thermostat Kit

Thermostat Kit, 6.5-15 Kw, Fits 6.5TWG, 8.5BTG, 12.5BTG and 15.0BTG



O.E. No. 35736, 33417

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3652	(23-3652)	$23.57 H

Thermostat Kit

Thermostat Kit, 8-12.6 Kw, Fits: 8.0BTD, 10.0BTD, 11.0BTD, 12.5BTD, 12.5BTDA and 12.6BTD



O.E. No. 24688, 34196

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3653	(23-3653)	$20.72 H

Thermostat Kit

Thermostat Kit, 4.5-9.6 Kw, Fits: 4.5BCGB, 4.5BCGTC, 7.0BCGB, 7.2BCGTC and 9.6BCGTC



O.E. No. 39378, 42260

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3654	(23-3654)	$21.38 H

Thermostat Kit

Thermostat Kit, 5-6.5 Kw, Fits: 5.0BCG, 5.0BCGA, 7.0BCGC, 5.0SBCG and 6.5SBCG



O.E. No. 39378, 46124

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3655	(23-3655)	$20.53 H

Thermostat Kit

Thermostat Kit, 8-15 Kw, Fits: 8.0BEG, 10.0BEG, 12.5BEG and 15.0BEG



O.E. No. 46097, 33417

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3656	(23-3656)	$33.00 H

Thermostat Kit

Thermostat Kit, 8-14 Kw, Fits: 8.0SBEG, 10.0SBEG, 12.5SBEG and 14.0SBEG



O.E. No. 24690, 33417

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3657	(23-3657)	$31.30 H

Pictures May Not Match Engine Description

Thermostat Kit

Thermostat Kit, 15 Kw, Fits: 15.0BTD



O.E. No. 24688, 33966

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3658	(23-3658)	$20.57 H

Thermostat Kit

Thermostat Kit, 4.5-7.0 Kw, Fits: 4.5BCG, 7.0BCG and 7.0BCGA



O.E. No. 37387, 37922

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-3659	(23-3659)	$42.07 H

Anode

Anode, Fits: Most 3-15 Kw



O.E. No. 260085

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-6400	(23-6400)	$5.80 H

Starter

Starter, Fits: Various 4.4-15 Kw WM and BT Series



O.E. No. 30593

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-5600	(23-5600)	$944.63 H

Starter

Starter, Fits: Various 4.4-14 Kw BC, BE, BT and SB Series



O.E. No. 34552

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-5601	(23-5601)	$750.68 H

Alternator

Alternator, Fits: 4.4BCD/WMD, 6.0BCD, 7.7WMD, 8.0BTD/WMD, 10.0BTD, 11.0BTD, 12.5BTD/BTDA/WMD and 15.0BTD



O.E. No. 30594

Brand Name	DMI No.	Mfg. No.	Price
Sierra	23-5900	(23-5900)	$674.15 H

Fun & Floatation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Pictures May Not Match Engine Description

©2014 Donovan Marine, Inc.

Spark Plug Cross Reference Chart

Champion No.	NGK No.
CJ8	BM6A
J6C	B6S
L76V	BUHW
L78V	BUHW-2
L82YC	BP7HS
P10Y	D6HA
QL77CC	BR8HS
QL78V	BUZHW-2
QL87YC	BPR6HS
RJ12YC	XR5
RL87YC	BPR6HS-10
RN5C	BR6ES

Champion No.	NGK No.
RS12YC	TR4
RV8C	BR6FS
UL81C	B7HS
J4C	B7S
J8C	B6S
L77J2	B9HS-10
L78YC	BP8HN-10
L86C	B6HS
QL16V	BUZ8H
QL77J4	BZ7HS-10
QL78YC	BPR7HS
RA8HC	DCPR7E

Champion No.	NGK No.
RL78C	BR8HS
RN2C	BR9ES
RN6YC	BPR8ES
RV12C	YR5
RV9YC	BPR6FS
Z9Y	CR6HS
J4C	B8S
L20V	BUH
L77JC4	B7HS-10
L78YC	BP8HS-10
L87YC	BP6HS
QL6VC	BUZ8H

Champion No.	NGK No.
QL77JC4	BZ7HS-10
QL82YC	BPR7HS
RC9MC4	FR5
RL82C	BR7HS
RN3C	BR7ES
RN7YC	BPR7ES
RV12YC	UR5
UL18V	BUHX
J4J	—
L6VC	BU-8H
L78C	B8HS
L82C	B7HS

Champion No.	NGK No.
L90C	B5HS
QL76V	BUZHW
QL78C	BR8HS
QL86C	BR6HS
RJ12C	BR6S
RL82YC	BPR7HS-10
RN3C	BR8ES
RN9YC	BPR6ES
RV15YC4	UR4
UL77V	BUHXW-1

Champion Spark Plugs



DMI #	MFG #	Plug No.	Pack	Price
999177	L78V	(833-1)	8	$5.98 I
283200	765880	CJ8	8	$2.96 H
283008	765847	J4C	8	$3.70 H
283022	765916	J4C	24*	$87.98 H
283109	765851	J6C	8	$3.70 H
283123	765911	J6C	24*	$87.98 H
283212	765848	J8C	8	$3.02 H
283489	765876	L16V	4	$5.98 L
283539	765899	L20V	8	$4.11 H
283159	885M	L6VC	4	$5.98 H
283705	765862	L76V	4	$5.98 H
283717	765905	L76V	24*	$96.98 H
283755	765843	L77JC4	4	$3.04 H
283779	765908	L77JC4	24*	$58.98 H
283907	765859	L78C	4	$3.22 H
283919	765871	L78V	4	$7.98 H
283915	765909	L78VSP	24*	$97.98 H
283882	936M	L78YC	4	$4.57 H
284024	765861	L82C	4	$3.19 L
284036	765881	L82YC	4	$3.19 L
283370	958	QC10PEP	6	$11.98 L

DMI #	MFG #	Plug No.	Pack	Price
283372	7919	QC10PEPB	6	$12.98 H
283387	9005	QC10WEP	4	$15.98 L
283399	956M	QC12PEP	6	$9.98 H
283401	7953	QC12PEPB	6	$12.98 H
283260	9809	QC8WEP	4	$14.98 H
283490	765856	QL16V	4	$12.98 H
283731	898	QL76V	8	$12.98 H
283806	941M	QL77CC	6	$5.98 F
283781	765838	QL77JC4	4	$4.50 H
283793	765910	QL77JC4	24*	$97.98 H
283922	765857	QL78C	4	$5.98 H
283930	765900	QL78V	4	$8.98 G
283933	765839	QL78YC	4	$5.98 K
283934	765906	QL78YC	24*	$129.98 L
284037	765844	QL82C	4	$5.98 L
284062	765907	QL82C	24*	$128.98 L
284039	765873	QL82YC	4	$5.98 L
284048	765913	QL82YC	24*	$128.98 L
284163	765855	QL86C	4	$5.98 L
284240	765853	QL87YC	4	$5.98 L
283224	765841	RA8HC	8	$3.46 H

DMI #	MFG #	Plug No.	Pack	Price
283462	765879	RJ12C	4	$3.30 G
284310	765864	RL82C	4	$3.57 L
283060	765882	RN5C	6	$3.40 H
283313	765883	RN9YC	4	$3.35 H
283390	765870	RP10HC	4	$5.98 E
283464	765842	RS12YC	6	$3.46 H
283467	406S	RV12YC	24*	$82.98 H
283476	765860	RV12YC	4	$3.46 H
283486	765904	RV154C4	24*	$81.98 H
283488	765846	RV15YC4	4	$3.30 H
283250	765852	RV8C	4	$3.56 H
284315	942M	RV91MC	4	$4.98 H
283325	765863	RV9YC	4	$3.40 H
283503	765858	UL18V	4	$4.32 H
283818	765849	UL77V	4	$10.98 H
283820	765912	UL77V	24*	$207.98 Q
283971	765854	UL81C	8	$5.98 L
283480	765845	XC12PEPB	4	$13.98 L
283481	765915	XC12PEPB	24*	$314.98 H

***Shop Pack**

Champion OMC Spark Plug Assortment



- Kit contains Champion Spark Plug Shop Packs of:
  Qty: 1 283123 (J6C)
  Qty: 2 283779 (L77JC4)
  Qty: 1 283793 (QL77JC4)
  Qty: 2 283934 (QL78YC)
  Qty: 1 284048 (QL82YC)

Order No.	Mfg. No. / Description	Price
B99999L	(SP-1) OMC Spark Plug Assortment	$570.98 E

AC Delco Spark Plugs



- **Available in Norwich only.**
- 8 per box except 203264 which is sold individually.

Order No.	Mfg. No. / Description	Price
203050	(41-993) Platinum Mercury	$15.98 K
203062	(41-983) Platinum Mercury	$15.98 K
203276	(MR43T) 14mm, 31/64" reach, 5/8"	$4.98 K
203288	(MR44T) 14mm, 31/64" reach, 5/8"	$4.98 K
203264	(MR43LTS) **SOLD EACH**	$4.98 K

NGK Spark Plugs



DMI #	MFG #	Plug No.	Pack	Price
498508	7534	B6HS	4	$2.98 H
498522	3510	B6S	10	$2.69 H
498596	5110	B7HS	10	$2.98 H
498611	2129	B7HS-10	10	$2.98 H
498623	704	B7HS-10	25*	$66.98 H
498748	5510	B8HS	10	$2.98 H
498762	5126	B8HS-10	10	$3.00 H
498777	705	B8HS-10	25*	$66.98 H
499005	3626	B9HS-10	10	$2.98 H
498490	6962	BKR6E	4	$2.98 H
498480	6993	BKR6EKU	10	$8.98 H
498481	5553	BKR6ES-11	4	$2.98 H
498652	5881	BKR7EKU	10	$8.98 H
498641	4952	BKR7ES-11	4	$2.98 H
498538	6326	BP6HS-10	10	$2.98 H
498659	7829	BP7HS-10	10	$2.98 H
498849	4838	BP8H-N-10	10	$2.98 H
498850	710	BP8H-N-10	25*	$66.98 H
498837	3823	BP8HS-10	10	$2.98 H
498813	6729	BP8HS-15	10	$2.98 H
498571	7734	BPR5ES	4	$2.98 H
498520	1006	BPR6EF	25*	$99.98 H
498526	3623	BPR6EFS	10	$2.98 H
498529	7131	BPR6ES	4	$2.98 H
498572	2623	BPR6FS	10	$2.98 H
498584	2633	BPR6HS-10	10	$2.98 H
498669	5534	BPR7ES	10	$2.98 H
498661	1092	BPR7HS-10	10	$3.98 H
498855	3923	BPR8ES	10	$2.98 H
499107	7788	BPR9ES	10	$3.49 H
498609	4495	BPZ8H-N-10	10	$9.98 H
498615	1018	BPZ8H-N-10	25*	$299.98 H
498562	1107	BPZ8HS	25*	$299.98 H
498859	3133	BPZ8HS-10	10	$9.98 H
498595	7696	BPZFR6H	4	$18.98 H
498534	4323	BR6FS	10	$2.98 H
498546	708	BR6FS	25*	$72.98 H
498536	3922	BR6HS	10	$4.77 D
498700	5122	BR7ES	10	$3.19 H
498570	1207	BR7HS	25*	$99.98 H
498712	4122	BR7HS	10	$2.98 H
498602	1113	BR7HS-10	25*	$99.98 H
498673	1098	BR7HS-10	10	$3.98 H
498825	713	BR8ES	25*	$72.98 H
498863	5422	BR8ES	10	$3.05 H
498865	7986	BR8ES-11	10	$2.98 H
498887	1157	BR8HCS-10	10	$7.98 H
498866	4322	BR8HS	10	$2.98 H
498875	1134	BR8HS-10	10	$2.98 H
498879	709	BR8HS-10	25*	$72.98 H
498964	5722	BR9ES	10	$3.19 H
499104	7548	BR9EYA	10	$4.49 H
499043	4522	BR9HS	10	$3.19 H
499050	4551	BR9HS-10	10	$2.98 H
499066	707	BR9HS-10	25*	$72.98 H
498902	6431	BU8H	10	$3.50 H
498924	703	BU8H	25*	$86.98 H
498320	2622	BUHW	10	$3.98 H
498332	701	BUHW	25*	$92.98 H
499079	702	BUHW2	25*	$92.98 H
498356	5626	BUHW-2	10	$3.98 H
498386	2522	BUHX	10	$3.50 H
498394	5526	BUHXW-1	10	$3.98 H
498947	7447	BUZ8H	10	$9.98 H
499081	2147	BUZHW	10	$9.98 H
498422	2173	BUZHW-2	10	$9.98 H
498724	3579	BZ7HS-10	10	$5.98 H
498588	7023	CR6HS	10	$3.00 H
499098	6955	CR9EB	10	$6.98 H
499091	4548	CR9EK	10	$8.98 F
498590	3481	DCPR6E	10	$4.29 H
498736	3932	DCPR7E	10	$4.25 H
499089	4339	DCPR8E	10	$4.25 H
498495	5531	DPR6EA-9	10	$3.00 H
498496	3108	DPR6EB-9	10	$2.98 H
498430	4623	DR5HS	10	$3.29 H
498740	7839	DR7EA	10	$3.00 H
498450	5588	ILFR6G	4	$19.98 H
498455	4212	ILFR6GE	4	$18.98 H
499096	6544	IMR9D-9H	4	$18.98 H
498448	5887	IZFR5G	4	$18.98 H
498447	5899	IZFR5J	4	$18.98 H
498591	4095	IZFR6FII	4	$18.98 H
498456	4462	IZFR6J	4	$18.98 H
498479	6376	LFR5A-11	10	$7.98 H
498501	1116	LFR5A-11	25*	$159.98 F
498593	3672	LFR6A-11	10	$7.98 H
498622	1119	LFR6A-11	25*	$139.98 H
498438	3741	PZFR5F	4	$19.98 H
498446	4363	PZFR5F-11	4	$18.98 H
499087	4253	PZFR7G-G	4	$18.98 H
499094	5196	R6918C-9	10	$49.98 H
498449	2238	TR5	4	$3.00 H
499101	7164	TR55IX	4	$11.98 H
498440	6630	UR4	4	$3.00 H
498457	7052	YR5	4	$3.00 H
499085	4043	ZFR4F-11	4	$3.50 H
498709	5913	ZFR7F	10	$3.50 H

***Shop Pack**

Marpac Universal Motor Flusher - Rectangular Cup



- Fits most engines with side water inlets.
- Installs easily - No tools needed.
- Flush away sand, silt, salt and alkali to prevent clogging and corrosion to extend engine life.

Order No.	Description	Price
7-0574	Universal Motor Flusher	$5.98 G
7-0574S	Display Box of 24 Motor Flushers	$119.98 I

Moeller Universal Rectangular Cup Motor Flusher



- Ideal in low-pressure conditions prevalent around marinas
- Improved water flow with rectangular cups will virtually eliminate water leakage for higher-pressure flushing.
- For use on all lower units with side water inlets; includes Volvo's SX.

Order No.	Mfg. No. / Description	Price
808716	(099077-00) Universal Motor Flusher	$8.98 F

Marpac Universal Motor Flusher - Round Cup



- Fits most engines with side water inlets.
- Installs easily - No tools needed.
- Flush away sand, silt, salt and alkali to prevent clogging and corrosion to extend engine life.

Order No.	Description	Price
7-0576	Universal Motor Flusher	$4.98 G
7-0576S	Display Box of 24 Motor Flushers	$125.98 G

Moeller Universal Motor Flusher



- No tools required.
- Easy-to-use.
- For use on all lower units with side water inlets.

Order No.	Mfg. No. / Description	Price
808720	(099076-00)	$5.98 F

©2014 Donovan Marine, Inc.

Marpac Adjustable Length Inboard Engine Flusher



- Installs easily without tools.
- Check, tune and flush your inboard engine anywhere on dry land.
- Adjusts from 18" to 30" with just a twist.
- For use on gas or diesel inboard engines with thru-hull water intakes.

Order No.	Mfg. No. / Description	Price
7-0579	(FP0500010)	$11.98 G

Marpac Dual Water Feed Motor Flusher



- Flush sand, silt and saltwater.
- Ideal for larger horsepower engines.
- Rectangular inlet cups create a better seal.
- For use with all lower units that have side water inlets.

Order No.	Description	Price
7-0573	Dual Water Feed Motor Flusher	$19.98 G

Perko Flushpro Engine Flushing Systems



- Flush your boat engine safely and easily.
- Durable check valve system activated by water pressure from a garden hose.
- Check valve automatically shuts off hull intake when water pressure is applied.

Order No.	Mfg. No. / Description	Price
539467	(456 DP6) 1"	$113.98 R
539481	(456 DP7) 1-1/4"	$113.98 R

Sierra Power Trim and Tilt Fluid



- Formulated for high operating pressure.
- Anti-foam additives assures uniform flow with reduced air contamination in hydraulic systems.
- Designed for heavy duty use at high operating pressures in applications subject to varied temperature ranges.
- Provides proper lubrication and corrosion protection for internal hydraulic components.

Order No.	Mfg. No. / Description	Price
189750	(18-9750-0) 10 oz. Tube	$7.67 F

Star Brite Pro Star Ultra High Performance Trim and Tilt Fluid



- High-tech formulation significantly outperforms traditional trim and tilt fluids.
- Provides unsurpassed protection against wear and ensures maximum performance.
- Ideal for use in all trim and tilt, trim tab, power steering and other hydraulic systems.
- Meets or exceeds OEM specs; won't void warranties.
- Unique environmentally - responsible formula is bio-renewable and biodegradable.

Order No.	Mfg. No. / Description	Price
451914	(26710) 10 oz. Tube	$10.98 G
451916	(26732) 32 oz.	$12.98 G

Moeller Inboard Engine Adjustable Motor Flusher



- No tools required; Telescoping flusher installs in minutes.
- Large cup prevents water blow-by or fall-off during usage.
- Telescoping tube allows precise alignment for hard-to-reach areas.

Order No.	Mfg. No. / Description	Price
808719	(099081-00) Adjustable Motor Flusher	$28.98 H

Moeller Dual Feed Motor Flusher



- A customer-favorite for all engines over 50 horsepower.
- Improved water flow with rectangular cups will virtually eliminate water leakage for higher-pressure flushing.
- For use on all lower units with side water inlets; includes Volvos.

Order No.	Mfg. No. / Description	Price
808717	(099082-00) Motor Flusher	$27.98 F

Moeller Universal Cup Motor Display



- An eye appealing, free standing floor display with a colorful "product-in-action" header.
- Comes with 22 universal, round-cup motor flushers.
- The highly visible display puts this popular product within easy reach of the customer.

Order No.	Mfg. No. / Description	Price
808725	(099076-50)	$139.98 F

Star Brite Power Trim and Tilt Fluid



- Exceeds OEM warranty requirements.
- Formulated to provide consistent (no-fade) performance in all marine trim and tilt applications.
- Anti-foam, anti-wear, anti-oxidation and advanced stabilizing additives assure optimum performance in hydraulic trim tabs, power tilt and power steering systems.
- Enhanced to protect seals, hoses and other components from drying, cracking or corroding.

Order No.	Mfg. No. / Description	Price
451910	(28510) 10 oz. Tube	$7.98 G
451912	(28532) 32 oz.	$8.98 G

OMC® SysteMatched™ Power Trim/Tilt and Steering Fluid



- Specially formulated to provide the viscosity, aniline point and lubricity necessary to insure proper pump performance and seal life in Evinrude/Johnson power tilts, power trim/tilts and stern drive power steering units.
- Used in all OMC outboards and sterndrives.

Order No.	Mfg. No. / Description	Price
B765731	(765731) 10 oz. Tube	$6.99 H

Star Brite Pro Star Super Premium Synthetic Blend 4 Stroke Oil - 10W 30



- Designed for 4 stroke high-performance outboards, gasoline inboards and sterndrives.
- Surpasses API requirement for SJ, CF-4 and CH-4.
- Certified under NMMA's new FC-W category.
- Meets or exceeds all criteria for viscosity, filter plugging, foaming and aeration.
- Additive package optimizes engine cleanliness, prevents sludge build up.
- Synthetic/organic blend assures excellent low-temperature properties for quicker starts.
- Provides maximum protection in severe, high RPM applications.

Order No.	Mfg. No. / Description	Price
189422	(28132) 32 fl. oz.	$10.98 G
189423	(28100) Gallon	$34.98 G

OMC® SysteMatched™ 4 Cycle Standard Oil



- A high velocity lubricant designed for high performance sterndrives.
- Specially formulated to stand-up to the punishing marine environment and give the engine superior protection.
- Handles the newest API service ratings of SG and CD.
- Meets or exceeds GM-6094-M, Ford ESE-MCC 153-E, API service SE-GF-SG-CC-CD.
- Acceptable for any gasoline or diesel engine which requires a 30 weight oil.

Order No.	Mfg. No. / Description	Price
B765721	(765721) Quart	$7.49 F
B765722	(765722) Gallon	$20.99 F

Star Brite Pro Star Premium Synthetic Blend 4 Stroke O/B Oil - 25W 40



- Designed for 4 stroke high performance outboards, gasoline inboards and sterndrives.
- Surpasses API requirement for SJ, CF-4 and CH-4.
- Certified under NMMA's new FC-W category.
- Meets or exceeds all criteria for viscosity, filter plugging, foaming and aeration.
- Additive package optimizes engine cleanliness, prevents sludge build up.
- Synthetic/organic blend assures excellent low-temperature properties for quicker starts.
- Provides maximum protection in severe, high RPM applications.

Order No.	Mfg. No. / Description	Price
451911	(28332) 32 fl. oz.	$10.98 G
451909	(28300) Gallon	$36.98 G

Sierra 25W-40 Synthetic Blend Engine Oil



- This 4 cycle oil is blended with premium grade synthetic and mineral based stock combined with superior designed additives formulated for the stress endured by sterndrive and inboard engines.
- Superior corrosion protection.
- Removes thermal breakdown under high RPM's, extreme temperatures and loads.
- Outstanding friction reduction and wear protection.
- Advanced lubrication for reduction of wear to internal engine components.

Order No.	Mfg. No. / Description	Price
1894402	(18-9440-2) Quart	$8.98 H

Star Brite Pro Star Super Premium Synthetic Blend 4 Stroke Oil - 10W 40



- Designed for 4 stroke high performance outboards, gasoline inboards and sterndrives.
- Surpasses API requirement for SJ, CF-4 and CH-4.
- Certified under NMMA's new FC-W category.
- Additive package optimizes engine cleanliness, prevents sludge build up.
- Synthetic/organic blend assures excellent low-temperature properties for quicker starts.
- Provides maximum protection in severe, high RPM applications.

Order No.	Mfg. No. / Description	Price
451908	(28232) 32 fl. oz.	$10.98 G
451907	(28200) Gallon	$36.98 G

Sierra 10W30 4 Stroke Synthetic Motor Oil



- Formulated specifically for 4 stroke outboard and sterndrive engine technology.
- A special blend of synthetic base oil and a balanced additive system that exceeds the FC-W requirements for marine engine oils.
- Recommended for use in both outboard and sterndrive applications.
- Offers faster lubrication at start up in low temperatures, excellent protection at high temperatures, and greater resistance to oxidation for lower oil consumption.

Order No.	Mfg. No. / Description	Price
1896902	(18-9690-2) Quart	$14.98 H

Sierra 25W-40 4 Stroke Marine Engine Oil



- Replaces Mercruiser 92-802837Q1.
- 25W-40 4 stroke marine stern drive engine oil has been formulated to provide excellent lubrication and corrosion protection.
- Stern drive and inboard engines operate under high load and running stresses.
- This product is developed for the marine environment and will out perform standard 4-cycle automotive engine oils.
- Offers excellent detergency, anti-oxidants, antiwear and corrosion protection.
- The benefits to your engine are reduced wear to the internal components, protection of internal parts from corrosion, cleaner pistons,and prevention of ring sticking.
- Excellent low temperature operating properties.
- Meets or exceeds quality performance API SJ, CF-4, CH-4.
- Recommended for use in Mercruiser and OMC.
- NMMA FC-W Certified.

Order No.	Mfg. No. / Description	Price
189400	(18-9400-2) Quart, 12 Per Case	$7.30 H

©2014 Donovan Marine, Inc.

OMC® SysteMatched™ Ultra 4 Stroke Oil



- For use in any Evinrude/Johnson 4 cycle outboard.
- Designed for the rigors of high revving 4 cycle outboard engines.
- Viscosity stability resists thermal breakdown.
- Engines stay cleaner and run more efficiently.
- Ultra friction reducing properties help the engine run at maximum efficiency and power.
- Ultra film strength reduces wear and offers superior corrosion protection.

Order No.	Mfg. No. / Description	Price
B765720	(765720) Quart	$8.49 H

Star Brite Super Premium 2 Cycle Engine Oil - TC-W3



- Synthetic Super Premium TC-W3.
- Meets or exceeds manufacturers' specifications-will not void engine warranty.
- NMMA approved-meets or exceeds their stringent TC-W3 requirements.
- Exceeds performance specifications for FICHT, Optimax and HPDI engines.
- Contains PIB viscosity modifier to greatly improve lubricity and to reduce smoking.
- High-detergent formula removes deposits from fuel delivery system.
- Ashless formula minimizes piston ring sticking and protects against preignition problems.
- Environmentally friendly, reduces emissions.
- Engineered for operation under extreme conditions.
- For use in oil injection, 2 cycle and pre-mix engines.
- Super premium additive package makes this oil one of the cleanest burning, smoothest running, best lubricating TC-W3 oils you can buy.
- For use in Yamaha, Suzuki, Evinrude, Mercury, Johnson, Sea-Doo, Polaris, Jet Ski and any other outboard.

Order No.	Mfg. No. / Description		Price
452158	(19232) 32 fl. oz.	12 Per Case	$112.98 H
452161	(19200) Gallon	6 Per Case	$187.98 H
452172	(19225) 2.5 Gallons	2 Per Case	$161.98 G
452125	(19255) 55 Gallon Drum		$1,672.98 G

Marpac MixMate™ Oil-Fuel Mixing Bottle



- Oil to gas measuring device for 2 cycle engines.
- Includes oil - gas mixture ratios: 100-1, 50-1, 24-1 and 10-1.
- All measurements shown are in gallons and liters.

Order No.	Mfg. No. / Description	Price
7-6022	MixMate™	$5.98 I

Star Brite Premium 2 Cycle Engine Oil - TC-W3



- Meets or exceeds manufacturer's specifications.
- Ashless formula provides superior protection.
- Environmentally friendly, clean burning fuel that reduces emissions.
- Engineered for operation under extreme conditions.
- For use in oil injection, 2 cycle and pre-mix engines.

Order No.	Mfg. No. / Description		Price
452185	(19016) 16 fl. oz.	12 Per Case	$61.98 G
452190	(19032) 32 fl. oz.	12 Per Case	$102.98 G
452196	(19000) Gallon	6 Per Case	$180.98 G
452200	(19025) 2.5 Gallons	2 Per Case	$153.98 G

Star Brite Premium 2 Cycle Engine Oil - TC-W3 Displays



- Free-standing display sits on a quarter pallet and has two sides of 32 oz. and gallon product.
- Can be located anywhere in store for maximum visibility.
- Display includes: (12) 452196 (19000) Gallon and (30) 452190 (19032) 32 oz.

Order No.	Mfg. No. / Description	Price
431318	(19099) Premium Display	$588.98 G

- Display includes: (12) 452161 (19200) Gallon and (30) 452158 (19232) 32 oz.

Order No.	Mfg. No. / Description	Price
431320	(19299) Super Premium Display	$659.98 G

OMC® SysteMatched™ Synthetic Blend Oil



- Reduces exhaust smoke for cleaner operation.
- Minimizes carbon deposits and keeps engine cleaner for better performance and longer life.
- Formulated to match the warranty requirements of Evinrude/Johnson Outboard Engines.
- Designed for pre-mix, oil injection and direct injection engines.
- Exceeds NMMA TC-W, TC-WII, TC-W3 and TC-W3RL specifications.

Order No.	Mfg. No. / Description	Price
B765718	(765718) Pint	$5.99 H
B765719	(765719) Gallon	$38.99 H
B766152	(766152) 55 Gallon Drum	$1,649.99 H

OMC® SysteMatched™ Mineral Oil Red



- Provides 25% greater detergency than minimum TC-W3 requirements.
- Minimizes carbon deposits and keeps engine cleaner for better performance and longer life.
- Formulated to match the original warranty requirements of carbureted Evinrude/Johnson Outboard Engines.
- Exceeds NMMA TC-W, TC-WII, and TC-W3 and TC-W3RL specifications.

Order No.	Mfg. No. / Description	Price
B765716	(765716) Pint	$5.49 H
B765717	(765717) Gallon	$36.99 H
B766151	(766151) 55 Gallon Drum	$1,374.99 H

Star Brite Pro Star Super Premium Heavy Duty Motor Oil - SAE 30



- Recommended for engines requiring API CF-2 level performance.
- Exceeds warranty requirements for all diesel and gasoline engines specifying SAE 30 grade and API service classification including Caterpillar, Cummins, Detroit Diesel, Mack, Navistar, and Volvo. Exceeds Mack EO-K/2 and Allison C4 specs and CID; A-A-52306A requirements.
- API Service Classifications; CF-2, CD-II, CD, CF, CE/SJ, SH and SG specs/regs.
- Heavy duty formulation minimizes engine wear to provide long engine life.

Order No.	Mfg. No. / Description	Price
451894	(027832) 32 fl. oz.	$9.98 G
451892	(027800) Gallon	$30.98 G

Star Brite Pro Star Super Premium Heavy Duty Motor Oil - SAE 15W 40



- Exceeds the highest performance specifications for engines requiring CI service.
- Recommended for engines requiring API CF-2 level performance.
- Exceeds warranty requirements for all diesel and gasoline engines specifying SAE 15W 40 grade and API service classification including Caterpillar, Cummins, Detroit Diesel, Mack, Navistar, and Volvo.
- Recommended for applications requiring for ACEA E3, E5, MB228.3, Cummins CES 20077, 20076, 20072, 20071, DDC/MTU Type 1 and 2, Mack EO-M Plus, EO-M and EO-L Plus, Volvo VDS and VDS-2, Allison C4, JASO DH1, MAN 271 and 3275 and Global DHD-1 performance.
- API Service Classifications: CI, CH-4, CG-4, CF-4, CF, CE,CD/SJ, SH and EC.
- Heavy duty formulation minimizes engine wear to provide long engine life.

Order No.	Mfg. No. / Description	Price
451903	(028032) 32 fl. oz.	$9.98 G
451902	(028000) Gallon	$31.98 G

Star Brite Pro Star Super Premium Heavy Duty Motor Oil - SAE 40



- Recommended for engines requiring API CF-2 level performance.
- Exceeds warranty requirements for all diesel and gasoline engines specifying SAE 30 grade and API service classification including Caterpillar, Cummins, Detroit Diesel, Mack, Navistar, and Volvo. Exceeds Mack EO-K/2 and Allison C4 specs and CID; A-A-52306A requirements.
- API Service Classifications; CF-2, CD-II, CD, CF, CE/SJ, SH and SG specs/regs.
- Heavy duty formulation minimizes engine wear to provide long engine life.

Order No.	Mfg. No. / Description	Price
451898	(27932) 32 fl. oz.	$9.98 G
451896	(27900) Gallon	$31.98 G

Star Brite Oil and Lube Display



- Display contains:

(2) 28714 - Lever Action Grease Gun - 14 oz. Cartridge
(4) 28703 - Pistol Grease Gun - 3 oz. Cartridge
(2) 26003 - Wheel Bearing Grease - 3 oz. Cartridges 2/pack
(2) 28401 - Adaptor fitting for Nissan, Yamaha, Tohatsu, Honda Lower Unit
(2) 28402 - Adaptor fitting for Suzuki Lower Unit
(2) 27400 - Lower Unit Quart Pump
(2) 28600 - Lower Unit Lube Tube
(2) 28901 - Oil Filter Wrench - 2-13/16" x 3-5/32"
(2) 28902 - Oil Filter Wrench - 3-1/2" x 3-7/8"
(4) 26016 - Wheel Bearing Grease - 16 oz. Cartridge
(5) 26014 - Wheel Bearing Grease - 14 oz. Cartridge
(2) 28510 - Power Trim and Tilt Fluid - 10 oz. Tube
(2) 27010 - High Viscosity Lower Unit Gear Lube 80W 90 - 10 oz. Tube
(2) 27110 - Hypoid 90W Lower Unit Gear Lube - 10 oz. Tube
(2) 28532 - Power Trim and Tilt Fluid - 32 oz.
(2) 27732 - Transmission Fluid/Mercon/Dexron - 32 oz.
(2) 27032 - High Viscosity Lower Unit Gear Lube 80W 90 - 32 oz.
(2) 27232 - Synthetic Lower Unit Gear Lube 80W 90 - 32 oz.
(2) 27132 - Hypoid 90W Lower Unit Gear Lube - 32 oz.
(4) 19216 - Super Premium 2 Cycle Engine Oil TC-W3 - 16 oz.
(12) 19232 - Super Premium 2 Cycle Engine Oil TC-W3 - 32 oz.
(2) 28132 - Pro Star Super Premium Synthetic Blend 4 Stroke Outboard Oil 10W 30 - 32 oz.
(2) 28232 - Pro Star Super Premium Synthetic Blend 4 Stroke Outboard Oil 10W 40 - 32 oz.
(2) 27832 - Pro Star Super Premium Heavy Duty Motor Oil SAE 30 - 32 oz.
(2) 27932 - Pro Star Super Premium Heavy Duty Motor Oil SAE 40 - 32 oz.
(2) 28032 - Pro Star Super Premium Heavy Duty Motor Oil SAE 15W 40 - 32 oz.
(12) 19200 - Super Premium 2 Cycle Engine Oil TC-W3 - Gal.
(2) 27800 - Pro Star Super Premium Heavy Duty Motor Oil SAE 30 - Gal.
(2) 27900 - Pro Star Super Premium Heavy Duty Motor Oil SAE 40 - Gal.
(2) 28000 - Pro Star Super Premium Heavy Duty Motor Oil SAE 15W 40 - Gal.
(2) 28100 - Pro Star Super Premium Synthetic Blend 4 Stroke Outboard Oil 10W 30 - Gal.
(4) 28200 - Pro Star Super Premium Synthetic Blend 4 Stroke Outboard Oil 10W 40 - Gal.

Order No.	Mfg. No. / Description	Price
431325	(83505) Oil and Lube Display	$1,384.98 G

©2014 Donovan Marine, Inc.

Star Brite Synthetic Blend Lower Unit Gear Lube - 80W90



- Special extreme pressure and anti-wear additives.
- Recommended for all engines over 100 HP.
- Protects against rust and corrosion.
- High performance to meet the needs of high powered marine engines.
- Meets or exceeds OEM requirements-will not void manufacturers warranty.
- Recommended for use in Mercury, Mercruiser, Johnson, Evinrude, OMC, Force, Mariner, Nissan, Suzuki, Yamaha and Volvo.

Order No.	Mfg. No. / Description	Price
451776	(27232) 32 oz.	$11.98 G
451800	(27205) 5 Gallon Pail	$180.98 G

Star Brite Hypoid 90W Lower Unit Gear Lube



- For API MT-1, GL-5, MIL-L-2105D service.
- For outboards and stern drives with mechanical shift mechanisms.
- Formulated with special anti-wear additives, rust and corrosion inhibitors.
- Will not void manufacturerss warranties.
- The ultimate lubrication for maximum performance and economy.

Order No.	Mfg. No. / Description	Price
451906	(27110) 10 oz. Tube	$7.98 G
451905	(27132) 32 oz.	$9.98 G
451904	(27105) 5 Gallon Pail	$170.98 G

Sierra Hi-Performance Synthetic Blend Lower Unit Gear Lube



- Synthetic blended marine formulation reduces operating friction for increased performance and protection of gears, bearings and other gear case components.
- Recommended for use in high performance and high load operating conditions in both outboard and I/O lower units.

Order No.	Mfg. No. / Description	Price
451878	(18-9650-0) 10 oz. Tube	$9.22 F
451879	(18-9650-2) Quart	$13.87 F
189651	(18-9650-5) 5 Gallon	$188.07 F

Sierra Premium Lower Unit Gear Lube



- Recommended for all general marine applications requiring a GL-4 class lubricant.
- Ideal for replacing all old hypoid 90 application needs.
- Formulated for use in freshwater or saltwater conditions and all standard marine applications.
- Reduces friction and protects gears, bearings and other gearcase components.

Order No.	Mfg. No. / Description	Price
189600	(18-9600-0) 10 oz. Tube	$6.17 F
189602	(18-9600-2) Quart	$9.47 F
189605	(18-9600-5) 5 Gallon	$140.85 F

Star Brite High Viscosity Lower Unit Gear Lube - 80W90



- For API MT-1, GL-5, MIL-L-2105D service.
- Recommended for use in Mercury, Mercruiser, Johnson, Evinrude, OMC, Force, Mariner, Nissan, Suzuki, Yamaha and Volvo.
- Will not void manufacturers warranties.
- For lower units of all outboard motors and sterndrives.

Order No.	Mfg. No. / Description	Price
451803	(27010) 10 oz. Tube	$7.98 G
451815	(27032) 32 oz.	$10.98 G

Star Brite Premium Type C Lower Unit Gear Lube



- Recommended for electric shift gear cases used on Johnson/Evinrude Outboards (1962-1972), OMC Sterndrives (1977 and earlier) and other Type C applications.
- Meets or exceeds OEM requirements will not void manufacturers' warranty.

Order No.	Mfg. No. / Description	Price
451890	(27310) 10 oz. Tube	$8.98 G
451891	(27332) 32 oz.	$11.98 G

Star Brite Pro Star Ultra High Performance Lower Unit Lube - 80W90



- High-tech formulation significantly outperforms traditional lower unit gear lubes.
- Provides unsurpassed protection against wear, corrosion and heat.
- Ideal for use in all outboard and sterndrive lower units.
- Meets or exceeds OEM specs; wont void warranties.
- Unique environmentally-responsible formula is bio-renewable and biodegradable.

Order No.	Mfg. No. / Description	Price
451897	(26810) 10 oz.	$9.98 G
451899	(26832) 32 oz.	$16.98 G

Star Brite Premium Lower Unit Lubrication Kit



- Contains one 451815 (27032) quart high viscosity lower unit gear lube and a quart pump (27400).
- Allows easy DIY servicing of lower units.
- Premium quality gear lube meets or exceeds all manufacturer specifications; will not void any warranties.
- Recommended for use in Yamaha, Mercury, Mercruiser, Johnson, Evinrude, Suzuki, OMC, Force, Tohatsu, Nissan and Volvo lower units.

Order No.	Mfg. No. / Description	Price
451895	(29030)	$22.98 G

Star Brite Lower Unit Fill Kit



- Contains: (2) 10 oz. tubes of 451803 (27010) high viscosity lower unit gear lube and (28600) lower unit lube tube.

Order No.	Mfg. No. / Description	Price
451893	(29020)	$21.98 G

Sierra Type C Gear Lube



- Formulated for older model outboards and I/O's equipped with electric shift.
- Reduces friction and protects gears, bearings and other gearcase components.

Order No.	Mfg. No. / Description	Price
451841	(18-9620-0) 10 oz. Tube	$8.37 F
189622	(18-9620-2) Quart	$9.08 F
189625	(18-9620-5) 5 Gallon	$141.88 F

OMC® SysteMatched™ Gearcase Lubricant



- For use in Evinrude/Johnson Outboards 100 HP and lower that specify OMC SysteMatched Hi-Vis Gearcase Lube & all outboard engine lower units from 100 HP & lower.*
- Thermal stability agents help prevent lubricant breakdown and sludge accumulation.
- Offers high film strength and protection in wet environments.
- Marine-specific emulsifiers help protect against corrosion caused by water intrusion.

* Not intended for OMC electric shift lower units.

Order No.	Mfg. No. / Description	Price
B765725	(765725) 10 oz.	$6.99 H
B765726	(765726) 32 oz.	$13.99 H

Marpac Universal Gear Lube Pump



- Quart size pump for outboard lower units, power trim and tilt units.
- Fits outboards and stern drives with 3/8-16 threaded screw.
- Fits outboards: Johnson/Evinrude, Mercury/Mariner, Suzuki 25 HP & larger and Yamaha 8 HP & larger.
- Fits sterndrives: OMC, OMC Cobra, OMC SX Cobra, MerCruiser, Speedmaster and Volvo Penta SX™.
- 8 mm threaded adapter included for: Yamaha, Honda, Mercury 4 stroke (over 115 HP), Nissan and Tohatsu.

Order No.	Mfg. No. / Description	Price
7-6020		$12.98 G
189794	(28401) 8mm Adapter for: Honda, Yamaha, Nissan and Toh	$6.98 G
451497	(28402) 10mm Adapter for: Suzuki and Honda	$5.98 G

Sierra Synthetic Gear Lube



- Specifically formulated to optimize gear life by reducing friction and providing superior wear protection in severe operating conditions.
- The unique synthetic formulation is shear stable and resists oxidation to ensure high performance over a wide range of ambient operating temperatures.

Order No.	Mfg. No. / Description	Price
1896805	(18-9680-5) 5 Gallon	$225.17 H

OMC® SysteMatched™ Ultra Gearcase Lubricant



- For use in Evinrude/Johnson Outboards and all outboard engine lower units from 115 horsepower and higher.
- Can also be used in OMC King Cobra and OMC Cobra.
- Special friction reducers, anti-foam agents, and extreme pressure additives to systematically promote gear life and performance.
- Runs cooler for longer seal life and has improved load carrying capabilities for enhance durability in the harshest marine conditions.
- Will not decompose under heavy loading and does not turn black and create a heavy hydrogen sulfide (rotten egg) odor after use.
- Marine-specific emulsifiers help protect against corrosion and lubricant breakdown caused by water intrusion.
- Not intended for OMC electric shift lower units.

Order No.	Mfg. No. / Description	Price
B765723	(765723) 10 oz.	$5.99 H
B765724	(765724) 32 oz.	$12.49 H

OMC® SysteMatched™ Gear Lube Pump



- This easy to use pump was designed for use with 16 oz. or 32 oz. bottles of gear lubricant.
- The nylon fitting screws into the gearcase fitting to help prevent drips and spills.
- This pump is reusable.

Order No.	Mfg. No. / Description	Price
B765730	(765730)	$11.99 H

Star Brite 3 Piece Funnel Set



- Kit contains three sizes of funnels to fit most filling applications of water, oil, fuel, antifreeze, powders and more.
- Durable plastic construction for years of use; can be easily cleaned.
- Hang tabs and deep spouts make funnels easy to store and help prevent spills.

Order No.	Mfg. No. / Description	Price
360602	(038010)	$8.98 G

©2014 Donovan Marine, Inc.

Jabsco Porta Quick Oil Changer



- The oil changer includes: Reversible pump,1/4" x 40" dipstick probe, 8' cord with alligator clips, 14 quart holding container and female garden hose connector.

Order No.	Mfg. No. / Description	Price
415326	(17800-2000) 12 volt	$283.98 G
418601	(9200-0023-P) Replacement Impeller	$44.98 E

ITT Industries Flat Tank Engine Oil Change System



- Will extract up to 50 weight of oil at a temperature of 70° F through the engine's dip stick tube, usually in less than 5 minutes.
- The oil changer includes: Powerful suction pump with integral power switch, 14 quart holding container, 7' power cord with alligator clips and 8' oil and heat resistant suction tube.

Order No.	Mfg. No. / Description	Price
415340	(17860-0012) 12 volt	$189.98 G

Johnson Pump Oil Change Gear Pump Kit



470747



- Can run dry!
- Light and compact gear pump with pump body and gears made of PTFE.
- In cold weather, the gears move the oil more easily than impeller pumps.
- Comes complete with oil dip stick, extraction tube, connection wires and battery clamps.
- Flow 2.6 GPM. Fuse size 6 amp.

Order No.	Mfg. No. / Description	Price
470090	(80-47508-81) 12 volt	$161.98 G
470091	(80-47508-02) 24 volt	$161.98 G
470747	(65000) 12 volt, On Bucket	$178.98 F

Marpac Oil Drain Plugs



- Keep the oil in and the water out.
- Includes with plugs, gasket and O-ring.
- Sold 5 packages per display box.

Order No.	Description		Price
7-5999	Plug Gasket	Mercury Lower Unit	$3.99 G
7-6000	Magnetic Drain Plug	Mercury Lower Unit	$9.95 G
7-6005	Magnetic Drain Plug	Yamaha Lower Unit	$19.95 G
7-6006	Plug Gasket	Yamaha Lower Unit	$3.29 G
7-6011	O-Ring	Volvo Lower Unit	$3.29 G
7-6012	Plug Gasket	Volvo Lower Unit	$3.99 G

Jabsco Economy Engine Oil Changer



- Will extract up to 50 weight of oil at a temperature of 70° F through the engine's dip stick tube, usually in less than 5 minutes.
- The oil changer includes: Powerful suction pump with integral on/off switch, 10 quart bucket oil receiver with pouring spout, 7' power cord with alligator clips and 8' oil and heat resistant suction tube.

Order No.	Mfg. No. / Description	Price
415338	(17850-1012) 12 volt	$200.98 G

Shurflo Oil Change System



- Perfect for winterization, oil changes, and liquid transfer.
- Thermal overload protected, self priming, and ignition protected.
- Buna impeller.
- 8' cable with battery clips.
- Hose kit included and 3.5 gallon storage container.
- Flow rate: 1.5GPM.
- 12 volt.
- 4 max. amp.

Order No.	Mfg. No. / Description	Price
353235	(8050-305-426) 16" x 12.5"	$185.98 F

Jabsco Permanent Oil Drain Kit



- Includes drain plug fitting, oil drain hose, cap and hose hanger clamp.
- It is an ideal oil drain kit for use in conjunction with a 415287 (17250-0000) drill pump or 415249 (34060-0010) hand pump.
- Drain plug fitting size is 1/2" - 20.

Order No.	Mfg. No. / Description	Price
415299	(18080-0000)	$76.98 F

Jabsco Drill Pump Kit



- Includes: 3.5 GPM self-priming drill pump that chucks into standard 1/4" or 3/8" drill, (2) 3/4" garden hose thread port adaptors, 3' of 1/2" hose, probe adaptor and 1/4" x 40" dipstick probe.
- Note: Not for pumping gasoline or flammable liquids.

Order No.	Mfg. No. / Description	Price
415275	(17215-0000) Complete Kit	$58.98 G
415287	(17250-0003) Drill Pump Only	$43.98 G
415353	(17255-0003-P) Impeller Only	$30.98 G

Marpac Universal Hand Pump



- Self-priming design, great for pumping oil, water and other fluids.
- Siphons tank contents for quick and easy removal of large liquid quantities.
- Small size stores practically anywhere, such as tackle boxes.
- Not for use with gasoline or diesel.

Order No.	Description	Price
7-2232	Universal Hand Pump	$23.98 G

Moeller Economy Fluid Extractor Kit



- Universal self priming hand pump.
- Ideal for oil, water, and other fluids.
- Kit includes two 38" dipstick tubes and 40" tubing, and a self priming pump.

Order No.	Mfg. No. / Description	Price
807122	(033331-10) Fluid Extractor Kit	$38.98 F

Moeller Fluid Extractor



- Dual action vacuum pump works with both the upstroke and downstroke and gets the job done right in less time!
- Extracts warm or cold oil.
- No electric or air power required.
- Automatic shut-off float eliminates overflow.
- No-mess features! Tethered cap and easy-pour spout.
- Manual Pressure relief valve delivers gulp-free, mess-free performance!
- Fold-down Foot braces are built-in and provide added stability.
- Thread-on extraction tube kit and garden hose adapter kit included!

Order No.	Mfg. No. / Description	Price
807124	(035330) 5.0 Liter	$110.98 F

Marpac Fluid Xtractors



- Portable fluid extractor empties in 16 pumps or less.
- No power source needed.
- Warm or cold fluid extraction.
- Includes extraction tube kit.

Order No.	Description	Price
7-0950	Holds 6.5 Liters or 6.9 Quarts or 1.7 Gallons	$119.98 G
7-0951	Holds 4.0 Liters or 4.2 Quarts or 1.1 Gallons	$96.98 G

Jabsco Utility Hand Pumps



415251



415249

Note: *Explosion hazard. Do not pump gasoline, solvents, thinners or other flammable liquids. To do so can cause an explosion resulting in injury or death.*

- They never need coaxing or priming and give full suction on the first stroke.
- Pumps can be used in any position.
- Uses include bilge pumping, oil draining, diesel fuel transfer and many other liquid transfer applications.
- Note: Oil temperature should not exceed 140° F.
- Long life brass cylinders, high quality oil resistant plungers, intake and discharge caps are used.
- Includes: 2' of 1/2" hose and 40" of 1/2" dipstick probe.
- Hose size ID: 1/2".
- 40 strokes per gallon.
- 1-1/4" diameter cylinder.
- Stroke length : 4-5/8".
- Overall length: 10-1/4".

Order No.	Mfg. No. / Description	Price
415249	(34060-0010)	$56.98 G

- Hose size ID: 1/2".
- 40 strokes per gallon.
- 1-1/4" diameter cylinder.
- Stoke length : 4-5/8".
- Overall length: 10-1/4".
- Includes: 3' of 1/2" hose, (2) 40" of 1/4" dipstick probes, neoprene intake adaptor and tube connector.

Order No.	Mfg. No. / Description	Price
415251	(33799-0000)	$84.98 G

- Marine engine oil drain pump with 3/4" female garden hose fitting on suction connection for OMC; and MerCruiser 3/4" NH Threaded Dip-Stick Tube.
- Includes: 2' of 1/2" hose.

Order No.	Mfg. No. / Description	Price
415237	(34060-0130)	$61.98 G

Marpac Fluid Xtractor with Discharge Pump



- 2 in 1 pump-extracts and discharges at the same time.
- Easy to use, no power required.
- Huge capacity-holds 18 liters or 12.68 quarts or 4.75 gallons.
- Easy pour spout ensures mess-free pouring and transporting.
- Worldwide patented design.

Order No.	Description	Price
7-0949	Fluid Xtractor with Discharge Pump	$328.98 G

©2014 Donovan Marine, Inc.

OMC® SysteMatched™ Engine Tune Up Spray



- Removes gum, varnish and excessive carbon deposits from rings, pistons, valves and ports.
- Spray through the intake of a running engine for improved performance.

Order No.	Mfg. No. / Description	Price
B765740	(765740) 13 oz. Spray	$11.99 H

CRC Marine Engine Tune Up and Decarbonizer



- Breaks down carbon, varnish, and other harmful deposits in the combustion chamber.
- Dramatically improves power and performances.
- Solves many rough-idle or power loss problems.

Order No.	Mfg. No. / Description	Price
675807	(06121) 13 fl. oz.	$7.98 H

CRC Motor Treatment



- Cleans gum, varnish, and carbon from the fuel system, injectors, pistons, and combustion chamber.
- Removes moisture from fuel and oil systems and lubricates engine components.

Order No.	Mfg. No. / Description	Price
290535	(05316) 16 fl. oz.	$9.98 H

Marpro Carb and Choke Cleaner



- Sprays away varnish and gum.
- Cleans chokes.
- Cleans PCV valves.
- Smooths out the idle and frees sticking parts.

Order No.	Description	Price
6-4070	12 oz.	$6.98 I

CRC Marine Carb and Choke Cleaner



- Designed to maximize carburetor performance.
- Quickly dissolves carburetor deposits such as gum, sludge and varnish to improve fuel system performance and enhance fuel economy.

Order No.	Mfg. No. / Description	Price
289353	(06064) 12 oz.	$6.98 H

OMC® SysteMatched™ Carb and Choke Cleaner



- High concentrate solvent that removes the toughest gum and varnish deposits.

Order No.	Mfg. No. / Description	Price
B765743	(765743) 11 oz. Spray	$8.99 H

Marpro Engine Degreaser



- A blend of grease-cutting solvents that dislodge oils, lubricants and mineral grease from metal surfaces quickly and efficiently.
- Provides deep down scrubbing power.
- Clings to most vertical surfaces.
- Leaves no residue.

Order No.	Description	Price
6-4075	19 oz.	$8.98 I

CRC Marine Cleaner and Degreaser



- Cleans and degreases marine engines and non-sensitive electrical parts and equipment in place.
- Breaks through tough grease on motors, gears, chains and other metal parts.
- Leaves no residue; non-flammable.

Order No.	Mfg. No. / Description	Price
290243	(06019) 19 fl. oz.	$12.98 H

Star Brite Engine Degreaser



- A special marine formula which quickly and easily removes dirt, grease, oil and grime.
- Just spray on, let work and hose off.
- Will not harm metal, rubber, plastic, wood, fiberglass or painted surfaces.
- Heavy duty formula.
- Safe for use on electrical wiring and leaves engine sparkling clean.

Order No.	Mfg. No. / Description	Price
627159	(82812) 12 oz.	$5.98 G

CRC Top Engine Cleaner



- Breaks down carbon, varnish, and other harmful deposits in the combustion chamber.
- Dramatically improves power and performances.
- Solves many rough idle or power loss problems.

Order No.	Mfg. No. / Description	Price
290530	(05312) 16 oz.	$12.98 H

Star Brite Engine Protector



- Protects exterior engine surfaces from rust and corrosion during storage.
- Safe for all metal, rubber, plastic and painted surfaces.
- Simple spray on application.
- Easy to remove.
- Salt spray tested.
- Environmentally safe - does not contain CFCs.

Order No.	Mfg. No. / Description	Price
999124	(85312) 12 oz.	$13.98 G

CRC Marine Engine Stor® Fogging Fluid



- As fogging fluid, it protects outboard motors, marine engines and internal combustion engines, insures longer life.
- As long tem metal protectant, it keeps pistons, rings and cylinder walls corrosion free.
- Protects electrical connections in use/storage.

Order No.	Mfg. No. / Description	Price
289175	(06068) 13 oz.	$6.98 H
289151	(06072) 13 oz., For OMC Motors	$8.98 R
289187	(06069) Gallon	$34.98 G

OMC® SysteMatched™ Inject Valve and Hose



- For use with fogging oil and internal engine cleaner spray cans to give them injection capabilities.

Order No.	Mfg. No. / Description	Price
B765727	(765727)	$2.99 L

OMC® SysteMatched™ Oil Filters



- L6, V8 All H.P. 1965-Thru.
- GM long filter, thread 13/16" x 16" NPT. Replaces: 173233.

Order No.	Mfg. No. / Description	Price
B765564	(765564)	$10.99 L

- V6 H.P. 1983-Thru.
- GM long filter, thread 18 mm x 1.5. Replaces: 173834.

Order No.	Mfg. No. / Description	Price
B765576	(765576)	$10.99 L

- L6, V8 All H.P. 1975-Thru.
- Ford long filter, thread 3/4" x 16" NPT. Replaces: 173231.

Order No.	Mfg. No. / Description	Price
B765586	(765586)	$10.99 L

- L4, L6,V8 H.P. 1965-Thru.
- SD, GM short filter, thread 13/16" x 16" NPT. Replaces: 502902.

Order No.	Mfg. No. / Description	Price
B765568	(765568)	$9.99 L

Star Brite Fogging Oil



- Spray formula coats all interior engine surfaces with a heavy duty polymer coating that prevents corrosion during winter storage.
- Special formula makes starting the engine after storage quick and easy.

Order No.	Mfg. No. / Description	Price
460888	(84812) 12 fl. oz.	$6.98 G
460889	(84800) Gallon	$34.98 G

OMC® SysteMatched™ Fogging Oil



- Spray through the intake of a running engine to protect internal engine components from corrosion caused by condensation that develops during storage or extended periods of non-use.

Order No.	Mfg. No. / Description	Price
B765741	(765741) 12 oz.	$7.99 H
B765742	(765742) 1 Gallon	$51.99 H

Sierra Oil Filters



- Fits: F and T 9.9 (1990-2003).

Order No.	Mfg. No. / Description	Price
187901	(18-7901) Mercury/Mariner, Yamaha	$14.07 H

- Fits: F15 (2000-2003) F & T25 (2000-2003) F30 (2001-2003) F40 (2001-2003) F & T50 (2000-03) F60/T60 (2002-2003) F75/90 (2003) F80/100 (2000-2002) F115 (2001-2003).

Order No.	Mfg. No. / Description	Price
187911	(18-7911-1) Honda	$11.63 H

- Replaces: Suzuki 16510-87J00, OMC 778885, OMC 5031411.

Order No.	Mfg. No. / Description	Price
187915	(18-7915-1)	$9.82 H

- Replaces: Yamaha 69J-13440-00-00.

Order No.	Mfg. No. / Description	Price
187906	(18-7906-1) Yamaha	$9.98 H

- Replaces: OMC 434839.

Order No.	Mfg. No. / Description	Price
187916	(18-7916)	$9.83 H

- Replaces: Honda 15400-POH-305PE and 15400-POH-305.

Order No.	Mfg. No. / Description	Price
187910	(18-7910) Honda	$8.58 H

- Yamaha.

Order No.	Mfg. No. / Description	Price
188700	(18-8700)	$11.90 H

- Fits: F15 (1998-1999) F40 (1999-2000) F25 (1998-1999) F & T50 (1995-1999) F80/100 (1999).

Order No.	Mfg. No. / Description	Price
187902	(18-7902) Yamaha	$13.67 H

- 881540, 15412-93J00.

Order No.	Mfg. No. / Description	Price
187936	(18-7936) Mercury, Suzuki, Honda	$22.05 H

©2014 Donovan Marine, Inc.

Star Brite Adjustable Filter Wrench



- Fits canister filters from 2-3/4" - 4" diameter.
- Oversized handle for maximum torque.
- Easy to use; compact size.

Order No.	Mfg. No. / Description	Price
451605	(028908)	$12.98 G

Sierra Transmission Filter Kit



- For Mercruiser V8 Inboard with Hurth Transmission.
- Replaces: 35-815419.

Order No.	Mfg. No. / Description	Price
187964	(18-7964)	$122.65 H

Permatex Sensor-Safe Blue RTV Silicone Gasket



- Will not foul oxygen sensors.
- Replaces almost any cut gasket.
- Makes reliable formed-in-place gaskets that resist cracking, shrinking and migrating.
- Coats pre-cut gaskets to increase reliability.
- Temperature range -65° F to 500° F intermittent; resists auto and shop fluids.
- First generation 1970-1980 gasket maker.

Order No.	Mfg. No. / Description	Price
545092	(80022) 3 oz. Tube	$5.98 H

Permatex Form-A-Gasket® No. 2 Sealant



- Slow-drying, non-hardening sealant designed for sealing cut gaskets and stamped parts.
- Allows for easy disassembly if required.
- Temperature range -65° F to 400° F; resists common shop fluids and fuels.
- Use where sealing is more important than adhesion.

Order No.	Mfg. No. / Description	Price
545078	(80015) 1.5 oz. Tube	$4.98 H

Permatex Ultra Copper® RTV Silicone Gasket Maker



- OEM specified.
- Highest operating temperatures for 4 cylinder, turbocharged or high-performance engines.
- Sensor-safe, low odor, non-corrosive.
- Superior adhesion.
- Three times more oil resistant than conventional silicones; eight times more flexible than cut gaskets.
- Temperature range -75° F to 700° F intermittent; resists auto and shop fluids and vibration.
- Suggested applications: Exhaust manifolds headers, valve covers, oil pans, timing covers, water pumps, thermostat housings.

Order No.	Mfg. No. / Description	Price
545155	(81878) 3 oz. Tube	$8.98 H

Permatex Ultra Blue® RTV Silicone Gasket Maker



- OEM specified.
- Sensor-safe, low odor, non-corrosive.
- Outstanding oil resistance and joint movement values.
- Eight times more flexible than cork/composite gaskets; three times more oil resistant than conventional silicones.
- Temperature range -65° F to 500° F intermittent; resists auto and shop fluids and vibration.
- Suggested applications: Valve covers, oil pans, timing covers, transmission pans, differential covers.

Order No.	Mfg. No. / Description	Price
545143	(81724) 3.35 oz. Tube	$8.98 H

High-Temp Red RTV Silicone Gasket Maker



- OEM certified.
- Formulated for hi-temp applications or heavy duty use.
- Replaces almost any cut gasket by making gaskets that resist crackling, shrinking and migrating caused by thermal cycling.
- Temperature range -65° F to 650° F intermittent; resists auto and shop fluids.

Order No.	Mfg. No. / Description	Price
545129	(81160) 3 oz. Tube	$7.98 H

Permatex Aviation Form-A-Gasket® No. 3 Sealant



- Slow-drying, non-hardening brush-top sealant approved for use in aviation as well as automotive applications.
- Temperature range -65° F to 400° F; resists gasoline, oil and grease.
- Suggested applications: Close-fitting machined surfaces, sealing hoses, solid gaskets.

Order No.	Mfg. No. / Description	Price
545080	(80019) 4 oz. Bottle	$7.98 H

3M Ultrapro™ High Temp Silicone Gasket



- A rapid curing form-in-place gasket adhesive/sealant for engines.
- It is a flexible, noncorrosive, oxygen sensor safe compound designed to be used as a gasket material for valve covers, oil pans and other engine and transmission applications.

Order No.	Mfg. No. / Description	Price
856382	(08672) 3 oz. Tube, Black	$16.98 H

Permatex Anaerobic Gasket Maker



- OEM specified.
- Noncorrosive gasketing material designed primarily for use on aluminum, iron and steel flanged mating surfaces.
- Ideal for on-the-spot and emergency repairs, or when a conventional gasket is unavailable.
- Fills gaps up to .015" and cures to a solvent resistant seal that will not tear or decay during service.
- Suggested applications: Water pumps, thermostat housings, transmission pans, transmission case covers, transaxle casings, O-ring replacement.

Order No.	Mfg. No. / Description	Price
545042	(51813) 1.69 oz. Tube	$19.98 H

Permatex Ultra Black® RTV Silicone Gasket Maker



- OEM specified.
- Fast-curing formula.
- Sensor-safe, low odor, non-corrosive.
- Meets performance specs of OE silicone gaskets.
- Retains high flexibility, oil resistance properties through use of patented adhesion system.
- Temperature range -75° F to 600° F intermittent; resists auto and shop fluids and vibration.
- Suggested applications: Valve covers, oil pans, intake manifold end seals, timing covers, transmission pans.

Order No.	Mfg. No. / Description	Price
545167	(82180) 3.35 oz. Tube	$8.98 H

Marpro Zinc Chromate Primers



- Superior bonding to aluminum lower units.
- Formulated to work with engine paints.
- For use below water line.
- Protects against corrosion.
- Quick-dry formula.

Order No.	Description		Price
6-5605	Green	12 oz. Can	$11.98 I
6-5606	Yellow	12 oz. Can	$11.98 I

Marpro Clear Coat



- Provides that professional finish to reach a deep clear coat finish.
- Specifically formulated for the Marine environment with U.V. inhibitor restore older finishes to a higher gloss.
- Many manufactures use this final clear coat finish over color base coats to provide added depth and protection.
- Can be reapplied at any time with minor surface cleaning prep.
- Meet VOC requirements.

Order No.	Description	Price
6-6995	12 oz. Can	$8.98 I

Marpro Outboard Motor Spray Paint



- Easy to use aerosols deliver professional results every time.
- Ideal for entire outboard and stern drive reconditioning or touch up!
- Exact factory matched colors for Yamaha, Mercury, Johnson/Evinrude, Suzuki, Honda and more…
- Excellent solvent, gasoline and wear resistance.
- Meet VOC requirements.
- 12 oz. canister.
- To achieve the finest deep gloss finish available use Marpro Clear Coat #6-6995 as the final coat.


Order No.	Description	Price
6-6954	Light Blue (Metallic), OEM #173547, 1978-1987, J/E	$8.98 I
6-6961	White, OEM #173744, 1981-Present, Johnson/Evinrude	$8.98 I
6-6969	Metallic Blue Silver, OEM #LUB-87PNT-SL-VR, 1985-Present, Yamaha	$8.98 I
6-6979	Charcoal (Metallic), OEM # 395127, 1985-Present, OMC	$8.98 I
6-7003	Metallic Dark Blue, Yamaha	$8.98 I
6-7021	Silver Metallic, Honda	$8.98 I
6-7040	Shadow Black, Suzuki	$8.98 I
6-7045	Charcoal Grey, Suzuki	$8.98 I
6-6930	Volvo White	$7.98 I

Marpro Zinc Primer

6-9100	Green	$11.98 I

SkegShield™ Skeg Guard

- Protect your outboard or sterndrive from damage.
- Polished marine grade stainless steel.
- Reinforced lower edge for protection that makes SkegShield twice as strong as your OEM skeg and an exclusive drain hole to prevent water retention and corrosion.
- NO Welding - NO Messy glue, adhesive or epoxy NO curing or down time.
- You'll be back in the water in under 30 minutes and we don't affect performance.
- 3 Year Warranty.



- Yamaha: 115-130 HP 2 Stroke 1984-2002, 150 HP 2 and 4 Stroke 1984-2009, 150-350 HP 4 Stroke 2004-2009, 175-250 HP 2 Stroke 1984-2002 and all Sterndrives.
- Suzuki: 250SS and 300SS HP 4 Stroke 2006-2009.

Order No.	Mfg. No. / Description	Price
990015	(SS00512)	$149.98 R

- MerCruiser I and Alpha I Drives 1973-1984.

Order No.	Mfg. No. / Description	Price
990019	(99001)	$201.58 H

- MerCruiser: Alpha I 1985-1990.

Order No.	Mfg. No. / Description	Price
990021	(SS00501)	$149.98 R

- Mercury/Mariner: 40-60 HP 2 and 4 Stroke (Big Foot) 2003-2009, 70-80 HP 2 Stroke 1984-2009 and 90-125 HP 2 and 4 Stroke 1983-2009.
- Nissan: 70-140 HP 2 Stroke 1993-2009.
- Force: 75-115 HP 4 Stroke 1995-2007.

Order No.	Mfg. No. / Description	Price
990022	(SS00504)	$149.98 R

- MerCruiser: Alpha I Gen II 1991-2009.

Order No.	Mfg. No. / Description	Price
990033	(SS00502)	$149.98 R

- MerCruiser: Bravo 1 and 3 1990-2009.

Order No.	Mfg. No. / Description	Price
990057	(SS00503)	$149.98 R

- Mercury/Mariner: 135-200 HP 2 & 4 Stroke 1978-04, 225 HP 2 Stroke 78-95.

Order No.	Mfg. No. / Description	Price
990069	(SS00505)	$149.98 R

- Evinrude: 150-225 HP 2 Stroke 1986-03, 150 HP DBX & DPL (E-TEC) 2 Stroke 2004-09, 175-200 HP DPL 2 Stroke Blue (E-TEC) 2004-09 and 225-250 DCX, DCZ, DPX (E-TEC) 2 Stroke 2004-09. Johnson: 150 - 225 HP 2 Stroke 1986-03. OMC: Cobra 6 & 8 Cyl. Stern 1986-94. Suzuki: 300 HP 4 Stroke 2009.

Order No.	Mfg. No. / Description	Price
990083	(SS00508)	$149.98 R

- Mercury/Mariner: 150-275 HP 2 & 4 Stroke 2005-09, 225 HP 2 Stroke 96-04.

Order No.	Mfg. No. / Description	Price
990092	(SS00514)	$149.98 R

- Yamaha: 60-100 HP 2 and 4 Stroke 2002-2009.

Order No.	Mfg. No. / Description	Price
990095	(SS00515)	$149.98 R

- Yamaha: 115-130 HP 2 Stroke 2003-2009, 115-130 HP 4 Stroke 2000-2009.

Order No.	Mfg. No. / Description	Price
990098	(SS00516)	$149.98 R


Zinc for Maxi-Prop Propellers

- Shaft size: 3/4", 7/8", 1", 1-1/8".



Order No.	Mfg. No. / Description	Price
338097	(63M)	$8.98 H

T-H Marine Replacement Skegs



- A cast aluminum direct replacement skeg for outboard and I/O lower units.
- Welds to existing lower unit to bring back original performance and appearance.
- Sold each per skin packed.

Order No.	Mfg. No. / Description	Price
642404	(RS-4-DP) Mercury - V6 and Stern Drives	$27.98 H
642428	(RS-1-DP) OMC - V6	$27.98 H
642431	(RS-2-DP) OMC - V4	$27.98 H

©2014 Donovan Marine, Inc.

Anodes for Yamaha Outboard

Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.

• 70 HP.



Order No.	Mfg. No. / Description	Price
338120	(6884537102)	$22.98 I

• 150-200 HP.



Order No.	Mfg. No. / Description	Price
338118	(6J9-45371-00)	$14.98 H

• 90-200 HP, Base OD 3-5/8".



Order No.	Mfg. No. / Description	Price
269295	(6E54537101)	$38.98 I

• 115-200 HP.



Order No.	Mfg. No. / Description	Price
338106	(6G5-45251-01)	$21.98 H

• 225-250 HP.



Order No.	Mfg. No. / Description	Price
338093	(61A45371)	$14.98 R





Order No.	Mfg. No. / Description	Price
269297	(6K1-45371-00) Counter Rotation Only	$29.98 R
269298	(6K1-45371-02) Counter Rotation Only	$38.98 R

Anodes for Yamaha Outboard Motors







Order No.	Mfg. No. / Description	Price
186034	(18-6034) For Use on Lower Drive 150, 200 HP (1986)	$48.25 H
186035	(18-6035) For 150-200 HP	$24.53 H
186097	(18-6097) For Use on Lower Casing Drive 115. 130 HP, 1984-04	$31.68 H

Anode for Suzuki Outboard



• 150-200 HP.

Order No.	Mfg. No. / Description	Price
338156	(55125-87D00) 150-200 HP	$9.98 H

Anodes for Johnson/Evinrude Outboard and OMC Sterndrive

Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.

OMC Outdrive Zinc

Order No.	Mfg. No. / Description	Price
269033	(C173)	$11.98 H

OMC Outdrive - Cobra



Order No.	Mfg. No. / Description	Price
269038	(984547)	$45.98 H

OMC Outdrive



Order No.	Mfg. No. / Description	Price
338124	(3854130)	$29.98 H

OMC Outdrive - Low Profile



Order No.	Mfg. No. / Description	Price
338128	(38554112) Low Profile	$30.98 H

Johnson/Evinrude Outboard Cubes



Order No.	Mfg. No. / Description	Price
338144	(398331) 275 HP, Cube	$14.98 H
269043	(393023) 1" x 1-3/8"	$8.98 I

OMC Outdrive - Cobra



Order No.	Mfg. No. / Description	Price
269037	(CM984513Z) Cobra	$31.98 I

OMC Transom Bar



• Length 7-5/8".
• Hole centers 6-15/16".

Order No.	Mfg. No. / Description	Price
269034	(367)	$16.98 I

OMC Cobra Sterndrive



• Hole centers 4-1/2".

Order No.	Mfg. No. / Description	Price
269039	(983494)	$14.98 I

Johnson/Evinrude Medium Outboard



• Dimensions: 3" x 4-5/8".

Order No.	Mfg. No. / Description	Price
269040	(392123)	$35.98 I

Camp Sea Strainer Zinc



- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.

Order No.	Mfg. No. / Description	Price
338510	(SZ1) 3-7/8" L x 1-1/2" W	$6.98 H

Canada Metal Company Tear Drop Zincs



Order No.	Mfg. No. / Description	Price
269779	(MDT21) Length 5-1/4"	$15.98 I

Mariner Outdrive Anodes



Order No.	Mfg. No. / Description	Price
269004	(818298)	$11.98 R
269005	(826134) 60-225 HP	$6.98 R

Mercury Tabs



Order No.	Mfg. No. / Description	Price
269010	(31640) Base OD 3-1/2	$14.98 I
269022	(34127) Long Mercury Tab, Base OD 3-1/2	$16.98 I
269027	(46399) Racing Mercury Tab, Base OD 3-1/2	$10.98 I

MerCruiser Outdrive Anode - Alpha 1



- Dimensions: 3-3/4" x 3".


Order No.	Mfg. No. / Description	Price
269030	(43994)	$19.98 I

Marpac Alpha I Generation I Kit



Order No.	Mfg. No. / Description	Price
620164	(CMALPHAG1KIT)	$36.98 H

Outdrive Bar



Order No.	Mfg. No. / Description	Price
269285	(832598) Outdrive Bar, 250-270 Length 7-1/8	$27.98 I
269286	(852835) Outdrive Bar, 290B	$31.98 I

Mercury Outdrive Zinc



Order No.	Mfg. No. / Description	Price
268979	(34762) Mercury Outdrive Zinc	$5.98 R

MerCruiser Anodes - Bravo



Order No.	Mfg. No. / Description	Price
269006	(821630)	$14.98 R
269007	(821631)	$24.98 R

MerCruiser Outdrive Anodes - Alpha



Order No.	Mfg. No. / Description	Price
268983	(806105)	$13.98 R
269000	(806189)	$3.98 R
269002	(815933)	$14.98 R

MerCruiser Nut



- 1-1/4" OD, Length 1-1/8".

Order No.	Mfg. No. / Description	Price
269084	(55989)	$6.98 I

Marpac Bravo II and III Kit - Up to 2003



Order No.	Mfg. No. / Description	Price
620168	(CMBRAVO23KIT)	$42.98 H

Duo Prop Zinc for Volvo Sterndrive



Order No.	Mfg. No. / Description	Price
269292	(875821) Duo Prop Zinc for Volvo	$24.98 I

Mercury Plate



- Base OD 3-1/2".

Order No.	Mfg. No. / Description	Price
269026	(76214)	$11.98 I

MerCruiser Outdrive Anodes - Bravo



Order No.	Mfg. No. / Description	Price
268990	(806188)	$11.98 R
269001	(806190)	$5.98 R
269003	(817373)	$14.98 R

Mercury Waffle Plate - 75-115 HP



- Dimensions: 7-5/8" x 2".

Order No.	Mfg. No. / Description	Price
269028	(43396)	$16.98 I

Marpac Bravo I Kit



Order No.	Mfg. No. / Description	Price
620162	(CMBRAVO1KITA) Bravo I Kit	$49.98 H

Marpac Bravo III and Design II Kit - 2004 and Up



Order No.	Mfg. No. / Description	Price
620170	(CMBRAVO3KITA)	$57.98 H

©2014 Donovan Marine, Inc.

Marpac Aluminum Trim Tab Anode



- OEM #31640T-4.

Order No.	Mfg. No. / Description	Price
620178	(CM31640KITA)	$11.98 H

OMC Sterndrive/Cobra Sterndrive



- Zinc.
- Replaces: OMC 393023, OMC 436745.

Order No.	Mfg. No. / Description	Price
186024	(18-6024)	$13.35 H

MerCruiser



- Magnesium.
- Replaces: Mercury/Mariner 806190.

Order No.	Mfg. No. / Description	Price
186089	(18-6089)	$37.03 H

MerCruiser Sterndrive


186099


186079


186114


186240

- Magnesium.

Order No.	Mfg. No. / Description	Price
186079	(18-6079) Replaces: Mer/Mar 806105A1, 806105	$29.20 H
186099	(18-6099) Replaces: Mer/Mar 821629	$34.50 H
186114	(18-6114) Replaces: Mer/Mar 806189	$17.23 H
186240	(18-6240) Replaces: Mer/Mar 821630	$30.53 H

Mercury/Mariner



- Replaces: Honda 41107-ZW1-003ZA, Mercury Marine 31640T6, 31640Q4, 31640.

Order No.	Mfg. No. / Description	Price
186241	(18-6241)	$16.62 H

Mercury/Mariner



- Replaces: Mercury Marine 76214Q5, 76214.

Order No.	Mfg. No. / Description	Price
186244	(18-6244)	$19.95 H

Martyr Mercury Alpha I Anode Kit

Martyr



- Fits Alpha I Generation II Engine 1983 -1990.

Order No.	Mfg. No. / Description	Price
620163	(CMALPHAKITA)	$59.98 G

Martyr Verado Anode Kits

Martyr



Order No.	Mfg. No. / Description	Price
620165	(CMVERADO4KIT) Fits Verado 4 Engine	$48.98 H
620167	(CMVERADO6KIT) Fits Verado 6 Engine	$62.98 H

Martyr Mercury Bravo III Anode Kit

Martyr



- Trim Tab Anode, Fits Bravo III Drive 2004-Present.

Order No.	Mfg. No. / Description	Price
620169	(CM762144KITA)	$15.98 H

Martyr Volvo Anode Kits

Martyr



Order No.	Mfg. No. / Description	Price
620171	(CM280DPKITA) Fits Volvo 280 Duo Prop Engine	$38.98 H
620173	(CMSXKITA) Fits Volvo SX Engine	$60.98 H
620175	(CM290KITA) Fits Volvo 290 Engine	$38.98 H
620177	(CM290DPKITA) Fits Volvo 290 Duo Prop Engine	$39.98 H

Martyr Yamaha Anode Kits

Martyr




- For use in salt and brackish water.
- Not recommended for use in fresh water.
- Proven to last longer than zinc due to increased capacity.
- Alloy is manufactured to meet or exceed US Military Specification (MIL-A-24779 (SH)).

Order No.	Mfg. No. / Description	Price
620179	(CMY150CRKITA) Fits Yamaha 150-200 HP Outboards (Counter Rotation)	$33.98 Q
620181	(CMY150KITA) Fits Yamaha 150-200 HP Outboards	$33.98 F
620183	(CMY200250KIT) Fits Yamaha 200-250 HP Outboards	$34.98 F
620185	(CMYHP200300K) Fits Yamaha High Performance 200-300 HP Outboards	$34.98 F


Clymer Motor Repair Manuals

CLYMER



- Step-by-step instructions for every job.
- Every conceivable part, assembly and system is covered in detail and illustrated by hundreds of photos, drawings and tables prepared specifically for each title.
- Also features a 32-page full color section covering lubricants, corrosion prevention, propeller design, tools, test equipment, shop safety and mechanic's tips.
- All manuals are 8-1/2" x 11" in size.

Order No.	Mfg. No.	Description		Price
Chrysler				
180075	(B750)	3.5-140 HP Outboards	1966-1984	$34.98 H
Evinrude/Johnson				
180067	(B734)	1.5-125 HP Outboards	1956-1972	$34.98 H
180068	(B732)	2-40 HP Outboards	1973-1990 (Includes Electrics)	$34.98 H
180070	(B736)	48-235 HP Outboards	1973-1990 (Includes Sea Drives)	$34.98 H
180088	(B733)	2-300 HP Outboards	1991-1994 (Includes Jet Drives & Sea Drives)	$34.98 H
180083	(B7352)	2-70 HP Outboards	1995-2003 (Includes Jet Drives)	$34.98 H
180082	(B7372)	88-300 HP Outboards	1995-2002 (85-300 HP Outboards)	$34.98 H
Force				
180076	(B751-4)	4-150 HP Outboards	1984-1999 (Includes L-Drives)	$34.98 H
Honda				
180097	(B7572)	2-130 HP Outboards	1976-1999 (4 Stroke - Includes Jet Drives)	$34.98 H
Mariner				
180077	(B714)	2-220 HP Outboards	1976-1989 (Includes Electrics)	$34.98 H
MerCruiser				
180062	(B740)	Stern Drives	1964-85 (Includes 1986-1987 TR and TRS Models)	$34.98 H
180093	(B742)	Alpha One, Bravo One, Bravo Two & Bravo Three Stern Drives, 1986-1994		$34.98 H
180095	(B744)	Alpha One, Bravo One, Bravo Two & Bravo Three Stern Drives, 1995-1997		$34.98 H
603009	(B745-2)	MerCruiser Stern Drives	1998-2004	$34.98 H
Mercury				
180091	(B710)	4-90 HP Outboards	1995-2000 (4 Stroke)	$34.98 H
180065	(B721)	3.5-40 HP Outboards	1972-1989 (Includes Electrics)	$34.98 H
180086	(B723)	2.5-60 HP Outboards	1994-1997 (Includes Jet Drives)	$34.98 H
180087	(B724)	75-275 HP Outboards	1994-1997 (2 Stroke - Includes Jet Drives)	$34.98 H
180066	(B726)	45-225 HP Outboards	1972-1989	$34.98 H
180085	(B722)	3-275 HP Outboards	1990-1993	$34.98 H
180055	(B727)	75-250 HP Outboards	1998-2002	$34.98 H
603081	(B712)	75-225 HP Outboards	2001-2003 (4 Stroke)	$34.98 H
OMC				
180061	(B730)	Stern Drives	1964-1986	$34.98 H
180072	(B738)	Cobra Stern Drives	1986-93 (Includes 1988 & 1989 King Cobra Models)	$34.98 H
Suzuki				
180050	(B780)	2-140 HP Outboards	1977-1984	$34.98 H
180051	(B781)	2-225 HP Outboards	1985-1991 (Includes Jet Drives)	$34.98 H
180052	(B778)	2-65 HP Outboards	1992-1999 (2 Stroke - Includes Jet Drives)	$34.98 H
180053	(B779)	75-225 HP Outboards	1992-1999 (2 Stroke - Includes Jet Drives)	$34.98 H
180060	(B782)	9.9-70 HP Outboards	1997-2000 (4 Stroke)	$34.98 H
Volvo				
180084	(B770)	Stern Drives	1968-1993	$34.98 H
180089	(B771-2)	Penta Stern Drives	1994-2000	$34.98 H
603012	(B775)	Penta Stern Drives	2001-2004	$34.98 H
Yamaha				
180071	(B783)	2-225 HP Outboards	1984-1989 (2 Stroke)	$34.98 H
180073	(B784)	2-250 HP Outboards	1990-1995 (2 Stroke)	$34.98 H
180074	(B785)	2-250 HP Outboards	1996-1998 (2 Stroke - Includes Jet Drives)	$34.98 H
180092	(B786)	2-90 HP Outboards	1999-2002 (2 Stroke)	$34.98 H
180080	(B787)	Stern Drives	1989-1991	$34.98 H
180079	(B788)	9.9-100 HP Outboards	1985-1999 (4 Stroke)	$34.98 H
180094	(B789)	115-250 HP Outboards	1999-2002 (2 Stroke)	$34.98 H
603077	(B791)	75-225 HP Outboards	2000-2004 (4 Stroke)	$34.98 H



Clymer Displays

CLYMER



603040



603044

- Clymer also offers display racks for in-store promotion.
- Perfect for counters and pegboards.
- 603040 and 603042 holds 20 manuals, 603044 holds 6 manuals.

Order No.	Mfg. No. / Description	Price
603040	(CM-EASEL) Easel	$34.98 H
603042	(CM-20) Spinner	$34.98 H
603044	(CM-6) Rack	$34.98 H

©2014 Donovan Marine, Inc.

SOLAS®
Where Speed Begins



Lexor
Stainless Steel Propellers

- All around performance.
- Large diameter and blade area for big boat loads.
- Great high speed performance without sacrificing mid-range speeds.



HR Titan 3
Stainless Steel Propellers

- Performance stainless steel propeller for high speed planning hulls.
- Heavy cup design increases bite and reduces slip.



HR Titan 4
Stainless Steel Propellers

- Performance stainless steel propeller for high speed planning hulls.
- Heavy cup design increases bite and reduces slip.



Saturn
Stainless Steel Propellers

- General purpose stainless steel propeller.



New Saturn
Stainless Steel Propellers

- All around performance stainless steel propeller with good acceleration.
- Large ear design is ideal for pontoons, commercial hulls and heavy loads.





Amita 3
Aluminum Propellers

- Outstanding acceleration and top speed.



Amita 4
Aluminum Propellers

- 4 Blade Aluminum.
- Increased static thrust for heavy loads and manueverability.
- Great stern lift and mid-range performance.



Amita 3-C Plus & 3-E Plus
Aluminum Propellers

Better thrust. Suitable for heavy boats. Traditional rubber hub. Larger blade design.

Michigan Wheel Marine



Michigan Match propellers are high quality, performance propellers that typically cost less than the OEM propeller you're replacing. Each Michigan Match propeller features a NAVAL brass spindle with a rubber cushioned hub, designed to absorb impact and the stress caused by shifting gears. The rubber bushing is designed to spin free under significant impact, reducing the potential for lower unit damage. Michigan Match propellers are great primary propellers, priced as a weekend-saving spare!



Stainless Steel



Aluminum

Michigan Wheel's Xchangeable Hub System absorbs impact and stress caused by shifting gears and is designed to spin under significant impact to protect your lower end unit. XHS™ is also designed to be interchangeable with Mercury's Flo-Torq™ II hub system, potentially saving you money when replacing or upgrading your propeller. Note: Must order propeller and hub kit seperately!

OMC SYSTEMATCHED™



SX3

Stainless Steel Propellers

- General Purpose and Durability.
- Fast planing 3 blade versatile prop.
- Cupped blades provide superior performance.
- Ideal upgrade from aluminum.
- Note: If a customer has an aluminum propeller, a "direct pitch" replacement (same and diameter) is recommended when upgrading.



VX3

Stainless Steel Propellers

- Runabouts and General Recreation.
- Excellent on any recreational boat, from runabouts and cruisers to deck boats.
- Versatile 3 blade performance.
- Custom high luster finish.
- Balance of speed and durability.



CX4

Stainless Steel Propellers

- 4 Blade Offshore Cruising and Runabouts.
- Designed for heavier and twin-engine boats as well as runabouts.
- Stays on plane with minimum RPM.
- Tracks true in all water conditions.
- Less vibrations and improved fuel economy.



Aluminum Series

Aluminum Propellers

- Precision casting provides greater strength and longer life.
- Baked-on corrosion resistant paint gives added protection.
- Engineered to match the power curve of your outboard for superior performance.

Stiletto STAINLESS



Advantage I & Advantage II

Stainless Steel Propellers

- One-piece investment cast stainless steel for exceptional strength and safety.
- Progressive design.
- Cupped blades help reduce the chance of cavitation, increasing efficiency and performance.
- Designed to help achieve peak performance at all throttle levels.
- Advantage II: Designed for 135 and Higher H.P.
- Advantage I: Designed for 70-140 H.P.



Triad I & Triad II

Stainless Steel Propellers

- Stainless steel three blade propeller.
- Peak performance at all throttle levels.
- Triad II: Designed for 35-70 H.P.
- Triad I: Designed for 25-35 H.P.

©2014 Donovan Marine, Inc.

Basic Propeller Information

Propeller Basics:

This information is critical to determining the correct propeller for your application:

1. 3 or 4 Blades?
A 3-blade propeller usually offers top speed performance while a 4-blade propeller provides a maximum thrust and smooth cruising operation.




2. Diameter:
Diameter is the distance across a circle encompassing all of the propeller blades. (See Original Equipment Considerations item 2 below).



3. Pitch:
Pitch is the theoretical distance a propeller will move through the water for each revolution (i.e. a 21" pitch propeller shold move a boat forward 21" for each revolution, assuming there is no slippage).



4. Right Hand or Left Hand Rotation?
In most cases, right hand propellers are used for single engine applications and one left hand propeller is used for twin engine applications to achieve better steering control.

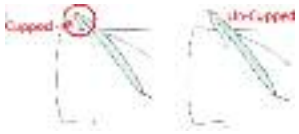

5. Cupped Blades:
This is a technique used to enhance the performance of propellers under certain conditions. A cupped propeller will exhibit very high efficiency at high speeds as well as minimize cavitation under heavy loads.



6. Rake:
Rake is a special design feature. Positive rake benefits from normal bow lift to permit the use of a larger diameter propeller, while negative rake can provide extra blade strength for use in very high speed applications.

Original Equipment Considerations:

1. Determine the year, brand, model and horsepower of your motor.
2. Calculate the diameter of the OEM propeller by measuring from the center of the shaft hole to the tip of a blade x 2 (Example: a measurement of 7-1/4" - a diameter of 14-1/2").
3. Is the type of material aluminum or stainless steel?

Performance Considerations:

1. Type of boat (cruiser, ski, runabout, bass, pontoon)?
2. Prop on boat now (brand, model, diameter, pitch, cupping)?
3. Engine RPM at wide open throttle (WOT)?
4. Speed of boat over water at WOT?
5. Normal operating altitude (motors lose 3% of power per 1000 ft.)?

SOLAS Propeller Accessories Installation Instructions

Mercury Installation

It is very important to refer to your Engine's Owner Manual for important safety precautions when installing the propeller. Use the original propeller hardware thrust washer, spacer, locking tab, nut, and cotter pin depending on engine/drive manufacturer. This is a Mercury installation instruction.



1. Put the **Thrust Washer** on propeller shaft, just as it came off. The taper on the **Thrust Washer** should mate properly with the taper on the propeller shaft.
2. **Grease the propeller shaft.**
3. Slide the propeller assembly onto the propeller shaft.
4. Install **Spacer** if required. Consult your engine/drive manual.
5. Install the **Tab Washer** if required. Consult your engine/drive manual.
6. Make sure the shaft splines are engaged with spines in space.
7. Install the **Shaft Nut**. Consult your engine/drive manual for proper torque.
8. Secure nut by bending tabs on the **Tab Washer** to engage slots in **Spacer**.

Warning: Always shift engine into the neutral position. Remove spark plug leads and ignition coil lead when you are servicing the propeller.

BRP / Yamaha / Suzuki / Tohatsu / Honda / Volvo / Yanmar Installation

It is very important to refer to your Engine's Owner Manual for important safety precautions when installing the propeller. Use the original propeller hardware thrust washer, spacer, locking tab, nut, and cotter pin depending on engine/drive manufacturer. This is a BRP/Yamaha/Suzuki/Tohatsu/Honda/ Volvo/Yanmar installation instruction.



1. Put the **Thrust Washer** on propeller shaft, just as it came off. The taper on the **Thrust Washer** should mate properly with the taper on the propeller shaft.
2. Grease the propeller shaft.
3. Slide the propeller assembly onto the propeller shaft.
4. Install **Spacer** if required. Consult your engine/drive manual.
5. Install the **Washer** if required. Consult your engine/drive manual.
6. Install the **Shaft Nut**. Consult your engine/drive manual for proper torque.
8. Install the **Cotter Pin** if required. Consult your engine/drive manual.

Warning: Always shift engine into the neutral position. Remove spark plug leads and ignition coil lead when you are servicing the propeller.

SOLAS Where Speed Begins

Information Courtesy of Solas.

BRP, Johnson, Evinrude, OMC Stern Drive - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
9.9-15 HP	13 Tooth	9-1/4" x 8"		Solas	Saturn	867309	2121-093-08	$153.98 G
9.9-15 HP	13 Tooth	9-1/4" x 9"		Solas	Saturn	867310	2121-093-09	$153.98 G
9.9-15 HP	13 Tooth	9-1/4" x 10"		Solas	Saturn	867315	2121-093-10	$153.98 G
9.9-15 HP	13 Tooth	9-1/4" x 11"		Solas	Saturn	867316	2121-093-11	$153.98 G
20-35 HP	14 Tooth	10-3/4" x 10"		Solas	New Saturn	867323	2231-108-10	$204.98 G
20-35 HP	14 Tooth	10-1/2" x 11"		Solas	New Saturn	867329	2231-105-11	$204.98 G
20-35 HP	14 Tooth	10-1/4" x 12"		Solas	New Saturn	867338	2231-103-12	$204.98 G
20-35 HP	14 Tooth	10-1/8" x 13"		Solas	New Saturn	867339	2231-101-13	$204.98 G
20-35 HP	14 Tooth	10" x 14"		Solas	New Saturn	867347	2231-100-14	$204.98 G
20-35 HP	14 Tooth	10" x 15"		Solas	New Saturn	867349	2231-100-15	$204.98 G
40-75 HP (Small Gearcase)	13 Tooth	12-1/2" x 13"		Solas	New Saturn	867359	2331-125-13	$274.98 G
40-75 HP (Small Gearcase)	13 Tooth	12-1/4" x 15"		Solas	New Saturn	867366	2331-123-15	$274.98 G
40-75 HP (Small Gearcase)	13 Tooth	11-3/4" x 15"		Stiletto	Triad II	860154	22315	$275.98 D
40-75 HP (Small Gearcase)	13 Tooth	11-3/4" x 17"		Stiletto	Triad II	860178	22317	$275.98 D
40-75 HP (Small Gearcase)	13 Tooth	12" x 17"		Solas	New Saturn	867373	2331-120-17	$274.98 G
40-75 HP (Small Gearcase)	13 Tooth	11-3/4" x 19"		Stiletto	Triad II	860191	22319	$275.98 D
40-140 HP (Large Gearcase)	13 Tooth	13-3/4" x 13"		OMC SysteMatched	SX3	B765804	765804	$485.99 I
45-140 HP (Large Gearcase)	13 Tooth	13 3/4" x 13"		Solas	New Saturn	867407	2431-138-13	$356.98 G
85-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 15"		Stiletto	Advantage I	860292	21315	$338.98 D
40-140 HP (Large Gearcase)	13 Tooth	13-1/2" x 15"		OMC SysteMatched	SX3	B765805	765805	$485.99 I
45-140 HP (Large Gearcase)	13 Tooth	13-1/2" x 15"		Solas	New Saturn	867409	2431-135-15	$356.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-3/4" x 15"		Solas	Titan	867438	2441-138-15	$359.98 G
40-140 HP (Large Gearcase)	13 Tooth	13-7/8" x 15"		OMC SysteMatched	VX3	B765795	765795	$489.99 I
40-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 17"		OMC SysteMatched	SX3	B765806	765806	$485.99 I
45-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 17"		Solas	New Saturn	867412	2431-133-17	$356.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 17"		Solas		867440	2441-133-17	$359.98 G
85-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 17"		Stiletto	Advantage I	860305	21317	$338.98 D
40-140 HP (Large Gearcase)	13 Tooth	13-7/8" x 17"		OMC SysteMatched	VX3	B765796	765796	$489.99 I
40-140 HP (Large Gearcase)	13 Tooth	13" x 19"		OMC SysteMatched	SX3	B765807	765807	$485.99 I
45-140 HP (Large Gearcase)	13 Tooth	13" x 19"		Solas	New Saturn	867424	2431-130-19	$356.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 19"		Stiletto	Advantage I	860317	21319	$338.98 D
40-140 HP (Large Gearcase)	13 Tooth	13-7/8" x 19"		OMC SysteMatched	VX3	B765797	765797	$489.99 I
45-140 HP (Large Gearcase)	13 Tooth	13" x 21"		Solas	New Saturn	867436	2431-130-21	$356.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 21"		Stiletto	Advantage I	860329	21321	$338.98 D
40-140 HP (Large Gearcase)	13 Tooth	13-7/8" x 21"		OMC SysteMatched	VX3	B765798	765798	$409.99 I
40-140 HP (Large Gearcase)	13 Tooth	13-1/2" x 13"	4 Blade	OMC SysteMatched	CX4	B765799	765799	$547.99 I
45-140 HP (Large Gearcase)	13 Tooth	13-1/2" x 13"	4 Blade	Solas	HR Titan 4	868188	2453-135-13	$349.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 15"	4 Blade	Solas	HR Titan 4	868190	2453-133-15	$349.98 G
40-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 15"	4 Blade	OMC SysteMatched	CX4	B765800	765800	$547.99 I
40-140 HP (Large Gearcase)	13 Tooth	13" x 17"	4 Blade	OMC SysteMatched	CX4	B765801	765801	$547.99 I
45-140 HP (Large Gearcase)	13 Tooth	13" x 17"	4 Blade	Solas	HR Titan 4	868214	2453-130-17	$349.98 G
40-140 HP (Large Gearcase)	13 Tooth	13" x 19"	4 Blade	OMC SysteMatched	CX4	B765802	765802	$547.99 I
45-140 HP (Large Gearcase)	13 Tooth	13" x 19"	4 Blade	Solas	HR Titan 4	868227	2453-130-19	$349.98 G
40-140 HP (Large Gearcase)	13 Tooth	13" x 21"	4 Blade	OMC SysteMatched	CX4	B765803	765803	$547.99 I
45-140 HP (Large Gearcase)	13 Tooth	13" x 21"	4 Blade	Solas	HR Titan 4	868236	2453-130-21	$349.98 G
DF 90-140 (4 Stroke)	15 Tooth	13-7/8" x 15"		Solas	HR Titan 3	873868	3451-139-15	$366.98 G
DF 90-140 (4 Stroke)	15 Tooth	13-7/8" x 17"		Solas	HR Titan 3	873869	3451-139-17	$366.98 G
DF 90-140 (4 Stroke)	15 Tooth	13-7/8" x 19"		Solas	HR Titan 3	873871	3451-139-19	$366.98 G
DF 90-140 (4 Stroke)	15 Tooth	13-7/8" x 21"		Solas	HR Titan 3	873883	3451-139-21	$366.98 G
90-300 HP	15 Tooth	14-1/4" x 15"		Stiletto	Advantage II	860379	20315	$349.98 D
90-300 HP	15 Tooth	14-1/2" x 15"		Solas	New Saturn	867448	2531-145-15	$367.98 G
90-300 HP	15 Tooth	15-1/2" x 15"		Solas	Titan	867502	2541-155-15	$367.98 G
90-300 HP	15 Tooth	14-1/4 x 17"		Solas	New Saturn	867450	2531-143-17	$367.98 G
90-300 HP	15 Tooth	14-1/4" x 17"		Stiletto	Advantage II	860381	20317	$349.98 D
90-300 HP	15 Tooth	14-3/4" x 17"		Solas	HR Titan 3	867504	2551-148-17	$367.98 G
90-300 HP	15 Tooth	15-1/3" x 17"		Solas	Titan	867506	2541-153-17	$367.98 G
90-300 HP	15 Tooth	15 1/4" x 19"		Solas	Lexor	869430	2571-153-19	$454.98 G
90-300 HP	15 Tooth	14" x 19"		Solas	New Saturn	867474	2531-140-19	$378.98 G
90-300 HP	15 Tooth	14-1/4" x 19"		Stiletto	Advantage II	860393	20319	$349.98 D
90-300 HP	15 Tooth	14-3/4" x 19"		Solas	HR Titan 3	867508	2551-148-19	$367.98 G
90-300 HP	15 Tooth	14" x 21"		Solas	New Saturn	867498	2531-140-21	$378.98 G
90-300 HP	15 Tooth	14-1/4" x 21"		Stiletto	Advantage II	860406	20321	$349.98 D
90-300 HP	15 Tooth	14-1/4" x 21"	Left Ro.	Stiletto	Advantage II	860482	20221	$349.98 D
90-300 HP	15 Tooth	14-1/4" x 23"		Stiletto	Advantage II	860418	20323	$349.98 D
90-300 HP	15 Tooth	14 1/2" x 15"	4 Blade	Solas	HR Titan 4	868540	2553-145-15	$374.98 G
90-300 HP	15 Tooth	14-1/4" x 17"	4 Blade	Solas	HR Titan 4	868541	2553-143-17	$374.98 G
90-300 HP	15 Tooth	14-1/8" x 19"	4 Blade	Solas	HR Titan 4	868553	2553-141-19	$374.98 G
90-300 HP	15 Tooth	14" x 21"	4 Blade	Solas	HR Titan 4	868565	2553-140-21	$374.98 G

©2014 Donovan Marine, Inc.

BRP, Johnson, Evinrude, OMC Stern Drive - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
5-8 HP (Pin Drive)		8" x 7"		Solas	Amita 3	866377	2011-080-07	$69.98 G
5-8 HP (Pin Drive)		8-1/2" x 8"		Solas	Amita 3	866378	2011-085-08P	$69.98 G
5-8 HP (Pin Drive)		8-1/2" x 9"		Solas	Amita 3	866379	2011-085-09P	$69.98 G
5-8 HP (Pin Drive)		8-1/2" x 9"	Non Thru Hub	Michigan Wheel	Michigan Match	346684	12032	$96.98 E
6, 9, 10, 14, 15 HP (Pin Drive)		8-1/2" x 8"	Non Thru Hub	Michigan Wheel	Michigan Match	346925	12007	$102.98 E
6, 9, 10, 14, 15 HP (Pin Drive)		8-1/2" x 8.5"	Non Thru Hub	Michigan Wheel	Michigan Match	346913	12008	$102.98 E
8-25 HP (Pin Drive)		9" x 10"		Solas	Amita 3	866409	2111-090-10P	$89.98 G
8-25 HP (Pin Drive)		9-1/4" x 11"		Solas	Amita 3	866412	2111-093-11P	$89.98 G
9.9-15 HP	13 Tooth	9-1/4" x 7"		OMC SysteMatched		B765752	765752	$100.99 I
9.9-15 HP	13 Tooth	9-1/4" x 7"		Solas	Amita 3	866382	2111-093-07	$72.98 G
9.9-15 HP	13 Tooth	9-1/4" x 8"		OMC SysteMatched		B765753	765753	$101.99 I
9.9-15 HP	13 Tooth	9-1/4" x 8"		Solas	Amita 3	866383	2111-093-08	$72.98 G
9.9-15 HP	13 Tooth	9-1/4" x 9"		OMC SysteMatched		B765754	765754	$100.99 I
9.9-15 HP	13 Tooth	9-1/4" x 9"		Solas	Amita 3	866384	2111-093-09	$72.98 G
9.9-15 HP	13 Tooth	9-1/4" x 10"		OMC SysteMatched		B765755	765755	$99.99 I
9.9-15 HP	13 Tooth	9-1/4" x 10"		Solas	Amita 3	866408	2111-093-10	$73.98 G
9.9-15 HP	13 Tooth	9.3" x 10"		Michigan Wheel	Michigan Match	346951	12111	$107.98 E
9.9-15 HP	13 Tooth	9-1/4" x 11"		OMC SysteMatched		B765756	765756	$99.99 I
9.9-15 HP	13 Tooth	10" x 5"	4 Blade	Solas	Amita 4	866371	2113-100-05	$103.98 G
9.9-15 HP	13 Tooth	9-1/4" x 7"	4 Blade	Solas	Amita 4	866380	2113-093-07	$80.98 G
9.9-15 HP	13 Tooth	10" x 7"	4 Blade	Solas	Amita 4	866376	2113-100-07	$103.98 G
9.9-15 HP	13 Tooth	9-1/4" x 8"	4 Blade	Solas	Amita 4	866375	2113-093-08	$80.98 G
9.9-15 HP	13 Tooth	9-1/4" x 9"	4 Blade	Solas	Amita 4	866372	2113-093-09	$80.98 G
9.9-15 HP	13 Tooth	9-1/4" x 10"	4 Blade	Solas	Amita 4	866373	2113-093-10	$80.98 G
9.9-15 HP	13 Tooth	9-1/4" x 11"	4 Blade	Solas	Amita 4	866374	2113-093-11	$80.98 G
10-28 HP	13 Tooth	9-1/4" x 11"		Solas	Amita 3	866411	2111-093-11	$76.98 G
10-25 HP		9" x 10"	Non Thru Hub	Michigan Wheel	Michigan Match	347092	12015	$107.98 E
10-25 HP		9.3" x 11"	Non Thru Hub	Michigan Wheel	Michigan Match	347105	12016	$105.98 E
10-25 HP		9.3" x 12"	Non Thru Hub	Michigan Wheel	Michigan Match	347117	12030	$105.98 E
10-25 HP		9.2" x 11"	Non Thru Hub	Michigan Wheel	Michigan Match	347042	12013	$107.98 E
10-25 HP		9" x 9"	Non Thru Hub	Michigan Wheel	Michigan Match	347028	12109	$107.98 E
10-25 HP		9" x 10"	Non Thru Hub	Michigan Wheel	Michigan Match	347030	12011	$107.98 E
20-35 HP	14 Tooth	11" x 9"		OMC SysteMatched		B765757	765757	$117.99 I
20-35 HP	14 Tooth	11" x 9"		Solas	Amita 3	866395	2211-110-09	$85.98 G
20-35 HP	14 Tooth	10-1/2" x 11"		Solas	Amita 3	866422	2211-105-11	$85.98 G
20-35 HP	14 Tooth	10-1/2" x 11"		OMC SysteMatched		B765758	765758	$117.99 I
20-35 HP	14 Tooth	10-1/2" x 11"		Michigan Wheel	Michigan Match	347220	12055	$114.98 E
20-35 HP	14 Tooth	10-1/4" x 12"		Solas	Amita 3	866446	2211-103-12	$85.98 G
20-35 HP	14 Tooth	10-1/2" x 12"		OMC SysteMatched		B765759	765759	$117.99 I
20-35 HP	14 Tooth	10" x 13"		OMC SysteMatched		B765760	765760	$117.99 I
20-35 HP	14 Tooth	10.1" x 13"		Michigan Wheel	Michigan Match	347232	12056	$114.98 E
20-35 HP	14 Tooth	10-1/8" x 13"		Solas	Amita 3	866460	2211-101-13	$85.98 G
20-35 HP	14 Tooth	10" x 14"		Solas	Amita 3	866484	2211-100-14	$85.98 G
20-35 HP	14 Tooth	10" x 15"		OMC SysteMatched		B765761	765761	$117.99 I
20-35 HP	14 Tooth	10" x 15"		Solas	Amita 3	866496	2211-100-15	$85.98 G
20-35 HP	14 Tooth	10" x 15"		Michigan Wheel	Michigan Match	347244	12057	$114.98 E
20-35 HP	14 Tooth	10.2" x 11"	4 Blade	OMC SysteMatched		B765762	765762	$128.99 I
20-35 HP	14 Tooth	10-1/5" x 11"	4 Blade	Solas	Amita 4	866498	2213-102-11	$100.98 G
20-35 HP	14 Tooth	10.1" x 12"	4 Blade	OMC SysteMatched		B765763	765763	$128.99 I
20-35 HP	14 Tooth	10.1" x 12"	4 Blade	Solas	Amita 4	866499	2213-101-12	$100.98 G
20-35 HP	14 Tooth	10" x 13"	4 Blade	OMC SysteMatched		B765764	765764	$128.99 I
20-35 HP	14 Tooth	10" x 13"	4 Blade	Solas	Amita 4	866500	2213-100-13	$100.98 G
20-35 HP	14 Tooth	10" x 14"	4 Blade	OMC SysteMatched		B765765	765765	$128.99 I
20-35 HP	14 Tooth	10" x 14"	4 Blade	Solas	Amita 4	866501	2213-100-14	$100.98 G
20-35 HP	14 Tooth	10" x 15"	4 Blade	OMC SysteMatched		B765766	765766	$128.99 I
20-35 HP	14 Tooth	10" x 15"	4 Blade	Solas	Amita 4	866502	2213-100-15	$100.98 G
40-75 HP (Small Gearcase)	13 Tooth	13" x 11"		OMC SysteMatched		B765767	765767	$142.99 I
40-75 HP (Small Gearcase)	13 Tooth	13" x 11"		Michigan Wheel	Michigan Match	347282	12036	$130.98 E
40-75 HP (Small Gearcase)	13 Tooth	13" x 11"		Solas	Amita 3	866505	2311-130-11	$114.98 G
40-75 HP (Small Gearcase)	14 Tooth	12-1/2" x 13"		OMC SysteMatched		B765768	765768	$141.99 I
40-75 HP (Small Gearcase)	13 Tooth	12-1/2" x 13"		Solas	Amita 3	866509	2311-125-13	$114.98 G
40-75 HP (Small Gearcase)	13 Tooth	12-1/2" x 13"		Michigan Wheel	Michigan Match	347294	12037	$130.98 E
40-75 HP (Small Gearcase)	13 Tooth	12-1/4" x 15"		OMC SysteMatched		B765769	765769	$141.99 I
40-75 HP (Small Gearcase)	13 Tooth	12-1/4" x 15"		Solas	Amita 3	866523	2311-123-15	$114.98 G
40-75 HP (Small Gearcase)	13 Tooth	12-1/4" x 15"		Michigan Wheel	Michigan Match	347333	11027	$130.98 E
40-75 HP (Small Gearcase)	13 Tooth	12" x 17"		OMC SysteMatched		B765770	765770	$141.99 I
40-75 HP (Small Gearcase)	13 Tooth	12" x 17"		Solas	Amita 3	866547	2311-120-17	$114.98 G
40-75 HP (Small Gearcase)	13 Tooth	11-3/4" x 17"		Michigan Wheel	Michigan Match	347346	11028	$130.98 E

BRP, Johnson, Evinrude, OMC Stern Drive - Aluminum (Cont.)

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
40/50 HP (4-Stroke)		12" x 10"		OMC SysteMatched		B765771	765771	$153.99 I
40/50 HP (4-Stroke)		11.8" x 11"		OMC SysteMatched		B765772	765772	$153.99 I
40/50 HP (4-Stroke)		11.6" x 12"		OMC SysteMatched		B765773	765773	$153.99 I
40/50 HP (4-Stroke)		11.6" x 13"		OMC SysteMatched		B765774	765774	$153.99 I
40/50 HP (4-Stroke)		11.6" x 14"		OMC SysteMatched		B765775	765775	$153.99 I
DF 90, 115, 140 (4 Stroke)	15 Tooth	13-3/4" x 15"	4 Blade	Solas	Amita 4	873340	3413-138-15	$149.98 G
DF 90, 115, 140 (4 Stroke)	15 Tooth	13-3/4" x 17"	4 Blade	Solas	Amita 4	873352	3413-138-17	$149.98 G
DF 90, 115, 140 (4 Stroke)	15 Tooth	13-3/4" x 19"	4 Blade	Solas	Amita 4	873364	3413-138-19	$149.98 G
DF 90, 115, 140 (4 Stroke)	15 Tooth	13-3/4" x 21"	4 Blade	Solas	Amita 4	873376	3413-138-21	$149.98 G
DF 70A, 80A, 90A (4 Stroke)	15 Tooth	13.875" x 17"		Solas	Amita 3	866833	3411-139-17	$136.98 G
DF 70A, 80A, 90A (4 Stroke)	15 Tooth	13.875" x 19"		Solas	Amita 3	866835	3411-139-19	$136.98 G
DF 70A, 80A, 90A (4 Stroke)	15 Tooth	13.875" x 21"		Solas	Amita 3	866837	3411-139-21	$136.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-3/4" x 13"		Solas	Amita 3	866561	2411-138-13	$124.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-1/2" x 15"		Solas	Amita 3	866573	2411-135-15	$124.98 G
45-140 HP (Large Gearcase)	13 Tooth	14" x 9"		Solas	Amita 3	866550	2411-140-09	$124.98 G
45-140 HP (Large Gearcase)	13 Tooth	14" x 11"		Solas	Amita 3	866551	2411-140-11	$124.98 G
40-140 HP (Large Gearcase)	13 Tooth	14" x 11"		Michigan Wheel	Michigan Match	347368	12047	$157.98 E
40-140 HP (Large Gearcase)	13 Tooth	13-3/4" x 13"		Michigan Wheel	Michigan Match	347372	11101	$150.98 E
40-140 HP (Large Gearcase)	13 Tooth	13-1/2" x 15"		Michigan Wheel	Michigan Match	347383	11102	$153.98 E
45-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 17"		Solas	Amita 3	866597	2411-133-17	$124.98 G
40-140 HP (Large Gearcase)	13 Tooth	13-1/4" x 17"		Michigan Wheel	Michigan Match	347395	11003	$152.98 E
45-140 HP (Large Gearcase)	13 Tooth	13" x 19"		Solas	Amita 3	866612	2411-130-19	$124.98 G
40-140 HP (Large Gearcase)	13 Tooth	13" x 19"		Michigan Wheel	Michigan Match	347408	11004	$152.98 E
45-140 HP (Large Gearcase)	13 Tooth	13.2" x 19"		Solas	Amita 3	866613	2411-132-19	$124.98 G
45-140 HP (Large Gearcase)	13 Tooth	13" x 21"		Solas	Amita 3	866623	2411-130-21	$124.98 G
40-140 HP (Large Gearcase)	13 Tooth	13" x 21"		Michigan Wheel	Michigan Match	347410	11005	$152.98 E
45-140 HP (Large Gearcase)	13 Tooth	13.2" x 21"		Solas	Amita 3	866624	2411-132-21	$124.98 G
45-140 HP (Large Gearcase)	13 Tooth	13-3/4" x 13"	4 Blade	Solas	Amita 4	866626	2413-133-13	$136.98 G
45-140 HP (Large Gearcase)	13 Tooth	13" x 15"	4 Blade	Solas	Amita 4	866627	2413-130-15	$136.98 G
45-140 HP (Large Gearcase)	13 Tooth	12-3/4" x 17"	4 Blade	Solas	Amita 4	866628	2413-128-17	$136.98 G
45-140 HP (Large Gearcase)	13 Tooth	12-1/2" x 19"	4 Blade	Solas	Amita 4	866629	2413-125-19	$136.98 G
45-140 HP (Large Gearcase)	13 Tooth	12-1/2" x 21"	4 Blade	Solas	Amita 4	866631	2413-125-21	$136.98 G
90-300 HP	15 Tooth	15-1/2" x 13"		Solas	Amita 3	866649	2511-155-13	$136.98 G
90-300 HP	15 Tooth	15-1/2" x 15"		Michigan Wheel	Michigan Match	347663	11006	$171.98 E
90-300 HP	15 Tooth	15" x 15"		Solas	Amita 3	866650	2511-150-15	$136.98 G
90-300 HP	15 Tooth	15" x 17"		Michigan Wheel	Michigan Match	347674	11007	$171.98 E
90-300 HP	15 Tooth	14.8" x 17"		Solas	Amita 3	866674	2511-148-17	$136.98 G
90-300 HP	15 Tooth	15-1/2" x 17"		Solas	Amita 3 - E Plus	866675	2511-155-17	$146.98 G
90-300 HP	15 Tooth	14-1/2" x 19"		Michigan Wheel	Michigan Match	347686	11008	$171.98 E
90-300 HP	15 Tooth	14-1/2" x 19"		Solas	Amita 3	866698	2511-145-19	$136.98 G
90-300 HP	15 Tooth	15.3" x 19"		Solas	Amita 3 - E Plus	866699	2511-153-19	$146.98 G
90-300 HP	15 Tooth	14.3" x 21"		Solas	Amita 3	866713	2511-143-21	$136.98 G
90-300 HP	15 Tooth	15.3" x 21"		Solas	Amita 3 - E Plus	866714	2511-153-21	$146.98 G
90-300 HP	15 Tooth	14.2" x 23"		Solas	Amita 3	866715	2511-142-23	$136.98 G
90-300 HP	15 Tooth	14-3/4" x 15"	4 Blade	Solas	Amita 4	866716	2513-148-15	$149.98 G
90-300 HP	15 Tooth	14-1/2" x 17"	4 Blade	Solas	Amita 4	866717	2513-145-17	$149.98 G
90-300 HP	15 Tooth	14-1/4" x 19"	4 Blade	Solas	Amita 4	866718	2513-143-19	$149.98 G
90-300 HP	15 Tooth	14" x 25"	4 Blade	Solas	HR Titan 4	868568	2553-140-25	$374.98 G
90-300 HP	15 Tooth	14" x 21"	4 Blade	Solas	Amita 4	866719	2513-140-21	$149.98 G

Solas Low Horsepower Plastic Boat Propeller

SOLAS® Where Speed Begins

- Developed to meet the special requirements of small horsepower applications.
- Uses the most advanced design and manufacturing technology to produce the best prop for portable outboard motors.
- Mercury, Mariner 2.5, 3.3 H.P.
- Johnson, Evinrude (BRP) 3.5 H.P.
- Tohatsu, Nissan 2.5, 3.3 H.P.



Order No.	Mfg. No. / Description	Price
865945	(0001-073-06P) Plastic Boat Propeller	$15.98 G

See Page 871 for Propeller Displays

©2014 Donovan Marine, Inc.

Mercury, Mariner, Mercruiser - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
6-15 HP	8 Tooth	9-1/4" x 8"		Solas	Saturn	867006	1121-093-08	$153.98 G
6-15 HP	8 Tooth	9-1/4" x 9"		Solas	Saturn	867018	1121-093-09	$153.98 G
6-15 HP	8 Tooth	9-1/4" x 10"		Solas	Saturn	867020	1121-093-10	$153.98 G
6-15 HP	8 Tooth	9-1/4" x 11"		Solas	Saturn	867021	1121-093-11	$153.98 G
9.9-25 HP	10 Tooth	10-1/2" x 11"		Solas	New Saturn	867032	1231-105-11	$204.98 G
9.9-25 (4 Stroke)	10 Tooth	10-1/8" x 12"		Stiletto	Triad I	857497	13312	$264.98 D
9.9-25 HP	10 Tooth	10-1/4" x 12"		Solas	New Saturn	867056	1231-103-12	$204.98 G
9.9-25 HP	10 Tooth	10-1/8" x 13"		Solas	New Saturn	867070	1231-101-13	$204.98 G
9.9-25 HP	10 Tooth	10" x 14"		Solas	New Saturn	867082	1231-100-14	$204.98 G
9.9-25 (4 Stroke)	10 Tooth	10-1/8" x 14"		Stiletto	Triad I	857498	13314	$264.98 D
9.9-25 HP	10 Tooth	10" x 15"		Solas	New Saturn	867098	1231-100-15	$204.98 G
25-70 HP	13 Tooth	12" x 9"		Solas	New Saturn	866951	1331-120-09	$275.98 G
25-70 HP	13 Tooth	10-7/8" x 10"		Solas	New Saturn	866952	1331-119-10	$275.98 G
25-70 HP	13 Tooth	11-5/8" x 11"		Solas	New Saturn	866953	1331-116-11	$275.98 G
40-75 HP	13 Tooth	10-1/2" x 12"		Stiletto	Triad II	857500	12312	$275.98 D
25-70 HP	13 Tooth	11-3/8" x 12"		Solas	New Saturn	866964	1331-114-12	$275.98 G
25-70 HP	13 Tooth	11-1/8" x 13"		Solas	New Saturn	866965	1331-111-13	$275.98 G
25-70 HP	13 Tooth	11-1/8" x 14"		Solas	New Saturn	866966	1331-111-14	$275.98 G
25-70 HP	13 Tooth	11" x 15"		Solas	New Saturn	866977	1331-110-15	$275.98 G
40-140 HP	15 Tooth	14" x 11"		Solas	New Saturn	867167	1431-140-11	$339.98 G
40-140 HP	15 Tooth	13-3/4" x 13"		Solas	New Saturn	867169	1431-138-13	$339.98 G
40-140 HP	15 Tooth	13-3/4" x 13"		Solas	Titan	867209	1441-138-13	$339.98 G
40-140 HP	15 Tooth	13-1/2" x 15"		Solas	New Saturn	867171	1431-135-15	$339.98 G
40-140 HP	15 Tooth	13-3/4" x 15"		Solas	Titan	867210	1441-138-15	$339.98 G
40-140 HP	15 Tooth	13-1/4" x 17"		Solas	Titan	867211	1441-133-17	$339.98 G
40-140 HP	15 Tooth	13-1/4" x 17"		Solas	New Saturn	867188	1431-133-17	$339.98 G
40-140 HP	15 Tooth	13" x 19"		Solas	New Saturn	867195	1431-130-19	$339.98 G
40-140 HP	15 Tooth	13-1/4" x 19"		Solas	Titan	867212	1441-133-19	$339.98 G
40-140 HP	15 Tooth	13" x 21"		Solas	New Saturn	867208	1431-130-21	$339.98 G
40-140 HP	15 Tooth	13-1/4" x 15"	4 Blade	Solas	HR Titan 4	868116	1453-133-15	$349.98 G
40-140 HP	15 Tooth	13" x 17"	4 Blade	Solas	HR Titan 4	868091	1453-130-17	$349.98 G
40-140 HP	15 Tooth	13" x 19"	4 Blade	Solas	HR Titan 4	868070	1453-130-19	$349.98 G
40-140 HP	15 Tooth	13" x 21"	4 Blade	Solas	HR Titan 4	868084	1453-130-21	$349.98 G
135 & Higher HP	15 Tooth	15-5/8" x 13"	**	Solas	New Saturn - E Plus	867220	1531-156-13	$419.98 G
135 & Higher HP	15 Tooth	14-1/2" x 15"	**	Solas	New Saturn	867222	1531-145-15	$377.98 G
135 & Higher HP	15 Tooth	15-1/2" x 15"	**	Solas	Titan	867297	1541-155-15	$367.98 G
135 & Higher HP	15 Tooth	14-1/4" x 17"	**	Solas	New Saturn	867246	1531-143-17	$377.98 G
135 & Higher HP	15 Tooth	14-3/4" x 17"	**	Solas	HR Titan 3	868450	1551-148-17	$369.98 G
135 & Higher HP	15 Tooth	14 3/4" x 17"	Left Ro.	Solas	HR Titan 3	868462	1552-148-17	$369.98 G
135 & Higher HP	15 Tooth	15.3" x 17"	**	Solas	Titan	867298	1541-153-17	$367.98 G
135 & Higher HP	15 Tooth	15-1/2" x 17"	**	Solas	Lexor	869226	1571-155-17	$454.98 G
135 & Higher HP	15 Tooth	14" x 19"	**	Solas	New Saturn	867260	1531-140-19	$377.98 G
135 & Higher HP	15 Tooth	14-3/4" x 19"	**	Solas	HR Titan 3	868452	1551-148-19	$369.98 G
135 & Higher HP	15 Tooth	14 3/4" x 19"	Left Ro.	Solas	HR Titan 3	868463	1552-148-19	$369.98 G
135 & Higher HP	15 Tooth	15" x 19"	**	Solas	Titan	867299	1541-150-19	$367.98 G
135 & Higher HP	15 Tooth	15-1/4" x 19"	**	Solas	Lexor	869240	1571-153-19	$454.98 G
135 & Higher HP	15 Tooth	15-1/4" x 19"	Left Ro.**	Solas	Lexor	869353	1572-153-19	$454.98 G
135 & Higher HP	15 Tooth	14-3/4" x 20"	**	Solas	HR Titan 3	868454	1551-148-20	$369.98 G
135 & Higher HP	15 Tooth	14" x 21"	**	Solas	New Saturn	867284	1531-140-21	$377.98 G
135 & Higher HP	15 Tooth	14-1/2" x 21"	**	Solas	HR Titan 3	868456	1551-145-21	$369.98 G
135 & Higher HP	15 Tooth	14 1/2" x 21"	Left Ro.	Solas	HR Titan 3	868461	1552-145-21	$369.98 G
135 & Higher HP	15 Tooth	14-4/5" x 21"	**	Solas	Titan	867300	1541-148-21	$367.98 G
135 & Higher HP	15 Tooth	15" x 21"	**	Solas	Lexor	869264	1571-150-21	$454.98 G
135 & Higher HP	15 Tooth	15" x 21"	Left Ro.**	Solas	Lexor	869365	1572-150-21	$454.98 G
135 & Higher HP	15 Tooth	14-1/4" x 22"	**	Solas	HR Titan 3	868458	1551-143-22	$369.98 G
135 & Higher HP	15 Tooth	14" x 23"	**	Solas	New Saturn-E Plus	867295	1531-140-23	$377.98 G
135-300 HP	15 Tooth	14-1/4" x23"	**	Stiletto	Advantage II	858235	10323	$349.98 D
135 & Higher HP	15 Tooth	14" x 24"	**	Solas	HR Titan 3	868460	1551-140-24	$369.98 G
135 & Higher HP	15 Tooth	14-1/2" x 25"	**	Solas	Lexor	869267	1571-145-25	$454.98 G
135 & Higher HP	15 Tooth	14-1/2" x 15"	4 Blade**	Solas	HR Titan 4	868464	1553-145-15	$374.98 G
135 & Higher HP	15 Tooth	14-1/4" x 17"	4 Blade**	Solas	HR Titan 4	868476	1553-143-17	$374.98 G
135 & Higher HP	15 Tooth	14 1/4" x 17"	4 Blade, Left Ro.	Solas	HR Titan 4	868506	1554-143-17	$374.98 G
135 & Higher HP	15 Tooth	14-1/8" x 18"	4 Blade**	Solas	HR Titan 4	868487	1553-141-18	$374.98 G
135 & Higher HP	15 Tooth	14-1/8" x 19"	4 Blade**	Solas	HR Titan 4	868488	1553-141-19	$374.98 G
135 & Higher HP	15 Tooth	14 1/8" x 19"	4 Blade, Left Ro.	Solas	HR Titan 4	868504	1554-141-19	$374.98 G
135 & Higher HP	15 Tooth	14" x 20"	4 Blade**	Solas	HR Titan 4	868489	1553-140-20	$374.98 G
135 & Higher HP	15 Tooth	14" x 21"	4 Blade, Left Ro.	Solas	HR Titan 4	868502	1554-140-21	$374.98 G
135 & Higher HP	15 Tooth	14" x 21"	4 Blade**	Solas	HR Titan 4	868490	1553-140-21	$374.98 G
135 & Higher HP	15 Tooth	14" x 23"	4 Blade**	Solas	HR Titan 4	868491	1553-140-23	$374.98 G
135 & Higher HP	15 Tooth	14" x 25"	4 Blade**	Solas	HR Titan 4	868492	1553-140-25	$374.98 G

***Includes Sterndrives Alpha One & Bravo One*

Mercruiser III

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
Fits all Mercruiser Bravo III Stern Drives	19 Tooth	14-1/4" x 22"	Rear	Solas	B3 Bravo III	877852	1651-143-22	$569.98 G
	19 Tooth	14" x 24"	Rear	Solas	B3 Bravo III	877854	1651-140-24	$569.98 G
	19 Tooth	14" x 26"	Rear	Solas	B3 Bravo III	877856	1651-140-26	$569.98 G
	19 Tooth	15-3/4" x 22"	Front	Solas	B3 Bravo III	877861	1654-158-22	$629.98 G
	19 Tooth	15-1/2" x 24"	Front	Solas	B3 Bravo III	877863	1654-155-24	$629.98 G
	19 Tooth	15-1/2" x 26"	Front	Solas	B3 Bravo III	877865	1654-155-26	$629.98 G





Mercury, Mariner, Mercruiser - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
4-10 HP	8 Tooth	9" x 9"		Michigan Wheel	Michigan Match	345757	32021	$133.98 E
6-15 HP	8 Tooth	9-1/4" x 7"		Solas	Amita 3	866002	1111-093-07	$72.98 G
6-15 HP	8 Tooth	9-1/4" x 8"		Solas	Amita 3	866003	1111-093-08	$72.98 G
6-15 HP	8 Tooth	9-1/4" x 9"		Solas	Amita 3	866004	1111-093-09	$72.98 G
6-15 HP	8 Tooth	9" x 9"		Michigan Wheel	Michigan Match	345606	32052	$105.98 E
6-15 HP	8 Tooth	9-1/4" x 10"		Solas	Amita 3	866005	1111-093-10	$72.98 G
6-15 HP	8 Tooth	9-1/4" x 11"		Solas	Amita 3	866006	1111-093-11	$72.98 G
6-15 HP	8 Tooth	10" x 5"	4 Blade	Solas	Amita 4	865999	1113-100-05	$102.98 G
6-15 HP	8 Tooth	9-1/4" x 7"	4 Blade	Solas	Amita 4	865599	1113-093-07	$80.98 G
6-15 HP	8 Tooth	10" x 7"	4 Blade	Solas	Amita 4	865600	1113-100-07	$102.98 G
6-15 HP	8 Tooth	9-1/4" x 8"	4 Blade	Solas	Amita 4	865603	1113-093-08	$80.98 G
6-15 HP	8 Tooth	9-1/4" x 9"	4 Blade	Solas	Amita 4	865601	1113-093-09	$80.98 G
6-15 HP	8 Tooth	9-1/4" x 10"	4 Blade	Solas	Amita 4	865602	1113-093-10	$80.98 G
6-15 HP	8 Tooth	9-1/4" x 11"	4 Blade	Solas	Amita 4	865604	1113-093-11	$80.98 G
8-9.9 HP	12 Tooth	8-1/2" x 9"		Solas	Amita 3	877159	5011-085-09	$65.98 G
20 HP	8 Tooth	9-7/8" x 8"		Michigan Wheel	Michigan Match	345656	32135	$130.98 E
20 HP	8 Tooth	10" x 9"		Michigan Wheel	Michigan Match	345644	32136	$130.98 E
9.9-25 HP	10 Tooth	10-1/2" x 9"		Solas	Amita 3	866015	1211-110-09	$85.98 G
9.9-25 HP	10 Tooth	10-1/4" x 11"		Solas	Amita 3	866016	1211-105-11	$85.98 G
9.9-25 HP	10 Tooth	10-7/8" x 11"		Michigan Wheel	Michigan Match	345682	31049	$128.98 E
9.9-25 HP	10 Tooth	10-1/4" x 12"		Solas	Amita 3	866028	1211-103-12	$85.98 G
9.9-25 HP	10 Tooth	10-1/8" x 13"		Solas	Amita 3	866042	1211-101-13	$85.98 G
9.9-25 HP	10 Tooth	10-7/8" x 13"		Michigan Wheel	Michigan Match	345694	31048	$128.98 E
9.9-25 HP	10 Tooth	10" x 14"		Solas	Amita 3	866066	1211-100-14	$85.98 G
9.9-25 HP	10 Tooth	10" x 15"		Solas	Amita 3	866067	1211-100-15	$85.98 G
9.9-25 HP	10 Tooth	10" x 13"	4 Blade	Solas	Amita 4	866070	1213-100-13	$100.98 G
9.9-25 HP	10 Tooth	10.1" x 12"	4 Blade	Solas	Amita 4	866071	1213-101-12	$100.98 G
9.9-25 HP	10 Tooth	10-3/16" x 11"	4 Blade	Solas	Amita 4	866069	1213-102-11	$100.98 G
9.9-25 HP	10 Tooth	10" x 14"	4 Blade	Solas	Amita 4	866072	1213-100-14	$100.98 G
9.9-25 HP	10 Tooth	10" x 15"	4 Blade	Solas	Amita 4	866073	1213-100-15	$100.98 G
25-70 HP	13 Tooth	12-3/16" x 7"		Solas	Amita 3	866076	1311-122-07	$114.98 G
25-70 HP	13 Tooth	12-1/5" x 8"		Solas	Amita 3	866077	1311-122-08	$114.98 G
25-70 HP	13 Tooth	12-1/2" x 8"		Michigan Wheel	Michigan Match	345808	32141	$152.98 E
25-70 HP	13 Tooth	12-1/8" x 9"		Solas	Amita 3	866078	1311-121-09	$114.98 G
25-70 HP	13 Tooth	11-1/4" x 10"		Michigan Wheel	Michigan Match	345896	31015	$151.98 E
25-70 HP	13 Tooth	12" x 10"		Solas	Amita 3 - C Plus	866079	1311-120-10	$115.98 G
25-70 HP	13 Tooth	11-5/8" x 11"		Solas	Amita 3	866080	1311-116-11	$114.98 G
25-70 HP	13 Tooth	11-3/4" x 11"		Solas	Amita 3 - C Plus	866081	1311-118-11	$115.98 G
25-70 HP	13 Tooth	10-7/8" x 11"		Michigan Wheel	Michigan Match	345900	31053	$151.98 E
25-70 HP	13 Tooth	10-5/8" x 12"		Michigan Wheel	Michigan Match	345909	31016	$151.98 E
25-70 HP	13 Tooth	11-3/8" x 12"		Solas	Amita 3	866092	1311-114-12	$114.98 G
25-70 HP	13 Tooth	11-5/8" x 12"		Solas	Amita 3 - C Plus	866082	1311-116-12	$115.98 G
25-70 HP	13 Tooth	11-1/8" x 13"		Solas	Amita 3	866117	1311-111-13	$114.98 G
25-70 HP	13 Tooth	10-3/8" x 13"		Michigan Wheel	Michigan Match	345911	31017	$151.98 E
25-70 HP	13 Tooth	11-5/8" x 13"		Solas	Amita 3 - C Plus	866083	1311-116-13	$115.98 G

©2014 Donovan Marine, Inc.

Mercury, Mariner, Mercruiser - Aluminum (Cont.)

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
25-70 HP	13 Tooth	11-1/8" x 14"		Solas	Amita 3	866131	1311-111-14	$114.98 G
25-70 HP	13 Tooth	11.6" x 14"		Solas	Amita 3 - C Plus	866084	1311-116-14	$115.98 G
40-75 HP	13 Tooth	10-1/4" x 14"		Michigan Wheel	Michigan Match	345923	31018	$151.98 E
25-70 HP	13 Tooth	10-1/8" x 15"		Michigan Wheel	Michigan Match	345935	31019	$151.98 E
25-70 HP	13 Tooth	11" x 15"		Solas	Amita 3	866155	1311-110-15	$114.98 G
25-70 HP	13 Tooth	10" x 17"		Michigan Wheel	Michigan Match	345947	31020	$151.98 E
25-70 HP	13 Tooth	11-3/4" x 9"	4 Blade	Solas	Amita 4	866157	1313-118-09	$129.98 G
25-70 HP	13 Tooth	11-3/8" x 10"	4 Blade	Solas	Amita 4	866158	1313-114-10	$129.98 G
25-70 HP	13 Tooth	11-1/8" x 11"	4 Blade	Solas	Amita 4	866159	1313-111-11	$129.98 G
25-70 HP	13 Tooth	10-3/4" x 12"	4 Blade	Solas	Amita 4	866161	1313-108-12	$129.98 G
25-70 HP	13 Tooth	10-1/2" x 13"	4 Blade	Solas	Amita 4	866160	1313-105-13	$129.98 G
25-70 HP	13 Tooth	10-1/2" x 14"	4 Blade	Solas	Amita 4	866162	1313-105-14	$129.98 G
60-140 HP	15 Tooth	14" x 9"		Solas	Amita 3	866166	1411-140-09	$123.98 G
60-140 HP	15 Tooth	14" x 11"		Solas	Amita 3	866167	1411-140-11	$123.98 G
40-140 HP (Includes 4 Stroke)	15 Tooth	14" x 11"		Michigan Wheel	Michigan Match	346952	031154	$164.98 E
60-140 HP	15 Tooth	13-3/4" x 13"		Solas	Amita 3	866179	1411-138-13	$123.98 G
40-140 HP (Includes 4 Stroke)	15 Tooth	13-3/4" x 13"		Michigan Wheel	Michigan Match	346963	031155	$164.98 E
60-140 HP	15 Tooth	13-1/2" x 15"		Solas	Amita 3	866181	1411-135-15	$123.98 G
60-140 HP	15 Tooth	13-1/4" x 17"		Solas	Amita 3	866206	1411-133-17	$123.98 G
40-140 HP (Includes 4 Stroke)	15 Tooth	13-1/4" x 17"		Michigan Wheel	Michigan Match	345985	031042	$163.98 E
60-140 HP	15 Tooth	13" x 19"		Solas	Amita 3	866220	1411-130-19	$123.98 G
40-140 HP (Includes 4 Stroke)	15 Tooth	13" x 19"		Michigan Wheel	Michigan Match	345997	031143	$165.98 E
60-140 HP	15 Tooth	13" x 21"		Solas	Amita 3	866244	1411-130-21	$123.98 G
40-140 HP (Includes 4 Stroke)	15 Tooth	13" x 21"		Michigan Wheel	Michigan Match	346002	031044	$163.98 E
60-140 HP	15 Tooth	13-1/4" x 13"	4 Blade	Solas	Amita 4	866256	1413-133-13	$136.98 G
60-140 HP	15 Tooth	13" x 15"	4 Blade	Solas	Amita 4	866268	1413-130-15	$136.98 G
60-140 HP	15 Tooth	12-3/4" x 17"	4 Blade	Solas	Amita 4	866262	1413-128-17	$136.98 G
60-140 HP	15 Tooth	12-1/2" x 19"	4 Blade	Solas	Amita 4	866264	1413-125-19	$136.98 G
60-140 HP	15 Tooth	12-1/2" x 21"	4 Blade	Solas	Amita 4	866266	1413-125-21	$136.98 G
135 & Higher HP	15 Tooth	15-1/2" x 13"	**	Solas	Amita 3	866269	1511-155-13	$136.98 G
135 & Higher HP	15 Tooth	16" x 13"	**	Solas	Amita 3 - E Plus	866270	1511-160-13	$146.98 G
135 & Higher HP	15 Tooth	16" x 13"	**	Michigan Wheel	Michigan Match	346177	31022	$188.98 E
135 & Higher HP	15 Tooth	15" x 15"	**	Solas	Amita 3	866282	1511-150-15	$136.98 G
135 & Higher HP	15 Tooth	15" x 15"	Left Ro.**	Solas	Amita 3	866340	1512-150-15	$139.98 G
135 & Higher HP	15 Tooth	15-1/4" x 15"	**	Michigan Wheel	Michigan Match	346052	31023	$191.98 E
135 & Higher HP	15 Tooth	15-4/5" x 15"	Left Ro.**	Solas	Amita 3 - E Plus	866346	1512-158-15	$146.98 G
135 & Higher HP	15 Tooth	15-4/5" x 15"	**	Solas	Amita 3 - E Plus	866294	1511-158-15	$146.98 G
135 & Higher HP	15 Tooth	14-1/2" x 17"	**	Michigan Wheel	Michigan Match	346064	31024	$174.98 E
135 & Higher HP	15 Tooth	14-4/5" x 17"	**	Solas	Amita 3	866307	1511-148-17	$136.98 G
135 & Higher HP	15 Tooth	14-4/5" x 17"	Left Ro.**	Solas	Amita 3	866348	1512-148-17	$136.98 G
135 & Higher HP	15 Tooth	15" x 17"	**	Michigan Wheel	Michigan Match	346191	31064	$174.98 E
135 & Higher HP	15 Tooth	15-1/2" x 17"	Left Ro.**	Solas	Amita 3 - E Plus	866347	1512-155-17	$146.98 G
135 & Higher HP	15 Tooth	15-1/2" x 17"		Solas	Amita 3	877805	1511-155-17	$146.98 G
135 & Higher HP	15 Tooth	14" x 19"	**	Michigan Wheel	Michigan Match	346076	31025	$174.98 E
135 & Higher HP	15 Tooth	14-1/2" x 19"	**	Solas	Amita 3	866321	1511-145-19	$136.98 G
135 & Higher HP	15 Tooth	14-1/2" x 19"	Left Ro.**	Solas	Amita 3	866349	1512-145-19	$136.98 G
135 & Higher HP	15 Tooth	14-1/2" x 19"	**	Michigan Wheel	Michigan Match	346204	31065	$174.98 E
135 & Higher HP	15 Tooth	15.3" x 19"	**	Solas	Amita 3 - E Plus	877817	1511-153-19	$146.98 G
135 & Higher HP	15 Tooth	13-3/4" x 21"	**	Michigan Wheel	Michigan Match	346088	31026	$174.98 E
135 & Higher HP	15 Tooth	14.3" x 21"	**	Solas	Amita 3	866345	1511-143-21	$139.98 G
135 & Higher HP	15 Tooth	14.3" x 21"	Left Ro.**	Solas	Amita 3	866339	1512-143-21	$139.98 G
135 & Higher HP	15 Tooth	14-1/4" x 21"	**	Michigan Wheel	Michigan Match	346216	31066	$174.98 E
135 & Higher HP	15 Tooth	15.3" x 21"	**	Solas	Amita 3 - E Plus	877829	1511-153-21	$146.98 G
135 & Higher HP	15 Tooth	14-1/5" x 23"	**	Solas	Amita 3	866357	1511-142-23	$136.98 G
135 & Higher HP	15 Tooth	15.3" x 23"	**	Solas	Amita 3 - E Plus	877831	1511-153-23	$146.98 G
135 & Higher HP	15 Tooth	14-3/4" x 15"	4 Blade**	Solas	Amita 4	866350	1513-148-15	$149.98 G
135 & Higher HP	15 Tooth	14-3/4" x 15"	4 Blade, Left Ro.**	Solas	Amita 4	868440	1514-148-15	$142.98 G
135 & Higher HP	15 Tooth	14-1/2" x 17"	4 Blade**	Solas	Amita 4	866351	1513-145-17	$149.98 G
135 & Higher HP	15 Tooth	14-1/2" x 17"	4 Blade, Left Ro.**	Solas	Amita 4	868442	1514-145-17	$142.98 G
135 & Higher HP	15 Tooth	14-1/4" x 19"	4 Blade**	Solas	Amita 4	866352	1513-143-19	$149.98 G
135 & Higher HP	15 Tooth	14" x 21"	4 Blade**	Solas	Amita 4	866353	1513-140-21	$149.98 G
135 & Higher HP	15 Tooth	14" x 23"	4 Blade**	Solas	Amita 4	866354	1513-140-23	$149.98 G
Bravo II: 4.3L-7.4L/ D2.8L-D7.3L, 350 Mag, 454 Mag, 502 Mag		19-1/2" x 13"		Solas	Amita 3	866359	1611-195-13	$534.98 G
		19-1/2" x 13"	Left Ro.	Solas	Amita 3	866369	1612-195-13	$534.98 G
		19.3" x 15"		Solas	Amita 3	866361	1611-193-15	$534.98 G
		19.3" x 15"	Left Ro.	Solas	Amita 3	866370	1612-193-15	$534.98 G
		18-4/5" x 17"		Solas	Amita 3	866363	1611-188-17	$534.98 G
		18.3" x 19"		Solas	Amita 3	866365	1611-183-19	$534.98 G
		18-1/4" x 19"	Left Ro.	Solas	Amita 3	866368	1612-183-19	$534.98 G

***Includes Sterndrives Alpha One & Bravo One*

Yamaha - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
9.9-15 HP	8 Tooth	9-1/4" x 7"		Solas	Saturn	870204	3121-093-07	$153.98 G
9.9-15 HP	8 Tooth	9-1/4" x 8"		Solas	Saturn	870205	3121-093-08	$153.98 G
9.9-15 HP	8 Tooth	9-1/4" x 9"		Solas	Saturn	870206	3121-093-09	$153.98 G
9.9-15 HP	8 Tooth	9-1/4" x 10"		Solas	Saturn	870229	3121-093-10	$153.98 G
9.9-15 HP	8 Tooth	9-1/4" x 11"		Solas	Saturn	870230	3121-093-11	$153.98 G
25-35 HP	10 Tooth	10-1/8" x 10"		Stiletto	Triad I	862018	33310	$264.98 D
20-30 HP	10 Tooth	10-3/4" x 10"		Solas	New Saturn	870255	3231-108-10	$204.98 G
20-30 HP	10 Tooth	10-1/2" x 11"		Solas	New Saturn	870256	3231-105-11	$204.98 G
25-35 HP	10 Tooth	10-1/8" x 12"		Stiletto	Triad I	862032	33312	$264.98 D
20-30 HP	10 Tooth	10-1/4" x 12"		Solas	New Saturn	870279	3231-103-12	$204.98 G
20-30 HP	10 Tooth	10-1/8" x 13"		Solas	New Saturn	870280	3231-101-13	$204.98 G
20-30 HP	10 Tooth	10" x 14"		Solas	New Saturn	870293	3231-100-14	$204.98 G
25-35 HP	10 Tooth	10-1/8" x 14"		Stiletto	Triad I	862044	33314	$264.98 D
20-30 HP	10 Tooth	10" x 15"		Solas	New Saturn	870294	3231-100-15	$204.98 G
20-30 HP	10 Tooth	10" x 9"	4 Blade	Solas	New Saturn	870298	3233-100-09	$234.98 G
30F-60F HP, 40-60 HP	13 Tooth	10-1/2" x 12"		Stiletto	Triad II	862056	32312	$275.98 D
30F-60F HP, 40-60 HP	13 Tooth	10-1/2" x 13"		Stiletto	Triad II	862068	32313	$275.98 D
30F-60F HP, 40-60 HP	13 Tooth	10-1/2" x 14"		Stiletto	Triad II	862070	32314	$275.98 D
30F-60F HP, 40-60 HP	13 Tooth	10-1/2" x 15"		Stiletto	Triad II	862082	32315	$275.98 D
50-130 HP, 80FS-115FS HP	13 Tooth	13-1/4" x 15"		Stiletto	Advantage I	862284	31315	$338.98 D
50-130 HP, 80FS-115FS HP	13 Tooth	13-1/4" x 15"	Left Ro.	Stiletto	Advantage I	862347	31215	$338.98 D
50-130 HP, 80FS-115FS HP	13 Tooth	13-1/4" x 17"		Stiletto	Advantage I	862296	31317	$338.98 D
50-130 HP, 80FS-115FS HP	13 Tooth	13-1/4" x 17"	Left Ro.	Stiletto	Advantage I	862356	31217	$338.98 D
50-130 HP, 80FS-115FS HP	13 Tooth	13-1/4" x 19"		Stiletto	Advantage I	862309	31319	$338.98 D
50-130 HP, 80FS-115FS HP	13 Tooth	13-1/4" x 19"	Left Ro.	Stiletto	Advantage I	862361	31219	$338.98 D
40-60 HP	13 Tooth	12.3" x 9"		Solas	Saturn	874322	3321-123-09	$278.98 G
40-60 HP	13 Tooth	11-5/8" x 11"		Solas	New Saturn	870320	3331-116-11	$274.98 G
40-60 HP	13 Tooth	11-4/5" x 11"		Solas	Saturn	874324	3321-118-11	$278.98 G
40-60 HP	13 Tooth	11-3/8" x 12"		Solas	New Saturn	870332	3331-114-12	$274.98 G
40-60 HP	13 Tooth	11.1" x 13"		Solas	Saturn	874326	3321-111-13	$278.98 G
40-60 HP	13 Tooth	11-1/8" x 13"		Solas	New Saturn	870344	3331-111-13	$274.98 G
40-60 HP	13 Tooth	11-1/8" x 14"		Solas	New Saturn	870356	3331-111-14	$274.98 G
40-60 HP	13 Tooth	11" x 15"		Solas	New Saturn	870368	3331-110-15	$274.98 G
40-60 HP	13 Tooth	11" x 15"		Solas	Saturn	874328	3321-110-15	$278.98 G
60-130 HP	15 Tooth	14" x 11"		Solas	New Saturn	870394	3431-140-11	$351.98 G
60-130 HP	15 Tooth	13-3/4" x 13"		Solas	New Saturn	870407	3431-138-13	$351.98 G
60-130 HP	15 Tooth	13-1/2" x 15"		Solas	New Saturn	870419	3431-135-15	$351.98 G
60-130 HP	15 Tooth	13-1/4" x 17"		Solas	Titan	870650	3441-133-17	$349.98 G
60-130 HP	15 Tooth	13-1/2" x 17"		Solas	New Saturn	870421	3431-133-17	$351.98 G
60-130 HP	15 Tooth	13-1/4" x 19"		Solas	Titan	870651	3441-133-19	$349.98 G
60-130 HP	15 Tooth	13-3/4" x 13"		Solas	Titan	870468	3441-138-13	$349.98 G
60-130 HP	15 Tooth	13-3/4" x 15"		Solas	Titan	870649	3441-138-15	$349.98 G
60-130 HP	15 Tooth	13" x 19"		Solas	New Saturn	870433	3431-130-19	$351.98 G
60-130 HP	15 Tooth	13" x 21"		Solas	New Saturn	870445	3431-130-21	$356.98 G
60-130 HP	15 Tooth	13-1/2" x 13"	4 Blade	Solas	HR Titan 4	871153	3453-135-13	$359.98 G
60-130 HP	15 Tooth	13-1/4" x 15"	4 Blade	Solas	HR Titan 4	871156	3453-133-15	$359.98 G
60-130 HP	15 Tooth	13" x 17"	4 Blade	Solas	HR Titan 4	871168	3453-130-17	$359.98 G
60-130 HP	15 Tooth	13" x 19"	4 Blade	Solas	HR Titan 4	871170	3453-130-19	$359.98 G
60-130 HP	15 Tooth	13" x 21"	4 Blade	Solas	HR Titan 4	871173	3453-130-21	$359.98 G
150-300 HP	15 Tooth	15-5/8" x 11"		Solas	New Saturn - E Plus	870554	3531-156-11	$416.98 G
150-250 HP, 200FS, 225FS HP †	15 Tooth	14-1/4" x 13"		Stiletto	Advantage II	862436	30313	$349.98 D
150-300 HP	15 Tooth	15-5/8" x 13"		Solas	New Saturn - E Plus	870556	3531-156-13	$416.98 G
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 15"		Stiletto	Advantage II	862448	30315	$349.98 D
150-300 HP	15 Tooth	14-1/2" x 15"		Solas	New Saturn	870558	3531-145-15	$375.98 G
150-300 HP	15 Tooth	15-1/2" x 15"		Solas	Titan	870436	3541-155-15	$369.98 G
150-300 HP	15 Tooth	15-3/4" x 15"		Solas	Lexor	871459	3571-158-15	$454.98 G
150-300 HP	15 Tooth	14-1/4" x 17"		Solas	New Saturn	870560	3531-143-17	$375.98 G
150-300 HP	15 Tooth	14-1/4" x 17"	Left Ro.	Solas	New Saturn	870623	3532-143-17	$375.98 G
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 17"		Stiletto	Advantage II	862450	30317	$349.98 D
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 17"	Left Ro.	Stiletto	Advantage II	862549	30217	$349.98 D
150-300 HP	15 Tooth	14-3/4" x 17"		Solas	HR Titan 3	870852	3551-148-17	$369.98 G
150-300 HP	15 Tooth	14 3/4" x 17"	Left Ro.	Solas	HR Titan 3	870938	3552-148-17	$369.98 G
150-300 HP	15 Tooth	15-1/4" x 17"		Solas	Titan	870438	3541-153-17	$369.98 G
150-300 HP	15 Tooth	15-1/2" x 17"		Solas	Lexor	871473	3571-155-17	$454.98 G

† All V6 Gearcases

See Page 871 for Propeller Displays

©2014 Donovan Marine, Inc.

Yamaha - Stainless Steel (Cont.)

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
150-300 HP	15 Tooth	15-1/2" x 17"	Left Ro.	Solas	Lexor	871586	3572-155-17	$454.98 G
150-300 HP	15 Tooth	14-4/5" X 18"	Left Ro.	Solas	HR Titan 3	870940	3552-148-18	$369.98 G
150-300 HP	15 Tooth	14-3/4" x 18"		Solas	HR Titan 3	870853	3551-148-18	$369.98 G
150-300 HP	15 Tooth	14" x 19"		Solas	New Saturn	870572	3531-140-19	$375.98 G
150-300 HP	15 Tooth	14" x 19"	Left Ro.	Solas	New Saturn	870635	3532-140-19	$375.98 G
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 19"		Stiletto	Advantage II	862462	30319	$349.98 D
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 19"	Left Ro.	Stiletto	Advantage II	862551	30219	$349.98 D
150-300 HP	15 Tooth	14-3/4" x 19"		Solas	HR Titan 3	870854	3551-148-19	$369.98 G
150-300 HP	15 Tooth	14 3/4" x 19"	Left Ro.	Solas	HR Titan 3	870942	3552-148-19	$369.98 G
150-300 HP	15 Tooth	15" x 19"		Solas	Titan	870840	3541-150-19	$369.98 G
150-300 HP	15 Tooth	15-1/4" x 19"		Solas	Lexor	871497	3571-153-19	$454.98 G
150-300 HP	15 Tooth	15-1/4" x 19"	Left Ro.	Solas	Lexor	871601	3572-153-19	$454.98 G
150-300 HP	15 Tooth	14" x 21"		Solas	New Saturn	870584	3531-140-21	$375.98 G
150-300 HP	15 Tooth	14" x 21"	Left Ro.	Solas	New Saturn	870647	3532-140-21	$375.98 G
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 21"		Stiletto	Advantage II	862474	30321	$349.98 D
150-250 HP, 200FS HP †	15 Tooth	14-1/4" x 21"	Left Ro.	Stiletto	Advantage II	862563	30221	$349.98 D
150-300 HP	15 Tooth	14-1/2" x 21"		Solas	HR Titan 3	870856	3551-145-21	$369.98 G
150-300 HP	15 Tooth	14 1/2" x 21"	Left Ro.	Solas	HR Titan 3	870930	3552-145-21	$369.98 G
150-300 HP	15 Tooth	14-3/4" x 21"		Solas	Titan	870841	3541-148-21	$369.98 G
150-300 HP	15 Tooth	15" x 21"		Solas	Lexor	871512	3571-150-21	$454.98 G
150-300 HP	15 Tooth	15" x 21"	Left Ro.	Solas	Lexor	871613	3572-150-21	$454.98 G
150-250 HP, 200FS, 225FS HP †	15 Tooth	14-1/4" x 23"		Stiletto	Advantage II	862486	30323	$349.98 D
150-300 HP	15 Tooth	14-1/2" x 27"		Solas	Lexor	871517	3571-145-27	$454.98 G
150-300 HP	15 Tooth	14-1/2" x 15"	4 Blade	Solas	HR Titan 4	871257	3553-145-15	$374.98 G
150-300 HP	15 Tooth	14-1/4" x 17"	4 Blade	Solas	HR Titan 4	871269	3553-143-17	$374.98 G
150-300 HP	15 Tooth	14 1/4" x 17"	4 Blade, Left Ro.	Solas	HR Titan 4	871286	3554-143-17	$374.98 G
150-300 HP	15 Tooth	14 1/8" x 19"	4 Blade, Left Ro.	Solas	HR Titan 4	871284	3554-141-19	$374.98 G
150-300 HP	15 Tooth	14-1/8" x 19"	4 Blade	Solas	HR Titan 4	871271	3553-141-19	$374.98 G
150-300 HP	15 Tooth	14" x 21"	4 Blade	Solas	HR Titan 4	871283	3553-140-21	$374.98 G
150-300 HP	15 Tooth	14" x 21"	4 Blade, Left Ro.	Solas	HR Titan 4	871280	3554-140-21	$374.98 G
150-300 HP	15 Tooth	14" x 23"	4 Blade	Solas	HR Titan 4	871285	3553-140-23	$374.98 G
150-300 HP	15 Tooth	14" x 25"	4 Blade	Solas	HR Titan 4	871287	3553-140-25	$374.98 G

† All V6 Gearcases

Yamaha - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
2.5/5 HP	9 Tooth	7-1/4" x 5"		Solas	Amita 3	866728	3011-073-05S	$67.98 G
2.5/5 HP	9 Tooth	7-1/2" x 7"		Solas	Amita 3	866730	3011-075-07S	$67.98 G
6-8 HP (Pin Drive)	7 Tooth	8-1/2" x 7"		Solas	Amita 3	866736	3011-085-07	$67.98 G
6-8 HP (Pin Drive)	7 Tooth	8-1/2" x 8"		Solas	Amita 3	866737	3011-085-08	$67.98 G
6-8 HP (Pin Drive)	7 Tooth	8-1/2" x 9"		Solas	Amita 3	866738	3011-085-09	$67.98 G
9.9-15 HP	8 Tooth	9-1/4" x 7"		Solas	Amita 3	866742	3111-093-07	$74.98 G
9.9-15 HP	8 Tooth	9-1/4" x 8"		Solas	Amita 3	866743	3111-093-08	$74.98 G
9.9-15 HP	8 Tooth	9-1/4" x 9"		Solas	Amita 3	866744	3111-093-09	$74.98 G
9.9-20 HP	8 Tooth	9-1/4" x 9"		Michigan Wheel	Michigan Match	348133	102004	$120.98 E
9.9-15 HP	8 Tooth	9-1/4" x 10"		Solas	Amita 3	866751	3111-093-10	$74.98 G
9.9-20 HP	8 Tooth	9.3" x 10"		Michigan Wheel	Michigan Match	348145	102005	$124.98 E
9.9-15 HP	8 Tooth	9-1/4" x 11"		Solas	Amita 3	866752	3111-093-11	$74.98 G
9.9-15 HP	8 Tooth	10" x 5"	4 Blade	Solas	Amita 4	866788	3113-100-05	$103.98 G
9.9-15 HP	8 Tooth	10" x 7"	4 Blade	Solas	Amita 4	866754	3113-100-07	$103.98 G
9.9-15 HP	8 Tooth	10.2" x 11"	4 Blade	Solas	Amita 4	866794	3213-102-11	$101.98 G
9.9-15 HP	8 Tooth	9-1/4" x 7"	4 Blade	Solas	Amita 4	866755	3113-093-07	$80.98 G
9.9-15 HP	8 Tooth	9-1/4" x 8"	4 Blade	Solas	Amita 4	866756	3113-093-08	$80.98 G
9.9-15 HP	8 Tooth	9-1/4" x 9"	4 Blade	Solas	Amita 4	866757	3113-093-09	$80.98 G
9.9-15 HP	8 Tooth	9-1/4" x 10"	4 Blade	Solas	Amita 4	866759	3113-093-10	$80.98 G
20-30 HP	10 Tooth	9-1/4" x 11"	4 Blade	Solas	Amita 4	866758	3113-093-11	$80.98 G
20-30 HP	10 Tooth	9-7/8" x 9"		Solas	Amita 3	866774	3211-099-09	$85.98 G
20-30 HP	10 Tooth	9-7/8" x 10-1/2"		Michigan Wheel	Michigan Match	348183	22002	$119.98 E
20-30 HP	10 Tooth	9-7/8" x 11"		Solas	Amita 3	866776	3211-099-11	$85.98 G
20-30 HP	10 Tooth	9-7/8" x 12"		Michigan Wheel	Michigan Match	348195	22003	$123.98 E
20-30 HP	10 Tooth	9.9" x 10"		Solas	Amita 3	866775	3211-099-10	$85.98 G
20-30 HP	10 Tooth	9.9" x 12"		Solas	Amita 3	866787	3211-099-12	$85.98 G
20-30 HP	10 Tooth	9-7/8" x 13"		Solas	Amita 3	866789	3211-099-13	$85.98 G
20-30 HP	10 Tooth	10-1/8" x 12"	4 Blade	Solas	Amita 4	866795	3213-101-12	$101.98 G
20-30 HP	10 Tooth	10" x 13"	4 Blade	Solas	Amita 4	866790	3213-100-13	$101.98 G

See Page 871 for Propeller Displays

Yamaha - Aluminum (Cont.)

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
20-30 HP	10 Tooth	10" x 14"	4 Blade	Solas	Amita 4	866796	3213-100-14	$101.98 G
20-30 HP	10 Tooth	10" x 15"	4 Blade	Solas	Amita 4	866797	3213-100-15	$101.98 G
40-60 HP	13 Tooth	12-1/5" x 7"		Solas	Amita 3	866806	3311-122-07	$114.98 G
40-60 HP	13 Tooth	12-1/5" x 8"		Solas	Amita 3	866809	3311-122-08	$114.98 G
40-60 HP	13 Tooth	12-1/8" x 9"		Solas	Amita 3	866973	3311-121-09	$108.98 G
40-60 HP	13 Tooth	12" x 10"		Solas	Amita 3 - C Plus	866791	3311-120-10	$115.98 G
40-60 HP	13 Tooth	11-3/5"x 11"		Solas	Amita 3	866792	3311-116-11	$114.98 G
40-60 HP	13 Tooth	11-3/4" x 11"		Solas	Amita 3 - C Plus	866793	3311-118-11	$115.98 G
40-60 HP	13 Tooth	11-5/8" x 12"		Solas	Amita 3 - C Plus	866803	3311-116-12	$115.98 G
40-60 HP	13 Tooth	11-2/5" x 12"		Solas	Amita 3	866802	3311-114-12	$114.98 G
25-60 HP	13 Tooth	11-3/8" x 12"		Michigan Wheel	Michigan Match	348246	32043	$152.98 E
40-60 HP	13 Tooth	11.1" x 13"		Solas	Amita 3	866813	3311-111-13	$114.98 G
40-60 HP	13 Tooth	11-5/8" x 13"		Solas	Amita 3 - C Plus	866814	3311-116-13	$115.98 G
40-60 HP	13 Tooth	11.1" x 14"		Solas	Amita 3	866826	3311-111-14	$114.98 G
40-60 HP	13 Tooth	11-5/8" x 14"		Solas	Amita 3 - C Plus	866827	3311-116-14	$115.98 G
40-60 HP	13 Tooth	11" x 15"		Solas	Amita 3	866828	3311-110-15	$114.98 G
35-60 HP	13 Tooth	11" x 15"		Michigan Wheel	Michigan Match	348272	32040	$152.98 E
40-60 HP	13 Tooth	11-3/4" x 9"	4 Blade	Solas	Amita 4	874303	3313-118-09	$129.98 G
40-60 HP	13 Tooth	11.1" x 11"	4 Blade	Solas	Amita 4	874304	3313-111-11	$129.98 G
40-60 HP	13 Tooth	10-3/4" x 12"	4 Blade	Solas	Amita 4	874305	3313-108-12	$129.98 G
40-60 HP	13 Tooth	10.5 x 13	4 Blade	Solas	Amita 4	874316	3313-105-13	$129.98 G
40-60 HP	13 Tooth	10-1/2" x 14"	4 Blade	Solas	Amita 4	874317	3313-105-14	$129.98 G
60-130 HP	15 Tooth	14" x 9"		Solas	Amita 3	866829	3411-140-09	$124.98 G
60-130 HP	15 Tooth	14" x 11"		Solas	Amita 3	866830	3411-140-11	$124.98 G
50-130 HP	15 Tooth	14" x 11"		Michigan Wheel	Michigan Match	348335	101136	$145.98 E
60-130 HP	15 Tooth	13-3/4" x 13"		Solas	Amita 3	866831	3411-138-13	$124.98 G
60-130 HP	15 Tooth	13-3/4" x 13"	Left Ro.	Solas	Amita 3	866892	3412-138-13	$124.98 G
50-130 HP	15 Tooth	13-4/5" x 13"		Michigan Wheel	Michigan Match	348359	101031	$145.98 E
60-130 HP	15 Tooth	13-1/2" x 15"		Solas	Amita 3	866840	3411-135-15	$124.98 G
60-130 HP	15 Tooth	13-1/2" x 15"	Left Ro.	Solas	Amita 3	866893	3412-135-15	$124.98 G
50-130 HP	15 Tooth	13-1/2" x 15"		Michigan Wheel	Michigan Match	348361	101032	$145.98 E
60-130 HP	15 Tooth	13-1/4" x 17"		Solas	Amita 3	866864	3411-133-17	$124.98 G
60-130 HP	15 Tooth	13-1/5" x 17"		Solas	Amita 3	866865	3411-132-17	$124.98 G
60-130 HP	15 Tooth	13-1/4" x 17"	Left Ro.	Solas	Amita 3	866894	3412-133-17	$124.98 G
50-130 HP	15 Tooth	13.3" x 17"		Michigan Wheel	Michigan Match	348373	101033	$145.98 E
60-130 HP	15 Tooth	13" x 19"		Solas	Amita 3	866888	3411-130-19	$124.98 G
60-130 HP	15 Tooth	13.1" x 19"		Solas	Amita 3	866887	3411-131-19	$124.98 G
60-130 HP	15 Tooth	13-1/5" x 19"		Solas	Amita 3	866889	3411-132-19	$124.98 G
50-130 HP	15 Tooth	13" x 19"		Michigan Wheel	Michigan Match	348385	101034	$145.98 E
60-130 HP	15 Tooth	13" x 21"		Solas	Amita 3	866891	3411-130-21	$124.98 G
60-130 HP	15 Tooth	13-1/5" x 21"		Solas	Amita 3	866890	3411-132-21	$124.98 G
50-130 HP	15 Tooth	12.7" x 21"		Michigan Wheel	Michigan Match	348397	101035	$148.98 E
60-130 HP	15 Tooth	12-3/4" x 17"	4 Blade	Solas	Amita 4	873333	3413-128-17	$134.98 G
60-130 HP	15 Tooth	12-1/2" x 19"	4 Blade	Solas	Amita 4	873363	3413-125-19	$136.98 G
60-130 HP	15 Tooth	12-1/2" x 21"	4 Blade	Solas	Amita 4	873375	3413-125-21	$136.98 G
150-300 HP	15 Tooth	15-1/2" x 13"		Solas	Amita 3	866900	3511-155-13	$136.98 G
150-300 HP	15 Tooth	14-3/4" x 15"	4 Blade	Solas	Amita 4	866980	3513-148-15	$144.98 G
150-300 HP	15 Tooth	15" x 15"		Solas	Amita 3	866902	3511-150-15	$136.98 G
150-300 HP	15 Tooth	15" x 15"	Left Ro.	Solas	Amita 3	866943	3512-150-15	$136.98 G
150-300 HP	15 Tooth	15-4/5" x 15"		Solas	Amita 3 - E Plus	866901	3511-158-15	$146.98 G
150-300 HP	15 Tooth	14-1/2" x 17"	4 Blade	Solas	Amita 4	866982	3513-145-17	$144.98 G
150-250 HP, 200FS, 225FS HP †	15 Tooth	14-1/2" x 17"		Michigan Wheel	Michigan Match	348462	101027	$156.98 E
150-300 HP	15 Tooth	14-4/5" x 17"		Solas	Amita 3	866903	3511-148-17	$136.98 G
150-300 HP	15 Tooth	14-4/5" x 17"	Left Ro.	Solas	Amita 3	866945	3512-148-17	$136.98 G
150-300 HP	15 Tooth	15-1/2" x 17"		Solas	Amita 3 - E Plus	866904	3511-155-17	$146.98 G
150-250 HP, 200FS, 225FS HP †	15 Tooth	14" x 19"		Michigan Wheel	Michigan Match	348474	101028	$156.98 E
150-300 HP	15 Tooth	14-1/4" x 19"	4 Blade	Solas	Amita 4	866984	3513-143-19	$144.98 G
150-300 HP	15 Tooth	14-1/4" x 19"	4 Bl., Left Ro.	Solas	Amita 4	866990	3514-143-19	$144.98 G
150-300 HP	15 Tooth	14-1/2" x 19"		Solas	Amita 3	866927	3511-145-19	$136.98 G
150-300 HP	15 Tooth	14-1/2" x 19"	Left Ro.	Solas	Amita 3	866947	3512-145-19	$136.98 G
150-300 HP	15 Tooth	15-1/4" x 19"		Solas	Amita 3 - E Plus	866928	3511-153-19	$146.98 G
150-300 HP	15 Tooth	14" x 21"	4 Blade	Solas	Amita 4	866986	3513-140-21	$144.98 G
150-300 HP	15 Tooth	14.3" x 21"		Solas	Amita 3	866941	3511-143-21	$136.98 G

† All V6 Gearcases

©2014 Donovan Marine, Inc.

BRP, J/E, OMC Small Engine Props Assortment

Order No.	Mfg. No.	Brand	Price
B99999W	PA-A1	OMC SysteMatched	$3,393.98 E

Kit Contains:			Dia. x Pitch	Qty
B765752	(763456)	9.9-15 HP 2 Stroke 1974 Thru, 9.9-15 HP 4 Stroke 1995-2001, 8 HP 4 Stroke 1996 Thru	9.25 x 7	1
B765753	(763457)	Same As Above	9.25 x 8	1
B765764	(763458)	Same As Above	9.25 x 9	3
B765755	(778772)	Same As Above	9.25 x 10	3
B765756	(778773)	Same As Above	9.25 x 11	1
B765757	(765048)	20-35 HP, 1984-Current	11 X 9	1
B765758	(765049)	Same as Above	10.5 x 11	1
B765759	(765050)	Same as Above	10.5 x 12	1
B765760	(778863)	Same as Above	10 x 13	2
B765761	(763486)	Same as Above	10 x 15	1
B765763	(765136)	Same as Above, 4 Blade	10.1 x 12	1
B765764	(765137)	Same as Above, 4 Blade	10 x 13	2
B765765	(765138)	Same as Above, 4 Blade	10 x 14	2
B765766	(765139)	Same as Above, 4 Blade	10 x 15	1
B767767	(766807)	2-3 Cyl. 40-75 HP Small Gearcase 1975 Thru	13 x 11	1
B765768	(775713)	Same as Above	12.5 x 13	2
B765769		Same as Above	12.3 x 15	2
B765770		Same as Above	12.0 x 17	2

BRP, J/E, OMC V4-V6 Aluminum Prop Kit Assortment

Order No.	Mfg. No.	Brand	Price
B99999Y	PA-A6	OMC SysteMatched	$4,284.98 E

Kit Contains:			Dia. x Pitch	Qty
B765181K	(765181)	V4	13.75 x 13	1
B765182K	(765182)	V4	13.50 x 15	2
B765183K	(765183)	V4	13.25 x 17	3
B765184K	(765184)	V4	13.2 x 19	2
B765185K	(765185)	V4	13.2 x 21	1
B765186K	(765186)	V6	15 x 15	1
B765187K	(765187)	V6	14.8 x 17	2
B785188K	(765188)	V6	14.5 x 19	2
B765189K	(765189)	V6	14.3 x 21	1
B765793		Hub Only Suzuki, Johnson 90-115 4 Stroke		1
B765788		Hub Only Cobra, Volvo SX V6 GC SIZE		1
B765786		Hub Only MERC, Yamaha, Honda V6 G		1

BRP, J/E, OMC Stainless Steel V4 Prop w/Pressed Rubber Hub Assortment

Order No.	Mfg. No.	Brand	Price
B99999X	PA-S1	OMC SysteMatched	$5,561.98 E

Kit Contains:			Dia. x Pitch	Qty
B765805	(763950)	SX3	13.5 x 15	1
B765806	(763951)	SX3	13.25 x 17	2
B765807	(763952)	SX3	13 x 19	1
B765795	(763929)	VX3	13.9 x 15	1
B765796	(763930)	VX3	13.9 x 17	2
B765797	(763931)	VX3	13.9 x 19	1
B765800	(763965)	CX4, 4 Blade	13.25 x 15	1
B765801	(763966)	CX4, 4 Blade	13 x 17	1
B765802	(763967)	CX4, 4 Blade	13 x 19	1

BRP, J/E, OMC Stainless Steel V6 Prop Kits with OMC Hub Assortment

Order No.	Mfg. No.	Brand	Price
B99999Z	PA-S6	OMC SysteMatched	$4,682.98 E

Kit Contains:			Dia. x Pitch	Qty
B763912K	(763912)	VX V6	14.75 x 16	1
B763914K	(763914)	VX V6	14.75 x 17	1
B763918K	(763918)	VX V6	14.75 x 19	1
B763922K	(763922)	VX V6	14.5 x 21	1
B763938K	(763938)	CX V6, 4 Blade	14.3 x 17	1
B763942K	(763942)	CX V6, 4 Blade	14.2 x 19	1
B763946K	(763946)	CX V6, 4 Blade	14 x 21	1

BRP, J/E, OMC Display - Aluminum and Stainless Steel

Order No.	Mfg. No.	Brand	Price
878804	BRP	Solas	$5,055.98 H

Kit Contains:			Dia. x Pitch	Qty
866509	2311-125-13	Aluminum	12.5 x 13	1
866523	2311-123-15	Aluminum	12.3 x 15	1
866547	2311-120-17	Aluminum	12 x 17	1
866573	2411-135-15	Aluminum	13.5 x 15	1
866597	2411-133-17	Aluminum	13.3 x 17	1
866612	2411-130-19	Aluminum	13 x 19	1
866674	2511-148-17	Aluminum	14.3 x 17	1
866698	2511-145-19	Aluminum	14 x 19	1
866713	2511-143-21	Aluminum	14 x 21	1
867359	2331-125-13	Stainless Steel	12.5 x 13	1
867366	2331-123-15	Stainless Steel	12.3 x 15	1
867373	2331-120-17	Stainless Steel	12 x 17	1
867409	2431-135-15	Stainless Steel	13.5 x 15	1
867412	2431-133-17	Stainless Steel	13.3 x 17	1
867424	2431-130-19	Stainless Steel	13 x 19	1
867450	2531-143-17	Stainless Steel	14.3 x 17	1
867474	2531-140-19	Stainless Steel	14 x 19	1
867498	2531-140-21	Stainless Steel	14 x 21	1

Mercury Prop Display - Aluminum and Stainless Steel

Order No.	Mfg. No.	Brand	Price
878803	MERCURY	Solas	$4,997.98 H

Kit Contains:			Dia. x Pitch	Qty
866080	1311-116-11	Aluminum	11.8 x 11	1
866117	1311-111-13	Aluminum	11.1 x 13	1
866155	1311-110-15	Aluminum	11 x 15	1
866181	1411-135-15	Aluminum	13.5 x 15	1
866206	1411-133-17	Aluminum	13.3 x 17	1
866220	1411-130-19	Aluminum	13 x 19	1
866307	1511-148-17	Aluminum	14.3 x 17	1
866321	1511-145-19	Aluminum	14 x 19	1
866345	1511-143-21	Aluminum	14 x 21	1
866953	1331-116-11	Stainless Steel	11.8 x 11	1
866965	1331-111-13	Stainless Steel	11.1 x 13	1
866977	1331-110-15	Stainless Steel	11 x 15	1
867171	1431-135-15	Stainless Steel	13.5 x 15	1
867188	1431-133-17	Stainless Steel	13.3 x 17	1
867195	1431-130-19	Stainless Steel	13 x 19	1
867246	1531-143-17	Stainless Steel	14.3 x 17	1
867260	1531-140-19	Stainless Steel	14 x 19	1
867284	1531-140-21	Stainless Steel	14 x 21	1

Yamaha Prop Display - Aluminum and Stainless Steel

Order No.	Mfg. No.	Brand	Price
878802	YAMAHA	Solas	$5,055.98 H

Kit Contains:			Dia. x Pitch	Qty
866792	3311-116-11	Aluminum	11.6 x 11	1
866813	3311-111-13	Aluminum	11.1 x 13	1
866828	3311-110-15	Aluminum	11 x 15	1
866840	3411-135-15	Aluminum	13.5 x 15	1
866864	3411-133-17	Aluminum	13.3 x 17	1
866888	3411-130-19	Aluminum	13 x 19	1
866903	3511-148-17	Aluminum	15 x 17	1
866927	3511-145-19	Aluminum	14.8 x 19	1
866941	3511-143-21	Aluminum	14.5 x 21	1
870320	3331-116-11	Stainless Steel	11.6 x 11	1
870344	3331-111-13	Stainless Steel	11.1 x 13	1
870368	3331-110-15	Stainless Steel	11 x 15	1
870419	3431-135-15	Stainless Steel	13.5 x 15	1
870421	3431-133-17	Stainless Steel	13.3 x 17	1
870433	3431-130-19	Stainless Steel	13 x 19	1
870560	3531-143-17	Stainless Steel	15 x 17	1
870572	3531-140-19	Stainless Steel	14.8 x 19	1
870584	3531-140-21	Stainless Steel	14.5 x 21	1

Suzuki - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
9.9-15 HP	10 Tooth	9-1/4" x 9"		Solas	Saturn	873040	4121-093-09	$153.98 G
9.9-15 HP	10 Tooth	9-1/4" x 10"		Solas	Saturn	873042	4121-093-10	$153.98 G
9.9-15 HP	10 Tooth	9-1/4" x 11"		Solas	Saturn	873043	4121-093-11	$153.98 G
20-30 HP	10 Tooth	10-1/8" x 13"		Solas	New Saturn	873580	4231-101-13	$204.98 G
20-30 HP	10 Tooth	10-1/4" x 12"		Solas	New Saturn	873579	4231-103-12	$204.98 G
20-30 HP	10 Tooth	10" x 15"		Solas	New Saturn	873582	4231-100-15	$204.98 G
40-65 HP	13 Tooth	11-1/8" x 13"		Solas	New Saturn	873667	4331-111-13	$279.98 G
75-140 HP	13 Tooth	13-1/2" x 15"		Solas	New Saturn	873720	4431-135-15	$339.98 G
75-140 HP	13 Tooth	13-1/4" x 17"		Solas	New Saturn	873732	4431-133-17	$339.98 G
150-300 HP	15 Tooth	15-1/2" x 17"		Solas	Lexor	873124	4571-155-17	$454.98 G
150-300 HP	15 Tooth	15-1/2" x 17"	Left Ro.	Solas	Lexor	873186	4572-155-17	$454.98 G
150-300 HP	15 Tooth	15-1/4" x 19"		Solas	Lexor	873148	4571-153-19	$454.98 G
150-300 HP	15 Tooth	15-1/4" x 19"	Left Ro.	Solas	Lexor	873198	4572-153-19	$454.98 G
150-300 HP	15 Tooth	15" x 21"		Solas	Lexor	873162	4571-150-21	$454.98 G
150-300 HP	15 Tooth	15" x 21"	Left Ro.	Solas	Lexor	873199	4572-150-21	$454.98 G

Suzuki - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
9.9-15 HP	10 Tooth	9-1/4" x 7"		Solas	Amita 3	873010	4111-093-07	$73.98 G
9.9-15 HP	10 Tooth	9-1/4" x 8"		Solas	Amita 3	873013	4111-093-08	$73.98 G
9.9-15 HP	10 Tooth	9-1/4" x 9"		Solas	Amita 3	873011	4111-093-09	$65.98 G
9.9-15 HP	10 Tooth	9-1/4" x 11"		Solas	Amita 3	873035	4111-093-11	$73.98 G
9.9-15 HP	10 Tooth	9-1/4" x 10"		Solas	Amita 3	873012	4111-093-10	$73.98 G
9.9-15 HP	10 Tooth	10" x 5"	4 Blade	Solas	Amita 4	873009	4113-100-05	$101.98 G
9.9-15 HP	10 Tooth	9-1/4" x 7"	4 Blade	Solas	Amita 4	873005	4113-093-07	$80.98 G
9.9-15 HP	10 Tooth	9-1/4" x 9"	4 Blade	Solas	Amita 4	873008	4113-093-09	$80.98 G
9.9-15 HP	10 Tooth	9-1/4" x 11"	4 Blade	Solas	Amita 4	873006	4113-093-11	$80.98 G
20-30 HP	10 Tooth	11" x 9"		Solas	Amita 3	873069	4211-110-09	$85.98 G
20-30 HP	10 Tooth	10-1/2" x 11"		Solas	Amita 3	873073	4211-105-11	$85.98 G
20-30 HP	10 Tooth	10.3" x 12"		Solas	Amita 3	873085	4211-103-12	$85.98 G
20-30 HP	10 Tooth	10.1" x 13"		Solas	Amita 3	873097	4211-101-13	$85.98 G
20-30 HP	10 Tooth	10" x 14"		Solas	Amita 3	873100	4211-100-14	$85.98 G
20-30 HP	10 Tooth	10" x 15"		Solas	Amita 3	873102	4211-100-15	$85.98 G
20-30 HP	10 Tooth	10-1/5" x 11"	4 Blade	Solas	Amita 4	873106	4213-102-11	$100.98 G
40-65 HP	13 Tooth	12" x 10"		Solas	Amita 3 - C Plus	873227	4311-120-10	$119.98 G
40-65 HP	13 Tooth	11-4/5" x 11"		Solas	Amita 3 - C Plus	873200	4311-118-11	$119.98 G
40-65 HP	13 Tooth	11-3/5" x 12"		Solas	Amita 3 - C Plus	873214	4311-116-12	$119.98 G
40-65 HP	13 Tooth	11.1" x 13"		Solas	Amita 3	873201	4311-111-13	$119.98 G
40-65 HP	13 Tooth	11-3/5" x 13"		Solas	Amita 3 - C Plus	873213	4311-116-13	$119.98 G
40-65 HP	13 Tooth	11-3/5" x 14"		Solas	Amita 3 - C Plus	873223	4311-116-14	$119.98 G
40-65 HP	13 Tooth	11" x 15"		Solas	Amita 3	873225	4311-110-15	$119.98 G
40-65 HP	13 Tooth	11.1" x 11"	4 Blade	Solas	Amita 4	873237	4313-111-11	$127.98 G
40-65 HP	13 Tooth	10-1/2" x 13"	4 Blade	Solas	Amita 4	873239	4313-105-13	$127.98 G
60-140 HP	13 Tooth	14" x 11"		Solas	Amita 3	873275	4411-140-11	$122.98 G
60-140 HP	13 Tooth	13-3/4" x 13"		Solas	Amita 3	873287	4411-138-13	$122.98 G
60-140 HP	13 Tooth	13-1/2" x 15"		Solas	Amita 3	873299	4411-135-15	$122.98 G
60-140 HP	13 Tooth	13-1/4" x 17"		Solas	Amita 3	873302	4411-133-17	$122.98 G
60-140 HP	13 Tooth	13" x 19"		Solas	Amita 3	873314	4411-130-19	$122.98 G
60-140 HP	13 Tooth	13-1/4" x 13"	4 Blade	Solas	Amita 4	873319	4413-133-13	$134.98 G
60-140 HP	13 Tooth	13" x 15"	4 Blade	Solas	Amita 4	873321	4413-130-15	$134.98 G
60-140 HP	13 Tooth	12-3/4" x 17"	4 Blade	Solas	Amita 4	873323	4413-128-17	$134.98 G
DF 70A, 80A, 90A (4 Stroke)	15 Tooth	13.875" x 17"		Solas	Amita 3	866833	3411-139-17	$136.98 G
DF 70A, 80A, 90A (4 Stroke)	15 Tooth	13.875" x 19"		Solas	Amita 3	866835	3411-139-19	$136.98 G
DF 70A, 80A, 90A (4 Stroke)	15 Tooth	13.875" x 21"		Solas	Amita 3	866837	3411-139-21	$136.98 G
150-300 HP	15 Tooth	14-4/5" x 17"		Solas	Amita 3	873388	4511-148-17	$136.98 G
150-300 HP	15 Tooth	14-1/2" x 19"		Solas	Amita 3	873390	4511-145-19	$136.98 G
150-300 HP	15 Tooth	15.3" x 19"		Solas	Amita 3 - E Plus	873391	4511-153-19	$146.98 G
150-300 HP	15 Tooth	14.3" x 21"		Solas	Amita 3	873403	4511-143-21	$136.98 G
150-300 HP	15 Tooth	15.3" x 21"		Solas	Amita 3 - E Plus	873404	4511-153-21	$146.98 G

©2014 Donovan Marine, Inc.

Honda - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
25-30 HP	10 Tooth	10" x 8"		Solas	Saturn	867891	5221-100-08	$249.98 G
25-30 HP	10 Tooth	10" x 10"		Solas	Saturn	867915	5221-100-10	$249.98 G
25-30 HP	10 Tooth	10" x 12"		Solas	Saturn	867918	5221-100-12	$249.98 G
75-130 HP (Also Merc. 40-125 HP)		13-1/4" x 15"		Stiletto	Advantage I	858007	11315	$338.98 D
75-130 HP (Also Merc. 40-125 HP)		13-1/4" x 17"		Stiletto	Advantage I	858019	11317	$338.98 D
75-130 HP (Also Merc. 40-125 HP)		13-1/4" x 19"		Stiletto	Advantage I	858021	11319	$338.98 D
75-130 HP (Also Merc. 40-125 HP)		13-1/4" x 21"		Stiletto	Advantage I	858033	11321	$338.98 D
75-130 HP (Also Merc. 40-125 HP)		13-1/4" x 23"		Stiletto	Advantage I	858034	11323	$338.98 D
175, 200, 225 HP Also All V6 Mercs and Alpha 1 I/O's		14-1/4" x 15"		Stiletto	Advantage II	858196	10315	$349.98 D
		14-1/4" x 17"		Stiletto	Advantage II	858209	10317	$349.98 D
		14-1/4" x 17"	Left Ro.	Stiletto	Advantage II	858273	10217	$349.98 D
		14-1/4" x 19"		Stiletto	Advantage II	858211	10319	$349.98 D
		14-1/4" x 19"	Left Ro.	Stiletto	Advantage II	858285	10219	$349.98 D
		14-1/4" x 21"		Stiletto	Advantage II	858223	10321	$349.98 D

Honda - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
25-30 HP	10 Tooth	9-7/8" x 10"		Solas	Amita 3	875206	5211-099-10	$85.98 G
25-30 HP	10 Tooth	9-7/8" x 12"		Solas	Amita 3	875230	5211-099-12	$85.98 G
35-60 HP	13 Tooth	11-3/4" x 10"		Michigan Wheel	Michigan Match	348222	32045	$152.98 E
35-60 HP	13 Tooth	11-5/8" x 11"		Michigan Wheel	Michigan Match	348234	32044	$152.98 E
35-60 HP	13 Tooth	11-1/8" x 13"		Michigan Wheel	Michigan Match	348258	32042	$152.98 E
35-60 HP	13 Tooth	11-1/4" x 14"		Michigan Wheel	Michigan Match	348260	32041	$152.98 E
35-60 HP	13 Tooth	11" x 15"		Michigan Wheel	Michigan Match	348272	32040	$152.98 E
75-130 HP (Also Merc 40-125)		13-3/4" x 15"		Michigan Wheel	Michigan Match	345973	031141	$165.98 E

Force/Chrysler/US Marine - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
25-70 HP (1995-98 40-75 HP)		10-1/2" x 13"		Stiletto	Triad II	857512	12313	$275.98 D
25 HP, 3 Cyl. (1995-98 40-75 HP)		10-1/2" x 14"		Stiletto	Triad II	857524	12314	$275.98 D
25 HP, 3 Cyl. (1995-98 40-75 HP)		10-1/2" x 15"		Stiletto	Triad II	857536	12315	$275.98 D

Force/Chrysler/US Marine - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
25 HP, 3 Cyl. (1995-98)	10 Tooth	10-7/8" x 11"		Michigan Wheel	Michigan Match	345682	31049	$128.98 E
25 HP, 3 Cyl. (1995-98)	10 Tooth	10-7/8" x 13"		Michigan Wheel	Michigan Match	345694	31048	$128.98 E
40-75 HP	13 Tooth	12-1/2" x 8"		Michigan Wheel	Michigan Match	345808	32141	$152.98 E
40-75 HP	13 Tooth	11-1/4" x 10"		Michigan Wheel	Michigan Match	345896	31015	$151.98 E
40-75 HP	13 Tooth	10-7/8" x 11"		Michigan Wheel	Michigan Match	345900	31053	$151.98 E
40-75 HP	13 Tooth	10-5/8" x 12"		Michigan Wheel	Michigan Match	345909	31016	$151.98 E
40-75 HP	13 Tooth	10-3/8" x 13"		Michigan Wheel	Michigan Match	345911	31017	$151.98 E
40-75 HP	13 Tooth	10-1/2" x 13"		Michigan Wheel	Michigan Match	345861	31057	$151.98 E
40-75 HP	13 Tooth	10-1/4" x 14"		Michigan Wheel	Michigan Match	345923	31018	$151.98 E
40-75 HP	13 Tooth	10-3/8" x 14"		Michigan Wheel	Michigan Match	345872	31058	$151.98 E
40-75 HP	13 Tooth	10-1/8" x 15"		Michigan Wheel	Michigan Match	345935	31019	$151.98 E
40-75 HP	13 Tooth	10" x 17"		Michigan Wheel	Michigan Match	345947	31020	$151.98 E

Nissan, Tohatsu - Stainless Steel

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
9.9-20 HP	14 Tooth	9-1/4" x 9"		Solas	Saturn	875200	5121-093-09	$153.98 G
9.9-20 HP	14 Tooth	9-1/4" x 10"		Solas	Saturn	875202	5121-093-10	$153.98 G
25-30 HP	10 Tooth	10" x 9"		Solas	Saturn	867892	5221-100-09	$249.98 G
25-30 HP	10 Tooth	10" x 11"		Solas	Saturn	867917	5221-100-11	$249.98 G
25-30 HP	10 Tooth	10" x 13"		Solas	Saturn	867931	5221-100-13	$249.98 G
33-55 HP	13 Tooth	11-1/8" x 13"		Solas	New Saturn	875282	5331-111-13	$274.98 G
60-140 HP (Also Yamaha 50-130)		13-1/4" x 21"		Stiletto	Advantage I	862311	31321	$338.98 D

Nissan, Tohatsu - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
5 HP		7-4/5" x 8"		Solas	Amita 3	877157	5011-078-08	$76.98 G
8-9.8 HP	12 Tooth	8.7" x 5"	4 Blade	Solas	Amita 4	877165	5013-087-05	$103.98 G
8-9.8 HP	12 Tooth	8-1/2" x 7"		Solas	Amita 3	877156	5011-085-07	$65.98 G
8-9.8 HP	12 Tooth	8-1/2" x 8"		Solas	Amita 3	877158	5011-085-08	$72.98 G
9.9-20 HP	14 Tooth	9-1/4" x 7"		Solas	Amita 3	875249	5111-093-07	$72.98 G
9.9-20 HP	14 Tooth	9-1/4" x 8"		Solas	Amita 3	875250	5111-093-08	$72.98 G
9.9-20 HP	14 Tooth	9-1/4" x 9"		Solas	Amita 3	875251	5111-093-09	$72.98 G
9.9-20 HP	14 Tooth	9-1/4" x 10"		Solas	Amita 3	875252	5111-093-10	$72.98 G
9.9-20 HP	14 Tooth	9-1/4" x 11"		Solas	Amita 3	875253	5111-093-11	$72.98 G
9.9-20 HP	14 Tooth	10" x 5"	4 Blade	Solas	Amita 4	875259	5113-100-05	$103.98 G
9.9-20 HP	14 Tooth	9-1/4" x 7"	4 Blade	Solas	Amita 4	875261	5113-093-07	$80.98 G
9.9-20 HP	14 Tooth	10" x 7"	4 Blade	Solas	Amita 4	875260	5113-100-07	$103.98 G
9.9-20 HP	14 Tooth	9-1/4" x 8"	4 Blade	Solas	Amita 4	875262	5113-093-08	$80.98 G
9.9-20 HP	14 Tooth	9-1/4" x 9"	4 Blade	Solas	Amita 4	875263	5113-093-09	$80.98 G
9.9-20 HP	14 Tooth	9-1/4" x 10"	4 Blade	Solas	Amita 4	875264	5113-093-10	$80.98 G
25-30 HP	10 Tooth	9.9" x 9"		Solas	Amita 3	875205	5211-099-09	$85.98 G
25-30 HP	10 Tooth	9.9" x 11"		Solas	Amita 3	875229	5211-099-11	$85.98 G
25-30 HP	10 Tooth	9.9" x 13"		Solas	Amita 3	875243	5211-099-13	$85.98 G
25-30 HP	10 Tooth	10-1/5" x 11"	4 Blade	Solas	Amita 4	875265	5213-102-11	$100.98 G
25-30 HP	10 Tooth	10.1" x 12"	4 Blade	Solas	Amita 4	875266	5213-101-12	$100.98 G
25-30 HP	10 Tooth	10" x 13"	4 Blade	Solas	Amita 4	875268	5213-100-13	$100.98 G
25-30 HP	10 Tooth	10" x 14"	4 Blade	Solas	Amita 4	875270	5213-100-14	$100.98 G
35-55 HP	13 Tooth	12.1" x 9"		Solas	Amita 3	875271	5311-121-09	$114.98 G
35-55 HP	13 Tooth	11-3/5" x 11"		Solas	Amita 3	875373	5311-116-11	$114.98 G
35-55 HP	13 Tooth	11-2/5" x 12"		Solas	Amita 3	875274	5311-114-12	$114.98 G
33-55 HP	14 Tooth	11-1/8" x 13"		Solas	Amita 3	875275	5311-111-13	$114.98 G
35-55 HP	13 Tooth	11.1" x 14"		Solas	Amita 3	875276	5311-111-14	$114.98 G
35-55 HP	13 Tooth	11" x 15"		Solas	Amita 3	875277	5311-110-15	$114.98 G
60-140 HP	15 Tooth	13-1/4" x 13"	4 Blade	Solas	Amita 4	873338	3413-133-13	$134.98 G
60-140 HP	15 Tooth	13" x 15"	4 Blade	Solas	Amita 4	873339	3413-130-15	$134.98 G

Lehr - Aluminum

See Pages 859-860 for Propeller Features

Horsepower	Spline	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
2.5 and 5.0 HP		7-1/4" x 6"		Lehr, Inc		468180	LPP2.5	$76.99 D
2.5 and 5.0 HP		7-1/2" x 7"		Lehr, Inc		468184	LPP5.0	$79.99 D

©2014 Donovan Marine, Inc.

Volvo Penta Aquamatic SP Stern Drive - Aluminum

See Pages 859-860 for Propeller Features

Hub	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
Standard Hub, Short Hub	14-1/2" x 19"	Left Ro.	Solas	Amita 3	880284	8712-145-19	$139.98 G
Standard Hub, Short Hub	14-3/4" x 15"	4 Blade, Left Ro.	Solas	Amita 4	880290	8714-148-15	$149.98 G
Standard Hub, Short Hub	14-1/2" x 17"	4 Blade, Left Ro.	Solas	Amita 4	880292	8714-145-17	$149.98 G
Standard Hub, Short Hub	14-1/4" x 19"	4 Blade, Left Ro.	Solas	Amita 4	880294	8714-143-19	$149.98 G
Standard Hub, Short Hub	14" x 21"	4 Blade, Left Ro.	Solas	Amita 4	880296	8714-140-21	$149.98 G
Long Hub	15" x 15"		Solas	Amita 3	880257	8811-150-15	$136.98 G
Long Hub	15" x 15"	Left Ro.	Solas	Amita 3	880270	8812-150-15	$136.98 G
Long Hub	15-4/5" x 15"	Left Ro.	Solas	Amita 3 - E Plus	880271	8812-158-15	$149.98 G
Long Hub	14-4/5" x 17"		Solas	Amita 3	880259	8811-148-17	$136.98 G
Long Hub	14-4/5" x 17"	Left Ro.	Solas	Amita 3	880274	8812-148-17	$136.98 G
Long Hub	15-1/2" x 17"		Solas	Amita 3 - E Plus	880258	8811-155-17	$149.98 G
Long Hub	15-1/2" x 17"	Left Ro.	Solas	Amita 3 - E Plus	880275	8812-155-17	$149.98 G
Long Hub	14-1/4" x 19"	4 Blade, Left Ro.	Solas	Amita 4	880302	8814-143-19	$149.98 G
Long Hub	14-1/2" x 19"		Solas	Amita 3	880260	8811-145-19	$136.98 G
Long Hub	14-1/2" x 19"	Left Ro.	Solas	Amita 3	880265	8812-145-19	$136.98 G
Long Hub	15.3" x 19"		Solas	Amita 3 - E Plus	880261	8811-153-19	$149.98 G
Long Hub	15.3" x 19"	Left Ro.	Solas	Amita 3 - E Plus	880266	8812-153-19	$149.98 G
110-260 HP	15.3" x 19"	Left Ro.	Solas	Amita 3 - E Plus	880283	8712-153-19	$139.98 G
Long Hub	14.3" x 21"		Solas	Amita 3	880262	8811-143-21	$136.98 G
Long Hub	14.3" x 21"	Left Ro.	Solas	Amita 3	880267	8812-143-21	$136.98 G
Long Hub	15.3" x 21"	Left Ro.	Solas	Amita 3 - E Plus	880268	8812-153-21	$149.98 G
Long Hub	14-3/4" x 15"	4 Blade	Solas	Amita 4	880280	8813-148-15	$149.98 G
Long Hub	14-3/4" x 15"	4 Blade, Left Ro.	Solas	Amita 4	880298	8814-148-15	$149.98 G
Long Hub	14-1/2" x 17"	4 Blade	Solas	Amita 4	880282	8813-145-17	$149.98 G
Long Hub	14-1/2" x 17"	4 Blade, Left Ro.	Solas	Amita 4	880300	8814-145-17	$149.98 G
Long Hub	14-1/4" x 19"	4 Blade	Solas	Amita 4	880285	8813-143-19	$149.98 G
Long Hub	14" x 21"	4 Blade	Solas	Amita 4	880286	8813-140-21	$149.98 G
Long Hub	14" x 21"	4 Blade, Left Ro.	Solas	Amita 4	880304	8814-140-21	$149.98 G
Long Hub	14" x 23"	4 Blade	Solas	Amita 4	880288	8813-140-23	$149.98 G

OMC SX Cobra™, Volvo Penta SX Drives - Stainless Steel

See Pages 859-860 for Propeller Features

Fits	Spline	Dia. x Pitch	Brand	Type	Order No.	Mfg. No.	Price
Penta SX & Cobra SX Drives	19 Tooth	14-1/4" x 17"	Stiletto	Advantage II	862892	40317	$349.98 D
Penta SX & Cobra SX Drives	19 Tooth	14-3/4" x 18"	Solas	HR Titan 3	880253	8651-148-18	$369.98 G
Penta SX & Cobra SX Drives	19 Tooth	14-1/4" x 19"	Stiletto	Advantage II	862905	40319	$349.98 D
Penta SX & Cobra SX Drives	19 Tooth	14-3/4" x 19"	Solas	HR Titan 3	880255	8651-148-19	$369.98 G
Penta SX & Cobra SX Drives	19 Tooth	14-1/4" x 21"	Stiletto	Advantage II	862917	40321	$349.98 D
Penta SX & Cobra SX Drives	19 Tooth	14-1/2" x 21"	Solas	HR Titan 3	880256	8651-145-21	$369.98 G
Penta SX & Cobra SX Drives	19 Tooth	14-1/4" x 22"	Solas	HR Titan 3	880254	8651-143-22	$369.98 G
Penta SX & Cobra SX Drives	19 Tooth	14-1/4" x 23"	Stiletto	Advantage II	862929	40323	$349.98 D
Penta SX & Cobra SX Drives	19 Tooth	14-1/2" x 15"	Solas	HR Titan 4	880269	8653-145-15	$379.98 G
Penta SX & Cobra SX Drives	19 Tooth	14-1/4" x 17"	Solas	HR Titan 4	880272	8653-143-17	$379.98 G
Penta SX & Cobra SX Drives	19 Tooth	14-1/8" x 19"	Solas	HR Titan 4	880273	8653-141-19	$379.98 G
Penta SX & Cobra SX Drives	19 Tooth	14" x 21"	Solas	HR Titan 4	880276	8653-140-21	$379.98 G

OMC SX Cobra™, Volvo Penta SX Drives - Aluminum

See Pages 859-860 for Propeller Features

Fits	Spline	Dia. x Pitch	Brand	Type	Order No.	Mfg. No.	Price
SX Drive	19 Tooth	15" x 15"	Solas	Amita 3	880176	8611-150-15	$135.98 G
SX Drive	19 Tooth	14-4/5" x 17"	Solas	Amita 3	880179	8611-148-17	$135.98 G
SX Drive	19 Tooth	15-1/2" x 17"	Solas	Amita 3 - E Plus	880220	8611-155-17	$149.98 G
SX Drive	19 Tooth	14-1/2" x 19"	Solas	Amita 3	880193	8611-145-19	$135.98 G
SX Drive	19 Tooth	14-1/2" x 19"	Michigan Wheel	Michigan Match	350330	161003	$171.98 E
SX Drive	19 Tooth	15.3" x 19"	Solas	Amita 3 - E Plus	880232	8611-153-19	$149.98 G
SX Drive	19 Tooth	14-1/4" x 21"	Michigan Wheel	Michigan Match	350342	161004	$171.98 E
SX Drive	19 Tooth	14.3" x 21"	Solas	Amita 3	880218	8611-143-21	$135.98 G
SX Drive	19 Tooth	15.3" x 21"	Solas	Amita 3 - E Plus	880244	8611-153-21	$149.98 G
SX Drive	19 Tooth	14-1/5" x 23"	Solas	Amita 3	880219	8611-142-23	$135.98 G
SX Drive	19 Tooth	14-3/4" x 15"	Solas	Amita 4	880245	8613-148-15	$149.98 G
SX Drive	19 Tooth	14-1/2" x 17"	Solas	Amita 4	880246	8613-145-17	$149.98 G
SX Drive	19 Tooth	14-1/4" x 19"	Solas	Amita 4	880247	8613-143-19	$149.98 G
SX Drive	19 Tooth	14" x 21"	Solas	Amita 4	880248	8613-140-21	$149.98 G
SX Drive	19 Tooth	14" x 23"	Solas	Amita 4	880249	8613-140-23	$149.98 G

Prop Cone



- Volvo Penta: AQ200, 250, 270, 270T, 275, 280, 280T, 280PT, 290.
- Replaces: 850785, 854045.

Order No.	Mfg. No. / Description	Price
184210	(18-4210) Prop Cone	$56.47 H

Prop Cone Screw



- For: Volvo Penta (5/16"-18).
- Replaces: 850889.

Order No.	Mfg. No. / Description	Price
184212	(18-4212) Prop Cone Screw	$13.08 H

Fish Line Protector Spacer

- Volvo Penta: AQ250, 270, 275.
- Replaces: 839534.

Order No.	Mfg. No. / Description	Price
184209	(18-4209)	$41.08 H

Volvo Penta Dual Props - Aluminum

See Pages 859-860 for Propeller Features

Fits	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
Fits: DP 280, DP 290	15.5" x 17"	Front	Solas		880124	8512-155-17	$221.98 G
Fits: DP 280, DP 290	15.3" x 19"	Front	Solas		880120	8512-153-19	$221.98 G
Fits: DP 280, DP 290	15.3" x 21"	Front	Solas		880122	8512-153-21	$221.98 G
Fits: DP 280, DP 290	13.75" x 17"	4 Blade, Rear	Solas		880128	8513-138-17	$249.98 G
Fits: DP 280, DP 290	13.75" x 19"	4 Blade, Rear	Solas		880130	8513-138-19	$249.98 G
Fits: DP 280, DP 290	13.75" x 21"	4 Blade, Rear	Solas		880132	8513-138-21	$249.98 G

Volvo Penta Dual Props - Stainless Steel

See Pages 859-860 for Propeller Features

Fits	Dia. x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
Fits: DP 280, DP 290	15" x 15"	Front	Solas		880150	8532-150-15	$567.98 G
Fits: DP 280, DP 290	15" x 17"	Front	Solas		880152	8532-150-17	$567.98 G
Fits: DP 280, DP 290	15" x 19"	Front	Solas		880154	8532-150-19	$567.98 G
Fits: DP 280, DP 290	15" x 21"	Front	Solas		880156	8532-150-21	$567.98 G
Fits: DP 280, DP 290	13.5" x 15"	Rear	Solas		880146	8531-135-15	$498.98 G
Fits: DP 280, DP 290	13.3" x 17"	Rear	Solas		880144	8531-133-17	$498.98 G
Fits: DP 280, DP 290	13" x 19"	Rear	Solas		880140	8531-130-19	$498.98 G
Fits: DP 280, DP 290	13" x 21"	Rear	Solas		880142	8531-130-21	$498.98 G

Note: Volvo Duo Props may require special tools to install. This prop requires OEM hardware to install. Please consult OEM manual for proper installation and torque specs.

Volvo Part #	Front Propeller (SST Propeller)	Rear Propeller (SST Propeller)	Front Propeller (Aluminum Propeller)	Rear Propeller (Aluminum Propeller)
B2	8532-150-15	8531-135-15	-	-
A2	8532-150-17	8531-133-17	8512-155-17	8513-138-17
B3	8532-150-17	8531-133-17	8512-155-17	8513-138-17
(Heavy) A3	8532-150-17	8531-130-19	8512-155-17	8513-138-19
A3	8532-150-19	8531-130-19	8512-153-19	8513-138-19
B4	8532-150-19	8531-130-19	8512-153-19	8513-138-19
(Heavy) A4	8532-150-19	8531-130-19	8512-153-19	8513-138-19
A4	8532-150-19	8531-130-21	8512-153-19	8513-138-21
B5	8532-150-19	8531-130-21	8512-153-19	8513-138-21
A5	8532-150-19	8531-130-21	8512-153-19	8513-138-21
A6	8532-150-21	8531-130-21	8512-153-21	8513-138-21
B6	8532-150-21	8531-130-21	8512-153-21	8513-138-21
(Light) A7	8532-150-21	8531-130-21	8512-153-21	8513-138-21

*Check with engine manufacturer for complete prop hardware listings. SOLAS does not make all hardware required for all motors.





Aluminum Rear Propeller



Aluminum Front Propeller



Full Assembly



Stainless Steel Rear Propeller



Stainless Steel Front Propeller



Full Assembly

©2014 Donovan Marine, Inc.

OMC® SysteMatched™ Interchangeable Hub Propellers

See Page 859-860 for Propeller Features


SX3


VX3


CX4


Aluminum

Johnson, Evinrude - Stainless Steel

- Stainless Steel, E Series V6, 2 Stroke.
- 15 Spline, Interchangeable Hub, 150-300 H.P. and 90-130 H.P., 25" Shaft.
- 90 and 115 H.P. Evinrude® E-TEC®, 25" Shaft, 2004 thru 100 H.P., 2004 thru 100 H.P. Commercial, 1984 thru 120 and 140 H.P., 1985 130 H.P., 1995-1996 130 H.P. Evinrude® E-TEC®, 2009-2010 135 H.P., 200 thru 140 H.P. (25"), 1989 thru 150 and 155 H.P. Commercial, 1978 thru 150-300 H.P., Evinrude® E-TEC®, 2004 thru 175 H.P., 1977 thru 185 H.P., 1984-1985 200 H.P., 1976 thru 225 H.P., 1986 thru 235 H.P., 1978-1985 2.6 Liter, 1984-1985 250 H.P., 1991 thru 275 H.P., 1986-1988 300 H.P., 1988 thru 3.6 Liter, 1986-1987.
- Note: Hub not included with propeller.

Order No.	Mfg. No.	Type	Dia. x Pitch	Description	Price
B765826	765826	SX3	15-5/8" x 11"		$551.99
B765827	765827	SX3	15-5/8" x 13"		$551.99
B765828	765828	SX3	15-5/8" x 13"	Left Ro.	$551.99
B765829	765829	SX3	15" x 15"		$551.99
B765830	765830	SX3	15" x 15"	Left Ro.	$551.99
B765808	765808	VX3	14-3/4" x 16"		$551.99
B765809	765809	VX3	14-3/4" x 16"	Left Ro.	$551.99
B765810	765810	VX3	14-3/4" x 17"		$495.99
B765811	765811	VX3	14-3/4" x 17"	Left Ro.	$551.99
B765812	765812	VX3	14-3/4" x 19"		$551.99
B765813	765813	VX3	14-3/4" x 19"	Left Ro.	$551.99
B765814	765814	VX3	14-1/2" x 21"		$551.99
B765815	765815	VX3	14-1/2" x 21"	Left Ro.	$551.99
B765816	765816	CX4	14-1/2" x 15"	4 Blade	$663.99
B765817	765817	CX4	14-1/2" x 15"	4 Blade, Left Ro.	$663.99
B765818	765818	CX4	14-1/4" x 17"	4 Blade	$663.99
B765819	765819	CX4	14-1/4" x 17"	4 Blade, Left Ro.	$663.99
B765820	765820	CX4	14-1/8" x 19"	4 Blade	$663.99
B765821	765821	CX4	14-1/8" x 19"	4 Blade, Left Ro.	$663.99
B765822	765822	CX4	14" x 21"	4 Blade	$663.99
B765823	765823	CX4	14" x 21"	4 Blade, Left Ro.	$663.99
B765824	765824	CX4	14" x 23"	4 Blade	$663.99
B765825	765825	CX4	14" x 23"	4 Blade, Left Ro.	$663.99

Hub Kit for Stainless Steel E Series Propellers

Order No.	Mfg. No. / Description	Price
B765831	(B765831) Johnson/Evinrude	$67.99

Johnson, Evinrude - Aluminum

- Aluminum, D Series, 2 Stroke.
- 40-140 H.P. 13 Spline.
- 40/50/60 H.P., Evinrude® E-TEC®, 2004 thru 45 H.P. Commercial, 1986 thru 50 H.P. and 50 H.P. Commercial, 1971-1974 55 H.P. Commercial, 1980 thru 55 H.P., 1968-1969 60 H.P., 1970-1971 and 1986-1996 65 H.P. and 65 H.P. Commercial, 1972-1973 70 H.P., 1974-2001 75/90/115 H.P., Evinrude® E-TEC®, 2004 thru 75 H.P., 1975-1984 and 2004 thru 85 H.P., 1969-1980 and 1991-1995 88 H.P., 1981 thru 90 H.P., 1981 thru 100 H.P., 1979-1980 and 1988 thru 110 H.P., 1986-1989 115 and 115 H.O. H.P., 1973 thru 120 H.P., 1986-1994 125 H.P., 1971-1972 130 H.P. Evinrude® E-TEC®, 2009-2010 135 H.P., 1973-1976 140 H.P., 1977-1984 and 1986-1994.
- Note: Hub not included with propeller.

Order No.	Mfg. No.	Dia. x Pitch	Price
B765776	765776	13-3/4" x 13"	$173.99
B765777	765777	13-1/2" x 15"	$173.99
B765778	765778	13-1/4" x 17"	$173.99
B765779	765779	13" x 19"	$173.99
B765780	765780	13" x 21"	$173.99

Hub Kit for Aluminum D Series Propellers

Order No.	Mfg. No. / Description	Price
B765789	(B765789) Johnson/Evinrude	$62.99

Johnson, Evinrude - Aluminum

- Aluminum, E Series V6.
- 15 Spline, 150-300 H.P. and 90-130 H.P., 25" Shaft.
- 90 and 115 H.P. Evinrude® E-TEC®, 25" Shaft, 2004 thru 100 H.P., 2004 thru 100 H.P. Commercial, 1984 thru 120 and 140 H.P., 1985 130 H.P., 1995-1996 130 H.P. Evinrude® E-TEC®, 2009-2010 135 H.P., 200 thru 140 H.P. (25"), 1989 thru 150 and 155 H.P. Commercial, 1978 thru 150-300 H.P., Evinrude® E-TEC®, 2004 thru 175 H.P., 1977 thru 185 H.P., 1984-1985 200 H.P., 1976 thru 225 H.P., 1986 thru 235 H.P., 1978-1985 2.6 Liter, 1984-1985 250 H.P., 1991 thru 275 H.P., 1986-1988 300 H.P., 1988 thru 3.6 Liter, 1986-1987.
- Note: Hub not included with propeller.

Order No.	Mfg. No.	Dia. x Pitch	Price
B765781	765781	15" x 15"	$184.99
B765782	765782	14-7/8" x 17"	$184.99
B765783	765783	14-1/2" x 19"	$184.99
B765784	765784	14" x 21"	$184.99

Hub Kit for Aluminum E Series Propellers

Order No.	Mfg. No. / Description	Price
B765785	(B765785) Johnson/Evinrude	$61.99

OMC® SysteMatched™ Preconfigured Kits

- Fits: V6 E Series Evinrude/Johnson Outboards plus OMC Sterndrive, OMC Cobra. 15 Tooth Spline. Hub included.

Dia x Pitch	Description	Brand	Type	Order No.	Mfg. No.	Price
14-3/4" x 16"		OMC® SysteMatched™	VX3	B763912K	765808/76583	$619.98 H
14-3/4" x 16"	Left Ro.	OMC® SysteMatched™	VX3	B763913K	765809/76583	$619.98 H
14-3/4" x 17"		OMC® SysteMatched™	VX3	B763914K	765810/76583	$564.98 H
14-3/4" x 17"	Left Ro.	OMC® SysteMatched™	VX3	B763915K	765811/76583	$619.98 H
14-3/4" x 19"		OMC® SysteMatched™	VX3	B763918K	765812/76583	$619.98 H
14-3/4" x 19"	Left Ro.	OMC® SysteMatched™	VX3	B763919K	765813/76583	$619.98 H
14-1/2" x 21"		OMC® SysteMatched™	VX3	B763922K	765814/76583	$619.98 H
14-1/2" x 21"	Left Ro.	OMC® SysteMatched™	VX3	B763923K	765815/76583	$619.98 H
14-1/2" x 15"	4 Blade	OMC® SysteMatched™	CX4	B763936K	765816/76583	$731.98 H
14-1/2" x 15"	4 Blade, Left Ro.	OMC® SysteMatched™	CX4	B763937K	765817/76583	$731.98 H
14-1/4" x 17"	4 Blade	OMC® SysteMatched™	CX4	B763938K	765818/76583	$731.98 H
14-1/4" x 17"	4 Blade, Left Ro.	OMC® SysteMatched™	CX4	B763939K	765819/76583	$731.98 H
14-1/8" x 19"	4 Blade	OMC® SysteMatched™	CX4	B763942K	765820/76583	$731.98 H
14-1/8" x 19"	4 Blade, Left Ro.	OMC® SysteMatched™	CX4	B763943K	765821/76583	$731.98 H
14" x 21"	4 Blade	OMC® SysteMatched™	CX4	B763946K	765822/76583	$731.98 H
14" x 21"	4 Blade, Left Ro.	OMC® SysteMatched™	CX4	B763947K	765823/76583	$731.98 H
14" x 23"	4 Blade	OMC® SysteMatched™	CX4	B763948K	765824/76583	$731.98 H
14" x 23"	4 Blade, Left Ro.	OMC® SysteMatched™	CX4	B763949K	765825/76583	$731.98 H
15-5/8" x 11"		OMC® SysteMatched™	SX3	B763959K	765826/76583	$619.98 H
15-5/8" x 13"		OMC® SysteMatched™	SX3	B763960K	765827/76583	$619.98 H
15-5/8" x 13"	Left Ro.	OMC® SysteMatched™	SX3	B763961K	765828/76583	$619.98 H
15" x 15"		OMC® SysteMatched™	SX3	B763962K	765829/76583	$619.98 H
15" x 15"	Left Ro.	OMC® SysteMatched™	SX3	B763963K	765830/76583	$619.98 H

- Fits: Evinrude/Johnson. Hub included.

Spline	Dia x Pitch	Brand	Order No.	Mfg. No.	Price
13 Tooth	13-3/4" x 13"	OMC® SysteMatched™	B765181K	765776/76578	$234.98 H
13 Tooth	13-1/2" x 15"	OMC® SysteMatched™	B765182K	765777/76578	$234.98 H
13 Tooth	13-1/4" x 17"	OMC® SysteMatched™	B765183K	765778/76578	$234.98 H
13 Tooth	13" x 19"	OMC® SysteMatched™	B765184K	765779/76578	$234.98 H
13 Tooth	13" x 21"	OMC® SysteMatched™	B765185K	765780/76578	$234.98 H
15 Tooth	15" x 15"	OMC® SysteMatched™	B765186K	765781/76578	$243.98 H
15 Tooth	14-7/8" x 17"	OMC® SysteMatched™	B765187K	765782/76578	$243.98 H
15 Tooth	14-1/2" x 19"	OMC® SysteMatched™	B765188K	765783/76578	$243.98 H
15 Tooth	14" x 21"	OMC® SysteMatched™	B765189K	765784/76578	$243.98 H

OMC® SysteMatched™ Stainless Steel Propeller Hub System



- Designed for OMC® SysteMatched™ V6, E Series CX4, VX3 and SX3 propellers.
- Higher level of durability and reliability to OMC® SysteMatched™ propellers.
- The system is designed to flex and cushion shock loads to help protect the lower unit drivetrain.
- The patented torsion sleeve and drive spline withstand extreme temperatures in any application.

Stainless Steel

Order No.	Mfg. No.	Fits	Price
B765831	765831	1976-Current Evinrude/Johnson V6; 15 Tooth Spline	$67.99 H
B765832	765832	Mercury, Honda, Suzuki, Yamaha E Series, 150-225 H.P.; 15 Tooth Spline	$116.99 H

Aluminum

Order No.	Mfg. No.	Fits	Price
B765789	765789	Evinrude/Johnson 13 Tooth Spline 1968-Current	$59.96 H
B765790	765790	Honda, 15 Tooth Spline, 1999-Current	$59.97 H
B765791	765791	Nissan/Tohatsu, 15 Tooth Spline, 1987-Current	$59.97 H
B765793	765793	Suzuki DF90, DF115 (4 Stroke), Johnson 90, 115 H.P. (4 Stroke), 15 Tooth Spline, 2001-Current	$59.97 H
B765787	765787	Yamaha, 15 Tooth Spline, 1984-Current	$59.97 H
B765794	765794	Suzuki DF140 (4 Stroke), 15 Tooth Spline, 2001-Current	$59.97 H
B765786	765786	Mercury, Yamaha Honda, 15 Tooth Spline, 1961-Current	$59.97 H
B765788	765788	Volvo SX Sterndrives, Cobra SX, 19 Tooth Spline, 1994-Current	$59.96 H
B765792	765792	Mercury 225 EFI (Yamaha), 15 Tooth Spline	$59.97 H
B765785	765785	Evinrude/Johnson, 15 Tooth Spline, 1991-Current	$59.96 H

©2014 Donovan Marine, Inc.

SOLAS® Where Speed Begins

Rubex Stainless Steel Interchangeable Hub Propellers



C4

- Four blade propeller.
- Provides great stern lift and acceleration.
- Exceptional handling and maneuverability.
- Increased speed and fuel efficiencies in the engine mid-range.
- Excellent cruising performance.



NS3

- All-around performance.
- Offers good acceleration.
- Smaller sizes offered in extra large diameter with increased blade area.
- Large ear design is ideal for pontoons, commercial hulls, and heavy loads.



HR4

- Four blade propeller.
- Great stern lift and acceleration.
- Excellent Cruising Characteristics.
- Delivers a very smooth and powerful thrust.
- Increased speed and fuel efficiency in the motor's mid-range.



L3

- All-around performance.
- Large diameter and blade area for big boat loads.
- Great high speed performance without sacrificing mid-range speeds.
- Excellent fuel economy for offshore boats.



L3 Plus

- All-around performance.
- Large diameter and blade area for big boat loads.
- Great high speed performance without sacrificing mid-range speeds.
- Excellent fuel economy for offshore boats.



L4

- All-around performance.
- Four blade propeller
- Large diameter and blade area for big boat loads.
- Great high speed performance without sacrificing mid-range speeds.
- Excellent fuel economy for offshore boats.



S3

- High performance for bass and bay boats.
- High rake design for increased bow lift.
- Extra cupping for great bite in high engine mount positions.
- Cut down blade design reduces drag.
- Incorporates tuned exhaust relief for improved acceleration.

Order No.	Mfg. No.	Type	Dia. x Pitch	Description	Price
30-75 H.P. Outboards and Stern Drives					
880010	9333-115-12	C4	11-1/2" x 12"	4 Blade	$292.98 G
880011	9333-115-13	C4	11-1/2" x 13"	4 Blade	$292.98 G
880012	9333-115-14	C4	11-1/2" x 15"	4 Blade	$292.98 G
40-140 H.P. Outboards and Stern Drives					
879051	9431-138-13	NS3	13-3/4" x 13"		$299.98 G
879042	9432-138-13	NS3	13-3/4" x 13"	Left Ro.	$299.98 G
879063	9431-135-15	NS3	13-1/2" x 15"		$299.98 G
879043	9432-135-15	NS3	13-1/2" x 15"	Left Ro.	$299.98 G
879075	9431-133-17	NS3	13-1/4" x 17"		$299.98 G
879044	9432-133-17	NS3	13-1/4" x 17"	Left Ro.	$299.98 G
879087	9431-130-19	NS3	13" x 19"		$299.98 G
879045	9432-130-19	NS3	13" x 19"	Left Ro.	$299.98 G
879099	9431-130-21	NS3	13" x 21"		$299.98 G
880020	9453-135-13	HR4	13-1/2" x 13"	4 Blade	$325.98 G
880021	9453-133-15	HR4	13-1/4" x 15"	4 Blade	$325.98 G
880028	9454-133-15	HR4	13-1/4" x 15"	4 Bl, Left Ro	$325.98 G
880022	9453-130-17	HR4	13" x 17"	4 Blade	$325.98 G
880029	9454-130-17	HR4	13" x 17"	4 Bl, Left Ro	$325.98 G
880023	9453-130-19	HR4	13" x 19"	4 Blade	$325.98 G
880030	9454-130-19	HR4	13" x 19"	4 Bl, Left Ro	$325.98 G
880024	9453-130-21	HR4	13" x 21"	4 Blade	$325.98 G
880031	9454-130-21	HR4	13" x 21"	4 Bl, Left Ro	$325.98 G
135-300 H.P. Outboards and Stern Drives					
879102	9531-145-15	NS3	14-1/2" x 15"		$309.98 G
879151	9532-145-15	NS3	14-1/2" x 15"	Left Ro.	$309.98 G
879175	9571-158-15	L3	15-3/4" x 15"		$413.98 G
879230	9572-158-15	L3	15-3/4" x 15"	Left Ro.	$413.98 G
879114	9531-143-17	NS3	14-1/4" x 17"		$309.98 G
879152	9532-143-17	NS3	14-1/4" x 17"	Left Ro.	$309.98 G
879176	9571-155-17	L3	15-1/2" x 17"		$413.98 G
879231	9572-155-17	L3	15-1/2" x 17"	Left Ro.	$413.98 G
879203	9571-160-17	L3 Plus	16" x 17"		$422.98 G
879239	9572-160-17	L3 Plus	16" x 17"	Left Ro.	$422.98 G
879126	9531-140-19	NS3	14" x 19"		$309.98 G
879164	9532-140-19	NS3	14" x 19"	Left Ro.	$309.98 G
879188	9571-153-19	L3	15-1/4" x 19"		$413.98 G
879232	9572-153-19	L3	15-1/4" x 19"	Left Ro.	$413.98 G
879215	9571-160-19	L3 Plus	16" x 19"		$422.98 G
879241	9572-160-19	L3 Plus	16" x 19"	Left Ro.	$422.98 G
879138	9531-140-21	NS3	14" x 21"		$309.98 G
879190	9571-150-21	L3	15" x 21"		$413.98 G
879233	9572-150-21	L3	15" x 21"	Left Ro.	$413.98 G

Order No.	Mfg. No.	Type	Dia. x Pitch	Description	Price
135-300 H.P. Outboards and Stern Drives *(continued)*					
879227	9571-158-21	L3 Plus	15-3/4" x 21"		$422.98 G
879253	9572-158-21	L3 Plus	15-3/4" x 21"	Left Ro.	$422.98 G
879140	9531-140-23	NS3	14" x 23"		$309.98 G
879166	9532-140-23	NS3	14" x 23"	Left Ro.	$309.98 G
879228	9571-148-23	L3	14-3/4" x 23"		$413.98 G
879234	9572-148-23	L3	14-3/4" x 23"	Left Ro.	$413.98 G
880070	9561-151-23	S3	15-1/8" x 23"		$434.98 G
879254	9572-156-23	L3 Plus	15-5/8" x 23"	Left Ro.	$422.98 G
880071	9561-151-24	S3	15-1/8" x 24"		$434.98 G
880072	9561-151-25	S3	15-1/8" x 25"		$434.98 G
880073	9561-151-26	S3	15-1/8" x 26"		$434.98 G
880074	9561-151-27	S3	15-1/8" x 27"		$434.98 G
880075	9561-151-28	S3	15-1/8" x 28"		$434.98 G
880050	9553-145-15	HR4	14-1/2" x 15"	4 Blade	$359.98 G
880060	9554-145-15	HR4	14-1/2" x 15"	4 Bl, Left Ro	$359.98 G
880051	9553-143-17	HR4	14-1/4" x 17"	4 Blade	$359.98 G
880061	9554-143-17	HR4	14-1/4" x 17"	4 Bl, Left Ro	$359.98 G
879260	9573-153-18	L4	15-1/4" x 18"	4 Blade	$489.98 G
879270	9574-153-18	L4	15-1/4" x 18"	4 Bl, Left Ro	$489.98 G
880052	9553-141-19	HR4	14-1/8" x 19"	4 Blade	$359.98 G
880062	9554-141-19	HR4	14" x 19"	4 Bl, Left Ro	$359.98 G
879261	9573-153-20	L4	15-1/4" x 20"	4 Blade	$489.98 G
879271	9574-153-20	L4	15-1/4" x 20"	4 Bl, Left Ro	$489.98 G
880053	9553-140-21	HR4	14" x 21"	4 Blade	$359.98 G
880063	9554-140-21	HR4	14" x 21"	4 Bl, Left Ro	$359.98 G
879262	9573-153-22	L4	15-1/4" x 22"	4 Blade	$489.98 G
879272	9574-153-22	L4	15-1/4" x 22"	4 Bl, Left Ro	$489.98 G
880054	9553-140-23	HR4	14" x 23"	4 Blade	$359.98 G
880064	9554-140-23	HR4	14" x 23"	4 Bl, Left Ro	$359.98 G
879263	9573-153-24	L4	15-1/4" x 24"	4 Blade	$489.98 G
879273	9574-153-24	L4	15-1/4" x 24"	4 Bl, Left Ro	$489.98 G
879264	9573-153-26	L4	15-1/4" x 26"	4 Blade	$489.98 G
879274	9574-153-26	L4	15-1/4" x 26"	4 Bl, Left Ro	$489.98 G
879265	9573-153-28	L4	15-1/4" x 28"	4 Blade	$489.98 G



Rubex Aluminum Interchangeable Hub Propellers



Rubex 3

3 Blade Aluminum Propellers

Rubex 4

4 Blade Aluminum Propellers

Order No.	Mfg. No.	Type	Dia. x Pitch	Description	Price
30-75 H.P. Outboards and Stern Drives					
880002	9311-114-12	3	11.4" x 12"		$72.98 G
880001	9311-111-13	3	11.1" x 13"		$72.98 G
880000	9311-111-14	3	11.1" x 14"		$72.98 G
879994	9311-110-15	3	11" x 15"		$72.98 G
879998	9311-120-10	3	12" x 10"		$72.98 G
878805	9411-140-09	3	14" x 9"		$89.98 G
40-140 H.P. Outboards and Stern Drives					
878806	9411-140-11	3	14" x 11"		$89.98 G
878807	9411-138-13	3	13.75" x 13"		$89.98 G
878819	9411-135-15	3	13.5" x 15"		$89.98 G
878821	9411-133-17	3	13.25" x 17"		$89.98 G
878833	9411-132-19	3	13.2" x 19"		$89.98 G
878834	9411-132-21	3	13.2" x 21"		$89.98 G
878836	9413-133-13	4	13.25" x 13"	4 Blade	$101.98 G
878837	9413-130-15	4	13" x 15"	4 Blade	$101.98 G
878838	9413-128-17	4	12.75" x 17"	4 Blade	$101.98 G
878839	9413-125-19	4	12.5" x 19"	4 Blade	$101.98 G
135-300 H.P. Outboards and Stern Drives					
878842	9511-155-11	3	15.5" x 11"		$96.98 G
878843	9511-153-13	3	15.3" x 13"		$96.98 G
878844	9511-160-13	3	16" x 13"		$96.98 G
878845	9511-150-15	3	15" x 15"		$96.98 G
878873	9512-150-15	3	15" x 15"	Left Ro.	$96.98 G
878857	9511-148-17	3	14.8" x 17"		$96.98 G
878874	9512-148-17	3	14.8" x 17"	Left Ro.	$96.98 G
878869	9511-145-19	3	14.5" x 19"		$96.98 G
878875	9512-145-19	3	14.5" x 19"	Left Ro.	$96.98 G
878871	9511-143-21	3	14.3" x 21"		$96.98 G
878876	9512-143-21	3	14.3" x 21"	Left Ro.	$96.98 G
878883	9513-148-15	4	14.75" x 15"	4 Blade	$111.98 G
878895	9513-145-17	4	14.5" x 17"	4 Blade	$111.98 G
878908	9513-143-19	4	14.25" x 19"	4 Blade	$111.98 G
878910	9513-140-21	4	14" x 21"	4 Blade	$111.98 G



Must order propeller & hub kit seperately!



Rubex Display Racks

Rubex Interchangeable Hub Display - Stainless Steel

Order No.	Mfg. No.	Brand	Price
878800	STAINLESS STEEL	Solas	$7,403.98 H

Kit Contains:			Dia. x Pitch	Qty
879063	(9431-135-15)	Stainless Steel Rubex NS3	13-1/2" x 15"	3
879075	(9431-133-17)	Stainless Steel Rubex NS3	13-1/4" x 17"	3
879087	(9431-130-19)	Stainless Steel Rubex NS3	13" x 19"	3
879114	(9531-143-17)	Stainless Steel Rubex NS3	14-1/4" x 17"	3
879126	(9531-140-19)	Stainless Steel Rubex NS3	14" x 19"	3
879138	(9531-140-21)	Stainless Steel Rubex NS3	14" x 21"	3
879861	(RBX-100)	Hub Kit - J/E V6 Gearcase 91 to pre		1
879874	(RBX-101)	Hub Kit - J/E V6 Gearcase 1976 to 90		1
879885	(RBX-102)	Hub Kit - M/M/Mer/For/Hon 70-250 HP		1
879897	(RBX-103)	Hub Kit - Yamaha V6		1
879900	(RBX-104)	Hub Kit - Suzuki 150-225 HP		1
879912	(RBX-105)	Hub Kit - Volvo SX DRIVE		1
879924	(RBX-106)	Hub Kit - J/E V4 Gearcase		1
879936	(RBX-107)	Hub Kit - Honda 75-130 HP		1
879948	(RBX-108)	Hub Kit - Yamaha 60-90 HP		1
879950	(RBX-110)	Hub Kit - Suzuki 60-140 HP		1
879962	(RBX-124)	Hub Kit - Yamaha/Mercury/Honda EFI		1
879974	(RBX-125)	Hub Kit - Suzuki 4 Stroke 90-115 HP		1
879986	(RBX-126)	Hub Kit - Suzuki 4 Stroke 140 HP and up		1
878798		Rubex Display Rack		1

Rubex Interchangeable Hub Display - Aluminum and Stainless Steel

Order No.	Mfg. No.	Brand	Price
878799	ALUMIMUM & S/S	Solas	$4,374.98 H

Kit Contains:			Dia. x Pitch	Qty
878819	(9411-135-15)	Aluminum Rubex 3	13.5" x 15"	2
878821	(9411-133-17)	Aluminum Rubex 3	13.3" x 17"	2
878833	(9411-130-19)	Aluminum Rubex 3	13" x 19"	2
878857	(9511-148-17)	Aluminum Rubex 3	14.8" x 17"	2
878869	(9511-145-19)	Aluminum Rubex 3	14.5" x 19"	2
878871	(9511-143-21)	Aluminum Rubex 3	14.3" x 21"	2
879063	(9431-135-15)	Stainless Steel Rubex NS3	13-1/2" x 15"	1
879075	(9431-133-17)	Stainless Steel Rubex NS3	13-1/4" x 17"	1
879087	(9431-130-19)	Stainless Steel Rubex NS3	13" x 19"	1
879114	(9531-143-17)	Stainless Steel Rubex NS3	14-1/4" x 17"	1
879126	(9531-140-19)	Stainless Steel Rubex NS3	14" x 19"	1
879138	(9531-140-21)	Stainless Steel Rubex NS3	14" x 21"	1
879861	(RBX-100)	Hub Kit - J/E V6 Gearcase 91 to pre		1
879874	(RBX-101)	Hub Kit - J/E V6 Gearcase 1976 to 90		1
879885	(RBX-102)	Hub Kit - M/M/Mer/For/Hon 70-250 HP		1
879897	(RBX-103)	Hub Kit - Yamaha V6		1
879900	(RBX-104)	Hub Kit - Suzuki 150-225 HP		1
879912	(RBX-105)	Hub Kit - Volvo SX DRIVE		1
879924	(RBX-106)	Hub Kit - J/E V4 Gearcase		1
879936	(RBX-107)	Hub Kit - Honda 75-130 HP		1
879948	(RBX-108)	Hub Kit - Yamaha 60-90 HP		1
879950	(RBX-110)	Hub Kit - Suzuki 60-140 HP		1
879962	(RBX-124)	Hub Kit - Yamaha/Mercury/Honda EFI		1
879974	(RBX-125)	Hub Kit - Suzuki 4 Stroke 90-115 HP		1
879986	(RBX-126)	Hub Kit - Suzuki 4 Stroke 140 HP and up		1
878798		Rubex Display Rack		1

Rubex Interchangeable Hub Display - Aluminum

Order No.	Mfg. No.	Brand	Price
878801	ALUMINUM	Solas	$2,858.98 H

Kit Contains:			Dia. x Pitch	Qty
878819	(9411-135-15)	Aluminum Rubex 3	13.5" x 15"	3
878821	(9411-133-17)	Aluminum Rubex 3	13.3" x 17"	3
878833	(9411-130-19)	Aluminum Rubex 3	13" x 19"	3
878857	(9511-148-17)	Aluminum Rubex 3	14.8" x 17"	3
878869	(9511-145-19)	Aluminum Rubex 3	14.5" x 19"	3
878871	(9511-143-21)	Aluminum Rubex 3	14.3" x 21"	3
879861	(RBX-100)	Hub Kit - J/E V6 Gearcase 91 to pre		1
879874	(RBX-101)	Hub Kit - J/E V6 Gearcase 1976 to 90		1
879885	(RBX-102)	Hub Kit - M/M/Mer/For/Hon 70-250 HP		1
879897	(RBX-103)	Hub Kit - Yamaha V6		1
879900	(RBX-104)	Hub Kit - Suzuki 150-225 HP		1
879912	(RBX-105)	Hub Kit - Volvo SX DRIVE		1
879924	(RBX-106)	Hub Kit - J/E V4 Gearcase		1
879936	(RBX-107)	Hub Kit - Honda 75-130 HP		1
879948	(RBX-108)	Hub Kit - Yamaha 60-90 HP		1
879950	(RBX-110)	Hub Kit - Suzuki 60-140 HP		1
879962	(RBX-124)	Hub Kit - Yamaha/Mercury/Honda EFI		1
879974	(RBX-125)	Hub Kit - Suzuki 4 Stroke 90-115 HP		1
879986	(RBX-126)	Hub Kit - Suzuki 4 Stroke 140 HP and up		1
878798		Rubex Display Rack		1

©2014 Donovan Marine, Inc.

SOLAS®
Where Speed Begins

Rubex Hub Kits



- Interchanges with Mercury Flo-Torque® and Michigan Vortex® Systems.
- Rubber construction.
- All necessary hardware included.

BRP, Johnson, Evinrude, OMC Stern Drive:

Order No.	Mfg. No.	Description	Price
879924	RBX-106	• 45-75 H.P., Large Gearcase - 4-1/4", 1968-Present, 13 Spline Propshaft • 85-140 H.P., 1969-Present, 13 Spline Propshaft • Model 400 Cobra, 1978-1991, 13 Spline Propshaft	$39.98 G
879951	RBX-111	• 40-75 H.P., Small Gearcase - 3-3/8", 1975 and Newer, 13 Spline Propshaft	$34.98 G
879861	RBX-100	• 90-140 H.P., Large Gearcase, 1991-Present, 15 Spline Propshaft • 150-300 H.P., 1991-Present, 15 Spline Propshaft Model 800/Cobra/King Cobra, 1991-1994, 15 Spline Propshaft	$39.98 G
879950	RBX-110	• 60 and 70 H.P. (4 Stroke), 1998-Present, 13 Spline Propshaft • Suzuki: 75-140 H.P., DF60 and DF70, 1979-Present, 13 Spline Propshaft	$39.98 G
879974	RBX-125	• 90 and 115 H.P. (4 Stroke), 2003-Present, 15 Spline Propshaft • Suzuki: DF90, DF115 (4 Stroke), 2001-Present, 15 Spline Propshaft	$39.98 G
879874	RBX-101	• 90-140 H.P., Large Gearcase, 1976-1990, 15 Spline Propshaft • 150-300 H.P., 1976-1990, 15 Spline Propshaft • Model 800/Cobra/King Cobra, 1978-1990, 15 Spline Propshaft	$39.98 G
879986	RBX-126	• 140 H.P. (4 Stroke), 2003-Present, 15 Spline Propshaft • Suzuki: DF140 (4 Stroke), 2001-Present, 15 Spline Propshaft	$39.98 G

Mercury, Mariner, Mercruiser:

Order No.	Mfg. No.	Description	Price
879961	RBX-123	• 1-1/4" 19 Spline Propshaft	$104.98 G
879954	RBX-114	• 30 H.P. 1994 and Newer, 35 H.P. 1984-1989, Model 402-500 1974-1984, 13 Spline Propshaft • Model 650 1972-1976, Model 700 1977-1984, 13 Spline Propshaft • 40/50 H.P. (2 and 4 Stroke, not Bigfoot) 1977 and Newer, 13 Spline Propshaft • 48 H.P. Mariner All Years, 13 Spline Propshaft • 55 H.P. Seapro and Marathon 1995 and Newer, 13 Spline Propshaft • 60 H.P. (Not Bigfoot or Seapro) 1978 and Newer, 13 Spline Propshaft • 60 HP Mariner 1976, 70 H.P. thru 1983, 13 Spline Propshaft • Force: 40 and 50 H.P. 1995-1998, 70 H.P. 1991-1995, 75 H.P. 1996-1998, 13 Spline Propshaft	$34.98 G
879885	RBX-102	• 60 H.P. Bigfoot, 15 Spline Propshaft • 70-140 H.P. (except 135 H.P.), 1961-Present, XR-4, XR-6, 15 Spline Propshaft • 135 H.P., 1987-Present, 15 Spline Propshaft • 150-300 H.P., 1978-Present, 15 Spline Propshaft • Mercruiser Alpha 1 and Bravo 1 (Less than 400 H.P.), 15 Spline Propshaft • Yamaha: 80-140 H.P., 1978-1983, 15 Spline Propshaft, • 150-175 H.P., 1978-1983, 15 Spline Propshaft • Honda: 75-90 H.P., 1995-1998, 15 Spline Propshaft • Force: 75-150 H.P., 1995-Present, 15 Spline Propshaft	$42.98 G
879962	RBX-124	• 225 EFI (4 Stroke, Manufactured by Yamaha) 15 Tooth Spline	$39.98 G

Yamaha:

Order No.	Mfg. No.	Description	Price
879957	RBX-117	• F30 (4 Stroke) 2001-2005, 40 H.P. and 50 H.P. (Not T50) 1984 and Newer, 13 Spline Propshaft • 48 H.P. 1995 and Newer, 55 H.P. 1976-1995, 13 Spline Propshaft • F40 (4 Stroke) 1999 and Newer, F50 (4 Stroke) 1995 and Newer, 13 Spline Propshaft • 60 H.P. 1976-1991, F60 (4 Stroke) 1999 and Newer, 13 Spline Propshaft	$34.98 G
879948	RBX-108	• T50, 1996-Present, 15 Spline Propshaft • 60-100 H.P., Including 4 Stroke, 1984-Present, 15 Spline Propshaft	$39.98 G
879897	RBX-103	• 115 H.P., FS115 (4 Stroke) and 130 H.P., 1984-Present, 15 Spline Propshaft • 150-300 H.P., 1984-Present, 15 Spline Propshaft • 225 EFI (4 Stroke) • Sterndrives, 1989-1993, 15 Spline Propshaft	$39.98 G
879987	RBX-127	• F350 (350 H.P. 4 Stroke V8 Engine	$104.98 G

Suzuki:

Order No.	Mfg. No.	Description	Price
879955	RBX-115	• DT50, 50M 1983-1984, DT55 1985-1997, DT60 1983-1984, DT65 1985-1997, 13 Spline Propshaft	$34.98 G
879990	RBX-150	• DF70A, DF80A, DF90A (4 Stroke) 2009-, 15 Spline Propshaft	$39.98 G
879900	RBX-104	• DT150-225 H.P., 1986-Present, 2 Stroke DF150-300 H.P., 15 Spline Propshaft	$39.98 G

Honda:

Order No.	Mfg. No.	Description	Price
879953	RBX-113	• BF35/45 1991-1994, BF40/50/50A 1995 and Newer, 13 Spline Shaft	$34.98 G
879936	RBX-107	• 75-90 H.P., 1999-Present; 115-130 H.P., 1998-Present, 15 Spline Propshaft • 115-130 H.P., 1998-Present, 15 Spline Propshaft • BF135 H.P., 150, 200 and 225 H.P., 2003-Present, 15 Spline Propshaft	$39.98 G

Nissan, Tohatsu:

Order No.	Mfg. No.	Description	Price
879956	RBX-116	• 5 H.P. (35B Only) thru 1984, 40 H.P. 1984 and Newer, 13 Spline Propshaft • 50 HP (Not 50C) 1992 and Newer, 13 Spline Propshaft	$34.98 G
879952	RBX-112	• 50 H.P. (50C Only) 1987-1991, 55 H.P. 1981-1988, 13 Spline Propshaft • 60A 1986 and Newer, 70A/70B 1981 and Newer, 13 Spline Propshaft	$34.98 G
879949	RBX-109	• 90-140 H.P., 1987-Present, 15 Tooth Spline	$39.98 G

OMC SX Cobra™, Volvo Penta SX Drives:

Order No.	Mfg. No.	Description	Price
879912	RBX-105	• Cobra SX, 1994-Present, 19 Spline Propshaft • SX Sterndrives, 1994-Present, 19 Spline Propshaft	$39.98 G

Must order propeller & hub kit seperately!

SOLAS® BRP, Johnson, Evinrude, OMC Stern Drive Rubex Pre-Configured Kits (Hub Included)

- 45-75 H.P., Large Gearcase - 4-1/4", 1968-Present, 13 Spline Propshaft.
- 85-140 H.P., 1969-Present, 13 Spline Propshaft.
- Model 400 Cobra, 1978-1991, 13 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
881626	9431-13/106	NS3	13-3/4" x 13"		$415.98 G
881638	9431-15/106	NS3	13-1/2" x 15"		$415.98 G
881640	9431-17/106	NS3	13-1/4" x 17"		$415.98 G
881652	9431-19/106	NS3	13" x 19"		$415.98 G
881664	9431-21/106	NS3	13" x 21"		$415.98 G
Aluminum					
881587	9411-13/106	3	13.75" x 13"		$152.98 G
881599	9411-15/106	3	13.5" x 15"		$152.98 G
881602	9411-17/106	3	13.25" x 17"		$152.98 G
881614	9411-19/106	3	13.2" x 19"		$152.98 G

- 90-140 H.P., Large Gearcase, 1991-Present, 15 Spline Propshaft.
- 150-300 H.P., 1991-Present, 15 Spline Propshaft.
- Model 800/Cobra/King Cobra, 1991-1994, 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
880511	9531-15/100	NS3	14-1/2" x 15"		$427.98 G
880523	9531-17/100	NS3	14-1/4" x 17"		$427.98 G
880561	9532-17/100	NS3	14-1/4" x 17"	Left Ro.	$427.98 G
880585	9571-17/100	L3	15-1/2" x 17"		$527.98 G
880535	9531-19/100	NS3	14" x 19"		$427.98 G
880573	9532-19/100	NS3	14" x 19"	Left Ro.	$427.98 G
880597	9571-19/100	L3	15-1/4" x 19"		$527.98 G
880547	9531-21/100	NS3	14" x 21"		$427.98 G
880600	9571-21/100	L3	15" x 21"		$527.98 G
880559	9531-23/100	NS3	14" x 23"		$427.98 G
Aluminum					
880434	9511-15/100	3	15" x 15"		$161.98 G
880446	9511-17/100	3	14.8" x 17"		$161.98 G
880458	9511-19/100	3	14.5" x 19"		$161.98 G
880460	9511-21/100	3	14.3" x 21"		$161.98 G
880472	9513-15/100	4	14.75" x 15"	4 Blade	$177.98 G
880484	9513-17/100	4	14.5" x 17"	4 Blade	$177.98 G
880496	9513-19/100	4	14.25" x 19"	4 Blade	$177.98 G
880509	9513-21/100	4	14" x 21"	4 Blade	$177.98 G

- 60 and 70 H.P. (4 Stroke), 1998-Present, 13 Spline Propshaft.
- Suzuki: 75-140 H.P., DF60 and DF70, 1979-Present, 13 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch	Price
Stainless Steel				
882084	9431-13/110	NS3	13-3/4" x 13"	$415.98 G
882096	9431-15/110	NS3	13-1/2" x 15"	$415.98 G
882109	9431-17/110	NS3	13-1/4" x 17"	$415.98 G
882111	9431-19/110	NS3	13" x 19"	$415.98 G
882123	9431-21/110	NS3	13" x 21"	$415.98 G
Aluminum				
882046	9411-13/110	3	13.75" x 13"	$152.98 G
882058	9411-15/110	3	13.5" x 15"	$152.98 G
882060	9411-17/110	3	13.25" x 17"	$152.98 G
882072	9411-19/110	3	13.2" x 19"	$152.98 G

- 90-140 H.P., Large Gearcase, 1976-1990, 15 Spline Propshaft.
- 150-300 H.P., 1976-1990, 15 Spline Propshaft.
- Model 800/Cobra/King Cobra, 1978-1990, 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
880698	9531-15/101	NS3	14-1/2" x 15"		$427.98 G
880701	9531-17/101	NS3	14-1/4" x 17"		$427.98 G
880749	9532-17/101	NS3	14-1/4" x 17"	Left Ro.	$427.98 G
880763	9571-17/101	L3	15-1/2" x 17"		$527.98 G
880713	9531-19/101	NS3	14" x 19"		$427.98 G
880751	9532-19/101	NS3	14" x 19"	Left Ro.	$427.98 G
880775	9571-19/101	L3	15-1/4" x 19"		$527.98 G
880725	9531-21/101	NS3	14" x 21"		$427.98 G
880787	9571-21/101	L3	15" x 21"		$527.98 G
880737	9531-23/101	NS3	14" x 23"		$427.98 G
Aluminum					
880612	9511-15/101	3	15" x 15"		$161.98 G
880624	9511-17/101	3	14.8" x 17"		$161.98 G
880636	9511-19/101	3	14.5" x 19"		$161.98 G
880648	9511-21/101	3	14.3" x 21"		$161.98 G
880650	9513-15/101	4	14.75" x 15"	4 Blade	$177.98 G
880662	9513-17/101	4	14.5" x 17"	4 Blade	$177.98 G
880674	9513-19/101	4	14.25" x 19"	4 Blade	$177.98 G
880686	9513-21/101	4	14" x 21"	4 Blade	$177.98 G

SOLAS® Mercury, Mariner, Mercruiser Rubex Pre-Configured Kits (Hub Included)

- 60 H.P. Bigfoot, 15 Spline Propshaft.
- 70-140 H.P. (Except 135 H.P.), 1961-Present, XR-4, XR-6, 15 Spline Propshaft.
- 135 H.P., 1987-Present, 15 Spline Propshaft.
- 150-300 H.P., 1978-Present, 15 Spline Propshaft.
- Mercruiser Alpha 1 and Bravo 1 (Less than 400 H.P.), 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
880915	9431-13/102	NS3	13-3/4" x 13"		$421.98 G
880927	9431-15/102	NS3	13-1/2" x 15"		$421.98 G
880965	9531-15/102	NS3	14-1/2" x 15"		$432.98 G
880939	9431-17/102	NS3	13-1/4" x 17"		$421.98 G
880977	9531-17/102	NS3	14-1/4" x 17"		$432.98 G
881018	9532-17/102	NS3	14-1/4" x 17"	Left Ro.	$432.98 G
881032	9571-17/102	L3	15-1/2" x 17"		$532.98 G
880941	9431-19/102	NS3	13" x 19"		$421.98 G
880989	9531-19/102	NS3	14" x 19"		$432.98 G
881020	9532-19/102	NS3	14" x 19"	Left Ro.	$432.98 G
881044	9571-19/102	L3	15-1/4" x 19"		$532.98 G
880953	9431-21/102	NS3	13" x 21"		$421.98 G
880991	9531-21/102	NS3	14" x 21"		$432.98 G
881056	9571-21/102	L3	15" x 21"		$532.98 G
881006	9531-23/102	NS3	14" x 23"		$432.98 G

- Yamaha: 80-140 H.P., 1978-1983, 15 Spline Propshaft.
- Yamaha: 150-175 H.P., 1978-1983, 15 Spline Propshaft.
- Honda: 75-90 H.P., 1995-1998, 15 Spline Propshaft.
- Force: 75-150 H.P., 1995-Present, 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Aluminum					
880799	9411-13/102	3	13.75" x 13"		$158.98 G
880802	9411-15/102	3	13.5" x 15"		$158.98 G
880838	9511-15/102	3	15" x 15"		$166.98 G
880814	9411-17/102	3	13.25" x 17"		$158.98 G
880840	9511-17/102	3	14.8" x 17"		$166.98 G
880826	9411-19/102	3	13.2" x 19"		$158.98 G
880852	9511-19/102	3	14.5" x 19"		$166.98 G
880864	9511-21/102	3	14.3" x 21"		$166.98 G
880876	9513-15/102	4	14.75" x 15"	4 Blade	$182.98 G
880888	9513-17/102	4	14.5" x 17"	4 Blade	$182.98 G
880890	9513-19/102	4	14.25" x 19"	4 Blade	$182.98 G
880903	9513-21/102	4	14" x 21"	4 Blade	$182.98 G

See Pages 879-880 for Propeller Features.

©2014 Donovan Marine, Inc.

SOLAS® Yamaha Rubex Pre-Configured Kits (Hub Included)

- T50, 1996-Present, 15 Spline Propshaft.
- 60-100 H.P. (Including 4 Stroke) 1984-Present, 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
881993	9431-13/108	NS3	13-3/4" x 13"		$415.98 G
882008	9431-15/108	NS3	13-1/2" x 15"		$415.98 G
882010	9431-17/108	NS3	13-1/4" x 17"		$415.98 G
882022	9431-19/108	NS3	13" x 19"		$415.98 G
882034	9431-21/108	NS3	13" x 21"		$415.98 G
Aluminum					
881955	9411-13/108	3	13.75" x 13"		$152.98 G
881967	9411-15/108	3	13.5" x 15"		$152.98 G
881979	9411-17/108	3	13.25" x 17"		$152.98 G
881981	9411-19/108	3	13.2" x 19"		$152.98 G

- 115 H.P., FS115 (4 Stroke) and 130 H.P., 1984-Present, 15 Spline Propshaft.
- 150-300 H.P., 1984-Present, 15 Spline Propshaft.
- 225 EFI (4 Stroke).
- Sterndrives, 1989-1993, 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
881145	9531-15/103	NS3	14-1/2" x 15"		$427.98 G
881157	9531-17/103	NS3	14-1/4" x 17"		$427.98 G
881195	9532-17/103	NS3	14-1/4" x 17"	Left Ro.	$427.98 G
881210	9571-17/103	L3	15-1/2" x 17"		$527.98 G
881169	9531-19/103	NS3	14" x 19"		$427.98 G
881208	9532-19/103	NS3	14" x 19"	Left Ro.	$427.98 G
881222	9571-19/103	L3	15-1/4" x 19"		$527.98 G
881171	9531-21/103	NS3	14" x 21"		$427.98 G
881234	9571-21/103	L3	15" x 21"		$527.98 G
881183	9531-23/103		14" x 23"		$427.98 G
Aluminum					
881068	9511-15/103	3	15" x 15"		$161.98 G
881070	9511-17/103	3	14.8" x 17"		$161.98 G
881082	9511-19/103	3	14.5" x 19"		$161.98 G
881094	9511-21/103	3	14.3" x 21"		$161.98 G
881107	9513-15/103	4	14.75" x 15"	4 Blade	$177.98 G
881119	9513-17/103	4	14.5" x 17"	4 Blade	$177.98 G
881121	9513-19/103	4	14.25" x 19"	4 Blade	$177.98 G
881133	9513-21/103	4	14" x 21"	4 Blade	$177.98 G

SOLAS® OMC SX COBRA™, Volvo Penta SX Drives Rubex Pre-Configured Kits (Hub Included)

- Cobra SX, 1994-Present, 19 Spline Propshaft.
- SX Sterndrives, 1994-Present, 19 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
881501	9531-17/105	NS3	14-1/4" x 17"		$427.98 G
881537	9532-17/105	NS3	14-1/4" x 17"	Left Ro.	$427.98 G
881551	9571-17/105	L3	15-1/2" x 17"		$527.98 G
881513	9531-19/105	NS3	14" x 19"		$427.98 G
881549	9532-19/105	NS3	14" x 19"	Left Ro.	$427.98 G
881563	9571-19/105	L3	15-1/4" x 19"		$527.98 G
881525	9531-21/105	NS3	14" x 21"		$427.98 G
881575	9571-21/105	L3	15" x 21"		$527.98 G
Aluminum					
881424	9511-15/105	3	15" x 15"		$161.98 G
881436	9511-17/105	3	14.8" x 17"		$161.98 G
881448	9511-19/105	3	14.5" x 19"		$161.98 G
881450	9511-21/105	3	14.3" x 21"		$161.98 G
881462	9513-15/105	4	14.75" x 15"	4 Blade	$177.98 G
881474	9513-17/105	4	14.5" x 17"	4 Blade	$177.98 G
881486	9513-19/105	4	14.25" x 19"	4 Blade	$177.98 G
881498	9513-21/105	4	14" x 21"	4 Blade	$177.98 G

SOLAS® Honda Rubex Pre-Configured Kits (Hub Included)

- 75-90 H.P., 1999-Present; 115-130 H.P., 1998-Present, 15 Spline Propshaft.
- 115-130 H.P., 1998-Present, 15 Spline Propshaft.
- BF135 H.P., 150, 200 and 225 H.P., 2003-Present, 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
881791	9431-13/107	NS3	13-3/4" x 13"		$415.98 G
881804	9431-15/107	NS3	13-1/2" x 15"		$415.98 G
881854	9531-15/107	NS3	14-1/2" x 15"		$427.98 G
881816	9431-17/107	NS3	13-1/4" x 17"		$415.98 G
881866	9531-17/107	NS3	14-1/4" x 17"		$427.98 G
881905	9532-17/107	NS3	14-1/4" x 17"	Left Ro.	$427.98 G
881929	9571-17/107	L3	15-1/2" x 17"		$527.98 G
881830	9431-19/107	NS3	13" x 19"		$415.98 G
881878	9531-19/107	NS3	14" x 19"		$427.98 G
881917	9532-19/107	NS3	14" x 19"	Left Ro.	$427.98 G
881931	9571-19/107	L3	15-1/4" x 19"		$527.98 G
881842	9431-21/107	NS3	13" x 21"		$415.98 G
881880	9531-21/107	NS3	14" x 21"		$427.98 G
881943	9571-21/107	L3	15" x 21"		$527.98 G
881892	9531-23/107	NS3	14" x 23"		$427.98 G
Aluminum					
881676	9411-13/107	3	13.75" x 13"		$152.98 G
881688	9411-15/107	3	13.5" x 15"		$152.98 G
881715	9511-15/107	3	15" x 15"		$161.98 G
881690	9411-17/107	3	13.25" x 17"		$152.98 G
881727	9511-17/107	3	14.8" x 17"		$161.98 G
881703	9411-19/107	3	13.2" x 19"		$152.98 G
881739	9511-19/107	3	14.5" x 19"		$161.98 G
881741	9511-21/107	3	14.3" x 21"		$161.98 G
881753	9513-15/107	4	14.75" x 15"	4 Blade	$177.98 G
881765	9513-17/107	4	14.5" x 17"	4 Blade	$177.98 G
881777	9513-19/107	4	14.25" x 19"	4 Blade	$177.98 G
881789	9513-21/107	4	14" x 21"	4 Blade	$177.98 G

SOLAS® Suzuki Rubex Pre-Configured Kits (Hub Included)

- DT150-225 H.P., 1986-Present, 2 Stroke DF150-300 H.P., 15 Spline Propshaft.

Order No.	Mfg. No.	Type	Dia. x Pitch		Price
Stainless Steel					
881323	9531-15/104	NS3	14-1/2" x 15"		$427.98 G
881335	9531-17/104	NS3	14-1/4" x 17"		$427.98 G
881373	9532-17/104	NS3	14-1/4" x 17"	Left Ro.	$427.98 G
881397	9571-17/104	L3	15-1/2" x 17"		$527.98 G
881347	9531-19/104	NS3	14" x 19"		$427.98 G
881385	9532-19/104	NS3	14" x 19"	Left Ro.	$427.98 G
881400	9571-19/104	L3	15-1/4" x 19"		$527.98 G
881359	9531-21/104	NS3	14" x 21"		$427.98 G
881412	9571-21/104	L3	15" x 21"		$527.98 G
881361	9531-23/104	NS3	14" x 23"		$427.98 G
Aluminum					
881246	9511-15/104	3	15" x 15"		$161.98 G
881258	9511-17/104	3	14.8" x 17"		$161.98 G
881260	9511-19/104	3	14.5" x 19"		$161.98 G
881272	9511-21/104	3	14.3" x 21"		$161.98 G
881284	9513-15/104	4	14.75" x 15"	4 Blade	$177.98 G
881296	9513-17/104	4	14.5" x 17"	4 Blade	$177.98 G
881309	9513-19/104	4	14.25" x 19"	4 Blade	$177.98 G
881311	9513-21/104	4	14" x 21"	4 Blade	$177.98 G

See Pages 879-880 for Propeller Features.

Michigan Wheel Xchangeable Hub System

Michigan Wheel's Xchangeable Hub System absorbs impact and stress caused by shifting gears and is designed to spin under significant impact to protect your lower end unit. XHS™ is also designed to be interchangeable with Mercury's Flo-Torq™ II Hub System, potentially saving you money when replacing or upgrading your propeller.



Must order propeller & hub kit seperately!

Apollo Stainless Steel Propellers

Order No.	Mfg. No.	Outboards	Extra	Gearcase	Dia. x Pitch	Price
359059	993143	V4		4-1/4"	13-3/8" x 15"	$329.98 E
359061	993144	V4		4-1/4"	13-1/4" x 17"	$329.98 E
359073	993145	V4		4-1/4"	13-1/8" x 19"	$329.98 E
359085	993146	V4		4-1/4"	13" x 21"	$329.98 E
359354	993042	V6, V8		4-3/4"	14-3/8" x 15"	$359.98 E
359617	993023	V6, V8	LD*	4-3/4"	15-1/2" x 17"	$365.98 E
359364	993043	V6, V8		4-3/4"	14-1/4" x 17"	$359.98 E
359376	993044	V6, V8		4-3/4"	14-1/8" x 19"	$359.98 E
359629	993024	V6, V8	LD*	4-3/4"	15-1/4" x 19"	$365.98 E
359388	993045	V6, V8		4-3/4"	14" x 21"	$360.98 E
359631	993025	V6, V8	LD*	4-3/4"	14-3/4" x 21"	$365.98 E
359403	993046	V6, V8		4-3/4"	13-7/8" x 23"	$360.98 E

**Large Diameter 3 Blade*

Vortex XHS Aluminum Performance Propellers

Order No.	Mfg. No.	HP	Extra	Gearcase	Dia. x Pitch	Price
358324	992501	20-35 HP			10-1/2" x 9"	$69.98 E
358336	992502	20-35 HP			10-1/2" x 10"	$69.98 E
358348	992503	20-35 HP			10-1/2" x 11"	$69.98 E
358350	992504	20-35 HP			10-1/8" x 12"	$69.98 E
358362	992505	20-35 HP			10-1/8" x 13"	$69.98 E
358386	992404	30-70 HP			10-3/8" x 11"	$76.98 E
358398	992405	30-70 HP			10-3/8" x 12"	$76.98 E
358401	992406	30-70 HP			10-3/8" x 13"	$76.98 E
358413	992407	30-70 HP			10-3/8" x 14"	$76.98 E
358425	992408	30-70 HP			10" x 15"	$76.98 E
358437	992409	30-70 HP			10" x 16"	$76.98 E
358451	992301	40-70 HP			11-3/4" x 13"	$76.98 E
358463	992302	40-70 HP			11-3/4" x 15"	$76.98 E
358475	992303	40-70 HP			11-3/4" x 17"	$76.98 E
358502	992213	50-140 HP		4-1/4"	13-3/4" x 15"	$112.98 E
358514	992214	50-140 HP		4-1/4"	13-1/4" x 17"	$112.98 E
358538	992215	50-140 HP		4-1/4"	13" x 19"	$112.98 E
358539	992216	50-140 HP		4-1/4"	12-3/4" x 21"	$112.98 E
358704	992002	V6, V8*		4-3/4"	15-1/4" x 15"	$116.98 E
358906	992202	V6, V8*	4 Bl.	4-3/4"	15" x 16"	$130.98 E
358716	992003	V6, V8*		4-3/4"	15" x 17"	$116.98 E
358918	992203	V6, V8*	4 Bl.	4-3/4"	14-1/2" x 18"	$130.98 E
358920	992204	V6, V8*	4 Bl.	4-3/4"	14" x 20"	$130.98 E
358728	992004	V6, V8*		4-3/4"	14-1/2" x 19"	$116.98 E
358730	992005	V6, V8*		4-3/4"	14-1/4" x 21"	$116.98 E
358742	992006	V6, V8*		4-3/4"	14" x 23"	$116.98 E

**V6, V8 Outboards and I/O's*

Michigan Wheel XHS Hub Kits



Must order propeller & hub kit seperately!

Hub Kits for Evinrude/Johnson Outboards and OMC

Order No.	Mfg. No.	Size	Description	Price
358019	118	20-70	Evinrude/Johnson Outboards, 20-35 HP	$36.98 E
358021	111	20-70	Evinrude/Johnson Outboards, 40-75 HP	$36.98 E
358033	206	V4/V6	Evinrude/Johnson Outboards, OMC Sterndrives (V4 Gearcase 1968-Present)	$48.98 E
358045	200	V4/V6	Evinrude/Johnson Outboards, OMC Sterndrives (V6/V8 Gearcase 1991-Present)	$48.98 E
358057	201	V4/V6	Evinrude/Johnson Outboards, OMC Sterndrives (V6/V8 Gearcase 1984-1990)	$48.98 E

Hub Kits for Mercury, Mariner, Mercruiser and Force

Order No.	Mfg. No.	Size	Description	Price
357980	120	20-70	Mercury/Mariner/Force Outboards, 9.9-25 HP	$36.98 E
357992	114	20-70	Mercury/Mariner/Force Outboards, 25-70 HP	$36.98 E
358007	202	V4/V6	Mercruiser Alpha One & Bravo One (Less than 400 HP) Mercury/Mariner 60 HP Bigfoot, 70-125 HP Mercury/Mariner/Force 135-250 HP Force: 90-120 HP Honda: Outboards 75-90 HP thru 1998 Yamaha: Outboards thru 1983	$49.98 E

Hub Kits for Yamaha

Order No.	Mfg. No.	Size	Description	Price
358071	123	20-70	Yamaha Outboards 20-30 HP	$36.98 E
358083	117	20-70	Yamaha Outboards 30-60 HP	$36.98 E
358095	208	V4/V6	Yamaha Outboards 50-100 HP (Splined Front Thrust Washer)	$48.98 E
358108	203	V4/V6	Yamaha Outboards and Sterndrives (115-130 HP, 150-250 HP, V6 Gearcase 1984-Present)	$48.98 E

Hub Kits for Suzuki

Order No.	Mfg. No.	Size	Description	Price
358247	121	20-70	Suzuki Outboards 25-30 HP	$36.98 E
358259	115	20-70	Suzuki Outboards 35-65 HP	$36.98 E
358261	210	V4/V6	Suzuki V4 Outboards 60-140 HP	$48.98 E
358273	204	V4/V6	Suzuki Outboards 150-300 HP, V6 Gearcase	$48.98 E
358285	225	V4/V6	Suzuki/Johnson 90-115 HP 4 Stroke	$48.98 E
358297	226	V4/V6	Suzuki/Johnson 140 HP 4 Stroke	$48.98 E

Hub Kits for Honda

Order No.	Mfg. No.	Size	Description	Price
358160	119	20-70	Honda Outboards 25 and 30 HP	$36.98 E
358172	113	20-70	Honda Outboards 35-60 HP	$36.98 E
358184	207	V4/V6	Honda Outboards 115-130 HP 1998-Present, 75-90 HP 1999-Present, BFP60 1998-Present	$49.98 E

Hub Kit for Nissan, Tohatsu

Order No.	Mfg. No.	Size	Description	Price
358235	209	V4/V6	Nissan/Tohatsu Outboards 90-140 HP	$49.98 E

Hub Kit for Volvo Penta SX Drives

Order No.	Mfg. No.	Size	Description	Price
358300	205	V4/V6	Volvo SX Sterndrives, 1994-present, 19 Tooth Spline	$48.98 E

©2014 Donovan Marine, Inc.

Michigan Wheel Vortex Prop and Hub Assortment



Order No.	Mfg. No.	Brand	Price
357900		Michigan Wheel	$2,989.98 E

Kit Contains:		Description	Dia. x Pitch	Qty
358007	(202)	XHS Hub Kit Mercruiser Alpha One and Bravo One (Less than 400 HP). Mercury/Mariner 60 HP Bigfoot, 70-125 HP. Mercury/Mariner/Force 135-250 HP. Force 90-120 HP. Honda Outboards 75-90 HP thru 1998. Yamaha Outboards thru 1983		5
358045	(200)	XHS Hub Kit Evinrude/Johnson Outboards - OMC Sterndrives (V6/V8 Gearcase 1991 to present)		3
358108	(203)	XHS Hub Kit Yamaha Outboards and Sterndrives (115-130 HP, 150-250 HP, V6 Gearcase 1984 to present)		5
358261	(210)	XHS Hub Kit Suzuki V4 Outboards (60-140 HP)		1
358273	(204)	XHS Hub Kit Suzuki Outboards (150-225 HP, V6 Gearcase)		1
358285	(225)	XHS Hub Kit Suzuki/Johnson 90-115 HP 4 Stroke		1
358300	(205)	XHS Hub Kit Volvo SX Sterndrives (19 tooth spline 1994 to present)		2
358502	(992113)	Aluminum Prop with 4-1/2" Gearcase	13-3/4" x 15"	2
358514	(992114)	Aluminum Prop with 4-1/2" Gearcase	13-1/4" x 17"	3
358538	(992115)	Aluminum Prop with 4-1/2" Gearcase	13" x 19"	3
358704	(992002)	Aluminum Prop with 4-3/4" Gearcase	15-1/4" x 15"	1
358716	(992003)	Aluminum Prop with 4-3/4" Gearcase	15" x 17"	3
358728	(992004)	Aluminum Prop with 4-3/4" Gearcase	14-1/2" x 19"	3
358730	(992005)	Aluminum Prop with 4-3/4" Gearcase	14-1/4" x 21"	2
358742	(992006)	Aluminum Prop with 4-3/4" Gearcase	14-1/4" x 23"	1

Marpac Propeller Wrench



- 6 point socket style made of high strength indestructible nylon.

Order No.	Description	Price
7-1899	Propeller Wrench	$11.98 G

Sierra Propeller Wrench



- For all Cobra.
- For Merc/Mariner/Mercruiser, Replaces: 91-95830A1.

Order No.	Mfg. No. / Description	Price
184444	(18-4444) Propeller Wrench	$44.75 H

Prop Guard®



- The Prop Guard is a two piece plastic injection molded cage that will completely cover the propeller.
- It is attached by a specially designed clamp system and bolts.
- The Prop Guard's two halves are attached like a clam shell to the cavitation plate and the skeg of any outboard or stern drive motor.
- Orange.

Order No.	Mfg. No.	Size / Fits	Price
604501	782619011171	11" / 25-35 HP	$306.98 B
604503	782619313688	13" / 40-65 HP	$293.98 B
604495	782619077771	9" / 9.9 to 20 HP, Yellow	$300.98 B
604512	782619810668	14" / 70 to 100 HP, Red	$317.98 B
604519	782619925782	16" / 110 to 350 HP and All Stern Drives, Black	$388.98 B

McGard Propeller Locks



- Naval brass and hardened stainless steel.
- Dynamically balanced.
- Easy to use key design.
- Lock design features a free-spinning collar that will turn if attached by gripping tools without loosening the lock.

Order No.	Mfg. No.	Size / Fits	Price
484028	74039	3/4 - 16 Thread	$79.98 F
484042	74052	Johnson/Evinrude Outboard 40-140 HP	$79.98 F
484004	74040	M18 x 1.5 Thread	$79.98 F
484066	74018	Stern drives: MerCruiser, Alpha, Bravo I-III, Blackhawk, OMC Cobra & King Cobra,Volvo SX, DP-S	$33.98 G
484016	74056	Yamaha Up to 90 HP	$79.98 F

T & R Marine Corp "Prop Mate" Combo Propeller Wrench



- Stainless steel.
- A combination tool to perform the following operations: Remove the spider washer, install the square head drain plug, remove the gas cap and remove the prop nut.
- For 1-1/16" nut size.
- Comes packaged for pegboard display.

Order No.	Mfg. No. / Description	Price
642533	(PM-116) Prop Mate	$59.98 G

Marpac Propeller Hardware

Nuts, Spacers and Thrust Washers are 1 Per Pack.
Washers are 2 Per Pack.
*** All hardware listed below is Marpac except where noted, which are Sierra.*



Nut | Spacer | Thrust Washer | Washer

Evinrude/Johnson and OMC

Order No.	Type	Fits	Price
7-1914	Nut	9.9-15 HP	$4.83 G
7-1912	Nut	20-35 HP	$9.98 G
B777992	Nut	40-60 HP	$11.99 L
7-1916	Nut	80-140 HP	$9.98 G
7-1918	Nut	140 HP and up	$9.98 G
7-1900	Spacer	9.9-15 HP	$9.98 G
7-1902	Spacer	20-35 HP	$13.98 G
7-1904	Spacer	40-75 HP	$9.98 G
7-1920	Spacer	140 HP and up	$20.98 G
184228	Spacer**	Replaces: 315810	$3.32 H
184194	Spacer**	OMC: 1994 King Cobra Lower Units, Replaces: 3852350, Volvo Penta: Lower Gearcase Models SX-M (1994), Replaces: 3852350	$30.37 H
7-1922	Thrust Washer	9.9-15 HP	$20.98 G
7-1924	Thrust Washer	20-35 HP	$22.98 G
7-1926	Thrust Washer	40-75 HP	$46.98 G
7-1928	Thrust Washer	80-140 HP	$45.98 G
7-1930	Thrust Washer	140 HP and up	$56.98 G
184230	Thrust Washer	Replaces: 320305	$59.15 H
B777996	Bushing	150-300 HP	$31.99 H
B778002	Bushing	40-60 HP	$48.99 H
B777994	Prop Kit	Without Thrust Bushing	$11.99 L
B777995	Prop Kit	Without Thrust Bushing	$24.99 L

Mercury

Order No.	Type	Fits	Price
7-1960	Nut	8-15 HP	$5.98 G
7-1962	Nut	20-25 HP	$4.98 G
7-1964	Nut	30-70 HP	$9.98 G
7-1978	Nut	70 HP and up	$10.98 G
183721	Nut**	11-13439-1, 11-859116, for: MR/Alpha	$2.53 H
183713	Nut**	5/8" - 18, Replaces: Merc 11-22339	$3.47 H
7-1966	Spacer	135 HP and up	$19.98 G
7-1972	Thrust Washer	30-70 HP	$25.98 G
7-1970	Thrust Washer	70 HP and up	$35.98 G
7-1975	Washer	20-25 HP	$3.94 G
7-1976	Washer	30-70 HP	$3.99 G
7-1974	Washer	70 HP and up	$6.98 G

Yamaha

Order No.	Type	Fits	Price
7-1933	Nut	9.9-15 HP	$5.98 G
7-1934	Nut	20-30 HP	$8.98 G
7-1936	Nut	40-90 HP, Tohatsu	$9.98 G
7-1938	Nut	100-250 HP, Suzuki	$13.98 G
183732	Nut**	95307-16900, 90171-16011-00	$14.52 H
7-1946	Spacer	20-30 HP	$19.98 G
7-1948	Spacer	40-60 HP	$16.98 G
7-1950	Spacer	60 HP and up, Tohatsu	$24.98 G
184274	Spacer**	Replaces: 688-45997-01-00	$38.70 H
7-1951	Thrust Washer	9.9-15 HP	$20.98 G
7-1952	Thrust Washer	20-30 HP	$32.98 G
7-1954	Thrust Washer	40-60 HP	$34.98 G
7-1956	Thrust Washer	60-90 HP	$51.98 G
7-1958	Thrust Washer	100-250 HP	$50.98 G
7-1939	Washer	9.9-15 HP	$5.98 G
7-1940	Washer	40-60 HP	$5.98 G
7-1942	Washer	60-90 HP, Tohatsu	$4.98 G

Marpac Propeller Hardware - Cotter Pins (4 Per Pack)

*** All hardware listed below is Marpac except where noted, which are Sierra.*



Order No.	Type	Fits	Price
7-1968	Cotter Pin	Johnson/Evinrude 9.9-35 HP, Yamaha 9.9-15 HP, Fit Tohatsu	$2.98 G
7-1906	Cotter Pin	Johnson/Evinrude 40 HP and up, Yamaha 60 HP and up, Suzuki	$4.98 G
183741	Cotter Pin**	Johnson/Evinrude (OMC/BRP) Replaces: 309955, 314502"	$0.75 H
7-1932	Cotter Pin	Yamaha 20-60 HP, Suzuki, Tohatsu	$3.99 G

Sierra Mercruiser Tab Washer



Order No.	Fits	Price
183788	Mercruiser, Bravo II, Replaces: 14-34817	$65.47 H

Sierra Mercruiser Castle Washer



Order No.	Fits	Price
183714	Alpha/Bravo I (without Flo-Torq II Hub)*, Replaces: Merc 12-31211A2. *Note: With rubber hub propellers (non-Flo-Torq II)	$7.80 H

Sierra Propeller Nut Kits



Evinrude/Johnson and OMC

Order No.	Mfg. No.	Fits	Price
183715	18-3715	Johnson/Evinrude (OMC/BRP), Includes: 18-3708-1 Prop Nut/Keeper, 18-3741 Cotter Pin, 18-4231 Prop Spacer	$22.23 H
183717	18-3717	Johnson/Evinrude (OMC/BRP), Replaces: 175268, Includes: 18-3707 Prop Nut, 18-3743 Cotter Pin, 18-4232 Prop Spacer	$8.13 H
183716	18-3716	Johnson/Evinrude (OMC/BRP), Replaces: 175267, Includes: 18-3705 Prop Nut, 18-3742 Cotter Pin, 18-4228 Prop Spacer	$9.03 H

Mercury

Order No.	Mfg. No.	Fits	Price
183702	18-3702	Replaces: Mercury 11-69578A1, 11-6957801, 11-69578T1, Includes: 18-3204 Tab Washer, 18-3704 Prop Nut	$11.48 H
183701	18-3701	Replaces: Mercury 11-52707A1, Includes: 18-3200 Tab Washer, 18-3700 Prop Nut	$10.72 H

Yamaha

Order No.	Mfg. No.	Fits	Price
183781	18-3781	Yamaha	$43.23 H

Volvo

Order No.	Mfg. No.	Fits	Price
183733	18-3733	Volvo	$19.67 H

Suzuki

Order No.	Mfg. No.	Fits	Price
183726		Nut**, All V4 and V6 (Except D150)	$7.22 H

©2014 Donovan Marine, Inc.

Solas PWC Concord

SOLAS

- The Power Torque Series - from water skiing to high speed cruising it's everything one could ask for in an impeller.
- Large blade area and a unique geometric blade design.
- Delivers remarkable thrust and extraordinary efficiency.
- Enhances the 4 stroke engine characteristics, not only delivering incredible acceleration but excellent top end performance.


Kawasaki


Honda


Yamaha


Sea Doo

Kawasaki

Order No.	Mfg. No.	Pitch	Fits	Price
883520	KE-CD-11/16	11/16	743cc 1995-2001 750STS, 1995-1997 750 ZXI, 1995-1996 750 SXI, 1992-1996 750 SX, 1993-1995 750 ST	$303.98 G
883525	KG-CD-12/18	12/18	891cc 2003-2006 900 STX	$302.98 G
883529	KG-CD-13/19	13/19	1199cc 2003- STX-12F; 1071cc 2001-2003 1100 STX DI, 1996-2003 1100 ZXI	$333.98 G
883531	KG-CD-14/20	14/20	1199cc 2003- STX-12F Modified Motor; 1071cc 1100 STX DI Modified Motor, 1996-2003 1100 ZXI Modified Motor	$333.98 G
883555	KG-CD-14/21	14/21	1498cc 2003- STX-15F Stock and Limited Motor	$333.98 G
883543	KX-CD-10/16	10/16	1498cc 2007- Ultra LX Stock and Limited Motor	$357.98 G
883567	KX-CD-16/21	16/21	1498cc 2007- Ultra 250X	$357.98 G
883570	KR-CD-14/21	14/21	Fits Kawasaki 1498cc: Ultra 300X/300LX 2011-, Ultra 260X/260LX 2008-, Ultra 250X 2007-, Ultra LX 2007-, STX-15F 2004-	$376.98 G

Polaris

883630	PA-CD-12/18	12/18	750cc 2003-2004 MSX 110; 779cc SLX Pro 785, SL780, SLT 780; 777cc 2002-2204 VIRAGE I; 744cc SL750, SLT750, SL750; 700cc 2000-2004 Virage, Freedom; 700cc 1998-2001 SLH, 1996-1997 SL 700DLX, SL700, Hurricane	$302.98 G

Mercury

883620	MC-CD-22/39	22/39	Sport Jet V6 250 HP, 240 HP, 210 HP, 200 HP (M2Jet) Speedster, Speedster SK, Speedster 160, Challanger 1800, 2000, x Sportster 1800, Utopia 205, 185, Islandia	$477.98 G

Honda

883445	HA-CD-17/29	17/29	1235cc R-12X 2004-2007; F-12X/F-12X GPScape 2002-	$438.98 G

Yamaha

883948	YD-CD-11/14	11/14	760cc 1998-1999 Wave Runner XL760/WAVE VENTURE 760	$314.98 G
883935	YB-CD-13/17	13/17	800cc 1998-2000 Wave Runner XL800; 701cc 1994-2007 SPER JET	$314.98 G
883985	YF-CD-11/14	11/14	800cc 2001-2005 Wave Runner GP800R, 2000-2004 Wave Runner XL800	$314.98 G
883961	YD-CD-13/19	13/19	1200cc 1997-1999 Wave Runner GP1200, 1999 Wave Runner GP1200R	$314.98 G
883959	YD-CD-12/18	12/18	1200cc 1999-2003 Wave Runner SUV1200, 1998-1999 Wave Runner XL1200 ; 1100cc 1995-1997 Wave Runner 1100/Wave Venture 1100; 1200cc 2003-2005 LX210; 998cc 2004-2005 SX230/SR230AR230	$314.98 G
883997	YF-CD-12/18	12/18	1200cc 1999-2003 Wave Runner SUV1200; 998cc 2003- FX-140/FX Cruiser; 9998cc 2004-2005 SX230/SR230/AR230	$314.98 G
884002	YF-CD-13/19	13/19	1300cc 2003-2004 Wave Runner GP1300R; 1200CC 2002-2003 Wave Runner GP1200R, 2000-2201 XR1800; 1052cc 2006 SX230/AR230/SR230	$314.98 G
884028	YQ-CD-12/18	12/18	701cc 2008- SUPER JET	$314.98 G
883947	YB-CD-14/18	14/18	701cc 1994-2007 Super Jet Modified Motor	$314.98 G
884030	YQ-CD-13/19	13/19	701cc 2008- Super Jet Limited Motor	$314.98 G
884004	YH-CD-11/14	11/14	701cc 2006- VX700	$330.98 G
884014	YH-CD-18/22	18/22	1052cc 2005- VX/VX Sport/VX Deluxe/VX Crusier	$330.98 G
883964	YD-CD-14/20	14/20	1200cc Wave Runner XLT 1200 1999-2005, Wave Runner GP1200R 2000-2002, Wave Runner SUV1200 1999-2003, Wave Runner XL1200 1998-1999, Wave Runner GP1200 1997-1999, Wave Runner GP1200R 1999	$314.98 G

Sea-Doo

883846	ST-CD-10/16	10/16	782cc 2005-2007 3D/3DBASE; 720 2001-2005 GTI/GTI LE/GTI RFI; 2001-2002 GTS	$302.98 G
883769	SR-CD-12/20	12/20	1494cc 2003-2004 GTX 4 Tech Limited Supercharged 185 HP, 2003-2006 GTX 4 Tech Supercharged 185 HP	$351.98 G
883783	SR-CD-13/21	13/21	1494cc 2003-2004 GTX 4 Tech Limited Supercharged 185 HP Limited and Modified Motor, 2003-2006 GTX 4 Tech Supercharged 185 HP Modified Motor	$351.98 G
883721	SR-CD-10/18	10/18	1494cc 2006- GTI/GTI SE 130	$351.98 G
883757	SR-CD-11/19	11/19	1494cc 2007- GTS SE 155/RXP (155 HP), 2002- GTX/GTX 4-TECH/GTX Wake (155 HP); 4 TEC/1494cc 2007-230 Wake, 2007- Islandia SE 155 HP, 2007- Speedster 150 155 HP	$351.98 G
883795	SRX-CD-13/18	13/18	1494cc 2005- RXT 215 HP, Wake Pro 215 HP, GTX 215 HP	$382.98 G
883838	SRZ-CD-13/18	13/18	1494cc RXT 215 HP, RXP 215 HP, WAKE PRO 215 HP, GTX 215 HP	$382.98 G
883808	SRX-CD-14/19	14/19	1494cc 2009- RXP 215 HP Stock and Limited Motor, 2009- RXT 215 HP Limited Motor, 2009- GTX 215 HP Limited Motor	$382.98 G
883822	SRX-CD-15/21	15/21	1494cc 2008 RXP-X	$382.98 G
883840	SRZ-CD-15/21	15/21	1494cc 2009- RXT IS 260/RXT-X 260, 2009- GTX Limited IS 260, 2009- RXP-X 255, 2008 RXP-X	$382.98 G
883836	SRX-CD-15/22	15/22	1494cc 2008 RXP-X	$382.98 G
883719	SF-CD-15/23	15/23	780cc 1998-1999 Speedster Jet Boat 2 Required 1997-1999 Challanger 1800 Jet Boat 2 Required; 782cc 1999-2000 GSX RFI/GTX RFI	$302.98 G
883682	SD-CD-14/22	14/22	782cc 1996-1998 GTX/GTX PRO, 720cc 1995-1997 XP/SPX, 1997-2001 GS/GSI, 1996-2000 GTI/GTS	$302.98 G
883707	SD-CD-15/23	15/23	782cc 1996-1998 XP/SPX/GSX, 1996-1998 GTX/GTX PRO Limited Motor; 720cc 1995-1997 XP/SPX Limited Motor, 1997-2001 GS/GSI Limited Motor, 1996-2000 GTI/GTS Limited Motor	$302.98 G
883858	ST-CD-15/20	15/20	951cc 2000-2004 XP/XP DI, 2000-2003 GTX/GTX DI, 1998-1999 GSX LTD/GTX LTD/XP LTD	$302.98 G
883860	ST-CD-16/21	16/21	951cc 1998-1999 GSX LTD, GTX LTD/XP LTD Modified Motor	$302.98 G

Solas PWC Dynafly

SOLAS®

- Maximum acceleration.
- Designed to give high compression ratio pumps a stronger acceleration with less cavitation.
- This impeller is capable of giving a PWC an incredible boost in its performance.



Kawasaki

Order No.	Mfg. No.	Pitch	Fits	Price
883586	KP-DF-14/23	14/23	782cc 2003- 800 SX-R Limited and Modified Motor	$333.98 G
883590	KP-DF-15/24	15/24	782cc 2003- 800 SX-R Modified Motor	$333.98 G
883582	KP-DF-13/22	13/22	782cc 2003- 800 SX-R	$333.98 G
883579	KH-DF-16/20	16/20	1176cc 1999-2006 Ultra 150 Stock and Limited Motor	$333.98 G

YAMAHA

884040	YS-DF-14/21	14/21	1812cc 2008- SHO/SHO FZR/FZS, 2009- FX High Output/FX Cruiser High Output	$330.98 G

SEA-DOO

884052	YG-DF-14/20	14/20	1052cc 2004-2008 FX High Output/FX Cruiser High Output	$330.98 G
883870	ST-DF-13/19	13/19	951cc 2000-2004 XP/XP DI Modified Motor, 2000-2003 RX/RX DI	$308.98 G

Solas PWC Super Camber A-B-C-D-E

SOLAS®

- Cost effective solution.
- Remains one of the most popular products in the personal watercraft market.
- The Super Camber blade has increased flow and the thrust of the impeller.



Kawasaki

Order No.	Mfg. No.	Pitch	Fits	Price
883466	KB-SC-A		550cc 1982-1989 550JS	$303.98 G
883492	KD-SC-A		550cc 1990-1996 550SX	$303.98 G
883478	KE-SC-A		743cc 1993-1995 750ST, 1994 750XIR, 1992-1996 750SX, 1992-1997 750SS,	$303.98 G

MERCURY

883606	MB-SC-A		Mercury Sport Jet 90 HP Spline Drive	$303.98 G

YAMAHA

883906	YA-SC-A		650cc All Wave Jammer 650/LX650; 500cc All Wave Runner 500/Wave Jammer 500	$310.98 G

SEA-DOO

883656	SD-SC-A		580cc 1991-1992 XP, 1993 SPX, 1993-1996 SPI, 1988-1996 SP, 1992-1993 GSX/GTX, 1992-1996 GTS, 1990-1991 GT	$303.98 G
883660	SD-SC-B		580cc 1991-1992 XP, 1993 SPX, 1993-1996 SPI, 1988-1996 SP, 1992-1993 GSX/GTX, 1992-1996 GTS, 1990-1991 GT Limited Motor	$303.98 G

Solas PWC Super Camber S-I-J-K-H

SOLAS®

- The last word of impeller evolution.
- This patented series has a more streamlined rubber seal.
- Streamlining reduces drag for the impeller while increasing volumetric flow of the pump at the same time.



Kawasaki

Order No.	Mfg. No.	Pitch	Fits	Price
883454	KA-SC-I		635cc 1989-1996 650TS/650SX Stock and Limited Motors	$303.98 G
883480	KE-SC-I		743cc 1994 750XIR	$303.98 G
883505	KF-SC-I		891cc 1996-2002 900STX/STS/ZXI	$303.98 G
883522	KE-SC-S	13-18	743cc 750 SXi PRO 1995-2002, 750STS 1995-2001, 750Xi Sport 1993-2000, 750ZXi 1995-1997, 750Xi 1993-1997, 750SS 1992-1997, 750SXi 1995-1996, 750SX 1992-1996, 750 XiR 1994, 750ST 1993-1995	$302.98 G

POLARIS

883635	PA-SC-I		1165cc 200-2002 Virage TX, Virage TXi, 2000 Genesis FFL, 1999-2004 Genesis, Genesis I	$303.98 G

YAMAHA

883915	YB-SC-S		650cc Wave Runner III, 1991-1995 VXR	$308.98 G
883911	YB-SC-I		650cc 1990-1993 Super Jet	$308.98 G

SEA-DOO

883668	SD-SC-I		720cc 1995-1997 XP/SPX, 1996-2000 GTI/GTS 1995- HX; 650cc 1993-1994 XP, 1994-1995 SPX, 1994-1995 GSX, 1994-1995 GTX	$303.98 G

©2014 Donovan Marine, Inc.

Solas PWC X-Prop

SOLAS®



- High speed and ultimate performance.
- The most powerful propulsion in the water.
- Advanced design that incorporates a high compression hub and cambered blades.
- Enthusiasts looking for speed and acceleration from the novice to the professional, will be satisfied using this impeller.
- Trust the harsh field testing of the Xprop by Team SOLAS.

Kawasaki

Order No.	Mfg. No.	Pitch	Fits	Price
883510	KF-SC-X		891cc 1996-2002 900STX/STS/ZXi	$302.98 G

SEADOO

883669	SD-SC-X		720cc 1995-1997 XP/SPX, 1997-2001 GS/GSI, 1996-2000 GTI/GTS	$302.98 G
883670	SD-SC-XO		82cc 1996-1998 XP/SPX/GSX, 1996-1998 GTX/GTX PRO	$302.98 G

Solas PWC Impeller Seal

SOLAS®



Order No.	Mfg. No.	Fits	Price
883210	SL009	Kawasaki KA SUPER CAMBER (ABC Series), SUPER CAMBER (IJK Series); KD SUPER CAMBER (ABC Series); KE SUPER CAMBER (ABC Series), SUPER CAMBER (IJK Series), Xprop Series, Concord Series; KF SUPER CAMBER (IJK Series), Xprop Series; KG Xprop Series, Concord Series; KP Dynafly, Concord Series, Polaris PF Concord Series, Tiger Shark TB SUPER CAMBER (IJK Series), Xprop Series ***Kawasaki: Use with wrench WR001 (883303). Polaris, Tiger Shark: Use with wrench WR006 (883339)***	$5.98 G
883202	SL007	SEADOO SD SUPER CAMBER (ABC Series); SD SUPER CAMBER (IJK Series); SD, ST Xprop Series; SD, SF, ST Concord Series; ST Dynafly Series, Kawasaki KH Dynafly ***Use with wrench WR001 (883303)***	$5.98 G
883217	SLA011	SEADOO SR Concord Series for Shaft 24mm ***Use with wrench WR011 (883353)***	$13.98 G
883220	SLA012	SEADOO SRX Concord Series ***Use with wrench WR012 (883365)***	$18.98 G
883205	SL008A	Yamaha YB SUPER CAMBER (IJK Series) for Shaft 15mm ***Use with wrench WR004 (883327), Holder WR004H (883416)***	$5.98 G
883214	SLA009	Yamaha YD Concord Series, YF Xprop Series, Concord Series; YG Dynafly Series; YH Concord Series, ***YD: Use with wrench WR007 (883341), Holder WR004H (883416). YF/YG: Use with wrench WR007 (883341), Holder WR007H (883428). YH: Use with wrench WR001 (883303)***	$13.98 G

Solas PWC Jet Pump Wrench

SOLAS®



Order No.	Mfg. No.	Fits	Price
883303	WR001	SeaDoo SD SUPER CAMBER (ABC Series); SD SUPER CAMBER (IJK Series); SD, ST Xprop Series; SD,SF, ST Concord Series; ST Dynafly Series, Kawasaki KA SUPER CAMBER (ABC Series), SUPER CAMBER (IJK Series); KD SUPER CAMBER (ABC Series); KE SUPER CAMBER (ABC Series), SUPER CAMBER (IJK Series), Xprop Series, Concord Series; KF SUPER CAMBER (IJK Series), Xprop Series; KG Xprop Series, Concord Series; KH Dynafly; KP Dynafly, Concord Series, Honda HA Concord Series	$9.98 G
883353	WR011	SeaDoo SR Concord Series	$15.98 G
883365	WR012	SeaDoo SRX Concord Series	$18.98 G
883315	WR003	Yamaha YA SUPER CAMBER (ABC Series)	$6.98 G
883327	WR004	Yamaha YB SUPER CAMBER (IJK Series), Xprop Series, Concord Series; YD SUPER CAMBER (IJXprop Series), Xprop Series	$6.98 G
883339	WR006	Polaris PF Concord Series; PL SUPER CAMBER (ABC Series)(IJK Series); PA SUPER CAMBER (ABC Series), SUPER CAMBER (IJK Series), Xprop Series, Concord Series, Tiger Shark TB SUPER CAMBER (IJK Series), Xprop Series	$9.98 G
883341	WR007	Yamaha YD Concord Series; YF Xprop Series, Concord Series; YG Dynafly Series	$9.98 G

Solas PWC Wear Ring

SOLAS®



Order No.	Mfg. No.	Fits	Price
883370	SR-HS-156-01	SeaDoo 1494 GTX 4-Tech Limited Supercharged (185 HP) 2003-2004; GTX 4-tech Supercharged (185 HP) 2003-2006; GTS SE 155/RXP (155 HP) 2007-; GTX/GTX 4-Tech/GTX Wake (155 HP) 2002-; GTI/GTI SE 130 2006-	$133.98 G
883375	SRX-HS159-02	SeaDoo 1494 RXP-X 2009-; RXT-X 2009-; RXP (215 HP) 2009-; RXT (215 HP) 2009-; GTX Limited (215 HP) 2009-; Wake Supercharged (215 HP) 2009-; RXP-X 2008; RXT-X 2008; RXP (215 HP) 2004-; RXT (215 HP) 2005-; GTX Limited (215 HP) 2005-; Wake Supercharged (215 HP) 2007-	$133.98 G

Solas Stainless Steel Ski Propellers

SOLAS®



- Designed with a revolutionary new foil section.
- Can handle very wide range of loading variation and heavy maneuvering conditions.
- Stainless steel propeller offers excellent corrosion resistant capability.
- Much more durable than the traditional bronze propeller.

Order No.	Mfg. No.	Dia. x Pitch	Bore	Price
3 Blade, Left Hand				
865901	A002-130-13	13" x 13"	1" Bore	$346.98 G
865925	B002-130-13	13" x 13"	1-1/8" Bore	$346.98 G
4 Blade, Left Hand				
865930	B004-130-13	13" x 13"	1-1/8" Bore	$359.98 G

Solas PWC Intake Grates

SOLAS®



Left to Right:
883098 (PL-IG-B, POLARIS), 883094 (KH-IG-B, KAWASAKI), 883151 (XP-IG-B, SEADOO), 883113 (GTX-IG-B, SEADOO), 883101 (GSX-IG-B, SEADOO), 883125 (SD-IG-B, SEADOO)

Order No.	Mfg. No.	Fits	Price
883094	KH-IG-B	Kawasaki 1999-2006 1176 Ultra 150, 2001-2006 1071 Ultra 130 DI	$110.98 G
883098	PL-IG-B	Polaris 2000-2002 1165 Pro 1200, VIRAGE TX/ VIRAGE Txi; 1997-1998 1050 SL/SLX/SLXH/SLTX 1050; 1996-1997 900 SL900; 1996-2001 779 SLX Pro 785/SL780/SLT 780; 2002-2204 777 VIRAGE I; 1994-1995 744 SL750/SLT 750/SL750; 2000-2004 700 VIRAGE, 1998-2001 SLH, 1997 SL700DLX, 1996-1997 SL700, 1996-1997 Hurricane	$101.98 G
883090	HW1-IG-B	Honda 2002-2007 1235 Turbo F-12X, 2002-2007 1235 F-12	$129.98 G

Order No.	Mfg. No.	Fits	Price
883101	GSX-IG-B	SeaDoo 1997 951 GSX Ltd., 2000-2001 GTX/ GTX D1, 1998-1999 GSX Ltd./GTX Ltd./XP Ltd., 1999-2003 LRV/LRV DI	$110.98 G
883113	GTX-IG-B	SeaDoo 1999-2000 782 GSX RFI/GTX RFI, 1996-1998 GTX/GTX PRO	$110.98 G
883125	SD-IG-B	SeaDoo 996-1998 782 XP/SPX/GSX; 1995-1997 720 XP/SPX, 1997-2001 GS/GSI, 1995- HX; 1993-1995 650 XP/SPX/GSX/GTX; 1991-1992 580 XP, 1993 SPX, 1993-1996 SPI, 1988-1996 SP, 1992-1993 GSX, 1992-1993 GTX, 1992-1996 GTS, 1990-1991 GT	$101.98 G
883151	XP-IG-B	SeaDoo 2001-2005 720 GTI/GTI LE/GTI RFI; 2001-2002 GTS	$110.98 G

©2014 Donovan Marine, Inc.

Federal Propellers Commercial Propeller - Bronze

FEDERAL PROPELLERS

Order No.	Mfg. No.	Dia. x Pitch	Blade	Rotation	Bore	Price
Bronze						
344010	28X28MP	28" x 24"	3	Right	2-1/4"	$2,573.98 F
344034	28X28MP	28" x 28"	3	Left	2-1/4"	$2,573.98 F
344022	28X29RH-PT	28" x 29"	4	Right	2"	$2,278.98 B
344058	28X30MP	28" x 30"	3	Left	2-1/4"	$2,573.98 F
344046	28X30MP	28" x 30"	3	Right	2-1/4"	$2,573.98 F
Bronze Dyna-Quad						
343513	18X24LH	18" x 24"	4	Left	-	$611.98 B
343525	18X24 RH	8" x 24"	4	Right	2"	$611.98 B
Nibral						
343307	490646 18X14	8" x 14"	2	-	1-1/2"	$793.98 Q

Solas Jet Pump Assembly

SOLAS®



Application: SeaDoo 782/720/650/580 cc PWC.

Order No.	Mfg. No.	Description	Price
883646	SD-PM-140/60	6 Vane	$1,382.98 G

Western Branch Metals Shaft Nuts

Order No.	Mfg No	Fits	Price
685810	3/4" REG HEX	3/4" Hex Shaft Nut	$7.98 C
685834	7/8" REG HEX	7/8" Hex Shaft Nut	$23.98 C
685858	1" REG HEX	1" Hex Shaft Nut	$21.98 C
685860	1" REG JAM	1" Jam Shaft Nut	$15.98 C
685872	1-1/8" REG HEX	1-1/8" Hex Shaft Nut	$44.98 C

Solas PWC Jet Pump Holders

SOLAS®



Order No.	Mfg. No.	Fits	Price
883404	WR003H	Yamaha YA Super Camber (ABC Series)	$6.98 G
883416	WR004H	Yamaha YB Super Camber (IJK Series), Xprop Series, Concord Series; YD Super Camber (IJXprop Series), Xprop Series	$6.98 G
883428	WR007H	Yamaha YD Concord Series; VF Xprop Series, Concord Series; YG Dynafly Series	$9.98 G
883435	WR014H	Yamaha YS Dynafly Series, Concord Series	$10.98 G

Inboard Analysis Data

Name: _____

Street: _____ P.O. Box: _____

City: _____ State: _____ Postal Code: _____

Telephone: _____ Date: _____

Vessel Data

Manufacturer: _____ Model: _____

Overall Length (OAL): _____ Waterline Length (WL): _____

Beam: _____ Draft: _____ Displacement Weight: _____

Weights

Vessel Hull Material: ____ Fibreglass ____ Steel ____ Aluminum ____ Wood

____ Other: _____

Vessel Use: ____ Commerical ____ Pleasure

If Commerical: ____ Pulling/Towing ____ Pushing ____ Dragging/Trawling ____ Ship Handling

____ Other: _____

Anticipated Hull Speed: ____ Knots

Engine Data

Manufacturer: _____ Model: _____

____ Gas ____ Diesel

Engine MFG. Max. HP: _____

Governed at What RPM? _____

Gear Ratio: _____ Direct Reduction: _____ :1 No. of Engines: ___ Single ____ Twin

Propeller Data

Max. Diameter: _____

Prop. Application: ____ Nozzle ____ Open

Suggested Prop. Size: ____ Diameter ____ X Pitch ____ Style ____ Blades ____ Material

Price: _____ Delivery: _____

Vessel/propeller/Nozzle Certification Required:

____ ABS ____ Lloyds ____ DNV ____ Other

Remarks:

_____

_____

_____

_____

_____

©2014 Donovan Marine, Inc.

Marpac Offshore High Back Yacht Chair



- Comfortable high back.
- Stable double leg construction with cross bar.
- Durable 1" corrosion resistant aluminum tubing.
- Easy to store-only 4" wide when folded.
- Water and UV resistant materials.
- Classic look with the varnished hardwood arms.

Order No.	Description	Price
7-0006	Offshore High Back Yacht Chair	$89.98 E

Marpac Offshore Double Wide Chair



- Thickly padded high back for superior support.
- Double wide seat, made for two.
- All stainless steel fasteners.
- Unique joint design includes smooth-shank stainless steel screw and composite bearing which reduces wear.
- 1" O.D. anodized aluminum tubing with 1.9 mm wall thickness.
- Marine grade vinyl is reinforced with polyester stitching to meet the harsh marine environment.
- Seat base and back uses marine grade plywood for longevity.
- Anti-fold locks keep the chair open when in use.

Order No.	Description	Price
7-0005	Offshore Double Wide Chair	$261.98 E

Springfield Marine Captains Chair with Deck Stand



- Perfect for comfortably riding out tough conditions, this Deluxe Seat features high density foam cushions for maximum comfort.
- Weather resistant upholstery made from heavy duty marine grade vinyl, the rugged upholstery is specially treated to resist mildew and UV treated to withstand fading.
- Back bars are anodized aluminum.
- Seat is made out of plastic substrate no wood to rot.
- Color: Off White.
- Armrest are made out of aluminum, cushions are attached to the arm and are 10" long x 3.5" wide x 3".
- Thick cushions are made out of marine grade vinyl that is UV resistant.
- Deck stand: Height: 24" (measured from deck to top of seat mount) 1" anodized legs with rubber tip guards.
- Legs are 24.5" apart to provide a stable ride.
- Heavy duty swivel: swivels 360°, powder coated finish, size is 7" x 7" and mounting pattern is 5" x 5".
- Seat measures: 19-1/2" H x 19" W x 20" D.
- Assembly required.

Order No.	Mfg. No. / Description	Price
550005	(1020003) White, Stand Anodized	$462.98 H

Marpac Folding Deck Chair



- Aluminum.
- White.
- Overall width 26-1/2" W.
- Seat dimensions: 19" W x 15" D.
- Depth 26".
- Stored width 11".
- Cushion 3".

Order No.	Description	Price
7-0003	Folding Deck Chair	$179.98 F

Wise Folding Deck Chair with Sailfish Design



- Injection molded plastic frame will not rot or soften.
- High density foam cushions are resilient and firm for maximum comfort.
- They easily fold for storing.
- The heavy duty 26 oz. marine grade vinyl upholstery is mildew resistant and UV treated to withstand fading.
- All hardware in corrosion resistant stainless steel.
- Double leg frames are constructed of sturdy, thick-wall, bright-dipped anodized aluminum.
- Seat height: 30", seat width: 26", depth: 24", seat depth: 15-3/4".
- Positive locking 1 anodized aluminum tubular frame.
- With stylish, sailfish embroidered design.

Order No.	Mfg. No. / Description	Price
262686	(WD119-710)	$264.98 F

Garelick EEz-In White Standard Pilot Chair



- Width 19".
- Depth 17.5".
- Includes stool frame.
- Polished aluminum frame.
- Contemporary, updated styling.
- For houseboats, pontoons and cruisers.
- Molded seamless white vinyl cushions.
- Seat height 30".

Order No.	Mfg. No. / Description	Price
391653	(43130-01)	$407.98 G

Taylor Made White Rubber Chair Tips



- No-marking rubber chair tips are great for use on deck chairs, boarding ladders, boat hooks, etc.
- Sold in packages of 4 tips.
- Fits 1" tubing.

Order No.	Mfg. No. / Description	Price
361042	(96025)	$11.98 G

Inland Pilot Chairs


334994


335001

- Specially designed for inland use.
- The padding is highly resilient and fire retardant.
- Upholstered in fire and mildew retardant 40 oz. marine grade Naugahyde.
- Frame is sturdy, all welded, corrosion resistant marine grade aluminum alloy.
- 360° swivel and rocking mechanism adjustable glides.
- Note: Custom height pedestals can be special ordered.

Order No.	Mfg. No. / Description	Price
334994	(EMS-2028) Standard, Black	$1,396.98 B
335000	(EMS-2028) Standard, Brown	$1,396.98 B
335001	(EMS-2028D) Highback, Brown	$1,452.98 B
335009	(EMS-CIR) Chair Iron Rocking	$166.98 B

Mariner Pilot Seats with Shock Absorber



- Base mounted pilot seat.
- Heavy duty shock absorber.
- Knee-action mechanical suspension.
- 3" seat height adjustment.
- 6" fore and aft double locking slide adjustment.
- Adjustable backrest.
- Fold-up armrests.
- Contoured lumbar support.
- Convenient side “chart pockets”.
- Width 24".

Order No.	Mfg. No. / Description	Price
335251	(158106VA06) Brown	$1,048.98 C
335252	(158106VA01) Black	$1,048.98 C
335263	(158106VA02) Blue	$1,048.98 C

Springfield Marine Deluxe Captain's Chair



- Perfect for comfortably riding out tough conditions, this Deluxe Seat features high density foam cushions for maximum comfort.
- Weather resistant upholstery made from heavy duty marine grade vinyl, specially treated to resist mildew and UV treated to withstand fading.
- Back bars are anodized aluminum.
- Seat is made out of plastic substrate no wood to rot.
- Armrest are made out of aluminum, cushions are attached to the arm and are 10" long x 3.5" wide x 3".
- Thick cushions are made out of marine grade vinyl that is UV resistant.
- Mounting pattern: 5" x 5".
- Seat dimensions: 19-1/2” H x 19” W x 20” D.

Order No.	Mfg. No. / Description	Price
550010	(1040002) Off White	$300.98 H

Offshore Pilot Chairs



- 3-1/2" fore and aft traverse adjustment.
- 360° swivel with positive lock.
- Custom designed for comfort and ruggedness.
- Seat height 37".
- Seat bucket width 20".
- Deluxe back: 66” height.

Order No.	Mfg. No. / Description	Price
335005	(EMS-2037D) Chestnut	$1,781.98 C

- Standard back: 53” height.

Order No.	Mfg. No. / Description	Price
335007	(EMS-2037S) Blue	$1,743.98 C
335008	(EMS-2037S) Black	$1,743.98 C

Wise Heavy Duty Pilot Chair



- Meets FMVSS 207 and 302.
- Infinite back angle thru 90°.
- 14 gauge steel tubing.
- Black powder coat finish.
- 6 fore/aft adjustor.
- No sag spring construction.
- 50 oz. heavy duty vinyl.

Order No.	Mfg. No. / Description	Price
335275	(WM1113-630)	$432.98 F

Wise Offshore Fighting Chair with Polymer Seat



- Premium ladder back sportfishing - helm chair features rotational molded frame with heavy duty aluminum support brackets and arm bars.
- Great for anywhere on the boat.
- This seat lasts season after season.
- UV and mildew treated marine grade vinyl with embroidered logo.
- Padded arm rests.
- High compression foam padding with snap on and off cushions.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dimensions: Height 19”, width 17”, depth 22”, seat depth 15-1/2”.

Order No.	Mfg. No. / Description	Price
391639	(WD562-3) White	$737.98 G

Wise Deluxe Helm Chairs with Arm Rests



- Super plush helm seat is constructed with injection molded plastic frame.
- 6" thick high compression foam seat padding.
- UV and mildew treated marine grade vinyl.
- Heavy duty aluminum bar back brackets flex for comfort.
- Aluminum arm rest brackets.
- Mounts on any BIA Standard 4 bolt pedestal or 5-1/4” hole pattern mounting system.
- Height 20-1/4”, overall width 24-1/2”, cushion width 19-3/4”, width inside arms 17”, overall depth 20-1/2”, seat depth 17”.

Order No.	Mfg. No. / Description	Price
263311	(WD431AR-710) White	$296.98 F
263323	(WD431AR-717) Gray	$296.98 F

©2014 Donovan Marine, Inc.

For ease of ordering and manufactured by industry leading companies. These products meet the requirements for "A" Drivers.

Wise Pilot Chair



- Standard pilot chair features rotational molded thick wall plastic frame with T-nut inserts for mounting.
- UV and mildew treated marine grade vinyl with embroidered logo.
- Snap on and off seat cushion have mesh underlay to expel moisture.
- High compression foam padding.
- Comes pre-mounted with injection molded plastic mounting plate.
- Mounts to any 4 bolt BIA Standard pedestal or 5-1/4" hole pattern mounting system.
- Seat dims.: Height 18-1/4", width 16", depth 19-1/5", seat depth 16-1/2".

Order No.	Mfg. No. / Description	Price
484820	(WD013-3-710)	$127.98 F

Wise Heavy Duty Pilot Chair



- Deluxe pilot helm chair features rotational molded thick wall plastic frame with T-nut inserts for mounting.
- UV and mildew treated marine grade vinyl with embroidered logo.
- Snap on and off seat cushions have mesh underlay to expel moisture.
- High compression foam padding.
- Molded arm rests.
- Comes pre-mounted with injection molded plastic mounting plate.
- Mounts to any 4 bolt BIA Standard pedestal or 5-1/4" hole pattern mounting system.
- Seat dims.: Height 18-1/4", width 17-3/4", depth 22-1/4", seat depth 17".

Order No.	Mfg. No. / Description	Price
484840	(WD015-3-710)	$135.98 F

Wise Ladder Back Pilot Chair



- Ladder back helm chair features rotational molded thick wall plastic frame pre-mounted with injection molded plastic mounting plate with T-nut inserts.
- UV and mildew treated marine grade vinyl.
- Seat cushions snap on and off with mesh underlay to expel moisture.
- Molded arm rests.
- High compression foam padding.
- Mounts to any 4 bolt BIA Standard pedestal.
- Seat dims.: Height 32", width 17-1/2", depth 23", seat depth 17-1/2".

Order No.	Mfg. No. / Description	Price
484900	(WD1095-3-710)	$224.98 F

Wise Extra Wide Captain's Chair



- Captains chair features rotational molded thick wall plastic frame with pre-mounted injection molded plastic mounting plate with T-nut inserts.
- Molded arm rests with padded cushions.
- UV and mildew treated marine grade vinyl.
- Seat cushions snap on and off with mesh underlay to expel moisture.
- High compression foam padding.
- Mounts to any 4 bolt BIA Standard pedestal.
- Seat dims.: Height 21", width 17-1/2", depth 24", seat depth 15".

Order No.	Mfg. No. / Description	Price
484890	(WD1007-3-710)	$186.98 F

Garelick EEz-In Premium Roto Molded Seat



- Rotationally molded of tough UV resistant white polyethylene.
- Marine grade white quilted vinyl.
- Snap-on removable cushions.
- Tee-nut bottom inserts accept anodized support rails that make it compatible with most pedestals, swivel and fore and aft seat slides.
- Width 22-1/2", depth 18", height 19".

Order No.	Mfg. No. / Description	Price
391603	(48050)	$285.98 G

Wise Flip-Up Bucket Seat



- Premium bucket seat features flip up bolster seat for added visibility while docking or cruising.
- Rotational molded thick wall plastic frame comes pre-mounted with plastic injection molded mounting plate with T-nut inserts.
- High compression foam padding.
- Soft touch UV and mildew treated marine grade vinyl.
- Very detailed upholstery design is top of the line quality.
- Mounts to any BIA Standard 4 bolt pedestal.
- Seat dimensions: Height 22", width 17", depth 27", seat depth 22".

Order No.	Mfg. No. / Description	Price
484853	(WD1156-784) Cuddy Brite White	$501.98 F

Tempress Captain's Series Helm Seats - High-Back



- Rotationally molded, incorporates the patented NaviStyle StylePanel system and ensures superior comfort, unequaled quality.
- Constructed of materials designed to withstand the rigors of the marine environment.
- Built-in lumbar support and a rolled front edge.
- Seat dimensions: 26" H x 23-1/2" W x 27-1/2" D.

Order No.	Mfg. No. / Description	Price
262698	(57010) White	$260.98 E
262701	(57017) Charcoal/Gray Cushion with Black Shell	$260.98 E

Wise Pilot Chair with 15" Pedestal and Slide



- Standard pilot helm chair (WD013) features thick wall rotational molded plastic frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- 15" fixed height pedestal (WP23-15-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 18-1/4", width 17-3/4", depth 26-1/4", seat depth 16-1/2".

Order No.	Mfg. No. / Description	Price
263500	Seat Package #1	$226.98 F

Wise Pilot Chair with Adjustable Pedestal and Slide



- Standard pilot helm chair (WD013) features thick wall rotational molded plastic frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- 12" to 18" adjustable pedestal (WP21-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 18-1/4", width 17-3/4", depth 26-1/4", seat depth 16-1/2".

Order No.	Mfg. No. / Description	Price
263502	Seat Package #2	$274.98 F

Wise Pilot Chair with 15" Pedestal



- Deluxe pilot helm chair (WD015) features thick wall rotational molded plastic frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- Molded arm rests.
- 15" fixed height pedestal (WP23-15S) features 9" polished aluminum base plate, 2-7/8" thick wall aluminum post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded mounting plate pre-mounted to seat frame.
- Seat dims.: Height 18-1/4", width 17-3/4", depth 22-1/2", seat depth 17".

Order No.	Mfg. No. / Description	Price
263503	Seat Package #3	$443.98 F

Wise Pilot Chair with 15" Pedestal and Slide



- Deluxe pilot helm chair (WD015) features thick wall rotational molded plastic frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- Molded arm rests.
- 15" fixed height pedestal (WP23-15-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall aluminum post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 18-1/4, width 17-3/4", depth 22-1/2", seat depth 17".

Order No.	Mfg. No. / Description	Price
263504	Seat Package #4	$246.98 F

Wise Captain's Chair Adjustable Pedestal and Slide



- Captain's chair (WD1007) features rotational molded thick wall plastic seat frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- Molded arm rests with cushion pads.
- 12" to 18" adjustable pedestal (WP21-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 21", width 17-1/2", depth 24", seat depth 15".

Order No.	Mfg. No. / Description	Price
263505	Seat Package #5	$284.98 F

Wise Captain's Chair with 15" Pedestal and Slide



- Captain's chair (WD1007) features rotational molded thick wall plastic seat frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- Molded arm rests with cushion pads.
- 15" fixed height pedestal (WP23-15-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 21", width 17-1/2", depth 24", seat depth 15".

Order No.	Mfg. No. / Description	Price
263506	Seat Package #6	$307.98 F

Note: *Wise Seat Packages: Seat height refers to the distance from the bottom (mounting plate) of the seat to the top of the backrest. Does not include pedestal height.*

©2014 Donovan Marine, Inc.

Wise Captain's Chair with 15" Pedestal



- Captain's chair (WD1007) features rotational molded thick wall plastic seat frame with T-nut mounting inserts.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Embroidered logo.
- Molded arm rests with cushion pads.
- 15" fixed height pedestal (WP23-15S) features 9" polished aluminum base plate, 2-7/8" thick wall aluminum post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded mounting plate pre-mounted to seat frame.
- Seat dims.: Height 21", width 17-1/2", depth 24", seat depth 15".

Order No.	Mfg. No. / Description	Price
263507	Seat Package #7	$344.98 F

Wise Ladder Back Pilot Chair with Adjustable Pedestal and Slide



- Ladder back pilot chair (WD1095) features rotational molded thick wall seat frame.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Molded arm rests.
- 12" to 18" adjustable pedestal (WP21-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 32", width 17-1/2", depth 23", seat depth 17-1/2".

Order No.	Mfg. No. / Description	Price
263508	Seat Package #8	$384.98 F

Wise Ladder Back Pilot Chair with 15" Pedestal and Slide



- Ladder back pilot chair (WD1095) features rotational molded thick wall seat frame.
- Snap on and off UV and mildew treated marine grade vinyl cushions with mesh underlay to expel moisture.
- Molded arm rests.
- 15" fixed height pedestal (WP23-15-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat dims.: Height 32", width 17-1/2", depth 23", seat depth 17-1/2".

Order No.	Mfg. No. / Description	Price
263509	Seat Package #9	$345.98 F

Wise Bucket Seat with Adjustable Pedestal and Slide



- Premium bucket seat (WD1156) features flip up bolster seat.
- Rotational molded thick wall plastic seat frame with T-nut mounting inserts.
- Soft touch marine grade premium vinyl with very detailed upholstery.
- High compression foam padding.
- 12" to 18" adjustable pedestal (WP21-374) with 5" travel fore and aft slide.
- Features 9" diameter polished aluminum base plate, 2-7/8" diameter thick wall post.
- Seat mount swivels 360° with locking mechanism.
- Comes with injection molded plastic mounting plate pre-mounted to seat frame.
- Seat Dims.: Height 22", width 17", depth 27", seat depth 22".

Order No.	Mfg. No. / Description	Price
263510	Seat Package #10	$636.98 F

Note: *Wise Seat Packages: Seat height refers to the distance from the bottom (mounting plate) of the seat to the top of the backrest. Does not include pedestal height.*

Springfield Marine Yachtsman Chair Package



- The seat is rotational molded in UV stable white polyethylene.
- Features a molded in arm rests helps keep crew in the seat in rough weather and a one piece hollow center with no sharp edges.
- This seat has a slide mount hole pattern.
- This is chair #3 - Please note that on the bottom of the chair there is a rectangular area that says "Chair No. 3".
- Cushions are made out of Marine Grade vinyl and plush foam padding with a heat seal channel designed textilene mesh underliners to permit cushions to dry.
- Pedestal Set: Second Generation 09 Anodized 15" Pedestal (measured from deck to top of seat mount).
- Post diameter: 2-7/8", post finish: Satin anodized.
- Base diameter: 9", base finish: Anodized.
- Trac-Lock III 2-7/8" locking slide seat mount swivel - powder coated.
- Color: White.
- Seat dimensions: Height 17", width 21.5", depth 16".

Order No.	Mfg. No. / Description	Price
550310	(1001414-L) Includes: Seat, Cushions, Mount, Pedestal	$325.98 H

Springfield Marine Newport Chair Package



- This seat is a rotational molded seat molded from LLDPE plastic with UV inhibitors to weather the outdoors for years of carefree use.
- This is chair #1 - Please note that on the bottom of the chair there is a rectangular area that says "Chair No. 1".
- Cushions are made out of Marine Grade vinyl and plush foam padding with a heat seal channel designed textilene mesh underliners to permit cushions to dry.
- Pedestal: Explorer Manual Adjustable Pedestal.
- Post diameter: 2-3/8", post finish: Satin anodized.
- Base diameter: 9", base finish: Anodized.
- Adjusts: 12.75" to 15.75".
- Seat mount: Trac-Lock III 2-3/8" swivel - powder coated.
- Swivels 360°.
- Color: Off White.
- Seat dimensions: Height 18", width 20", depth 15".

Order No.	Mfg. No. / Description	Price
550315	(1060100) Includes: Seat, Cushions, Mount, Pedestal	$294.98 H

Springfield Marine Ladder Back Chair



- Ladderback chair features: UV stabilized polypropylene back with grab handle.
- Plastic armrest on anodized and polished aluminum arm brackets with snap on cushions.
- Outside dimensions: 21.094" H x 22.25" W x 28.072" D.
- Inside dimension: 13" H x 17.75" W x 18.75" D.
- Mounting pattern: 5" x 12".

Order No.	Mfg. No. / Description	Price
550015	(1061301) Off-White	$421.98 H

Springfield Marine Ladder Back Chair Package



- Ladderback chair features: UV stabilized polypropylene back with grab handle.
- Plastic armrest on anodized and polished aluminum arm brackets with snap on cushions.
- Mounting pattern 5" x 12" Trac-Lock III.
- Seat mount: Swivel is powder coated swivels 360° locks in the forward position.
- Slide plate is aluminum travels 5-1/4" fore and aft.
- Pedestal is 18" tall 2-7/8" diameter, post finish is satin anodized with 9" anodized floor base.
- Color: White.
- Outside dimensions: 21.094" H x 22.25" W x 28.072" D.
- Inside dimension: 13" H x 17.75" W x 18.75 D.

Order No.	Description	Price
550000	(550000) Includes: Chair, Mount and Pedestal	$595.98 H

Springfield Marine Bluewater Chair Package



- Seat is rotational molded in UV stable white polyethylene.
- The one piece seat has no sharp edges.
- Molded in arm rests helps keep crew in the seat in rough weather.
- Seat uses T-nuts.
- This is Chair #13 - Please note that on the bottom of the chair there is a rectangular area that says "Chair No. 13".
- Bluewater seat cushions made out of marine grade vinyl.
- Plush foam padding heat seal channel designed textilene mesh underliners to permit cushions to dry.
- Pedestal set Mainstay 09 anodized adjustable.
- Pedestal post diameter: 2-3/8"
- Post finish: Satin anodized.
- Adjustment height: 14.5" to 19.5".
- Base diameter: 9".
- Base finish: Anodized.
- Trac-Lock III 2-3/8" Air Ride locking seat mount.
- Slide seat mount swivel finish: Powder coated.
- Color: White.
- Dimensions: 19.5" H x 18" W x 20" D.

Order No.	Description	Price
550305	(1001204-L) Includes: Chair, Cushions, Mount and Pedestal	$411.98 H

Springfield Marine Commodore Chair Package



- This is a comfortable seat with armrest.
- Rotational molded seat.
- Molded from LLDPE plastic with UV inhibitors to weather the outdoors for years of carefree use.
- Mounts to most seat swivels and slides.
- This is chair #2 - Please note that on the bottom of the seat there is a rectangular area that says "Chair No. 2". You may need to remove your seat mount to see the number.
- Commodore seat cushions: These seat cushions are made out of marine grade vinyl. Plush foam padding heat seal channel designed textilene mesh underliners to permit cushions to dry.
- Color: White pedestal set: Second Generation 09 anodized 17" pedestal (measured from deck to top of seat mount).
- Post diameter: 2-7/8".
- Post finish: Satin.
- Anodized base diameter: 9" base.
- Finish: Anodized Trac-Lock III.
- 2-7/8" locking seat mount slide.
- Seat mount swivel finish: Powder coated.
- Color: White.
- Dimensions: 19" H x 17" W x 19" D.

Order No.	Description	Price
550295	(1000205-L) Includes: Chair, Cushions, Mount and Pedestal	$316.98 H

Springfield Marine Commodore Pilot Chair Package



- Seafarer Seat #4 Schulman rotational molded seat from LLDPE plastic with UV inhibitors to weather the outdoors for years of carefree use.
- Mounts to most seat swivels and slides.
- This is Chair #4 - Please note that on the bottom of the chair there is a rectangular area that says "Chair No. 4".
- Seat cushions: These seat cushions are made out of marine grade vinyl.
- Plush foam padding heat seal channel designed textilene mesh underliners to permit cushions to dry.
- Pedestal set: Anodized 15" pedestal (measured from deck to top of seat mount).
- Post diameter: 2-3/8".
- Post finish: Satin anodized.
- Base diameter: 9".
- Base finish: Anodized.
- Kingpin Hi-Rise seat mount swivel.
- Swivel finish: E-coated, rotates 360°.
- Color: White.
- Dimensions: 17" H x 16" W x 17" D.

Order No.	Description	Price
550300	(1000605-5) Includes: Chair, Cushions, Mount and Pedestal	$266.98 H

©2014 Donovan Marine, Inc.

Wise Stainless Steel Swingback Seat



- Space below seat is designed to fit a cooler, saving valuable space.
- Fits 72 and 94 qt. coolers.
- Three different seating positions are available by adjusting the back and securing with stainless steel locking pins.
- Cooler sold separately.
- Seat height 38", width 37", depth 21".

Order No.	Mfg. No. / Description	Price
263448	(WD155P-710) White	$740.98 F

TACO Neptune III Brand Accessory Leaning Post



- Compact footprint suits smaller boats.
- Designed to look great and last.
- Optional removable, clamp-on grab rail and fixed ergonomically - designed backrest.
- Easy installation and adjustment of rod holders and accessories.
- Bolt-down installation.
- Anodized brushed aluminum construction.

Order No.	Description	Price
484965	(L10-2005BSA-1)	$833.98 F

TACO Neptune III Clamp-On Grab Rail and Backrest



- Clamp-on grab rail and backrest.
- Ergonomic backrest designed for comfort.
- Smooth upholstery.

Order No.	Description	Price
484977	(L11-2600BSA-1)	$387.98 F

Wise Economy Fold Down Seats



- Heavy duty 28 oz. marine grade vinyl.
- High impact plastic frame.
- Compression foam padding.
- Plastic sealed to resist moisture.
- UV treated to resist mildew and fading.
- Dacron thread.
- Aluminum hinges, less swivel.
- Seat height 18-1/2", width 16", depth 17-1/2".

Order No.	Mfg. No. / Description	Price
264255	(WD1123PLS-941) Gray/Navy/White	$41.98 F
264260	(WD1123PLS-942) White/Charcoal/Navy	$41.98 F

Wise Deluxe Cooler/Livewell Swingback Seats



- Durable seats feature brite dipped anodized aluminum swing-arms, plush ribbed marine grade vinyl upholstery, rounded interior corners to prevent bait from getting trapped, hinged lid with a recessed, rubber gasket for a tight seal, a drain fitting and polyethylene mounting plates.
- The cooler/livewell has a double wall, foamed insulated interior.
- 50 quart.
- Seat height 34-1/2", width 31", depth 17".

Order No.	Mfg. No. / Description	Price
263397	(WD159-710) White	$389.98 D

- 70 quart.
- Overall height 35", height to top of seat 19-1/2", width 36", depth 17-3/4".

Order No.	Mfg. No. / Description	Price
263400	(WD156-710) White	$398.98 D

Wise Double Leaning Post



- Heavy duty 28 oz. marine grade vinyl.
- UV treated to resist fading and mildew.
- High density foam cushions.
- Removable cushions.
- Two rod holders.
- Open storage compartment.
- 24 pedestals with 9 diameter base.
- Stainless steel hardware.
- Height 9-1/2", width 36-3/4", depth 15-1/2".
- Height with pedestal 33-1/2".

Order No.	Description	Price
485020	(WD440A-710)	$649.98 F

Wise Economy Fold Down Seats



- Built around state-of-the-art high impact plastic frames.
- Made with deep polyurethane foam padding, covered with rugged marine grade vinyl upholstery which is mildew resistant and UV treated to withstand fading.
- All vinyl covers are sewn with Dacron thread and upholstered with rust resistant staples.
- Aluminum hinges, less swivel.
- Seat height 18-3/4", width 15-3/4", depth 18-1/2".

Order No.	Mfg. No. / Description	Price
264139	(WD734PLS-718) Light Blue	$51.98 F
264141	(WD734PLS-717) Gray	$51.98 F
264150	(WD734PLS-716) Brown	$51.98 F
264165	(WD734PLS-715) Sand	$51.98 F
264174	(WD734PLS-713) Green	$51.98 F
264186	(WD734PLS-711) Navy	$51.98 F
264207	(WD734PLS-710) White	$51.98 F
264212	(WD734PLS-664) Gray/Charcoal	$51.98 F
264228	(WD734PLS-662) Sand/Brown	$51.98 F
264231	(WD734PLS-661) Gray/Red	$51.98 F
264249	(WD734PLS-660) Gray/Navy	$51.98 F

Marpac Deluxe Highback Seat



- Purposely designed with a high back and deep seat for added comfort.
- Heavy duty molded plastic inner frame and covered in a durable, marine grade vinyl.
- Corrosion resistant aluminum hinges and hardware.
- Weathers the toughest marine environments
- Dimensions: 17" wide x 15" deep x 22" tall.

Order No.	Description	Price
7-7830	Gray/Red	$62.98 G

Wise Deluxe Hi-Back Fold Down Seats



- Built around state-of-the-art high impact plastic frames.
- Made with deep polyurethane foam padding, covered with rugged marine grade vinyl upholstery which is mildew resistant and UV treated to withstand fading.
- All vinyl covers are sewn with Dacron thread and upholstered with rust-resistant staples.
- Molded plastic seats.
- With cushions.
- Seat height 22-1/2", width 17", depth 19-1/4", seat depth 16".

Order No.	Mfg. No. / Description	Price
263501	(WD892PLS-1713) Bright White/Midnight Navy	$138.98 F
263513	(WD892PLS-911) Marvel Gray/Charcoal	$138.98 F

Tempress All-Weather Highback Seats



- Bullet proof design, heavy duty construction.
- Features a double contoured seat pan that eliminates pressure points.
- Cushions feature a wrap around design, 500 Denier marine grade UV stable polyester cordura and high density foam inserts.
- Stainless steel hinge pins secure the fold down back.
- Dimensions: 18-1/2" H x 18-1/4" W x 17" D.
- Accepts Tempress proprietary quick disconnect mounting kit for more functionality.

Order No.	Mfg. No. / Description	Price
263284	(45602) Gray/Gray	$111.98 E
263285	(45608) Charcoal/Gray	$111.98 E
263286	(45611) Red/Gray	$111.98 E
263290	(45616) White	$108.98 E

Tempress Quick Disconnect Mounting Kit



- All-Weather quick disconnect kit.
- Allows seat to swivel on a low profile corrosion proof disk.

Order No.	Mfg. No. / Description	Price
263295	(45930) White	$31.98 F

Boater Sports Deluxe Highback Fold Down Seats



- Seat height 22", width 17", depth 15".

Order No.	Description	Price
1-BS588PLGRYGN	Gray/Green	$49.95 H
1-BS588PLS660	Gray/Navy	$55.95 E
1-BS588PLS661	Gray/Red	$55.95 E
1-BS588PLS662	Sand/Brown	$55.95 E
1-BS588PLS664	Gray/Charcoal	$55.95 E
1-BS588PLS710	White	$55.95 E
1-BS588PLS713	Green	$55.95 E
1-BS588PLS716	Brown	$55.95 E
1-BS588PLS717	Gray	$55.95 E
1-BS588PLS720	Charcoal	$55.95 E
1-BS588PLS940	OD Green	$55.95 E

Wise Deluxe 2 Tone Hi-Back Fold Down Seats



- Popular full size folding boat seat is constructed with injection molded plastic frame.
- UV and mildew treat marine grade vinyl.
- High compression foam padding.
- No pinch aluminum hinge.
- Embossed vinyl surface with logo.
- Seat height 21-1/4", width 17", depth 21", seat depth 14".
- Mounts to any 4 Bolt BIA standard pedestal or 5-1/4" hole pattern mounting system.

Order No.	Mfg. No. / Description	Price
263145	(WD588PLS-710) White	$74.98 F
263146	(WD588PLS-717) Gray	$74.98 F
263157	(WD588PLS-660) Gray/Navy	$74.98 F
263169	(WD588PLS-661) Gray/Red	$74.98 F
263171	(WD588PLS-664) Gray/Charcoal	$74.98 F
263183	(WD588PLS-662) Sand/Brown	$74.98 F
263184	(WD588PLS-713) Green	$74.98 F

Tempress Navistyle Highback Seats



- A perfect blend of ergonomic craftsmanship and smooth functionality.
- Subtle curves provide lumbar support while the tapered sides allow for the lateral movements.
- Features no-pinch hinge and automatic locking mechanism.
- Dimensions: 23-1/2" H x 18-1/2" W x 19-1/2" D.

Order No.	Mfg. No. / Description	Price
262713	(54800) White	$148.98 E
262725	(54907) Charcoal/Gray	$148.98 E

©2014 Donovan Marine, Inc.

Tempress Fishing Seats



- Constructed of materials designed to withstand the rigors of the marine environment.
- Built in lumbar support and a rolled front edge for comfort, durability, and superior style.

Order No.	Mfg. No. / Description	Price
263300	(56101) White, Low Back	$287.98 E
263310	(56104) White, High Back	$269.98 E

Boater Sports Pro Pedestal Seats



- Seat height 5-1/2", width 15-1/2", depth 11".

Order No.	Description	Price
1-BS112P710	White	$18.25 F
1-BS112P711	Navy	$18.25 F
1-BS112P712	Red	$18.25 F
1-BS112P713	Green	$18.25 F
1-BS112P715	Sand	$18.25 F
1-BS112P716	Brown	$18.25 F
1-BS112P717	Gray	$18.25 F
1-BS112P718	Light Blue	$18.25 F
1-BS112P719	Black	$18.25 F
1-BS112P720	Charcoal	$18.25 F

Wise Camouflage Hi-Back Fold Down Seat



- 500 denier cordura nylon.
- Injection molded plastic frame.
- Black aluminum no pinch hinges.
- Less swivel.
- Seat height 22", width 16-1/2", depth 18", seat depth 14-1/2".

Order No.	Mfg. No. / Description	Price
262596	(WD617PLS-763) Mossy Oak Break Up	$74.98 F

Wise Camouflage Hunting/Fishing Fold Down Seats



- 500 denier cordura nylon.
- Injection molded plastic frame.
- Black aluminum hinges.
- Less swivel.
- Seat height 18-1/2", width 16", depth 16", seat depth 14".

Order No.	Mfg. No. / Description	Price
262600	(WD618PLS-732) Advantage Max 4	$67.98 F
262610	(WD618PLS-763) Mossy Oak Break Up	$67.98 F
262612	(WD618PLS-729) Mossy Oak Shadow Grass	$67.98 F

Marpac Pro Casting Seats



- Fits any standard pedestal.
- Designed to fit most bass casting platforms.
- Comfortably cushioned with a plastic frame and covered in a durable marine grade vinyl.
- Holds up against the toughest marine environments.
- Dimensions: 14" wide x 10" deep x 5" tall.
- Sold in pairs only. Priced each.

Order No.	Description	Price
7-7815	Gray	$21.98 G
7-7817	Blue	$21.98 G
7-7819	White	$21.98 G
7-7821	Red	$21.98 G

Wise Pro Pedestal Seat



- Heavy duty 28 oz. marine grade vinyl.
- High impact plastic frame.
- Compression foam padding.
- Plastic sealed to resist moisture.
- Concave back for lumbar support.
- UV treated to resist mildew and fading.
- Mounts on any standard pedestal or swivel.
- Seat height 5-1/4", width 15-1/2", depth 11".

Order No.	Mfg. No. / Description	Price
263210	(WD112BP-720) Charcoal	$28.98 F

Boater Sports Southern Oak Camo Seat



- Seat height 22", width 17", depth 15".

Order No.	Description	Price
1-BS617PLS763	Southern Oak Camo	$55.98 E

Tempress Camouflage All-Weather Highback Seats



- Bullet proof design and heavy duty construction.
- Not just durable, but comfortable as well.
- Features a double contoured seat pan that eliminates pressure points.
- Stainless steel hinge pins secure the fold down back and included 1/4" x 20 T-nuts allow mounting to any standard marine swivel, slide or seat spider.
- Will also accept the Tempress proprietary Quick Disconnect Mounting Kit for even more functionality.
- Includes custom fitted cushion.
- These cushions feature a wrap-around design, 30 oz UV stable vinyl, and high density foam inserts.

Order No.	Mfg. No. / Description	Price
263287	(45612) Cordura, Mossy Oak Shadow Grass	$107.98 E
263292	(45623) Vinyl, Mossy Oak Shadow Grass	$139.98 F
263293	(45622) Vinyl, Mossy Oak Break Up	$139.98 F

Wise Camouflage Big Man Hunting/Fishing Fold Down Seats



- 500 denier cordura nylon.
- Injection molded plastic frame.
- No-pinch black aluminum hinges.
- Less swivel.
- Seat height 22-3/4", width 20-3/4", depth 20", seat depth 15-1/2".

Order No.	Mfg. No. / Description	Price
262613	(WD619PLS-729) Mossy Oak Shadow Grass	$137.98 F
262614	(WD619PLS-732) Advantage Max 4	$137.98 F

Boater Sports Camouflage Pro Pedestal Seat



- Seat height 5-1/2", width 15-1/2", depth 11".

Order No.	Description	Price
1-BS112P763	Camo	$18.25 F

Tempress Seat Shells



- Dimensions: 18" H x 17" W x 19" D.

Order No.	Mfg. No. / Description	Price
2626010	(T-BLK) Black	$54.98 G
2626011	(T-GRY) Grey	$54.98 G
2626012	(T-WHT) White	$54.98 G

Boater Sports Seat Shells



Order No.	Mfg. No. / Description	Price
1-58710	(58710) White	$49.15 H
1-58711	(58711) Black	$49.15 H
1-58712	(58712) Grey	$49.15 H

Tempress Low Back All-Weather Replacement Seat Cushion



- Feature welded seams that inhibit water intrusion, 30 oz. marine grade UV stable vinyl, and high density foam inserts.
- Fits the All-Weather Low Back Seat shells.

Order No.	Mfg. No. / Description	Price
263315	(54035) White, Cushion Only	$84.98 F

Wise Camouflage Low Back Seat

No Image Available

Order No.	Mfg. No. / Description	Price
262615	(8030-129)	$49.98 F

Wise Camouflage Deluxe Molded Fold Down Seat



- 500 denier cordura nylon cushions.
- Injection molded plastic frame.
- Mounting screws included.
- Seat height 15-1/4", width 20-1/4", depth 19-3/4", seat depth 15-1/2".

Order No.	Mfg. No. / Description	Price
262624	(WD139CLST-732) Advantage Maxx 4 with Tan Plastic Shell	$72.98 F

Wise Camouflage Pedestal Seat



- 500 denier cordura nylon.
- Molded plastic frame.
- 5-1/4" hole pattern.
- Mounting screws included.
- Seat height 5-1/2", width 15-1/2", depth 11".

Order No.	Mfg. No. / Description	Price
263250	(WD112BP-729) Mossy Oak Shadow Grass	$33.98 F

Boater Sports Seat Cushions



Order No.	Mfg. No. / Description	Price
1-58730	(58730) White	$63.35 H
1-58731	(58731) Gray	$63.35 H
1-58732	(58732) Southern Oak Camo	$63.35 H

Tempress High Back All-Weather/Profile Replacement Seat Cushion



- This cushion features a wrap around design that provides a clean and professional look.
- 30 oz. marine grade UV stable vinyl and high density foam inserts.
- Fits both our High Back All-Weather and Profile Seat Shells.

Order No.	Mfg. No. / Description	Price
263320	(53130) White, Cushion Only	$84.98 F

©2014 Donovan Marine, Inc.

Wise Lounge Seats with Plastic Frame



- Deluxe Series 36" pontoon bench seat features plastic injection molded seat frame system.
- High compression foam padding.
- UV and mildew treated marine grade vinyl.
- Hinge seat to reveal storage area.
- Rotational molded plastic base with pre-drilled drain holes.
- Seat dims.: Height 29-1/4", length 36", depth 22-1/2", seat depth 17-1/4".
- Base footprint: Height 11", length 36", depth 22-1/2".

Order No.	Mfg. No. / Description	Price
264315	(WD100-1011) Light Gray/Navy/Blue	$309.98 E
263638	(WD100-1012) Light Gray/Charcoal/Red	$309.98 E

Wise Corner Sections with Plastic Frame



- Deluxe Series 25" radius corner seat features injection molded seat frame system.
- High compression foam padding.
- UV and mildew treated marine grade vinyl.
- Seat cushion lifts up for storage.
- Rotational molded plastic base with pre-drilled drain holes.
- This corner unit will fit in both square and radius corner railings.
- Seat dims.: Height 29-1/4", width 25-1/2", depth 32-3/4", seat depth 23".
- Base footprint: Height 11", width 25-1/2", depth 32-3/4".

Order No.	Mfg. No. / Description	Price
264539	(WD133-1011) Light Gray/Navy/Blue	$316.98 E
264515	(WD133-1012) Light Gray/Charcoal/Red	$316.98 E

Wise Captain's Stands with Plastic Frame



- Deluxe Series steering console features injection molded plastic frame.
- UV and mildew treated marine grade vinyl.
- Dual cup holders.
- Easy access door panel.
- Height 29-1/4", width 26", depth 18".

Order No.	Mfg. No. / Description	Price
264933	(WD115-1011) Light Gray/Navy/Blue	$285.98 E
264919	(WD115-1012) Light Gray/Charcoal/Red	$285.98 E

Wise Deluxe Jump Seat with Plastic Frame



- Deluxe 10" base universal jump seat features color matched and texturized injection molded plastic frame.
- UV and mildew treated marine grade vinyl.
- High compression foam padding.
- Seat cushion lifts up for storage.
- Easy assembly.
- Height 27-3/4", width 16", depth 17-1/2", seat depth 12".
- Base footprint: 14" x 13-1/4".

Order No.	Mfg. No. / Description	Price
266568	(WD1414P-717) Gray	$147.98 E

Wise Flip-Flop Seats with Plastic Frame



- Deluxe Series flip-flip seat features injection molded seat frame.
- UV and mildew treated marine grade vinyl.
- High compression foam padding.
- Aluminum swing bars.
- Seat lifts up to reveal lots of storage.
- Rotational molded plastic base with pre-drilled drain holes.
- Seat dimensions: Height 32-1/4", depth 27-1/2", width 36-1/2", cushion width 32-1/2".
- Base footprint: Height 11-1/4", width 32", depth 22".

Order No.	Mfg. No. / Description	Price
265288	(WD125FF-1011) Light Gray/Navy/Blue	$309.98 E
265264	(WD125FF-1012) Light Gray/Charcoal/Red	$309.98 E

Wise Deluxe Bucket-Style Captain's Chairs with Plastic Frame



- Deluxe Series helm bucket seat features injection molded plastic frame.
- High compression foam padding.
- UV and mildew treated marine grade vinyl.
- Mounts to any 4 bolt BIA standard pedestal.
- Height 23", width 24-1/4", depth 22-1/4", seat depth 16-1/2".

Order No.	Mfg. No. / Description	Price
265087	(WD120LS-1011) Light Gray/Navy/Blue	$268.98 E
265062	(WD120LS-1012) Light Gray/Charcoal/Red	$268.98 E

Wise Arm Rests with Plastic Frame



- Deluxe Series arm rest features injection molded plastic frame.
- UV and mildew treated marine grade vinyl.
- Single cup holder.
- Height 22-1/2", width 9", depth 22-3/4".

Order No.	Mfg. No. / Description	Price
264604	(WD105-221) Square Arm Rest, Gray	$111.98 E
264717	(WD112-221) Radius Arm Rest, Right, Gray	$111.98 E
264818	(WD110-221) Radius Arm Rest, Left, Gray	$111.98 E

Wise Deluxe Lounge Seats with Plastic Frame



- Deluxe 10" base lounge fits most 16 - 19' boats.
- Injection molded plastic base is color matched and texturized to match UV and mildew treated marine grade vinyl.
- Embossed vinyl surface.
- High compression foam padding.
- Strong aluminum legs fold out for sunbathing.
- Easy assembly.
- Height 28", width 17-1/2", depth 14-1/4", upright length 45-1/2", extended length 64-1/2", seat depth 14-1/2".
- Base footprint: 13-1/2" x 36".

Order No.	Mfg. No. / Description	Price
263608	(WD707P-1-710) White	$238.98 F
263610	(WD707P-1-711) Navy	$238.98 F
263613	(WD707P-1-717) Gray	$238.98 F

Garelick EEz-In Blue Water Adjustable Height Positive Pin Type Pedestal - Ribbed Finish



- Anodized aluminum finish.
- Pin secures base at specific height in 1" increments.
- Stainless steel lock pin locates securing hole easily.
- 2-7/8" diameter ribbed stanchion tube, 9-1/4" diameter 6 hole base plate.
- From 12" to 17".

Order No.	Mfg. No. / Description	Price
392124	(75635)	$173.98 F

Garelick EEz-In Fixed Overall Height Pedestal - Ribbed Series



- Anodized aluminum finish.
- Accepts Garelick fore and aft seat slides and 360° swivel spider combinations.
- 2-7/8" diameter smooth stanchion tube, 9-1/4" diameter 6 hole base plate.

Order No.	Mfg. No. / Description	Price
392085	(75530) Height 12"	$82.98 F
392097	(75532) Height 18"	$92.98 F

Springfield The "Clipper 10" Series Pedestals



- Ideal for deck boats, pontoon boats and any barstool application, the "Clipper 10" Series pedestals have 10" diameter solid brushed aluminum bases and the revolutionary new "Quad-Action" swivel from Springfield.
- Comes complete with 2-3/8" diameter post.

Order No.	Mfg. No. / Description	Price
5500027	(1440213) Height 9"	$98.98 H
5500028	(1440220) Height 12"	$100.98 H
5500029	(1440228) Height 15"	$115.98 H

Wise Adjustable Height Locking Pedestal with Seat Mount



- ABYC Class AD Driver rated 12" to 18" adjustable pedestal with WD374 Seat Slide.
- Slide features 5" of fore and aft travel.
- Slide constructed of extruded and polished aluminum.
- Seat mount constructed with heavy duty cast aluminum texturized finish.
- Plastic covered stainless steel adjustment handles allows 360° or total lock down.
- Height adjustment knob pulls out to raise or lower.
- 2-7/8" diameter post works effortlessly with inner post.
- 5-1/4" hole pattern fits virtually all seat brands.

Order No.	Mfg. No. / Description	Price
512015	(WD21-374) Adjustable Height 12" - 18"	$168.98 F

Garelick EEz-In Fixed Height Seat Bases - Smooth Finish



- Polished finish.
- Mounts any seat securely.
- 4 prong spider swivels 360° and locks positively.
- 2-7/8" diameter smooth stanchion tube, 9-1/4" diameter base plate.

Order No.	Mfg. No. / Description	Price
392009	(75031) Height 9"	$138.98 F
392011	(75030) Height 12"	$143.98 F
392023	(75032) Height 18"	$155.98 F
392035	(75033) Height 24"	$155.98 F
392047	(75034) Height 30"	$178.98 F
392100	(99023) Anodized Aluminum Swivel Seat Mount Top	$54.98 F

Garelick EEz-In Adjustable Height Seat Bases - Smooth Finish



- Polished finish.
- Seat raises or lowers, locks at desired height.
- 4 prong spider swivels 360° and locks positively.
- 2-7/8" diameter smooth stanchion tube, 9-1/4" diameter base plate.

Order No.	Mfg. No. / Description	Price
392061	(75035) From 12" to 17"	$181.98 F
392073	(75028) From 18" to 24"	$187.98 F

Wise Fixed Height Pedestal



- ABYC Class AD Driver rated premium quality 15" fixed height pedestal features thick wall 2-7/8" diameter post.
- 9" diameter raised polished aluminum base plate with knurled finish recessed mounting holes.
- Seat mount is heavy duty cast texturized cast aluminum with plastic covered stainless steel adjustment handles.
- Swivels 360° or locks down tight.
- 5-1/4" hole pattern fits virtually all seat brands.

Order No.	Mfg. No. / Description	Price
512006	(WD23-15S) Height 15"	$104.98 F

Wise Fixed Height Pedestal



- ABYC Class AD Driver rated premium quality 15" fixed pedestal with WD374 Seat Slide.
- Slide features 5" of fore and aft travel.
- Slide constructed of extruded and polished aluminum with locking handle.
- Thick wall 2-7/8" diameter post.
- 9" diameter raised polished aluminum base plate with knurled finish recessed mounting holes.
- Seat mount is heavy duty cast texturized aluminum with plastic covered stainless steel adjustment handles.
- Swivels 360° or locks down tight.
- 5-1/4" hole pattern fits virtually all seat brands.

Order No.	Mfg. No. / Description	Price
512008	(WD-23-15-374) Height 15"	$128.98 F

©2014 Donovan Marine, Inc.

Springfield Marine Mainstay Power-Rise Adjustable Pedestal

Includes Seat Mount



- It adjusts 12-1/2" to 15-1/2" with an air powered cylinder.
- Floor base is 9" diameter with an anodized finish.
- Post is 2-3/8 diameter with a satin anodized finish.
- Bolt pattern: 8". Bolt holes: 6.
- Comes with seat mount slide and swivel combo.
- Swivel is powder coated and swivels 360°.
- Travel: 5.25" fore and aft.
- Convenient front operating handle for height adjustment.
- A simple squeeze of the handle and you can adjust to your desired height instantly.
- High strength aluminum and engineering-grade plastics used throughout.

Order No.	Mfg. No. / Description	Price
550320	(1250250-L) Air Powered Adjustable Pedestal	$271.98 H

Springfield Marine Mainstay Power-Rise Adjustable Pedestal

Includes Seat Mount Swivel



- It adjusts 14" to 20" with an air powered cylinder.
- Floor base is 9" diameter with an anodized finish.
- Post is 2-3/8 diameter with a satin anodized finish.
- Seat mount swivel is powdered coated.
- Rotates 360° with locking handle and has a 3° tilt.
- Mounting pattern: 5" x 5".

Order No.	Mfg. No. / Description	Price
550085	(1250100-L) Air Powered Adjustable Pedestal	$251.98 H

Wise Adjustable Height Aluminum Pedestal



- Bell pedestal adjusts 13" to 18".
- Features powdered coated 10" diameter thick wall cast aluminum base.
- 2-3/8" diameter aluminum post.
- Seat mount swivels 360° with locking mechanism.
- ABYC Class B Rating.
- Mounts to any 5-1/4" hole pattern boat seat.

Order No.	Mfg. No. / Description	Price
263647	(WD1500)	$80.98 F

Springfield Belle Adjustable Pedestal with Swivel



- Adjustable post with 10" floor base and seat mount swivel that is powder coated.
- Swivels 360°.
- Adjust 13" to 17" with easy grip handles.
- Mounting pattern: 5" x 5".

Order No.	Mfg. No. / Description	Price
550125	(1440248)	$96.98 H

Wise Pivot Pedestal Mount



- Extra sturdy 5-point pivot for extra stability in rough seas.
- Corrosion resistant marine grade alloy.
- Passes salt spray B-117-97 test.
- Diameter base 27".
- Swivels 360°.

Order No.	Mfg. No. / Description	Price
263640	(WM1326)	$965.98 E

Attwood Swivl-Eze Adjustable Height Pedestal



- Sturdy 2-3/8" diameter bell pedestal.
- Ergonomic positive-locking handles with stainless steel components.
- Bases have underside ribs for superior strength.
- Adjustable height 12-1/2" to 15-1/2".
- Super satin anodized post.
- Engineered to exceed ABYC Standards.

Order No.	Mfg. No. / Description	Price
512012	(2385405)	$99.98 G

Attwood Swivl-Eze Adjustable Height Power Pedestal



- Heavy duty 2-7/8" post and 9" diameter machined base.
- Ergonomic positive-locking handles with stainless steel components.
- PowerLock Multi-Action handle controls both swiveling and height adjustment.
- EZ-Lock CAM-Action makes seat removal simple.
- Adjustable height 14-1/2" to 19-1/2".

Order No.	Mfg. No. / Description	Price
512014	(89101)	$278.98 F

Springfield Marine HD Mainstay Pedestal

Includes Slide/Swivel Seat Mount



- Rigid keyed aluminum post with 9" diameter floor base that has an anodized finish.
- It adjusts 14-1/2" to 20" with an air powered cylinder.
- Post is 2-7/8" diameter with a satin anodized finish.
- Seat mount has powder coated finish on swivel, size 2-7/8" with bushing for snug fit.
- Rotates 360° with locking handle and has a 3° tilt.
- Slide plate is aluminum with 5.25" fore and aft travel.
- Mounting patterns: 5" x 5" and 5" x 12".

Order No.	Mfg. No. / Description	Price
550090	(1250301) Air Powered Adjustable Pedestal	$377.98 H

Garelick EEz-In Toggler Brand Toggle Bolt Anchors



- Works with all Garelick seat pedestal bases.
- Positively secures seats and table bases to decks or any accessory to cabin walls.
- Made of 304 stainless steel.
- For deck or cabin thickness from 3/8" to 2-1/2", requires 1/2" holes.
- 1/4" - 20 size anchor only.

Order No.	Mfg. No. / Description	Price
359972	(21021) Contains: 50 Each	$5.98 G
359962	(21022) Contains: 1 Pair	$18.98 G
392136	(21026) Contains: 6 Each	$39.98 G

Garelick EEz-In Solid Detachable Stanchion Plate



- Plate mounts to deck surface for base attachment.
- Allows base and seat to be removed.
- 9-1/4" diameter machined anodized aluminum, 3 stainless cap screws and allen wrench included.
- Adapts to all models, simply enlarge 6 base holes to 7/16" diameter.

Order No.	Mfg. No. / Description	Price
392148	(75056)	$71.98 F

Boater Sports Fixed Seat Pedestals





- Black powder coated economy seat pedestal.
- Use with flat swivel.

Order No.	Mfg. No. / Description	Price
1-54938	(54938) 7" Fixed	$21.95 H
1-54940	(54940) 13" Fixed	$21.95 H

Boater Sports Adjustable Seat Pedestal



- Black powder coated economy seat pedestal.
- Use with flat swivel.

Order No.	Mfg. No. / Description	Price
1-54942	(54942) Adjustable Height 11-1/2" - 17-1/2"	$34.95 H

Garelick EEz-In Millennium Series - Seat Slide System - Ribbed Series



- Anodized aluminum.
- Left hand lever silver powder coat finish.
- Low profile design allows 360° of rotation and 6" of smooth, wobble-free fore and aft travel.
- Heavy duty anodized aluminum slide 13-3/4" x 8" plate has standard 5" x 12" hole pattern.
- Positive lock spider - rotates 360°, internal cup engages in 10° increments for positive stop lock.
- Swivel: 2-7/8" diameter.
- Internal Delrin cup provides smooth, gaul-free operation.
- Includes retaining hardware.

Order No.	Mfg. No. / Description	Price
391906	(21000)	$131.98 G

Springfield Marine Trac-Lock III

2-7/8" Seat Mount Slide/Swivel Combo



- High strength aluminum with a powder coated finish on the swivel.
- Size: 2-7/8" with bushing for snug fit, swivels 360° with a 3° tilt.
- Slide plate is aluminum and the size is 7-1/4" x 13".
- Travels 5.25" for and aft, with a mounting pattern of 5" x 5" and 5" x 12".

Order No.	Mfg. No. / Description	Price
550055	(1100521-1)	$99.98 H



Order No.	Mfg. No. / Description	Price
550060	(1100521-L1) With Seat Lock	$118.98 H

Wise Economy Pedestals



- Black powdered coated steel pedestal are great for small boats.
- ABYC Class B Rated.
- 5-1/4" hole pattern fit virtually all seat brands.

Order No.	Mfg. No. / Description	Price
512040	(WD1251) Height 7"	$22.98 F
512042	(WD1250) Height 13"	$23.98 F

Springfield Marine Economy Pedestals



- Rugged all steel construction with a E-coated finish.
- Floor base and seat mount are 7" x 7".
- Seat mount does not swivel.
- Mounting pattern: 5" x 5"
- Base, post and seat mount are one unit.

Order No.	Mfg. No. / Description	Price
550130	(1561105) 7" Post	$25.98 H
550135	(1561106) 13" Post	$30.98 H

Wise Fore and Aft Slide



- ABYC Class AD Driver rated premium quality extruded and polished aluminum seat slide features locking handle and 5" of fore and aft travel.
- Fits locking and non-locking 2-7/8" OD posts or pedestals.
- Seat mount is cast aluminum with texturized finish.
- Plastic covered stainless steel handles allow 360° or lock down.
- 5-1/4" hole pattern fits virtually all seat brands.

Order No.	Mfg. No. / Description	Price
511990	(WD374)	$78.98 F

Springfield Marine Trac-Lock III

2-7/8" Seat Mount Swivel



- Trac-Lock III is the most functional and dependable seat mount available.
- Swivel is powder coated and swivels 360° with a 3° tilt.
- Size: 2-7/8".
- Mounting Pattern: 5" X 5".

Order No.	Mfg. No. / Description	Price
550035	(1100021-1)	$53.98 H



- Locking handle for drivers position.

Order No.	Mfg. No. / Description	Price
550040	(1100021-L1) With Seat Lock	$58.98 H

©2014 Donovan Marine, Inc.

Attwood Swivl-Eze SeaSport Seat Mounts



- Heavy duty 2-7/8" posts and 9" diameter machined bases.
- Ergonomic positive-locking handles with stainless steel components.
- PowerLock Multi-Action handle controls both swiveling and height adjustment.
- EZ-Lock CAM-Action makes seat removal simple.
- Aluminum with friction control.
- 3° tilt.
- Without slider.
- Installed height 5/8".

Order No.	Mfg. No. / Description	Price
512002	(818641)	$49.98 Q



- With aluminum slider.
- Installed height 1".

Order No.	Mfg. No. / Description	Price
512004	(828661)	$99.98 G

Garelick EEz-In Swivel Seat Mount - Ribbed Series



- Powder coated finish.
- Low profile design allows 360° of rotation.
- 360° rotation is regulated by dual locking devices.
- Secondary twist control offers variable drag adjustment.
- Internal Delrin Bearing Cup provides smooth, gaul-free operation.

Order No.	Mfg. No. / Description	Price
392251	(99026)	$81.98 F

Springfield Marine Trac-Lock III

2-3/8" Seat Mount Slide/Swivel Combo



- High strength aluminum with a powder coated swivel.
- Size: 2-3/8" with bushing for snug fit.
- Rotates 360° with a 3° tilt.
- Slide plate is aluminum size 7-1/4" x 13" with 5-1/4" travel fore and aft.
- Mounting pattern: 5" x 5" and 5" x 12"

Order No.	Mfg. No. / Description	Price
550065	(1100531-1)	$108.98 H



- Locking handle to lock in position.

Order No.	Mfg. No. / Description	Price
550070	(1100531-L1) With Seat Lock	$117.98 H

Garelick EEz-In Low Profile Seat Slide and Locking Swivel



- Allows helm or boat seats to adjust fore and aft 7-1/2" and swivel 360°.
- Slide mounts under seat in between seat and pedestal base.
- Convenient handle provides solid locking at any position.
- Anodized aluminum with stainless steel hardware.
- Width 8-1/2", length 8", height 4".

Order No.	Mfg. No. / Description	Price
392376	(75090)	$171.98 F

Springfield Marine Prestige Mount Combo

2-7/8" Locking Seat Slide/Swivel Combo



- High strength aluminum with an anodized slide and swivel finish.
- Size: 2-7/8", rotates 360° with a 3° tilt.
- Slide plate 8" x 13" with travel of 6-3/8" fore and aft.
- Easy to reach handles.
- Mounting pattern: 5" x 5" and 5" x 12".

Order No.	Mfg. No. / Description	Price
550075	(1101521-L)	$14998 H

Wise Cast Aluminum Seat Mount



- Seat mount spider fits 2-7/8" outside diameter posts.
- Features high quality cast aluminum texturized aluminum and rubber inner sleeve.
- Plastic covered stainless steel knob to lock mount or release to allow 360° swivel.
- Plastic paddle handle locks mount down with pre-drilled post.
- 5-1/4" hole pattern fits virtually all seat brands.

Order No.	Mfg. No. / Description	Price
511988	(WP94)	$41.98 F

Springfield Marine Trac-Lock III

2-3/8" Seat Mount Swivel



- High strength aluminum with a powder coated finish.
- Size: 2-3/8" with bushing for a snug fit.
- Rotates 360° with a 3° tilt.
- Mounting pattern: 5" x 5".

Order No.	Mfg. No. / Description	Price
550045	(1100031-1)	$47.98 H



- Locking handle to lock in position.

Order No.	Mfg. No. / Description	Price
550050	(1100031-L1) With Seat Lock	$52.98 H

Attwood Swivl-Eze Deck Mounted Seat Slide



- Mounts directly to the boat deck.
- 1-5/8" total height.
- Constructed of strong aluminum with convenient front control operation.

Order No.	Mfg. No. / Description	Price
5870062	(815000)	$122.98 F

Wise Universal Seat Mounting Plate



- Injection molded plastic seat mounting plate is ideal for all rotational molded seat frames to provide extra strength.
- 5-1/4" hole pattern with T-nut inserts along with 2 pre-drilled holes on each end allow multiple mounting options.

Order No.	Mfg. No. / Description	Price
404894	(WD399-1)	$25.98 F

Attwood Swivl-Eze Bench Style Seat Mount



- Great for mounting seats in jon boats.
- Constructed of quality aluminum.

Order No.	Mfg. No. / Description	Price
581068	(SP-15900) Rail Kit, Seat Plate and 15" Rails	$46.98 F
581067	(SP-15100) Plate Only	$23.98 F
581069	(SP-15200) 30" Rails Only	$32.98 F

Attwood Swivl-Eze Clamp-On Boat Seat Swivel



- Black powder coated swivel.
- Fits most seat hole patterns.
- Adjusts from 7.5" to 18".

Order No.	Mfg. No. / Description	Price
512020	(15700-3)	$32.98 G

Springfield Marine Seat Mount Swivel - 7" Square



- Light duty mounting system.
- Nylon ring bushing.
- Dimensions: 6-7/8" square, height 1-1/8", 4 hole pattern 4-1/4" to 5-1/4".
- Designed to fit most fishing seats or flat surface mount.
- Rotates 360° with a 0° tilt.
- E-coated.

Order No.	Mfg. No. / Description	Price
550030	(1100018) Class AD	$33.98 H

Garelick EEz-In Boat Seat Swivel - Angled



- Rotates 360°.
- Fits most standard seat hole patterns.
- Self-lubricated, noncorrosive poly swivel bearings.
- Angled with 7° angle.

Order No.	Mfg. No. / Description	Price
360848	(75017)	$29.98 F

Attwood Swivl-Eze Seat Swivel with Ball Bearings



- 360° ball bearing seat swivel.
- Zinc coated.
- 0° tilt.

Order No.	Mfg. No. / Description	Price
5870014	(1772-F)	$10.98 H

Springfield Marine Seat Mount Swivel - 7" Square - Stainless Steel



- Swivel 7" x 7" stainless steel with a bolt pattern of 4-1/2" to 5-1/2".
- Swivels 360° and is 6-7/8"
- Square with a height of 1-1/8" and a zero degree tilt.
- Made from 304 stainless steel and includes nylon bushing.

Order No.	Mfg. No. / Description	Price
550025	(1100009) Class B	$46.98 H

Garelick EEz-In Adjustable Seat Swivel Clamp



- Durable - all metal construction.
- Accepts standard boat seats, fits tank or bench tops.
- Quick mounting and dismounting, includes 360° swivel.
- Width adjusts from 8" to 18".
- Vinyl covered clamps.

Order No.	Mfg. No. / Description	Price
392302	(75007)	$55.98 G

Springfield Marine Jon Boat Seat Mount



- Clamp adjust 8" to 20-1/2" to fit most bench seats.
- Steel E-coated to resist corrosion.

Order No.	Mfg. No. / Description	Price
550080	(1104010) Non-Locking Seat Swivel	$47.98 H

Boater Sports Seat Swivel with Ball Bearings



- 360° ball bearing seat swivel.
- Black powder coated.
- 0° tilt.

Order No.	Mfg. No. / Description	Price
1-54946	(54946)	$14.95 H

Wise Ball Bearing Swivel



- Wise trendler ball bearing swivel is still produced in the USA.
- Black powder coated rugged steel plate.
- 6-1/4" with 5-1/4" hole pattern fits virtually all brand of seats.

Order No.	Mfg. No. / Description	Price
293333	(WD10)	$12.98 H

Springfield Marine Seat Mount Swivel - 7" Square



- Swivel 7" x 7" E-coated with zero degree tilt.
- Swivels 360°.
- Mounting pattern: 4-1/2" to 5-1/2".
- Swivel is 6-7/8".
- Square with a height of 1-1/8".
- Nylon bushing.
- Swivel is black E-coated with Springfield's hard as nails finish.

Order No.	Mfg. No. / Description	Price
550020	(1100007) Class B	$16.98 H

Wise Small Helmsman Seat Hinge - Aluminum



- One pair of aluminum seat hinges.
- 1 left side and 1 right side.
- 10" x 8".

Order No.	Mfg. No. / Description	Price
264301	(WD13)	$19.98 E

©2014 Donovan Marine, Inc.

Boater Sports Jon Boat Style Seat Bracket



- Jon boat style seat bracket.
- Non-swivel seat base designed to clamp onto your Jon boat seat.

Order No.	Mfg. No. / Description	Price
1-54943	(54943)	$19.95 H

Boater Sports Seat Pedestal Set



- Seat mount kit: Pin type mount, base and 11" post.
- Zinc plated seat mount, aluminum extension post and stainless steel 7" x 7" base.

Order No.	Mfg. No. / Description	Price
1-54900	(54900) Height 11"	$54.95 H

Attwood Swivl-Eze Lock'N-Pin Power Pedestals - Adjustable



- Brushed aluminum.
- Adjustable power pedestal for use with pin seat mount.
- 3/4" pin pedestal.
- Steel pin.
- 1.77" diameter.
- Non-Threaded.

Order No.	Mfg. No. / Description	Price
5870028	(3004-R) Adjustable Height 15" - 18"	$105.98 H
5870032	(3204-R) Adjustable Height 24" - 30"	$116.98 H

- Threaded.

Order No.	Mfg. No. / Description	Price
587622	(3004-R-T) Adjustable Height 15" - 18"	$105.98 R
587595	(3204-R-T) Adjustable Height 24" - 30"	$123.98 R

Attwood Swivl-Eze Lock'N-Pin Power Pedestals - Adjustable



- Brushed aluminum.
- Adjustable power pedestal with integral seat mount.
- 3/4" pin pedestal.
- Steel pin.
- 1.77" diameter.
- Non-Threaded.

Order No.	Mfg. No. / Description	Price
5870027	(3004) Adjustable Height 15" - 18"	$97.98 H
587572	(3204) Adjustable Height 24" - 30", Pro-Post	$109.98 F

- Threaded.

Order No.	Mfg. No. / Description	Price
587634	(3004-T) Adjustable Height 15" - 18"	$105.98 R
587571	(3204-T) Adjustable Height 24" - 30", Pro-Post	$109.98 R

Attwood Swivl-Eze Offset Seat Swivel



- Swivels 360° allowing a 6" offset from extension post.
- Zinc plated for corrosion resistance with olite bronze bushings for added durability.
- Seat mount and pedestal sold separately.

Order No.	Mfg. No. / Description	Price
587383	(7062-3)	$43.98 G

Attwood Swivl-Eze Lock'N-Pin Offset Post - Fixed Height



- 3/4" pin pedestal.
- Height 13".
- 1.50" diameter.
- Stainless steel pin.
- Threaded.

Order No.	Mfg. No. / Description	Price
586402	(7153-T-SS) Polished Stainless	$76.98 Q

Attwood Swivl-Eze Lock'N-Pin Pedestal Packages



- Complete packages includes: Brushed aluminum post, zinc plated seat mount with spring and stainless steel base plate.
- 3/4" pin pedestal.
- Non-Threaded.


Order No.	Mfg. No. / Description	Price
587482	(96839) 6" x 8" Base Plate, 11" Post (2114)	$68.98 G
587494	(97739) 7" x 7" Base Plate, 11" Post (2114)	$68.98 G

- Threaded.

Order No.	Mfg. No. / Description	Price
587519	(977339-T) 7" x 7" Base Plate, 13" Post (2134-T)	$65.98 F


Attwood Swivl-Eze Lock'N-Pin Base Plates - Aluminum

587356





587355



5870051

- Aluminum.
- 3/4" pin pedestal.
- Nylon bushing.
- Non-Threaded.
- ABYC Code: B.

Order No.	Mfg. No. / Description			Price
5870051	(6684)	6" x 8"	Bulk	$29.98 E
5870056	(67749)	7" x 7"	Bulk	$32.98 D
587381	(SP-67749)	7" x 7"	Skin Pack	$34.98 F
587355	(68R4)	8" Round	Bulk	$39.98 G
5870059	(69R4-I)	9" Round, Inverted	Bulk	$42.98 F
587356	(SP-69R4-I)	9" Round, Inverted	Skin Pack	$49.98 Q

Boater Sports Stainless Steel Bases



- High strength stainless steel construction with a satin finish.
- Accepts all 3/4" pin-type extensions.
- Nylon bushing.

Order No.	Mfg. No. / Description	Price
1-54936	(54936) Non-Threaded	$31.95 R
1-54937	(54937) Threaded	$34.95 R

Attwood Swivl-Eze Lock'N-Pin Seat Mounts





- Zinc plated steel.
- 3/4" pin pedestals.
- 3° tilt.
- ABYC Code: B.

Order No.	Mfg. No. / Description	Price
587102	(1002) 2-3/4" Steel Pin with Spring	$12.98 H
587127	(1002-ADJ-3) Adjusts From Flat to 22° to 45°	$67.98 G
587110	(1002-S) 2-1/2" Steel Pin without Spring	$16.98 H

- All stainless steel.
- 3/4" pin pedestals.
- 3° tilt.
- ABYC Code: B.

Order No.	Mfg. No. / Description	Price
587111	(1002-SS) 2-3/4" Stainless Steel Pin without Spring	$39.98 R

Attwood Swivl-Eze Lock'N-Pin Posts - Fixed Height



- Brushed aluminum.
- 3/4" pin pedestal.
- 1.50" diameter.
- Steel pin.
- Tough nylon swivel bushings provide smooth seat rotation.
- ABYC Code: B.

Order No.	Mfg. No. / Description				Price
587150	(2064)	Height 6"	Non-Threaded	Bulk	$16.98 G
587204	(2114)	Height 11"	Non-Threaded	Bulk	$15.98 H
587206	(SP-2114)	Height 11"	Non-Threaded	Skin Pack	$17.98 Q
587216	(2134)	Height 13"	Non-Threaded	Bulk	$16.98 R
582065	(SP-2134)	Height 13"	Non-Threaded	Skin Pack	$19.98 Q
587217	(2164)	Height 16"	Non-Threaded	Bulk	$18.98 F
5870022	(2244)	Height 24"	Non-Threaded	Bulk	$30.98 H
587205	(2114-T)	Height 11"	Threaded	Bulk	$16.98 R
587207	(SP-2114-T)	Height 11"	Threaded	Skin Pack	$19.98 Q
587230	(2134-T)	Height 13"	Threaded	Bulk	$18.98 F
587209	(SP-2134-T)	Height 13"	Threaded	Skin Pack	$20.98 R
5870021	(2164-T)	Height 16"	Threaded	Bulk	$22.98 H

- Stainless steel pin.

Order No.	Mfg. No. / Description				Price
587208	(2134-T-SS)	Height 13"	Threaded	Bulk	$26.98 Q

Attwood Swivl-Eze Lock'N-Pin Base Plates - Stainless Steel





- Stainless steel.
- 3/4" pin pedestal.
- ABYC Code: B.
- Bronze bushing.

Order No.	Mfg. No. / Description				Price
5870053	(6773)	7" x 7"	Non-Threaded	Bulk	$38.98 I
587329	(6773-T)	7" x 7"	Threaded	Bulk	$36.98 G
5870047	(6483)	4" x 8"	Non-Threaded	Bulk	$29.98 R
587319	(6483-T)	4" x 8"	Threaded	Bulk	$34.98 F

- Nylon bushing.

Order No.	Mfg. No. / Description				Price
587906	(67739)	7" x 7"	Non-Threaded	Bulk	$37.98 R
582063	(SP-67739)	7" x 7"	Non-Threaded	Skin Pack	$42.98 F
587330	(SP-67739-T)	7" x 7"	Threaded	Skin Pack	$40.98 F
587909	(66839)	6" x 8"	Non-Threaded	Bulk	$37.98 R
587310	(6683-T)	6" x 8"	Threaded	Bulk	$36.98 G
587312	(64839)	4" x 8"	Non-Threaded	Bulk	$28.98 F

Boater Sports 3/4" Pin-Type Seat Mount



- Plated steel construction with spring to absorb shock.
- Fits all standard 3/4" pin applications.
- 360° rotation.

Order No.	Mfg. No. / Description	Price
1-54934	(54934)	$11.99 H

Boater Sports 3/4" Pin-Type Fixed Extension Posts



- Marine grade satin finished aluminum.

Order No.	Mfg. No. / Description				Price
1-54930	(54930)	Height 11"	Non-Threaded	Skin Pack	$13.99 H
1-54929	(54929)	Height 11"	Threaded	Skin Pack	$15.95 H
1-54931	(54931)	Height 13"	Threaded	Skin Pack	$14.95 H

Attwood Swivl-Eze Lock'N-Pin Posts - Adjustable Height



- Brushed aluminum.
- 3/4" pin pedestal.
- 1.50" diameter.
- Pro-Post.
- Steel pin.
- Adjustable height 25" to 31".
- ABYC Code: B.

Order No.	Mfg. No. / Description			Price
587557	(2244-ADJ)	Non-Threaded	Bulk	$51.98 Q
587558	(SP-2244-ADJ)	Non-Threaded	Skin Pack	$55.98 R
5870024	(2244-ADJ-T)	Threaded	Bulk	$54.98 H
587556	(SP-2244-ADJ-T)	Threaded	Skin Pack	$56.98 R
587999	(932) Stainless Steel Hitch Pin			$4.98 F

©2014 Donovan Marine, Inc.

Boater Sports 3/4" Pin-Type Adjustable Extension Posts



- 3/4" Pin type extension post.
- Brushed aluminum.
- Adjusts from 25" to 31".

Order No.	Mfg. No. / Description	Price
1-54932	(54932) Non-Threaded, Skin Pack	$31.95 H

Springfield Marine Kingpin Power-Rise Stand-Up Pedestal Packages



- The Kingpin post has a 3/4" pin that extends from the bottom of the post.
- E-coated pin.
- Satin finish post.
- Quik-Tilt seat bracket tilts in 4 angles (0°, 30°, 60°, 90°).
- Seat bracket mounting pattern: 5" x 5" finish is e-coated.
- Seat is gray with a plastic substrate covered in marine grade vinyl and padding.
- Seat dimensions: 3" H x 15-1/2" W x 11-1/2" D.
- Adjusts from 22-1/2" to 29-1/2".
- Works with all "Springfield" Kingpin floor bases.

Order No.	Mfg. No. / Description	Price
550155	(1611433) 3" Pin, Non-Threaded	$198.98 H
550180	(1631037) 4" Pin, Threaded	$199.98 H

Springfield Marine Kingpin Power-Rise Stand-Up Pedestals



- The Kingpin post has a 3/4" pin that extends from the bottom of the post.
- E-coated pin.
- Satin finish post.
- Quik-Tilt seat bracket tilts in 4 angles (0°, 30°, 60°, 90°).
- Seat bracket mounting pattern: 5" x 5" finish is e-coated.
- Adjusts from 22-1/2" to 29-1/2".
- Works with all "Springfield" Kingpin floor bases.

Order No.	Mfg. No. / Description	Price
550150	(1611432) 3" Pin, Non-Threaded Pin	$145.98 H
550360	(1631038) 4", Threaded Pin	$146.98 H

Springfield Marine Kingpin Offset Posts with 3/4" Pin



- The Kingpin post has a 3/4" pin that extends from the bottom of the post.
- E-coated pin.
- Satin finish post.
- Provides a full 5" of offset extension.
- Top of post has a 3/4" socket for the "Kingpin" seat mount.
- Works with all "Springfield" Kingpin floor bases.

Order No.	Mfg. No. / Description	Price
550145	(1610413-OSS) 3" Pin, Non-Threaded	$47.98 H
550175	(1630402-CSS) 4" Pin, Threaded	$50.98 H

Attwood Swivl-Eze Pedestal Replacement Parts



Order No.	Mfg. No. / Description	Price
581066	(SP-14000) Pin Adapter, 1.77" to 3/4"	$21.98 F
587963	(SP-102) Seat Mount Spring	$4.25 R
587975	(SP-201) Replacement Bushing, White Nylon	$4.75 R
587987	(P-30006) Replacement Bushing, Bronze	$9.98 F
587999	(932) Stainless Steel Hitch Pin	$4.98 F

Springfield Marine Replacement Bushings and Adapters



Order No.	Mfg. No. / Description	Price
5500059	(2100077) Brass Bushing, 3/4" Pin-Style Base	$7.98 H
5500058	(2100055) Plastic Bushing, 3/4" Pin-Style Base	$6.98 H
5500054	(2100032) Adapts 2-3/8" to 3/4" Pin-Style Post	$26.98 H
5500067	(2171035) Adapts 2" to 3/4" Pin-Style Post	$7.98 H
5500066	(2171032) Adapts Taper-Lock to 3/4" Pin-Style	$9.98 H
5500064	(2171003) Seat Mount Bushing	$21.98 G
5500065	(2171005) 2" Taper-Lock Bushing	$13.98 H
5500062	(2171000) 2-3/8" Pedestal Bushing	$13.98 H
5500063	(2171001) 2-7/8" Pedestal Bushing	$17.98 I

Springfield Marine Kingpin Hi-Lo 3 Piece Pedestal Packages



- Perfect for those of you who need the flexibility of different heights quickly.
- For "Hi" seating insert post into floor base, for "Lo" seating insert seat mount into floor base.
- 3 Piece Set Includes: KingPin satin finish post, E-coat finish swivel and KingPin 7" x 7" satin finish base.
- Hefty 1-3/4" diameter post and reinforcement ring.
- It has a 3/4" pin for your post.

Order No.	Mfg. No. / Description	Price
550355	(1615433) Height 13", Standard	$98.98 H
550170	(1630401) Height 11", Threaded	$85.98 H

Springfield Marine Kingpin 7" x 7" Seat Swivel



- 7" x 7" seat swivel is stainless steel polished passivated finish.
- Has a 3/4" pin with a spring. Swivels 360°.
- Fits bolt pattern 4-1/2" x 5-1/2" square.
- Works with all "Springfield" Kingpin posts.

Order No.	Mfg. No. / Description	Price
550160	(1614201-PP)	$69.98 H

Springfield Marine Kingpin Standard Round Base



- High strength aluminum with a satin finish.
- Floor base diameter 8" with 3/4" socket.
- Requires a 2-1/2" hole into the deck and extends 3" below the deck.
- Works with all "Springfield" Kingpin posts.

Order No.	Mfg. No. / Description	Price
550165	(1620017-S)	$34.98 H

Springfield Marine Plug-In 2-3/8" 3 Piece Package



- Seat mount: Size - 2-3/8" with a powder coated finish.
- Swivels 360°.
- This is a "Locking" unit.
- Post size: 2-3/8".
- Height: 12" (Measured from deck to top of seat mount).
- Finish: Satin anodized.
- 2-3/8", 9" round base.

Order No.	Mfg. No. / Description	Price
550325	(1300712-L)	$130.98 H

Springfield Marine Plug-In Hi-Lo 3 Piece Package



- This is a unique 2 position, 3 part system that allows upright seating while fishing or remove the pedestal and insert the seat mount directly into the floor base for "lo" position.
- Floor base diameter is 9" with 2-3/8" socket and satin finish.
- Post diameter 2-3/8" with a satin anodized finish.
- Height: 12" (Measured from deck to top of seat mount).
- The seat mount is black E-coated finish with a 3° tilt to keep you in your seat.
- It has a 5" x 5" mounting pattern.

Order No.	Mfg. No. / Description	Price
550100	(1300712-HL)	$81.98 H

Springfield Marine Plug-In Power-Rise Air-Ride Package



- Plug-in pedestal has a unique notched/keyed design that provides security against rotation in the floor base.
- Post diameter 2-3/8" with a satin finish.
- Adjusts from 12-1/2" to 16-1/4".
- Seat mount is powdered coated and swivels 360° with a 3° tilt and a mounting pattern of 5" x 5".
- Works with all "Springfield" Plug-In 2-3/8" floor bases.

Order No.	Mfg. No. / Description	Price
550095	(1300601)	$208.98 H

Springfield Marine Plug-In Power-Rise Stand-Up Package



- This Plug-In Power-Rise adjustable pedestal has a unique notched/keyed design that provides security against rotation in the floor base.
- Adjusts from 22-1/2" to 29-1/2", post diameter 2-3/8" with a satin anodized finish.
- Quik tilt seat mount is E-coated and provides 360° rotation with 4 tilts (0°, 30°, 60° and 90°).
- Seat is gray with a plastic substrate, dimension: 3" H x 15.5" W x 11.5" D covered in marine grade vinyl and padding.
- Works with all "Springfield" Plug-in 2-3/8" floor bases.

Order No.	Mfg. No. / Description	Price
550115	(1301037) Includes: Stand-Up Post, Seat and Mount	$255.98 H

Springfield Marine Plug-In Power-Rise Air-Ride Pedestals



- This Plug-In Power Rise adjustable pedestal has a unique notched/keyed design that provides security against rotation in the floor base.
- Post diameter 2-3/8" with a satin anodized finish.
- Has a locking collar so it can be locked in any position or unlock to rotate freely.
- Seat mount is powder coated with a 5" x 5" mounting pattern.
- Works with all "Springfield" Plug-in 2-3/8" floor bases.

Order No.	Mfg. No. / Description	Price
550105	(1300901) Air Powered Adjusts 14-1/4" to 21"	$164.98 H
550110	(1300902) Air Powered Adjusts 22-1/4" to 28-3/4"	$169.98 H

Springfield Marine Plug-In Hi-Lo Seat Mount Swivel



- Attach this seat mount to your seat, then insert into the top of your "Hi-Lo" pedestal for the "Hi" position or remove your post from the floor base and insert seat mount directly into your "Hi-Lo" floor base for the "Lo" position.
- Size: 2-3/8".
- E-coated (Springfield Marine's Hard as Nails Finish).
- Pin length: 5".
- Mounting pattern: 5" x 5".
- Works with all "Springfield" Plug-In Series "Hi-Lo" post and floor bases.

Order No.	Mfg. No. / Description	Price
550250	(3312700)	$20.98 H

©2014 Donovan Marine, Inc.

Springfield Marine Taper-Lock Power-Rise Stand-Up Package



- This Taper-Lock power rise adjustable pedestal has a locking latch that you press to easily removal from floor base.
- This polished post adjusts 30" - 37", post diameter 2".
- Quik tilt seat mount is E-coated and provides 360° rotation with 4 tilts (0°, 30°, 60° and 90°).
- Seat is gray with a plastic substrate, dimension: 3" H x 15.5" W x 11.5" D covered in marine grade vinyl and padding.
- Works with all "Springfield" Taper-Lock floor bases.

Order No.	Mfg. No. / Description	Price
550350	(1601037) Includes: Stand-Up Post, Seat and Mount	$227.98 H

Springfield Marine Taper-Lock Power-Rise Sit Down Pedestal



- Adjusts from 13" to 19-1/8".
- Post diameter: 2-3/8".
- Brite dip finish post.
- Seat mount swivels 360°.
- Mounts easily to most seats mounting pattern: 5" x 5", stainless steel cylinder with locking collar keeps cam from spinning while trailoring.
- Easy to reach handle for the perfect height every time.
- Can be used with all "Springfield" Taper-Lock floor bases.

Order No.	Mfg. No. / Description	Price
550345	(1601002-L)	$171.98 H

Springfield Marine Taper-Lock Hi-Lo 2 Piece Package



- Taper-Lock post is 2-3/8" in diameter and polished.
- Top of post has a 3/4" socket for the seat mount.
- Seat mount is E-coated.
- Rotates 360°.
- Converts easily to a Hi-Lo unit, insert into post for "Hi" position and insert into floor base for the "Lo" position.
- Swivel adds 4" to your height.

Order No.	Mfg. No. / Description	Price
550335	(1600420) Height 13"	$73.98 H

Springfield Marine Taper-Lock Hi-Lo Seat Mount Swivel



- Rotates 360°.
- Made from: Diecast aluminum.
- Finish: E-coated (Springfield's "Hard As Nails Finish").
- Converts easily to a Hi-Lo unit, insert into post for "Hi" position and insert into floor base for the "Lo" position.
- Swivel adds 4" to your height.

Order No.	Mfg. No. / Description	Price
550330	(1600205) Taper-Lock Hi-Lo Seat Mount Swivel	$37.98 H

Springfield Marine Taper-Lock Power-Rise Stand-Up Pedestals



- The slight taper of the composite bushing matches the taper in the socket of the floor base, creating a snug, secure fit that can be disengaged as needed by pressing on the locking tab.
- Brite dip finish post.
- Seat mount is powder coated with a 5" x 5" mounting pattern.
- Adjustment height 22-1/2" to 29-1/2".
- Works with all "Springfield" Taper-Lock floor bases.

Order No.	Mfg. No. / Description	Price
550140	(1602016) 2-3/8" Diameter Post	$141.98 H
5500038	(1602024) 2" Diameter Post	$138.98 H

Springfield Marine Taper-Lock Power-Rise Sit Down Pedestal



- Springfield's patented Taper-Lock seat systems have long been a favorite of boaters and boat manufacturers.
- Post diameter: 2".
- Stainless steel cylinder with black powder coated aluminum seat mount.
- Non-locking.
- Seat mount swivels 360°.
- Adjusts from 13" to 19-1/8".
- Can be used with all "Springfield" Taper-Lock floor bases.

Order No.	Mfg. No. / Description	Price
5500037	(1602011)	$134.98 H

Springfield Marine Taper-Lock Locking 2 Piece Package



- Taper-Lock post is 2-3/8" diameter, 13-3/4" height and polished.
- Trac-Lock III seat mount is powder coated and is locking.
- Rotates 360°.
- Works with all "Springfield" Taper-Lock floor bases.

Order No.	Mfg. No. / Description	Price
550340	(1600607-L)	$64.98 H

Springfield Marine Taper-Lock Aluminum Bases



- Brushed satin finish is scratch-resistant.
- Attractive and durable.
- Designed to accommodate Taper-Lock extensions.

Order No.	Mfg. No. / Description	Price
5500031	(1600003) Fits Flush 9" Round Mount	$33.98 H
5500032	(1600005) Fits Flush 9" x 7" Mount	$34.98 G
5500033	(1600010) Fits Inverted 9" Round Mount	$52.98 G

Springfield Marine Clip-Lock 3-Piece Pedestal Package



- The Clip-Lock easily slips into the floor base, the base securely holds the post in place, then simply pull up on the post to remove from floor base.
- 7" x 7" stainless steel base.
- 13" locking post with satin finish.
- The seat mount is locking swivel with powder coat finish.

Order No.	Mfg. No. / Description	Price
550220	(1684513-S)	$134.98 H

Springfield Marine Spring-Lock Power-Rise Adjustable Pedestal



- Stainless steel.
- A unique design utilizing a compressed gas cylinder to assist in adjusting height of pedestal.
- Can be used with any non-locking Spring-Lock base.

Order No.	Mfg. No. / Description	Price
512016	(1642005) Adjustable Height 13-1/2" - 20"	$151.98 H

Springfield Marine Spring-Lock Power-Rise Stand-Up Post



- This Spring-Lock Power-Rise adjustable pedestal has a push button latch release for easy removal from floor base.
- Stainless steel post adjusts 22-1/2" to 29-1/2", post diameter 1-3/4", extends 2.9" into floor base.
- Works with any non-locking Spring-Lock base.

Order No.	Mfg. No. / Description	Price
550205	(1643013)	$163.98 H

Springfield Marine Taper-Lock Extension Posts



- Hi-Lo pedestal post.
- Converts quickly from a 16" fishing pedestal to a 4" boating pedestal.
- Works with 1600205 seat mount only.
- Post is 2" in diameter.
- Display packaged.

Order No.	Mfg. No. / Description	Price
5500035	(1600414) Height 13"	$21.98 H
5500036	(1600635) Height 13" with Lock Handle	$72.98 G
5500039	(1603825) Adjustable Height 13" - 16"	$82.98 G

Springfield Marine Spring-Lock Power-Rise Adjustable Stand-Up Pedestal



- A unique design utilizing a compressed gas cylinder to assist in adjusting height of pedestal.
- Stainless steel post with chrome cylinder.
- Post diameter: 1.77".
- Seat mount is powder coated with a 5" x 5" mounting pattern and swivels 360°.
- Push button for easy release from floor base.
- Can be used with Spring-Lock non-locking floor bases pedestal rated: Class B.

Order No.	Mfg. No. / Description	Price
512018	(1642008) Adjustable Height 22-1/2" - 29-1/2"	$169.98 H

Springfield Marine Spring-Lock Power-Rise Stand-Up Pedestal Set



- This Spring-Lock Power-Rise adjustable pedestal has a push button latch release for easy removal from floor base.
- Stainless steel post adjusts 30" to 37", post diameter 1.77".
- Quik tilt seat mount is E-coated and provides 360° rotation with 4 tilts (0°, 30°, 60° and 90°).
- Seat is gray with a plastic substrate covered in marine grade vinyl and padding.
- Seat dimensions: 3" H x 15-1/2" W x 11-1/2" D.
- Works with all "Springfield" Spring-Lock non-locking floor bases.

Order No.	Mfg. No. / Description	Price
550200	(1641037) Includes: Pedestal, Seat Mount and Seat	$244.98 H

Springfield Marine Spring-Lock Fixed Height Posts



- Hefty 1-3/4" diameter stainless steel.
- Can be used with any non-locking Spring-Lock seat mount.
- Can be used with any non-locking Spring-Lock base.

Order No.	Mfg. No. / Description	Price
5500045	(1640403) Height 15-1/2"	$41.98 H
5500046	(1640404) Height 13-1/2"	$41.98 H

©2014 Donovan Marine, Inc.

Springfield Marine Spring-Lock Offset Post



- Spring-Lock uses a locking latch that extends from the pedestal post.
- When the Spring-Lock's push button activator is depressed, the latch unlocks and allows removal of the post from the base.
- Hefty 1-3/4" diameter stainless steel.
- Provides a full 5" offset extension.
- Use with any non-locking Spring-Lock seat mount.
- Use with any non-locking Spring-Lock base.

Order No.	Mfg. No. / Description	Price
550195	(1640401) Height 13"	$58.98 H

Springfield Marine Spring-Lock Hi Rise Seat Mount



- Cast aluminum E-coat finish to resist corrosion.
- 7" x 7" swivel adds 3-1/2" to height of post.
- Use with any non-locking Spring-Lock or Clip-Lock post.

Order No.	Mfg. No. / Description	Price
550190	(1640203)	$42.98 H

Springfield Marine Spring-Lock Locking Base



- 7" x 7" stainless steel square base.
- Satin finish.
- Below the deck mount, requires a 4" hole in deck.
- Use with any non-locking Spring-Lock or Clip-Lock post.

Order No.	Mfg. No. / Description	Price
550215	(1680013-CL)	$76.98 H

Springfield Marine Spring-Lock Socket Cover

- This handy little unit keeps debris and water out of your 1.77" base.
- It is constructed of a very durable black plastic.
- Packaged and sold in pairs.

Order No.	Mfg. No. / Description	Price
5500060	(2100091)	$6.98 G

Attwood Swivl-Eze Snap-Lock 1.77" Posts



- All Snap-Lock Series components snap and hold together.
- Posts are sturdy bright anodized aluminum.
- Includes a larger locking clip with a metal insert that slows the posts to lock into bases for added safety. Press button to release.
- Both the Snap-Lock and locking clip are engineered to prevent unintentional detachment.
- ABYC Code: B.

Order No.	Mfg. No. / Description	Price
587990	(SP-29110) Fixed Height 11"	$25.98 F
5870026	(29250) Fixed Height 25", Pro-Post	$49.98 R

- With integral seat mount.

Order No.	Mfg. No. / Description	Price
587988	(39004) Adjustable Height 16" - 20"	$101.98 R
5870037	(39204) Adjustable Height 24" - 30", Pro-Post	$110.98 H

Springfield Marine Spring-Lock Swivel



- 7" x 7" swivel.
- E-coat finish to resist corrosion.
- Use with any non-locking Spring-Lock or Clip-Lock post.

Order No.	Mfg. No. / Description	Price
5500044	(1640202)	$25.98 H

Springfield Marine Spring-Lock Non-Locking Base



- 7" x 7" stainless steel square base.
- Satin finish.
- Below the deck mount, requires a 4" hole in deck.
- Use with any non-locking Spring-Lock or Clip-Lock post.

Order No.	Mfg. No. / Description	Price
550185	(1640013-CL)	$58.98 H

Springfield Marine Spring-Lock Non-Locking Base



- 9" round high-strength aluminum base.
- Satin finish.
- Below the deck mount, requires a 4" hole in deck.
- Use with any non-locking Spring-Lock or Clip-Lock post.

Order No.	Mfg. No. / Description	Price
5500042	(1640002)	$38.98 H

Swivl-Eze Snap-Lock 1.77" Seat Mount



- Black E-coated steel.
- 3° tilt.
- 1.77" extension poles.
- Installed height: 2".
- Designed to permanently lock into the post, in any swiveling position.
- ABYC Code: AN.

Order No.	Mfg. No. / Description	Price
587566	(19000)	$24.98 F

Attwood Swivl-Eze Snap-Lock 1.77 Base Plates





- 1.77" extension poles.
- Depth below deck: 3".
- ABYC Code: AO.

Order No.	Mfg. No. / Description	Price	
587361	(67904) 9" Round, Aluminum	Req. Dia. Mnt. Hole: 2-1/2"	$37.98 Q
5870058	(69773) 7" x 7", S/S	Req. Dia. Mnt. Hole: 2-3/4"	$41.98 F

Attwood Swivl-Eze 238 Series Adjustable Height Power Pedestal



- Pedestal tubes are hard-anodized aluminum.
- All springs are stainless steel.
- Bases are bead-blasted (to close aluminum porosity) and clear coated.
- Height measured from deck to top of seat mount.
- Adjustable height: 13" to 16-1/2".

Order No.	Mfg. No. / Description	Price
588035	(238512-1)	$149.98 F

Attwood Swivl-Eze 238 Series Seat Mounts



- Styling is clean and uncomplicated.
- Handles are ergonomically designed to be easy on the hands and easy to reach.
- 3° tilt.
- Without slider.

Order No.	Mfg. No. / Description	Price
588015	(238153-1) Plated Steel, Forward Handle	$45.98 Q
588020	(238142-1) Stainless Steel, Right Handle	$58.98 F

Attwood Swivl-Eze LakeSport 2-3/8" Extension Post



- Hard anodized aluminum base pedestal tubes.
- Bead blasted finish pounds the aluminum surface and closes up porosity.
- All LakeSport 238 Series hardware is engineered to exceed ABYC standards.

Order No.	Mfg. No. / Description	Price
588060	(238613L1) Height 13", Anodized Finish	$39.98 Q

Attwood Swivl-Eze LakeSport 2-3/8" Seat Mount



- Ergonomic positive-locking handle with stainless steel components.
- Aluminum.
- With Friction Control, 3° tilt.
- Without slider.
- Installed height 5/8".
- ABYC Code: AN.

Order No.	Mfg. No. / Description	Price
588065	(818440)	$33.98 R

Garelick EEz-In Swivel Stanchion Footrest



- Eliminates dangling feel - adds comfort at helm.
- Aluminum casting fits 2-7/8" diameter stanchion.
- Can be locked in any position.
- Traction grooved stepping surface.
- 14" wide, 11.3" deep.

Order No.	Mfg. No. / Description	Price
392198	(75004)	$173.98 F

Attwood Swivl-Eze 238 Series Fixed Height Extension Posts



- Pedestal tubes are hard-anodized aluminum.
- All springs are stainless steel.
- Bases are bead-blasted (to close aluminum porosity) and clear coated.
- Height measured from deck to top of seat mount.

Order No.	Mfg. No. / Description	Price
588025	(238613-1) Height 13"	$35.98 F
588030	(238614-1) Height 14"	$41.98 F
588040	(238027-3) Height 27", Pro-Pole	$54.98 R

Attwood Swivl-Eze LakeSport 2-3/8" Hydraulic Power Pedestals



- These sturdy 2-3/8" diameter bell pedestals have all the strength and durability you need.
- Hard anodized aluminum base pedestal tubes.
- Bead blasted finish pounds the aluminum surface and closes up porosity.
- Includes seat mount.
- All LakeSport 238 Series hardware is engineered to exceed ABYC standards.
- Height measured from deck to top of seat mount.

Order No.	Mfg. No. / Description	Price
588045	(238813LSM1) Adjustable Height 13" - 16"	$199.98 F
588050	(238833LSM1) Adjustable Height 25" - 32"	$229.98 Q

Attwood Swivl-Eze LakeSport and 238 Series Base



- Bead-blasted and clear coated.
- Bead-blasted finish pounds the aluminum surface and closes up porosity.
- Interchangeable between LakeSport 238 Series and 238 Series.
- Aluminum, 9" round, anodized finish.
- ABYC Code: AO.

Order No.	Mfg. No. / Description	Price
588055	(238312-1)	$39.98 F

Garelick EEz-In Oak Footrest



- Used in conjunction with Helmsman Seat.
- Eliminates dangling feet while piloting.
- Stamped aluminum folding side brackets.
- Varnished Oak traction grooved surface.
- Height 7-1/2", depth 8-1/4", width 15".

Order No.	Mfg. No. / Description	Price
360014	(26015)	$71.98 G

Garelick EEz-In Surface Type Fishing Gimbal



- Chrome plated brass.
- Fits all Garelick EEz-In seats.
- Sold each.

Order No.	Mfg. No. / Description	Price
360812	(75011:01)	$85.98 G

©2014 Donovan Marine, Inc.

Springfield Thread-Lock 3 Piece Pedestal Package



- A locking mechanism was added to the seat post to provide a secure and wobble-free experience.
- The Thread-Lock floor base is satin finished with an anti-lock, foot operated release works on a threaded twist lock surface mount, low profile base.
- Aluminum base is 5/8" tall, 9" diameter with a 8" bolt pattern.
- The post is a sturdy 2-3/8" high strength aluminum with anodized finish.
- Kingpin 7" x 7" swivel seat mount with spring, E-coated finish.
- Mounts to most seats with a 5" x 5" mounting pattern.

Order No.	Mfg. No. / Description	Price
550235	(1793113) Height 13"	$121.98 H

Springfield Thread-Lock 13" Seating Posts



- Sturdy 2-3/8" high strength aluminum post with threads on the end for the floor base.
- Locking collar prevents unintentional removal from base.
- Finish: Anodized.
- Works with all "Springfield" seating 2-3/8" Thread-Lock floor bases.

Order No.	Mfg. No. / Description	Price
550285	(3793013-A) 13" Seat Post	$45.98 H

- Top of post has a 3/4" socket for your seat mount

Order No.	Mfg. No. / Description	Price
550290	(3793213) 13" Fishing Seat Post	$46.98 H

DetMar Removable Marine/RV Table Kits



- Complete table kit includes: Top, leg and surface mount floor receptacle.
- Two table tops are offered, rectangular (16" x 28") or octagonal (8-sided 20" across) shapes, both molded from high-impact plastic.
- For easy installation and removal, tables have molded-in underside receptacles that fit 2" diameter 304 brushed stainless steel table legs.
- Octagonal table height is 27", rectangular table height is 26".

Order No.	Mfg. No. / Description	Price
327101	(12-1106C) Rectangular Table Kit	$56.98 D
327102	(12-1109C) Octagonal Table Kit	$134.98 D

- Receptacles.
- Molded of high impact plastic.
- Base measures 6-1/2" in diameter.
- Fits 2" diameter legs.

Order No.	Mfg. No. / Description	Price
327104	(12-1127) Recessed Flush Mount, Black	$9.98 F
327105	(12-1131) Surface Mount, Black	$9.98 F

- Polished stainless steel leg.
- 2" diameter tube measures 26" in length.
- Made of corrosion resistant 304 stainless steel.

Order No.	Mfg. No. / Description	Price
327103	(12-1122)	$33.98 F

Springfield Thread-Lock 3 Piece Pedestal Package



- A locking mechanism was added to the seat post to provide a secure and wobble-free experience.
- The Thread-Lock floor base is satin finished with an anti-lock, foot operated release works on a threaded twist lock surface mount, low profile base.
- Aluminum base is 5/8" tall, 9" diameter with a 8" bolt pattern.
- The post is a sturdy 2-3/8" high strength aluminum with anodized finish
- Kingpin Trac-Lock seat mount, high strength aluminum with powder coated finish. Rotates 360°. Non-locking.
- Mounts to most seats with a 5" X 5" mounting pattern.

Order No.	Mfg. No. / Description	Price
550240	(1793313) Height 13"	$149.98 H

Springfield Thread-Lock Satin Floor Base



- High strength aluminum, no hole required into deck.
- Finish: Satin.
- Size: 2-3/8", diameter: 9".
- Works with all "Springfield" fixed height 2-3/8" Thread-lock post and the table and grill post.

Order No.	Mfg. No. / Description	Price
550280	(3790009-SL)	$46.98 H

Garelick EEz-In Folding Deck Table with Melamine Top



- Compact size ideal for decks, inside cabins or picnics ashore.
- Durable hard finish top is sealed watertight.
- Top: Thermofused, white melamine is permanently bonded to core on both sides, edge finished with molded sea lip.
- Legs - rugged 7/8 diameter aluminum, folds flat, plastic tips.
- Table is 24" round and 16" high.

Order No.	Mfg. No. / Description	Price
391487	(50410)	$117.98 G

Garelick EEz-In Adjustable Table Base



- Manual rise.
- Smooth polished finish.
- Converts dinettes to berths.
- 9" diameter cast aluminum base on each end for support.
- 2-7/8" smooth stanchion tube.
- Tube protrudes 6" below deck.
- Locks any height from 14-1/2" to 29-1/2".

Order No.	Mfg. No. / Description	Price
360862	(75025)	$232.98 G

Springfield Thread-Lock Table Package



- Table top: Made of high quality injection molded plastic and designed for lasting strength and durability. Size is rectangular 15-1/2" x 27-1/2", Off-White in color, 7/64" thick with a height of 1.54".
- Table pedestal set: Thread-Lock table post is keyed down one side and a height of 26" (measured from deck to top of table mount). Finished in satin anodized and 2-3/8" diameter
- Base: 7" diameter, silver metallic and a 5-3/4" hole pattern.
- Flush mount table mount has a diameter of 7" and a 5-3/4" hole pattern.
- Includes: Floor base, post, table mount and table top.

Order No.	Mfg. No. / Description	Price
550370	(1690107)	$165.98 H

Springfield Stowable Table Pedestal Set



- Stowable floor base with anodized finish is 7" diameter with a hole pattern of 5-3/4", it extends 2" below the deck.
- It requires a 3-1/2" diameter hole into the deck.
- Table mount is anodized and is 7" diameter.
- Table post is 28" tall (measured from the deck to the top of table mount).
- Overall length of post 28-5/8" (measured from end to end).
- The post has an anodized finish and is fluted.
- The post diameter is 2-7/8" and tapers on both ends to 2-11/16".

Order No.	Mfg. No. / Description	Price
550210	(1661127-CAL)	$128.98 H

- Post height: 30" (measured from deck to top of swivel).
- Overall length of post is 31-1/4" (measured from end to end).
- Size: 2-3/8" tapered on both ends to 2-1/4".

Order No.	Mfg. No. / Description	Price
550365	(1660029)	$116.98 H

Springfield Thread-Lock Round Table Package



- Table top: Made of high quality injection molded plastic and designed for lasting strength and durability. Size is 24" diameter, 7/64" thick and 1.54" high.
- Color: White.
- Table pedestal set: Thread-Lock table post is keyed down one side with a height of 27" (measured from deck to top of table mount) with a satin anodized finish and 2-3/8" in diameter.
- Base: 7" diameter with a silver metallic finish and a 5-3/4" hole pattern.
- Flush mount table mount has a diameter of 7" and a 5-3/4" hole pattern.
- Includes: Floor base, post, table mount and table top.

Order No.	Mfg. No. / Description	Price
550385	(1690102)	$158.98 H

Springfield Economy Stowable Table Bases



- 2-3/8" Table base.
- High strength aluminum with Kennedy Gray Finish.
- 6-3/4" diameter with 5-3/4" hole pattern.

Order No.	Mfg. No. / Description	Price
550255	(3660003)	$19.98 H



- 2-7/8" Table base.
- High strength aluminum with anodized finish.
- 7" diameter with 5-3/4" hole pattern.

Order No.	Mfg. No. / Description	Price
550270	(3660107)	$53.98 H

Springfield Economy Stowable Table Posts



- 2-7/8" diameter, 27" anodized fluted table post.

Order No.	Mfg. No. / Description	Price
550375	(3660127-CAL)	$64.98 H

- 2-3/8" diameter, 27" table post with anodized finish.

Order No.	Mfg. No. / Description	Price
550380	(3660327)	$27.98 H

Springfield Thread-Lock Oval Table Package



- Table top: Constructed of high quality injection molded plastic. Size is oval 18" x 30" with a thickness of 7/64", height of 1.54".
- Color: Off-white.
- 6 mounting screws included.
- Table post: 2-3/8" Thread-Lock with a satin anodized finish and a length of 27" (measured from deck to top of table mount).
- Table base: 7" diameter flush mount, no hole to cut into deck in a silver metallic finish. No mounting hardware included.
- Table mount: Stowable table mount finished in silver metallic aluminum.
- Includes: Floor base, post, table mount and table top.

Order No.	Mfg. No. / Description	Price
550390	(1690106)	$158.98 H

Springfield Stowable Swivel Table Mount



- This stowable table mount is used to mount to your table top so it will fit on the top of your table pedestal.
- 2-3/8" Table mount.
- High strength aluminum with anodized finish.
- 7" diameter with 5-3/4" hole pattern.
- Works with any 2-3/8" stowable table post and Thread-Lock.

Order No.	Mfg. No. / Description	Price
550265	(3660018)	$33.98 H

Springfield Economy Stowable Table Mounts



- This stowable table mount is used to mount to your table top so it will fit on the top of your table pedestal.
- 2-3/8" Table mount.
- High strength aluminum with silver metallic finish.
- 7" diameter with 5-3/4" hole pattern.
- Works with any 2-3/8" stowable table post

Order No.	Mfg. No. / Description	Price
550260	(3660004-SM)	$20.98 H



- 2-7/8" Table mount.
- High strength aluminum with anodized finish.
- 7" diameter with 5-3/4" hole pattern.
- Works will any 2-7/8" stowable table post.

Order No.	Mfg. No. / Description	Price
550275	(3660207) Anodized Finish	$54.98 H

©2014 Donovan Marine, Inc.

About Marpac Fabrics

Performance Poly-Guard® Cover Features:

- 100% Marine-grade polyester.
- Highest tear strength available.
- 8 oz. strong and durable.
- UV and mildew resistant.
- Excellent resistance to fading.
- Extremely water repellent.
- Breathable to help allow interior moisture to escape.
- Haze gray.
- Trailerable.
- Made in USA.
- 5 Year Warranty.

About Tough Guy Fabrics

Poly-Cotton Boat Cover Features:

- 10 oz. 60/40 Poly-Cotton fabric.
- Treated for mildew and stain resistance.
- Breathable and UV resistant.
- Shock cord sewn in hem to insure a close fit.
- Heavy duty webbing and adjustable tie-down kits included.
- 2 year limited warranty.

Polyester Boat Cover Features:

- 6.25 oz. acrylic coated polyester.
- Completely synthetic, mildew can't attack it.
- Great for all climates.
- UV inhibitors added.
- A great combination of breathability and water resistance.
- Windshield reinforcements sewn in.

Fish N' Ski Boats



- Walk thru windshields and pedestal seats.
- Fits wide transom boat.
- Sewn in motor hood.
- Poly-Cotton Fabric/Gray - Outboard.

Order No.	Description		Price
821822	18' 5" - 19' 4" Length	96" Beam	$239.98 F

V-Hull Runabout Boats



- Open or closed bows.
- Fits integrated swim platforms and square transoms.
- Fits over low profile accessories.
- Fits boats with bow rails under 6" high.
- Comes with bound in motor hoods, O/B models only.
- Polyester Fabric - I/O.

Order No.	Description		Price
7-8000	18' 5" - 19' 4" L x 96" W	Green	$294.98 F

- Poly-Cotton Fabric/Gray - I/O.

Order No.	Description		Price
821214	16' 5" - 17' 4" Length	90" Beam	$189.98 F
821226	17' 5" - 18' 4" Length	96" Beam	$209.98 F
821303	19' 5" - 20' 4" Length	102" Beam	$229.98 F
821327	21' 5" - 22' 4" Length	102" Beam	$259.98 F
821339	22' 5" - 23' 4" Length	102" Beam	$292.98 F

- Poly-Cotton Fabric/Gray - Outboard.

Order No.	Description		Price
821048	18' 5" - 19' 4" Length	96" Beam	$235.98 F
821113	19' 5" - 20' 4" Length	102" Beam	$247.98 F
821125	20' 5" - 21' 4" Length	102" Beam	$252.98 F

V-Hull Cuddy Cabin Boats



- 6" - 18" bow rails.
- Forward decks.
- Reduced cockpit & high windshields.
- Poly-Cotton Fabric/Gray.

Order No.	Description			Price
821733	22' 5" - 23' 4" Length	102" Width	I/O	$393.98 F
821721	21' 6" Length	102" Width	Outboard	$344.98 F

Marpac V-Hull Center Console Shallow Draft Boat Covers



- For V-hull center console shallow draft fishing boats.
- Coverage is provided for bow mounted trolling motors.
- Cover accommodates console height up to 60" from deck.
- Includes sewn in motor cover.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0102	Centerline Length 18' 6"	Beam Width 102"	$319.98 G
5-0104	Centerline Length 19' 6"	Beam Width 102"	$332.98 G
5-0106	Centerline Length 20' 6"	Beam Width 102"	$351.98 G
5-0108	Centerline Length 21' 6"	Beam Width 102"	$369.98 G
5-0110	Centerline Length 22' 6"	Beam Width 102"	$389.98 G
5-0092	Centerline Length 24' 6"	Beam Width 102"	$430.98 G

Bay Style V-Hull Center Console Boats



- Accommodates V-hull shallow draft hulls.
- Fits high center consoles with windshields.
- Low or no bow rails.
- Comes with bound in motor hood.
- Poly-Cotton Fabric/Gray - Outboard.

Order No.	Description		Price
822406	21' 5" - 22' 4" Length	102" Beam	$289.98 F

Marpac Bay Style Center Console Fishing Boat Covers



- For center console bay style fishing boats with shallow draft hull.
- Cover accommodates up to 55" center console and up to 8" bow rails.
- Includes sewn in motor cover.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0080	Centerline Length 17' 6"	Beam Width 90"	$238.98 G
5-0082	Centerline Length 18' 6"	Beam Width 94"	$259.98 G
5-0084	Centerline Length 19' 6"	Beam Width 96"	$278.98 G
5-0086	Centerline Length 20' 6"	Beam Width 96"	$302.98 G
5-0088	Centerline Length 21' 6"	Beam Width 96"	$319.98 G
5-0090	Centerline Length 23' 6"	Beam Width 96"	$372.98 G

Marpac Wide Bass Boat Covers



- For wide bass boats.
- Coverage is provided for trolling motor, depth finders, and pedestal seats (with seats on pedestals and backs of seats folded down).
- Cover accommodates windscreen up to 12".
- Each cover has an attached motor cover.
- Note: If boat is equipped with a jack plate, add length of jack plate to the centerline of boat to determine the correct size cover.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0120	Centerline Length 17' 6"	Beam Width 90"	$226.98 G
5-0122	Centerline Length 18' 6"	Beam Width 96"	$241.98 G

Marpac I/O Deck Boat Covers



- For deck boats with walk thru windshield or side console.
- Each cover has two sewn in pads for use with a boat cover support pole.
- Coverage not provided for extended swim platform.
- To cover platform, add length of extended swim platform to centerline to determine correct size cover.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0164	Centerline Length 22' 6"	Beam Width 102"	$436.98 G
5-0166	Centerline Length 23' 6"	Beam Width 102"	$453.98 G

Marpac Jon Boat Covers



- For open jon boats.
- Includes sewn in motor cover.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0140	Centerline Length 14' 6"	Beam Width 60"	$155.98 G
5-0142	Centerline Length 16' 6"	Beam Width 72"	$183.98 G
5-0144	Centerline Length 18' 6"	Beam Width 84"	$195.98 G

Bay Style Center Console Boats



- Fits bay style fishing boats.
- Lower consoles with shorter windscreens.
- Fits over low profile trolling motors.
- Comes with bound in motor hood.
- Poly-Cotton Fabric/Gray - Outboard.

Order No.	Description		Price
822280	18' 6" - 19' 5" Length	96" Beam	$276.98 F

Tournament Style Bass Boats



- Fits wide transom bass boats with pedestal seats.
- With or without wind screens.
- Room for folded up trolling motor.
- Comes with bound in motor hood.
- Polyester Fabric - Outboard.

Order No.	Description		Price
7-8076	20' 5" - 21' 4" L x 96" W	Burgundy	$349.98 F

- Poly-Cotton Fabric/Gray - Outboard.

Order No.	Description		Price
822444	17' 5" - 18' 4" Length	94" Beam	$219.98 F
822456	18' 5" - 19' 4" Length	94" Beam	$224.98 F
822468	19' 5" - 20' 4" Length	94" Beam	$229.98 F

Marpac Jon Style Bass Boat Covers



- For jon style bass boats.
- Coverage is provided for trolling motor, depth finders, and pedestal seats (with seats on pedestals and backs of seats folded down).
- Designed for single console.
- If motor is mounted on a jack plate, order next larger size.
- Each cover has an attached motor cover.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0130	Centerline Length 16' 6"	Beam Width 72"	$193.98 G
5-0132	Centerline Length 18' 6"	Beam Width 84"	$220.98 G

Aluminum Bass Boats



- Wide bow.
- Folding pedestals.
- Consoles without windscreens.
- Bound in motor hoods (up to 90 hp).
- Fits over low profile trolling motors.
- Poly-Cotton Fabric/Gray - Outboard.
- Crestliner, Lund, Alumacraft, Starcraft styles.

Order No.	Description		Price
822569	15' 5" - 16' 4" Length	74" Beam	$169.98 F
822571	17' 6"	74" Beam	$179.98 F
822583	17' 5" - 18' 4" Length	82" Beam	$189.98 F

©2014 Donovan Marine, Inc.

Marpac Pontoon Boat Covers - Fully Enclosed Decks



- For pontoons with bimini top and rails that fully enclose deck.
- Each cover has sewn-in snap patches for use with a boat cover support pole.
- Support poles are sold separately.
- A separate motor cover is included in each package.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0064	Deck Length 18' 6"	Deck Width 102"	$382.98 G
5-0066	Deck Length 20' 6"	Deck Width 102"	$397.98 G
5-0068	Deck Length 22' 6"	Deck Width 102"	$426.98 G
5-0070	Deck Length 24' 6"	Deck Width 102"	$449.98 G

Marpac Pontoon Boat Covers - Partially Enclosed Decks



- For pontoons with bimini top and rails that partially enclose deck leaving 1'-3' of open deck forward of the front gate.
- Each cover has sewn-in snap patches for use with a boat cover support pole.
- The 14' to 24' covers.
- Support poles are sold separately.
- A separate motor cover is included in each package.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-0190	Centerline Length 18' 6"	Beam Width 102"	$382.98 G
5-0192	Centerline Length 20' 6"	Beam Width 102"	$397.98 G
5-0194	Centerline Length 22' 6"	Beam Width 102"	$426.98 G
5-0196	Centerline Length 23' 6"	Beam Width 102"	$443.98 G

Tough Guy Inflatable Sport Boats

- For blunt bow, tapered or blunt Pontoon Inflatable Sport Boats.
- Covers fit from bow to end of pontoons up and over tilted outboard motor.
- Accommodates low consoles without windscreens.
- Poly-Cotton Fabric.

Order No.	Description		Price
458346	14' 5" - 15' 4" L	76" Beam	$261.98 G
458355	11' 5" x 12' 4" L	70" Beam	$224.98 G

Boston Whaler Boats



- Center console.
- Bow rails.
- Windshield.
- Bound in motor hood.
- Poly-Cotton Fabric/Gray.

Order No.	Description		Price
826404	13 Sport SC with Rails	13' 4", 65" Beam	$240.98 G
826416	15 Sport SC with Rails	15' 3", 68" Beam	$244.98 G

Pontoon Boats



- Patterned for pontoons with rails approx. 30" high.
- Available in two styles:
  1) Full Cover - Designed to fit over entire deck area with top down, includes deck area in front of gate.
  2) Playpen - covers fit over fenced in area only.
- Polyester Fabric.

Order No.	Description			Price
7-8012	17' 1" - 18' L x 96" W	Playpen	Beige	$296.98 G
7-8013	17' 1" - 18' L x 96" W	Playpen	Blue	$296.98 G
7-8815	17' 1" - 18' L - 96" W	Playpen	Green	$269.98 G
7-8816	19' 1" - 20' L x 96" W	Playpen	Beige	$279.98 G
7-8817	19' 1" - 20' L x 96" W	Playpen	Blue	$279.98 G
7-8019	19' 1" - 20' L x 96" W	Playpen	Green	$284.98 G
822250	19' 1" - 20' L x 96" W	Playpen	Gray	$269.98 G
7-8820	21' 1" - 22' L x 96" W	Playpen	Beige	$299.98 G
7-8920	21' 1" - 22' L x 96" W	Playpen	Blue	$299.98 G
822252	21' 1" - 22' L x 96" W	Playpen	Gray	$299.98 G
7-8029	22' 1" - 24' L x 96" W	Playpen	Blue	$335.98 G
822254	22' 1" - 24' L x 96" W	Playpen	Gray	$309.98 G

- Poly-Cotton Fabric/Gray.

Order No.	Description		Price
822090	22' 1" - 24' L x 96" W	Full Cover	$399.98 G
822127	19' 1" - 20' L x 102" W	Playpen	$389.98 G
822141	23' 1" - 24' L x 102" W	Playpen	$438.98 G

Offshore Fishing Boats



- High bow rails.
- Large open cockpits.
- High center consoles.
- Bound in motor hood.
- Poly-Cotton Fabric/Gray - Outboard.

Order No.	Description		Price
822204	16' 5" - 17' 4" Length	88" Beam	$224.98 F
822216	17' 5" - 18' 4" Length	92" Beam	$219.98 F
822228	18' 5" - 19' 4" Length	96" Beam	$239.98 F
822230	19' 5" - 20' 4" Length	102" Beam	$269.98 F
822242	20' 5" - 21' 4" Length	102" Beam	$279.98 F

Marpac Boston Whaler Custom Boat Covers



- Cover has attached motor cover.
- Sport/Supersport 13' with rails, centerline length 13' 3", beam width 71".
- Performance Poly-Guard® Cover.

Order No.	Description	Price
5-0150		$254.98 G

- Cover comes with separate motor cover.
- Montauk 17/170 with bow and side rails, centerline length 17', beam width 82".
- Performance Poly-Guard® Cover.

Order No.	Description	Price
5-0152		$310.98 G

Marpac Boat Covers - Gray



- Water repellent, breathable fabric.
- 3 oz., 210 Denier 100% Polyester resists UV and mildew.
- "Snug-fit" reinforced sewn-in elastic cord.
- V-Hull Boat Cover.

Order No.	Description		Price
7-7854	Length 14' - 16'	68" Max. Beam Width	$55.98 G

- V and Tri Hull Bass Boat Cover.

Order No.	Description		Price
7-7856	Length 14' - 16'	90" Max. Beam Width	$66.98 G

- Fishing, Ski Boat Cover.

Order No.	Description		Price
7-7858	Length 16' - 19'	94" Max. Beam Width	$70.98 G

- V-Hull Boat Cover.

Order No.	Description		Price
7-7860	Length 17' - 19'	96" Max. Beam Width	$72.98 G

- V-Hull Boat Cover.

Order No.	Description		Price
7-7862	Length 20' - 22'	96" Max. Beam Width	$79.98 G

- Pontoon Boat Covers.

Order No.	Description		Price
7-7864	Length 17' - 19'	96" Max. Beam Width	$102.98 G
7-7866	Length 21' - 24'	96" Max. Beam Width	$109.98 G

Marpac Boat Cover Planogram Sets

Order No.	Description	Price
7-7870	19' & Under Boat Cover Planogram Set Includes: (1) 7-7854 V-Hull Boat Cover; (1) 7-7856 V & Tri Hull Bass Boat Cover; (1) 7-7858 Fishing, Ski Boat Cover; (1) 7-7860 V-Hull Boat Cover	$269.98 I
7-7871	24' & Under Boat Cover Planogram Set Includes: (1) 7-7860 V-Hull Boat Cover; (1) 7-7862 V-Hull Boat Cover; (1) 7-7864 Pontoon Boat Cover; (1) 7-7866 Pontoon Boat Cover	$396.98 I

Tough Guy V-Skin Polyester Universal Boat Covers





- Polyester fabric is treated to be mildew resistant, water repellent and stain resistant.
- Stronger than Poly-Cotton at 1/3 the weight.
- Able to withstand the rigors of the road.
- 3.2 oz/sq yd pigment dyed acrylic coated gray polyester.
- Heavy duty sewn-in Tie-Down loops.
- 2 year limited warranty.
- Aluminum Bass Boats O/B.

Order No.	Description		Price
7-8302	Length 16' 5" - 17' 4"	76" Max. Beam Width	$99.98 E
7-8304	Length 17' 5" - 18' 4"	82" Max. Beam Width	$109.98 E

Marpac T-Top Covers





- For Walk Around Cuddy Boats with hard top and center console boats with T-Top.
- Accommodates VHF antennas, outrigger mounts, GPS and rod holders.
- Dual zippered entry.
- Heavy duty 1/4" draw rope encased in hem.
- Designed for single engines with bow rails up to 24".
- Include bow pulpit and engine bracket in centerline measurement.
- For dual engines, order next larger size.
- Cover comes standard with self-adhesive boat cover reinforcement kit, heavy duty boat cover tie down kit, rope ratchet and two support poles.
- Performance Poly-Guard® Cover.

Order No.	Description		Price
5-8930	Centerline Length 20' 6"	Beam Width 102"	$743.98 F
5-8932	Centerline Length 21' 6"	Beam Width 102"	$756.98 F
5-8936	Centerline Length 23' 6"	Beam Width 102"	$796.98 F

Marpac Outboard T-Top Covers - Center Console





- Bow and stern sections zip together for single person installation.
- Console tubes secures up underneath the T-Top, protects the center console.
- Tie-Downs System included - relieves stress on the zippered ends during over the road trailering.
- 6 oz. acrylic coated polyester fabric.

Order No.	Description	Price
5-8930	Length 20' 5"	$734.98 F
5-8932	Length 21' 5"	$752.98 F
7-8934	Length 22' 5"	$586.98 F
5-8936	Length 23' 5"	$796.98 F

Taylor Made Universal T-Top Center Console Cover



- This trailerable T-Top Console cover is secured to the underside of the fixed T-Top structure and will enclose any size console, helm seat and T-Top support combination with a maximum base perimeter (at the deck) of 18' or less.
- Measures: 48" W x 60" L x 66" H.
- Adjustable straps allow the cover to conform to most console configurations.
- Boats with smaller consoles and T- Tops can also cover and protect the helm seats.
- Heavy duty marine grade zipper allows easy installation and removal.

Order No.	Mfg. No. / Description		Price
255445	(678520G) Hot Shot Fabric	Gray	$187.98 G

©2014 Donovan Marine, Inc.

About Boater Sports Boat Covers

- Trailerable.
- 6.5 oz Acrylic-Coated Polyester.
- Tie Downs Included.
- Foam Windshield Reinforcement where applicable.
- Motor Hood where applicable.

Boater Sports Tournament Style Bass Boat Covers



- Designed for today's wide-beam tournament-style bass boats.
- Unique design with built-in allowance for bow-mounted trolling motors etc.
- Separate motor hood included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10181BLK	(B10181-BLK)	16' 8" L x 84"	Black	$175.00 F
1-B10181BLU	(B10181-BLU)	16' 8" L x 84"	Blue	$175.00 F
1-B10181BUR	(B10181-BUR)	16' 8" L x 84"	Burgundy	$175.00 F
1-B10181GR	(B10181-GR)	16' 8" L x 84"	Gray	$175.00 F
1-B10181GRN	(B10181-GRN)	16' 8" L x 84"	Green	$175.00 F
1-B10181MR	(B10181-MR)	16' 8" L x 84"	Mountain Rock	$175.00 F
1-B10182BLK	(B10182-BLK)	17' 6" L x 86"	Black	$183.00 F
1-B10182BLU	(B10182-BLU)	17' 6" L x 86"	Blue	$183.00 F
1-B10182BUR	(B10182-BUR)	17' 6" L x 86"	Burgundy	$183.00 F
1-B10182GR	(B10182-GR)	17' 6" L x 86"	Gray	$183.00 F
1-B10182GRN	(B10182-GRN)	17' 6" L x 86"	Green	$183.00 F
1-B10182MR	(B10182-MR)	17' 6" L x 86"	Mountain Rock	$183.00 F
1-B10182CHAR	(B10182-CHAR)	17' 6" L x 86"	Charcoal	$183.00 F
1-B10183BLK	(B10183-BLK)	18' 2" L x 88"	Black	$192.00 F
1-B10183BLU	(B10183-BLU)	18' 2" L x 88"	Blue	$192.00 F
1-B10183BUR	(B10183-BUR)	18' 2" L x 88"	Burgundy	$192.00 F
1-B10183GR	(B10183-GR)	18' 2" L x 88"	Gray	$192.00 F
1-B10183GRN	(B10183-GRN)	18' 2" L x 88"	Green	$192.00 F
1-B10183MR	(B10183-MR)	18' 2" L x 88"	Mountain Rock	$192.00 F
1-B10183NA	(B10183-NA)	18' 2" L x 88"	Navy	$192.00 F
1-B15401BLK	(B15401-BLK)	18' 10" L x 90"	Black	$199.00 F
1-B15401BLU	(B15401-BLU)	18' 10" L x 90"	Blue	$199.00 F
1-B15401BUR	(B15401-BUR)	18' 10" L x 90"	Burgundy	$199.00 F
1-B15401GR	(B15401-GR)	18' 10" L x 90"	Gray	$199.00 F
1-B15401GRN	(B15401-GRN)	18' 10" L x 90"	Green	$199.00 F
1-B15401MR	(B15401-MR)	18' 10" L x 90"	Mountain Rock	$199.00 F
1-B10184BLK	(B10184-BLK)	19' 6" L x 90"	Black	$216.00 F
1-B10184BLU	(B10184-BLU)	19' 6" L x 90"	Blue	$216.00 F
1-B10184BUR	(B10184-BUR)	19' 6" L x 90"	Burgundy	$216.00 F
1-B10184GR	(B10184-GR)	19' 6" L x 90"	Gray	$216.00 F
1-B10184GRN	(B10184-GRN)	19' 6" L x 90"	Green	$216.00 F
1-B10184MR	(B10184-MR)	19' 6" L x 90"	Mountain Rock	$216.00 F
1-B10184NA	(B10184-NA)	19' 6" L x 90"	Navy	$216.00 F
1-B10185BLK	(B10185-BLK)	20' 6" L x 96"	Black	$199.00 F
1-B10185BLU	(B10185-BLU)	20' 6" L x 96"	Blue	$199.00 F
1-B10185BUR	(B10185-BUR)	20' 6" L x 96"	Burgundy	$199.00 F
1-B10185GR	(B10185-GR)	20' 6" L x 96"	Gray	$199.00 F
1-B10185GRN	(B10185-GRN)	20' 6" L x 96"	Green	$199.00 F
1-B10185MR	(B10185-MR)	20' 6" L x 96"	Mountain Rock	$199.00 F
1-B10197BLK	(B10197-BLK)	21' 6" L x 96"	Black	$214.00 F
1-B10197BLU	(B10197-BLU)	21' 6" L x 96"	Blue	$214.00 F
1-B10197BUR	(B10197-BUR)	21' 6" L x 96"	Burgundy	$214.00 F
1-B10197GR	(B10197-GR)	21' 6" L x 96"	Gray	$214.00 F
1-B10197GRN	(B10197-GRN)	21' 6" L x 96"	Green	$214.00 F
1-B10197MR	(B10197-MR)	21' 6" L x 96"	Mountain Rock	$214.00 F
1-B10197NA	(B10197-NA)	21' 6" L x 96"	Navy	$214.00 F

Boater Sports Pro Style Bass Boat Covers



- Patterned to fit high-pedestal/pro-style seats and other late model bass boats.
- Unique design with built-in allowance for bow-mounted trolling motors etc.
- Separate motor hood included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10139BLK	(B10139-BLK)	17' 6" L x 80"	Black	$175.00 F
1-B10139BLU	(B10139-BLU)	17' 6" L x 80"	Blue	$175.00 F
1-B10139BUR	(B10139-BUR)	17' 6" L x 80"	Burgundy	$175.00 F
1-B10139GR	(B10139-GR)	17' 6" L x 80"	Gray	$175.00 F
1-B10139GRN	(B10139-GRN)	17' 6" L x 80"	Green	$175.00 F
1-B10139MR	(B10139-MR)	17' 6" L x 80"	Mountain Rock	$175.00 F
1-B10063BLK	(B10063-BLK)	18' 6" L x 82"	Black	$189.00 F
1-B10063BLU	(B10063-BLU)	18' 6" L x 82"	Blue	$189.00 F
1-B10063BUR	(B10063-BUR)	18' 6" L x 82"	Burgundy	$189.00 F
1-B10063GR	(B10063-GR)	18' 6" L x 82"	Gray	$189.00 F
1-B10063GRN	(B10063-GRN)	18' 6" L x 82"	Green	$189.00 F
1-B10063MR	(B10063-MR)	18' 6" L x 82"	Mountain Rock	$189.00 F

Boater Sports Wide Transom Bass Boat Covers



- Patterned to fit the Late Model, Wide transom aluminum bass boats like the Xpress etc.
- Separate motor hood included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-BX17BLK	(BX17-BLK)	17' L x 97"	Black	$189.00 F
1-BX17BUR	(BX17-BUR)	17' L x 97"	Burgundy	$189.00 F
1-BX17GR	(BX17-GR)	17' L x 97"	Gray	$189.00 F
1-BX17MR	(BX17-MR)	17' L x 97"	Mountain Rock	$189.00 F
1-BX17NA	(BX17-NA)	17' L x 97"	Navy	$189.00 F
1-BX18BLK	(BX18-BLK)	18' L x 97"	Black	$195.00 F
1-BX18BUR	(BX18-BUR)	18' L x 97"	Burgundy	$195.00 F
1-BX18GR	(BX18-GR)	18' L x 97"	Gray	$195.00 F
1-BX18MR	(BX18-MR)	18' L x 97"	Mountain Rock	$195.00 F
1-BX18CHAR	(BX18-CHAR)	18' L x 97"	Charcoal	$195.00 F
1-BX19BLK	(BX19-BLK)	19' L x 97"	Black	$199.00 F
1-BX19BLU	(BX19-BLU)	19' L x 97"	Blue	$199.00 F
1-BX19BUR	(BX19-BUR)	19' L x 97"	Burgundy	$199.00 F
1-BX19GR	(BX19-GR)	19' L x 97"	Gray	$199.00 F
1-BX19GRN	(BX19-GRN)	19' L x 97"	Green	$199.00 F
1-BX19MR	(BX19-MR)	19' L x 97"	Mountain Rock	$199.00 F
1-BX19RED	(BX19-RED)	19' L x 97"	Red	$199.00 F

Boater Sports Aluminum Bass Boat Covers



- Patterned to fit standard beam aluminum bass boats.
- Unique design with built-in allowance for bow-mounted trolling motors.
- Separate motor hood included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10195BLK	(B10195-BLK)	16' L x 76"	Black	$165.00 F
1-B10195BLU	(B10195-BLU)	16' L x 76"	Blue	$165.00 F
1-B10195BUR	(B10195-BUR)	16' L x 76"	Burgundy	$165.00 F
1-B10195GR	(B10195-GR)	16' L x 76"	Gray	$165.00 F
1-B10195GRN	(B10195-GRN)	16' L x 76"	Green	$165.00 F
1-B10195MR	(B10195-MR)	16' L x 76"	Mountain Rock	$165.00 F
1-B10195NA	(B10195-NA)	16' L x 76"	Navy	$165.00 F
1-B10202GRN	(B10202-GRN)	16' L x 82"	Green	$175.00 F
1-B10204BLK	(B10204-BLK)	17' L x 79"	Black	$169.00 F
1-B10204BLU	(B10204-BLU)	17' L x 79"	Blue	$169.00 F
1-B10204BUR	(B10204-BUR)	17' L x 79"	Burgundy	$169.00 F
1-B10204GR	(B10204-GR)	17' L x 79"	Gray	$169.00 F
1-B10204GRN	(B10204-GRN)	17' L x 79"	Green	$169.00 F
1-B10204MR	(B10204-MR)	17' L x 79"	Mountain Rock	$169.00 F
1-B10204NA	(B10204-NA)	17' L x 79"	Navy	$169.00 F
1-B15426BLK	(B15426-BLK)	17' 6" L x 76"	Black	$174.00 F
1-B15426BLU	(B15426-BLU)	17' 6" L x 76"	Blue	$174.00 F
1-B15426BUR	(B15426-BUR)	17' 6" L x 76"	Burgundy	$174.00 F
1-B15426GR	(B15426-GR)	17' 6" L x 76"	Gray	$174.00 F
1-B15426GRN	(B15426-GRN)	17' 6" L x 76"	Green	$174.00 F
1-B15426MR	(B15426-MR)	17' 6" L x 76"	Mountain Rock	$174.00 F
1-B15426CHAR	(B15426-CHAR)	17' 6" L x 79"	Charcoal	$174.00 F
1-B10206BLK	(B10206-BLK)	18' L x 80"	Black	$179.00 F
1-B10206BLU	(B10206-BLU)	18' L x 80"	Blue	$179.00 F
1-B10206BUR	(B10206-BUR)	18' L x 80"	Burgundy	$179.00 F
1-B10206GR	(B10206-GR)	18' L x 80"	Gray	$179.00 F
1-B10206GRN	(B10206-GRN)	18' L x 80"	Green	$179.00 F
1-B10206MR	(B10206-MR)	18' L x 80"	Mountain Rock	$179.00 F

Boater Sports Fish-N-Ski Boat Covers



- Designed for the larger windshield used on today's fish-ski boats.
- Unique design with built-in allowance for bow-mounted trolling motors etc.
- Separate motor hood included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B17574GR	(B17574-GR)	17' 6" L x 84"	Gray	$209.00 H
1-B17575BLK	(B17575-BLK)	18' 6" L x 88"	Black	$209.00 G
1-B17575BLU	(B17575-BLU)	18' 6" L x 88"	Blue	$209.00 G
1-B17575BUR	(B17575-BUR)	18' 6" L x 88"	Burgundy	$209.00 G
1-B17575GR	(B17575-GR)	18' 6" L x 88"	Gray	$209.00 G
1-B17575GRN	(B17575-GRN)	18' 6" L x 88"	Green	$209.00 G
1-B17575MR	(B17575-MR)	18' 6" L x 88"	Mountain Rock	$209.00 G
1-B17575NA	(B17575-NA)	18' 6" L x 88"	Navy	$209.00 G
1-B17576BLK	(B17576-BLK)	19' 6" L x 90"	Black	$219.00 G
1-B17576BLU	(B17576-BLU)	19' 6" L x 90"	Blue	$219.00 G
1-B17576BUR	(B17576-BUR)	19' 6" L x 90"	Burgundy	$219.00 G
1-B17576GR	(B17576-GR)	19' 6" L x 90"	Gray	$219.00 G
1-B17576GRN	(B17576-GRN)	19' 6" L x 90"	Green	$219.00 G
1-B17576MR	(B17576-MR)	19' 6" L x 90"	Mountain Rock	$219.00 G
1-B17576NA	(B17576-NA)	19' 6" L x 90"	Navy	$219.00 G

Boater Sports V-Hull with I/O Boat Covers



- Designed to fit older style v-hull with I/O and straight transom.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10163BLK	(B10163-BLK)	17' L x 85"	Black	$175.00 F
1-B10163BLU	(B10163-BLU)	17' L x 85"	Blue	$175.00 F
1-B10163BUR	(B10163-BUR)	17' L x 85"	Burgundy	$175.00 F
1-B10163GR	(B10163-GR)	17' L x 85"	Gray	$175.00 F
1-B10163GRN	(B10163-GRN)	17' L x 85"	Green	$175.00 F
1-B10163MR	(B10163-MR)	17' L x 85"	Mountain Rock	$175.00 F
1-B10163NA	(B10163-NA)	17' L x 85"	Navy	$175.00 F
1-B10164BLK	(B10164-BLK)	18' L x 91"	Black	$183.98 F
1-B10164BLU	(B10164-BLU)	18' L x 91"	Blue	$185.00 F
1-B10164BUR	(B10164-BUR)	18' L x 91"	Burgundy	$185.00 F
1-B10164GR	(B10164-GR)	18' L x 91"	Gray	$185.00 F
1-B10164GRN	(B10164-GRN)	18' L x 91"	Green	$185.00 F
1-B10164MR	(B10164-MR)	18' L x 91"	Mountain Rock	$185.00 F
1-B10165BLK	(B10165-BLK)	19' L x 93"	Black	$195.00 F
1-B10165BLU	(B10165-BLU)	19' L x 93"	Blue	$195.00 F
1-B10165BUR	(B10165-BUR)	19' L x 93"	Burgundy	$195.00 F
1-B10165GR	(B10165-GR)	19' L x 93"	Gray	$195.00 F
1-B10165GRN	(B10165-GRN)	19' L x 93"	Green	$195.00 F
1-B10165MR	(B10165-MR)	19' L x 93"	Mountain Rock	$195.00 F
1-B10165NA	(B10165-NA)	19' L x 93"	Navy	$195.00 F
1-B10166BLK	(B10166-BLK)	20' L x 96"	Black	$203.00 F
1-B10166BLU	(B10166-BLU)	20' L x 96"	Blue	$203.00 F
1-B10166BUR	(B10166-BUR)	20' L x 96"	Burgundy	$203.00 F
1-B10166GR	(B10166-GR)	20' L x 96"	Gray	$203.00 F
1-B10166GRN	(B10166-GRN)	20' L x 96"	Green	$203.00 F
1-B10166MR	(B10166-MR)	20' L x 96"	Mountain Rock	$203.00 F
1-B10167BLK	(B10167-BLK)	21' L x 96"	Black	$209.00 F
1-B10167BLU	(B10167-BLU)	21' L x 96"	Blue	$209.00 F
1-B10167BUR	(B10167-BUR)	21' L x 96"	Burgundy	$209.00 F
1-B10167GR	(B10167-GR)	21' L x 96"	Gray	$209.00 F
1-B10167GRN	(B10167-GRN)	21' L x 96"	Green	$209.00 F
1-B10167MR	(B10167-MR)	21' L x 96"	Mountain Rock	$209.00 F
1-B10168BLK	(B10168-BLK)	22' L x 96"	Black	$215.00 F
1-B10168BLU	(B10168-BLU)	22' L x 96"	Blue	$215.00 F
1-B10168BUR	(B10168-BUR)	22' L x 96"	Burgundy	$215.00 F
1-B10168GR	(B10168-GR)	22' L x 96"	Gray	$215.00 F
1-B10168GRN	(B10168-GRN)	22' L x 96"	Green	$215.00 F
1-B10168MR	(B10168-MR)	22' L x 96"	Mountain Rock	$215.00 F

Boater Sports Bomber Style Bass Boats



- Designed for bomber style bass boats with outboard motors and fold-down seats.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B17550GR	(B17550-GR)	15' L x 66"	Gray	$159.00 Q
1-B17552GR	(B17552-GR)	16' L x 74"	Gray	$169.00 G
1-B17552RED	(B17552-RED)	16' L x 74"	Red	$169.00 G

©2014 Donovan Marine, Inc.

Boater Sports Euro Style V-Hull with I/O Boat Covers



- Designed to fit newer, euro-style v-hull fiberglass runabouts with swim platform.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10274BLK	(B10274-BLK)	18' L x 92"	Black	$199.00 H
1-B10274BLU	(B10274-BLU)	18' L x 92"	Blue	$199.00 H
1-B10274BUR	(B10274-BUR)	18' L x 92"	Burgundy	$199.00 H
1-B10274GR	(B10274-GR)	18' L x 92"	Gray	$199.00 H
1-B10274GRN	(B10274-GRN)	18' L x 92"	Green	$199.00 H
1-B10274MR	(B10274-MR)	18' L x 92"	Mountain Rock	$199.00 H
1-B10274NA	(B10274-NA)	18' L x 92"	Navy	$199.00 H
1-B10275BLK	(B10275-BLK)	19' L x 96"	Black	$209.00 H
1-B10275BLU	(B10275-BLU)	19' L x 96"	Blue	$209.00 H
1-B10275BUR	(B10275-BUR)	19' L x 96"	Burgundy	$209.00 H
1-B10275GR	(B10275-GR)	19' L x 96"	Gray	$209.00 H
1-B10275GRN	(B10275-GRN)	19' L x 96"	Green	$209.00 H
1-B10275MR	(B10275-MR)	19' L x 96"	Mountain Rock	$209.00 H
1-B10275NA	(B10275-NA)	19' L x 96"	Navy	$209.00 H
1-B10276BLK	(B10276-BLK)	20' L x 102"	Black	$212.00 H
1-B10276BLU	(B10276-BLU)	20' L x 102"	Blue	$212.00 H
1-B10276BUR	(B10276-BUR)	20' L x 102"	Burgundy	$212.00 H
1-B10276GR	(B10276-GR)	20' L x 102"	Gray	$212.00 H
1-B10276GRN	(B10276-GRN)	20' L x 102"	Green	$212.00 H
1-B10276MR	(B10276-MR)	20' L x 102"	Mountain Rock	$212.00 H
1-B10277BLK	(B10277-BLK)	21' L x 102"	Black	$210.00 H
1-B10277BLU	(B10277-BLU)	21' L x 102"	Blue	$210.00 H
1-B10277BUR	(B10277-BUR)	21' L x 102"	Burgundy	$210.00 H
1-B10277GR	(B10277-GR)	21' L x 102"	Gray	$210.00 H
1-B10277GRN	(B10277-GRN)	21' L x 102"	Green	$210.00 H
1-B10277MR	(B10277-MR)	21' L x 102"	Mountain Rock	$210.00 H
1-B10278BLK	(B10278-BLK)	22' L x 102"	Black	$215.00 H
1-B10278BLU	(B10278-BLU)	22' L x 102"	Blue	$215.00 H
1-B10278BUR	(B10278-BUR)	22' L x 102"	Burgundy	$215.00 H
1-B10278GR	(B10278-GR)	22' L x 102"	Gray	$215.00 H
1-B10278GRN	(B10278-GRN)	22' L x 102"	Green	$215.00 H
1-B10278MR	(B10278-MR)	22' L x 102"	Mountain Rock	$215.00 H
1-B10279BLK	(B10279-BLK)	23' L x 102"	Black	$250.00 R
1-B10279BLU	(B10279-BLU)	23' L x 102"	Blue	$250.00 R
1-B10279BUR	(B10279-BUR)	23' L x 102"	Burgundy	$250.00 R
1-B10279GR	(B10279-GR)	23' L x 102"	Gray	$250.00 R
1-B10279GRN	(B10279-GRN)	23' L x 102"	Green	$250.00 R
1-B10279MR	(B10279-MR)	23' L x 102"	Mountain Rock	$250.00 R

Boater Sports Center Console Boat Covers



- Designed to fit center console bay boats similar to Kenner & Blue Wave boats.
- Separate motor hood included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B15402BLK	(B15402-BLK)	17' L x 88"	Black	$199.00 F
1-B15402BLU	(B15402-BLU)	17' L x 88"	Blue	$199.00 F
1-B15402BUR	(B15402-BUR)	17' L x 88"	Burgundy	$199.00 F
1-B15402MR	(B15402-MR)	17' L x 88"	Mountain Rock	$199.00 F
1-B15402NA	(B15402-NA)	17' L x 88"	Navy	$199.00 F
1-B15402RED	(B15402-RED)	17' L x 88"	Red	$199.00 F
1-B15403BLK	(B15403-BLK)	18' L x 92"	Black	$199.00 Q
1-B15403BLU	(B15403-BLU)	18' L x 92"	Blue	$199.00 Q
1-B15403MR	(B15403-MR)	18' L x 92"	Mountain Rock	$199.00 Q
1-B15403NA	(B15403-NA)	18' L x 92"	Navy	$199.00 Q
1-B15403RED	(B15403-RED)	18' L x 92"	Red	$199.00 Q
1-B15404BLU	(B15404-BLU)	19' L x 97"	Blue	$229.00 F
1-B15404NA	(B15404-NA)	19' L x 97"	Navy	$229.00 F
1-B15404RED	(B15404-RED)	19' L x 97"	Red	$229.00 F
1-B15405BLU	(B15405-BLU)	20' L x 100"	Blue	$235.00 F
1-B15405GR	(B15405-GR)	20' L x 100"	Gray	$235.00 F
1-B15405GRN	(B15405-GRN)	20' L x 100"	Green	$235.00 F
1-B15405NA	(B15405-NA)	20' L x 100"	Navy	$235.00 F
1-B15406BLU	(B15406-BLU)	21' L x 100"	Blue	$239.00 G
1-B15406MR	(B15406-MR)	21' L x 100"	Mountain Rock	$239.00 G
1-B15406GR	(B15406-GR)	21' L x 100"	Gray	$239.00 G
1-B15406RED	(B15406-RED)	21' L x 100"	Red	$239.00 G
1-B15407BLK	(B15407-BLK)	22' L x 100"	Black	$249.00 F
1-B15407BLU	(B15407-BLU)	22' L x 100"	Blue	$249.00 F
1-B15407GR	(B15407-GR)	22' L x 100"	Gray	$249.00 F

Boater Sports Jon Boat Covers



- Designed to fit basic flat bottom jon boats without windshield or trolling motor.
- Includes separate motor hood that will fit smaller outboard motors.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B17040BLK	(B17040-BLK)	14'-15' L x 57"	Black	$156.98 G
1-B17040BLU	(B17040-BLU)	14'-15' L x 57"	Blue	$149.00 G
1-B17040BUR	(B17040-BUR)	14'-15' L x 57"	Burgundy	$149.00 G
1-B17040GR	(B17040-GR)	14'-15' L x 57"	Gray	$149.00 G
1-B17042GR	(B17042-GR)	15'-16' L x 64"	Gray	$149.00 G
1-B17042GRN	(B17042-GRN)	15'-16' L x 64"	Green	$149.00 G
1-B17042MR	(B17042-MR)	15'-16' L x 64"	Mountain Rock	$149.00 G
1-B17044BLK	(B17044-BLK)	14'-15' L x 74"	Black	$149.00 G
1-B17046BUR	(B17046-BUR)	15'-16' L x 74"	Burgundy	$159.00 F
1-B17046GR	(B17046-GR)	15'-16' L x 74"	Gray	$159.00 F
1-B17046MR	(B17046-MR)	15'-16' L x 74"	Mountain Rock	$159.00 F
1-B17048GR	(B17048-GR)	17'-18' L x 80"	Gray	$169.00 F

Boater Sports New Style Family Deck Boat Covers



- Designed to fit late-model deck boats.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10189BLK	(B10189-BLK)	21' 6" L x 102"	Black	$226.00 F
1-B10189BLU	(B10189-BLU)	21' 6" L x 102"	Blue	$226.00 F
1-B10189BUR	(B10189-BUR)	21' 6" L x 102"	Burgundy	$226.00 F
1-B10189GR	(B10189-GR)	21' 6" L x 102"	Gray	$226.00 F
1-B10189GRN	(B10189-GRN)	21' 6" L x 102"	Green	$226.00 F
1-B10189MR	(B10189-MR)	21' 6" L x 102"	Mountain Rock	$226.00 F
1-B10190BLK	(B10190-BLK)	22' 6" L x 102"	Black	$242.00 F
1-B10190BLU	(B10190-BLU)	22' 6" L x 102"	Blue	$242.00 F
1-B10190BUR	(B10190-BUR)	22' 6" L x 102"	Burgundy	$242.00 F
1-B10190GR	(B10190-GR)	22' 6" L x 102"	Gray	$242.00 F
1-B10190GRN	(B10190-GRN)	22' 6" L x 102"	Green	$242.00 F
1-B10190MR	(B10190-MR)	22' 6" L x 102"	Mountain Rock	$242.00 F
1-B10190NA	(B10190-NA)	22' 6" L x 102"	Navy	$242.00 F
1-B10190RED	(B10190-RED)	22' 6" L x 102"	Red	$242.00 F
1-B10190YEL	(B10190-YEL)	22' 6" L x 102"	Yellow	$242.00 F
1-B10191BLK	(B10191-BLK)	23' 6" L x 102"	Black	$253.00 F
1-B10191BLU	(B10191-BLU)	23' 6" L x 102"	Blue	$253.00 F
1-B10191BUR	(B10191-BUR)	23' 6" L x 102"	Burgundy	$253.00 F
1-B10191GR	(B10191-GR)	23' 6" L x 102"	Gray	$253.00 F
1-B10191GRN	(B10191-GRN)	23' 6" L x 102"	Green	$253.00 F
1-B10191MR	(B10191-MR)	23' 6" L x 102"	Mountain Rock	$253.00 F
1-B10199BLK	(B10199-BLK)	24' 6" L x 102"	Black	$269.00 F
1-B10199BLU	(B10199-BLU)	24' 6" L x 102"	Blue	$269.00 F
1-B10199BUR	(B10199-BUR)	24' 6" L x 102"	Burgundy	$269.00 F
1-B10199GR	(B10199-GR)	24' 6" L x 102"	Gray	$269.00 F
1-B10199GRN	(B10199-GRN)	24' 6" L x 102"	Green	$269.00 F
1-B10199MR	(B10199-MR)	24' 6" L x 102"	Mountain Rock	$269.00 F
1-B10200BLK	(B10200-BLK)	25' 6" L x 102"	Black	$256.00 F
1-B10200BLU	(B10200-BLU)	25' 6" L x 102"	Blue	$256.00 F
1-B10200BUR	(B10200-BUR)	25' 6" L x 102"	Burgundy	$256.00 F
1-B10200GR	(B10200-GR)	25' 6" L x 102"	Gray	$256.00 F
1-B10200GRN	(B10200-GRN)	25' 6" L x 102"	Green	$256.00 F
1-B10200MR	(B10200-MR)	25' 6" L x 102"	Mountain Rock	$256.00 F

Boater Sports PWC Covers - Non-Trailerable



- Water repellent and breathable.
- Gray colored fabric, 3 oz. 100% Marine Grade Polyester.
- Treated to resist mildew and UV rays.
- Superior water repellency.
- Includes tie-down kit and storage bag.
- Two year warranty.

Order No.	Mfg. No./ Description	Price
1-67112	(67112) 2 Seater, 106"-115"	$34.95 H
1-67113	(67113) 3 Seater, 116"-135"	$34.95 H
1-B19143BLU	(B19143-BLU) 128" x 135", Blue	$99.00 H
1-B19143GR	(B19143-GR) 128" x 135", Gray	$109.95 H

Boater Sports Pontoon Boat Covers



- Designed to fit 96" beam pontoon boats.
- Unique lace-up design in rear insures a snug fit around the pontoon fence.
- Motor hood not included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10244BLK	(B10244-BLK)	17'-20' L x 96"	Black	$265.00 F
1-B10244BLU	(B10244-BLU)	17'-20' L x 96"	Blue	$265.00 F
1-B10244BUR	(B10244-BUR)	17'-20' L x 96"	Burgundy	$265.00 F
1-B10244GR	(B10244-GR)	17'-20' L x 96"	Gray	$265.00 F
1-B10244GRN	(B10244-GRN)	17'-20' L x 96"	Green	$265.00 F
1-B10244MR	(B10244-MR)	17'-20' L x 96"	Mountain Rock	$265.00 F
1-B10244GRYMNI	(B10244GRYMIN)	17'-20' L x 96"	Gray	$289.00 R
1-B10245BLU	(B10245-BLU)	21'-24' L x 96"	Blue	$279.00 F
1-B10245BUR	(B10245-BUR)	21'-24' L x 96"	Burgundy	$279.00 F
1-B10245GR	(B10245-GR)	21'-24' L x 96"	Gray	$279.00 F
1-B10245GRN	(B10245-GRN)	21'-24' L x 96"	Green	$279.00 F
1-B10245MR	(B10245-MR)	21'-24' L x 96"	Mountain Rock	$279.00 F
1-B10247BLK	(B10247-BLK)	25'-28' L x 96"	Black	$310.00 H
1-B10247BLU	(B10247-BLU)	25'-28' L x 96"	Blue	$310.00 H
1-B10247BUR	(B10247-BUR)	25'-28' L x 96"	Burgundy	$310.00 H
1-B10247GRN	(B10247-GRN)	25'-28' L x 96"	Green	$310.00 H
1-B10247MR	(B10247-MR)	25'-28' L x 96"	Mountain Rock	$310.00 H

Boater Sports Pontoon Boat Covers



- Designed to fit 102" beam pontoon boats.
- Unique lace-up design in rear insures a snug fit around the pontoon fence.
- Motor hood not included.

Order No.	Mfg. No.	Fits (Length x Beam)	Color	Price
1-B10244BLK102	(B10244-BLK-1)	17'-20' L x 102"	Black	$275.00 F
1-B10244BLU102	(B10244-BLU-1)	17'-20' L x 102"	Blue	$275.00 F
1-B10244BUR102	(B10244-BUR-1)	17'-20' L x 102"	Burgundy	$275.00 F
1-B10244GR102	(B10244-GR-1)	17'-20' L x 102"	Gray	$265.00 F
1-B10244GRN102	(B10244-GRN-1)	17'-20' L x 102"	Green	$275.00 F
1-B10244MR102	(B10244-MR-1)	17'-20' L x 102"	Mountain Rock	$289.00 F
1-B10244NA102	(B10244-NA-1)	17'-20' L x 102"	Navy	$275.00 F
1-B10244RED102	(B10244-RED-1)	17'-20' L x 102"	Red	$265.00 F
1-B10245BLK102	(B10245-BLK-1)	21'-24' L x 102"	Black	$289.00 F
1-B10245BLU102	(B10245-BLU-1)	21'-24' L x 102"	Blue	$289.00 F
1-B10245BUR102	(B10245-BUR-1)	21'-24' L x 102"	Burgundy	$289.00 F
1-B10245GRN102	(B10245-GRN-1)	21'-24' L x 102"	Green	$289.00 F
1-B10245MR102	(B10245-MR-1)	21'-24' L x 102"	Mountain Rock	$289.00 F
1-B10245CHR102	(B10245CHAR1)	21'-24' L x 102"	Charcoal	$289.00 F
1-B10245GR102	(B10245-GR-1)	21'-24' L x 102"	Gray	$289.00 F
1-B10245NA102	(B10245-NA-1)	21'-24' L x 102"	Navy	$279.00 F
1-B10245RED102	(B10245-RED-1)	21'-24' L x 102"	Red	$289.00 F
1-B10247BLK102	(B10247-BLK-1)	25'-28' L x 102"	Black	$310.00 H
1-B10247BLU102	(B10247-BLU-1)	25'-28' L x 102"	Blue	$310.00 H
1-B10247BUR102	(B10247-BUR-1)	25'-28' L x 102"	Burgundy	$310.00 H
1-B10247GR102	(B10247-GR-1)	25'-28' L x 102"	Gray	$310.00 H
1-B10247GRN102	(B10247-GRN-1)	25'-28' L x 102"	Green	$310.00 H
1-B10247MR102	(B10247-MR-1)	25'-28' L x 102"	Mountain Rock	$310.00 H
1-B10247NA	(B10247-NA-1)	25'-28' L x 102"	Navy	$310.00 H

©2014 Donovan Marine, Inc.

Boater Sports Telescopic Boat Cover Support Poles



- 1" diameter.
- Use the telescopic adjustable pole and help eliminate standing water.
- Twist to lock and unlock.
- Rubber tips at both ends.
- Deluxe model includes canvas snap and mushroom head.

Order No.	Mfg. No. / Description	Price
1-56202	(56202) 28"-48" Standard Pole	$15.45 H
1-56201	(56201) 36"-64" Deluxe Pole	$22.99 H

Boater Sports Boat Cover Tie Down Kit



- 12 Pack of black nylon boat cover tie downs to secure a boat cover.
- 1" x 8'.

Order No.	Mfg. No. / Description	Price
1-55133	(55133)	$19.25 H

Perko Fig. 578 Boat Cover Sockets



- Overall length 3-1/4".
- Overall width 5/8".
- Opening 1-7/8" x 7/16".
- Chrome plated zinc.
- Uses #6 fasteners.
- Will accommodate 3/8" wood or plastic battens up to 1-3/4" wide.
- Sold per pair per skin packed card.

Order No.	Mfg. No. / Description	Price
541056	(0578 DP0 CHR)	$11.98 Q

Tough Guy Motor Covers



- Silver gray color.
- Cut to fit close for trailering.
- Draw rope sewn in hem.
- Made from the same great polyester fabric as the V-Skin Boat Covers.

Order No.	Description	Price
7-8025	Fits V4, 22" L x 10" W x 17" H	$17.98 G
7-8026	Fits V6, 31" L x 23" W x 24" H	$20.98 G

Taylor Made Adjustable Boat Cover Support Pole - Aluminum



- Prevent water from pooling on top.
- Non-marring tip on each end of a telescoping aluminum tube.
- Durable plastic knob allows for easy adjustment of the height.
- 36" - 64".

Order No.	Mfg. No. / Description	Price
820730	(11991)	$32.98 G

Taylor Made Wooden Bows





- Fixed Length.
- Strong.
- Resilient.
- Sap-free Poplar wood.
- Bulk pack (one gross).

Order No.	Mfg. No. / Description	Price
822435	1.5" W x 5/16" Thick, 72"	$10.98 F
822440	1.5" W x 5/16" Thick, 96"	$13.98 G

Taylor Made Die Cast Bow Sockets



- Accepts any bow.
- Chrome-plated.

Order No.	Mfg. No. / Description	Price
828154	Die Cast (pair)	$9.98 G

Marpac Universal Center Console Covers



- Console covers provide protection for the console, electronic equipment and controls.
- Improved design now accommodates the forward console seat.
- Heavy duty adjustable strap system for a more customized fit.
- Shock cord in the hem to keep the cover securely in place.
- Made from PolyFlex 100% Marine Polyester which is lightweight and strong with good resistance to tearing.
- Water repellent, UV and mildew resistant finish.
- Breathable to allow interior moisture to escape.
- Haze Gray.
- Made in USA.
- 2 year warranty.

Order No.	Description	Price
5-8020	Small, 40" D x 33" W x 36" H	$43.98 G
5-8021	Medium, 45" D x 36" W x 46" H	$51.98 G
5-8022	Large, 50" D x 40" W x 60" H	$58.98 G

Carver Boat Cover Support Poles





- Prevent dry rot and mildew.
- These lightweight telescoping poles are designed to support the cover so that water does not pool.
- Constructed of anodized aluminum tubing that can be adjusted to desired height from 22" to 70".
- Support pole with snap and vinyl end.
- Packaged 1 per box.

Order No.	Mfg. No. / Description	Price
820729	(60000)	$22.98 G

Carver Boat Cover Tie Down Kit



- An absolute must for protecting your boat and extending the life of your boat cover.
- This is an efficient, effective way to secure your boat cover when trailering.
- Constructed of heavy-duty 1" black polypropylene webbing and convenient quick-release buckles.
- Unlike bungee cords, these durable tie-downs don't stretch, so they won't tear your cover or damage your boat.
- Each kit contains twelve 8-foot straps.

Order No.	Mfg. No. / Description	Price
820705	(61000)	$25.98 G

Tough Guy Center Console Covers



- 7 oz. polyester.
- Strong durable lightweight.
- Water repellent.
- Breathable.
- Draw rope sewn into hem.

Order No.	Description	Price
5-8020	Small, 25" D x 33" W x 40" H	$43.98 G
5-8021	Medium, 30" D x 40" W x 45" H	$51.98 G
5-8022	Large, 40" D x 48" W x 45" H	$58.98 G

Boater Sports Outboard Motor Covers



- Boater Sports motor hoods have a shock cord sewn into the hem for a tight fit.
- Made from the same Acrylic-Coated Polyester material used on our boat covers.
- Fits 225 - 300 HP.

Order No.	Mfg. No.	Fits	Color	Price
1-B10545RED	(B10545-RED)	31" L x 24" W x 28" H	Red	$25.50 Q
1-B10545YEL	(B10545-YEL)	31" L x 24" W x 28" H	Yellow	$25.50 Q

Attwood Custom-Fit Mercury Motor Covers



- The outer shell is tough, abrasion-resistant polyester.
- Acrylic coating keeps the cover waterproof and UV resistant.
- The inside lining is soft, non-woven polyester backing that provides a cushioned barrier around the engine cowling.
- 5 year warranty.
- A 1" polyweb strap in the bottom hem cinches the cover tight.
- Includes quick-release buckle for fast tightening and removal.
- 242318: Optimax 3.0L 200 HP, 225 HP, 250 HP, 2-Stroke 3.0L EFI 200 HP, 225 HP and 250 HP.
- 242329: Verado 200 HP, 225 HP, 250 HP and 275 HP.

Order No.	Mfg. No. / Fits	Price
242318	(105638) Optimax	$199.98 G
242329	(105639) Verado	$239.98 G

Boater Sports Canvas Fastener Kit



- 47 piece assorted canvas fastener kit with handy carrying case.
- For repairing canvas covers, tarps, boat covers, sail covers or any heavy fabric.
- Contains: (1) Stainless steel snap tool and die set, (6) stud wood screws, (10) brass caps (10) brass eye sockets and (10) eyelets.

Order No.	Mfg. No. / Description	Price
1-54430	(54430)	$11.99 H


Star Brite Waterproofing with PTEF



- Safe for all fabrics including Sunbrella.
- Top rated waterproofing.
- PTEF based formula.
- For boat covers, bimini tops, sail covers, clothing and tents.
- Does not change color or feel of fabric.

Order No.	Mfg. No. / Description	Price
626513	(81922P) 22 oz, Case of 6	$19.98 G
626518	(81900N) Gallon, Case of 4	$46.98 G

Lifesafe Boat Cover Bimini Bandage



- Prolong life of a boat cover.
- Adds strength along seams, stress points, creases and corners.
- Resists stretching, wrinkling and tearing.
- Use it as extra padding on stress points around windshields or trolling motors.

Order No.	Mfg. No. / Description	Price
228269	(RE3868) 3" x 15'	$21.98 H

Taylor Made Canvas Tools



Order No.	Mfg. No. / Description	Price
731535	(990690) Punch Tool	$45.98 I
731540	(990691) Canvas Pliers	$31.98 I

Star Brite Teflon Snap and Zipper Lubricant



- Use on boat snaps, metal and plastic zippers to protect against corrosion, reduce wear and friction, prevent binding and repel salt spray deposits.
- Non-toxic, non-staining.
- Will not wash off.
- Protects from -65° F to +650° F.

Order No.	Mfg. No. / Description	Price
627173	(89102) 2 oz. Tube	$9.98 G

Star Brite Sail and Canvas Cleaner



- Biodegradable.
- Cleans and brightens whites and colors.
- Concentrated formula.
- Does not weaken fabric or thread.
- Removes dirt, grease and mildew stains.
- Great for boat covers, bimini tops and sails.
- Equally good for nylon or dacron sails.

Order No.	Mfg. No. / Description	Price
626525	(82016) 16 fl. oz.	$9.98 G

Taylor Made Canvas Fastener Kit



- Kit contains: (6) Stud, (10) Wood Screw, (10) Snap Cap, (10) Snap Socket, (10) Snap Stud, (10) Snap Eyelet and (1) Snap Tool.

Order No.	Mfg. No. / Description	Price
731600	(HP107)	$29.98 I

Taylor Made Boat Cover Repair Kit



- Includes canvas tool, snap extenders, screw studs and more.

Order No.	Mfg. No. / Description	Price
731555	(561014) 24 Pieces	$24.98 I

Marpro Marine Fabric Protector




- Provides maximum UV protection.
- Resists rot and mildew on boat covers, bimini tops, sail covers and canvas.
- Will not change color of feel of fabric.
- Excellent oil and water repellency.

Order No.	Description	Price
6-4080	10 fl. oz	$7.98 I

©2014 Donovan Marine, Inc.

2013 DEALER DROP-SHIP FREIGHT PROGRAM

CARVER INDUSTRIES, INC.

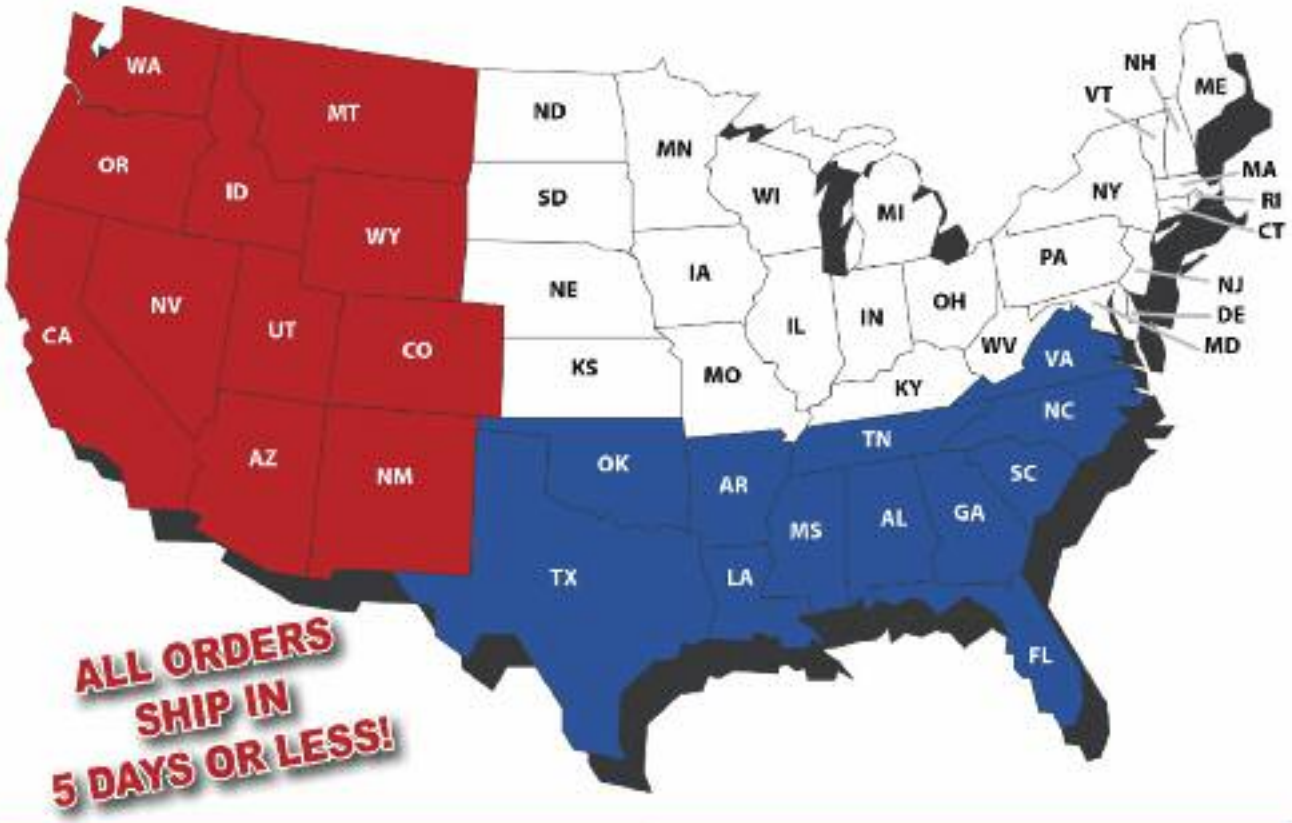

ALL ORDERS SHIP IN 5 DAYS OR LESS!

UPS PROGRAM	MOTOR FREIGHT PROGRAM
To Commercial Dealer Addresses ONLY	To Commercial Dealer Addresses ONLY
ALL BOAT COVERS	**FULLY-ASSEMBLED BIMINI TOPS**
FLAT RATE GROUND SHIPMENT	GET UP TO 5 UNITS
$10.00 EACH	SHIPPED FOR ONE LOW PRICE
ALL KNOCK-DOWN BIMINI TOPS	RED STATES $125.00
FLAT RATE GROUND SHIPMENT	WHITE STATES $100.00
$20.00 EACH	BLUE STATES $75.00

Carver Boat Covers & Bimini Tops are Proudly Made in the USA

Marpac Sunbrella® Bimini Tops

Special Handling May Apply



- Traditional marine-grade acrylic fabric from Sunbrella, the #1 marine fabric in the world.
- Full frame construction for easy mounting to boat.
- Frames are made from bright dip anodized aluminum.
- Fittings made from non-corrosive, high-density black nylon.
- Boot included.
- All Tops are 3 Bow - 54" Tall x 6' Long.
- Made in USA.
- Not UPSable.

Order No.	Description		Price
5-3200	Width 60" - 66"	Black	$373.98 G
5-3220	Width 60" - 66"	Burgundy	$354.98 G
5-3230	Width 60" - 66"	Gray	$373.98 G
5-3240	Width 60" - 66"	Green	$373.98 G
5-3250	Width 60" - 66"	Navy	$373.98 G
5-3252	Width 60" - 66"	Pacific Blue	$373.98 G
5-3260	Width 60" - 66"	Red	$354.98 G
5-3270	Width 60" - 66"	Sand	$373.98 G
5-3280	Width 60" - 66"	Teal	$354.98 G
5-3290	Width 67" - 72"	Black	$377.98 G
5-3300	Width 67" - 72"	Burgundy	$377.98 G
5-3310	Width 67" - 72"	Gray	$377.98 G
5-3320	Width 67" - 72"	Green	$358.98 G
5-3330	Width 67" - 72"	Navy	$377.98 G
5-3332	Width 67" - 72"	Pacific Blue	$377.98 G
5-3340	Width 67" - 72"	Red	$358.98 G
5-3350	Width 67" - 72"	Sand	$377.98 G
5-3360	Width 67" - 72"	Teal	$377.98 G
5-3370	Width 73" - 78"	Black	$381.98 G
5-3400	Width 73" - 78"	Burgundy	$381.98 G
5-3410	Width 73" - 78"	Gray	$381.98 G
5-3420	Width 73" - 78"	Green	$381.98 G
5-3430	Width 73" - 78"	Navy	$381.98 G
5-3432	Width 73" - 78"	Pacific Blue	$381.98 G
5-3440	Width 73" - 78"	Red	$381.98 G
5-3450	Width 73" - 78"	Sand	$381.98 G
5-3460	Width 73" - 78"	Teal	$381.98 G
5-3470	Width 79" - 84"	Black	$407.98 G
5-3490	Width 79" - 84"	Burgundy	$407.98 G
5-3500	Width 79" - 84"	Gray	$407.98 G
5-3510	Width 79" - 84"	Green	$386.98 G
5-3520	Width 79" - 84"	Navy	$407.98 G

Order No.	Description		Price
5-3522	Width 79" - 84"	Pacific Blue	$407.98 G
5-3530	Width 79" - 84"	Red	$407.98 G
5-3540	Width 79" - 84"	Sand	$407.98 G
5-3550	Width 79" - 84"	Teal	$407.98 G
5-3252	Width 60" - 66"	Pacific Blue	$373.98 G
5-3560	Width 85" - 90"	Black	$433.98 G
5-3580	Width 85" - 90"	Burgundy	$433.98 G
5-3590	Width 85" - 90"	Gray	$433.98 G
5-3600	Width 85" - 90"	Green	$433.98 G
5-3610	Width 85" - 90"	Navy	$433.98 G
5-3612	Width 85" - 90"	Pacific Blue	$433.98 G
5-3620	Width 85" - 90"	Red	$433.98 G
5-3630	Width 85" - 90"	Sand	$433.98 G
5-3640	Width 85" - 90"	Teal	$412.98 G
5-3650	Width 91" - 96"	Black	$439.98 G
5-3670	Width 91" - 96"	Burgundy	$417.98 G
5-3680	Width 91" - 96"	Gray	$439.98 G
5-3690	Width 91" - 96"	Green	$417.98 G
5-3700	Width 91" - 96"	Navy	$439.98 G
5-3702	Width 91" - 96"	Pacific Blue	$439.98 G
5-3710	Width 91" - 96"	Red	$417.98 G
5-3720	Width 91" - 96"	Sand	$439.98 G
5-3730	Width 91" - 96"	Teal	$439.98 G
5-3740	Width 97" - 103"	Black	$460.98 G
5-3760	Width 97" - 103"	Burgundy	$460.98 G
5-3770	Width 97" - 103"	Gray	$460.98 G
5-3780	Width 97" - 103"	Green	$460.98 G
5-3790	Width 97" - 103"	Navy	$460.98 G
5-3792	Width 97" - 103"	Pacific Blue	$460.98 G
5-3800	Width 97" - 103"	Red	$460.98 G
5-3810	Width 97" - 103"	Teal	$460.98 G

Boater Sports Bimini Top Frames - Round Frames



- All Boater Sports Bimini Tops are made from 12 oz. Acrylic Coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!
- Zippered pockets for fast and easy installation.
- Frame sold separately.
- Boots available on special order request.

- 3 Bow round frame.

Order No.	Mfg. No. / Description		Price
2350010	(10341)	61"-67" Wide x 36" High x 72" Long	$175.98 H
2350011	(10342)	68"-74" Wide x 36" High x 72" Long	$179.98 H
2350012	(10343)	75"-81" Wide x 36" High x 72" Long	$183.98 H
2350013	(10344)	82"-88" Wide x 36" High x 72" Long	$187.98 H
2350014	(10345)	89"-96" Wide x 36" High x 72" Long	$191.98 H
2350015	(10347)	61"-67" Wide x 46" High x 72" Long	$181.98 H
2100025	(BS10348)	68"-74" Wide x 46" High x 72" Long	$163.98 Q
2100026	(BS10349)	75"-81" Wide x 46" High x 72" Long	$190.98 Q
2100027	(BS10350)	82"-88" Wide x 46" High x 72" Long	$225.98 Q
2350018	(10351)	89"-96" Wide x 46" High x 72" Long	$191.98 H
2100028	(BS10351-XT)	89"-96" Wide x 60" High x 72" Long, Extra Tall	$188.98 Q

- 4 Bow round frame.

Order No.	Mfg. No. / Description		Price
2350019	(10354)	68"-74" Wide x 54" High x 94" Long	$242.98 H
2350020	(10355)	75"-81" Wide x 54" High x 94" Long	$246.98 H
2350021	(10356)	82"-88" Wide x 54" High x 94" Long	$250.98 H
2100030	(BS10357)	89"-96" Wide x 54" High x 94" Long	$214.98 Q

©2014 Donovan Marine, Inc.

Boater Sports Acrylic Bimini Tops - Canvas Only



- All Boater Sports Bimini Tops are made from 12 oz. Acrylic Coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!
- Zippered pockets for fast and easy installation.
- Frame sold separately.
- Boots available on special order request.
- 3 Bow round frame.

Order No.	Mfg. No. / Description		Price
1-BS341BKA	(BS341-BKA) Black	Fits 61"-67"	$219.00 F
1-BS341BLA	(BS341-BLA) Blue	Fits 61"-67"	$219.00 F
1-BS341BGA	(BS341-BGA) Burgundy	Fits 61"-67"	$219.00 F
1-BS341GNA	(BS341-GNA) Green	Fits 61"-67"	$219.00 F
1-BS341GYA	(BS341-GYA) Gray	Fits 61"-67"	$219.00 F
1-BS341MRA	(BS341-MRA) Mountain Rock	Fits 61"-67"	$219.00 F
1-BS341NA	(BS341-NA) Navy	Fits 61"-67"	$219.00 F
1-BS341RDA	(BS341-RDA) Red	Fits 61"-67"	$219.00 F
1-BS341WA	(BS341-WA) White	Fits 61"-67"	$219.00 F
1-BS341YEL	(BS341-YEL) Yellow	Fits 61"-67"	$219.00 F
1-BS342BKA	(BS342-BKA) Black	Fits 68"-74"	$219.00 F
1-BS342BLA	(BS342-BLA) Blue	Fits 68"-74"	$219.00 F
1-BS342BGA	(BS342-BGA) Burgundy	Fits 68"-74"	$219.00 F
1-BS342GNA	(BS342-GNA) Green	Fits 68"-74"	$219.00 F
1-BS342GYA	(BS342-GYA) Gray	Fits 68"-74"	$219.00 F
1-BS342MRA	(BS342-MRA) Mountain Rock	Fits 68"-74"	$219.00 F
1-BS342NA	(BS342-NA) Navy	Fits 68"-74"	$219.00 F
1-BS342RDA	(BS342-RDA) Red	Fits 68"-74"	$219.00 F
1-BS342WA	(BS342-WA) White	Fits 68"-74"	$219.00 F
1-BS343BKA	(BS343-BKA) Black	Fits 75"-81"	$219.00 F
1-BS343BLA	(BS343-BLA) Blue	Fits 75"-81"	$219.00 F
1-BS343BGA	(BS343-BGA) Burgundy	Fits 75"-81"	$219.00 F
1-BS343GNA	(BS343-GNA) Green	Fits 75"-81"	$219.00 F
1-BS343GYA	(BS343-GYA) Gray	Fits 75"-81"	$219.00 F
1-BS343MRA	(BS343-MRA) Mountain Rock	Fits 75"-81"	$219.00 F
1-BS343NA	(BS343-NA) Navy	Fits 75"-81"	$219.00 F
1-BS343RDA	(BS343-RDA) Red	Fits 75"-81"	$219.00 F
1-BS343WA	(BS343-WA) White	Fits 75"-81"	$219.00 F
1-BS344BKA	(BS344-BKA) Black	Fits 81"-88"	$219.00 F
1-BS344BLA	(BS344-BLA) Blue	Fits 81"-88"	$219.00 F
1-BS344BGA	(BS344-BGA) Burgundy	Fits 81"-88"	$219.00 F
1-BS344GNA	(BS344-GNA) Green	Fits 81"-88"	$219.00 F
1-BS344GYA	(BS344-GYA) Gray	Fits 81"-88"	$219.00 F
1-BS344MRA	(BS344-MRA) Mountain Rock	Fits 81"-88"	$219.00 F
1-BS344NA	(BS344-NA) Navy	Fits 81"-88"	$219.00 F
1-BS344RDA	(BS344-RDA) Red	Fits 81"-88"	$219.00 F
1-BS344WA	(BS344-WA) White	Fits 81"-88"	$219.00 F
1-BS345BKA	(BS345-BKA) Black	Fits 89"-96"	$219.00 F
1-BS345BLA	(BS345-BLA) Blue	Fits 89"-96"	$219.00 F
1-BS345BGA	(BS345-BGA) Burgundy	Fits 89"-96"	$219.00 F
1-BS345GNA	(BS345-GNA) Green	Fits 89"-96"	$219.00 F
1-BS345GYA	(BS345-GYA) Gray	Fits 89"-96"	$219.00 F
1-BS345MRA	(BS345-MRA) Mountain Rock	Fits 89"-96"	$219.00 F
1-BS345NA	(BS345-NA) Navy	Fits 89"-96"	$219.00 F
1-BS345RDA	(BS345-RDA) Red	Fits 89"-96"	$219.00 F
1-BS345WA	(BS345-WA) White	Fits 89"-96"	$219.00 F

Boater Sports Acrylic Bimini Tops - Canvas Only



- All Boater Sports Bimini Tops are made from 12 oz. Acrylic Coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!
- Zippered pockets for fast and easy installation.
- Frame sold separately.
- Boots available on special order request.
- 4 Bow round frame.

Order No.	Mfg. No. / Description		Price
1-BS354BKA	(BS354-BKA) Black	Fits 68"-74", 94" Long	$255.00 F
1-BS354BLA	(BS354-BLA) Blue	Fits 68"-74", 94" Long	$255.00 F
1-BS354BGA	(BS354-BGA) Burgundy	Fits 68"-74", 94" Long	$255.00 F
1-BS354GNA	(BS354-GNA) Green	Fits 68"-74", 94" Long	$255.00 F
1-BS354GYA	(BS354-GYA) Gray	Fits 68"-74", 94" Long	$255.00 F
1-BS354MRA	(BS354-MRA) Mountain Rock	Fits 68"-74", 94" Long	$255.00 F
1-BS354NA	(BS354-NA) Navy	Fits 68"-74", 94" Long	$255.00 F
1-BS354RDA	(BS354-RDA) Red	Fits 68"-74", 94" Long	$255.00 F
1-BS354WA	(BS354-WA) White	Fits 68"-74", 94" Long	$255.00 F
1-BS355BKA	(BS355-BKA) Black	Fits 75"-81", 94" Long	$255.00 F
1-BS355BLA	(BS355-BLA) Blue	Fits 75"-81", 94" Long	$255.00 F
1-BS355BGA	(BS355-BGA) Burgundy	Fits 75"-81", 94" Long	$255.00 F
1-BS355GNA	(BS355-GNA) Green	Fits 75"-81", 94" Long	$255.00 F
1-BS355GYA	(BS355-GYA) Gray	Fits 75"-81", 94" Long	$255.00 F
1-BS355MRA	(BS355-MRA) Mountain Rock	Fits 75"-81", 94" Long	$255.00 F
1-BS355NA	(BS355-NA) Navy	Fits 75"-81", 94" Long	$255.00 F
1-BS355RDA	(BS355-RDA) Red	Fits 75"-81", 94" Long	$255.00 F
1-BS355WA	(BS355-WA) White	Fits 75"-81", 94" Long	$255.00 F
1-BS356BKA	(BS356-BKA) Black	Fits 82"-88", 94" Long	$255.00 F
1-BS356BLA	(BS356-BLA) Blue	Fits 82"-88", 94" Long	$255.00 F
1-BS356BGA	(BS356-BGA) Burgundy	Fits 82"-88", 94" Long	$255.00 F
1-BS356GNA	(BS356-GNA) Green	Fits 82"-88", 94" Long	$255.00 F
1-BS356GYA	(BS356-GYA) Gray	Fits 82"-88", 94" Long	$255.00 F
1-BS356MRA	(BS356-MRA) Mountain Rock	Fits 82"-88", 94" Long	$255.00 F
1-BS356NA	(BS356-NA) Navy	Fits 82"-88", 94" Long	$255.00 F
1-BS356RDA	(BS356-RDA) Red	Fits 82"-88", 94" Long	$255.00 F
1-BS356WA	(BS356-WA) White	Fits 82"-88", 94" Long	$255.00 F
1-BS357BKA	(BS357-BKA) Black	Fits 89"-96", 94" Long	$255.00 F
1-BS357BLA	(BS357-BLA) Blue	Fits 89"-96", 94" Long	$255.00 F
1-BS357BGA	(BS357-BGA) Burgundy	Fits 89"-96", 94" Long	$255.00 F
1-BS357GNA	(BS357-GNA) Green	Fits 89"-96", 94" Long	$255.00 F
1-BS357GYA	(BS357-GYA) Gray	Fits 89"-96", 94" Long	$255.00 F
1-BS357MRA	(BS357-MRA) Mountain Rock	Fits 89"-96", 94" Long	$255.00 F
1-BS357NA	(BS357-NA) Navy	Fits 89"-96", 94" Long	$255.00 F
1-BS357RDA	(BS357-RDA) Red	Fits 89"-96", 94" Long	$255.00 F
1-BS357WA	(BS357-WA) White	Fits 89"-96", 94" Long	$255.00 F

Boater Sports Bimini Top Boots - 3 Bow Round Frame

- 3 Bow round frame.
- Made from 12 oz. Acrylic-Coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!

Order No.	Mfg. No. / Description			Price
1-BS10441BGA	(BS10441-BGA)	Burgundy	Fits 61"-67"	$53.00 H
1-BS10441BKA	(BS10441-BKA)	Black	Fits 61"-67"	$53.00 H
1-BS10441BLA	(BS10441-BLA)	Blue	Fits 61"-67"	$53.00 H
1-BS10441GNA	(BS10441-GNA)	Green	Fits 61"-67"	$53.00 H
1-BS10441GYA	(BS10441-GYA)	Gray	Fits 61"-67"	$53.00 H
1-BS10441MRA	(BS10441-MRA)	Mountain Rock	Fits 61"-67"	$53.00 H
1-BS10441NA	(BS10441-NA)	Navy	Fits 61"-67"	$53.00 H
1-BS10441RDA	(BS10441-RDA)	Red	Fits 61"-67"	$53.00 H
1-BS10441WA	(BS10441-WA)	White	Fits 61"-67"	$53.00 H
1-BS10442BGA	(BS10442-BGA)	Burgundy	Fits 68"-74"	$58.00 H
1-BS10442BKA	(BS10442-BKA)	Black	Fits 68"-74"	$58.00 H
1-BS10442BLA	(BS10442-BLA)	Blue	Fits 68"-74"	$58.00 H
1-BS10442GNA	(BS10442-GNA)	Green	Fits 68"-74"	$58.00 H
1-BS10442GYA	(BS10442-GYA)	Gray	Fits 68"-74"	$58.00 H
1-BS10442MRA	(BS10442-MRA)	Mountain Rock	Fits 68"-74"	$58.00 H
1-BS10442NA	(BS10442-NA)	Navy	Fits 68"-74"	$58.00 H
1-BS10442RDA	(BS10442-RDA)	Red	Fits 68"-74"	$58.00 H
1-BS10442WA	(BS10442-WA)	White	Fits 68"-74"	$58.00 H
1-BS10443BGA	(BS10443-BGA)	Burgundy	Fits 75"-81"	$58.00 H
1-BS10443BKA	(BS10443-BKA)	Black	Fits 75"-81"	$58.00 H
1-BS10443BLA	(BS10443-BLA)	Blue	Fits 75"-81"	$58.00 H
1-BS10443GNA	(BS10443-GNA)	Green	Fits 75"-81"	$58.00 H
1-BS10443GYA	(BS10443-GYA)	Gray	Fits 75"-81"	$58.00 H
1-BS10443MRA	(BS10443-MRA)	Mountain Rock	Fits 75"-81"	$58.00 H
1-BS10443NA	(BS10443-NA)	Navy	Fits 75"-81"	$58.00 H
1-BS10443RDA	(BS10443-RDA)	Red	Fits 75"-81"	$58.00 H
1-BS10443WA	(BS10443-WA)	White	Fits 75"-81"	$58.00 H
1-BS10444BGA	(BS10444-BGA)	Burgundy	Fits 82"-88"	$62.00 Q
1-BS10444BKA	(BS10444-BKA)	Black	Fits 82"-88"	$62.00 Q
1-BS10444BLA	(BS10444-BLA)	Blue	Fits 82"-88"	$62.00 Q
1-BS10444GNA	(BS10444-GNA)	Green	Fits 82"-88"	$62.00 Q
1-BS10444GYA	(BS10444-GYA)	Gray	Fits 82"-88"	$62.00 Q
1-BS10444MRA	(BS10444-MRA)	Mountain Rock	Fits 82"-88"	$62.00 Q
1-BS10444NA	(BS10444-NA)	Navy	Fits 82"-88"	$62.00 Q
1-BS10444RDA	(BS10444-RDA)	Red	Fits 82"-88"	$62.00 Q
1-BS10444WA	(BS10444-WA)	White	Fits 82"-88"	$62.00 Q
1-BS10445BGA	(BS10445-BGA)	Burgundy	Fits 89"-96"	$62.00 Q
1-BS10445BKA	(BS10445-BKA)	Black	Fits 89"-96"	$62.00 Q
1-BS10445BLA	(BS10445-BLA)	Blue	Fits 89"-96"	$62.00 Q
1-BS10445GNA	(BS10445-GNA)	Green	Fits 89"-96"	$58.00 F
1-BS10445GYA	(BS10445-GYA)	Gray	Fits 89"-96"	$62.00 Q
1-BS10445MRA	(BS10445-MRA)	Mountain Rock	Fits 89"-96"	$62.00 Q
1-BS10445NA	(BS10445-NA)	Navy	Fits 89"-96"	$62.00 Q
1-BS10445RDA	(BS10445-RDA)	Red	Fits 89"-96"	$62.00 Q
1-BS10445WA	(BS10445-WA)	White	Fits 89"-96"	$62.00 Q

Boater Sports Bimini Top Frames - 4 Bow Square Frames

- All Boater Sports Bimini Tops are made from 12 oz. Acrylic Coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!
- Zippered pockets for fast and easy installation.
- Frame sold separately.
- Boots available on special order request.

- 4 Bow square frame.

Order No.	Mfg. No. / Description		Price
2100031	(BS10369)	89"-96" Wide x 54" High x 93" Long	$203.98 Q
2100032	(BS10372)	97"-102" Wide x 54" High x 100" Long	$214.98 Q

Boater Sports Acrylic Bimini Tops - Canvas Only

- All Boater Sports Bimini Tops are made from 12 oz. Acrylic-coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!
- Zippered pockets for fast and easy installation.
- Frame and Boot sold separately.

- 4 Bow square frame.

Order No.	Mfg. No. / Description			Price
1-BS369BGA	(BS369-BGA)	Burgundy	89"-96" Wide, 93" Long	$299.00 F
1-BS369BKA	(BS369-BKA)	Black	89"-96" Wide, 93" Long	$299.00 F
1-BS369BLA	(BS369-BLA)	Blue	89"-96" Wide, 93" Long	$299.00 F
1-BS369GNA	(BS369-GNA)	Green	89"-96" Wide, 93" Long	$299.00 F
1-BS369GYA	(BS369-GYA)	Gray	89"-96" Wide, 93" Long	$299.00 F
1-BS369MRA	(BS369-MRA)	Mtn. Rock	89"-96" Wide, 93" Long	$299.00 F
1-BS369NA	(BS369-NA)	Navy	89"-96" Wide, 93" Long	$299.00 F
1-BS369RDA	(BS369-RDA)	Red	89"-96" Wide, 93" Long	$299.00 F
1-BS369WA	(BS369-WA)	White	89"-96" Wide, 93" Long	$299.00 F
1-BS372BGA	(BS372-BGA)	Burgundy	97"-102" Wide, 100" Long	$329.10 F
1-BS372BKA	(BS372-BKA)	Black	97"-102" Wide, 100" Long	$329.10 F
1-BS372BLA	(BS372-BLA)	Blue	97"-102" Wide, 100" Long	$329.10 F
1-BS372GNA	(BS372-GNA)	Green	97"-102" Wide, 100" Long	$329.10 F
1-BS372GYA	(BS372-GYA)	Gray	97"-102" Wide, 100" Long	$329.10 F
1-BS372MRA	(BS372-MRA)	Mtn. Rock	97"-102" Wide, 100" Long	$329.10 F
1-BS372NA	(BS372-NA)	Navy	97"-102" Wide, 100" Long	$329.10 F
1-BS372RDA	(BS372-RDA)	Red	97"-102" Wide, 100" Long	$329.10 F
1-BS372WA	(BS372-WA)	White	97"-102" Wide, 100" Long	$329.10 F
1-BS372YEL	(BS372-YEL)	Yellow	97"-102" Wide, 100" Long	$329.10 F
1-BS370BGA	(BS370-BGA)	Burgundy	Buggy Style Top, 93" Long	$299.00 F
1-BS370BKA	(BS370-BKA)	Black	Buggy Style Top, 93" Long	$299.00 F
1-BS370BLA	(BS370-BLA)	Blue	Buggy Style Top, 93" Long	$299.00 F
1-BS370GNA	(BS370-GNA)	Green	Buggy Style Top, 93" Long	$299.00 F
1-BS370GYA	(BS370-GYA)	Gray	Buggy Style Top, 93" Long	$299.00 F
1-BS370MRA	(BS370-MRA)	Mtn. Rock	Buggy Style Top, 93" Long	$299.00 F
1-BS370NA	(BS370-NA)	Navy	Buggy Style Top, 93" Long	$299.00 F
1-BS370RDA	(BS370-RDA)	Red	Buggy Style Top, 93" Long	$299.00 F
1-BS370WA	(BS370-WA)	White	Buggy Style Top, 93" Long	$299.00 F

©2014 Donovan Marine, Inc.

Boater Sports Bimini Top Boots - 4 Bow Square Frame

- 4 Bow square frame.

Order No.	Mfg. No. / Description		Color	Price
1-BS10446BGA	(BS10446-BGA)	97" - 102"	Burgundy	$73.00 H
1-BS10446BKA	(BS10446-BKA)	97" - 102"	Black	$73.00 H
1-BS10446BLA	(BS10446-BLA)	97" - 102"	Blue	$73.00 H
1-BS10446BUR	(BS10446-BUR)	97" - 102"	Red	$73.00 H
1-BS10446GNA	(BS10446-GNA)	97" - 102"	Green	$73.00 H
1-BS10446GYA	(BS10446-GYA)	97" - 102"	Gray	$73.00 H
1-BS10446MRA	(BS10446-MRA)	97" - 102"	Mtn Rock	$73.00 H
1-BS10446NA	(BS10446-NA)	97" - 102"	Navy	$73.00 H
1-BS10446WA	(BS10446-WA)	97" - 102"	White	$73.00 H

- Made from 12 oz. Acrylic-Coated Polyester.
- This heavy duty material is weather, UV and fade resistant.
- Designed to fit Boater Sports frames: NOT UNIVERSAL!

Marpac Sun-DURA® Bimini Tops - UPSable



- 100% Solution Dyed Polyester means Sun-DURA colors are part of the polyester fiber itself, rather than the dye adhering only to the surface of the fibers.
- 7 oz. marine grade polyester that offers superior resistance to harmful UV rays, fading, mildew, tearing and overall wear-and-tear.
- Unique finish provides exceptional water repellency while maintaining breathability for the health of the boat.
- Complete top kit, UPSable.
- Doubled-walled main bow for added strength.
- 7/8" heavy-wall anodized aluminum tubing.
- Fittings made from non-corrosive, high-density nylon.
- Heavy duty nickel plated brass snap hooks and eye straps.
- Stainless steel adjuster buckles and assembly fasteners.
- Canvas binding is 100% marine-grade acrylic.
- Matching boot included with heavy duty marine grade zipper that won't corrode.
- Weather resistant anti-wick thread used throughout canvas construction.
- Professional stitching, no raw edges.
- All tops are 3 bow - 54" tall x 6' long.
- Made in USA.
- 7 Year warranty.

Order No.	Mfg. No. / Description	Price
5-7900	67"-72" Width, Black	$304.98 G
5-7903	67"-72" Width, Blue	$304.98 G
5-7905	67"-72" Width, Burgundy	$304.98 G
5-7908	67"-72" Width, Green	$304.98 G
5-7911	73"-78" Width, Black	$307.98 G
5-7914	73"-78" Width, Blue	$307.98 G
5-7923	79"-84" Width, Black	$328.98 G
5-7926	79"-84" Width, Blue	$328.98 G
5-7931	79"-84" Width, Green	$328.98 G
5-7934	85"-90" Width, Black	$349.98 G
5-7937	85"-90" Width, Blue	$349.98 G
5-7946	91"-96" Width, Black	$368.98 G
5-7949	91"-96" Width, Blue	$368.98 G

Marpac Bimini Top Frames for Sun-DURA® Bimini Tops



- 3 Bow round tube frames.
- High grade black nylon fittings with stainless steel assembly fasteners.
- 7/8" heavy wall anodized round aluminum tubing.
- Double-walled main bow on all tops for added strength and durability.
- Heavy nickel-plated brass snap hooks.
- All mounting hardware included, universal mounts are standard on every frame.
- Center bow adjustment straps for adjusting crown.
- Instructions for easy installation.

Order No.	Mfg. No. / Description	Price
5-8051	Height 36", Long 6', Width 61"-66"	$161.98 R
5-8052	Height 36", Long 6', Width 67"-72"	$161.98 R
5-8053	Height 36", Long 6', Width 73"-78"	$164.98 R
5-8054	Height 36", Long 6', Width 79"-84"	$175.98 R
5-8055	Height 36", Long 6', Width 85"-90"	$187.98 R
5-8056	Height 36", Long 6', Width 91"-96"	$194.98 R
5-8061	Height 46", Long 6', Width 61"-66"	$161.98 R
5-8062	Height 46", Long 6', Width 67"-72"	$161.98 R
5-8063	Height 46", Long 6', Width 73"-78"	$164.98 R
5-8064	Height 46", Long 6', Width 79"-84"	$175.98 R
5-8065	Height 46", Long 6', Width 85"-90"	$187.98 R
5-8066	Height 46", Long 6', Width 91"-96"	$194.98 R

Order No.	Mfg. No. / Description	Price
5-8070	Height 54", Long 8', Width 73"-78"	$216.98 R
5-8071	Height 54", Long 8', Width 79"-84"	$219.98 R
5-8072	Height 54", Long 8', Width 85"-90"	$228.98 R
5-8073	Height 54", Long 8', Width 91"-96"	$228.98 R
5-8074	Height 54", Long 8', Width 97"-102"	$244.98 R
5-8080	Height 54", Long 6', Width 67"-72"	$167.98 R
5-8082	Height 54", Long 6', Width 73"-78"	$168.98 R
5-8084	Height 54", Long 6', Width 79"-84"	$180.98 R
5-8086	Height 54", Long 6', Width 85"-90"	$191.98 R
5-8088	Height 54", Long 6', Width 91"-96"	$194.98 R

Marpac Sun-DURA® Bimini Top Canvas Only

- 100% Solution Dyed Polyester means Sun-DURA colors are part of the polyester fiber itself, rather than the dye adhering only to the surface of the fibers.
- 7 oz. marine grade polyester that offers superior resistance to harmful UV rays, fading, mildew, tearing and overall wear-and-tear.
- Unique finish provides exceptional water repellency while maintaining breathability.
- Weather resistant anti-wick thread used throughout canvas construction.
- Professional stitching, no raw edges.
- Order frames separately, does not include storage boot.
- Made in USA.
- 7 year warranty.



Order No.	Mfg. No. / Description		Price
5-8090	Width 67"-72"	Black	$155.98 R
5-8092	Width 67"-72"	Blue	$155.98 R
5-8094	Width 67"-72"	Burgundy	$155.98 R
5-8096	Width 67"-72"	Green	$155.98 R
5-8098	Width 73"-78"	Black	$156.98 R
5-8100	Width 73"-78"	Blue	$156.98 R
5-8106	Width 79"-84"	Black	$167.98 R
5-8108	Width 79"-84"	Blue	$167.98 R
5-8112	Width 79"-84"	Green	$167.98 R
5-8114	Width 85"-90"	Black	$178.98 R
5-8116	Width 85"-90"	Blue	$178.98 R
5-8122	Width 91"-96"	Black	$196.98 R
5-8124	Width 91"-96"	Blue	$196.98 R

Marpac Square Tube Pontoon Tops

- Designed for pontoon boats.
- The tough, rigid 1" square satin-finish tube compliments the rails on the pontoon boat.
- All 4-bow square tube bimini tops come with an attached rear brace kit with quick release pins, high grade domestic nylon fittings and matching zippered storage boot.
- Frames are ready to assemble.
- UPSable.
- Frames Only.



Order No.	Mfg. No. / Description	Price
5-8129	Height 48", Long 8', Fits Deck Width 96" or 102"	$254.98 R
5-8128	Height 54", Long 8', Fits Deck Width 96" or 102"	$234.98 R

- 3 and 4-bow storage boots are ideal for protecting and securing the canvas when the bimini top is not deployed.
- 100% Solution Dyed Polyester means Sun-DURA colors are part of the polyester fiber itself, rather than the dye adhering only to the surface of the fibers.
- 7 oz. marine grade polyester that offers superior resistance to harmful UV rays, fading, mildew, tearing and overall wear-and-tear.
- Extremely water repellent.
- Made in USA.
- Heavy duty marine grade zipper that won't corrode.
- Boot Only.

Order No.	Mfg. No. / Description	Price
5-8200	Black, Top Width 67"-72"	$28.98 R
5-8203	Blue, Top Width 67"-72"	$28.98 R
5-8221	Black, Top Width 73"-78"	$28.98 R
5-8215	Blue, Top Width 73"-78"	$28.98 R
5-8224	Black, Top Width 79"-84"	$28.98 R
5-8227	Blue, Top Width 79"-84"	$28.98 R
5-8236	Black, Top Width 85"-90"	$28.98 R
5-8239	Blue, Top Width 85"-90"	$28.98 R
5-8248	Black, Top Width 91"-96"	$28.98 R
5-8251	Blue, Top Width 91"-96"	$28.98 R



- Weatherproof vinyl 14 oz. with charcoal denim backing.
- Waterproof, all-weather finish.
- Resistant to dirt, grease and mildew.
- Excellent sun blockage.
- Easy to handle, fold and store.
- Made in USA.
- 5 year warranty.
- Canvas Only (Does Not Include Boot).

Order No.	Mfg. No. / Description	Price
5-8131	White, Fits Deck Width 96" or 102"	$181.98 R

- 100% Solution Dyed Marine Acrylic 9.25 oz.
- Highly UV and mildew resistant.
- Excellent resistance to fading and rot.
- Extremely water repellent.
- Excellent sun blockage.
- Endorsed by the American Cancer Society and the Skin Cancer Foundation.
- Made in USA.
- 7 year warranty.
- Canvas and Boot Only.

Order No.	Mfg. No. / Description	Price
5-8143	Sunbrella Blue, Fits Deck Width 96" or 102"	$302.98 R
5-8155	Sunbrella Burgundy, Fits Deck Width 96" or 102"	$302.98 R
5-8167	Sunbrella Teal, Fits Deck Width 96" or 102"	$302.98 R
5-8179	Sunbrella Green, Fits Deck Width 96" or 102"	$302.98 R
5-8181	Sunbrella Gray, Fits Deck Width 96" or 102"	$302.98 R
5-8193	Sunbrella Red, Fits Deck Width 96" or 102"	$302.98 R

Pontoon Bimini Tops with Boot - 56" Height



- Constructed of 7 oz. polyurethane coated polyester fabric. Water repellent, UV and mildew resistant.
- 54" tall frame is made from bright anodized aluminum square tubing.
- Frame includes non-corrosive, high density black nylon fittings. Boot included.
- **Must Order Top & Frame.**

Order No.	Description		Price
828155	Width 96" - 96"	Burgundy	$269.98 F
828179	Width 96" - 96"	Hunter Green	$269.98 F

©2014 Donovan Marine, Inc.

Tough Guy Ultima Full Frame Bimini Tops

Special Handling May Apply



- 7 oz. Urethane Coated Polyester Fabric top.
- Non-corrosive, high density black nylon fittings.
- Heavy duty thick wall 7/8" bright anodized aluminum tubing.
- Sewn in Bow Sleeve helps eliminate “parachuting” effect.
- Both horizontal and vertical hardware included.
- Adjustable polypropylene tie down straps with heavy duty snaps and metal adjusters.
- All Tops are 3 Bow - 54" Tall x 6' Long.
- Boot included.
- Not UPSable.

Order No.	Description		Price
5-2210	Width 60" - 66"	Blue	$329.98 F
5-2360	Width 67" - 72"	Teal	$334.98 F
5-2370	Width 73" - 78"	Black	$339.98 F
5-2390	Width 73" - 78"	Blue	$376.98 G
5-2430	Width 73" - 78"	Navy	$339.98 F
5-2460	Width 73" - 78"	Teal	$339.98 F
5-2060	Width 73" - 78"	White	$339.98 F
5-2490	Width 79" - 84"	Cranberry	$359.98 F
5-2520	Width 79" - 84"	Navy	$359.98 F
5-2550	Width 79" - 84"	Teal	$359.98 F
5-2560	Width 85" - 90"	Black	$427.98 G
5-2640	Width 85" - 90"	Teal	$379.98 F
5-2670	Width 91" - 96"	Cranberry	$389.98 F
5-2700	Width 91" - 96"	Navy	$389.98 F
5-2730	Width 91" - 96"	Teal	$389.98 F
5-2770	Width 97" - 103"	Gray	$419.98 F
5-2790	Width 97" - 103"	Navy	$419.98 F
5-2800	Width 97" - 103"	Red	$419.98 F

Marpac Vinyl Full Frame Bimini Tops



Special Handling May Apply

- 14 oz. Marine Vinyl Fabric top.
- Non-corrosive, high density black nylon fittings.
- Heavy duty thick wall 7/8" bright anodized aluminum tubing.
- Sewn in Bow Sleeve helps eliminate “parachuting" effect .
- Both horizontal and vertical hardware included.
- Adjustable polypropylene tie down straps with heavy duty snaps and metal adjusters.
- Not UPSable.
- 3 Bow - 54" Height - 6' Length.

Order No.	Description		Price
5-2010	Width 54" - 60"	White Vinyl	$318.98 G
5-2030	Width 60" - 66"	White Vinyl	$322.98 G
5-2050	Width 67" - 72"	White Vinyl	$325.98 G
5-2070	Width 73" - 78"	White Vinyl	$328.98 G
5-2090	Width 79" - 84"	White Vinyl	$345.98 G
5-2110	Width 85" - 90"	White Vinyl	$368.98 G
5-2130	Width 91" - 96"	White Vinyl	$373.98 G
5-2140	Width 97" - 103"	White Vinyl	$404.98 G

- 3 Bow - 60" Height - 6' Length.

Order No.	Description		Price
5-2150	Width 73" - 78"	White Vinyl	$309.98 F
5-2160	Width 79" - 84"	White Vinyl	$355.98 F
5-2170	Width 85" - 90"	White Vinyl	$330.98 F

Tough Guy Hot Shot Full Frame Bimini Tops



Special Handling May Apply

- Constructed of 6.25 oz. coated polyester.
- Completely synthetic, so mildew cannot attack it.
- UV inhibitors added.
- Sewn in bow sleeve helps eliminate “parachuting" effect.
- Non-corrosive, high density black nylon fittings.
- Adjustable polypropylene tie down straps with heavy duty snaps and metal adjusters.
- Plated, die cast strap eyes.
- Heavy duty thick wall 7/8" bright anodized aluminum tubing.
- Both horizontal and vertical hardware included.
- Boot sold separately.
- Not UPSable.

Order No.	Description		Price
7-8170	Width 73" - 78"	Blue	$297.98 G
7-8171	Width 73" - 78"	Gray	$297.98 G
7-8172	Width 73" - 78"	Navy	$297.98 G
7-8178	Width 79" - 84"	Gray	$327.98 G
7-8186	Width 85" - 90"	Gray	$344.98 G
7-8187	Width 85" - 90"	Navy	$344.98 G
7-8188	Width 85" - 90"	White	$344.98 G

Tough Guy Hot Shot Knockdown Bimini Tops




Black


Burgundy


Green


Blue

- Frame Only - 3 Bow - 42" Height.

Order No.	Description	Price
7-8087	Width 85" - 90"	$179.98 G

- The same great features as our full frame biminis, but these Knockdown units are sold with the frame and fabric top separately.
- Storage boots not included.
- Top Fabric Only - 3 Bow - 42" Height.

Order No.	Description		Price
7-8131	Width 67" - 72"	Black	$134.98 G
7-8135	Width 67" - 72"	Burgundy	$134.98 G
7-8137	Width 67" - 72"	Green	$134.98 G
7-8140	Width 73" - 78"	Black	$138.98 G
7-8144	Width 73" - 78"	Burgundy	$138.98 G
7-8146	Width 73" - 78"	Green	$138.98 G
7-8152	Width 79" - 84"	Burgundy	$145.98 G
7-8154	Width 79" - 84"	Green	$145.98 G
7-8158	Width 85" - 90"	Blue	$152.98 G
7-8160	Width 85" - 90"	Burgundy	$152.98 G
7-8162	Width 85" - 90"	Green	$152.98 G

Tough Guy Hot Shot Knockdown Bimini Tops



- The same great features as our full frame biminis, but these Knockdown units are sold with the frame and fabric top separately or available as a kit. (Storage boots not included).
- Top and Frame Kits - 3 Bow - 54" Height - 6' Length.

Order No.	Description		Price
7-7920	Width 73" - 78"	Green	$303.98 G
7-7929	Width 79" - 84"	Burgundy	$315.98 G
7-7940	Width 85" - 90"	Burgundy	$333.98 G
7-7943	Width 85" - 90"	Green	$333.98 G
7-7952	Width 91" - 96"	Burgundy	$356.98 G
7-7955	Width 91" - 96"	Green	$356.98 G

- Frame Only - 3 Bow - 54" Height.

Order No.	Description	Price
7-8080	Width 67" - 72"	$170.98 G
7-8082	Width 73" - 78"	$170.98 G
7-8084	Width 79" - 84"	$181.98 G
7-8086	Width 85" - 90"	$192.98 G
7-8088	Width 91" - 96"	$202.98 G

- Top Fabric Only - 3 Bow, 6' Length.

Order No.	Description		Price
7-8090	Width 67" - 72"	Black	$144.98 G
7-8092	Width 67" - 72"	Blue	$144.98 G
7-8094	Width 67" - 72"	Burgundy	$144.98 G
7-8096	Width 67" - 72"	Green	$144.98 G
7-8098	Width 73" - 78"	Black	$148.98 G
7-8100	Width 73" - 78"	Blue	$148.98 G
7-8102	Width 73" - 78"	Burgundy	$148.98 G
7-8104	Width 73" - 78"	Green	$148.98 G
7-8106	Width 79" - 84"	Black	$155.98 G
7-8108	Width 79" - 84"	Blue	$155.98 G
7-8110	Width 79" - 84"	Burgundy	$155.98 G
7-8112	Width 79" - 84"	Green	$155.98 G
7-8114	Width 85" - 90"	Black	$163.98 G
7-8116	Width 85" - 90"	Blue	$163.98 G
7-8118	Width 85" - 90"	Burgundy	$163.98 G
7-8120	Width 85" - 90"	Green	$163.98 G
7-8122	Width 91" - 96"	Black	$174.98 G
7-8124	Width 91" - 96"	Blue	$174.98 G
7-8126	Width 91" - 96"	Burgundy	$174.98 G
7-8128	Width 91" - 96"	Green	$174.98 G

Tough Guy Bimini Top Boots



- Keeps your bimini top neatly stored away when not in use.
- Boots feature one separating zipper for easy on/easy off.
- Made from the same great fabric as our knockdown style bimini tops.

Order No.	Description		Price
7-8200	Width 67" - 72"	Black	$47.98 F
7-8203	Width 67" - 72"	Blue	$47.98 F
7-8206	Width 67" - 72"	Burgundy	$47.98 F
7-8209	Width 67" - 72"	Green	$47.98 F
7-8212	Width 73" - 78"	Green	$47.98 F
7-8218	Width 73" - 78"	Burgundy	$47.98 F
7-8221	Width 73" - 78"	Black	$47.98 F
7-8224	Width 79" - 84"	Black	$47.98 F
7-8227	Width 79" - 84"	Blue	$47.98 F
7-8230	Width 79" - 84"	Burgundy	$47.98 F
7-8233	Width 79" - 84"	Green	$47.98 F
7-8239	Width 85" - 90"	Blue	$47.98 F
7-8245	Width 85" - 90"	Green	$47.98 F
7-8248	Width 91" - 96"	Black	$47.98 F
7-8254	Width 91" - 96"	Burgundy	$47.98 F
7-8257	Width 91" - 96"	Green	$47.98 F

©2014 Donovan Marine, Inc.

TACO Neptune T-Top with Black Canvas Top





- Assembles and installs without costly welding innovative clamp design assembles without drilling.
- Rugged design and marine tested for durability.
- Adjustable to fit most consoles up to 41".
- Accessory Ready T-top allows for versatile interchangeable accessorizing and adjustment.
- Comes standard with TACO's patented Outrigger Ready plates for easy installation of TACO's Grand Slam 270 Outrigger Mounts.
- Packs flat for easy shipping and storage.

Order No.	Mfg. No. / Description	Price
443990	(T34-1002BSA-1)	$2,573.98 E

TACO Neptune Tele-Shade



- Combines the "walkaround" benefits of a Neptune T-top with the lightweight adjustability of a Bimini Top.
- Add shade without obstructing deck and gunnels.
- Mounts to center console for full "walkaround" access.
- Telescopes from 4-1/2' to 7' for use with low-profile consoles & boat storage.
- Unique clamp-on assembly offers do-it-yourself installation with minimum tools required.
- Stainless steel locking buttons & pull pins for easy & secure height adjustments.
- Adjust to fit consoles up to 46" W x 48" H.

Order No.	Mfg. No. / Description	Price
443992	(T34-2002VEL-1)	$824.98 E

Taylor Made AnchorShade™



- This unique designed 7 x 7 square umbrella can be used on almost any vessel from a small fishing boat to the large high performance boats.
- AnchorShade II is designed to be used when anchored or at idle speed on a calm day.
- AnchorShade II is perfect for relaxing on the water, at dockside, or just lounging on the beach.
- Adjustable pole locks in place up to 8. Lightweight, mildew fade resistant UV-treated nylon top which blocks out 85% - 90% of harmful rays.
- Pole and frame constructed of tempered steel, which is phosphate-dipped and powder-coated to prevent rusting.
- Adjustable straps with non-corrosive hardware provide mounting flexibility for nearly all applications.
- Comes complete with its own heavy duty carrying case with shoulder strap.

Order No.	Mfg. No. / Description	Price
723568	(22030) White	$214.98 G
723571	(22031) Blue	$214.98 G


Taylor Made T-Top Bow Shade



- A quick and easy way to gain additional shaded area on a center console boat with a T-top installed.
- Shade is available in sizes to accommodate boats up to 102" width and extends out to 7 ft. of coverage.
- Constructed from Hot Shot marine grade polyester fabric, the top is strong yet light weight.
- It is secured to the T-top and bow rails with adjustable straps with quick release buckles for simple and fast installation.
- Shade folds down to compact size for ease of storage.

Order No.	Mfg. No. / Description	Price
255420	(12004OB) 6' Long x 90" Wide, Pacific Blue	$151.98 G
255425	(12004OG) 6' Long x 90" Wide, Gray	$151.98 G
255430	(12005OB) 7' Long x 102" Wide, Pacific Blue	$180.98 G
255435	(12005OG) 7' Long x 102" Wide, Gray	$180.98 G

Kwik T-BAG™ T-Top and Bimini Top Storage Packs



- Specially designed storage packs that easily mount to most T-Tops, bimini tops and pontoon tops.
- Designed to hold Type II life jackets and other gear.
- Main compartment has a nylon zipper for easy access to life jackets.
- Also features 2 zippered compartments and 3 mesh pockets to organize gear or other items.
- Stretch cord zig-zagging across bottom for towels, rain gear, etc.
- Made of 600- denier UV and water-resistant polyester pack cloth.

Order No.	Mfg. No. / Description	Price
587658	(PFD-T4) Holds 4 Jackets, 25" W x 20" D x 6" H	$53.98 G
587660	(PFD-T6) Holds 6 Jackets, 37" W x 20" D x 6" H	$60.98 G

Marpac Bimini Top Upgrade Kit



- Heavy duty cast type 316 marine grade stainless steel.
- Kit includes: (6) 7/8" Top Caps, (4) 7/8" Top Slides and (2) Standard Deck Hinges.

Order No.	Mfg. No. / Description	Price
7-0201	Bimini Top Upgrade Kit	$94.98 G

Marpac Hinge Rail Mount Jaw Slide



- Simplifies bimini top installation.
- Allows bimini top installation on existing hand rails.
- For use with 7/8" or 1" tubing.

Order No.	Description	Price
7-0196	Hinge Rail Mount Jaw Slide	$18.98 G

Marpac Inside Eye End Tubes - Black Nylon



Order No.	Mfg. No. / Description	Price
7-0325	3/4"	$2.22 F
7-0327	7/8"	$3.02 F

Boater Sports External Eye End



- Stainless steel construction for exceptional durability.

Order No.	Mfg. No. / Description	Price
1-55112	(55112) 7/8", Sold Each	$10.99 H

Marpac Deck Hinges



7-0999



7-0199



7-0198



7-0303



7-0302

Order No.	Description	Price
7-0198	Angled Base, Stainless Steel	$8.98 G
7-0199	90° Base, Stainless Steel	$8.98 G
7-0999	Removable Pin, Stainless Steel	$12.98 G
7-0294	Large Angled, Black Nylon	$5.98 G
7-0302	Slide Lock, Black Nylon	$8.98 G
7-0303	Large Pattern, Black Nylon	$3.98 G
7-0347	Small Pattern, Black Nylon	$3.98 F

Marpac Top Slides with Set Screw



7-0333



7-0197

- Stainless steel bolt and set screw.

Order No.	Description	Price
7-0197	Tube 7/8", Stainless Steel	$9.98 G
7-0997	Tube 1", Stainless Steel	$9.98 G
7-0335	Tube 3/4", Black Nylon	$3.98 F
7-0333	Tube 7/8", Black Nylon	$4.01 F

Boater Sports Hinged Jaw Slide



- High-impact nylon construction for exceptional durability.
- Black with stainless steel hinge.

Order No.	Mfg. No. / Description	Price
1-55093	(55093) 7/8", Sold Per Pair	$7.90 H

Marpac Top Caps with Set Screw



7-0329



7-0194

Order No.	Description	Price
7-0194	Tube 7/8", Stainless Steel	$6.98 G
7-0195	Tube 1", Stainless Steel	$8.98 G
7-0331	Tube 3/4", Black Nylon	$3.02 F
7-0329	Tube 7/8", Black Nylon	$3.01 F

Boater Sports Deck Hinges



- Stainless steel construction for exceptional durability.
- Stainless steel screw.
- Sold each.

Order No.	Mfg. No. / Description	Price
1-55116	(55116) 7/8", 90° Deck Hinge, Sold Each	$12.99 H
1-55118	(55118) 7/8", Deck Hinge, Sold Each	$13.45 H

Marpac Side Mount Deck Hinges



7-0344



7-1000



7-0200

Order No.	Description	Price
7-0200	2 Hole, Stainless Steel	$8.98 G
7-1000	4 Hole, Stainless Steel	$15.98 G
7-0344	2 Hole, Black Nylon	$3.30 F

©2014 Donovan Marine, Inc.

Marpac Swivel Deck Hinge - Stainless Steel



- Swivel allows deck hinge to be mounted on almost any angle.
- Use with any bimini top cap fitting.

Order No.	Mfg. No. / Description	Price
7-0203	Swivel Deck Hinge	$19.98 G

Accon QR Bimini Top Post Hinge

Accon Marine



- Mounts sideways to accommodate bimini tops for direct post mounting.
- Surface mount, no cut-outs are necessary.
- Easily remove or install top without having to keep track of screws and pins.
- The hinge snaps into base and stays attached to bimini when separated.

Order No.	Mfg. No. / Description	Price
Special Order	(401-7/8) For 7/8" Tubing	Price on Request
Special Order	(401-1) For 1" Tubing	Price on Request

Accon Stainless Steel Quick Release Bimini Hinges

Accon Marine


405


404


403


402

- Easily remove or install top without having to keep track of screws & pins.
- The hinge snaps into base and stays attached to bimini when separated.
- Adapter can be inserted four different ways, 90° apart.

Order No.	Mfg. No. / Description	Price
Special Order	(402) Flush Mount	Price on Request
Special Order	(403) Rail Mount, Fits 7/8" & 1" Rail	Price on Request
Special Order	(404) Round Surface Mount	Price on Request
Special Order	(405) Flush Mount, 1-1/4" Square Tubing	Price on Request

Accon Quick Release Bimini Top Hinge

Accon Marine



- Surface mount quick release 316 stainless steel hinge.
- No cut-outs necessary.
- Easily remove or install top without having to keep track of screws and pins.
- The hinge snaps into the base and stays attached to the bimini top when separated.
- Installs with two #10 screws (not included).

Order No.	Mfg. No. / Description	Price
Special Order	(401)	Price on Request
Special Order	(401-P) Post Only	Price on Request
Special Order	(401-320) For Plastic Eye Ends	Price on Request
Special Order	(401-P-320) Post Only f/Plastic Eye Ends	Price on Request

Accon Stainless Steel Quick Release Bimini Hinges - Tube Adapters

Accon Marine


413


412


411

- Quick release 316 stainless steel hinge.
- Tube adapter fits 1" bimini tops, flag poles or straight handrails.
- Easily remove or instal top without having to keep track of screws and pins.
- The hinge snaps into base and stays attached to bimini when separated.

Order No.	Mfg. No. / Description	Price
Special Order	(411) Surface Mount, Round	Price on Request
Special Order	(412) Flush Mount with Oval Base	Price on Request
Special Order	(413) Flush Mount	Price on Request

Accon Black Plastic Quick Release Bimini Hinges

Accon Marine


410

Order No.	Mfg. No. / Description	Price
Special Order	(406) Flush Mount	Price on Request
Special Order	(406-B) Flush Mount, Base Only	Price on Request
Special Order	(407) Rail Mount	Price on Request
Special Order	(407-B) Rail Mount, Base Only	Price on Request
Special Order	(408) Round Surface Mount	Price on Request
Special Order	(408-B) Round Surface Mount, Base Only	Price on Request
Special Order	(410) Surface Mount	Price on Request
Special Order	(410-B) Surface Mount, Base Only	Price on Request
Special Order	(406-P) Post Only	Price on Request

Accon Quick Release Bimini Hinges

Accon Marine


410-W


410-C


410-AL

Order No.	Mfg. No. / Description	Price
Special Order	(410-C) Chrome Plated	POR
Special Order	(410-P-C) Chrome Plated, Post Only	POR
Special Order	(410-C-B) Chrome Plated, Base Only	POR
Special Order	(410-W) White Powder Coated Alum.	POR
Special Order	(410-P-W) White Powder Coated Alum., Post Only	POR
Special Order	(410-W-B) White Powder Coated Alum., Base Only	POR
Special Order	(410-B) Black Powder Coated Alum.	POR
Special Order	(410-P-B) Black Powder Coated Alum., Post Only	POR
Special Order	(410-B-B) Black Powder Coated Alum., Base Only	POR
Special Order	(410-AL) Satin Finish Aluminum	POR
Special Order	(410-P-AL) Satin Finish Alum., Post Only	POR
Special Order	(410-AL-B) Satin Finish Alum., Base Only	POR

Accon Low Profile Quick Release Bimini Hinge for Straps

Accon Marine



- Low profile quick release 316 stainless steel hinge.
- Surface mount, no cut-outs necessary.
- Holds down bimini straps.
- Easily remove or instal top without having to keep track of screws and pins.
- The hinge snaps into base and stays attached to bimini when separated.

Order No.	Mfg. No. / Description	Price
Special Order	(415)	Price on Request
Special Order	(415-P) Post Only	Price on Request

Accon Square Eye Ends

Accon Marine



- 316 stainless steel hinge.
- For use with square tubing.

Order No.	Mfg. No. / Description	Price
Special Order	(430) 1-1/4"	Price on Request
Special Order	(431) 1-1/8"	Price on Request
Special Order	(432) 1"	Price on Request

Marpac Bimini Top Snaps



- Stainless steel.
- 1" snap.
- Sold per pair.

Order No.	Description	Price
7-0277	Bimini Top Snap	$4.95 G

Marpac Bimini Top Straps



- 1" x 96" nylon web, adjustable.
- Fits most bimini tops.
- Sold per pair.

Order No.	Description	Price
7-0029	Black	$8.98 G
7-0030	White	$8.98 G

Boater Sports Bimini Top Replacement Straps



- High impact 1" nylon webbing with adjustable buckle and stainless steel spring snap hook.
- Length 96".
- Sold each.

Order No.	Mfg. No. / Description	Price
1-55130	(55130) Black	$4.99 H
1-55132	(55132) White	$5.15 H

Accon Shims for Quick Release Bimini Hinges

Accon Marine



- Allows our quick release bimini hinges to be mounted to 1.9, 2.36, and 3.0 diameter tubing.
- Made in silver to match both stainless steel and aluminum.
- Made of UV-resistant plastic.
- For use with part numbers: 401,401-7/8, 401-1 and 415.

Order No.	Mfg. No. / Description	Price
Special Order	(401-S-1.9) Diameter 1.9"	Price on Request
Special Order	(401-S-2.36) Diameter 2.36"	Price on Request
Special Order	(401-S-3.0) Diameter 3"	Price on Request

Accon 10° Shim for Quick Release Bimini Hinges

Accon Marine



- Allows our quick release bimini hinges to be mounted at a 10° angle.
- Use two shims for a 20° angle.
- Made of UV-resistant plastic.
- For use with part numbers: 401,401-7/8, 401-1 and 415.
- Neutral or Black.

Order No.	Mfg. No. / Description	Price
Special Order	(401-3S)	Call for Price

Accon Gasket for Quick Release Bimini Hinges

Accon Marine



- Creates a more finished look when mounting quick release bimini hinges.
- For use with part numbers: 401,401-7/8, 401-1 and 415.
- Separates dissimilar metals.
- White or Black.

Order No.	Mfg. No. / Description	Price
Special Order	(401-G)	Call for Price

Marpac Head Screws



- 1/4" x 20 thread.
- Molded black nylon head.
- Stainless steel threads.
- Sold 2 per card.

Order No.	Description	Price
7-0298	Head Screws	$2.98 F

Boater Sports Head Screws



- High-impact nylon handle with stainless steel screw.
- 1/4".
- Sold per pair.

Order No.	Mfg. No. / Description	Price
1-55142	(55142) Black	$3.45 H

©2014 Donovan Marine, Inc.

Marpac Eye Straps



- Type 304 forged stainless steel.
- Fasten with #10 oval head screws.
- 1-3/4" long with 3/8" eye.
- Sold 4 per card.

Order No.	Description	Price
7-0502	Eye Straps	$6.98 G

Boater Sports Eye Straps



- Stainless steel.
- 5/16" diameter, 1-7/8" long and pre-drilled.
- One pair.

Order No.	Description	Price
1-54110	(54110)	$5.85 H

Marpac Eye Straps



- 1-3/4" long with 3/8" eye.
- Fasten with #10 oval head screws.
- Sold 4 per card.

Order No.	Description	Price
7-0342	Eye Straps	$2.10 F

Perko Fig. 1242 Eye Straps



- Chrome plated zinc.
- Overall length 1-7/8", eye ID 5/16".
- Uses #8 fasteners.
- Sold 5 per display pack. Standard pack 10.

Order No.	Description	Price
533681	(1242 DPO CHR)	$11.98 R

Perko Fig. 562 Eye Straps



- 300 series stainless steel.
- Length overall 1-5/8", eye ID 1/4".
- Sold five pieces per display card.
- Standard pack 10.

Order No.	Description	Price
540864	(562 DPO STS)	$13.98 R

Taylor Made Top-Lock Snaps



- Stainless steel.
- Sold 4 per skin packed card.

Order No.	Description	Price
722353	(1348) Trim: 3/4"	$9.98 G
722365	(1344) Trim: 7/8"	$10.98 G

Marpac End Stops



- Black nylon.
- Sold 2 per card.

Order No.	Description	Price
7-0349	End Stops	$3.15 F

Taylor Made Replacement End Caps



- Chrome plated zamak.
- For slide track assemblies.
- Sold per pair.

Order No.	Description	Price
722416	(5962)	$9.98 G

Boater Sports Clevis Pin with Spring



- Stainless steel.
- 1-1/4" clevis pin.

Order No.	Description	Price
1-55124	(55124) No Lanyard	$8.80 H
1-55190	(55190) With Lanyard	$6.69 H

Boater Sports Pull Pin



- Stainless steel.
- 1-1/4" clevis pin with lanyard.

Order No.	Description	Price
1-55126	(55126)	$5.15 H

White Cap Quick Release Pin

- 304 Stainless steel.
- 1" x 1/4" with retractable pin.
- Display packaged.

Order No.	Description	Price
2011568	(S-1020C)	$12.98 H

White Cap Stainless Steel Pull Pins

- Stainless steel cable and fittings, ring and tapping screw.
- Display packaged.

Order No.	Description	Price
2011569	(S-1021C) Pin with Flip Tab and Spring, 1/4" x 1"	$21.98 H
2011570	(S-1025C) Pin with Retractable Ball, 5/16" x 2-7/16"	$4.10 G

Carver Bimini Top Slide Track Kits



- Designed to allow a retracted top to slide into storage position, this is an alternative to a brace kit.
- Hardware is included to accommodate standard mounting or side mounting.
- Each aluminum slide track kit includes 2 slide tracks, 2 sliding deck hinges with combined slide locks, 2 side-mount sliding deck hinges, 2 slide locks, 4 end caps and all necessary screws for mounting.
- One pair per package.

Order No.	Mfg. No. / Description	Price
820743	(62004) 18" Slide Track Kit	$27.98 G
820767	(62001) 36" Slide Track Kit	$36.98 G
820779	(62002) 48" Slide Track Kit	$41.98 G
820781	(62003) 60" Slide Track Kit	$45.98 G

Attwood Bimini Top Slider Kit



- Provide slide adjustment for convenient use and storage of bimini top frames.
- Kit contains two high impact nylon jaw slides with stainless steel nuts and bolts, two 36" aluminum slider tracks, and four end caps.

Order No.	Mfg. No. / Description	Price
2350022	(10605-5)	$33.98 H

Boater Sports Bimini Top Support Tube Kits



- Rear brace assembly to easily fold back out of the way and securely brace when not in use.
- Includes two 7/8" x 40" tubes that can be cut to length, two deck mounts and hardware.

Order No.	Mfg. No. / Description	Price
1-56204	(56204) Round Tube Support Kit, 7/8"	$33.50 H
1-56205	(56205) Square Tube Support Kit, 1"	$39.99 H

Carver Bimini Top Brace Kit



- Bimini Top braces are specially designed to hold your top up and out of the way when top is folded and not in use.
- Each package contains 2 braces which can be cut down to the desired length, 2 deck hinges, 2 unique hinged jaw slides that make installation easy by eliminating the need to disassemble the main bow.
- All screws necessary for mounting are included.
- 1 pair per package.

Order No.	Mfg. No. / Description	Price
820731	(62010) 48" Brace Kit, Aluminum	$59.98 G

Taylor Made Adjustable Bimini Top Support Pole



- Keep your bimini top off the gunwale with a pair of bimini support poles.
- Use these poles to replace your rear straps and keep your top "up and out of the way".
- Two jaw slides (7/8") are included.
- 28" to 48".

Order No.	Description	Price
721969	(11995)	$83.98 G

©2014 Donovan Marine, Inc.

Marpac Stainless Steel Drain Plugs


7-0564


7-0563



- Stainless steel handle.
- Neoprene plug.

Order No.	Description	Price
7-0563	Snap Drain Plug, 1"	$3.98 F
7-0563S	Snap Drain Plug (Bucket of 50), 1"	$134.98 F
7-0565	Snap Drain Plug, 1-1/4"	$5.98 F
7-0564	Twist Drain Plug, 1"	$3.08 F
7-0564S	Twist Drain Plug (Bucket of 50), 1"	$128.98 F
7-0567	Twist Drain Plug, 1-1/4"	$5.98 F

Boater Sports Twist Type Drain Plugs



- Twist type drain plugs are for 1" transom tubes.
- Offers the smooth, tight seal.

Order No.	Mfg. No. / Description			Price
1-54804	(54804) 1" Stainless Steel	Packaged	Each	$4.25 H
1-54822	(54822) 1" Aluminum	Packaged	2 Per Pack	$4.20 H
1-54810	(54810) 1" Aluminum	36 Ct. Display Box		$64.95 H
1-54844	(54844) 1" Brass	Packaged	Each	$3.49 H
1-54845	(54845) 1" Brass	48 Ct. Display Box		$169.95 H

Moeller Snap-Tite Drain Plugs





- Corrosion resistant construction.
- Designed only for mounting from the inside of the transom.
- These plugs utilize a smooth operating mechanism to provide the tightest possible seal.

Order No.	Mfg. No. / Description	Price
486945	(29000-50) 1" Brass, Bucket of 48	$177.98 F
486969	(29070-10) 1" Aluminum	$4.49 R
486957	(29055-001) 1-1/4" Brass, Sold Bulk	$5.98 R

Boater Sports Deck and Baitwell Plugs



- Livewell/baitwell drain plugs snap shut to form a secure seal.
- Brass construction.
- Most common sizes.

Order No.	Mfg. No. / Description		Price
1-54847	(54847) 7/16"	Sold Per Pair	$4.95 H
1-54850	(54850) 1/2"	Sold Per Pair	$4.95 H
1-54854	(54854) 5/8"	Sold Per Pair	$5.79 H
1-54858	(54858) 11/16"	Sold Per Pair	$5.99 H
1-54856	(54856) 3/4"	Sold Per Pair	$5.95 H
1-54860	(54860) 7/8"	Sold Per Pair	$5.95 H

Marpac Brass Drain Plugs


7-0094


7-0093



- Brass handle.
- Neoprene plug.
- Size 1".

Order No.	Description	Price
7-0093	Snap Drain Plug	$3.25 G
7-0093S	Snap Drain Plug (Bucket of 50)	$112.98 G
7-0094	Twist Drain Plug	$2.95 G
7-0094S	Twist Drain Plug (Bucket of 50)	$112.98 G

Boater Sports Snap Type Drain Plugs



- Snap type drain plugs are for 1" transom tubes.
- Fast working cam offer the smooth, tight seal.

Order No.	Mfg. No. / Description			Price
1-54802	(54802) 1" Stainless Steel	Packaged	Each	$4.69 H
1-54824	(54824) 1" Aluminum	Packaged	2 Per Pack	$4.45 H
1-54805	(54805) 1" Aluminum	36 Ct. Display Box		$69.99 R
1-54842	(54842) 1" Brass	Packaged	Each	$3.99 H
1-54840	(54840) 1" Brass	48 Ct. Display Box		$169.95 H
1-54843	(54843) 1-1/4" Brass	Packaged	Each	$5.95 H

Moeller Turn-Tite Drain Plugs





- Corrosion resistant construction.
- Designed only for mounting from the inside of the transom.
- Fully adjustable, simply turn the T-handle clockwise to create a waterproof construction.

Order No.	Mfg. No. / Description	Price
486868	(20899-50) 1" Brass, Bucket of 48	$153.98 F
486820	(20883-001) 1-1/4" Brass, Sold Bulk	$4.01 H

Marpac Baitwell Plugs



- Brass handle.
- Neoprene plug.
- Sold 2 per card.

Order No.	Description	Price
7-0570	Size 1/2"	$4.01 F
7-0571	Size 5/8"	$4.25 G
7-0572	Size 3/4"	$4.14 F

Moeller Turn-Tite Baitwell Plugs



- For use in livewells or baitwells.
- The neoprene body; stainless steel plates and adjustable brass cam snaps to provide a leakproof, nonslip seal.
- Stopper is adjustable.

Order No.	Mfg. No. / Description	Price
487000	(51001-10) 3/8" ID	$3.47 F
487024	(51003-10) 1/2" ID	$3.77 F
487048	(51005-10) 5/8" ID	$4.06 F
487062	(51007-10) 3/4" ID	$4.30 F
487086	(51009-10) 7/8" ID	$4.22 F

Marpac Drain Plug



- Screw type construction of nylon featuring O-ring for positive seal.
- 1" diameter mounting hole.

Order No.	Description	Price
7-0368	Black	$5.98 G

T-H Marine Drain Plugs



- Screw-in plug - stays with boat.
- Tough nylon material - O-ring seal.
- Flange 1-1/2" x 2" - fits 1" hole.

Order No.	Mfg. No. / Description	Price
641389	(DP-1) Black	$6.98 G
641391	(DP-2) White	$7.98 H

Moeller Transom Drain Tube with Plug



- Fits flush to boat transom or exterior.
- The plug has a screw-driver slot and rubber O-ring to seal watertight.
- Tough natural nylon will not rot, bend or mildew.
- Fits 1-1/8" ID opening, flange OD 2-3/16".

Order No.	Mfg. No. / Description	Price
486755	(20303-10) Drain Tube	$6.98 R

Perko Fig. 714 Garboard Drain Plugs



- Cast bronze flange with brass plug.
- 1/2" IPT thread.
- Flange OD 2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
541753	(714 DP1 PLB)	$30.98 R
467628	1/2" Brass Plug, Each in Bulk	$3.98 F

Moeller Air Chamber Plug



- Designed to seal 5/8" openings in baitwells, livewells or dry boxes.
- Oil and grease resistant.
- Just pop in the black neoprene rubber plug for a secure, tight fit.

Order No.	Mfg. No. / Description	Price
487199	(90801-10) Air Chamber Plug	$4.06 R

Marpac Automatic Drain Plug



- Automatically drains water when boat is moving.
- Provides seal when boat is stopped.
- For use with standard 1" drain installations when transoms are up to 2-1/4" thick.

Order No.	Description	Price
7-0612	Drain Plug Complete	$10.98 G
7-0613	Spare Flapper Valve	$5.98 G

Boater Sports Drain Plug Assembly



- This screw-type drain plug is constructed of black nylon and features an O-ring for positive sealing.
- Fine threads maintain sealing under heavy vibrations.
- Mounts in a 1" dia. hole. Ideal for transoms, livewells, water tanks or even ice chests.
- Fast and easy to install.
- Display packaged.

Order No.	Mfg. No. / Description	Price
1-54838	(54838)	$3.45 H

Marpac Garboard Drain Plugs



7-0322



7-0352

- 1/2" IPS pressure.
- Flange OD 2".
- Depth 5/8".

Order No.	Description	Price
7-0322	Cast Bronze	$7.98 G
7-0352	Stainless Steel	$17.98 G
7-0824	Spare Cast Bronze Plug, 2 Per Card	$6.98 H
7-0353	Spare Stainless Steel Plug, 1 Per Card	$11.98 G

Boater Sports Garboard Drain Plug - Brass



- Garboard drain plug provides bilge drainage when hauling out.
- The nut plug is easily removed with a wrench or pliers.
- Machined, tapered pipe threads ensure water tight fit.
- All garboard drain plugs are 1/2" NPT male threads.

Order No.	Mfg. No. / Description	Price
1-54835	(54835) Easy Screw Replacement Plug	$5.99 H
1-54836	(54836) Replacement Plug, Packaged	$3.99 H
1-54837	(54837) Drain and Plug, Packaged	$9.99 H

©2014 Donovan Marine, Inc.

Marpac Flanged Drain Tube



- Brass.
- Dimensions: 1" x 3".

Order No.	Description	Price
7-0569	Drain Tube	$4.98 G

Moeller Drain Tubes



- Special alloy brass or aluminum tube flanged 90° one end, use as a drain for transom, motorwell, livewell or baitwell.
- Use brass tubes with brass plugs and aluminum tubes with aluminum plugs.
- Wall thickness .035".
- Measurements are OD x length.

Order No.	Mfg. No. / Description	Price
486870	(21002-188D) 1" x 1-7/8", Aluminum	$2.49 R
486882	(21003-188D) 1" x 1-7/8", Brass	$4.06 R
486894	(21003-300D) 1" x 3", Brass	$6.98 R
486907	(21253-300D) 1-1/4" x 3", Brass	$7.98 R

Moeller Motorwell Drain Tube



- Durable plastic drain for motorwell, livewell or baitwell.
- Will not rot, bend or mildew.
- Concentric rings snap-lock in place for a tight leakproof seal.

Order No.	Mfg. No. / Description	Price
486743	(20300-10) 3/4" to 2-1/2"	$3.98 R

Marpac Cockpit Scupper Valve



- Molded white plastic with soft black flapper valve.
- Uses #6 fasteners.
- Note: Fasteners not included.

Order No.	Description	Price
7-0351	OD 2-7/8"	$4.98 G

T-H Marine Flush Mount Scupper Assembly



- Designed to mount over a drain tube or to mount directly to a 1-1/2" thru hull with four screws.
- Features the same "curl proof" flapper as the recessed scuppers above.
- Will retrofit other manufacturers' rubber flapper assemblies.
- White frame/black flapper.

Order No.	Mfg. No. / Description	Price
641868	(SA-2B-DP) Scupper	$8.98 H

Boater Sports Brass Drain Tubes



- For use with 1" drain plugs.
- .032" wall thickness.

Order No.	Mfg. No. / Description		Price
1-54830	(54830) 1-7/8"	Packaged	$3.95 H
1-54832	(54832) 3"	Packaged	$4.89 H

Moeller Flanging Tool



- For 1" drain tubes.
- Sold each per box.

Order No.	Mfg. No. / Description	Price
486781	(20700-00) Flanging Tool	$41.98 F

Marpac Flow-Max Ball Scupper



- Easy twist-off design makes clearing debris a snap.
- Stainless steel security pin provided for added safety.
- Larger exit hole allows 70% more water drainage than its nearest competitor.
- Multiple mounting holes make retrofits quick and easy - no filling holes or re-drilling.
- Neutral buoyancy ball insures ball won't float up and break seal.
- Meets all ABYC standards.

Order No.	Description	Price
7-0232	Flow-Max Ball Scupper	$11.98 G

T-H Marine Flow-Max Ball Scupper



- New easy twist-off design makes clearing debris a snap.
- Stainless steel security pin provided for added safety.
- Larger exit hole allows 70% more water drainage than its nearest competitor.
- Multiple mounting holes make retrofits quick and easy - no filling holes or re-drilling.
- Neutral buoyancy ball insures ball won't float up and break seal.
- Meets all ABYC standards.

Order No.	Mfg. No. / Description	Price
247748	(FMS-1-0) Clear	$16.98 I

Perko Fig. 365 Scupper Valve Assembly



- For surface mount applications.
- Molded white plastic with soft black flapper valve.
- Does not include thru-hull and mounting hardware.
- Uses #6 fasteners.

Order No.	Mfg. No. / Description	Price
237126	(0365 DP) OD 2-7/8"	$14.98 F

T-H Marine Inline Scuppers



- Prevents backwash.
- Chemical resistant materials.
- Thermo-plastic flapper.
- Black.

Order No.	Mfg. No. / Description	Price
247736	(ILS-750) Fits 3/4" Hose	$17.98 H
247737	(ILS-1200) Fits 1-1/8" Hose	$17.98 H
247746	(ILS-1500) Fits 1-1/2" Hose	$17.98 H

T-H Marine Flapper Scupper Repair Kit



- Repairs most scuppers.
- Kit contains: 2 each 1/2", 1" and 2" black flappers, keepers and fasteners.

Order No.	Mfg. No. / Description	Price
641867	(FSRK-1-DP)	$13.98 H

Perko Fig. 285 Cockpit Scupper



- Molded white plastic.
- Flush mount.
- For use when discharge is above the waterline.
- Insert prevents passage of large objects without restricting waterflow.
- Maximum hull thickness 1-3/4" for 1-1/2" hose.

Order No.	Mfg. No. / Description	Price
536777	(285 DP) OD 2-3/4"	$20.98 R

T-H Marine Floor Drains



- Designed with a flange molded into part to fit into hole so that cut or raw edges are hidden by floor drain.
- Molded black plastic.
- Mounts with 4 screws.

Order No.	Mfg. No. / Description	Price
641452	(FD-2) 4-1/4" OD, Diameter Hole 2-1/2"	$4.49 H
641464	(FD-4) 5-5/8" OD, Diameter Hole 4"	$5.98 H

T-H Marine Recessed Threaded Thru-Hull Scupper



- Molded of a flexible thermo-plastic that is totally impervious to the effects of sun and chemicals.
- Will not curl up, rot or lose their sealing ability.
- This thru-hull type scupper is barbed to fit 1-1/2" ID hose.
- The threaded portion accommodates hulls up to 3-1/2" thick.
- Mounting nut is included.

Order No.	Mfg. No. / Description	Price
641832	(RFTH-2) White	$17.98 H

T-H Marine Duckbill Scupper



- Tough thermoplastic flapper.
- Seals tight under water pressure.

Order No.	Mfg. No. / Description	Price
641860	(DBS-2-DP) White	$10.98 H

Perko Fig. 323 Thru-Hull Scupper



- Molded white plastic.
- Soft black flapper valve.
- Maximum hull thickness 2-1/8" for 1-1/2" hose.
- Complete with nut and mounting hardware.

Order No.	Mfg. No. / Description	Price
537360	(323 DP) OD 2-7/8"	$42.98 R

T-H Marine Cockpit Scupper Drain



- This injection molded part is high strength and UV stabilized.
- Fits 1-1/2" drain hoses.
- The check ball contained inside the cockpit scupper drain is molded and then ground smooth and round to provide better sealing against reverse water flow that occurs when backing boat.
- The overall diameter of the mounting flange is 3-9/16".
- The cockpit scupper drain requires a 2-1/2" diameter hole for installation and mounts with four number 8 screws (not furnished).
- Top of cockpit scupper drain is removable for cleaning.

Order No.	Mfg. No. / Description	Price
641862	(CSD-2-DP) 45° White	$56.98 H

©2014 Donovan Marine, Inc.

MPI Products Series 141 PVC Bilge VAC Hose



- Smooth clear vinyl tube reinforced with black PVC helix rod.
- Excellent flexibility for use as bilge pump discharge.
- Tube produced from FDA approved compound suitable for potable water.
- Sold in 50' box.

Order No.	Mfg. No. / Description	Price
770722	(141-0346) 3/4", Clamp (276053) 7/16" - 1-1/16"	$158.98 M
770734	(141-1186) 1-1/8", Clamp (276079) 1/2" - 1-1/2"	$175.98 M
770746	(141-1126) 1-1/2", Clamp (276091) 1" - 2"	$237.98 M

- Sold in 10' length.

Order No.	Mfg. No. / Description	Price
770714	(141-0343) 3/4", Clamp (276053) 7/16" - 1-1/16"	$32.98 M
770730	(141-1183) 1-1/8", Clamp (276079) 1/2" - 1-1/2"	$34.98 M


MPI Products Series 120 Standard Bilge Hose



- Heavy corrugated polyethylene hose provides outstanding flexibility.
- Resists oily bilge acids and sea water.
- Ideal for electric and manual bilge pumps and livewell aerators.
- Custom molded cuffs provide proper clamping.
- 50' box.

Order No.	Mfg. No. / Description	Price
770633	(120-0586) 5/8", Black	$51.98 M
770657	(120-0346) 3/4", Black	$61.98 M
770671	(120-1186) 1-1/8", Black	$73.98 M
770683	(120-1146) 1-1/4", Black	$8.98 M
770708	(120-1126) 1-1/2", Black	$124.98 M
770645	(120-0341) 3/4" x 6', Black, Sold Per Bag	$9.98 M
770544	(121-0346) 3/4", White	$62.98 M
770556	(121-1186) 1-1/8", White	$73.98 M
770568	(121-1126) 1-1/2", White	$124.98 M

MPI Products Series 164 White Reinforced PVC Tubing



- Blue tracer.
- Heavy duty, clear vinyl cover with white inner tube reinforced for wash down, pressurized water systems, hot/cold water vent and drain lines.
- Non-toxic, odorless, tasteless and FDA approved compound.
- Operating temperature range -20° F to +150° F.
- Burst pressure 250 PSI.
- 50' box.

Order No.	Mfg. No. / Description	Price
770998	(164-0126) 1/2", Clamp (276053) 7/16" - 1-1/16"	$87.98 M
771003	(164-0586) 5/8", Clamp (276053) 7/16" - 1-1/16"	$103.98 M
771015	(164-0346) 3/4", Clamp (276053) 7/16" - 1-1/16"	$129.98 M

Marpac RNF Bilgeflex Hose



- Smooth, clear PVC tube with black PVC helical rod.
- Excellent flexibility and bend radius.
- For use in bilge pump discharge, livewell circulation and scupper.

Order No.	Description	Price
7-2770	3/4" x 10'	$30.98 G
7-2775	1-1/8" x 10'	$42.98 G

Marpac Bilgeflex Hose



- Heavy corrugated polyethylene construction with custom molded cuff every foot for easy installation and clamping.
- Excellent flexibility.
- Ideal for electric and manual bilge pumps and livewell aerators.
- Resists heat, cold, sea water, ozone and oily bilge acids.
- Quality tested for marine applications.

Order No.	Description	Price
7-2755	3/4" x 10'	$22.98 G
7-2760	1-1/8" x 10'	$30.98 G

MPI Products Series 148 White Sanitation Hose



- VAC rating is 28.
- White.
- 50' box.
- Smooth wall extra heavy duty vinyl hose for all sanitation system connections and other critical applications.
- FDA approved and low water absorption compounds provide excellent odor resistance.

Order No.	Mfg. No. / Description	Price
771407	(148-0346) 3/4"	$198.98 M
771419	(148-1006) 1"	$228.98 M
771421	(148-1186) 1-1/8"	$249.98 M
771433	(148-1146) 1-1/4"	$321.98 M
771445	(148-1126) 1-1/2"	$347.98 M

Marpac RNF PVC Hose



- Heavy duty clear vinyl non-toxic reinforced tubing with red and blue tracers.
- Made with FDA approved compound.
- Excellent for use with potable water.

Order No.	Mfg. No. / Description	Price
7-2785	1/2" x 15'	$25.98 G
7-2790	3/4" x 15'	$37.98 G


MPI Products Series 150 Clear PVC Tubing



- Single extrusion, non-toxic vinyl hose produced with FDA approved compound.
- Recommended for non-pressurized cool water uses such as freshwater, sink, shower, livewell and refrigerator drain lines.
- Clear.
- 50' box.

Order No.	Mfg. No. / Description	Price
770760	(150-0386) 3/8", Clamp (276015) 7/32" - 5/8"	$68.98 M
770772	(150-0126) 1/2", Clamp (276053) 7/16" - 1-1/16"	$99.98 M
770784	(150-0586) 5/8", Clamp (276053) 7/16" - 1-1/16"	$107.98 M
770796	(150-0346) 3/4", Clamp (276053) 7/16" - 1-1/16"	$133.98 M
770809	(150-1006) 1", Clamp (276067) 7/16" - 1-1/4"	$195.98 M

MPI Products Series 149 Heavy Duty PVC Livewell - Black



- Helical PVC reinforcement provides excellent flexibility and bend radius for heavy duty livewell and bilge pump applications.
- Smooth outer surface allows easy clamping.
- Not suitable for pressurized water systems.
- 50' box.

Order No.	Mfg. No. / Description	Price
771560	(149-0346) 3/4", Clamp (276053) 7/16" - 1-1/16"	$162.98 M
771562	(149-1186) 1-1/8", Clamp (276079) 1/2" - 1-1/2"	$218.98 M
771563	(149-1126) 1-1/2", Clamp (276091) 1" - 2"	$320.98 M

AWAB 316 Stainless Steel Hose Clamps



- Features rolled band edges to eliminate the risk of damage to the hose.
- The extra wide threads of the band are stamped, leaving the unperforated band smooth on the inside.
- Sold 10 per box.

Order No.	Mfg. No. / Description	Price
275506	(316017) SAE Size: 4, 7/16" - 11/16"	$35.98 I
275518	(316020) SAE Size: 6, 1/2" - 13/16"	$37.98 I
275520	(316024) SAE Size: 8, 5/8" - 15/16"	$37.98 I
275532	(316028) SAE Size: 10, 3/4" - 1-1/8"	$39.98 I
275544	(316032) SAE Size: 12, 7/8" - 1-1/4"	$39.98 I
275556	(316038) SAE Size: 16, 1-1/16" - 1-1/2"	$41.98 I
275568	(316044) SAE Size: 20, 1-1/4" - 1-3/4"	$42.98 I
275570	(316050) SAE Size: 24, 1-1/2" - 2"	$45.98 I
275582	(316057) SAE Size: 28, 1-1/4" - 2-1/4"	$46.98 I
275594	(316064) SAE Size: 32, 1-1/2" - 2-1/2"	$52.98 I
275619	(316076) SAE Size: 40, 2" - 3"	$57.98 I
275621	(316083) SAE Size: 44, 2-1/4" - 3-1/4"	$60.98 I
275645	(316095) SAE Size: 52, 2-3/4" - 3-3/4"	$61.98 I
275671	(316114) SAE Size: 64, 3-1/2" - 4-1/2"	$73.98 I
275695	(316140) SAE Size: 80, 4" - 5-1/2"	$81.98 I
275710	(316165) SAE Size: 96, 5" - 6-1/2"	$95.98 I

MPI Products Series 162 Clear Reinforced PVC Tubing



- Red and blue tracer.
- Heavy duty, all clear vinyl tubing reinforced for hot or cold pressurized water systems and many other uses.
- Non-toxic, odorless, tasteless and FDA approved compound.
- Operating temperature range -20° F to +150° F.
- Burst pressure 250 PSI.
- 50' box.

Order No.	Mfg. No. / Description	Price
770900	(162-0386) 3/8", Clamp (276015) 7/32" - 5/8"	$69.98 M
770912	(162-0126) 1/2", Clamp (276053) 7/16" - 1-1/16"	$102.98 M
770924	(162-0586) 5/8", Clamp (276053) 7/16" - 1-1/16"	$118.98 M
770936	(162-0346) 3/4", Clamp (276053) 7/16" - 1-1/16"	$138.98 M
770948	(162-1006) 1", Clamp (276067) 7/16" - 1-1/4"	$235.98 M
770950	(162-1186) 1-1/8", Clamp (276079) 1/2" - 1-1/2"	$276.98 M
770962	(162-1146) 1-1/4", Clamp (276089) 3/4" - 1-3/4"	$364.98 M
770974	(162-1126) 1-1/2", Clamp (276091) 1" - 2"	$530.98 M

MPI Products Series 132 Heavy Duty Water/Heater Hose



- Heavy wall EPDM tube and cover reinforced with high strength polyester yarn.
- Used mainly for engine water, water heater, bait box, air conditioner circulation and icebox, sink and shower drain lines.
- Resistance to mild chemicals, heat, cold, ozone and sea water.
- 2 ply.
- Operating temperature range -40° F to +210° F.
- Burst pressure 600#.
- 50' box.

Order No.	Mfg. No. / Description	Price
770607	(132-0126) 1/2", Clamp (276053) 7/16" - 1-1/16"	$150.98 M
770619	(132-0586) 5/8", Clamp (276053) 7/16" - 1-1/16"	$169.98 M
770621	(132-0346) 3/4", Clamp (276053) 7/16" - 1-1/16"	$215.98 M

AWAB Hose Clamps





- Mini clamps have an unbroken band with rounded edges.
- The band is folded over to retain the nut, and together with the small screw-thread pitch, gives the clamp self locking characteristics.
- Sold 20 per box.

Order No.	Mfg. No. / Description	Price
275811	(306008) 19/64" - 21/64"	$42.98 I
275823	(306010) 3/8" - 7/16"	$43.98 I
275859	(306013) 31/64" - 35/64"	$44.98 I
275861	(306014) 17/32" - 19/32"	$45.98 I
275873	(306015) 37/64" - 5/8"	$45.98 I
275885	(306016) 19/32" - 43/64"	$47.98 I
275897	(306017) 5/8" - 45/64"	$47.98 I
275900	(125010) Flexible Clamp Driver	$24.98 I

AWAB Wall Merchandiser

- Includes (10) of the following hose clamps: 316017, 316020, 316024, 316028, 316032, 316038, 316044, 316050, 316057, 316064 and (1) 125010 flexible clamp driver.

Order No.	Mfg. No. / Description	Price
275924	(A316101) Wall Merchandiser	$497.98 I

©2014 Donovan Marine, Inc.

T-H Marine Oetiker® Stepless Ear Hose Clamps



- Stainless steel.
- Forms a full 360° circle.
- Tongue and groove interlock design.
- Fast clamping with tool.
- No leaks around hose.

Order No.	Mfg. No. / Description		Price
247805	(16700001) 5.8 - 7.0 mm	100 Per Bag	$59.98 H
247808	(16700004) 7.8 - 9.5 mm	100 Per Bag	$59.98 H
247810	(16700006) 8.8 - 10.5 mm (3/8")	100 Per Bag	$59.98 H
247818	(16700011) 11.0 - 13.8 mm (1/2")	100 Per Bag	$59.98 H
247821	(16700017) 14.5 - 17.0 mm (5/8")	100 Per Bag	$64.98 H
247829	(16700024) 17.8 - 21.00 mm (3/4")	100 Per Bag	$70.98 H
247836	(16700031) 22.4 - 25.6 mm (1")	100 Per Bag	$74.98 H
247842	(16705000) 34.9 - 38.1 mm (1-1/2")	100 Per Bag	$83.98 H

T-H Marine Oetiker® Hose Clamps



- All stainless steel.
- Clamp on - quick and secure.
- Full size range for all marine hose.

Order No.	Mfg. No. / Description		Price
6400064	(15500007) Nominal Size: 9/16"	100 Per Bag	$45.98 H
6400065	(15500008) Nominal Size: 5/8"	100 Per Bag	$40.98 F
6400066	(15500009) Nominal Size: 11/16"	100 Per Bag	$48.98 H

Order No.	Mfg. No. / Description	Price
6400061	(14100083) Side Jaw Pincers	$74.98 F
6400062	(14100118) Standard Jaw Pincers	$63.98 H

2 Ear Crimp Hose Clamp



- Nominal size 3/4".
- Width .335".
- Closed/open .669/.787".

Order No.	Mfg. No. / Description	Price
645768	(4E589) Stainless Steel	$3.98 B

T-H Marine Oetiker® Stepless Ear Clamp Kit



- Great for shop or rigging work.
- Contains 10 each of the most needed sizes.
- Complete with connection tool.

Order No.	Mfg. No. / Description	Price
642656	(18500000)	$169.98 H


Ideal Hose Clamp Display



- Yellow, plastic counter top display with 120 stainless steel hose clamps.
- The display includes: (20) 62602, (10) 62606, (10) 6310, (20) 6312, (30) 6320, (20) 6328 and (10) 6336 clamps.

Order No.	Mfg. No. / Description	Price
276003	(6304MS) Hose Clamp Display	$395.98 M


Marpac Hose Clamp Display



- This display includes the following:
  (10) 276015 - Clamp Diameter 1/4" - 5/8"
  (10) 276041 - Clamp Diameter 7/16" - 1"
  (10) 276053 - Clamp Diameter 1/2" - 1-1/16"
  (10) 276079 - Clamp Diameter 3/4" - 1-1/2"
  (10) 276089 - Clamp Diameter 3/4" - 1-3/4"
  (10) 276091 - Clamp Diameter 1" - 2"
  (10) 276128 - Clamp Diameter 7/8" - 2-3/4"
  (10) 276142 - Clamp Diameter 1-5/8" - 3-1/2"


Order No.	Mfg. No. / Description	Price
7-3005	Clamp Display	$135.98 G

Ideal Stainless Steel Hose Clamps



- Micro-Gear, 62M Series.
- 300 series marine grade stainless steel screw, band and housing.
- These clamps are tiny, tough and precision engineered for use in such small hose applications as emission control, fuel lines and vacuum hoses.
- 5/16" band and low profile housing makes them easy to install in confined areas.
- Hy-Gear, 63 Series.
- High nickel alloy stainless steel meets the demands of inground and marine use.
- A marine grade clamp for boating applications and other corrosive environments.
- Band and housing: 9/16" wide.
- 300 grade stainless steel. Sold box of 10.

Conversion Table - Pipe Size OD (Outside Diameter) to Hose Size ID (Inside Diameter)

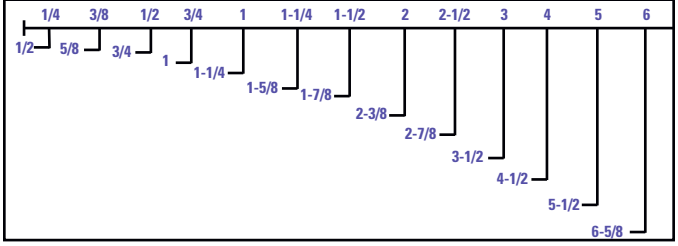

DMI #	MFG #	Clamp Diameter	Fits Hose ID	Price
276015	(6260402)	1/4" - 5/8"	1/8" to 5/16"	$0.98 I
276027	(62606MS)	5/16" - 7/8"	1/4" to 7/16"	$0.98 I
276039	(6306MS)	3/8" - 7/8"	5/16" to 3/8"	$1.40 I
276041	(6308MS)	7/16" - 1"	5/16" to 1/2"	$1.40 I
276053	(6310MS)	1/2" - 1-1/16"	3/8" to 5/8"	$1.40 I
276067	(6312MS)	1/2" - 1-1/4"	3/8" to 3/4"	$1.43 I
276079	(6316MS)	3/4" - 1-1/2"	3/4" to 7/8"	$1.43 I
276089	(6320MS)	3/4" - 1-3/4"	3/4" to 1-1/8"	$1.48 I
276091	(6324MS)	1" - 2"	7/8" to 1-3/8"	$1.48 I
276104	(6328MS)	1-5/16" - 2-1/4"	1-1/4" to 1-5/8"	$1.48 I
276116	(6332MS)	1-9/16" - 2-1/2"	1-1/2" to 1-7/8"	$1.48 I
276128	(6336MS)	7/8" - 2-3/4"	3/4" to 2"	$1.52 I
276130	(6340MS)	1-1/8" - 3"	1" to 2-1/4"	$1.64 I
276134	(6344MS)	1-5/16" - 3-1/4"	1-1/4" to 2-1/2"	$1.89 I
276142	(6348MS)	1-5/8" - 3-1/2"	1-1/2" to 2-3/4"	$1.89 I
276146	(6352MS)	1-7/8" - 3-3/4"	1-3/4" to 3"	$1.98 I
276154	(6356MS)	2-1/8" - 4"	2" to 3"	$1.98 I
276166	(6364MS)	2-5/8" - 4-1/2"	2-1/2" to 3-1/2"	$2.19 I
276178	(6372MS)	3-1/8" - 5"	3" to 5"	$2.29 I
276180	(6380MS)	3-5/8" - 5-1/2"	3-1/2" to 4-1/2"	$2.50 I
276192	(6388MS)	4-1/4" - 6"	3-1/2" to 5-1/2"	$2.55 I
276205	(6396MS)	4-3/4" - 6-1/2"	4-1/2" to 6"	$2.64 I
276217	(63104MS)	4" - 7"	3-1/2" to 6-1/2"	$2.67 I

Bronze Pipe Reducing Couplings



Order No.	Description	Price
467414	3/8" x 1/4" NPT	$7.98 F
467438	1/2" x 3/8" NPT	$9.98 F
467440	3/4" x 1/2" NPT	$13.98 F
467452	1" x 3/4" NPT	$22.98 F
467464	1-1/4" x 1" NPT	$35.98 F
467476	1-1/2" x 1-1/4" NPT	$46.98 F
467478	2" x 1-1/2" NPT	$66.98 F

Bronze Pipe Locknuts



Order No.	Description	Price
467767	1/4" NPT	$3.98 F
467781	1/2" NPT	$6.98 F
467806	1" NPT	$10.98 F
467807	1-1/4" NPT	$17.98 F
467820	1-1/2" NPT	$21.98 F

Bronze 45° Pipe Elbows



Order No.	Description	Price
467161	1/8" NPT	$5.98 F
467173	1/4" NPT	$7.98 F
467185	3/8" NPT	$7.98 F
467197	1/2" NPT	$6.98 F
467205	3/4" NPT	$15.98 F
467212	1" NPT	$16.98 F
467214	1-1/4" NPT	$25.98 F

Bronze Pipe Caps



Order No.	Description	Price
467705	1/2" NPT	$7.98 F
467717	3/4" NPT	$9.98 F
467729	1" NPT	$15.98 F
467734	1-1/2" NPT	$29.98 F
467738	2" NPT	$48.98 F

Bronze 90° Pipe Elbows



Order No.	Description	Price
467084	1/8" NPT	$7.98 F
467096	1/4" NPT	$7.98 F
467109	3/8" NPT	$7.98 F
467111	1/2" NPT	$10.98 F
467123	3/4" NPT	$15.98 F
467135	1" NPT	$22.98 F
467147	1-1/4" NPT	$34.98 F
467159	1-1/2" NPT	$42.98 F
467160	2" NPT	$68.98 F

Bronze 90° Pipe Street Elbows



Order No.	Description	Price
467250	1/4" NPT	$10.98 F
467262	3/8" NPT	$10.98 F
467274	1/2" NPT	$13.98 F
467286	3/4" NPT	$18.98 F
467298	1" NPT	$27.98 F
467301	1-1/4" NPT	$46.98 F
467313	1-1/2" NPT	$59.98 F
467315	2" NPT	$98.98 F

Bronze Pipe Bushings



Order No.	Description	Price
467488	1/4" x 1/8" NPT	$2.08 F
467490	3/8" x 1/8" NPT	$3.33 F
467515	3/8" x 1/4" NPT	$3.47 F
467527	1/2" x 1/4" NPT	$4.67 F
467539	1/2" x 3/8" NPT	$3.54 F
467540	3/4" x 1/4" NPT	$9.98 F
467541	3/4" x 1/2" NPT	$7.98 F
467542	3/4" x 3/8" NPT	$7.98 F
467560	1" x 1/2" NPT	$11.98 F
467565	1" x 3/4" NPT	$11.98 F
467577	1-1/4" x 3/4" NPT	$19.98 F
467589	1-1/4" x 1" NPT	$19.98 F
467568	1-1/2" x 1" NPT	$25.98 F
467503	1-1/2" x 1-1/4" NPT	$25.98 F
467573	2" x 1-1/4" NPT	$35.98 F
467590	2" x 1-1/2" NPT	$35.98 F

Bronze Pipe Tees



Order No.	Description	Price
467844	1/8" NPT	$10.98 F
467856	1/4" NPT	$10.98 F
467868	3/8" NPT	$10.98 F
467870	1/2" NPT	$11.98 F
467882	3/4" NPT	$18.98 F
467894	1" NPT	$30.98 F
467907	1-1/4" NPT	$42.98 F
467919	1-1/2" NPT	$58.98 F
467921	2" NPT	$95.98 F

Bronze Pipe Unions



Order No.	Description	Price
468024	3/4" NPT	$35.98 F
468036	1" NPT	$47.98 F

Groco Bronze Pipe to Hose Adapters

GROCO



- Curved 90°.

Order No.	Mfg. No. / Description	Price
541323	(PTHC750) Hose 3/4", 4-1/2" L	$12.98 G
541335	(PTHC1000) Hose 1", 4-3/4" L	$18.98 G
541347	(PTHC1125) Hose 1-1/8" x 1-1/4" NPT, 5-1/2" L	$26.98 G
541359	(PTHC1500) Hose 1-1/2", 6" L	$37.98 G

Groco Bronze Pipe to Hose Adapters

GROCO



- NPT to hose.

Order No.	Mfg. No. / Description	Price
371207	(PTH-5062) Pipe NPT: 1/2", Hose ID: 1/2", Length Overall: 2.70"	$6.98 F
542046	(PTH-750) Pipe NPT: 3/4", Hose ID: 3/4", Length Overall: 2.39"	$8.98 G
542058	(PTH-1000) Pipe NPT: 1", Hose ID: 1", Length Overall: 2.48"	$10.98 G
542060	(PTH-1250) Pipe NPT: 1-1/4", Hose ID: 1-1/4", Length Overall: 2.65"	$19.98 G
542072	(PTH-1500) Pipe NPT: 1-1/2", Hose ID: 1-1/2", Length Overall: 3"	$24.98 G
542084	(PTH-2000) Pipe NPT: 2", Hose ID: 2", Length Overall: 3"	$34.98 G

©2014 Donovan Marine, Inc.

Bronze Pipe Nipples



Order No.	Description	Price
466640	1/8" NPT, Close	$5.98 F
466641	1/8" NPT, Length 1-1/2"	$6.98 F
466652	1/8" NPT, Length 2"	$6.98 F
466688	1/4" NPT, Close	$6.98 F
466689	1/4" NPT, Length 1-1/2"	$6.98 F
466690	1/4" NPT, Length 2"	$7.98 F
466693	1/4" NPT, Length 3"	$9.98 F
466727	3/8" NPT, Close	$6.98 F
466739	3/8" NPT, Length 1-1/2"	$6.98 F
466741	3/8" NPT, Length 2"	$7.98 F
466791	1/2" NPT, Close	$7.98 F
466792	1/2" NPT, Length 1-1/2"	$9.98 F
466804	1/2" NPT, Length 2"	$9.98 F
466806	1/2" NPT, Length 3"	$13.98 F
466816	1/2" NPT, Length 4"	$17.98 F
466820	1/2" NPT, Length 5"	$21.98 F
466830	3/4" NPT, Close	$10.98 F
466831	3/4" NPT, Length 1-1/2"	$10.98 F
466842	3/4" NPT, Length 2"	$11.98 F
466854	3/4" NPT, Length 3"	$17.98 F
466866	3/4" NPT, Length 4"	$21.98 F
466880	1" NPT, Close	$15.98 F
466892	1" NPT, Length 2"	$18.98 F
466905	1" NPT, Length 3"	$23.98 F
466917	1" NPT, Length 4"	$31.98 F
466931	1-1/4" NPT, Close	$22.98 F
466936	1-1/4" NPT, Length 2"	$25.98 F
466944	1-1/4" NPT, Length 3"	$22.98 F
466993	1-1/2" NPT, Close	$29.98 F
467008	1-1/2" NPT, Length 2"	$30.98 F
467011	1-1/2" NPT, Length 3"	$42.98 F
467036	1-1/2" NPT, Length 5"	$45.98 F
467042	2" NPT, Close	$42.98 F
467054	2" NPT, Length 5"	$57.98 F

Bronze Pipe Plugs



Order No.	Description	Price
467591	1/8" NPT	$2.35 F
467604	1/4" NPT	$2.28 F
467616	3/8" NPT	$3.56 F
467628	1/2" NPT	$3.98 F
467630	3/4" NPT	$9.98 F
467642	1" NPT	$11.98 F
467654	1-1/4" NPT	$34.98 F
467660	2" NPT	$69.98 F

Bronze Pipe Couplings



Order No.	Description	Price
467325	1/8" NPT	$4.98 F
467337	1/4" NPT	$7.98 F
467349	3/8" NPT	$7.98 F
467351	1/2" NPT	$9.98 F
467363	3/4" NPT	$11.98 F
467375	1" NPT	$18.98 F
467387	1-1/4" NPT	$26.98 F
467389	1-1/2" NPT	$35.98 F
467399	2" NPT	$59.98 F

Groco Full Flow Pipe to Hose Adapters

GROCO

- Cast bronze.
- Enough barb area for double hose clamps.
- Full pipe size flow provides an unrestricted passage through the fitting.
- Generous hex nut cast in for secure tightening.



Straight Hose Barb

Straight Hose Barb

Order No.	Mfg. No. / Description	Price
371219	(FF-750) 3/4" NPT, Hose ID 1"	$12.98 F
371221	(FF-1000) 1" NPT, Hose ID 1-1/4"	$15.98 F
371233	(FF-1250) 1-1/4" NPT, Hose ID 1-1/2"	$26.98 F
371245	(FF-1500) 1-1/2" NPT, Hose ID 1-3/4"	$29.98 F
371257	(FF-2000) 2" NPT, Hose ID 2-1/4"	$55.98 F



90° Hose Barb

90° Hose Barb

Order No.	Mfg. No. / Description	Price
371269	(FFC-750) 3/4" NPT, Hose ID 1"	$23.98 F
371271	(FFC-1000) 1" NPT, Hose ID 1-1/4"	$32.98 F
371283	(FFC-1250) 1-1/4" NPT, Hose ID 1-1/2"	$48.98 F
371295	(FFC-1500) 1-1/2" NPT, Hose ID 1-3/4"	$60.98 F
371308	(FFC-2000) 2" NPT, Hose ID 2-1/4"	$112.98 F

Groco FF - Straight Full Flow Bronze Fittings

GROCO



Order No.	Mfg. No. / Description	Price
	(FF-2500) 2-1/2" NPT, Hose 2-3/4" ID	Call for Price
	(FF-3000) 3" NPT, Hose 3-1/2" ID	Call for Price

Groco PTHC - 90° Standard Flow Bronze Fittings

GROCO



Order No.	Mfg. No. / Description	Price
	(PTHC-2000) 2" NPT, Hose 2" ID	Call for Price
	(PTHC-2500) 2-1/2" NPT, Hose 2-1/2" ID	Call for Price
	(PTHC-3000) 3" NPT, Hose 3" ID	Call for Price

Groco STH Series - Fittings

GROCO



Order No.	Mfg. No. / Description	Price
	(STH-1500-W) Pipe 1-1/2" NPS	Call for Price
	(STH-2000-W) Pipe 2" NPS	Call for Price

Groco FFC - 90° Full Flow Bronze Fittings

GROCO



Order No.	Mfg. No. / Description	Price
	(FFC-2500) 2-1/2" NPT, Hose 2-3/4" ID	Call for Price
	(FFC-3000) 3" NPT, Hose 3-1/2" ID	Call for Price

Groco PTH - Straight Standard Flow Bronze Fittings

GROCO



Order No.	Mfg. No. / Description	Price
	(PTH-2500) 2-1/2" NPT, Hose 2-1/2" ID	Call for Price
	(PTH-3000) 3" NPT, Hose 3" ID	Call for Price

Forespar 90° Elbows



- Molded in high strength glass reinforced "Marelon" for superior corrosion protection.

Order No.	Mfg. No. / Description	Price
354263	(901000) 1/2" IPT, Hose ID 5/8"	$3.97 F
354275	(901001) 3/4" IPT, Hose ID 3/4"	$4.99 F
354287	(901002) 1" IPT, Hose ID 1"	$5.98 F
354299	(901003) 1-1/4" IPT, Hose ID 1-1/4"	$6.98 F
354302	(901004) 1-1/2" IPT, Hose ID 1-1/2"	$8.98 F

Forespar Tailpipes



- Molded in high strength glass reinforced "Marelon" for superior corrosion protection.
- Pipe to assorted hose sizes.

Order No.	Mfg. No. / Description	Price
354427	(910148) 1/4" Thread, Tube ID 3/8"	$3.28 I
354439	(910149) 1/4" Thread, Tube ID 1/2"	$3.28 I
354453	(910154) 3/8" Thread, Tube ID 1/2"	$5.98 I
354465	(910156) 1/2" Thread, Tube ID 1/2"	$5.98 I
354477	(910157) 1/2" Thread, Tube ID 3/4"	$5.98 I
354489	(910158) 3/4" Thread, Tube ID 1/2"	$6.98 I
354491	(910159) 3/4" Thread, Tube ID 3/4"	$6.98 I
354504	(910160) 3/4" Thread, Tube ID 1"	$7.98 I
354516	(910168) 1-1/4" Thread, Tube ID 1-1/2"	$9.98 I

Marpac Stainless Steel Ball Valves



- 316 investment cast stainless steel.
- Bonding screw hole included.
- Tested to 1000 psi WOG.
- NPT threading.

Order No.	Description	Price
7-2240	3/4"	$59.98 G
7-2241	1"	$74.98 G
7-2242	1-1/4"	$119.98 G
7-2243	1-1/2"	$213.98 G
7-2244	2"	$315.98 G

Forespar Ball Valves



- Molded in high strength glass reinforced "Marelon".
- Ideal for controlling water requirements above or below the waterline.
- P.T.F.E. seals are supplied.

Order No.	Mfg. No. / Description	Price
354124	(905100) 1/2" NPT	$39.98 F
354136	(905101) 3/4" NPT	$41.98 F
354148	(905102) 1" NPT	$99.98 F
354150	(905103) 1-1/4" NPT	$105.98 F
354162	(905104) 1-1/2" NPT	$122.98 F

Forespar Tailpipes



- Molded in high strength glass reinforced "Marelon" for superior corrosion protection.
- Perfect choice for joining hose lines to ball valves and seacocks.

Order No.	Mfg. No. / Description	Price
354201	(905006) 1/2" NPT, Hose ID 5/8"	$4.97 F
354213	(905007) 3/4" NPT, Hose ID 3/4"	$4.97 F
354225	(905008) 1" NPT, Hose ID 1"	$6.98 F
354237	(905009) 1-1/4" NPT, Hose ID 1-1/4"	$6.98 F
354249	(905010) 1-1/2" NPT, Hose ID 1-1/2"	$7.98 F

Groco Full-Flow Inline Ball Valves



- Patented selectable handle rotation.
- Handle has square hole to accept standard ratchet, to help reach valves in hard-to-reach locations and ease actuation of difficult to operate valves.
- 400 WOG rated.
- Full flow.
- Stainless steel handle and hardware.
- Chrome plated solid brass ball (not a hollow ball).
- PTFE seats and seals.
- Bonding attachment.
- UL listed for fuel or water.

Order No.	Mfg. No. / Description	Price
313003	(IBV-375) 3/8" NPT	$28.98 I
375231	(IBV-500) 1/2" NPT	$27.98 G
375242	(IBV-750) 3/4" NPT	$34.98 G
375258	(IBV-1000) 1" NPT	$60.98 G
375268	(IBV-1250) 1-1/4" NPT	$80.98 G
375278	(IBV-1500) 1-1/2" NPT	$110.98 G
375281	(IBV-2000) 2" NPT	$181.98 G

Groco Full-Flow Flanged Seacocks



- Patented field reversible handle allows you to select the closed position orientation (clockwise or counterclockwise) that best suits the installation.
- Handle has square hole to accept standard ratchet, to help reach valves in hard-to-reach locations and ease actuation of difficult to operate valves.
- Full flow.
- Triangular base with bolt pattern to match most popular brands makes retrofit easy.
- Stainless steel handle and hardware.
- Chrome plated solid brass ball.
- PTFE seats and seals.
- Bonding attachment on base.
- Drain plugs on both sides.

Order No.	Mfg. No. / Description	Price
312950	(FBV-750) 3/4" NPS	$96.98 I
312962	(FBV-1000) 1" NPS	$142.98 I
312974	(FBV-1250) 1-1/4" NPS	$152.98 I
312986	(FBV-1500) 1-1/2" NPS	$219.98 I
312998	(FBV-2000) 2" NPS	$414.98 I

©2014 Donovan Marine, Inc.

Groco Fuel Valves



- Patented selectable handle rotation.
- Full flow.
- Mount foot included.
- Stainless steel handle and hardware.
- 400 WOG.
- PTFE seats and seals.
- UL Listed for fuel.

Order No.	Mfg. No. / Description	Price
	(FV-250) 1/4" NPT	**Price On Request**
	(FV-375) 3/8" NPT	**Price On Request**
	(FV-500) 1/2" NPT	**Price On Request**
	(FV-750) 3/4" NPT	**Price On Request**

Groco Three-Way Valve - 1-1/2" NPT



- 3-way valve operates logically - the handle points to the direction of flow.
- Center position is "off".
- Handles rotates a full 180°.
- Mount foot included.
- Full flow.
- Stainless steel handle and hardware.
- PTFE seats and seals.
- Ideal for waste systems.
- UL Listed for fuel.

Order No.	Mfg. No. / Description	Price
	(TWV-1500)	**Price On Request**

Brass Gate Valves



Order No.	Description	Price
485498	(940-132) 1/2" NPT	**$15.98** F
485501	(940-133) 3/4" NPT	**$19.98** F
485513	(940-134) 1" NPT	**$27.98** F
485525	(940-135) 1-1/4" NPT	**$48.98** F
485537	(940-136) 1-1/2" NPT	**$61.98** F

Whale Water Systems Non-Return Valve



- The Whale One Way Valves help maintain prime in a manual or electric system and prevent drainback.
- With a white plastic finish the One Way Valve is suitable for flexible hose.

Order No.	Mfg. No. / Description	Price
706160	(FV1227) For 1/2" connections	**$10.98** F

Groco Tank Selector Valve



- For fuel or water.
- Four Positions: Tank-I. Tank-2, Tanks 1 & 2, Off.
- Full 1/2" flow.
- Audible "click" at each handle position.
- For thru panel mounting.

Order No.	Mfg. No. / Description	Price
	(FV-450-X)	**Price On Request**

Groco 6-Port Fuel Valves



- Six-port fuel valves are used where 2 tanks supply a single engine, and a return to each supply tank is required.
- ABYC H33.9.2 states that fuel system valves must have an independent means of support, so in-line valves are not suitable for fuel system applications.
- Has a "L" shaped flow pattern and 180° handle swing.

Order No.	Mfg. No. / Description	Price
	(FV-65038) Main 1/2" NPT, Return 3/8" NPT	**Price On Request**
	(FV-61075) Main 1" NPT, Return 3/4" NPT	**Price On Request**

Swing Check Valves



Order No.	Description	Price
485561	1/2" NPT	**$16.98** F
485573	3/4" NPT	**$18.98** F
485585	1" NPT	**$26.98** F

Whale Water Systems Inline Non-Return Valve



- The Whale Non-Return Valves provide an easy way to maintain prime in a suction or discharge line and prevent drainback.
- They are designed to fit in-line for connections with manual or electric pumps.

Order No.	Mfg. No. / Description	Price
706195	(LV1215) For 1" or 1-1/2" Connections	**$25.98** F
706200	(LV1219) For 3/4" Connections	**$21.98** F

Groco 90° Fuel Valves



- Compact design.
- 90 Degree flow path.
- 1/2" NPT male and female ports.

Order No.	Mfg. No. / Description	Price
	(FV-590) For Fiberglass Tanks	**POR**
	(FV-590-S) For Aluminum or Stainless Steel Tanks	**POR**

Groco CV Series - Check Valves



- CV Series in-line check valve may be used in water or fuel systems to keep pumps primed and to prevent back-flow in pressure systems.
- Unique design reduces flow turbulence and restriction, and improves pump performance.
- Cast bronze construction.
- NPT threaded ports.

Order No.	Mfg. No. / Description	Price
	(CV-50) 1/2" NPT	**Price On Request**
	(CV-75) 3/4" NPT	**Price On Request**
	(CV-100) 1" NPT	**Price On Request**
	(CV-125) 1-1/4" NPT	**Price On Request**
	(CV-150) 1-1/2" NPT	**Price On Request**
	(CV-200) 2" NPT	**Price On Request**

T-H Marine Seacock Arm with Mounting Bracket



Order No.	Mfg. No. / Description	Price
641313	(SEACOCK-18.5)	**$43.98** I

Marpac Thru-Hull Connectors



- Stainless steel.
- Includes stainless steel nut.

Order No.	Description	Price
7-0855	Hose ID 3/4"	$22.98 G
7-0856	Hose ID 1-1/8"	$27.98 G
7-0857	Hose ID 1-1/2"	$39.98 G

Marpac 90° Thru-Hull Connectors



- Molded white plastic.
- Note: These thru-hulls for hose are not recommended for use below the waterline.

Order No.	Description	Price
7-0362	Hose ID 3/4"	$5.98 G
7-0364	Hose ID 1-1/8"	$6.98 G

Marpac Thru-Hull Connectors



- All nylon thru-hull with stainless steel outside cover.
- Note: These thru-hulls for hose are not recommended for use below the waterline.

Order No.	Description	Price
7-0848	Hose ID 3/4"	$7.98 H
7-0850	Hose ID 1-1/8"	$9.98 G
7-0852	Hose ID 1-1/2"	$11.98 G

Groco Thru-Hull Connectors



- Cast bronze.
- Flange is machined to fit hull and grooved to retain bedding compound.
- Neck is threaded to approximately 3/8" from flange.

Order No.	Mfg. No. / Description	Price
256443	(TH500W) Pipe 1/2", Flange OD 1-1/2"	$17.98 E
256455	(TH750W) Pipe 3/4", Flange OD 1-7/8"	$19.98 E
256479	(TH1000W) Pipe 1", Flange OD 2-3/16"	$29.98 F
256493	(TH1250W) Pipe 1-1/4", Flange OD 2-3/4"	$50.98 F
256506	(TH1500W) Pipe 1-1/2", Flange OD 3"	$74.98 F
256518	(TH2000W) Pipe 2", Flange OD 3-5/8"	$91.98 F
256520	(322 010 PLB) Pipe 2-1/2", Flange OD 4-1/2"	$145.98 I
256532	(322 011 PLB) Pipe 3", Flange OD 5"	$263.98 I

Groco Extra Long Thru-Hull Connectors



- Extra long.
- Cast bronze.
- Flange is machined to fit hull and grooved to retain bedding compound.
- Neck is threaded to approximately 3/8" from flange.

Order No.	Mfg. No. / Description	Price
256557	(THXL750W) Pipe 3/4", Flange OD 1-7/8", Max. Hull Thick 5"	$30.98 F
256568	(THXL1000W) Pipe 1", Flange OD 2-1/4", Max. Hull Thick 4-7/8"	$39.98 F
256571	(THXL1250W) Pipe 1-1/4", Flange OD 2-3/4", Max. Hull Thick 4-5/8"	$60.98 F
256583	(THXL1500W) Pipe 1-1/2", Flange OD 3", Max. Hull Thick 4-5/8"	$72.98 F
256595	(THXL2000W) Pipe 2", Flange OD 3-5/8", Max. Hull Thick 4-1/2"	$89.98 F

T-H Marine Thru-Hull - Drain



- 90° Thru-hull fits 1-1/2" hose.
- Doubles as a drain fitting 641399 (ODT-2) Overflow drain tube for livewells.

Order No.	Mfg. No. / Description	Price
642192	(TH-1592)	$11.98 H

T-H Marine Plastic Thru-Hull Connector



- Made of the highest quality virgin material to insure consistent size and extra durability.
- Hose ID 1-1/2", length 3-1/2".
- Maximum hull thickness 1-1/4".
- Flange diameter 2-7/8".


Order No.	Mfg. No. / Description	Price
641414	(TH-1502-DP) White	$7.98 H

Buck-Algonquin "Tuff-Lite" Nylon Tees



Order No.	Description	Price
354617	(60TSSS222) Tube ID 1/4"	$2.97 F
354629	(60TSSS333) Tube ID 3/8"	$2.97 F
354631	(60TSSS444) Tube ID 1/2"	$2.98 F

T-H Marine Plumbing Tee



- 3-way hose barb.

Order No.	Mfg. No. / Description	Price
641375	(TEE-3/4) 3/4"	$3.07 H

Whale Water Systems Quick Connect Plumbing Kit



- Complete plumbing box with Whale's award winning quick connect pipework designed for yards or as a retail starter kit in one SKU.
- Includes: 2 x 32.8' rolls of semi-rigid tubing for hot and cold systems, 1 x tubing cutters plus plumbing fittings.

Order No.	Mfg. No. / Description	Price
703250	(PK1510) Quick Connect Plumbing Kit	$266.98 F
703255	(PK1520) Refill Kit	$145.98 F

©2014 Donovan Marine, Inc.

Boater Sports Thru-Hulls



- Corrosion proof.
- For use above the waterline.

Order No.	Mfg. No. / Description			Price
1-57221	(57221) 5/8" Hose	White Nylon	Packaged	$3.30 H
1-57222	(57222) 3/4" Hose	White Nylon	Packaged	$3.95 H
1-57224	(57224) 1-1/8" Hose	White Nylon	Packaged	$4.99 H
1-57240	(57240) 3/4" Hose	Stainless Steel	Packaged	$19.95 H
1-57243	(57243) 1-1/8" Hose	Stainless Steel	Packaged	$21.95 H

Forespar Thru-Hull Connectors - Plastic


251 Series


250 Series

- For connection to seacox, ball valves or hose.
- Molded in high strength glass reinforced "Marelon" for superior corrosion protection.
- For use above or below the waterline.
- Must be installed with proper bedding compound.

250 Series Thru-Hull Connectors - Full threaded/flush head.

Order No.	Mfg. No. / Description	Price
353502	(906000) 1/2" Thread, Length 2"	$13.98 F
353526	(906004) 1" Thread, Length 2-3/8"	$15.98 F
353538	(906006) 1-1/4" Thread, Length 3"	$15.98 F
353540	(906008) 1-1/2" Thread, Length 3"	$26.98 F

251 Series Thru-Hull Connectors - Full threaded/mushroom head.

Order No.	Mfg. No. / Description	Price
353576	(906010) 1/2" Thread, Length 2"	$14.98 F
353588	(906012) 3/4" Thread, Length 2-1/4"	$14.98 F
353589	(906014) 1" Thread, Length 2-3/8"	$16.98 F
353590	(906016) 1-1/4" Thread, Length 3"	$19.98 F
353603	(906018) 1-1/2" Thread, Length 3"	$25.98 F

253 Series Thru-Hull Connectors - Hose tailpipe/mushroom head.

Order No.	Mfg. No. / Description	Price
353639	(906022) Hose ID 1/2" - 5/8"	$13.98 F
353641	(906024) Hose ID 3/4"	$14.98 F
353653	(906026) Hose ID 1"	$17.98 F
353665	(906028) Hose ID 1-1/4"	$19.98 F
353677	(906030) Hose ID 1-1/2"	$25.98 F

Buck-Algonquin Navy Pump Strainers



- Dimensions: 3-1/2" x 5".

Order No.	Mfg. No. / Description	Price
256873	(20NPSB-150) Aluminum, For 1-1/2" Nipple	$117.98 Q
256900	(00NPS-200) Cast Bronze, For 2" Nipple	$118.98 Q
256885	(20NPSB-200) Aluminum, For 2" Nipple	$121.98 Q


Marpac Thru-Hulls



- Molded plastic.
- Note: These thru-hulls for hose are not recommended for use below the waterline.

Order No.	Description	Price
7-0357	Hose ID 1/2", White	$4.56 G
7-0358	Hose ID 5/8", White	$4.56 G
7-0359	Hose ID 3/4", White	$4.57 G
7-0359S	Hose ID 3/4", White (Bucket of 24)	$25.98 D
7-0360	Hose ID 1", White	$6.98 G
7-0363	Hose ID 1-1/8", White	$6.98 G
7-0365	Hose ID 1-1/2", White	$8.98 G
7-0354	Hose ID 3/4", Black	$4.31 G
7-0356	Hose ID 1-1/8", Black	$4.53 G

T-H Marine Plastic Thru-Hull Connectors - Extended Length


642062


642024

- Made of the highest quality virgin material to insure consistent size and extra durability.
- Hose ID 3/4", length 4-1/2". Max. hull thickness 2". Flange diameter 1-3/4".

Order No.	Mfg. No. / Description	Price
642024	(TH-752XL-DP) White	$5.98 H

- Hose ID 1-1/8", length 5-3/8". Max. hull thickness 3-1/8". Flange dia. 1-7/8".

Order No.	Mfg. No. / Description	Price
642062	(TH-1202XL-DP) White	$7.98 H

- Hose ID 1-1/2", length 5-3/8". Max. hull thickness 3-1/4". Flange dia. 2-7/8".

Order No.	Mfg. No. / Description	Price
641427	(TH-1502XL-DP) White	$11.98 H

Perko Fig. 722 Pump Strainer



- Cast bronze construction.
- Pipe 1-1/4".
- Length overall 4-1/2".
- Width overall 2-3/4".

Order No.	Mfg. No. / Description	Price
541791	(722 000 PLB) Pump Strainer	$121.98 Q

Perko Fig. 709 Pump Strainer



- Cast bronze construction.
- Hose 5/8".
- Length overall 3-5/8".
- Width overall 1-3/4".

Order No.	Mfg. No. / Description	Price
541727	(709 DP PLB) Pump Strainer	$58.98 R

Buck-Algonquin Rectangular Scoop Strainers



- Cast bronze.
- Slide-out removable screens.

Order No.	Mfg. No. / Description	Price
256708	(OORSS655P) Dim.: 10-5/16" L x 4-5/8" W	$162.98 Q
256710	(OORSS1100P) Dim.: 12-3/4" L x 5-7/8" W	$227.98 Q
256709	(OORSS655PS) Screen Only for 256708	$33.98 Q
256711	(OORSS110PS) Screen Only for 256710	$46.98 Q

Sen-Dure Water Strainer



- Bronze.
- For seacock inlets up to 2-1/2".
- Overall size: 15" x 5-7/8".

Order No.	Mfg. No. / Description	Price
605014	(0910) Water Strainer	$332.98 E

Groco ASC Series - Slotted Hull Strainers



- Access to the thru-hull fitting and seacock beneath GROCO hull strainers is made easy with the patented access door design.
- Now there is no need to remove the entire strainer to clear nuisance marine growth.
- Bronze.

Order No.	Mfg. No. / Description	Price
S/O	(ASC-1250) Max. T-Hull 1-1/4", 7" L x 3.38" W x 1.5" D	Price on Request
374166	(ASC-2000) Max. T-Hull 2", 10.25" L x 4.38" W x 1.63" D	$205.98 I
S/O	(ASC-3000) Max. T-Hull 3", 15.38" L x 6" W x 2" D	Price on Request
S/O	(ASC-6000) Max. T-Hull 4", 20.25" L x 11" W x 4" D	Price on Request

Groco Bronze Intake Strainers



- Bronze.
- NPT thru-hull fitting with integral scoop strainer.

Order No.	Mfg. No. / Description	Price
256734	(STH500W) Pipe 1/2"	$26.98 F
256746	(STH750W) Pipe 3/4"	$35.98 F
256758	(STH1000W) Pipe 1"	$43.98 F
256772	(STH1250W) Pipe 1-1/4"	$61.98 F
256784	(OOIS150) Pipe 1-1/2"	$148.98 Q
256785	(OOIS200) Pipe 2"	$148.98 Q

Groco RSC Series - Round Hull Strainers



- Access to the thru-hull fitting and seacock beneath GROCO hull strainers is made easy with the patented access door design.
- Now there is no need to remove the entire strainer to clear nuisance marine growth.
- Bronze.

Order No.	Mfg. No. / Description	Price
S/O	(RSC-1000) Max. T-Hull 1", Diameter 3.63", Height .56"	POR
S/O	(RSC-2000) Max. T-Hull 2", Diameter 5.2", Height .83"	POR
S/O	(RSC-4000) Max. T-Hull 4", Diameter 9", Height 1.3"	POR

Buck-Algonquin Rectangular Scoop Strainer



- Cast bronze.
- Type: Perforated.
- Screen is stainless steel.
- Inside dimensions: 6-1/2" x 4".
- Max. thru hull: 2-1/2".

Order No.	Mfg. No. / Description	Price
256683	(RSS650P) Scoop Strainer	$123.98 Q

Groco APHS Series - Perforated Hull Strainers



- Access to the thru-hull fitting and seacock beneath GROCO hull strainers is made easy with the patented access door design.
- Now there is no need to remove the entire strainer to clear nuisance marine growth.
- Bronze.

Order No.	Mfg. No. / Description	Price
S/O	(APHS-1250-1) Max. T-Hull 1-1/4", 7" L x 3.38" W x 1.5" D	POR
S/O	(APHS-2000-1) Max. T-Hull 2", 10.25" L x 4.38" W x 1.63" D	POR
S/O	(APHS-3000-1) Max. T-Hull 3", 15.38" L x 6" W x 2" D	POR
S/O	(APHS-6000-1) Max. T-Hull 4", 20.25" L x 11" W x 4" D	POR

Bronze Scoop Strainers



- Bronze.
- Converts standard thru-hull to high speed intake strainer.

Order No.	Mfg. No. / Description	Price
256633	(OOSS500) Fits Thru-Hull 3/4", 5.25" x 6.62"	$39.98 Q
256645	(SC1000L) Fits Thru-Hull 3/4" and 1", 6.25" x 4.25"	$27.98 F
256657	(66 DP3 PLB) Fits Thru-Hull 1-1/4" and 1-1/2", 8.5" x 6.0"	$49.98 F
256669	(SC2500L) Fits Thru-Hull 2"	$90.98 F

Perko Fig. 86 Round Strainers



- Cast bronze construction.
- For mounting over thru-hull or other draining needs.

Order No.	Mfg. No. / Description	Price
542678	(0086 DP2 PLB) OD 3", Thru-Hull 3/4"	$21.98 R
542680	(0086 DP3 PLB) OD 3-1/2", Thru-Hull 1"	$22.98 R
542692	(0086 DP4 PLB) OD 4", Thru-Hull 1-1/4"	$30.98 R
542705	(0086 DP5 PLB) OD 5", Thru-Hull 2"	$57.98 R
542717	(0086 006 PLB) OD 6", Thru-Hull 2-1/2"	$73.98 Q

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Buck-Algonquin Intake Water Strainer - Adjustable



- Bronze.
- Diameter 6".
- Overall height 4-1/2".
- Hose 1-1/2".
- Tapped for 1" pipe.
- Ends can be cut off leaving 1-1/2" hose ends.
- Clear plexiglass top.

Order No.	Mfg. No. / Description	Price
257205	(OOIWS150)	$324.98 Q
257229	(COIWS1215G) Replacement Gasket	$12.98 Q
257245	(70IWS1215R) Screen Only	$17.98 Q

Buck-Algonquin Black Polyethylene Strainers



Order No.	Mfg. No. / Description	Price
256722	(60TSS25) Size 2"	$15.98 Q
256735	(60TSS35) Size 3"	$31.98 Q

Jabsco "Pumpgard" In-Line Strainers



- Prevents dirt and particles from entering pump intake, cuts repairs.
- Works in any position.
- Transparent inspection housing.
- Just remove one screw for easy cleaning.

Order No.	Mfg. No. / Description	Price
414754	(36400-0000) 1/2" ID hose, 50 Mesh Screen	$27.98 G
414350	(36200-0000) 3/4" ID hose, 16 Mesh Screen	$26.98 G

Forespar Water Strainer



- Molded in high strength glass reinforced "Marelon" for superior corrosion protection.
- It features an integral mounting bracket and clear polycarbonate lid for ready inspection.
- The plastic strainer basket can be easily removed for cleaning.
- Intake and exit ports are 1-1/2" threads standard.
- The flow rate is 40 GPM.

Order No.	Mfg. No. / Description	Price
353401	(906066) Diameter 6.3", Height 6.1"	$149.98 F

Groco WSB Series - Pump Inlet Strainers



- Protect fresh water pumps from debris.
- White nylon strainer head and clear plastic sight glass.
- Glass unscrews for filter basket cleaning.
- Mount bracket included.
- For fresh water systems.

Order No.	Mfg. No. / Description	Price
S/O	(WSB-500) 1/2" NPT	Price on Request
S/O	(WSB-750) 3/4" NPT	Price on Request
S/O	(WSB-1000) 1" NPT	Price on Request
S/O	(WSB-1250) 1-1/4" NPT	Price on Request

Shurflo Raw Water Strainers



- Built to keep bait tank, livewell and washdown pumps protected from harmful debris.
- Features a clear twist off bowl and removable stainless steel screen, which allows for easy inspection and cleaning.
- An integral o-ring creates a tight seal, eliminating possible leaks.
- Screen: Mesh T304 SS.

Order No.	Mfg. No. / Description	Price
375190	(253-220-01) Inlet/Outlet Ports: 3/4" NPT-F	$40.98 F
375205	(253-400-01) Inlet/Outlet Ports: 1-1/4" NPT-F	$62.98 F

Raritan Raw Water Strainer



- Wise addition to all seawater intake lines.
- Trash and waterflow can be monitored through this clear plastic body.
- Nylon strainer basket can be removed without tools.
- Inlet and outlet 1-1/2" NPT female pipe thread.
- Plastic fittings must be used.

Order No.	Mfg. No. / Description	Price
564268	(RWS) Height 9-3/4"	$159.98 F

Johnson Pump 40 Mesh PUMProtector Universal Strainer



- Assure long, trouble-free pump operation.
- Strainers visible through transparent covers.
- Covers can be twisted off with one hand.
- Easy to install and remove for thorough cleaning thanks to KlickTite port connectors.
- Make it easier to drain and winterize the pump system.
- Stainless steel 40 mesh. 2x 1/2 barb / 3/8 NPT, 2x 3/4 barb / 1/2 NPT.
- Diameter 3.15. Height 2.35.
- Materials comply with ANSIO/NSF Standard 61.

Order No.	Mfg. No. / Description	Price
462334	(09-2465204CN) PUMProtector Strainer	$15.98 G

Johnson Pump PUMProtector Universal Strainer, 40 mesh



- Stainless steel 40 mesh.
- 2" x 1/2" hose
- 3/8" NPT x 3/4" hose/1/2" NPT.

Order No.	Mfg. No. / Description	Price
471374	(092465202CN) Universal Strainer	$17.98 R

Perko Fig. 493 Intake Water Strainers



- Cast bronze.
- Features include mounting lugs cast into both sides to assure universal mounting, four outside tie rods and a 304 stainless steel strainer basket to minimize electrolysis.
- Screen hole size diameter .077 inches, 46% open area.
- Hinged lugs for the cast bronze cover permit easy removal and cleaning of the strainer basket.
- A drain plug in the bottom casting is provided for easily removing sediment and draining for winterizing.
- Tested and accepted for labeling and UL listed.

Order No.	Mfg. No. / Description	Price
538946	(493 004 PLB) Pipe 1/2" Cylinder 3-1/2" x 4" Height 5-3/4" Width 4-1/2"	$262.98 Q
538958	(493 005 PLB) Pipe 3/4" Cylinder 3-1/2" x 6" Height 8-3/8" Width 4-1/2"	$282.98 Q
538960	(493 006 PLB) Pipe 1" Cylinder 4-1/2" x 5-1/2" Height 9-1/2" Width 5-1/2"	$396.98 Q
538972	(493 007 PLB) Pipe 1-1/4" Cylinder 4-1/2" x 6" Height 10" Width 5-1/2"	$400.98 Q
538984	(493 008 PLB) Pipe 1-1/2" Cylinder 6" x 8" Height 11-1/2" Width 7-1/4"	$555.98 E
538996	(493 009 PLB) Pipe 2" Cylinder 6" x 12" Height 16" Width 7-1/2"	$686.98 E
539001	(493 010 PLB) Pipe 2-1/2" Cylinder 6" x 12" Height 16" Width 7-1/2"	$689.98 E
539075	(0493 010 99C) Transparent Cylinder Only - 99C	$175.98 Q
539095	(0493-005 99D) Basket Strainer - 99D	$70.98 Q
539102	(0493-006 99D) Basket Strainer - 99D	$88.98 Q
539114	(0493-007 99D) Basket Strainer - 99D	$99.98 Q
539126	(0493-008 99D) Basket Strainer - 99D	$133.98 Q
539138	(0493-009 99D) Basket Strainer - 99D	$171.98 Q
539140	(0493-010 99D) Basket Strainer - 99D	$191.98 Q
539291	(0493DP599M) 1) Cover and (2) Cylinder Gaskets - 99M	$26.98 R
539316	(0493 DP7 99M) 1) Cover and (2) Cylinder Gaskets - 99M	$26.98 R
539328	(0493 DP9 99M) 1) Cover and (2) Cylinder Gaskets - 99M	$39.98 R
539377	(0493 DP5 99L) Hinged Bolt for Cover - 99L	$33.98 R
539378	(0493 DP7 99L) Hinged Bolt for Cover - 99L	$35.98 R
539379	(0493 DP9 99L) Hinged Bolt for Cover - 99L	$49.98 R
539295	(0493DP599R) Rubber Gasket Kit #4/#5	$27.98 R

Model	Transparent Cylinder Only – 99C	Basket Strainer – 99D	Hinged Bolt for Cover – 99L	(1) Cover and (2) Cylinder Gaskets – 99M
538946 (493 004)	N/A	N/A	539377 – $33.98 Q	539291 – $26.98 Q
538958 (493 005)	N/A	539095 – $70.98 Q	539377 – $33.98 Q	539291 – $26.98 Q
538960 (493 006)	N/A	539102 – $88.98 Q	539378 – $35.98 Q	539316 – $26.98 Q
538972 (493 007)	N/A	539114 – $98.98 Q	539378 – $35.98 Q	539316 – $26.98 Q
538984 (493 008)	N/A	539126 – $133.98 Q	539379 – $49.98 Q	539328 – $39.98 Q
538996 (493 009)	539075 – $175.98 Q	539138 – $171.98 Q	539379 – $49.98 Q	539328 – $39.98 Q
539001 (493 010)	539075 – $175.98 Q	539140 – $191.98 Q	539379 – $49.98 Q	539328 – $39.98 Q

Groco ARG Series Water Strainers



- #304 stainless steel filter basket.
- No tie rods or gaskets.
- Bronze castings.
- No leaks under pressure or vacuum.
- Buna-N O-ring seals.
- Routine maintenance and service without tools.
- Spanner wrench holes in screw-on cap allow use of Groco SW-2531 spanner wrench if desired.
- Available in 1/2" to 3" female pipe sizes.
- Repair kit includes: Sight glass O-ring, cap O-ring, O-ring and washer.

Order No.	Mfg. No. / Description	Price
373009	(ARG-500-S) Pipe 1/2", Cylinder Diameter 3.5", Cylinder Height 4"	$182.98 F
373011	(ARG-750-S) Pipe 3/4", Cylinder Diameter 3.5", Cylinder Height 6"	$182.98 F
373023	(ARG-1000-S) Pipe 1", Cylinder Diameter 4.5", Cylinder Height 5.75"	$253.98 F
373035	(ARG-1250-S) Pipe 1-1/4", Cylinder Diameter 4.5", Cylinder Height 7.75"	$263.98 F
373037	(ARG-1500-S) Pipe 1-1/2", Cylinder Diameter 6", Cylinder Height "	$351.98 F
373039	(ARG-2000-S) Pipe 2", Cylinder Diameter 6", Cylinder Height 9.56"	$426.98 F
373041	(ARG-2500-S) Pipe 2-1/2", Cylinder Diameter 6", Cylinder Height 11.56"	$494.98 F
373043	(ARG-3000-S) Pipe 3", Cylinder Diameter 6", Cylinder Height 13.94"	$550.98 F

Replacement Filter Baskets

Order No.	Mfg. No. / Description	Price
373112	(SS-69-B) For ARG-500-S	$27.98 F
373124	(SS-69-C) For ARG-750-S	$29.98 F
373136	(SS-76-B) For ARG-1000-S	$33.98 F
373148	(SS-76-C) For ARG-1250-S	$36.98 F

Strainer Repair Kit

Order No.	Mfg. No. / Description	Price
373097	(ARG-2) Repair Kit For 1" & 1-1/4" Pipe	$18.98 F

- Includes: Sight glass O-ring, cap O-ring, O-ring and washer.

©2014 Donovan Marine, Inc.

Perko Fig. 500 Heavy Duty Intake Water Strainer



- Pipe 3". Cylinder 8" x 14". Height 18-1/2", width 9".
- Cast bronze.
- Features include mounting lugs cast into both sides to assure universal mounting, four outside tie rods and a 304 stainless steel strainer basket to minimize electrolysis.
- Screen hole size diameter .077 inches, 46% open area.
- Hinged lugs for the cast bronze cover permit easy removal and cleaning of the strainer basket.
- A drain plug in the bottom casting is provided for easily removing sediment and draining for winterizing.
- High capacity with diesels and large gasoline engines.
- Tested and accepted for labeling and UL listed.

Order No.	Mfg. No. / Description	Price
539506	(500 011 PLB)	$1,266.98 E
539520	(500 011 99D) Basket Strainer	$363.98 Q
539532	(500 DP9 99M) Cork Gasket Kit: (1) Cover Gasket and (2) Cyl. Gaskets	$56.98 R
539535	(500 DP9 99R) Rubber Gasket Kit	$56.98 R
539544	(500 DP9 99C) Hinged Bolt for Cover with Pin, Nut and Washer	$52.98 R

Groco SD Series Water Strainers



- Stainless steel filter basket with clear sight glass.
- Monel inside tie rod.
- Naval bronze outside tie rods.
- Bronze wingnut spins off for easy access to filter basket.

Model	Basket, S/S	Cylinder	Repair Kit*
373908 (SD-2000-S)	373960 – $191.98 F	N/A	373946 – $36.98 F
373910 (SD-2500-S)	373972 – $196.98 F	N/A	373946 – $36.98 F
373922 (SD-3000-S)	373984 – $199.98 F	374025 – $288.98 F	373946 – $36.98 F

Order No.	Mfg. No. / Description	Price
S/O	(SD-1500-S) Pipe 1-1/2", Cylinder Diameter 9.00", Cylinder Height 14.50"	Price On Request
373908	(SD-2000-S) Pipe 2", Cylinder Diameter 9.00", Cylinder Height 16.00"	$1,213.98 E
373910	(SD-2500-S) Pipe 2-1/2", Cylinder Diameter 9.00", Cylinder Height 19.13"	$1,364.98 E
373922	(SD-3000-S) Pipe 3", Cylinder Diameter 9.00", Cylinder Height 22.25"	$1,465.98 E
374075	(S-85) Wingnut for SD-2000, SD-2500 and SD-3000	$35.98 F
374087	(SD-14) Strainer Cap for SD-2000, SD-2500 and SD-3000	$172.98 F
374099	(SD-16) End Cap for SD-2000, SD-2500 and SD-3000	$271.98 F
374126	(SD-20B) Outside Tie Rod for SD-3000	$14.98 F

Replacement Filter Baskets - Stainless Steel

373960	(SSD-17) For SD-2000-S	$191.98 F
373972	(SSD-17-A) For SD-2500-S	$196.98 F
373984	(SSD-17-B) For SD-3000-S	$199.98 F
373955	(SD-3000-H) SD-3000 Series Strainer Head	$812.98 F

Strainer Repair Kit

373946	(SD) For Pipe 2", 2-1/2" or 3"	$36.98 F

- Includes: Sight glass O-ring, cap O-ring, O-ring and washer.

Cylinders

374025	(SD-21-B) For SD-3000-S, Diameter 9.00", Height 22.25"	$288.98 F

Strainer Head

373954	(SD-2500-H)	$812.98 F

Strainer Cap for SD-200, SD-2500 and SD-3000

374087	(SD-14)	$172.98 F

Perko Fig. 693 Heavy Duty Intake Water Strainer for 4" Pipe



- Cylinder: 8-3/4" x 12", basket: 6-3/4" x 8-5/8".
- Height 17-1/2", width 16-1/2".
- Weight: 122 lbs.
- Ratio: 10:1.
- Features include mounting lugs cast into both sides to assure universal mounting, four outside stainless steel tie rods and nuts.
- A 316 stainless steel strainer basket to minimize electrolysis.
- Acrylic cylinder.
- Screen hole size diameter .077 inches.
- Winged cast bronze lugs for easy removal of cover to permit cleaning of the strainer basket.
- A drain plug in the bottom casting is provided for easily removing sediment and draining for winterizing.
- High capacity with diesels and large gasoline engines.
- Tested and accepted for labeling and UL listed.

Order No.	Mfg. No. / Description	Price
539556	(693 012 PLB) Pipe size: 4"	$4,848.98 E

Groco SA Series High-Capacity Water Strainers



- #304 stainless steel filter basket with clear sight glass.
- Monel inside tie rod.
- Easy service with spin-off-wingnut.
- *Repair kit includes: Sight glass O-ring, cap O-ring, O-ring and washer.

Order No.	Mfg. No. / Description	Price
373364	(SA-1000-S) Pipe 1", Cylinder Diameter 5.00", Cylinder Height 10.50"	$407.98 I
373376	(SA-1250-S) Pipe 1-1/4", Cylinder Diameter 5.00", Cylinder Height 12.75"	$438.98 I
373388	(SA-1500-S) Pipe 1-1/2", Cylinder Diameter 6.25", Cylinder Height 13.75"	$637.98 I
373390	(SA-2000-S) Pipe 2", Cylinder Diameter 6.25", Cylinder Height 16.50"	$824.98 I
373403	(SA-2500-S) Pipe 2-1/2", Cylinder Diameter 6.25", Cylinder Height 18.75"	$919.98 I
373718	Wingnut for SA-1000 and SA-1250 (SVS-5)	$14.98 F
373720	Wingnut for SA-1500, SA-2000 and SA-2500 (S-75)	$21.98 F
373768	End Cap for SA-1500, SA-2000 and SA-2500 (S82A)	$148.98 Q
373578	Tie Rod for SA-2000 (S-87-A)	$7.98 F

Replacement Filter Baskets

Order No.	Mfg. No. / Description	Price
373528	(SS-76) For SA-1000-S	$32.98 F
373530	(SS-76-A) For SA-1250-S	$30.98 F
373542	(SS-85-F) For SA-1500-S	$41.98 F
373554	(SS-85-A) For SA-2000-S	$45.98 F
373566	(SS-85-B) For SA-2500-S	$47.98 F

Strainer Repair Kit

Order No.	Mfg. No. / Description	Price
373453	(SA-2) For Pipe 1" to Pipe 1-1/4"	$29.98 F
373465	(SA-3) For Pipe 1-1/2" to Pipe 2-1/2"	$28.98 F

- Includes: Sight glass O-ring, cap O-ring, O-ring and washer.

Cylinders

Order No.	Mfg. No. / Description	Price
373631	(S-88-A) For SA-2000-S, Diameter 6.25", Height 16.50"	$139.98 F
373643	(S-88-B) For SA-2500-S, Diameter 6.25", Height 18.75"	$168.98 F

Johnson Pump Handpump with hose



- Light, tough, durable easy handling, extra fast pumping hand pumps are a ideal stow aboards.
- Comfortable handle grip and extra large capacity makes manual pumping somewhat less of a chore. Ideal for emergency pumping where electrical current is not available.
- 4 strokes per gallon.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470500	(20195) 18 inch Handpump with Hose	$33.98 G
470505	(20255) 24 inch Handpump with Hose	$35.98 G
470510	(20375) 36 inch Handpump with Hose	$41.98 G

Boater Sports Hand Bilge Pump



- 24" Hand bilge pump with 36" hose.
- Perfect for use on small boats, dinghies and lockers or any other place water collects.

Order No.	Mfg. No. / Description	Price
1-57004	(57004)	$29.99 H

Beckson Thirsty-Mate™ Hand Bilge Pumps



- It is self-priming and very easy to clean.
- All plastic.
- Self lubricating.
- This hand pump will not rust or corrode or mar your boat.
- If your THIRSTY-MATE hand pump becomes clogged, simply remove the foot valve assembly and clean out the inside.
- Includes: Flexible hose.
- Manufactured in the USA.

Order No.	Mfg. No. / Description	Price
247456	(118PF) 18", 20" Hose, 10 Strokes per Gallon	$32.98 G
247470	(124PF) 24", 24" Hose, 6 Strokes per Gallon	$37.98 F
247482	(124PF6) 24", 72" Hose, 6 Strokes per Gallon	$51.98 G
247494	(136PF) 36", 36" Hose, 4 Strokes per Gallon	$46.98 G
247507	(136PF6) 36", 72" Hose, 4 Strokes per Gallon	$56.98 G

Beckson Thirsty-Mate® Hand Bilge Pump - High Capacity



- High capacity pump.
- Self lubricating.
- This hand pump will not rust or corrode or mar your boat.
- Length 24".
- Diameter 3".
- Capacity 22 GPM.
- Provided with 2" wire reinforced vinyl hose.
- Intake hose assembly: Length 4'.
- Outlet hose: Length 6'.

Order No.	Mfg. No. / Description	Price
247533	(519C) Plastic	$285.98 G

Whale Water Systems Gusher Titan Service Kit (Neoprene)



- The AK4400 service kit for the Gusher Titan manual bilge pump is suitable neoprene models.
- The service kit includes: 4 Circlips, 6 Screws, 1 Outlet Valve Spring, 1 Clamping Nut, 1 Outlet Valve Plate, 1 Inlet Valve Plate, 1 Outlet Valve, 1 Inlet Valve and 1 Diaphragm.

Order No.	Mfg. No. / Description	Price
706035	(AK4400) For Neoprene Models	$42.98 F

Whale Water Systems Gusher 10 Service Kit (Neoprene)



- The AK3706 service kit for the Gusher 10 manual bilge pump is suitable for Mk 2 and 3 neoprene models.
- The service kit includes: 2 Valves (For Mk 2 models only), 2 Screws, 2 Bridge Pieces, 1 Diaphragm, 1 Buffer, 1 Valve (For Mk 3 pump only) and 1 Gasket (For Mk 3 pump only).

Order No.	Mfg. No. / Description	Price
706030	(AK3706) For Mk 2 and 3 Neoprene Models	$49.98 F

Whale Water Systems Mk 5 Universal Service Kit



- The AK8050 complete service kit for the Mk 5 Universal Single acting manual bilge pump.
- The service kit includes: 1 Inlet Valve Plate, 1 Inlet Valve, 2 Long Valve Screws, 1 Top Cover Seal, 1 Diaphragm, 1 Outlet Valve, 2 Large Circlips, 2 Small Circlips, 8 Screws M5x25 and 8 Nuts M5.

Order No.	Mfg. No. / Description	Price
706045	(AK8050) Service Kit	$55.98 F

Whale Water Systems Gusher Urchin Service Kit (Neoprene)



- The AK9003 service kit for the Gusher Urchin neoprene model.
- The service kit includes: 1 Diaphragm, 1 Inlet Valve, 1 Outlet Valve, 2 Small Circlips and 2 Large Circlips.

Order No.	Mfg. No. / Description	Price
706050	(AK9003) For Neoprene Models	$25.98 F

©2014 Donovan Marine, Inc.

Whale Water Systems Mk 5 Universal



- The Mk 5 Universal has a clever design allowing the one pump to be mounted 3 different ways - on deck, bulkhead and thru deck.
- The Mk 5 Universal Pump is a lightweight yet robust manual bilge and waste water transfer pump.
- Its fully protected diaphragm and non-choke valves ensure reliability and the specifically designed seals safeguard against unwanted odors.
- With a high flow rate of 17.5 US gals per minute, the Mk 5 Universal pump is suitable lifeboat pump with MCA and USCG approval ratings.

Order No.	Mfg. No. / Description	Price
706065	(BP0510) Mk 5 Manual Bilge Pump	$162.98 F

Whale Water Systems Gusher 10



- The Gusher 10 is one of Whale's most famous bilge pumps for its bright color and robust design for tough marine conditions.
- The pump is designed for easy access and maintenance and has a high flow rate of 17 US gals per minute.
- The Gusher 10 is suitable on boats over 40 ft.

Order No.	Mfg. No. / Description	Price
706095	(BP3708) On Deck Version	$319.98 F
706100	(BP3740) Underdeck Version	$319.98 F

Whale Water Systems Gusher Urchin



- The Whale Gusher Urchin is a popular compact manual bilge and waste water transfer pump.
- The compact design is suitable on small to medium sized boats with a flow rate of 14.5 US gals.
- It is tough yet lightweight and the easily removable clamp ring allows for easy installation and maintenance.
- The Gusher Urchin also has dual nozzle sizes suitable for 1" or 1-1/2" hoses.

Order No.	Mfg. No. / Description	Price
706120	(BP9005) Fixed Handle Version	$79.98 F
706125	(BP9013) Underdeck	$105.98 F
706130	(BP9021) Removable Handle Version	$84.98 F

Whale Water Systems Compac 50



- The Whale Compac 50 has a compact design suitable for confined spaces at only 120mm deep for underdeck installation.
- The easily removed clamping ring allows for rotation of the head and therefore easy installation and maintenance.
- Pumping 10.5 US gals per minute the tough and proven design ensures reliability throughout usage as an emergency bilge pump.
- The pump is suitable for pumping saltwater and diesel.

Order No.	Mfg. No. / Description	Price
706060	(BP0350) Compac 50 Manual Bilge Pump	$119.98 F

Whale Water Systems Gusher Titan



- The Whale Gusher Titan is a powerful yet lightweight manual bilge and waste pump.
- It is made of tough glass-filled polypropylene with an easily removable clamping ring to allow for adjustments to the head during installation and easy maintenance.
- With a high flow rate of 28 US gals per minute this pump is suitable for use on boats over 40 ft.

Order No.	Mfg. No. / Description	Price
706105	(BP4402) On Deck Model	$159.98 F
706110	(BP4410) Underdeck Version	$179.98 F

Whale Water Systems Babyfoot



- The Whale Babyfoot Pump is a self-priming compact freshwater foot pump.
- The easy to install compact design of the Whale Babyfoot pump is ideal where space is limited.
- The angled design of the pump allows for a smooth, easy and more comfortable operation.
- This pump is ideal as a priming pump suitable for freshwater and saltwater installations.

Order No.	Mfg. No. / Description	Price
706190	(GP4618) Manual Galley Pump	$56.98 F

Boater Sports Bilge Pumps



- Bilge pumps have universal mounting base allowing pumps to snap into competitors bases without modification to mounting holes or position.
- All pumps are ignition protected and meet USCG requirements.

Order No.	Mfg. No. / Description		Price
1-57412	(57412) 600 GPH	3/4" Outlet	$19.95 H
1-57420	(57420) 800 GPH	3/4" Outlet	$24.99 H
1-57426	(57426) 1,100 GPH	1-1/8" Outlet	$25.99 H

Rule Non-Automatic Bilge Pumps

- Fully submersible.
- Ignition protected.
- Easy clean snap lock strainer.
- Compact, efficient long life motor.
- Silent and vibrationless operation.
- No burn-out when run dry.
- Rust and corrosion protection.
- Anti-airlock protection.
- Width 2-7/8", height 4".
- 12 volt.


582052


582040

Order No.	Mfg. No. / Description	Price
582040	(20F) 800 GPH, Discharge 3/4"	$50.98 R
582052	(20A) 1,000 GPH, Discharge 1-1/8"	$50.98 R

Attwood Tsunami Series Cartridge Bilge Pumps

- Made of premium materials with cool running motors, watertight seals and waterproof wiring...together, they ensure a longer life.
- Motor cartridges are replaceable.
- Barbed 3/4" outlets for T-500 and T-800 bilge pumps.
- 1-1/8" barbed outlet for the T-1200 bilge pump.
- Improved motor and seal for longer life.



Order No.	Mfg. No. / Description	Price
236059	(4606-7) T-500, 500 GPH	$23.98 G
236078	(4608-7) T-800, 800 GPH	$37.98 H
236112	(4612-7) T-1200, 1,200 GPH	$48.98 R
236060	(4620-6) Replacement Cartridge for 236059	$19.98 R
236079	(4622-6) Replacement Cartridge for 236078	$28.98 H
236081	(4624-6) Replacement Cartridge for 236112	$39.98 H

Johnson Bilge Mate Pump



- A low budget alternative designed for long life and high performance capacity.
- Bracket molded to pump.
- Connection 3/4 inch, Amperage 2.5A, Fuse size 5A.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470514	(21405) 400 GPH, 12 volt, 3/4" Connection	$21.98 I

Rule Non-Automatic Bilge Pumps

- Fully submersible.
- Ignition protected.
- Compact, efficient long life motor.
- Easy clean snap lock strainer.
- Silent and vibrationless operation.
- No burn-out when run dry.
- Rust and corrosion protection.
- Anti-airlock protection.
- Width 2-3/8".
- 12 volt.


582000


582026


582064

Order No.	Mfg. No. / Description	Price
582000	(24) 360 GPH, Discharge 3/4", 3-1/2" H	$22.98 F
582026	(25D) 500 GPH, Discharge 3/4", 3-1/2" H	$28.98 F
582042	(20R) 800 GPH, Discharge 3/4", 3-3/4" H	$49.98 R
582064	(27D) 1,100 GPH, Discharge 1-1/8", 4-1/4" H	$54.98 G

Rule Side Mounting Bracket for Bilge Pumps

- Permits small Rule bilge pumps to be side mounted to a vertical stringer, a bulkhead or a transom.
- Use this bracket when bottom mounting is inconvenient or impossible.
- Simply remove the strainer from the pump, put the bracket in place, and reassemble.
- For use with Rule 360, 500 and 1,100 GPH bilge pumps.



Order No.	Mfg. No. / Description	Price
582886	(66) Mounting Bracket	$7.98 H

Marpac Cartridge Bilge Pump

- Power head is removable.
- Water cooled housing extends motor life.
- Tough thermoplastic housing that resists heat and stress, it has a high grade 316 stainless steel shaft and heavy duty 16 gauge corrosion resistant tinned wire.
- Straight and omni-directional 90° hose barbs are included for the 3/4" discharge port, along with a backflow check valve.
- Made in USA, this pump meets and exceeds NMMA, ABYC, USCG and IMCI (ISO 8849) specifications.



Order No.	Description	Price
7-0442	750 GPH, 12 volt	$31.98 G
7-2218	Spare Cartridge	$31.98 G

Johnson Pump 1250 GPH Cartridge Bilge Pump

- 12v, 1 1/8 inch connection.
- Removable and upgradeable motor cartridge bilge pump for easy maintenance and repair.
- Amperage 3A.
- Fuse size 5A.
- Made in the USA.



Order No.	Mfg. No. / Description	Price
470230	(42122) 1,250 GPH	$57.98 R
470232	(42123) 1,250 GPH	$57.98 G

©2014 Donovan Marine, Inc.

Johnson Proline Bilge Pumps - DuraPorts



- Pro-Line Bilge Pumps duraports includes straight and 90° 3/4" connectors.
- Bracket molded to pump.
- Includes removable check valve.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470524	(22502) 500 GPH, 12 volt	$32.98 Q
470536	(22702) 750 GPH, 12 volt	$48.98 Q
470462	(22102) 1,000 GPH	$61.98 Q

Rule LoPro Bilge Pumps



- Only 2" tall-about half the height of a normal bilge pump.
- 180° of discharge orientation.
- Anti-airlock protected.
- Fittings for 3/4" or 1-1/8" hose with check valve included.
- Automatic version can be set to pump at 1.3", 2" or check for water every 2 minutes.

Order No.	Mfg. No. / Description		Price
582333	(LP900S) 900 GPH	Automatic	$68.98 E
582335	(LP900D) 900 GPH		$50.98 E

Johnson Pump 1000 GPH Bilge Pump



- 1000 GPH Bilge Pump, 3/4" hose, 12v.
- Removable and upgradeable motor cartridge bilge pump for easy maintenance and repair.
- Pump comes with both a 90° and straight non-cracking dura-port.
- Check valve standard.
- Easily upgrade flow capacitites with change of motor cartridge.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470533	(32903) 1,000 GPH	$53.98 G
470726	(28512) Spare Cartridge for 1,000 GPH	$44.98 Q

Johnson Proline Bilge Pumps - DuraPorts



- Removable and upgradeable motor cartridge bilge pump for easy maintenance and repair.
- Pump comes with both a 90° and straight non-cracking dura-port.
- Check valve standard.
- Easily upgrade flow capacitites with change of motor cartridge.
- Fuse size 5A.
- Amperage 2.5A.
- 12 volt.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470548	(32102) 1.000 GPH	$51.98 R
470651	(32702) 750 GPH	$41.98 G
470687	(32502) 500 GPH	$29.98 H

Johnson Pump 750 GPH Bilge Pump



- 3/4" hose, 12v, duraports include a straight and 90° externally threaded fitting
- Removable and upgradeable motor cartridge bilge pump for easy maintenance and repair.
- Pump comes with both a 90° and straight non-cracking dura-port.
- Check valve standard.
- Easily upgrade flow capacitites with change of motor cartridge.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470532	(32703) 750 GPH	$41.98 G

Boater Sports High Output Bilge Pumps



- Turbo designed impeller, 12 volt bilge pump.
- Ignition protected, submersible.
- Includes stainless steel mounting hardware.
- Tinned marine grade wire.
- Quick release mount allows easy access to clean debris from strainer.

Order No.	Mfg. No. / Description		Price
1-57430	(57430) 1,500 GPH	1-1/8" Outlet	$49.95 H
1-57435	(57435) 2,000 GPH	1-1/8" Outlet	$54.98 H

Johnson Pump Heavy Duty High Capacity Bilge Pumps


470461

- 1,600 and 2,200 GPH bilge pump includes internal threaded duraports of both 1-1/8" and 1-1/4" straight fittings and removable check valve.
- 4,000 GPH bilge pump, includes internal threaded duraports of both 1-1/2" and 2" straight fittings and removable check valve.
- Cool running, heavy duty,double ball bearing motor for extended life.
- Fully submersible.
- Tin coated 6' wire leads prevents corrosion.
- Designed and tested for tough salt water conditions.
- This pump can click into Rule base.
- Fuse size 6A.
- Amperage 3.5A.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470447	(16004-00) 1,600 GPH, Duraports Straight	$99.98 F
470449	(16084-00) 1,600 GPH, 24 volt	$132.98 G
470450	(22084) 2,200 GPH, 24 volt	$146.98 Q
470461	(22004) 2,200 GPH, 12 volt	$126.98 Q
470497	(40004) 4,000 GPH, 12 volt	$239.98 G

Attwood Heavy-Duty Bilge Pumps

attwood



- Heavy Duty Bilge Pumps integrate the highest quality bearings, brushes, alloys and magnets designed to withstand extreme usage cycles.
- Pump all employs an exclusive shaft and motor compartment, reducing wear and significantly extending pump life.
- Advanced resin compositions incorporated in exterior to resist chemicals such as engine oil, aggressive detergents and hose plasticizers.
- Attwoods Heavy Duty bilge has unsurpassed durability and efficiency in a compact design to ensure electrical energy is converted to the pump rather than excess heat.
- Attwood's highest capacity pump!
- Ball-bearing design provides for cooler motor operation and longer life.
- Delivers over 2,000 GPH at open flow while drawing less than 7-amps.

Order No.	Mfg. No. / Description	Price
236090	(4730-4) 1,700 GPH, 12 volt CE Rated, 36 Wire	$100.98 R
236095	(4760-4) 2,000 GPH, 12 volt CE Rated, 36 Wire	$133.98 H
236100	(4770-4) 2,000 GPH, 24 volt CE Rated, 36 Wire	$135.98 R

Rule Non-Automatic Bilge Pumps

rule



- Fully submersible.
- Ignition protected.
- Easy clean snap lock strainer.
- Silent and vibrationless operation.
- No burn-out when run dry.
- Rust and corrosion protection.
- Anti-airlock protection.
- Discharge 1-1/2".
- Width 4-7/8", height 7-1/4".

Order No.	Mfg. No. / Description	Price
582545	(14A) 3,700 GPH, 12 volt	$244.98 F
582557	(16A) 3,700 GPH, 24 volt	$264.98 F
582571	(15A) 3,700 GPH, 32 volt	$261.98 F

Johnson Pump Low Boy Bilge Pump

Johnson Pump



- Includes dura ports both straight and 90° externally threaded fitting.
- Low profile pump design for ease of mounting and removal in tight bilge areas.
- Perfect for vessels with bilge pumps mounted beneath inboard or I/O engines.
- Removable cartridge style.
- Works well with 36152 electro magnetic switch.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470688	(33703) 750 GPH, 3/4" Connection, 12 volt	$46.98 G
470689	(33103) 1,250 GPH, 1-1/8" Connection, 12 volt	$59.98 G

Johnson Pump Heavy Duty Bilge Pump

Johnson Pump



- 4,000 GPH,bilge pump includes internal threaded duraports of both 1-1/2" and 2" straight fittings and removable check valve.
- Cool running, heavy duty,double ball bearing motor for extended life.
- Fully submersible.
- Tin coated 6' wire leads prevents corrosion.
- Designed and tested for tough salt water conditions.
- This pump can click into Rule base.
- Fuse size 15A.
- Amperage 7.5A.
- 24 volt.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470499	(40084) 4,000 GPH	$259.98 G

Rule Non-Automatic Bilge Pump

rule



- Fully submersible.
- Compact, efficient long life motor.
- Ignition protected.
- Easy clean snap lock strainer.
- Silent and vibrationless operation.
- No burn-out when run dry.
- Rust and corrosion protection.
- Anti-airlock protection.
- Discharge 2".
- Width 4-7/8", height 7-3/4".

Order No.	Mfg. No. / Description	Price
582584	(56D) 4,000 GPH, 12 volt	$265.98 F
582785	(72) Thru Hull Fitting, 2" Straight	$39.98 E

Rule Non-Automatic Bilge Pumps

rule



582482



582519

- Fully submersible.
- Compact, efficient long life motor.
- Ignition protected.
- Silent and vibrationless operation.
- No burn-out when run dry.
- Rust and corrosion protection.
- Anti-airlock protection.
- Easy clean snap lock strainer.
- Discharge 1-1/8".
- Height 6", width 4-1/4".

Order No.	Mfg. No. / Description	Price
582456	(02) 1,500 GPH, 12 volt	$93.98 E
582494	(10) 2,000 GPH, 12 volt	$126.98 E
582496	(10-6UL) 2,000 GPH, 12 volt, UL Listed	$165.98 F
582519	(12) 2,000 GPH, 24 volt	$163.98 F
582521	(11) 2,000 GPH, 32 volt	$168.98 F

- Easy clean triple stage snap lock strainer.
- Features an exclusive 5 year warranty.
- Heavy 5/16" stainless steel shaft.
- Discharge 1-1/8". Height 6". Width 4-1/4".

Order No.	Mfg. No. / Description	Price
582482	(09) 2,000 GPH, 12 volt	$173.98 F

©2014 Donovan Marine, Inc.

Boater Sports Plumbing Kit - Bilge Pump



- Complete the installation of your bilge pump with ease using this plumbing kit.
- Kit includes plastic bilge hose, thru-hull fitting, and 2 stainless steel clamps.

Order No.	Mfg. No. / Description	Price
1-57304	(57304) 3/4" x 5'	$12.85 H

Boater Sports Automatic Bilge Pump with Float Switch



- Bilge pump has universal mounting base allowing pump to snap into competitors bases without modification to mounting holes or position.
- Ignition protected and meet USCG requirements.

Order No.	Mfg. No. / Description		Price
1-57422	(57422) 800 GPH	3/4" Outlet	$39.95 H

Johnson Pump AC Utility PUMP 2,000 GPH



- 2,000 GPH AC sump pump rated for continuous duty - 24 hours a day, 365 days a year.
- 1" threaded discharge.
- 10' cord.

Order No.	Mfg. No. / Description	Price
470463	(10-10216-01) AC Utility PUMP 2,000 GPH, 110V	$220.98 G

Attwood Sahara Series Automatic Bilge Pumps



236198



236186



236201

- Sahara Bilge Pumps include 36" lengths of 16-gauge tinned copper wire.
- Wire is caulked to prevent water from wicking through insulation jacket.
- All materials and components are state-of-the-art.
- Permanent-magnet motor, stainless steel shaft, and steel-reinforced seal ensure powerful, durable performance.

Order No.	Mfg. No. / Description	Price
236186	(4505-7) 500 GPH, Hose Size 3/4" ID	$64.98 H
236198	(4507-7) 750 GPH, Hose Size 3/4" ID	$99.98 H
236201	(4511-7) 1,100 GPH, Hose Size 1-1/8" ID	$116.98 H

Rule Reducing Hose Adapter



- Heavy duty molded, non-corrosive, high impact plastic.
- Double stepped straight adapter for adapting 1-1/8" outlet to 3/4" or 5/8" ID hose.
- For Rule 1,000, 1,100, 1,500 2,000 and 5-Year Pumps.

Order No.	Mfg. No. / Description	Price
582824	(69) Reducing Hose Adapter	$7.84 H

Rule Garden Hose Adapter



- Heavy duty molded, non-corrosive, high impact plastic.
- Adapts 1-1/8" outlet to standard garden hose fitting.
- For Rule 1,000, 1,100, 1,500 2,000 and 5-Year Pumps.

Order No.	Mfg. No. / Description	Price
582812	(68) Garden Hose Adapter	$9.98 H

Rule 110 Volt Automatic Pump



- Designed to remove water from basements, garages, stairwells, utility rooms, backyards, sumps, pools, pool covers, boats and other utility applications.
- Includes: 8' cord, garden hose and rigid pipe, #57.
- Discharge 1-1/8".
- 4-3/4" W x 7-3/4" H.
- 110V AC.

Order No.	Mfg. No. / Description	Price
582575	(A53S) 1,800 GPH	$231.98 F

Rule-Mate™ Fully Automatic Bilge Pumps



582360



582379

- Exclusive moisture tight seals.
- Anti-Airlock protection.
- No burn-out when run dry.
- Easy clean snap-lock strainer bases.
- Stainless steel shafts.
- Completely submersible.
- Silent and vibrationless operation.
- Ignition protection.
- Rust and corrosion protection.
- All-in-one pump and switch - No float switch required.
- 12 volt.

Order No.	Mfg. No. / Description	Price
582348	(RM500A) 500 GPH, Discharge 3/4"	$59.98 E
582360	(RM750A) 750 GPH, Discharge 3/4"	$84.98 E
582370	(RM1100A) 1,100 GPH/4,164 LPH	$109.98 E
582379	(RM1500) 1,500 GPH, Discharge 1-1/8"	$209.98 E
582381	(RM2000) 2,000 GPH, Discharge 1-1/8"	$269.98 F

Marpac Premier Automatic Bilge Pumps



- A rugged ABS fuel resistant housing with patented "Field Effect" sensing technology that uses micro electrical fields to turn the pump on/off when water is detected.
- Advanced digital design that is Mercury free with no float switch to be jammed on or off.
- The simple 3 wire design is easy to install and can be run in auto or manual override mode.
- Straight and omni-directional 90° hose barbs, as well as a backflow check valve are included.
- Made in USA, this pump is NMMA, ABYC, USCG and CE Certified.
- Includes a 3 year warranty.

Order No.	Description	Price
7-2206	600 GPH	$62.98 G
7-2208	800 GPH	$83.98 G
7-2212	1,250 GPH	$130.98 G

Johnson Ultima Bilge Pumps



- Integrated pump and digital float switch-on demand, quiet operation.
- Straight and 90° duraports external threaded fittings included-removable check valve.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470120	(32-47258-003) 600 GPH, 3/4" Hose	$66.98 G
470122	(32-47259-003) 800 GPH, 3/4" Hose	$83.98 G
470124	(32-47260-003) 1,000 GPH, 3/4" Hose	$93.98 G
470126	(32-47261-002) 1,250 GPH, 1-1/8" and 1-1/4" Hose	$114.98 G

Johnson Pump Auto Bilge Pump With Ultima Switch



- Best heavy duty bilge pump prewired to ultima switch for automatic operation.
- Comes with 2 straight ports of 1-1/8" and 1-1/4".
- Also includes check valve.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470240	(01674-001) 1,600 GPH, 12 volt	$185.98 Q
470241	(01674-002) 1,600 GPH, 24 volt	$190.98 Q
470242	(02274-001) 2,200 GPH, 12 volt	$227.98 Q
470243	(02274-002) 2,200 GPH, 24 volt	$232.98 R

Johnson Pump Bilge Pump Ultima Combo



- Includes both duraports of straight and 90° external fittings
- Combines the cartridge bilge pump with automatic operation.
- Equipped with non-clogging electronic float switch.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470528	(07503-00) 500 GPH, 12 volt, 3/4" Connection	$80.98 Q
470529	(07703-00) 750 GPH, 12 volt, 3/4" Connection	$94.98 G
470530	(07903-00) 1,000 GPH, 12 volt, 3/4" Connection	$104.98 G
470531	(08203-00) 1,250 GPH, 12 volt, 1-1/8" Connection	$125.98 Q

Rule Automatic Bilge Pumps



582329



582222



582305

- Computerized operation - no float switch required.
- Anti-Airlock protection.
- Compact, efficient, long life motor.
- No burn-out when run dry.
- Easy clean snap-lock strainer bases.
- Completely submersible.
- Rust and corrosion protection.
- Silent and vibrationless operation.
- Ignition protected.
- 12 volt.

- Discharge 3/4".
- 2-3/8" W x 4" H.

Order No.	Mfg. No. / Description	Price
582305	(25S) 500 GPH	$74.98 E

- Discharge 1-1/8".
- 2-3/8" W x 4-1/2" H.

Order No.	Mfg. No. / Description	Price
582329	(27S) 1,100 GPH	$119.98 E

- 3 wire version allows manual override or indicator light capability.
- Discharge 1-1/8".
- 4-3/4" W x 7-3/4" H.

Order No.	Mfg. No. / Description	Price
582216	(51S) 1,500 GPH	$190.98 E
582222	(53S) 2,000 GPH	$259.98 E

Johnson Pump Ultima Combo Pump



- Digital bilge switch for automatic operation
- 3/4" hose, includes both duraports of straight and 90° external threaded fittings
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470525	(04104-00) 1,000 GPH, 12 volt	$106.98 Q
470527	(04504-00) 500 GPH, 12 volt	$80.98 Q

Johnson Pump Auto Bilge Pump



- Electro magnetic switch combo.
- Removable and upgradeable motor cartridge bilge pump for easy maintenance and repair.
- Pump comes with both a 90° and straight non-cracking dura-port.
- Check valve standard.
- Easily upgrade flow capacitites with change of motor cartridge.
- It is prewired with the Electronic Float Switch.
- Automatic switch has solid state electronics and sealed housing, false start prevention.
- Handles up to 15 amps.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470526	(05503-00) 550 GPH, 12 volt	$65.98 G
470538	(05703-00) 750 GPH, 12 volt	$78.98 G

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Boater Sports Bilge Pump with Float Switch



- 600 GPH bilge pump packaged with (57438) float switch.
- Ignition protected and meet USCG requirements.

Order No.	Mfg. No. / Description		Price
1-57418	(57418) 600 GPH	3/4" Outlet	$26.95 H

Rule Combo Bilge Pump and Float Switch



- Includes: (20R) 800 GPH Bilge Pump and 582646 (35A) Rule-A-Matic Float Switch.

Order No.	Mfg. No. / Description	Price
582030	(20R-35A) Pump and Switch	$59.98 G

Boater Sports Automatic Float Switch



- Automatic ball-type switch - no mercury - with tinned marine-grade wire.
- For use with most 12 volt bilge pumps.
- 15 amp.
- Simple installation, mounting hardware included.

Order No.	Mfg. No. / Description	Price
1-57438	(57438)	$7.95 H

Rule Rule-A-Matic® Plus™ Float Switch



- A strong, fully integrated, impact resistant cover, which protects against debris and jamming.
- 14 gauge highly abrasive resistant marine grade wire, and a built-in test feature.
- Designed for pumps drawing up to 20 amps.
- Dimensions: 4-7/8" x 2-1/2" x 2-3/4".
- 2 year warranty.

Order No.	Mfg. No. / Description	Price
582696	(40FA) With Fuse Holder	$48.98 F
582698	(40A) Without Fuse Holder	$45.98 E

Rule Combo Bilge Pump and Float Switch



- Includes: 582000 (24) 360 GPH Bilge Pump and 582646 (35A) Rule-A-Matic Float Switch.
- 3 year warranty on pump and 2 year warranty on float switch.

Order No.	Mfg. No. / Description	Price
582076	(24-35A) Pump and Switch	$54.98 G

Rule Combo Bilge Pump and Float Switch



- Includes: 582026 (25D) 500 GPH Bilge Pump and 582696 (40A) Rule-A-Matic Plus Float Switch.
- 3 year warranty on pump and 2 year warranty on float switch.

Order No.	Mfg. No. / Description	Price
582038	(25D-40A) Pump and Switch	$81.98 G

Rule SuperSwitch™ Float Switches



- A 5 year warranty, the non-mercury SuperSwitch is designed for the toughest applications.
- Design includes marine grade 14 gauge "blocked wire", larger float for increased buoyancy, and removable base for easy servicing.
- Design capable of handling pumps drawing up to 20 amps.
- Dimensions: 5" x 2" x 2".

Order No.	Mfg. No. / Description	Price
582662	(37A) Without Fuse Holder	$59.98 F
582660	(37FA) With Fuse Holder	$60.98 F

Rule Rule-A-Matic® Non-Mercury Float Switches



- Mercury-free snap switch tested to over one million cycles.
- Includes a removable base for easy cleaning and servicing, and marine grade "blocked" wire.
- Designed for pumps drawing up to 14 amps.
- Dimensions: 4-1/2" x 1-1/2" x 2".
- 2 year warranty.

Order No.	Mfg. No. / Description	Price
582646	(35A) Without Fuse Holder	$32.98 E
582658	(35FA) With Fuse Holder	$41.98 F

Johnson Pump Automatic Float Switch



- For full automatic bilge pumping operation, connect the automatic switch to a bilge pump.
- Has a time-proven micro switch without mercury.
- When water exceeds the acceptable level, the pump is turned on by a rolling steel ball changes the pressure, which changes the pressure on the micro switch.
- Can be used with 6, 12, 24 or 32 volt systems.

Order No.	Mfg. No. / Description	Price
470055	(26014) Automatic Float Switch	$18.98 R

Sure Bail Automatic Float Switch



- Mercury switch potted in a urethane foam float will never waterlog.
- High impact polypropylene case protects float and prevents failures due to debris lodging on top or under the float.
- For manual operation simply rotate the external shaft.
- Width 2-7/8", length 5-1/2".
- 5 year warranty.

Order No.	Mfg. No. / Description	Price
470017	(900-2000) Float Switch	$39.98 G

Marpac Premier Ultima Switch



- Features Mirus detector cells with "Field Effect" technology, it utilizes detectors with a unique electrode structure that projects dual microelectric fields that actually detect the presence of water in the bilge.
- This patented design allows the detectors to be tuned to read contaminates such as oil or fuel that can foul or stick older mechanical style devices and electronic switches.
- No moving parts and no mercury make the UltimaSwitch highly reliable and environmentally friendly.

Order No.	Description	Price
7-2228	Ultima Switch	$49.98 F

Johnson Pump Bilge Pump Switch



- Compact mechanical switch offers a combination of reliable solid sate electronics and a sealed float switch.
- False start prevention, no mercury, high impact plastic and encapsulated electronics adds up to dependability.
- Activates pump at 2" water level, deactivates pump at 3/4: water level.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
471363	(36152) Electro Magnetic Float Switch, 12 volt	$22.98 Q
471364	(36252) Electro Magnetic Float Switch, 24 volt	$22.98 Q

Attwood Automatic Float Switches



- Converts any bilge pump that draws 12 amps (at 12 VDC) or 6 amps (at 24 VDC) or less to fully automatic operation.
- Compact, low-profile design that mounts on any surface from horizontal up to a 24° angle.
- Incorporates a reliable and affordable mechanical switch that actuates pump motor at 2" water level.
- Contains no mercury, a "Persistent Toxic Substance," listed as a health hazard in more than 26 states.

Order No.	Mfg. No. / Description	Price
236162	(4202-7) Dimensions: 1-3/8" H x 3-7/8" W x 4-1/4" L	$28.98 R
236174	(4201-7) With Cover: 2-7/8" H x 3-7/8" W x 5-1/4" L	$33.98 H

Sure Bail Electronic Float Switch



- Environmentally safe, contains no mercury.
- High-impact polypropylene case.
- On at 2" of water, off at 1/2".
- ROHS Compliant (Regulations on Hazardous Substances).
- Solid state electronic relay switch sealed in urethane within the float.
- Manual operation-simply rotate the external shaft.

Order No.	Mfg. No. / Description	Price
470029	(902-2000) Float Switch	$59.98 G

Johnson Pump Ultima Switch



- Ultima Switch, 12 and 24 volt in same switch, up to 20 amps.
- Solid state digital switch, on demand.
- Patented Mirus field effect dector cells producing micro-electrical field that detect disruptions caused by water and fluids.
- Detector cells are totally sealed and are never in contact with the water, will not corrode and are not affected by oil or foreign debris.
- Five second delay for sloshing preventing false starts.
- No moving parts, totally sealed, no mercury.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
471365	(36303) Ultima Switch, 12 and 24 volt	$50.98 G

Groco AS-100 Bilge Pump Switch



- AS-100 Bilge pump switch turns bilge pump off and on by sensing changes in pressure (caused by rising or falling bilge water level) in its air tube.
- Approximate levels are ON at 2-3/4 of bilge level and OFF at 1.
- Use with a pump that draws up to 10 amps continuous or up to 20 amps intermittent.

Order No.	Mfg. No. / Description	Price
373102	(AS-100)	$99.98 F

©2014 Donovan Marine, Inc.

Rule Switch Adapter



- Adapter to attach Rule Superswitch or Rule-A-Matic to Rule 1,500, 2,000 or 5-Year Bilge Pumps.

Order No.	Mfg. No. / Description	Price
582800	(65) Switch Adapter	$3.04 I


Rule Hi-Water Bilge Alarm



- Consists of a non-mercury float switch and an in-dash gauge that features both a visual and an audible 85 db alarm.
- Allows an unmanned compartment to be constantly monitored.
- For additional compartments add additional Rule Float Switches.
- Complies with CFR 182.530 which requires a visual and audible alarm in each unmanned space on commercial vessels at least 26' in length.

Order No.	Mfg. No. / Description	Price
581505	(33ALA) Bilge Alarm	$85.98 G

Johnson Pump High Water Alarm With Sensor



- Bilge alert high water alarm with sensor 12 volt.
- High water alarm featuring digital technology using the patented Mirus field effect.
- Totally sealed fluid detector are never in contact with water, will not corrode and are not affected by oil or debris.
- Bilge alert detects water and sends a signal (3 second delay for sloshing) to the alarm and switch conveniently mounted on a panel.
- Three way rocker switch allows alarm to be tested, turned off and armed.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
471351	(72303) 12 volt	$96.98 G

Rule 2-Way Panel Switch



- Dimensions: 2-1/4" x 2".
- 12/24/32 volt.
- For any manually operated system.
- Black stainless steel panel.
- Simple "on" or "off" positions.

Order No.	Mfg. No. / Description	Price
582759	(49) 2-Way Panel Switch	$24.98 E

Rule 3-Way Panel Switch - Standard



- Controls any pump equipped with an automatic float switch.
- Toggle has three position: Automatic, off or manual.
- Black stainless steel panel.
- 12/24/32 volt.

Order No.	Mfg. No. / Description	Price
582735	(45) Dimensions: 2-1/4" x 2"	$25.98 E

Marpac Premier High Water Bilge Alarm



- SensaLevel detects so perfectly because it eliminates failure prone parts.
- NO seals to leak, NO moving contacts to corrode, NO moving levers to become jammed and NO effect from temperature, humidity or vibration.
- The SensaLevel Detector Cell surrounds itself with a microelectrical field.
- When rising water disrupts that field, it triggers the alarm.
- Activation is accurate - no missed signals or false alarms.

Order No.	Description	Price
7-2230	High Water Bilge Alarm	$89.98 G

Johnson Pump High Water Alarm with Ultima Switch



- Bilge alert high water alarm with ultima switch, 12 volt.
- High water alarm featuring digital technology using the patented Mirus field effect.
- Totally sealed fluid detector are never in contact with water, will not corrode and are not affected by oil or debris.
- Bilge alert detects water and sends a signal (3 second delay for sloshing) to the alarm and switch conveniently mounted on a panel.
- Three way rocker switch allows alarm to be tested, turned off and armed.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
471353	(72303-001)	$96.98 G

Boater Sports Bilge Pump Switch



- 3-Way bilge pump switch.
- 10 amp breaker.
- On/Off/Auto.
- Marine grade tinned wire with aluminum face plate.
- Booted toggle switch.
- LED Power indicators.

Order No.	Mfg. No. / Description	Price
1-57444	(57444) Dimensions: 3-1/4" x 2"	$21.95 H

Johnson Pump Bilge Pump 2-Way Panel Switch



- Switch panel that gives full control of your bilge pump.
- Just push the button for the manual or automatic bilge pumping.
- The automatic feature operates in combination with the automatic bilge switches or the electronic float switch.
- Matt black finish has integrated fuse holder and operating light.
- Dimensions: 2.99" x 2.17" x 1.57" depth.

Order No.	Mfg. No. / Description	Price
471361	(82004) 2-Way Panel Switch, 12 volt	$35.98 G
471362	(82044) 3-Position Bilge Pump Switch, 12 volt	$37.98 G

Rule 3-Way Panel Lighted Switches - Deluxe



- Controls any pump equipped with an automatic float switch.
- Toggle has three positions: Automatic, off and manual.
- The "manual" position has a "fail-safe" spring return to "off".
- Black stainless steel with red indicator light and fuse.
- Dimensions: 3-1/4" x 2".

Order No.	Mfg. No. / Description	Price
582709	(41) 12 volt	$34.98 E
582711	(42) 24/32 volt	$35.98 E

Jabsco 12 volt Bilge Motor



- Spare or replacement motor for ITT Jabsco 12V DC Bilge Pumps.
- For models: 36900, 36800, 36950, 34600 and 36600.

Order No.	Mfg. No. / Description	Price
416138	(30200-0000) 12 volt	$166.98 F

Jabsco Cummins K19 125GPM 2 HOL



Order No.	Mfg. No. / Description	Price
418106	(18770-0003)	$3789.98 F

Jabsco Cummins Vortex Pump



Order No.	Mfg. No. / Description	Price
418120	(15780-0000)	$8,530.98 G

Rule 3-Way Lighted Rocker Panel Switch



- Built-in fuse holder and an internally lighted rocker switch with 3 positions (Automatic, Off or Manual).
- Includes fail-safe spring return to Off from the manual position.

Order No.	Mfg. No. / Description	Price
582713	(43) 3-Way Switch	$34.98 E

Jabsco Bilge Pump Service Kit



- Kit includes replacement belt, diaphragm, valves, and pulsation dampeners to restore the performance of old or worn out pumps.

Order No.	Mfg. No. / Description	Price
416026	(30124-0000)	$144.98 G

Jabsco Variable Speed Pump 5.0



- 5.0 gallons per minute (19 liters).
- DiMOND technology provides consistent water pressure.
- Up to 50% less power consumption.
- Learns the boat's water pressure system to improve pump performance.

Order No.	Mfg. No. / Description	Price
414701	(42755-0092)	$362.98 G

Jabsco PAR-MAX 4 Bilge and Shower Drain Pump



- Run dry without damage.
- Powerful heavy duty motor with thermal overload protection.
- Snap-in ports.
- Self-priming up to 10 ft.
- 258 GPH open flow output.
- Connections for 3/4" ID hose.

Order No.	Mfg. No. / Description	Price
414817	(31750-0092) 12 volt	$225.98 Q

©2014 Donovan Marine, Inc.

Jabsco Medium and Heavy Duty Bilge Pumps



- Self-priming so they can be remotely mounted in a high & dry location.
- Unique run-dry diaphragm design.
- Belt drive and rubber mounting pads reduce noise and vibration.
- Corrosive resistant base assembly.
- Supplied with pumpgard in-line strainer.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414235	(36680-2000) 5.5 GPM	$447.98 F
414261	(36600-0000) 8 GPM	$544.98 F
414350	(36200-0000) Spare Strainer	$26.98 G

Jabsco Light Duty Bilge Pump



- Self-priming allows pump to be mounted above bilge and sump areas with only the intake hose in the bilge.
- Run-dry design.
- Tough plastic body has ports for 3/4" ID hose.
- Supplied with pumpgard in-line strainer.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414211	(36960-2000) 4 GPM	$369.98 F
414350	(36200-0000) Spare Strainer	$26.98 G

Marpac Impeller Removal Tool



- Fits most impeller makes.
- Won't damage pump.
- Easy to use.
- Stainless steel construction for a lifetime of use.

Order No.	Description	Price
7-1898	Impeller Removal Tool	$49.98 G

Jabsco Pedestal Mounts

- Jabsco pedestal mounts are constructed from marine quality bronze and stainless steel for ruggedness and reliability.
- Ideal for engine cooling, washdown, circulation and many general purpose on-board or dockside applications.
- The shaft is installed with permanently lubricated ball bearings for long life and heavy duty service.
- Self-priming with the ability to operate in either direction variable speeds.
- Removable end cover for easy impeller service.
- Handles hard and soft solids without clogging.
- Can pump in either direction.
- Will not airlock.

Jabsco Flexible Impeller Pedestal Pump



- 23.3 GPM.
- Port Type: 1" NPT Internal.
- 5/8" diameter shaft.
- Mechanical face seal.

Order No.	Mfg. No. / Description	Price
417940	(777-9001) Pump	$402.98 G
418361	(920-0001P) Neoprene Impeller	$39.98 G

Jabsco Flexible Impeller Pedestal Pump



- 11.0 GPM.
- Port Type: 1/2" NPT.
- 5/8" diameter shaft.
- Lip seal.

Order No.	Mfg. No. / Description	Price
417902	(1673-1001) Pump	$368.98 G
418309	(1210-0001) Neoprene Impeller	$37.98 F

Jabsco Flexible Impeller Pedestal Pump



- 5.8 GPM.
- Port Type: 3/8" NPT Internal.
- 1/2" diameter shaft.
- Lip seal.

Order No.	Mfg. No. / Description	Price
417898	(2620-1101) Pump	$295.98 G
418500	(18673-0001) Neoprene Impeller	$47.98 Q

Jabsco Flexible Impeller Pedestal Pump



- 83 GPM.
- Port Type: 2" NPT Internal.
- 1" diameter shaft.
- Carbon-Ceramic face seal.

Order No.	Mfg. No. / Description	Price
417976	(18370-0000) Pump	$1,239.98 G
418457	(17936-0001P) Neoprene Impeller	$107.98 F

Jabsco Flexible Impeller Pedestal Pumps



- 62 GPM.
- Port Type: 1-1/4" NPT Internal.
- 1" diameter shaft.
- Carbon-Ceramic face seal.
- Full thickness cam, neoprene impeller and standard shaft.

Order No.	Mfg. No. / Description	Price
417953	(6400-0004) Pump	$634.98 G
418435	(836-0001P) Neoprene Impeller	$58.98 G

- Half thickness cam, neoprene impeller and short shaft for CAT Engines.

Order No.	Mfg. No. / Description	Price
417954	(6400-1051) Pump	$594.98 F
418435	(836-0001P) Neoprene Impeller	$58.98 G

Jabsco Engine Cooling Pump - Flange Mount



- This semi-positive displacement design has superior priming ability, is compact, with simple mechanical characteristics that ensure trouble-free running and long life.
- Consult Jabsco reference guide for engine model.
- Flagship, Palmer, Lehman and Chris Craft Replacement Pump.

Order No.	Mfg. No. / Description	Price
418093	(5850-0001) Pump, 3/4" NPT	$604.98 F
418309	(1210-0001P) Neoprene Impeller	$37.98 F

Johnson Engine Cooling Pump



- Bronze body, flexible impeller, stainless steel shaft, pedestal mounted, universal application, lip seal.
- 1" IPT capacity 28.3 GPM (F7B-8007).

Order No.	Mfg. No. / Description	Price
461513	(10-24572/51) 1 inch NPT, F7B-8	$358.98 Q
462034	(09-1028BT-1) Impeller	$43.98 G

Johnson Engine Cooling Pumps



- Note 15% more flow!
- GM engine blocks with crank driven cooling including Volvo Penta, Indmar, Marine Power, and PCM.
- Bronze body, stainless steel shaft, flexible impeller, flange mounted, vertical ports, OEM pumps.

Order No.	Mfg. No. / Description	Price
461385	(10-24228-1) Small GM V-8 Crankshaft Pump	$273.98 G
461401	(10-24805-01) Crankshaft pump, F6B-9	$239.98 G
462248	(09-1027B-1) F5 Impeller	$36.98 G
462250	(09-812B-1) Impeller	$50.98 H
462907	(09-45825) Service Kit for F6B9	$65.98 E

Johnson Engine Cooling Pump



- Fits Detroit Diesel Engine Models 671T, 871 and 1271.
- 2 port connection.

Order No.	Mfg. No. / Description	Price
461828	(10-13095-02) F9B-9 Gear Driven without Flange	$1,417.98 G
462301	(09-814B) Impeller, Neoprene, 12 Blade	$110.98 R

Jabsco Flexible Impeller Pedestal Pump



- 62 GPM.
- Port Type: 1-1/4" NPT Internal.
- 1" diameter shaft.
- Carbon-Ceramic face seal.
- Features: Full thickness cam, neoprene impeller and standard shaft.

Order No.	Mfg. No. / Description	Price
417964	(7420-0004) Pump	$722.98 G
418435	(836-0001P) Neoprene Impeller	$58.98 G

Jabsco Sherwood Type Engine Cooling Pump



- Constructed marine quality bronze and stainless steel shaft for ruggedness and reliability.
- Alternator mount.
- Pulley drive - 6-1/2" Full Grip "A" Belt.
- Bearings: Twin single row, ball type.
- Carbon-Ceramic Face type.
- Replaces Sherwood Model G-5 pump.
- 1-1/4" port connection.

Order No.	Mfg. No. / Description	Price
418078	(18940-0010) Pump	$766.98 F
418599	(11979-0001P) Neoprene Impeller	$51.98 Q

Jabsco MerCruiser Type Engine Cooling Pump



- Lip Type.
- 1-1/4" hose barb.
- Constructed from marine quality bronze and stainless steel shaft.
- Bearings: Twin single row, Ball Type.
- Direct replacement for Quicksilver OEM #46-72774-A32.

Order No.	Mfg. No. / Description	Price
418143	(43210-0001) Pump	$754.98 F
418637	(17954-001P) Impeller, OEM #47-59362	$48.98 G

Johnson Engine Cooling Pump



- F35B-8 Engine Cooling Pump-For Onan, Westerbeke.
- Port Size: 3/8 NPT.
- Mounting type: Pedestal.
- Impeller 09-808B-1- Service Kit 09-46840.

Order No.	Mfg. No. / Description	Price
461944	(10-24569-09) F35B-8 Engine Cooling Pump	$252.98 E
462262	(9-808B-1) Impeller	$23.98 G
462868	(09-45589) Service Kit for F35B-8/8007	$50.98 G

Johnson Pump Impeller, original F4, MC97 material



- For popular engines such as Fischer Panda, Volvo Penta, Yanmar.

Order No.	Mfg. No. / Description	Price
462274	(09-1026B-1) F4 Series Impeller	$27.98 G

©2014 Donovan Marine, Inc.

Johnson Accessories for Engine Cooling Pump



- Impeller, 09-820B,Original OEM impeller F95, Neoprene.

Order No.	Mfg. No. / Description	Price
462313	(09-820B) Impeller	$304.98 F
463098	(0.12172.421) O-Ring	$5.98 G

Johnson Electro-Magnetic Clutch Assembly



- Fits F7B-5, F8B-5 and F9B-5 clutch pumps.
- Double A pulley.
- 12 volt.

Order No.	Mfg. No. / Description	Price
462995	(0.3454-001)	$212.98 F

Johnson Electro-Magnetic Clutch Pump



- Electric Clutch Pump, F8B-50017, 1-1/4" NPT, 12v, 2xA Pulley with 12v Clutch Bronze body.
- Mechanical seal.
- Impeller 09-819B-Service Kit 09-45575.
- Cross to Jabsco 11870-0005.

Order No.	Mfg. No. / Description	Price
461777	(10-1302295-1) Electric Clutch Pump	$885.98 G

Johnson Impeller for Engine Cooling Pump



- Impeller for Engine Cooling Pump F9 neoprene.

Order No.	Mfg. No. / Description	Price
462298	(09-802B) 9 Blade	$115.98 G

Johnson Pump Volvo Penta /Johnson Pump Repair Kit



- Volvo Penta /Johnson Pump F5 repair kit includes: impeller, o-ring, lip seal, ball bearing, retaining ring, slotted screws, and lube pack.

Order No.	Mfg. No. / Description	Price
462340	(09-5000) F5 Cooling Pump Repair Kit	$102.98 R
462342	(09-6000) F6 Cooling Pump Repair Kit	$119.98 R

Johnson Pump Multi Purpose Flexible Impeller Pump



- Utility pump 3/4 inch NPT or 1 inch hose.
- Offers a high level of flexibility making them ideally suited as bilge, deckwash, oil or diesel transfer pumps and various other dutys.
- Ignition protected.
- Nitrile impeller.

Order No.	Mfg. No. / Description	Price
461866	(10-24689-03) F4B-19, 12 GPM, 12 volt	$314.98 G
462286	(09-824P-9) Wakeboard and Ballast Pump Impeller	$36.98 G

Jabsco Flexible Impellers

- Nitrile, 1-1/4"D, 15/32" W, 5/16" Shaft Diameter, 6 Blades

Order No.	Mfg. No. / Description	Price
415364	(1414-0003-P) Silhouette A, Drive Type 4	$32.98 G

- Neoprene, 1-9/16" D, 3/4" W, 3/8" Shaft Diameter, 6 Blades

Order No.	Mfg. No. / Description	Price
418497	(4528-0001-P) Silhouette D, Drive Type 1 or 2	$46.98 G

- Neoprene, 3-1/4" D, 2-57/64" W, 25/32" Shaft Diameter

Order No.	Mfg. No. / Description	Price
418613	(18958-0001-P) Silhouette GG, Drive Type 3	$99.98 F

- Nitrile, 2-1/4" D, 1-1/4" W, 5/8" Shaft, 7 Blades

Order No.	Mfg. No. / Description	Price
418311	(1210-0003-P) Silhouette K, Drive Type 7	$37.98 F

- Neoprene, 2-1/4" D, 1-1/4" W, 1/2" Shaft Diameter, 10 Blades

Order No.	Mfg. No. / Description	Price
418562	(3085-0001-P) Silhouette L, Drive Type 7	$73.98 Q

- Nitrile, 2-9/16" D, 2" W, 5/8" Shaft Diameter, 8 Blades

Order No.	Mfg. No. / Description	Price
418574	(4598-0003-P) Silhouette M, Drive Type 3	$69.98 Q

- Nitrile, 3-3/4" D, 2-1/2" W, 1" Shaft Diameter, 12 Blades

Order No.	Mfg. No. / Description	Price
418448	(836-0003-P) Silhouette O, Drive Type 7	$55.98 G

- Neoprene, 3-3/4" D, 3-1/2" W, 1" Shaft Diameter, 12 Blades

Order No.	Mfg. No. / Description	Price
425492	(17370-0001-P) Silhouette Q, Drive Type 5	$122.98 E

- Neoprene, 3-3/4" D, 2-1/2" W, 1" Shaft Diameter, 12 Blades

Order No.	Mfg. No. / Description	Price
418424	(17935-0001-P) Silhouette Q, Drive Type 7	$69.98 F

- Neoprene, 2-9/16" D, 1-5/8" W, 5/8" Shaft Diameter, 12 Blades

Order No.	Mfg. No. / Description	Price
418664	(18948-0001-P) Silhouette X, Drive Type 3	$49.98 G

- Neoprene, 2-9/16" D, 2" W, 5/8" Shaft Diameter, 10 Blades

Order No.	Mfg. No. / Description	Price
418384	(17956-0001-P) Silhouette Y, Drive Type 6	$123.98 F

- Neoprene, 2-9/16" D, 2" W, 5/8" Shaft Diameter, 10 Blades Replaces 920-0001

Order No.	Mfg. No. / Description	Price
418359	(17937-0001-P) Silhouette Y, Drive Type 7	$40.98 F

- Neoprene, 3-1/16" D, 3" W, 13/16" Shaft Diameter, 12 Blades

Order No.	Mfg. No. / Description	Price
415186	(30919-0001) Silhouette Z, Drive Type 5	$90.98 G

Johnson Pump Application Guide

Johnson Pump

Johnson Pump Model Number	Engine Application where Applicable	Port Size	Mounting Type	Serivce Kit	Impeller	End Cover	Wearplate	Cam
F5B-9 (461385) 10-24228-1 (10950-240)	Volvo 431A, 500A/B, 501A, 570A, 571A, AQ180 AQ200, AQ200B/C/D/F, AQ205A, AQ211A AQ225, AQ231A/B, AQ260, AQ255B, AQ260A, AQ271A/B/C/D, AQ280A, AQ290A	3/4"	Flange	09-45808	(462248) 09-1027B (1210-0001)	(462604) 01-45312-1	–	(462755) 05-04-174
F35B-9 10-35-157-3 (29300-2101c)	Volvo MB10A/11, MD1, MD11C/D, MD1A/1B, MD1KHD/HY, MD2, MD2B, MDHBY MD5B/C, MD6A, MD7A/B	3/8"	Flange	09-45589	09-808B	01-43239 (29305-0000)	01-45087 (29306-0000)	01-42679 (ALB)
F7B-9 10-24277-3	Volvo AD31A/B, AD41A/B, AQAD31A, AQD40A, AQD41A, D41A/B, MD31, MD31A, MD40A, TAMD31, TAMD31A, TAMD41, TAMD41A/B, TMD31, TMD31A/B, TMD40A/B/C, TMD41A/B	1"	Flange	09-45592	(462034) 09-1028B (17937-0001)	01-42441 (3993)	–	01-42679 (934)
F4B-9 10-35098-3	Volvo AQ110/115, AQ115A/B, AQ120, AQ120B, AQ125A/B, AQ130, AQ130A/B/C/D, AQ140, AQ60F, BB100, BB115A/B, BB30, MB16A, MB18, MB18F, MB20A/B/C, MD17C/D, MD20B, MD3B	3/8"	Flange	09-45905	09-1026B (18673-0001)	01-45282 (29475-0000)	–	01-42389 (10818)
F6B-9 (461401) 10-24232-1 (22740-0000)	Indmar Marine Power	3/4"	Flange	09-45825	(462250) 09-812B (13554-0001)	(462604) 01-45312-1	–	(462767) 01-45670
F9B-9 (461804) 10-13096-2	Detroit Diesel 653, 671, 853	1-1/2" Flanged	Flange	09-45579	(462050) 09-819B	01-42422-1 (9336)	01-42423 (2574)	01-42680 (834)
F9B-9 (461828) 10-13095-02	Detroit Diesel 671T, 871, 1271	2" Flanged	Flange	0945582	09-814B (17936-0001)	01-42422-1 (9336)	01-42423 (2574)	01-43137 (6988)
F9B-9 10-24239-2 (22040-0501)	Man D2540MLE, D2840LXE/LE401, D2849LE403, D2842LE, D2842LE401/02/06/03/08, D2842LYE/LZE, D2848LE/LXE/LE401/403	2" Flanged	Flange	09-45581	09-802B (17936-0001)	01-42422-1 (9336)	01-42423 (2574)	01-43137 (6988)
F5B-9 10-24140-5	Ford Engines	3/4" NPT	Flange	09-45583	(462248) 09-1027B (1210-0001)	01-42398 (3992)	01-42399 (7883)	01-42397 (490)
F7B-9 10-24139-5	Ford Engines	1" NPT	Flange	09-45590	(462034) 09-1028B (17937-0001)	01-42441 (3993)	01-42443 (4156)	01-42679 (934)
F35B-8007 10-35038-4 3/8" Shaft (2620-1001)	Appollo Diesel, Next Generation	3/8" NPT	Pedestal	09-45589	09-808B	01-43239 (29305-0000)	01-45087 (29306-0000)	01-42415 (29303-0000) (AL8-01)
F35B-8027 10-35038-5 (12mm) metric shaft	Onan, Westerbeke	3/8" NPT	Pedestal	09-45589	09-808B	01-43239 (29305-0000)	01-45087 (29306-0000)	01-42415 (29303-0000) (AL8-01)
F4B-1907 10-24512-3	Multi purpose impeller pump	1/2" NPT 1' Hose	Pedestal	09-46600	09-824P-9	01-42398 (3992)	–	–
F8B-8007**** 10-13021-95 (6400-0004)	Multi purpose impeller pump	1-1/4" NPT	Pedestal	09-45575	(462050) 09-819B	01-42422-1 (9336)	01-42423 (2574)	01-42680 (834)
F7B-8007* (461513) 10-24070-51	Multi purpose impeller pump	1" NPT	Pedestal	09-45592	(462034) 09-1028B (17937-0001)	01-42441 (3993)	–	01-42679 (934)
F7B-5** (461739) 10-24071-17 (11860-0005)	Electric Clutch Pump 12V, 2A Pulley	1" NPT	Pedestal	09-45592	(462034) 09-1028B (17937-0001)	01-42441 (3993)	–	01-42679 (934)
F8B-5*** (461777) 10-13022-33 (50200-2011)	Electric Clutch Pump 12V, 2A Pulley	1-1/4" NPT	Pedestal	09-45575	(462050) 09-819B	01-42422-1 (9336)	01-42423 (2574)	01-42680 (834)

*Replaces Jabsco Model 777-9001
***Replaces Jabsco Model 11870-0005
**Replaces Jabsco Model 11860-0005
****Replaces Jabsco Model 6400-0004

©2014 Donovan Marine, Inc.

- Clutch pumps combine the unique advantages of the self-priming flexible impeller Jabsco pump and a clutch-drive mechanism to engage or disengage the pump as needed.
- They are available with either manual or electric clutches for application versatility.
- Generally they are powered by propulsion engines but may be driven by any adequate source of belt drive power.
- The clutch will "free wheel" with the source of power until the pump is required.
- Then, whenever desired, the clutch can be engaged to throw the pump into operation for emergency of general circulation requirements.
- Constructed with bronze pump bodies and rotary-mechanical face seals.
- They are equipped with replaceable brass cam and wearplate to prolong serviceability.
- The removable end cover allows easy impeller replacement without having to remove plumbing or drive belt.
- They are ideal for bilge pumping, livewell circulation, deck washdown and many commercial or pleasure boat general pumping requirements.

Jabsco Electric Clutch Pumps


417778


417838

- The electro-magnetic clutch pumps are equipped with a powerful electric clutch for convenient remote operation.
- Comes with double "A" belt grooves in a 7" diameter pulley.
- Carbon/Ceramic Mechanical Type.
- 23.3 GPM.
- 1" IPT.

Order No.	Mfg. No. / Description	Price
417778	(11860-0005) Pump, 12 volt	$846.98 G
418373	(920-0003P) Nitrile Impeller	$39.98 G

- 62 GPM.
- 1-1/4" IPT.

Order No.	Mfg. No. / Description	Price
417802	(11870-0005) Pump, 12 volt	$1,055.98 F
417814	(11870-0007) Pump, 32 volt	$1,030.98 F
418373	(920-0003P) Nitrile Impeller	$39.98 G

- 83 GPM.
- 2" IPT.

Order No.	Mfg. No. / Description	Price
417838	(18330-0000) Pump, 12 volt	$1,444.98 G
418465	(6760-0003P) Nitrile Impeller	$182.98 E

Jabsco Cyclone Centrifugal Pump - Stainless Steel



- Heavy duty robust stainless steel construction.
- Virtually silent running.
- 3,500 hour long life DC motor.
- Rotatable head 90°.
- Anti-clog impeller design.
- NPT and BSP ports available for global markets.
- Long life mechanical seal.
- Typical applications would be for circulation applications such as hot water systems, livewell or bait tank installations.
- 3/4" NPT.

Order No.	Mfg. No. / Description	Price
417027	(50840-0012) 12 volt	$294.98 F

Jabsco Cyclone Centrifugal Pump - Stainless Steel

Order No.	Mfg. No. / Description	Price
418725	(11831-0000) End Cover 1"	$27.98 G
418738	(12062-0000) End Cover 1-1/4" - 2"	$88.98 G
418878	(890-0000) EC Gasket 1"	$5.98 Q
418888	(816-0000) EC Gasket 1-1/4" - 2"	$10.98 Q
423246	(6408-0000) Seal	$70.98 F
423272	(6988-0000) Cam	$64.98 F

Jabsco Manual Clutch Pumps


417675


417698

- The manual clutch pumps are equipped with a mechanically activated clutch that is engaged with the flip of a lever on the pump body.
- Although they require the operator to go to the location of the pump to put it into service, they do provide security of operation in the event of an electrical power failure.
- The 51000-Series clutch pumps are capable of operating in either rotational direction.
- The 6590-0005 must rotate in a clockwise direction looking at the end cover.
- 417675 and 417687 has a 6" diameter pulley.
- 417698 has a 7" diameter pulley.

Order No.	Mfg. No. / Description	Price
417675	(51080-9013) 26 GPM, 1" IPT, Imp.	$993.98 G
417687	(6590-0005) 62 GPM, 1-1/4" IPT, Imp.	$1,536.98 G
417698	(51270-9013) 83 GPM, 2" IPT, Imp.	$1,721.98 G

Jabsco Water Puppy - Flexible Impeller Type Pumps


417217


417243

- Applications: Bilge pumping, bait tank circulation, livewell aerator and windshield washers.
- Continuous duty.
- Self-priming.
- Low voltage DC motor pump units.
- Bronze pump heads.
- Ignition protected.
- The ports have 1/2" internal pipe thread and 1" external hose barb.
- Included are two adapters for connecting garden hose.

Water Puppy Pump - Non-Reversible.

Order No.	Mfg. No. / Description	Price
417217	(18660-0121) 12 volt, 6.3 GPM @ 10' Head	$197.98 G

Commercial Duty Water Puppy Pumps - Reversible.

Order No.	Mfg. No. / Description	Price
417243	(18670-0123) 12 volt, 7.8 GPM @ 10' Head	$341.98 G

Replacement Impellers.

Order No.	Mfg. No. / Description	Price
418284	(6303-0001P) Neoprene Impeller, 6 Blades	$28.98 G
418295	(6303-0003P) Nitrile Impeller, 6 Blades	$27.98 G

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Jabsco Service Parts

Order No.	Mfg. No. / Description	Price
416176	(30021-0000) Belt Kit	$26.98 G
416188	(30022-0000) Belt Kit	$24.98 G
416215	(30002-0000) Valve Kit	$60.98 F
416288	(30016-0000) Diaphragm Kit	$44.98 G
416467	(2235-0000) Wear Plate	$15.98 G
416594	(2574-0000) Wear Plate	$26.98 G
416803	(92701-0180) Seal	$15.98 G
416820	(90200-0000) Service Kit for 45710 Pump	$64.98 G
416912	(3181-0000) Slinger 1-1/4"	$15.98 G
416998	(3298-0000) Gasket	$11.98 G
417511	(6065-0003) Pump Head	$634.98 G
418625	(18786-0001-W) Impeller Kit	$183.98 G
418702	(11830-0000) End Cover 3/8"	$16.98 G
418738	(12062-0000) End Cover 1-1/4 - 2	$88.98 G
418878	(890-0000) EC Gasket 1	$5.98 Q
423119	(4156-0000) Wear Plate/1	$17.98 G
423121	(4156-0010) Wear Plate	$27.98 FG
423195	(490-0001) Brass Cam	$35.98 F
423222	(6398-0000) Slinger, Bag of 3	$28.98 F
423234	(6407-0010) Seal	$67.98 F
423296	(7867-0000) Brass Cam	$43.98 F
423309	(7869-0000) Cam/Plate Assembly	$53.98 F
423323	(7884-0000) Cam/Wear Plate Assembly	$47.98 F
423335	(817-0000) Bearing Seal 1-1/4"	$27.98 F
423347	(818-0000) Seal	$38.98 F
423359	(824-0020) SS Shaft	$362.98 F
423361	(18838-0001-P) Flexible Impeller	$40.98 F
423373	(834-0001) Brass Cam 1-1/4"	$54.98 F
423385	(91002-0020) Screw, 3 Pack	$15.98 F
423397	(91003-0010) End Cover Screw, 3 Pack	$14.98 F
423400	(91004-0090) Cam Screw, 3 Pack	$8.98 F
423412	(91005-0040) CVR/Cam Screw, 3 Pack	$7.98 F
423424	(913-0000) Inner Bearing Seal/1	$18.98 F
423436	(914-0000) Outer Bearing Seal/1	$23.98 F
423462	(92600-0060) Bearing	$110.98 F
423498	(92700-0060) 1 Lip Seal	$25.98 F
423501	(92700-0080) Seal	$57.98 E
423513	(92700-0420) Seal	$27.98 F
423537	(934-0000) Brass Cam	$30.98 F
423549	(96080-0080) Face Seal 1	$64.98 F
423587	(17360-1001) Engine Cooling Pump	$2,689.98 G
423640	(98022-0500) Field Coil, 12 volt	$184.98 G
423664	(92300-0030) Clutch Assembly, 12 volt	$368.98 G
423688	(90058-0003) Service Kit	$158.98 F
425517	(17365-1000) Gasket End Cover	$20.98 F
425529	(17374-1000) Cam Liner	$236.98 F
425531	(17372-1000) Wear Plate	$91.98 F
425555	(96080-0371) Water Seal	$91.98 F
425567	(18721-0000) Retaining Ring/Seal	$19.98 F
425579	(15296-1000) Wear Plate Kit (Vortex)	$561.98 F
425581	(15297-1010) Cam Wear Kit (Vortex)	$492.98 F
425593	(15294-1010) Wear Ring (Vortex)	$426.98 F
425606	(15295-1010) Shaft (Vortex)	$490.98 F
425668	(17366-1000) Shaft	$878.98 F
425810	(90071-0001) Minor Service Kit	$468.98 F
425825	(90202-0000) Minor Service Kit Cummins Vortex	$941.98 G
425830	(99202-0000) Major Service Kit Cummins Vortex	$3,583.98 G
425834	(18789-0001) Impeller	$222.98 F
425858	(18785-0000) Liner/O Ring	$242.98 F
425860	(18784-2000) End Cover	$451.98 F
425872	(18787-0000) Wear Plate	$224.98 F
425911	(18753-0525) Shaft	$331.98 F
418221	(50070-0200) Impeller Puller	$136.98 G

Groco U-Lube Oil Change Systems

GROCO



- At the heart of GROCO's U-Lube systems is a powerful gear pump that delivers an honest 3-plus GPM.
- All models have dry-run protection, touchpad control, a plumbing schematic to tell you what hose goes where, and a handy maintenance log.
- G-3 is covered (except for the valves), for a clean engine room appearance, and offers a compact mount footprint. Touch-pad control and over-current protection are cover-mounted.
- G-6 is covered (except for the valves), and offer a slim mount footprint. Touch-pad control and over-current protection are cover-mounted.

Order No.	Mfg. No. / Description	Price
S/O	(G-3) 3-Port	POR
S/O	(G-6) 6-Port	POR

Jabsco Vane Pumps

JABSCO



- Self-priming rotary vane pumps are a positive displacement type design with an off-center eccentric rotor whose vanes slide inward and outward, as they move from the top to the bottom of the bore; this action creates a vacuum to pull liquid into the pump.
- Diesel fuel transfer and engine oil changing.
- Intermittent duty - 30 minutes maximum.
- Port Type: 1/2" NPT female and 1" hose barb.
- Note: Do not pump gasoline or other explosive liquids.

Order No.	Mfg. No. / Description	Price
417053	(18680-1000) 6 GPM, 12 volt, Reversible	$382.98 G

Groco Gear Pumps

GROCO



- Self-priming, are instantly reversible, and are capable of operation in either direction.
- Relatively low flow (less than vane pumps) makes them suitable for duties such as deck-wash, fuel transfer, ballast transfer, and oil change.
- All models have an ignition protected motor and #316 stainless steel shaft, and are available in models that provide reversing (R), remote reversing (RR),and reversing with touchpad (RT) control options.
- 3/8" NPT.
- Note: Do not pump gasoline or other explosive liquids.

Order No.	Mfg. No. / Description	Price
S/O	(GPB-1) Control Type Included: None	POR
S/O	(GPBR-1) Control Type Included: Pump Mounted Reversing Switch	POR
S/O	(GPRR-1) Control Type Included: Remote Momentary Reversing Rocker Switch	POR

Groco Flo-Master SPO-60 Series Vane Pumps

GROCO

375181



375177



- Oil pumping, diesel fuel pumping, bilge pumping and deckwash.
- Mounts in any position.
- Self-priming to 24".
- Continuous duty face-type shaft seal.
- Ignition protected permanent magnet ball bearing motor.
- Delrin rotor & blades are not affected by exposure to diesel fuel or crankcase oil.
- Optional reversing switch allows pumping in either direction.
- Ports are threaded externally for garden hose and internally for 1/2" NPT.
- 24 and 32 volt available.
- Note: Do not pump gasoline or other explosive liquids.

Order No.	Mfg. No. / Description	Price
375181	(SPO-60N-12V) Non-Reversing, 12 volt, 7 GPM	$378.98 Q
375177	(SPO-60R-12V) Reversing, 7 GPM	$592.98 Q

©2014 Donovan Marine, Inc.

Jabsco #	DMI #	Description
02090104	352524	PRESSURE SWITCH/4405
02090118	352500	PRESSURE SWITCH/4325
02840100A	352726	HIGH VOLUME WTR SYSTEM
04105501A	352574	PUMP GENERAL PURPOSE 12V
04325043A	352575	WATER SYSTEM PUMP 45GPM
04325143L	352714	WASHDOWN PUMP KIT 12V
04405143A	352702	12V WATER PRESS PUMP
04405443A	352738	32V WATERPRESS PUMP 1/2
11810-0003	417459	AC MOTOR PUMP 9.5GPM
11830-0000	418702	END COVER 3/8"
11831-0000	418725	END COVER 1"
11860-0005	417778	CLUTCH PUMP 12V 1"
11870-0005	417802	CLCH PUMP 12V 1-1/4"
11870-0007	417814	CLCH PUMP 32V 1-1/4"
11979-0001-P	418599	IMPELLER
12062-0000	418738	END COVER 1-1/4"-2"
1210-0001-P	418309	IMPELLER
1210-0003-P	418311	IMPELLER
12210-0003	417407	AC MOTOR PUMP 3.4GPM
1414-0003-P	415364	OIL CHANGER IMPELLER
14750-0001	418233	IMPELLER
14750-0003-P	418246	IMPELLER
14780-0001	413601	QUARTZ FLOODLIGHT
15294-1010	425593	WEAR RING (VORTEX)
15295-1010	425606	SHAFT (VORTEX)
15296-1000	425579	WEAR PLATE KIT (VORTEX)
15297-1010	425581	CAM WEAR KIT (VORTEX)
15780-0000	418120	CUMMINS VORTEX PUMP
16731001	417902	1/2" ENG PUMP 11.3 GPM
17215-0000	415275	DRILL PUMP KIT
17250-0003	415287	DRILL PUMP
17255-0003-P	415353	DRILL PUMP IMPELLER
17360-1001	423587	2" G.M. REPLACEMENT PUMP
17365-1000	425517	GASKET END COVER
17366-1000	425668	SHAFT
17370-0001-P	425492	IMPELLER
17372-1000	425531	WEAR PLATE
17374-1000	425529	CAM LINER
17800-2000	415326	OIL CHANGER UNIT
17850-1012	415338	DIY OIL CHANGER
17860-0012	415340	OIL CHANGER FLAT TANK
17890-0000	415302	OIL ABSORBER PAD
17935-0001-P	418424	IMPELLER
17936-0001-P	418457	IMPELLER
17937-0001-P	418359	IMPELLER
17954-0001-P	418637	47-59362 MERC IMPELLER
17956-0001-P	418384	IMPELLER
18080-0000	415299	DRAIN KIT
18220-1127	417040	MPU BALLAST W/PUPPY
18330-0000	417838	CLUTCH PUMP 12V 2"
18370-0000	417976	ENG PUMP 83 GPM
18590-2092	415154	MACERATOR 12V RUNDRY
18598-1000	415162	MACERATOR SERVICE KIT
18610-0003	417422	AC PUMP 5.8GPM
18660-0121	417217	12V WATER PUPPY 6.3GPM
18670-0123	417243	12VHD WATER PUPPY 7.8GPM
18673-0001-P	418500	IMPELLER
18680-1000	417053	12V PUMP 5GPM
18685-0000	414463	115V FUEL TRANSFER PUMP
18690-0000	415174	HD MACERATOR 110V
18721-0000	425567	RETAINING RING/SEAL
18753-0178	413067	BULB FOR 135SL LIGHT
18753-0336	413079	BULB FOR 255SL LIGHT
18753-0455	413081	BULB FOR 146SL LIGHT
18753-0525	425911	SHAFT
18770-0003	418106	CUMMINS K19 125GPM 2-HOL
18784-2000	425860	END COVER
18785-0000	425858	LINER/O RING
18786-0001-W	418625	IMPELLER KIT
18787-0000	425872	WEAR PLATE
18789-0001	425834	IMPELLER
18810-0000	414641	PRESSURE TANK
18838-0001-P	423361	SHERWOOD IMPELLER
18940-0010	418078	1-1/4" SHERWOOD PUMP
18948-0001-P	418664	10615 SHERWOOD IMPELLER
18958-0001-P	418613	IMPELLER
2235-0000	416467	WEAR PLATE
2574-0000	416594	WEAR PLATE
2620-1101	417898	3/8" ENG PUMP 5.8 GPM
29045-0000	414920	TOILET SRV KIT PRE '97
29045-2000	414932	TOILET SRV KIT AFT 1997
29090-3000	414906	COMPACT MANUAL TOILET
30002-0000	416215	VALVE KIT
30016-0000	416288	DIAPHRAGM KIT
30021-0000	416176	BELT KIT
30022-0000	416188	BELT KIT
30124-0000	416026	SERVICE KIT
30200-0000	416138	12V D.C. MOTOR KIT
30573-0003	414627	ACCUMULATOR
3085-0001-P	418562	IMPELLER
30919-0001	415186	IMPELLER
31395-0092	414603	PARMAX PRESS PUMP 2.9GPM
31395-0094	414480	PUMP S/E 2.9GPM 24V
31620-0092	414490	PARMAX PUMP 4.5GPM 12V
31705-0092	414817	BILGE/LIVEWELL PUMP
31777-0000	414590	SMOOTH FLOW PUMP CONTROL
3181-0000	416912	SLINGER 1-1/4"
32600-0092	414487	PARMAX PUMP 3.5GPM 12V
32900-0092	414780	WASHDN KIT 4.0GPM W/HOSE
3298-0000	416998	GASKET
33799-0000	415251	PUMP
34060-0010	415249	PUMP
34060-0130	415237	PUMP-HAND OIL DRAIN
34344-0000	414689	CHECK VALVE
34739-0010	413928	150 CFM FLNG BLOWER 12V
34744-0000	413904	BLOWER 115V AC
35115-0020	413916	105 CFM FLNG BLOWER 12V
35400-0000	413966	250 CFM FLNG BLOWER 12V
35515-0010	414019	105 CFM FLEX BLOWER 12V
36200-0000	414350	PUMP GUARD 3/4"
36400-0000	414754	PUMPGARD 1/2"
36600-0000	414261	BILGE PUMP 12V 8GPM
36680-2000	414235	BILGE PUMP 12V 5.5GPM
36740-0000	414021	150 CFM FLEX BLOWER 12V
36800-1000	414526	WATER PRESSURE SYS 12V
36950-2000	414499	WATER PRESSURE SYS 12V
36960-2000	414211	BILGE PUMP 12V 4GPM
37010-0090	414956	TOILET COMPACT 12V
37010-0092	415085	12V TOILET CONV KIT
37010-1090	414970	HOUSEHOLD 12V HEAD
37040-0000	415011	SERVICE KIT FOR 37010
37041-0010	415023	REPLACEMENT PUMP ASSY
37064-0000	415035	REPL 12V MOTOR
37121-0010	425721	PRESSURE SWITCH
4156-0000	423119	WEAR PLATE/1"
4156-0010	423121	WEAR PLATE
42510-0000	414398	PLASTIC WATER PUMP
42530-0000	414401	COMB PUMP/FAUCET
42755-0092	414701	VFLO VAR SPEED PMP 5.0
43210-0001	418143	MERCRUISER COOLING PUMP
43670-0003	413245	MAIN CONTROL
43670-0004	413257	SECONDARY CONTROL KIT
43990-0014	413269	15' WIRING CABLE ASSY
44411-0045	414716	INLINE WTR PRS RGLTR 3/4
44412-1045	414704	FLSH WTR PRES RGLTR 1/2"
4528-0001-P	418497	IMPELLER
45490-1000	415201	Y VALVE
45900-0000	413500	FLOODLIGHT 4X6 12V/72656
45900-1000	413512	FLOODLIGHT 3X5 12V/73620
45903-0000	413550	4X6 12V BULB
45903-0002	413562	3X5 12V BULB
4598-0003-P	418574	IMPELLER
490-0001	423195	BRASS CAM
50070-0200	418221	IMPELLER PULLER
50840-0012	417027	PUMP CNTRFGL SS 3/4"NPT
50890-1000	415136	PUMP WASTE EVACUATION
50900-1000	414831	PUMP FISH BOX EVACUATION
51080-9013	417675	CLUTCH PUMP 1"
51270-9013	417698	MAN CLUTCH PUMP 2"
52900-0092	414792	PUMP PARMX WASHDN 7.0GPM
58020-1012	414982	TOILET DELUXE FLUSH 12V
5850-0001	418093	OEM COOLING PUMP
5929-0001-P	418335	IMPELLER
5929-0003-P	418347	IMPELLER
60010-2012	412647	SEARCHLIGHT 12V 255SL
60020-0000	412609	SEARCHLIGHT 12V 135SL
60030-0000	413395	DUAL STATN CNTROL/60020
60080-0012	412623	SEARCHLIGHT 12V 146SL
60233-0012	412659	SEARCHLIGHT #233 12V 55W
6050-0003	417507	MOTOR PUMP 26GPM
6056-0003-P	418412	IMPELLER
6065-0003	417511	PUMP HEAD
61050-0012	412611	SEARCHLIGHT 12V 155SL
63022-0012	412750	SEARCHLIGHT SPT/FLD 6"
6303-0001-P	418284	IMPELLER
6303-0003-P	418295	IMPELLER
6303-0007-P	418285	IMPELLER KIT POS
63042-1224	412762	SEARCHLIGHT HI INT 6"
6398-0000	423222	SLINGER BAG OF 3
6400-0004	417953	1-1/4" ENG PUMP 62 GPM
6400-1051	417954	1-1/4" ENG PUMP 62GPM SS
64042-1008	413423	EXTENSION CABLE 25'
64046-0006	413051	SPOT/FLOOD BULB & SEAL
6407-0010	423234	SEAL
6408-0000	423246	SEAL
6590-0005	417687	MAN CLUTCH PUMP 1-1/4"
67262-0000	413043	12V 7" BULB
6760-0003-P	418465	IMPELLER
6988-0000	423272	CAM
7273-0001-P	418524	IMPELLER
7273-0003-P	418536	IMPELLER
7420-0004	417964	1-1/4" ENG PUMP 62 GPM
777-9001	417940	ENGINE PUMP 1" 26GPM
7867-0000	423296	BRASS CAM PUMP
7869-0000	423309	CAM/PLATE ASSEMBLY
7884-0000	423323	CAM/WEAR PLATE ASSEMBLY
816-0000	418888	EC GASKET 1-1/4"-2"
817-0000	423335	BEARING SEAL/1-1/4
818-0000	423347	SEAL
824-0020	423359	SS SHAFT
834-0001	423373	BRASS CAM 1-1/4
836-0001-P	418435	IMPELLER
836-0003-P	418448	NITRILE IMPELLER
890-0000	418878	EC GASKET 1"
90058-0003	423688	SERVICE KIT
90071-0001	425810	MINOR SERVICE KIT
90200-0000	416820	SERVICE KIT F/45710 PUMP
90202-0000	425825	MNR SRV KT CUMMINS VORTX
91002-0020	423385	SCREW 3PK
91003-0010	423397	END COVER SCREW 3-PK
91004-0090	423400	CAM SCREW 3-PK
91005-0040	423412	CVR/CAM SCREW 3-PK
913-0000	423424	INNER BEARING SEAL/1"
914-0000	423436	OUTER BEARING SEAL/1"
920-0001-P	418361	IMPELLER
9200-0023-P	418601	IMPELLER KIT FOR 17800
920-0003-P	418373	IMPELLER
92300-0030	423664	CLUTCH ASSEMBLY 12V
92600-0060	423462	BEARING
92700-0060	423498	1" LIP SEAL
92700-0080	423501	SEAL
92700-0420	423513	SEAL
92701-0180	416803	SEAL
934-0000	423537	BRASS CAM
96080-0080	423549	FACE SEAL 1"
96080-0371	425555	WATER SEAL
98022-0500	423640	FIELD COIL 12V
99202-0000	425830	MJR SRV KT CUMMINS VORTX
A53S-24	582580	PUMP 110V 1800G 24'CORD
AQ500-102	426000	PORT UTILITY PMP RECHARGE
RB280-100	426005	RAIN BARREL PUMP SOLAR

Donovan #	Impeller #	Drive Material	Type	No. of Blades	Diameter	Width	Shaft Dia.	Insert Material	Remarks
Silhouette A									
	1414-0001	Neoprene	4	6	1-1/4"	15/32"	5/16"	BR	
415364	1414-0003P	Nitrile	4	6	1-1/4"	15/32"	5/16"	BR	
	12104-0001	Neoprene	2	6	1-1/4"	15/32"	5/16"	BR	Onan (Use 6-32 x 5/8 Hdl's Screw)
	21414-0001	Neoprene	4	6	1-1/4"	15/32"	5/16"	BR	
Silhouette B									
418233	14750-0001P	Neoprene	4	8	1-1/4"	15/32"	5/16"	BR	
418246	14750-0003P	Nitrile	4	8	1-1/4"	15/32"	5/16"	BR	
Silhouette C									
	14609-0001	Neoprene	4	6	1-1/4"	15/32"	5/16"	BR	
	14609-0003	Nitrile	4	6	1-1/4"	15/32"	5/16"	BR	
	14787-0001	Neoprene	4	6	1-1/4"	15/32"	5/16"	PL	Was SS Insert
	14787-0003	Nitrile	4	6	1-1/4"	15/32"	5/16"	PL	Was SS Insert
Silhouette D									
418497	4528-0001P	Neoprene	1 or 2	6	1-9/16"	3/4"	3/8"	BR	Was AL -24
	4528-0003	Nitrile	1 or 2	6	1-9/16"	3/4"	3/8"	BR	Was AL -24 - 37
415353	17255-0003P	Nitrile	–	6	1-9/16"	3/4"	1/4"	None	Impeller Molded on Shaft
	22405-0001	Neoprene	1	6	1-9/16"	3/4"	15/32"	BR	
Silhouette F									
	9200-0001	Neoprene	4	10	1-19/32"	3/4"	5/16"	PL	Was Brass Insert
	9200-0003	Nitrile	4	10	1-19/32"	3/4"	5/16"	PL	Was Brass Insert
	9200-0021	Neoprene	4	10	1-19/32"	3/4"	5/16"	BR	
	9200-0023	Nitrile	4	10	1-19/32"	3/4"	5/16"	BR	
Silhouette G									
	653-0001*	Neoprene	1	6	2"	7/8"	15/32"	BR	
	673-0001*	Neoprene	1 or 2	6	2"	7/8"	1/2"	BR	
	673-0003*†	Nitrile	1 or 2	6	2"	7/8"	1/2"	BR	
	4527-0001	Neoprene	2	6	2"	7/8"	5/16"	None	Was B-12
	4527-0003	Nitrile	2	6	2"	7/8"	5/16"	None	Was B-12
	5616-0001	Neoprene	6	6	2"	7/8"	1/2"	BR	Brass Extended Drive Cup
	5616-0003	Nitrile	6	6	2"	7/8"	1/2"	BR	
418524	7273-0001P	Neoprene	4	6	2"	7/8"	5/16"	PL	
418536	7273-0003P	Nitrile	4	6	2"	7/8"	5/16"	PL	
	22799-0001	Neoprene	3	6	2"	7/8"	1/2"	BR	
Silhouette H									
418284	6303-0001P	Neoprene	4	6	2"	7/8"	5/16"	PL	
418295	6303-0003P	Nitrile	4	6	2"	7/8"	5/16"	PL	
	17486-0001	Neoprene	6	6	2"	7/8"	1/2"	BR	Brass Extended Drive Cup
Silhouette I									
	18653-0001*	Neoprene	1	10	2"	7/8"	15/32"	BR	Johnson 810 B
418500	18673-0001P*	Neoprene	1 or 2	10	2"	7/8"	1/2"	BR	
	18673-0003*	Nitrile	1 or 2	10	2"	7/8"	1/2"	BR	
Silhouette K									
418309	1210-0001P	Neoprene	7	12	2-1/4"	1-1/4"	5/8"	BR	
418311	1210-0003P	Nitrile	7	12	2-1/4"	1-1/4"	5/8"	BR	
	4568-0001	Neoprene	3	12	2-1/4"	1-1/4"	5/8"	BR	Replaces C-12
418335	5929-0001P	Neoprene	6	12	2-1/4"	1-1/4"	1/2"	BR	SS Extended Drive Cup
418347	5929-0003P	Nitrile	6	12	2-1/4"	1-1/4"	1/2"	BR	SS Extended Drive Cup
	13554-0001	Neoprene	7	12	2-1/4"	1-29/32"	5/8"	BR	Johnson 812 B
	14281-0001	Neoprene	5	12	2-1/4"	1-1/4"	5/8"	PL	
	22120-0001	Neoprene	7	12	2-1/4"	2"	5/8"	BR	Volvo V-8
Silhouette L									
418562	3085-0001P	Neoprene	7	10	1/2"	1-1/4"	5/8"	BR	
	18815-0005	Neoprene	6	10	1/2"	1-1/4"	1/2"	BR	SS Extended Drive Cup (Sanitary)


*653-Series impellers are not interchangeable with 673-Series and 18653-Series impellers are not interchangeable with 18673-Series. The shaft diameters are different.
†673-Series impellers may be replaced with the newer 18673-Series.

©2014 Donovan Marine, Inc.

Donovan #	Impeller #	Drive Material	Type	No. of Blades	Diameter	Width	Shaft Dia.	Insert Material	Remarks
Silhouette M									
418361	920-0001P	Neoprene	7	8	2-9/16"	2"	5/8"	BR	
418373	920-0003P	Nitrile	7	8	2-9/16"	2"	5/8"	BR	
	920-0008†	Natl. Rub.	7	8	2-9/16"	2"	5/8"	BR†	For Low Temp. to 27° F - Max. 120° F
	4598-0001	Neoprene	3	8	2-9/16"	2"	5/8"	BR	Was D-12
418574	4598-0003P	Nitrile	3	8	2-9/16"	2"	5/8"	BR	Was D-12-37
418412	6056-0003P	Nitrile	6	8	2-9/16"	2"	5/8"	BR	SS Extended Drive Cup
418599	11979-0001P	Neoprene	7	8	2-9/16"	1-7/16"	5/8"	BR	
	17018-0001	Neoprene	7	8	2-9/16"	3"	5/8"	BR	
Silhouette O									
418435	836-0001P	Neoprene	7	9	3-3/4"	2-1/2"	1"	BR	
418448	836-0003P	Nitrile	7	9	3-3/4"	2-1/2"	1"	BR	
	836-0008†	Natl. Rub.	7	9	3-3/4"	2-1/2"	1"	BR†	
	6760-0001	Neoprene	7	9	3-3/4"	3-1/2"	1"	BR	
418465	6760-0003P	Nitrile	7	9	3-3/4"	3-1/2"	1"	BR	
	6760-0008†	Natl. Rub.	7	9	3-3/4"	3-1/2"	1"	BR†	
Silhouette Q									
425492	17370-0001P	Neoprene	5	12	3-3/4"	3-1/2"	1"	PL	
418424	17935-0001P	Neoprene	7	12	3-3/4"	3-1/2"	1"	BR	Alternative to 836-0001
418457	17936-0001P*	Neoprene	7	12	3-3/4"	3-1/2"	1"	BR	Alternative to 6760-0001
	21676-0003	Neoprene	7	12	3-3/4"	3-1/2"	1"	BR	U.K. Equivalent to 17936-0001
Silhouette R									
	17240-0001	Neoprene	7	9	4-5/8"	3-1/2"	1"	BR	
	18786-0001	Neoprene	5	9	4-5/8"	3-1/2"	1"	PL	
	18789-0001	Neoprene	7	9	4-5/8"	3-1/2"	1"	BR	Replaces UK 17240-0001
Silhouette U									
	2999-0001	Neoprene	7	13	5"	4"	1-1/2"	BR	
Silhouette W									
423361	18838-0001P	Neoprene	3	12	2-7/16"	1-1/4"	5/8"	BR	Replaces Sherwood 9959 Impeller
Silhouette X									
418664	18948-0001P	Neoprene	3	12	2-9/16"	1-5/8"	5/8"	BR	Replaces Sherwood 10615 Imp.
Silhouette Y									
418359	17937-0001P	Neoprene	7	10	2-9/16"	2"	5/8"	BR	Replaces 920-0001
	17937-0003	Nitrile	7	10	2-9/16"	2"	5/8"	BR	
418637	17954-0001P	Neoprene	4	10	2-9/16"	2"	3/4"	BR	MerCruiser Replacement
418384	17956-0001P	Neoprene	6	10	2-9/16"	2"	5/8"	BR	SS Drive Cup, Replaces 6056-0001
	18327-0001	Neoprene	3	10	2-9/16"	2"	5/8"	BR	Replaces Sherwood 15000 Impeller
Silhouette Z									
415186	30919-0001P	Neoprene	5	12	3-1/16"	3"		BR	
Silhouette CC									
	31130-0061	Neoprene	7	10	2-19/32"	2-11/16"	5/8"	R	MerCruiser Replacement (HINO)
									(Replaces Quicksilver 47-831311350)
Silhouette GG									
418613	18958-0001P	Neoprene	3	12	3-1/4"	2-57/64"	25/32"	BR	Replaces Sherwood 17000 Impeller

† = For Low Temp. to 27° F Max. 120° F
* = The 17936-0001 Impeller may be used to replace an English Model 21676-0001.

Drive Type

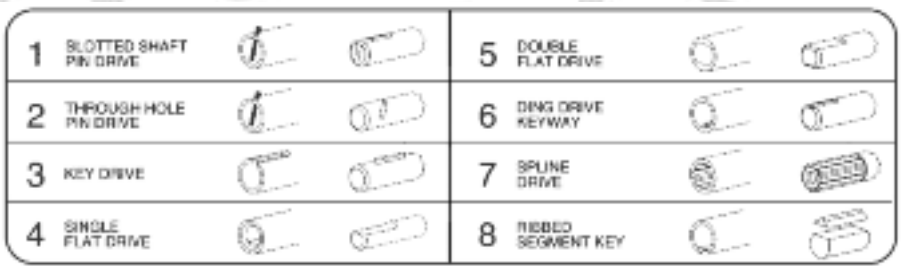

Jabsco Ballast Puppy Wakeboard Towboat Ballast Pump



- Flow rate: 11 US gallons/min (40 Liters/min)
- Self-priming from dry up to 1.8m (6ft)
- Fills a typical 180 liter ballast tank in under 5 minutes
- Reversible to both fill and empty tanks
- Simple design means fewer wearing parts.

Order No.	Mfg. No. / Description	Price
417040	(18220-1127) Polyurethane Compound Impeller	$375.98 G

Johnson Pump Oil Change Gear Pump Kit



- Can run dry!
- Light and compact gear pump with pump body and gears made of PTFE.
- In cold weather, the gears move the oil more easily than impeller pumps.
- Comes complete with oil dip stick, extraction tube, connection wires and battery clamps.
- Flow 2.6 GPM
- Fuse size 6 A

Order No.	Mfg. No. / Description	Price
470090	(80-47508-81) Oil Change Gear Pump Kit, 12 volt	$161.98 Q
470091	(80-47508-02) Oil Change Gear Pump Kit, 24 volt	$161.98 Q

Jabsco Flexible Impeller AC Motor Pumps

- Self-priming and portable.
- Equipped with AC electric motors.
- These pumps are suitable for almost any circulation or washdown applications.
- All pump heads are constructed of bronze materials.
- Exterior threads accept garden hose on all (except 6050 Series).
- All models have a 6' grounded power cord and oil resistant nitrile impellers.

Jabsco 18610 Series Flexible Impeller AC Motor Pump



- A midrange model.
- Continuous duty.
- Motor: 1/6 HP.
- Internal port: 1/2" IPT.
- Exterior port: 1" hose.
- 5.8 GPM @ 10' head.
- 115V AC.
- Includes adapters.

Order No.	Mfg. No. / Description	Price
417422	(18610-0003)	$753.98 G
418524	(7273-0001P) Impeller Neoprene, 6 Blades	$37.98 Q
418536	(7273-0003P) Impeller Nitrile, 6 Blades	$38.98 Q

Jabsco 12210 Series Flexible Impeller AC Motor Pump



- Compact.
- Intermittent duty.
- Motor: 1/12 HP.
- The motor has replaceable brushes for extended life.
- 3/8" Internal pipe thread and adapters for 3/4" garden hose thread.
- 3.4 GPM @ 10' head.
- 115V AC.

Order No.	Mfg. No. / Description	Price
417407	(12210-0003)	$510.98 G
418233	(14750-0001P) Impeller Neoprene, 8 Blades	$36.98 F
418246	(14750-0003P) Impeller Nitrile, 8 Blades	$38.98 F

Jabsco 11810 Series Flexible Impeller AC Motor Pump



- A midrange model.
- Continuous duty.
- Motor: 1/3 HP.
- It has a replaceable wearplate to extend serviceability when handling abrasive fluids.
- Will accept the optional 425682 (4732-0000) vacuum switch to automatically shut off the pump and prevent dry running.
- 1/2" NPT Internal or 3/4" GHT External.
- 9.6 GPM @ 10' head.
- 115V AC.

Order No.	Mfg. No. / Description	Price
417459	(11810-0003)	$737.98 F
418335	(5929-0001P) Impeller Neoprene, 12 Blades	$105.98 F
418347	(5929-0003P) Impeller Nitrile, 12 Blades	$102.98 F

Jabsco 6050 Series Flexible Impeller AC Motor Pump



- Largest.
- Continuous duty.
- Motor: 3/4 HP.
- Will accept the optional 425682 (4732-0000) vacuum switch to automatically shut off the pump and prevent dry running.
- Internal port: 1" IPT.
- 26 GPM @ 10' head.
- 115/230V AC.

Order No.	Mfg. No. / Description	Price
417507	(6050-0003)	$801.98 F
418412	(6056-0003P) Impeller Nitrile, 8 Blades	$146.98 F

©2014 Donovan Marine, Inc.

Rule Rain Barrel Solar Pump



- Provides pressurized pumping through a garden hose (13 PSI).
- Runs on a solar rechargeable (NiMH) battery for operation anytime, day or night.
- Connects to all standard garden hoses.
- Easy operation and installation.
- Adaptable to most style rain barrels.
- Pumps up to 100 gallons of water on a single charge.

Order No.	Mfg. No. / Description	Price
426005	(RB280-100)	$178.98 F

Jabsco Ultra 7.0 GPM Washdown Pump



- Flow rate to 7.0 GPM.
- Shut off pressure 80 psi (5.7 bar).
- Self-priming up to 8 feet.
- Pump body: Glass filled polypropylene.
- 5 chamber design.
- Ports: (2) 3/4" hose barb, and (2) 3/4" hose barb 90° elbow.
- Motor: Permanent magnet.
- ISO 8846 MARINE (ignition protection).
- Includes: Pumpgard intake strainer, pressure nozzle, port fittings and 25' of hose coil.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414792	(52900-0092)	$555.98 Q

5.2 GPM Washdown and 550 GPM Livewell Kit



- Aqua Jet 5.2 WD and Livewell Kit includes: 73 psi 5.2 washdown pump, 500 GPH twinport livewell pump, PUMProtector inlet strainer, spray nozzle, bulk head fitting with valve, 25 foot high quality coiled hose, and two illuminated panel switches all in one box.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470751	(64634) 12 volt	$323.98 G

Rule Submersible Sump Pump



- 1800 GPH
- Designed to remove water from basements, garages, stairwells, utility rooms, backyards, sumps, pools, pool covers, boats and other utility applications.
- Includes: 8' cord, garden hose and rigid pipe, #57.
- Discharge 1-1/8".
- 4-3/4" W x 7-3/4" H.
- 110V AC.

Order No.	Mfg. No. / Description	Price
582580	(A53S-24)	$237.98 F

Jabsco Washdown Pump



- Flow rate to 4.0 GPM.
- Shut off pressure 60 psi (4.1 bar).
- Self-priming up to 8 feet.
- New compact 3 chamber design for greater pumping efficiency.
- Port: 3/4" hose barb.
- Motor: Permanent magnet.
- ISO 8846 MARINE (ignition protection).
- Includes: Pumpgard intake strainer, pressure nozzle, port fittings and 25' of hose coil.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414780	(32900-0092)	$181.98 Q

Johnson Pump 2.9 GPM Washdown Pump



- 2.9 GPM Aqua Jet Washdown pump,73 psi.
- Complete with trigger nozzle, PUMProtector inlet strainer, hose connections for 1/2" hose.
- Both BSP and NPT connections included in package.
- 3/8" BSP x 1/2" barb/1/2" NPT x 3/4" barb.
- Fuse size 10A.
- 12 volt.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470453	(10-24728-03)	$135.98 G

Rule Rechargeable Utility Pump



- Fully submersible.
- Rechargeable battery (charger included).
- Connects to the included 8' hose or any standard garden hose.
- Easy operation.
- Pumps up to 200 gallons of water on a single charge.
- Includes submersible pump, 8' hose, charging base, 110v power adaptor, and 12v vehicle power adaptor.

Order No.	Mfg. No. / Description	Price
426000	(AQ500-102)	$112.98 F

5.2 GPM Washdown Kit in Clamshell



- 5.2 GPM Washdown kit in clamshell includes a high capacity and at 73 psi.
- Kit includes WD pump, PUMProtector inlet strainer, spray nozzle,and 25 foot high quality coiled hose.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470732	(64534CL) 5.2 GPM	$249.98 Q

Marpac Washdown Pump - 3.5 GPM



- Delivers 3.5 GPM.
- Self-priming.
- For fresh or salt water use.
- Automatic high performance pump for deck and anchor washdown.
- Ideal for cleaning pleasure boats, fish boxes, scaling stations, anchor chains and dinghies.
- May also be used for full flow bait tank circulation.
- Automatic pump shut-off feature when hose nozzle is in off position.
- Includes plug-in ports for easy installation: (2) 3/4" hose barb ports and (2) garden hose ports.

Order No.	Description	Price
7-0900	Washdown Pump	$151.98 G

Johnson Pump Aqua Jet Washdown kit



- Conveniently includes a high capacity Aqua Jet WD 3.5, 73 psi.
- PUMProtector inlet strainer, spray nozzle, bulk head fitting with valve, 25 foot high quality coiled hose, and a illuminated panel switch-all in one box.

Order No.	Mfg. No. / Description	Price
470749	(64534) 5.2 GPM Washdown Kit, 12 volt	$269.98 Q
470750	(64535) 3.5 GPM Washdown Kit, 12 volt	$239.98 R

Johnson Pump Aqua Jet Washdown Pumps



- 73 PSI!
- As a washdown pump, the Aqua Jet offers much higher pressures than competitive models, making clean-up faster and easier than ever before.
- Complete with 5.2 GPM WD pump,trigger nozzle, PUMProtector inlet strainer and hose connections for 1/2" hose.
- Both BSP and NPT connections included in package.
- Fuse size 20A.
- 1/2" NPT/hose 3/4", GHT 3/4", 3/8" BSP x 1/2" barb.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
461830	(10-13399-03) 3.5 GPM, 73 psi,12 volt	$159.98 G
461835	(10-13407-07) 5.2 GPM, 73 psi, 12 volt	$220.98 Q

Shurflo Blaster Washdown Pump



- Heavy duty construction for tough washdown applications, such as fish boxes, scaling, and anchor chain cleaning areas.
- Each comes complete with a non-corrosive heavy duty hose spray nozzle, wingnut swivel to 3/4" garden hose thread, and wingnut swivel to 3/4" barb.
- These rugged self-priming pumps deliver high lift, can run dry without damage, and wont overheat with extended use.
- The new SHURcote II seamless motor shell prevents any water splashing through to the motor.
- Pressure switches are sealed against water damage.
- Pumps at 45 psi and 3.5 gallons per minute.
- Thermally protected, ignition protected.
- 12 volt.
- One year warranty.

Order No.	Mfg. No. / Description	Price
353118	(3901-2214)	$165.98 F

Shurflo Pro Washdown Kit II Deluxe 4.0



- 4.0 GPM, 15 max. amps, 12 volt, 60 PSI.
- Run dry capability.
- Self priming.
- SHURcote II seamless motor.
- Sealed switch.
- Ignition protected.
- Thermally protected.
- Kit includes: Pro Blaster Pump, 25 coiled hose, nozzle, raw water strainer and fittings. Two year warranty.

Order No.	Mfg. No. / Description	Price
353172	(4348-153-E09)	$259.98 F

Marpac Washdown and Baitwell System



- Includes: (1) 7-0900 - Washdown Pump, (1) 581858 - Rule 800 Pump and (1) 7-0423 - Coiled Washdown Hose with Nozzle.

Order No.	Mfg. No. / Description	Price
7-0434	Washdown and Baitwell System	$275.98 G

Shurflo ProBlaster II Ultimate 5.0 Pump



- The Pro Blaster is perfect for tough washdown applications, such as fish box, scaling, and anchor chain cleaning.
- 5.0 GPM. 14.0 maximum amp.
- 60 PSI.
- These rugged self-priming pumps deliver high lift, can run dry without damage, and won't overheat with extended use.
- The new SHURcote II seamless motor shell prevents any water splashing through to the motor.
- Fittings, non-corrosive sprayer and strainer included.
- Pumps are ignition protected, thermally protected and switches are sealed against water damage.
- Two year warranty.

Order No.	Mfg. No. / Description	Price
353150	(4258-153-E09) 10" x 5" x 4.75", 12 volt	$289.98 F

Shurflo ProBlaster II Deluxe 4.0 Pump



- The Pro Blaster is perfect for tough washdown applications, such as fish box, scaling, and anchor chain cleaning.
- These rugged self-priming pumps deliver high lift, can run dry without damage, and won't overheat with extended use.
- 4.0 GPM.
- 10.0 maximum amp. 60 PSI.
- The new SHURcote II seamless motor shell prevents any water splashing through to the motor. Pumps are ignition protected, thermally protected and switches are sealed against water damage.
- Two year warranty.

Order No.	Mfg. No. / Description	Price
353160	(4248-153-E09) 10" x 5" x 4.75", 12 volt	$205.98 F

©2014 Donovan Marine, Inc.

Marpac Washdown Pump - 5.0 GPM



- Delivers 5.0 GPM.
- Quiet, efficient and compact.
- Five chamber diaphragm pump that provides 70 psi of pressure.
- Comes with snap in ports for a variety of hose configurations.
- 12 volt.

Order No.	Description	Price
7-0440	Washdown Pump	$206.98 G

Rule General Purpose Pump



- It is designed for use as a washdown pump and/or to circulate water to your livewell tank.
- Heavy duty construction for use on commercial or pleasure boats.
- 1-1/2" inlet and 1-1/2" discharge outlet.
- Must be mounted below the waterline.
- It does not deliver high pressure, nor is it self-priming.
- 3,800 GPH.

Order No.	Mfg. No. / Description	Price
582611	(17A) 12 volt	$270.98 F

Rule Slimline In-Line Submersible Pump



- Suitable for diesel, fresh and salt water.
- Quick diesel transfer with no spillage.
- Water transfer, deck shower or deck wash.
- Bilge or storm water emptying.
- Garden watering.
- Container filling and emptying.
- Continuous rating but should not be run dry for long periods.
- Includes: Spray nozzle, 13 feet cable with battery clips and 13 feet layflat hose.
- Fully submersible heavy duty construction.
- Outlets 3/4" ID hose.
- Pump length 6.5", diameter: 1.5".
- 2.9 GPH, 12 volt.

Order No.	Mfg. No. / Description	Price
581707	(IL500PK)	$108.98 Q

Flojet General Purpose Pump - Quad II



- Used for: Diesel fuel transfer, liquid transfer jobs, dockside pumping, dewatering or circulation and engine oil changing.
- Designed with heavy duty ball bearings, thermal overload protection and a continuous duty motor for long life.
- Fitted with oil resistant elastomers.
- Self-priming and can be mounted above the waterline.
- Includes plug-in ports for easy installation: (2) 3/4"" hose barb ports and (2) garden hose ports.
- Includes: 3/4" inlet strainer.
- 3.3 GPM.
- Dimensions: 3.75" H x 6.3" W x 8.2" L.
- 12 volt.

Order No.	Mfg. No. / Description	Price
352574	(4105-501) Quad II Pump	$189.98 G

Flojet Heavy Duty Deck Wash Pump - Quad II



- Automatic high performance pump for deck and anchor washdown.
- Self-priming.
- Automatic pump shut off feature when hose nozzle is in off position.
- For fresh or salt water use.
- Includes plug-in ports for easy installation: (2) 3/4" hose barb ports and (2) garden hose ports.
- Includes: Pressure nozzle, non-corrosive and 3/4 hose barb inline strainer.
- Shut off at 40 PSI.
- 4.5 GPM.
- Dimensions: 3.75" H x 6.3" W x 9.9" L.
- 12 volt.

Order No.	Mfg. No. / Description	Price
352714	(04325-143L)	$240.98 F
352500	(02090-118) Pressure Switch Assembly	$45.98 G

Flojet Heavy Duty Deck Wash Pump



- Self-priming diaphragm pump.
- Ideal for cleaning leisure boats, fish boxes, anchor chains and dinghies.
- Self-primes up to 2.4m vertical lift
- Quick-connect plug-in ports for easy installation.
- Strainer included.
- Optional pressure nozzle control to run the pump only as needed.
- Shut off at 40 PSI.
- 4.5 GPM.
- Dimensions: 3.75" H x 6.3" W x 9.9" L.
- 115V AC.

Order No.	Mfg. No. / Description	Price
352575	(04325-043A) Deck Wash Pump	$313.98 G

Whale Water Systems Supersub



- The Whale Supersub is a new higher capacity electric bilge pump.
- The pump has a low profile design suitable for narrow bilge spaces where space is limited and with a non-return valve included, the pump leaves the bilge almost dry depending on installation.
- With a multi-position outlet and long caulked wires installation is quick and simple and a manual override facility is included.
- The Supersub is also easy to maintain with a snap fit strainer easily removed for cleaning.

Order No.	Mfg. No. / Description	Price
703230	(SS5012) Supersub 500 Electic Submersible	$37.98 H
703235	(SS5212) Supersub Smart 650, Low Profile	$81.98 H
706225	(SS1212) Supersub Smart 1100	$105.98 F

Whale Water Systems Twist Deck Shower



- Whale Twist Deck Shower is an award winning radical innovation in deck showers.
- The unique and stylish Whale Twist Deck Shower is a totally revolutionary design with a unique integrated handset incorporating shower temperature and flow controls.
- Twists rubberized end cap creates a splash-proof seal when stowed, so there are no covers or lids to damage, and no leaks into the locker area below.
- The lightweight unit with rubberized end cap will help prevent damage to the gel coat if dropped.
- It is virtually maintenance free, as it uses high quality ceramic valve technology.
- The easy to install range includes two unique unobtrusive housing options that are mountable on either flat or curved surfaces virtually anywhere on deck.

Order No.	Mfg. No. / Description	Price
706135	(DS0005) Cold Only Version	$134.98 F
706140	(DS0006) Mixer Model	$169.98 F
703245	(TB4172) White Shower Faucet with Elbow	$43.98 F

Whale Water Systems Swim 'n' Rinse Deck Shower



- The RT2658 is a mixer Swim 'n' Rinse shower designed for use in the transom.
- It has a lockable hinged cover providing a neat finish to the unit and is available in white.

Order No.	Mfg. No. / Description	Price
706220	(RT2658) With Lockable Cover	$179.98 F

Johnson Pump Flush Mount Deckwash 316 Stainless Fitting



- Flush mount.
- Connects and disconnects under full pressure.
- Positive lock bayonet connector.
- Double viton o-ring seals-large flow capacity.
- 316 stainless steel-connections made of nylon 66.
- Two connector versions: American standard garden hose in blue.

Order No.	Mfg. No. / Description	Price
470072	(61121) 316 Stainless Fitting	$92.98 G
470074	(61122) 2-Way Flush Mount	$98.98 G

Whale Water Systems Telescopic Faucets



- The Whale Telescopic Faucet Range are designed for where galley space is limited.
- Designed for non-pressurized water systems, these taps are available with an on/off valve at the outlet to prevent against leakages where is vessel is on an uneven keel.

Order No.	Mfg. No. / Description	Price
706150	(FT1152) White Finish	$32.98 F
706155	(FT1160) On/Off Control, White Finish	$49.98 F

Shurflo Pump Fittings



- Nylon.
- Garden hose wingnut swivel.
- 3/4" GHT (M) x 1/2" NPT (F).

Order No.	Mfg. No. / Description	Price
353266	(244-2356)	$5.98 G

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Gilmour Nylon Hose Repair Accessories


439124


439162


439148


439174

- Leakproof, reusable.
- For rubber or plastic hose.
- Fits 5/8" or 3/4" hose.
- Nylon construction for maximum strength and durability.
- Patented impact resistant clamp design.
- Non-corroding high grade stainless steel screws will not strip when tightened.

Order No.	Mfg. No. / Description	Price
439124	(01F) Female Coupling	$5.00 I
439148	(01M) Male Coupling	$4.00 I
439162	(01HM) Hose Mender	$5.98 I
439174	(01RW) Neoprene Hose Washers, 10 Per Package	$3.96 I

Gilmour Reinforced Vinyl Garden Hose



- 4-ply construction.
- Weather and abrasion resistant.
- Kink resistant.
- Lightweight and flexible for easy handling.
- Good burst strength; withstands nozzle shut-off.
- Full-Flo brass couplings for unrestricted water flow.

Order No.	Mfg. No. / Description	Price
646109	(15-58050) 5/8" x 50'	$34.98 I

Marpac Hose with Nozzle



- Stainless steel spring.
- No-kink design.
- Solid brass fittings.
- Drinking water safe.
- Corrosion resistant construction.
- Quick connect fitting with shut off.
- Removable quick connect adaptor.
- 35% more flow at 40 PSI.

Order No.	Description	Price
7-0422	1/2" x 15' Hose with Nozzle	$29.98 F
7-0423	1/2" x 25' Hose with Nozzle	$32.98 F
7-0425	Hose Nozzle with Quick Fitting	$4.98 G

MPI Products Marine Washdown Hose



- Flexible reinforced PVC that is drinking-water safe.
- White with blue stripe.
- Vinyl-protected, non-corrosive couplings will not mar decks and other surfaces.
- 5/8" ID.

Order No.	Mfg. No. / Description	Price
771630	(170-0585) Length 25'	$61.98 M
771700	(170-0586) Length 50'	$105.98 M

Gilmour Marine Space Saver Flat Hose



- Space saving flat hose is easy to store.
- Quality reinforced vinyl construction.
- On self-storing, hand-held reel.
- FDA approved liner material for drinking water safety.
- Full-Flo brass couplings for unrestricted water flow.

Order No.	Mfg. No. / Description	Price
437704	(11-12050R) 1/2" x 50'	$59.98 I

Groco Salt Water Pistol-Grip Nozzle



- Squeeze for fine spray to stream, release it for instant shut off.
- Locks in position.
- Designed and built specifically for continuous use with saltwater.
- All parts are corrosion-free plastic, except for the internal stainless steel return spring.

Order No.	Mfg. No. / Description	Price
371118	(PGN-50) Nozzle	$15.98 F

Gilmour Insulated Pistol Grip Nozzle with Threaded Front



- Insulated, molded grip for spraying hot or cold water.
- Heavy duty, full-size, die cast zinc body.
- Solid brass valve stern with permanent adjusting nut.
- Male hose threaded front for attaching accessories.
- Hold-open clip for continuous spraying.
- Rust resistant stainlesss steel spring.
- Self-adjusting lifetime leakproof seal.

Order No.	Mfg. No. / Description	Price
439186	(571TFR) Nozzle	$13.98 I

Marpac Hose Nozzle



- Corrosion resistant.
- Quick connect fitting with shut off.

Order No.	Description	Price
7-0425	Pistol Grip Nozzle	$4.98 G

Gilmour Poly Body Select-A-Spray Nozzle



- 5 position dial with 7 spray patterns: Full action, gentle shower, jet, flood and mist.
- Hold-open clip for continuous spraying.
- Rust resistant stainless steel spring.
- Self-adjusting "duck" packing for lifetime leakproof seal.
- Durable, rust resistant, high impact poly construction.
- Poly valve assembly with fixed nut.

Order No.	Mfg. No. / Description	Price
493185	(586) Select-A-Spray	$10.98 I

Gilmour Full Size Polymer Nozzle with Threaded Front



- Male hose threaded front for attaching accessories.
- Polymer valve assembly with fixed nut.
- Hold-open clip for continuous spraying.
- Self-adjusting "duck" packing for lifetime leakproof seal.
- Impact resistant, rustproof, full size, polymer body.

Order No.	Mfg. No. / Description	Price
493182	(474) Polymer Nozzle	$6.98 I

Perko Fig. 499 Water Inlet Fitting



- Chrome plated bronze.
- Standard female swivel hose connector.
- Complete with black plastic watertight plug and stainless steel bead chain.
- For obtaining water under pressure at dockside.
- Flange OD 2-3/4".
- Pipe size 1/2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
539429	(499 DP0 CHR)	$110.98 R

Marpac Water Inlet and Outlet - Stainless Steel



- 316 cast stainless steel.
- 2-3/4" OD.
- For use with 1/2" hose.

Order No.	Description	Price
7-0418	Water Inlet	$37.98 G
7-0419	Water Outlet	$33.98 G

T-H Marine Washdown Fittings



- A bulkhead mounted washdown fitting which is easy to install and rustproof.
- This injection molded plastic fitting is 2-1/4" in diameter and mounts in 1-1/4" hole.
- It connects to 3/4" ID hose.
- Black.

Order No.	Mfg. No. / Description	Price
641360	(WDV-1) With Shut-Off Valve	$27.98 H
641301	(WDV-1CP) With Shut-Off Valve, Chrome Flange	$28.98 H
772272	(WD-1CP) Without Shut-Off Valve, Chrome Flange	$25.98 H

Perko Fig. 504 Water Outlet Fitting



- Chrome plated bronze.
- Standard male hose connector.
- Complete with watertight black plastic cap and stainless steel bead chain.
- For use with on-board washdown systems.
- Pipe size 1/2".
- Uses #8 fasteners.

Order No.	Mfg. No. / Description	Price
539444	(504 DP CHR) 2-3/4" OD	$80.98 R

Jabsco Water Pressure Regulators



- Reduces unregulated city water pressures that can run as high as 125 psi down to a safe 45 psi - automatically.
- Features built-in backflow preventer.
- Built-in port strainer is easily cleanable.

Order No.	Mfg. No. / Description	Price
414704	(44412-1045) Flush Mount Model	$53.98 G
414716	(44411-0045) In-line Model	$39.98 F

Perko Water Deck Fill



- 1-1/2 IPT
- Flange OD 3-5/8".
- Chrome plated bronze.
- Comes complete with key and O-ring.
- 1-1/2 caps have a slot between the holes.

Order No.	Mfg. No. / Description	Price
540458	(0528 DPW CHR)	$140.98 R

Jabsco High Pressure Check Valve



- When located at the pump outlet, these high pressure check valves protect your pump from the damaging high pressure of unregulated marina service connections.
- Also can be located at the water heater inlet to prevent backflow of hot water into cold water system and pump.
- For 1/2" slip-on hose inlet and outlet.

Order No.	Mfg. No. / Description	Price
414689	(34344-0000)	$71.98 F

Jabsco Smooth-Flow Water Pump Control



- Variable speed drive (VSD) converts everyday pumps into sensor-controlled pumps that automatically adjust in real time to changes in pressure.
- Works on most water pressure pumps rated 3-12 amps and on Shurflo pumps.
- Eliminates accumulator tank.
- Runs on 12 or 24 VDC input.

Order No.	Mfg. No. / Description	Price
414590	(31777-0000)	$114.98 F

©2014 Donovan Marine, Inc.

Flojet Quad DC Water System Pumps - 3.3 GPM



- Self-priming up to 2.4m vertical lift.
- Four-piston design delivers higher flow rates.
- Quick-connect plug-in ports for easy installation.
- Pressure-switch control to run the pump only as needed.
- Includes plug-in ports for easy installation: (2) 1/2" Qest ports and (2) 1/2" hose barb ports.
- Shut off at 35 PSI.
- 3.3 GPM.
- 2 year warranty.

Order No.	Mfg. No. / Description	Price
352702	(4405-143) 12 volt	$150.98 F
352738	(4405-443) 32 volt	$189.98 G
352524	(02090-104) Pressure Switch	$45.98 G

Jabsco PAR-Max 2.9 GPM Water Pressure System Pumps



- Voltage: 24 volt.
- Amp Draw: 2.2 amp.
- Fuse Size: 5 amp.
- Maximum pressure: 50 psi, 3.4 bar.
- Flow rate: 11 liters/min (2.9 gallons/min).
- Self-priming from dry up to 2.4m (7.8ft).
- Smooth flow.
- Dry running capability.
- Soft noise absorbing mounts.
- Snap-fit port fittings.
- Built-in bypass-less pulsation.
- Reduces need for accumulator tank.
- Corrosion resistant materials.
- CSA listed.

Order No.	Mfg. No. / Description	Price
414480	(31395-0094)	$130.98 G

Shurflo Aqua King™ Standard Water Pump



- Guarantees quiet and smooth performance while providing the ultimate in durability and reliability.
- Waterproof seamless can motor.
- Shur-coated for corrosion protection.
- Sealed waterproof pressure switch.
- Can operate at 55 PSI which virtually eliminates cycling.
- Fittings included.
- Ignition protected.
- Thermally protected.
- 55 PSI shutoff, 5 max. amp draw.
- 3 GPM.
- 12 volt.
- Three year warranty.

Order No.	Mfg. No. / Description	Price
353100	(3901-0216) 7.3" x 5" x 4.6"	$138.98 F

Johnson Pump Viking Power Diaphragm Pump



- A modern, single-chamber self-priming 4.2 GPM diaphragm pump that can be set up in several different pump/motor configurations.
- It is easy to install anywhere after the drain outlet in the wastewater system or as a bilge pump.
- Its non-choke valves mean that no inline filters are necessary.
- Self priming to about 10 feet.
- The low pulse and muffled rubber bracket offer quiet operation.
- The pump can be run dry, and handle a mixture of air and water easily.
- Incl. 1" hose and 3/4" hose 1/2" BSP and BSP KlickTite XL connectors.
- Now with double check valves for improved pumping action.
- Works with optional gray water tank 09-13384.
- 4.2 GPM, 16 Diaphragm Pump, 12 volt.

Order No.	Mfg. No. / Description	Price
461951	(10-13350-03)	$255.98 G

Marpac Water Pressure System - 5.0 GPM



- Delivers 5.0 GPM.
- 1/2" ports.
- (41 PSI) shut off switch.

Order No.	Description	Price
7-0441	12 volt	$218.98 G

Jabsco PAR-Max 4 Water Pressure System Pump



- Smooth flow.
- Self-priming from dry up to 7.8'.
- Dry running capability.
- Snap-fit port fittings.
- Corrosion resistant materials.
- Shut-off pressure 2.8 bar.
- 4.3 GPM.
- 40 psi.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414490	(31620-0092)	$215.98 G

Jabsco PAR-Max 2.9 Water Pressure System Pump



- Self-priming from dry up to 7.8'.
- Smooth flow.
- Dry running capability.
- Snap-fit port fittings.
- Corrosion resistant materials.
- Built-in bypass-less pulsation.
- Shut-off pressure 3.4 bar.
- 2.9 GPM.
- 50 psi.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414603	(31395-0092)	$120.98 G

Shurflo Aqua King™ Premium Water Pump



- Built in patented bypass enabling pump to vary flow rate "on demand" without the need for an accumulator and eliminating cycling.
- Provides "just like home" shower pressure to multiple fixtures.
- Self priming and can run dry without damage.
- Equipped with a seamless motor shell, Shur-coated for corrosion protection, waterproof pressure switch.
- Fittings included: 1/2" straight wing nut swivel barb, 1/2" elbow wing nut swivel barb.
- Ignition protected.
- Thermally protected.
- 4.0 GPM, 55 PSI.
- 10.0 max. amp.
- 12 volt.
- Three year warranty.

Order No.	Mfg. No. / Description	Price
353122	(4148-153-E75)10" x 5" x 4.75"	$218.98 F

Johnson Pump 5.2 GPM WPS Assembly



- WPS assembly with inlet strainer and accumulator tank,12 volt.
- 5.2 GPM WPS fixed on a base with PUMProtector inlet strainer and 2 liter pre-pressurized accumulator tank.
- Fuse size 15A, connection 3/4 inch hose.
- 12 volt.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
461953	(10-13408-03)	$639.98 Q

Johnson Pump Aqua Jet Duo WPS



- High capacity unit with two parallel connected Aqua jet WPS capacity 10.4 GPM fixed on a base with Pump protector inlet strainers and a 2 liter pre pressurized accumulator tank.
- 3/4 inch hose connection.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
461840	(10-13409-01) 10.4 GPM	$976.98 G

Shurflo Aqua King II Supreme 5.0 Pump



- Built in patented bypass enabling pump to vary flow rate "on demand" without the need for an accumulator and eliminating cycling.
- Provides "just like home" shower pressure to multiple fixtures.
- Self priming and can run dry without damage.
- Equipped with a seamless motor shell, Shur-coated for corrosion protection, waterproof pressure switch.
- Fittings included: 1/2" straight wing nut swivel barb, 1/2" elbow wing nut swivel barb.
- Ignition protected.
- Thermally protected.
- 5.0 GPM, 55 PSI.
- 13.0 max. amp.
- 12 volt.
- Three year warranty.

Order No.	Mfg. No. / Description	Price
353146	(4158-153-E75) 10" x 5" x 4.75"	$300.98 F

Jabsco PAR-Max 3 Water Pressure System Pump



- Smooth flow.
- Self-priming from dry up to 7.8'.
- Dry running capability.
- Snap-fit port fittings.
- Corrosion resistant materials.
- Shut-off pressure 2.8 bar.
- 3.5 GPM. 40 psi.

Order No.	Mfg. No. / Description	Price
414487	(32600-0092) 12 volt	$163.98 G

Johnson Aqua Jet Water Pressure System Pump - 2.9 GPM



- The five chamber Aqua Jet WPS provides a reliable heart for small boat and recreational vehicle water pressure system.
- Whisper quiet operation.
- Self priming.
- Pressure switch standard.
- 2.9 GPM. Pressure cut off: 41 PSI.
- Connection for 1/2 ID hose.
- 12 volt.

Order No.	Mfg. No. / Description	Price
470043	(10-13405-103)	$121.98 Q

Johnson Pump 3.5 GPM Aqua Jet WPS



- This WPS 4.0 GPM - Five-chamber, lower noise, and water pulsation characteristics of this pump makes it a reliable choice.
- May be used with optional accumulator tank.
- Optional inlet strainer 09-24653-02-CN clicks into pump.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
461954	(10-13395-103) 12 volt	$146.98 G
461955	(10-24677-03) With Inlet Strainer, 12 volt	$155.98 G
461956	(10-13406-103) 4.0 GPM, 12 volt	$199.98 R
461958	(10-13406-107) 5.2 GPM, 12 volt	$229.98 Q

©2014 Donovan Marine, Inc.

Johnson Pump Multi-Purpose Utility Pump



- F38B-19 pump suited for use in boats as bilge and deckwash pumps, fresh water pumps, refueling pumps for oil and diesel.
- Can be combined with a vacuum switch for automatic operation.
- All motors are heavy duty to provide long service life even under heavy use.
- Connection hose 1" / 1/2" NPT, 12 volt, 8 GPM.
- Direct replacement for the Water Puppy.

Order No.	Mfg. No. / Description	Price
461961	(10-24516-03) 3/8" NPT, 12 volt	$264.98 G
461962	(10-24727-03) 3/4" NPT or 1" Hose, 12 volt, F28B-19	$230.98 G

Johnson Pump CM 30 30 Magnetic Drive Circulating Pump



- CM 30 30 Magnetic drive circulating pump, 12 volt, 5/8".
- Compact magnetic driven centrifugal pump which combines high flow rates with very low electric current consumption.
- Suitable for fresh water, ethylene glycol and salt water circulation.
- Liquid temperature from Minimum -40C to Maximum +100C degrees.

Order No.	Mfg. No. / Description	Price
461970	(10-24503-03) 12 volt, 5/8"	$287.98 G

Johnson Pump Oil Change Pump



- 12 volt, F3B-19.
- Connection: 3/8" NPT.
- Reversible rubber impeller pump with integrated quick reversing switch.
- Designed to remove old oil from the engine/fill new oil back into the engine.

Order No.	Mfg. No. / Description	Price
462000	(10-24760-03) Oil Change Pump	$291.98 G
462329	(09-45595) Service Kit for F3B-19/1907	$47.98 G

Jabsco Multi-Outlet Electric Fresh Water System Pump



- Diaphragm design allows dry running.
- Self-priming up to 4.9 feet.
- Built-in discharge check valve.
- Built-in hydraulic pulsation dampener.
- Large vibration absorbing pads.
- Slip-on ports 1/2" or 5/8" ID hose.
- Shut-off pressure 2.7 bar.
- 40 PSI.
- 3.3 GPM.
- 12 volt.

Order No.	Mfg. No. / Description	Price
414526	(36800-1000)	$624.98 G
425721	(37121-0010) Pressure Switch	$47.98 F

Johnson Pump Aqua Jet Flow Mater Variable Speed WPS



- The digital controller adjusts water flow as the demand is increased and decreased while maintaining a very smooth flow.
- Ideal choice for pressurizing water in a closed system.
- The unique variable flow feature allows the pump to be mounted w/o an accumulator tank.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
461950	(10-13329-103) 5.0 WPS, 12 volt	$277.98 G

Johnson Pump DC Driven Flexible Impeller Pump



- Pump suited for use in boats as bilge and deckwash pumps, fresh water pumps, refueling pumps for oil and diesel.
- Can be combined with a vacuum switch for automatic operation.
- All motors are heavy duty to provide long service life even under heavy use.
- 1/2" hose connection.
- Optional vacuum switch 09-45053.

Order No.	Mfg. No. / Description	Price
461960	(10-24180-1) 3.8 GPM, 12 volt	$325.98 G

Johnson Pump Impellers

Order No.	Mfg. No. / Description	Price
462299	(09-806B-1) Fits Pump F35, MC97	$34.98 G
462300	(09-810B-1) Fits Pump F4, MC97	$27.98 G
462302	(09-810B-9) Fits Pump F4B, Nitrile	$32.98 G
462310	(09-819B-00) Fits Pump F8, Neoprene	$72.98 F
462312	(09-819B-9) Fits Pump F8B, Nitrile	$96.98 G
462320	(09-824P-1) Fits Pump Ultraballast, MC97	$41.98 G
462322	(09-1026B-9) Fits Pump F4B, Nitrile	$55.98 G
462324	(09-1029B) Fits Pump F8B, Neoprene	$83.98 G
462326	(09-1052S-9) Fits Pump TA3P10, Nitrile	$25.98 G
462328	(09-1077B-9) Fits Pump F2, Nitrile	$38.98 G

Jabsco Multi-Outlet Electric Fresh Water System Pump



- Diaphragm design allows dry running.
- Self-priming up to 4.9 feet.
- Built-in discharge check valve.
- Built-in hydraulic pulsation dampener.
- Large vibration absorbing pads.
- Slip-on ports 1/2" or 5/8" ID hose.
- Shut-off pressure 2.7 bar.
- 40 PSI, 3 GPM.
- 12 volt.
- Designed for self contained recreational vehicles and pleasure boats with multiple outlet water systems.

Order No.	Mfg. No. / Description	Price
414499	(36950-2000)	$403.98 G
425721	(37121-0010) Pressure Switch	$47.98 F

Jabsco Impeller

Order No.	Mfg. No. / Description	Price
418285	(6303-0007-P) Yellow (Polyurethane)	$51.98 G

Johnson Pump 3.5 GPM Aqua Jet WPS

Order No.	Mfg. No. / Description	Price
462005	(09-701B-1) MC97, Cross to Sherwood 9959k	$26.98 Q
462010	(09-702B-1) MC97 Cross to Sherwood 10615k	$28.98 Q
462015	(09-703BT-1) MC97, Cross to Mercruiser 47-59362T	$40.98 G
462020	(09-704BT-1) MC97, Cross to Sherwood 17000k	$69.98 G
462025	(09-705BT-1) MC97 Cross to Sherwood 18000k	$206.98 H
462299	(09-806B-1) Fits Pump F35, MC97	$34.98 G
462300	(09-810B-1) Fits Pump F4, MC97	$27.98 G
462302	(09-810B-9) Fits Pump F4B, Nitrile	$32.98 G
462310	(09-819B-00) Fits Pump F8, Neoprene	$72.98 F
462312	(09-819B-9) Fits Pump F8B, Nitrile	$96.98 G
462320	(09-824P-1) Fits Pump Ultraballast, MC97	$41.98 G
462322	(09-1026B-9) Fits Pump F4B, Nitrile	$55.98 G
462324	(09-1029B) Fits Pump F8B, Neoprene	$83.98 G
462326	(09-1052S-9) Fits Pump TA3P10, Nitrile	$25.98 G
462328	(09-1077B-9) Fits Pump F2, Nitrile	$38.98 G

Flojet High Volume Water Pressure System - 4.5 GPM



- Integrated pump and accumulator tank system.
- Designed to provide steady water pressure and generous water flow.
- The pump is fully automatic with a built-in switch and check valve to maintain system pressure and will supply smooth water flow from a trickle to full flow.
- May be mounted vertically or horizontally.
- Can run dry without harm.
- Self-priming up to 10 ft.
- Accumulator tank has total volume of 1.1 Gallon.
- Pressure shut off 40 PSI.
- 12 volt.
- Includes strainer and assorted ports for easy installation.

Order No.	Mfg. No. / Description	Price
352726	(2840-100) 7.2" H x 11.3" W x 12.8" D	$583.98 G

Rule Shower Drain System - 800 GPH



- A compact, full capacity shower drain system.
- Automatically turns on after the water starts and shuts off when the water is removed.
- A clear screw down cover, removable strainer for easy cleaning and an internal check valve to prevent back flow.
- Discharge 3/4".
- Dimensions: 8-1/4" x 11-1/4" x 5-1/2".
- Includes three inlet ports which offer varying combinations of inlet hose.

Order No.	Mfg. No. / Description	Price
581719	(98A) 800 GPH	$140.98 E

Kuuma Products Water Heater



- Front heat exchange, front/back mount.
- Marine quality aluminum alloy case.
- Two different mounting bracket options on each heater.
- TIG welded tanks.
- Stainless steel heat exchanger option.
- All water heaters are ETL listed to UL 174.
- Large diameter dual loop heat exchanger is standard.
- High temp limiter with automatic reset after breaker cycle.
- Water heaters of choice for Sea Ray, Cruisers Yachts, Four Winns, Hunter, Crownline, Beneteau and Boston Whaler.

Order No.	Mfg. No. / Description	Price
609101	(11811) 6 Gallon, 120 volt	$325.98 F
609202	(11841) 11 Gallon, 120 volt	$405.98 F


Jabsco Mini Accumulator Tank



- The mini accumulator tank smoothes water flow and reduces on/off switch cycling of the pump by lessening the variation in pressure and flow between the pump and the system discharge points.
- The even flow of water gives better control of hot water temperature with systems using instant water heaters.
- Its compact design also allows for convenient installation in tight spaces.

Order No.	Mfg. No. / Description	Price
414627	(30573-3003) Accumulator Tank	$57.98 F

Johnson Pump Multiple Port Shower Sump with Ultima Switch



- Multiple port shower sump with ultima switch.
- Designed to work flawlessly in harsh environments, ultima switch is mercury free, has no moving parts, ignores dirt, grease, hair, detergents, and other nasty contaminants that enter the typical shower sump.
- 5.3" H x 5" W x 11" L.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470067	(57151) 12 volt	$135.98 G
470730	(57151-24) 1,000 GPH, 24 volt	$183.98 G
470070	(54304) Cover, Shower Sump	$8.98 G

©2014 Donovan Marine, Inc.

Jabsco Pneumatic Accumulator Tank



- Pre-pressurized to 20 PSI.
- Diameter 8", height 12-5/8".
- This pneumatic accumulator tank will smooth flow from faucets and shower, reducing pump cycling and eliminating pulsations and water hammer.
- Water is totally separated from air chamber by a diaphragm and polypropylene tank liner.
- Volume of tank is 2 gallons with a working water volume of about 1 gallon.
- Mounts horizontally or vertically, even upside down.
- Port is 3/4" NPT (male). Includes brackets and band clamps.
- May be fine tuned to cut-in pressure of pump.
- Maximum working pressure 100 PSI.

Order No.	Mfg. No. / Description	Price
414641	(18810-0000) Accumulator Tank	$243.98 F

Groco Pressure Storage Tanks



- A pneumatic pressure charge, matched to the pump cut-on pressure prevents waterlogging by separating the air charge from system water pressure with a rubber bladder.
- The result is smooth pressure delivery, even temperature mix in showers, and reduced pump cycling.
- Tanks may be mounted in any position and anywhere in the cold water plumbing after the pump.
- PST tanks may be used for fresh or salt water.
- Mount hardware is included.
- Pipe connection 3/4".

* Drawdown is measured with 20 PSI air charge and with 40 PSI system water pressure.

Order No.	Mfg. No.	Capacity	Diameter	Length	Drawdown*	Price
375143	(PST-1)	1 Gallon	8"	12.63"	.5 Gallon	$143.98 F
S/O	(PST-2)		11"	14"	1.4 Gallons	POR
375154	(PST-3A)	2.7 Gallon	15.4"	19.25"	3 Gallons	$403.98 F
S/O	(PST-4)		15.4"	24"	4.4 Gallons	POR

Monarch Water Pressure Systems




- The MJS Series of jet pumps feature a suction up to 25 ft.
- Built from cast iron and specially treated with an anti-rust primer coating.
- 1-1/4" NPT suction and 1" discharge.
- Pressure gauge 0-100.
- Pressure switch is preset at 30-50 PSI.
- 115/230V.

Order No.	Mfg. No. / Description	Price
496192	(MJSHP) Freshwater System Pump, 1/2 HP, Complete with Tank	$801.98 G
496193	(MJSH75) Freshwater System Pump, 3/4 HP, Complete with Tank	S/O
496197	40 Gallon - 3/4 HP Fresh Water Pump System	S/O
496199	40 Gallon - 1 HP Fresh Water Pump System	$1,168.98 G
496194	(MJS100) Standard Pressure Pump Only, 1 HP	$533.98 Q
496188	(604050) Base Plate for Pump System	$31.98 Q
496190	(604457) Replacement Tank for Pump System	$289.98 Q
496287	(305446942) Impeller	$56.98 B
496302	(305446943) Seal Plate	$37.98 B
496338	(224310) Pressure Switch	$36.98 F

			Pump Capacity in U.S. GPM Discharge Pressure in PSI													
Model No.	Motor HP	Total Suction Lift (ft.)	20	25	30	35	40	45	50	55	60	65	70	75	80	Maximum Pressure (PSI)
MJS-75	3/4	5	16.2	16.0	15.8	15.6	15.4	12.1	8.7	5.7	2.9	-	-	-	-	65.0
MJS-75	3/4	10	14.3	14.0	13.7	13.5	13.2	10.6	7.6	4.6	1.6	-	-	-	-	62.8
MJS-75	3/4	15	12.1	11.7	11.3	11.0	10.6	9.3	6.3	3.2	0.2	-	-	-	-	60.6
MJS-75	3/4	20	9.9	9.6	9.3	9.0	8.7	7.8	4.8	1.9	-	-	-	-	-	58.5
MJS-75	3/4	25	7.2	7.1	7.0	6.9	6.8	6.7	3.5	0.6	-	-	-	-	-	56.3
MJSHP-50	1/2	5	8.8	8.9	8.6	8.4	8.3	8.1	7.4	6.0	4.7	3.4	2.2	1.2	0.15	80.6
MJSHP-50	1/2	10	7.8	7.7	7.55	7.4	7.25	7.2	6.6	5.4	4.15	2.8	1.8	0.7	-	78.5
MJSHP-50	1/2	15	6.5	6.4	6.3	6.2	6.1	6.0	5.3	4.8	3.6	2.3	1.3	0.3	-	76.3
MJSHP-50	1/2	20	5.3	5.2	5.1	4.9	4.8	4.7	4.6	4.1	2.9	1.7	0.7	-	-	74.1
MJSHP-50	1/2	25	3.7	3.65	3.6	3.55	3.5	3.5	3.45	2.4	2.3	1.3	0.3	-	-	71.9
MJC-100	1 (Shallow)	5	20.2	20.1	19.9	19.5	16.7	13.9	11.1	8.3	5.6	-	-	-	-	71.0
MJC-100	1 (Shallow)	15	14.5	14.3	14.1	13.8	13.6	11.4	8.7	6.0	3.3	-	-	-	-	66.7
MJC-100	1 (Shallow)	25	9.1	8.9	8.8	8.7	8.6	8.5	6.0	3.6	1.2	-	-	-	-	62.1
MJC-100	1 (Deep)	20	-	12.8	10.5	8.7	7.3	6.6	5.2	4.4	3.6	-	-	-	-	87.0
MJC-100	1 (Deep)	50	-	8.4	7.2	6.0	5.0	4.2	3.4	2.6	1.9	-	-	-	-	74.0
MJC-100	1 (Deep)	90	-	4.3	3.4	2.7	1.9	1.8	0.7	-	-	-	-	-	-	56.7

March Seal-Less Magnetic Drive Pumps



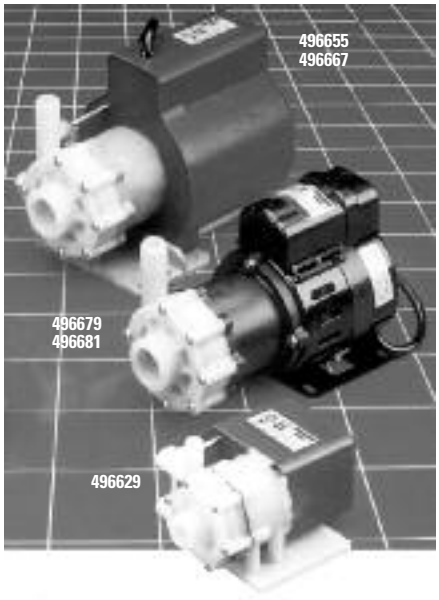

- For use submerged or in damp environments.
- Magnetic drive - no shaft seal to wear, leak, or replace.
- Extremely low energy consumption.
- March epoxy encapsulated circulating pumps with seal-less magnetic drive offer the ultimate in reliability.
- These versatile pumps are widely used on commercial and pleasure craft for recirculating sea water and for air conditioning and refrigeration.
- All models can be run in open air or submerged except model AC-5C-MD, which must be in a dry environment.
- All centrifugal pumps require a flooded inlet (suction side of pump).

Submersible Pumps.

Order No.	Mfg. No. / Description	Price
496605	(893-00001-040) 12 volt	$283.98 E
496629	(125-057-02) 115 volt, 1/50-60 Hz	$344.98 E
496631	(130-159-02) 230 volt, 1/60 Hz	$436.98 E
496643	(130-158-02) 115 volt, 1/60 Hz	$397.98 E
496655	(150-0004-050) 115 volt, 1/50-60 Hz	$907.98 E
496667	(150-004-66) 230 volt, 1/50-60 Hz	$997.98 E

Non-Submersible Pumps, Air Cooled.

Order No.	Mfg. No. / Description	Price
496679	(150-0026-010) 115 volt, 1/50-60 Hz	$386.98 E
496681	(150-136-01) 230 volt, 1/50-60 Hz	$424.98 E

Replacement Parts.

Order No.	Mfg. No. / Description	Price
496719	(0150-0030-0100) Impeller, Series 5 Pumps	$29.98 D
496768	(0125-0115-0100) Wet End Kit for LC-2CP-MD	$100.98 D

Model No.	Max. Flow GPM	Max. Head Ft.	Inlet	Outlet	HP	RPM	Volts	PH	Hz	Watts	Amp	Motor Type	Electrical Connection	Wt. Packed Lbs.
893-04	2.7	10.5	3/8" FPT	3/8" OD	1/150	4000	12	DC	-	12	1.0	TE/SUB	18' loose leads	1.2
893-06	2.7	10.5	3/8" FPT	3/8" OD	1/150	4000	24	DC	-	12	.5	TE/SUB	18' loose leads	1.2
LC-2CP-MD	5	13	3/8" FPT	1/4" MPT	1/35	3200	115	1	50/60	54	1.0	TE/SUB	6 ft. SJT	5
LC-3CP-MD	8.5	19	3/4" FPT	1/2" MPT	1/20	3200	115	1	60	120	2.35	TE/SUB	6 ft. SJT	8-1/2
LC-3CP-MD230	8.5	19	3/4" FPT	1/2" MPT	1/20	2450	230	1	60	78	.79	TE/SUB	6 ft. SJT	8-1/2
LC-5C-MD	14.5	27	1" FPT	1/2" MPT	1/8	2800	115	1	50/60	250	2.1	TE/SUB	6 ft. SJT	18
LC-5C-MD230	14.5	27	1" FPT	1/2" MPT	1/8	2750	230	1	50/60	143	.60	TE/SUB	6 ft. SJT	18
AC-5C-MD	17	27	1" FPT	1/2" MPT	1/8	3200	115	1	50/60	227	2.2	AC	3 ft. SJO	9-1/2
AC-5C-MD230	17	27	1" FPT	1/2" MPT	1/8	3200	115	1	50/60	260	1	AC	3 ft. SJO	9-1/2

©2014 Donovan Marine, Inc.

Polar Ware Stainless Steel Sink



- Deep drawn seamless construction.
- 20 gauge 18-8 polished finish with self-rimming.
- Dimensions: 11-3/4" ID, 13-3/4" OD and 5" D.
- Drain fitting not included, use 541068 (6813-3-106).

Order No.	Mfg. No. / Description	Price
538059	(0012-1-0-M)	$282.98 I


Polar Ware Stainless Steel Drain Fitting



- Highly polished.
- Diameter 1-1/2".
- Tail piece length 4".

Order No.	Mfg. No. / Description	Price
541068	(6813-3-106)	$22.98 I

Hot and Cold Faucet



- Chrome plated bronze faucet is furnished complete with tail piece for easy connection to 5/8" hose on pressure water supply lines.
- Height above drainboard 3" and below drainboard 3".
- Spout projects 2-3/4".
- Standard model must be specified hot or cold when ordering.

Order No.	Mfg. No. / Description	Price
530445	(1832-CH) Faucet	$17.98 I

Polar Ware Self-Rimming Compartment Flat Rim Sink



- Buffed stainless steel.
- Deep drawn seamless construction.
- 20 gauge 18-8 satin finish with self-rimming bottom heavily undercoated for sound deadening.
- Dimensions: 10" x 14" ID, 13" x 17" OD and 6-1/2" D.
- **Drain fitting not included, use 541068 (6813-3-106).**

Order No.	Mfg. No. / Description	Price
538061	(173-8)	$249.98 I

Jabsco Electric Pump and Faucet



- Quiet operation electric pump is compact, draws only 1.6 amps at 12 volts and pumps 1 GPM at 3 PSI.
- The attractive faucet has a stainless steel swing spout, easy-to-clean white plastic base and built-in switch to operate the pump.
- Pump and faucet have a 3/8" hose connection.
- The centrifugal pump is not self-priming and must be mounted below waterlevel of tank.
- Pump may be screwed directly into water tank.

Order No.	Mfg. No. / Description	Price
414398	(42510-0000) Pump Only	$56.98 G
414401	(42530-0000) Pump and Faucet	$167.98 Q

Johnson Pump 1.1 GPM WPS Pump



- 1.1 GPM WPS Pump, 12v, for single tap use.
- Great for bar sinks.
- Self priming, not required to be installed below the waterline.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
461957	(10-22020-101) 1.1 GPM WPS Pump, 12 volt	$78.98 G

Johnson Compact 12 Volt Electric Toilet



- AquaTMarine standard electric, compact, toilet with 12V macerator is remarkable with white vitreous porcelain and corrosion resistant parts throughout.
- Versatile plumbing connection options.
- Automatic back-flow prevention.
- Wooden seat.
- Carling switch panel.
- Complies with ISO 8846, ignition protection and EN 55014 EMC.
- Low water consumption (2-2.5 l/flush) makes the most of holding tank capacity.
- May be installed above or below the waterline.
- Designed to be direct replacement for Jabsco.

Order No.	Mfg. No. / Description	Price
470083	(80-47435-01) Macerator Style	$453.98 G

Johnson Aqua T Compact Manual Toilet



- Compact, made with white vitreous porcelain and corrosion resistant parts throughout.
- Ergonomic pump handle for ease of use.
- Pump can be mounted left or right of the toilet bowl.
- Innovative brake bushing prevents annoying leakage at the handle.

Order No.	Mfg. No. / Description	Price
470079	(80-47229-01) Aqua T Toilet	$191.98 F

Johnson Pump Toilet Accessories

Order No.	Mfg. No. / Description	Price
470085	(81-36105-01) Control Panel	$100.98 G
470086	(81-47237-01) 3/4"	$45.98 G
470087	(81-47237-02) 1"	$51.98 G
470088	(81-47237-03) 1-1/2"	$49.98 G
470089	(81-47238-01) Y-valve for Marine Toilet	$92.98 G

Monarch Ind Inc.

Order No.	Mfg. No. / Description	Price
496245	(92980055)	$1,891.98 Q

Marpro Mega Rolls Toilet Tissue



- Premium quality 2 ply sheets.
- Biodegradeable.
- 100% recycled materials.
- Resealable pouch.
- Dissolves quickly.
- 2 rolls per package.

Order No.	Description	Price
7-2730	1000 Sheets	$6.98 Q
7-2731	500 Sheets	$6.98 Q

Raritan Atlantes Freedom Electric Toilet



- Commercial grade.
- One piece china bowl.
- Simple flexible installation.
- Low power consumption.
- Anti-clog "power shred" discharge system.
- Three modes of operation: Fill, dry flush or fill and flush.
- Handle with timer operation has "fail-safe" mode.
- Diaphragm intake pump can be run dry.
- Microprocessor control and solid state circuit breaker.
- No fuses or relays inside the unit.

Order No.	Mfg. No. / Description	Price
563830	(A812) Electric Toilet	$1,598.98 F

Raritan Crown Head Electric Toilets



- The Crown Head features a single motor that drives both the intake and discharge pumps, and a sturdy bronze housing for the macerating section.
- It can be installed above or below the waterline and the 12V model draws only 36 amps with an average required flushtime of 10 seconds using only 1 quart of water.
- 12 volt.

Order No.	Mfg. No. / Description	Price
563937	(C912) Marine-Size, Standard	$1,399.98 D
563930	(CW912) Household-Size	$1,427.98 D
563963	(CHRK) Standard Repair Kit	$119.98 F
564624	(1238A) Standard Seat and Cover	$42.98 F

Jabsco Electric Marine Toilets



- White vitreous china bowl.
- Baked enamel seat and cover.
- Flexible impeller flush pump.
- Permanent magnet type motor, fully enclosed with stainless steel shaft.
- High capacity macerator and bowl scavenger pump.
- Built-in back flow preventer.
- All corrosion resistant material for marine use.
- Compact toilet.

Order No.	Mfg. No. / Description	Price
414956	(37010-0090) 13-3/4" H x 13-7/8" W x 17-5/8" L	$551.98 F

- Household toilet.

Order No.	Mfg. No. / Description	Price
414970	(37010-1090) 14-3/8" H x 14-5/8" W x 19-3/4" L	$520.98 F

Repair Kits and Replacement Parts.

Order No.	Mfg. No. / Description	Price
415011	(37040-0000) Seal and Gasket Service Kit	$65.98 F
415023	(37041-0010) Replacement 12 volt Pump Assembly	$270.98 E
415035	(37064-0000) Replacement Motor, 12 volt	$173.98 E

Johnson Aqua T Compact Silent Electric Toilet



- Equipped with 12 volt Aqua Jet pump.
- Versatile plumbing connection options.
- Automatic back-flow prevention.
- Complies with ISO 8846, ignition protection and EN 55014 EMC.
- Hygienic, easy-to-clean vitreous china bowl and exterior surfaces.
- Low water consumption (2-2.5 l/flush) makes the most of holding tank capacity.
- May be installed above or below the waterline.

Order No.	Mfg. No. / Description	Price
470081	(80-47231-01) 12 volt	$549.98 G

Raritan Model PHII Hand Toilet



- The PHII's inlet valve can provide either simultaneous intake and discharge or dry flush.
- The pump can be mounted for use with either left or right hand.
- Constructed with only the finest plastic, stainless steel and buna "N" rubber.
- Standard size bowl.
- Outlet hose ID 1-1/2".
- Inlet hose ID 3/4".
- Dimensions: 14-1/6" H x 18-3/16" W x 16-1/4" D.
- 30 lbs.

Order No.	Mfg. No. / Description	Price
564179	(PHII) Hand Toilet	$489.98 D
564183	(PHRKIIC) Repair Kit, Post 1992	$72.98 F
564624	(1238A) Standard Seat and Cover	$42.98 F

Raritan Parts for Crown Head II Electric Toilet

Order No.	Mfg. No. / Description		Price
563848	(CWPS12A) Water Solenoid, 12 Volt	19PU95.421	$177.98 F
563968	(G13W) Intake Pump Impeller w/Teflon Washers	19PU94.42	$34.98 F
564059	(CH-102MW) Crown Head Pump	19PU99.061	$229.98 F
564069	(CH18W) Front Cover with O-Ring	19PU98.23	$46.98 F
564077	(C253) Joker Valve for Most Raritan Toilets	19PU96.41	$20.98 F

Jabsco Twist 'n' Lock Manual Toilet



- Twist 'n' Lock safety handle and flush control lever.
- Powerful swirl action for efficient flushing.
- Full sized external seal housing allows quick clean seal replacement and instant access to pump cylinder.
- Powerful self-priming pump for above or below waterline installation.
- Crevice free contours and smooth mouldings for added hygiene.
- Automatic vacuum breaker for easier pumping.
- Angled pump housing and long stroke for ease of installation.

Order No.	Mfg. No. / Description	Price
414906	(29090-3000) Compact Bowl	$198.98 E
414920	(29045-0000) Service Kit, Up to 1997	$77.98 F
414932	(29045-2000) Service Kit, From 1998	$74.98 F

©2014 Donovan Marine, Inc.

Marpac Self-Contained Portable Toilets



- High-density polyethylene construction is corrosion proof.
- No external connections required.
- Fresh water bellows provides up to 50 easy-push flushes.
- Double seal valve eliminates leakage and odors.
- Quick emptying with easy-pour spout.
- Matte finish conceals scratches and is easy to clean.

Order No.	Description	Price
7-0009	2.6 Gallon	$110.98 G
7-0010	5.2 Gallon	$124.98 G
7-0007	Hold Down Bracket for 7-0009	$19.98 G

Raritan Electro Scan® Type I Marine Sanitation Device



- The most popular USCG certified Type I MSD.
- Electro Scan generates its own natural disinfectant from salt water.
- Coated electrodes use salt water to kill bacteria and viruses without harmful chemicals.
- It records each treatment cycle and stores key information in non-volatile memory that can be summarized on the LCD display or downloaded to a PC. Single button operation is possible and can be used with both manual and electric toilets.
- Requires sea water for salinity or salt feed tank.

Order No.	Mfg. No. / Description	Price
564054	(EST12) Type I Marine Sanitation Device	$1,570.98 D

Raritan Purasan On-Board Sewage Treatment Device



- Onboard sewage treatment device for fresh water lakes and rivers.
- Neutralizes waste, making it sanitary and safe for boaters and marine life.
- Alleviates need for holding tanks.
- U.S. Coast Guard approved Type I Marine Sanitation Device for vessels up to 65 feet in length - can be used with most marine toilets.
- Toilet and treatment cycle are activated with a single push button.
- Order Cartridge Separately.

Order No.	Mfg. No. / Description	Price
564187	(PST-1202)	$1,670.98 F
564189	(41-135) Tablet Cartridge	$146.98 F

Jabsco Deluxe Flush Electric Toilet



- The stylish and extremely compact design is carefully contoured to conceal the flush pump, wiring and plumbing, whilst still featuring a full-size household seat.
- The Slant Back gives minimal footprint and makes it easy to mount against a sloping surface or in a corner.
- Features a multifunction 'one touch' control pad offering 4 rinse and flush options, using as little as 1.5 US Quarts (1.5 liters) of water.
- This model supplied with solenoid valve and siphon breaker assembly for connection to any existing pressurized water system capable of delivering 2.9 US gpm (11 lpm) or more.
- The siphon breaker ensures there is no backflow from the toilet into the water system.
- Complies with USCG 183.410 and ISO 8846 MARINE (Ignition protection).

Order No.	Mfg. No. / Description	Price
414982	(58020-1012) Deluxe Electric Toilet	$882.98 F

Thetford Porta Potti 555 Portable Toilet



- Bellows flush.
- About 45 flushes before emptying.
- Level Indicator tells when it's time to empty.
- Lid latch secures seat and lid. 3.2 gallon water tank, 4.5 gallon holding tank.

Order No.	Mfg. No. / Description	Price
658003	(25113) Porta Potti Portable Toilet	$183.98 G

Jabsco Electric Toilet Base Assembly



- The electric toilet base assembly offers an economical way to own an electric toilet because it utilizes existing manual toilet bowl and seat/lid assembly.
- It can be fitted with the Raritan P.H. or compact, Wilcox Crittenden Head Mate, Groco HC and Sealand (Mansfield) 750 through 752 Series china bowls.
- It also fits any Par or Brydon 59128-Series or Jabsco 29090-29120 Series and virtually any other marine toilet using a 3-3/4 diameter bolt circle with 4-hole pattern.
- The self-priming flexible flush pump rinses the bowl while the powerful macerator scavenger pump grinds up and pumps out waste.
- A built-in backflow preventer is included in discharge.
- A heavy duty push button switch and 1" to 1-1/2" hose adaptor for the discharge port plus all clamps and fasteners to complete the conversion are included.

Order No.	Mfg. No. / Description	Price
415085	(37010-0092) Inlet 3/4", Discharge 1", 12 volt	$469.98 E

Raritan Purasan Tablets & Retro-Fit Kit

- This kit is required the first time you need to order replacement tablets for an older Purasan system.
- If your Purasan used 41-135 then this kit will upgrade the dispenser to the new version and replacement tablets in the future will be 41-135A
- Purasan Tablets - These are used in the NEW PST12EX or PST24EX.
- Users of the original PST12 or PST24 if this is the first time ordering replacement tablets you MUST order the 41-135RFK the first time then simply order the 41-135A on subsequent orders.

Order No.	Mfg. No. / Description	Price
564194	(41-135RFK) Retro-Fit Kit	$89.98 F
564199	(41-135A) Tablets	$60.98 F

Whale Water Systems Compact Fold Down Faucet



- The Whale Compact Faucet Range has a modern design suitable for where space is limited.
- This modern design ensures total flow control with on a 90 degree movement of controls and the spout neatly swivels and folds down when not in sure, maximizing space available.
- They are made from high quality chrome plated brass and are fully compatible with Whale Quick Connect Plumbing Systems.

Order No.	Mfg. No. / Description	Price
703240	(TB4110) Chrome Cold Only	$127.98 F

Whale Water Systems Elegance Faucet



- The Elegance swivelling faucet range are ideal for installation where space is limited.
- The RT1210 is a cold only option with a standard spout length.

Order No.	Mfg. No. / Description	Price
706205	(RT1210) Cold Only Faucet	$78.98 F
706210	(RT2210) Mixer Faucet	$63.98 F

Whale Water Systems V Pump



- The Whale Freshwater V Pump is a vertical, self-priming hand pump ideal for narrow spaces between sinks where space may be limited. It's angled spout and adjustable height allows for various options in installation.
- With a capacity of up to 2.2 US gals per minute the V Pump delivers a smooth flow on each stroke up and down.
- Ideal as a back up to an electric freshwater system the V Pump can pump either freshwater or saltwater.

Order No.	Mfg. No. / Description	Price
706180	(GP0650) Hand Operated Manual Pump	$76.98 F

Whale Water Systems Gusher Galley Service Kit



- The AK0502 service kit for the Gusher Galley pump is suitable for Mk 1 and 2 Models.
- The service kit includes: 4 Small o-rings, 4 valves, 4 x-large o-ring, and 2 diaphragms.

Order No.	Mfg. No. / Description	Price
706005	(AK0502) Mk 1 and 2 Models	$25.98 F

Whale Water Systems Flipper Pump



- The Whale Freshwater Flipper Pump is a self-priming lever operated hand pump.
- It has a swivelling outlet ideal for use between two sinks and the light back and forth pumping action is easy to use.
- It is suitable for use with freshwater or saltwater and has a flow capacity of 1.85 US gals per minute.

Order No.	Mfg. No. / Description	Price
706165	(GP0418) Manual Galley Pump	$109.98 F

Whale Water Systems Elegance Faucet and Shower Combination Unit



- The Elegance swivelling faucet range are ideal for installation where space is limited.
- The RT2498 is a Faucet and Shower Combination Unit with 1/2" connections that has an extendable shower with up to 5-9/16" hose length.

Order No.	Mfg. No. / Description	Price
706215	(RT2498) 1/2" Connections	$137.98 F
706055	(AS5133) White Assembly (BSP)	$69.98 F

Whale Water Systems V Pump Service Kit



- The AK0618 service kit for the V pump is suitable for Mk 5 and 6 Models.
- The service kit includes: 1 Handle buffer, 1 cup packing,1 buffer, 1 valve, 1 valve stem, 1 o-ring (plunger cup seat), 1 gland U packing, 1 o-ring (base) and 1 o-ring (head).

Order No.	Mfg. No. / Description	Price
706015	(AK0618) For Mk 5 and 6 Models	$13.98 F

Whale Water Systems Gusher Galley Service Kit



- The AK0553 service kit for the Gusher Galley pump is suitable for Mk 3 Model.
- The service kit includes: 2 Small o-rings, 4 valves, 4 valve stems, 4 large o-rings, 4 self-tapping screws, 1 sealing washer and 2 diaphragms.

Order No.	Mfg. No. / Description	Price
706010	(AK0553) Mk 3 Model	$25.98 F

©2014 Donovan Marine, Inc.

Whale Water Systems Flipper Pump Service Kit



- The AK0405 service kit for the Flipper Pump is suitable for Mk 3 and 4 Models.
- The service kit includes: 3 O-rings (3 per outlet), 1 gasket, 1 bucket ring, 1 cup washer, 1 valve ball, 2 buffer, 1 o-ring, 1 o-ring (gland brush, 1 valve stem and 1 valve.

Order No.	Mfg. No. / Description	Price
706000	(AK0405) MK 3 and 4 Models	$24.98 F

Whale Water Systems Tiptoe Pump



- The Whale Tiptoe Pump is a self-priming freshwater foot pump.
- The easy to install thru deck design is compact and allows for the plunger to be locked down flush with floor level when not in use.
- The Tiptoe pump has a smooth and easy operation and can be comfortably used with bare-foot.
- With a capacity of 1.85 US gals per minute this pump is ideal as a priming pump suitable for pumping freshwater and saltwater.

Order No.	Mfg. No. / Description	Price
706185	(GP1309) Foot Operated Manual Galley Pump	$66.98 F

Jabsco Heavy Duty Macerator Pump - 115V AC Voltage



- The macerator section grinds waste down to a particle size of 1/8" maximum.
- Self-priming, permitting the unit to be mounted above or below the tank in a convenient location.
- Empties a 30 gallon holding tank in only 3 minutes.
- Thermal overload protection.
- Ports: Inlet - 1-1/2" external pipe thread; Outlet - 1" ID hose barb.
- Dimensions: 8-1/4" H x 7-1/4" W x 15" L.
- 115V AC.

Order No.	Mfg. No. / Description	Price
415174	(18690-0000)	$756.98 F
415162	(18598-1000) Service Kit	$69.98 F

Jabsco Self-Priming Macerator Pump - DC Voltage



- Self-priming flexible impeller with stainless steel wearplate.
- Permanent magnet type motor, fully enclosed, with stainless steel shaft.
- Includes run-dry protection device that shuts-off pump.
- Powder coated housing with sealed end-bells and bearings.
- Complies with USCG Regulation 183.410 and ISO 8846 MARINE.

Order No.	Mfg. No. / Description	Price
415154	(18590-2092) Macerator Pump	$194.98 F

Whale Water Systems Manual Gusher Galley



- The Whale Gusher Galley Pump is a foot operated freshwater pump suitable for small galleys.
- It has three mounting options including through bulkhead and is left handed for easy of use.
- The Whale Gusher Galley has a multi-directional inlet and outlet hose connection making installation easier.
- Ideal as a back up to an electric freshwater system the Gusher Galley can pump either freshwater or saltwater.

Order No.	Mfg. No. / Description	Price
706170	(GP0550) Foot Operated	$127.98 F
706175	(GP0551) Left Handed Version	$126.98 F

Whale Water Systems Tiptoe Pump Service Kit



- The AK1304 service kit for the Tiptoe pump is suitable for Mk 3 and 4 Models.
- The service kit includes: 1 Cup washer, 1 gland U packing, 1 bottom valve washer, 1 plunger valve washer, 1 plunger valve plate, 1 circlip, 1 valve retaining washer and 1 o-ring.

Order No.	Mfg. No. / Description	Price
706020	(AK1304) Mk 3 and 4 Models	$17.98 F

Marpac Macerator Pump



- Provides superior performance while delivering up to 13 GPM.
- Unique dual blade housing construction ensures problem free pumping.
- Dual carbon steel blades stay sharper, longer.
- Specifically designed for waste and fish box evacuations.
- Includes o-ring sealed end bells with a sealed manual turn key to withstand the harsh marine environment.
- 100% tested, self priming.
- Heavy duty 12 volt motor.

Order No.	Description	Price
7-0901	1-1/2" Waste Inlet, 1" Discharge Outlet	$119.98 G

Jabsco Fish Box Evacuation Pump



- Perfect for emptying a fish box after a day's fishing.
- 360° rotating head for flexible installation.
- 1-1/2" ports allow for easy passage of particulates.
- Filterless design.

Order No.	Mfg. No. / Description	Price
414831	(50900-1000) Evacuation Pump	$348.98 G

Johnson Pump Viking Power 32 Waste Pump



- This 8.5 GPM diaphragm pump has been designed for rigorous demands, it's single chamber design and non-choke valves, with a ball bearing supported transmission for long service life.
- It can handle a mixture of air and water w/o difficulty and un-macerated sewage to a holding tank.
- Includes a hand crank in case of emergency.

Order No.	Mfg. No. / Description	Price
461952	(10-13373-03) 12 volt, 1-1/2" Connection	$352.98 G

Whale Water Systems Gulper Range Service Kit



- The AK2050 is the complete service kit for the Gulper 220, 320 and IC Shower/Waste/Bilge Pumps.
- The service kit includes: 6 Screw No. 6 x (valve plates), 1 inlet valve, 1 outlet valve, 1 diaphragm, 1 nut nyloc M5, 1 screw M5x16 (clamping plate), 1 outlet valve tricuspid, 1 inlet valve plate and 1 outlet valve plate.

Order No.	Mfg. No. / Description	Price
706025	(AK1550) For the Gulper 220, 320 and IC Pumps	$29.98 F

Whale Water Systems Gulper Electric Waste Pump



- The market leading Whale Gulper is the original specifically designed filter-free waste pump.
- The self-priming diaphragm pump can handle a variety of debris and run dry without damage.
- There is no impeller to clog or burn and non-choke valves built into the pump means there is no filter to block or clean, a strainer is also included to prevent large debris from entering the pump.
- This means the pumps are easy to maintain and installation is simple with a multi-directional head allowing the pump to be mounted in the most convenient position.

Order No.	Mfg. No. / Description	Price
706075	(BP1552) Gulper 220, 12 volt	$209.98 F
706080	(BP1554) Gulper 220, 24 volt	$225.98 F
706085	(BP2052) Gulper 320, 12 volt	$224.98 F

Whale Water Systems Gulper Grouper



- The Whale Gulper Grouper is an electric pump designed to manage fishbox waste.
- The market leading Whale Gulper is the original specifically designed filter-free waste pump.
- The self-priming diaphragm pump can handle a variety of debris and run dry without damage.
- There is no impeller to clog or burn and non-choke valves built into the pump means there is no filter to block or clean.
- This means the pumps are easy to maintain and installation is simple with a multi-directional head allowing the pump to be mounted in the most convenient position.
- The Gulper Grouper non choke fishbox waste box suits standard 1 or 1 hose connections.

Order No.	Mfg. No. / Description	Price
706115	(BP4572) Fishbox Discharge Pump	$285.98 F

Johnson Pump Gray Water Tank



- Designed to be used as collection tank for waste water from showers, sinks, dishwashing machines, etc. with 19 mm, 25 mm, and 38 mm inlet ports and 19 mm and 25 mm outlet ports.
- The tank includes the Ultima Switch for automatic operation and is easy to connect to any 12V/24V pump up to 20 amp.
- The tank is already prepared for the optional Viking 16 Pump with pre-drilled holes.

Order No.	Mfg. No. / Description	Price
462330	(09-13384) Gray Water Tank	$335.98 G

Whale Water Systems Mk5 Sanitation Pump



- The Whale Mk5 Sanitation Pump is a manual pump designed for use in a black waste system as a toilet flush or holding tank pump out.
- Its fully protected diaphragm and seals mean it is protected against unwanted odors.
- The Mk5 Sanitation pump can be mounted in a variety of orientations and the inspection port ensures easy maintenance as no tools are required.
- The pump has a flow capacity of up to 17.5 US gals per minute.

Order No.	Mfg. No. / Description	Price
706070	(BP0527) Mk5 Sanitation Pump	$163.98 F

Whale Water Systems Gulper Toilet Pump



- The Whale Gulper Toilet Pump is an electric pump designed to manage un-macerated waste for holding tank pump out / discharge.
- The market leading Whale Gulper is the original specifically designed filter-free waste pump.
- The self-priming diaphragm pump can handle a variety of debris and run dry without damage.
- There is no impeller to clog or burn and non-choke valves built into the pump means there is no filter to block or clean.
- This means the pumps are easy to maintain and installation is simple with a multi-directional head allowing the pump to be mounted in the most convenient position.

Order No.	Mfg. No. / Description	Price
706090	(BP2552B) For Un-Macerated Waste	$299.98 F

Whale Water Systems Diverter Valve



- The Whale Diverter valve is suitable for use within electric or manual bilge or toilet waste management systems.
- The robust and reliable design, with a lubricated non-stick operation, is precision engineered for an odor proof seal.
- Withstanding sewage/black waste, saltwater and bilge water, it is suitable for 1" hose connections.

Order No.	Mfg. No. / Description	Price
706145	(DV5606) For 1" Hose Connections	$89.98 F

©2014 Donovan Marine, Inc.

Jabsco Waste Evacuation Pump



- Specifically for use in the evacuation of holding tanks.
- 360° rotating head for flexible installation.
- 1-1/2" ports and no requirements for a pre-filter, black water can be moved easily at a flow rate of 5 GPM.

Order No.	Mfg. No. / Description	Price
415136	(50890-1000) Evacuation Pump	$294.98 F

Moeller Waste Tanks



- Molded of FDA approved linear polyethylene which meets the CFR 177.1520 criteria.
- Waste tanks feature a heavier wall thickness for strength.
- 667038 (41230) features a 3" inspection port for your convenience.

Order No.	Mfg. No. / Description	Price
666961	(41206) 6 Gallon, 16" L x 11-3/4" W x 8" H	$134.98 F
666973	(41209) 9 Gallon, 17" L x 13-3/4" W x 10-1/4" H	$140.98 F
667014	(41220) 20 Gallon, 21" L x 17" W x 14" H	$229.98 F
667038	(41230) 30 Gallon, 28" L x 23" W x 11-1/2" H	$289.98 F

Groco Vented Loops



- All bronze construction.
- For hose connections.
- Suitable for engine exhaust system installations or sanitation system installations.
- Oversized vent valve virtually clog-free and can easily be removed without tools for inspection cleaning by unscrewing the threaded cap.

Order No.	Mfg. No. / Description	Price
S/O	(HVL-750) Hose ID 3/4"	
375103	(HVL-1000) Hose ID 1"	$140.98 Q
S/O	(HVL-1500) Hose ID 1-1/2"	

Perko Fig. 1269 Waste Deck Plate for Hose



- Deck plate with cap marked "Waste".
- Chrome plated zinc unit, with black plastic cap with O-ring for air tightness.
- For 1-1/2" hose.
- Length of neck is 2", flange diameter 3-1/4".
- Cap has holes and a slot for key, screw driver or large coin.

Order No.	Mfg. No. / Description	Price
540165	(1269 DP0 CHR)	$42.98 R
540166	(1269 DP0 99A) Cap Only	$12.98 R

Forespar 1-1/2" Y-Valve



- Molded from glass reinforced Marelon.
- When installed in waste systems, the waste can be pumped directly into a holding tank or diverted to an overboard discharge fitting.
- The valves are operated by a simple 120° movement.
- Positive stops are provided between positions.
- Barb 1-1/2".

Order No.	Mfg. No. / Description	Price
353451	(902000) Y- Valve	$72.98 F

Jabsco 1-1/2" Y-Valve



- Diverts waste from a toilet to either an onboard holding tank of directly overboard where legal to do so.
- It can be used to direct waste from a holding tank to either an onboard discharge pump or a deck waste fitting for dockside pumpout.
- Its self cleaning design provides trouble free operation.
- The 1-1/2" curved discharge ports can be rotated through 360° so the discharge hoses can be routed away in parallel, at 90° to each other, in opposite directions or either up or down.
- It is supplied with both a 1-1/2" and 1" straight inlet port for easy attachment to toilets with 1" discharge hoses.

Order No.	Mfg. No. / Description	Price
415201	(45490-1000) Y- Valve	$81.98 G

Forespar Vented Loops for Waste Line



- Molded in glass reinforced Marelon.
- The simple valve system incorporated in the top of the loop allows air to enter the line when not in use, yet effectively seals as water or other fluid passes through.
- If your toilet is set below the waterline, a vented loop should be installed to prevent back siphoning.

Order No.	Mfg. No. / Description	Price
353425	(903001) Barb 3/4", 4-1/2" H, 3-3/4" W	$30.98 F
353437	(903000) Barb 1-1/2", 5-1/4" H, 7-3/4" W	$34.98 F


Perko Fig. 524 Waste Deck Plate for Pipe



- 1-1/2" IPT.
- Flange OD 3-5/8".
- Uses #8 fasteners.
- Chrome plated bronze marked "Waste".
- Comes complete with key and O-ring.
- Cap has a slot between the holes.
- Note: Complies with adopted standards on "fittings" ABYC Recommended Practices Standards Covering Sewage Holding and/or Treatment Device for Marine Waste Systems.

Order No.	Mfg. No. / Description	Price
540155	(524 DP0 CHR) Waste Deck Plate	$147.98 R

MPI Products Series 148 White Sanitation Hose



- VAC rating is 28.
- White. • 50' box.
- Smooth wall extra heavy duty vinyl hose for all sanitation system connections and other critical applications.
- FDA approved and low water absorption compounds provide excellent odor resistance.

Order No.	Mfg. No. / Description	Price
771407	(148-0346) 3/4"	$198.98 M
771419	(148-1006) 1"	$228.98 M
771421	(148-1186) 1-1/8"	$249.98 M
771433	(148-1146) 1-1/4"	$321.98 M
771445	(148-1126) 1-1/2"	$347.98 M

Marpro Instant Fresh Toilet and Holding Tank Treatment



- Heavy duty formula quickly eliminates odors.
- Fresh lemon scent.
- Breaks down waste and tissue paper.
- Formaldehyde free, safe formula.
- Lubricates, prevents drain valves from sticking.

Order No.	Description	Price
7-2727	8 oz., Sold 4 Pack Only	$14.98 Q
7-2728	32 oz.	$8.98 Q
7-2729	64 oz.	$17.98 Q

Camco TastePURE™ Drinking Water Freshener



- Eliminate algae and slime buildup from drinking water tanks.
- Just one ounce helps remove bad smells and taste from 20 gallons of water.

Order No.	Mfg. No. / Description	Price
583701	(40208) 16 fl. oz.	$7.98 D

Byrne, Rice & Turner MSD Activator



Order No.	Mfg. No. / Description	Price
264313	(1210) Quart	$39.98 F

Camco Fresh Water Dewinterizer



- For use with boats or RVs coming out of storage.
- Just one bottle freshens and deodorizes your Fresh Water System from tank to tap.
- Treats up to 60 gallons.

Order No.	Mfg. No. / Description	Price
583155	(40218) 16 fl. oz.	$17.98 D

Billiot Pools Chlorine Tablets



Order No.	Mfg. No. / Description	Price
256328	(3" CHL TAB25) 3", 25#	$155.98 F
256330	(1" CHL TAB2) 1", 25#	$166.98 F

©2014 Donovan Marine, Inc.

Marine Wastewater Treatment Systems for Small Boats and Offshore

OWENS KLEEN TANK™
Fighting Pollution "The Best"

MARINE

Wastewater Treatment Systems for Small Boats and Offshore

PATENTED - PROVEN - U.S.C.G. CERTIFIED TYPE II MSD

The OWENS KLEEN TANK is a self-contained "extended aeration" biological system that is ready for operation when site electrical and mechanical connections are in place. The KLEEN TANK small boat models can be designed to fit small, hard to fit areas and have a capacity range from 33 GPD to thousand of gallons per day. Easy maintenance, long lasting reliability and optimum effluent compliance make the KLEEN TANK the educated choice for marine sanitation devices.

CONSTRUCTION

- Constructed of Carbon Steel or Stainless
- Patented Floating Skimmer
- Seam Welded
- Upflow Gravel Bed Filter w/Backwash System
- Sandblasted to near white metal
- Easy Access Covers
- Corrosion Protected
- Easy Access / Non-Corrosive Valve Controls
- Coal Tar Epoxy inside
- Low Maintenance Disinfection System
- 3-Part Polyurethane Paint System outside
- Alarm System (optional)
- Stainless Steel weir basket - self cleaning
- Nationwide Single Source Supplier for Repair Parts
- Regenerative Blower TEFC - quiet (optional)
- Exterior Mounted Filter Cleaning Valve
- Float Controlled Effluent Pump (optional)

SIZED TO DO THE JOB

Model (small boat)	Gallons	Crew Size	Dimensions (H x W x L)	Mt. Wt. (Approx.)
A	33	3	3.5 x 1 x 3	400
A *Lowboy	33	3	2.5 x 1.5 x 3	400
B	76	6	3.5 x 1.5 x 4.5	500
C	112	10	3.5 x 2 x 6	800
D	182	16	4 x 2 x 7	1105
E	240	20	4.5 x 2 x 8	1317
F	360	32	4.5 x 3 x 8	1550
G	450	40	6 x 3 x 8	2050
H	750	62	6 x 4 x 10	2230
I	900	80	6 x 4 x 12	3296
J	1125	100	6 x 5 x 12	4668

ALL UNIT APPLICATION SIZING (CREW SIZE) IS BASED ON:

1. Low Flush Toilets. 1-1/2 Gallons/Flush
2. 24 hour Occupancy
3. BLACKWATER ONLY. FOR OTHER APPLICATIONS CONSULT FACTORY.


*** Modified size for easy placement on vessels. Models C-J are skid mounted. Add 4" to height and 6" to length for overall dimensions.**

NOTES:

1. Standard units are constructed of carbon steel plate. Stainless Steel or aluminim plants are also available, consult factory for prices.
2. Explosion proof or 3 phase equipment available on special order, consult factory.
3. Larger & Special units are available by Special order. Designs to fit most small and hard to fit areas also available upon request.
4. U.S.C.G. certified as Type II MSD/33CFR 159.15 Under OWENS KLEEN TANK, Certification #159.1038/5/11

KLEEN TANK 4-POINT EASY MAINTENANCE PLAN

1. Every two weeks - add Formula 101 to toilet
2. Every two weeks - add chlorine as required
3. Once a month - clean external up-flow filter by opening the external fluffer value for 5 minutes
4. Every six months - replace inlet air filter

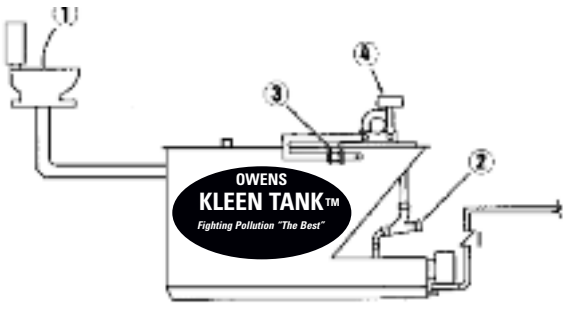

CALL FOR PRICING AND AVAILABILITY

Fun & Flotation
Perform
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Rule "FC Tournament" Series Livewell/Aerator Pumps



- Discharge nozzle can be rotated 360° for optimal installation.
- Pump housing can rotate 360° to allow positioning of discharge outlet.
- Quick one hand "push button" motor cartridge removal system.
- Dual port fitting for optional washdown pump.
- Tapered thread for seacock application.

Order No.	Mfg. No. / Description	Price
581856	(401FC) 500 GPH	$49.98 F
581858	(403FC) 800 GPH	$50.98 F
581872	(405FC) 1,100 GPH	$56.98 E

"R" Series Pro-Series™ Livewell/Aerator



- Replacement motor modules.
- For all Pro-Series Aerator Pumps.
- Fits older Rule Aerator Pumps.
- Old Style.

Order No.	Mfg. No. / Description	Price
581859	(20RR) 700 GPH, Replacement Cartridge	$38.98 G
581884	(27DR) 1,100 GPH, Replacement Cartridge	$42.98 F

Rule Tournament Series Livewell/Aerator Repl. Motor Cartridges



- Quick one hand "push button" motor cartridge removal system.

Order No.	Mfg. No. / Description	Price
582088	(45DR) Spare Cartridge for 500 GPH	$34.98 R
582090	(46DR) Spare Cartridge for 800 GPH	$43.98 R
582103	(47DR) Spare Cartridge for 1,100 GPH	$47.98 G

Rule Tournament Series Livewell Pump



- Silent running and vibrationless.
- Heavy duty long life motors.
- Anti-airlock.
- 1,600 GPH.
- Discharge 1-1/8".
- 1" NPT female intake.
- Dual port pump.
- Allows connection to washdown pump.

Order No.	Mfg. No. / Description	Price
581733	(209FDP) 12 volt	$177.98 E

Shurflo Straight Port Aerator Pump - 600 GPH



- Tough, high density nylon housing and heavy duty water cooled motor.
- Patented anti-airlock feature allows the pump to clear trapped air in rough water or when the boat is anchored.
- Removable cartridge for easy cleaning.
- Includes 6 tinned wire assembly.
- 3/4" ports.
- 12 volt. 2 max. amps.

Order No.	Mfg. No. / Description	Price
353110	(357-012-10) 9.5" x 3.75"	$49.98 F
353115	(94-005-00) Replacement Cartridge	$29.98 F

Rule "STC Tournament" Series Livewell/Aerator Pumps



- Discharge nozzle can be rotated 360° for optimal installation.
- Pump housing can rotate 360° to allow positioning of discharge outlet.
- Quick one hand "push button" motor cartridge removal system.
- Dual port fitting for optional washdown pump.
- Straight pick-up with straight thread.

Order No.	Mfg. No. / Description	Price
581769	(401STC) 500 GPH	$53.98 F
581860	(403STC) 800 GPH	$55.98 E
581875	(405STC) 1,100 GPH	$62.98 E

Rule "C Tournament" Series Livewell/Aerator Pumps



- Discharge nozzle can be rotated 360° for optimal installation.
- Pump housing can rotate 360° to allow positioning of discharge outlet.
- Quick one hand "push button" motor cartridge removal system.
- Dual port fitting for optional washdown pump.
- Angled pick-up with straight thread.

Order No.	Mfg. No. / Description	Price
581757	(401C) 500 GPH	$53.98 F
581810	(403C) 800 GPH	$56.98 F
581874	(405C) 1,100 GPH	$62.98 E

Rule Tournament Series Livewell Pump



- Silent running and vibrationless.
- Heavy duty long life motors.
- Anti-airlock.
- 1,600 GPH.
- Discharge 1-1/8".
- 1" NPT female intake.
- Robust bronze base.
- Single port.

Order No.	Mfg. No. / Description	Price
581745	(209B) 12 volt	$184.98 E

Shurflo Bait Sentry™ Livewell Pumps



- Has a unique magnetically-driven impeller.
- The mag-drive pump can ingest large amounts of debris without damage to the motor.
- Dual port allows for livewell and washdown to be properly supplied.
- There are no seals to burn and dry run conditions are not a problem.
- The Bait Sentry has a patented anti-airlock feature that automatically clears the air in the livewell system whether the boat is moving forward or sitting still.
- Tank size 30 Gl.
- 12 volt, 1.75 max. amp.
- Three year warranty.

Order No.	Mfg. No. / Description	Price
353114	(1700-001-030) 500 GPH, 3/4" Inlet, 3/4" Outlet	$104.98 F
353116	(1700-011-030) 800 GPH, 3/4" Inlet, 3/4" Outlet	$109.98 F
353117	(1700-021-030) 1,100 GPH, 3/4" Inlet, 1-1/8" Outlet	$118.98 F

©2014 Donovan Marine, Inc.

Marpac Livewell Pumps - Cartridge Type



- Made with an exclusive anti-airlock feature that keeps the water flowing, these easy to install Livewell pumps have a removable Powerhead design.
- Just lift a tab and remove the motor to clean.
- The extended life water cooled motor has a high grade 316 stainless steel shaft.
- The pump's tough thermoplastic housing resists heat and stress.
- A lightweight glass resin composite impeller resists breakage.
- Both Livewell pumps come with 3/4" straight and omni-directional 90° hose barbs.
- Made in USA.
- 12 volt.

Order No.	Description	Price
7-2216	750 GPH, In-line	$47.98 G
7-2214	750 GPH, 90°	$47.98 G
7-2218	750 GPH, Replacement Cartridge	$31.98 G

Attwood Tsunami Series Cartridge Bilge Pumps



- Innovative engineering and compact design, Tsunami pumps deliver high output from a small package.
- Move more water and oxygen into livewell tanks to keep fish active.
- Cooler-running motors, premium materials, watertight seals and waterproof wiring.
- Cartridges are replaceable and interchangeable between bilge and aerator pumps.

Order No.	Mfg. No. / Description	Price
236326	(4640-7) 500 GPH	$34.98 R
236348	(4650-7) 800 GPH	$41.98 R
236350	(4660-7) 1,200 GPH	$51.98 H
236060	(4620-6) Spare Cartridge for 236326	$19.98 R
236079	(4622-6) Spare Cartridge for 236348	$28.98 H
236081	(4624-6) Spare Cartridge for 236350	$39.98 H

Boater Sports Dual Mount Livewell Pump



- 800 GPH thru-hull, submersible livewell pump with 3/4" hose outlet.
- Straight or angled mount.
- 30" marine-grade tinned lead wires.
- Salt or freshwater.
- 12 volt.

Order No.	Mfg. No. / Description	Price
1-57473	(57473)	$29.95 R

Johnson Aerator Pumps - Cartridge Series



- Exclusive Anti-airlock feature.
- Quick replace motor cartridge.
- Crack resistant Dura Port fittings.
- 316 Stainless steel shaft .
- Tough thermoplastic housing.
- Extended life water cooled motor.
- Easy installation.
- 3 Year warranty.
- Made in USA.

Order No.	Mfg. No. / Description	Price
470699	(28703) 750 GPH, In-line	$59.98 F
470719	(38702) 750 GPH, 90	$57.98 G
470702	(28502) 500 GPH, In-line	$48.98 F
470714	(38502) 500 GPH, 90	$50.98 G
470738	(28572) 750 GPH Spare Motor Cartridge	$38.98 R
470742	(38771) 750 GPH Ranger Style	$87.98 G
470743	(28571 PR) Spare Motor Cartridge for 470742	$63.98 G

Johnson Twin Port Cartridge Type Livewell Pumps



- Maximum intake pressure: 50 PSI.
- Run dry capability.
- Anti-airlock - internal fins.
- 316 stainless steel shaft and hardware material.
- ABS high impact thermoplastic housing.
- Glass filled polypropylene intake.
- Two outlet ports: Upper port - 3/4" NPT Male "Dura-Port", 1-1/8" hose barb.
- Lower port - 1/2" NPT Female.
- Port adapters: Upper port - straight 3/4" "Dura-Port" hose barb.
- 90 degree 3/4" "Dura-Port" hose.
- Barb: Lower port - 1/2" NPT male plug, 1/2" NPT male x 3/4" NPT male.
- Intake Port: 3/4" NPT male, 1" long.

Order No.	Mfg. No. / Description	Price
470839	(48703) 750 GPH, 12 volt	$54.98 G

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Johnson 1,600 GPH Tournament Livewell Pump



- 1,600 GPH Pro Series Livewell/Baitwell Pump features heavy duty bronze bottom inlet, unique dual port capability, mega torque motor, double ball bearings, quiet running design, 1" NPT female intake.
- Built for the serious fisherman!
- Amperage 7a, fuse size 10a, Port connection includes 1-1/8" and 1-1/4".

Order No.	Mfg. No. / Description	Price
470700	(16004B) 1,600 GPH, 12 volt	$157.98 F

Johnson Pump Twin Port Aerator/Livewell Pump



- Twin port pumps offer the convenience of using only the one intake for both the livewell and raw water washdown pump.
- The tapered inlet connects directly to the seacock and the upper outlet port provides a continuous flow of water through the discharge to the livewell while the lower outlet port connects to the washdown pump through either a 1/2" or 3/4" ports.
- New high pressure inlet seal easily handles the higher pressures created by high speed pickups commonly used.
- Note can also keep in the plug on second port and use as aerator for tight applications that can use NPT thread.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470725	(48503) 500 GPH, 3/4" Port Connection	$47.98 G
470729	(48903) 1,000 GPH, 3/4" Port Connection	$57.98 G

Johnson Replacement Cartridges



- Replacement fits all Johnson Pump universal cartridge housings like aerators, bilge, twinport, or lowboy pumps.
- Upgrade the output of your bilge pump in a matter of a few minutes by replacing the cartridge.
- Cleaning debris from the impeller has never been simpler or easier.

Order No.	Mfg. No. / Description	Price
470740	(28552) Spare Cartridge for 500 GPH	$24.98 R
470745	(42522) Spare Cartridge for 1,250 GPH	$46.98 R

Johnson Pump Mounting Bracket



- Gives opportunity to mount the pump on a wall.
- Suitable for Cartridge and Cartridge Duo.
- 90° Side mount bracket.

Order No.	Mfg. No. / Description	Price
470744	(10605-00) 90° Side Mount Bracket	$6.98 F

Johnson Pump 1000 GPH Cartridge Aerator



- 1,000 GPH straight aerator includes both straight and 90° externally threaded fitting.
- Removable and upgradeable motor cartridge bilge pump for easy maintenance and repair.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470721	(28103-00) 1,000 GPH, Straight, 12 volt	$63.98 G
470722	(38103) 1,000 GPH, 90°, 12 volt	$70.98 G

Johnson Baitwell Pumps



- Baitwell is a well thought out designed pump for pressurized water transfer to keep bait alive and active.
- 5 chamber pump head design for long life and quiet operation.
- 12 volt. 100% tested Fuse size 15A-GHT, 1/2" NPT x 3/4" hose.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470734	(1013252103BW) 4.0 GPM Baitwell, 12 volt	$55.98 G
470736	(1013252107BW) 5.2 GPM Baitwell, 12 volt	$231.98 G

Johnson Pump Cartridge Basspirator Kit



- Includes aerator pump, 3/4" hose, clamps, aerating head, transom shims, and overflow drain with hose and additional wire.
- 12 volt.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470690	(34014) 12 volt	$117.98 G

©2014 Donovan Marine, Inc.

Marpac Baitwell Pump - 4.5 GPM



- Delivers superior performance while providing up to 4.5 GPM.
- Specifically designed for pressurized water transfer, keeps bait alive and active for successful live-bait fishing.
- Salt water tough, high-powered pump has a stainless steel impeller plate for longevity.
- Quiet operation from the permanent magnet drive, while using little power.
- Easy slide connections include 3/4" ID hose barbs in threaded, straight and in 90° to make rigging simpler.
- Inlet debris strainer included for smooth flowing, problem free pumping
- 100% tested, with dry run protection.
- Heavy duty 12 volt motor.

Order No.	Description	Price
7-0439	Baitwell Pump, 4.5 GPM	$229.98 G

Johnson Pump Livewell Timer



- Livewell timer will turn on or cycle your aerator to increase the life of pump motor.
- On cycle pumps for 30 seconds, off cycle is variable from 0 to 5 1/2 minutes.
- Allows for continuous run for filling livewell.
- Keeps bait or fish alive without draining battery down.
- 3 wire installation easily replaces your on-off switch.
- 3/8 inch mounting hole for dashes up to 1 inch thick.
- A must for every livewell.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470746	(61125) Livewell Timer	$54.98 Q

Shurflo Pro Baitmaster II Livewell/Washdown Pump



- Shurflo Pro Baitmaster II is best suited for continuous duty livewell or washdown applications in harsh environments.
- The SHURcote II seamless motor shell protects the pump from splashed liquids and switches are sealed against water damage.
- These rugged self-priming pumps deliver high lift, can run dry without damage, and wont overheat with extended use.
- Run dry capability. Continuous duty. Self priming.
- Thermally protected. SHURcote II seamless motor.
- Splash proof. Sealed switch.
- Ignition protected.
- 35 gallon and under tank.
- 4.0 GPM.
- 12 volt. Max. amps 8.5.
- 45 PSI.
- Two year warranty.

Order No.	Mfg. No. / Description	Price
353184	(4648-453-E07)	$290.98 F

T-H Marine Fish 02 Oxygen Generation System



- Safe, reliable system that takes outside air and filters it to produce 90% pure oxygen to your livewell or bait tank.
- The oxygen is introduced into the livewell through the recirculation pump system and T-H Marine's Max Air venturi fitting or through a simple air diffuser.
- Salt water and fresh water applications.
- No oxygen tanks to refill.
- No electrolysis that can shock fish or create dangerous chemicals.
- Can be mounted in any type of boat or used with portable bait tanks.
- Includes: Recirc pump, Max Air Venturi and hose.

Order No.	Mfg. No. / Description	Price
641490	(FISH02-1) 1 Liter	$950.98 G

Rule Portable Aerator Kit



- Aerates from 5 to 30 gallons of water.
- Attaches easily with suction cups to any non-porus surface.
- 9" long spray tube can be custom cut to fit into any container.
- A fully adjustable spray head increases or reduces flow of water.
- Foam filtration system keeps water sparkling clean.
- The kit also includes battery clips for easy attachment to your 12 volt power source.
- 12 volt.

Order No.	Mfg. No. / Description	Price
581896	(202K) 460 GPH	$49.98 F

Rule Gentle-Flow Oxygenator - 700 GPH



- Produces millions of micro-fine bubbles with patented infusor technology.
- Directional discharge.
- Flexible installations for most custom tanks.
- Flow control with "Air Control" center.
- Removable cartridge motor for quick replacement.
- Kit comes complete with a pump, directional discharge, intake strainer, hose and intake valve.
- Port: 3/4" hose barb.
- Ideal for 25 lbs. of bait.

Order No.	Mfg. No. / Description	Price
581865	(255) 12 volt	$116.98 E

T-H Marine Automatic Aerator Control - 10 amp



- Provides a source of oxygen-rich water to your live well automatically.
- This unit features a solid-state timer with adjustable off times to adjust to varying conditions.
- Easily adaptable to existing systems.
- Requires a 3" diameter round hole or a 2-1/2" square hole for mounting.
- Front panel is 3-1/4" x 3-1/4" and requires only 3" behind panel.
- Fully potted to be waterproof.

Order No.	Mfg. No. / Description	Price
641678	(AAC-1)	$76.98 H

T-H Marine Pro-Air System



- The Pro-Air System air pump has advanced design features that are engineered under rigid quality control conditions to insure long lasting dependable oxygen rich air source to your livewell or baitwell.
- Comes complete with pump, two air stone mounts, two air stones, switch panel and 20 feet of air line tubing.
- For 12 volt applications.

Order No.	Mfg. No. / Description	Price
641503	(PAS-1)	$79.98 R
641504	(PAR-1) Pump Only	$87.98 R

T-H Marine EZ-Pump™ Advanced Water Pickups



- Fills & aerates live wells while underway.
- Mounts over pump intake.
- Eliminates pump air lock.
- Built in screen.

Order No.	Mfg. No. / Description	Price
247617	(EZ-BLK-1-DP) Length 4-3/4", Black	$19.98 F
247619	(EZ-WHT-1-DP) Length 4-3/4", White	$17.98 F
247620	(EZ-WHT-3-DP) Length 2-1/4", White	$18.98 F

T-H Marine Remote Diverter Valve



- Fits 3/4" hose.
- Diverts water to two systems from one pump.
- Control two systems from cockpit.
- Flat push-pull control panel.
- Functions: Baitwell/washdown.

Order No.	Mfg. No. / Description	Price
641488	(DV-1-DP) Kit	$79.98 R
641489	(DVO-1-DP) Valve Only	$46.98 H

Johnson Spray Head Assemblies



- One shut-off valve.

Order No.	Mfg. No. / Description	Price
470827	(90191-00) Length 13", 3/4" Thru Hull	$25.98 Q



- One shut-off valve with mounting bracket.

Order No.	Mfg. No. / Description	Price
470815	(90681-00) Length 10-1/2", 3/4" Barb	$24.98 F

Johnson Ice Chest Aerator Kit



- Convert any good sized chest into your own livewell and keep bait or your catch in vastly improved condition.
- Kit includes a powerful 12 volt pump, hose, spray bar, press-on clamp and clear cut instructions.
- 5 minute conversion.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
470752	(24052) Ice Chest Aerator Kit	$41.98 G

T-H Marine Remote Drain Control Kit



- Eliminates the problem of plugging and unplugging drain while fishing.
- The control cable has a stainless steel slide wire, plastic outer jacket, molded plastic threaded barrel with brass nut, 8-1/2' long, with black matte finished knob.
- Fits 3/4" ID hose.
- Flat panel/push-pull cable/cable hook-up is parallel to hose/in-line valve.

Order No.	Mfg. No. / Description	Price
641404	(RDC-1-DP) Control Panel: Flat Panel	$62.98 H
641329	(RDCF-1-DP) Control Panel: Flush Mount	$62.98 H
641438	(RDV-2-DP) Replacement Valve Only	$31.98 H


T-H Marine Directional Aerator Heads



- Great for saltwater baitwells.
- Creates circular current.
- Maximum wall thickness 5/8".
- Comes with 90° fitting.

Order No.	Mfg. No. / Description	Price
641591	(DAHIK-118-DP) 1-1/8"	$9.98 H
641589	(DAHIK-750-DP) 3/4"	$9.98 H

T-H Marine Aerator Heads with Shut-Off Valve



- Aerator heads with shut-off valve.
- Single nut-fixed flange.
- Hose ID 3/4".
- Mounting hole diameter 1-1/16".
- O-rings for no leaks.

Order No.	Mfg. No. / Description	Price
641540	(AHV-1DP) Maximum Wall Thick 3/8", Black, Straight	$11.98 H
641553	(AHV-92-DP) Maximum Wall Thick 5/8", White, 90°	$5.98 F

- Aerator heads with shut-off valve.
- Screw on valve.
- Hose ID 1-1/8".
- Mounting hole diameter 1-1/4".

Order No.	Mfg. No. / Description	Price
640108	(AHV-90-DP) Maximum Wall Thick 3/4", Black, 90°	$11.98 H

©2014 Donovan Marine, Inc.

T-H Marine Overflow Drain Tubes



- Tough, flexible vinyl plastic end with a standpipe of white PVC tubing.
- To use simply insert vinyl end into the opening of thru-hull fitting.
- To drain livewell or baitwell, simply remove.
- 7/8" OD tube.

Order No.	Mfg. No. / Description	Price
641387	(ODT-1-DP) 1-1/8"Straight, 12"	$10.98 H
641388	(ODT-190-DP) 1-1/8", 90°, 12"	$11.98 H
641399	(ODT-2-DP) 1-1/2"Straight, 18"	$26.98 H
641386	(ODTS-1-DP) Filter Screen for ODT-1 and ODT-190	$3.08 H
641390	(ODTS-2-DP) Filter Screen for ODT-2	$6.98 H

T-H Marine Push In Plugs for Drains



- These push plugs are used to stop water flow through drains from baitwell or livewell.
- Plug works great with T-H Marine overflow drain tubes.
- This black injection-molded push plug features a large ring for easy removal.
- It also has a double ring seal.

Order No.	Mfg. No. / Description	Price
641426	(PP-150-DP) 1-1/2"	$10.98 G
641507	(PP-118-DP) 1-1/8"	$7.98 H

T-H Marine Stainless Steel Wire Mesh Strainers




- Designed to provide effective, dependable protection against trash or fish scales which could clog drains in bait wells or pump impellers in aeration systems.
- Made from formed stainless steel wire mesh cloth and then molded into a black PVC base with internal threads this unit is non-corrosive, functional and looks extremely good installed on any boat.
- Used on any aerator pump intake.
- Simply screws onto threaded pump intake in livewell or on exterior of boat.

Order No.	Mfg. No. / Description	Price
641642	(AS-1-DP) 3/4"	$8.98 H

- Used as a strainer on livewell drains.
- Screws onto thru-hull fitting.

Order No.	Mfg. No. / Description	Price
640088	(AS-2-DP) 1"	$10.98 H

T-H Marine Bait Tank and Plumbing Kit

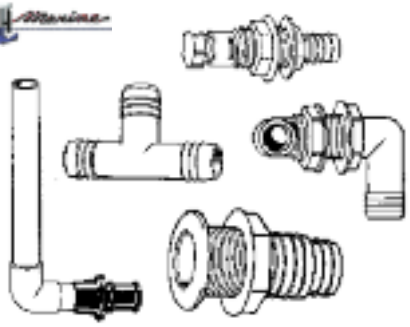

- This kit contains everything needed to rig a baitwell or tank.
- The kit contains the following products: 641388 (ODT-190) 90º overflow drain tube and (TH-1202) 5/8" - 1-1/4" thru-hull for overflow control, drain plugging and well draining; 641541 (AHV-2) valved aeration head for pumping in fresh water; DAH-90 directional aerator head for current creation; and 641375 (TEE-3/4) tee to connect both aerator heads to aerator pump.

Order No.	Mfg. No. / Description	Price
236388	(BWK-2-DP)	$31.98 I

T-H Marine Thru-Hull Strainer Mount

- This specialized thru-hull fitting is designed to enable a 3/4" thru-hull passage thru a transom or livewell wall and to attach an aerator screen on the other side.
- This fitting allows the screen to mount flush against the wall with no extra nut to secure the fitting.
- Perfect for remote mounted pumps for filling from the transom or for recirculating from the livewell.
- Includes: Thru-hull (THSM-1) and 641642 (AS-1) wire mesh strainer.

Order No.	Mfg. No. / Description	Price
641869	(THSM-1KIT)	$13.98 H

T-H Marine Baitwell Filter



- This baitwell filter installs with the overflow fitting on baitwells to prevent bait fish being lost.
- Black injection molded base.
- Designed to fit either 1-1/8" or 1-1/2" diameter thru-hull fittings.

Order No.	Mfg. No. / Description	Price
641680	(BWF-1-DP)	$8.98 H

T-H Marine Aerator Filter



- An externally installed filter for aeration systems.
- Made of black poly material.
- Installs with three screws over intake for aerator pumps.
- It prevents foreign matter from clogging pump.

Order No.	Mfg. No. / Description	Price
641604	(AF-1-DP)	$5.98 H

Boater Sports Stainless Steel Wire Mesh Strainer



- This screw-on strainers are made from formed stainless steel wire mesh cloth and then molded into a PVC base with internal threads.
- Packaged for display.
- Black base with 3/4" female threads.

Order No.	Mfg. No. / Description	Price
1-57075	(57075)	$5.75 H

T-H Marine Max-Air Livewell Venturi



- The venturi system draws fresh air from outside the livewell and injects tiny air bubbles into the water flowing into the livewell.
- With the aerated water entering the well at a lower level than with traditional spray heads, the entire well is more thoroughly aerated.
- The reduced restriction of this fitting allows more water to flow from the pump than traditional spray heads.
- The faceplate inlet can be mounted anywhere above the waterline.
- Includes: Venturi, face plate and 6' tubing.

Order No.	Mfg. No. / Description	Price
641527	(MAV-2KT-DP)	$19.98 H

Johnson Pump Transom Shims



- Transom shims for boats with severe angle to keep pump underwater to hinder airlock.

Order No.	Mfg. No. / Description	Price
470754	(71245)	$9.98 G

Flitz Metal, Plastic & Fiberglass Polish



- Cream formula, non-toxic, eco-friendly.
- Safe for cleaning, polishing and protecting all metals, fiberglass, plastics and painted surfaces.
- Removes oxidation, tarnish, rust, water stains heat discoloration, lead & powder residue, scuff marks and much more.

Order No.	Mfg. No. / Description	Price
608005	(BP 03511) 1.76 oz.	$12.98 H
608010	(BU 03515) 5.29 oz.	$28.98 H
608015	(CA 03518-6) 2#	$69.98 H
608020	(CA 03588) Gallon	$209.98 H

Star Brite Premium Marine Polish with PTEF®



- The ultimate protection for fiberglass, metal and painted surfaces, lasts up to 6 times longer than other marine waxes.
- UV inhibitors help stop fading and oxidation.
- Leaves a super smooth, non-stick coating which reduces drag and repels dirt, grime, oil and stains.

Order No.	Mfg. No. / Description	Price
625181	(85716P) 16 fl. oz.	$19.98 G
625218	(85732) 32 fl. oz.	$30.98 G

Farecla Ultimate UV Wax



- Premium quality wax polish which gives you excellent high gloss finish and protection.
- Quick and easy to use.
- Its revolutionary formula provides a durable finish for up to 6 months.

Order No.	Mfg. No. / Description	Price
812140	(FM-UVW-500) 500 ml	$25.98 G

Marpro Premium Marine Wax



- Shines and protects.
- UV inhibitors guard against fading and chalking.
- Specially formulated for use on fiberglass, metal, plexiglass and painted surfaces.
- Can be applied over old wax or polish.
- Repels water and oil based stains and deposits, making future cleanup quick and easy.
- Priced each, sold packs of 4 only.

Order No.	Description	Price
7-2734	16 fl. oz.	$14.98 Q

Flitz Liquid Metal, Plastic & Fiberglass Polish



- Liquid formula, non-toxic, eco-friendly.
- Safe for cleaning and polishing all metals, fiberglass, plastics and painted surfaces
- Removes oxidation, tarnish, rust, water stains heat discoloration, lead & powder residue, scuff marks and much more.

Order No.	Mfg. No. / Description	Price
608025	(LQ 04587) 7.6 oz.	$18.98 H
608030	(LQ 04506) 16 oz.	$35.98 H
608035	(LQ 04510) Gallon	$165.98 H
608140	(FBTS-010-100) 2.2 Gm	$0.98 H

Meguiar's High Gloss Polish



- Restores optimal gloss on gel coat and painted marine or RV surfaces after cleaning.
- Restores valuable oils to feed and nourish the surface.
- Especially effective on dark colors.

Order No.	Mfg. No. / Description	Price
628365	(M4516) 16 fl. oz.	$14.98 G

Farecla Profile UV Wax



- Contains UV absorbers.
- High Carnauba wax content resists washing off.
- Easy to apply - thick creamy liquid formulation resists smearing, especially in sunny conditions.

Order No.	Mfg. No. / Description	Price
812152	(10040) Liter	$37.98 G

Marpro Spray Fast Wax



- Spray on, wipe off for a fast deep shine.
- Ideal for fiberglass, painted surfaces, chrome and stainless steel.
- Easy to use spray-on formula.
- Priced each, sold packs of 4 only.

Order No.	Description	Price
7-2738	16 fl. oz.	$17.98 Q

Corrosion Technologies RejeX



- Recently named on of the top 10 boat care products ever, RejeX is a thin-film polymer sealant designed to shine and protect gelcoat and paint.
- Also works on carbon fiber, acrylic and Eisenglas.
- This very thin film coating should be used instead of wax-type products to prevent stains and adhesion of common contaminants such as diesel exhaust, fish blood, bugs splats, bird droppings, and mineral and tannin stains, etc.
- It is easy to apply and produces an unrivaled deep, lustrous shine that lasts three times longer than waxes.
- RejeX contains none of the free silicone oils found in some other products that are known to contaminate paint and cause problems when repainting.

Order No.	Mfg. No. / Description	Price
302947	(61001) 12 fl. oz.	$16.98 F
302951	(77000-1) 1 fl. oz.	$6.98 F

Star Brite Marine Polish



- Liquid.
- No hard rubbing required.
- Helps stop fading from UV rays.
- Lasts up to 4 times longer than other polishes.
- Equally good for new and older boats.

Order No.	Mfg. No. / Description	Price
625080	(80116P) 16 fl. oz.	$15.98 G

Star Brite Marine Formula Spray Wax



- Protects against salt, sun and weathering.
- Convenient spray application.
- Long lasting.
- For fiberglass, metal and painted surfaces.

Order No.	Mfg. No. / Description	Price
625042	(82422) 22 fl. oz.	$14.98 G

3M Marine Scotchgard Liquid Wax



- Designed for the harsh marine environment and provides protection from the suns damaging ultraviolet rays.
- Safe for use on fiberglass, gelcoat, marine topside paints, and marine metals.
- Liquid.

Order No.	Mfg. No. / Description	Price
857375	(09061) 500 ml	$19.98 G
857376	(09062) 1 Liter	$39.98 H

©2014 Donovan Marine, Inc.

Meguiar's Flagship Premium Marine Wax



- Dramatically enriches color and shine of fiberglass and gel coat surfaces.
- Effective in removing light oxidation and dullness, restoring gloss and adding protection from UV damage.

Order No.	Mfg. No. / Description	Price
628454	(M6316) 16 fl. oz.	$25.98 G
628456	(M6332) 32 fl. oz.	$38.98 G
628385	(M6301) Gallon	$83.98 G

Meguiar's Flagship Ultimate Quik Wax



- Mist on...wipe off...effortlessly
- Can be applied in direct sunlight
- Deep, wet look sunlight

Order No.	Mfg. No. / Description	Price
628550	(M14016) 16 oz.	$13.98 G

Meguiar's Pure Wax



- Durable high gloss protection for fiberglass & all painted surfaces.
- Blend of pure Brazilian carnauba wax with silicones, polymers and resins to maintain extraordinary gloss and protection.
- Protects against the sun's ultraviolet rays.

Order No.	Mfg. No. / Description	Price
628430	(M5616) 16 fl. oz.	$17.98 G

Meguiar's Flagship Ultimate Detailer™



- Designed to quickly remove dirt, grime, water spots and other fresh contaminants while adding deep gloss and long-lasting polymer protection.
- Use on all surfaces of your boat, including gel coat, metal and clear plastics to create a just-washed appearance.
- Once applied, this specialized detailer with Hydrophobic Polymer Technology™ will help to repel water in order to reduce drying time and water spot etching.

Order No.	Mfg. No. / Description	Price
628535	(M9424) 24 oz.	$16.98 G

Flitz Marine Speed Waxx



- Premium-grade detailing spray thats perfect for when youre in a hurry and need a super-fast, super gloss shine.
- Exceptional Performance on: Fiberglass, Gelcoat, Plastic Windows, Hatches, Plexiglass, Acrylics, Enamel & Painted Surfaces, Clearcoat, Lacquer, Polyurethane, Ceramic & Powder Coatings.
- Prevents oxidation when used regularly.
- Made with Brazilian Carnauba to provide extraordinary gloss and protection.
- This remarkable spray-on, wipe-off wax product fills in swirls & hairline scratches.
- This product is water-based, environment friendly, no streak, no smear.
- Will not leave a chalky residue around decals or lettering like other wax products.

Order No.	Mfg. No. / Description	Price
608070	(MX 32806) 16 oz. Trigger	$17.98 H
608075	(MX 32810) Gallon	$66.98 H
608080	(IC 32820) 5.5 Gallons	$275.98 H

Meguiar's Quick Spray Wax



- Provides incredible gloss with light wax protection.
- Excellent for maintaining brilliant gloss and protection between periodic waxings.
- Perfect for use on fiberglass, painted surfaces (including painted aluminum), stainless steel, clear plastic and other non-porous surfaces.

Order No.	Mfg. No. / Description	Price
628442	(M5916) 16 fl. oz.	$10.98 G

3M Marine Clean and Shine Wax



- It is a quick and easy, "spray on/wipe off" product that recaptures that "just waxed" look and feel.
- Excellent for use on wet or dry surfaces; no water needed!
- May also be used to enhance the shine of your boats fiberglass gelcoat, marine topside paint, painted aluminum or metal parts.

Order No.	Mfg. No. / Description	Price
857373	(09033) 15 fl. oz.	$16.98 G

Meguiar's Flagship Premium Marine Wax Paste



- Dramatically enriches color and shine of fiberglass and gel coat surfaces.
- Effective in removing light oxidation and dullness, restoring gloss, and adding protection from UV damage.
- Use wax only after the surface has been cleaned and restored to a "like new" or "average" finish.

Order No.	Mfg. No. / Description	Price
628387	(M6311) 11 oz. (325 ml)	$28.98 G

Star Brite Presoftened Boat Wax



- Easy to use presoftened wax formula, provides a deep, rich shine.
- Long lasting protection against fading, chalking and oxidation.
- Use on fiberglass, aluminum, chrome, and on painted surfaces.
- Cleans, shines and protects in one easy step.
- May be applied in direct sunlight.

Order No.	Mfg. No. / Description	Price
625028	(82314) 14 oz.	$15.98 G

3M Marine Ultra Performance Paste Wax



- Designed to provide high gloss and protect fiberglass/gelcoat, marine topside paints, painted aluminum and marine metal parts.
- Easy on/easy off formula which also retards ultraviolet light damage.
- Paste.
- Ultra Perfection.

Order No.	Mfg. No. / Description	Price
857358	(09030) 9.5 oz.	$30.98 G

CRC Trewax® Boat Paste Wax



- Contains Carnauba.
- Leaves a hard, brilliant finish with long lasting durability.
- Use on fiberglass, painted surfaces, aluminum, chrome, stainless steel.
- Protects against the adverse effects of sun, salt, rain, etc.

Order No.	Mfg. No. / Description	Price
216716	(MK66) 12 oz.	$24.98 H

Meguiar's Maximum Mold Release Wax



- The industry's first and still most widely used mold release wax.
- Wax of choice when maximum release power is required.
- Excellent for breaking in new molds and tooling.

Order No.	Mfg. No. / Description	Price
628290	(M0811) 11 oz.	$13.98 G

Flitz Ultimate Marine Care Kit



- Kit Includes: Large (5) BuffBall, Flitz Polish-Paste (1.76 oz), Waxx Protectant (1.7 oz).
- Everything needed to clean, polish and protect the aluminum, boat props, cleats, bow rails, fiberglass, gelcoat, hatches, plastic windows and more.

Order No.	Mfg. No. / Description	Price
608095	(MK 31509)	$52.98 H

Meguiar's Flagship New Boat Owner's Kit



- A complete starter kit for every new boat owner who wants to care and maintain their new investment.
- Three specialized products will help to keep a boat looking new.
- Includes: No. 65 Flagship Premium Marine Wash, No. 63 Flagship Premium Marine Wax, No. 52 Quik Clean and an Applicator Pad.

Order No.	Mfg. No. / Description	Price
628303	(M6375)	$38.98 G

Flitz Cycle 2 Go Care Kit



Order No.	Mfg. No. / Description	Price
608125	(CY 41503)	$23.98 H

Flitz Marine Detailers Kit



- Restores and details: Chrome and aluminum mag wheels, Clearcoated mag wheels, aluminum and stainless steel, Diamond plate, RV & trailer trim work, Rock guards, fiberglass.
- Removes: Oxidation, road tar, scuff marks, hard water stains, bluing, rust and burn marks.
- Kit includes: 1 Metal, Plastic & Fiberglass Polish 5.3 oz tube, 1 Aluminum Preclean, 16 oz. bottle, 1 Marine Waxx 16 oz. bottle, 3 Red Thick 'n Thirsty Microfiber 16 x 16, 1 Super Mini, 2 Buff Ball, 1 Large 5 Buff Ball, 1 X-Large 7 Buff Ball and 1 6-Pack Mini Scuff Pads.
- All included in a resealable bucket.

Order No.	Mfg. No. / Description	Price
608100	(MAR 21503)	$143.98 H

Star Brite 6 Pack Sampler Kit



- Kit includes: 8 fl. oz. Instant Black Streak Remover, 8 fl. oz. Non-Skid Deck Cleaner, 8 fl. oz. Instant Hull Cleaner, 8 fl. oz. Rust Stain Remover, 8 fl. oz. Premium Marine Polish and 8 fl. oz. Sea Safe Biodegradable Boat Wash.

Order No.	Mfg. No. / Description	Price
431330	(94300) Sampler Kit	$35.98 G

Marykate Nano Boat Wax with Carnauba and PTFE



- Revolutionary wax combines Carnauba and PTFE with the Nano technology chemical process.
- Long-lasting, brilliant finish.
- Superior UV protection.

Order No.	Mfg. No. / Description	Price
216418	(MK7510) 10 oz. Tube	$15.98 G

Flitz Motorcycle Detail Kit



- The Flitz buff ball will help you buff hard-to-reach areas in seconds.
- Kit includes: Flitz polish-paste 1.7 oz., Super-mini 2" buff ball and Flitz wax protectant - sample.

Order No.	Mfg. No. / Description	Price
608130	(CY 61501)	$50.98 H

Marykate Nano Products Twinpack



- Kit includes: 16 fl. oz. Nano Boat Wax with Carnauba and PTFE and 16 fl. oz. Nano Color Restorer with PTFE.

Order No.	Mfg. No. / Description	Price
216424	(MK7732) Nano	$27.98 G

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Marpro Liquid Rubbing Compound and Color Restorer



- Bring back original color and luster.
- Quickly removes oxidation and hazing.
- Great for fiberglass and painted surfaces.
- Priced each, sold packs of 4 only.

Order No.	Description	Price
7-2740	16 fl. oz.	$12.98 Q

Marpro One-Step Cleaner Wax



- The easy way to remove chalk and oxidation.
- Restores original shine and color with no hard rubbing or buffing.
- Leaves a protective coating.
- Ideal for all fiberglass and painted surfaces.
- Priced each, sold packs of 4 only.

Order No.	Description	Price
7-2736	16 fl. oz.	$14.98 Q

3M Marine One-Step Fiberglass Cleaner and Wax



- Designed to remove light to medium oxidation, clean, polish and protect fiberglass/gelcoat and marine topside paints.
- Liquid.

Order No.	Mfg. No. / Description	Price
857233	(09009) 16 fl. oz.	$19.98 F
857245	(09010) 32 fl. oz.	$30.98 F
857257	(09011) Gallon	$105.98 H

Marykate Nano Color Restorer with PTFE®



- Restores gelcoat to a like new gloss and shine.
- Removes oxidation, stains, and sun fading that can leave fiberglass looking dull.
- PTFE adds superior UV protection and excellent abrasion resistance.

Order No.	Mfg. No. / Description	Price
216422	(MK7616) 16 oz.	$14.98 G

3M Marine Color/Gloss Restorer



- Combines an exceptionally fast cutting compound with a finishing material in one.
- It removes light to heavy oxidation, scratches, stains, blemishes, and fine swirl marks that compounding normally leaves behind on fiberglass gelcoat.
- Contains no wax or silicone.
- Use by hand or with electric/air powered machine.

Order No.	Mfg. No. / Description	Price
857260	(09089) 500 ml	$34.98 H

3M Marine One-Step Fiberglass Restorer and Wax



- Designed to remove heavy oxidation, chalking, fading, minor scratches, rust and exhaust stains.
- Provide protection on fiberglass/gelcoat and marine topside paints.

Order No.	Mfg. No. / Description	Price
857168	(09005) 16 fl. oz.	$20.98 F
857182	(09006) 32 fl. oz.	$34.98 F
857194	(09007) Gallon	$121.98 H

Star Brite Fiberglass Color Restorer



- Brings back original color and lustre.
- Will not scratch or harm gelcoat.
- Removes heavy oxidation, chalking and fading.
- Seals surface to protect against future fading and weathering.
- Excellent for all dark colored boats.

Order No.	Mfg. No. / Description	Price
624886	(81816PW) 16 fl. oz.	$15.98 G

Star Brite Premium Cleaner Wax with PTEF®



- Unique formula cleans and restores fiberglass, metal and painted surfaces and leaves a protective coating, all in one step.
- Wipe on and buff off to remove oxidation, chalk and fading from dull fiberglass surfaces.
- Leaves a polymer coating with UV inhibitors to maintain restored finish.

Order No.	Mfg. No. / Description	Price
625220	(89616P) 16 fl. oz.	$15.98 G

Meguiar's Color Restorer



- Safely removes moderate oxidation, stains and blemishes on all fiberglass and painted surfaces.
- Revives faded, oxidized surfaces to their original vibrant color.
- Safe alternative to a rubbing compound.

Order No.	Mfg. No. / Description	Price
628353	(M4416) 16 fl. oz.	$14.98 G

Meguiar's One Step Cleaner Wax



- A non-abrasive formula that cleans, polishes and protects all boats and RV's in one easy step.
- Removes light oxidation and haze, minor scratches and swirls.
- Provides long-lasting protection against salt air, corrosion and the sun's ultraviolet rays.

Order No.	Mfg. No. / Description	Price
628391	(M5001) 1 Gallon	$68.98 Q

Meguiar's One Step Compound



- This aggressive, yet safe, one-step compound will clean and restore gloss to the gel coat surface in one step.
- Removes moderate-heavy oxidation, scratches, stains and tough water spots on all fiberglass and painted gel coat marine or RV surfaces.

Order No.	Mfg. No. / Description	Price
628381	(M6732) 32 fl. oz.	$27.98 G

Meguiar's One Step Boat Cleaner/Wax



- A non-abrasive formula that cleans, polishes and protects all boats in one easy step.
- Removes light oxidation and haze, minor scratches and swirls.
- Provides long-lasting protection against salt air, corrosion and the sun's ultraviolet rays.

Order No.	Mfg. No. / Description	Price
628404	(M5016) 16 fl. oz.	$17.98 G
628428	(M5032) 32 fl. oz.	$26.98 G

Meguiar's Flagship Premium Cleaner / Wax



- A unique formula that will effortlessly remove light oxidation and water spots, minor scratches and haze while adding brilliant gloss and superior protection.
- Powerful Flagship ingredients provide long lasting protection against salt air corrosion and the sun's devastating ultraviolet rays.
- It's perfect to use on all fiberglass, painted and gel coated surfaces.
- Works great on all colors and in direct sunlight!

Order No.	Mfg. No. / Description	Price
628382	(M6132) 32 fl. oz.	$26.98 G

Star Brite Premium Cleaner Wax with PTEF®



- Unique formula cleans and restores fiberglass, metal and painted surfaces and leaves a protective coating, all in one step.
- Wipe on and buff off to remove oxidation, chalk and fading from dull fiberglass.
- Leaves a polymer coating with UV inhibitors to maintain restored surface.

Order No.	Mfg. No. / Description	Price
625232	(89632P) 32 fl. oz.	$21.98 G

Farecla Profile 100 Tub Paste Compound



- Extra coarse cut - removes up to P600 dry.
- Special hard abrasives to cut even tough gel coats.
- Excellent in a two-step process with Profile 300.
- No fillers.

Order No.	Mfg. No. / Description	Price
812099	(00043) 100 Tub Paste	$101.98 G

Meguiar's Cleaner Wax Paste



- A non-abrasive formula that cleans, polishes and protects all boats and RV's in one easy step.
- Removes light oxidation and haze, minor scratches and swirls.
- Provides long-lasting protection against salt air, corrosion and the sun's ultraviolet rays.

Order No.	Mfg. No. / Description	Price
628380	(M5014) 14 oz.	$19.98 G

Star Brite Boat Guard Speed Detailer & Protectant



- The fast, easy way to add shine and enhance color.
- PTEF polymers provide a barrier against UV rays.
- Safe for use on fiberglass, metal and painted surfaces.
- Restores shine to rubrails.
- Gently removes dirt and grime.

Order No.	Mfg. No. / Description	Price
625040	(81022) 22 fl. oz.	$14.98 G

Farecla Profile Glaze



- Enhances the gloss level of the polished surface.
- Ideal for final finishing prior to delivery to customers.
- Especially suited to dark colored gel coats.
- Offers a semi-durable protection against dirt and water.

Order No.	Mfg. No. / Description	Price
812160	(42035) 34 fl. oz. (1 Liter)	$49.98 G

Interlux Premium Marine Wax with Cleaner



- Advanced long lasting wax with cleaner that cleans, polishes and protects.
- Suitable for fiberglass, wood, metals and painted surfaces.
- Superior low friction surface, for ultimate protection against sun, salt, water, dirt oil and grease.
- Will not dry out or chalk during application, provides long working time and can be applied by hand or electric buffer.
- Quick and easy to use.
- Produces a high gloss, dirt-repellant finish.
- Does not discolor or scratch surface.
- Will not dry out or chalk during application.
- Long working time.

Order No.	Mfg. No. / Description	Price
411532	(YMA013/500) 16.9 fl. oz.	$12.98 I

Farecla Profile UV Wax



- Contains UV absorbers that slow the effects of aging.
- High carnauba wax content that resists washing off.
- Easy to apply a thick creamy liquid formulation that resists smearing especially in sunny conditions.
- Laboratory tested QUV and Xenon arc accelerated weathering testing conducted according to BS EN ISO 4892 and ASTM D589.

Order No.	Mfg. No. / Description	Price
812145	(20105-5000) 170 fl. oz. (5 Liters)	$146.98 G

Farecla Profile 200 Coarse Cut Compound



- Coarse cut - removes up to P800 dry paste.
- Is ideal in a two step process with Profile 500.
- Quick and economical.
- No fillers.

Order No.	Mfg. No. / Description	Price
812102	(57007) 1 Gallon	$101.98 G

©2014 Donovan Marine, Inc.

Farecla Profile 200 Liquid Compound



- Designed to achieve maximum cutting action when used with the Advanced G Mop Wool Compounding Pad.
- Removes coarse sanding marks in preparation for Step 2 polishing (Profile 400).
- Depending on the type of gelcoat used, coarser grades of abrasive paper marks can be removed.
- Silicone free.
- For machine application only.

Order No.	Mfg. No. / Description	Price
812105	(57035) 1 Liter	$53.98 G

Farecla Profile 300 Liquid Compound



- Fast - liquid compound.
- Rapid cut - P1000 - P1200 dry sanding marks.
- Single step compound.
- Safe working.
- High gloss finish.
- Economical - more abrasive.
- Formulated for GRP.
- For hand and machine application.

Order No.	Mfg. No. / Description	Price
812129	(201035000) 5 Liters	$171.98 G

Star Brite Liquid Rubbing Compound for Medium Oxidation



- For light to medium duty applications.
- Use on fiberglass, metal and painted surfaces.
- Great for hand or buffer application.
- Removes stains, medium oxidation and scratches.
- Will not "set up" like old fashioned rubbing compounds which speeds up the buffing process.

Order No.	Mfg. No. / Description	Price
624925	(81316) 16 fl. oz.	$11.98 G

Farecla Profile 200XL Liquid Compound



- For coarse cutting action on production and tooling gelcoats.
- Extra cut and good gloss one-step from P1000 dry.
- XL formula for extra lubrication - works longer without drying out.

Order No.	Mfg. No. / Description	Price
812107	(202031000) 1 Liter	$51.98 G
812108	(202035000) 5 Liters	$171.98 G

Farecla Profile 500 Light Cut Liquid Compound



- Great for removing swirl marks.
- Excellent second step product - to be used after either Profile 100, 200 or 300.
- Achieves a high gloss finish, especially on darker colors.
- No fillers.

Order No.	Mfg. No. / Description	Price
812138	(00041) 1 Liter	$53.98 G

3M Perfect-It III Extra Cut Rubbing Compound



- Designed for Automotive Paint Systems.
- It has all the features, advantages and benefits of Perfect-It III Rubbing Compound with increased aggressiveness to remove 1000 - 1200 scratches.

Order No.	Mfg. No. / Description	Price
856964	(06060) 1 Quart	$77.98 H
2012225	(06061) 1 Gallon	$228.98 G

Interlux Light Duty Rubbing Compound



- Unique formula is aggressive and safe for fiberglass, wood, metals and painted surfaces.
- Light Duty Rubbing Compound removes light scratches, minor oxidation and restores gloss to topsides.
- Easy to use liquid can be applied by hand or electric buffer (800-1000 rpm).
- Contains lubricated rubbing grains, ensures surface is not scratched or damaged when applied.
- Clean effectively.
- Easy to use.
- Does not discolor.
- Can be applied by hand or with electric buffer.

Order No.	Mfg. No. / Description	Price
411520	(YMA012/500) 500 ml	$11.98 I

Farecla Profile 300 Rapid Cut Compound



- Rapid cutting - removes up to P1000 dry sanding marks.
- Can be used as a single step process, achieves an excellent gloss level.
- Universal application - extremely versatile, will remove marks on virtually any surface.
- No fillers.

Order No.	Mfg. No. / Description	Price
812114	(81007) 1 Gallon, Paste	$101.98 G
812126	(81009) Liter	$53.98 G

Star Brite Paste Rubbing Compound for Medium Oxidation



- For light to medium duty applications.
- Use on fiberglass, metal and painted surfaces.
- Great for hand or buffer application.
- Removes stains, medium oxidation and scratches.
- Will not "set up" like old fashioned rubbing compounds which speeds up the buffing process.

Order No.	Mfg. No. / Description	Price
624949	(82614) 14 oz.	$11.98 G

3M Perfect-It™ Rubbing Compound



- Fast cutting rubbing compound designed remove sand scratches and leaves a fine finish on automotive paints.

Order No.	Mfg. No. / Description	Price
856887	(06085) 1 Quart	$74.98 H

3M Super Duty Rubbing Compound



- Recommended for heavy aggressive compounding of oxidized gelcoat and marine paint.
- Contains no silicone.
- Buffs to a high gloss.

Order No.	Mfg. No. / Description	Price
856863	(05954) Quart	$32.98 H
856875	(05955) Gallon	$107.98 H

Farecla Quick Guide to Compounding

2-Step System		1-Step or 2-Step System	1-Step System
Compound Selection	Sanding Scratch Removal Range	Pad to use for Best Results	Then…
Profile 100 Gal. (Paste)	600 Dry 800+ Wet	White Wool Compounding	Profile 300 or 500* then Wax
Profile 200 Gal. (Paste)	800 Dry 1000+ Wet	White Wool Compounding	Profile 300 or 500* then Wax
Profile 200 Lit. (Liquid)	800 Dry 1000+ Wet	White Wool Compounding or Yellow Polishing	Apply Wax or… Profile 300 or 500* then Wax
Profile 300 Gal. (Liquid)	1000 Dry 1200+ Wet	White Wool Compounding or Yellow Polishing	Apply Wax or… Profile 500* then Wax
Profile 300 Lit. (Liquid)	1000 Dry 1200+ Wet	White Wool Compounding or Yellow Polishing	Apply Wax or… Profile 500* then Wax
Profile 500 Lit. (Liquid)	Removes 1500+ Dry Scratches & Great Swirl Mark Remover	Yellow Polishing or Foam Finishing	Wax

*When using Profile 300 or 500 as 2nd Step, always use a polishing/finishing pad for best results

*Before a Wax is applied, Glaze can also be used to enhance the gloss of the surface.

Compounding/Polishing Pad Selections and Why?

White Wool Compound Pads: Most Aggressive Cut / Least Gloss & Shine
Yellow Polishing Pads: Less Cut / Higher Gloss & Shine
Foam Pads: Least Cut / Highest Gloss and Shine

Quick Notes

All Farecla compounds are water based and are to be considered Low VOC
25% more abrasive weight by volume than competition = less product needed to do jobs
All compounds are white in color and contain no fillers

©2014 Donovan Marine, Inc.

3M Marine Finesse-It™ Marine Paste Compound



- Well suited for boat reconditioning of heavily oxidized surfaces/finishes and removing P800 sand scratches on production gelcoat and grade 1000 or 1200 sand scratches on tooling gelcoat.
- White color reduces the potential for staining of light-colored boats.
- Has long-working time, requiring less compound to be used per application.

Order No.	Mfg. No. / Description	Price
856926	(06039) 1 Gallon	$76.98 H

3M Imperial Compound and Finishing Material



- It has a fast cut and leaves an excellent finish without swirl marks.
- It is designed to remove a P600 or P800 dual action sand scratch from gelcoat, with a wool pad.
- Designed to be used with an air or electric buffer (1500 - 2500 RPM) equipped with a 3M Compounding Buff Pads.

Order No.	Mfg. No. / Description	Price
856899	(06044) 32 fl. oz.	$62.98 H
856901	(06045) Gallon	$199.98 H

3M Finesse-It™ II Finishing Material



- Designed for use on topside paint systems to remove swirl marks after compounding, while leaving a glazed finish.
- Contains no silicone or wax.
- Removes light to medium oxidation on gelcoat for boat reconditioning.

Order No.	Mfg. No. / Description	Price
857176	(09048) Pint	$30.98 G
856952	(35928) Quart	$69.98 H

Marpro Premium Wash and Wax



- Cleans and waxes in one step.
- Biodegradable formula contains no phosphates or harsh chemicals.
- Strips away dirt but will not remove wax or polish.
- Leaves a durable polymer coating to protect against UV damage and weathering.
- Sold in packs of 4 only.

Order No.	Description	Price
7-2732	32 fl. oz.	$17.98 Q

3M Marine High Gloss Gelcoat Compound



- Designed to quickly remove P600 dual action or 1000 wet sanding scratches from production gelcoat.
- This compound contains no wax or silicone and leaves a high gloss finish without swirl/wheel marks.
- Reduces slinging while buffing.

Order No.	Mfg. No. / Description	Price
856890	(06025) 1 Gallon	$102.98 H

3M Marine Super Duty Rubbing Compound



- For fiberglass and painted boats.
- Fast cut formula.
- Contains no wax and silicone.
- Removes scratches and heavy oxidation.

Order No.	Mfg. No. / Description	Price
857175	(09004) 1 Pint	$16.98 G

Marpro Boat Wash



- Powerful - 6 cap fulls clean a 24' boat.
- Special cleaning agents remove tar, gas stains, exhaust smudge, scum line, fish blood.
- Concentrated formula is economical to use.
- Cleans the entire boat from trailer to T-Top.

Order No.	Description	Price
7-1092	32 fl. oz.	$7.98 G
7-1093	Gallon, 4 Per Case	$15.98 G

Meguiar's Boat Wash



- Safely removes grime and dirt.
- Refreshing scent.
- Long lasting suds.
- Biodegradable.

Order No.	Mfg. No. / Description	Price
6270021	(M4364) 64 oz.	$11.98 H

3M Multipurpose Boat Soap



- Concentrated formula designed to clean anything from dirty decks to soiled fabrics to degreasing engines.
- Mix concentrate with water for desired cleaning strength.
- Cleans grease, oil, grime, algae, fish blood, dirt, etc. on hulls, decks, upholstery, canvas, carpet and engines.

Order No.	Mfg. No. / Description	Price
857396	(09034) 16 fl. oz.	$14.98 G

Interlux All Purpose Boat Soap



- Concentrated universal cleaner with a wax effect that leaves surfaces shiny and water repellent.
- Suitable for fiberglass, wood, metals and painted surfaces.
- Does not remove wax and may be used regularly without affecting wax protection.

Order No.	Mfg. No. / Description	Price
411506	(YMA010/500) 500 ml	$8.98 I

Star Brite Boat Wash in a Bottle



- Ideal for cleaning all marine surfaces: fiberglass, vinyl, painted areas, plastic, rubber and metal.
- Great for washing cars and trucks, too.
- Economical to use; a few capfuls will clean a 20' boat.
- Biodegradable formula is "lake safe."
- Nonstreaking, does not leave residue.

Order No.	Mfg. No. / Description	Price
624800	(80416P) 16 fl. oz.	$6.98 G

Star Brite Sea Safe Boat Wash



- Environmentally friendly, biodegradable formula.
- Cleans away dirt, stains, grease, oil and salt.
- Use on fiberglass, metal, glass, rubber and painted surfaces.
- Concentrated for heavy duty cleaning.

Order No.	Mfg. No. / Description	Price
624802	(89732PW) 32 fl. oz.	$10.98 G

Star Brite Power Pine Boat Wash



- Concentrated formula makes 96 gallons (32 fl. oz. size) or 384 gallons (1 gallon size).
- Dissolves in fresh or salt water.
- Environmentally safe, biodegradable.
- Cleans fiberglass, painted surfaces, fish boxes, windows, canvas, rugs, brightwork, etc.

Order No.	Mfg. No. / Description	Price
625690	(93732) 32 fl. oz.	$16.98 G
625689	(93700N) Gallon	$43.98 G

Star Brite Easy Scrub



- Cleans ground-in dirt and stains from fiberglass, metal, plastic, mica, tile and painted surfaces.
- Excellent for cleaning stainless steel sinks.
- Special heavy duty formula with mild abrasives.
- Does not contain phosphates - environmentally safe.

Order No.	Mfg. No. / Description	Price
625383	(87516) 16 fl. oz.	$7.98 G

Star Brite Sea Safe Wash and Wax



- Biodegradable formula cleans, shines and leaves a protective coating all in one step.
- Cleans, shines and protects in one easy step.
- Concentrated for economical use.
- Leaves a protective coat of wax on surface.
- No hard rubbing or buffing required.
- Excellent for use on fiberglass, metal and painted surfaces.

Order No.	Mfg. No. / Description	Price
624790	(089737) 32 fl. oz.	$17.98 G

Star Brite Power Pine Boat Wash and Wax



- Concentrated formula makes 96 gallons (32 fl. oz. size) or 384 gallons (1 gallon size).
- Dissolves in fresh or salt water.
- Environmentally safe, biodegradable.
- Use to clean, shine and protect all fiberglass, painted surfaces, glass, plastic and metals.

Order No.	Mfg. No. / Description	Price
625691	(94732) 32 fl. oz.	$18.98 G
625692	(94700N) Gallon	$49.98 G

©2014 Donovan Marine, Inc.

Meguiar's Flagship Premium Wash N Wax



- Uses a blend of carnauba and synthetic polymers to add a valuable layer of wax protection while at the same time delivering great cleaning results.
- This advanced blend not only emulsifies salt spray, dirt, bird droppings and boat scum but also protects against salt air corrosion and the sun's ultraviolet rays while adding a brilliant streak free shine.

Order No.	Mfg. No. / Description	Price
628520	(M4232) 32 fl. oz.	$21.98 G

Marykate Super Suds® Boat Soap



- A modern, synthetic detergent that contains no soaps.
- It cleans by chemical action making cleaning easier.
- It has been formulated for washing glassware, pots, pans and utensils.

Order No.	Mfg. No. / Description	Price
216463	(MK2232) Quart	$12.98 F
216475	(MK22128) Gallon	$33.98 E

Meguiar's Gel Wash



- Biodegradable wash lifts boat scum, dirt, salt spray, grime, bird droppings and other loose contaminants.
- Sheeting action greatly reduces drying time.
- Does not strip wax.

Order No.	Mfg. No. / Description	Price
628517	(M5416) 16 fl. oz., Priced Each, Sold in Case of 6 Only	$8.98 G
6270031	(M5401) Gallon	$30.98 I

Meguiar's Quik Clean



- Quickly and safely removes fresh water spots, mineral deposits, salt spray, boat scum and other loose contaminants.
- Easy to use, spray and wipe formula maintains your boat's high gloss finish between washings.

Order No.	Mfg. No. / Description	Price
628492	(M5216) 16 fl. oz.	$9.98 G

Star Brite Super Green Heavy Duty Cleaner



- Super cleaner whisks away dirt, grease and oil, is safe, does not contain acids, alkalies or other harsh chemicals and is an environmentally friendly, biodegradable formula.
- Simple spray or wipe on, wipe off application.
- An incredible general purpose cleaner with 100's of uses; use on metal, fiberglass, painted surfaces, mica or finished wood.

Order No.	Mfg. No. / Description	Price
625390	(91622) 22 fl. oz.	$9.98 G

Meguiar's Heavy Duty Oxidation Remover



- Removes heavy oxidation, scratches, stains and tough water spots on all fiberglass and painted surfaces.
- Restores color by effectively removing surface degradation.
- Safe alternative to a rubbing compound.

Order No.	Mfg. No. / Description	Price
628377	(M4916) 16 fl. oz.	$14.98 G

Meguiar's Fiberglass Restoration System



- A specialized three-step system developed to restore the original look of faded or damaged fiberglass gel coat surfaces.
- 1. No. 49 Oxidation Remover will remove oxidation, stains, and scratches.
- 2. No. 45 Polish will restore brilliant gloss.
- 3. No. 56 Pure Wax will provide long-lasting, durable protection to the restored surface.

Order No.	Mfg. No. / Description	Price
628379	(M4965)	$39.98 G

Star Brite Boat Scuff Eraser



- The fastest way to remove stains, scuffs and streaks from fiberglass and vinyl surfaces.
- Ideal for removing shoe scuff marks on decks.
- Gentle on surfaces - tough on dirt and stains.
- Also ideal for use around the house to clean walls, baseboards, showers and tubs.
- Each package contains 2 Boat Scuff Erasers.

Order No.	Mfg. No. / Description	Price
675968	(41000) Scuff Eraser	$5.98 G

Marpro Cleaning Kit



- Quick and convenient, the Marpro Cleaning Kit includes:
  7-2732 - Premium Wash and Wax
  7-2734 - Tough Guy Wax
  7-2738 - Spray Fast Wax
  Bucket with a sponge

Order No.	Description	Price
7-2745	Cleaning Kit	$35.98 Q

Marpro Boat Care Display



- Display offers a variety of maintenance products to choose from.
- Marpro products saves your customers money and increases your profit.
- Includes attractive header card.

(4) 7-1031 - Salt Terminator - Quart
(2) 7-1032 - Salt Terminator - Gallon
(4) 7-1033 - Salt Terminator Kit - Quart
(2) 7-1088 - EZ-ON EZ-OFF Cleaner - Gallon
(4) 7-1090 - Formula Nine - Gallon
(4) 7-1089 - EZ-ON EZ-OFF Cleaner - Quart
(4) 7-1091 - Formula Nine - 22 oz.
(4) 7-1093 - Boat Wash - Gallon
(4) 7-1095 - Deck Cleaner - Gallon
(4) 7-1097 - Hull Cleaner - Gallon
(4) 7-1099 - Bilge Cleaner - Gallon
(4) 7-1340 - Salt Terminator Spray - 12 oz.
(4) 7-2724 - Spider Stain Remover - 32 oz.
(4) 7-2728 - CSS Toilet Treatment - 32 oz.
(4) 7-2732 - Premium Wash & Wax - 32 oz.
(4) 7-2734 - Tough-Guy Wax - 16 oz.
(4) 7-2736 - Cleaner Wax - 16 oz.
(4) 7-2738 - Spray Fast Wax - 16 oz.
(4) 7-1084 - Black Streak/Fish Blood Remover - Gallon
(4) 7-1085 - Black Streak/Fish Blood Remover - 22 oz.
(4) 7-2720 - Clear Plastic Cleaner & Restorer - 22 oz.
(4) 7-2740 - Liquid Compound & Color Restorer - 16 oz.

Order No.	Mfg. No. / Description	Price
7-2749	(89710) Boat Care Display	$1,020.98 G

Star Brite Merchandising Center



Contains:

4 (19200) Super Prem 2-Cycle Engine Oil TC-W3 - Gallon
4 (19216) Super Prem 2-Cycle Engine Oil TC-W3 - 16 fl. oz.
4 (19232) Super Prem 2-Cycle Engine Oil TC-W3 - 32 fl. oz.
4 (27010) High Viscosity Lower Unit Gear Lube 80W 90 - 10 fl. oz. Tube
4 (27110) Hypoid 90W Lwr Unit Gear Lube - 10 fl. oz. Tube
4 (28510) Power Trim and Tilt Fluid - 10 fl. oz. Tube
4 (71622) Instant Black Streak Remover - 22 fl. oz.
4 (71716) Instant Fresh Toilet Treatment - 16 fl. oz. Lemon
4 (71761) Instant Fresh Toilet Treatment - 6 Pack Lemon
4 (80116) Marine Polish - 16 fl. oz.
4 (80216) Vinyl Shampoo - 16 fl. oz.
4 (80316) Vinyl Brite - 16 fl. oz.
4 (80416) Boat Wash - 16 fl. oz.
4 (80922) Tower Guard Protector - 22 fl. oz.
4 (81216) Pint Teak Care Kit
4 (81316) Liquid Rubbing Cmpd Medium Oxidation - 16 fl. oz.
4 (81318) Liquid Rubbing Cmpd Heavy. Oxidation - 16 fl. oz.
4 (81732) Hull Cleaner - 32 fl. oz.
4 (81816) Fiberglass Color Restorer with PTEF - 16 fl. oz.
4 (81922) Waterproofing with PTEF - 22 fl. oz.
4 (82016) Sail & Canvas Cleaner - 16 fl. oz.
4 (82708) Chrome & Stainless Polish - 8 fl. oz.
4 (83222) Super Spray Boat Cleaner - 22 fl. oz.
4 (84104) Liquid Electrical Tape Black - 4 fl. oz.
4 (85132) Premium Teak Oil - 32 fl. oz.
4 (85470) No Damp - Hanging Bag - 14 fl. oz.
4 (85412) No Damp Dehumidifier - 12 fl. oz.
4 (85460) No Damp Ultra Dome - 24 fl. oz.
4 (85616) Mildew Stain Remover - 22 fl. oz.
4 (85714) Premium Marine Polish with PTEF - 14 fl. oz. (Paste)
4 (85716) Premium Marine Polish with PTEF - 16 fl. oz.
4 (85732) Premium Marine Polish with PTEF- 32 fl. oz.
4 (85922) Non-Skid Deck Cleaner with PTEF- 22 fl. oz.
4 (85932) Non-Skid Deck Cleaner with PTEF- 32 fl. oz.
4 (87208) Plastic Scratch Remover - 8 fl. oz.
4 (87308) Plastic Polish Restorer - 8 fl. oz.
4 (88016) Tropical Teak Oil/Sealer Classic - 16 fl. oz.
4 (88708) Rain View - 8 fl. oz.
4 (89222) Rust Stain Remover - 22 fl. oz.
4 (89616) Premium Cleaner/Wax with PTEF - 16 fl. oz.
4 (89632) Premium Cleaner/Wax with PTEF - 32 fl. oz.
4 (89722) Sea-Safe Cleaner & Degreaser - 22 fl. oz.
4 (89732) Sea Safe Boat Wash - 32 fl. oz.
4 (89736) Sea Safe Bilge Cleaner - 32 fl. oz.
4 (89737) Sea Safe Wash/Wax - 32 fl. oz.
4 (89950) NosGuard SG Small Space Slow Release - 2 Pack
4 (91016) Vinyl Cleaner/Polish - 16 fl. oz.
4 (92832) EZ On EZ Off Boat Bottom Cleaner - 32 fl. oz.
4 (93008) Star Tron Gasoline Additive - 8 fl. oz.
4 (93016) Star Tron Gasoline Additive - 16 fl. oz.
4 (93108) Star Tron Diesel Additive - 8 fl. oz.
4 (93116) Star Tron Diesel Additive - 16 fl. oz.
4 (93922) Salt Off Protector w/ PTEF - 22 fl. oz.
4 (94000) Salt Off Protector Kit w/ PTEF - 32 fl. oz. with Applicator
4 (95022) Spider Away - 22 fl. oz.
4 (95122) Bird & Spider Stain Remover - 22 fl. oz.

Order No.	Mfg. No. / Description	Price
431420	(83612)	$3,058.98 G
431435	(083612NR) No Rack Included	$3,058.98 G

©2014 Donovan Marine, Inc.

Star Brite Sea Safe Floor Display



- This eye-catching in-store display contains the entire lineup of Sea Safe products.
- Includes:
  (12) 89738 - Sea Safe Hull Cleaner, 32 fl. oz.
  (12) 89732 - Sea Safe Boat Wash, 32 fl. oz.
  (6) 89739 - Sea Safe Deck Cleaner, 32 fl. oz.
  (6) 89737 - Sea Safe Wash and Wax, 32 fl. oz.
  (6) 89736 - Sea Safe Bilge Cleaner, 32 fl. oz.
  (6) 89722 - Sea Safe Degreaser, 22 fl. oz.

Order No.	Mfg. No. / Description	Price
624801	(89710) Sea Safe Display	$631.98 G

Star Brite Marine Chemical Display



- Free-standing display contains the top 8 best-selling Star brite marine chemicals.
- Contains 6 each
  Mildew Stain Remover, 22 oz.
  Black Streak Remover, 22 oz.
  Instant Hull Cleaner, 32 oz.
  Non-Skid Deck Cleaner, 32 oz.
  Heavy Duty Cleaner Wax with PTEF, 32 oz.
  Premium Marine Polish with PTEF, 32 oz.
  Super Orange Citrus Cleaner/Degreaser, 22 oz.
  Super Orange Citrus Boat Wash, 32 oz.

Order No.	Mfg. No. / Description	Price
431315	(83690) Chemical Display	$667.98 G

Marpro Spider & Bird Stain Remover



- Quickly dissolves spider and bird droppings.
- Won't remove polish or wax.
- Safe around kids and pets.
- Contains no bleach or harsh chemicals.
- Non-toxic, natural formula is biodegradable and phosphate-free.
- Sold in packs of 4 only.

Order No.	Description	Price
7-2724	32 fl. oz.	$7.98 Q

Star Brite Bird and Spider Stain Remover



- Quickly dissolves messy spider and bird droppings.
- Non-toxic, all-natural formula.
- Contains no bleach; safe for use around kids and pets.
- Will not remove polish or wax.

Order No.	Mfg. No. / Description	Price
625597	(95122P) 22 fl. oz.	$13.98 G

Star Brite Spider Away



- Shoos spiders away without harming them.
- Non-Toxic - Safe for the planet.
- Keeps messy spiders away from boat, house garage and garden.
- One applications lasts 3 - 6 months.
- Safe for use around pets and children.
- Safe for use on all surfaces.

Order No.	Mfg. No. / Description	Price
625585	(95022P) 22 fl. oz.	$13.98 G

Meguiar's Hard Water Spot Remover



- Thick, low-drip formula remains on vertical surfaces for easy cleaning of water spots.
- New technology chemically embraces and lifts mineral deposits and protects surface from future water spots.
- Easy to apply and easy to wipe off.

Order No.	Mfg. No. / Description	Price
628370	(M4716) 1 6oz. (473 ml)	$16.98 G

Star Brite Rust Stain Remover



- Great for removing rust stains and deposits.
- Easy to use spray on formula.
- No rubbing or scrubbing required.
- Safe for use on fiberglass, metal and painted surfaces.
- Removes rust drip stains and sprinkler rust deposits.

Order No.	Mfg. No. / Description	Price
625680	(89222P) 22 fl. oz.	$12.98 G

Flitz Instant Calcium, Rust & Lime Remover



- Natural organic salt formula,eco-friendly.
- Instantly removes calcium, rust, lime, hard water spots, soap scum, corrosion and more.
- Use on fiberglass, plexiglas, tile, stainless, glass, porcelain, painted surfaces and more.

Order No.	Mfg. No. / Description	Price
608060	(CR 01606) 16 oz. (473 ml) Trigger Spray	$17.98 H
608065	(CR 01610) Gallon	$66.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Star Brite Black Streak Remover



- Instantly removes black streaks caused by water run off.
- Safe for use on fiberglass, metal and painted surfaces.
- Contains no harsh acids or alkalies.
- Just spray on, let work and hose off.

Order No.	Mfg. No. / Description	Price
628151	(71622P) 22 fl. oz.	$10.98 G

3M Marine Black Streak Remover



- Designed to remove black streaks.
- This product is safe for use on fiberglass, metal and painted surfaces.

Order No.	Mfg. No. / Description	Price
857380	(09047) 500 ml	$14.98 G

Marpro Black Streak/Fish Blood Remover



- Removes black streak.
- Removes fish blood deposits.
- Safe for use on fiberglass, metal and painted surfaces.

Order No.	Description	Price
7-1085	22 fl. oz.	$8.98 G
7-1084	Gallon	$24.98 G

Marykate Black Streak Remover



- Instantly removes black streaks caused by water run off on fiberglass.
- Metal and painted surfaces.
- Spray on/wipe off.
- Commercial grade.
- Works when others won't.

Order No.	Mfg. No. / Description	Price
216728	(MK6732) 1 Quart	$13.98 R

Toon-Brite Fiberglass Boat Cleaner



- Designed for DIY boaters.
- Removes algae, lime deposits, water stains and oxidation.
- Also great on painted wood.
- Priced Each. Sold in Case of 8 Only.
- Concentrate.

Order No.	Mfg. No. / Description	Price
371849	(F1000) 1/2 Gallon	$24.98 I

Davis FSR - Fiberglass Stain Remover



- It's ideal for removing oil, rust, exhaust, waterline and transom stains.
- Its nonabrasive quality means that it's safe to use on white painted surfaces as well as on gelcoat.
- Requires no sanding or compounding.
- Simply apply with a brush, sponge or cloth.

Order No.	Mfg. No. / Description	Price
323458	(790) 16 fl. oz.	$11.98 G
323460	(792) 67.8 fl. oz.	$32.98 R

Marpro Formula 9



- All purpose heavy duty cleaner and degreaser.
- Does not leave dulling film.
- Simple spray on, wipe off application.
- Whisks away oil grease, grime, dirt and stains.

Order No.	Description	Price
7-1091	22 fl. oz., 12 Per Case	$7.98 G
7-1090	Gallon, 4 Per Case	$24.98 G

Spray Nine



- America's first all purpose, hard surface, "spray on – wipe off", germicidal cleaner.
- It contains no chlorinated or petroleum solvents and is nonflammable, ready-touse, nontoxic and harmless to normal skin and almost all hard surfaces.
- Priced Each. Sold in Case Lots Only.

Order No.	Description	Price
437056	32 fl. oz., 12 Per Case	$9.98 H
437068	Gallon, 6 Per Case	$21.98 H

OMC® SysteMatched™ Marine Cleaner



- Biodegradable, phosphate-free, high concentrate detergent marine cleaner.
- Gentle enough for painted surfaces, vinyl upholstery, and convertible/bimini tops, yet powerful enough to tackle grease, oil and mildew stains.

Order No.	Mfg. No. / Description	Price
B765746	(765746) Quart	$13.99 H
B765748	(765748) Gallon	$28.99 H

Star Brite Super Spray Boat Cleaner



- All purpose heavy duty cleaner formulated to whisk away grime, grease, oil, fish blood and stains.
- Simple spray on, wipe off application.
- Will not remove wax or polish.

Order No.	Mfg. No. / Description	Price
999138	(83222P) 22 fl. oz.	$9.98 G

©2014 Donovan Marine, Inc.

Marpro EZ On EZ Off Hull and Bottom Cleaner



- Removes the toughest deposits and stains.
- The most effective hull & bottom cleaner available.
- Special high-tech, buffered hydrochloric acid makes it safer to use than traditional bottom cleaners.
- Ideal for cleaning RIB bottoms, too.
- Can be shipped UPS Air.

Order No.	Description	Price
7-1089	Quart, 4 Per Case	$11.98 G
7-1088	Gallon, 4 Per Case	$27.98 G

Marpro Hull Cleaner



- Quickly removes scum line and other tough stains.
- Specifically formulated for fiberglass and painted surfaces.
- Great way to prepare a hull for polishing.
- Buffered formula is very effective, but safe to use.

Order No.	Description	Price
7-1096	32 fl. oz.	$12.98 G
7-1097	Gallon, 4 Per Case	$29.98 G

Star Brite Instant Hull Cleaner



- No rubbing required. Removes stains from grassy marine growth, rust stains and scum line.
- Excellent for use on fiberglass, metal and painted surfaces.
- Biodegradable.
- Contains no harmful acids – safe to use.

Order No.	Mfg. No. / Description	Price
625650	(81732PW) 32 fl. oz.	$17.98 G

Star Brite Sea Safe Hull Cleaner



- Removes stains from waterlines and rust stains from all hull surfaces.
- No rubbing required.
- Environmentally friendly.
- Does not contain solvents, strong acids or harsh chemicals.
- Simple wipe on, rinse off formula.

Order No.	Mfg. No. / Description	Price
999141	(89738) 32 fl. oz.	$18.98 G

Marykate On & Off Hull and Bottom Cleaner



- Instantly removes waterline stains, algae stains, rust and gas exhaust stains.
- Softens barnacle rings and zebra mussels for easy removal.
- Not harmful to fiberglass. Biodegradable.
- Gallons sold case of 4 only and not UPSable.

Order No.	Mfg. No. / Description	Price
216425	(MK2032) Quart	$15.98 R
216437	(MK20128) Gallon	$39.98 Q

3M Marine Heavy Duty Hull and Deck Cleaner



- Easily removes algae, grime, oil, fish blood and dirt from fiberglass, metal and painted surfaces.
- Removes waterline stains.

Order No.	Mfg. No. / Description	Price
857386	(09060) 32 fl. oz.	$27.98 F

Zing Hull Cleaner



- Zing Hull Cleaner is an advanced formula hull cleaner that removes stubborn algae stains, lime deposits, grease, etc.
- Must be applied with applicator mop.
- Does not incur UPS hazmat charge.

Order No.	Mfg. No. / Description	Price
2012140	(70007) Quart	$10.98 I

Zing Aluminum Cleaner



- Zing is an advanced formula cleaner for unpainted aluminum pontoons, boats and lower units.
- Made of synergistic blend of acids, metal inhibitors, detergents and emulsifiers.
- Does not incur a hazardous charge when shipped on UPS.

Order No.	Mfg. No. / Description	Price
2012141	(70011) Quart	$10.98 I

Marpro Deck Cleaner



- Quickly and easily removes dirt, grime, fish blood and more from non-skid surfaces.
- Safe for use on all fiberglass, vinyl, metal and painted surfaces.

Order No.	Description	Price
7-1094	32 fl. oz.	$7.98 G
7-1095	Gallon, 4 Per Case	$20.98 G

Star Brite Non-Skid Deck Cleaner with PTEF®



- Cleans away ground-in dirt and stains.
- No hard scrubbing or rubbing.
- Will not remove wax or polish.
- Safe to use, contains no harsh chemicals.
- Leaves a protective coating to repel dirt and stains.

Order No.	Mfg. No. / Description	Price
625612	(85932PW) 32 fl. oz.	$11.98 G

Marykate Cleaning Detail® Non-Skid Deck Cleaner



- This remarkable liquid crème cleaner quickly and easily removes stubborn stains, grease, grime, soil, soap scum, fish blood, oxidation, scuff marks, rain stains and diesel soot from a variety of surfaces.

Order No.	Mfg. No. / Description	Price
216451	(MK2132) 1 Quart	$16.98 F

3M Marine Non-Skid Deck Cleaner



- Designed to clean hard to reach ground-in dirt and stains on non-skid decks.
- Safe for use on fiberglass, metal and painted surfaces.

Order No.	Mfg. No. / Description	Price
857390	(09063) 1 Liter	$29.98 H

Star Brite Sea Safe Deck Cleaner



- Biodegradable formula cleans dirt and stains from non-skid decks and all fiberglass surfaces.
- Leaves a non slippery protective coating to protect cleaned surfaces.
- Will not remove wax or polish.

Order No.	Mfg. No. / Description	Price
624792	(89739) 32 fl. oz.	$14.98 G

Meguiar's Non-Skid Deck Cleaner



- Powerful cleaning and degreasing formula designed for non-skid surfaces.
- Safe, non-toxic formula will remove black streaks, oily film, grease, grime and ground in dirt.
- A clean slick hull adds to boat performance.
- Safe on fiberglass and the environment, no VOC's.

Order No.	Mfg. No. / Description	Price
628390	(M6832) 32 oz. (946 ml)	$21.98 G

©2014 Donovan Marine, Inc.

Boatlife Live Well and Bait Well Cleaner



- Cleans live wells and bait wells and deodorizes to leave a pleasant fragrance.
- Decreases spread of diseases amongst aquatic animals.

Order No.	Mfg. No. / Description	Price
248798	(1138) Quart	$14.98 I

Star Brite Sea Safe Bilge Cleaner



- Biodegradable formula dissolves oil, grease, sludge, and fuel and leaves bilge smelling fresh and clean.
- Easy to use - just pour in, run boat and drain.

Order No.	Mfg. No. / Description	Price
625681	(89736P) 32 fl. oz.	$14.98 G

Star Brite Power Pine Bilge Cleaner



- Concentrated formula makes 96 gallons (32 fl. oz. size) or 384 gallons (1 gallon size).
- Dissolves in fresh or salt water.
- Environmentally safe, biodegradable.
- Cleans bilges easily and effectively.

Order No.	Mfg. No. / Description	Price
625688	(93832) 32 fl. oz.	$18.98 G

Marykate Carpet Stain and Spot Remover



- Contains no ozone-depleting ingredients.
- Odor-free formula.
- Penetrates fibers to break up and lift out even the toughest soils and stains - food, wine, grease, fish blood, cosmetics, ink, and more.
- Color safe, contains no ammonia or bleach.

Order No.	Mfg. No. / Description	Price
216682	(MK4232) 32 fl. oz.	$12.98 G

CRC Spray Away™ All Purpose Cleaner



- A heavy-duty, non-flammable all purpose cleaner.
- It removes grease, dirt and grime the easy way.
- Produces an excellent water based degreaser without petroleum solvents.

Order No.	Mfg. No. / Description	Price
216540	(MK2832) Quart	$11.98 G
216552	(MK28128) Gallon	$29.98 F

Star Brite Heavy Duty Bilge Cleaner



- Biodegradable.
- Easy to use; just pour in, run boat, drain.
- Dissolves and eliminates oil, grease, gasoline, scum and sludge.

Order No.	Mfg. No. / Description	Price
625686	(80532PW) 32 fl. oz.	$12.98 G

Star Brite Stain-Buster Rug Cleaner



- Removes oil, grease, pet stains, odors.
- Safe for all types of carpet.
- Does not leave carpet sticky or matted - helps repel future staining.
- Simple and easy to use - just spray on and wipe off.
- Biodegradable.

Order No.	Mfg. No. / Description	Price
625369	(88922) 22 fl. oz.	$13.98 G

303 Fabric Guard



- Powerful enough to protect fabrics in the harshest environment...outdoors.
- Yet it is safe for the finest fabrics, wool, silk, and fine leathers - including suede.
- Restores lost water repellency and stain repellency to factory new levels.
- It resists soiling, impedes mildew formation and helps protect against the sun's harmful UV rays.

Order No.	Mfg. No. / Description	Price
437447	(30616) 16 fl. oz.	$15.98 H

Marpro Bilge Cleaner



- Removes sludge, grime and odors to clean and freshen bilge.
- Heavy duty cleaning power.
- Easy to use; pour into bilge and run boat- motion "scrubs" bilge.
- Biodegradable formula won't harm hoses or bilge pumps.

Order No.	Description	Price
7-1098	32 fl. oz.	$8.98 G
7-1099	Gallon, 4 Per Case	$14.98 G

Star Brite Boat Bottom Cleaner



- Barnacle and Zebra Mussel remover.
- Removes barnacles, zebra mussels, algae, scum line and rust quickly and easily.
- Water based, biodegradable formula.
- Will not harm fiberglass when used as directed.
- Removes all aquatic stains fast and easy.

Order No.	Mfg. No. / Description	Price
625674	(92232P) 32 fl. oz.	$17.98 G
625662	(92200) Gallon	$46.98 G

Marykate Big Bully® Natural Orange Bilge Cleaner



- Works fast to emulsify oil, grease and scum.
- It leaves bilge areas clean and fresh.
- Self cleaning commercial action.
- Boat's rolling action cleans out the bilge.

Order No.	Mfg. No. / Description	Price
216487	(MK2332) Quart	$12.98 F
216499	(MK23128) Gallon	$36.98 G

303 Carpet & Upholstery Cleaner and Spot Remover



- Amazing colloidal cleaner.
- Non-toxic. biodegradable.
- Rinses residue-free.
- Non-flammable.

Order No.	Mfg. No. / Description	Price
437459	(30551) 32 fl. oz.	$7.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Star Brite Mildew Stain Remover



- Removes mildew stains on contact.
- Works like magic.
- Simple spray on/wipe off application.
- Use on headliners, vinyl covers, cushions, etc.

Order No.	Mfg. No. / Description	Price
625559	(85616P) 22 fl. oz.	$11.98 G

Marykate Mildew Stain Remover



- This viscous formula clings where it is sprayed removing mildew and mold stains, while reducing the odor and drippage normally associated with similar type products.

Order No.	Mfg. No. / Description	Price
216603	(MK3732) 1 Quart	$13.98 G

3M Marine Mildew Stain Remover



- Quickly removes mildew stains on vinyl, covers, cushions and other marine surfaces.
- Follow-up with 3M Marine Mildew Block for long-lasting protection and to help keep surfaces looking cleaner and newer longer.

Order No.	Mfg. No. / Description	Price
857159	(09067) 16.9 fl. oz.	$14.98 F

Spray Nine® Mold & Mildew Stain Remover



- Destroys bacterial odors and helps control mold and mildew formation.
- It cleans with spray on - wipe off ease, disinfects nonporous surfaces and deodorizes after use!
- Use on sinks, tubs, showers, glazed tiles, toilet exteriors, floors, wall coverings, garbage pails, patio furniture, vinyl siding, boats, jet skis, RVs, camping equipment, and more!

Order No.	Mfg. No. / Description	Price
437054	(15045) 32 fl. oz.	$9.98 H

Star Brite Mildew Stain Blocker



- Nano-tech barrier prevents mold stains and mildew stains from forming.
- Lasts 3 to 6 months (interior areas).
- Non-toxic formula; safe for use around people and pets.
- For use on fiberglass, vinyl, plastic, rubber, fabric and painted surfaces.

Order No.	Mfg. No. / Description	Price
625575	(086622) 22 fl. oz.	$14.98 G

3M Marine Mildew Block



- Offers a unique solution in preventing unsightly mildew growth.
- Safe to use on most marine surfaces and materials above the waterline, and can be used both indoors and outdoors.
- Non-toxic formula helps keep surfaces looking newer and cleaner longer.

Order No.	Mfg. No. / Description	Price
857156	(09065) 16.9 fl. oz.	$18.98 F

CRC Moisture Absorber



- Dries air in cabins, lockers, closets, bathrooms, basements and other enclosed areas.
- Concentrated pellet formula absorbs up to 50% more moisture than flake formulas.

Order No.	Mfg. No. / Description	Price
2899063	(MK6912) 12 oz. Tub	$7.98 H

CRC Moisture Control Bag



- Absorbs dampness that leads to rust and odors.
- Soaks up air moisture like a sponge.
- Does not drip.
- Great for lockers, head, galley, bilge, cabin, and rope storage.
- Reusable.

Order No.	Mfg. No. / Description	Price
2899064	(MK7112) 12 oz. Bag	$17.98 H

©2014 Donovan Marine, Inc.

Star Brite No Damp Dehumidifier



- Dries air to a level where mildew cannot grow.
- Stops odors.
- Unique inner basket design increases efficiency and life of unit.

Order No.	Mfg. No. / Description	Price
460864	(85412) 12 oz., Treats 900 cu. ft. Area	$8.98 G
460852	(85401) 36 oz., Treats 1,800 cu. ft. Area	$14.98 G

Star Brite No Damp Hanging Moisture Absorber



- Eliminates mildew odors and other musty odors.
- Helps prevent damage and stains caused by excess airborne moisture.

Order No.	Mfg. No. / Description	Price
460883	(85470) 14 oz.	$7.98 G

Star Brite No Damp Display



- The compact, very attractive display allows retailers to locate the entire No Damp family of Mildew Smell solutions in high-traffic areas.
- The four-color header card provides a compelling sell point.
- The display can be used year-round as well as during seasonal promotions.

Order No.	Mfg. No. / Description	Price
460895	(85499) Display	$213.98 G

Star Brite No Damp Dehumidifier Refill



- Refills all No Damp Dehumidifiers.
- Add right on top of remaining chemical.
- Sold each.
- Standard pack 12.

Order No.	Mfg. No. / Description	Price
460840	(85400) 12 oz.	$4.11 G
460842	(85448) 48 oz.	$9.98 G

Star Brite No Damp Ultra Dome



- Super dry, concentrated pellet formula absorbs more moisture per ounce than flake formulas.
- The unique design of the dome allows maximum airflow over and through the pellets for peak efficiency.

Order No.	Mfg. No. / Description	Price
460876	(85460) 24 oz.	$17.98 G

MDR Damp Away Dehumidifier II



- It effectively helps eliminate mold and mildew by removing excessive moisture.
- Odorless, non-corrosive, with no harsh chemicals emitted.
- Individually sealed cloth bags (3 x 8 x 1).

Order No.	Mfg. No. / Description	Price
460794	(MDR-306) Twin Pack	$19.98 I

MDR Damp Away Dehumidifier



- Automatically removes moisture from the air for months.
- Odorless.
- Will absorb 17 times its own weight of water from the air.

Order No.	Mfg. No. / Description	Price
460792	(MDR-304) 32 oz.	$21.98 I

Star Brite Mildew Odor Control Bags Floor Display



- Use anywhere mildew odors are a problem.
- Eliminates musty odors.
- Formaldehyde free, nontoxic.
- Each bag protects 400 cu. ft.
- Will not harm humans, pets or the environment.
- Contains: (36) 2 unit pack boxes of 460890 (89900) Mildew Odor Control Bags in an attractive floor standing display.

Order No.	Mfg. No. / Description	Price
460893	(89936) Display	$455.98 G

Star Brite NosGUARD "Tree" Display



- Contains 32 each 89950 Twin Packs of NosGUARD SG Mold/Mildew Odor Control Slow Release Systems.
- Free-standing display comes loaded with (32) NosGUARD SG Mold/Mildew Odor Control systems (p/n 89950).
- Display features QR scanner codes and can be located virtually anywhere in retail stores.
- Note: Not for sale in California.

Order No.	Mfg. No. / Description	Price
460922	(89932) Display	$406.98 G

Star Brite MGD Display



- MDG Mold/Mildew Odor Control Fast & Slow Release System Display.

Contains:
16 (89970) Fast Release Systems
24 (89950) 2 Pack Slow Release Systems

Order No.	Mfg. No. / Description	Price
431425	(89933) Display	$443.98 G

Star Brite MDG Mildew Odor Control Bags



- Contains 2 bags with decorative holders.
- Eliminates mildew odors and musty odors.
- Formaldehyde free, nontoxic.
- Each bag protects 400 cu. ft.
- Lasts 4 months.
- Great for shrink wrapped boats.

Order No.	Mfg. No. / Description	Price
460890	(89900) 12 - 2 Packs	$13.98 G

Star Brite MDG Mold/Mildew Odor Control Bulk Pack



- MDG Mold/Mildew Odor Control utilizes a deep-penetrating chlorine gas vapor that permeates an enclosed area to eliminate and prevent foul odor, including mold or mildew odor, as well as odor from smoke, spoiled food, pets, or other sources.
- Each 10-gram pouch treats an area 10'L x 10'H x 10'W for up to 3 months.
- Ideal for protecting stored boats or RVs or vacation homes.
- Can also be used year-round in occupied boats and homes to maintain air quality.
- 100 - 10-gram pouches and 100 clamshell designated holder (Bulk).
- Pouches Are Not Labeled/Intended for Individual Retail Sale.

Order No.	Mfg. No. / Description	Price
460891	(89910) Bulk Pack	$555.98 G

Odor Guard Surface Cleaner, Deodorizer Air Freshener



- High-tech formula removes dirt and grime from hard surfaces.
- Eliminates odor quickly and permanently.
- Safe for use on all hard surfaces and most fabrics.
- A very effective air freshener for interior spaces.
- Safe for use around people and pets.

Order No.	Mfg. No. / Description	Price
460838	(095322) 22 fl. oz.	$14.98 G

Star Brite NosGUARD SG Mold/Mildew Odor Control Fast Release



- NosGUARD SG Mold/Mildew Odor Control utilizes a deep-penetrating chlorine gas vapor that permeates an enclosed area to quickly eliminate and prevent foul odor, including mold or mildew odor, as well as odor from smoke, spoiled food, pets, or other sources.
- Each 10-gram pouch treats an area 10'L x 10'H x 10'W. Ideal for eliminating odor found in stored boats or RVs or vacation homes.
- Each kit includes a sponge that is moistened to expedite the chlorine dioxide gas generation process to allow very fast elimination of foul odor.
- Can also be used to eliminate odors from cars or trucks.
- Note: Not for sale to California.

Order No.	Mfg. No. / Description	Price
460912	(89970) 1 10-gram Pouch	$9.98 G
460901	(89950) Twin Pack of 10-gram Pouches	$14.98 G

©2014 Donovan Marine, Inc.

Flitz Stainless Steel & Chrome Cleaner



- Water-based formula, non-toxic, eco-friendly.
- Voted best on stainless by the Wall Street Journal 2007 - great on chrome too.
- Removes fingerprints, oil, grease, water spots, automotive fluids, brake dust and more.

Order No.	Mfg. No. / Description	Price
608040	(SP 01506) 16 oz. (473 ml) Trigger Spray	$14.98 H
608045	(SP 01510) Gallon	$55.98 H

Flitz Stainless Steel & Chrome Polish



- Water-based formula, non-toxic, eco-friendly.
- Produces a deep gloss shine.
- Use on appliances, gas grills, vent hoods, elevators, escalators and more.

Order No.	Mfg. No. / Description	Price
608050	(SS 01306) 16 oz. (473 ml) Trigger Spray	$17.98 H
608055	(SS 01310) Gallon	$66.98 H

Flitz X-treme Stainless Steel Cleaner



- For heavy build-up.
- Removes heavy grease build-up, mold, rust, lime, corrosion, water-spots, dried-on debris and more.
- Environmentally friendly and non-flammable.

Order No.	Mfg. No. / Description	Price
608105	(HV 11706) 16 oz.	$19.98 H
608110	(HV 11710) Gallon	$66.98 H
608115	(IC 11720) 5.5 Gallons	$275.98 H

Star Brite Chrome and Stainless Polish



- Cleans and protects chrome, stainless steel and aluminum surfaces.
- Protects against pitting, discoloration and rusting.
- Simple wipe on and lightly buff off application.
- Special polymers bond to all metal surfaces to provide long lasting protection.

Order No.	Mfg. No. / Description	Price
625535	(82708) 8 fl. oz.	$9.98 G

Snee Aluminum Brightener and Fiberglass Cleaner



- Aluminum brightener specifically selected acids and stable wetting agents designed to clean and brighten anything aluminum.
- Priced each. Sold in Case of 4 Only.

Order No.	Mfg. No. / Description	Price
437010	(06 AB) 1 Gallon	$20.98 F

Toon-Brite Pontoon and Aluminum Boat Cleaner



- Removes algae, lime deposits, water stains and oxidation.
- 1/2 gallon concentrate.
- Includes 3-finger trigger sprayer.
- Will make up to one gallon.
- Priced each.

Order No.	Mfg. No. / Description	Price
371847	(B-1000) Case of 8	$24.98 I
2001317	(B-1015) 15 Gallon - S/O Only	$311.98 K

3M Marine "One Step" Aluminum Restorer and Polish



- Designed to remove oxidation growth and stains and restore a lustrous appearance to bare aluminum.
- Removes heavy oxidation and restores shine to most painted aluminum surfaces.
- Paste.

Order No.	Mfg. No. / Description	Price
857269	(09020) 18 oz.	$30.98 F

3M Marine Metal Restorer and Polish



- Restores and polishes stainless steel, brass, bronze, copper, chrome, aluminum and other marine metals by removing surface rust, oxidation, corrosion and tarnish.
- Paste.

Order No.	Mfg. No. / Description	Price
857284	(09019) 18 oz.	$29.98 F

Nevr-Dull



- "Magic" wadding polish for cleaning and polishing all metals.
- Cleans brass, aluminum, steel, chrome and other metals.
- Removes rust, tar and rubber sole marks.

Order No.	Mfg. No. / Description	Price
457526	5 oz.	$12.98 I

Farecla Metal Cleaner



- Mild abrasive cleaner which removes oxidation, dirt and grime from all metal surfaces leaving a clean shiny finish.

Order No.	Mfg. No. / Description	Price
812164	(FM-MC-500) 500 ml	$23.98 G

Marykate Pontoon and Aluminum Hull Cleaner



- Maximum strength formula quickly removes the heaviest oxidation and eliminates waterline stains, lime deposits and algae stains.
- Not for use on painted surfaces.

Order No.	Mfg. No. / Description	Price
2899053	(MK3132) 32 fl. oz.	$16.98 H

Marykate Aluminum Cleaner and Brightener



- Dual-action formula specially designed to instantly clean and brighten aluminum hulls.
- With Safe Acid Technology best for light to medium oxidation.
- Safe on anodized and painted aluminum.

Order No.	Mfg. No. / Description	Price
2899054	(MK3332) 32 fl. oz.	$15.98 H

Star Brite Aluminum Boat Care Kit



- Everything needed to clean, polish and protect your aluminum boat or pontoons.
- Kit includes: Aluminum Cleaner - 32 oz. (87732), Aluminum Polish - 22 oz. (87822), scrub pad with handle, polishing cloth and protective gloves.
- Star Brite Aluminum Boat Cleaner quickly removes stains and oxidation.
- Star Brite Aluminum Boat Polish leaves a bright, protective finish.

Order No.	Mfg. No. / Description	Price
999144	(93300) Aluminum Care Kit	$42.98 G

Snappy Teak-Nu



- No hard work - No bronze wool.
- Removes all old sealers, soil, fish blood, rust stains, fuel and oil stains.
- Kit contains: 1 quart of formula No. 1 and No. 2 and (2) plastic bristle brushes.
- Note: Both No. 1 and No. 2 must be used.

Order No.	Mfg. No. / Description	Price
437308	Kit	$33.98 H
437311	No. 1, Quart	$12.98 H
437323	No. 2, Quart	$12.98 H
437335	No. 1, Gallon	$36.98 G
437347	No. 2, Gallon	$36.98 G

Star Brite Teak Care Kit



- Everything needed to clean, restore and protect teak.
- Each kit contains: (1) pint - Teak Cleaner, (1) pint - Teak Brightener and (1) pint - Teak Oil.
- Standard pack 6 kits.

Order No.	Mfg. No. / Description	Price
625953	(81216) Teak Care Kit	$39.98 G

©2014 Donovan Marine, Inc.

Meguiar's Teak Cleaner



- Quickly cleans and brightens teak.
- Apply, lightly brush and hose off.
- Biodegradable.

Order No.	Mfg. No. / Description	Price
628553	(M14116) 16 oz.	$13.98 G

Te-Ka™ Cleaner



- No more hard scrubbing.
- Simply pour on Part A and B and hose off to original golden brown beauty of teak.
- Deep cleans in a fraction of time, compared to conventional and super cleaners.
- Te-ka is a two part system.

Order No.	Mfg. No. / Description	Price
660476	Quart Kit	$34.98 Q
660488	Half Gallon Kit	$49.98 Q

Star Brite Teak Oil



- Seals and protects teak and other fine woods.
- Fast drying.
- Oil penetrates deep into the wood for extra protection.
- Contains ultraviolet absorbers to resist weathering.

Order No.	Mfg. No. / Description	Price
626169	(81616) 16 fl. oz.	$17.98 G
626171	(81632) 32 fl. oz.	$23.98 G
626183	(81600) Gallon	$62.98 G

Star Brite Teak Cleaner



- Cleans teak and other fine woods.
- Does not contain acid - no neutralizers needed.
- Removes stains and weathering.
- Does not raise wood grain.
- No need to sand after cleaning.

Order No.	Mfg. No. / Description	Price
626044	(81416) 16 fl. oz.	$13.98 G
626056	(81432) 32 fl. oz.	$18.98 G

Interlux Premium Teak Restorer



- Restores the natural color of teak.
- For use on any interior or exterior hardwood.
- For decks, teak details and finishing.
- Does not damage fiberglass, varnish, paintwork or metals.

Order No.	Mfg. No. / Description	Price
411556	(YMA015/500) 16.9 fl. oz.	$15.98 I

Star Brite Premium Teak Oil



- Combines virgin Tung Oil with special polymers that bond with teak & create an extra long-lasting finish.
- Extra long-lasting formula contains the finest UV inhibitors to resist weathering.
- Penetrates and bonds with teak wood to preserve and protect natural finish.

Order No.	Mfg. No. / Description	Price
626210	(85116PW) 16 fl. oz.	$18.98 G
626222	(85132) 32 fl. oz.	$28.98 G
626234	(85100) Gallon	$76.98 G

Star Brite Teak Brightener



- Brightens teak and other fine woods.
- Highlights wood grain and enhances warm natural color.
- Easy to use - just apply and rinse.
- No rubbing or scrubbing required.

Order No.	Mfg. No. / Description	Price
626119	(81532) 32 oz.	$18.98 G

Meguiar's Gold Teak Oil



- Protects teak, rejuvenating the rich, natural golden wood colors.
- Prevents drying out of wood from exposure to the elements.
- Great for bulkheads, hatch covers, swim steps, grad rails and decking.
- Priced each. Sold in case of 6 only.

Order No.	Mfg. No. / Description	Price
628466	(M4616) 16 fl. oz.	$9.98 G

3M Citrus Base Industrial Cleaner



- An aerosol, all-natural cleaner which will dissolve and flush away dirt, grease, tar, most non-curing type adhesive films, and similar substances.
- It is a citrus oil based cleaner that emulsifies when flushed with water.
- It can be used to clean and degrease metal parts, motors, tools, concrete, or any dirty or greasy surfaces.

Order No.	Mfg. No. / Description	Price
857411	(76394) 24 fl. oz.	$45.98 H

Permatex Fast Orange Pumice Lotion Hand Cleaner



- Biodegradable, waterless, petroleum solvent-free hand cleaner that contains no harsh chemicals, mineral oils or ammonia.

Order No.	Mfg. No. / Description	Price
545206	(25116) 15 fl. oz. Bottle	$4.98 H
545218	(25218) Gallon Bottle with Pump	$23.98 H

- Cream version of Fast Orange Hand Cleaner.

Order No.	Mfg. No. / Description	Price
545220	(35406) 4.5 lb. Container	$13.98 H

Permatex Fast Orange Glass & Multi-Surface Cleaner



- A professional strength aerosol made with our original "no-streak, non-runny orange scented formula" that cleans and deodorizes practically any surface.
- Suggested applications: Glass, stainless steel, aluminum, chrome, vinyl, plastic, enamel, laminate and more.
- Safe for use on film-tinted windows.

Order No.	Mfg. No. / Description	Price
545193	(25544) 18.75 oz.	$5.98 H

3M Sharpshooter Extra Strength No Rinse Cleaner



- This no-rinse cleaner removes tough stains such as grease, lipstick, crayon, black heel marks, pencil marks and smoke film from most washable hard surfaces.

Order No.	Mfg. No. / Description	Price
857415	(19344) Quart	$23.98 H

Flitz Eisenglass & Plastic Restoration Kit



- Contains: X-large BffBall, 1.76 oz. Polish, 1.7 oz. Wxx & mail-in coupon for free microfiber cloth
- Restores faded Eisenglass & plastics; Boat & camper windows, hatches, radar housings, fiberglass, gelcoat and more.

Order No.	Mfg. No. / Description	Price
608090	(PL 31503)	$58.98 H

Meguiar's Clear Plastic & Vinyl Window Wax



- Mist on & wipe off effortlessly.
- Provides UV protection.
- Great on colored plastics.

Order No.	Mfg. No. / Description	Price
628560	(M14216) 16 oz.	$14.98 G

Marpro Plastic Cleaner and Restorer



- Safe for use on Isinglass, Strataglass, Plexiglass, plastic and vinyl.
- Removes hazing, restores clarity.
- Removes salt spray, grime, fingerprints and more from all types of clear plastic surfaces.
- Sold pack of 4 only.

Order No.	Description	Price
7-2720	22 fl. oz.	$8.98 Q

Meguiar's Vinyl and Rubber Cleaner/Conditioner



- Cleans, revitalizes, and protects vinyl and rubber surfaces in one easy step.
- Screens out damaging UV rays that can dry out or crack the surface.
- Priced Each. Sold in Case of 6 Only.

Order No.	Mfg. No. / Description	Price
628480	(M5716) 16 fl. oz.	$11.98 G

Meguiar's Mirror Glaze Clear Plastic Cleaner



- Clear Plastic Cleaner removes fine hairline scratches from all types of clear plastic.
- Unique, non-abrasive formula prepares the surface for Mirror Glaze Clear Plastic Polish.

Order No.	Mfg. No. / Description	Price
628543	(M1708) 8 fl. oz.	$10.98 G

Meguiar's Mirror Glaze Clear Plastic Polish



- Clear Plastic Polish safely restores optic clarity to all clear plastics.
- Provides a static-free coating that repels dust.
- Safe and effective on both acrylic and polycarbonate surfaces.
- Ideal for boats, RV's, cars, motorcycles and aircraft.

Order No.	Mfg. No. / Description	Price
628531	(M1008) 8 fl. oz.	$10.98 G

Star Brite View Guard Clear Plastic Treatment



- Repels water to enhance wet weather visibility.
- Safe for use on Strataglass, EZ2CY, Eisinglass and all other clear plastic surfaces.
- Repels water, spray, salt and dirt.
- Gently cleans clear plastic surfaces.
- Provides protection against damaging UV rays.

Order No.	Mfg. No. / Description	Price
625448	(95222) 22 fl. oz.	$14.98 G

Meguiar's Heavy Duty Vinyl Cleaner



- A tough cleaner that removes heavy dirt and grime.
- Great for cleaning and prepping all vinyl, plastic,rubber and urethane surfaces.
- Apply to vinyl tops, bumpers, plastic door panels, car and boat interiors, luggage and furniture.
- Priced Each. Sold in Case of 6 Only.

Order No.	Mfg. No. / Description	Price
628478	(M3916) 16 fl. oz.	$13.98 G

Star Brite Vinyl Cleaner and Polish



- This revolutionary new formula cleans and restores all vinyl surfaces while leaving a polymer coating which provides UV protection and a long lasting shine.
- Removes stains and yellowing.
- Keeps vinyl soft and supple, while it also prevents vinyl surfaces from drying out and cracking.

Order No.	Mfg. No. / Description	Price
625446	(91016P) 16 fl. oz.	$14.98 G

Star Brite Marine Vinyl Brite



- Restores old marine vinyl to "like new" appearance.
- Keeps new vinyl looking new.
- Simple spray on application.
- UV inhibitors screen out sun's damaging rays.
- Prevents vinyl from cracking, fading & discoloring.

Order No.	Mfg. No. / Description	Price
625434	(80316) 16 fl. oz.	$16.98 G

Star Brite Vinyl Cleaner Shampoo



- Instantly removes dirt, mildew, grease and stains.
- Won't streak, stain or discolor vinyl.
- Excellent for all interior and exterior vinyl.
- Concentrated formula.
- Biodegradable.

Order No.	Mfg. No. / Description	Price
625408	(80216P) 16 fl. oz.	$7.98 G

©2014 Donovan Marine, Inc.

Star Brite Total Vinyl Care Kit



- Everything needed to restore dull, faded vinyl to like new condition.
- Kit includes Star Brite Vinyl Cleaner & Polish (91016), Star Brite Vinyl Brite (80308), scrub pad and cotton polishing cloth.
- Star Brite Vinyl Cleaner & Polish removes ground-in dirt and grime while restoring original shine and color.
- Use Star Brite Vinyl Brite periodically to prevent future fading and dulling.

Order No.	Mfg. No. / Description	Price
999143	(93200) Vinyl Care Kit	$23.98 G

Visiclear™ Display & Electronics Screen Cleaner



- A unique, high quality, natural water based foam cleaner for all televisions, monitors, notebooks/laptops, camcorders, navigation systems, touch screens, PDSs, scanners, and copy machines.
- It clings to surfaces and will not drip from vertical surfaces.
- Works to remove dirt, dust, fingerprints, nicotine, and haze deposits.

Order No.	Mfg. No. / Description	Price
290545	(05131) 8 oz. Aerosol	$11.98 G

Star Brite Trailer Spa - Boat Trailer Washdown System



- The easiest, most effective way to rinse trailers after launching.
- Regular fresh water rinses will greatly extend life of springs and brakes.
- Can be customized to rinse specific areas and parts of trailer.
- Includes 32 fl. oz. Salt Off with PTEF and Applicator (94000).
- Includes all parts needed to install system on up to a triple-axle trailer.

Order No.	Mfg. No. / Description	Price
624795	(77550) Washdown System	$79.98 G

3M Marine Vinyl Conditioner and Protector



- Designed to clean, condition and protect marine vinyl and rubber components.
- Gel formula provides durable protection in exterior, as well as interior applications.

Order No.	Mfg. No. / Description	Price
857295	(09023) 8 fl. oz.	$18.98 F

Star Brite Inflatable Boat and Fender Cleaner



- Heavy duty formula removes dirt, grime, scuff marks, oxidation stains.
- Safe for use on all rubber and vinyl surfaces.
- Leaves a tough protective coating.
- The quick and easy way to maintain inflatable boats & boat fenders.
- Protects against sun's harmful rays.

Order No.	Mfg. No. / Description	Price
625395	(83416) 16 fl. oz.	$15.98 G

Star Brite Rain View



- Improves wet weather visibility through windshield and windows.
- Use on glass and plastic.
- Works with or without windshield wipers.
- Makes surface so slick that rain & wet weather deposits literally slide off.

Order No.	Mfg. No. / Description	Price
626549	(88708) 8 fl. oz.	$13.98 G

3M Marine Vinyl Conditioner and Protector



- Rejuvenates vinyl and rubber surfaces.
- Cleans and protects.
- Easy spray formula.

Order No.	Mfg. No. / Description	Price
857296	(09029) 15 fl. oz.	$14.98 G

303 Aerospace Protectant



- A penetrating, waterproofing UV screen (sunblock).
- Conditions treated surfaces and has very intense beautifying properties.
- Not oily or greasy, will not attract dust and contains no harmful petrochemicals.
- Non-hazardous and biodegradable.
- 303 ends buffing and waxing colored gelcoat fiberglass boats.
- Use to protect synthetic and natural rubber from drying and cracking caused by UV light.
- Use on anodized aluminum.
- The answer to the water spotting problems associated with stainless steel.

Order No.	Mfg. No. / Description	Price
437408	(230330) 8 fl. oz., Spray	$7.98 H
437412	(030340) 16 fl. oz., Trigger	$13.98 H
437421	(030350) 32 fl. oz., Trigger	$21.98 H
437434	(030370) Gallon, Refill	$64.98 G

Marpro Salt Terminator



- Dissolves salt and leaves protective sheen.
- Protects against future corrosion.
- Mixer automatically dilutes concentrate and syphons it through standard garden hose.
- Good on all surfaces exposed to saltwater or air.

Order No.	Description	Price
7-1340	12 fl. oz.	$9.98 H
7-1031	Quart	$18.98 H
7-1033	32 fl. oz. Kit with Nozzle	$36.98 H
7-1032	Gallon	$45.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Oil Mop Absorbent Spill Kit



- Approximate absorption 95 to 115 gallons.
- Includes:

(1) Reuseable 55 gallon drum with lid.

(6) 8" x 18" absorbent pillows. Leno mesh outer case, super absorbent fibers. Soaks up many times its own weight. Designed to soak up any accumulated pools of containment.

(50) 17" x 19" absorbent pads. Tear resistant, can be used in tight spaces. Absorbs petroleum off water surface.

(4) 5" x 10' absorbent boom. Forms floating containment barrier. Tough mesh coating is light weight and very flexible. Can be connected together with poly ties.

(8) 3" x 4' absorbent socks. For quickly surrounding problem areas. Will float even when saturated. Can be connected with ties.

Order No.	Mfg. No. / Description	Price
517219	(CSK40SPILL)	$444.98 F
517221	(510SN) Absorbent Boom, 5" x 10'	$37.98 F
517233	(810SN) Absorbent Boom, 8" x 10'	$50.98 F

3M Petroleum Sorbent Pads/Rolls



- Picks up petroleum based fluids, will not absorb water.
- High capacity sorbents have a scrim on one side to increase strength and help eliminate linting.
- For routine use, cleaning up small spills and wiping contaminated areas.

Order No.	Mfg. No. / Description	Price
852459	(16050) 17" x 19" x 3/8", 100 Pads Per Bale	$173.98 H
852461	(28991) 17" x 19" x 1/4", 100 Pads Per Bale	$124.98 H

Star Brite Bilge Oil Pads



- Quickly absorbs oil and fuel, but will not absorb water.
- Made of high-quality, virgin materials; will not unravel.
- Can be wrung out and re-used.
- Ideal for wrapping fuel nozzle to prevent refueling spills.

Order No.	Mfg. No. / Description	Price
461152	(91845) 5 Per Pack	$7.98 G

Snee All Purpose Absorbent



Order No.	Mfg. No. / Description	Price
436976	(FLX 2) Absorbent	$15.98 F


3M Superbuff™ Polishing Pad - 9"



- Double sided, soft edge polishing pad designed for use with a polisher and glaze.
- Made with extremely fine fibers to produce a high gloss on paint surfaces.
- Fits all standard (5/8" shaft) slow-speed polishers.

Order No.	Mfg. No. / Description	Price
857079	(05705) 6 Per Case	$59.98 H

Jabsco Maintenance Pad



- Uses proprietary technology to absorb,encapsulate and biodegrade used engine oil.
- Handles 5 quarts of used engine oil.
- Also suitable for other hydrocarbon based fluids.

Order No.	Mfg. No. / Description	Price
415302	(17890-0000) 22" x 22" x 1.5"	$19.98 F

Star Brite Oil-Absorbent Maxi-Boom



- Absorbs oil in the bilge so that remaining water may legally be pumped over- board.
- Convenient tie downs keep booms in place.
- Special design allows maximum absorption.
- 2 quart absorber capacity.

Order No.	Mfg. No. / Description	Price
461150	(86805) Maxi-Boom	$16.98 I

3M Superbuff™ Pad - 6"



- Allows you to recondition and maintain your boat, using your drill to obtain a high gloss finish.
- A 6" diameter buffing pad with a 1" wool pile on both sides of the pad.
- Fits any standard electric drill with its 1/4" arbor and hex-head nut.

Order No.	Mfg. No. / Description	Price
857055	(09038) 12 Per Case	$33.98 H

Buffalo Industries Oil Sorbent Bilge Pillow



- Ideal for bilges, sumps, drains and basins.
- 100% polypropylene fill.
- Absorbs oil, fuel and hydraulic fluid.
- Will not absorb water.
- Lint-free.
- Won't shed.
- Absorbs up to 1.75 gallons.

Order No.	Mfg. No. / Description	Price
461151	(90964) 9" x 15"	$18.98 I

3M Finesse-It™ Roloc Finishing Disc Pad - 3"



- Pad is made with soft foam, Roloc button, and mushroom headed hooks.
- Use with 3" soft Roloc Disc Pad.
- Holds the Finesse-it Buffing Pad (red and white) firmly in place.
- Soft foam provides good conformability.

Order No.	Mfg. No. / Description	Price
857084	(14736) 3"	$255.98 H

3M Perfect-It™ Foam Polishing Pad - 8"



- Convoluted foam face produces wheel/swirl free paint finish when used with 3M Perfect-It Foam Polishing Pad Glazes.
- Attaches to either 3M Hookit Back Up Pad (05717) or 3M Perfect-It Back Up Pad (05718).
- 2 pads per bag,

Order No.	Mfg. No. / Description	Price
857133	(05725) 12 Bags Case	$61.98 H

©2014 Donovan Marine, Inc.

3M Perfect-It™ Foam Compounding Pads - 9"



- Designed to provide easy attachment and removal and accurate centering of the Hookit SBS Compounding or Polishing Pad to the Hookit SBS Back-Up Pad.
- Fits all standard (5/8" shaft) slow-speed polishers.

Order No.	Mfg. No. / Description	Price
857106	(05711) Wool Compounding Pad, 6 Per Case	$32.98 H
857118	(05713) Wool Polishing Pad, 6 Per Case	$33.98 H
857120	(05717) Hookit Backup Pad, 1 Per Case	$89.98 H

3M Superbuff™ Adaptor



- Adaptor for the 3M Superbuff Buffing Pads - (05700), 857067 (05701), 857069 (05703), 857071 (05704) and 857079 (05705).
- Works with 3M Perfect-It Backup Pad (05718).

Order No.	Mfg. No. / Description	Price
857135	(05710) Adaptor	$19.98 H

Buff and Shine Center Ring Pad



- 100% 4 ply twisted wool grip pad.
- Pile height: 1-1/2".

Order No.	Mfg. No. / Description	Price
812227	(753R) Diameter 7-1/2"	$16.98 G

Buff and Shine Grip Backing Plate



- Grip backing plate with 5/8" x 11 threads.

Order No.	Mfg. No. / Description	Price
812241	(658Y) Backing Plate	$29.98 G

3M Superbuff™ Buffing Pads - 9"



- A versatile general use blended wool pad with stiffer central hub for more cutting power.
- Twice the usable buffing surface and has an untwisted yarn construction that gives excellent cut and finish.

Order No.	Mfg. No. / Description	Price
857071	(05704) 6 Per Case	$57.98 H



- A new 100%, double sided, wool pad with a stiffer central hub for more cutting power.
- This pad has untwisted yarn construction, which allows for more surface contact, while giving excellent cut and finish.

Order No.	Mfg. No. / Description	Price
857069	(05703) 6 Per Case	$52.98 H

Buff and Shine Grip Double Side Adaptor



- Our Double Sided Pad adapter is made of 100% brass that will hold up to any job.
- 5/8" x 11 Thread.

Order No.	Mfg. No. / Description	Price
812253	(1400)	$8.98 G

Buff and Shine Center Ring Pad



- Wool blend 4 ply twisted polishing grip pad.
- Pile height: 1-1/2".

Order No.	Mfg. No. / Description	Price
812239	(753RY) Diameter 7-1/2"	$15.98 G

Buff and Shine Foam Pad Hex Face



- The hex face will help dissipate polish or compounds evenly, minimizing grabbing and reducing heat while the backing plate helps reduce pad stiffness.
- Black, 1.375" thickness.
- Application: Finishing.

Order No.	Mfg. No. / Description	Price
812245	(820WR) Diameter 8"	$14.98 G

3M Finesse-It™ Natural Buffing Pad - 3"



- Made with hand selected lamb's wool hide of natural color and trimmed to 20mm in length.
- Designed with a Hookit attachment system and 3" diameter buffing pad for use with Finesse-it Polishes.

Order No.	Mfg. No. / Description	Price
857085	(81470) 10 Per Bag	$132.98 H

Buff and Shine Compounding Pad



- Double sided.
- Wool blend, 4 ply twist.
- Pile height: 1-1/4".
- Diameter 8".

Order No.	Mfg. No. / Description	Price
812215	(802Y) Yellow	$32.98 G

Buff and Shine Compounding Pad



- Double sided.
- 100% wool, 4 ply twist.
- Pile height: 1-1/4".
- Natural color.

Order No.	Mfg. No. / Description	Price
812203	(802N) Diameter 8"	$30.98 G

Buff and Shine Polishing Pad



- 2 Sided.
- Made with plush durable fibers along with strong and washable backing structure.
- Yellow, 1.50" pile height.
- Wool blend single ply.
- Application: Polishing/finishing.

Order No.	Mfg. No. / Description	Price
812223	(803YS) Diameter 8"	$26.98 G


Star Brite Deluxe Long Handle Utility Brush



- Ergonomic handle is padded for comfortable use.
- Extra-long handle for those hard-to-reach areas.
- Durable bristles sweep out dirt and grime.
- Built tough for years of service.

Order No.	Mfg. No. / Description	Price
675934	(40115) Utility Brush	$14.98 G

Captain's Choice Wash and Scrub Brush



- Medium grit scrubber strip for those hard to clean areas.
- Large 10" block for extra fast cleaning.
- Filled with a firm, solvent resistant synthetic bristle.
- Threaded hole for handle.

Order No.	Mfg. No. / Description	Price
460383	(M763) Scrub Brush	$39.98 I

Star Brite Stainless Steel Bristle Cleaning Brush



- Stainless steel bristles.
- Hard wood handle.
- 1-3/16" bristle trim.

Order No.	Mfg. No. / Description	Price
675912	(40059) Block 14" x 1-1/8"	$14.98 G

Star Brite Big Boat Brush



- Medium duty Star prene fibers for all around cleaning of soiled and stained surfaces.
- Excellent all around brush.
- Will only fit quick connect handles.

Order No.	Mfg. No. / Description	Price
675882	(40015) Boat Brush	$28.98 G

Star Brite Utility Brush with Long Handle



- 2" bristle trim.
- Excellent for cleaning hard to reach baitwells, waterlines, bilges, etc.

Order No.	Mfg. No. / Description	Price
675894	(40026) 20" Overall	$12.98 G

Magnolia Fender Wash Brush



- Filling material is staple set in wax tumbled hardwood block with hang up hole in handle.
- Length of trim: 2".
- Brown plastic.

Order No.	Mfg. No. / Description	Price
575033	(70) Block: 20" L x 3" W	$7.98 F

Star Brite Hand Scrub Brush



- Chemically resistant bristles.
- Molded plastic block with comfortable finger indents on the handle.
- Medium bristles are great for general cleaning.
- Ideal for cleaning all surfaces including vinyl.

Order No.	Mfg. No. / Description	Price
675896	(40027) Scrub Brush	$7.98 G

Captain's Choice Handy Scrub



- 2-1/2" x 6" block filled with a chemical resistant propylene bristle.

Order No.	Mfg. No. / Description	Price
437525	(M835) Scrub Brush	$8.98 I

Star Brite Utility Brush



- Features Star prene fibers with flagged ends to hold water and cleaning solutions for easier washing.
- Ideal for scrubbing hard to reach areas, waterlines, baitwells, etc.

Order No.	Mfg. No. / Description	Price
675892	(40025) Utility Brush	$8.98 G

Stainless Steel Bristle Utility Brush with Scrapper



- Stainless steel bristles.
- Hard wood handle.
- 1-1/8" bristle trim.

Order No.	Mfg. No. / Description	Price
675910	(40058) Block: 10" x 1-1/8"	$14.98 G

Star Brite Deluxe Hand Scrub Brush



- Ergonomic handle for comfortable use.
- Durable bristles sweep out dirt and grime.
- Built tough for years of service.

Order No.	Mfg. No. / Description	Price
675936	(40117) Scrub Brush	$7.98 G


Captain's Choice Teak Brush



- 2-1/2" x 7" block filled with a firm propylene bristle.
- Threaded to accept any of our handles.

Order No.	Mfg. No. / Description	Price
439719	(M773) Teak Brush	$9.98 I

Captain's Choice All Purpose Brushes



- 20" x 3" block filled with a chemical resistant propylene bristle.

Order No.	Mfg. No. / Description	Price
460421	(M872) Extra Soft Synthetic Bristle	$14.98 I
460423	(M873) Firm, Two Color Bristle	$14.98 I
460439	(M875) Very Stiff Bristle	$14.98 I

Captain's Choice All Purpose Brushes



- 8-1/2" x 3" block filled with a chemical resistant, propylene bristle.

Order No.	Mfg. No. / Description	Price
460408	(M853) Firm, Two Color Bristle	$9.98 I
460410	(M855) Very Stiff Bristle	$8.98 I

©2014 Donovan Marine, Inc.

Star Brite Detail Brush with Plastic Handle and Bristles



- Plastic handle is molded with comfortable finger grips.
- 1/2" bristle trim.
- Block size is 7-3/4" x 7/16".

Order No.	Mfg. No. / Description	Price
675914	(40062) With Nylon Bristles	$3.98 G
675916	(40063) With Brass Bristles	$3.98 G
675918	(40064) With Stainless Steel Bristles	$3.98 G

Star Brite Small Plastic Utility Brushes with Bristles



- 5/8" bristle trim.
- Block size is 7-1/4" x 1-1/2".

Order No.	Mfg. No. / Description	Price
675920	(40069) With Brass Bristles	$8.98 G
675922	(40070) With Nylon Bristles	$6.98 G

Captain's Choice Deluxe Boat Wash Brushes



- 3" x 9" block with a protective bumper.
- Threaded hole for handle.

Order No.	Mfg. No. / Description	Price
460345	(M753) Filled with Firm Solvent Resistant Bristle	$22.98 I
460369	(M750) Filled with an Extra Soft Synthetic Bristle	$22.98 I

Captain's Choice Maxi-Scrubs



- 2-1/2" x 8-1/2" block.
- Great for cleaning teak.

Order No.	Mfg. No. / Description	Price
437501	(M700) Crimped Brass Bristle	$8.98 I
437513	(M703) Firm Propylene Bristle	$6.98 I

Magnolia Deck Brushes



- Stiff palmyra fiber.
- Staple set in a smooth sanded hardwood block with one threaded and one tapered handle hole.
- Length of trim: 2".
- Length 10".

Order No.	Mfg. No. / Description	Price
575057	(MB110) Deck Brush	$6.98 F

- Length of trim: 2".
- Length 10".
- Filled with high quality polypropylene.
- Staple set in a smooth sanded hardwood block with one threaded and one tapered handle hole.
- Yellow

Order No.	Mfg. No. / Description	Price
575069	(310Y) Deck Brush	$7.98 F


Magnolia Wash Brush



- Filling material is staple set in foam plastic block with protective bumper.
- Has one threaded and one tapered handle hole.
- Length of trim: 3".

Order No.	Mfg. No. / Description	Price
575088	(MB3032) Length 10"	$16.98 F

Captain's Choice Deck Brush



- 2-1/2" x 8" block filled with a firm, two color, chemical resistant propylene bristle.
- Threaded hole for handle.

Order No.	Mfg. No. / Description	Price
437563	(M740) Deck Brush	$13.98 I

Deluxe Wooden Block Brush With Bumper



- Medium duty Star prene fibers for all around cleaning of soiled and stained surfaces.
- Bumper protects against scuff marks and surface damage.
- High gloss varnish finish on wood block.
- Will only fit quick connect handles.

Order No.	Mfg. No. / Description	Price
675952	(040151) Blue Medium	$28.98 G

Star Brite Scrub Brushes



- High density Star prene fibers quickly break down heavy dirt and stains.
- Will fit all Extend-A-Brush handles.

Order No.	Mfg. No. / Description	Price
675876	(40010) Scrub Brush, White	$14.98 G
675878	(40011) Medium Wash Brush, Blue	$14.98 G
675880	(40013) Soft Wash Brush, Yellow	$14.98 G

Star Brite Wash Brushes with Wood Block



- Features fine Star prene fibers with flagged ends that hold water and cleaning solutions.
- Bumper protects against scuff marks and surface damage.
- High gloss varnish finish on wood block.
- Fits all Extend-A-Brush quick connect premium handles.

Order No.	Mfg. No. / Description	Price
675950	(40150) Soft Wash Brush, Yellow	$29.98 G
675954	(40152) Scrub Brush, White	$29.98 G

Mr. LongArm Flow-Thru Brushes



- 10" non-restrictive, flow-thru brushes fit all Mr. LongArm extension poles, utility poles and flow-thru extension poles.
- Chemical resistant materials work well with most common cleaning agents.
- Plastic blocks are durable and lightweight.
- Full rubber bumper prevents scratching and includes a hang hole for use with pegboard or to hang for drying.

Order No.	Mfg. No. / Description	Price
460155	(0405M) Soft Polystyrene Fiber	$19.98 I
460167	(0406) Stiff Polystyrene Fiber	$17.98 I
460179	(0407) Very Stiff Polystyrene Fiber	$14.98 I

Swobbit Deck Brushes



- Old fashioned varnished premium hardwood blocks feature high quality bristles set with corrosion resistant wire for extra durability.
- Wide bristle flare ensures maximum cleaning.
- Welded safety bumpers protect surrounding finishes while First Mate's quick release mechanism locks the brush onto the handle.

Order No.	Mfg. No. / Description	Price
460222	(SW77340) Extra Soft Bristle	$34.98 G
460234	(SW76355) Stiff Bristle	$22.98 G

Swobbit Brush and Pole Display



- Display consists of:
  (5) SW45650 Telescoping Handle Perfect Pole™ 3' - 6'
  (4) SW45660 Telescoping Handle Perfect Pole™ 5' - 9'
  (5) SW45640 Telescoping Handle Perfect Pole™ 2' - 4'
  (5) SW46710 48" Fixed Length Pole™
  (4) SW77340 Deck Brush 7.5" Ex. Soft Purple
  (4) SW77345 Deck Brush 7.5" Soft Flag. Green
  (4) SW77350 Deck Brush 7.5" Medium Orange
  (4) SW77355 Deck Brush 7.5" Stiff Aqua
  (1) SW91025 Merchandiser Brush & Pole

Order No.	Mfg. No. / Description	Price
460491	(SW93200) Brush and Pole Display	$1,080.98 G

Swobbit Pole Display



Contains:
(4) SW45640 Perfect Pole™ Telescoping Handle 2' - 4'
(8) SW45650 Perfect Pole™ Telescoping Handle 3' - 6'
(8) SW45660 Perfect Pole™ Telescoping Handle 5' - 9'
(4) SW45670 Perfect Pole™ Telescoping Handle 6' - 11'
(1) SW91026 Perfect Pole™ Rack

Order No.	Mfg. No. / Description	Price
460494	(SW93400) Pole Display	$541.98 G

Star Brite Premium Brushes



- Constructed of the finest Star prene fibers that quickly break down heavy dirt and stains.
- Bumper protects against scuff marks and surface damage.
- Fits all Extend-A-Brush handles and standard screw in handles.

Order No.	Mfg. No. / Description	Price
675958	(40161) Soft Wash Brush, Yellow	$17.98 G
675960	(40162) Medium Wash Brush, Blue	$17.98 G
675962	(40163) Scrub Brush, White	$17.98 G

Mr. LongArm Twist-Lok® Light Duty Extension Pole



- The aluminum slider and handle combination provides the most lightweight extension pole possible.
- Anodizing prevents rust and provides a smoother extension.
- Nylar universal threaded end fits most standard threaded tools.
- Bi-directional locking mechanism locks in either direction at any extended length.

Order No.	Mfg. No. / Description	Price
675874	(40008) Length 3' - 6'	$21.98 G

Swobbit Island Merchandise Display



Contains:
(4) SW45640 Perfect Pole™ Telescoping Handle 2' - 4'
(12) SW45650 Perfect Pole™ Telescoping Handle 3' - 6'
(12) SW45660 Perfect Pole™ Telescoping Handle 5' - 9'
(4) SW46700 Perfect Pole™ 24" Fixed Length
(4) SW46710 Perfect Pole™ 48" Fixed Length
(4) SW77340 Deck Brush 7.5" Extra Soft [Purple]
(4) SW77345 Deck Brush 7.5" Soft Flagged [Green]
(4) SW77350 Deck Brush 7.5" Medium [Orange]
(4) SW77355 Deck Brush 7.5" Stiff [Aqua]
(3) SW19140 Soft Washing Tool Uni-Snap™
(3) SW19150 Synthetic Replacement Bonnet for Washing Tool
(4) SW21414 Quik Dry® Water Blade 14'
(4) SW21215 Uni-Snap™ Water Blade Adapter
(4) SW31315 Aquazorber® Uni-Snap™ Drying Mop
(3) SW38855 Aqua Dry® PVA Drying Cloth 3.19 sq ft
(4) SW55450 Uni-Snap™ Dual Axis Swivel Plate
(3) SW55220 Scrub Pads White 2/pack [Fine]
(3) SW55230 Scrub Pads Blue 2/pack [Medium]
(3) SW55240 Scrub Pads Brown 2/pack [Coarse]
(3) SW61865 Micro Fiber Chenille Wash Mitt w/ Cuff
(4) SW66610 Uni-Snap™ Threaded Adapter
(4) SW61855 Sheepskin Wash Mitt with Thumb
(4) SW66650 Uni-Snap™ Boat Hook
(1) SW93310 Portable Island Merchandiser

Order No.	Mfg. No. / Description	Price
460496	(SW93300) Merchandise Display	$2,658.98 G

Swobbit Premium Deck Brushes



- 7.5" wide molded poly block with premium quality flared bristles set with corrosion resistant staples.
- Wrap around safety bumper.
- Uni-Snap adapter molded into block.
- 20º bristle flare provides optimum cleaning efficiency.

Order No.	Mfg. No. / Description	Price
460220	(SW77345) Soft Flagged Bristle	$35.98 G
460218	(SW77350) Medium Bristle	$29.98 G
460232	(SW77355) Stiff Bristle	$30.98 G

Mr. LongArm Pro-Pole® Light Duty Extension Pole



- The aluminum slider and fiberglass handle combination ensures that extension poles are better balanced and more rigid when telescoped.
- Fluted round fiberglass handle provides a better grip.
- Aluminum slider is anodized which prevents rust and provides a smoother extension.
- Nylar universal threaded end fits most standard threaded tools.
- Compression mechanism lock at any extended length.

Order No.	Mfg. No. / Description	Price
460117	(3208) Length 4' - 8'	$24.98 I

Mr. Longarm Smart System Twist-Lok



- The original D.I.Y. extension pole allows the user to easily access out-of-reach areas without the use of a ladder.
- Quality, lightweight anodized aluminum construction.
- Nylar threaded end fits all universal threaded tools.
- Twist-Lok mechanism easily locks pole at intermediate lengths.
- Proudly Made in U.S.A.

Order No.	Mfg. No. / Description	Price
460105	(9236) 3' - 6'	$15.98 I

©2014 Donovan Marine, Inc.

Star Brite Heavy Duty Extending Handle



- Lightweight and incredibly strong.
- Constructed of heavy duty aircraft grade, triple anodized aluminum.
- Telescoping shafts feature two non-slip hand grips with positive twist lock.
- Special air chambers make it float.
- Stainless steel push button quick connect/disconnect for instant attachment of all Extend-A-Brush accessories.

Order No.	Mfg. No. / Description	Price
675956	(40155) Length 3' - 6'	$35.98 G

Star Brite Standard Extending Handle



- Constructed of aircraft grade, triple anodized aluminum.
- Telescoping shafts feature two non-slip hand grips with positive twist lock.
- Stainless steel push button quick connect/disconnect allows for instant attachment of all Extend-A-Brush accessories.

Order No.	Mfg. No. / Description	Price
675870	(40000) Length 3' - 6'	$26.98 G

Swobbit Perfect Poles



- Teardrop design makes Perfect Pole up to 67% stronger then other telescoping handles.
- Outer pole is made of custom extruded, heat treated, anodized aluminum.
- Inner pole is made of drawn 6063 T8 heat treated, anodized aluminum.
- Comfortable hand grip.
- Patented no-lock tracking system for foolproof adjustments.
- It's also perfect for use with our Gaff Hook and Net to land that big catch.

Order No.	Mfg. No. / Description	Price
460208	(SW45640) Length 2' - 4'	$20.98 G
460206	(SW45650) Length 3' - 6'	$34.98 G
460193	(SW45660) Length 5' - 9'	$45.98 G
460181	(SW45670) Length 6' - 11'	$62.98 G

- Features: Exclusive teardrop shape makes 67% stronger then other handles and Insta-Just Tracking System guarantees button will pop up in the next hole every time.

Order No.	Mfg. No. / Description	Price
460212	(SW44650) Length 3' - 6'	$19.98 G

Star Brite Extending Handle



- Accepts screw-on accessories.
- Built tough for years of dependable service.
- Use with our 8" standard brush or 8" deluxe brushes.

Order No.	Mfg. No. / Description	Price
675874	(40008) Length 2' - 4'	$21.98 G

Star Brite Economy Handle



- A durable, very attractive one-piece handle that accepts screw-on accessories.
- Outlasts traditional wooden economy brushes.

Order No.	Mfg. No. / Description	Price
675872	(40007) Length 4'	$7.98 G

Swobbit Fixed Length Handle



- A lightweight alternative to telescoping handles.
- Made of 6063 T8 drawn, heat treated, anodized aluminum.

Order No.	Mfg. No. / Description	Price
460331	(SW46710) Length 4'	$18.98 G

Star Brite Wooden Handle with Screw Thread End



- An affordable, traditional, very durable 5' wooden handle that accepts screw-on accessories.

Order No.	Mfg. No. / Description	Price
675924	(40088) Length 5'	$7.98 G

Corona Wood Extension Pole with Die Cast Metal Tip



- Unlacquered hardwood extension pole with heavy duty die cast metal threaded tip.

Order No.	Mfg. No. / Description	Price
575071	(R-1249-DCM) Length 49"	$6.98 F

Star Brite Brush Display



Order No.	Mfg. No. / Description	Price
431400	(40804) Brush Display	$1,401.98 G
431430	(040804NR) No Rack Included	$1,401.98 G

Star Brite Extend-A-Brush 12-Piece Brush Display



- Attractive cardboard display holds 12 brush combos utilizing only a few square feet of space.

Order No.	Mfg. No. / Description	Price
431410	(40812) Extend-A-Brush Display	$437.98 G

Star Brite Extend-A-Brush 68-Piece Brush Display



Order No.	Mfg. No. / Description	Price
431405	(40808) Extend-A-Brush Display	$1,242.98 G

Attwood Fold-N-Stow Fishing Net



- Fold down for convenient and compact storage or extend for added reach with Attwood's new line of Fold-N-Stow Fishing Net.
- A flip of the handle opens and locks the net into place.
- Easily pull back the trigger and the net collapses down into an easily stowable size.
- Constructed of durable knot-free netting.

Order No.	Mfg. No. / Description	Price
334008	(12773-2) Medium, 47" L x 16" W x 16" D	$17.98 R
334010	(12774-2) Large, 81" L x 27" W x 27" D	$27.98 R

Swobbit Landing Net-Pear Shape



- Perfect for retrieving overboard items or landing fish.
- Large, light to medium weight, not intended for landing heavy fish or objects.
- Uni-Snap adapter attaches to Perfect Pole telescoping handle.

Order No.	Mfg. No. / Description	Price
460337	(SW66680) Pear Shape Net	$30.98 G

Captain's Choice Deck Brush with Handle Kit



- Contains 437563 (M740) deck brush, a 48" long 2-piece painted hardwood handle and an extra strength nylon handle connector.

Order No.	Mfg. No. / Description	Price
460523	(M747) Deck Brush and Handle	$23.98 I

©2014 Donovan Marine, Inc.

Marpro Deluxe Deck Brush Kit



- Kit includes:
  Twist-locking pole telescopes from 29-1/2" to 65"
  Medium stiff brush with squeegee
  Mop head
  Boat hook end.

Order No.	Description	Price
7-0430	Deck Brush Kit	$42.98 F

Boater Sports Deck Brush with 4' Aluminum Handle



- Deck brush with basic 4' aluminum handle with added rubber bumper, mar resistant head - medium soft bristles.
- Deluxe has telescopic aluminum handle, non-slip cam lock for positive no leak on-off use.

Order No.	Mfg. No. / Description	Price
1-52702	(52702)	$17.99 H

Star Brite Support Pole Tip



- Attaches to all Extend-A-Brush quick connect handles to make an adjustable support for boat covers.
- Constructed of nylon for years of maintenance-free service.

Order No.	Mfg. No. / Description	Price
675904	(40035)	$5.98 G

Star Brite Wood Handle with 8" Deck Brush



- Two 2' section wooden handles with an unbreakable aluminum connector.
- 8" standard deck brush with medium duty Star prene bristles.
- Easy to stow.

Order No.	Mfg. No. / Description	Price
675926	(40095)	$18.98 G

Swobbit Deluxe Cleaning Kit



- Kit includes: (1) 460206 (SW45650) Telescoping pole 3' - 6', (1) 460220 (SW77345) Soft flagged deck brush, (1) 460333 (SW66650) Universal boat hook, (1) SW56301 - Micro fiber towel and (1) SW61850 - HD Synthetic wash mitt.

Order No.	Mfg. No. / Description	Price
460381	(SW82000)	$49.98 G

Standing Extending Handle with 8" Deluxe Brush



- Pole extends from 3' to 6'; features two non-slip hand grips and positive twist lock.
- Constructed with aircraft grade, triple anodized aluminum.
- Medium duty 8" deluxe deck brush with bumper has high density Star prene fibers for all-purpose deck cleaning.

Order No.	Mfg. No. / Description	Price
675964	(40192)	$39.98 G

Swobbit Collapsible Bucket



- Zippered storage cover.
- Coated and sealed acrylic fabric.
- Stainless steel handle.

Order No.	Mfg. No. / Description	Price
460446	(SW66660) 10" Diameter	$19.98 G

Swobbit Deluxe Watercraft Cleaning Kit



- Kit Includes: (1) 460206 (SW45650) 3' - 6' Perfect Pole Telescoping Handle, (1) 460256 (SW19140) Soft washing tool, (1) 460268 (SW21215) Quik-Dry water blade adapter, (1) 460270 (SW21414) 14" Quik-Dry water blade, (1) 460333 (SW66650) Universal boat hook, (1) 460220 (SW77345) Soft flagged deck brush, (1) 460307 (SW31315) Aquazorber drying mop, (1) 460282 (SW38855) PVA drying cloth, (1) (SW61855) Genuine sheepskin wash mitt and Terry micro fiber towel.

Order No.	Mfg. No. / Description	Price
460378	(SW81100)	$293.98 G

Star Brite Extending Handle with 8" Deck Brush



- 8" standard deck brush with medium duty Star prene bristles.
- Aluminum handle extends from 2' to 4'.
- Nylon screw thread end.

Order No.	Mfg. No. / Description	Price
675928	(40097)	$34.98 G

Swobbit Cruise Kit



- Kit Includes: 10" Diameter collapsible bucket with zippered storage cover, 2' - 4' Telescoping Perfect Pole, medium brush for non-skid, roof tops, teak, awnings and more, wash mitt, micro fiber towel and MaryKate travel size chemical cleaning pack.

Order No.	Mfg. No. / Description	Price
460379	(SW81500) Cruise Kit	$109.98 G

Swobbit Basic Watercraft Cleaning Kit



- Kit includes: (1) 460206 (SW45650) 3' - 6' Perfect Pole Telescoping Handle, (1) 460256 (SW19140) Soft washing tool, (1) 460268 (SW21215) Quik-Dry water blade adapter, (1) 460270 (SW21414) 14" Quik-Dry water blade, (1) 460333 (SW66650) Universal boat hook and (1) 460220 (SW77345) Soft flagged deck brush.

Order No.	Mfg. No. / Description	Price
460380	(SW81000)	$122.98 G


Swobbit Aquazorber Drying Mop



- Made from imported material featuring 2" wide die cut strips for maximum absorbency.
- Aquazorber mops are designed for drying decks, painted and fiberglass surfaces quickly and easily.
- Material is not affected by mold, mildew, cleaning chemicals or fuel.

Order No.	Mfg. No. / Description	Price
460307	(SW31315)	$70.98 G

Swobbit Wiper Blade



- Soft medical grade silicone blade that molds to curves and contours.
- Patented T-bar edge dries in one pass.
- Safe for all finishes including paint, fiberglass, windows and enclosures.

Order No.	Mfg. No. / Description	Price
460270	(SW21414)	$35.98 G

Star Brite Deluxe Chamois Mop



- Features synthetic strips that absorb 50% more water than natural chamois.
- Will only fit quick connect handles.
- Comes with an airtight vinyl storage pouch that keeps mop from drying out and ready for use.

Order No.	Mfg. No. / Description	Price
675930	(40102) Chamois Mop	$27.98 G

Swobbit Soft Washing Tool Uni-Snap



460245



460256

- Over 70 sq. inches of cleaning surface.
- Dual-axis swivel head follows curves and contours for quick washing.
- Safe for all finishes including paint, fiberglass, windows and enclosures.

Order No.	Mfg. No. / Description	Price
460256	(SW19140) Soft Washing Tool Uni-Snap	$33.98 G
460245	(SW19150) Synthetic Replacement Bonnet	$16.98 G
460246	(SW19155) Genuine Sheepskin Replacement Bonnet	$19.98 G

Star Brite Brush Head Adapter to Shurhold Handle



- Made from triple anodized aluminum.
- Allows use of Star Brite Extend-A-Brush accessories with Shurhold handles.

Order No.	Mfg. No.	Price
675948	(40136)	$8.98 G

Shurhold Brush Head Adapter to Star Brite Handle



- Made from triple anodized aluminum.
- Allows use of Shurhold accessories with Star Brite Extend-A-Brush handles.

Order No.	Mfg. No.	Price
675946	(40135)	$8.98 G

Swobbit Quik Dry Adapter



- Quik Dry Adapter allows you to use the 14" or 18" water blade with the Perfect Pole telescoping handle.
- Dry hard to reach areas like decks, hardtops, roofs, hull sides and more, quickly and easily.
- Adapter is adjustable to 180°.

Order No.	Mfg. No. / Description	Price
460268	(SW21215) Adapter	$13.98 G

Star Brite Screw Thread Adaptor



- Allows use of screw thread accessories with Extend-A-Brush quick connect handles.
- Constructed of unbreakable glass reinforced nylon for years of trouble free use.

Order No.	Mfg. No. / Description	Price
675902	(40034) Adapter	$5.98 G

Star Brite Adjustable Knuckle



- For use with all Extend-A-Brush premium handles to obtain an offset adjustment of scrubber pads.
- Helps you get to those hard to reach, awkward areas.
- Swivel function allows scrubber pad to follow curved surfaces for effective cleaning.
- Molded of glass reinforced nylon for durability.

Order No.	Mfg. No. / Description	Price
675898	(SW81000)	$6.98 G

Star Brite Flexible Head Scrubber with Red Pad



- Dual articulating connector allows pad to stay in contact with varying angled surfaces.
- Interchangeable pads for fine, medium and heavy duty cleaning and scrubbing.
- Fits all Extend-A-Brush handles.

Order No.	Mfg. No. / Description	Price
675938	(40124)	$28.98 G

Swobbit 180° Adjustable Angle Adapter



- Attach your favorite Swobbit cleaning tool to one end, snap it onto the Perfect Pole Telescoping Handle and let the cleaning begin.
- Adjustable to 180°.

Order No.	Mfg. No. / Description	Price
460332	(SW66640) Adapter	$14.98 G

3M Doodlebug™ Pad Holder with Pads Kit



- Orange plastic holder with special grippers that hold 4-5/8" x 10" 3M Doodlebug Cleaning Pads.
- Holder swivels in all directions.
- The threaded socket attaches to any standard threaded broom handle.

Order No.	Mfg. No. / Description	Price
857095	(08542) Doodlebug	$79.98 H

Swobbit Threaded Uni-Snap™ Adapter



- Allows you to use the Perfect Pole with a standard ACME threaded product.
- Snaps into the Perfect Pole converting it into a threaded end product.
- Made of drawn, heat treated anodized aluminum with a glass filled nylon tip.

Order No.	Mfg. No. / Description	Price
460258	(SW66610) Adapter	$7.98 G

©2014 Donovan Marine, Inc.

Star Brite Dual Use Scrubber Pads



- Attaches to premium handles with the use of Star brite's Adjustable Knuckle (40030).
- For heavy duty cleaning.
- Ideal for cleaning boat hulls.

Order No.	Mfg. No. / Description	Price
675884	(40020P) Coarse, Brown	$8.98 G

- For all-purpose scrubbing.
- Excellent for cleaning teak.

Order No.	Mfg. No. / Description	Price
675886	(40021P) Medium, Red	$8.98 G

- Will not scratch fiberglass, metal or painted surfaces.

Order No.	Mfg. No. / Description	Price
675888	(40022P) Fine, White	$8.98 G


Swobbit Scrub Pads



- Designed to work with the Swobbit System Dual-Axis swivel plate.
- Dimensions: 4" x 10" x 1".
- Sold 2 per pack.

Order No.	Mfg. No. / Description	Price
460318	(SW55220) Fine Grade, White	$7.98 G
430320	(SW55240) Corse Grade, Brown	$7.98 G

Swobbit Dual-Axis Swivel Plate



- Made of durable ABS Plastic.
- Dual-axis Swivel plate features heavy duty hooks to securely attach Swobbit System scrub pads.
- Uni-Snap adapter is designed to work with the Perfect Pole telescoping handle.

Order No.	Mfg. No. / Description	Price
460321	(SW55450) Dual Axis Swivel Plate	$23.98 G

Swobbit Micro Soft Washing Tool



- Super-soft micro fiber strands gently wash paint, fiberglass, windows and enclosures.
- Holds plenty of soap and water.
- Dual-axis swivel head follows curves and contours for quick washing.

Order No.	Mfg. No. / Description	Price
460252	(SW19170) Tool	$35.98 G
460255	(SW19175) Replacement Bonnet	$17.98 G

Star Brite Scrub Pads with Handle



- Durable, comfortable handle makes cleaning simple and easy.
- Pads are interchangeable.
- Handle grips onto each individual pad.

Order No.	Mfg. No. / Description	Price
675940	(40129) Fine Scrub Pad, White	$6.98 G
675942	(40130) Medium Scrub Pad, Red	$6.98 G
675944	(40131) Coarse Scrub Pad, Black	$6.98 G

- Scrub kit with handle and 3 pads.
- Includes: (1) Handle, (1) Fine Scrub Pad, (1) Medium Scrub Pad and (1) Coarse Scrub Pad.

Order No.	Mfg. No. / Description	Price
675890	(040023PW)	$12.98 G

Captain's Choice Cleaning Pads



- Pad attached to a 3-1/2" x 6" handle.

Order No.	Mfg. No. / Description	Price
857083	(M931) Light Grit Pad	$6.98 I
857082	(M932) Medium Grit Pad	$6.98 I
857081	(M933) Heavy Grit Pad	$6.98 I

3M Doodlebug™ Pads



- Sold box of 5

Order No.	Mfg. No. / Description	Price
857097	(08440) White Cleaning Pad, Delicate Surfaces and Light Cleaning Jobs	$21.98 H
857096	(08242) Blue Cleaning Pad, Medium Duty	$24.98 H
857098	(08541) Brown Scrub 'N Strip Pad, Tough Cleaning and Stripping Jobs	$21.98 H

Flitz Microfiber Polishing Cloths



- Use anywhere and everywhere: Glass, Auto Paint, Wheels, Fiberglass, Plastic, Vinyl, Leather, Stainless Steel Appliances, All Metals, Tile, Ceramic, Marble, Granite, Formica Counters, Floors, Electronics, Mirrors and so much more.
- Thick n Thirsty Design - Twice as thick as most microfiber cloths on the market.
- Extremely absorbant.
- Streak free performance.
- Use wet or dry.
- Use with cleaners or without.
- Machine washable - lasts for years and years.

Order No.	Mfg. No. / Description	Price
608085	(MC 16164) 16 x 16 (40.64 cm x 40.64 cm) Red	$16.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Swobbit Aqua Dry PVA Cloth



- Made from reinforced PVA material.
- Towel measures 3.19 sq. ft.
- PVA absorbs 5 times its weight in liquids and is not affected by mold or mildew.
- Perfect for use in conjunction with a Quik Dry Water Blade to reduce drying time.
- Safe to use on paint, fiberglass, windows and enclosures.
- Stores in its own reusable tube.

Order No.	Mfg. No. / Description	Price
460282	(SW38855) 27" x 17"	$19.98 I

Marpro Resi-Clean Hand Wipes



- Lightweight towels saturated with a biodegradable liquid.
- Completely environmentally friendly.
- Designed to clean: 3M 5200 adhesives, caulking, epoxy resin, gel-coat, grease, mold release, over spray removal, polyester resin, polyurethane foam, varnish and vinyl ester resin.

Order No.	Description	Price
6-7490	30 Per Pack	$19.98 G
6-7495	100 Per Pack	$54.98 G

Swobbit Utility Towel



- Industrial quality towels use for grease and oil clean up and handling of hot parts.
- Colorfast towels are safe to use everywhere from the bilge to the engine room.
- Washable.

Order No.	Mfg. No. / Description	Price
460361	(SW56005) 10 Pack, Red	$7.98 G
460363	(SW56006) 25 Pack, Red	$11.98 G

Swobbit Cloth Diapers



- For sparkling clean lint and streak-free windows.
- Ideal for applying vinyl and leather protectants.
- Great for final wipe down of virtually any finish.
- 100% cotton.
- Washable.

Order No.	Mfg. No. / Description	Price
460370	(SW56405) 3 Pack	$8.98 G

Swobbit Glass and Finishing Towel



- 100% cotton, lint-free, machine washable, reusable.
- White.
- 6 pack.

Order No.	Mfg. No. / Description	Price
460348	(SW56505) 25"	$7.98 G

Star Brite SuperSorb Smooth Synthetic PVA Wipes



- Excels at all drying tasks - absorbs up to 50% more than a natural chamois.
- Over 3 square feet.
- Unaffected by salt water.
- Leaves surface spot free.
- Waffle Weave provides more surface area for superior drying.
- Long lasting, will not tear, lint or shred.

Order No.	Mfg. No. / Description	Price
675906	(40046) Giant 27" x 17"	$16.98 G

Swobbit Terry Towel



- The perfect towel for a variety of uses onboard and in the engine room including wiping, cleaning, polishing and soaking up spills.
- Extra-soft and absorbent ring spun cotton makes this towel stand above the rest.
- Washable.

Order No.	Mfg. No. / Description	Price
460364	(SW56100) 3 Pack	$6.98 G
460365	(SW56106) 12 Pack	$14.98 G

Swobbit Synthetic Wash Mitt



- Plush 40 oz synthetic material for a gentle wash.
- Oversized, holds plenty of soap & water, elastic cuff & hang tag for easy storage and drying.

Order No.	Mfg. No. / Description	Price
460475	(SW61850) Wash Mitt	$8.98 G

Buffalo Industries Marine Diaper Cloth



- Ideal for polishing brass, stainless steel and aluminum.
- Pre-washed for maximum absorbency.
- Super soft marine-grade Diaper Cloths made of the world's best cotton.
- Classic three-panel construction.
- Machine washable.
- 3 pack.

Order No.	Mfg. No. / Description	Price
460362	(63036) 13" x 18"	$11.98 I

Buffalo Industries Microfiber Cleaning Cloths



- Ultra absorbent, super gentle, premium cloths clean and polish without chemicals.
- Ultra-fine fibers act like dirt magnets to clean and polish fine finishes, glass, polished and plated metals, lenses, electronics, appliances and furniture.
- Cleans all glass surfaces.
- 80% Polyester/20% Polyamide.

Order No.	Mfg. No. / Description	Price
460497	(64000) 3 Pack, 12" x 12"	$3.98 I
460509	(65000) 3 Pack, 12" x 16", 3 Colors	$11.98 I

Swobbit Terry Micro Towel



- High-Tech cloth cleans without chemicals or water.
- Micro fiber can be used on any surface to clean and remove dirt, grease and grime instead of smearing it.
- Fibers are 1/100th the width of a human hair!
- Washable.

Order No.	Mfg. No. / Description	Price
460367	(SW56308) 8 Pack	$16.98 G

Swobbit Sheepskin Wash Mitt



- Safe for all finishes.
- Washes, polishes, dusts.
- Use wet or dry.
- Pamper delicate finishes with the First Mate™ Genuine Sheepskin washing mitt.
- It holds plenty of soap and water, gently lifting away dirt and grime from fiberglass, paint, gelcoat, windows, and more!

Order No.	Mfg. No. / Description	Price
460478	(SW61855) Wash Mitt	$12.98 G

©2014 Donovan Marine, Inc.

Swobbit Micro Wash Mitt



- Super-soft micro fiber strands gently wash paint, fiberglass, windows and enclosures.
- Holds plenty of soap and water.
- Elastic Cuff.

Order No.	Mfg. No. / Description	Price
460483	(SW61860)	$7.98 G

Star Brite Microfiber Reggae Sponge



- Microfiber material is highly absorbent yet super soft, so it will not scratch gelcoat or painted surfaces.
- Special scrubbing side quickly and easily removes tough dirt, stains, scum line on hull.
- Use wet for washing, dry for dusting.
- Machine washable.

Order No.	Mfg. No. / Description	Price
360599	(40078) Reggae Sponge	$8.98 G

Star Brite Microfiber Reggae Wash Mitt



- Microfiber material won't scratch gelcoat or painted surfaces.
- Use wet for washing, dry for dusting.
- Machine washable.

Order No.	Mfg. No. / Description	Price
675932	(40105)	$8.98 G

Swobbit Chenille Microfiber Wash Mitt



- Thousands of tiny micro fibers 1/100th the width of a human hair clean without smearing or streaking.
- Super-soft chenille micro fiber "Rasta" strands gently wash paint, fiberglass, windows and enclosures.
- Lined for your comfort.
- Elastic Cuff.

Order No.	Mfg. No. / Description	Price
460485	(SW61865) Chenille Wash Mitt	$12.98 G

Star Brite SuperSorb Synthetic PVA Block



- Synthetic PVA material is super absorbent.
- Outlasts and out absorbs all conventional cellulose sponges.
- Will provide many years of service.
- Includes plastic storage case.

Order No.	Mfg. No. / Description	Price
675908	(40048) PVA Block	$9.98 G

Star Brite Bone Shaped Sponge



- Easy-grip "dog-bone" shape.
- Excellent for all washing tasks.

Order No.	Mfg. No. / Description	Price
360593	(40074) 9" x 5" x 3-1/4"	$5.98 G

Star Brite Cellulose Hand Grip Sponge



- Half moon design makes it easy to grip for quick clean-up.
- Super absorbent cellulose construction.

Order No.	Mfg. No. / Description	Price
360597	(40077) 7-3/4" x 3-1/2" x 2-1/2"	$8.98 G

Star Brite Cellulose Big Boat Bail Sponge



- Huge bail sponges great for soaking up any liquid.
- Absorbs over 1 quart of liquid.

Order No.	Mfg. No. / Description	Price
360595	(40075) 7-3/4" x 4-1/4" x 2-3/4"	$10.98 I

Swobbit General Purpose Orange Plastic Blade



- General purpose, softest material, very pliable and forgiving, for use on delicate surfaces like: auto paint, other plastics, finished wood, painted surfaces, soft surfaces.

Order No.	Mfg. No. / Description	Price
570716	(SR5GPOE) Plastic Blade	$5.98 G

Hardline SCRAPERITE™ Double-edged Plastic Razor Blades



- Lift and peel away vinyl, dirt, grime, tar, gum and any other substance without damaging surface area.
- Will not rust or corrode.
- Gentle enough to use on delicate surfaces.
- Includes holder and 5 blades.

Order No.	Mfg. No. / Description	Price
257680	(SR5 GPOE)	$5.98 F

Marpro Slow Epoxy Hardener



- The pot life for the slow hardener is approximately 20 - 25 minutes at 77° F; 15 - 20 minutes at 90° F and 30 - 35 minutes at 65° F.

Order No.	Description	Price
7-2528	.44 Pint, Use with 7-2510	$9.98 G
7-2530	.84 Quart, Use with 7-2512	$21.98 G
7-2532	.94 Gallon, Use with 7-2514	$76.98 G
7-2534	11.31 Gallon, Use with 7-2516	$783.98 G

Marpro Fast Epoxy Hardener



- The pot life of the fast hardener is approximately 10 - 15 minutes at 77° F; 8 - 12 minutes at 90° F and approximately 20 minutes at 65° F.
- Providing low temperature cure down to 50° F.

Order No.	Description	Price
7-2520	.44 Pint, Use with 7-2510	$8.98 G
7-2522	.86 Quart, Use with 7-2512	$21.98 G
7-2524	.94 Gallon, Use with 7-2514	$77.98 G

Marpro X-Tra Slow Epoxy Hardener



- The pot life for the x-tra slow hardener is approximately 30 - 40 minutes at 77° F and 25 - 30 minutes at 90° F.
- Use with 7-2512.

Order No.	Description	Price
7-2540	.33 Gallon	$28.98 G

Marpro 2:1 Epoxy Resin



- 2:1 mix ratio is easy to measure and mix.
- Non blush formula.
- Totally clear formula with excellent wet-out properties.
- Especially good for exotic fabrics.
- Designed to cure in cooler temperatures & on damp surfaces.
- Better UV resistance.

Order No.	Description	Price
7-2582	Gallon, Resin	$82.98 G
7-2584	1/2 Gallon, Fast Hardener, Above 80° F	$63.98 G
7-2586	1/2 Gallon, Medium Hardener, Below 80° F	$62.98 G

Marpro Epoxy Resin



- Zero V.O.C.'s.
- Formulated to be mixed at 5 parts resin to 1 part Fast or Slow Hardener.
- May be used as a laminating epoxy or thickened with Marpro fillers to a desired consistency for putty and adhesive.

Order No.	Description	Price
7-2510	Quart	$20.98 G
7-2512	.98 Gallon	$73.98 G
7-2514	4.35 Gallon	$314.98 G
7-2516	52.03 Drum	$2913.98 G

Marpro Cab-O-Sil Resin Thickening Agent



- Lightweight bulking and thickening agent.
- Minimal sanding required.

Order No.	Description	Price
6-7578	22#	$212.98 G
6-7579	Quart	$11.98 G
7-2562	Gallon	$23.98 G
6-7577	10# Bag	$212.98 G

Marpro High Load Filler



- Used to build high physical strength.
- Contains Talc.

Order No.	Description	Price
7-2558	43 oz.	$23.98 G

Marpro Epoxy Resin Display



- This display includes the following:
  (4) 6-7445 - High Performance Resin Cleaner, Acetone Replacement, Quart
  (4) 6-7450 - Acetone, Quart
  (2) 6-7501 - M.E.K.P., 1 oz. for Gallon
  (2) 6-7506 - Vinylester Resin, Gallon
  (2) 6-7514 - Premium Resin with Wax, Gallon
  (2) 6-7520 - Epoxy Glue, Quart Set
  (2) 6-7544 - Coloring Agent, Green, 1 oz.
  (2) 6-7547 - Coloring Agent, Brown, 1 oz.
  (2) 6-7548 - Coloring Agent, Blue, 1 oz.
  (2) 6-7549 - Coloring Agent, Black, 1 oz.
  (2) 6-7550 - Coloring Agent, White, 1 oz.
  (2) 6-7570 - Milled Fibers, Quart
  (2) 6-7575 - Micro Balloons, Quart
  (2) 6-7579 - Cab-O-Sil Resin Thickening Agent, Quart
  (2) 6-7581 - Micro Cell, Quart
  (2) 6-7590 - Fiberglass Cloth, 38" x 1 yd.
  (2) 6-7595 - Fiberglass Woven Roving, 38" x 1 yd.
  (2) 6-7600 - Fiberglass Mat, 38" x 1 yd.
  (4) 6-7621 - Gel Coat with Wax, Quart
  (2) 6-7622 - Gel Coat with Wax, Gallon
  (2) 6-7623 - Gel Coat, Neutral for Tint Base, No Wax, Quart
  (4) 6-7625 - Gel Coat, White, No Wax, Quart
  (2) 6-7626 - Gel Coat, White, No Wax, Gallon
  (2) 6-7630 - Wax Sol, 4 oz. for Gallon
  (2) 6-7637 - Marine Putty BPO-Cured, 1/2 Pint
  (2) 6-7640 - Resin Roller, Dimensions: 1/2" x 3"
  (4) 7-2510 - Resin, Quart
  (2) 7-2512 - Resin, .98 Gallon
  (4) 7-2520 - Fast Epoxy Hardener, .44 Pint
  (2) 7-2522 - Fast Epoxy Hardener, .86 Quart
  (4) 7-2528 - Slow Epoxy Hardener, .44 Pint
  (2) 7-2530 - Slow Epoxy Hardener, .84 Quart
  (2) Wide Base Sign Holder
  (1) Literature Pack for Rack

Order No.	Description	Price
6-7397	Epoxy Resin Display	$1,645.98 G

Travaco Rapid-Set Marine-Tex



- Convenient repair paste, one to one mix, for emergency or permanent repairs.
- Bonds to wood, steel, aluminum and fiberglass.

Order No.	Mfg. No. / Description	Price
660427	(RM320K) 43 oz.	$11.98 Q

Travaco Marine-Tex



- Self-hardening plastic metal.
- Repairs damaged hulls, dry rot, leaky tanks and engine blocks in minutes.
- Watertight.
- Handles like putty.
- Hardens like steel and sands like wood.
- Can be drilled, threaded, sanded and painted.

Order No.	Description	Price
660399	White Jr., 2 oz.	$15.98 Q
660402	White, 14 oz.	$47.98 Q
660414	White, 2.5 lbs.	$112.98 Q
660363	Grey Jr., 2 oz.	$15.98 Q
660375	Grey, 14 oz.	$47.98 Q
660387	Grey, 3 lbs.	$112.98 Q

©2014 Donovan Marine, Inc.

Interlux Watertite Epoxy Compound



- A two-part, easy to use epoxy compound for filling holes and repairing scratches in gelcoat and fiberglass above and below the waterline.
- It has a long easy-to-sand window and can be applied to a thickness of 3/4" without sagging.
- Its superior spreadability makes it an ideal glazing compound for filling small nicks and scratches.

Order No.	Mfg. No. / Description	Price
404309	(YAV135KIT) 24 oz.	$44.98 E
404323	(YAV135KIT) 48 oz.	$74.98 E

Pettit Splash Zone Epoxy Compound



- It is a two part 100% solids epoxy that applies like putty, Splash Zone seals, fills, patches or builds metals, wood, concrete, fiberglass and steel.
- It can be used to repair boat hulls, buoys, seawalls and docks.
- Pettit Emergency Repair Kit epoxy cures to an extremely hard coating which is abrasion and impact resistant.

Order No.	Mfg. No. / Description	Price
735728	(A788) 1/2 Gallon Kit	$87.98 D

Star Brite Epoxy/Aluminum Putty Stick



- Makes permanent and emergency repairs on aluminum boats, outdrives, fuel and water tanks and other aluminum parts.
- Easy to use; just hand knead for 1 minute and apply to damaged area.
- Sold each.
- Standard pack 12

Order No.	Mfg. No. / Description	Price
431356	(87004) 4 oz.	$16.98 G

Fibreglass Evercoat Aluminox Epoxy Stick



- Permanently repairs holes, gouges, cuts, rivet leaks in aluminum boats.
- Seals leaks in fuel water tanks and lines, drains, exhaust lines, manifolds and mufflers.
- Cuts through oxidation and anoxidation to enhance ability to adhere to old aluminum.
- Works equally well on other materials including fiberglass, wood, other metals and ceramics.
- Sets in 30 minutes.
- Can be sanded, painted, drilled, tapped and filed.
- Will not shrink or pull away.

Order No.	Mfg. No. / Description	Price
440074	(108020) Epoxy Stick	$18.98 H

Devcon Plastic Steel® Putty



- Cures at room temperature and forms a tough, durable, metallic mass.
- Can be drilled, tapped, machined or painted.
- Excellent resistance to oil, gasoline, water, and many chemicals.
- Ideal for patching and repairing areas where welding or brazing would be undesirable or impossible.
- Most metals, concrete and some plastics.

Order No.	Mfg. No. / Description	Price
273184	(DEVC-10110) 1 lb. Kit	$66.98 B

Star Brite Emergency Repair Epoxy Putty Stick



- Makes permanent and emergency repairs on fiberglass, wood, metal and plastic.
- Easy to use; just hand knead until color turns white and apply to damaged area.
- Sold each.
- Standard pack 12.

Order No.	Mfg. No. / Description	Price
431332	(87104) 4 oz.	$16.98 R

Marpro Marine Putty BPO-Cured



- White, polyester based marine putty that is cured with a BPO hardener (included).
- This is a fast putty that allows the user to sand within 20 minutes of application.
- No Shrinkage.
- Approved for use below the waterline.

Order No.	Description	Price
6-7637	1/2 Pint	$17.98 G
6-7638	Pint	$26.98 G
6-7540	Quart	$35.98 G

3M Marine Premium Filler



- It is a two-component vinyl ester filler designed for marine filling and fairing of fiberglass, wood, aluminum and steel surfaces above and below the waterline.
- Resists water absorption into hulls, decks and other fiberglass parts.
- Sandable in just 30 minutes.
- Cures faster than marine epoxy fillers and fairing compounds.
- Hardener included.

Order No.	Mfg. No. / Description	Price
852499	(46004) Pint	$34.98 H
852500	(46005) Quart	$61.98 H
852512	(46006) Gallon	$189.98 H

3M Marine High Strength Repair Filler



- It is a two-component vinyl ester filler formulated with short strand fiberglass for blister and other semi-structural repairs, above and below the waterline.
- This high performance reinforced filler is designed to reduce water transmission and absorption into repaired areas of fiberglass hulls, decks and other parts, reducing the possibility of future osmotic blister damage.

Order No.	Mfg. No. / Description	Price
852548	(46013) Quart	$81.98 H
852550	(46014) Gallon	$226.98 H

Fibreglass Evercoat Formula 27® Plastic Filler



- Permanent repair of wood, fiberglass, metal, stucco and drywall.
- High quality, white plastic filler for filling dents, scrapes and gouges.
- Does not shrink after drying.
- A true "miracle mender" that won't crack or pop out.
- Can be mixed with Coloring Agents to closely match many colors.
- White cream hardener included.

Order No.	Mfg. No. / Description	Price
431255	(100572) 1/2 Pint	$17.98 G
431267	(100571) Pint	$27.98 G
431279	(100570) Quart	$36.98 G

Boatlife Fix Repair Putty



- Unlike similar products on the market, Fix is a non-sagging repair putty that cures like steel.
- Completely cured after 24 hours and can even be used underwater.
- Once cured, it can be drilled, tapped, sanded and painted.
- It bonds to fiberglass, wood, metal, glass and concrete and is impervious to oil, gasoline, alcohol, caustic detergent and salt water oxidation.
- Also offers easy clean up with soap and water.

Order No.	Mfg. No. / Description	Price
248900	(1196) 454 gms	$45.98 I
248902	(1197) 136 gms	$22.98 I

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

3M Marine Lightweight Body Filler



- This vacuum processed lightweight body filler is designed to be used for filling and shaping prototypes and plugs in the OEM Plug/ Mold Department.
- This filler cures tack-free in 15 - 20 minutes, reducing sandpaper loading.
- This filler has a creamy texture, spreads smoothly, easy to sand and is vacuum processed to minimize pinholing.

Order No.	Mfg. No. / Description	Price
856724	(05801) 1 Gallon	$44.98 H

3M Marine Cream Hardener



- A blue cream hardening agent designed to be used with 3M Zebra Fillers, part number 05868, 05870 and 05871 and 3M Piranna Putty 05821.

Order No.	Mfg. No. / Description	Price
856748	(05766) 2.75 oz.	$6.98 H

3M Marine Piranha™ Advanced Finishing Putty



- Two component, self-leveling putty designed for use as a skin coat over plastic filler to fill pinholes, sand scratches, low areas and other imperfections.

Order No.	Mfg. No. / Description	Price
856801	(05821) 24 oz.	$57.98 H

Marpro Table Top Epoxy Resin



- Self leveling, clear formula.
- Formulated for a one to one mix ratio.
- Designed for interior wood depth coat finishing.
- Apply up to 1/8" deep per coat.
- For use in temps above 75° F.
- 45 minute pot life.

Order No.	Description	Price
6-7530	Quart Kit	$35.98 G
6-7531	Gallon Kit	$61.98 G

Polyester Resin Fiberglass Repair Kits



- Fast and easy permanent repairs of fiberglass, most woods and metals.
- Strengthens, repairs and rebuilds.
- May be used for small lay-up jobs or fabricating missing fiberglass panels.
- Both kits include: Fiberglass fabric, spreader stick, polyester resins (or resin gel) and liquid hardener.
- Includes: 1/2 pint of polyester resin with hardener, 3 sq. ft. of fiberglass cloth, spreader stick, mixing tray and instructions.

Order No.	Mfg. No. / Description	Price
431231	(100637) Repair Kit	$35.98 G

- Includes: 1 quart of polyester resin, 11 cc tube of hardener, 6 sq. ft. fiberglass mat, 3" x 5' tape, mixing cups, sticks and instructions.

Order No.	Mfg. No. / Description	Price
431229	(100370) 1 Quart Kit	$73.98 G

3M Marine Acryl-Marine Putty - White



- Designed specifically for the boat repair market, this putty is recommended for filling pinholes, scratches and other surface defects on hulls.

Order No.	Mfg. No. / Description	Price
856774	(05962) 21 oz.	$25.98 H

Boat Life "Git"-Rot®



- A two-part liquid epoxy that penetrates and saturates dry rotted wood and restores structural strength.
- Compatible with fiberglass resin, epoxies and polysulfide.
- Cures overnight, sandable, paintable, tappable.

Order No.	Mfg. No. / Description	Price
248775	(1063) 4 oz.	$22.98 I
248787	(1064) Pint	$48.98 I
248788	(1065) Quart	$96.98 I

Fibreglass Evercoat Polyester Glazing Putty



- Can be applied directly to bare metal, body filler, fiberglass and fully cured sanded top coats.
- Easily fills grind marks, pinholes, low spots and other minor imperfections.
- Contains ZNX-7 for superior adhesion to galvanized steel, bare steel, aluminum, SMC, E-Coat and OEM finishes.
- No shrinkage. Easy dry. Reduces risk of staining.
- Blue cream hardener included.

Order No.	Mfg. No. / Description	Price
431243	(100400) 20 oz.	$45.98 G

3M Marine Cream Hardener



- A red cream hardening agent designed to be used with 3M lightweight body filler.
- Its creamy consistency mixes easily and quickly.

Order No.	Mfg. No. / Description	Price
856736	(05830) 2.75 oz.	$9.98 H

Travaco Gluvit



- Epoxy waterproof sealer.
- Fills and seals leaks on cabin roofs, decks, hatches, part of the hull or the complete hull.
- No fiberglass required.
- Single coat of up to 10 mils, will withstand 4,000 lbs. per sq. ft. water pressure.
- Gluvit is a neutral pigment and must be painted after cure for maximum ultra-violet protection.

Order No.	Mfg. No. / Description	Price
660426	Quart	$56.98 Q
660438	Gallon	$149.98 Q

Marpro High Quality Vinylester Resin



- For use in boat construction where the highest strength water intrusion resistance is required.
- May be used in some vacuum infusion applications.
- Contains no wax.
- Has shelf life restrictions.

Order No.	Description	Price
6-7506	Gallon	$84.98 G
6-7507	5 Gallon	$400.98 G
6-7508	55 Gallon	$2587.98 G

©2014 Donovan Marine, Inc.

Marpro Gel Coat



- Exterior gelcoat is pigmented with Titanium Dioxide.
- It is resilient (will withstand good impact), and it is light stabilized.
- Designed for mold operation, a wax solution must be added when using for repairs to provide sandability.

Gel Coat - No Wax.

Order No.	Description	Price
6-7623	Neutral for Tint Base, Quart	$24.98 G
6-7625	White, Quart	$21.98 G
6-7626	White, Gallon	$70.98 G
6-7627	White, 5 Gallon	$319.98 G

Gel Coat with Wax.

Order No.	Description	Price
6-7621	Quart	$19.98 G
6-7622	Gallon	$72.98 G

Webbing Solution

- Used to create a splatter or spider web effect with Gel Coat of one color and sprayed on another.

Order No.	Description	Price
6-7634	Pint	$22.98 G

Fibreglass Evercoat One-Step Finish Gel Coat



- The highest quality ISO NPG marine finish gel coat to permanently repair or replace original, high-glass finish.
- The product cures to a hard finish and does not require Evercoat Mold Release to attain a fully cured surface.

Order No.	Mfg. No. / Description	Price
2000676	(105670) White, Pint	$42.98 H

Marpro Premium Resin - No Wax



- A polyester resin specially formulated to create a hard film in a minimum of time.
- Can be re-laminated up to six months from initial layup with no sanding.
- Contains no wax.
- Has an extended shelf life.

Order No.	Description	Price
6-7410	Quart	$16.98 G
6-7411	Gallon	$45.98 G
6-7412	5 Gallon	$186.98 G
6-7413	55 Gallon	$1622.98 G

Fibreglass Evercoat Gel Kote



- The highest quality ISO NPG marine gel coat to permanently repair or replace the original, high-gloss finish.
- Use to fill gouges, chips, scrapes and deep scratches in the fiberglass gel coat.
- Gel-Kote is a non-run, non-sag formulation of rigid, flexible polyester resins to produce resiliency and toughness.

Order No.	Mfg. No. / Description	Price
2000678	(105673) White Gel Coat, Pint	$34.98 H

Marpro Premium Resin with Wax



- No shrinkage.
- Tack free finish.
- Cannot be coated with gel coat or paint.

Order No.	Description	Price
6-7514	Gallon	$49.98 G
6-7515	5 Gallon	$217.98 G

Fibreglass Evercoat Premium Marine Resin



- The perfect no-run, no-sag polyester resin for marine repairs!
- Use on softwoods and fiberglass.
- Ideal repair for hulls, decks, cabins and tanks.
- Repairs all boat surfaces, resists impacts and protects against moisture damage.
- Use with Sea- Glass fiberglass fabrics and Evercoat Coloring Agents.
- Hardener included.

Order No.	Mfg. No. / Description	Price
2000652	(100554) Pint	$25.98 H

Fibreglass Evercoat Boatyard Resin



- A general-purpose economy finish resin.
- Has excellent wettability and good strength.
- For use on most wood, fiberglass, and some metal.
- Liquid hardener included.

Order No.	Mfg. No. / Description	Price
2000651	(100518) Quart	$35.98 H

Marpro M.E.K.P.



- A Methyl-ethyl ketone peroxide liquid hardener catalyst for all polyester resins, vinylester resins and gel coats.

Order No.	Description	Price
6-7500	1/4 oz., For Quart	$3.98 G
6-7501	1 oz., For Gallon	$6.98 G
6-7502	Pint, For 5 Gallon	$15.98 G
6-7503	Gallon, For 55 Gallon	$76.98 G
7-2580	M.E.K.P. Dispenser	$9.98 G

Marpro Micro Balloons



- Use for thickening epoxy and polyester resins.
- Larger particle size, used for fairing compounds and putty.

Order No.	Description	Price
7-2570	5 oz.	$21.98 G
7-2574	4#	$129.98 G
6-7575	Quart	$24.98 G
6-7576	Gallon	$47.98 G

Marpro Styrene



- Resin and gel coat thinner.
- Use up to 10% with polyester resin.
- Use up to 5% with gel coat.

Order No.	Description	Price
6-7475	4 oz.	$7.98 G
6-7620	Pint	$16.98 G

Fibreglass Evercoat Polyester Gel-Paste



- Repair larger areas of gel coat scratches, nicks and gouges.
- Mix paste with coloring agents to match the gel coat's original color.
- This neutral paste will make permanent repairs on gel coat and fiberglass panels.
- Will also adhere to most woods and metals.

Order No.	Description	Price
440051	(100695) 1 Pint	$34.98 G

Marpro Wax Sol



- Add to gel coat that does not contain wax to produce a tack free finish.

Order No.	Description	Price
6-7630	4 oz., For Gallon	$8.98 G
6-7632	Gallon	$70.98 G

Marpro Micro Cell



- Creates a light weight filler that is easily sanded.
- Excellent for fairing compounds.

Order No.	Description	Price
6-7581	Quart	$24.98 G

Marpro Milled Fibers



- Used to thicken polyester and epoxy resins.

Order No.	Description	Price
6-7570	1 Quart	$21.98 G

Fibreglass Evercoat Gelcoat Repair Kit



- Permanently repair nicks, gouges and scratches in fiberglass hulls and decks.
- Blend coloring agents to achieve a match to almost any color.
- Repair material cures glass-hard in one hour.
- A special release film and no-run polyester gel makes a slick, no-sand finish quick and easy.
- Complete kit contains: Colors, polyester gel coat paste, hardener, release film, mixing sticks, blending chart and instructions.

Order No.	Mfg. No. / Description	Price
440064	(108000) 1 oz.	$49.98 G
2000664	(100668) 4 oz.	$56.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Marpro Coloring Agents



- Popular color matching agents that blend with polyester resins, gel paste and epoxy resins, Formula 27 and various putties.
- Colorants may be mixed to obtain desired color match.
- Use 1 oz. color per quart of resin.
- Use very small amounts to tint fiberglass repair putty or scratch patch.

Order No.	Description	Price
6-7544	Green, 1 oz.	$9.98 G
6-7545	Red, 1 oz.	$9.98 G
6-7546	Gold, 1 oz.	$9.98 G
6-7547	Brown, 1 oz.	$9.98 G
6-7548	Blue, 1 oz.	$9.98 G
6-7549	Black, 1 oz.	$9.98 G
6-7550	White, 1 oz.	$9.98 G
6-7551	White, 4 oz.	$19.98 G

Fibreglass Evercoat Gelcoat Scratch Patch



- Repair fiberglass boats.
- Easy permanent repairs on hairline cracks, small scratches and chips in fiberglass.
- Does not need a catalyst.
- Ideal for surface scratch repairs of metal flake finish.

Order No.	Mfg. No. / Description	Price
439972	(105651) Clear, 1 fl. oz.	$15.98 G
439984	(105652) White, 1 fl. oz.	$16.98 G
439996	(105653) Buff White, 1 fl. oz.	$16.98 G


Taco Marine Lumber (Polyboard/Starboard)



- UV-stabilized marine-grade polymer specifically designed to withstand harsh marine environment.
- Excellent resistance to sun and salt water.
- Ideal wood replacement for cabinets, dock, step boxes and more.
- Individually shrink-wrapped.

Order No.	Mfg. No. / Description	Price
840002	(P105012WHA27) 1/2" Thick @ 12 x 27 White	$35.98 E
840005	(P105024WHA27) 1/2" Thick @ 24 x 27 White	$68.98 E
840010	(P105024WHA54) 1/2" Thick @ 24 x 54 White	$126.98 E
840208	(P107512WHA27) 3/4" Thick @ 2 x 27 White	$52.98 E
840303	(P105012BLK27) 1/2" thick @ 12 x 27 Black	$35.98 E
840307	(P105012SFM27) 1/2" Thick @ 12 x 27 Sea Green	$35.98 E
840505	(P102512WHA27) 1/4" Thick @ 12 x 27 White	$20.98 E
840510	(P102524WHA27) 1/4" Thick @ 24 x 27 White	$36.98 E

3M Marine Scotchlite™ Glass Bubbles



- This filler/resin extender can be used in mixing of marine putties and fairing compounds, as well as in fiberglass reinforced plastic layup.
- Offer light-weight, minimal shrinkage & easy sanding.
- For hand mixing use.

Order No.	Mfg. No. / Description	Price
852473	(86416) K15, 10 lbs.	$189.98 H

Marpro Resin Rollers



- Spiral threaded grooves to spread resin and glass better, removes air bubbles and laminates evenly.
- Features: Angled tapered grooved sizes, contoured angles and aluminum.

Order No.	Description	Price
6-7640	Dimensions: 1/2" x 3"	$21.98 G
6-7641	Dimensions: 3/4" x 6"	$26.98 G

Fibreglass Evercoat Spreader Kit



- Set of 3 flexible, long lasting plastic spreaders in different sizes.
- For fast, smooth application of resins, body filler or crack filler.

Order No.	Mfg. No. / Description	Price
431217	(100381)	$5.98 G
440836	(101018) 5" Spreader	$3.18 Q

Coosa Core Material Composite Panels



- Bluewater 20.
- Same superior stiffness and strength.
- Density of 20 pounds per cubic foot.
- Typically used as a semi-structural component.
- 45% or more lighter than plywood.

Order No.	Mfg. No. / Description	Price
412180	(B20W0025T) 1/4", 4' x 8'	$276.98 I
412192	(B20W0050T) 1/2", 4' x 8'	$310.98 I

- High-density, polyurethane foam reinforced with layers of woven roving and continuous strand fiberglass.
- Bluewater 26.
- Ultimate high strength-to-weight ratio.
- Density of 26 pounds per cubic foot.
- Typically used as a structural component.
- 30% or more lighter than plywood.

Order No.	Mfg. No. / Description	Price
412130	(PBW0375T) 3/8", 4' x 8'	$373.98 I
412142	(PBW0050T) 1/2", 4' x 8'	$439.98 I
412154	(PBW0625T) 5/8", 4' x 8'	$466.98 I
412166	(PBW0075T) 3/4", 4' x 8'	$471.98 I
412178	(PBW1000T) 1", 4' x 8'	$558.98 I

Marpro Polyester Resin Display



- This display includes the following:
  (4) 6-7410 - Premium Resin, No Wax, Quart
  (2) 6-7411 - Premium Resin, No Wax, Gallon
  (4) 6-7445 - High Performance Resin Cleaner, Acetone Repl., Quart
  (4) 6-7450 - Acetone, Quart
  (2) 6-7451 - Acetone, Gallon
  (2) 6-7501 - M.E.K.P., 1 oz. for Gallon
  (2) 6-7506 - Vinylester Resin, Gallon
  (2) 6-7514 - Premium Resin with Wax, Gallon
  (2) 6-7520 - Epoxy Glue, Quart Set
  (2) 6-7535 - The Complete Polyester Resin Repair Kit
  (2) 6-7544 - Coloring Agent, Green, 1 oz.
  (2) 6-7547 - Coloring Agent, Brown, 1 oz.
  (2) 6-7548 - Coloring Agent, Blue, 1 oz.
  (2) 6-7549 - Coloring Agent, Black, 1 oz.
  (2) 6-7550 - Coloring Agent, White, 1 oz.
  (2) 6-7570 - Milled Fibers, Quart
  (2) 6-7575 - Micro Balloons, Quart
  (2) 6-7579 - Cab-O-Sil Resin Thickening Agent, Quart
  (2) 6-7581 - Micro Cell, Quart
  (2) 6-7590 - Fiberglass Cloth, 38" x 1 yd.
  (2) 6-7595 - Fiberglass Woven Roving, 38" x 1 yd.
  (2) 6-7600 - Fiberglass Mat, 38" x 1 yd.
  (2) 6-7620 - Styrene, Pint
  (4) 6-7621 - Gel Coat with Wax, Quart
  (2) 6-7622 - Gel Coat with Wax, Gallon
  (2) 6-7623 - Gel Coat, Neutral for Tint Base, No Wax, Quart
  (4) 6-7625 - Gel Coat, White, No Wax, Quart
  (2) 6-7626 - Gel Coat, White, No Wax, Gallon
  (2) 6-7630 - Wax Sol, 4 oz. for Gallon
  (2) 6-7637 - Marine Putty BPO-Cured, 1/2 Pint
  (2) 6-7640 - Resin Roller, Dimensions: 1/2" x 3"
  (2) Wide Base Sign Holder
  (1) Literature Pack for Rack

Order No.	Description	Price
6-7398	Resin Display	$1,197.98 G

Marpro Polyester & Epoxy Resin Display



- This display includes the following:
  (4) 6-7410 - Premium Resin, No Wax, Quart
  (2) 6-7411 - Premium Resin, No Wax, Gallon
  (4) 6-7445 - High Performance Resin Cleaner, Acetone Repl., Quart
  (4) 6-7450 - Acetone, Quart
  (2) 6-7501 - M.E.K.P., 1 oz. for Gallon
  (2) 6-7520 - Epoxy Glue, Quart Set
  (2) 6-7535 - The Complete Polyester Resin Repair Kit
  (2) 6-7544 - Coloring Agent, Green, 1 oz.
  (2) 6-7547 - Coloring Agent, Brown, 1 oz.
  (2) 6-7548 - Coloring Agent, Blue, 1 oz.
  (2) 6-7549 - Coloring Agent, Black, 1 oz.
  (2) 6-7550 - Coloring Agent, White, 1 oz.
  (2) 6-7575 - Micro Balloons, Quart
  (2) 6-7579 - Cab-O-Sil Resin Thickening Agent, Quart
  (2) 6-7590 - Fiberglass Cloth, 38" x 1 yd.
  (2) 6-7595 - Fiberglass Woven Roving, 38" x 1 yd.
  (2) 6-7600 - Fiberglass Mat, 38" x 1 yd.
  (2) 6-7620 - Styrene, Pint
  (4) 6-7621 - Gel Coat with Wax, Quart
  (2) 6-7622 - Gel Coat with Wax, Gallon
  (2) 6-7623 - Gel Coat, Neutral for Tint Base, No Wax, Quart
  (2) 6-7630 - Wax Sol, 4 oz. for Gallon
  (2) 6-7637 - Marine Putty BPO-Cured, 1/2 Pint
  (2) 6-7640 - Resin Roller, Dimensions: 1/2" x 3"
  (4) 7-2510 - Resin, Quart
  (2) 7-2512 - Resin, .98 Gallon
  (4) 7-2520 - Fast Epoxy Hardener, .44 Pint
  (2) 7-2522 - Fast Epoxy Hardener, .86 Quart
  (4) 7-2528 - Slow Epoxy Hardener, .44 Pint
  (2) 7-2530 - Slow Epoxy Hardener, .84 Quart
  (2) Wide Base Sign Holder
  (1) Literature Pack for Rack

Order No.	Description	Price
6-7399	Epoxy Resin Display	$1,320.98 G

©2014 Donovan Marine, Inc.

MAS Resin



- Use with MAS Hardeners and Fillers.
- Choose MAS Pre-calibrated pumps for easy measuring.

Order No.	Mfg. No. / Description	Price
308301	(30-001) 1 Quart	$44.98 F
308302	(30-002) 1 Gallon	$132.98 F
308303	(30-003) 4 Gallons	$537.98 F
308305	(30-005) 1/2 Gallon	$82.98 F

MAS Medium Hardener



- 30m Pot Life 4 hr. Working Time @ 70°.
- Use with MAS Low-Vis and FLAG Resins.
- Choose MAS Pre-calibrated Pumps for easy measuring.

Order No.	Mfg. No. / Description	Price
308350	(30-510) 1 Gallon	$175.98 F
308353	(30-516) 1 Pint	$35.98 F
308359	(30-532) 1 Quart	$55.98 F
308363	(30-564) 1/2 Gallon	$103.98 F

MAS Phenolic Micro Balloons



- Use with MAS Low-Viscosity or FLAG Resins and all Hardeners.


Order No.	Mfg. No. / Description	Price
308207	(25-007) 1 Quart	$29.98 F
308208	(25-008) 1/2 Gallon	$48.98 F

MAS Resin & Hardener Pump



Order No.	Mfg. No. / Description	Price
308316	(30-016) Pump	$16.98 F

MAS Mixing Sticks



Order No.	Mfg. No. / Description	Price
308375	(35-019) 10 Pack	$5.98 F

MAS 5 to 1 Marine Epoxy Resin System



- Formulated for bonding and coating wood.
- Superb penetrating power.
- Available for use with two hardeners of varying work life/gel time.
- These wood laminating systems are well suited for sealing wood surfaces, bonding applications, general marine construction/repair, and the cold molding process for fabricating wood and fiberglass structures.

Order No.	Mfg. No. / Description	Price
308280	(30-720) Resin, 5 Gallon	$494.98 F
308283	(30-820) Fast Hardener, Gallon	$192.98 F
308286	(30-920) Slow Hardener, Gallon	$192.98 F

MAS Fast Hardener



- 30m Pot Life 4 hr. Working Time @ 70 degrees.
- Use with MAS Low-Vis and FLAG Resins.
- Choose MAS Pre-calibrated Pumps for easy measuring.

Order No.	Mfg. No. / Description	Price
308365	(30-611) 1 Pint	$35.98 F
308368	(30-612) 1 Quart	$55.98 F

MAS Rapid Cure Mini Kit



Order No.	Mfg. No. / Description	Price
308345	(30-100) Rapid Cure	$43.98 F

MAS 60cc Syringe



Order No.	Mfg. No. / Description	Price
308381	(35-025) 60cc Syringe	$8.98 F

MAS Bio-Solv



Order No.	Mfg. No. / Description	Price
308390	(35-332) 1 Pint	$10.98 F
308392	(35-333) 1 Quart	$19.98 F
308394	(35-334) 1/2 Gallon	$36.98 F
308396	(35-335) 1 Gallon	$68.98 F
308398	(35-336) 5 Gallons	$324.98 F

MAS Slow Hardener



- 30m Pot Life 4 hr. Working Time @ 70 degrees.
- Use with MAS Low-Vis and FLAG Resins.
- Choose MAS Pre-calibrated Pumps for easy measuring.

Order No.	Mfg. No. / Description	Price
308306	(30-006) 1 Pint	$35.98 F
308307	(30-007) 1 Quart	$55.98 F
308308	(30-008) 1 Gallon	$175.98 F
308326	(30-026) 1/2 Gallon	$103.98 F

MAS Wood Flour



- Use with MAS Low-Viscosity or FLAG Resins and all Hardeners.

Order No.	Mfg. No. / Description	Price
308220	(25-020) 1 Quart	$15.98 F
308021	(25-021) 1/2 Gallon	$22.98 F

MAS Flag Medium Handy Kit



Order No.	Mfg. No. / Description	Price
308371	(30-FLAG) Handy Kit	$55.98 F

MAS 4-Sided Notched Trowel



Order No.	Mfg. No. / Description	Price
308405	(35-730) Trowel	$5.98 F

MAS Bio-Solv Wipes Canister 40 Ct.



Order No.	Mfg. No. / Description	Price
308402	(35-345) 40 Ct.	$16.98 F
308404	(35-347) Individual Wipes	$0.98 F

MAS Spreader



- 3", 4", and 5" Spreader Included.

Order No.	Mfg. No. / Description	Price
308407	(35-731) 3 Pack	$8.98 F

MAS Roller Cover



- 6" Nylon Short Nap.

Order No.	Mfg. No. / Description	Price
308414	(35-739)	$5.98 F

MAS Woven Roving



- 24 oz.
- 50" x 36".

Order No.	Mfg. No. / Description	Price
308445	(65-825) 24 oz., 50" x 36"	$34.98 F

MAS Flag Resin



Order No.	Mfg. No. / Description	Price
308602	(FLAG032) 1 Quart	$41.98 F
308604	(FLAG064) 1/2 Gallon	$75.98 F
308609	(FLAG1G) 1 Gallon	$110.98 F
308611	(FLAG4G) 4 Gallons	$439.98 F

MAS Colloidal Silica

No Image Available

- Use with MAS Low-Viscosity or FLAG Resins and all Hardeners.

Order No.	Mfg. No. / Description	Price
380194	(25-001) 1 Quart	$17.98 F
380198	(25-002) 1/2 Gallon	$24.98 F

MAS Mixing Paddles

No Image Available

Order No.	Mfg. No. / Description	Price
308411	(35-736) 10 Pack	$6.98 F

MAS Fiberglass Cloth



Order No.	Mfg. No. / Description	Price
308423	(65-801) 6 oz., 38" x 36"	$15.98 F

MAS Fiberglass Mat



- 1.5 oz.
- 38" x 34".

Order No.	Mfg. No. / Description	Price
308429	(65-809) 1.5 oz., 38" x 34"	$16.98 F

MAS Gelcote® Kit





Order No.	Mfg. No. / Description	Price
308542	(95-742) White	$31.98 F
308543	(95-743) Multi-Color	$43.98 F

MAS Mixing Cups



Order No.	Mfg. No. / Description	Price
308420	(35-846) 8 oz., 10 Pack	$14.98 F
308421	(35-847) 16 oz., 10 Pack	$15.98 F

MAS Fiberglass Tape



Order No.	Mfg. No. / Description	Price
308425	(65-805) 6 oz., 4" x 10 yds.	$37.98 F

MAS Fiberglass Biax Cloth



Order No.	Mfg. No. / Description	Price
308437	(65-817) 50" x 36"	$54.98 F

MAS Cell-O-Fill®

No Image Available

- Use with MAS Low-Viscosity or FLAG Resins and all Hardeners.

Order No.	Mfg. No. / Description	Price
380201	(25-003) 1 Quart	$10.98 F
380202	(25-004) 1/2 Gallon	$17.98 F

MAS Milled Fibers

No Image Available

- Use with MAS Low-Viscosity or FLAG Resins and all Hardeners.

Order No.	Mfg. No. / Description	Price
380204	(25-005) 1 Quart	$31.98 F
380205	(25-006) 1/2 Gallon	$57.98 F

©2014 Donovan Marine, Inc.

105 EPOXY RESIN

MAS FLAG RESINS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
105-A	Resin	1 Quart	308602	FLAG032	FLAG Resin	1 Quart
N/A			308604	FLAG064	FLAG Resin	1/2 Gallon
105-B	Resin	.98 Gallon	308609	FLAG1G	FLAG Resin	1 Gallon
N/A			308611	FLAG4G	FLAG Resin	4 Gallon
105-C	Resin	4.35 Gallon		FLAG5G	FLAG Resin	5 Gallon
105-E	Resin	52.03 Gallon		FLAG55G	FLAG Resin	55 Gallon

GENERAL PURPOSE HARDENERS

MAS HARDENERS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
205-A	Fast Hardener	.44 Pint	308365	30-611	Fast Hardener	1 Pint
205-B	Fast Hardener	.86 Quart	308368	30-612	Fast Hardener	1 Quart
205-C	Fast Hardener	.94 Gallon		30-613	Fast Hardener	1 Gallon
205-E	Fast Hardener	11.31 Gallon		30-666	Fast Hardener	15 Gallon
206-A	Slow Hardener	.44 Pint	308353	30-516	Medium Hardener	1 Pint
206-B	Slow Hardener	.86 Quart	308359	30-532	Medium Hardener	1 Quart
N/A			308363	30-564	Medium Hardener	1/2 Gallon
206-C	Slow Hardener	.94 Gallon	308350	30-510	Medium Hardener	1 Gallon
206-E	Slow Hardener	11.31 Gallon		30-515	Medium Hardener	15 Gallon
209-SA	Extra Slow Hardener	.66 Pint	308306	30-006	Slow Hardener	1 Pint
209-SB	Extra Slow Hardener	.33 Gallon	308307	30-007	Slow Hardener	1 Quart
N/A			308326	30-026	Slow Hardener	1/2 Gallon
209-SC	Extra Slow Hardener	1.45 Gallon	308308	30-008	Slow Hardener	1 Gallon
209-SE	Extra Slow Hardener	17.34 Gallon		30-065	Slow Hardener	15 Gallon

CLEAR FINISH HARDENER

MAS HARDENERS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
207-SA	Special Clear Hardener	.66 Pint	308306	30-006	Slow Hardener	1 Pint
207-SB	Special Clear Hardener	.33 Gallon	308307	30-007	Slow Hardener	1 Quart
207-SC	Special Clear Hardener	1.45 Gallon	308308	30-008	Slow Hardener	1 Gallon
207-SE	Special Clear Hardener	17.34 Gallon		30-065	Slow Hardener	15 Gallon

MAS LOW VISCOSITY EPOXY RESINS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
	Proset - Laminating Resin		308301	30-001	MAS Epoxy Resin	1 Quart
			308302	30-002	MAS Epoxy Resin	1 Gallon
			308303	30-003	MAS Epoxy Resin	4 Gallon
			308305	30-005	MAS Epoxy Resin	1/2 Gallon
	Infusion Products				MAS Infures and	
					Infucure Hardeners	

METERING PUMPS

MAS PUMPS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
300	Mini Pump Set (Group Size A, B or C)	1 Set	308316	30-016	Pump Set	1 Set
306-25	Model A Pump (5:1 ratio)	1 Each				
306-23	Model A Pump (3:1 ratio)	1 Each				
306-Kit	Model A Rebuild Kit (for 306 pumps)	1 Kit				
309	Gear Pump (5:1 ratio)	1 Each				
309-3	Gear Pump (3:1 ratio)	1 Each				
320	Small-Batch Epoxy Scale	1 Each				

REPAIR PACKS & ADHESIVE

MAS REPAIR KITS AND ADHESIVES

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
101	Handy Repair Pack	1 Kit				
101-6	Maxi Repair Pack	1 Kit				
101-T	Resin & Hardener Packets	Six, .56 fl. oz.	308371	30-FLAG	FLAG/Medium Handy Repair Kit	1
610	Six10 Adhesive	190 ml		30-652	Super Epoxy All 300 ml Cartridge	1
600-2	Static Mixer (for Six10 Adhesive)	2 Each		35-657	2 Static Mixer Nozzles	1
600-12	Static Mixer (for Six10 Adhesive)	12 Each		35-659	10 Static Mixer Nozzles	1
650-8	G/flex Epoxy	Two, 4 oz.				
650-32	G/flex Epoxy	Two, 16 oz.		.		
650-K	G/flex Epoxy Repair Kit	1 Kit				
650-2G	G/flex Epoxy	Two, 1 Gallon				
650-CR	G/flex Epoxy Resin	4.75 Gallon				
650-CH	G/flex Epoxy Hardener	4.75 Gallon				
650-ER	G/flex Epoxy Resin	51.21 Gallon				
650-EH	G/flex Epoxy Hardener	51.21 Gallon				
655-K	G/flex Epoxy Adhesive Repair Kit	1 Kit				
655-2QT	G/flex Epoxy Adhesive	Two, 1 Quart				
655-2G	G/flex Epoxy Adhesive	Two, 1 Gallon				
655-CR	G/flex Epoxy Adhesive Resin	4.75 Gallon				
655-CH	G/flex Epoxy Adhesive Hardener	4.75 Gallon				
655-ER	G/flex Epoxy Adhesive Resin	50.35 Gallon				
655-EH	G/flex Epoxy Adhesive Hardener	50.35 Gallon				
865-4	G/5 Five-Minute Adhesive, 2 Part	Two, ¼ Pint	308345	30-100	Mini kit Rapid Cure	1
865-16	G/5 Five-Minute Adhesive, 2 Part	Two, 1 Pint		30-101	Raid Cure Pint Kit	1
865-2G	G/5 Five-Minute Adhesive, 2 Part	Two, 1 Gallon				
			308305	35-058	Flexbond 5000 Black	Cartridge
			308542	95-742	White Gelcoat Kit	1
			308543	95-743	Multi-Color Gelcoat Kit	1

FACTORY NOTE: Any MAS Resin and Hardener, with the exception of Rapid Cure and Super Epoxy All can be used and will do the same job as the G/flex product

©2014 Donovan Marine, Inc.

FILLERS / MAS FILLERS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
403-9	Microfibers	6.0 oz.	380201	25-003	Cell-O-Fill Cellulose	1 Quart
403-28	Microfibers	20.0 oz.	380202	25-004	Cell-O-Fill Cellulose	1/2 Gallon
403-B	Microfibers	20.0 lb.		25-017	Cell-O-Fill, 44#	1
404-15	High-Density Filler	15.2 oz.	380204	25-005	Milled Fibers	1 Quart
404-45	High-Density Filler	43.0 oz.	380205	25-006	Milled Fibers	1/2 Gallon
404-B	High-Density Filler	30.0 lb.				
405	Filleting Blend	8.0 oz.				
406-2	Colloidal Silica	1.7 oz.	380194	25-001	Colloidal Silica	1 Quart
406-7	Colloidal Silica	5.5 oz.	380198	25-002	Colloidal Silica	1/2 Gallon
406-B	Colloidal Silica	10.0 lb.		25-009	Colloidal Silica, 10# Bulk	1
407-5	Low-Density Filler	4.0 oz.	308207	25-007	Phenolic Microballoons	1 Quart
407-15	Low-Density Filler	12.0 oz.	308208	25-008	Phenolic Microballoons	1/2 Gallon
407-B	Low-Density Filler	14.0 lb.		25-012	Microballoons, 35# Box	1
410-2	Microlight	2.0 oz.				
410-7	Microlight	5.0 oz.				
410-B	Microlight	4.0 lb.				
			308220	25-020	Wood Flour (Wood Glueing)	1 Quart
				25-021	Wood Flour (Wood Glueing)	1/2 Gallon

EPISIZE™ REINFORCING MATERIALS / MAS REINFORCING MATERIALS

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
702-12	Unidirectional Carbon Tape	1½" × 12 ft.				
702-50	Unidirectional Carbon Tape	1½" × 50 ft.				
703-12	Unidirectional Carbon Tape	3" × 12 ft.				
703-50	Unidirectional Carbon Tape	3" × 50 ft.				
713-50	Unidirectional Glass Tape	3" × 50 ft.				
727-10	Biaxial Tape	4" × 10 ft.				
727-20	Biaxial Tape	4" × 20 yd.				
729-10	Glass Tape, 9 oz.	2" × 10 ft.				
729	Glass Tape, 9 oz.	2" × 50 yd.		65-812	6 oz., 2" x 50 yards Tape	4 Roll
731	Glass Tape, 9 oz.	3" × 50 yd.				
732-10	Glass Tape, 9 oz.	4" × 10 ft.	308425	65-805	6 oz., 4" x 10 yards	1
732	Glass Tape, 9 oz.	4" × 50 yd.		65-814	6 oz., 4" x 50 yards	3 Roll
733	Glass Tape, 9 oz.	6" × 50 yd.		65-816	6 oz., 6" x 50 yards	2 Roll
737-20	Biaxial Fabric	50" × 20 yd.			Call for Pricing Depends of Weight	
738-20	Biaxial Fabric with Mat	50" × 20 yd.			Call for Pricing Depends of Weight	
740-10	Glass Fabric, 4 oz.	50" × 10 yd.				
740-20	Glass Fabric, 4 oz.	50" × 20 yd.				
742-10	Glass Fabric, 6 oz.	60" × 10 yd.				
742-20	Glass Fabric, 6 oz.	60" × 20 yd.		65-820	6 oz., 38" x 60 yards	1
			308423	65-801	6 oz., Cloth, 38" x 36"	1
			308429	65-809	1.5 oz., Matt, 38" x 34"	1
			308437	65-817	1708 BIAX Cloth, 50" x 36"	1
			308445	65-825	24 oz., Woven Roving, 50" x 36"	1
745-30	Glass Fabric, 12 oz.	30"×30 in				
745-10	Glass Fabric, 12 oz.	60"×10 yd				
745-20	Glass Fabric, 12 oz.	60"×20 yd				

APPLICATION TOOLS & SUPPLIES

MAS APPLICATION TOOLS AND SUPPLIES

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
800-2	Roller Covers	2 Each	308414	35-739	9" Roller Cover	1
801-HD	3" Roller Frame	1 Each				
802	Roller Pan	1 Each				
803-12	Glue Brushes	12 Each				
803-144	Glue Brushes	144 Each				
804-8	Reusable Mixing Sticks	8 Each	308375	35-019	Disposable Sticks, 10 Pack	1
804-60	Reusable Mixing Sticks	60 Each		35-020	Disposable Sticks, 100 Pack	1
			308411	35-736	Mixing Paddles, 10 Pack	1
			308420	35-846	8 oz polypropylene mixing cup, 10 pk.	1
805	Poly Mixing Pot, 16 oz.	1 Each	308421	35-847	16 oz polypropylene mixing cup, 10 pk.	1
806	Poly Mixing Pot, 32 oz.	1 Each			32 oz. Polypor Mixing Cup	1
807-2	Syringes	2 Each	308381	35-025	60 cc Syringe	1
807-12	Syringes	12 Each		35-026	60 cc Syringe, 30 Pack	1
808-2	Flexible Plastic Spreaders	2 Each	308407	35-731	3 Pack Spreader, 3", 4", 5"	1
808-12	Flexible Plastic Spreaders	12 Each		35-751 case	Spreaders, Case of 50	1
809	Notched Spreader	1 Each	308405	35-730	4 Sides Notched Trowel	1
810-2	Fillable Caulking Tubes	2 Each				
810-24	Fillable Caulking Tubes	24 Each				
830	Medicated Skin Cream	5 fl. oz.				
831	Protective Skin Cream	5 fl. oz.				
832-4	Disposable Gloves	4 Pair		35-018	Disposable Gloves, 5 Pair	1
832-50	Disposable Gloves	50 Pair		35-006	Disposable Gloves, 50 Pair (100 ea)	1
836-( )	Coverall, (L or XL)	1 Each				
838-2	Sleeves	2 Pair				
860-8	Aluminium Etch Kit (2 Step)	Two, ¼ Pint				
875	Scarffer	1 Each				

MAS BIO-SOLV

WEST SYSTEM #	DESCRIPTION	UNIT SIZE	DONOVAN PART #	MAS PART #	DESCRIPTION	UNIT SIZE
			308390	35-332	BIO-SOLV	1 Pint
			308392	35-333	BIO-SOLV	1 Quart
			308394	35-334	BIO-SOLV	1/2 Gallon
			308396	35-335	BIO-SOLV	1 Gallon
			308398	35-336	BIO-SOLV	5 Gallon
			308402	35-345	40 CT Canister	1
			308404	35-347	BIO-SOLV Individual Wipe, 50 Per Case	1

©2014 Donovan Marine, Inc.

Marpro Fiberglass Cloth Tape



- The finest quality fiberglass cloth woven in narrow widths with non-raveling edges.

Order No.	Description	Price
6-7610	2" x 50 yds.	$33.98 G
6-7611	4" x 50 yds.	$64.98 G
6-7612	6" x 50 yds.	$96.98 G
6-7613	12" x 50 yds.	$174.98 G

Marpro Fiberglass Woven Roving



- Heavy weight fiberglass fabric.
- Very bulky for stronger repair applications where large build-up is needed.

Order No.	Description	Price
6-7595	38" x 1 yd.	$13.98 G

Marpro Parts Washer Solution



- Low odor, quick drying, crystal clear formula.
- Effectively removes dirt, grease and grime.
- Excellent for areas where low flash point solutions can't be used.
- Good for cleaning parts, brushes and rollers.

Order No.	Description	Price
6-7405	Gallon	$20.98 G
6-7407	5 Gallon	$86.98 G

Marpro Lacquer Thinner



- Thins and cleans more effectively than mineral spirits.
- Used to help control brushing and spraying consistency.
- May be used as a cleaner for spray equipment, brushes and rollers.
- Not for use on nylon or synthetic tools.

Order No.	Description	Price
6-7465	Quart	$12.98 G
6-7466	Gallon, Case of 4	$29.98 G
6-7467	5 Gallon	$108.98 G
6-7468	Gallon, Single	$39.98 G

Marpro Mineral Spirits



- Good brush cleaning solvent.
- Low odor, quick drying.
- May be added to oil base paints, enamels and varnishes for exterior and interior use to thin and control flow rate.
- Do not use with synthetic or rubber base enamels or water thinned paints.

Order No.	Description	Price
6-7470	Quart	$9.98 G
6-7471	Gallon	$21.98 G

Marpro Fiberglass Mats



- 100% fiberglass in a non-woven state.
- Use as reinforcement for polyester or epoxy resin.
- Finishing mat.

Order No.	Description	Price
6-7600	38" x 1 yd.	$8.98 G
6-7601	38" x 3 yds.	$23.98 G
6-7603	50" x 1 yd.	$11.98 G
6-7604	50" x 3 yds.	$31.98 G
6-7605	50" x 73 lineal yds.	$314.98 G

Marpro Fiberglass Cloth



- The finest quality 7-1/2 oz. fiberglass cloth available for use with polyester and epoxy resins and gelcoats.

Order No.	Description	Price
6-7590	38" x 1 yd.	$12.98 G
6-7591	38" x 3 yds.	$33.98 G
6-7592	50" x 1 yd.	$21.98 G
6-7593	50" x 3 yds.	$48.98 G
6-7585	38" x 60 yds.	$399.98 G

High Performance Resin Cleaner - Acetone Replacement



- Environmentally friendly.
- Versatile high solids resin cleaner designed for clean-up purposes in a typical composites manufacturing facility.
- Designed to remove uncured Polyester, Vinyl Ester, Epoxy Resin and Gel-Coat from tools, equipment and cleaning vessels.
- Aggressive enough to be an effective cleaner for cured resins under specific conditions.
- Non-corrosive formula is compatible with steel, aluminum and stainless steel.
- Dilution with water provides additional value and extended product life.

Order No.	Description	Price
6-7445	1 Quart	$31.98 G

Marpro M.E.K. Solvent



- An active ketone solvent for cleaning and dissolving epoxy and polyester resins and caulks.
- Slower evaporating than acetone.

Order No.	Description	Price
6-7456	Quart	$12.98 G
6-7457	Gallon, Case of 4	$47.98 G
6-7458	Gallon, Single	$35.98 G

Marpro Combination Mats

- Mat and woven roving combination.
- 24 oz. woven stitched to 1.5 chopped strand mat.

Order No.	Description	Price
6-7608	50" x 1 yd.	$27.98 G
6-7594	50" x 1 yd., Biaxial	$25.98 G
6-7588	6" x 50 yds.	$107.98 G
6-7589	12" x 50 yds.	$214.98 G
6-7606	50" x 60 lineal yds.	$381.98 G

- 12 oz. woven stitched to 1/2 chopped strand mat.

Order No.	Description	Price
6-7586	50" x 60 lineal yds.	$807.98 G

- 17 oz. woven stitched to 1/2 chopped strand mat.

Order No.	Description	Price
6-7587	50" x 60 lineal yds.	$876.98 G

Marpro Acetone



- Premium grade quality, 100% virgin acetone.
- A colorless, clear, fast drying solvent used extensively for cleaning brushes, rollers, as a degreaser, cleaner in fiberglass fabrication and formulations for removing paint, lacquer and varnish.

Order No.	Description	Price
6-7450	Quart	$8.98 G
6-7451	Gallon, Case of 4	$21.98 G
6-7452	5 Gallon	$99.98 G
6-7453	55 Gallon	$740.98 G
6-7454	Gallon, Single	$34.98 G

Marpro Denatured Alcohol



- An excellent fuel for alcohol burning stoves and lamps.
- Burns with a clear colorless flame.

Order No.	Description	Price
6-7460	Quart	$8.98 G
6-7461	Gallon	$22.98 G
6-7462	5 Gallon	$110.98 G
6-7463	Gallon, Single	$34.98 G

Marpro Xylene



- Use for paint thinning and brush cleaning.

Order No.	Description	Price
6-7473	1 Gallon	$30.98 G

Marpro Epoxy Glue



- High viscosity.
- One to one mix ratio.
- 45 minute pot life; sandable in 4 hrs.
- Excellent bonding to properly prepared surfaces.

Order No.	Description	Price
6-7520	Pint Set	$26.98 G
6-7521	Quart Set	$41.98 G
6-7522	Gallon Set	$131.98 G

Fibreglass Evercoat Epoxy Glue Syringe



- Crystal clear liquid formula is great for the small jobs demanding an epoxy.
- Sets in five minutes and has full 1,500 lb. strength in one hour.
- The plunger dispenses the correct 1:1 ratio every time.
- Marine formula resists water, brine, sun, chemicals and fuels.
- Bonds to wood, metal, glass, fiberglass, gelcoat, ceramics and most plastics.

Order No.	Mfg. No. / Description	Price
440075	(108017) .86 fl. oz.	$14.98 H

3M Marine Adhesive/Sealant 5200



- High performance polyurethane adhesive/ sealant becomes tack free in 48 hours, completely cures in 5 - 7 days with no shrinkage.
- Retains its strength above or below the waterline.
- Stays flexible too - allows for structural movement.
- Has excellent resistance to weathering and saltwater.
- Won't sag or flow in vertical or horizontal seams.

Order No.	Mfg. No. / Description	Price
856027	(05203) 3 oz. Tube, White	$16.98 H
856041	(05205) 3 oz. Tube, Black	$16.98 H
856053	(05206) 1 oz. Tube, White	$9.98 H
856091	(06500) 10 oz. Cartridge, White	$27.98 H
856104	(06501) 10 oz. Cartridge, Tan	$28.98 H
856116	(06502) 10 oz. Cart., Mahogany	$28.98 H
856130	(06504) 10 oz. Cartridge, Black	$31.98 H
856003	(21463) 5 Gallon, White	$1299.98 H

3M Marine Fastbond™ Contact Adhesive - 10 Neutral



- Used for bonding decorative laminates, aluminum, steel, wallboard, plywood, panels, wood and wood veneer, rubber, canvas and other porous and non-porous materials.
- Bonds immediately and permanently upon application eliminating the need for clamping or fixturing the materials being bonded.
- Offers exceptional high-bond strength and superior resistance to heat and sunlight.

Order No.	Mfg. No. / Description	Price
856538	(20272) 1 Quart	$42.98 H

3M Marine Adhesive/Sealant Fast Cure 5200



- A faster curing version of 3M Marine Adhesive/ Sealant 5200.
- The high performance polyurethane becomes tack free in one hour and fully cures in approximately 24 hours.
- The seal is extremely strong, retains its strength above or below the waterline.
- Stays flexible too - allows for structural movement.
- Stress caused by shock, vibration, swelling or shrinking is effectively absorbed. Has excellent resistance to weathering and salt water.

Order No.	Mfg. No. / Description	Price
856135	(05220) 3 oz. Tube	$18.98 H
856136	(06520) 10 oz. Cartridge	$33.98 H

3M Marine Adhesive/Sealant Fast Cure 4200



- A one-part general purpose polyurethane that chemically reacts with moisture to deliver flexible bonds with good adhesion to wood, fiberglass, gelcoat, plastics and metals.
- Paintable and sandable.
- Forms watertight, weather resistant seals on joints and boat hardware above or below the waterline.

Order No.	Mfg. No. / Description	Price
856140	(05260) 3 oz., White	$16.98 H
856142	(06560) 10 oz., White	$28.98 H
856144	(06564) 10 oz., Black	$28.98 H

Permatex Cold Weld Bonding Compound



- A 15-minute, two-part adhesive and filler system that eliminates the need for welding or brazing.
- Once cured, it can be drilled, sanded, painted or filed.
- Over 3,000 PSI shear strength on steel.
- Suggested applications: Aluminum, steel, brass, bronze, castings and stampings.

Order No.	Mfg. No. / Description	Price
545016	(14600) Two 1 oz. Tubes	$6.98 H

Permatex Super Glue Gel



- This no run gel formula "stays put" for precise application, even on vertical surfaces.
- Ideal for overhead or hard-to-reach surfaces.
- Suggested applications: Metal, plastics, rubber, vinyl, paper, wood, textiles and cork gaskets.

Order No.	Mfg. No. / Description	Price
545179	(82191) .07 oz. Tube	$2.98 H

Permatex Perma Poxy Epoxy



- Permatex PermaPoxy products are two part, clear epoxy adhesive systems.
- PermaPoxy Clear General Purpose epoxies are of a maximum strength formula that is available in several working times.
- Ideal for complex, multi-piece assemblies.
- They are water and solvent resistant and available in dual syringes or tubes.

Order No.	Mfg. No. / Description	Price
5450130	(84101) .84 fl. oz. Dual Syringe	$5.98 H

3M Marine Sealant Fast Cure 4000 UV



- Resistant to weathering, saltwater and stresses caused by joint movement.
- Seals between mechanically fastened joints on wood, fiberglass, metal and most plastics above and below the waterline.
- Applications include sealing deck to hull joints, thru-hull fittings, window and door frames, deck hardware, navigation lights, hatches and porthole frames.
- It is also paintable.

Order No.	Mfg. No. / Description	Price
856153	(05280) 3 oz. Tube	$15.98 H
856154	(06580) 10 oz. Cartridge	$24.98 H

©2014 Donovan Marine, Inc.

3M Super 77™ Multipurpose Adhesive

3M



- High tack, high coverage and fast drying for permanently attaching foils, carpeting, lightweight foams, paper, cardboard, felt and, cloth to painted or unpainted metals, wood and hardboard.
- Low VOCs.
- Does not contain ozone depleting CFCs.
- Sold 12 per case.

Order No.	Mfg. No. / Description	Price
856537	(21210) 24 fl. oz.	$29.98 H

3M Super Trim Adhesive

3M



- Fast acting, high strength, aerosol contact adhesive designed for two surface application.
- This adhesive is resistant to heat and plasticizing oils and is excellent for attaching vinyl, insulation, foam, padding and rubber parts to metal and other surfaces.
- Yellow.
- Sold 6 per case.

Order No.	Mfg. No. / Description	Price
856535	(08090) 19 fl. oz.	$30.98 H

3M General Purpose Adhesive Cleaner

3M



- A specially blended solvent that provides easy cleanup of most types of adhesives and quickly removes waxes, greases, oil and tars.
- Sold 6 per case.

Order No.	Mfg. No. / Description	Price
856536	(08984) 1 Quart	$24.98 H

3M Marine Grade Mildew Resistant Silicone

3M



- A mildew resistant non-sagging, moisture-curing silicone rubber sealant.
- Remains flexible.
- Adheres to bare and painted metal, fiberglass, glass, non-oily woods and many plastics and abraded rubbers.
- Ideal for head and galley sealing applications.
- Also excellent gasket adhesive and formed-in-place gasket material.

Order No.	Mfg. No. / Description	Price
856318	(08017) 3 oz. Tube, White	$14.98 H
856332	(08019) 3 oz. Tube, Clear	$14.98 H
856356	(08027) 10 oz. Cartridge, White	$34.98 H
856370	(08029) 10 oz. Cart., Clear	$34.98 H

Boatlife Silicone Rubber



- An all-purpose, non-corrosive, non-yellowing, mildew resistant, low-odor, 100% marine high quality silicone sealant.
- Tack-free in 30 minutes or less.
- Fully cured in 24 hours.
- For use above or below the waterline.
- Will not shrink, crack, or dry out.
- Superior flexibility and adhesion to fiberglass, plastic, metal, and wood.
- Retains flexibility and tensile strength even after years of exposure.
- Acid free cure will not corrode metal.

Order No.	Mfg. No. / Description	Price
248614	(1140) 2.8 fl. oz. Tube, Clear	$10.98 I
248616	(1141) 2.8 fl. oz. Tube, White	$10.98 I
248618	(1142) 2.8 fl. oz. Tube, Black	$10.98 I
248619	(1150) 310 ml Cartridge, Clear	$19.98 I
248620	(1151) 310 ml Cartridge, White	$19.98 I
248621	(1152) 310 ml Cartridge, Black	$19.98 I

Boat Life Life-Seal® Sealant



- A unique combination of marine silicone and polyurethane, formulated especially for fiberglass.
- Offers a fast-curing, low odor, high adhesion, non-sagging, non-corrosive, non-yellowing formula.
- May be used above or below the waterline.
- Will adhere to metal, glass, wood, Lexan, ABS and certain other materials.
- Cures in presence of water.
- Mildew resistant and acid free.

Order No.	Mfg. No. / Description	Price
248612	(1109) 1 oz. Tube, Clear	$9.98 I
248624	(1160) 2.8 oz. Tube, Clear	$13.98 I
248635	(1161) 2.8 oz. Tube, White	$13.98 I
248662	(1169) 10.6 oz. Cartridge, Clear	$25.98 I
248674	(1170) 10.6 oz. Cartridge, White	$25.98 I

Boat Life Life-Calk® Sealant



- A long lasting, permanently flexible marine polysulfide sealant which can be sanded, painted and used above and below the waterline.
- Tack-free in 1 to 3 days.
- Excellent resistance to teak oils, gasoline and diesel fuel.
- Will bond to fiberglass, wood, metal, glass and itself.
- Cures to a firm flexible rubber seal with excellent waterproofing and adhesion qualities.
- Can be applied to damp surfaces.

Order No.	Mfg. No. / Description	Price
248460	(1030) 2.8 oz. Tube, White	$15.98 I
248472	(1031) 2.8 oz. Tube, Black	$15.98 I
248509	(1033) 10.6 oz. Cartridge, White	$26.98 R
248511	(1034) 10.6 oz. Cartridge, Black	$26.98 R

Marpro Marine Grade Silicone Sealant



- Is a high performance silicone which exhibits excellent adhesion to glass, metal, porcelain, ceramic, fiberglass and other non-porous surfaces.
- Cures to a tough, rubbery and permanently flexible sealant.
- Sold in 4 Packs Only.

Order No.	Description	Price
7-2505	10.1 oz., Clear	$9.98 G
7-2507	10.1 oz., White	$9.98 G

Permatex Form-A-Gasket® No. 2 Sealant



- Slow-drying, non-hardening sealant designed for sealing cut gaskets and stamped parts.
- Allows for easy disassembly if required.
- Temperature range -65° F to 400° F; resists common shop fluids and fuels.
- Use where sealing is more important than adhesion.

Order No.	Mfg. No. / Description	Price
545078	(80015) 1.5 oz. Tube	$4.98 H

High-Temp Red RTV Silicone Gasket Maker



- OEM certified.
- Formulated for hi-temp applications or heavy duty use.
- Replaces almost any cut gasket by making gaskets that resist crackling, shrinking and migrating caused by thermal cycling.
- Temperature range -65° F to 650° F intermittent; resists auto and shop fluids.

Order No.	Mfg. No. / Description	Price
545129	(81160) 3 oz. Tube	$7.98 H

Permatex Aviation Form-A-Gasket® No. 3 Sealant



- Slow-drying, non-hardening brush-top sealant approved for use in aviation as well as automotive applications.
- Temperature range -65° F to 400° F; resists gasoline, oil and grease.
- Suggested applications: Close-fitting machined surfaces, sealing hoses, solid gaskets.

Order No.	Mfg. No. / Description	Price
545080	(80019) 4 oz. Bottle	$7.98 H

Sensor-Safe Blue RTV Silicone Gasket Maker



- Will not foul oxygen sensors.
- Replaces almost any cut gasket.
- Makes reliable "formed-in-place" gaskets that resist cracking, shrinking and migrating.
- Coats pre-cut gaskets to increase reliability.
- Temperature range -65° F to 500° F intermittent; resists auto and shop fluids.

Order No.	Mfg. No. / Description	Price
545092	(80022) 3 oz. Tube	$5.98 H

Permatex Ultra Blue® RTV Silicone Gasket Maker



- OEM specified.
- Sensor-safe, low odor, noncorrosive.
- Outstanding oil resistance and joint movement values.
- Eight times more flexible than cork/composite gaskets; three times more oil resistant than conventional silicones.
- Temperature range -65° F to 500° F intermittent; resists auto and shop fluids and vibration.
- Suggested applications: Valve covers, oil pans, timing covers, transmission pans, differential covers.

Order No.	Mfg. No. / Description	Price
545143	(81724) 3.35 oz. Tube	$8.98 H

Caulking Gun



- All welded construction.
- A reliable tool to deliver caulk.

Order No.	Mfg. No. / Description	Price
249107	(6001) Size: 1/10	$4.98 I

3M Marine Ultrapro™ High Temp Silicone Gasket



- A rapid curing form-in-place gasket adhesive/sealant for engines.
- It is a flexible, noncorrosive, oxygen sensor safe compound designed to be used as a gasket material for valve covers, oil pans and other engine and transmission applications.

Order No.	Mfg. No. / Description	Price
856382	(08672) 3 oz. Tube, Black	$16.98 H

3M Feathering Disc Adhesive



- It is specially formulated to allow multiple disc applications without adhesive buildup or paper delamination.
- Discs remove easily and cleanly.
- Sold 6 per case.

Order No.	Mfg. No. / Description	Price
856534	(52011) 5 oz. Tube	$32.98 H

3M Super Weatherstrip and Gasket Adhesive



- For adhering all types of weatherstrip to doors.
- Very fast drying, exceptional bonding strength.
- Used as a gasket adhesive on engines.
- Sold 6 per case.

Order No.	Mfg. No. / Description	Price
856533	(08001) 5 oz. Tube	$10.98 H

©2014 Donovan Marine, Inc.

Permatex Ultra Copper® RTV Silicone Gasket Maker



- OEM specified.
- Highest operating temperatures for 4 cylinder, turbocharged or high-performance engines.
- Sensor-safe, low odor, noncorrosive.
- Superior adhesion.
- Three times more oil resistant than conventional silicones; eight times more flexible than cut gaskets.
- Temperature range -75° F to 700° F intermittent; resists auto and shop fluids and vibration.
- Suggested applications: Exhaust manifolds headers, valve covers, oil pans, timing covers, water pumps, thermostat housings.

Order No.	Mfg. No. / Description	Price
545155	(81878) 3 oz. Tube	$8.98 H

Permatex Ultra Black® RTV Silicone Gasket Maker



- OEM specified.
- Fast-curing formula.
- Sensor-safe, low odor, noncorrosive.
- Meets performance specs of OE silicone gaskets.
- Retains high flexibility, oil resistance properties through use of patented adhesion system.
- Temperature range -75° F to 600° F intermittent; resists auto and shop fluids and vibration.
- Suggested applications: Valve covers, oil pans, intake manifold end seals, timing covers, transmission pans.

Order No.	Mfg. No. / Description	Price
545167	(82180) 3.35 oz. Tube	$8.98 H

Permatex Anaerobic Gasket Maker



- OEM specified.
- Noncorrosive gasketing material designed primarily for use on aluminum, iron, and steel flanged mating surfaces.
- Ideal for on-the-spot and emergency repairs, or when a conventional gasket is unavailable.
- Fills gaps up to .015" and cures to a solvent resistant seal that will not tear or decay during service.
- Suggested applications: Water pumps, thermostat housings, transmission pans, transmission case covers, transaxle casings, o-ring replacement.

Order No.	Mfg. No. / Description	Price
545042	(81813) 50 ml Tube	$19.98 H

Boatlife Marine Instant Gasket



- Silicone gasket compound withstands temperatures up to 500° F.
- Quickly and easily replaces any size gasket.
- Fast-curing, high-performance formula will not corrode metal.
- Ideally suited for marine engines.

Order No.	Mfg. No. / Description	Price
248575	(1075) 2.8 fl.oz. Tube	$15.98 I

Boat Life Life-Calk® Solvent and Cleaner



- Removes uncured Life-Calk from hands, tools and clothing.
- An excellent oil base paint thinner.
- Used as a degreaser for tools and equipment.
- It is a strong cleaning solvent - not recommended to clean up fiberglass or painted surfaces.

Order No.	Mfg. No. / Description	Price
248573	(1056) 1 Pint	$28.98 I


Boat Life Release Adhesive and Sealant Remover



- Ideal for removing cured silicone, polyurethane, and polysulfide.
- Removes tapes, labels, and decals from metal, fiberglass and wood.
- Check compatibility on small area on painted surfaces and plastics.

Order No.	Mfg. No. / Description	Price
248579	(1288) 16 oz.	$53.98 R

Boat Life Life-Calk® Primer



- Adds adhesive strength to Life-Calk Products.
- For use on oily woods such as teak.
- May be used to prime metal, glass and fiberglass.
- Fast dry formula permits priming and caulking same day.

Order No.	Mfg. No. / Description	Price
248585	(1059) 8 oz.	$24.98 R

3M Specialty Adhesive Remover



Order No.	Mfg. No. / Description	Price
856541	(38984) 1 Quart	$45.98 H

Marpro Corrosion Inhibitor



- Specially formulated anti-corrosion sealer.
- Featured capillary reaction, flows and penetrate into hard to reach areas.
- Ozone safe hydrocarbon product.
- Excellent sprayable anti-corrosion performance.
- Non-drying and easy to apply.

Order No.	Description	Price
6-4050	12 oz.	$8.98 I

Marpro Floatation Foam



- A 1 to 1 mix liquid urethane foam with 2 pounds per cubic foot density which is not affected by solvents or gasoline.
- Produces 4 cubic feet per gallon.
- It bonds to wood, metal or fiberglass and foams wherever it is poured.
- Provides extra flotation in boats and sound proofs and insulates hulls, walls, floors, seats, decks, or any cavity.
- Do not use below 70°.

Order No.	Description	Price
6-7560	2 Quart, 2 lbs. Density	$46.98 G
6-7562	2 Gallon, 2 lbs. Density	$156.98 G
6-7565	2 Quart, 4 lbs. Density	$46.98 G
6-7566	2 Gallon, 4 lbs. Density	$156.98 G

T-9 Rust and Corrosion Protection Lubrication



- Waterproof lubrication.
- Combination of solvents, lubricants and waxes designed for penetration, moisture displacement, lubrication and protection.
- Loosens rusty and corroded parts.

Order No.	Mfg. No. / Description	Price
290700	(T90004) 4 oz.	$9.98 Q
290712	(T90012) 12 oz.	$18.98 Q

Corrosion Technologies CorrosionX



- RECENTLY NAMED ONE OF THE TOP 10 BOAT CARE PRODUCTS EVER, CorrosionX is the most advanced and effective corrosion prevention compound, lubricant and penetrant in the world!
- Although it may look like an ordinary oil-based anti-corrosion spray, CorrosionX utilizes a revolutionary technology called Polar Bonding that does far more than merely slow down the corrosion process; CorrosionX actually kills existing rust and corrosion (keeping it from spreading) and provides long-term protection against rust and corrosion on any metal surface.
- Because CorrosionX bonds to metal, it doesn't wash off, so it lubricates metal wear surfaces longer and more effectively (virtually eliminating wear) than any other product.
- It also penetrates quicker than products specifically designed for that purpose.
- CorrosionX contains less than 1/10 the Volatile Organic Content (VOCs) as most other spray lubes (so it's safe on the environment), and it's also excellent for restoring and preventing corrosion on electronics.

Order No.	Mfg. No. / Description	Price
302953	(90101) 6 oz.	$9.98 D
302954	(90102) 16 oz.	$18.98 E

Corrosion Technologies CorrosionX Heavy Duty



- NAMED "BEST OF THE BEST" by Field and Stream magazine, CorrosionX Heavy Duty is for super long-term protection against serious rust and corrosion assault.
- There is no other product like it on the market today.
- Heavy Duty is a high performance, thick-film version of CorrosionX.
- It was developed specifically to provide maximum protection against moisture intrusion and resulting rust and corrosion.
- Highly recommended for use on boat trailers.
- CorrosionX Heavy Duty forms a dripless, dynamic, non-hardening, self-healing film that stubbornly resists erosion by splash or spray - including complete submersion in saltwater.
- It will slowly penetrate existing rust and corrosion, remove moisture and stop electrolysis.
- Unlike wax coatings, it will not dry out, stiffen or crack under stress.
- It will remain for hours on outdrives, even while underway!

Order No.	Mfg. No. / Description	Price
302961	(90104) 12 oz.	$18.98 E

Forespar MareLube™



- General purpose and valve lubricant.
- Safe on rubber, plastic, bronze and painted surfaces.
- Specially formulated synthetic lubricant designed for a variety of uses around boats and marine environments.
- Long lasting PTFE.
- Works equally well in fresh or salt water.

Order No.	Mfg. No. / Description	Price
354525	(770050) Synthetic Lubricant with TPFE	$13.98 I

Forespar MareLube TEF 45



- Maximum 45% PTFE lubrication.
- Long term protection for wet or submerged parts.
- Excellent dissimilar metal corrosion barrier & premium dielectric grease for power connections.
- Highly water resistant Marine lubrication containing 45% PTFE.
- Great for Heavy Loads and Bi-Metal Corrosion Protection.

Order No.	Mfg. No. / Description	Price
354540	(770065) 6cc Syringe	$16.98 I
354545	(770066)	$21.98 I
354550	(770067) 4 oz. Jar	$44.98 I

CRC Marine White Lithium Grease with Teflon



- Provides superior lubrications and durability in any weather and most temperatures.
- It is a versatile grease designed for applications requiring a long grease life.
- Will not wash off, melt or freeze.

Order No.	Mfg. No. / Description	Price
290344	(06037) 10 oz.	$5.98 H

Forespar MareLube Extra



- General purpose marine lubricant.
- Extra provides long lasting and water resistant PTFE lubrication barrier that controls rust and bi-metal corrosion.

Order No.	Mfg. No. / Description	Price
354530	(770056)	$14.98 I

OMC® SysteMatched™ Anti Corrosion Spray



- Protects engine from external rust and corrosion

Order No.	Mfg. No. / Description	Price
B765745	(765745) 11 oz. Spray	$10.99 H

CRC Marine Heavy Duty Silicone



- Clean, odorless, highly water resistant.
- Fights corrosion.
- Lubricates wood, nylon, rubber, metals, canvas and leather.
- Eliminates squeaking and binding.
- Lubricates from -40° F to 400° F.

Order No.	Mfg. No. / Description	Price
290457	(06077) 9 oz.	$4.98 G

Forespar MareLube™ Valve Lubricant



- Liquid is non toxic, bio-degradeable formula that can be conveniently poured directly into your drain system to lubricate valve and sea cocks without disassembly.
- With 33CC Syringe.

Order No.	Mfg. No. / Description	Price
354535	(770055) 16 oz.	$25.98 I

OMC® SysteMatched™ DPL Lubricant



- Excellent anti-corrosion protection
- Penetrates rust
- Displaces moisture
- Environmentally responsible, safe for wood, vinyl, rubber or paint
- Use on boats, motors, trailers, cars, trucks, and sporting equipment

Order No.	Mfg. No. / Description	Price
B765739	(765739) 12 oz. Spray	$10.99 H

OMC® SysteMatched™ Heavy Duty Lube



- Heavy duty anti-corrosion and anti-rust protection.
- Penetrates rust, reduces friction and displaces moisture.
- Environmentally responsible; won't harm electrical contacts, rubber, vinyl, wood or paint.
- Use on boats, motors, trailers, cars, trucks, sporting equipment and household equipment.

Order No.	Mfg. No. / Description	Price
B765744	(765744)	$9.99 H

©2014 Donovan Marine, Inc.

CRC Marine Heavy Duty Corrosion Inhibitor



- A long term, flexible corrosion inhibitor that protects and preserves metal surfaces, electrical connections, engine components and fasteners, subject to salt spray and high humidity.
- Also provides effective protection for steering and throttle linkages.

Order No.	Mfg. No. / Description	Price
290306	(06026) 10 oz.	$8.98 H

Marpro Multi-Purpose Lubricant



- A high quality multipurpose, four-way lubricant.
- Penetrates, lubricates, protects, cleans, repels moisture, fights rust.
- Easy to apply.

Order No.	Description	Price
6-4060	11 oz.	$7.98 I

Penray Open Gear lube



- Fortified with a finely dispersed Moly Sulfide in addition to a petroleum based extreme pressure lubricant.
- Ideal for use on all open gears.
- Resists temperature extremes.
- Reduces friction from metal-to-metal contact.

Order No.	Mfg. No. / Description	Price
604324	(7003) 11 oz.	$11.98 Q

Star Brite White Lithium Grease



- Superior quality compared to traditional greases.
- Ideal for marine, auto and shop lubrication projects.
- Can be used to lubricate plastic components.
- Helps prevent corrosion; provides a barrier to moisture.
- Works in most standard grease guns.

Order No.	Mfg. No. / Description	Price
451746	(026214) 14 oz.	$9.98 G



Multi-Purpose Lithium Grease

- An ideal general-purpose lubricant.
- Excellent adhesion for maximum protection.

Order No.	Mfg. No. / Description	Price
431285	(25914) 14 oz.	$9.98 G

CRC Freeze-Off® Super Penetrant



- A unique formula that immediately drops the temperature of the area in direct contact with the spray.
- The freezing effect cracks rusted surfaces, allowing Freeze-Off to reach deeper and work more effectively than other penetrants.
- Low VOC Formula.

Order No.	Mfg. No. / Description	Price
290128	(05002) 11.5 oz.	$9.98 G

Marpro White Lithium Grease



- A high temperature premium grease.
- Serves as an excellent gelling lubricant for most marine, industrial and automotive applications.
- Excellent elasticity and recovery for a wide range of operating temperatures.
- Superior water resistance.

Order No.	Description	Price
6-4055	11 oz.	$8.98 I

Penray PR-3 Wrench-Eze and Lubricant



- Frees rusted parts and lubricates sticky parts.
- Penetrates, lubricates, stops rust and corrosion.

Order No.	Mfg. No. / Description	Price
604315	(4516) 11 oz.	$7.98 Q

Permatex Anti-Seize Lubricant



- A highly refined blend of aluminum, copper and graphite lubricants.
- Use during assembly to prevent galling, corrosion and seizing and to assure easier disassembly.
- Temperature range: -60° F to 1,600° F.
- Salt, corrosion and moisture resistant.

Order No.	Mfg. No. / Description	Price
545105	(80078) 8 oz., Brush-Top Bottle	$10.98 H
545131	(81343) 1 oz., Carded Tube	$4.98 H

CRC Marine Formula 6-56 - Multi-Purpose Lubricant



- Long lasting, superior lubrication that resists water and salt spray.
- Drives out moisture that can cause electrical failures and hard starting.
- Penetrates deep through rust and corrosion to loosen frozen parts.
- Starts wet engines.

Order No.	Mfg. No. / Description	Price
290089	(06005) 5 oz.	$4.95 H
290091	(06006) 9 oz.	$5.98 H
290104	(06007) 11 oz.	$6.98 H
290117	(06008) Gallon	$42.98 Q

CRC Magic Oil™ Lock Lubricant and De-Icer



- Long lasting graphite formula lubricates seized and frozen locks allowing for smooth operation.
- Spray lightly in the keyhole of the lock.

Order No.	Mfg. No. / Description	Price
290540	(05130) 0.6 oz. Aerosol	$3.98 H

Star Brite Marine Formula White PTEF® Lubricant



- Special PTEF formula will not wash off.
- Protects from -65° F to +650° F.
- Reduces wear and friction.
- Non-toxic, non-staining.
- The ultimate lubricant - exceeds performance of normal grease.
- Great on zippers, winches, etc.

Order No.	Mfg. No. / Description	Price
627161	(85504) 4 oz.	$14.98 G

CRC Marine Premium Electronics Grease



- Seals, protects and insulates electrical contacts from moisture.
- Lubricates and seals rubber and plastic parts.
- Waterproofs components and contacts to protect against arcing.
- Improves electrical performance during adverse conditions such as rain and fog.

Order No.	Mfg. No. / Description	Price
290267	(06106) 3.3 oz.	$13.98 H

Corrosion Technologies ReelX

CorrosionX





- CHOICE OF THE U.S. LONG CASTERS TEAM AND THE FACTORY LUBE FOR MANY OF THE WORLD'S TOP REEL MANUFACTURERS.
- ReelX is the new, hi-tech, extreme-pressure reel lubricant that virtually eliminates wear, disrupts existing corrosion and prevents new corrosion or rust from forming.
- ReelX is perfect choice for all spinning and casting reels.
- Starting with the revolutionary CorrosionX core technology, Corrosion Technologies added an exotic, extreme pressure additive specifically engineered to make fishing reels achieve their ultimate performance.
- ReelX contains no wax, tar, silicone or other solids, so it will never gum-up.
- ReelX will outperform any other lubricant on a fishing reel period.
- And it is backed with a 100% Money Back Guarantee.
- ReelX displaces moisture, and will not harm plastic, Teflon or monofilament.
- ReelX is not harmful to the environment.
- The choice of the U.S. Longcasters Team (with ReelX, the longcasters are able to achieve casts that routinely exceed 260 yards as measured by laser, accurate to withing +/- 1/2".
- Used by many of the world's top reel manufacturers, including: Penn Fishing Tackle Manufacturing Company, Shimano, Accurate Fishing Products, Bauer Premium Fly Reels, Inc. and Okuma Fishing Tackle Corporation, among others.

Order No.	Mfg. No. / Description	Price
302949	(77000)	$158.98 F

CRC Marine Battery Cleaner



- Removes corrosion from cables, terminals, cases, and hold-downs.
- Neutralizes acid spills.
- Assures maximum battery current flow and promotes longer life.

Order No.	Mfg. No. / Description	Price
290433	(06023) 11 oz.	$4.49 H

CRC Marine Battery Terminal Protector



- Specially designed to protect battery terminals form corrosion, a leading cause of hard starting and battery failure.
- Provides a lead free soft protective coating.

Order No.	Mfg. No. / Description	Price
290445	(06046) 7.5 oz.	$5.98 H

CRC Marine QD Electronic Cleaner



- Cleans sensitive electronic components and contacts.
- Use on electronic engine controls, data sensors and wiring, GPS, fishfinders, computers, VCRs, stereos, CD and DVD players.
- Helps prevent contact failure or malfunction.
- Evaporates quickly.

Order No.	Mfg. No. / Description	Price
290255	(06102) 11 oz.	$7.98 H

Penray Electric Motor Cleaner



- Safe, non-flammable cleaning agent for electrical system parts.
- Evaporation is quick, leaving no residue.
- Extension tube is included for more exacting spray pattern.

Order No.	Mfg. No. / Description	Price
604327	(7014) 11 oz.	$8.98 Q

CRC Empty Trigger Bottle



- 24 oz. bottle features volume measurements as well as blank lines and boxes where the user can add their own product and safety information.

Order No.	Mfg. No. / Description	Price
290522	(14021) 24 oz.	$6.98 H

Flitz BBQ Grill Care Kit



- Everything needed to keep a stainless steel grill looking its best!
- An Eco-Safe Green Product.
- Kit Includes:
  Stainless Steel Cleaner - 1.7 oz.
  Stainless Steel Polish - 1.7 oz.
  Liquid Metal Polish - 3.4 oz.
  Microfiber Cloth - 16" x 16"

Order No.	Mfg. No. / Description	Price
608120	(BBQ 41504) BBQ Grill Care Kit	$23.98 H

Flitz Gun & Knife Care Kit



Order No.	Mfg. No. / Description	Price
608135	(KG 41501) Gun & Knife Care Kit	$23.98 H

©2014 Donovan Marine, Inc.

Spray Nine Marine Grez-Off



- Heavy duty biodegradable formula - quickly and completely cuts through oil, grease and grime.
- Ideal for: Outboards, inboards, I/O's, asphalt drives, dock and mooring, equipment and more.
- Great bilge cleaner too.

Order No.	Mfg. No. / Description	Price
437079	(30232) 32 oz.	$8.98 I

Penray Universal 2-Way Test Strips



- Check the condition of your cooling system in less than two minutes.
- Extremely precise.
- Determines freeze point and nitrite levels.

Order No.	Mfg. No. / Description	Price
603959	(TS-100) 50 Per Bottle	$38.98 Q

Penray 2001 On-Line Cooling System Cleaner



- Cleans diesel engine cooling systems while they remain in service.
- An excellent alternative to in-shop cleaning for engines having only light scale and limited corrosion product formation.
- Ideal for periodic on-the-road cleaning, as it removes harmful mineral scale and oxide deposits.
- 1/2 gallon treats 8 gallons.

Order No.	Mfg. No. / Description	Price
603957	(200164) 1/2 Gallon	$24.98 Q

Pencool® 3000 with Stabil-Aid® Cooling System Treatment



- An advanced cooling system treatment that helps prevent the formation of gel deposits in cooling systems.
- These deposits can plug radiator passages, aftercoolers, and oil coolers, and can cause excessive water pump wear.
- Blocks the formation of this gel, conditions cooling system water, and protects all cooling system metal components from corrosive attack.
- Use to maintain proper cooling system heat transfer characteristics and long engine life.

Order No.	Mfg. No. / Description	Price
604252	(300016) 16 fl. oz.	$8.98 Q
604264	(300064) 1/2 Gallon	$33.98 Q
604276	(300005) 5 Gallon	$202.98 Q
604288	(300055) 55 Gallon	$1,724.98 Q

Pencool® 2000 Engine Cooling System Treatment



- A patented liquid formula to keep diesel engines running cleaner.
- This easy-to-use product reduces scaling and corrosion and acts as a lubricant in the cooling system.
- Controls formation of harmful scale deposits, reduces metal corrosion and cavitation erosion, and lubricates the water pump and other metal surfaces.
- Eliminates messy filters.

Order No.	Mfg. No. / Description	Price
603945	(200064) 1/2 Gallon	$19.98 Q
604214	(200005) 5 Gallon	$71.98 Q
604228	(200055) 55 Gallon	$732.98 Q

Rust Free Rust and Stain Remover



- Removes rust from any surface: Steel, cast iron, stainless, fiberglass, chrome, tile, porcelain, concrete, vinyl and cloth.

Order No.	Mfg. No. / Description	Price
290736	(RF0008) 8 fl. oz.	$13.98 Q

Snee Rust Inhibitor Concentrate Phosphatizer



- A blend of acids and detergents that neutralizes rust and forms a phosphatized surface that inhibits the reformation of new rust and scales and prepares metal for painting.
- This rust solvent can be used as a preventative corrosion inhibitor.

Order No.	Mfg. No. / Description	Price
437011	(06 DC550) 1 Gallon	$29.98 F

Snee Rust Dissolve - Ready-to-use Phosphatizer

- Formulated to remove rust from metal surfaces, this compound begins to penetrate the scale and rust upon application and protects them with a fine coating which inhibits further rusting.
- Excellent for preparing metal surfaces for primer paints or other treatments.
- This is also a preventative corrosion inhibitor.

Order No.	Mfg. No. / Description	Price
200035	(06 RD) 1 Gallon	$18.98 F

OSPHO Rust and Stain Remover



- Stops rust and prepares rusted surfaces for painting.
- When applied to rusted surfaces Ospho causes rust to chemically change to iron osphate, an inert hard substance that turns the metal black.
- Note: Not UPSable.

Order No.	Mfg. No. / Description	Price
437036	Quart	$17.98 G
437037	Gallon	$40.98 G

Snee Endall-Rust Converter



- Surface protector converts rust to a non-corrosive material and forms a highly protective coating.
- Reduces the need for sandblasting.
- Non-acid.

Order No.	Mfg. No. / Description	Price
437035	(02 EAR) 1 Gallon	$88.98 F

Dr. Shrink Heat Tool



- It is a lightweight (2.1 pounds), yet powerful propane fueled Shrink Wrap Gun.
- It puts out 300,000 BTU's at maximum power, but is variable from 10,000 BTU's upward through use of the trigger.
- Kit includes: 25' propane hose, Adjustable regulator, Professional training CD, and 18" extension.
- Optional 24" and 40" extensions.

Order No.	Mfg. No. / Description	Price
227896	(DS-789) Heat Tool	$761.98 I

Shrink Wrap Access Doors



Order No.	Mfg. No. / Description	Price
281105	30" x 36", Blue	$24.98 Q
281117	36" x 48", Blue	$27.98 M
281206	30" x 36", White	$20.98 K
281218	36" x 48", White	$28.98 K
281120	36" x 48", White	$27.98 M
281307	30" x 36", Clear	$24.98 K
281319	30" x 48", Clear	$26.98 M
281118	36" x 48", Clear	$27.98 M

Incom Heat Shrink Tape

INCOM



- 9 mil-backed tape with no UV inhibitors.
- Heat shrink tape is designed to tape seams, patch holes and secure zipper access doors.
- Length 180'.

Order No.	Description	Price
227909	Width 2", Blue	$19.98 Q
227911	Width 4", Blue	$38.98 G
227923	Width 6", Blue	$55.98 G
227935	Width 2", White	$19.98 I
227947	Width 4", White	$38.98 I
227959	Width 6", White	$55.98 I
227961	Width 2", Clear	$19.98 I
227973	Width 4", Clear	$38.98 I
227985	Width 6", Clear	$55.98 I

Shrinkfast 998 Heat Tool



- With its UL listing, the 998 is designed to handle the toughest industrial jobs with several built-in safety mechanisms: A "dead man" trigger is designed to automatically shut off the flame once the trigger is released.
- Also, the Shrinkfast patented combustion cycle allows the flame to burn outside the nozzle, which remains cool to the touch, even after extensive use.
- 212,000 BTUs.

Order No.	Mfg. No. / Description	Price
279504	(998)	$929.98 E
279516	(200) 6' Extension	$599.98 Q

Shrinkfast 975 Heat Tool

- This heat shrink tool is the most economical gun suitable for shrink wrapping your boat.
- It is completely portable and hand-held.
- With no electrical connections and weighing only three and one half pounds, it can easily be carried to any job inside or out.

Order No.	Mfg. No. / Description	Price
279528	(975) 125,000 BTUs	$898.98 E

Dr. Shrink Prepaid "REBAG" Kit



- Put a prepaid "REBAG" recycling kit in each boat you cover (two bags in boats over 26' long).
- When the boat is uncovered the shrink wrap is put in the "REBAG", the designated shipper is called and the shrink wrap is picked up at your doorstep at no additional charge.

Order No.	Mfg. No. / Description	Price
227810	(DS-RBAG-K) "REBAG" Kit	$89.98 I

Dr. Shrink Film Cutting Knives



- Great for cutting shrink wrap film and the various tapes and installing the access doors.

Order No.	Mfg. No. / Description	Price
228103	(DS-007D) Film Cutting Knife, Disposable	$3.98 R
228115	(DS-007) Film Cutting Knife, Professional	$17.98 Q
228118	(DS-007R) Replacement Blades for DS-007	$9.98 Q

©2014 Donovan Marine, Inc.

Shrink Wrap Rolls - 180#



- Our Shrink Wrap is tough!
- U.V. inhibitors added.
- Best quality guaranteed!
- Shrinks uniformly and easier than most others.
- 7 mil. 180# rolls.

Order No.	Mfg. No. / Description	Price
205662	14' x 383', Blue	$436.98 I
205674	16' x 335', Blue	$436.98 I
205676	17' x 315', Blue	$436.98 I
205678	18' x 298', Blue	$436.98 I
205686	20' x 268', Blue	$436.98 I
205698	24' x 223', Blue	$436.98 I
205713	28' x 191', Blue	$436.98 I
205725	32' x 167', Blue	$436.98 I
205737	40' x 134', Blue	$436.98 I
205749	14' x 383', White	$436.98 I
205751	16' x 335', White	$436.98 I
205753	17' x 315', White	$436.98 I
205756	18' x 298', White	$436.98 I
205763	20' x 268', White	$436.98 I
205775	24' x 223', White	$436.98 I
205787	26' x 206', White	$436.98 I
205799	28' x 191', White	$436.98 I
205802	32' x 167', White	$436.98 I
205804	36' x 149', White	$436.98 I
205814	40' x 134', White	$436.98 I
205889	20' x 268', Clear	$738.98 I
205903	26' x 206', Clear	$436.98 I
205927	32' x 167', Clear	$436.98 I

Taylor Made D-Icer



- It is a powerful submersible motor-driven water circulation unit that prevents ice formation during winter months by continuously propelling warmer subsurface water up to the surface.
- It's ideal for use around a boat or dock.
- The unique one-piece design of the shroud prevents large debris from being sucked through and damaging the propeller, a major cause of failure in other ice prevention devices.
- Optional thermostat control is available, as well as an optional flotation collar to hold the D-Icer near the surface for aerating.
- Oil-Free design is more energy efficient than the typical Oil-Filled units.
- 2 Year Warranty.

Order No.	Mfg. No. / Description	Price
279768	(6208D) D-Icer 3/4 HP, 120 Volt	$781.98 F
279782	(6205D) D-Icer 1/2 HP, 120 Volt	$699.98 F
279809	(6215) Thermostat for Salt Water	$113.98 F

Shrink Wrap Rolls - 60#

- Note: UPSable

Order No.	Mfg. No. / Description	Price
205825	14' x 128', 60#, 7 Mil., White	$203.98 I
205835	14' x 128', 60#, 7 Mil., Blue	$203.98 I
205830	17' x 105', 60#, 7 Mil., Blue	$203.98 I
205820	17' x 105', 60#, 7 Mil., White	$203.98 I
205822	20' x 89', 60#, 7 Mil., White	$203.98 I
205824	24' x 74', 60#, 7 Mil., White	$203.98 I
205826	28' x 63', 60#, 7 Mil., White	$203.98 I

Shrink Wrap Rolls - 80#

- Note: UPSable

Order No.	Mfg. No. / Description	Price
205840	40' x 60', 80#, 7 Mil., White	$271.98 I

Shrink Wrap Rolls - 200#



- Our Shrink Wrap is tough!
- U.V. inhibitors added.
- Best quality guaranteed!
- Shrinks uniformly and easier than most others.

Order No.	Mfg. No. / Description	Price
373996	14' x 425', White	$706.98 I
374000	17' x 350', White	$706.98 I
374010	20' x 298', White	$706.98 I
374020	24' x 248', White	$706.98 I
374030	26' x 229', White	$706.98 I
374040	28' x 213', White	$706.98 I
374050	32' x 186', White	$706.98 I
374060	40' x 149', White	$706.98 I
374065	14' x 425', Blue	$706.98 I
374067	17' x 350', Blue	$706.98 I
374071	20' x 298', Blue	$706.98 I
374175	24' x 248', Blue	$706.98 I
374179	26' x 229', Blue	$706.98 I
374183	28' x 213', Blue	$706.98 I
374287	32' x 186', Blue	$706.98 I
374291	40' x 149', Blue	$706.98 I
374042	28' x 213', Clear	$706.98 I

Incom Preservation Tape - White



- Has a very aggressive adhesive on it that won't leave an adhesive residue, plus UV inhibitors in the backing for long term usage.
- This is the tape to use to adhere the edges of your shrink wrap film to the hull for transport, to prevent air from getting underneath.

Order No.	Description	Price
227997	2" W x 108' L x 10 mil.	$23.98 I
228002	3" W x 108' L x 10 mil.	$34.98 I
222801	4" W x 108' L x 10 mil.	$46.98 I

Blue Poly Covers



- 8 X 8 weave, woven and coated polyethylene.
- P.P. Rope in hem.
- Aluminum grommets every 3 ft. including corners.

Order No.	Mfg. No. / Description	Price
459051	(MT68) 6' x 8'	$6.98 M
459102	(MT810) 8' x 10'	$9.98 M
459152	(MT812) 8' x 12'	$12.98 M
459203	(MT1012) 10' x 12'	$15.98 M
459253	(MT1015) 10' x 15'	$18.98 M
459354	(MT1216) 12' x 16'	$24.98 M

Dr. Shrink Weather-Tight Self-Adhesive Vent



- Made of sturdy polyethylene with maximum UV inhibitors and screened bases.
- 4" x 5" x 1-1/8" high.

Order No.	Mfg. No. / Description	Price
227719	(DS-683)	$4.58 F

Metal Buckles



- Used to connect strap ends.
- Sold 100 per bag.

Order No.	Mfg. No. / Description	Price
227834	(B-4/1) 1/2" Standard	$8.98 H
227846	(B-6) 3/4" Heavy Duty	$10.98 H

Star Brite -50° F RV/Marine Anti-Freeze



- Protects water systems from freeze ups.
- Use in boats, RV's, vacation homes and pools.
- Safe for copper, brass and all types of plastic.
- Non-toxic propylene glycol formula.
- Pink Color.
- Gallons sold 6 per case.

Order No.	Mfg. No. / Description	Price
452209	(31400) Gallon	$10.98 I
452212	(314G55) Drum	$484.98 D

Winter Safe -50° F Anti-Freeze



- Safe for copper, brass and all types of plastic.
- Non-toxic virgin propylene glycol formula.
- Ethanol-free.
- Protects water systems and engines from freeze ups during storage.
- Contains corrosion inhibitors to protect all metal engine components and seals.


Order No.	Mfg. No. / Description	Price
452235	(31200) Gallon	$9.98 D
452241	(312G55) 55 Gallon	$456.98 D

Dr. Shrink Support Pole Caps

- Use with 2 x 4 to create your own supports.

Order No.	Mfg. No. / Description	Price
227757	(DS-CAPS) Pole Caps	$3.45 F
227767	(DS-BCAP) Pole Caps Bottom	$4.68 F

Stealth Self-Piercing Louvered Vent



- Approximate dimensions 8" long x 4.5" wide x 1" high.
- This vent easily pieces shrink wrap to allow good air flow.

Order No.	Mfg. No. / Description	Price
222722	(BSP-1) White	$2.98 I

Dr. Shrink Strap Tensioning Tool



- Used to tighten straps.
- For standard or heavy duty strapping.

Order No.	Mfg. No. / Description	Price
227858	(DS-15)	$97.98 Q

50/50 Ready-To-Use Antifreeze Coolant



- Ideal for year-round use in all engines, including boats and cars.
- Safe for all engines, including those with aluminum blocks.
- The low-silicate formula uses special corrosion inhibitors to protect aluminum, brass, copper and solder.
- Died green for easy visibility; contains ethylene glycol.
- Sold 6 per case.

Order No.	Mfg. No. / Description	Price
452199	(30800) 1 Gallon	$22.98 D

Star Brite -100° F RV/Marine Anti-Freeze



- Non-toxic propylene glycol formula.
- Safe for use in all engines, including aluminum.
- Contains advanced corrosion inhibitors to protect all metals.
- Blue Color.
- Gallons sold 6 per case.

Order No.	Mfg. No. / Description	Price
452214	(31500) Gallon	$18.98 D
452217	(315G55) Drum	$919.98 D

Dr. Shrink Foam Padding



- For padding sharp edges.
- 6" x 75' roll.

Order No.	Mfg. No. / Description	Price
227795	(DS-675F)	$33.98 I

Woven Cord Strapping



- Used to hold supports and for perimeter band and belly bands.

Order No.	Mfg. No. / Description	Price
227808	(40WPT) 1/2" x 1,500'	$55.98 I
227809	(P40CW) 1/2" x 3,900'	$144.98 I
227822	(P60CW) 3/4" x 2,100'	$123.98 Q

3M Preservation Sealing Tape - 4811



- A white polyethylene backing with a unique rubber adhesive that provides excellent performance as an industrial preservation tape.
- 24 rolls per case.

Order No.	Mfg. No. / Description	Price
855410	(62334) 2" x 36 yards	$79.98 H

Star Brite E.G. Anti-Freeze



- For year-round use.
- Special premium low silicate formula.
- Safe for all engines including aluminum.
- Contains corrosion inhibitors which protect against rust and corrosion of aluminum, copper, solder and brass.
- Sold 6 per case.

Order No.	Mfg. No. / Description	Price
452201	(30200N) 1 Gallon	$30.98 I

Star Brite -200° P.G. Anti-Freeze



- Safe for all engines including aluminum.
- Non-toxic propylene glycol formula.
- Provides burst protection down to -100° F.
- Contains corrosion inhibitors to protect all metal engine components and seals.
- Concentrate.
- Gallons sold 6 per case.

Order No.	Mfg. No. / Description	Price
452259	(31600) 1 Gallon	$26.98 I
452221	(316G55) 55 Gallon	$1553.98 D

©2014 Donovan Marine, Inc.

Rotella ELC Extended Life Coolant/Anti-Freeze



- It is recommended for use in heavy duty diesel, gasoline and natural gas engines by Caterpillar, Navistar, Cummins, Detroit Diesel, Volvo and other manufacturers.
- Made with ethylene glycol.
- Full cases only.

Order No.	Mfg. No. / Description	Price
980955	(ELC100) Concentrate, Gallon	$42.98 Q
980967	(ELC50) Pre-Diluted 50/50, Gallon	$27.98 Q

Star Brite Do-It-Yourself Winterize Kit



- Kit quickly and easily adds antifreeze to inboard and outboard engines.
- Removes zebra mussels and other marine growth to keep your engines running cool.

Order No.	Mfg. No. / Description	Price
460903	(35001) Winterize Kit	$68.98 Q

Buck-Algonquin Heavy Duty Stud Type Packing Boxes



- Cast bronze plain finish.
- Complete with hose and clamps.

Order No.	Shaft Size	Hose End ID	Price
265138	1-1/4"	2-1/4"	$285.98 F
265151	1-1/2"	2-1/2"	$239.98 F
265164	1-3/4"	3"	$389.98 F
622263	1-3/4"	3-1/2"	$378.98 F
265177	2"	3"	$374.98 F
622274	2"	3-1/2"	$378.98 F
265190	2-1/4"	3-1/2"	$472.98 F
265203	2-1/2"	3-1/2"	$459.98 F



- A complete assembly includes all parts shown (2 clamps).
- The nut, spud and body are finely machined cast bronze.
- Hose is 5 ply marine exhaust hose.
- Clamp is all stainless steel up to and including 1-1/4" sizes.
- Larger sizes have heavy duty malleable iron clamp with rustproof plating.

Order No.	Shaft Size	Hose End ID	Price
541513	1"	1-3/4"	$109.98 F
265047	1-1/4"	2-1/4"	$159.98 F
265073	1-1/2"	2-1/2"	$186.98 F
265086	1-3/4"	3"	$309.98 F
265099	2"	3"	$318.98 F

Camco Anti-Freeze



- Protect your RV's potable water system from freeze damage.
- Camco anti-freezes inhibit fouling and corrosion while preventing algae growth.
- Lubricates pumps & valves throughout the system.
- Choose a temperature specific product designed for your winterizing needs.
- Gallons sold 6 per case.

- -50° F Freeze Ban Anti-Freeze.

Order No.	Mfg. No. / Size	Price
206309	(30767) Gallon	$11.98 L
206311	(30768) Drum	$554.98 L

- -100° F Winter Ban Anti-Freeze.

Order No.	Mfg. No. / Size	Price
206347	(30787) Gallon	$18.98 H
206359	(30788) Drum	$996.98 M

- Premium Ban Frost 2000 Anti-Freeze.

Order No.	Mfg. No. / Size	Price
206361	(30627) Gallon	$28.98 I
206373	(30628) Drum	$1433.98 I

Buck-Algonquin Rudder Collars



- Cast bronze with 5/16" bolt.

Order No.	Shaft Size	Price
261153	Shaft Size ID 1"	$33.98 Q
261177	Shaft Size ID 1-1/4"	$33.98 Q
261191	Shaft Size ID 1-1/2"	$38.98 Q
261204	Shaft Size ID 1-3/4"	$79.98 Q

Buck-Algonquin Tiller Arms



- Manganese bronze with bolt and keyway.

Order No.	Shaft Size	Overall Length	Price
261305	1"	9-1/2"	$85.98 F
261343	1-1/4"	11-1/2"	$226.98 F
261367	1-1/2"	15-3/4"	$210.98 F
261379	1-3/4"	15-3/4"	$189.98 F
261381	2"	15-3/4"	$275.98 F

Centek Industries Shaft Log Rudder Post Housing

Order No.	Mfg. No. / Description	Price
675213	(1100207) 2.000" ID, 3.000" OD	$78.98 Q
675225	(1100216) 2.500" ID, 3.000" OD	$26.98 Q
675237	(1100226) 2.750" ID, 3.500" OD	$59.98 Q
675249	(1100232) 3.000" ID, 4.000" OD	$95.98 Q
675251	(1100257) 3.735" ID, 5.000" OD	$117.98 Q
675255	(1100242) 2.875" ID, 3.880" OD	$93.98 Q

Star Brite Winter Tech Water Systems Antifreeze



- Value-priced propylene glycol/alcohol blend.
- Formulated to protect against freeze-up of freshwater and sanitation systems to -50° F.
- Ready to use; do not dilute.
- Bright color allows maximum blow-through visibility.
- NOTE: Not recommended for engine storage. Not to be used as an engine coolant. -50° F is copper burst point; -10° F is PVC burst point.

Order No.	Mfg. No. / Description	Price
452246	(31100) Gallon	$9.98 D
452249	(311G55) 55 Gallon	$510.98 D

Buck-Algonquin Regular Rudder Ports



- Cast bronze plain finish.
- Inside mount.

Order No.	Shaft	Mounting Flange	Price
261557	1"	3-7/8" x 3-7/8", 4" L	$179.98 F
261583	1-1/4"	4-1/4" x 4-1/4", 4" L	$249.98 F
261610	1-1/2"	4-1/2" x 4-1/2", 5" L	$409.98 F
261646	1-1/2"	3-3/4" x 7", 5" L	$429.98 F
261658	1-3/4"	4-1/4" x 7-1/4", 5" L	$584.98 F
261660	2"	4-1/4" x 7-1/4", 5" L	$699.98 Q

Buck-Algonquin Tournament Regular Rudder Port



Order No.	Shaft	Mounting Flange	Price
622541	1-1/2"	4" x 4", 6" L	$384.98 F

Duramax® Ultra-X™ Packing



- Dissipates frictional heat, over 5 times more thermally conductive than flax and PTFE.
- Grease-free installation.
- Virtually eliminates shaft scoring-stays pliable, never hardens or becomes abrasive.
- Leakage practically eliminated.
- Lasts over 5 times longer than other packing.

Order No.	Mfg. No. / Description	Price
428810	(X-5/8") 5/8", 10# Box	$748.98 C
428815	(X-3/4") 3/4", 10# Box	$748.98 C
428820	(X-7/8") 7/8", 10# Box	$748.98 C
428825	(X-1") 1", 10# Box	$748.98 C

PSS Shaft Seals

- The PSS Shaft Seal is a mechanical seal that uses a self-aligning carbon-graphite stator to ensure a 100% watertight seal with proven reliability.
- This seal will eliminate shaft wear and minimize corrosion.
- A mechanical seal is created by the contact of a turning surface against a stationary surface.
- In the case of the PSS Shaft Seal, the stationary surface is a carbon flange held in contact against a stainless steel rotor which turns with the shaft.
- The carbon flange is attached to the boat by a nitrile bellow which, with the help of water pressure, produces a constant contact between the carbon and the stainless steel ring.
- These type of seals are unaffected by engine motion or vibrations.
- The result is a 100% watertight and totally maintenance-free seal.

Additional Sizes Available. Call for Pricing and Availability



Order No.	Mfg. No. / Description	Price
032160	(02-112-212) Shaft Diameter 1-1/2", Stern Tube Outside Diameter 2-1/2"	$345.98 B
032184	(02-112-300) Shaft Diameter 1-1/2", Stern Tube Outside Diameter 3"	$345.98 B
032273	(02-212-334) Shaft Diameter 2-1/2", Stern Tube Outside Diameter 3-3/4"	$503.98 B

Gore Tex Packing



- For marine use is virtually maintenance-free and hardly ever drips.
- It keeps bilges clean and helps to meet current environmental requirements.
- Runs cool, even at high shaft speeds, because it dissipates frictional heat.
- It is over four times more thermally conductive than flax.
- With only minimal thermal expansion, GFO fiber packing easily handles high shaft speeds without being consumed or destroyed.

Key Features:

- Runs cool at high shaft speeds.
- Grease-free.
- Minimum leakage, hardly drips.

Key Benefits:

- Virtually Maintenance-Free.
- Eliminates costly equipment damage.
- Chemically inert.
- Does not cause galvanic corrosion.

Order No.	Mfg. No. / Description	Price
318255	(M10262G10) 1/2", 10# Box, Approx. 61'	$756.98 C
318267	(M10262I10) 5/8", 10# Box, Approx. 39'	$756.98 C
318279	(M10262K10) 3/4", 10# Box, Approx. 27.9'	$756.98 C
318293	(M10262M10) 7/8", 10# Box, Approx. 21'	$756.98 C
318281	(M10262O10) 1", 10# Box, Approx. 16.3'	$756.98 C

Square Flax Packing



Order No.	Mfg. No. / Description	Price
379912	3/16" x 3'	$9.98 I
379924	1/4" x 3'	$9.98 I
379936	5/16" x 3'	$9.98 I
379948	3/8" x 3'	$9.98 I

- Ten Pound Box, #2

Order No.	Mfg. No. / Description	Price
380054	3/16", Approx. 55.50'	$130.98 G
380042	1/4", Approx. 32'	$130.98 G
380066	5/16", Approx. 20.41'	$130.98 G
380078	3/8", Approx. 14.22'	$130.98 G
380082	1/2", Approx. 8'	$130.98 G
380106	5/8", Approx. 5.12'	$130.98 G
380117	3/4", Approx. 3.55'	$130.98 G
380129	7/8", Approx. 2.61'	$130.98 G
380131	1", Approx. 2'	$130.98 G
380143	1-1/8"	$130.98 G

- Twenty-Five Pound Box, #2

Order No.	Mfg. No. / Description	Price
380146	1-1/8"	$324.98 G
380159	1-1/4"	$324.98 G

Teflon (PTFE) Flax Packing



- PTFE Flax packing is braided from quality flax rovings which are then impregnated with TEFLON (PTFE).
- The result is a quality packing that offers high performance and extended packing life.

Order No.	Mfg. No. / Description	Price
380169	(10016) 3/16" x 2'	$7.98 G
380170	(10017) 1/4" x 2'	$8.98 G
380171	(10018) 5/16" x 2'	$10.98 G
380172	(10019) 3/8" x 2'	$12.98 G
380173	(10021) 1/2" x 2'	$17.98 G

Packing Puller Flexible Shaft

Order No.	Mfg. No. / Description	Price
261812	(10160) Small, Size 1	$15.98 F
261824	(10161) Medium, Size 2	$19.98 F
261836	(10162) Large, Size 3	$30.98 F

Teflon (PTFE) Flax Packing

- This popular shaft packing is a blend of quality flax rovings that are braided to a high quality standard.
- The braid is then impregnated with TEFLON (PTFE) to give it a low surface friction.
- This combination results in a packing that delivers solid performance, season after season.

- One Pound Spools.

Order No.	Mfg. No. / Description	Price
380177	(10101) 3/16", Approx. 59'	$40.98 G
380178	(10102) 1/4", Approx. 33'	$40.98 G
380179	(10103) 5/16", Approx. 21'	$40.98 G
380180	(10104) 3/8", Approx. 15'	$40.98 G

- Ten Pound Spools.

Order No.	Mfg. No. / Description	Price
380183	(10315) 1/2", Approx. 82'	$396.98 G
380184	(10316) 5/8", Approx. 53'	$377.98 G
380185	(10317) 3/4", Approx. 35'	$396.98 G
380186	(10318) 7/8", Approx. 24'	$396.98 G
380187	(10319) 1", Approx. 20'	$396.98 G
380188	(10320) 1-1/8", Approx. 15'	$396.98 G
380189	(10321) 1-1/4", Approx. 12'	$396.98 G

©2014 Donovan Marine, Inc.

Johnson Rubber Co. Water Lubricated Rubber Sleeve Bearings



- Naval Bronze Shell.
- Smooth molded rubber surface minimizes vibration and friction.
- Proper clearance tolerances between bearing and journal surfaces provides for efficient lubrication.

Order No.	Mfg. No. / Description	Price
426230	Shaft Size 3/4", 1-1/4" OD, Length 3"	$78.38 L
426254	Shaft Size 7/8", 1-3/8" OD, Length 3-1/2"	$83.70 L
426278	Shaft Size 1", 1-1/4" OD, Length 4"	$81.95 L
426280	Shaft Size 1", 1-3/8" OD, Length 4"	$86.61 L
426292	Shaft Size 1", 1-1/2" OD, Length 4"	$84.78 L
426305	Shaft Size 1", 1-5/8" OD, Length 4"	$86.30 L
426317	Shaft Size 1", 2" OD, Length 4"	$108.66 L
426329	Shaft Size 1-1/8", 1-1/2" OD, Length 4-1/2"	$107.37 L
426343	Shaft Size 1-1/8", 1-3/4" OD, Length 4-1/2"	$112.91 L
426355	Shaft Size 1-1/8", 2" OD, Length 4-1/2"	$120.39 L
426367	Shaft Size 1-1/4", 1-1/2" OD, Length 5"	$108.66 L
426379	Shaft Size 1-1/4", 1-3/4" OD, Length 5"	$109.53 L
426381	Shaft Size 1-1/4", 2" OD, Length 5"	$114.74 L
426393	Shaft Size 1-1/4", 2-1/8" OD, Length 5"	$126.46 L
426406	Shaft Size 1-3/8", 1-7/8" OD, Length 5-1/2"	$122.01 L
426418	Shaft Size 1-3/8", 2" OD, Length 5-1/2"	$132.64 L
426420	Shaft Size 1-3/8", 2-3/8" OD, Length 5-1/2"	$146.11 L
426432	Shaft Size 1-1/2", 2" OD, Length 6"	$151.33 L
426444	Shaft Size 1-1/2", 2-3/8" OD, Length 6"	$159.90 L
426468	Shaft Size 1-3/4", 2-3/8" OD, Length 7"	$186.44 L
426470	Shaft Size 1-3/4", 2-5/8" OD, Length 7"	$190.60 L
426483	Shaft Size 1-7/8", 2-15/16" OD	$223.05 L

Order No.	Mfg. No. / Description	Price
426494	Shaft Size 2", 2-5/8" OD, Length 8"	$212.09 L
426507	Shaft Size 2", 3" OD, Length 8"	$217.24 L
426519	Shaft Size 2-1/4", 2-15/16" OD, Length 9"	$264.27 L
426521	Shaft Size 2-1/4", 3-1/8" OD, Length 9"	$275.33 L
426557	Shaft Size 2-1/2, 3-1/8" OD, Length 10"	$324.65 L
426569	Shaft Size 2-1/2", 3-3/8" OD, Length 10"	$326.62 L
426571	Shaft Size 2-3/4", 3-3/8" OD, Length 11"	$378.59 L
426583	Shaft Size 2-3/4", 3-3/4" OD, Length 11"	$397.98 L
426595	Shaft Size 3", 3-3/4" OD, Length 12"	$425.60 L
426608	Shaft Size 3", 4" OD, Length 12"	$438.96 L
426646	Shaft Size 3-1/2", 4-1/4" OD, Length 14"	$568.34 L
426658	Shaft Size 3-1/2", 4-1/2" OD, Length 14"	$573.10 L
426660	Shaft Size 3-5/8", 4-1/2" OD, Length 14-1/2"	$641.38 L
426696	Shaft Size 4", 5" OD, Length 16"	$878.87 L
426709	Shaft Size 4", 5-1/4" OD, Length 16"	$944.70 L
426723	Shaft Size 4-1/2", 5-1/2" OD, Length 18"	$1123.19 L
426735	Shaft Size 4-1/2", 5-3/4" OD, Length 18"	$1198.66 L
426759	Shaft Size 5", 6-1/8" OD, Length 20"	$1608.51 L
426761	Shaft Size 5", 6-1/2" OD, Length 20"	$1729.67 L
426800	Shaft Size 5-1/2", 7" OD, Length 22"	$2246.81 L
426812	Shaft Size 5-3/4", 7" OD, Length 23"	$2385.71 L
426824	Shaft Size 6", 7-1/2" OD, Length 24"	$2509.88 L

Johnson Rubber Co. Water Lubricated Rubber Sleeve Bearings




- The shell is reinforced thermoset plastic specially engineered.
- The compounded Nitrile Rubber is securely bonded to the shell with all tolerances maintained for proper lubrication.
- The Non-Metallic Sleeve Bearings are ideally suited for installations where corrosion or electrolysis is a problem.
- Half the weight of standard brass sleeve bearings and lower cost.
- All other standard sizes available upon request.

Order No.	Mfg. No. / Description	Price
427105	Shaft Size 1", 1-1/2" OD, Length 4"	$68.78 L
427143	Shaft Size 1-1/4", 1-3/4" OD, Length 5"	$88.35 L
427167	Shaft Size 1-1/4", 2" OD, Length 5"	$93.58 L
427179	Shaft Size 1-1/4", 2-1/8" OD, Length 5"	$102.01 L
427206	Shaft Size 1-1/2", 2" OD, Length 6"	$122.16 L
427218	Shaft Size 1-1/2", 2-3/8" OD, Length 6"	$129.52 L
427232	Shaft Size 1-3/4", 2-3/8" OD, Length 7"	$149.09 L
427244	Shaft Size 1-3/4", 2-5/8" OD, Length 7"	$152.27 L
427268	Shaft Size 2", 2-5/8" OD, Length 8"	$173.50 L

Order No.	Mfg. No. / Description	Price
427270	Shaft Size 2", 3" OD, Length 8"	$177.37 L
427307	Shaft Size 2-1/4", 2-15/16" OD, Length 9"	$215.92 L
427319	Shaft Size 2-1/4", 3-1/8" OD, Length 9"	$224.99 L
427345	Shaft Size 2-1/2", 3-1/8" OD, Length 10"	$257.77 L
427357	Shaft Size 2-1/2", 3-3/8" OD, Length 10"	$266.84 L
427383	Shaft Size 3", 3-3/4" OD, Length 12"	$354.65 L
427395	Shaft Size 3", 4" OD, Length 12"	$364.90 L
427446	Shaft Size 3-1/2", 4-1/2" OD, Length 14"	$471.93 L


Johnson Rubber Co. Sleeve Bearing Specifications Chart

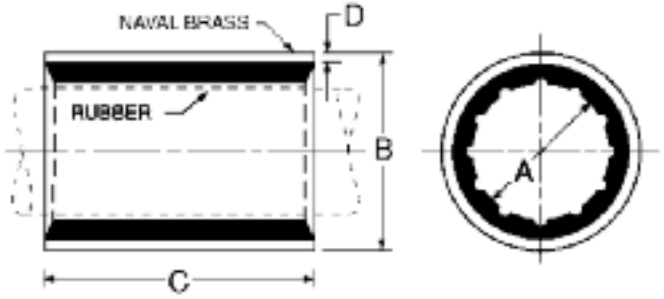

(A) Shaft or Sleeve Size	(B) Outside Diameter	(C) Length	(D) Wall Thick	Metallic Shell	Non-Metallic Shell
3/4"	1-1/4"	3"	1/8"	ABLE	ALDA
7/8"	1-1/4"	3-1/2"	1/16"	ACID	ALICE
7/8"	1-3/8"	3-1/2"	1/8"	APEX	ANNE
7/8"	1-1/2"	3-1/2"	1/8"	ATOM	ARDELE
1"	1-1/4"	4"	1/16"	BACK	BABE
1"	1-1/4"	6"	1/16"	BADE	–
1"	1-3/8"	4"	1/16"	BAIT	BECKY
1"	1-1/2"	4"	1/8"	BALE	BETTY
1"	1-5/8"	4"	1/8"	BAND	CANDY
1"	2"	4"	1/8"	BASE	CARLA
1-1/8"	1-1/2"	4-1/2"	1/16"	BEAM	CEIL
1-1/8"	1-5/8"	4-1/2"	1/8"	BELT	CINDY
1-1/8"	1-3/4"	4-1/2"	1/8"	BEND	CONNIE
1-1/8"	2"	4-1/2"	1/8"	BILL	CORA
1-1/4"	1-1/2"	5"	1/16"	BIND	DEENA
1-1/4"	1-3/4"	5"	1/8"	BIRD	DELLA
1-1/4"	2"	5"	1/8"	BITE	DORIS
1-1/4"	2-1/8"	5"	1/8"	BLOW	DOTTY
1-3/8"	1-7/8"	5-1/2"	1/8"	BOAT	EDNA
1-3/8"	2"	5-1/2"	1/8"	BOLD	ELLEN
1-3/8"	2-1/8"	5-1/2"	1/8"	BOND	ELSA
1-3/8"	2-3/8"	5-1/2"	1/8"	BOOT	ERMA
1-1/2"	2"	6"	1/8"	BOSS	EVA
1-1/2"	2-3/8"	6"	1/8"	BRAD	FANNY
1-5/8"	2-1/8"	6-1/2"	1/8"	BREW	FLO
1-5/8"	2-5/8"	6-1/2"	1/8"	BRIM	FRAN
1-3/4"	2-3/8"	7"	1/8"	BROW	GLENDA
1-3/4"	2-5/8"	7"	1/8"	BUCK	GLORIA
1-7/8"	2-5/8"	7-1/2"	1/8"	BULB	GWEN
1-7/8"	2-15/16"	7-1/2"	3/32"	BULL	HANNA
2"	2-5/8"	8"	1/8"	CALL	HAZEL
2"	2-3/4"	8"	1/8"	CAMP	–
2"	3"	8"	1/8"	CALM	HELEN
2-1/8"	2-15/16"	8-1/2"	3/32"	CAME	HILDA
2-1/8"	3-1/8"	8-1/2"	1/8"	CAPE	ILA
2-1/4"	2-15/16"	9"	3/32"	CARE	INEZ
2-1/4"	3"	9"	1/8"	CARD	IRIS
2-1/4"	3-1/8"	9"	1/8"	CART	INGRID
2-1/4"	3-3/8"	9"	1/8"	CASE	IRENE
2-3/8"	3-3/8"	9-1/2"	1/8"	COOK	JENNY
2-1/2"	3-1/8"	10"	1/8"	CORD	JOAN
2-1/2"	3-3/8"	10"	1/8"	CORN	JOSIE
2-1/2"	3-1/2"	10"	5/32"	COVE	–
2-5/8"	3-3/8"	10-1/2"	1/8"	CRAB	JOYCE
2-3/4"	3-3/8"	11"	1/8"	CROW	JUNE
2-3/4"	3-1/2"	11"	5/32"	CUBE	–
2-3/4"	3-3/4"	11"	1/8"	CURD	KATHY
2-7/8"	3-3/4"	11-1/2"	1/8"	CURE	KELLY
3"	3-3/4"	12"	1/8"	DANE	KIM
3"	4"	12"	1/8"	DARE	LAURA
3-1/8"	4-1/4"	12-1/2"	1/8"	DARK	LENA
3-1/4"	4"	13"	1/8"	DARN	LINDA
3-1/4"	4-1/4"	13"	1/8"	DELL	LISA
3-3/8"	4-1/2"	13-1/2"	1/8"	DIKE	LOIS
3-1/2"	4-1/4"	14"	1/8"	DINE	MANDY
3-1/2"	4-1/2"	14"	1/8"	DOCK	MARIE
3-5/8"	4-1/2"	14-1/2"	1/8"	DOLE	MARTHA
3-3/4"	4-1/2"	15"	1/8"	DONE	MARY
3-3/4"	5"	15"	3/16"	DOVE	NANCY
3-3/4"	5-1/4"	15"	3/16"	DRAW	NEVA
3-7/8"	5-1/4"	15-1/2"	3/16"	DULL	NORA
4"	5"	16"	3/16"	EARN	OLGA
4"	5-1/4"	16"	3/16"	EASE	OLIVE
4-1/8"	5-1/4"	16-1/2"	3/16"	ECHO	OPAL
4-1/4"	5-1/2"	17"	3/16"	EDIT	PAM
4-3/8"	5-3/4"	17-1/2"	3/16"	ELSE	PANSY
4-1/2"	5-1/2"	18"	3/16"	EPIC	PAULA
4-1/2"	5-3/4"	18"	3/16"	EDGE	PENNY
4-5/8"	6-1/8"	18-1/2"	1/4"	EVEN	RHODE
4-3/4"	6-1/8"	19"	1/4"	EVER	RINA
4-7/8"	6-1/8"	19-1/2"	1/4"	EVIL	ROSE
5"	6-1/8"	20"	1/4"	FACE	RUTH
5"	6-1/2"	20"	1/4"	FACT	SALLY
5-1/4"	6-3/4"	21"	1/4"	FADE	SANDRA
5-1/4"	7"	21"	1/4"	FARE	SARAN
5-3/8"	6-3/4"	21-1/2"	1/4"	FEAR	SUSAN
5-3/8"	7"	21-1/2"	1/4"	FELT	TONI
5-1/2"	7"	22"	1/4"	FIND	TRICIA
5-5/8"	7"	22-1/2"	1/4"	FLAT	VERA
5-3/4"	7"	23"	1/4"	FORK	WANDA
5-7/8"	7-1/2"	24"	1/4"	FUEL	WINNIE
6"	7-1/2"	24"	1/4"	GALE	ZELDA
6-1/2"	8-3/8"	30"	7/16"	GOLD	–

©2014 Donovan Marine, Inc.

Johnson Rubber Co. Solid Flanged Bearings, Full Molded Type for Strut or Aft Stern Tube

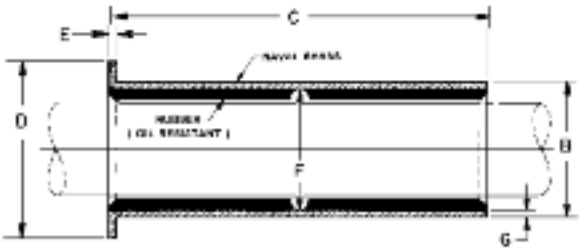

- Duramax flanged type water lubricated bearings are centrifugally cast naval brass with an integral flange for bolting to stern tube or strut housing to retain bearing and prevent rotation in housing.
- Specially formulated oil and chemical resistant nitrile rubber is securely bonded to the shell.
- Flanges are furnished not drilled.
- Meets MIL-B-17901B military specification.
- (Ships Class II).

Code	(A) Shaft or Sleeve Size	(B) Outside Diameter	(C) Length	(D) Flange Diameter	(E) Flange Thickness	(F) Metal ID	(G) Metal Thickness	Special Instructions	Shipping Weight
BRACE	2"	3"	8"	5"	3/8"	2-5/8"	3/16"		8 lbs.
BROAD	2-1/2"	3-3/8"	10"	5-1/2"	3/8"	3-1/8"	1/8"		9 lbs.
CATCH	3"	4-1/4"	12"	6-3/4"	1/2"	3-3/4"	1/4"	DMI #427561	17 lbs.
CLAMP	3-1/4"	4-1/2"	13"	7"	1/2"	4"	1/4"		20 lbs.
CRANK	3-1/2"	4-3/4"	12-1/2"	6-3/4"	1/2"	4-1/4"	1/4"		21 lbs.
CLEAR	3-1/2"	4-7/8"	14"	7-3/8"	1/2"	4-1/4"	5/16"	DMI #427585	34 lbs.
CIVIL	3-3/4"	5-1/4"	15"	7-3/4"	1/2"	4-5/8"	5/16"		39 lbs.
DRAFT	4"	5-1/2"	16"	8"	1/2"	4-7/8"	5/16"	DMI #427600	43 lbs.
DREAD	4-1/4"	5-3/4"	17"	8-1/4"	1/2"	5-1/8"	5/16"		47 lbs.
DROLL	4-1/4"	5-3/4"	17"	8-1/4"	1/2"	5"	3/8"	Split on centerline	52 lbs.
DANCE	4-3/8"	6"	22"	8-7/8"	1/2"	5-3/8"	5/16"		64 lbs.
DRINK	4-1/2"	6"	18"	8-7/8"	1/2"	5-3/8"	5/16"	DMI #427636	54 lbs.
DROVE	4-3/4"	6-1/4"	19"	9-1/8"	1/2"	5-5/8"	5/16"		58 lbs.
EARTH	5"	6-3/4"	20"	9-5/8"	9/16"	6"	3/8"	DMI #427650	75 lbs.
EASEL	5-1/4"	6-7/8"	21"	9-7/8"	9/16"	6-1/8"	3/8"		77 lbs.
ERASE	5-1/2"	7-1/4"	22"	10-1/4"	9/16"	6-1/2"	3/8"		89 lbs.
EVENT	5-3/4"	7-1/4"	23"	10-1/4"	9/16"	6-1/2"	3/8"	DMI #427698	91 lbs.
FABLE	6"	7-3/4"	15"	12-1/4"	9/16"	7"	3/8"		75 lbs.
FAULT	6"	7-3/4"	24"	11"	9/16"	7"	3/8"	DMI #427705	98 lbs.
FAITH	6"	8-1/2"	20"	11-5/8"	5/8"	7"	3/4"	Split 1/16" above & below centerline	147 lbs.
FARCE	6"	8-1/2"	24"	11-5/8"	5/8"	7"	3/4"	Split 1/16" above & below centerline	179 lbs.
FLAKE	6"	8-3/4"	20"	11-5/8"	5/8"	7"	7/8"	Split 1/16" above & below centerline Male pilot 8" x 1/4"	175 lbs.
FERRY	6"	8-3/4"	24"	11-5/8"	5/8"	7"	7/8"	Split 1/16" above & below centerline	–
FENCE	6-1/4"	8"	22-1/2"	10-5/8"	9/16"	7-1/4"	3/8"	DMI #427713	99 lbs.
FLARE	6-1/2"	8-3/8"	23-1/2"	11"	9/16"	7-1/2"	7/16"		129 lbs.
FLEET	6-1/2"	8-3/8"	30"	11"	5/8"	7-1/2"	7/16"		141 lbs.
FLUTE	6-5/8"	8-1/2"	15"	13-1/2"	5/8"	7-5/8"	7/16"		100 lbs.
FLOOR	6-5/8"	8-1/2"	24"	11-1/4"	9/16"	7-5/8"	7/16"		133 lbs.
FETCH	6-5/8"	8-5/8"	15"	13-1/2"	5/8"	7-5/8"	1/2"	Male pilot 8-5/8" x 3/8"	104 lbs.
FRANK	6-5/8"	8-5/8"	24"	11-1/4"	9/16"	7-7/8"	3/8"		130 lbs.
FROZE	6-3/4"	8-3/4"	24"	11-1/4"	5/8"	7-7/8"	7/16"	DMI #427749	131 lbs.
FORCE	6-3/4"	8-3/4"	24"	11-1/4"	9/16"	7-7/8"	7/16"	Split 1/16" above & below centerline	127 lbs.
FANCY	6-3/4"	8-3/4"	24-1/2"	11-3/8"	9/16"	7-7/8"	7/16"		135 lbs.
FLANK	6-3/4"	8-7/8"	15"	13-3/4"	5/8"	7-7/8"	1/2"	Split 1/16" above & below centerline Male pilot 9" x 3/8"	
FLASH	6-3/4"	8-7/8"	24-1/2"	11-3/8"	9/16"	7-7/8"	1/2"	Split 1/16" above & below centerline	138 lbs.
FOUND	6-7/8"	8-7/8"	24-1/2"	11-3/8"	9/16"	7-7/8"	1/2"		134 lbs.
GAVEL	7"	9"	25-1/2"	11-5/8"	9/16"	8-1/8"	7/16"	DMI #427751	137 lbs.
GLAND	7"	9-1/8"	25-1/2"	11-5/8"	9/16"	8-1/8"	1/2"	DMI #427750	143 lbs.
GLASS	7-1/4"	9-1/4"	26-1/2"	11-7/8"	9/16"	8-3/8"	7/16"		148 lbs.
GLORY	7-1/2"	9-5/8"	17-1/2"	14-1/2"	1"	8-3/4"	7/16"		129 lbs.
GLOBE	7-1/2"	9-5/8"	27-1/2"	12-3/4"	9/16"	8-3/4"	7/16"		160 lbs.
GIPSY	7-3/4"	9-7/8"	28-1/2"	12-1/2"	9/16"	8-7/8	1/2"		195 lbs.
HARDY	8"	10-1/4"	20"	14-7/8"	5/8"	9-1/4"	1/2"	Male pilot 10-3/8" x 3/8"	145 lbs.
HEART	8"	10-1/4"	29-1/2"	13-1/4"	5/8"	9-1/4"	1/2"	DMI #427763	197 lbs.
HEDGE	8"	10-1/2"	29-1/2"	13-1/4"	5/8"	9-1/2"	1/2"	DMI #427787	232 lbs.
HITCH	8-1/4"	10-1/2"	30-1/2"	13-1/2"	5/8"	9-1/2"	1/2"		212 lbs.
HOIST	8-1/2"	10-3/4"	31-1/2"	13-3/4"	5/8"	9-3/4"	1/2"		221 lbs.
HOVER	8-3/4"	11"	32-1/2"	14"	5/8"	10"	1/2"		229 lbs.
INFRA	9"	11-1/4"	33-1/2"	14-1/4"	3/4"	10-1/4"	1/2"		246 lbs.
IDEAL	9"	11-1/2"	33-3/8"	15"	3/4"	10-1/4"	5/8"	Split 1/8" above & below centerline	275 lbs.
IDIOT	9"	12"	21-3/8"	17-5/8"	1"	10-1/4"	7/8"	Male pilot 11-1/2" x 3/8"	287 lbs.
INNER	9-1/8"	11-1/2"	34-1/2	16-3/8"	5/8"	10-3/8"	9/16"		284 lbs.
INLET	9-1/4"	11-1/2"	22-1/2"	16"	3/4"	10-1/2"	1/2"	Male pilot 11-1/2" x 3/8"	200 lbs.
IRISH	9-1/8"	11-1/2"	34-1/2"	14-5/8"	11/16"	10-1/2"	1/2"		269 lbs.

Johnson Rubber Co. Solid Flanged Bearings, Full Molded Type for Strut or Aft Stern Tube *(Continued)*

Call 1-800-347-4464 for Lowest Price

Code	(A) Shaft or Sleeve Size	(B) Outside Diameter	(C) Length	(D) Flange Diameter	(E) Flange Thickness	(F) Metal ID	(G) Metal Thickness	Special Instructions	Shipping Weight
INSET	9-1/2"	11-3/4"	35-1/2"	14-7/8"	3/4"	10-3/4"	1/2"		274 lbs.
INSUL	9-1/2"	11-7/8"	20-3/4"	14-3/4"	1"	10-3/4"	9/16"	Split 1/16" above & below centerline	170 lbs.
IVORY	9-3/4"	12-1/8"	36-1/2"	15-1/4"	3/4"	11"	9/16"		295 lbs.
JEWEL	10"	12-3/8"	37-1/2"	15-1/2"	3/4"	11-1/4"	9/16"		332 lbs.
JETTY	10-1/4"	12-5/8"	38-1/2"	15-7/8"	3/4"	11-1/2"	9/16"		353 lbs.
JUMBO	10-1/2"	12-7/8"	39-1/2"	16-1/8"	3/4"	11-3/4"	9/16"		369 lbs.
JOLLY	10-3/4"	13-1/8"	25"	18-1/4"	3/4"	12"	9/16"	Male pilot 13-1/8" x 3/8"	247 lbs.
JUDGE	10-3/4"	13-1/8"	40-1/2"	16-3/8"	3/4"	12"	9/16"		384 lbs.
KETCH	11"	13-1/2"	27-1/2"	18-5/8"	3/4"	12-3/8"	9/16"	Male pilot 13-1/2" x 3/8"	300 lbs.
KNOCK	11"	13-1/2"	41-1/2"	17-1/4"	3/4"	12-3/8"	9/16"		424 lbs.
KRAFT	11-1/4"	13-3/4"	42-1/2"	17-1/2"	3/4"	12-5/8"	9/16"		431 lbs.
KNEEL	11-1/2"	14-1/8"	43-1/2"	17-7/8"	3/4"	12-7/8"	5/8"		490 lbs.
KNIFE	11-1/2"	14-7/8"	50-3/4"	20-1/4"	1-1/4"	12-7/8"	1"		871 lbs.
KNOTS	11-3/4"	14-3/8"	44-1/2"	18-1/8"	3/4"	13-1/8"	5/8"		497 lbs.
LABOR	12"	14-3/4"	45-1/2"	18-1/2"	3/4"	13-1/2"	5/8"		524 lbs.
LOGAN	12-1/8"	14-7/8"	46"	18-5/8"	3/4"	13-5/8"	5/8"		–
LANCE	12-1/4"	15"	46-1/2"	18-3/4"	3/4"	13-3/4"	5/8"		540 lbs.
LEASE	12-3/8"	15-1/8"	47"	18-7/8"	3/4"	13-7/8"	5/8"		–
LAYER	12-1/2"	15-1/4"	47-1/2"	19"	3/4"	14"	5/8"		556 lbs.
LOGIC	12-5/8"	15-3/8"	48"	19-1/8"	3/4"	14-1/8"	5/8"		545 lbs.
MILKY	12-3/4"	15-1/2"	48-1/2"	19-1/4"	3/4"	14-1/4"	5/8"		–
MUSIC	12-7/8"	15-5/8"	49"	19-3/8"	3/4"	14-3/8"	5/8"		–
MINCE	13"	15-7/8"	50"	19-5/8"	7/8"	14-1/2"	11/16"		–
MITTY	13-1/8"	16"	50-1/2"	19-3/4"	7/8"	14-5/8"	11/16"		–
MISTY	13-1/4"	16-1/8"	51"	19-7/8"	7/8"	14-3/4"	11/16"		–
NIFTY	13-3/8"	16-1/4"	51-1/2"	20"	7/8"	14-7/8"	11/16"		716 lbs.
NIECE	13-1/2"	16-3/8"	52"	20-1/8"	7/8"	15"	11/16"		718 lbs.
NOVEL	13-5/8"	16-1/2"	52-1/2"	20-1/4"	7/8"	15-1/8"	11/16"		–
ORTHA	13-3/4"	16-5/8"	53"	20-3/8"	7/8"	15-1/4"	11/16"		–
OGGLE	13-7/8"	16-3/4"	53-1/2"	20-1/2"	7/8"	15-3/8"	11/16"		–
OPERA	14"	16-7/8"	54"	20-5/8"	7/8"	15-1/2"	11/16"		–
PURSE	14-1/8"	17"	54-1/2"	20-3/4"	7/8"	15-5/8"	11/16"		–
POLAR	14-1/4"	17-1/8"	55"	20-7/8"	7/8"	15-3/4"	11/16"		–
POINT	14-3/8"	17-1/4"	55-1/2"	21"	7/8"	15-7/8"	11/16"		842 lbs.
PRUNE	14-1/2	17-1/2"	56"	21-1/4"	7/8"	16"	3/4"		–
PRICE	14-5/8"	17-5/8"	56-1/2"	21-3/8"	7/8"	16-1/8"	3/4"		–
PUNCH	14-3/4"	17-3/4"	57"	21-1/2"	7/8"	16-1/4"	3/4"		–
QUAKE	14-7/8"	17-7/8"	57-1/2"	21-5/8"	7/8"	16-3/8"	3/4"		–
QUIET	15"	18"	58"	21-3/4"	7/8"	16-1/2"	3/4"		–

Buck-Algonquin Taper Coupling Propeller Shaft Flange

DMI #	MFG #	Shaft Dia.	Flange Dia.	Bolt Holes	Bolt Circle	Bolt Dia.	Pilot	Price
258305	(50-TC500-150)	1-1/2"	5"	5	4-1/4"	7/16"	M	$171.98 Q
258310	(50-TC500-175)	1-3/4"	5"	5	4-1/4"	7/16"	M	$171.98 Q
258315	(50-TC669-225)	2-1/4"	6.69"	12	5.512"	16mm	F	$392.98 Q
258320	(50-TC669-250)	2-1/2"	6.69"	12	5.512"	16mm	F	$392.98 Q
258325	(50-TC807-300)	3"	8.07"	10	6.692"	18mm	F	$812.98 Q
258334	(50-TC576-200)	2"	5-3/4"	6	4-3/4"	16mm	F	$393.98 Q

Buck-Algonquin Split Hub Propeller Shaft Flange



- High tensile ductile iron with heat treated clamping bolts and self locking square head alloy set screws for small sizes.
- Cross riveting pins for larger sizes.

DMI #	MFG #	Shaft Dia.	Flange Dia.	Bolt Holes	Bolt Circle	Bolt Dia.	Price
257863	(50-475A-1150)	1-1/2"	4-3/4"	6	3-7/8"	7/16"	$129.98 E
257899	(50-475B-1175)	1-3/4"	4-3/4"	6	3-7/8"	7/16"	$144.98 E

©2014 Donovan Marine, Inc.

Buck-Algonquin Split Coupling Propeller Shaft Flange



- Note: 4" B Series fits Borg-Warner #1017-71C, 5" AC Series fits Borg-Warner #1018-72C, 5-3/4" AB Series fits Borg-Warner #1018-73C and 5-3/4" AB Series fits Twin Disc, Capitol and Allison.

DMI #	MFG #	Shaft Dia.	Flange Dia.	Bolt Holes	Bolt Circle	Bolt Dia.	Pilot	Price
257750	(50-400B-1000)	1"	4"	4	3-1/4"	3/8"	M	$117.98 Q
257762	(50-400B-1125)	1-1/8"	4"	4	3-1/4"	3/8"	M	$117.98 Q
257774	(50-400B-1250)	1-1/4"	4"	4	3-1/4"	3/8"	M	$117.98 Q
257776	(50-400B-1375)	1-3/8"	4"	4	3-1/4"	3/8"	M	$117.98 Q
257798	(50-400B-1500)	1-1/2"	4"	4	3-1/4"	3/8"	M	$117.98 Q
257801	(50-400YS-100)	1"	4"	4	3.070"	10mm	M	$109.98 Q
257803	(50-400YS-112)	1-1/8"	4"	4	3.070"	10mm	M	$109.98 Q
257805	(50-400YS-125)	1-1/4"	4"	4	3.070"	10mm	M	$109.98 Q
257808	(50-401S-1000)	1"	4"	4	3-1/4"	3/8"	M	$109.98 Q
257811	(50-401S-1125)	1-1/8"	4"	4	3-1/4"	3/8"	M	$109.98 Q
257904	(50-476A-1375)	1-3/8"	4-3/4"	6	3-7/8"	12mm	F	$135.98 E
257926	(50-500A-1250)	1-1/4"	5"	4	4-1/4"	7/16"	M	$129.98 E
257938	(50-500A-1375)	1-3/8"	5"	4	4-1/4"	7/16"	M	$129.98 E
257940	(50-500A-1500)	1-1/2"	5"	4	4-1/4"	7/16"	M	$129.98 E
257990	(50-500C-1750)	1-3/4"	5"	4	4-1/4"	7/16"	M	$142.98 E
258005	(50-500C-2000)	2"	5"	4	4-1/4"	7/16"	M	$142.98 E
258007	(50-500YS-125)	1-1/4"	4-3/4"	4	3-15/16"	10mm	M	$129.98 E
258010	(50-500YS-137)	1-3/8"	4-3/4"	4	3-15/16"	10mm	M	$129.98 E
258015	(50-500YS-150)	1-1/2"	4-3/4"	4	3-15/16"	10mm	M	$129.98 E
258037	(50-575-1-137)	1-3/8"	5-3/4"	6	4-3/4"	1/2"	F	$224.98 Q
258043	(50-575-1-150)	1-1/2"	5-3/4"	6	4-3/4"	1/2"	F	$224.98 Q
258055	(50-575-1-175)	1-3/4"	5-3/4"	6	4-3/4"	1/2"	F	$224.98 Q
258067	(50-575-1-200)	2"	5-3/4"	6	4-3/4"	1/2"	F	$224.98 Q
258080	(50-575-2-150)	1-1/2"	5-3/4"	6	4-3/4"	5/8"	F	$224.98 Q
258092	(50-575-2-175)	1-3/4"	5-3/4"	6	4-3/4"	5/8"	F	$224.98 Q
258095	(50-575-2-200)	2"	5-3/4"	6	4-3/4"	5/8"	F	$224.98 Q
258098	(50-575-2-250)	2-1/4"	5-3/4"	6	4-3/4"	5/8"	F	$266.98 Q
258105	(50-725BZF-200)	2"	7-1/4"	8	6"	16mm	F	$529.98 Q
258109	(50-725B-2250)	2-1/4"	7-1/4"	6	6"	5/8"	F	$529.98 Q
258113	(50-725B-2500)	2-1/2"	7-1/4"	6	6"	5/8"	F	$529.98 Q
258117	(50-726B-2000)	2"	7-1/4"	6	6"	3/4"	F	$529.98 Q
258120	(50-726B-2250)	2-1/4"	7-1/4"	6	6"	3/4"	F	$529.98 Q
258125	(50-726B-2500)	2-1/2"	7-1/4"	6	6"	3/4"	F	$529.98 Q
258212	(50MC00-4075)	3/4"	4"	4	3-1/4"	3/8"	M	$74.98 E
258215	(50MC00-4087)	7/8"	4"	4	3-1/4"	3/8"	M	$74.98 E
258219	(50MC00-4100)	1"	4"	4	3-1/4"	3/8"	M	$74.98 E
258220	(50MCY00-410)	1"	4"	4	3.070"	10mm	M	$74.98 E
258221	(50MC00-4112)	1-1/8"	4"	4	3-1/4"	3/8"	M	$74.98 E
258233	(50MC00-4125)	1-1/4"	4"	4	3-1/4"	3/8"	M	$74.98 E
258261	(50MC00-5100)	1"	5"	4	4-1/4"	7/16"	M	$119.98 E
258269	(50MC00-5125)	1-1/4"	5"	4	4-1/4"	7/16"	M	$119.98 E
258271	(50MC00-5137)	1-3/8"	5"	4	4-1/4"	7/16"	M	$119.98 E
258283	(50MC00-5150)	1-1/2"	5"	4	4-1/4"	7/16"	M	$119.98 E

R.E. Thomas Piranha Dual Line Cutter

- The PIRANHA line cutter features dual serrated cutting edges for unmatched performance, machined from high quality stainless steel.
- Dual serrated edge designed allows for a cleaner more efficient cutting surface.
- Reduce the worry of entanglement when navigating in low visibility conditions.
- Simple & stabile precision split design eliminates the need to remove your propeller.
- The design allows for the cutter to be re-sharpened.

Order No.	Mfg. No. / Description	Price
050106	(PDLC1000) 1"	$308.98 B
050118	(PDLC1250) 1-1/4"	$365.98 B
050120	(PDLC1500) 1-1/2"	$475.98 B
050132	(PDLC1750) 1-3/4"	$535.98 B

Order No.	Mfg. No. / Description	Price
050144	(PLDC2000) 2"	$596.98 B
050156	(PDLC2250) 2-1/4"	$647.98 B
050168	(PDLC2500) 2-1/2"	$681.98 B

Duramax® Flanged Bearings

DURAMAX MARINE

- Johnson Cutless Flanged Bearings are centrifugally cast naval brass with an integral range for bolting to stern tube or strut housing to retain bearing and prevent rotation in housing.
- Specially formulated oil and chemical resistant nitrile rubber is securely bonded to the shell.
- Shells are heavy walled providing structural strength and can be step turned if desired.
- Flanges are furnished UN-DRILLED unless specified.
- For Split and Stepped Styles see page 6.
- PRECAUTION: When shrink fitting of the bearing is required, chilling must be achieved by gradual cooling to not more than minus 20F(-28C) using freezer or regular ice (DO NOT DRY ICE).
- NOTE: Pounding or shocking the bearing while in the chilled state could cause the rubber to separate from the shell.
- Approved Bearings: Johnson Cutless Naval Brass Flanged Bearings meet military specification MIL-B-17901 (Ships) Class II Full-Molded type and have full type approval from The American Bureau of Shipping.



Order No.	Mfg. No. / Description	Price
427561	(860762100) 3.00 X 4.250 Catch	$1,003.98 D
427585	(860892101) 3.50 X 4.875 Clear	$1,199.98 D

- Centrifugally cast Naval brass shell with integral flange.
- Meet MIL-B-17901B (SH) Class II type bearing specifications.

Order No.	Mfg. No. / Description	Price
427600	(861022100) 4.00 X 5.500 Draft	$1,397.98 D
427636	(861152100) 4.50 X 6.00 Drink	$1,712.98 D
427650	(861272100) 5.00 X 6.750 Earth	$1,703.98 D
427698	(861462100) 5.75 X 7.250 Event	$2,327.98 D
427705	(861532101) 6.00 X 7.750 Fault	$2,139.98 D
427713	(861592100) 6.25 X 8.000 Fence	$2,368.98 D
427749	(861722100) 6.75 X 8.750 Froze	$3,503.98 D
427750	(861782101) 7 X 9.125 Gland	$3,768.98 D
427751	(861782100) 7.00 X 9.000 Gavel	$2,754.98 D
427763	(862042101) 8.00 X 10.25 Heart	$3,585.98 D
427787	(862042102) 8.00 X 10.50 Hedge	$4,744.98 D

M & M Industries Anodes

- Aluminum Tear Drop Anode.
- 6 lbs., 1 Cast-in Galvanized Steel Strap, Weld on.

Order No.	Mfg. No. / Description	Price
323602	(ZTS-6 ALUM) 9" L x 3" W x 1-1/4" T	$26.98 C

- Aluminum Tear Drop Anode.
- 6 lbs., 1 Cast-in Galvanized Steel Strap, Weld on.

Order No.	Mfg. No. / Description	Price
323602	(ZTS-6 ALUM) 9" L x 3" W x 1-1/4" T	$26.98 C

- Zinc Plates for Hull.
- 11-1/2 lbs., 1 Cast-in Galvanized Steel Strap, Weld on.

Order No.	Mfg. No. / Description	Price
323834	(ZSS12) 3" L x 12" W x 1/4" T	$58.98 C

- Zinc Plates for Hull.
- 22 lbs., 2 Cast-in Galvanized Steel Straps, Weld on.

Order No.	Mfg. No. / Description	Price
323841	(ZHS-23) 6" L x 12" W x 1-1/4" T	$107.98 C

- Zinc Plates for Hull.
- 22 lbs., 2 Cast-in Galvanized Steel Straps, Bolt on.

Order No.	Mfg. No. / Description	Price
323844	(ZHC23-BOLT) 6" L x 12" W x 1-1/4" T	$107.98 C

Zinc Only



- Other sizes up to 1-1/4" IPS x 10" are available.

Order No.	Mfg. No. / Description	Price
269957	(MDE-0Z) Zinc Only, For E-0	$3.12 I
269969	(MDE-1Z) Zinc Only, For E-1	$4.13 I
269971	(MDE-2Z) Zinc Only, For E-2	$4.16 I
269983	(MDE-3Z) Zinc Only, For E-3	$5.98 I
270001	(MDE-4Z) Zinc Only, For E-4	$6.98 I

R.E. Thomas Anodes

Order No.	Mfg. No. / Description	Price
040105	(N-1-P) Bronze Anode Plate	$69.98 B
040117	(N-1-Z) Anode Plate	$14.98 B
040129	(8X-SL) Anode 1-3/4"	$21.98 B
040131	(9X-SL) Anode 2"	$19.98 B
040143	(11X-SL) Anode 2-1/2"	$37.98 B
040167	(5HC) Anode 5"	$35.98 B
040155	(2R) Bi-Direct Anode 2"	$8.98 B

Engine Anodes with Bronze Plugs



- Other sizes up to 1-1/4" IPS x 10" are available.

Order No.	Mfg. No. / Description	Price
269832	(E-0) 1/4" Plug (NPT), Dia. 3/8", Length 1-3/4"	$5.98 I
269844	(E-1) 3/8" Plug (NPT), Dia. 1/2", Length 2"	$9.98 I
269959	(E-1D) 3/8" Plug (NPT), Dia. 1/2", Length 1-3/4"	$6.98 R
269960	(E-1E) 3/8" Plug (NPT), Dia. 1/2", Length 1-1/2"	$6.98 R
269961	(E-1F) 3/8" Plug (NPT), Dia. 1/2", Length 1-1/4"	$6.98 R
269856	(E-2) 1/2" Plug (NPT), Dia. 5/8", Length 2"	$10.98 I
269868	(E-3) 3/4" Plug (NPT), Dia. 3/4", Length 2"	$15.98 I
269882	(E-4) 3/4" Plug (NPT), Dia. 3/4", Length 3-3/8"	$17.98 I
269831	(CME-00) 1/8" x 2" Pencil Zinc Complete	$5.98 I
269956	(CME-00) 1/4" Pencil Zinc Only (CMEZ00)	$3.19 I
270018	3/4" Zinc Only, For Detroit Diesel	$4.98 H
270019	3/4" Zinc Complete, For Detroit Diesel	$19.98 R

©2014 Donovan Marine, Inc.

Newmar Galvanic Isolator

- Sacrificial zincs corrode away as they protect metal thru hulls, shafts and props from damaging electrolysis.
- Stray, low voltage current flowing between the AC safety ground and DC bonding system is a principal cause of this "galvanic" action.
- Installing the Galvanic Isolator between the AC safety ground and DC bonding system, blocks a majority of the low voltage currents and corrosive action on the zincs is significantly reduced (while the integrity of the critical safety ground path is maintained.)
- This means a significant savings in boat haul-out fees and zinc replacement costs.
- For additional safety, all units feature a large capacitor, providing a secondary low impedance path for sending AC current to ground.



Order No.	Mfg. No. / Description	Price
699902	(GI-30) Rated for 30 amps, Dimensions: 2.7" H x 4.8" W x 7.3" D	$239.98 E
699905	(GI-50) Rated for 50 amps, Dimensions: 4.5" H x 4.7" W x 8.9" D	$282.98 E

Camp Donut Shaft Anodes



- Supplied with stainless steel screws and lock washers.
- Sizes up to 6-1/2" are available.

Order No.	Mfg. No. / Description	Price
338308	(C-1) 3/4"	$11.98 H
338310	(C-2) 7/8"	$11.98 H
338322	(C-3) 1"	$15.98 H
368334	(C-4) 1-1/8"	$15.98 H
338346	(C-5) 1-1/4"	$15.98 H
338358	(C-6) 1-3/8"	$18.98 H
338360	(C-7) 1-1/2"	$18.98 H
338363	(C-8) 1-3/4"	$25.98 H
269351	(C-9) 2"	$25.98 R
269363	(C-11) 2-1/4"	$32.98 R
269375	(C-12) 2-1/2"	$44.98 R
269399	(C-13) 3"	$44.98 R
269426	(C-14) 3-1/2"	$54.98 R
269438	(C-15) 4"	$54.98 R

Camp Zinc Plates for Hull



338233



338247



338245

Order No.	Mfg. No. / Description	Price
338233	(ZP-2) Dimensions: 12" L x 6" W x 1/2" T	$106.98 H
338245	(ZHC-3) Dimensions: 6-1/4" L x 2-3/4" W x 3/4" T	$34.98 H
338247	(ZHC-5) Dimensions: 8" L x 4" W x 3/4" T	$56.98 H
338249	(ZHC-11) Dimensions: 12" L x 3" W x 1-1/2" T	$124.98 H
338251	(ZHC-15) Dimensions: 15" L x 3" W x 1-1/2" T	$192.98 H
338254	(ZHC-17) Dimensions: 12" L x 6" W x 1" T	$337.98 H

Camp Zinc Plates



269046



338283

Order No.	Mfg. No. / Description	Price
338271	(A-24) Dimensions: 4-3/4" L x 2" W x 3/4" T	$8.98 H
338283	(A-25) Dimensions: 9-1/4" L x 3-3/8" W x 3/4" T	$39.98 H
269046	(A-30) Dimensions: 6-1/4" L x 2-3/4" W x 5/8" T	$15.98 R
269047	(A-40) Dimensions: 7-1/2" L x 2-3/4" W x 1/2" T	$15.98 R

Camp Rudder Anodes



- Supplied with stainless steel screws and lock washers.

Order No.	Mfg. No. / Description	Price
269135	(R1) 1-7/8"	$3.98 R
338461	(R2) 2-13/16"	$11.98 H
338473	(R3) 3-3/4"	$16.98 H
338485	(R4) 5"	$29.98 H
338497	(R5) 5-1/8"	$43.98 H
338500	(R7) 6-1/2"	$65.98 H

Camp Shaft Anodes



Order No.	Mfg. No. / Description	Price
338548	(X-0) 1/2"	$12.98 H
338550	(X-1) 3/4"	$9.98 H
338562	(X-2) 7/8"	$9.98 H
338574	(X-3) 1"	$10.98 H
338575	(X-3A) 1", Heavy Duty	$18.98 H
338586	(X-4) 1-1/8"	$12.98 H
338598	(X-5) 1-1/4"	$12.98 H
338599	(X-5A) 1-1/4", Heavy Duty	$21.98 H
338613	(X-6) 1-3/8"	$16.98 H
338625	(X-7) 1-1/2"	$16.98 H
338637	(X-8) 1-3/4"	$25.98 H
338649	(X-9) 2"	$26.98 H
338651	(X-10) 2-1/4"	$56.98 H
338663	(X-11) 2-1/2"	$55.98 H
269313	(X-12) 2-3/4"	$73.98 R
338687	(X-13) 3"	$66.98 H
338699	(X-15) 3-1/2"	$85.98 H
338702	(X-17) 4"	$89.98 H

Metal Distributors Commercial Prop Nut Anode - #8

- Large Commercial Zinc Anodes Meet All Military Specifications.

Order No.	Mfg. No. / Description	Price
269096	(CMPN08Z)	$195.98 C

Metal Distributors Commercial Heat Exchanger Anode

Order No.	Mfg. No. / Description	Price
270110	(AH2B4) Aluminum, 4"	$26.98 I

Camp Zinc Plate - Pacemaker Style 1



- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.
- Dimensions: 9-1/4" L x 3-3/8" W x 53/64" T.

Order No.	Mfg. No. / Description	Price
338295	(A-90) 1 Hole	$39.98 H

Camp Zinc Plate for Hull



- Dimensions: 8-5/8" L x 3-3/16" W x 1/2" T.

Order No.	Mfg. No. / Description	Price
338270	(N-1) Plate for Hull	$37.98 H

Camp Grouper Anode



- Comes with 10 ft. of galvanized wire rope and connector with instruction sheet.

Order No.	Mfg. No. / Description	Price
269330	(GP-1) 6 lbs.	$121.98 R

Anode for Suzuki Outbound



Order No.	Mfg. No. / Description	Price
338156	(55125-87D00) 150-200 HP	$9.98 H

Outdrive Ring



Order No.	Mfg. No. / Description	Price
269194	(V-17) 250-275, 4-1/2" OD	$8.98 I

Camp Divers Plate



- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.
- Dimensions: 11-1/2" L x 5-1/4" W x 5/8" T.


Order No.	Mfg. No. / Description	Price
338257	(DP-1) Divers Plate	$123.98 H

Camp Zinc Bolt-On

- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.
- Dimensions: 14" L x 6-1/4" W x 1-1/4" T.

Order No.	Mfg. No. / Description	Price
338268	(B-24) Bolt-On	$265.98 H

Zinc for Maxi-Prop Propellers



- Shaft Size: 3/4", 7/8", 1", 1-1/8".

Order No.	Mfg. No. / Description	Price
338097	(63M) Zinc	$8.98 H

Duo Prop Zinc for Volvo



Order No.	Mfg. No. / Description	Price
269292	(875821) Volvo Sterndrive	$24.98 I

Volvo Outdrive



Order No.	Mfg. No. / Description	Price
338128	(38855411-2) Volvo Outdrive	$30.98 H

Camp Tapered Hull Anode



- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.
- Dimensions: 9" L x 4-1/2" W x 1-1/8" T.

Order No.	Mfg. No. / Description	Price
338269	(B-12) Hull Anode	$118.98 H

Camp Sea Strainer Zinc



- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.
- Dimensions: 3-3/8" L x 1-1/2" W.

Order No.	Mfg. No. / Description	Price
338510	(SZ-1) Sea Strainer Zinc	$6.98 H

Canada Metal Company Tear Drop Zincs




Order No.	Mfg. No. / Description	Price
269755	(MDT20) Length 3-1/2"	$6.98 I
269779	(MDT21) Length 5-1/4"	$15.98 I

Anodes for Volvo Sterndrive

- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.

Outdrive Bar





Order No.	Mfg. No. / Description	Price
269285	(832598) 250-270, Length 7-1/8"	$27.98 I
269286	(852835) 290B	$31.98 I

Anodes for Yamaha Outboard

- Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.



Order No.	Mfg. No. / Description	Price
338120	(688-45371-02) 70 HP	$22.98 I



Order No.	Mfg. No. / Description	Price
338106	(6G5-45251) 115-200 HP	$21.98 H



Order No.	Mfg. No. / Description	Price
338118	(6J9-45371-00) 150-200 HP	$14.98 H



Order No.	Mfg. No. / Description	Price
338093	(61A-45371) 225-250 HP	$14.98 R



- Base OD 3-5/8".

Order No.	Mfg. No. / Description	Price
269295	(6E5-45371-01) 90-200 HP	$38.98 I





Order No.	Mfg. No. / Description	Price
269297	(6K1-45371-00) Counter Rotation Only	$29.98 R
269298	(6K1-45371-02) Counter Rotation Only	$38.98 R

Lehr Anode

LEHR

Order No.	Mfg. No. / Description	Price
468168	(OB 072.3-051) Zinc	$7.99 D



©2014 Donovan Marine, Inc.

Anodes for Johnson/Evinrude Outboard and OMC Sterndrive

• Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.

OMC Transom Bar



• Hole centers 6-15/16".

Order No.	Mfg. No. / Description	Price
269034	(367) Length 7-5/8"	$16.98 I

OMC Outdrive



Order No.	Mfg. No. / Description	Price
338124	(3854130) OMC Outdrive	$29.98 H

OMC Outdrive - Cobra



Order No.	Mfg. No. / Description	Price
269037	(CM984513Z) Cobra	$31.98 I

Johnson/Evinrude Medium Outboard



Order No.	Mfg. No. / Description	Price
269040	(392123) 3" x 4-5/8"	$35.98 I

OMC Outdrive Zinc

Order No.	Mfg. No. / Description	Price
269033	(C173) OMC Outdrive	$11.98 H

OMC Outdrive - Low Profile



Order No.	Mfg. No. / Description	Price
338128	(3855411-2) Low Profile	$30.98 H

OMC Cobra Sterndrive



Order No.	Mfg. No. / Description	Price
269039	(983494) Centers 4-1/2"	$14.98 I

Johnson/Evinrude Outboard Cubes





Order No.	Mfg. No. / Description	Price
269043	(393023) Dimensions: 1" x 1-3/8"	$8.98 I
269044	(433580)	$23.98 H
338144	(398331) 275 HP	$14.98 H

OMC Outdrive - Cobra



Order No.	Mfg. No. / Description	Price
269038	(984547) Cobra	$45.98 H

Anodes for Mercury Outboard and MerCruiser Sterndrive

• Meets all MIL-A-18001-H specifications. Used as sacrificial anodes to protect propellers, struts, bearings, etc. from underwater electrolysis.

MerCruiser Outdrive Anodes - Bravo



Order No.	Mfg. No. / Description	Price
268990	(806188)	$11.98 R
269001	(806190)	$5.98 R
269003	(817373)	$14.98 R

MerCruiser Anodes - Bravo



Order No.	Mfg. No. / Description	Price
269006	(821630)	$14.98 R
269007	(821631)	$24.98 R

Mercury Tabs



Order No.	Mfg. No. / Description	Price
269010	(31640) Short, Base OD 3-1/2"	$14.98 I
269022	(34127) Long, Base OD 3-1/2"	$16.98 I
269027	(46399) Racing, Base OD 3-1/2"	$10.98 I

MerCruiser Outdrive Anodes - Alpha



Order No.	Mfg. No. / Description	Price
268983	(806105)	$13.98 R
269000	(806189)	$3.98 R
269002	(815933)	$14.98 R

Mercury Outdrive Zinc



Order No.	Mfg. No. / Description	Price
268979	(34762) Mercury Outdrive	$5.98 R

Mercury Waffle Plate - 75-115 HP



Order No.	Mfg. No. / Description	Price
269028	(43396) 7-5/8" x 2"	$16.98 I

Mariner Outdrive Anodes



Order No.	Mfg. No. / Description	Price
269004	(818298)	$11.98 R
269005	(826134) 60-225 HP	$6.98 R

Mercury Plate



Order No.	Mfg. No. / Description	Price
269026	(A76214) Base OD 3-1/2"	$11.98 I

MerCruiser Nut



• 1-1/4" OD

Order No.	Mfg. No. / Description	Price
269084	(55989) Length 1-1/8"	$6.98 I

MerCruiser Outdrive Anode - Alpha 1



Order No.	Mfg. No. / Description	Price
269030	(43994A) 3-3/4" x 3"	$19.98 I

Sierra Anodes

OMC Sterndrive/Cobra Sterndrive



- Replaces: OMC 393023, OMC 436745.

Order No.	Mfg. No. / Description	Price
186024	(18-6024) Zinc	$13.35 H

Mercury/Mariner



186241

186244

- Magnesium

Order No.	Mfg. No. / Description	Price
186241	(18-6241)	$16.62 H
186244	(18-6244)	$19.95 H

MerCruiser



- Replaces: Mercury/Mariner 806190

Order No.	Mfg. No. / Description	Price
186089	(18-6089) Magnesium	$35.13 H

Yamaha Outboard Motors



186035



186097



186034

Order No.	Mfg. No. / Description	Price
186034	(18-6034) For Use on Lower Drive 150, 200 HP (1986)	$48.25 H
186035	(18-6035) For 150-200 HP	$24.53 H
186097	(18-6097) For Use on Lower Casing Drive 115. 130 HP, 1984-04	$31.68 H

MerCruiser Sterndrive



186240



186099



186079



186114

- Magnesium

Order No.	Mfg. No. / Description	Price
186079	(18-6079) Replaces: Mer/Mar 806105A1, 806105	$29.20 H
186099	(18-6099) Replaces: Mer/Mar 821629	$34.50 H
186114	(18-6114) Replaces: Mer/Mar 806189	$17.23 H
186240	(18-6240) Replaces: Mer/Mar 821630	$30.53 H

Marpac Alpha One Generation I Kit



Order No.	Mfg. No. / Description	Price
620164	(10108A-D) Alpha One Generation I Kit	$36.98 G

Marpac Alpha One Generation II Kit



Order No.	Mfg. No. / Description	Price
620163	(CMALPHAKITA) Alpha One Generation II Kit	$59.98 G

Marpac Bravo I Kit



Order No.	Mfg. No. / Description	Price
620162	(10060A-D) Bravo I Kit	$49.98 H

Marpac Bravo II and III Kit - Up to 2003



Order No.	Mfg. No. / Description	Price
620168	(10061A-D) Bravo II & III Kit - Up to 2003	$42.98 H

Marpac Bravo III and Design II Kit - 2004 and Up



Order No.	Mfg. No. / Description	Price
620170	(10165A-D) Bravo II & III Kit - 2004 and Up	$57.98 H

Marpac Aluminum Trim Tab Anode



- OEM #31640T-4

Order No.	Mfg. No. / Description	Price
620178	(CM31640KITA) Aluminum Trim Tab Anode	$11.98 H

©2014 Donovan Marine, Inc.

Martyr Mercury Alpha I Anode Kit

Martyr



- Fits Alpha I Generation II Engine 1983 -1990.

Order No.	Mfg. No. / Description	Price
620163	(CMALPHAKITA)	$59.98 G

Martyr Mercury Bravo III Anode Kit

Martyr



- Trim Tab Anode, Fits Bravo III Drive 2004 - Present.

Order No.	Mfg. No. / Description	Price
620169	(CM762144KITA)	$15.98 G

Martyr Verado Anode Kits

Martyr



Order No.	Mfg. No. / Description	Price
620165	(CMVERADO4KIT) Fits Verado 4 Engine	$48.98 H
620167	(CMVERADO6KIT) Fits Verado 6 Engine	$62.98 H

Martyr Volvo Anode Kits

Martyr



Order No.	Mfg. No. / Description	Price
620171	(CM280DPKITA) Fits Volvo 280 Duo Prop Engine	$38.98 H
620173	(CMSXKITA) Fits Volvo SX Engine	$60.98 H
620175	(CM290KITA) Fits Volvo 290 Engine	$38.98 H
620177	(CM290DPKITA) Fits Volvo 290 Duo Prop Engine	$39.98 H

Martyr Yamaha Anode Kits

Martyr



- For use in salt and brackish water
- Not recommended for use in fresh water
- Proven to last longer than zinc due to increased capacity
- Alloy is manufactured to meet or exceed US Military Specification (MIL-A-24779(SH))

Order No.	Mfg. No. / Description	Price
620179	(CMY150CRKITA) Fits Yamaha 150-200HP Outboards (Counter Rotation)	$33.98 Q
620181	(CMY150KITA) Fits Yamaha 150-200 HP Outboards	$33.98 F
620183	(CMY200250KIT) Fits Yamaha 200-250 HP Outboards	$34.98 F
620185	(CMYHP200300K) Fits Yamaha High Performance 200-300 HP Outboards	$34.98 F

Duramax® Stern Tube Clamp Adapter

- Shaft diameter 1" thru 1-3/4".
- Stern tube diameter 2-1/2".

Order No.	Mfg. No. / Description	Price
473047	(SXU-1000-2500) Stern Tube Clamp Adapter	$121.96 E

Duramax® Hose Adapter

- Shaft diameter 1" thru 1-3/4".
- Stern tube diameter 2-1/2".

Order No.	Mfg. No. / Description	Price
472907	(HXU-1000-250) Hose Adapter	$73.00 E

Martyr Aluminum Anode Shaft

Martyr



- Designed to install over the propeller shaft and provide maximum corrosion protection.
- Performs well in salt and brackish waters.
- Comes with stainless steel hardware: a screw (either Allen head or slotted head), a lock washer, and a bolt retaining washer.
- Inner diameter 1-1/4".
- Outer diameter 2- 3/4".
- Length 2-1/2".

Order No.	Mfg. No. / Description	Price
620133	(CMX01AL) 3/4"	$7.98 H
620134	(CMX02AL) 7/8"	$8.98 H
620135	(CMX03AL) 1"	$8.98 H
620136	(CMX04AL) 1-1/8"	$9.98 H
620137	(CMX05AL) 1-1/4"	$11.98 H
620138	(CMX06AL) 1-3/8"	$11.98 H
620139	(CMX07AL) 1-1/2"	$12.98 H

Martyr Aluminum Rudder Anode

Martyr



- Aluminum anodes for rudders and trim tabs are disc shaped plates of aluminum designed to minimize corrosion around your boat's metal rudders and trim tabs.
- Aluminum anodes are specifically designed for use in salt or brackish waters.

Order No.	Mfg. No. / Description	Price
620140	(CMR01AL) Diameter 1-7/8", Thickness 1/4"	$4.88 H
620141	(CMR02AL) Diameter 2-13/16", Thickness 1/2"	$7.98 H
620142	(CMR03AL) Diameter 3-3/4", Thickness 1/2"	$10.98 H
620143	(CMR04AL) Diameter 5", Thickness 5/8"	$21.98 H

Martyr Divers Dream Aluminum Anode

Martyr



- Bolts on to hulls to minimize the corrosive effects of metals in the water.
- Uses 1/2" studs.

Order No.	Mfg. No. / Description	Price
620151	(CMDIVERMINIA) 6" Long, 4" High and 1/2" Thick	$18.98 H
620155	(CMDIVERA) 12" Long, 6" High and 1/2" Thick	$35.98 H

Martyr Doka Aluminum Bolt-On Anode

Martyr

Order No.	Mfg. No. / Description	Price
620157	(CM656934A) 3-1/2" x 1"	$3.91 H

Martyr Bennet Trim Tab Anode Kit

Martyr

- Zinc anodes for salt water.
- Fits Bennett Trim Tabs.
- Kit includes (2) anodes and stainless steel mounting hardware.

Order No.	Mfg. No. / Description	Price
620159	(CMBNT1AKITZ)	$18.98 H

Pencil Anode Retaining Plug

- Complete zinc and plug.

Order No.	Mfg. No. / Description	Price
269907	(E-7C) 1" x 5"	$46.98 H

DONOVAN MARINE

THERE'S A NEW SHERIFF IN TOWN.

Rated "EXCELLENT" & "BEST BUY" — PRACTICAL SAILOR® - 5 Consecutive Years



QUALITY INGREDIENTS

Blue Water Marine Paint™ contains higher concentrations of premium domestic copper & active ingredients, and only use virgin rosins, colorants & solvents in all antifoulings.

LASTING PERFORMANCE

Coatings available for single & multiple seasons, as well as epoxy hard, ablative, copper-free & SCX - Slime Control Xtra™ additives.

AVAILABILITY

All Products listed are stocked in all 20 Donovan warehouse for quick delivery.

WARRANTY

Ask about our written warranty.

EXCLUSIVELY available through Donovan Marine

CALL CENTERS

New Orleans	800-347-4464
Clearwater	800-226-4562
Ft Lauderdale	877-936-4722
Harvey	504-361-5731
Houston	800-669-8392
Little Rock	888-562-5008
Nashville	800-288-4450

LOCATIONS

Annapolis
Atlanta
Birmingham
Charleston
Charlotte
Chicago
Clearwater
Denton
Ft Lauderdale/International
Harvey
Houston
Jacksonville
Little Rock
Miami
Nashville
New Orleans
Norwich
Pensacola

DONOVAN MARINE

BOTTOM PAINT COMPARISON CHART

MARPRO®	BLUE WATER®	INTERLUX®	PETTIT®	SEAHAWK®	WEST MARINE®	WOOLSEY®
SUPER-B SPC™	Gold Coast SPC™	Micron 66™	--	Biocop TF™	--	--
SUPER-B GOLD™	Copper Pro SCX™	--	Ultima SR™	--	--	Defense HC™ (no booster)
SUPER B XTRA™	Copper Shield SCX™	Micron Extra™	Ultima SR-40™	Cukote Biocide Plus™	PCA Gold™	Yacht Shield SF™
SUPERKOTE GOLD™	Copper Pro SCX Hard™	Ultra™	Trinidad SR™	Tropikote Biocide Plus™	--	--
SUPER-B ABLATIVE™	Copper Shield™	Micron CSC™	Horizons™	Cukote™ or AF 33™	CPP Plus™	Yacht Shield™
SUPERKOTE HARD™	Copper Shield Hard™	F/B Bottomkote™	Unepoxy Plus™	Sharkskin™	BottomShield™	--
SUPER B UNO™	Copper Shield UNO™	Act™	--	AF 33™	--	--
SUPER-B SHIELD™	New England Copper™	--	Seamate™	--	Bottomshield™	--
ALUMA PRO™	Kolor™	Trilux 33™	Vivid™	Mission Bay™	--	--
AQUA-B™	Aquashield™	Aqua™	Hydrocoat™	Monterey™	Pure Oceans™	--
SUPER-B ECO™	Shelter Island Plus™	Pacific Plus™	Vivid Eco™	Smart Solution™	--	--

Interlux® and Interlux® products are registered trademarks of the Akzo Nobel Company. Pettit® & Pettit® products are registered trademarks of RPM®. Seahawk® and Seahawk® products are registered trademarks of New Nautical Coatings. West Marine® products are registered trademarks of West Marine®. Woolsey® & Woolsey® products are registered trademarks of RPM®.

For more information or technical assistance call Blue Water Marine Paint at 800-628-8422.

SUPER PREMIUM GOLD BOTTOM PAINT



NEW!

SUPER-B SPC™

Multi Season
Slime Control Xtra™
BOOSTED SELF POLISHING COPOLYMER (SPC) ABLATIVE
39% Copper, 3% Zinc Pyrithione™

Alternative Product Replacements for: Blue Water® Gold Coast SPC™, Interlux® Micron 66™ and Seahawk Biocop TF™

Blue

Black

Part #'s coming soon



SUPER-B GOLD™

Multi Season
Slime Control Xtra™
BOOSTED COPPER ABLATIVE
67% Copper, 2% SCX™

Alternative Product Replacements for: Blue Water® Copper Pro SCX™, Pettit® Ultima SR™ Ultima SR™ and Woolsey® Defense HC™

7-2629 Gallon
7-2630 Quart
Blue

7-2633 Gallon
7-2634 Quart
Black

7-2627 Gallon
7-2628 Quart
Green

7-2631 Gallon
7-2632 Quart
Red

For more information or technical assistance call Blue Water Marine Paint at 800-628-8422.

SUPER PREMIUM GOLD BOTTOM PAINT



SUPER-B XTRA™

Multi Season
Slime Control Xtra™
BOOSTED COPPER ABLATIVE
45% Copper, 2% SCX™

Alternative Product Replacements for: Blue Water® Copper Shield SCX™, Interlux® Micron Extra™, Pettit® Ultima SR-40™, Seahawk® Cukote Biocide Plus™, West Marine® PCA Gold™ and Woolsey® Yacht Shield SF™

7-2700 Gallon
7-2701 Quart
Blue

7-2702 Gallon
7-2703 Quart
Black

7-2704 Gallon
7-2705 Quart
Green

7-2706 Gallon
7-2707 Quart
Red



SUPERKOTE GOLD™

Full Season
Slime Control Xtra™
BOOSTED HARD COPPER MODIFIED EPOXY
67% Copper, 2% SCX™

Alternative Product Replacements for: Blue Water® Copper Pro SCX Hard™, Interlux® Ultra™, Pettit® Trinidad SR™ and Seahawk® Tropikote Biocide Plus™

7-2609 Gallon
7-2610 Quart
Blue

7-2613 Gallon
7-2614 Quart
Black

7-2611 Gallon
7-2612 Quart
Red

For more information or technical assistance call Blue Water Marine Paint at 800-628-8422.

PREMIUM BOTTOM PAINT



SUPER-B ABLATIVE™

Multi Season
COPPER ABLATIVE
45% Copper

Alternative Product Replacements for: Blue Water® Copper Shield™, Interlux® Micron CSC™, Pettit® Horizons™, Seahawk® Cukote™ Cukote™ or AF 33™, West Marine® CPP Plus™ and Woolsey® Yacht Shield™

7-2635 Gallon
7-2636 Quart
Blue

7-2639 Gallon
7-2640 Quart
Black

7-2641 Gallon
7-2642 Quart
Green

7-2637 Gallon
7-2638 Quart
Red



SUPERKOTE HARD™

Full Season
HARD COPPER MODIFIED EPOXY
45% Copper

Alternative Product Replacements for: Blue Water® Copper Shield Hard™, Interlux® F/B Bottomkote™, Pettit® Unepoxy Plus™, Seahawk® Sharkskin™ and West Marine® Bottomshield™

7-2619 Gallon
7-2620 Quart
Blue

7-2623 Gallon
7-2624 Quart
Black

7-2617 Gallon
7-2618 Quart
Green

7-2621 Gallon
7-2622 Quart
Red

For more information or technical assistance call Blue Water Marine Paint at 800-628-8422.

PREMIUM BOTTOM PAINT



NEW!

SUPER-B UNO™

Full Season
COPPER ABLATIVE
35% Copper

Alternative Product Replacements for: Blue Water® Copper Shield UNO™, Interlux® Act™ and Seahawk® AF 33™

Blue Black

Part #'s coming soon



NEW!

SUPER-B SHIELD™

Full Season
COPPER ABLATIVE
25% Copper

Alternative Product Replacements for: Blue Water® New England Copper™, Pettit® Seamate™ and West Marine® Bottomshield™

Blue Black Red

Part #'s coming soon



ALUMA PRO™

Multi Season
ALUMINUM BOATS / BRIGHT COLOR ABLATIVE
45% Copper Thiocyanate

Alternative Product Replacements for: Blue Water® Kolor™, Interlux® Trilux 33™, Pettit® Vivid™ and Seahawk® Mission Bay™

7-2603 Gallon 7-2604 Quart Blue	7-2605 Gallon 7-2606 Quart Black	7-2600 Gallon 7-2601 Quart White

For more information or technical assistance call Blue Water Marine Paint at 800-628-8422.

PREMIUM ENVIRONMENTAL BOTTOM PAINT



AQUA-B™

Multi Season
WATERBASED COPPER ABLATIVE
45% Copper
No Solvent Smell

Alternative Product Replacements for: Blue Water® Aquashield™, Interlux® Aqua™, Pettit® Hydrocoat™, Seahawk® Monterey™ and West Marine® Pure Oceans™

7-2708 Gallon 7-2709 Quart Blue	7-2710 Gallon 7-2711 Quart Black	7-2712 Gallon 7-2713 Quart Green	7-2714 Gallon 7-2715 Quart Red



NEW!

SUPER-B ECO™

Multi-Season - Solvent Based
Copper-Free Ablative (6% Econea, 4% Zinc Pyrithione)

Alternative Product Replacements for: Interlux® Pacifica™, Pettit® Vivid Free™ and Seahawk® Mission Bay™

Blue	Black	Off White

Part #'s coming soon



NEW!

OUTDRIVE SPRAY™

Full Season
Copper-Free

Alternative Product Replacements for: Blue Water® Drivesleek™ and Trilux™ Outdrive Spray

Primer	Part #'s coming soon	Black

For more information or technical assistance call Blue Water Marine Paint at 800-628-8422.



NEW!

MAR-PROTECT 70 HIGH SOLIDS EPOXY PRIMER™

70% SOLIDS

2 Coats yields 10 mils dry

White | Black | Gray | Red

Part #'s coming soon



MAR-PROTECT EPOXY PRIMER™

50% SOLIDS

Epoxy Primer

Alternative Product Replacements for: Blue Water® Bottom Protect™, Interlux® Interprotect™, Pettit® Protect™ and Seahawk® Tuff Stuff™

7-2670K
Gray



MAR-PRO PROFESSIONAL FISHBOAT COATINGS

MAR-PRO PROFESSIONAL

Fishboat Coatings

Topside Enamels

Alternative Product Replacements for: Blue Water® Mega Gloss™, Interlux® Brightside™, Pettit® Easypoxy™ and West Marine® Seagloss™

7-2649 Gallon
7-2650 Quart
White

7-2652 Gallon
7-2653 Quart
Medium Gray

7-2654 Gallon
7-2655 Quart
Black

7-2656 Gallon
7-2657 Quart
Green

7-2658 Gallon
7-2659 Quart
Blue

Marpro Superkote Gold™ with SCX™-Slime Control Xtra



- SUPERKOTE GOLD™ is the highest performance modified hard epoxy performance products on the market today.
- The highest copper content (67%) in our line.
- Performance booster SCX™ (Slime Control Xtra™) provides outstanding protection against slime, grass and weed.
- Continual release of biocide makes this modified hard epoxy most effective for antifouling protection.
- Superior protection against hard and soft growth in extreme fouling conditions.
- Perfect for powerboats and sailboats.
- Can be applied directly over properly prepared epoxies and vinyls, and most any other hard bottom paints.

Order No.	Description	Price
7-2609	Blue, Gallon	$277.98 I
7-2610	Blue, Quart	$81.98 I
7-2611	Red, Gallon	$277.98 I
7-2613	Black, Gallon	$277.98 I
7-2614	Black, Quart	$81.98 I
7-2615	Green, Gallon	$277.98 I

Marpro Super-B Gold™ with SCX™-Slime Control Xtra



- SUPER-B GOLD™ is the highest performance ablative copolymer on the market today.
- The highest copper content (67%) in our line.
- Performance booster SCX™ (Slime Control Xtra™) provides outstanding protection against slime, grass and weed.
- Continual release of biocide makes this self-polishing copolymer most effective for anti-fouling protection, with only minimal paint buildup.
- Tough, multi-season paint for superior protection against hard and soft growth in extreme fouling conditions.
- Can re-launch after extended haul-out and retain original antifouling properties.
- Perfect for powerboats and sailboats.
- Can be applied directly over properly prepared ablatives, epoxies and vinyl's, and most any other hard or ablative bottom paints.

Order No.	Description	Price
7-2627	Green, Gallon	$290.98 I
7-2628	Green, Quart	$85.98 I
7-2629	Blue, Gallon	$290.98 I
7-2630	Blue, Quart	$85.98 I
7-2631	Red, Gallon	$290.98 I
7-2633	Black, Gallon	$290.98 I
7-2634	Black, Quart	$85.98 I

Marpro Superkote Antifouling



- Hard modified epoxy.
- Up to 65% cuprous oxide.
- Apply over most other antifoulings.
- Excellent for fiberglass, wood and steel.

Order No.	Description	Price
7-1070	Blue, Gallon	$162.98 E
7-1071	Red, Gallon	$162.98 E

Marpro Superkote Hard™



- SUPERKOTE HARD™ has a high cuprous oxide content (45%) with a coating that provides a modified epoxy technology.
- This coating will provide full season protection for moderate fouling conditions.
- Perfect for powerboats and sailboats in seasonal boating conditions.
- Can be applied directly over properly prepared vinyls, epoxies and most any other hard bottom paints.

Order No.	Description	Price
7-2617	Green, Gallon	$128.98 I
7-2618	Green, Quart	$49.98 I
7-2619	Blue, Gallon	$128.98 I
7-2620	Blue, Quart	$49.98 I
7-2621	Red, Gallon	$128.98 I
7-2622	Red, Quart	$49.98 I
7-2623	Black, Gallon	$128.98 I
7-2624	Black, Quart	$49.98 I

Marpro Super-B Ablative™



- SUPER-B ABLATIVE™ has a high cuprous oxide content (45%) with a coating that provides a self-polishing ablative technology.
- This coating will provide multi-season protection for moderate fouling conditions.
- No paint buildup will occur and eliminates the need for heavy sanding.
- Perfect for powerboats and sailboats in seasonal boating conditions.
- Can be applied directly over properly prepared vinyl's, epoxies and most any other hard or multi-season bottom paints.

Order No.	Description	Price
7-2635	Blue, Gallon	$128.98 I
7-2636	Blue, Quart	$51.98 I
7-2637	Red, Gallon	$128.98 I
7-2638	Red, Quart	$51.98 I
7-2639	Black, Gallon	$128.98 I
7-2640	Black, Quart	$51.98 I
7-2641	Green, Gallon	$128.98 I
7-2642	Green, Quart	$51.98 I

Marpro Aluma Pro™



- ALUMA PRO™ bottom paint has the cleanest, brightest colors, the whitest whites and the blackest black.
- Combine all of that with a multi-season self-polishing ablative copolymer, and is as effective as it is clean & vibrant.
- This product provides antifouling protection against barnacles, algae and hydroids in salt and fresh water on boat bottoms only.
- This product has universal application over all types of properly prepared bottom paints.
- For use on fiberglass, aluminum, wood & steel hulls.

Order No.	Description	Price
7-2600	White, Gallon	$255.98 I
7-2601	White, Quart	$72.98 I
7-2603	Blue, Gallon	$255.98 I
7-2604	Blue, Quart	$72.98 I
7-2605	Black, Gallon	$255.98 I
7-2606	Black, Quart	$72.98 I

©2014 Donovan Marine, Inc.

Marpro Professional Fishboat Coatings - Alkyd Topside Enamel



- Single component topside alkyd enamel gives a hard protective coating.
- Fast drying which, when brushed or rolled, give a smooth finish with excellent handle and flow.
- Can be used on fiberglass, wood, aluminum and steel.
- High Gloss with Great UV protection.
- Good color retention.
- Good durability to cleaning solutions, abrasion & stains.
- High Performance Coating for Marine, Industrial & Offshore Structures.

Order No.	Description	Price
7-2649	Gloss White, Gallon	$44.98
7-2650	Gloss White, Quart	$13.98
7-2652	Medium Gray, Gallon	$44.98
7-2653	Medium Gray, Quart	$13.98
7-2654	Gloss Black, Gallon	$44.98
7-2655	Gloss Black, Quart	$13.98
7-2656	Green, Gallon	$44.98
7-2657	Green, Quart	$13.98
7-2658	Blue, Gallon	$44.98
7-2659	Blue, Quart	$13.98

Marpro Topside Gold™



- Technically advanced, single component silicone copolymer topside finish that delivers a mirror-like finish.
- Will last up to 5 times longer than conventional topside finishes.
- Extremely durable, hard, super high gloss, exceptional color retention, and tremendous durability.
- Fast drying which when brushed or rolled gives a silky smooth finish with excellent handle and flow.
- Can be used on fiberglass, wood, aluminum and steel.
- Hard, mirror high gloss one-part silicone copolymer finish with great UV protection.
- Great for cleaning, tough abrasion & stain resistance.
- Perfect for waterline striping.

Order No.	Description	Price
7-2663	White, Quart	$38.98

Marpro Super-B Xtra™



- SUPER-B XTRA™ provides extended antifouling protection against barnacles, algae and hydroids in salt and fresh water on boat bottoms only.
- SCX™ - SLIME CONTROL XTRA™ - acts like a sunscreen to prevent slime and algae.
- Its ablative copolymer base renders a smooth finish with durability and abrasion resistance.
- Releases biocide by the constant exposure of new paint film to the water.
- Universal application over all types of properly prepared bottom paints (except aluminum).
- For use on fast fiberglass boats, as well as wood and steel hulls.
- Extended protection is possible, since performance is directly proportional to the amount of paint applied.

Order No.	Description	Price
7-2700	Blue, Gallon	$240.98
7-2701	Blue, Quart	$67.98
7-2702	Black, Gallon	$240.98
7-2703	Black, Quart	$67.98
7-2704	Green, Gallon	$240.98
7-2705	Green, Quart	$67.98
7-2706	Red, Gallon	$240.98
7-2707	Red, Quart	$67.98

Marpro Aqua B™



- AQUA B™ has a high copper content (45%) in a water-base ablative technology.
- This coating will provide multi-season protection for medium fouling conditions.
- No paint buildup will occur and eliminates the need for heavy sanding.
- Multi-season paint for superior protection against hard and soft growth in fouling waters.
- Can re-launch after extended haul-out and retain original antifouling properties.
- Perfect for powerboats and sailboats.
- Can be applied directly over properly prepared ablatives, epoxies and vinyl's, and most any other hard or ablative bottom paints.

Order No.	Description	Price
7-2708	Blue, Gallon	$184.98
7-2709	Blue, Quart	$50.98
7-2710	Black, Gallon	$184.98
7-2711	Black, Quart	$50.98
7-2712	Green, Gallon	$184.98
7-2713	Green, Quart	$50.98
7-2714	Red, Gallon	$184.98
7-2715	Red, Quart	$50.98

Marpro Paint Display

- This display includes the following:
  - (2) 7-2609 - Superkote Gold, Blue, Gallon
  - (2) 7-2610 - Superkote Gold, Blue, Quart
  - (2) 7-2613 - Superkote Gold, Black, Gallon
  - (2) 7-2614 - Superkote Gold, Black, Quart
  - (2) 7-2619 - Superkote Hard 45, Blue, Gallon
  - (2) 7-2620 - Superkote Hard 45, Blue, Quart
  - (2) 7-2623 - Superkote Hard 45, Black, Gallon
  - (2) 7-2624 - Superkote Hard 45, Black, Quart
  - (2) 7-2629 - Super-B Gold, Blue, Gallon
  - (2) 7-2630 - Super-B Gold, Blue, Quart
  - (2) 7-2633 - Super-B Gold, Black, Gallon
  - (2) 7-2634 - Super-B Gold, Black, Quart
  - (2) 7-2635 - Super-B Ablative 45, Blue, Gallon
  - (2) 7-2636 - Super-B Ablative 45, Blue, Quart
  - (2) 7-2639 - Super-B Ablative 45, Black, Gallon
  - (2) 7-2640 - Super-B Ablative 45, Black, Quart
  - (4) 7-2650 - Pro Fishboat Coatings, Gloss White, Qt
  - (2) 7-2653 - Pro Fishboat Coatings, Med Gray, Qt
  - (2) 7-2655 - Pro Fishboat Coatings, Gloss Black, Qt
  - (2) 7-2657 - Pro Fishboat Coatings, Green, Qt
  - (2) 7-2659 - Prof Fishboat Coatings, Blue, Qt
  - (4) 7-2663 - Topside Gold, White, Quart
  - (2) 7-1038 - Foam Cigar Roller 4" - 2 Pack
  - (2) 7-1039 - Foam Cigar Roller 6.5" - 2 Pack
  - (2) 7-1050 - Roller Cover - 3" X 3/8"
  - (2) 7-1051 - Roller Cover - 4" X 3/8"
  - (2) 7-1053 - Roller Cover - 9" X 3/8"
  - (2) 7-1060 - Paint Brush - 1"
  - (2) 7-1061 - Paint Brush - 1-1/2"
  - (2) 7-1062 - Paint Brush - 2"
  - (2) 7-1063 - Paint Brush - 2-1/2"
  - (2) 7-1064 - Paint Brush - 3"
  - (2) 7-2670 - Mar-Protect Epoxy Primer, Gallon



Order No.	Description	Price
7-2589	Display	$3,387.98 E

Marpro Camouflage Paint



- Dull-finish marine paint is perfect for hunting or fishing vehicles.
- High quality, temporary finish for use on duck boats, skiffs and canoes.
- Easily removed with the included neutralizer.
- Brush, roll or spray on finish.

Order No.	Description	Price
7-2660	Olive, Quart	$13.98 I
7-2661	Brown, Quart	$13.98 I

Marpro Strontium Chromate Primer





- An excellent 2-part metal primer ideally suited for corrosion resistance.
- Long pot life, perfect for large surface area, a heavy duty 2:1 mix.
- Anti-corrosive substrate primer for steel/aluminum.

Order No.	Description	Price
759071	(8004K) 2 Gallon Kit, Lt Yellow	$256.98 I

Marpro Thinner/Solvent for Marine Coatings



- Reducer improves the application and the flow of coatings for brushing and rolling.
- A slow drying solvent, compatible with all antifoulings, primers and enamels and is also effective as a a cleaner for paint supplies.

Order No.	Description	Price
7-2674	Gallon	$30.98 I
7-2675	Quart	$10.98 I

Blue Water Coal Tar Epoxy Primer



- It is a heavy duty high build epoxy primer.
- Prevents rust and corrosion, has excellent adhesion and abrasion resistance, and is recommended for saltwater immersion service.
- Marine docks, ship hulls, tank interiors, marine barges (exterior), metal protection in most chemical environments.

Order No.	Mfg. No. / Description	Price
759069	(8003K) Black, Gallon Kit	$88.98 I

Marpro Barrier Shield



- A barrier/sealer coat over incompatible or unknown antifoulings.
- Effective anticorrosive primer for underwater metal surfaces.
- An excellent primer for antifouling paint over sanded fiberglass.

Order No.	Description	Price
7-2689	1 Gallon	$117.98 I

Marpro White Undercoater



- One coat is good for coverage of 75 square feet/quart.
- Great coverage, quick dry, great adhesion for topcoat.

Order No.	Description	Price
7-2697	1 Quart	$16.98 I

Marpro Mar-Protect Epoxy Primer



- High Build Epoxy Primer.
- Heavy duty 3:1 epoxy coating that prevents water absorption and blistering of a fiberglass hull.
- Provides a seamless epoxy coating that creates a high build water barrier that eliminates any direct path for water migration.
- Excellent anti-corrosive substrate primer for metals.

Order No.	Description	Price
7-2670	1 Gallon	$97.98 I

Blue Water Rusty Metal Primer



- Commercial/Industrial Only.

Order No.	Mfg. No. / Description	Price
759540	(5905-G) Gallon	$71.98 I

Blue Water Copper Shield 45



- High performance multi-season ablative.
- Multi-season protection against hard and soft growth in moderate fouling conditions.
- Re-launch after extended haul-out while retaining original antifouling properties.
- Ablative polishing like a bar of soap - no paint build-up.
- Apply directly over any properly sanded hard or ablative bottom paint or epoxy primer.

Order No.	Mfg. No. / Description	Price
759732	(8602G) Black, Gallon	$173.98 II
759733	(8602Q) Black, Quart	$47.98 I

©2014 Donovan Marine, Inc.

Blue Water Copper Shield Uno/Marpro Super-B Uno



- High cuprous oxide content with a coating that provides a self-polishing ablative technology.
- Full season protection for moderate fouling conditions.
- No paint buildup will occur and eliminates the need for heavy sanding.
- Perfect for powerboats and sailboats in seasonal boating conditions.
- Apply directly over properly prepared vinyl's, epoxies and most any other hard or multiseason bottom paints.

Order No.	Mfg. No. / Description	Price
7-2866	(8631G) Blue, Gallon	$122.98
7-2868	(8632G) Black, Gallon	$122.98
759768	(8633G) Green, Gallon	$122.98
759772	(8634G) Red, Gallon	$122.98
759761	(8631Q) Blue, Quart	$36.98
759765	(8632Q) Black, Quart	$36.98

Blue Water Net Dip Coating



- Commercial grade.

Order No.	Mfg. No. / Description	Price
759925	(1002-FG) 5 Gallon	$416.98

Forespar LanoCote® Prop & Bottom Foul Release™



- All natural Foul Release Prop & Bottom Coating.
- LanoCote is a revolutionary new way to keep your underwater surfaces clean.
- Simply wipe a thin coating onto foul prone surface for long lasting growth resistance.
- Can be applied underwater or on the hard.

Order No.	Mfg. No. / Description	Price
354555	(770035)	$49.98

Blue Water Marine Copper Shield Hard™



- High performance hard modified epoxy.
- Full season protection against hard and soft growth in extreme fouling conditions.
- Harder finish allows scrubbing of harder paint film.
- Apply directly over any properly sanded hard bottom paint or epoxy primer.

Order No.	Mfg. No. / Description	Price
759740	(8621G) Blue, Gallon	$122.98
759744	(8622G) Black, Gallon	$122.98
759748	(8623G) Green, Gallon	$122.98
759752	(8624G) Red, Gallon	$122.98
759741	(8621Q) Blue, Quart	$36.98
759745	(8622Q) Black, Quart	$36.98

Blue Water Marine New England Copper/Marpro Super-B Shield



- Good performance single season ablative.
- Full season protection against hard and soft growth in low-moderate fouling conditions.
- Ablative polishing like a bar of soap - no paint build-up.
- Apply directly over any properly sanded hard or ablative bottom paint or epoxy primer.

Order No.	Mfg. No. / Description	Price
7-2876	(8254G) Red, Gallon	$92.98
759696	(8252Q) Red, Quart	$27.98
7-2872	(8251G) Blue, Gallon	$92.98
759681	(8251Q) Blue, Quart	$27.98
7-2874	(8252G) Black, Gallon	$92.98
759686	(8252Q) Black, Quart	$27.98

Blue Water Uraglow™ Epoxy Primer



- Two Component epoxy primer with corrosion and adhesion properties.
- For fiberglass, steel, aluminum and wood substrates.
- Also used to seal filler primers, and fairing work before applying topcoats.
- May be used above or below the waterline.

Order No.	Mfg. No. / Description	Price
759500	(UE1000G) Gray Base, Gallon	$104.98
759501	(UE1001G) Converter, Gallon	$104.98

Blue Water Marine Alkyd 50



- A single component marine grade alkyd finish.
- High gloss and good color retention.
- Fast drying and good leveling characteristics.
- Good resistance to chemicals cleaners and abrasion.

Order No.	Mfg. No. / Description	Price
759463	(3023-G) Safety Yellow, Gallon	$64.98 H
759502	(3035-G) White Primer, Gallon	$49.98 I

Blue Water AF 25 - TBT Free Ablative Antifouling



- Low copper load ablative antifouling.
- Used for fouling control on coastal vessels requiring shorter drydock intervals in low fouling waters.
- Used for fouling control on flat bottoms of deep sea vessels.

Order No.	Mfg. No. / Description	Price
759196	(2504-5G) Red, 5 Gallon	$477.98 I
759209	(2504-G) Red, Gallon	$95.98 I

Blue Water Kolor™ Multi Season Ablative Anti-Fouling



- Perfect for aluminum boats.
- Available in white & bright colors.
- Multi-season ablative protects against hard and soft growth in moderate fouling conditions.
- Re-launch after extended haul-out while retaining original antifouling properties.
- Ablative polishing like a bar of soap - no paint buildup.
- Apply directly over any properly sanded hard or ablative bottom paint or epoxy primer.

Order No.	Mfg. No. / Description	Price
759780	(8611G) Royal Blue, Gallon	$264.98 I
759788	(8616G) White, Gallon	$264.98 I
759789	(8616Q) White, Quart	$66.98 I

Blue Water Mega Gloss Alkyd



- Super high gloss, smooth finish.
- Excellent handle and flow.
- Superior UV protection prevents fading.
- Resistance to tough chemicals.
- Use on fiberglass, steel, aluminum and wood.
- Excellent recoatability.
- Tremendous coverage and hiding.

Order No.	Mfg. No. / Description	Price
759000	(8901G) Super White, Gallon	$44.98 I
759002	(8902G) Semi-Gloss White, Gallon	$44.98 I
759015	(8922G) Royal Blue, Gallon	$44.98 I
759016	(8927G) Light Gray, Gallon	$44.98 I

Blue Water AF 45 - TBT Free Ablative Antifouling



- Moderate copper load (45%) ablative antifouling.
- TBT free.
- Used for fouling control on coastal vessels requiring drydock intervals less than 36 month.

Order No.	Mfg. No. / Description	Price
759210	(4501-G) Blue, Gallon	$125.98 I
759211	(4502-5G) Black, 5 Gallon	$599.98 H
759223	(4502-G) Black, Gallon	$119.98 H

Blue Water Drivesleek™



- Full season protection.
- Excellent for outdrives, propellers, shafts, bow thrusters, rudders, trim tabs.
- Compatible with other existing coatings.
- 12 ounce spray for easy application.

Order No.	Mfg. No. / Description	Price
7-2593	(8123SP) Clear	$39.98 I
7-2594	(8125SP) Black	$39.98 I
7-2595	(8127SP) Primer	$26.98 I

Blue Water Mega Gloss™ Topside Polyurethane Enamel

- Single component topside polyurethane enamel.
- Hard protective coating for super high gloss, color retention, durability.
- Smooth finish with excellent handle and flow.
- Resistance to tough chemicals, cleaning solutions & ultraviolet light.
- Can be used on fiberglass, wood, aluminum and steel.

Order No.	Mfg. No. / Description	Price
759800	(8701G) Super White, Gallon	$78.98 I
759801	(8701Q) Super White, Quart	$20.98 I
759802	(8702G) Semi-Gloss White, Gallon	$78.98 I
759803	(8702Q) Semi-Gloss White, Quart	$20.98 I
759806	(8704G) Black, Gallon	$78.98 I
759807	(8704Q) Black, Quart	$20.98 I
759810	(8706G) Flat Black, Gallon	$78.98 I
759813	(8707Q) Sky Blue, Quart	$20.98 I
759817	(8709Q) Medium Gray, Quart	$20.98 I
759823	(8714Q) Bright Red, Quart	$20.98 I
759829	(8718Q) Continental Blue, Quart	$20.98 I
759833	(8721Q) Bright Orange, Quart	$20.98 I
759834	(8722G) Royal Blue, Gallon	$78.98 I
759835	(8722Q) Royal Blue, Quart	$20.98 I
759837	(8723Q) Medium Yellow, Quart	$20.98 I
759843	(8732Q) Emerald Green, Quart	$20.98 I
759851	(8758Q) Dark Oak, Quart	$20.98 I
759846	(8735G) White Primer, Gallon	$78.98 I
759849	(8738Q) Grey Primer, Quart	$20.98 I
759852	(8800NS) Non-skid, Pint	$20.98 I

Blue Water Armada Wood Finishes™



- High performance synthetic wood finishes that allows the wood to breathe.
- Contain synthetic transparent iron oxide pigments which shield the wood against sunlight.
- Protective shell is very resistant to impact damage and abrasion.
- Flexible which allows for natural expansion and contraction of wood.

Order No.	Mfg. No. / Description	Price
759858	(017G) Satin, Glass	$112.98 I
759859	(017Q) Satin, Quart	$31.98 I
759861	(018Q) Gloss, Quart	$31.98 I

Boero 613 Defender Underwater Epoxy Primer Kit



- Highest solids formulation means 40% less labor, less coats, less cost, less time to apply.
- High performance underwater primer to DEFEND & PROTECT hulls.
- Ideal for Fiberglass, Aluminum, Steel, Keels and Wood Hulls.
- For the prevention & repair of Gelcoat Blistering.
- Excellent for propellers, rudders and shafts with antifouling paint.
- Contains Mica Platelets to block water.

Order No.	Mfg. No. / Description	Price
760147	(613-000C) Quart Kit: White	$47.98 I
760149	(613-001) Gallon Kit: White	$139.98 I

Boero Altura Extra 619



Boero SuperNavi Altura Extra 619 is a hard, protective antifouling paint formulated for use in the highest fouling areas. While 619 works exceptionally well on boats frequently sitting at a dock, it is also extremely effective on vessels requiring a harder coating for high-speed usage of demanding operating conditions. Ever-Clean antifouling technology combines a high load of cuprous oxide and the organic biocide Irgarol, which results in unprecedented resistance to fight barnacles, slime and algae and will perform for extended periods of service. Its hard matrix surface is abrasion resistant and can be scrubbed if desired. It has excellent adhesion when applied over most hard antifouling coatings that are clean and well adhered to the hull. Altura Extra 619 can be applied over most hard antifouling paints. Old soft or ablative antifouling paints should be removed or painted with Mistral Extra Advanced Self-Polishing Ablative 633 for best results. Altura 619 is formulated to be used on vessels of all sizes traveling at 4 to 50 knots, in fresh or salt water. Altura 619 Advanced Hard Matrix meets EPA guidelines for safe to use raw materials, and have passed the most stringent water quality tests required by EPA. If you are looking for a hard, strongest, long life bottom paint Altura 619 is your best choice.

- Highest level of biocides to fight severe fouling conditions.
- EVER-CLEAN Technology fights slime like no other.
- Its dual biocide formulation insures long life protection.
- Hard surface can be polished, burnished or scrubbed.
- Its clean bottom saves fuel and reduces carbon footprint.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
760151	(619-1012) Gallon, Blue	$421.98 I
760154	(619-1016) Gallon, Red	$421.98 I
760157	(619-1018) Gallon, Black	$421.98 I

Boero Mistral Plus Ablative Antifouling Bottom Paint



- Slowly release its biocide to ensure long life antifouling protection.
- Contains higher level of cuprous oxide than other brands in its category.
- Used to fight slime, zebra mussels & other forms of marine growth keeping the boat bottom clean.
- This reduces fuel consumption as the boat moves through the water, which reduces the boats carbon footprint.
- Compatible with all yacht bottom paints (except those containing Teflon).
- Ideal for boats traveling at 2 to 45 knots used in salt, brackish & fresh water.
- Apply directly over properly prepared vinyl's, epoxies and most any other hard or multi-season bottom paints.

Order No.	Mfg. No. / Description	Price
760090	(630-1032) Blue	$292.98 I
760094	(630-1036) Red	$292.98 I
760096	(630-1038) Black	$292.98 I

Boero SuperNavi Mistral Extra 633



Boero SuperNavi Mistral Extra 633 Advanced Self-Polishing Ablative antifouling paint is the longest lasting multi-seasonal, long-life formulation designed to provide maximum fouling resistance even in the most severe fouling areas. It is formulated to wash away at a highly controlled rate constantly releasing enough slime-fighting ingredients to prevent fouling each day. In fact, Mistral Extra 633 actually becomes smoother with age, eliminating surface roughness like other, less sophisticated ablative paints. Ever-Clean antifouling technology combines the controlled release of biocide with a high load of cuprous oxide and the organic biocide Irgarol to fight barnacles, slime and algae. As a result, this product will stay clean; get smoother with use and save fuel. It is formulated to meet the needs of boats of all sizes from small to superyachts, traveling from 4 to 45 knots, in fresh or salt water. Regardless of whether you haul your boat for winter storage or repairs, Boero Mistral Extra 633 can remain out of the water and re-launched without repainting. It is compatible with any well adhered and sanded bottom paint (except those containing Teflon®). Mistral Extra Advanced Self-Polishing Ablative 633 meets EPA guidelines for safe to use raw materials and have passed the most stringent water quality tests required by EPA. If you are looking for a long life antifouling paint to polish away with time, doesn't build up on your hull, yet improves fuel efficiency, Mistral Extra 633 is for you.

- True Multi-Year Protection.
- EVER-CLEAN Technology fights slime like no other Highest Copper level ablative to fight aggressive fouling.
- Haul and relaunch without repainting.
- Becomes smoother with use improving fuel Economy Multi-Season, Self Polishing No paint build up.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
760175	(633-1022) Gallon, Blue	$269.98 C
760179	(633-1026) Gallon, Red	$269.98 C
760181	(633-1028) Gallon, Black	$269.98 C

Boero SuperNavi Corsair Extra 642



Boero SuperNavi Corsair Extra 642 antifouling is an environmentally responsible formulation resistant to slime, algae, barnacles and other fouling organisms. It is copper oxide free and its low VOC levels meet every guideline throughout North America. Ever-Clean antifouling technology combines two biocides including an organic algaecide to deliver unprecedented control over all types of fouling even in the most severe fouling area. Corsair 642 is an excellent choice for those seeking an extremely effective lowest metal content product. It is well suited for fiberglass, aluminum, steel and wood hulls. It will deliver multi-season performance and can be hauled and re-launched without repainting. Its colors look clean, fresh and bright and it has passed EPA's most stringent water quality testing. Affective in fresh, salt or brackish waters, as well as, on shafts, struts, propellers and other metal underwater parts. Its finish is hard which makes it ideal for racing, trailer boats or rack stored boats. Advanced Copper Oxide Free Antifouling Paint

- Environmentally friendly with low metal and low VOC levels.
- Effectively delivers multi-seasonal protection.
- Ideal for Aluminum, Fiberglass, Steel and Wood hulls.
- EVER-CLEAN Technology Fights Slime like no other B.
- Bright colors including clean white. Colors can be mixed together.
- Hard finish for racing, trailer and rack storage.
- Made in USA.

Order No.	Mfg. No. / Description	Price
760185	(642-1051) Gallon, White	$254.98 C
760188	(642-1052) Gallon, Blue	$254.98 C
760191	(642-1056) Gallon, Red	$254.98 C
760193	(642-1058) Gallon, Black	$254.98 C

Boero Challenger Hi Solid Hardener



- State of The Art Polyacrylic two component topcoat.
- It can be repaired and polished if desired.
- Formulated for Excellent gloss, D.O.I. and long term performance.
- High hide properties with Low V.O.C.
- Highly resistant to chemicals, gas and diesel.
- Easy application of a 2 coat system without risk of sagging.

Order No.	Mfg. No. / Description	Price
760270	(674-000) 1 Liter	$166.98 I

Boero Challenger Hi Solid Clear



- State of The Art Polyacrylic two component topcoat.
- It can be repaired and polished if desired.
- Formulated for Excellent gloss, D.O.I. and long term performance.
- High hide properties with Low V.O.C.
- Highly resistant to chemicals, gas and diesel.
- Easy application of a 2 coat system without risk of sagging.

Order No.	Mfg. No. / Description	Price
760276	(678-000) 2 Liters	$287.98 I
760282	(679-000) 1 Liter	$150.98 I
760285	(679-000ML) Hardener, 500 ml	$66.98 I

Boero Challenger Hi-Solid Top Coat



- High solid polyacrylic top coat.
- Creates a protection barrier on the yacht surface with a compact, no yellowing, elastic layer with a high resistance to marine atmospheric conditions.
- Top coat can be polishable.
- Indicated for a spray application.

Order No.	Mfg. No. / Description	Price
760222	(673-002) Cloud White	$162.98 I
760226	(673-006) Snow White	$162.98 I
760232	(673-018) Matterhorn	$162.98 I
760239	(673-068) Jade Green	$230.98 I
760241	(673-130) Bluetouch White	$162.98 I
760244	(673-131) Navy Blue	$187.98 I
760247	(673-132) Perini Blue	$187.98 I
760250	(673-158) Fighting Lady Yellow	$190.98 I
760253	(673-184) Deep Red	$239.98 I
760255	(673-201) Jet Black	$175.98 I
760258	(673-216) Aqua	$230.98 I
760261	(673-265) Aristo Blue	$187.98 I
760264	(673-268) Royal Blue	$187.98 I
760267	(673-306) Claret Red	$239.98 I

Boero Challenger Hi-Tech Top Coat



- Two component polyester urethane top coat.
- Forms a barrier that protects the yacht with a compact high gloss, no yellowing film.
- Flexible but at the same time resistant to scrapes as well as weathering in the marine environment.
- Great filling properties and a high covering power.
- Normally used for spray application, is possible to obtain high thickness without problems.

Order No.	Mfg. No. / Description	Price
760301	(684-008) Off White	$147.98 I
760324	(684-068) Jade Green	$209.98 I

Boero 676-001 Challenger HS UC: Urethane Primer



676 Challenger HS UC Polyacrylic Undercoat Challenger HS UC is a two pack polyacrylic High Solid undercoat. It is formulated to provide an excellent foundation for polyurethane topcoats of all brands. It possesses excellent sandability and sealing characteristics of the substrate or older coatings. 676 Challenger HS UC is preferred by many professional applicators because it maximizes the gloss level and DOI of the Challenger topcoats as a direct result of the polyurethane topcoat not being absorbed by the primer.

- Mix 4:1 with 679.000.
- High Solids polyacrylic undercoat or finish primer.
- Formulated to serve as the ideal foundation for any polyurethane topcoat to maximize gloss and "Distinction of Image" of the topcoat.
- Fast dry for accelerated top coat process.
- It has excellent sandability.
- Low V.O.C. for products in the category and has a mix ration of 4:1.

Order No.	Mfg. No. / Description	Price
760273	(676-001) 2 Liters	$250.98 I

©2014 Donovan Marine, Inc.

Boero Challenger Hi Tech Polyurethane



- Polyester two component topcoat with exceptional hiding.
- Long term gloss and color retention.
- Exceptionally good chemical resistance to gas and diesel.
- Provides unsurpassed abrasion resistance.
- It is scuff and scratch resistant.
- Delivers long service life and durability with low maintenance.

Order No.	Mfg. No. / Description	Price
760291	(684-001) 2 Liters, Pure White	$147.98
760294	(684-002) 2 Liters, Cloud White	$147.98
760297	(684-006) 2 Liters, Snow White	$147.98
760303	(684-014) 2 Liters, Eggshell White	$147.98
760305	(684-015) 2 Liters, Stark White	$147.98
760308	(684-018) 2 Liters, Matterhorn White	$147.98
760310	(684-020) 2 Liters, Beige	$174.98
760313	(684-022) 2 Liters, Moonstone	$174.98
760315	(684-035) 2 Liters, Oyster White	$147.98
760318	(684-039) 2 Liters, Green	$201.98
760321	(684-051) 2 Liters, Light Gray	$165.98
760327	(684-071) 2 Liters, Portofino Green	$209.98
760330	(684-130) 2 Liters, Bluetouch White	$147.98
760333	(684-131) 2 Liters, Navy Blue	$171.98
760336	(684-132) 2 Liters, Perini Navi Blue	$171.98
760339	(684-157) 2 Liters, Catherine yellow	$203.98
760341	(684-158) 2 Liters, Fighting Lady Yellow	$173.98
760344	(684-173) 2 Liters, Bright Red	$239.98
760347	(684-178) 2 Liters, Italy Red	$239.98
760350	(684-184) 2 Liters, Deep Red	$239.98
760352	(684-201) 2 Liters, Jet Black	$159.98
760355	(684-210) 2 Liters, Medium Gray	$165.98
760357	(684-215) 2 Liters, Dark Green	$209.98
760360	(684-216) 2 Liters, Aqua	$209.98
760362	(684-222) 2 Liters, Cream	$174.98
760364	(684-240) 2 Liters, Dark Gray	$165.98
760367	(684-268) 2 Liters, Royal Blue	$171.98
760370	(684-299) 2 Liters, Camel Tan	$174.98
760372	(684-306) 2 Liters, Claret	$239.98
760374	(684-360) 2 Liters, Sahara Sand	$174.98
760376	(684-516) 2 Liters, Flag Blue	$171.98
760382	(686-000) Hardener-Spray	$173.98
760384	(687-000) Hardener-Brush	$130.98

Boero Altura UV Matt Varnish



Boero Altura UV Matte Varnish 647 is specifically formulated for traditional varnish applications in which satin or rubbed effect gloss levels are desired without compromising performance. 698 Altura Matte varnish is quite unique in that it contains a blend of UV absorber and light stabilizers to allow it to be used on exterior applications. It is also used on all types of wood used in boat interiors. It is a polyurethane modified varnish resin to remain flexible, thereby allowing the varnish system to move with the hull or spar. If a premium performance satin gloss level varnish is desired for exterior or interior applications, 648 Altura UV Matte varnish is a proven.

- Lower satin gloss level for interior use delivers hand rubbed effect appearance.
- Flexible coating to move with the hull and resist cracking.
- Golden rich color brings out the best in interior wood grain.
- Fast dry, two coats in one day at 70.
- F and above.

Order No.	Mfg. No. / Description	Price
760158	(648-000) 750 ml	$42.98

Boero 679-000 Challenger HS UC

679 Challenger HS UC component B when used with 676 is a two pack polyacrylic High Solid undercoat. It is formulated to provide an excellent foundation for polyurethane topcoats of all brands. It possesses excellent sealing characteristics of the substrate or older coatings. 676 Challenger HS UC is preferred by many professional applicators because it maximizes the gloss level and DOI of the Challenger topcoats as a direct result of the polyurethane topcoat not being absorbed by the primer.

Order No.	Mfg. No. / Description	Price
760279	(679-000B) 500 ml	$68.98

Boero Challenger UV High Gloss Polyurethane Varnish 685



Boero Challenger UV High Gloss Two component Polyurethane Varnish 685 is a two component clear varnish with a high level of initial gloss and retains its gloss significantly longer than one component varnishes. Its catalyzed polyurethane technology makes its abrasion resistance second to none. It also contains a UV absorber package to block the sun from deteriorating the film and protecting the wood grain, ultimately making it the longest lasting clear coat choice. It can also be applied over pigmented Challenger and other polyurethanes. It is a varnish that is very elastic and physically resistant and can be used on wood, as well as, under severe working conditions. Advanced flow additives help to insure exceptional results when applied by brush or spray. Challenger UV varnish is recommended for use on interior or exterior marine applications. Challenger Polyurethane varnish should only be applied over two component products. Challenger UV Polyurethane varnish is a two component clear varnish that will outperform all others.

- A two-component long life clear varnish formulated to outlast all one component varnishes.
- Two-component technology delivers highest of all gloss levels.
- Maximum Abrasion Resistance.
- Fast dry, two coats in one day at 65.
- F and above.

Order No.	Mfg. No. / Description	Price
760379	(685-KIT) Two Component In 750 Kit Cans	$72.98

Boero Altura UV Varnish



Classic European Varnish Formulation Boero Altura UV High Gloss Varnish 643 has a long standing reputation among many of the world's most discriminating yacht builders as an exceptional high gloss varnish. 643 Altura UV resists deterioration from the UV rays of the sun to maximize varnish film longevity. It has a proven reputation for its long lasting gloss retention. 643 Altura UF has a traditional blend of Tung oil and Linseed resin to deliver very good build and grain filling properties. It is also known for its flow characteristics. Its traditional golden color on marine woods like teak and mahogany are unequaled. 643 Altura UV is also known for its ability to move with the wood and as a result, will protect the wood from the ravages of the sea. Traditional proven formulation, protection and longevity are the hallmarks of 643 Altura UV.

- A Classic Italian varnish formulated for yacht craftsman.
- Formulated to bring out the golden richness in the wood grain.
- A traditional long lasting varnish which resists the UV rays of the sun.
- Fast dry, two coats in one day at 70.
- F and above.

Order No.	Mfg. No. / Description	Price
760159	(643-000) 750 ml	$40.98

Boero Sunglass High Gloss Varnish 667



Boero Sunglass High Gloss Varnish 667 has a rich gloss level to enhance the color and grain of the wood. Its clear color highlights the wood grain like no other. Sungloss is also formulated with a unique blend of phenol-modified alkyd resin with Tall oil and Linseed oil to deliver a protective coating that moves or flexes with the wood as the boat moves through the water. This flexibility prevents Sungloss from cracking, which will cause damage to the wood and shorten the life of the varnish system. It is also highly abrasion resistant on the surface making it well suited for decks, toerails and other abrasion areas. It combines UV absorbers and light stabilizers to protect the wood and extend the life of the varnish. Beautiful gloss, flexibility, abrasion resistance and grain enhancement are the reasons 667 Sungloss is preferred by the most demanding professional varnish applicators.

- A Clear color to highlight the wood grain.
- Flexes with the movement of the hull.
- Excellent resistance to abrasion.
- Fast dry, two coats in one day at 70.
- F and above.

Order No.	Mfg. No. / Description	Price
760215	(667-000) 750 ml Clear Varnish	$44.98 I

Boero Polywood Wood Sealer Two Component Clear Sealer 671



Boero Polywood Wood Sealer two Component Clear Sealer 671 is formulated to fill the porosity of wood quickly to reduce the total number of coats in a complete varnish system. It can seal teak, mahogany, and spruce, marine plywood, MDF and other woods used on boats. This two component product will fill wood grain, as well as, eliminating pin holes in the varnish film to complete the full varnish system. It accomplishes this by penetrating and sealing the wood surface and is fast and easy to sand prior to the application of varnishes. Either one or two coats are typically required. It can be over-coated by all one or two part component varnishes and clears. If an applicator is interested in stabilizing a new wood surface and expediting the application of a full clear system, the application of 671 Polywood Wood Sealer is the answer.

- A Two-component wood sealer to seal wood fibers and porosity in bare wood to yield the ideal primer.
- Extends the life of two-component and one component clear systems.
- Polywood dries very quickly and will allow two coats to be applied in one day.

Order No.	Mfg. No. / Description	Price
760219	(671-000) 1 Liter Kit	$85.98 I

Boero 696 Fast Thinner



- Boero 696 Fast Thinner is formulated to enhance the application of two-component polyurethane products like Challenger Hi-Tech and Challenger Hi-Solids.
- It can be used for spray application.
- It is best suited when temperatures range from 59° F - 66° F.
- It can also be used to clean spray equipment.

Order No.	Mfg. No. / Description	Price
760391	(696-000) 2-1/2 Liters	$57.98 I
760393	(696-000ML) 500 ml	$15.98 I

Boero Biowood Protective Wood Preserver 647



Boero Biowood Protective Wood Preserver 647 is a neutral colored wood stain and preserver that fills wood grain and seals porosity. It is one component wood filler that penetrate into the wood fibers to prepare the surface for the application of one component varnish. It also protects the wood fibers from fungi, mold and worms. One or two coats are usually required. It is effective internally as well as externally. When used as part of a total varnish system on bare marine wood like teak and mahogany 647 Biowood Protective Wood Preserver will expedite the full system application

- A one component clear wood preservative to be used on bare wood to stain and protect it.
- Apply before varnish to protect wood from fungus, mold and worms.
- Its neutral color brings out the beauty of the wood grain beneath the varnish topcoat.
- Extends the life of a varnish system.

Order No.	Mfg. No. / Description	Price
760195	(647-376) 750 ml	$20.98 I

Boero 693 Boero Epoxy Thinner



- Boero 693 Boero Epoxy Thinner is formulated to be used in all two component epoxy coatings.
- It is a universal epoxy thinner formulated to improve brushing, rolling and spraying characteristics.
- It is ideally suited to improve flow when temperatures are high or when there is a breeze that can cause premature surface drying.
- Use 693 to improve flow and leveling.

Order No.	Mfg. No. / Description	Price
760385	(693-000) 2-1/2 Liters	$31.98 I
760387	(693-000ML) 500 ml	$8.98 I

Boero 697 Slow Thinner



- Boero 697 Slow Thinner is for two-component polyurethane products like Challenger Hi-Tech and Challenger Hi-Solids.
- It is used for spray application in temperature range of 73° F - 95° F.
- It is also recommended as a brushing thinner for Challenger Hi-Tech and Hi-Solids.

Order No.	Mfg. No. / Description	Price
760396	(697-000) 2-1/2 Liters	$59.98 I
760399	(697-000ML) 500 ml	$15.98 I

©2014 Donovan Marine, Inc.

Boero 698 Polyurethane Medium Thinner



- Boero 698 Polyurethane Medium Thinner is the Boero standard thinner to be used with Challenger Hi-Solids and Hi-Tech Polyurethanes.
- It is a good place to start for applications at temperatures of 66° F - 84° F.
- It can also be blended with Boero 696 Fast Thinner or Boero 697 Slow Thinner when customized evaporation speed is desired by the applicator.

Order No.	Mfg. No. / Description	Price
760401	(698-000) 2-1/2 Liters	$59.98
760403	(698-000ML) 500 ml	$15.98

Boero 962-001 Boero Epoply Epoxy Undercoat



This two-component finish primer or undercoat is formulated for use prior to the application of Challenger Hi-Tech polyester urethane or Challenger Hi-Solid polyacrylic topcoats. It is a high build epoxy undercoat used to minimize porosity in the substrate or primer. It is designed to be easy to sand. 962 Epoply Epoxy Undercoat is a tight, smooth undercoat specifically designed to maximize the gloss and Distinction of Image (DOI) of linear polyurethane and other topcoats. It can be used as part of a system on fiberglass, aluminum, steel or wood hulls.

- Maximum build epoxy finish primer.
- Unsurpassed sanding properties.
- Produces superior surface for application of urethane top coats.
- Mix ratio: 4:1.

Order No.	Mfg. No. / Description	Price
760421	(962-001) 2 Liters	$69.98

Boero 260 Boero Epoxy Filler Quick Dry Kit



260 Kit Boero Epoxy Filler Quick Dry Boero Epoxy Filler Quick Dry 260 is an easy to use, 1-to-1 mix filling compound formulated to be very fast drying and highly water resistant. It can be used to fill, fair or shape areas above and below water. Boero Epoxy Filler 260 is designed to fill holes and scratches in gelcoat, fiberglass and on keels, as well as, aluminum, steel and wood surfaces. This filler is solvent free and will not shrink when drying. It is the ideal filler to be used as part of a gelcoat blistering repair system such as the Defender Underwater Epoxy Primer 613. At 68°F Boero Epoxy Filler is very fast drying and can be sanded in 3-4 hours after application. It is the fastest drying 100% solids epoxy filler allowing the job to be finished sooner. It is particularly easy to sand if done before curing for 72 hours. It can be applied to 5/8" without sagging and can be applied to greater thicknesses when filling a hole or void without cracking. If you are looking for an easy to use, fast drying, highly water resistant epoxy filler for use above and below water Boero Epoxy Filler 260 is your best choice.

- An easy to use 1 to 1 mix.
- Faster dry times to sanding or overcoating than competitive epoxy resin fillers to improve productivity.
- Highly water and solvent resistant to prevent blistering.
- Well suited for above and below water use.
- Should be used as part of a fiberglass blister repair.
- Effective to fix and shape boat keels while resisting water.

Order No.	Mfg. No. / Description	Price
760106	(260-001) 2 Liter Two Component Kit	$142.98
760108	(260-001ML) 500 ml Kit	$45.98

Boero 703 Boero Thinner



- Boero 703 Boero Thinner is a universal solvent for one component products including antifouling paints, one component varnishes, enamels and primers.
- It can be used to improve product flow on hot days or improve brushing on windy days.
- It can be used to improve spray, brush and roller application characteristics.

Order No.	Mfg. No. / Description	Price
760411	(703-000) 2-1/2 Liters	$26.98
760414	(703-000ML) 500 ml	$6.98

Boero 200 Boero Fiberglass No-Sand Primer



Boero Fiberglass No-sand Primer 200 is formulated to eliminate the need to sand a new or bare fiberglass hull before the application of antifouling paint. 200 No-sand Primer is an adhesion primer to be applied between the antifouling paint and the fiberglass hull to improve the attachment of the bottom paint. Best results will be achieved after cleaning the fiberglass hulls with 680 Boero Dewaxer and Solvent Wash. Ideal for use on vinyl ester gelcoats, where sanding may void the hull warrantee. It may also be used on epoxy primer to improve adhesion of the antifouling paint. Unlike other brands of no-sand primers, 200 No-sand Primer can be overcoated up to 7 days after application.

- Eliminates the need to sand new and bare fiberglass.
- An adhesion primer between bottom paint and hull or epoxy primer.
- Ideal over vinyl ester gelcoat if sanding is not recommended.
- Has longer overcoating time to provide convenience.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
760101	(200-001) Quart	$58.98

Boero Grip Antiskid Additive for Decks



Boero Grip Antiskid 601 is a lightweight additive for one or two component enamel, as well as, varnishes to create a textured surface on boat decks and step areas to improve traction. It is designed to chemically bond with the enamel or varnish to insure the antiskid stays in the paint film. It is also extremely resistant to wear while affording very

- Anti- skidding additive which is added to any polyurethane or enamel.
- Add to topcoats to provide excellent footing on wet decks.
- Can be used in both mono and two component topcoats.
- Add 50 grams per quart of mixed paint.
- This product is white in color and will blend in with any color topcoat.

Order No.	Mfg. No. / Description	Price
760115	(601-000) 125 ml	$13.98

Boero Epomar Fine Filler 604



Mix 2.6 liter can of 604 Epomar with a 1.4 liter can of 604C Component B Epomar hardener

Boero Epomar Fine Filler 604 is ultra fine two-component epoxy trowelable filler especially developed to fill minor imperfections on the vessel surface. It is ideal as a fine filler to remove porosity and sanding scratches. It can be used to create a perfect profile on surfaces above and below the waterline. This filler is solvent free and does not shrink when drying. It is easy to mix and apply to large and small areas. This product is commonly used on surfaces treated with high build epoxy filler such as 620 Epolight Plus or 656 Epolight Win. It is formulated to be mixed with 620 Epolight Plus or 656 Epolight Epoxy fillers if desired, to provide applicators with additional options to meet their fairing needs.

- A two component fine filler for above and below water.
- Used to fill minor imperfections such as porosity, pin holes and sanding scratched.
- Solvent free and highly solvent resistant.
- A 2:1 mix ratio.
- Can be used above or below water.

Order No.	Mfg. No. / Description	Price
760121	(604-001) Fine Filler 604, 2.6 Liters	$106.98 |
760119	(604-000C) Component B Hardener, 1.4 Liters	$55.98 |

Boero EpoProfile Filler 605



Boero EpoProfile Filler component B hardener for 605 is a two-component epoxy 1:1mix light weight filler which can be mixed by hand or by an appropriate filler mixing machine calibrated for a 1:1 mix filler. Epoprofile can be easily applied with a trowel or spatula and provides remarkable build capabilities in a single coat. Epoprofile is easy to apply, shape and is resistant to sags. Epoprofile unique technology makes it very easy for the applicator to sand the product. It can be used in all cases where it is necessary to even out an imperfect surface. It provides the additional benefit of not adding unnecessary weight to the vessel. It is particularly suitable for steel and aluminum hulls which require significant amounts of fairing compound material to form the shape of the hull and super structure. Epoprofile 605 can be used above and below the water when used according to directions.

- New Two-Component epoxy light weight 1:1 mix filler.
- Formulated to be mixed by machine for large applications or by hand.
- Remarkable film build capabilities in a single coat.
- Easy to apply and sculpture to complex shape on large and small areas.
- Can be used above and below the water line as part of a system.

Order No.	Mfg. No. / Description	Price
760126	(605-118) 10 Liters	$367.98 |
760123	(605-000C) 10 Liters	$367.98 |

Boero 612 Epospray HB



612 Epospray HB is a sprayable high-build filler developed to be applied over epoxy fillers like 620 EPOLIGHT or 604 EPOMAR fillers to reduce both filling and finishing time. It is preferred by many applicators on both new construction, as well as, refit projects. Epospray HB Epoxy Sprayable Filler has excellent adhesion characteristics and has good sanding properties. It will minimize paint system distortion, print through, tension lines and the halo effect around spot repairs. 612 Epospray HB will serve as a very good filler to eliminate FRP print through. This sprayable filler can be used on GRP/fiberglass hulls as finishing filler to fair surface imperfections to deliver a smooth profile. It is formulated to be an ideal foundation to be over coated with epoxy primers and polyurethane undercoats.

- Maximum build spray filler used over Epoprofile, Epolight, Epomar.
- Enables reduced time for fairing and finishing.
- This epoxy provides excellent adhesion, elasticity, and sandability.
- Mix Ratio: 3:1.

Order No.	Mfg. No. / Description	Price
760145	(612-004) 3 Liters	$79.98 |
760142	(612-000C) Hardener, 1 Liter	$57.98 |

Boero Epolight Plus Epoxy Filler



620 Epolight Plus Epoxy Filler This two-component epoxy ultra-light filler is a 2:1 mix epoxy filler which can be mixed by hand or by an appropriate filler mixing machine calibrated for a 2:1 mix filler. Epolight Plus can be easily applied with a trowel or spatula and provides remarkable build capabilities in a single coat. Epolight Plus is easy to apply, shape and is resistant to sags. Epolight Plus unique technology makes it very easy for the applicator to sand the product. It can be used in all cases where it is necessary to even out an imperfect surface. It provides the additional benefit of not adding unnecessary weight to the vessel. It is particularly suitable for steel and aluminum hulls which require significant amounts of fairing compound material to form the shape of the hull and super structure. Epolight Plus 620 can be used above and below the water when used according to directions.

- The industry standard for light weight filler and fairing compound.
- Remarkable film build capabilities in a single coat.
- Easy to apply, shape and is resistant to sig to sculpture shape to a yacht.
- Commonly used on high quality aluminum, fiberglass and steel yachts.
- Can be used above and below the waterline.

Order No.	Mfg. No. / Description	Price
760162	(620-001) 10 Liters	$311.98 |
760164	(623-000) Hardener, 5 Liters	$198.98 |

©2014 Donovan Marine, Inc.

Boero Epozinc Epoxy Primer for Steel



632 Epozinc Epoxy Primer for Steel is a two component epoxy primer has a high zinc content, offering excellent resistance to corrosion and abrasion. It is formulated for steel surfaces and can be used above and below the waterline. It has been formulated to allow for ease of use for the applicators by extending the overcoating times. This product is consistently used on steel superyachts, as well are commercial vessels and has a proven track record of success

- A twp component high zinc epoxy primer.
- Excellent resistance to corrosion on steal surfaces.
- Ideal above and below water.
- Very good resistance to abrasion.
- Mix ratio: 3:1.

Order No.	Mfg. No. / Description	Price
760171	(632-051) 1.9 Liters	$124.98
760166	(632-00C) Component B Hardener, 2 Liters	$22.98

Boero Delta 3000 Anti-Corrosive Primer



Boero Delta 3000 Anti-Corrosive Primer is a two-component epoxy primer providing excellent adhesion on properly prepared marine surfaces such as aluminum, fiberglass, steel and wood. 653 Delta 3000 also contains an anticorrosive pigment to control corrosion of the metal substrate. When applied as specified it provides the ideal coating system foundation for the consecutive applications of two-component epoxy primers and fillers at high film thickness. Delta 3000 is very effective in applications both above and below water. It is for this reason that 653 Delta 3000 Epoxy Primer is the ideal keel to masthead epoxy primer on power and sailboats.

- Excellent adhesion to aluminum, steel and fiberglass
- Contains an anticorrosive pigment to control corrosion all metal substrates.
- Maximum build filler used over Epoprofile, Epolight, Epomar.
- Enables reduced time for fairing and finishing.
- This epoxy provides excellent adhesion, elasticity, and sandability.
- Mix Ratio: 3:1.

Order No.	Mfg. No. / Description	Price
760202	(653-171) 2 Liters	$59.98
760197	(651-00C) Hardener, 500 ml	$22.98

Boero Delta UC HB Epoxy Undercoat 636



Delta UC HB Epoxy Undercoat 636 Delta UC HB Epoxy Undercoat is a two-component high build epoxy undercoat is designed for epoxy and polyurethane paint systems. It provides exceptional build characteristic which reduces application time by minimizing the number of coats required to complete a full system. Both adhesion and sand-ability are excellent. It is frequently applied over Delta 3000, Epolight Plus, Epoprofile, Epomar and Epospray products to facilitate fast build in a complete system. It is also formulated to adhere directly to sanded fiberglass. Also appropriate for Aluminum and steel hulls. 636 Delta UC HB can be applied above and below water.

- Exceptional build qualities.
- Can be applied direct to fiberglass.
- Excellent sanding qualities.
- Can be applied above or below water.
- Mix ratio: 4:1.

Order No.	Mfg. No. / Description	Price
760183	(636-051) 2 Liters	$69.98

Boero Epolight Win Epoxy Filler



656 Epolight Plus Win Epoxy Filler This is Boero Yacht Coatings winter formulation of the successful 620 EPOLIGHT PLUS EPOXY FILLER. It has better working properties in lower temperatures. This two-component epoxy filler has proven to be the standard for all light weight fillers on new construction projects where weight savings and proven performance is essential. It is capable of being applied to ultra high thicknesses in a single pass. It has exceptional sag resistance to allow large areas to be shaped. It has very good sanding characteristics essential when fairing large areas. It provides the additional benefits of not adding unnecessary weight to the vessel. It is particularly suitable for steel or aluminum hulls which require significant amounts of fairing compound material to form the shape of the hull and super structure. 656 Epolight Win can be used above and below the water when used according to directions.

- The industry standard for light weight filler and fairing compound.
- For improved working properties at lower temperatures.
- Remarkable film build capabilities in a single coat.
- Easy to apply, shape and is resistant to sig to sculpture shape to a yacht.
- Can be used above and below the waterline.

Order No.	Mfg. No. / Description	Price
760205	(656-001) 10 Liters	$340.98

Boero 680 Boero Dewaxer and Solvent Wash



680 Boero Dewaxer and Solvent Wash Boero Dewaxer and Solvent Wash 680 is a blend of solvents formulated to remove various forms of surface contaminants on fiberglass or metal surfaces to prepare the surface for painting. A clean surface will improve the adhesion of the paint system. It is particular well suited for bare surfaces to remove fiberglass mold release wax used in the construction of hulls. It is also effective at degreasing metal surfaces prior to painting. To be effective, the wax or grease must be completely removed from the hull. Care must be taken to not simply moving the contaminates from one area of the hull to another area. This can best be done by using clean rags and rotating the rag frequently, as well as, replacing the clean wiping rag often. 680 Dewaxer and Solvent Wash should only be applied outside or in very well ventilated areas. Wear solvent resistant gloves and eye protection. Apply the 680 Dewaxer and Solvent Wash liberally with a clean solvent saturated rag by working in a small area measuring three feet by three feet.

- Removes Fiberglass Mold Release wax on bare gelcoat before painting.
- Can be used as part of a no-sand system on fiberglass surfaces.
- Effective metal surface degreaser prior to painting.
- Used as an effective multi-purpose parts cleaner before painting.

Order No.	Mfg. No. / Description	Price
760288	(680-000) 1 Liter	$26.98

PETTIT MARINE PAINT

PRODUCT GUIDE

HYDROCOAT eco

The Hydrocoat name has long been synonymous with ground breaking water-based marine technology. First with the award-winning Hydrocoat Ablative Antifouling paint - The benchmark for clean, easy to use antifoulings. The line was expanded last year with the development of revolutionary Hydrocoat SR - the world's first dual-biocide, water-based, ablative bottom paint. Dual-biocides that provide outstanding multi-season protection. And now, introducing Hydrocoat Eco - the third in the line-up - again shattering the perceptions of what an antifouling paint can be.



Hydrocoat ECO incorporates Pettit's exclusive self-polishing, water-based ablative technology with organic Econea™ biocide. Hydrocoat Eco utilizes the highest level of new metal-free Econea biocide available combined with a slime fighting inhibitor for unprecedented multi-season protection. Innovative technology is used to replace the harsh solvents found in most bottom paints with water, providing an easier application and clean up, with low VOC's and no heavy solvent smell. Its self-polishing, paint film wears away with use, eliminating paint build up and the need for sanding. This copper-free formula is compatible over almost all bottom paints and is safe for use on all substrates including aluminum. Hydrocoat Eco will not lose effectiveness when removed from the water.

Blue - 1204 | Green 1304 | Red 1604 | Black 1904 | White 1104

EZ Poxy² 2-PART POLYURETHANE

With 150 years of experience in marine coatings, Pettit has earned a reputation for high quality marine enamels that hold up to the rigors and challenges of even the toughest environments. Our new EZ-Poxy² provides truly superior gloss retention and scratch resistance in a two-part polyurethane enamel that is so easy to use, we couldn't have named it anything else.



EZ-Poxy² is a high-performance, two-part polyurethane marine paint without all of the costs and hassles associated with two-part enamels. EZ-Poxy² combines the added gloss, wear resistance, and durability boaters are looking for in a two-part polyurethane enamel with the ease of application of a single part product. This revolutionary formula reduces the effects of brush strokes and is so forgiving; it's practically foolproof. In fact, EZ-Poxy² is so innovative that it makes exact mixing ratios a thing of the past. Its added UV protection and gloss retention will keep your boat looking shiny and new for years to come. It is more economical, requires less effort, and is more forgiving than the competition.

Yacht White - 3821 | White Sand - 3823 | Mist White - 3825 | Blue Moon White - 3827

Buff Beige - 3829 | Signal Red - 3831 | Endeavor Blue - 3833 | Commodore Blue 3835

Twilight Blue - 3837 | Lemonade - 3839 | Bermuda Green 3841 | Gull Gray - 3843

Black Ice - 3845

With More New Products Featured Inside!



pettitpaint.com • 800-221-4466

HARD ANTIFOULING



Trinidad® SR and **Trinidad® PRO** – the standard by which all bottom paints are measured. It remains the longest lasting, strongest antifouling paint available. Utilizing the dual biocide combination of a high copper load and slime resistant Irgarol, Trinidad® SR provides unprecedented resistance to all fouling. Its hard protective coating has excellent adhesion, and withstands the toughest abuse. Left in the water, it will provide years of dependable service. So effective it earned Practical Sailor's "Gear of the Year" honors twice.

Trinidad® SR

BLUE - 1277 | GREEN - 1377 | RED - 1677 | BLACK - 1877

Trinidad® PRO

BLUE - 1082 | GREEN - 1083 | RED - 1086 | BLACK - 1088



Trinidad® and **Trinidad® 75** – the top-of-the-line in conventional antifouling paints. It has earned its reputation as one of the most respected names in the industry. Trinidad® delivers an extremely high load of cuprous oxide (up to 75%), to combat even the most extreme fouling conditions. Its durable, hard modified epoxy finish has excellent adhesion, and is highly abrasion resistant. When left in the water, Trinidad® will provide years of dependable service. The perfect choice for competitive racing or blue water cruising.

Trinidad®

BLUE - 1275 | GREEN - 1375 | RED - 1675 | BLACK - 1875

Trinidad® 75

LT BLUE - 1071 | BLUE - 1072 | RED - 1076 | BLACK - 1078 | SP BLACK - 1079



Unepoxy® and **Copperguard®** have long been the standard bottom paint for many boatyards and boat owners. It is a dependable antifouling paint formulated to provide outstanding protection at a very affordable price. Its durable, hard modified epoxy finish is able to withstand beaching, trailering, and season long abuse. It provides excellent coverage and adhesion, and can be applied over most bottom paints in good condition. Suitable for all non-aluminum trailered boats.

Unepoxy®

BLUE - 1228 | GREEN - 1328 | RED - 1628 | BLACK - 1818

Copperguard®

BLUE - 1042 | GREEN - 1043 | RED - 1046 | BLACK - 1048

FRESHWATER ANTIFOULING



SR-21 is an ultra-thin, super slick, low friction film for boat bottoms. It is an ideal racing finish for fresh water or cold saltwater boats. Its dual biocides combine the power of copper and Irgarol to produce an effective, thin film antifouling. It contains the slicking agents PTFE and Molybdenum Disulfide to reduce surface friction, allowing the hull to slide through the water. SR-21 is easy to apply and dries in 15 minutes. Color changes upon immersion.

BLUE - 1221 | ORIGINAL - 1921



Unepoxy® Plus is a durable, hard modified epoxy antifoulant that offers more protection for your dollar. It dries to a hard finish that is able to withstand trailering, beaching, and season-long use. Unepoxy® Plus has excellent adhesion and can be applied over most previously applied bottom paints in good condition. With a high copper load, Unepoxy® Plus offers more protection than standard hard epoxy paints.

BLUE - 1218 | GREEN - 1318 | RED - 1618 | BLACK - 1818



The Protector® has earned its solid reputation by providing excellent long lasting protection. A very high copper load makes it a good choice for tropical and other warm waters where extreme fouling exists. When left in the water, it provides dependable protection for up to two years of service. Its hard modified epoxy base provides a durable, abrasion resistant finish ideal for powerboat or sailboat use. Compatible with most finishes. (Available on the West Coast Only)

BLUE - B91 | RED - B90 | BLACK - B94

EPOXY PRIMERS



Pettit Protect® High-Build Epoxy Primers – **GRAY 4700/4701** is a heavy duty, two component, epoxy coating for use where maximum resistance to fresh or salt water is required. It reduces water absorption making it an excellent choice for osmotic blister prevention and repair. Its high-solids formula allows for quicker and easier application with fewer coats necessary for effective protection. It also offers dependable corrosion protection on all underwater metals.

Pettit Protect® White 4100/4101 offers all the benefits of Gray Pettit Protect® High Build Epoxy Primer in a white color that will not bleed into other primers, enamels or antifouling paints. Specifically designed for use below white and light colored Vivid® bottom paints. Its use reduces the number of finish coats needed to achieve full color. Pettit Protect® White has excellent durability in exterior exposures although, like most epoxies, it will chalk if not top coated.

CLEAN-CORE TECHNOLOGY

Pettit's new **CLEAN CORE TECHNOLOGY** is an enhanced paint film that contains fewer heavy metals, and allows a more consistent release of biocides. The result is more effective antifoulants that release up to 50% less heavy metals into the environment.

APPLY THE FUTURE

ABLATIVE ANTIFOULING



Ultima® SR 60 delivers exceptional, multi-season, dual-biocide performance by combining the highest ablative copper load (60%) with slime resistant Irgarol. Contains 50% more copper than Micron® Extra, to provide stronger protection in even the toughest conditions. Its ablative surface wears away over time, reducing build up. Utilizes the same proven formula as Ultima® Pro from our Pro Coatings line. Note: Due to extremely high copper load, some variations in color and finish may occur.

BLUE - 1032 GREEN - 1033 RED - 1036 BLACK - 1038



Ultima® SR 40 utilizes a high copper load (40%) combined with Irgarol to offer outstanding dual biocide, multi-season control in all types of fouling. Its ablative surface minimizes coating build-up to keep underwater surfaces smooth, while providing a continuous supply of fresh biocides. Can be hauled and re-launched without repainting. Formerly sold as Ultima® SR and Horizons® Pro, this formula has a proven track record as one of America's premium ablative bottom paints.

BLUE - 1092 GREEN - 1093 RED - 1096 BLACK - 1098



Ultima® Eco combines the breakthrough, metal-free Econea™ biocide with a powerful slime fighting agent for dual-biocide, multi-season protection. This copper-free formula can be safely used on all substrates, including aluminum. It provides excellent antifouling protection, with an ablative surface that makes it the perfect choice for both power and sailboats. Ultima Eco's surface wears away over time, eliminating paint film build up and the need for sanding. It can be used on almost all previously painted surfaces in good condition.

IVORY - 1108 BLUE - 1208 RED - 1608 BLACK - 1808



Ultima® SSA is an economical, yet extremely effective ablative bottom paint. Utilizing the proven formula of Premium® SSA, Ultima® SSA provides excellent antifouling protection with an ablative surface that makes it an excellent choice for both power and sailboats. Ultima® SSA's surface wears away over time, eliminating build up or the need for sanding. It can be used on most previously painted surfaces in good condition. One or two coats per season are recommended for optimal performance.

BLUE - 1281 DK BLUE - 1282 GREEN - 1381 RED - 1681 BLACK - 1881

PERFECT PICK

Take the guess work out of choosing your next antifouling paint with our easy to use **PERFECT PICK**.

Scan Here

WATER-BASED ABLATIVE ANTIFOULING



Hydrocoat® ECO Self-polishing, water-based ablative technology with organic Econea™ biocide. Hydrocoat Eco utilizes the highest level of new metal-free Econea biocide available combined with a slime fighting inhibitor for unprecedented multi-season protection. This copper-free formula is compatible over almost all bottom paints and is safe for use on all substrates including steel and aluminum.

BLUE - 1204 GREEN - 1304 RED - 1604 BLACK - 1804 WHITE - 1104



Hydrocoat® SR is the world's first dual-biocide, water-based, ablative bottom paint. Dual-Biocides provide outstanding multi-season protection. Hydrocoat SR uses Composite Copper Technology combined with an organic algaecide to offer outstanding protection against hard and soft fouling, for better antifouling protection and a greener earth. Ablative technology eliminates sanding and paint build-up. It is easy to apply and cleans up with soap & water.

BLUE - 1247 RED - 1647 BLACK - 1847



Hydrocoat® offers excellent multi-season protection against all types of fouling. Its innovative technology replaces the harsh solvents found in most bottom paints with water, resulting in an easier application and clean up, with no heavy solvent smell. Hydrocoat's ablative surface wears away with use, exposing fresh biocide while eliminating paint build up and the need for sanding. Its unlimited dry time to launch allows for painting in the fall.

BLUE - 1240 GREEN - 1340 RED - 1640 BLACK - 1840

ABLATIVE ANTIFOULING (cont)



SeaMate offers solid seasonal control of all types of fouling and is ideal for general boat yard use as well as for workboats and commercial fisherman. A perfect choice when dependable yet economical protection is desired. SeaMate permits easy application to properly prepared fiberglass, wood, steel and previously applied coatings. By leaching and washing away, paint buildup from year to year will be very slight and the surface can be easily cleaned.

BLUE - 1225 RED - 1625 BLACK - 1825



Horizons® offers excellent protection from fouling along with all of the benefits of ablative paints. Economically priced, it performs well in all conditions, including severe fouling waters. A heavy load of copper provides dependable, multi-season performance. Horizons® ablative surface wears away with use, exposing fresh biocides while eliminating paint build up and the need for sanding. Can be launched and re-launched without repainting making it an excellent choice for trailered boats.

BLUE - 1250 GREEN - 1350 RED - 1650 BLACK - 1850

Note: All swatch colors shown in this brochure are approximations of the actual paint color in the can or mixes.



Vivid® offers the brightest colors, the blackest black and the whitest white available. Dual biocides provide excellent multi-season protection. Hybrid technology incorporates all the benefits of ablative and hard paints in one. Its hard, smooth surface withstands trailering and is easily burnished to a high performance racing finish. Vivid® resists build up and can be hauled and relaunched without repainting. Safe for use on properly primed aluminum. The perfect choice for any boat.

WHITE - 1161 BLUE - 1261 GREEN - 1361 YELLOW - 1461 RED - 1661 BLACK - 1861



Vivid® Free is a copper-free, environmentally friendly, antifoulant that is available in clean, bright colors. Its ablative coating is resistant to slime, algae, barnacles and other marine fouling. Utilizing a unique controlled erosion process coupled with the latest biocide technology, Vivid® Free minimizes coating buildup and keeps underwater surfaces smooth and clean. Its non-corrosive formula is safe for use on aluminum. Vivid® Free can be hauled and re-launched without recoating.

WHITE - 1162 BLUE - 1262 RED - 1662 BLACK - 1862

Racers look no further, this guide demo's the application of a smooth racing finish with Vivid.

The Vivid Color Chart

Vivid Base Colors

WHITE
BLUE
GREEN
YELLOW
RED
BLACK

Vivid Mixed Colors

4 White / 1 Yellow
1 White / 1 Yellow
4 Yellow / 1 White
1 Red / 1 Yellow
4 Yellow / 1 Red
1 Red / 1 White


1 Red / 4 White
4 Yellow / 1 Blue
1 Yellow / 1 Blue
4 Blue / 1 Yellow
4 Green / 1 Yellow
1 Green / 1 White

1 Blue / 4 White
4 Blue / 1 Red
1 Blue / 1 Red
1 Blue / 4 Red
4 White / 1 Black
1 Black / 1 White

Note: All swatch colors shown in this brochure are approximations of the actual paint color in the can or mixes.

How Much Bottom Paint Do I Need?

1. Calculate the square footage of the hull to be painted – multiply the length of the hull by the beam then multiply that total by .85



Length x Beam x .85 = Square Feet of Hull

2. Divide that number (your square foot total) by the amount of coverage the selected bottom paint offers. This will give you a one-coat total.

Pettit Bottom Paint Compatibility Chart

Use this chart to determine compatibility and application preparation necessary to overcoat with Pettit Paints

		OLD ANTIFOULING			
		Sharkskin Talon Tropikoat Fiberglass Bottomkote Epoxycop Ultra UltraKote BottomShield Bottom Pro Gold Unepoxy Unepoxy Plus Trinidads (All)	Micron CSC Micron Extra Cukote Cukote Biocide Plus Epoxycop Ablative Smart Solutions Aerlstar PCA Gold Alumacoat SR Ultima SR Ultima SR40 Ultima SR60 Horizons Vivid Vivid Free	AF-33 Bottomkote Act Tarr & Wonson Bottomkote Bottomkote Pro Bottomkote NT CPP Plus Red Hand Sea Mate Premium SSA Ultima SSA	SR 21 VC 17 VC 17m VC 16 FW 21
NEW ANTIFOULING	The Protector Trinidad (All) Unepoxy (All) Vivid	SAND & APPLY	HEAVY SAND & APPLY	REMOVE	REMOVE
	Horizons Ultima SR-40 Ultima SR-60 Vivid Free	SAND & APPLY	LIGHT SAND & APPLY	REMOVE	REMOVE
	Ultima Eco Ultima SSA Sea Mate	SAND & APPLY	LIGHT SAND & APPLY	LIGHT SAND & APPLY	REMOVE
	Hydrocoat Hydrocoat SR Hydrocoat Eco	LIGHT SAND & APPLY	LIGHT SAND & APPLY	LIGHT SAND & APPLY	SAND & APPLY
	SR-21	SAND & APPLY	REMOVE	REMOVE	LIGHT SAND & APPLY

TOPSIDE



Easypoxy is a modern polyurethane topside and deck enamel improved by the addition of silicone for brilliant shine and easy brushability. It has ultraviolet filters which enhance the already superior gloss retention and durability of polyurethane. The result is a topside finish that's exceptionally easy to apply, producing a lasting gelcoat-like brilliance with a minimum of effort. For a semi-gloss finish for decks and interiors use 3106 Easypoxy Semi-Gloss White or simply add 9080 Easypoxy Satin Additive to any Easypoxy color for a custom satin look. Be sure to use **EZ-Prime 6149** as a base primer prior to application - see the product description below for more information.

Gloss White - 3175 | Blue Ice - 3213 | Bikini Blue - 3229 | Teal Blue - 3232 | Electric Blue - 3237 | Ocean Blue - 3248

Semi-Gloss Wht - 3106 | Jade Green - 3346 | Kelly Green - 3350 | Sunflower Yel - 3415 | Bright Work Brown 3510 | Sandtone - 3518

Off White - 3108 | GrandBanks Beige 3520 | Bright Red - 3624 | Burgundy - 3626 | Mist Gray - 3705 | Pearl Gray - 3706

Platinum - 3711 | Dark Gray - 3720 | 3001 - Black

Scan this in depth How-To guide to aid in selecting a topside finish that's right for you and the correct systems for application.



Z-Spar & Shipendec Traditional Alkyd Enamels are famous coast to coast for their excellent initial gloss and high gloss retention, as well as their overall long life and durability. Brushes beautifully without brush marks. For use on fiberglass, wood, metal and existing enamels.

99 - Solid Coat Gloss White
100 - Gloss White
101 - Semi-Gloss White
104 - Flat White

Gloss Black - 102 | Dull Dead Grass 3303* | French Gray - 3707

* Flat Finish

Marine Gray - 3708 | Battleship Gray - 3709

New!



EZ-Prime is a multipurpose primer designed for use as a base coat whenever the surface to be painted is aged, cracked, checked, pitted or in any way less than smooth. It can be applied to fiberglass, wood, properly etched metal and previously painted surfaces. EZ-Prime fills imperfections fast, dries quickly and is easy to sand.

White - 6149 | Gray - 6150



EZ-CabinCoat is a high-performance, water-based paint specially formulated for areas such as cabins, that are prone to moisture. A super-tough finish provides a moisture resistant, mold & mildew proof surface that will stay good-looking for years. EZ-CabinCoat provides excellent adhesion to most glossy and hard to paint surfaces without the need for sanding. Easy application, with soap & water cleanup.

White - 3121 | Off White - 3122 | Platinum Gray 3123



EZ-Decks is a super tough polyurethane non-skid performance deck finish containing a polypropylene grit that produces a slip-resistant finish on all decks and cabin soles. The durable weather resistant finish resists long term abrasion and abuse. It's loaded with ultraviolet filters to fight against fading while offering superior color retention that will stay vibrant for years without peeling or cracking.

White - 3127 | Off White - 3128 | Platinum Gray 3129



EZ-Bilge is a durable high-performance alkyd finish specially formulated to withstand the abuses associated with boat bilges. Its tough resilient surface will stand up to years of engine fluids, abrasion and wear. EZ-Bilge is easy to apply by brush, roller or spray and provides excellent coverage.

White - 3124 | Bilge Gray - 3125

VARNISHES, STAINS & SEALERS



Captain's Varnish 1015 is highly regarded for its ease of application, outstanding gloss retention and tough yet flexible durability. A combination of phenolic and alkyd resins blended with tung and linseed oils provides excellent performance. Its warm, light amber hue will enhance the rich, classic brightwork appearance.



Captain's Satin Sheen Varnish V-975 is specifically designed to enhance the beauty of interior woodwork with its soft, satin finish. Its pale, durable, long lasting polyurethane coat is water and alcohol-resistant. Satin Sheen is easy to apply and is intended for interior use only.

New!



EZ-Wood Sealer 2018 is a phenolic resin-based sealer used for sealing all types of raw wood prior to painting. The sealer acts as a moisture barrier layer to prevent peeling and excessive absorption of vehicle from topside primers, paints, or varnishes by the new wood. This sealer uniformly seals and satisfies the absorbency of all woods including Teak.



Flagship Varnish 2015 offers the best protection against the sun's damaging rays. With 6 times more UV inhibitors, this blend of phenolic and alkyd resins combined with tung and linseed oils offers excellent performance and a warm, deep amber hue. This high-build formula offers excellent abrasion resistance and a high gloss finish.



Captain's Ultra Clear Varnish 2067 is a premium urethane varnish with strong UV inhibitors. It features outstanding gloss retention along with an unparalleled resistance to foot traffic, chipping and scratching. This high-build formula offers ease of application, exceptional brushability, and excellent leveling characteristics.



High Build Varnish 2056 boasts the highest build and film depth per coat. Strong UV inhibitors are added to a blend of phenolic and alkyd resins combined with tung and linseed oils for easy application, high UV protection, excellent gloss, and a warm, deep amber hue. A good varnish for building up multiple coats quickly.



Paste Wood Filler Stains fill the grain and stains the wood to enhance it's natural beauty. The fillers can be intermixed and shaded with color in oil or universal colorants to achieve custom colors. The use of wood filler stains reduce the number of varnish coats required.

Red Mahogany – 1081

Brown Mahogany – 1082

Standard Mahogany – 1095

Dark Mahogany – 7665

Using a varnish not only enhances the beauty of wood, it seals and protects from moisture and UV damage. Scan here for more info.

UNDERWATER METALS



Metal Primer 6455/044 is a two-part, self-etching wash primer for use above or below the waterline on all bare metals. Offers excellent adhesion to metal hulls, keels, centerboards, and underwater running gear. Overcoat with epoxy primer, tie-coat primer, topside enamels, or antifouling paint.



Underwater Metal Kit 6456 combines convenient sized containers of both our Metal Primer and Tie Coat Primer in one easy package. This kit is specifically designed for the painting of underwater metal running gear including shafts, struts, props, thru-hulls, and trim tabs.



Prop Coat Barnacle Barrier 1792 provides aerosol spray protection to bare metals above or below the waterline. Its smooth, hard surface will self-clean in service and inhibits corrosion on steel, stainless, cast iron, copper, bronze, galvanized and lead.



Tie Coat Primer 6627 is a general purpose chlorinated rubber primer for use above and below the waterline on metal surfaces or as a tie coat between different types of coatings. When used over Pettit 6455/044 Metal Primer it forms an excellent, easy-to-use system for use on all underwater running gear.



AlumaProtect 4400/4401 is a two-part epoxy primer for use on sand-blasted aluminum where maximum corrosion resistance to fresh and salt water is required. Usually over coated with PettitProtect High Build Epoxy 4700/4701 when used on bare aluminum, pontoon hulls and outdrives.



Alumaspray® Plus is an aerosol antifouling paint specifically designed for use on aluminum outdrives and outboard motors without the need for a barrier coat. Alumaspray Plus offers superior resistance to all types of fouling.



GRAY - 1763



BLACK - 1863

UNDERWATER METAL SYSTEMS CHART

	Good System	Better System	Best System
Outdrives (Previously Painted)	Scuff Surface Spray Alumaspray + (Apply 1 aerosol can per unit)	Scuff Surface Tie-Coat Primer (1 coat) Ultima Eco(1 coat)	Scuff Surface Tie-Coat Primer (1 coat) Hydrocoat Eco or Vivid Antifouling (2 coats)
Stainless Steel & Bronze	Sandblast or Abrade Surface Spray Prop Coat Barnacle Barrier (2-3 Coats)	Metal Primer 6455/044* (1 coat) Tie-Coat Primer (1 coat) Vivid Antifouling (2 coats)	Sandblast or Abrade Surface Metal Primer 6455/044* (1 coat) 4700/4701 Pettit Protect (2 coats) Vivid Antifouling (2 coats)
Aluminum Hulls	Metal Primer 6455/044* (1 coat) Vivid Free (2 coats) (Smooth, non-abraded surfaces only)	Metal Primer 6455/044* (1 coat) Tie-Coat Primer (1 or 2 coats) Ultima Eco(2 coats)	(Maximum Corrosion Protection) Sandblast or Abrade Surface 4400/4401 Aluma Protect (2 coats) 4700/4701 Pettit Protect (2 coats) Hydrocoat Eco or Vivid Antifouling (2 coats)

If paints containing TBT were previously used, Tie-Coat primer must be applied before Alumaspray+, Hydrocoat Eco, Vivid or Ultima Eco. * If metal substrate temperature is below 60 degrees Fahrenheit, allow overnight dry before proceeding to next step.

CLEANERS / DEWAXERS



Bio-Blue Hull Surface Prep 92 de-waxes, cleans, and prepares bare fiberglass for painting. Easily removes unwanted contaminants and mold release agents prior to painting. When used with 6998 Skip Sand and antifouling paint, it is part of an easy 1-2-3 system.



Bottom Prep D-95 Fiberglass Dewaxer is a special blend of solvents, formulated specifically to cut through and remove mold release, grease, and previously applied wax from the gelcoat.

FIBERGLASS PRIMER



Skip Sand Primer 6998 eliminates the need to sand before applying antifouling paint providing a system of excellent overall adhesion. It may also be used between two-part epoxy primers and antifouling paints. 6998 has an extended overcoating window of a few hours up to 7 days to apply bottom paint.

Follow this simple guide to eliminate the need for sanding bare gelcoat.

STEEL PRIMERS



Rustlok Steel Primer 6980 is an easy to apply, moisture and corrosion proof primer for use on all cast iron and steel surfaces, including galvanized and stainless. Its water impervious barrier offers excellent adhesion and corrosion protection even over rusted surfaces.



Trailercoat 6981 is an easy to apply, bright silver, moisture and corrosion proof top coat for use on all cast iron and steel surfaces, including galvanized and stainless. Its water impervious barrier offers excellent adhesion and corrosion protection even over rusted surfaces.

SPECIALTY EPOXY PRODUCTS





EZ-Fair 7050 Epoxy Fairing Compound - Lightweight, two-part epoxy putty designed for filling and smoothing surface imperfections above and below the waterline. The special resins used in EZ-Fair impart a high degree of water and chemical resistance to the product, making it an integral part of the Pettit Gelcoat Blister Repair System. In addition, EZ-Fair is the product of choice for fairing metal keels or any underwater surface. Available in can kits or a unique self measuring, self mixing cartridge dispenser.



Flexpoxy 7076 Two-part epoxy resin that does not sag, run, or shrink. Its thick formula allows it to fill large cavities in a single application. When cured, it remains flexible making it ideal for environments that require flex such as keel joint repairs. Flexpoxy creates a superior bond to all epoxies, polyester resins, metals and wood. Comes in a unique self measuring, self mixing cartridge dispenser.



A-788 Splash Zone – Extremely hard, abrasion and impact resistant, two-part epoxy patching compound. It applies like putty to seal, fill, patch or rebuild aluminum, wood, concrete, fiberglass, and steel. It can be applied in or out of water to repair boat hulls, buoys, seawalls, docks, bridge abutments, and more. Splash Zone provides excellent protection against corrosion of metals and erosion and deterioration of concrete or wood. Splash Zone's rock-hard surface can be drilled, tapped, or machined.

PETTIT

Apply the future.

pettitpaint.com

800-221-4466

Pettit Trinidad SR Antifouling Paint, Slime Resistant



- Very high copper content.
- Effective in worst tropical conditions.
- Long term protection.
- Hard finish, easily burnished.
- Excellent for fiberglass, wood and steel boats.

Order No.	Mfg. No. / Description		Price
733175	(1277GL) Blue	Gallon	$329.98 D
733180	(1377GL) Green	Gallon	$329.98 D
733185	(1677GL) Red	Gallon	$329.98 D
733190	(1877GL) Black	Gallon	$329.98 D
733191	(1877QT) Black	Quart	$123.98 D

Pettit Trinidad 75 Antifouling Paint



- Hard epoxy, strongest conventional antifouling.
- Trinidad has more cuprous oxide - up to 75% depending on paint color - than any other antifouling paint, making it the strongest on the market.

Order No.	Mfg. No. / Description		Price
732417	(1071GL) Light Blue	Gallon	$223.98 D
732429	(1072GL) Blue	Gallon	$223.98 D
732431	(1076GL) Red	Gallon	$223.98 D
732443	(1078GL) Black	Gallon	$223.98 D
732455	(1079GL) Sp Black	Gallon	$223.98 D

Pettit Unepoxy Standard Antifouling Paint



- For fiberglass boats.
- For moderate fouling condition.
- Hard protective antifouling paint for use on boat bottoms.
- Also for non-aluminum trailered boats.

Order No.	Mfg. No. / Description		Price
380650	(1228GL) Blue	Gallon	$113.98 D
380651	(1228QT) Blue	Quart	$38.98 D
380655	(1328GL) Green	Gallon	$113.98 D
380656	(1328QT) Green	Quart	$38.98 D
380662	(1628GL) Red	Gallon	$113.98 D
380663	(1628QT) Red	Quart	$38.98 D
380674	(1810GL) Black	Gallon	$113.98 D
380675	(1810QT) Black	Quart	$38.98 D

Pettit Copperguard Antifouling Paint



- A hard protective antifouling paint for use on boat bottoms
- It can be applied over most aged hard antifouling coatings
- Suitable for all non-aluminum trailered boats.

Order No.	Mfg. No. / Description		Price
732366	(1042GL) Blue,	Gallon	$117.98 D
732380	(1046GL) Red	Gallon	$117.98 D
732405	(1048GL) Black	Gallon	$117.98 D

Pettit Trinidad Pro Antifouling Paint, Slime Resistant



- Aggressively combats even the most torrid, tropical fouling conditions and at the same time reduces annual hull maintenance.
- The only hard antifouling paint with dual biocides which is designed for the professional applicator.

Order No.	Mfg. No. / Description		Price
732460	(1082GL) Blue	Gallon	$267.98 D
732462	(1083GL) Green	Gallon	$267.98 D
732464	(1086GL) Red	Gallon	$267.98 D
732466	(1088GL) Black	Gallon	$267.98 D

Pettit Trinidad Antifouling Paint



- Hard epoxy, strongest conventional antifouling.
- Trinidad has more cuprous oxide - up to 75% depending on paint color - than any other antifouling paint, making it the strongest on the market.

Order No.	Mfg. No. / Description		Price
733015	(1275GL) Blue	Gallon	$292.98 D
733027	(1275QT) Blue	Quart	$98.98 D
733039	(1375GL) Green	Gallon	$292.98 D
733041	(1375QT) Green	Quart	$98.98 D
733091	(1675GL) Red	Gallon	$292.98 D
733104	(1675QT) Red	Quart	$98.98 D
733154	(1875GL) Black	Gallon	$292.98 D
733166	(1875QT) Black	Quart	$98.98 D

Pettit Unepoxy Plus Antifouling Paint



- Formulated for moderate to severe fouling conditions.
- A hard, modified - epoxy antifouling paint in salt and fresh water.
- Applies, without fear of lifting, over existing bottom paints on fiberglass, steel or wood hulls.
- Great for trailerable boats.

Order No.	Mfg. No. / Description		Price
733229	(1218GL) Blue	Gallon	$188.98 D
733231	(1218QT) Blue	Quart	$57.98 D
733281	(1618GL) Red	Gallon	$174.98 D
733344	(1818GL) Black	Gallon	$174.98 D
733356	(1818QT) Black	Quart	$57.98 D

Pettit Vivid Antifouling Paint - Clean, Bright Colors



- Hybrid technology offers all the advantages of ablative and hard paints.
- Dual-biocides provide excellent multi-season protection
- Can safely be used on aluminum hulls & outdrives when used over the recommended priming system

Order No.	Mfg. No. / Description		Price
733611	(1161GL) White	Gallon	$260.98 D
733613	(1161QT) White	Quart	$98.98 D
733623	(1261GL) Blue	Gallon	$260.98 D
733635	(1361GL) Green	Gallon	$260.98 D
733649	(1461QT) Yellow	Quart	$89.98 D
733659	(1661GL) Red	Gallon	$260.98 D
733661	(1861GL) Black	Gallon	$260.98 D
733673	(1861QT) Black	Quart	$98.98 D

©2014 Donovan Marine, Inc.

Pettit Hydrocoat® ECO



- Easy application and cleanup with soap and water.
- Water-based, copper-free, self-polishing ablative antifouling paint.
- Co-polymer ablative technology eliminates sanding and paint build-up.
- Dual-biocides provide outstanding multi-season protection in all conditions.
- Uses the power of organic ECONEA™ for better protection and a greener earth.
- Use water to thin if necessary.

Order No.	Mfg. No. / Description		Price
732580	(1104GL) White	Gallon	$257.98 D
732582	(1104QT) White	Quart	$85.98 D
732586	(1204GL) Blue	Gallon	$257.98 D
732588	(1204QT) Blue	Quart	$85.98 D
732592	(1304GL) Green	Gallon	$257.98 D
732594	(1304QT) Green	Quart	$85.98 D
732598	(1604GL) Red	Gallon	$257.98 D
732600	(1604QT) Red	Quart	$85.98 D
732604	(1804GL) Black	Gallon	$257.98 D
732606	(1804QT) Black	Quart	$85.98 D

Pettit Hydrocoat - Water-Based Antifouling Paint



- The ideal combination of high-speed performance and durability with environmental responsiveness.
- Hydrocoat is formulated with a 40% cuprous oxide and is tough enough to withstand frequent trailering, launching and beaching
- Minimal odor, easy clean-up with water.

Order No.	Mfg. No. / Description		Price
732467	(1240GL) Blue	Gallon	$194.98 D
732470	(1340GL) Green	Gallon	$194.98 D
732479	(1840GL) Black	Gallon	$194.98 D
732481	(1640GL) Red	Gallon	$194.98 D

Pettit Ultima® SR-40 Antifouling Paint



- Combines a high copper load (40%) with Irgarol to offer outstanding dual biocide, multi-season protection.
- Its ablative surface minimizes coating build-up while providing a continuous supply of fresh biocides.
- Formerly sold as Ultima SR and Horizons Pro.
- Can be hauled & re-launched without re-painting

Order No.	Mfg. No. / Description		Price
732544	(1093GL) Green	Gallon	$262.98 D
732532	(1092GL) Blue	Gallon	$262.98 D
732556	(1096GL) Red	Gallon	$262.98 D
732560	(1098GL) Black	Gallon	$262.98 D

Pettit Hydrocoat SR - Dual Biocide Water Based Ablative



- Hydrocoat SR takes the Hydrocoat name to a whole new level of performance and environmental consciousness.
- Pettit's Composite Copper Technology is combined with an organic algaecide to offer dependable protection against hard and soft fouling, while lowering the paint's environmental impact.
- Composite Copper Technology allows us to substantially reduce the copper content, while maintaining the same great performance. In fact, composite copper content is equivalent to only 40% that of traditional cuprous oxide.
- Hydrocoat SR also uses innovative technology to replace the harsh solvents found in most bottom paints with water, providing an easier application and clean up, with low VOC's and no heavy solvent smell.

Order No.	Mfg. No. / Description		Price
732484	(12472G) Blue	2 Gallon	$390.98 D
732485	(1247GL) Blue	Gallon	$234.98 D
732486	(1247QT) Blue	Quart	$78.98 D
732489	(1647GL) Red	Gallon	$240.98 D
732490	(1647QT) Red	Quart	$80.98 D
732492	(18472G) Black	2 Gallon	$390.98 D
732493	(1847GL) Black	Gallon	$234.98 D
732494	(1847QT) Black	Quart	$78.98 D

Pettit Ultima® SR-60 Antifouling Paint



- Delivers exceptional, multi-season, dual-biocide performance by combining the highest ablative copper load (60%) with slime resistant Irgarol.
- 54% More copper than Micron Extra, to provide stronger protection in even the toughest conditions.
- Note: Due to extremely high copper load, some variations in color & finish may occur.

Order No.	Mfg. No. / Description		Price
732510	(1032GL) Blue	Gallon	$295.98 D
732512	(1033GL) Green	Gallon	$295.98 D
732514	(1036GL) Red	Gallon	$295.98 D
732516	(1038GL) Black	Gallon	$295.98 D

Pettit Ultima® SSA Antifouling Paint



- Economical yet extremely effective bottom paint.
- Eliminates sanding and paint build up.
- Can be used on most previously painted surfaces

Order No.	Mfg. No. / Description		Price
732948	(1281GL) Blue	Gallon	$143.98 D
732950	(1281QT) Blue	Quart	$48.98 D
732962	(1381GL) Green	Gallon	$157.98 D
732986	(1681GL) Red	Gallon	$157.98 D
733003	(1881GL) Black	Gallon	$163.98 D
733013	(1881QT) Black	Quart	$48.98 D

Pettit Ultima Eco - Dual Biocide Antifouling Paint

Copper Free!



- Ultima Eco uses new metal-free Econea biocide combined with a slime fighting inhibitor for dual-biocide, multi-season protection.
- This copper-free formula can be safely used on all substrates including aluminum.
- It provides excellent antifouling protection with an ablative surface that makes it an excellent choice for both power and sailboats.

Order No.	Mfg. No. / Description		Price
732500	(1108GL) Ivory	Gallon	$251.98 D
732501	(1108QT) Ivory	Quart	$83.98 D
732502	(1208GL) Blue	Gallon	$251.98 D
732503	(1208QT) Blue	Quart	$83.98 D
732504	(1608GL) Red	Gallon	$251.98 D
732505	(1608QT) Red	Quart	$83.98 D
732506	(1808GL) Black	Gallon	$251.98 D
732507	(1808QT) Black	Quart	$83.98 D

Pettit SR-21 Dual Biocide Racing Antifouling



- SR-21 is an ultra-thin, super slick, low friction film for boat bottoms.
- Ideal racing finish for fresh water or cold saltwater boats.
- Dual biocides combine the power of copper and Irgarol to produce an effective, thin film antifouling.
- Contains the slicking agents PTFE and Molybdenum Disulfide to reduce surface friction, allowing the hull to slide through the water.
- SR-21 is easy to apply and dries in 15 minutes.
- Color changes upon immersion.

Order No.	Mfg. No. / Description		Price
732355	(1221QT) Blue	Quart	$68.98 D
732360	(1921QT) Bronze	Quart	$68.98 D

Pettit Seamate Tri-Polymer Ablative Antifouling Paint



- Sea Mate Antifouling Bottom Paint utilizes advanced tri-polymer ablative technology to provide dependable antifouling protection at a very economical price.
- Newly reformulated, Sea Mate now contains Clean Core Technology to offer better protection than ever while significantly reducing the heavy metal content.
- Sea Mate's ablative surface wears away with use, eliminating build up of the paint film or the need for sanding between coats.
- Its innovative quick drying formula provides for same-day launching.
- Sea Mate is easily applied, and can be used over almost any bottom paint in good condition.

Order No.	Mfg. No. / Description		Price
733380	(1225GL) Blue	Gallon	$99.98 D
733385	(1625GL) Red	Gallon	$99.98 D
733390	(1825GL) Black	Gallon	$99.98 D

Pettit Alumaspray + Antifouling Paint



- Aerosol antifouling for use on aluminum outdrives and outboard motors without a barrier coat.
- Copper-free formula will not cause galvanic corrosion.
- Self-cleaning surface offers superior slime resistance.

Order No.	Mfg. No. / Description	Price
733798	(1863) Black, 12 oz.	$36.98 D

Pettit Horizons Multi-Season Ablative Antifouling Paint



- This tried and true ablative antifoulant offers excellent protection at an economical price.
- Horizons utilizes a heavy load of cuprous oxide to provide dependable multi-season performance in all fouling conditions.
- Can be launched and re-launched without repainting.
- Horizons is the standard ablative antifouling paint for many boatyards.

Order No.	Mfg. No. / Description		Price
733820	(1250GL) Blue	Gallon	$186.98 D
733823	(1250QT) Blue	Quart	$63.98 D
733830	(1350GL) Green	Gallon	$186.98 D
733833	(1350QT) Green	Quart	$63.98 D
733840	(1650GL) Red	Gallon	$186.98 D
733843	(1650QT) Red	Quart	$63.98 D
733850	(1850GL) Black	Gallon	$186.98 D
733853	(1850QT) Black	Quart	$63.98 D

Pettit EZ Decks - Durable Non-Skid Deck Finish



- Pettit's EZ Decks is a super tough polyurethane non-skid performance deck finish. It contains a silica grit that produces a slip-resistant finish on all decks and cabin soles.
- EZ-Decks provides the simplest way to achieve optimum results with minimum effort.
- Durable weather resistant finish resists long term abrasion and abuse.
- EZ-Decks is loaded with ultraviolet filters to fight against fading while offering superior color retention that will stay vibrant for years without peeling or cracking like other deck finishes.

Order No.	Mfg. No. / Description		Price
732084	(3128GL) Off White	Gallon	$103.98 D

Pettit Pontoon Pro



- Multi-season antifouling paint designed for pontoon boats.
- Compatible over all bottom paints.
- Second organic biocide added for slime protection.
- Uses copper-free ECONEA biocide - will not cause galvanic corrosion.
- Self-polishing ablative paint film eliminates paint build up and the need for sanding
- Use 120 Thinner for brushing, rolling or cleanup. Use 121 Thinner for spraying.

Order No.	Mfg. No. / Description		Price
732620	(11008GL) Black	Gallon	$216.98 D

Pettit Alumacoat SR Antifouling Paint



- Slime resistant TBT and copper free-formula in clean, bright colors.
- Non-corrosive antifouling for underwater metals including aluminum.
- Contains PTFE to reduce friction keep underwater surfaces smooth and clean.
- Can safely be used on all aluminum hulls, outdrives and outboard motors in fresh, salt and brackish water.

Order No.	Mfg. No. / Description		Price
733697	(1160QT) White	Quart	$74.98 D
733762	(1860QT) Black	Quart	$65.98 D

©2014 Donovan Marine, Inc.

Pettit EZ EZ-Poxy2



- High-performance, two-part polyurethane marine paint without all of the costs and hassles associated with two-part enamels.
- EZ-poxy2 combines the added gloss, wear resistance, and durability boaters are looking for in a two-part polyurethane enamel with the ease of application of a single part product.
- This revolutionary formula reduces the effects of brush strokes and is so forgiving; it's practically fool-proof.
- In fact, EZ-poxy2 is so innovative that it makes exact mixing ratios a thing of the past.
- Its added UV protection and gloss retention will keep your boat looking shiny and new for years to come.
- It is more economical, requires less effort, and is more forgiving than the competition.

Order No.	Mfg. No. / Description	Price
734640	(3821GL) Gallon, Yacht White	$196.98 D
734641	(3821QT) Quart, Yacht White	$65.98 D
734643	(3823GL) Gallon, White Sand	$204.98 D
734644	(3823QT) Quart, White Sand	$68.98 D
734646	(3825GL) Gallon, Mist White	$195.98 D
734647	(3825QT) Quart, Mist White	$68.98 D
734649	(3827GL) Gallon, Blumoon White	$169.98 D
734650	(3827QT) Quart, Blumoon White	$65.98 D
734652	(3829GL) Gallon, Buff Beige	$204.98 D
734653	(3829QT) Quart, Buff Beige	$68.98 D
734655	(3831QT) Quart, Signal Red	$71.98 D
734657	(3833QT) Quart, Midnight Blue	$71.98 D
734659	(3835QT) Quart, Commodore Blue	$71.98 D
734661	(3837QT) Quart, Twilight Blue	$71.98 D
734663	(3839QT) Quart, Lemonade	$68.98 D
734665	(3841QT) Quart, Bermuda Green	$68.98 D
734667	(3843QT) Quart, Gull Gray	$68.98 D
734669	(3845QT) Quart, Black Ice	$75.98 D

Pettit Skip Sand Primer



- Eliminates the need to sand before applying antifouling paint providing a system of excellent overall adhesion.
- It may also be used between two part epoxy primers and antifouling paints.
- 6998 has an extended over coating window of a few hours up to 7 days to apply bottom paint.

Order No.	Mfg. No. / Description	Price
735300	(6998GL) Gallon	$125.98 D
735312	(6998QT) Quart	$41.98 D

- Fiberglass Dewaxer for Sandless System.

Order No.	Mfg. No. / Description	Price
736237	(955GL) Gallon	$55.98 D
736249	(955QT) Quart	$19.98 D

Pettit Vivid Epoxy Primer



- Reduces water absorption in fiberglass hulls and prevents osmotic blistering.
- High film build for maximum protection with fewer coats.
- Excellent water and chemical resistance.
- Exceptional protection for steel, aluminum, and other metals.
- High Performance System for Underwater Running Gear.

Order No.	Mfg. No. / Description	Price
735321	(4100/4101G) White, Gallon	$103.98 D

Pettit Alumaprotect Aluminum Epoxy Primer



- Easy to apply.
- Excellent Bonding Surface Smooth finish provides an excellent bonding surface for additional primers or topcoats.
- Excellent water, chemical and corrosion resistance for aluminum surfaces.
- High Performance Strontium Chromate Primer for all aluminum surfaces.

Order No.	Mfg. No. / Description	Price
735174	(4400/4401.75) .75 Gallon	$105.98 D

Pettit Tie Coat Primer



- A general purpose, chlorinated rubber primer for use on metal surfaces and as a tie coat between different types of coatings.
- Can be used above and below the waterline.
- It forms an excellent, easy to use system for use on all underwater running gear.

Order No.	Mfg. No. / Description	Price
735196	(6627GL) Gallon	$107.98 D
735209	(6627QT) Quart	$33.98 D

Pettit Metal Primer



- A two component, self-etching wash primer for use only on bare metals including steel, stainless steel, cast iron, copper, bronze, galvanized steel, lead and aluminum.
- It forms an excellent adhesive bond to metal hulls, keels, centerboards and other underwater running gear.
- Can be used above or below the waterline.
- Can be over coated with epoxy primer, tie-coat primer, topside enamels or antifouling paint.
- 1 quart.

Order No.	Mfg. No. / Description	Price
735108	(6455/044QT)	$44.98 D

Pettit Rustlok Steel Primer



- Moisture cured polyurethane coating designed for application over any steel or cast iron surface, including galvanized or stainless steel.
- Contains aluminum flake pigment which forms a dense, water impervious barrier.
- Easy to apply anti-corrosive barrier coating.

Order No.	Mfg. No. / Description	Price
735235	(6980GL) Gallon	$111.98 D
735247	(6980QT) Quart	$36.98 D

Pettit Alumaprotect Aluminum Epoxy Primer



- An epoxy primer formulated for use on sand-blasted aluminum where maximum corrosion resistance to fresh and salt water is required.
- Coating is resistant to water, as well as, many chemical fumes and very humid environments.
- Pettit Protect High Build Epoxy Primer is usually used over the Alumaprotect for bare aluminum, pontoon hulls and outdrives.

Order No.	Mfg. No. / Description	Price
735172	(4400/4401) 1/2 Gallon	$62.98 D

Pettit Protect High Build Epoxy Primer



- A heavy duty, two component, epoxy coating for use where maximum resistance to fresh or salt water is required.
- It reduces water absorption making it an excellent choice for osmotic blister prevention and repair.
- Dependable corrosion protection on all underwater metals.
- Much easier application due to less coats.

Order No.	Mfg. No. / Description	Price
735324	(4700/4701) Gallon Set	$100.98 D
735336	(4700/4701) Quart Set	$44.98 D

Pettit Underwater Metal Kit



- This kit is specifically designed for the painting of underwater metal running gear.
- Suitable for use on all underwater metal running gear, including steel, stainless or galvanized steel, bronze and aluminum.
- Kit includes: Metal Etching Primer, Tie Coat Primer and instructions.

Order No.	Mfg. No. / Description	Price
735122	(6456)	$57.98 D

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering & Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

Z-Spar White Undercoater



- A high filling, easy sanding marine undercoater designed for use with Z-Spar enamels on wood surfaces.
- Provides a smooth base that allows Z-Spar Enamel to dry to a uniform gloss and appearance.
- Do not use below the waterline.
- 1 quart.

Order No.	Mfg. No. / Description	Price
380395	(105)	$23.98 D

Petit Barnacle Barrier



- Provides easy to use only aerosol spray protection for bare metals including steel, stainless steel, cast iron, copper, bronze, galvanized steel and lead.
- It forms an excellent bond to underwater metals and running gear and inhibits corrosion on these surfaces.
- Can be used above or below the waterline.
- 16 oz.

Order No.	Mfg. No. / Description	Price
733801	(1793EA)	$24.98 D

Z-Spar Captain's Varnish



- Highly regarded for its ease of application, outstanding gloss retention and tough yet flexible durability.
- A combination of phenolic and alkyd resins blended with tung and linseed oils provide excellent performance.
- It's warm, light amber hue will enhance the rich, classic bright work appearance.

Order No.	Mfg. No. / Description	Price
380458	(1015PT) Pint	$22.98 D
380460	(1015QT) Quart	$36.98 D
380446	(1015GL) Gallon	$116.98 D

Z-Spar Clear Wood Sealer



- Used to seal new or bare wood, preventing solvent absorption on subsequent coatings.
- Seal bare wood with S-120 Sealer before applying undercoat or when applying all Z-Spar topside enamels and varnishes.
- Provides a good bond for Z-Spar undercoats and enamels.
- 1 quart.

Order No.	Mfg. No. / Description	Price
380511	(S-120)	$28.98 D

Pettit Easypoxy White Undercoater



- Should be used as a base coat whenever the surface to be painted is aged, cracked, checked, pitted or in any way less than smooth.
- It can be applied to fiberglass, wood and previously painted surfaces.

Order No.	Mfg. No. / Description	Price
734699	(6149GL) Gallon	$78.98 D
734702	(6149QT) Quart	$29.98 D

Z-Spar Flagship Varnish



- Offers the highest Ultra Violet protection available today in a marine varnish.
- A special blend of phenolic and alkyd resins combined with tung and linseed oils offer excellent performance and a warm, light amber hue.
- Has the highest build and film depth per coat, as well as excellent abrasion resistance and a high gloss.
- 1 quart.

Order No.	Mfg. No. / Description	Price
380472	(2015QT)	$42.98 D

Pettit Captain's Ultra-Clear Varnish



- A premium urethane varnish with ultraviolet inhibitors to maintain outstanding gloss long after ordinary varnishes have faded.
- Provides remarkable resistance against scratching and chipping.
- It's easy brushability, excellent leveling capabilities and fast build-up.
- 1 quart.

Order No.	Mfg. No. / Description	Price
738003	(2067QT)	$39.98 D

Pettit Yacht White Gloss



- Originally developed for wooden boats, these old-time favorites may also be applied to properly prepared fiberglass, metal and over existing enamels.
- Well known for their exceptionally easy, forgiving application, superb covering properties.
- Easy brushability - applies evenly.
- Can be brushed, rolled or sprayed.
- 1 quart.

Order No.	Mfg. No. / Description	Price
734788	(2153QT)	$18.98 D

Pettit Trailercoat



- A bright silver-color moisture-cured urethane coating that forms a moisture-proof barrier against rusting.
- It has excellent adhesion to rusty steel surfaces and will penetrate and seal existing corrosion.
- Anti-rust treatment for boat trailers.

Order No.	Mfg. No. / Description	Price
735045	(6981QT) Quart	$32.98 D
735046	(6981PT) Pint	$23.98 D

Pettit Seam Compound



- These Seam Compounds are to be used above the waterline under topside enamels or below the waterline under antifouling paints.
- They are knifed into a clean, sealed or primed seam.
- The white can be used under varnish on decks.
- These compounds are fairly stiff and can be softened by heat.

Order No.	Mfg. No. / Description	Price
736404	(7110QT) White, Quart	$52.98 D
736405	(7510QT) Brown, Quart	$52.98 D

Z-Spar Captain's Satin Varnish



- Designed to enhance the beauty of interior woodwork with its soft, satin finish.
- Its pale, durable, long lasting polyurethane coat is water and alcohol-resistant.
- Satin Sheen is easy to apply and is intended for interior use only.
- 1 quart.

Order No.	Mfg. No. / Description	Price
380509	(V-975QT)	$38.98 D

Pettit Yacht White Flat



- Originally developed for wooden boats, these old-time favorites may also be applied to properly prepared fiberglass, metal and over existing enamels.
- Well known for their exceptionally easy, forgiving application, superb covering properties.
- Easy brushability - applies evenly.
- Can be brushed, rolled or sprayed.
- Not recommended for constant immersion.
- 1 quart.

Order No.	Mfg. No. / Description	Price
734764	(2120QT)	$18.98 D

©2014 Donovan Marine, Inc.

Z-Spar Gloss White



Order No.	Mfg. No. / Description	Price
380357	(100GL) Gallon	$86.98 D
380369	(100QT) Quart	$25.98 D

Z-Spar Semi-Gloss White



Order No.	Mfg. No. / Description	Price
380372	(101QT) Quart	$25.98 D

Pettit Brushing Thinner #120



- This is a general purpose thinner used in most paint products for ease of application when brushing.

Order No.	Mfg. No. / Description	Price
735918	(1205GL) Gallon	$44.98 D
735920	(1205QT) Quart	$17.98 D

Pettit Spraying Thinner #121



- This is a fast evaporating thinner used in most Pettit products to reduce the paint for spray application.

Order No.	Mfg. No. / Description	Price
735944	(1215GL) Gallon	$44.98 D
735956	(1215QT) Quart	$20.98 D

Pettit EZ Bilge



- EZ Bilge is a durable high-performance alkyd finish specially formulated to withstand the abuses associated with boat bilges.
- The hard-wearing finish is resistant to antifreeze, grease, gasoline, diesel fuel, and engine oil.
- Its tough resilient surface will stand up to years of abrasion and wear.
- EZ-Bilge utilizes a high-solids formula that is easy to apply by brush, roller or spray and provides excellent coverage.
- Like other Pettit "EZ" products, EZ-Bilge provides the simplest way to achieve optimum results with minimum effort.

Order No.	Mfg. No. / Description	Price
734075	(3124GL) Gallon, White	$75.98 D
734076	(3124QT) Quart, White	$25.98 D
734078	(3125GL) Gallon, Gray	$75.98 D
734079	(3125QT) Quart, Gray	$25.98 D

Pettit Easypoxy



- A highly rated, one-part polyurethane topside paint improved by the addition of silicone for a brilliant shine and easy brushability.
- It also contains ultraviolet filters which enhance the already superior gloss retention and durability of polyurethane.
- Exceptionally easy to apply and produces a lasting gelcoat-like brilliance, with a minimum of effort.

Order No.	Mfg. No. / Description	Price
734031	(3106GL) Semi-Gloss White, Gallon	$107.98 D
734043	(3106QT) Semi-Gloss White, Quart	$39.98 D
734055	(3108GL) Off-White, Gallon	$109.98 D
734067	(3108QT) Off-White, Quart	$39.98 D
734093	(3175GL) Gloss White, Gallon	$104.98 D
734106	(3175QT) Gloss White, Quart	$39.98 D
734168	(3213QT) Blue Ice, Quart	$39.98 D
734219	(3229GL) Bikini Blue, Gallon	$104.98 D
734221	(3229QT) Bikini Blue, Quart	$39.98 D
734245	(3232QT) Teal Blue, Quart	$41.98 D
734269	(3237QT) Electric Blue, Quart	$41.98 D
734283	(3248GL) Ocean Blue, Gallon	$112.98 D
734295	(3248QT) Ocean Blue, Quart	$41.98 D
734346	(3348QT) Jade Green, Quart	$39.98 D
734360	(3350QT) Kelly Green, Quart	$39.98 D
734384	(3415QT) Sunflower Yellow, Quart	$42.98 D
734423	(3518QT) Sandtone, Quart	$41.98 D
734461	(3624QT) Bright Red, Quart	$42.98 D
734485	(3626QT) Burgundy, Quart	$42.98 D
734512	(3705QT) Mist Gray, Quart	$39.98 D
734524	(3706QT) Pearl Gray, Quart	$41.98 D
734550	(3711GL) Platinum, Gallon	$112.98 D
734562	(3711QT) Platinum, Quart	$41.98 D
734586	(3720QT) Dark Gray, Quart	$41.98 D
734625	(3801QT) Black, Quart	$42.98 D

Pettit Boot Top Paint



- Help you make easy work of hull graphics, boot stripe and accent painting.
- Formulated to provide excellent gloss and superior coverage.
- Boot top colors are easy-brushing enamels in small convenient sizes.
- May also be sprayed, if desired.

Order No.	Mfg. No. / Description	Price
737772	(8216HP) Blue, Half Pint	$14.98 D
737811	(8828HP) Black, Half Pint	$14.98 D

Pettit Shipendec - A Traditional Marine Alkyd Enamel



- A traditional modified long oil alkyd enamel of exceptional all-around durability.
- A superb finish for all topside surfaces of wood, metal or fiberglass.
- They are well known for their exceptionally easy, forgiving application, superb covering properties, good gloss, seasonal durability, and economical value.
- Not recommended for constant immersion.

Order No.	Mfg. No. / Description	Price
737188	(3303QT) Dull Dead Grass, Quart	$29.98 D
737203	(3304QT) Marsh Grass, Quart	$27.98 D
737241	(3333QT) Newport Green, Quart	$29.98 D

Pettit EZ Cabin Coat



- EZ Cabin-Coat is a high performance, water-based paint specially formulated for areas that are prone to moisture.
- Durable finish easily withstands the humid, challenging conditions that promote unsightly mildew growth and cause paint failures in cabin interiors.
- EZ Cabin-Coat provides a moisture resistant, mold & mildew proof finish that will stay good-looking, bright and color-fast for years.
- EZ Cabin-Coat's low-odor formula contains safe ingredients which prevent mold and mildew growth on the paint film for years.
- Ideal for high humidity areas such as cabin interiors, heads, lockers, cabinets, drawers and closets, it can be used on all interior surfaces, such as drywall, wood, fiberglass, wood coverings and even tile.
- Designed to be self-priming, EZ Cabin-Coat provides excellent adhesion to most glossy and hard to paint surfaces without the need for sanding.

Order No.	Mfg. No. / Description	Price
734069	(3121QT) Quart, White	$32.98 D
734071	(3122QT) Quart, Off White	$32.98 D
734073	(3123QT) Quart, Plat Gray	$32.98 D

Pettit A-788 Splash Zone Repair Compound



- A-788 is an extremely hard, abrasion and impact resistant, two-part epoxy patching compound.
- It applies like putty to seal, fill, patch, or re-build aluminum, wood, concrete, fiberglass, and steel.
- It can be applied in or out of water to repair boat hulls, buoys, seawalls, docks, bridge abutments, and more.
- Splash Zone provides excellent protection against corrosion of metals and erosion and deterioration of concrete or wood.
- Recommended for patching and repairing damaged underwater surfaces.
- Not for use in potable water.

Order No.	Mfg. No. / Description	Price
735722	(A-788-2GL) 2 Gallon Set	$199.98 D
735734	(A-788-QT) Quart Set	$47.98 D

Pettit Epoxy Thinner



- Polypoxy Thinner has been created specifically for use with Pettit's 4700/4701 Pettit Protect High Build Epoxy Primer.
- Can be used for both brush and spray applications.
- 1 quart.

Order No.	Mfg. No. / Description	Price
736150	(975QT)	$23.98 D

Pettit EZ Decks



- Pettit's EZ Decks is a super tough polyurethane non-skid performance deck finish.
- It contains a silica grit that produces a slip-resistant finish on all decks and cabin soles.
- Like other Pettit "EZ" products, EZ-Decks provides the simplest way to achieve optimum results with minimum effort. The durable weather resistant finish resists long term abrasion and abuse.
- EZ-Decks is loaded with ultraviolet filters to fight against fading while offering superior color retention that will stay vibrant for years without peeling or cracking like other deck finishes.

Order No.	Mfg. No. / Description	Price
734081	(3127GL) Gallon, White	$107.98 D
734082	(3127QT) Quart, White	$39.98 D
734085	(3128QT) Quart, Off White	$39.98 D
734087	(3129GL) Gallon, Gray	$107.98 D
734088	(3129QT) Quart, Gray	$39.98 D

Pettit Flexpoxy - Flexible 2-Part Repair Epoxy



- Flexpoxy is a two-part epoxy resin that does not sag, run, or shrink.
- Its thick formula allows it to fill large cavities in a single application.
- When cured, it remains flexible making it ideal for environments that require flex such as keel joint repairs.
- Flexpoxy creates a superior bond to all epoxies, polyester resins, metals and wood.
- It can be sanded, machined, cut, filed, planed, drilled, tapped, or nailed making it perfect for filling, filleting, forming, fairing, and fastening.
- This low odor formula is resistant to chemicals and is safe to use above and below the waterline.
- Flexpoxy can be molded and shaped during application and is easily tinted with paints and stains.
- Flexpoxy can be over coated by most paints and stains.

Order No.	Mfg. No. / Description	Price
737060	(7076CRT) A/B Cartridge	$37.98 D

Pettit Ablative Thinner



- A specially formulated blend of solvents designed specifically for thinning Pettit's Ultima SR, Ultima Pro, Horizons and Horizons Pro Bottom Paints.
- 1 quart.

Order No.	Mfg. No. / Description	Price
736124	(1855QT)	$26.98 D

Pettit EZ-Fair



- EZ-Fair is a lightweight, two-part epoxy putty designed for filling and smoothing surface imperfections above and below the waterline.
- The special resins used in EZ-Fair impart a high degree of water and chemical resistance to the product, making it an integral part of the Pettit Gelcoat Blister Repair System.
- In addition, EZ-Fair is the product of choice for fairing metal keels or any underwater surface.
- Use it for leveling uneven surfaces, filling gouges, scratches, or other damage on fiberglass, wood or metal surfaces.
- It's excellent chemical and water resistance make it the ideal choice for repairing blistered gelcoat in an osmotic blister repair system.
- EZ-Fair is non-sagging and non-shrinking and sands to a smooth finish.

Order No.	Mfg. No. / Description	Price
735317	(7050QT) .75 Gallon	$71.98 D
735319	(7050QTCRT)	$28.98 D

Pettit Skidless Compound



- A dry powder which may be added to any Pettit Topside Paint to produce a rough textured finish.
- 1 pint.

Order No.	Mfg. No. / Description	Price
737049	(9900)	$22.98 D

Pettit Fiberglass Dewaxer



- A special blend of solvents, formulated to cut through and remove mold release, grease and previously applied waxes from the gelcoat.
- Can be used above and below the waterline.

Order No.	Mfg. No. / Description	Price
736237	(955GL) Gallon	$55.98 D
736249	(955QT) Quart	$19.98 D

©2014 Donovan Marine, Inc.

Interlux Wood Solutions

Cetol® Marine

Cetol Marine with Next Wave™ UV-absorbing technology is a durable translucent protective wood finish for use above the waterline on interior and exterior woods. Next Wave technology is a unique UV package of advanced Ultra Violet absorbers that provide greater protection, durability and longevity. Cetol Marine has excellent weathering properties and allows for the natural expansion and contraction of wood which prevents Cetol Marine from cracking. Cetol Marine is also micro-porous, allowing moisture to escape from the wood which will prevent blistering and flaking of the finish. Cetol Marine is an easy to apply, low maintenance alternative to wood oils and other wood treatments.



- **Cetol Marine** produces an attractive dark amber appearance on wood.
- **Cetol Marine Light** produces a lighter amber appearance on wood.
- **Cetol Marine Natural Teak** has a rich golden color on wood.
- **Cetol Marine Gloss** provides a high-gloss, hard-wearing, UV protection and is developed as a topcoat for Cetol Marine, Cetol Marine Light and Cetol Marine Natural Teak.



Perfection® Plus

A high performance, two-part clear polyurethane, Perfection Plus delivers the ultimate in performance longevity resistance. The chemical cure urethane formulation combines with a best-in-class UV and HALS package to offer outstanding chemical and abrasion resistance and superb gloss and gloss retention that lasts four times longer than conventional one-part varnishes.



Schooner® Gold

This product offers a higher film build per coat that allows both professional applicator and boat owners to achieve great results faster and in fewer coats. This 'thicker' varnish will require thinning, in most conditions, to achieve optimum flow. Schooner Gold has shown to out-perform other leading brands and will offer superb longevity and durability.



Schooner® 96

Combines the very best of classic varnish craftsmanship with the newest technology. Schooner Varnish contains ultra-violet filters to screen the sun's damaging rays for remarkable durability, excellent water resistance and silky application. Superior self-leveling property and a bright, clear, high-gloss finish with the traditional golden color.



Compass® Clear

Compass Clear is a highly durable one-part polyurethane gloss varnish that contains a unique combination of ultra-violet additives, HALS, surface stabilizers and antioxidants to ensure long-term gloss and clarity. Polyurethane resin adds incredible abrasion, chemical and water resistance. Superior leveling properties along with silky application allows you to achieve a professional, long lasting finish. Compass Clear is suitable for all internal and external woods, and can be applied directly to oily timber, such as teak.



Goldspar® Satin 60

A modified polyurethane, low luster varnish designed for application to interior wood surfaces. It produces a warm, rich satin sheen finish that resists scratches and stains and applies easily enough to yield truly professional results by either brush or spray. Goldspar Satin Varnish 60 is ideal anywhere a low luster finish is desired, such as cabin soles, cabinets, counters and tables.



Premium Teak Restorer

Cleans, restores and brings back the natural color of teak and other hardwoods. Gentle formula, does not bleach or damage surrounding fiberglass, wood, metals and painted surfaces. Contains Tenside cleaners, which are excellent at removing oil and dirt.

Premium Teak Oil

Traditional Scandinavian formula providing ultimate protection against the elements. Formulated with a rust inhibitors, protecting metal from rusting. Easy to apply, fast drying, warm golden color for exterior and interior use. Can be applied to damp or dry wood, for best results apply to dry wood.

Interlux Yacht Finishes, 2270 Morris Avenue, Union, New Jersey 07083 Tel: 1 800-468-7589 Fax: 908-686-8545 E-mail: InterluxTechnicalService@akzonobel.com
For the latest updated information visit our website www.yachtpaint.com

Interlux, the AkzoNobel logo and all product names mentioned in this publication are trademarks of AkzoNobel. © AkzoNobel 2013. Cosmos™ is a trademark of Johnson & Johnson.

Premium Yacht Paint Solutions That Add Value

Topside Finishes

Perfection®



A high-gloss, high-performance two-part polyurethane that combines a long lasting abrasion and chemical resistant finish with superb protection from the detrimental effects of UV rays. Its abrasion resistance makes it ideal for application to decks and gunwales. Perfection can be used anywhere above the true waterline on properly prepared fiberglass, wood, aluminum, steel and epoxy. The superb high-gloss characteristics, long-lasting color retention and durability makes Perfection the finest coating available. **Professional quality results are made easy with Perfection.**

Snow White YHB000 | Mediterranean White YHA184 | Off-White YHA192 | Oyster White YHA164 | Matterhorn White YHA198

Arctic White YHB248 | Pearl White YHB253 | Platinum YHA180 | Cream YHB070 | Fighting Lady Yellow YHB065

Rochelle Red YHB249 | Jade Mist Green YHB853 | Lauderdale Blue YHB936 | Royal Blue YHA216 | Mauritius Blue YHB891

Flag Blue YHB990 | Jet Black YHY999

Interdeck



An excellent slip-resistant finish with a tough polyurethane resin that protects decks against everyday wear and tear. It contains a fine aggregate and will apply easily on all substrates. Interdeck has a low sheen finish to reduce sun glare from decks.

White YJB000 | Gray YJF914 | Cream YJC089 | Sand Beige YJ2008 | Squall Blue YJB923

Brightside® Polyurethane



Brightside is a hard, easy to use high-gloss one-part polyurethane topside finish. It has excellent application characteristics that yield a "sprayed on" look when brush applied in thin coats. Brightside is ideal for use anywhere above the true waterline and is easy to clean, resists staining and has great abrasion resistance. Brightside is also available in select colors in pints for striping and boottops.

Blue-Glo White Y4259 | White Y4369* | Off-White Y4381 | Matterhorn White Y4360 | Seattle Gray Y4206

Kingston Gray Y4190 | Steel Gray Y4250 | Black Y4258* | Light Blue Y4351 | Medium Blue Y4353

Largo Blue Y4100 | Ocean Blue Y4253 (C.C. Blue) | Sapphire Blue Y4241 | Dark Blue Y4318 | Flag Blue Y4990*

Sundown Buff Y4237 | Grand Banks Beige Y4217 | Bristol Beige Y4207 | Hatteras Off-White Y4209 | Sea Green Y4247

Fire Red Y4248* | Yellow Y4152 | Hatteras Off-White (1993) Y4218

* Also available in Brightside Bootop & Striping Enamel

Bilgekote®



A fast drying, durable coating formulated for application in bilge areas. Bilgekote helps prevent substrate absorption of oil, gasoline or sludge (into wood and fiberglass surfaces). Want an easy-to-clean finish? Try Bilgekote today!

Gray YMA100 | White YMA102

AkzoNobel

Interlux® Antifouling Range – Premium Protection

Micron® Technology

Micron® 66®



Top of the Micron range – Award-winning, self-polishing copolymer technology with Biolux® SPC.

- Outstanding antifouling performance in the harshest fouling conditions
- Top rated antifouling in independent tests
- Maximum protection even during stationary periods
- Not for use in fresh water or on aluminum



Red YBA472 | Black YBA473 | Blue YBA470 | Green YBA471

Micron® Extra



Along with Micron 66, Micron Extra is also in the 'Best Performance' classification from Interlux.

- Biolux® slime blocking technology boosts performance by controlling slime
- Excellent for use on all boats in all waters
- All the benefits of Micron Technology
- Haul and relaunch without repainting
- Not for use on aluminum



Red Y5592 | Black Y5593 | Dark Blue Y5595 | Blue Y5590 | Green Y5591 | Gray White 5594 | Brown 5595

Micron® CSC



The 'Classic Micron' in the Micron Family.

- Suitable for power and sailboats
- Proven performance for 25 years
- Haul and relaunch without repainting
- Not for use on aluminum




Red Y5582 | Black Y5583 | Blue Y5580 | Green Y5581 | Shark White Y5584

Micron® CSC High Solids



A higher solids version of Micron CSC, Micron CSC HS offers a reduction in Volatile Organic Compound (V.O.C) & overall solvent emissions.

- Fast drying formula
- High film build for added protection & longevity
- Multi-season, self-polishing, no build-up
- Haul & relaunch without repainting
- Not for use on aluminum



Red YBC582 | Black YBC583 | Blue YBC580 | Green YBC581

Micron® CF



Micron CF is a copper free multi-season antifouling that uses Biolux® Slime Blocking Technology and Econea™ to ward off hard growth like barnacles and zebra mussels.

- Suitable for all boats in all waters and all substrates
- Bright colors including shell white
- Reduced solvent emissions - VOC compliant
- Self-polishing paint reduces build- up and friction and improves fuel efficiency



Blue YBD100 | Green YBD101 | Red YBD102 | Black YBD103 | Shell White YBD104

ACT



Best value ablative antifouling protection.

- Ablative technology eliminates paint build up and sanding
- Provides excellent protection in waters with moderate to heavy fouling
- Not for use on aluminum



Red Y4400b | Black Y7700b | Dark Blue Y5595b | Blue Y5590b | Green Y5500b | Gray White Y7740b | Brown Y5500b

Pacifica® Plus



Pacifica Plus is a copper-free, dual biocide antifouling paint.

- Reduced solvent emissions - VOC compliant
- Contains Biolux® Slime-Blocking technology and Econea™ to control shell growth
- Self-polishing paint reduces build-up and friction
- Gray and black available in pints for brush application to outdrives and outboards
- Suitable for all substrates, including aluminum.



Red YBB262 | Black YBB263 | Blue YBB260 | Green YBB261 | Gray YBB264

Trilux® 33® Aerosol



The best performance aerosol antifouling available, Trilux 33 Aerosol has been formulated specifically for aluminum outboards, outdrives and can be used on all underwater metals. Biolux Technology is used to control slime growth. Prime bare metal with Primocon.



Black YBA063A | Gray YBA064A | White YBA068A

Fiberglass Bottomkote® NT



The Fiberglass Bottomkote NT Advantage:

- NT (New Technology) – Optimizes the benefits of hard and ablative paints through a unique Dual Resin Approach
- Durable Coating – Prevents premature wear-through yet a slow polishing action minimizes unnecessary paint build-up
- Fast-Dry – So fast you can paint and launch in the same day!
- Universal – A cost effective choice for all power and sail boats and in all waters
- Not for use on aluminum.

Red YBB349 | Black YBB379 | Blue YBB389 | Green YBB359

Fiberglass Bottomkote® Aqua



A great performing, waterbased, low V.O.C. formulation.

- Easy clean up with soap and water
- Low VOC - reduces solvent emissions
- Provides an exceptionally smooth finish - reduces drag and coefficient of friction
- Thinner film for less paint build-up
- Clean colorfast formula for excellent color stability

Red YBA549 | Black YBA579 | Blue YBA589 | Green YBA559

Note: All new Sea Ray, Meriden and Bayliner boats are delivered with Fiberglass Bottomkote Aqua.

Ultra™ with Biolux®



Durable, premium performance, low VOC formulation for medium to high fouling conditions.

- High solids, high performance, hard antifouling for durable finish
- Biolux® slime blocking technology reduces slime and increases antifouling performance
- Fast-drying formula - paint and launch in the same day
- Not for use on aluminum

Red YS449F | Black YS779F | Blue YS889F | Green YS559F

Trilux® 33®



Trilux 33 offers brighter, cleaner colors, and is ideal for use on all traditional boat substrates including aluminum.

- Biolux® slime blocking technology reduces slime and increases antifouling performance

Red YBA062 | Black YBA063 | Blue YBA060 | Green YBA061 | White YBA065

VC®17m Extra



The original thin film antifouling paint that is formulated with fluoro microadditive to reduce friction and drag, for optimum speed and efficiencies through the water. Favored by professional sailing race teams & power boaters for over 15 years, VC 17m Extra is a hard, super smooth, racing finish that is super easy to maintain. Biolux Technology blocks slime and improves antifouling performance. Not for use on aluminum.

Red YBA407 | Blue YBA405 | Original YBA405

VC® Offshore



For racing sailing and performance power boats. VC Offshore will yield a hard, smooth, low friction surface that can be burnished to a very low profile. VC Offshore is suitable for use in fresh and salt water. Not for use on aluminum.

Red V117 | Black V116 | Blue V116 | Retrofaire Metallic Grey R3860

InterProtect® Primers with Micro-Plates®

InterProtect primers with Micro-Plates can be used above and below waterline and on all substrates. Micro-Plate® Technology creates an overlapping barrier to help stop water migration through the coating reducing water migration through the epoxy to the hull surface which could lead to blistering.





InterProtect 2000E

- Fast drying, easy application
- Use as part of a no sand system
- The industry standard for more than 20 years



InterProtect HS

High solids two-part epoxy

- High solids for fewer coats to achieve film build
- Protect metals from rust and oxidation
- Reduced solvent emissions

Grey Y2000E | White Y2002E

Grey YPA420

Interlux Micron® 66



- Note: Not for use in Freshwater!
- Top of the Micron range - Award-winning, self polishing copolymer technology with Biolux SPC. (Use in saltwater).
- Outstanding antifouling performance in the harshest fouling conditions.
- Outperforms old TBT antifouling paints.
- Top rated antifouling in independent tests for max protection and long life.
- Formulated specifically for professional application.
- Maximum protection even during stationary periods at the dock or mooring.

Order No.	Mfg. No. / Description	Price
406036	(YBA470/1) Blue, Gallon	$356.98 E
406035	(YBA470/3) Blue, 3 Gallon	$1,019.98 E
406040	(YBA476/1) Navy Blue, Gallon	$400.98 E
406042	(YBA471/1) Green, Gallon	$356.98 E
406048	(YBA472/1) Red, Gallon	$356.98 E
406049	(YBA473/3) Black, 3 Gallon	$1,019.98 E
406050	(YBA473/1) Black, Gallon	$356.98 E

Interlux Micron® CSC



- The innovative copper-copolymer formula of Micron CSC provides a controlled release of antifouling biocide at the paint surface.
- True self polishing, multi-seasonal copolymer.

Order No.	Mfg. No. / Description	Price
405907	(Y5580/1) Blue, Gallon	$289.98 E
405919	(Y5580/QT) Blue, Quart	$83.98 E
405921	(Y5581/1) Green, Gallon	$289.98 E
405933	(Y5581/QT) Green, Quart	$83.98 E
405945	(Y5582/1) Red, Gallon	$289.98 E
405956	(Y5582/QT) Red, Quart	$83.98 E
405969	(Y5583/1) Black, Gallon	$289.98 E
405972	(Y5583/QT) Black, Quart	$83.98 E
405983	(Y5584/1) Shark White, Gallon	$289.98 E
405995	(Y5584/QT) Shark White, Quart	$83.98 E
405904	(Y5580/3) Blue, 3 Gallon	$848.98 E
405966	(Y5583/3) Black, 3 Gallon	$848.98 E

Interlux Micron CF

- Micron CF is a multi-season antifouling that uses Biolux® Slime Blocking Technology to combat slime and Econea™ to ward off barnacles and zebra mussels.
- A polishing product, Micron CF helps reduce paint build- up, reduce friction and improve fuel efficiency.
- Micron CF is a VOC compliant.
- It is available in 4 bright colors including Shell White as well as a crisp black.
- Micron CF is suitable for use on all boats in all waters.

Order No.	Mfg. No. / Description	Price
406360	(YBD100/1) Blue, Gallon	$265.98 E
406370	(YBD103/1) Black, Gallon	$265.98 E

Interlux Fiberglass Bottomkote® Classic



- Proven all purpose antifouling protection.
- Fast dry, paint and launch the same day.
- Overcoats any existing bottom paint.

Order No.	Mfg. No. / Description	Price
405653	(YBB669/3) Blue, 3 Gallon	$342.98 D
405654	(YBB669/1) Blue, Gallon	$123.98 D
405655	(YBB669/QT) Blue, Quart	$46.98 D

Interlux Micron® Extra with Biolux



- Combines the slime blocking power of Biolux with controlled solubility copolymer antifouling paint technology to provide long-lasting, full-spectrum defense against fouling organisms.

Order No.	Mfg. No. / Description	Price
406010	(Y5690/1) Blue, Gallon	$362.98 E
406011	(Y5690/QT) Blue, Quart	$105.98 E
406014	(Y5691/1) Green, Gallon	$362.98 E
406016	(Y5692/1) Red, Gallon	$362.98 E
406018	(Y5693/1) Black, Gallon	$362.98 E
406019	(Y5693/QT) Black, Quart	$105.98 E
406020	(Y5694/1) Shark White, Gallon	$362.98 E
406024	(Y5695/1) Brown, Gallon	$362.98 E
406026	(Y5696/1) Dark Blue, Gallon	$362.98 E

Interlux Fiberglass Bottomkote® ACT with Irgarol



- Uses Ablative Copolymer Technology providing excellent season-to-season protection.
- Ablative Copolymer Technology enables it to wear away with use and eliminates the build-up of sold spent coatings and the heavy sanding needed to remove them.
- It contains cuprous oxide and Irgarol.

Order No.	Mfg. No. / Description	Price
405561	(Y4490B/1) Red, Gallon	$177.98 E
405562	(Y4490B/QT) Red, Quart	$61.98 E
405563	(Y5590B/1) Green, Gallon	$177.98 E
405564	(Y5590B/QT) Green, Quart	$61.98 E
405565	(Y6690B/1) Blue, Gallon	$177.98 E
405566	(Y6690B/QT) Blue, Quart	$61.98 E
405567	(Y6690B/3) Blue, 3 Gallon	$397.98 E
405569	(Y7790B/1) Black, Gallon	$177.98 E
405570	(Y7790B/QT) Black, Quart	$61.98 E
405571	(Y7790B/3) Black, 3 Gallon	$397.98 E

Interlux Fiberglass Bottomkote® Aqua



- Color fast, durable water based antifouling paint that will provide premium protection from algae, slime, barnacles, zebra mussels and other forms of fouling.
- Perfect for use on either cruising or performance boats.
- The surface can be wet-sanded to provide a smooth racing finish with less drag.
- A low in Volatile Organic Content (VOC) with the added benefit of easy clean up with soap and water.

Order No.	Mfg. No. / Description	Price
405589	(YBA569/1) Blue, Gallon	$139.98 D

Interlux Interplate 937 Gray

- A two pack, heat resistant, zinc silicate shop primer providing good corrosion protection, with minimum production of zinc salts.
- Excellent welding and cutting properties and resistance to damage caused by welding, gas cutting and fairing thereby reducing secondary surface preparation requirements in comparison to typical zinc silicate products.
- 5 gallon.

Order No.	Mfg. No. / Description	Price
412001	(933)	$636.00 D

Interlux VC® 17m Extra with Biolux



- Thin film antifouling for racing sailboats and powerboats.
- With Fluoro microadditive for a low friction surface.
- Hard, smooth surface for use in fresh and low fouling saltwater.
- Great for use on inflatables.
- Quick drying for fast relaunch.

Order No.	Mfg. No. / Description	Price
404169	(YBA460KIT/QT) Blue, Quart	$71.98 E
404157	(YBA405KIT/QT) Black (Original), Quart	$71.98 E
404171	(YBA407KIT/QT) Red Quart	$71.98 E

Interlux Pacifica Plus



- Outstanding copper-free bottom paint.
- Contains Econea to control shell growth and Biolux Slime-Blocking technology.
- Clean, crisp, bright colors.
- Fast dry, low odor.
- High solids, reduced solvent emissions.
- Suitable for all substrates, including aluminum.

Order No.	Mfg. No. / Description	Price
404335	(YBB260/1) Blue, Gallon	$244.98 E
404347	(YBB262/1) Red, Gallon	$244.98 E
404359	(YBB263/1) Black, Gallon	$244.98 E

Interlux Fiberglass Bottomkote® NT



- Formulated with a unique, Dual Resin Technology that allows a boat owner to benefit from the advantages in both ablative and hard antifouling paints.
- A very durable coating, preventing premature wear-through, yet it has a slow polishing effect that keeps the hull clean and smooth without the heavy paint build-up you can get year after year with a traditional hard antifouling.
- A universal product for most substrates (excluding aluminum) and it's an affordable choice!

Order No.	Mfg. No. / Description	Price
405610	(YBB359/1) Green, Gallon	$122.98 E
405620	(YBB369/1) Blue, Gallon	$122.98 E
405629	(YBB379/1) Black, Gallon	$122.98 E
405604	(YBB349/1) Red, Gallon	$122.98 E
405622	(YBB369/QT) Blue, Quart	$47.98 E
405627	(YBB379/QT) Black, Quart	$47.98 E

Interlux Trilux® 33 with Biolux



- TBT Free.
- No licenses required.
- A tin-free antifouling formulated to provide safe, effective protection for aluminum boats, outdrives and outboards.

Order No.	Mfg. No. / Description	Price
733801	(179EA)	$24.98 D
406252	(YBA060/1) Blue, Gallon	$315.98 E
406264	(YBA060/QT) Blue, Quart	$94.98 E
406276	(YBA062/1) Red, Gallon	$315.98 E
406290	(YBA063/1) Black, Gallon	$315.98 E
406303	(YBA063/QT) Black, Quart	$94.98 E
406319	(YBA063/PT) Black, Pint	$55.98 E
406327	(YBA068/1) White, Gallon	$315.98 E
406339	(YBA068/QT) White, Quart	$94.98 E

Interlux Ultra® with Biolux



- High solids, high performance, hard antifouling.
- Biolux technology reduces slime and increases antifouling performance.
- Durable finish.
- Fast-drying formula.

Order No.	Mfg. No. / Description	Price
405772	(Y3559F/1) Green, Gallon	$251.98 E
405774	(Y3669F/1) Blue, Gallon	$251.98 E
405778	(Y3779F/1) Black, Gallon	$251.98 E
405770	(Y3449F/1) Red, 1 Gallon	$251.98 E
405773	(Y3669F/3) Blue, 3 Gallon	$673.98 E
405776	(Y3779F/3) Black, 3 Gallon	$673.98 E

Interlux Regatta Baltoplate Racing Finish



- A specialized antifouling bottom paint for the serious racer.
- Combines superior antifouling performance with the smoothness and lubricity of a superior racing bottom finish in one coat.
- It dries to a dull finish.
- Recommended for use in all waters.
- Gray metallic, gallon.

Order No.	Mfg. No. / Description	Price
404804	(R3950/1)	$383.98 E

Interlux Ultra-Kote® - Premium



- Has the highest copper content of all leading yacht antifouling paints.
- The new fast dry formula also allows you to paint and launch the same day.
- It is recommended for use where the fouling challenge is severe.
- Such as warm or tropical waters or in areas where the runoff from the aid causes higher algae and grass growth.

Order No.	Mfg. No. / Description	Price
405705	(2449/1) Red, Gallon	$209.98 D
405729	(2669/1) Blue, Gallon	$209.98 D
405743	(2779/1) Black, Gallon	$245.98 D

Interlux Epoxycop®



- For use below the waterline on fiberglass, wood and properly primed steel boat hulls and parts, in fresh, salt and brackish waters.
- Do not use on aluminum.
- Hard, smooth modified-epoxy antifouling paint.
- Dependable season long protection for power or sail.

Order No.	Mfg. No. / Description	Price
404703	(K50/QT) Red, Quart	$29.98 E
404715	(K51/1) Blue, Gallon	$111.98 E
404727	(K51/QT) Blue, Quart	$34.98 E
404765	(K53/QT) Green, Quart	$34.98 E

Interlux Epiglass HT9000 Epoxy Resin



- Can be used for blister repair, sheathing, laminating, filling, fairing and glueing.
- The system is available with standard and fast speed hardeners to allow for a greater variety of working temperatures and conditions.
- Use with Interprotect Y2000E for blister repair and prevention.
- Solvent free and low odor.

Order No.	Mfg. No. / Description	Price
410744	(HT9000) Resin, Gallon	$127.98 E
410756	(HT9000) Resin, Quart	$48.98 E
410782	(HT9002) Standard Hardener, Quart	$50.98 E

©2014 Donovan Marine, Inc.

Interlux Interprotect® Kits



- Interprotect Y2000E/2001E.
- An unique two-part epoxy coating developed to protect fiberglass boats from water absorption which can lead to osmotic blistering.
- Also used to repair gelcoat blistering.
- It has been made easier to use by allowing up to 2 weeks between coats.
- Now with longer overcoat times.

Order No.	Mfg. No. / Description	Price
409150	(Y2000E/2001E) Gray, 3 Gallon	$243.98 E
409163	(Y2000E/2001E) Gray, Gallon	$107.98 E
409157	(Y2000E/2001E) Gray, Quart	$38.98 E
409166	(Y2002E/2001E) White, Quart	$41.98 E
409165	(Y2002E/2001E) White, Gallon	$107.98 E
409152	(Y2002) Part A, White, 3 Gallon	$243.98 E
409154	(Y2001) Part B, Cure, Gallon	$82.98 E

- Interprotect Y3000/3001.
- A unique two-part epoxy coating developed to protect old and new fiberglass hulls from water absorption which can lead to hull blistering.

Order No.	Mfg. No. / Description	Price
409171	(Y3000/3001) Gallon	$157.98 D

Interlux Pre-Kote Primer - Above Waterline Primer



- A unique V.O.C. compliant, single package, undercoater for use with Brightside Polyurethane, Yacht Enamels or any one-part topside finish.
- Superior build and hide while improving flow and sandability.
- Use anywhere above the true waterline where a coating is needed to provide a smooth, fair surface for overcoating with a topside enamel.

Order No.	Mfg. No. / Description	Price
408915	(YA4279/1) White, Gallon	$95.98 E
408927	(YA4279/QT) White, Quart	$31.98 E
408941	(YA4280/QT) Gray, Quart	$31.98 E

Interlux Primocon Aerosol



- A non-bleeding, anti-corrosive primer that provides an excellent barrier on underwater metal surfaces, reducing galvanic corrosion.
- Use on underwater metal areas including aluminum outdrives and outboards, stainless steel, bronze props and shafts prior to application of Trilux Prop & Drive, Trilux 33 Aerosol or Trilux 33.
- 12 oz.

Order No.	Mfg. No. / Description	Price
409225	(YPA985)	$27.98 E

Interlux Super KL® with Slime Fighter



- A premium antifouling coating with a high copper loading and slime fighter added to combat slime and keep the bottom cleaner.
- It provides effective protection against all types of marine fouling including slime and is recommended for boats that are used in high fouling salt or fresh water areas, or which remain in the water for prolonged periods between haul outs.
- Black, gallon.

Order No.	Mfg. No. / Description	Price
404796	(NK93B/1)	$232.98 E

Interlux Vinyl-Lux® Primewash Base/Reducer



- A self-etching primer designed for use on bare metal, to obtain the optimum adhesion of primers and finish paints.
- Dries very quickly.
- Fast over coating times.

Order No.	Mfg. No. / Description	Price
409638	(Y355/QT) Vinyl-Lux Solvent, Quart	$18.98 E

Interlux Epoxy Primekote



- A multi-purpose two-part epoxy primer that is the recommended primer for use with two-part finishes such as Perfection Polyurethane and can also be overcoated with any Interlux topside paint.
- Can be used above and below the waterline.
- Good enamel hold-out, sands freely yet does not load the paper.
- Does not sand through easily.

Order No.	Mfg. No. / Description	Price
409108	(Y404KIT/1) Gallon Kit	$115.98 E
409118	(Y404KIT/QT) Quart Kit	$40.98 E

Interlux Primocon Underwater Primer



- An anti-corrosive primer for underwater metal surfaces including hulls, running gear, and the lower units of outboards and I/O's.
- It will provide an excellent barrier to reduce pitting caused by galvanic corrosion.
- Will not affect the color of antifouling paint.
- Can also be used as a conversion coating over an unknown antifouling.

Order No.	Mfg. No. / Description	Price
409208	(YPA984/1) Gallon	$92.98 E
409210	(YPA984/QT) Quart	$30.98 E

Interlux Fiberglass No Sand Primer



- Designed to eliminate the need to sand fiberglass prior to applying antifouling paint.
- It can also be used on epoxy primers to improve the adhesion of antifouling paint.
- Fast drying.
- It can be used on polyester, vinyl ester and epoxy.

Order No.	Mfg. No. / Description	Price
409097	(YPA200/QT) Quart	$36.98 E
409096	(YPA200/1) Gallon	$85.98 E

Interlux Trilux® 33 Aerosol



- Formulated with copper thiocyanate to be the safest and most effective product for use on aluminum boats, outdrives and outboards.
- It can also be applied to fiberglass, wood and other underwater metals.

Order No.	Mfg. No. / Description	Price
405863	(YBA063A) Black	$38.98 E
405864	(YBA068A) White	$38.98 E
405870	(YBA064A16) Gray	$38.98 E

Interlux Interprime™ Wood Sealer



- Suitable for either interior and exterior use.
- It stops varnish from soaking into the wood and seals the grain.
- Recommended for sealing plywood to resist cracking and checking.

Order No.	Mfg. No. / Description	Price
408838	(Y1026/1) Clear, Gallon	$55.98 D
408852	(Y1026/QT) Clear, Quart	$25.98 E

Interlux Goldspar® Satin Varnish



- A low luster modified urethane varnish designed for application to interior wood surfaces.
- Ideal for cabin interiors such as counters, cabinets and tables.
- Produces a warm, rich sheen finish which resists scratches and alcohol stains.
- Also suggested for home interior finishes such as bar tops, furniture and paneling.
- Excellent handling qualities enable truly professional results.

Order No.	Mfg. No. / Description	Price
408546	(Y60/PT) Pint	$16.98 E
408547	(Y60/QT) Quart	$30.98 E
408535	(Y60/1) Gallon	$73.98 E

Interlux Perfection



- Perfection is the ultimate performing, 2-part polyurethane gloss finish.
- It provides the longest lasting, ultra high-gloss finish that has superb color retention, together with excellent chemical, impact and abrasion resistance.
- It has been formulated specifically to enable amateur users to achieve professional quality results with ease on topsides, superstructure and decks.

Order No.	Mfg. No. / Description	Price
408042	(YHA192/QT) Off White, Quart	$84.98 E
408080	(YHB000/HG) Snow White, Half Gallon	$158.98 E
408092	(YHB000/QT) Snow White, Quart	$84.98 E

Interlux Epiglass HT450 Filler Powder



- 1 Quart.
- Ideal for filling and coving producing an easy to sand filler.
- Included in Epiglass HT450 is a specific lightweight powder developed to improve trowel and feathering properties especially over small areas.

Order No.	Mfg. No. / Description	Price
410807	(HT450)	$15.98 E

Interlux Original Varnish



- A traditional spar varnish that combines ease of application with good gloss and durability.
- Original is a phenolic resin varnish that contains ultra-violet filters.
- An ideal choice for use on interior and exterior woodwork such as cabin trim, handrails & coamings.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408561	(Y90/QT)	$22.98 E

Interlux Perfection Plus Varnish



- A high performance clear polyurethane, offering multiple solutions from one product.
- Delivers the ultimate in clear wood coating performance.
- Fully compatible with oily woods like teak after adequate degreasing & substrate preparation.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408408	(YVA950/QT)	$84.98 E

Interlux Schooner® Gold Varnish



- Advanced UV Technology.
- Longest lasting one-part varnish - 12 months or more in Florida!
- Traditional amber color.
- High build formulation achieves aesthetic results in fewer coats.

Order No.	Mfg. No. / Description	Price
408612	(YVA500/QT) Qt	$44.98 E
408624	(YVA500/PT) Pt	$25.98 E

Interlux Sealux White



- One-part, high gloss premium marine alkyds for multiple uses in exterior and interior applications.
- This high gloss finish can be used in deck, hull, cabin and interior surfaces on marine vessels.
- Exhibits excellent resistance to exterior exposures.
- Excellent recoatability and ease of use.

Order No.	Mfg. No. / Description	Price
408422	Flat White, Gallon	$68.98 I
408424	Super White, Gallon	$68.98 I

Interlux Schooner® Varnish



- Contains ultra-violet filters to screen the sun's damaging rays for remarkable durability.
- Excellent water resistance and silky application.
- Superior self-leveling property and a bright, clean, high gloss afford a pristine finish.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408603	(Y96/QT)	$34.98 E

Interlux Cetol Marine



- Cetol Marine Light.
- A durable, translucent satin protective wood finish formulated with a special alkyd resin and high quality synthetic UV-absorbing pigments which shields wood against damaging UV rays.
- Identical to the Cetol Marine but formulated with different pigments to produce a lighter amber appearance and can be used for interior or exterior wood.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408876	(IVA290/QT)	$40.98 E



- Cetol Marine.
- A durable translucent satin protective wood finish, formulated with a special alkyd resin and high quality synthetic UV-absorbing pigments which shields wood against damaging UV rays.
- It produces an attractive dark amber look to wood and can be used for interior or exterior wood.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408888	(IVA300/QT)	$40.98 E

- Cetol Marine Gloss.
- A durable clear gloss protective wood finish, developed as a topcoat for Cetol Marine, Cetol Marine Light and now Cetol Marine Natural Teak.
- Provides a high gloss, hard wearing, UV protection and an easy to clean finish.
- Do not use on decks.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408890	(IVA315/QT)	$43.98 E

- Cetol Marine Natural Teak.
- Enhance and protect the natural beauty and grain of teak.
- Formulated to have the same ease of application and maintenance characteristics as Cetol Marine and Cetol Marine Light but with a unique UV protection package and pigmentation.
- With "Next Wave" Technology.
- 1 quart.

Order No.	Mfg. No. / Description	Price
408903	(IVA316/QT)	$40.98 E

©2014 Donovan Marine, Inc.

Interlux Premium Yacht Enamel



- It is a fast drying, high quality topside finish.
- It has superior hiding characteristics and adhesion to properly prepared surfaces.
- Good gloss and color retention.

Order No.	Mfg. No. / Description	Price
406505	(Y1/1) High Intensity Gloss White, Gallon	$86.98 E
406517	(Y1/QT) High Intensity Gloss White, Quart	$31.98 E

Interlux Brightside Polyurethane



- Most technically advanced one-part polyurethane topside finish for fiberglass, wood, steel and aluminum.
- Flows on smoothly and evenly, brush strokes disappear and dry to a durable, abrasion-resistant finish.
- It contains an advanced ultraviolet package that insures high gloss and color retention.

Order No.	Mfg. No. / Description	Price
407040	(Y4152/QT) Yellow, Quart	$40.98 E
407052	(Y4205/QT) Seattle Gray, Quart	$40.98 E
407088	(Y4207/QT) Bristol Beige, Quart	$40.98 E
407103	(Y4208/QT) Hatteras Off-White, Quart	$40.98 E
407140	(Y4218/QT) Hatteras Off-White (1990), Quart	$40.98 E
407280	(Y4241/QT) Sapphire Blue, Quart	$40.98 E
407329	(Y4247/QT) Sea Green, Quart	$40.98 E
407343	(Y4248/QT) Fire Red, Quart	$40.98 E
407367	(Y4250/QT) Steel Gray, Quart	$40.98 E
407406	(Y4253/QT) Ocean Blue, Quart	$40.98 E
407432	(Y4258/QT) Black, Quart	$40.98 E
407456	(Y4259/1) Blue-Glo White, Gallon	$116.98 E
407468	(Y4259/QT) Blue-Glo White, Quart	$38.98 E
407583	(Y4316/QT) Dark Blue, Quart	$40.98 E
407709	(Y4351/QT) Light Blue, Quart	$40.98 E
407711	(Y4353/QT) Medium Blue, Quart	$40.98 E
407723	(Y4359/1) White, Gallon	$116.98 E
407735	(Y4359/QT) White, Quart	$38.98 E
407761	(Y4360/QT) Matterhorn White, Quart	$38.98 E
407800	(Y4381/QT) Off-White, Quart	$38.98 E

Interlux Brushing Liquid



- Slow drying solvent to ease brushing and facilitate the flow of specified paint coatings.
- Extends drying in hot weather.
- Also recommended in various topside systems for removing sanding residue from fiberglass and wood surfaces.

Order No.	Mfg. No. / Description	Price
409450	(Y333/1) Gallon	$43.98 E
409462	(Y333/QT) Quart	$20.98 E
409474	(Y333/PT) Pint	$16.98 E

Interlux Fiberglass Solvent Wash



- Used to remove mold release agents, wax, oil and grease from the hulls of bare fiberglass boats.
- It is also an excellent parts clean up and multi-purpose wipe down solvent.

Order No.	Mfg. No. / Description	Price
409309	(Y202/1) Gallon	$58.98 E
409311	(Y202/QT) Quart	$20.98 E

Interlux Reducing Solvent



- A fast evaporating solvent to be used in specific two-part polyurethane and epoxy products.

Order No.	Mfg. No. / Description	Price
409548	(Y2316N/1) Gallon	$51.98 E
409549	(Y2316N/QT) Quart	$22.98 E

Interlux Reducing Solvent



- 1 quart.
- A slow evaporating solvent to be used in specific two-part polyurethane and epoxy products.

Order No.	Mfg. No. / Description	Price
409587	(Y2333N/QT)	$27.98 E

Interlux Special Thinner



- A fast evaporating solvent which, when added to specified paint coatings, improves drying in cold climates and facilitates spray application.
- Also recommended for removing sanding residue from hull bottoms, wiping bare aluminum clean and for the general clean up of paint equipment.

Order No.	Mfg. No. / Description	Price
409373	(Y216/1) Gallon	$39.98 E
409397	(Y216/QT) Quart	$20.98 E
409400	(Y216/PT) Pint	$14.98 E

Interlux Brush-Ease



- 1 quart.
- A slow drying solvent to ease brushing and rolling and improve flow.
- Should only be used in products where it is specified in the directions, mostly antifouling paints, it is not an all purpose solvent.

Order No.	Mfg. No. / Description	Price
409676	(Y433/QT)	$17.98 E

These are only general requirements. Thinner quality and type vary depending upon temperature and specific application.

Product	Brush Solvent	Spray Solvent	Clean-up Solvent
Perfection Polyurethane	2333N	2316N	2333N or 2316N
Toplac Silicone Copolymer	333	216	216
Brightside & Yacht Enamel	333	216	216
Interstain	333	N/A	333
Varnishes	333	216	216
Bottom Paints (Conventional)	216	216	216

Product	Brush Solvent	Spray Solvent	Clean-up Solvent
Micron Extra, Micron CSC, Trilux 33, Trilux, Trilux II, Ultra	433	213	433 or 216
Fiberglass Bottomkote ACT	216	216	216
Micron Optima	6216	6216	Water
Fiberglass Bottomkote Aqua	6216	6216	Water
VC Offshore	355	355	355
VC 17m Extra, VC 17m	V172	V172	V172

Interlux Bilgekote



- A fast drying, durable coating formulated for application to bilge areas.
- Helps prevent absorption of oil, gasoline or sludge into wood and fiberglass.
- Hard wearing coating for bilges and bulkheads.
- Chemical resistance to fumes, fuel and oil.

Order No.	Mfg. No. / Description	Price
411326	(YMA102/QT) White, Quart	$28.98 E
411325	(YMA101/1) White, Gallon	$81.98 E
411328	(YMA100/QT) Gray, Quart	$28.98 E
411327	(YMA100/1) Gray, Gallon	$81.98 E

Interlux Interdeck



- Interdeck provides an excellent slip resistant finish with a tough polyurethane resin that protects decks against everyday wear and tear.
- It contains a fine aggregate and will apply easily to all substrates.
- Interdeck has a low-sheen finish to reduce sun glare.

Order No.	Mfg. No. / Description	Price
409753	(YJB000/QT) White, Quart	$40.98 E
409789	(YJF684/QT) Gray, Quart	$40.98 E

Interlux Fiberglass Surface Prep



- A mold release agent and wax remover.
- It is also used to thoroughly clean the gelcoat and provide a key for the Fiberglass No Sand Primer to be applied.
- Can also be used to remove Amine Blush from clear epoxy and clean previously painted surfaces when prepping to repaint.

Order No.	Mfg. No. / Description	Price
409323	(YMA601/QT) Quart	$24.98 E

Interlux Interstrip



- Designed specifically for the removal of antifouling paint from fiberglass, wood, steel and aluminum boats.
- Low odor.
- Incorporates special sealing agents that allow the stripper to stay wet longer, thereby lengthening working time.

Order No.	Mfg. No. / Description	Price
410352	(Y299E/1) Gallon	$81.98 E
410364	(Y299E/QT) Quart	$33.98 E

Paint Thinners

- A petroleum solvent used primarily as a thinner for conventional coatings.

Order No.	Mfg. No. / Description	Price
412062	(GTA004) Gallon	$35.40 D

- An aromatic hydrocarbon used in alkyd primers, chlorinated rubber coatings, and some epoxies.

Order No.	Mfg. No. / Description	Price
412063	(GTA007) Gallon	$43.20 D

- An aromatic/glycol ether/ketone blend used in epoxies, vinyls and zincs.

Order No.	Mfg. No. / Description	Price
412065	(GTA220) Gallon	$51.10 D
412066	(GTA220) 5 Gallon	$248.00 D

Interlux Seam Compound - Above Waterline Only



- Durable, tight sealing material designed to fill hull seams of wooden boats above the waterline.
- It remains pliable to allow for expansions and contractions of planks.
- Exhibits excellent adhesive qualities when applied over properly primed surfaces.
- Easily applied by putty knife.

Order No.	Mfg. No. / Description	Price
410579	(Y31/QT) White, Quart	$44.98 E

Interlux Seam Compound - Below Waterline Only



- Designed to fill seams of wooden boat bottoms and used to fill keel joints that flex.
- A tried and proven performer which remains durable and flexible after immersion, to absorb expansion and contraction of pranks.
- Exhibits excellent adhesive qualities when applied over properly primed surfaces.

Order No.	Mfg. No. / Description	Price
410542	(Y30/QT) Brown, Quart	$41.98 E

Biodegradable Cleaner

- A water based, biodegradable alkaline cleaner.
- To remove oil, grease and other contaminants prior to further surface preparation or for general cleaning purposes.

Order No.	Mfg. No. / Description	Price
412061	(GMA571/5) 5 Gallon	$169.75 D

Sea Jacket Paint

- Modified epoxy hard bottom paint for seasonal use.

Order No.	Mfg. No. / Description	Price
412098	(544) Blue, Gallon	$120.00 E

Interlux Intergrip No Skid Compound



- A man-made plastic sphere additive for transforming decks into no-skid surfaces.
- Its regular shape diminishes the tendency to collect dirt.
- It has excellent non-slip properties.

Order No.	Mfg. No. / Description	Price
409790	(Y2398/QT) Quart	$37.98 E

Interlux Intergard Filler Paste

- A modified form of epoxy resin.
- Must be mixed equal parts.
- Putty like paste.

Order No.	Mfg. No. / Description	Price
410819	(EAA201) Filler B Paste	$41.56 C
410833	(EAA200) Filler A Paste	$41.56 C

Interlux Interfill Epoxy Filler



- A two-part epoxy filler that can be used above the waterline to the surface prior to applying topside finishes, and can be used to fill pinholes between coats of two-part polyurethanes, due to its ability to trowel to a very line, smooth finish.
- Can also be used below the waterline to fill blisters and as part of a keel fairing system.

Order No.	Mfg. No. / Description	Price
410705	(YAV867/KIT)	$17.98 E
519493	(YAA868/2) Part B, 2 Gallon	$195.98 E

Non-Skid Additive

- A non slip aggregate for deck systems.

Order No.	Mfg. No. / Description	Price
412060	(GMA197) Gallon	$28.00 D

©2014 Donovan Marine, Inc.

Interlux Intertherm 891

International

- Single-pack Oleoresinous Aluminum Coating.
- Light reflective finish for cargo holds, pipes (up to 485F) etc.

Order No.	Mfg. No. / Description	Price
412099	(HTA002) Intertherm 891	$71.60 D

Interlac 665

International

- A one-part alkyd gloss finish for use in above water areas.
- A complete range of colors is available.
- Use thinner 412062 (GTA004).

Order No.	Mfg. No. / Description	Price
412014	(CLA074) Blue White Gloss, Gallon	$55.55 D
412018	(CLB000) White Gloss, Gallon	$55.55 D
412019	(CLB000) White Gloss, 5 Gallon	$267.50 D
412022	(CLB134) Yellow Gloss, Gallon	$76.70 D
412024	(CLB941) Aircraft Blue Gloss, Gallon	$69.65 D
412020	(CLB953) Signal Blue Gloss, Gallon	$60.70 D
412026	(CLC287) Signal Red Gloss, Gallon	$76.70 D
412030	(CLB295) Ensign Red Gloss, Gallon	$76.70 D
412034	(CLC935) Caribbean Blue Gloss, Gallon	$60.70 D
412036	(CLD260) International Orange Gloss, Gallon	$69.65 D
412037	(CLE143) Buff Gloss, Gallon	$57.20 D
412038	(CLF684) Surf Gray Gloss, Gallon	$55.55 D
412040	(CLG609) Dark Green Gloss, Gallon	$60.70 D
412042	(CLK724) Strom Gray Gloss, Gallon	$55.55 D
412044	(CL71048) Haze Gray Gloss, Gallon	$55.55 D
412046	(CLL274) Red Oxide Gloss, Gallon	$60.70 D
412048	(CL71032) Safety Blue Gloss, Gallon	$58.70 D
412050	(CLL549) Signal Green Gloss, Gallon	$57.20 D
412052	(CLP462) Alpine Green Gloss, Gallon	$60.70 D
412051	(CLR764) Admiral Gray Gloss, Gallon	$57.20 D
412053	(CLT806) Mid Graphite Gloss, Gallon	$57.20 D
412054	(CLY999) Black Gloss, Gallon	$39.25 D

Interprime 198

International

- An quick drying, one pack primer.
- It is surface tolerant, compatible with most substrates and can be overcoated with a wide range of finishes.
- Use thinner 412063 (GTA007).

Order No.	Mfg. No. / Description	Price
412057	(CPA098) Gray, Gallon	$68.45 D
412058	(CPA099) Red, Gallon	$68.45 D

Interline 925 Epoxy Tank Coating

International

- Light colored, solvent free potable water tank coating.

Order No.	Mfg. No. / Description	Price
412004	(925101/A) 4 Gallon	$533.20 D

Interlac 800

International

- A one pack, high solids, low VOC, gloss silicone alkyd with excellent color and gloss retention.
- Use thinner 412063 (GTA007).

Order No.	Mfg. No. / Description	Price
412068	(80010/1) White, Gallon	$117.75 D
412074	(80002/1) Black, Gallon	$119.40 D
412077	(800/45566) Buff, Gallon	$73.57 D
412080	(800/87426) Gunmetal Gray, Gallon	$120.90 D

Intertuf 262

International

- A surface tolerant, two part epoxy primer.
- Use thinner GTA415.

Order No.	Mfg. No. / Description	Price
412083	(KHA302/1) Light Gray, Gallon	$63.45 D
412084	(KHA302/5) Light Gray, 5 Gallon	$304.75 D
412087	(KHA303/1) Red Base, Gallon	$63.45 D
412088	(KHA303/5) Red Base, 5 Gallon	$304.75 D
412091	(KHA304/5) Black Base, 5 Gallon	$304.75 D
412093	(KHA305/5) Buff Base, 5 Gallon	$304.75 D
412078	(KHA062) Converter/Curing Agent	$52.70 D

Intergard 264

International

- A two pack, self priming, surface tolerant epoxy with low semi-gloss finish.
- Exhibits excellent chemical and abrasion resistance.
- Low VOC.

Order No.	Mfg. No. / Description	Price
412094	(FPL274/5) Red, 5 Gallon	$431.00 D
412096	(FPJ034/5) Light Gray, 5 Gallon	$431.00 D
412097	(FPY999/5) Black, 5 Gallon	$431.00 D

Interspeed 640

International

- A high performance, TBT free, polishing antifouling.
- Enhanced biocide release mechanism.
- Prevents coating build-up.
- At subsequent dry dockings, it is only necessary to top up the system.
- Low VOC.

Order No.	Mfg. No. / Description	Price
412081	(BRA642/5) Black, 5 Gallon	$900.00 D

Blue Water Marine AC 70/MarProtect 70

BLUE WATER Marine Paint



- A surface tolerant, two part 70% solids tar free epoxy anticorrosive primer.
- Epoxy anticorrosive coating for use on the entire vessel: Underwater, topside, deck, house, water ballast tank, cofferdam, voids, cargo holds and internal spaces.

Order No.	Mfg. No. / Description	Price
7-2680	(7001K) White, Gallon	$52.98 I
759550	(7001-5GK) White, 5 Gallon	$257.98 I
7-2682	(7009-K) Medium Gray, Gallon	$52.98 I
759639	(BWC70095GK) Medium Gray, 5 Gallon	$257.98 I
7-2681	(7004-K) Black, Gallon	$52.98 I
759615	(7004-5GK) Black, 5 Gallon	$257.98 I
7-2683	(7012-K) Red Oxide, Gallon	$52.98 I
759653	(7012-5GK) Red Oxide, 5 Gallon	$257.98 I

Mascoat Marine-DTM



- Mascoat Marine-DTM insulating coating is a water-based, one-part coating comprised of air filled ceramic and silica beads held in suspension by an acrylic binder.
- It applies like paint and is maintenance-free, providing thermal insulating and anti-condensation capabilities for shipboard construction.
- Currently, Mascoat Marine-DTM insulating coating is in use on over 2000 marine vessels from Alaska to Antarctica.
- This coating can replaced most blanket and foam insulation products, resulting in substantial reduction of weight and keeping the vessel within the new stringent marine codes and classifications.
- The coating employs the best water-based coating technology and contains no harmful elements.
- Unlike other insulation methods, Mascoat Marine-DTM bonds directly to the substrate or primer, leaving no room for corrosion to take hold.
- Direct bonding gives the coating the ability to insulate your vessel without degradation of the substrate for many years to come.
- By using Mascoat Marine-DTM coating system, you can rest assured that your vessel is protected and that the interior accommodations will be comfortable.
- Users of Mascoat Marine-DTM insulation coating have found that the coating replaces most conventional insulation methods.
- While yielding the same insulation capabilities, installing costing drastically less.
- Many vessel owners have saved up to 50% on total installed costs over conventional insulation.
- Best of all, the coating is extremely lightweight.
- This allows easy application around difficult areas such as stiffeners and other tight areas without adding excess weight.

Order No.	Mfg. No. / Description	Price
496517	(1101FGDTMWH) White, 5 Gallon	$463.98 B
496519	(1101FGDTMGRY) Gray, 5 Gallon	$463.98 B

Mascoat Sound Control-dB



- Reduction of structure-borne noise and vibrations.
- Saves installation time compared to sound damping tiles.
- Reduce overall construction time-frame.
- Excellent vapor barrier.
- Keeps substrates viewable at all times.
- Protect personnel.
- Increase interior comfort.
- No risk of water entrapment.
- Lightweight compared to damping tiles.
- Meets IMO/SOLAS guidelines.
- Easily repairable if needed.

Order No.	Mfg. No. / Description	Price
496522	(2101FGDBWHT) White, 5 Gallon	$465.98 B
496524	(2101FGDBGRY) Gray, 5 Gallon	$465.98 B

Mascoat Delta Sound Control-dB



- Mascoat Sound Control products are easily applied with a sprayer, roller or brush - even in hard to reach places.
- In addition, Sound Control coatings cure quickly and can be applied while equipment is functioning, so there's no lost production time or wasted manpower.
- Mascoat's engineered products protect workers from heat and chemical exposure while reducing vibration and noise in a variety of industrial and marine situations.

Order No.	Mfg. No. / Description	Price
496504	(DELTADB20LGR) Anti Drum, White, 5 Gallon	$357.98 B
496516	(DELTADB20L) Anti Drum, Gray, 5 Gallon	$357.98 B

©2014 Donovan Marine, Inc.

AWLGRIP SYSTEMS

WWW.AWLGRIP.COM

ABOVE THE WATERLINE



All substrates:

6	TOPCOAT	**Awlgrip** or **Awlcraft 2000**
5	FINISH PRIMER	**545 Epoxy Primer**
4	EPOXY SURFACER	**High Build**
3	EPOXY FAIRING COMPOUND	**Awlfair LW**
2	SUBSTRATE SEALER	**Hullgard Extra**
1	SUBSTRATE PREPARATION	Clean, sand, grind or blast (as necessary)
	SUBSTRATE	

The above is a typical example of a full Awlgrip system. Alternative systems are available and may not consist of as many layers as above. For a system tailored to your needs please contact your local Technical Sales Representative.

ALTERNATIVE OPTIONS

Step 2 — Non-Anodized Aluminum and Steel

Apply **Max Cor CF** before **Hullgard Extra** for the ultimate anti-corrosive system. **Max Cor CF** is a VOC compliant, high solids, chromate-free, anti-corrosive epoxy primer. This two-component product provides excellent adhesion to Aluminum and Steel.

Step 2 — Anodized Aluminum and Stainless Steel

Apply **Wash Primer** before applying **Hullgard Extra**. **Wash Primer** has been specially designed to promote adhesion by uniformly etching the anodized aluminum and stainless steel substrates.

Step 3 — Epoxy Fairing Compounds

If full fairing is not required, **Awlfair LW** can be replaced with **Ultra Build**, **High Build** or **Epoxy Sprayable Fairing Compound**. These products will fill and cover scratches, dings, pinholes, light crazing and other relatively minor physical defects on a surface which otherwise would have a true or fair line. **Epoxy Sprayable Fairing Compound** should not be used as a spot filler.

Step 4 — Epoxy Surfacers

High Build can be replaced with **Ultra Build**. **Ultra Build** has excellent sag resistance and film build capability. If only minor surfacing is required, **Awlquik** can be used as an alternative to high build products.

Step 5 — Finish Primers

For regions where VOC restrictions are in force: **345 HS Primer** can be used as an alternative to **545 Epoxy Primer**. **345 HS Primer** is a new high solids epoxy finish primer which has been formulated on a modern resin technology to provide a low VOC coating – less than 340g/lt applied. It requires fewer coats for the same DFT.

Step 6 — Topcoats

For regions where VOC restrictions are in force: **Awlgrip HS** can be used as an alternative to **Awlgrip** and **Awlcraft 2000** topcoats. **Awlgrip HS** is a high solids, low VOC polyurethane coating designed to provide premium gloss and distinctness of image. For more information please consult your local Technical Sales Representative.

BRIGHTWORK & VARNISH (EXTERIORS)

System I – Traditional Varnish System

AWLSPAR CLASSIC SPAR VARNISH



Awlspar varnish is a traditional phenolic, tung oil varnish modified with state of the art UV inhibitors and absorbers and is available in standard and high solids formulas.

Awlspar is a fast-dry material. Two, and sometimes three, coats can be applied in a single day allowing you to quickly apply a full system.

Awlspar is the perfect product for the traditionalist who wants an easy to apply, easy to repair product, and doesn't object to regular maintenance coats.

2	VARNISH	**Awlspar** or **Awlspar HS** (multiple coats)
1	SUBSTRATE PREPARATION	Clean and sand (multiple coats)
	WOOD	

System II – The Ultimate Brightwork System

AWLSPAR VARNISH OVERCOATED WITH AWLBRITE CLEAR



This system combines the color highlights of the **Awlspar** varnish to provide a traditional look, with the durability of the **Awlbrite Clear** in a fast recoat, relatively easy to repair combination of varnish and urethane coatings.

Awlbrite Clear contains a unique combination of light fast resins, UV inhibitors and absorbers, allowing the system to be sealed and protected by a tough, durable two-pack urethane.

3	FINISH	**Awlbrite Clear** (multiple coats)
2	VARNISH	**Awlspar** (multiple coats)
1	SUBSTRATE PREPARATION	Clean and sand
	WOOD	

(INTERIORS)

System I – The Interior Varnish System:

AWLBRITE QUIK-FIL CLEAR OVERCOATED WITH EITHER AWLBRITE CLEAR, AWLBRITE SEMI-GLOSS, AWLSPAR OR AWLSPAR HS

Awlbrite Quik-Fil Clear is the foundation of the system. It is applied to the wood for a rapid build-up of grain filling coats.

Awlbrite Quik-Fil Clear boasts excellent grain filling properties and the speed of the cure makes it ideal for builders and yards where a fast project turnaround is required. It can be sanded in just 3 hours at 75ºF (25ºC) and is touch dry after 30 minutes.

Awlbrite Quik-Fil Clear can be overcoated with **Awlbrite Clear**, **Awlbrite Semi-Gloss**, **Awlspar** or **Awlspar HS**; or can be finished off in full color with **Awlgrip** or **Awlcraft 2000** topcoats for a lacquer finish effect.

3	FINISH	**Awlbrite Clear or Awlbrite Semi-Gloss or Awlspar or Awlspar HS**
2	SUBSTRATE SEALER	**Awlbrite Quik-Fil Clear**
1	SUBSTRATE PREPARATION	Clean and sand
	WOOD	

BELOW THE WATERLINE

System I

All substrates:

3	ANTIFOULING	**Awlstar HS Gold Label***
2	SUBSTRATE SEALER	**Hullgard Epoxy**
1	SUBSTRATE PREPARATION	Clean, sand, grind or blast (as necessary)
	FIBERGLASS, GELCOAT, WOOD	*Not for use on aluminum

APPLICATION INFORMATION

AWLGRIP®

PRODUCT	CODE	MIX RATIO BY VOLUME	REDUCTION BY VOLUME	REDUCER	WFT PER COAT	MIN RECOAT TIME (25°C/77°F) SELF	MIN RECOAT TIME (25°C/77°F) OTHER
AWLGRIP TOPCOAT	G & H Codes	Spray: 1:1 with G3010 Brush/Roller: 2:1 with H3002	Spray: Up to 25% Brush/Roller: 10-33%	T0001, T0002, T0003, T0005 (spray) or T0031 (brush/roller)	2-3 mils (50-75 µm)	Spray: 2-3 coats applied in 1-4 hours Brush/Roller: 2 coats applied at a minimum of 16 hours apart	N/A
AWLCRAFT 2000 TOPCOAT	F Codes	2:1 with G3010	Up to 25%	T0001, T0002, T0003 or T0005	2-3 mils (50-75 µm)	2-3 coats applied in 1-4 hours	N/A
AWLGRIP HS TOPCOAT	N Codes	1:1 with N3242	Up to 6%	AN200, AN210 or AN220	2-3 mils (50-75 µm)	2-3 coats applied in 30 mins-2 hours	N/A
AWLCRAFT SE	E Codes	2:0.3 with G3010	43%	T0001, T0002 or T0003	1-2 mils (25-50 µm)	2 coats applied with 10-20 mins ambient flash off time	1 hour (F3029 clear)
545 EPOXY PRIMER	D1001 / D8001	1:1 with D3001	Spray: Up to 25% Brush/Roller: 5-10%	T0006 (spray) or T0031 (brush/roller)	7-10 mils (175-250 µm)	Spray: 1 hour Brush/Roller: 12-14 hours	Spray: 12 hours Brush/Roller: 12-14 hrs
345 HS PRIMER	R8011 / R1011	1:1 with R3011	Up to 5%	T0006 (spray) or T0031 (brush/roller)	Spray: 5-7 mils (125-175 µm) Brush/Roller: 3-4 mils (75-100 µm)	1 hour	8-24 hours
AWLQUIK	D8003	1:1 with D9001	Up to 50%	T0006 (spray) or T0031 (brush/roller)	5 mils (125 µm)	Spray: 4 hours Brush/Roller: 12-14 hours	12-14 hours
QUIK-GRIP	D8016	1:1 with D3040	25-50%	T0001 or T0003	3-4 mils (75-100 µm)	1-2 hours	1-2 hours
HIGH BUILD	D8002/ D9002	1:1 with D3002	10-20%	T0006	8-10 mils (200-250 µm)	2 hours	12-24 hours
ULTRA BUILD	D8008	1:1 with D3018	5-25%	T0073	25-30 mils (625-750 µm)	1 hour	12 hours
HULLGARD EXTRA	D6120	6.67:1 with D3730	Up to 5% at low temps.	T0006	Spray: 9 mils (220 µm) Brush/Roller: 5 mils (130 µm)	2 hours	16 hours
30-Y-94 MIL SPEC PRIMER	S9001	1:1 with S3001	50%	T0006	3-7.5 mils (75-175 µm)	N/A	2-4 hours
MAX COR CF	R4330	2:1 with R3330	Do not reduce	N/A	0.8-1.4 mils (20-34 µm)	N/A	17 hours
WASH PRIMER CF	D6600	1:1 with D3300	Do not reduce	N/A	2-4 mils (50-100 µm)	N/A	1 hour
AWLFAIR LW	D8200	1:1 with D7200 or D7222	Do not reduce	N/A	Up to 240 mils (6000 µm)	When screedable without removing previous layer	17 hours
SPRAYABLE FAIRING COMPOUND	D6001	1:1 with D3011	5-25%	T0006	Up to 30 mils (750 µm)	2 hours	48-72 hours
AWLBRITE CLEAR	J3005	2:1 with J3006	Spray: 25-33% Brush/Roller: Up to 15%	A0001, A0003, A0006 (spray) or A0031 (brush/roller)	2-2.5 mils (50-62 µm)	3 hours	N/A
AWLSPAR	M3131	N/A	100% first coat only, then up to 20% if needed	T0180 (spray) or T0016 (brush/roller)	2-3 mils (50-75 µm)	3-4 hours	3 days (Awlbrite)
AWLSPAR HS	M3146	N/A	100% first coat only, then up to 25% if needed	T0180 (spray) or T0016 (brush/roller)	2-3 mils (50-75 µm)	12-16 hours	7 days (Awlbrite)
AWLBRITE SEMI-GLOSS	J3630	2:1 with J3006	14%	A0001, A0003 or A0006	2-2.5 mils (50-62 µm)	3 hours	N/A
AWLBRITE QUIK-FIL CLEAR	J3901	1:1 with J3902	First coat reduce 25% with T0001	T0001 or T0003	3-3.5 mils (80-90 µm)	3 hours	3 hours
HULLGARD EPOXY PRIMER	D6070	3:1 with D3707	Up to 5% at low temps.	T0006	Spray: 12 mils (300 µm) Brush/Roller: 4 mils (110 µm)	2 hours	Spray: 6 hours Brush/Roller: 2 hours
AWLSTAR HS GOLD LABEL ANTIFOULING	BP Codes	N/A	Max 10% if needed	T0101	5 mils (125 µm)	4 hours	N/A

Spray Brush Roller

Visit us at www.awlgrip.com for further information.

The information given in this sheet is not intended to be exhaustive. Any person using the product without first making further enquiries as to the suitability of the product for the intended purpose does so at their own risk and, to the extent permitted by law, we can accept no responsibility for the performance of the product or for any loss or damage arising out of such use.
The information contained in this sheet is liable to modification from time to time in the light of experience and our policy of continuous product development.

AkzoNobel

NORTH AMERICA 2270 Morris Avenue Union New Jersey 07083 TEL: 888.355.3090 FAX: 908.686.8545
EUROPE Bannerlaan 54 2280 Grobbendonk Belgium TEL: 32.14.25.7770 FAX: 32.14.23.0880
AUSTRALIA Unit E54 Gold Coast City Marina 76 Waterway Drive Coomera Queensland 4209 Australia
TEL: 61.7.5573.9655 or 1800.007.866 FAX: 61.7.5573.9677
NEW ZEALAND 686 Rosebank Road Avondale Auckland New Zealand TEL: 64.9.828.3009 or 0800.150.527 FAX: 64.9.828.1129
ASIA No.1 Tuas Avenue 4 Singapore 639382 TEL: 65.6862.2928 FAX: 65.6862.0778

Awlgrip®, the AkzoNobel logo and all products mentioned in this publication are trademarks of, or licensed to, Akzo Nobel. © Akzo Nobel N.V. 2010.

AWLGRIP – WE HAVE YOUR COLOR



Sahara Tan
G5009/F5017/N5100



Sable Brown
G5001/F5171/N5101



Super Jet Black
G2017/F2091/N2100



Red Mahogany
G7022/F7252/N7102



Claret
G7305/F7029/N7103



Vivid Red
G7367/F7200/N7104



Sunfast Red
G7214/F7242/N7100



Toreador Red
H7161/F7232/N7105



Int'l Orange
G7362/F7233/N7106



Federal Yellow
G9298/F9148/N9100



Fighting Lady Yellow
G9093/F9120/N9101



Aqua Mist
H4365/F4126/N4100



Forest Green
H4094/F4105/N4101



Jade Mist Green
H4089/F4114/N4102



Dark Green
H4024/F4121/N4103



Kelly Green
H4302/F4088/N4104



Teal
H5328/F5252/N5102



Majestic Blue
H5409/F5275/N5103



Midnight Blue
H5346/F5381/N5104



Flag Blue
G5002/F5014/N5101



Carinthia Blue
H5342/F5359/N5105



Aristo Blue
G5003/F5010/N5100



Royal Blue
G5007/F5011/N5106



Sky Blue
G5014/F5256/N5107



Empress Blue
G5041/F5264/N5108



Marlin Blue
G5011/F5015/N5109



Navy Blue
G5001/F5028/N5110



Ice Blue
H5004/F5021/N5111



Blue Tone White
G8212/F8015/N5112



Sea Foam
H4256/F4101/N4105

BLUE "G or H" CODE NUMBERS = AWLGRIP® / BLACK "F" CODE NUMBERS = AWLCRAFT® 2000 / RED "N" CODE NUMBERS = AWLGRIP® HS

AkzoNobel

This color card is an image representation only. Actual color may vary.
To request an Awlgrip color card, contact us today at 866.355.3090

NORTH AMERICA 2270 Morris Avenue Union New Jersey 07083 TEL 888.302.3090 FAX 908.686.8645

Awlgrip, the AkzoNobel logo and all products mentioned in this sheet are trademarks of, or licensed to, Akzonobel. © Akzo Nobel N.V. 2011.

AWLGRIP
FINISH FIRST
www.awlgrip.com

AWLGRIP – WE HAVE YOUR COLOR



Cloud White
G8089 / F8215 / N8103



Vestal White
G8004 / F8018 / N8108



Fleet White
H8087 / F8185 / N8107



Matterhorn White
G8003 / F8024 / N8100



Off White Revisited
G8009 / F8166 / N8109



Snow White
G8044 / F8063 / N8101



Insignia White
G8022 / F8150 / N8110



Chevy White
H8086 / F8082 / N8111



Off White
G8010 / F8020 / N8112



Oyster White
H8139 / F8222 / N8102



Stark White
H8208 / F8155 / N8113



Egg Shell White
H8015 / F8017 / N8106



Cream
H8002 / F8016 / N8105



Moon Dust
G6004 / F6102 / N6102



Desert Sand
H6150 / F6187 / N6103



Castle Tan
G6006 / F6014 / N6104



San Mateo Wheat
G9001 / F9014 / N9102



Prairie Beige
G6003 / F6012 / N6105



Graystone
G1040 / F1182 / N1103



Pearl Gray
G1008 / F1196 / N1104



Whisper Gray
G8035 / F1204 / N1101



Light Gray
G1001 / F1007 / N1105



Kingston Gray
G1359 / F1009 / N1106



Medium Gray
G1007 / F1010 / N1107



Dark Gray
G1344 / F1228 / N1108



Pale Gold
H9182 / F9145 / NA



Cordovan Gold
H9178 / F9147 / NA



Medium Silver
H1303 / F1265 / NA



Bright Aluminum
H1021 / F1205 / NA



Silver
H1048 / F1195 / NA

BLUE "G or H" CODE NUMBERS = *AWLGRIP*® / BLACK "F" CODE NUMBERS = *AWLCRAFT*® 2000 / RED "N" CODE NUMBERS = *AWLGRIP*® HS

AkzoNobel

This color card is an image representation only. Actual color may vary.
To request an Awlgrip color card, contact us today at 888.955.3090

AWLGRIP®

FINISH FIRST

NORTH AMERICA 2270 Morris Avenue Union, New Jersey 07083 TEL: 888.955.3090 FAX: 908.686.6548

Awlgrip, the AkzoNobel logo and all products mentioned in this sheet are trademarks of, or licensed to, AkzoNobel © Akzo Nobel N.V. 2011.

www.awlgrip.com

AWLGRIP® Topcoat - Premium Polyester Urethane

AWLGRIP



- Easy application by brush, roller or spray.
- Excellent abrasion and chip resistance.
- Excellent distinction of image.
- Excellent chemical resistance.
- Excellent gloss retention.
- For use above waterline only.
- Excellent fade resistance.
- 1:1 mix.
- Stock colors.
- All topcoats are packaged 4 Quarts/ Gallons per case.

Order No.	Mfg. No. / Description	Price
509577	(G1001) Light Gray, Gallon	$317.98 J
509589	(G1001) Light Gray, Quart	$107.98 J
509604	(G1007) Medium Gray, Quart	$107.98 J
509628	(G1008) Pearl Gray, Quart	$107.98 J
509666	(G1359) Kingston Gray, Quart	$112.98 J
509692	(G2017) Super Jet Black, Gallon	$356.98 J
509705	(G2017) Super Jet Black, Quart	$120.98 J
509820	(G5001) Navy Blue, Gallon	$446.98 J
509832	(G5001) Navy Blue, Quart	$132.98 J
509844	(G5002) Flag Blue, Gallon	$387.98 J
509856	(G5002) Flag Blue, Quart	$128.98 J
509868	(G5003) Aristo Blue, Gallon	$377.98 J
509870	(G5003) Aristo Blue, Quart	$127.98 J
509882	(G5007) Royal Blue, Gallon	$366.98 J
509894	(G5007) Royal Blue, Quart	$127.98 J
509919	(G6004) Moon Dust, Quart	$112.98 J
509933	(G7214) Sunfast Red, Quart	$169.98 J
509957	(G7305) Claret, Quart	$169.98 J
509971	(G7362) International Orange, Quart	$169.98 J
509995	(G7367) Vivid Red, Quart	$169.98 J
510001	(G8003) Matterhorn White, Gallon	$305.98 J
510013	(G8003) Matterhorn White, Quart	$101.98 J
510025	(G8004) Vestal White, Gallon	$234.98 J
510037	(G8004) Vestal White, Quart	$112.98 J
510063	(G8009) Off-White Revisited, Gallon	$316.98 J
510075	(G8009) Off-White Revisited, Quart	$106.98 J
510080	(G8010) Off-White, Gallon	$316.98 J
510099	(G8010) Off-White, Quart	$106.98 J
510102	(G8022) Insignia White, Gallon	$316.98 J
510114	(G8022) Insignia White, Quart	$106.98 J

Order No.	Mfg. No. / Description	Price
510126	(G8035) Whisper Gray, Gallon	$305.98 J
510138	(G8035) Whisper Gray, Quart	$106.98 J
510140	(G8044) Snow White, Gallon	$312.98 J
510152	(G8044) Snow White, Quart	$104.98 J
510164	(G8089) Cloud White, Gallon	$316.98 J
510176	(G8089) Cloud White, Quart	$107.98 J
510190	(G8212) Blue Tone White, Quart	$112.98 J
510239	(G9093) Fighting Lady Yellow, Quart	$132.98 J
510253	(G9298) Federal Yellow, Quart	$142.98 J
510277	(H1021) Bright Aluminum, Quart	$132.98 J
510291	(H1048) Silver, Quart	$132.98 J
510392	(H4089) Jade Mist Green, Quart	$142.98 J
510417	(H4094) Forrest Green, Quart	$148.98 J
510429	(H4256) Sea Foam, Gallon	$359.98 J
510431	(H4256) Sea Foam, Quart	$148.98 J
510455	(H4365) Aqua Mist, Quart	$142.98 J
510479	(H5004) Ice Blue, Quart	$132.98 J
510493	(H5409) Majestic Blue, Quart	$132.98 J
510518	(H7161) Toreador Red, Quart	$152.98 J
510544	(H8002) Cream, Gallon	$336.98 J
510556	(H8002) Cream, Quart	$112.98 J
510568	(H8015) Egg Shell White, Gallon	$346.98 J
510570	(H8015) Egg Shell White, Quart	$112.98 J
510594	(H8087) Fleet White, Quart	$110.98 J
510607	(H8139) Oyster White, Gallon	$316.98 J
510619	(H8139) Oyster White, Quart	$106.98 J
510621	(H8208) Stark White, Gallon	$316.98 J
510633	(H8208) Stark White, Quart	$107.98 J
510645	(H9178) Cordavan Gold, Quart	$254.98 J

AWLGRIP® Clear Topcoat Bases

AWLGRIP



- Easy application by brush, roller or spray.
- Provides resin rich, crystal clear finish.
- Excellent chemical and abrasion resistance.
- Minimizes dirt pick-up, eases cleaning.
- Not recommended over whites or light pastel colors.
- Not recommended for direct application to bare wood.

Order No.	Mfg. No. / Description	Price
508878	(F3029) AWLCRAFT 2000 Clear, Gallon	$247.98 J
508880	(F3029) AWLCRAFT 2000 Clear, Quart	$81.98 J
509731	(G3005) AWLGRIP High Gloss Clear, Gallon	$244.98 J
509743	(G3005) AWLGRIP High Gloss Clear, Quart	$81.98 J
510758	(M3131) AWLSPAR Classic Spar Varnish, Quart	$50.98 J

- Reduce with T0180.

Order No.	Mfg. No. / Description	Price
510669	(J3005) AWL-BRITE Clear Base, Gallon	$305.98 J
510671	(J3005) AWL-BRITE Clear Base, Quart	$101.98 J

AWLGRIP® Converters

AWLGRIP



Mixing Ratio

AWL-CAT #2	Spray	1 to 1
AWL-CAT #3	Brushing	2 to 1

Order No.	Mfg. No. / Description	Price
509755	(G3010) AWL-CAT #2, Spray, Gallon	$326.98 J
509779	(G3010) AWL-CAT #2, Spray, Quart	$123.98 J
509767	(G3010) AWL-CAT #2, Spray, Pint	$67.98 J
510328	(H3002) AWL-CAT #3, Brushing, 1/2 Gallon	$275.98 J
510330	(H3002) AWL-CAT #3, Brushing, Pint	$81.98 J
510683	(J3006) AWL-BRITE Clear Converter, 1/2 Gallon	$275.98 J
510695	(J3006) AWL-BRITE Clear Converter, Pint	$91.98 J

AWLGRIP® AWLMIX® Color Matching System



- 2000 topcoat colors, including special requests for custom colors.
- We request any new formulation from Awlgrip on your behalf and we are able to mix and match most existing formulations.
- By using the Awlmix software provided by Awlgrip, you can be assured we will always have the most current formulations with an extensive choice of colors created by world-wide demand from builders and boat owners.
- The number of formulations in this database grows every month and the input from Awlgrip color chemists is crucial, as each formulation entered is thoroughly reviewed and quality controlled to provide the formulation with the greatest consistency for our day to day operation.
- We can access this information 24/7, all in order to speed up delivery to you.

What will Awlmix do for you?

- Improved service through an added choice of color selection.
- Greater ability to meet increasing customer demand of custom made colors, especially for the OEM or multi-production market.
- Capability to match 48 colors on the Awlcraft 2000 metallic color card.
- Opportunity to provide the color that your customer needs.
- Awlgrip continues to be the premium choice of topsides finishes world-wide.
- Using the Awlmix system to blend Awlgrip and Awlcraft 2000 topcoat colors on site shortens the lead time. Color access is now far beyond the traditional yacht and aerospace paint supplier.
- All colors will be shipped from our Clearwater or Norwich facilities with the corresponding shipping times and fees.
- Please supply color code from chart when ordering.

Order No.	Mfg. No. / Description	Price
507942	White Based, Gallon	$224.98 H
507943	Black Based, Gallon	$231.98 H
507944	Blue Based, Gallon	$255.98 H
507945	Green Based, Gallon	$269.98 H
507946	Silver Based, Gallon	$295.98 H
507947	Yellow Based, Gallon	$380.98 H
507948	Red Based, Gallon	$395.98 H
507949	Violet Based, Gallon	$489.98 H
507950	Orange Based, Gallon	$526.98 H
507954	White Based, Quart	$71.98 H
507955	Black Based, Quart	$73.98 H
507956	Blue Based, Quart	$79.98 H
507957	Green Based, Quart	$82.98 H
507958	Silver Based, Quart	$89.98 H
507959	Yellow Based, Quart	$126.98 H
507960	Red Based, Quart	$134.98 H
507961	Violet Based, Quart	$141.98 H
507962	Orange Based, Quart	$150.98 H

AWLPREP Surface Cleaner

- Wipe down final primed or topcoated surfaces before and after sanding.
- A mild surface cleaner and degreaser that will remove hand oils, light grease and other light surface contaminants.
- It has a "drying" effect which removes latent moisture from the surface, which can cause a gloss finish to come out flat.
- Use the two rag method to effectively clean with this product.

Order No.	Mfg. No. / Description	Price
510950	(T0008) Gallon	$68.98 J

AWLCRAFT® 2000 Topcoat - Premium Acrylic Urethane



- 2:1 mix.
- Stock colors.
- Super flow out and high gloss.
- Ease of application.
- Fast drying to reduce dust entrapment.
- Spray application only.
- For use above waterline only.
- All topcoats are packaged 4 Quarts/Gallons per case.

Order No.	Mfg. No. / Description	Price
508854	(F2091) Super Jet Black, Gallon	$356.98 J
508866	(F2091) Super Jet Black, Quart	$120.98 J
508993	(F5010) Aristo Blue, Gallon	$407.98 J
509008	(F5010) Aristo Blue, Quart	$132.98 J
509010	(F5011) Royal Blue, Gallon	$356.98 J
509034	(F5014) Flag Blue, Gallon	$356.98 J
509046	(F5014) Flag Blue, Quart	$125.98 J
509096	(F5275) Majestic Blue, Gallon	$342.98 J
509159	(F7200) Vivid Red, Gallon	$670.98 J
509161	(F7200) Vivid Red, Quart	$151.98 J
509274	(F8016) Cream, Gallon	$355.98 J
509286	(F8016) Cream, Quart	$121.98 J
509337	(F8020) Off-White, Gallon	$305.98 J
509349	(F8020) Off-White, Quart	$108.98 J
509351	(F8024) Matterhorn White, Gallon	$305.98 J
509363	(F8024) Matterhorn White, Quart	$108.98 J
509375	(F8063) Snow White, Gallon	$305.98 J
509387	(F8063) Snow White, Quart	$101.98 J
509399	(F8150) Insignia White, Gallon	$305.98 J
509402	(F8150) Insignia White, Quart	$101.98 J
509414	(F8155) Stark White, Gallon	$305.98 J
509426	(F8155) Stark White, Quart	$101.98 J
509438	(F8166) Off-White Revisited, Gallon	$289.98 J
509476	(F8215) Cloud White, Gallon	$305.98 J
509488	(F8215) Cloud White, Quart	$101.98 J
509490	(F8222) Oyster White, Gallon	$316.98 J
509503	(F8222) Oyster White, Quart	$101.98 J
509515	(F9120) Fighting Lady Yellow, Gallon	$365.98 J

AWLGRIP® Reducers



Order No.	Mfg. No. / Description	Price
508183	(A0031) AWL-BRITE Reducer, Pint	$40.98 M
510835	(T0001) Fast Evaporating, Spray, Gallon	$86.98 J
510847	(T0001) Fast Evaporating, Spray, Quart	$29.98 J
510859	(T0002) Very Fast Evaporating Reducer/Equip. Cleaner, Gallon	$74.98 J
510873	(T0003) Standard Reducer, Spraying, Gallon	$87.98 J
510885	(T0003) Standard Reducer, Spraying, Quart	$29.98 J
510900	(T0005) Slow-Hot Weather Retarder, Quart	$44.98 J
510974	(T0016) AWLSPAR Varnish Reducer, Quart	$28.98 J
510986	(T0031) Slow Drying Reducer, Brushing, Gallon	$110.98 J
510998	(T0031) Slow Drying Reducer, Brushing, Quart	$35.98 J

AWLPREP 400 Wipe Down Solvent

- Final wipe down product similar to T0008, its five times slower than T0008 and can be used in hot weather.
- Also good for removing tape residue.

Order No.	Mfg. No. / Description	Price
511077	(T0170) Gallon	$60.98 J
511089	(T0170) Quart	$12.98 H

AWLPREP Plus Wax and Grease Remover

- A medium-fast evaporating, strong, solvent designed to remove waxes, oils, and greases commonly found on painted surfaces, new or aged gelcoat, aluminum, or steel.
- Use before & after sanding the substrate prior to priming.

Order No.	Mfg. No. / Description	Price
511041	(T0115) Gallon	$72.98 J

AWLPREP Awlcraft SE Blending Solvent



- Use with Awlcraft 2000 Clearcoat per product data sheet.

Order No.	Mfg. No. / Description	Price
511110	(T0195/1QTUS) Quart	$122.98 J

©2014 Donovan Marine, Inc.

AWLPREP 1201 Chrome Conversion Coating

AWLGRIP

- Alodine 1201 is a non-flammable, chromic acid based, coating chemical that will produce a chrome conversion coating on aluminum and its alloys.
- The coating formed by Alodine 1201 is gold to tan in color and it becomes a part of the aluminum surface.
- Provides an excellent substrate for paint adhesion & corrosion resistance.
- This product can be used at full strength; no dilution is necessary.
- Apply Alodine 1201 to a surface that has been cleaned with Alumiprep 33.

Order No.	Mfg. No. / Description	Price
508032	(73003) Gallon	$126.98 M
508044	(73003) Quart	$66.98 M

Ultra-Build Epoxy Primer - White Base

AWLGRIP

- A two component epoxy primer with excellent sag resistance and excellent film build/filling capability.
- For use where high build and filling is required above the waterline.
- Spray application only - requires pressure feed equipment.
- Reduce with T0073.
- For use above waterline only.
- Mix ratio 1:1.

Order No.	Mfg. No. / Description	Price
508373	(D3018) Converter, Gallon	$175.98 J

AWL-QUIK Epoxy Primer/Surfacer - Yellow Base

AWLGI

- An excellent adhesion to properly prepared aluminum, fiberglass or wood.
- It is a fast dry/fast recoat material that sands very well.
- Easy to apply by brush, roller or spray.
- It is reduced with T0006 for spray or T0031 for brush/roller.
- For use above waterline only.
- Water resistance is greatly improved when sealed with 545 Epoxy Primer before topcoating.
- Mix ration 1:1.

Order No.	Mfg. No. / Description	Price
508525	(D8003) Base, Gallon	$202.98 J
508537	(D8003) Base, Quart	$68.98 J
508638	(D9001) Converter, Gallon	$201.98 J
508640	(D9001) Converter, Quart	$66.98 J

Awlgrip 321 HS Undercoat

AWLGI

- Low VOC - Compliant under all global legislation.
- The ideal base for Awlgrip and Awlcraft topcoats allowing you to achieve the ultimate finish.
- 1 coat application - reduces labor costs and work cycle time.
- Excellent adhesion to all substrates.
- Easy sand finish - Less time needed to achieve optimum substrate for topcoats.

Order No.	Mfg. No. / Description	Price
508398	(OR8100/1GLUS) White Base, Gallon	$122.98 J
508391	(OR1100/1GLUS) Grey Base, Gallon	$172.98 J
508393	(OR3100/1QTUS) Converter, Quart	$94.98 J

Awlgrip Max Cor CF Primer

AWLGRIP

- Max Cor CF is a high solids two component anti-corrosive, chromate-free epoxy primer for aluminum and steel with excellent chemical and solvent resistance.
- Max Cor CF is based on 'Controlled Fusion' (CF) technology, a unique chemical system that allows extended re-coat times, removes the need for sanding prior to applying the next coat and also gives excellent substrate adhesion.
- This technology eliminates the requirement for high hazard chemicals and ensures a tightly fused intercoat layer between the CF-based coating and the next applied coat.
- For above the waterline only.

Order No.	Mfg. No. / Description	Price
508395	(R3330/1HGUS) Convertor, 1/2 Gal.	$118.98 J
508410	(R4330/1GLUS) Base, Gallon	$305.98 M

- Innovative technology has allowed the two-component Max Cor CF paint to be dispersed in an aerosol, whilst greatly exceeding standard spray paint cans in terms of performance and quality.
- The Max Cor CF aerosol is ideal for repairs and hard to reach areas where a fast and effective solution is required.

Order No.	Mfg. No. / Description	Price
508408	(S4010/250MLU) Aerosol	$56.98 H

Epoxy Sprayable Fairing Compound

AWLGRIP

- A two component epoxy filler with excellent sag resistance, excellent film build capability and is easy to sand.
- When un-reduced it can be applied by trowel to small nicks and pinholes.
- Use spray application only - requires pressure feed equipment.
- Reduce with T0006.
- For use above waterline only.
- Heavy film may have to cure 3-4 days before hard enough to sand.
- Use for full panels only - not for spot repairs.
- Mix ration 1:1.

Order No.	Mfg. No. / Description	Price
508412	(D6001) Base, Gallon	$220.98 J
508361	(D3011) Converter, Gallon	$179.98 J

AWL-FAIR L.W. Fairing Compound

AWLGRIP

- A premium trowelable product for fairing, leveling or smoothing surface imperfections due to gouges, pitting, seams.
- Super smooth finish and easy sanding.
- Suitable for both manual and automatic mixing.
- May be used above or below the waterline.

Order No.	Mfg. No. / Description	Price
508628	(D8200) L.W. White Base, 2 Gallon	$275.98 H
508630	(D8200) L.W. White Base, Gallon	$193.98 J
508632	(D8200) L.W. White Base, Quart	$61.98 J
508476	(D7200) Red Converter, 2 Gallon	$305.98 J
508478	(D7200) Red Converter, Gallon	$193.98 J
508480	(D7200) Red Converter, Quart	$64.98 J
508482	(D7222) Red Converter - Fast, Gallon	$183.98 J
508484	(D7222) Red Converter - Fast, Quart	$71.98 J

High Build Epoxy Primer

AWLGRIP

- D9002 has slightly better anti-corrosive characteristics than D8002.
- It sands well, but has a very hard film.
- Excellent as the first product applied over a base primer in fairing projects.
- It's hard film prevents sand troughs eliminating the need to re-primer or re-prep in those areas.
- Slow drying, but can be recoated with itself in four hours.
- Spray application only - requires pressure feed equipment.
- For use above waterline only.
- Mix ratio 1:1.

Order No.	Mfg. No. / Description	Price
508501	(D8002) Off-White Base, Gallon	$183.98 J
508513	(D8002) Off-White Base, Quart	$61.98 J
508652	(D9002) Yellow Base, Gallon	$183.98 J
508664	(D9002) Yellow Base, Quart	$61.98 J
508347	(D3002) Converter, Gallon	$168.98 J
508359	(D3002) Converter, Quart	$58.98 J

HullGard Epoxy Primer

AWLGRIP

- Ideal for priming surfaces above and below the waterline.
- It has outstanding resistance to salt and fresh water and offers excellent corrosion protection.
- Superb adhesion and water barrier properties to properly prepared fiberglass, steel, aluminum and wood.
- The product also acts as a great adhesion promoter for Awlfair LW fairing compound.

Order No.	Mfg. No. / Description	Price
508405	(D3707) Converter, Quart	$38.98 J

Awlgrip Hullgard Extra Epoxy Primer

AWLGRIP

- Hullgard Extra Epoxy Primer is a holding primer, used as a base for subsequent fairing.
- It offers superb adhesion to properly prepared fiberglass, steel, aluminum and wood.
- For use above and below the waterline.
- Recoatable after 6 months without sanding.

Order No.	Mfg. No. / Description	Price
508407	(D3730/1QTUS) 1 Quart Converter (16.7 fl.oz fill volume)	$43.98 J
508432	(D6120/1GLUS) 1 Gallon Base (0.87GL fill volume)	$170.98 J

AWLGRIP® Pro-Cure

AWLGRIP



- A specialist accelerator used to speed up dry and cure times of Awlgrip and Awlcraft 2000 topcoats.

Order No.	Mfg. No. / Description	Price
508107	(73014) Pro-Cure X98 Accelerator, 2 oz.	$25.98 M
508119	(73015) Pro-Cure X138 Accelerator, 2 oz.	$25.98 M

545 Anti-Corrosive Epoxy Primer

AWLGRIP



- A two component epoxy primer with outstanding corrosion and adhesion properties for steel, aluminum, wood and fiberglass substrates.
- It is also used to seal filler primers and fairing work before applying topcoats.
- It can be used above or below the waterline.
- 545 has a relatively low build, 2 to 3 mils DFT and is slow drying - requires overnight cure to recoat.
- Apply by spray or brush/roller.
- Reduce with T0006 to spray.
- Reduce with T0031 for brush/roller application.
- 545 can be accelerated with Cold Cure (M3066).
- Gray (D1001) rolls/brushes better than white.
- Mix ration 1:1.

Order No.	Mfg. No. / Description	Price
508260	(D1001) Gray Base, Gallon	$152.98 J
508272	(D1001) Gray Base, Quart	$50.98 J
508486	(D8001) White Base, Gallon	$166.98 J
508498	(D8001) White Base, Quart	$55.98 J
508323	(D3001) Converter, Gallon	$142.98 J
508335	(D3001) Converter, Quart	$47.98 J

AWLSTAR HS Gold Label Antifouling

AWLGRIP

- Boasts a unique cleaning mechanism which prevents the permanent attachment of slime and all other types of fouling organisms.
- It has a self polishing mechanism which "ablates" away at a controlled rate.
- This reduces drag on the underwater hull while maintaining a fresh layer of active paint at all times; increasing fouling protection.
- It is recommended for use where extended dry-docking intervals are required.
- For use below the waterline only on fiberglass, steel or wood hulls.
- DO NOT USE ON ALUMINUM.

Order No.	Mfg. No. / Description	Price
508200	(BP231) Charcoal Black, Gallon	$389.98 J
508250	(BP731) Red, Gallon	$389.98 J

AWLGRIP® Flattening Agent

AWLGRIP

- Flattening agent reduces the gloss of Awlgrip and Awlcraft 2000 topcoats to a flat or semi-gloss finish.

Order No.	Mfg. No. / Description	Price
509781	(G3013) Gallon	$199.98 J
509793	(G3013) Quart	$66.98 J

AWLGRIP® Crater-X

AWLGRIP

- Crater-X is an anti-cratering additive used to alter the surface tension of Awlgrip and Awlcraft 2000 topcoats to improve flow and levelling.

Order No.	Mfg. No. / Description	Price
510708	(M1017) Pint	$84.98 J

AWLGRIP® Cold Cure Accelerator

AWLGRIP



- Cold Cure Accelerator for 545 Epoxy Primer is used to reduce cure and recoat times by up to 50%.

Order No.	Mfg. No. / Description	Price
510722	(M3066) Pint	$33.98 J

Awlgrip Wash Primer

AWLGRIP



- Chromate-free etch primer.
- Excellent adhesion to stainless steel and anodized aluminum through Controlled Fusion technology.
- Allows extended re-coat times, removes the need for sanding prior to applying the next coat and also gives excellent substrate adhesion.
- Ideal for repairs and hard to reach areas where a fast effective solution is required.
- For use above the waterline only.

Order No.	Mfg. No. / Description	Price
508390	(D3300/1QTUS) Converter, Quart	$40.98 J
508440	(D6600/1QTUS) Yellow Base, Quart	$61.98 J
510800	(S6300/250ML) Aerosol, 250 ml	$50.98 J

Epoxy Primer Reducers

Order No.	Mfg. No. / Description	Price
510924	(T0006) Standard Reducer, Gallon	$81.98 J
510936	(T0006) Standard Reducer, Quart	$27.98 J
511003	(T0073) Ultra Build Reducer, Gallon	$91.98 J
511015	(T0073) Ultra Build Reducer, Quart	$25.98 J

AWLGRIP® Flattening Agent

AWLGRIP

- Designed to promote adhesion by uniformly etching the aluminum, steel or anodized aluminum substrate.
- Not to be used below the waterline.
- 0.2 - 0.5 mils DFT.
- Recoat after a 30 minute to 6 hour cure time.
- Mix ration 1:1.

Order No.	Mfg. No. / Description	Price
509806	(G3014/1GLUS) Converter, Gallon	$157.98 J
510203	(G9072/1GLUS) Yellow Base, Gallon	$169.98 J

AWLSTAR Gold Label Antifouling

AWLGRIP



- Unique cleaning mechanism prevents permanent attachment of slime and all other types of fouling organisms.
- Eliminates the need to dive and scrub.
- Excellent static fouling protection.
- Tin-free.
- It is recommended for use where extended dry-docking intervals are required.
- Self polishing surface "ablates" away at a controlled rate that reduces the drag on the underwater hull and increases speed.
- Ideal for use where serious foulding conditions are encountered.
- For use below the waterline only on fiberglass, steel or wood hulls.
- DO NOT USE ON ALUMINUM.

Order No.	Mfg. No. / Description	Price
508222	(BP531) Light Blue, Gallon	$389.98 J
508234	(BP532) Deep Blue, Gallon	$389.98 J

Maintenance Products

AWLGRIP



Order No.	Mfg. No. / Description	Price
508121	(73234) Wash Down Concentrate, Gallon	$74.98 M
508133	(73234) Wash Down Concentrate, Quart	$25.98 M
508157	(73240) Protective Polymer Sealant, 1/2 Gallon	$81.98 M
508169	(73240) Protective Polymer Sealant, Pint	$30.98 J
508056	(73009) Tack Rags, 4 Per Pack	$10.98 M

©2014 Donovan Marine, Inc.

AWLGRIP® Griptex Non-Skid Additive



- Griptex Non Skid gives Awlgrip and Awlcraft 2000 Topcoats a non-skid texture for deck and step areas.
- Can be applied by spray.

Order No.	Mfg. No. / Description	Price
508070	(73012) Fine Grit, Gallon	$163.98 M
508068	(73012) Fine Grit, Quart	$56.98 M
508094	(73013) Coarse Grit, Gallon	$175.98 M
508082	(73013) Coarse Grit, Quart	$61.98 M
508145	(73237) Extra Coarse Grit, Quart	$63.98 M

AWLGRIP® AWLCOAT TPC



- A water-based, temporary peelable coating that serves to protect surfaces from damage or contamination.
- Provides a tough film that guards against scuffing, abrasion and contamination such as overspray, acid rain, fly rust or sanding dust.
- May be applied over Awlgrip and Awlcraft 2000 Topcoats.

Order No.	Mfg. No. / Description	Price
511154	(WP101) 5 Gallon	$509.98 J

Marpro Outboard Motor Spray Paint Display



- This display includes the following:
  - (4) 6-1258 - Mercury Black - 1258
  - (4) 6-6961 - J/E White- 6961
  - (4) 6-6979 - OMC Cobra Charcoal - 6979
  - (4) 6-6969 - Yamaha Blue Metallic - 6969
  - (4) 6-7003 - Yam Dark Blue Metallic - 7003
  - (4) 6-7021 - Honda Silver Metallic
  - (4) 6-6995 - Gloss Clear Coat - 6995
  - (4) 6-0214 - New Cat Yellow
  - (4) 6-0225 - GM Green
  - (4) 6-0800 - Zinc Cold Gal. - 800
  - (4) 6-5605 - Primer Zinc Green - 5605
  - (4) 6-5606 - Primer Zinc Yellow - 5606

Order No.	Mfg. No. / Description	Price
6-9998	Display	$353.98 G
6-9999	Display Rack Only	$43.98 B

Marpro Outboard Motor Spray Paint



- Easy to use aerosols deliver professional results every time.
- Ideal for entire outboard and stern drive reconditioning or touch up!
- Acrylic lacquer formula for a long lasting glossy base coat marine finish.
- It also protects with UV inhibitors!
- Excellent solvent, gasoline and wear resistance.
- Meet VOC requirements.
- 12 oz. canister.
- To achieve the finest deep gloss finish available use Marpro Clear Coat 6-6995 as the final coat.

Marpro	MFG #	OEM #	Color	Motor
Johnson/Evinrude Motor Colors				
6-6954	6954	173547	Light Blue (Metallic)	1978-87
6-6961	6961	173744	White	1981-Present
Mercury Motor Colors				
6-1258	1258	92-78373-12	Phantom Black	1960-Present
OMC Drive System Colors				
6-6979	6979	395127	Charcoal (Metallic)	1985-Present
Suzuki Motor Colors				
6-7040			Shadow Black	
6-7045			Charcoal Grey	
Yamaha Motor Colors				
6-6969	6969	LUB-87PNT-SL-VR	Metallic Blue Silver	1985-Present
6-7003	7003		Metallic Dark Blue	
Honda Motor Colors				
6-7021	70021		Silver Metallic	
Volvo Motor Colors				
6-6930		20859	White	

Order No.	Mfg. No. / Description	Price
Price Per Can		$8.98 I



- Provides that professional finish to reach a deep clear coat finish.
- Specifically formulated for the Marine environment with U.V. inhibitor restore older finishes to a higher gloss.
- Many manufactures use this final clear coat finish over color base coats to provide added depth and protection.
- Can be reapplied at any time with minor surface cleaning prep.
- Meet VOC requirements.
- 12 oz. canister.

Order No.	Mfg. No. / Description	Price
6-6995		$8.98 I

Marpro Cold Zinc Galvanizing



- 95% pure zinc formula.
- Recommended for steel and iron surfaces (including welded joints).
- Perfect for hardware corrosion protection.
- Resists abrasions and solvents.
- Quick-dry formula.
- 13 oz. can.

Order No.	Mfg. No. / Description	Price
6-0800		$8.98 I

Marpro Zinc Chromate Primers



- Superior bonding to aluminum lower units.
- Formulated to work with engine paints.
- For use below water line.
- Protects against corrosion.
- Quick-dry formula.
- 12 oz. can.

Order No.	Mfg. No. / Description	Price
6-5605	Green	$11.98 I
6-5606	Yellow	$11.98 I

Marpro Diesel Engine Colors



- Factory matched colors.
- Resistant to oil and gasoline.
- Fuses to the engine surface.
- Can be recoated anytime.
- Quick dry formula formulated for the marine environment.
- 12 oz. can.

Order No.	Mfg. No. / Description	Price
6-0214	New Caterpiller Yellow	$8.98 I
6-0225	GM Green	$8.98 I

SEM Vinyl Coat 30 Can Assortment

SEM MARINE



- Features VINYL COAT with increased UV inhibitors to withstand the harsh environment boat seats are subjected to.
- The color pallet has been matched to 25 of the most popular boat and personal watercraft interior colors based on watercraft registrations in the United States.
- Contains 30 cans, a SEM Marine aerosol counter display with header, one brochure holder, 10 color guide brochures and one register counter sales aid.
- Contains: two (2) each of M25063, M25073, M25083, M25093, M25103 and one each of the other 20 colors.

Order No.	Mfg. No. / Description	Price
888450	(M25779)	$444.98 G

SEM Vinyl Coat 12 Can Assortment

SEM MARINE



- Features VINYL COAT with increased UV inhibitors to withstand the harsh environment boat seats are subjected to.
- The color pallet has been matched to 25 of the most popular boat and personal watercraft interior colors based on watercraft registrations in the United States.
- Contains 12 cans, a SEM Marine aerosol counter display with header, one brochure holder, 10 color guide brochures and one register counter sales aid.
- Contains: Contains: one (1) each of M25003, M25013, M25063, M25073, M25083, M25093, M25103, M25113, M25123, M25143, M25223 and M25233.

Order No.	Mfg. No. / Description	Price
888451	(M25889)	$191.98 G

SEM Soap

SEM MARINE



- First step cleaner for all repair and refinish procedures.
- Gravitates into the pores of the substrate and floats contaminants to the surface.
- Contains a slight abrasive to open the substrate for greater adhesion.
- Great for use with SEM flexible coatings.
- 15 oz. bottle.

Order No.	Mfg. No. / Description	Price
888455	(39362)	$17.98 G

SEM Vinyl Prep

SEM MARINE



- Cleans soil, wax and grease from vinyl substrates while it softens and prepares the surface for adhesion of topcoat.
- 16 oz. aerosol.

Order No.	Mfg. No. / Description	Price
888457	(38343)	$17.98 G

SEM Vinyl Coat

SEM MARINE



- Features increased UV inhibitors to withstand the harsh environment boat seats are subjected to.
- The color pallet has been matched to 25 of the most popular boat and personal watercraft interior colors based on watercraft registrations in the United States.
- 16 oz. aerosol.

Order No.	Mfg. No. / Description	Price
888459	(M25063) Ranger White	$19.98 G
888461	(M25073) Ranger Off-White	$19.98 G
888463	(M25083) Carver White	$19.98 G
888465	(M25093) Sea Ray Mystic White	$19.98 G
888467	(M25103) Sea Ray Alabaster	$19.98 G
888469	(M25113) Sea Ray Champagne	$19.98 G
888471	(M25123) Carver Dade Bisque	$19.98 G
888473	(M25133) Carver Light Tan	$19.98 G
888475	(M25143) Chaparal Beige/Platinum	$19.98 G
888477	(M25153) Stingray Taupe	$19.98 G
888479	(M25163) Ranger Beige	$19.98 G
888481	(M25173) Ranger Charcoal	$19.98 G
888483	(M25183) Ranger Gunmetal Grey	$19.98 G
888485	(M25193) Light Grey	$19.98 G
888487	(M25203) Formula Boats Grey	$19.98 G
888489	(M25223) Stingray Yellow	$19.98 G
888491	(M25233) Formula Boats Red	$19.98 G
888493	(M25243) Sterling Burgundy	$19.98 G

3M PPS™ Paint Preparation System

3M



- A unique, closed paint system which eliminates the need for traditional mixing cups and paint strainers.
- Now, paint can be mixed and sprayed out of the same PPS liner with a lid and built-in filter.
- Designed adapters allow painters to use the PPS system with virtually any spray gun.
- A key advantage of this closed system is that it enables a painter's spray gun to function at any angle, even upside down!
- The liner, lid and built-in filter are all disposable, leaving only the adapter and spray gun to be cleaned.
- The PPS system is therefore a cleaner, faster system, safe from outside contamination and offers considerable time and solvent savings in regards to gun cleaning.

Order No.	Mfg. No. / Description	Price
886765	(16113) 200 Micron Cartridge Replacement Filters	$328.98 H
886789	(16023) Large Cups and Collars	$43.98 H
886791	(16024) Large Lids and Liners with 200 Micron Filters	$116.98 H
886769	(16115) Mini Cups and Collars	$46.98 H
886767	(16114) Mini Lids and Liners with 200 Micron Filters	$149.98 H
886760	(37720) Detailing Squeeze Bottle	$5.98 H

3M Atomizing Head Kit

3M

- 4 atomizing heads per kit.

Order No.	Mfg. No. / Description	Price
886797	(16611) Atomizing Head Refill 4 Per Kit	$32.98 H
886798	(16610) Atomizing Head Dispenser	$107.98 H
886799	(16571) Accuspray Fluid Needle	$113.98 H
886800	(16572) Accuspray HG09 Test Cap	$55.98 H
886801	(16573) Accuspray Flow Control Valve	$35.98 H

©2014 Donovan Marine, Inc.

Marpac Paint Spray Gun



- HVLP gun with durable metal body.
- Designed for use with a wide variety of paints.
- Includes polypropylene bottle.
- Low - air and paint applied in uniform layers.
- Excellent internal.

Order No.	Mfg. No. / Description	Price
7-1069		$62.98 G

Preval 1/6 H.P. Compressor

PREVAL



w/Auto Shutoff and Regulator

- Ideal for large scale airbrushing projects, our portable, lightweight electric compressor delivers quiet, consistent air pressure up to 60 psi to create continuous spray with the vFan Airbrush, both in and outside the shop.
- In addition, the automatic shutoff function enhances the unit's energy-efficiency and operating safety.
- Features:
  - 1/6th horsepower
  - Delivers up to 60 psi operating pressure
  - Automatic shut off
  - 1.48 CFM at 20 psi
- Runs on 120 volts (60 Hz, 1.5 amps - single phase).
- No oil required.
- Comes with 6' air hose for airbrush.

Order No.	Mfg. No. / Description	Price
556212	(0923)	$468.98 H

3M Accuspray™ Spray Gun Model HG18



- The HG09 Accuspray primer gun has been reworked, improved and renamed - it is now the HG18.
- The HG18 trigger is wider so it is more comfortable.
- We have shortened the reach to make the pull easier.
- An improved air valve gives users more precise control. Plus, we've added a reinforcing washer to the air fitting to prevent over tightening from damaging the gun body. And speaking of the gun body, there is now more internal reinforcement - so it can survive accidental abuse. We've even added a gray body panel, so technicians can easily spot their primer gun.

Order No.	Mfg. No. / Description	Price
886795	(16570)	$289.98 H

Preval Plastic Bottles - 6 Pack, 3 oz.

PREVAL



- These 2.94 Touch-up Jars are solvent-proof and ideal for multi-color applications.
- Storing is now even easier, and each touch-up jar comes with its own label.
- Individual safety caps and small dip tubes are included.
- Use with the vFan is compatible however a separate dip tube size is required.

Order No.	Mfg. No. / Description	Price
556220	(0271) 6 Pack, 3 oz.	$14.98 H

Complete Preval Airbrush Kit

PREVAL



- The award winning vFan Portable Airbrush is an all-in-one 'hybrid' spray kit for precision painting, surface prep, touch-ups and curing anywhere and anytime; without or with an electric compressor.
- Our siphon-fed, dual-action stainless steel airbrush delivers professional results with a silent compressor that fits in your pocket: 150 Feet of Energy.
- The vFan sprays: Gel coats, Clear coats, Water based paints, Solvent based paints, Latex paints and over 2,000 formulas.
- Protected against all solvents.
- vFan Airbrush System kit includes:
  - vFan Airbrush
  - (1) 3" fan cap
  - (1) 6' long air hose
  - (1) Pressure regulator for 150 feet of Energy
  - (2) cans of 150 Feet of Energy
  - (1) 1/16" hairline standard air cap
  - (1) extra .9 mm spray needle
  - Dip tubes and accessories
- Patent-pending.
- Includes a 1 year warranty.

Order No.	Mfg. No. / Description	Price
556211	(0100) Airbrush Kit	$244.98 H

Preval 150 Feet of Energy Disbursement Unit

PREVAL



- The Preval Energy Disbursement Unit (EDU) is simple way to get more continuous spray from each 150 Feet of Energy unit by keeping the compressor warm.
- The way it works is simple: just fill half the EDU with warm water, drop the 150 Feet of Energy unit inside, close the lid and spray for five times longer.

Order No.	Mfg. No. / Description	Price
556216	(0960)	$2.98 H

Preval 150 Feet of Energy

PREVAL



- Preval's 150 Feet of Energy is a 2-in-1 pocket compressor and duster.
- Each compressor unit enables professional results with atomized paints or formulas, anywhere and anytime.
- Airbrush anywhere, anytime!
- Each unit delivers 15 - 40 square feet of paint coverage with latex, clear coat, solvent based paints and more.
- 150 Feet of Energy also works as a powerful air duster to blow out hard-to-reach spaces and reduce cleanup times.
- Get 5x the spray time with our Energy Disbursement Unit, Pressure Regulator is sold separately.
- Made in the USA.

Order No.	Mfg. No. / Description	Price
556222	(0168)	$8.98 H

Preval 30' Airhose

PREVAL



- Strong, long and reliable, our 30' nylon braided airbrush hose is made in the USA.
- The latex inner hose has a 1/8 inner diameter and a 1/4 female compressor attachment.

Order No.	Mfg. No. / Description	Price
556218	(0961) 30' Airhose	$40.98 H

Preval Plastic Jars - 12 Pack, 3 oz.

PREVAL



- This bulk pack of 3 oz. plastic paint jars for the vFan Airbrush includes a full siphon, dip tubes and feed assembly.

Order No.	Mfg. No. / Description	Price
556214	(0955) 12 Pack, 3 oz.	$11.98 H

Preval Paint Sprayer Kit - Portable

PREVAL



	Power Capacity for:
Gel Coat	2 - 6 oz.
Oil and Alkyd Base Paint	6 - 9 oz.
Varnish and Enamel	9 - 12 oz.
Model Lacquer	12 - 16 oz.

- Disposable and replaceable spray power unit attaches to 6 oz. glass container.
- Sprays all paints, lacquers, enamels, acrylics, primers and other liquids.

Order No.	Mfg. No. / Description	Price
556184	(267) Complete Kit	$8.98 H
556196	(268) Replacement Spray Power Unit	$6.98 H
556209	(269) Replacement 6 oz. Glass Container	$2.15 H

Preval vGrip

PREVAL



- The Preval vGrip is a 2-in-1 gun handle and ergonomic trigger that snaps onto the Preval Sprayer with ease.
- It also attaches to most any other standard aerosol can.

Order No.	Mfg. No. / Description	Price
556224	(3002) vGrip	$7.98 H

3M Marine PPS™ Mixing Cup and Collar

3M



- Small, hard cup that supports and holds the PPS small flexible liner, part number 16000.

Order No.	Mfg. No. / Description	Price
886763	(16001) 20 oz.	$68.98 H

3M PPS™ Kit Standard Size, 200 Micron Filters

3M



- Kit contains - (50) disposable lids with 200 micron filters, (50) disposable liners and (20) sealing plugs.
- The 200 micron filters are recommended for traditional solvent based paint or primer applications.
- Graduated measurement to 20.3 oz./600 ml - with mix ratio film insert.
- Maximum capacity of 25 oz./750 ml when filled to within 1/8" of rim.
- For use with part number 16001.

Order No.	Mfg. No. / Description	Price
886762	(16000)	$222.98 H

©2014 Donovan Marine, Inc.

Marpro White China Bristle Brushes



- 100% White China Bristles.
- Excellent for use with oil paints, varnish and stains, and all marine coatings.

Order No.	Description	Price
7-1060	Size: 1"	$2.98 H
7-1061	Size: 1-1/2"	$3.98 I
7-1062	Size: 2"	$4.98 H
7-1063	Size: 2-1/2"	$5.98 H
7-1064	Size: 3"	$7.98 H

"Throwaway" Brushes - White Bristle



Order No.	Mfg. No. / Description	Price
570273	Size: 1/2"	$0.98 I
570285	Size: 1"	$1.53 H
570297	Size: 1-1/2"	$1.53 H
570300	Size: 2"	$1.92 H
570301	Size: 2", Double Thick	$3.93 H
570312	Size: 2-1/2"	$1.97 H
570324	Size: 3"	$1.91 H
570325	Size: 3", Double Thick	$3.86 H
570336	Size: 4"	$6.98 H
570337	Size: 4", Double Thick	$9.98 H

Marpac Bucket of Savings Chip Brushes



- Sold 48 brushes per bucket.
- Size 2".

Order No.	Mfg. No. / Description	Price
7-0508S		$33.12 G

Corona Urethaner Brushes



- White China bristle.
- Hand formed chisel.
- Unlacquered plastic foam Kaiser handle.
- Nickel ferrule.

Order No.	Mfg. No. / Description	Price
570406	(3052) Size: 1"	$6.98 G
570402	(3052) Size: 1-1/2"	$8.98 G
570403	(3052) Size: 2"	$11.98 G
570404	(3052) Size: 2-1/2"	$12.98 G
570405	(3052) Size: 3"	$16.98 G

Corona Europa Brushes - Badger Style



- Soft Badger style pure China bristle.
- Hand formed chisel.
- Extra fine tip.
- Stainless steel ferrule.
- Black lacquered hardwood special peg handle.

Order No.	Mfg. No. / Description	Price
570211	(16038) Size: 1"	$13.98 G
570223	(16038) Size: 1-1/2"	$15.98 G
570235	(16038) Size: 2"	$21.98 G
570247	(16038) Size: 2-1/2"	$28.98 G
570253	(16038) Size: 3"	$31.98 G
570257	(16038) Size: 4"	$36.98 G

Wood Handle Foam Brushes



Order No.	Mfg. No. / Description	Price
570350	1"	$0.98 H
570362	2"	$0.98 H
570374	3"	$0.98 H
570375	4"	$0.98 H

Marpro Cigar Foam Roller Covers



- Foam.
- For smooth to semi-smooth surface.
- Fiberglass and epoxy applications.

Order No.	Mfg. No. / Description	Price
7-1038	4", 3/8" Nap, 2 Pack	$3.98 H
7-1039	6-1/2", 3/8" Nap, 2 Pack	$4.08 H
7-1042	Roller Frame: 4" x 16"	$2.98 H
7-1043	Roller Frame: 6-1/2" x 24"	$2.08 I

Corona Glasskoter Brushes



- Pure white bristle.
- Solvent resistant plastic handle.
- Tin ferrule.

Order No.	Mfg. No. / Description	Price
570326	(3015) Size: 1"	$2.15 G
570327	(3015) Size: 1-1/2"	$2.67 G
570329	(3015) Size: 2"	$2.63 G
570330	(3040) Size: 4"	$8.98 G

Corona Deck and Cabin Brushes



- White China bristle.
- Hand formed chisel.
- Gloss black plastic foam Kaiser handle.
- Brass ferrule.

Order No.	Mfg. No. / Description	Price
570413	(3058) Size: 1"	$7.98 G
570436	(3058) Size: 1-1/2"	$10.98 G
570437	(3058) Size: 2"	$12.98 G
570451	(3058) Size: 3"	$18.98 G

Radiator Brush



- Black china bristle bent radiator brush.
- 45° angle for easy access.
- 2".

Order No.	Mfg. No. / Description	Price
570460	(PB1213)	$5.98 F

Marpro Roller Covers



- 100% Polyester fabric.
- Solvent resistant core.
- For smooth to semi-smooth surface.
- Fiberglass and epoxy applications.

Order No.	Mfg. No. / Description	Price
7-1050	Size: 3", 3/8" Nap	$2.28 I
7-1051	Size: 4", 3/8" Nap	$2.39 I
7-1052	Size: 7", 3/8" Nap	$2.98 I
7-1053	Size: 9", 3/8" Nap	$2.98 H
7-1049	Size: 9", 3/16" Nap	$5.98 I

Corona Glasskoter™ Roller Covers



- All-purpose polyester.
- Solvent resistant phenolic core.
- 3/8" nap.
- Sold each.

Order No.	Mfg. No. / Description	Price
570120	(R-201F-3) Size: 3"	$3.10 G
570122	(R-201F-4) Size: 4"	$4.14 G
570134	(MPR-201F-7) Size: 7", Sold in Bulk	$4.17 G
570146	(MPR-201F-9) Size: 9", Sold in Bulk	$5.98 G

Corona Slicker™ Foam Roller Covers



- Fine-celled foam.
- For enamels, varnishes and urethanes on smooth surfaces.
- Solvent resistant phenolic core.
- 1/8" nap.
- Sold each per poly bag.

Order No.	Mfg. No. / Description	Price
570400	(R-780-012F-7) Size: 7"	$4.89 G
570401	(R-780-012F-9) Size: 9"	$6.98 G

Arrow Roller Cover



- 100% polyester, good for all paints with high solvent resistant core.
- Nap height 3/8".
- Length 9".
- Color: Pink.

Order No.	Mfg. No. / Description	Price
570019	(9P3)	$4.20 I

Corona Ultradel™ Roller Covers



- High-density Golden Polyester.
- Solvent resistant phenolic core.
- For all paints.
- Sold each per poly bag.

Order No.	Mfg. No. / Description	Price
570110	(R-3030F-9) 9", 3/8" Nap	$7.98 G
570111	(R-3050F-9) 9", 1/2" Nap	$7.98 G

Corona Twin Paks™ Roller Covers



- Polyester fabric.
- Cardboard core.
- One time use.
- 3/8" nap.
- Size 9".
- Sold two per poly bag.

Order No.	Mfg. No. / Description	Price
570499	(R-900-9)	$4.35 G

Corona Ekono Set - Paint Tray Combo



- Includes: Metal tray, 3/8" polyester sleeve with cardboard core on "skeleton" frame.
- 9".

Order No.	Mfg. No. / Description	Price
570500	(R-1000)	$9.98 G

Corona Glasskoter™ Roller Covers



- Woven Mohair blend.
- Solvent resistant phenolic core.
- 1/8" nap.
- Sold each per poly bag..

Order No.	Mfg. No. / Description	Price
570083	(MPR-101F-7) Size: 7"	$6.98 G
570109	(MPR-101F-9) Size: 9"	$7.98 G

Corona Polycor™ Roller Cover



- Medium-density polyester.
- Plastic core.
- 3/4" nap.
- Size 9".

Order No.	Mfg. No. / Description	Price
570107	(R-2075-9)	$4.98 G

Wooden Handle



Order No.	Mfg. No. / Description	Price
570175	(HHM60) 60" Long	$6.98 C

Wood Extension Pole with Die Cast Metal Tip



- Unlacquered hardwood extension pole with heavy duty die cast metal threaded tip.
- Length 49".

Order No.	Mfg. No. / Description	Price
575071	(R-1249-DCM)	$6.98 F

Paint Trays - 9"



Order No.	Mfg. No. / Description	Price
570473	(BWT-P) Polypropylene, 2 Quart Capacity	$4.98 G
570474	(R-1315) Polypropylene, 3 Quart Capacity	$10.98 G
570475	(R-1300) Bright Metal, 2 Quart Capacity	$6.98 G
570476	(R-1303) Plastic Tray Liner for 570475	$3.10 G

Roller Frames



- Light duty use.
- Threaded plastic handle with metal ring.
- Four-wire birdcage.
- Imported.

Order No.	Mfg. No. / Description	Price
570172	(RF-200) 3"	$3.02 F
570184	(RF-200) 4", 1/4" Shank	$3.02 G
570196	(RF-200) 7", 1/4" Shank	$4.07 G
570209	(RF-209) 9", 1/4" Shank	$4.06 G

©2014 Donovan Marine, Inc.

Coveralls



- Both lightweight and durable - and is highly effective against contaminants.
- Disposable.
- White.
- Standard.
- Long sleeve.
- Zipper front.

Order No.	Mfg. No. / Description	Price
440470	(43000) Large	$11.98 I
440482	(43001) X Large	$11.98 I
440483	(43002) XX Large	$10.98 I
440484	(43003) XXX Large	$12.98 I

Boot Covers



- Tuff Sole is a heavy duty sole found on the boot and shoe covers.
- It offers more durability and strength than competitive protective footwear.
- Elastic top.
- Sold per pair per bag.

Order No.	Mfg. No. / Description	Price
440604	(40035)	$5.98 Q

3M Marine Protective Coverall 4520



- Breathable material to help reduce heat build-up and promote comfortable wear.
- Knit cuffs with elasticized waist and ankles for convenience and freedom of movement.
- Three panel hood design for compatibility with complementary PPE.
- Two-way zipper with storm flap.
- Anti-static coating on both sides.

Order No.	Mfg. No. / Description	Price
854305	(63266) X Large	$8.98 H

SAS Nitrile Glove Dispenser



- Powder-free nitrile.
- Superior puncture and abrasion resistance.
- Latex-free.
- Textured grip.
- Beaded cuff.
- Ambidextrous.
- 6 mil nitrile.
- Box quantity: 100 XL gloves by weight.

Order No.	Mfg. No. / Description	Price
440611	(66519)	$22.98 G

PRO 1000 Komfort Coveralls



- Constructed from breathable SMS non-woven material.
- It features a full hood, elastic cuffs, elastic ankles, elastic waist, breast pocket, two side pockets and a large rear rag pocket.
- Has an exclusive two way front zipper, which allows restroom visits without taking the coverall off.
- Features exclusive ankle zippers for EZ on and off with boots or shoes.
- Packed one per poly bag with color insert.

Order No.	Mfg. No. / Description	Price
440485	(41021) Large	$13.98 I
440486	(41022) X Large	$13.98 I
440488	(41023) XX Large	$13.98 I

Western Pacific Bronze Wool Pads



- Rust resistant, use it for prepping any surface to be dressed or painted.
- Resist shedding and corrosion and won't leave behind rust-prone fibers.
- Use to polish chrome, brass and stainless steel.
- Sold 3 pads per poly pack.

Order No.	Mfg. No. / Description	Price
412356	Fine	$10.98 H
412368	Medium	$10.98 H
412370	Coarse	$10.98 H

Painting Gloves



- Heavy duty nitrile (chemical) glove.
- 8 mil nitrile with textured fingers and palm-long wrist cuff.
- Textured surface for maximum dexterity.

Order No.	Mfg. No. / Description	Price
440606	(60031) X Large, Box of 50	$18.98 G

- Disposable nitrile glove - 5 mil.
- Textured fingers and thumb.
- Powder free.
- Black raven gloves.

Order No.	Mfg. No. / Description	Price
440607	(60032) Large, Box of 100	$22.98 G
440611	(66519) X Large, Box of 100	$22.98 G



- Disposable latex gloves - 5 mil.
- Light powder.

Order No.	Mfg. No. / Description	Price
440608	(60002) Large, Box of 100	$12.98 G
440610	(60003) X Large, Box of 100	$12.98 G

SAS Paint Suits



- Anti-static.
- Cloth-like fiber.
- Full zipper front and elastic wrists.
- Non-elastic ankle cuffs.

Order No.	Mfg. No. / Description	Price
440494	(6853) Large	$5.98 G
440496	(6854) X Large	$5.98 G
440498	(6855) XX Large	$5.98 G

Spray Sock



- Soft, four way stretch cotton-poly blend.
- Features an extended neck that can be tucked into protective clothing for additional security.
- The cotton-poly blend is not only comfortable but allows air flow to the wearer.

Order No.	Mfg. No. / Description	Price
440605	(40040)	$4.34 Q

Enviro-Pads - Boatyard Filtration Pads



- Filtration Pads filters the copper, paint chips, biological growth, bottom sediment and containments and wash water through a doubled treated geosynthetic non-woven polyester fabrics down to very fine filtration.
- Ground water then passes through the black mesh pad, and the filtered water from the pressure washer is now free to flow into surface waters or ground water.
- The pad is then disposed properly as solid waste.

Order No.	Mfg. No. / Description	Price
759158	(EP-PAD) 15' x 25' L	$422.98 I

Western Pacific Window Scraper



- Uses standard single edge blade.
- Includes one blade.
- Scrapes paint and stickers from glass, tile, metal and floors.

Order No.	Mfg. No. / Description	Price
570665	(32060)	$1.96 Q
440824	(100107) Replacement Blades, Box of 100	$16.98 I

Swobbit Recycled White T-Shirts



- All white knit t-shirt material.
- Excellent, all-purpose wiping, cleaning and polishing cloth.
- Practically lint-free.

Order No.	Mfg. No. / Description	Price
570541	(SW56725) 25# Box	$103.98 I
570552	(SW56705) 5# Box	$27.98 I

Pettit Paint Strainers

Order No.	Mfg. No. / Description	Price
736403	(14020) 100 Box	$28.98 D
736402	(14020-250) 250 Box	$71.98 D

Plastic Paint and Epoxy Mixing Tubs



Order No.	Mfg. No. / Description	Price
639306	16 oz.	$0.98 I
639317	32 oz.	$1.28 I
639320	85 oz.	$2.49 I
639332	172 oz.	$2.98 I

Swobbit General Purpose Orange Plastic Blade



- General purpose, softest material, very pliable and forgiving, for use on delicate surfaces like: auto paint, other plastics, finished wood, painted surfaces, soft surfaces.

Order No.	Mfg. No. / Description	Price
570716	(SR5GPOE)	$5.98 G

Western Pacific Angle Blade Scraper



- Stainless steel.
- 3" angle blade scraper.

Order No.	Mfg. No. / Description	Price
570603	(32040)	$6.98 Q

3M All-Purpose Tack Cloth



- Safely removes dust, dirt, lint and other particles from fiberglass, metal, plastic, wood and wallboard surfaces before painting.
- 16" x 20" reusable cloth per pack.

Order No.	Mfg. No. / Description	Price
857170	(03192)	$2.29 H

Plastic Pail and Lid



- Bucket with wire handle.
- Capacity: 5.7 gallon.

Order No.	Mfg. No. / Description	Price
639344	(40041)	$10.98 I
639356	(607007) Plastic Lid	$6.98 I

Western Pacific Putty Knives



- High quality stainless steel blades.
- Chemical resistant polycarbon handle.

Order No.	Mfg. No. / Description	Price
570641	(32005) 2", Stiff	$5.98 Q
570656	(32004) 1-1/2", Flex	$5.98 Q
570657	(32006) 2", Flex	$5.98 Q
570653	(32010) 2-1/2", Flex	$5.98 Q
570658	(32014) 3", Flex	$5.98 Q

Western Pacific Utility Knife



- 4-position retractable blade.
- 3 extra blades in handle. Ideal for drywall, industrial, general use.

Order No.	Mfg. No. / Description	Price
570689	(32065)	$4.97 Q
570691	(32070) Replacement Blades, Pack of 5	$2.99 Q

Kardol Blue Tack Cloth

- 12 per pack.

Order No.	Mfg. No. / Description	Price
440812	(100096)	$26.98 I

Rags

- 25# colored sweat shirt rags.

Order No.	Mfg. No. / Description	Price
211350		$15.98 F

Thermo Rags - 25#

- This material is soft and absorbent.
- This makes for an all around workhouse wiper.

Order No.	Mfg. No. / Description	Price
211362		$37.98 F

Western Pacific ProPainter Tool



- Oversize stainless blade with a chemical resistant handle.
- Beveled edge and strong blade make this the ideal painter tool.

Order No.	Mfg. No. / Description	Price
570704	(32075)	$6.98 Q

Metal Scraper



- 1" x 15" double end scraper.
- Fine grade tool steel, heat treated.

Order No.	Mfg. No. / Description	Price
532893	(JLSS15)	$14.98 B

Chipping and Scaling Hammer



- Hardened steel chisel and cross chisel.
- Wood handle.

Order No.	Mfg. No. / Description	Price
210601	(JCSH)	$10.98 F

©2014 Donovan Marine, Inc.

3M 5" Diameter Clean Sanding Discs



- Patented multi-hole design captures and removes more dust.
- Excellent for dry sanding applications like Gel Coat, Composites, Wood, Paint Prep and Primer sanding.
- Design doesn't require alignment of holes with the disc pad.
- Simpler to use than a standard "dust free" system.
- Fits all dustless sanding systems.
- Constructed on a C Weight paper backing with aluminum oxide.

Order No.	Mfg. No. / Description	Price
887031	(01693) P80 Grade, 50 Discs Per Roll	$60.98 H
887033	(01695) P120 Grade, 50 Discs Per Roll	$60.98 H
887035	(01697) P180 Grade, 50 Discs Per Roll	$60.98 H
887036	(01698) P220 Grade, 50 Discs Per Roll	$60.98 H
887038	(01701) P320 Grade, 50 Discs Per Roll	$60.98 H
887039	(01702) P400 Grade, 50 Discs Per Roll	$60.98 H

3M 5" Diameter Stikit™ Gold Disc Rolls



- Strong "C" weight backing provides excellent support for a tough and durable aluminum oxide mineral.
- Resists loading and the pressure sensitive adhesive coating ensures excellent adhesion to Stikit disc pads.
- Excellent for gelcoat, wood and plastic applications.

Order No.	Mfg. No. / Description	Price
886361	(86488) P80 Grade, 100 Discs Per Roll	$67.98 H
886385	(86490) P120 Grade, 100 Discs Per Roll	$62.98 H
886388	(86493) P220 Grade, 100 Discs Per Roll	$62.98 H
886397	(86495) P320 Grade, 100 Discs Per Roll	$62.98 H

Indasa USA 5" Solid Grip White Discs



- 50 disc per box.
- 10 box per case.
- Aluminum oxide plus lubricant.
- High cut power.
- High efficiency.
- Runs cooler.

Order No.	Mfg. No. / Description	Price
887740	(52-150) Grit/Weight P 150 C	$26.98 M
887743	(52-180) Grit/Weight P 180 C	$26.98 M
887746	(52-220) Grit/Weight P 220 C	$26.98 M
887749	(52-240) Grit/Weight P 240 C	$26.98 M
887752	(52-280) Grit/Weight P 280 C	$26.98 M
887755	(52-320) Grit/Weight P 320 C	$26.98 M
887758	(52-400) Grit/Weight P 400 C	$26.98 M
887761	(52-500) Grit/Weight P 500 C	$26.98 M
887764	(52-600) Grit/Weight P 600 C	$26.98 M

3M 5" Clean Sanding Disc Pads


853180


853168

Order No.	Mfg. No. / Description	Price
853170	(20290) 5" Hookit Pad, Soft	$41.98 H
853180	(20278) 5" Hookit Interface Pad, Soft	$20.98 H

3M 5" Stikit™ Dust Free Disc Pads



- Use with 5" diameter Stikit Dust Free Discs.
- Medium foam density and 45° tapered edge for flexibility.
- These lightweight, shock-resistant pads with vinyl face (blue) provide disc adhesion yet allow quick, easy removal.
- Size: 5" x 3/4" 5/16 - 24 External.

Order No.	Mfg. No. / Description	Price
853206	(45217) 5" Stikit Pad, 5 Dust Holes	$34.98 H

3M 5" Diameter Imperial™ Hookit™ Discs



- This uniquely blended mineral construction and tough "E" weight backing provides for a fast cutting, longer lasting abrasive.
- Excellent for stripping paint or sanding marine fairing compounds.

Order No.	Mfg. No. / Description	Price
886094	(01730) P36E Grade, 25 Discs Per Roll	$72.98 H
886082	(01729) P40E Grade, 25 Discs Per Roll	$67.98 H
886070	(01770) P60E Grade, 25 Discs Per Roll	$51.98 H
886068	(01728) P80E Grade, 25 Discs Per Roll	$55.98 H

Indasa USA 5" Solid, White Self-Adhesive Discs



- 100 disc per box.
- 10 box per case.
- General purpose hand sanding of flat surfaces.
- Aluminum oxide plus lubricant.
- D weight paper.

Order No.	Mfg. No. / Description	Price
887700	(50-150) Grit/Weight P 150 C	$38.98 M
887703	(50-180) Grit/Weight P 180 C	$38.98 M
887706	(50-220) Grit/Weight P 220 C	$38.98 M
887709	(50-240) Grit/Weight P 240 C	$38.98 M
887712	(50-280) Grit/Weight P 280 C	$38.98 M
887715	(50-320) Grit/Weight P 320 C	$38.98 M
887718	(50-360) Grit/Weight P 360 C	$38.98 M
887721	(50-400) Grit/Weight P 400 C	$38.98 M
887724	(50-500) Grit/Weight P 500 C	$38.98 M
887727	(50-600) Grit/Weight P 600 C	$38.98 M

Indasa USA Rhynalox® Red Line® Self Adhesive Discs



- 5" solid, aluminum oxide.
- 50 disc per box.
- Exclusive anti-clogging lubricant resists loading extending cut life.
- Rapid application with exclusive Rhyno-Tabs for easy off release paper increases efficiency.
- Closed coat reduces loading and extends abrasive cutting power.
- Premium quality pressure sensitive adhesive (PSA) allows for a stronger bond.
- Release paper protects adhesive from harmful contaminants allowing for superior grip.
- High cut power.
- High efficiency.
- Long life.
- Aluminum oxide.

Order No.	Mfg. No. / Description	Price
887880	(500-36E) 36 Grit, E Weight Paper	$38.98 M
887883	(500-40E) 40 Grit, E Weight Paper	$36.98 M
887886	(500-60E) 60 Grit, E Weight Paper	$32.98 M
887889	(500-80E) 80 Grit, E Weight Paper	$31.98 M

3M 6" Diameter Clean Sanding Discs



- Patented multi-hole design captures and removes more dust.
- Excellent for dry sanding applications like Gel Coat, Composites, Wood, Paint Prep and Primer sanding.
- Design doesn't require alignment of holes with the disc pad.
- Simpler to use than a standard “dust free” system.
- Fits all dustless sanding systems.
- Constructed on a C Weight paper backing with aluminum oxide.

Order No.	Mfg. No. / Description	Price
887045	(20749) P80 Grade, 50 Discs Per Roll	$75.98 H
887047	(20751) P120 Grade, 50 Discs Per Roll	$72.98 H
887049	(20753) P180 Grade, 50 Discs Per Roll	$72.98 H
887050	(20754) P220 Grade, 50 Discs Per Roll	$72.98 H
887052	(20756) P320 Grade, 50 Discs Per Roll	$72.98 H
887053	(20757) P400 Grade, 50 Discs Per Roll	$72.98 H

3M 6" Stikit™ Dust Free Disc Pad



- Use with 6" diameter Stikit Dust Free Discs.
- These lightweight, shock-resistant pads with vinyl face (blue) provide disc adhesion yet allow quick, easy removal.

Order No.	Mfg. No. / Description	Price
853209	(45218) 6" Stikit Pad, Medium	$40.98 H

3M 6" Diameter Stikit™ Imperial™ Disc Rolls



- Use for rough featheredging.
- Could be used for final sanding of plastic filler and putty.
- 3Ms fastest cutting, longest lasting abrasive for saving labor costs and improving quality.

Order No.	Mfg. No. / Description	Price
853247	(00330) P150 Grade, 75 Discs Per Roll	$86.98 H

Indasa USA Rhynogrip® Red Line® Sanding Discs



- 5" solid, aluminum oxide.
- 50 disc per box.
- Exclusive anti-clogging lubricant resists loading extending cut life.
- Grip's rapid application increases efficiency.
- Premium quality grip allows for a stronger hold.
- Closed coat reduces loading and extends abrasive cutting power.
- Grip design runs inherently cooler than PSA design.

Order No.	Mfg. No. / Description	Price
887900	(510-36E) 36 Grit, E Weight Paper	$48.98 M
887903	(510-40E) 40 Grit, E Weight Paper	$45.98 M
887906	(510-60E) 60 Grit, E Weight Paper	$42.98 M
887909	(510-80E) 80 Grit, E Weight Paper	$41.98 M

3M 6" Diameter Purple Clean Sanding Discs



- Disc with precise hole design for improved life and dust extraction.
- Use for shaping plastic filler, removing paint around damaged area and scratch refinement of bare metal.
- 3M's fastest cutting, longest lasting abrasive for saving labor costs and improving quality.

Order No.	Mfg. No. / Description	Price
887060	(01820) P80 Grade, 50 Discs Per Roll	$94.98 H
887062	(01818) P120 Grade, 50 Discs Per Roll	$79.98 H
887064	(01816) P180 Grade, 50 Discs Per Roll	$71.98 H
887066	(01815) P220 Grade, 50 Discs Per Roll	$71.98 H
887068	(01812) P320 Grade, 50 Discs Per Roll	$71.98 H
887070	(01811) P400 Grade, 50 Discs Per Roll	$71.98 H

3M 6" Clean Sanding Disc Pads



Order No.	Mfg. No. / Description	Price
853172	(05856) 6" Hookit Pad, Firm	$82.98 H
853174	(20356) 6" Hookit Pad, Medium	$66.98 H
853176	(20425) 6" Hookit Pad, Soft	$66.98 H
853182	(05774) 6" Hookit Interface Pad	$20.98 H

3M 6" Stikit™ Dust Free Low Profile Disc Pads



- Use with 6" diameter Stikit Dust Free Discs.
- Fits Random Orbital sanders with 5/16-24 internal thread.

Order No.	Mfg. No. / Description	Price
853210	(05646) 6" Stikit Pad, Soft, 6 Dust Holes	$47.98 H

©2014 Donovan Marine, Inc.

3M 6" Diameter Stikit™ Gold Disc Rolls



- Strong "C" weight backing provides excellent support for tough aluminum oxide mineral.
- Resists loading and the pressure sensitive adhesive coating ensures excellent adhesion to Stikit disc pads.
- Excellent for gelcoat, wood and plastic applications.

Order No.	Mfg. No. / Description	Price
852841	(86468) P80 Grade, 100 Discs Per Roll	$79.98 H
852839	(86469) P100 Grade, 100 Discs Per Roll	$76.98 H
852827	(86470) P120 Grade, 100 Discs Per Roll	$76.98 H
852815	(86471) P150 Grade, 100 Discs Per Roll	$76.98 H
852803	(86472) P180 Grade, 100 Discs Per Roll	$76.98 H
852790	(86473) P220 Grade, 100 Discs Per Roll	$76.98 H
852764	(86475) P320 Grade, 100 Discs Per Roll	$76.98 H
852776	(86476) P400 Grade, 100 Discs Per Roll	$76.98 H
852788	(86477) P500 Grade, 100 Discs Per Roll	$76.98 H

3M 6" Diameter Stikit™ Imperial™ Resin Bond Paper Disc Rolls



- Tough aluminum oxide mineral bonded with a full heat resistant resin to a strong F weight backing.
- Backing provides excellent shelling and tear resistance.
- Use for scratch refinement after coarse sanding.

Order No.	Mfg. No. / Description	Price
852930	(21794) 60F Grade, 100 Discs Per Roll	$137.98 H
852928	(21793) 80F Grade, 100 Discs Per Roll	$127.98 H
852924	(21791) P120F Grade, 100 Discs Per Roll	$122.98 H

3M 6" Diameter Imperial™ Hookit™ Dust-Free Discs

- Excellent for stripping paint or sanding marine fairing compounds.
- For use with dust free sanding systems.

Order No.	Mfg. No. / Description	Price
853677	(01821) P80E Grade, Fein, 25 Discs Per Box	$65.98 H

Indasa USA 6" 6 Hole White-Vacuum Discs



- 50 disc per box.
- 10 box per case.
- Aluminum oxide plus lubricant.
- High cut power.
- High efficiency.
- Runs cooler.

Order No.	Mfg. No. / Description	Price
887780	(62-150) Grit/Weight P 150 C	$37.98 M
887783	(62-180) Grit/Weight P 180 C	$37.98 M
887786	(62-220) Grit/Weight P 220 C	$37.98 M
887789	(62-240) Grit/Weight P 240 C	$37.98 M
887792	(62-280) Grit/Weight P 280 C	$37.98 M
887795	(62-320) Grit/Weight P 320 C	$37.98 M
887798	(62-400) Grit/Weight P 400 C	$37.98 M
887801	(62-500) Grit/Weight P 500 C	$37.98 M
887804	(62-600) Grit/Weight P 600 C	$37.98 M

3M 6" Diameter Stikit™ Finishing Film Discs



- Designed for use in scuff sanding before painting, as well as to remove runs, dust nibs and excess orange peel from paint and gelcoat prior to compounding.
- Individually lined and constructed of a high performance, aluminum oxide mineral bonded to a smooth film backing.
- Cuts fast, lasts long, resists loading and leaves a consistent finish.

Order No.	Mfg. No. / Description	Price
852637	(01321) P600 Grade, 100 Discs Per Box	$159.98 H
852636	(01320) P800 Grade, 100 Discs Per Box	$159.98 H
852635	(01319) P1000 Grade, 100 Discs Per Box	$159.98 H
852634	(01318) P1200 Grade, 100 Discs Per Box	$159.98 H

3M 6" Diameter Green Corps™ Stikit™ Resin Bond Discs



- Green in color with a heavy E weight paper backing.
- Individually linered, pressure-sensitive adhesive backed discs with a tough mineral designed to go down to bare metal.
- Use for stripping paint to metal, shaping and sanding plastic filler.

Order No.	Mfg. No. / Description	Price
852992	(01548) 36E Grade, 100 Discs Per Roll	$259.98 H
852980	(01547) 40E Grade, 100 Discs Per Roll	$234.98 H

3M 6" Diameter Stikit™ Imperial™ Disc Rolls - Purple



- Designed to cut faster and last longer enabling the user to obtain maximum usage from each disc.
- Constructed of a high-performance aluminum oxide mineral.
- Strongly bonded to a smooth film backing, leave a consistent finish and resist loading.
- **This product replaces gold film discs.**

Order No.	Mfg. No. / Description	Price
853249	(00332) P100 Grade, 100 Discs Per Roll	$86.98 H
853242	(00325) P320 Grade, 100 Discs Per Roll	$86.98 H
853240	(00323) P400 Grade, 100 Discs Per Roll	$86.98 H

Indasa USA 6" 8-Hole White-Vacuum Grip Discs



- 50 disc per box.
- 10 box per case.
- Aluminum oxide plus lubricant.
- High cut power.
- High efficiency.
- Runs cooler.

Order No.	Mfg. No. / Description	Price
887820	(63-150) Grit/Weight P 150 C	$37.98 M
887823	(63-180) Grit/Weight P 180 C	$37.98 M
887826	(63-220) Grit/Weight P 220 C	$37.98 M
887829	(63-240) Grit/Weight P 240 C	$37.98 M
887832	(63-280) Grit/Weight P 280 C	$37.98 M
887835	(63-320) Grit/Weight P 320 C	$37.98 M
887838	(63-400) Grit/Weight P 400 C	$37.98 M
887841	(63-500) Grit/Weight P 500 C	$37.98 M

Indasa USA 6" White Line Grip Vacuum Discs





- 50 disc per box.
- 10 box per case.
- Aluminum oxide plus lubricant.
- High cut power.
- High efficiency.
- Runs cooler.

Order No.	Mfg. No. / Description	Price
887850	(69-150) Grit/Weight P 150 C	$37.98 M
887853	(69-180) Grit/Weight P 180 C	$37.98 M
887856	(69-220) Grit/Weight P 220 C	$37.98 M
887859	(69-240) Grit/Weight P 240 C	$37.98 M
887862	(69-320) Grit/Weight P 320 C	$37.98 M
887865	(69-400) Grit/Weight P 400 C	$37.98 M
887868	(69-500) Grit/Weight P 500 C	$37.98 M
887871	(69-600) Grit/Weight P 600 C	$37.98 M

Indasa USA 6" Red Line Grip Vacuum Discs





- 50 disc per box.
- 10 box per case.
- Aluminum oxide grit.
- 8 + 1 hole vacuum combination for dust free environment.
- For use with FESTOOL and other vacuum systems.
- For use with GRIP system.

Order No.	Mfg. No. / Description	Price
887929	(690-80) Grit/Weight P 80 C	$49.98 M
887932	(690-220) Grit/Weight P 220 C	$48.98 M

Indasa USA 6" Solid, White Self-Adhesive Discs





- 100 disc per box.
- 10 box per case.
- Aluminum oxide plus lubricant.
- High cut power.
- High efficiency.
- Runs cooler.

Order No.	Mfg. No. / Description	Price
888079	(60-150) Grit/Weight P 150 C	$52.98 M
888081	(60-180) Grit/Weight P 180 C	$52.98 M
888083	(60-220) Grit/Weight P 220 C	$52.98 M
888085	(60-240) Grit/Weight P 240 C	$52.98 M
888087	(60-280) Grit/Weight P 280 C	$52.98 M
888089	(60-320) Grit/Weight P 320 C	$52.98 M
888090	(60-360) Grit/Weight P 360 C	$52.98 M
888091	(60-400) Grit/Weight P 400 C	$52.98 M
888092	(60-500) Grit/Weight P 500 C	$52.98 M
888093	(60-600) Grit/Weight P 600 C	$52.98 M
888095	(600-800) Grit/Weight P 800 C	$63.98 M

Indasa USA Rhynodry® Red Line® Self Adhesive Discs





- 50 disc per box.
- 6" solid, aluminum oxide plus lubricant.
- Exclusive anti-clogging lubricant resists loading extending cut life.
- Rapid application with exclusive Rhyno-Tabs for easy off release paper increases efficiency.
- Closed coat reduces loading and extends abrasive cutting power.
- Premium quality pressure sensitive adhesive (PSA) allows for a stronger bond.
- Release paper protects adhesive from harmful contaminants allowing for superior grip.
- High performance.
- Anti-clogging lubricant.
- Aluminum oxide plus lubricant.
- Long life.

Order No.	Mfg. No. / Description	Price
888071	(600-36E) 36 Grit, E Weight Paper	$50.98 M
888072	(600-40E) 40 Grit, E Weight Paper	$46.98 M
888073	(600-40) 40 Grit, D Weight Paper	$37.98 M
888078	(600-80E) 80 Grit, E Weight Paper	$41.98 M
888075	(600-80) 80 Grit, D Weight Paper	$68.98 M
888076	(600-60E) 60 Grit, E Weight Paper	$43.98 M
888077	(600-120) 120 Grit, D Weight Paper	$63.98 M

Indasa USA Rhynogrip® Red Line® Sanding Discs





- 6" Red Line Grip.
- Aluminum oxide grit.
- 8 + 1 hole vacuum combination for dust free environment.
- For use with FESTOOL and other vacuum systems.
- For use with GRIP system.
- 50 disc per box.

Order No.	Mfg. No. / Description	Price
887920	(690-36) 36 Grit	$69.98 M
887923	(690-40) 40 Grit	$55.98 M
887926	(690-60) 60 Grit	$52.98 M

Indasa USA 6" Solid White Grip Discs





- 50 disc per box.
- 10 box per case.
- Aluminum oxide plus lubricant.
- High cut power.
- High efficiency.
- Runs cooler.

Order No.	Mfg. No. / Description	Price
888120	(61-150) Grit/Weight P 150 C	$36.98 M
888122	(61-180) Grit/Weight P 180 C	$36.98 M
888126	(61-240) Grit/Weight P 240 C	$36.98 M
888127	(61-280) Grit/Weight P 280 C	$37.98 M
888129	(61-360) Grit/Weight P 360 C	$37.98 M
888131	(61-500) Grit/Weight P 500 C	$37.98 M
888132	(61-600) Grit/Weight P 600 C	$36.98 M

©2014 Donovan Marine, Inc.

Indasa USA Rhynogrip® Red Line® Sanding Discs



- 50 disc per box.
- 6" solid, aluminum oxide plus lubricant.
- Exclusive anti-clogging lubricant resists loading extending cut life.
- Grip's rapid application increases efficiency.
- Premium quality grip allows for a stronger hold.
- Closed coat reduces loading and extends abrasive cutting power.
- Grip design runs inherently cooler than PSA design.

Order No.	Mfg. No. / Description	Price
888204	(620-40E) 40 Grit, E Weight Paper	$61.98 M
888206	(620-60E) 60 Grit, E Weight Paper	$58.98 M
888208	(620-80E) 80 Grit, E Weight Paper	$54.98 M

Indasa USA 6" Solid Red Line Hook Loop Grip Discs



- High cutting power.
- Very high stock removal.
- Anti-clogging lubricant layer.
- Longer life time.
- Superior finish and nylon grip system.
- High performance on hard materials.
- Aluminum oxide abrasive, modified synthetic resin bonding.

Order No.	Mfg. No. / Description	Price
888202	(620-36E) P 36 Grit, E Weight	$67.98 M
888252	(620-180) P 180 Grit, A Weight	$48.98 M
888290	(620-600) P 600 Grit, A Weight	$48.98 M
888292	(620-800) P 800 Grit, A Weight	$48.98 M
888294	(620-1000) P 1000 Grit, A Weight	$48.98 M

3M 8" Diameter Stikit™ Imperial™ Resin Bond Paper Disc Rolls



- Tough aluminum oxide mineral bonded with a full heat resistant resin to a strong F weight backing.
- Backing provides excellent shelling and tear resistance.
- Use for scratch refinement after coarse sanding.

Order No.	Mfg. No. / Description	Price
852916	(21788) 60F Grade, 50 Discs Per Roll	$127.98 H
852905	(21787) 80F Grade, 50 Discs Per Roll	$112.98 H
852891	(21785) P120F Grade, 50 Discs Per Roll	$104.98 H

Indasa USA 6" 8- Hole Red Line Hook Loop Grip Discs



- High cutting power.
- Very high stock removal.
- Anti-clogging lubricant layer.
- Longer life time.
- Superior finish and nylon grip system.
- High performance on hard materials.
- Aluminum oxide abrasive, modified synthetic resin bonding.

Order No.	Mfg. No. / Description	Price
888036	(630-120) P 120 Grit, D Weight	$48.98 M
888074	(630-320) P 320 Grit, A Weight	$48.98 M
888086	(630-400) P 400 Grit, A Weight	$48.98 I
888098	(630-600) P 600 Grit, A Weight	$48.98 M

3M 8" Disc Pads



- Use with slow speed polisher/grinder.
- Ideal for use with abrasives for paint stripping and sanding primer on conformable surfaces.

Order No.	Mfg. No. / Description	Price
853211	(05579) 8" Stikit Pad, Medium	$87.98 H
853215	(05568) 8" Stikit Pad, Soft	$92.98 H

3M 8" Disc Pads



- Use with slow speed polisher/grinder.
- Ideal for use with fine grade abrasives for sanding primer on conformable surfaces.

Order No.	Mfg. No. / Description	Price
854097	(05768) 8" Soft Disc Pad	$99.98 H

3M 8" Diameter Green Corps™ Stikit™ Resin Bond Discs



- Green in color with a heavy E weight paper backing.
- Individually linered, pressure-sensitive adhesive backed discs with a tough mineral designed to go down to bare metal.
- Use for stripping paint to metal, shaping and sanding plastic filler.

Order No.	Mfg. No. / Description	Price
853057	(01552) 24E Grade, 20 Discs Per Box	$108.98 H
853019	(01551) 36E Grade, 50 Discs Per Box	$237.98 H
853007	(01550) 40E Grade, 50 Discs Per Box	$212.98 H
853071	(01556) 60E Grade, 50 Discs Per Box	$191.98 H
853021	(01549) 80D Grade, 50 Discs Per Box	$169.98 H

3M 8" Diameter Imperial™ Hookit™ Discs



- This uniquely blended mineral construction and tough "E" weight backing provides for a fast cutting, longer lasting abrasive.
- Excellent for stripping paint or sanding marine fairing compounds.

Order No.	Mfg. No. / Description	Price
886133	(01745) P36E Grade, 25 Discs Per Roll	$192.98 H
886121	(01744) P40E Grade, 25 Discs Per Roll	$178.98 H
886107	(01743) P80E Grade, 25 Discs Per Roll	$141.98 H

Indasa USA 8" Solid White Line Self-Adhesive Vacuum Discs



- Rapid application with exclusive Rhyno-Tabs for easy off release paper increases productivity.
- Closed coat reduces loading and extends abrasive cutting power.
- Pressure sensitive adhesive.

Order No.	Mfg. No. / Description	Price
888339	(80-36) P 36 Grit, D Weight	$75.98 M

Indasa USA Rhynodry® Red Line® Self Adhesive Discs



- 50 disc per box.
- 8" solid aluminum oxide plus lubricant.
- Exclusive anti-clogging Lubricant resists loading extending cut life.
- Rapid application with exclusive Rhyno-Tabs for easy off release paper increases efficiency.
- Closed coat reduces loading and extends abrasive cutting power.
- Premium quality pressure sensitive adhesive (PSA) allows for a stronger bond.
- Release paper protects adhesive from harmful contaminants allowing for superior grip.
- High performance.
- Anti-clogging lubricant.
- Aluminum oxide plus lubricant.
- Long life.

Order No.	Mfg. No. / Description	Price
888355	(800-36E) 36 Grit, E Weight Paper	$93.98 M
888356	(800-40E) 40 Grit, E Weight Paper	$90.98 M
888357	(800-40) 40 Grit, D Weight Paper	$88.98 M
888358	(800-60E) 60 Grit, E Weight Paper	$80.98 M
888359	(800-60) 60 Grit, D Weight Paper	$65.98 M
888360	(800-80E) 80 Grit, E Weight Paper	$79.98 M
888361	(800-80) 80 Grit, D Weight Paper	$76.98 M

3M Orbital Sander Accessories



- Clean Sanding Filter Bag and Adapter - Use for collecting dust when using SGV sanders.
- Eliminates the need for cumbersome vacuum hoses.
- Non-woven, electrically charged bag holds dust.
- Disposable.

Order No.	Mfg. No. / Description	Price
886929	(20452) Filter Bag, Large	$8.98 H

Indasa USA 8" 6- Hole Red Line Hook Loop Grip Discs



- High cutting power.
- Very high stock removal.
- Anti-clogging lubricant layer.
- Longer life time.
- Superior finish and nylon grip system.
- High performance on hard materials.
- Aluminum oxide abrasive, modified synthetic resin bonding.

Order No.	Mfg. No. / Description	Price
888315	(820-40) P 40 Grit, D Weight	$119.98 M
888320	(820-60) P 60 Grit, D Weight	$117.98 M
888327	(820-80) P 80 Grit, C Weight	$113.98 M

Indasa USA Rhynogrip® Red Line® Sanding Discs



- 50 disc per box.
- 8" solid aluminum oxide plus lubricant.
- Exclusive anti-clogging lubricant resists loading extending cut life.
- Grip's rapid application increases efficiency.
- Premium quality grip allows for a stronger hold.
- Closed coat reduces loading and extends abrasive cutting power.
- Grip design runs inherently cooler than PSA design.

Order No.	Mfg. No. / Description	Price
888303	(820-36E) 36 Grit, E Weight Paper	$134.98 M
888305	(820-40E) 40 Grit, E Weight Paper	$133.98 M
888307	(820-60E) 60 Grit, E Weight Paper	$122.98 M
888309	(820-80E) 80 Grit, E Weight Paper	$117.98 M

3M Self-Generated Vacuum Random Orbital Sanders



- Pneumatic.
- Designed to work with 3M's self-contained dust collection system.
- Consistent sand scratch for a better finish.
- Trap and contain airborne particles during the finishing process.
- Very smooth, fingertip control.
- Can also be used with conventional filter bags.
- Includes Clean Sanding Hookit Pad.

Order No.	Mfg. No. / Description	Price
886804	(20319) 5"	$384.98 H
886905	(20327) 6"	$384.98 H

3M Roloc™ Disc Pad Assemblies



- This hard rubber back up provides firm support for Scotch-Brite Roloc Surface Conditioning Discs and 3M Roloc Bristle Discs.
- Sold 10 per case.

Order No.	Mfg. No. / Description	Price
853111	(05539) Diameter 2"	$30.98 H
853110	(05540) Diameter 3"	$39.98 H

©2014 Donovan Marine, Inc.

3M Scotch-Brite™ Roloc™ Surface Conditioning Discs



- They combined with the quick "1/2 turn on, 1/2 turn off" Roloc disc fastening system.
- The coarse grade (brown) equates with a coated abrasive grit of 80 to 100 and medium (maroon) 100 to 120 grit.
- Sold 25 discs per box.

Order No.	Mfg. No. / Description	Price
855105	(07480) Coarse, Diameter 2"	$50.98 H
855106	(07481) Medium, Diameter 2"	$50.98 H
853080	(07485) Coarse, Diameter 3"	$91.98 H
853081	(07486) Medium, Diameter 3"	$91.98 H

3M Type D Discs - 280C



- Dependable open coated, heavy duty, aluminum oxide fiber backed discs.
- Excellent for fiberglass grinding.
- Sold 25 discs per box.

Order No.	Mfg. No. / Description	Price
854857	(01834) 24D Grade, 7" x 7/8"	$110.98 H

3M Green Corps™ Cut-Off Wheels



- Highest performance, longest lasting wheel used for cutting sheet metal, aluminum, stainless steel tubing, propeller shafts, clamps and rusted bolts.
- For use on utility type cut-off tools.
- Read all warnings supplied with wheels.
- Do not use on tool without guards.
- Sold 5 wheels per pack.

Order No.	Mfg. No. / Description	Price
854958	(01989) Dimensions: 3" x 1/32" x 3/8"	$52.98 H
854959	(01990) Dimensions: 3" x 1/16" x 3/8"	$52.98 H

Indasa USA Grinding Discs





- High cut efficiency.
- High performance.
- Vulcanized fiber backing.
- High mechanical resistance.
- Aluminum oxide.

Order No.	Mfg. No. / Description	Price
888380	(1000-80) P 80 Grit, 5" x 7/8"	$51.98 M
888389	(2000-24) P 24 Grit, 7" x 7/8"	$89.98 M
888391	(2000-36) P 36 Grit, 7" x 7/8"	$82.98 M
888393	(2000-80) P 80 Grit, 7" x 7/8"	$74.98 M

3M Green Corps™ Roloc™ Discs



- An aluminum oxide Roloc disc constructed on a water resistant polyester cloth backing.
- Resin bonded for heat resistance.
- Can be run wet or dry.
- Handy quick change tool for disc grinding which fits any standard 1/4" drill or air tool.
- Sold 25 discs per box.

Order No.	Mfg. No. / Description	Price
853085	(01397) 36YF Grade, Diameter 2"	$59.98 H
853083	(01406) 50YF Grade, Diameter 3"	$64.98 H
853095	(01407) 36YF Grade, Diameter 3"	$69.98 H
853108	(01408) 24YF Grade, Diameter 3"	$73.98 H

3M Green Corps™ Fibre Discs



- Used for grinding door skins, MIG welds or any kind of metal or fiberglass grinding.
- Other applications include paint, rust, and weld removal and metal work.
- Sold 20 discs per box.

Order No.	Mfg. No. / Description	Price
854776	(01914) 36 Grade, 5" x 7/8"	$127.98 H
854778	(01915) 24 Grade, 5" x 7/8"	$130.98 H

3M Stikit™ Gold Sheet Rolls



- Use for shaping plastic filler, removing paint around damaged area and scratch refinement of bare metal.
- 3M Stikit Sheets in roll form.
- Eliminates unused portion of torn sheets because nothing is wasted.
- 100% of the abrasive surface is used.
- 2-3/4" width.

Order No.	Mfg. No. / Description	Price
852560	(02590) P400 Grade, 45 Yards	$93.98 H
852561	(02591) P320 Grade, 45 Yards	$83.98 H
852563	(02594) P220 Grade, 45 Yards	$83.98 H
852564	(02595) P180 Grade, 45 Yards	$83.98 H
852565	(02596) P150 Grade, 45 Yards	$83.98 H
852566	(02597) P120 Grade, 30 Yards	$83.98 H
852568	(02599) P80 Grade, 25 Yards	$83.98 H

3M Marine Stikit™ Gold Sheet Rolls - 216U



- Coated aluminum oxide abrasive rolls bonded with resin and a pressure sensitive adhesive backing for quick adhesion to and easy removal from 3M Stikit Finish Sander Conversion Pads.
- Cut to desired length for use on vibrator sanders, fairing boards and sanding blocks.
- 4-1/2" width.

Order No.	Mfg. No. / Description	Price
886311	(02691) P320 Grade, 25 Yards	$111.98 I

3M Imperial™ Stikit™ Roll -734U

- Designed to cut faster and last longer enabling the user to obtain maximum usage.
- Excellent for use on tough marine gelcoat, paint and primer systems.
- 4-1/2" width.

Order No.	Mfg. No. / Description	Price
886753	(00497) P80 Grade, 30 Yards	$183.98 H

3M Imperial™ Wetordry™ Paper Sheets



- Use wet or dry for sanding old finishes, fine featheredging plus surface work.
- It is a silicon carbide, closed coat product bonded with a waterproof resin.
- Dimensions: 9" x 11".

Order No.	Mfg. No. / Description	Price
854202	(02033) 1200 Grade, 50 Sheets Per Sleeve	$119.98 H
854204	(02034) 1000 Grade, 50 Sheets Per Sleeve	$119.98 H

3M Tri-M-ite™ Fre-Cut Paper Sheets



- Dry sanding only by machine or hand.
- A specially treated paper with sharp silicon carbide mineral resists loading when working on wood, plastic or fiberglass.
- Dimensions: 9" x 11".
- A Weight.

Order No.	Mfg. No. / Description	Price
854528	(02347) 220A Grade, 100 Sheets Per Sleeve	$105.98 H
854578	(02352) 80A Grade, 50 Sheets Per Sleeve	$57.98 H
854516	(14190) 320A Grade, 100 Sheets Per Sleeve	$105.98 H

3M Stikit™ Hand Blocks



- Soft molded foam block with easy release hook face.
- Use with Stikit Sheet Rolls 2-3/4" wide or abrasives sheets 2-3/4" x 5" for leveling of repair area or following contours.

Order No.	Mfg. No. / Description	Price
854744	(05442)	$30.98 H



- Made of a sturdy, durable, high strength material.
- These blocks have an embossed rubber face which allows good adhesion for Stikit Sheet-Rolls and Stikit sheets.
- Dimensions: 2-3/4" x 7-3/4".

Order No.	Mfg. No. / Description	Price
854756	(05441)	$39.98 H

3M Stikit™ Hand File Board



- Sturdy design that provides a non-twisting, flat sanding surface.
- Can be used single or double handed.
- Has an embossed rubber face that allows good adhesion and release when used with Stikit sheets.
- Dimensions: 2-3/4" x 16".

Order No.	Mfg. No. / Description	Price
853615	(05444)	$82.98 H

3M Imperial™ Wetordry™ Paper Sheets



- Constructed of a silicone carbide mineral, better bonding system and more flexible backing.
- Provides a faster cut, longer life, more consistent finish which will reduce sanding and buffing time.
- Designed for light sanding prior to compounding.
- The size of the sheets eliminates the need for tearing - entire sheet can be used.
- Dimensions: 5-1/2" x 9".

Order No.	Mfg. No. / Description	Price
854186	(02021) 1000 Grade, 50 Sheets Per Sleeve	$59.98 H
854198	(02022) 1200 Grade, 50 Sheets Per Sleeve	$59.98 H
854201	(02023) 1500 Grade, 50 Sheets Per Sleeve	$59.98 H
854200	(02044) 2000 Grade, 50 Sheets Per Sleeve	$59.98 H


3M Production Paper Sheets



- Dry sanding only by machine or hand on wood, fiberglass or metal.
- Open coat with tough aluminum oxide mineral.
- D Weight, dimensions: 9" x 11".

Order No.	Mfg. No. / Description	Price
854390	(02115) 80D Grade, 50 Sheets Per Sleeve	$56.98 H
854403	(02116) 60D Grade, 50 Sheets Per Sleeve	$59.98 H
854427	(02118) 40D Grade, 50 Sheets Per Sleeve	$79.98 H

3M Wetordry™ Paper 413Q Sheets



- A silicon carbide sheet constructed on a light paper backing.
- Can be run wet or dry.
- Primary markets: Metalworking, woodworking.
- Dimensions: 9" x 11".
- Sold 50 sheets per sleeve.

Order No.	Mfg. No. / Description	Price
854225	(02000) 600A Grade, A Weight	$79.98 H
854237	(02002) 400A Grade, A Weight	$79.98 H
854251	(02004) 320A Grade, A Weight	$79.98 H
854275	(02007) 220A Grade, A Weight	$79.98 H

3M Wetordry™ Paper 413Q Sheets



- A silicon carbide Wetordry abrasive product constructed on a C weight, intermediate paper backing.
- Can be run wet or dry.
- Primary markets: Metalworking, woodworking.
- Dimensions: 9" x 11".
- Sold 50 sheets per sleeve.

Order No.	Mfg. No. / Description	Price
854124	(02014) 180C Grade, C Weight	$74.98 H
854148	(02016) 120C Grade, C Weight	$84.98 H
854150	(02017) 100C Grade, C Weight	$97.98 H
854162	(02018) 80C Grade, C Weight	$112.98 H
854174	(24001) 60C Grade, C Weight	$132.98 H

©2014 Donovan Marine, Inc.

3M Hand Sanding Block



- A pliable rubber block which holds the sandpaper securely during wet or dry sanding operations.
- It utilizes a 2-3/4" x 9" sheet.

Order No.	Mfg. No. / Description	Price
854732	(05519)	$22.98 H

3M Tri-M-ite™ Elek-Tro-Cut Cloth Utility Rolls



- Used for light deburring, clean-up, blending and finishing metal surfaces.
- 1" width x 50 yds.

Order No.	Mfg. No. / Description	Price
855001	(05002) 320J Grade	$63.98 H
855037	(05006) 180J Grade	$73.98 H
855051	(05010) 80J Grade	$75.98 H

Scotch-Brite General Purpose Commercial Scouring Pad



- It's the original nylon scouring pad and a performance pacesetter.
- It replaces steel wool and metal sponges, and won't leave metal slivers in hands.
- Long lasting, non-rusting and resilient.
- Dimensions: 6" x 9".

Order No.	Mfg. No. / Description	Price
855080	(08293) Sold Each	$2.00 H

3M Scotch-Brite Hand Pads



- Light duty cleansing pad.
- For scuffing basecoat/clearcoat finishes and light duty cleaning.
- Dimensions: 6" x 9".
- White.
- Sold 20 pads per box.

Order No.	Mfg. No. / Description	Price
855087	(07445)	$43.98 H

- General purpose hand pad.
- For scuffing primer and general purpose cleaning.
- Dimensions: 6" x 9".
- Sold 20 pads per box.

Order No.	Mfg. No. / Description	Price
855099	(07447)	$43.98 H

- Ultra fine hand pad.
- For light scuffing of primer and light cleaning.
- Dimensions: 6" x 9".
- Sold 20 pads per box.

Order No.	Mfg. No. / Description	Price
855102	(07448)	$43.98 H

3M Coated Abrasive Belt - 777F



- Cubitron abrasive grain cloth belt constructed on water resistant polyester cloth backing.
- Resin bonded for heat resistance.
- Features grinding aid for cooler grinding.
- Easiest to break down among premium abrasives.
- Use with softer contact wheel.
- Better for shorter welds and seams.
- 40 grit.

Order No.	Mfg. No. / Description	Price
854999	(77927) Box of 20	$800.98 H

3M Regalite 12" Belt



- Heavy duty polyester cloth backing provides greater strength and flexibility.
- Cubitron abrasive grain provides long life and fast cut on multiple surfaces.
- 40YF grit.

Order No.	Mfg. No. / Description	Price
854998	(88873) Box of 10	$210.98 H

3M 6000 Series Half Facepiece Respirators - Reusable



854984



854299





854287



854996



857041

- Facepiece is made from soft, lightweight thermoplastic elastomer.
- A standard head harness.
- Use against a variety of gases, vapors and particulate hazards according to NIOSH approvals.
- Comes with reclosable storage bag.

Order No.	Mfg. No. / Description	Price
857044	(07025) 6200 - Medium	$22.98 H
857046	(07026) 6300 - Large	$21.98 H
854287	(2071 P95) Particulate Filter, Sold 2 Per Pack	$7.98 H
854299	(2091 P100) Particulate Filter, Sold 2 Per Pack	$10.98 H
854984	(5N11) Particulate Filter, Sold 10 Per Pack	$29.98 H
854996	(17668) Filter Retainer, Sold 20 Per Pack	$72.98 H
857041	(21674) Organic Vapor Cartridge	$20.98 H
857039	(07047) Organic Vapor/Acid Gas Cartridge	$21.98 H

SAS Bandit™ Halfmask Respirator





- Made from soft blue thermoplastic elastomer (TPE).
- Face piece is supple form fitting and can be worn for hours.
- Headstrap designed for less tension for secure fit.
- Cartridges designed for better vision and balance.
- NIOSH approved.

Order No.	Mfg. No. / Description	Price
812479	(8661-92) Medium, Single	$21.98 G
812479S	(8661-92) Medium, 12 Pack	$316.98 G
812481	(8661-93) Large, Single	$22.98 G
812481S	(8661-93) Large, 12 Pack	$317.98 G

- SAS Bandit™ N95 Pre-Filter
- At least 95% efficient against non-oil particulate aerosols.
- Time use restrictions may apply.
- Do not exceed maximum-use concentrations established by regulatory standards.
- Box of 5 pairs.

Order No.	Mfg. No. / Description	Price
812467	(8661-20)	$13.98 G

3M 6000 Series Full Facepiece Respirators - Reusable



857035



- Lightweight design with silicone face seal enhances comfort and improves durability.
- Wide field of vision helps wearers feel safe.
- Use against a variety of gases, vapors and particulate hazards according to NIOSH approvals.

Order No.	Mfg. No. / Description	Price
857053	(54146) 6800 - Medium	$256.98 H
857054	(54159) 6900 - Large	$256.98 H
856655	(52634) Faceshield Cover	$77.98 H
857035	(37004) 6894 - Nose Cup Assembly	$56.98 H

MSA Ultra-Twin Full Facepiece Respirator



- Has an inturned lip around the edge for a secure, comfortable seal against the face, a large chin cup for easy positioning, five suspension headstraps and roller buckles that hold the facepiece in place while minimizing hair entanglement.
- The wide polycarbonate lens resists scratching and chemical attack and is held in place by a two-piece lens ring which is color-coded to indicate the size of the facepiece.
- Includes: A speaking diaphragm for clear, short-range communications, a nosecup to reduce lens fogging and uses the full line of Comfo cartridges and filters.
- Silicone.
- NIOSH Certified.

Order No.	Mfg. No. / Description	Price
773227	(480259) Medium	$308.98 E

3M 7500 Series Half Facepiece Respirators - Reusable



854300



- This large half facepiece was designed with the wearer in mind.
- Its soft sealing surface, along with a uniquely designed, 3M Cool Flow Exhalation Valve, enhances wearer comfort and face fit.
- Dual-mode head harness.
- Durable and heat-resistant.

Order No.	Mfg. No. / Description	Price
857051	(7503) Large	$51.98 H
854300	(2097 P100) Particulate Filter, Sold 2 Per Pack	$16.98 H

3M Respirator Cleaning Wipes



- For use with the 3M 5000 Series, 6000 Series and 7000 Series Half and Full Facepiece Respirators.
- Individually packed 8" x 10" towelettes are alcohol.
- Conveniently packaged in a dispenser style box that can be wall mounted for easy access.
- Sold 100 per box.

Order No.	Mfg. No. / Description	Price
856659	(07065)	$91.98 H

3M 8212, N95 Particulate Respirator



- Designed for welding, torch cutting, soldering, brazing and working with molten metals.
- Cool Flow Exhalation Valve, cake-resistant filter media, a comfortable form faceseal and fully adjustable straps.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.
- Unique filter media incorporating protective layers designed to be flame resistant as demonstrated per ASTM D2859-96.
- NIOSH Approved.
- Sold 10 per bag.

Order No.	Mfg. No. / Description	Price
856560	(8212 N95)	$113.98 H

3M Dual Cartridge Respirator Assemblies



856625



- NIOSH approved: OV/P95 for use against certain airborne organic vapors and particles.
- Recommended for paint spray, organic vapor or pesticide applications.
- Do not use for asbestos or sandblasting.
- Maintenance free, disposable.

Order No.	Mfg. No. / Description	Price
856611	(52P71) Medium	$41.98 H
856623	(53P71) Large	$41.98 H
856625	(5P71 P95) Particulate Filter, Sold 10 Per Box	$33.98 H

©2014 Donovan Marine, Inc.

3M 8247, R95 Particulate Respirator

3M



- NIOSH Approved.
- Designed to help provide comfortable protection against certain oil and non-oil based particles including those present with nuisance levels of organic vapors, such as solvents, degreasers, and resins.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.
- Carbon filter media provides relief against odors, vapors and other gaseous contaminants for greater wearer comfort.
- Sold 20 per bag.

Order No.	Mfg. No. / Description	Price
856572	(8247 R95)	$122.98 H

SAS Dust Masks



- Soft, flexible nosepiece permits individual adjustment to face.
- One size fits all.
- Compact design easily worn with glasses and goggles.
- Box of 50.

Order No.	Mfg. No. / Description	Price
812453	(2985)	$7.98 G

SAS N95 Flat Respirator



- Low breathing resistance with high filtration efficiency.
- Adjustable nosepiece and inner foam provide a custom seal.
- Maintenance free.
- Box of 20.

Order No.	Mfg. No. / Description	Price
812459	(8617)	$18.98 G

SAS N95 Flat Valved Respirator



- Low breathing resistance with high filtration efficiency.
- Adjustable nosepiece and inner foam provide a custom seal.
- Maintenance free.
- Box of 10.

Order No.	Mfg. No. / Description	Price
812461	(8618)	$17.98 G

3M 8511, N95 Particulate Respirator

3M



- NIOSH Approved.
- Cool Flow Exhalation Valve and M-noseclip.
- Designed to help provide protection against certain non-oil based particles.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.
- Sold 10 per bag.

Order No.	Mfg. No. / Description	Price
856550	(8511 N95)	$33.98 H

SAS N95 Particulate Respirator



- Inner foam provides a custom seal.
- Dual head strap for optimum fit.
- NIOSH Approved.
- Box of 20.

Order No.	Mfg. No. / Description	Price
812455	(8610)	$17.98 G

SAS N95 Valved Particulate Respirator



- Exhalation valve for extra comfort.
- Inner foam provides a custom seal.
- Dual head strap for optimum fit.
- NIOSH Approved.
- Box of 10.

Order No.	Mfg. No. / Description	Price
812457	(8611)	$18.98 G

SAS N95 Respirator



- Inner foam provides a custom seal.
- Dual head strap for optimum fit.
- Maintenance free.
- NIOSH Approved.
- Box of 20.

Order No.	Mfg. No. / Description	Price
812463	(8615)	$17.98 G

3M 8210, N95 Particulate Respirator

3M



- NIOSH Approved.
- Disposable.
- Welded strap attachment, soft nose foam and adjustable noseclip to help provide a custom fit and secure seal.
- Patented filter media with electrostatically charged microfibers help make breathing easier and cooler.
- Sold 20 per bag.

Order No.	Mfg. No. / Description	Price
856630	(8210 N95)	$34.98 H

SAS N95 Valved Respirator



- Exhalation valve for extra comfort.
- New seal cushion provides exceptional comfort.
- Dual head strap for optimum fit.
- Maintenance free.
- NIOSH Approved.
- Box of 10.

Order No.	Mfg. No. / Description	Price
812465	(8711)	$22.98 G

SAS Full Face Respirator



- Silicone skirt offers exceptional durability and comfort.
- Nose cup prevents fogging.
- Wide viewing area offering distortion free visibility and optical clarity.
- 5-Point headstrap.
- Replaceable, polycarbonate lens treated with anti-scratch coating.
- Easily converts to supplied-air respirator without the aid of tools.
- NIOSH Approved.

Order No.	Mfg. No. / Description	Price
812470	(7650-31) Medium	$235.98 G
812473	(7750-61) Large	$235.98 G

Incom Mfg Boat Striping Tape

LIFESAFE



- Conveniently packaged in 1/4", 1/2", 3/4", 1", 2" and 3" widths, each roll.
- 50 feet in length.
- 20 vibrant colors including opaques and metallic finishes.
- Premium marine grade for extra-long life.

Order No.	Mfg. No. / Description	Price
228011	(RE10WH) 1/4" x 50', White	$8.98 H
228013	(RE11WH) 1/2" x 50', White	$14.98 H
228015	(RE12WH) 3/4" x 50', White	$16.98 H
228017	(RE13WH) 1" x 50', White	$19.98 H
228019	(RE14WH) 2" x 50', White	$39.98 H
228021	(RE15WH) 3" x 50', White	$59.98 H
228023	(RE140MG) 1/4" x 50', Bright Gold	$13.98 H
228025	(RE141MG) 1/2" x 50', Bright Gold	$23.98 H
228027	(RE142MG) 3/4" x 50', Bright Gold	$34.98 H
228029	(RE143MG) 1" x 50', Bright Gold	$39.98 H
228031	(RE144MG) 2" x 50', Bright Gold	$69.98 H
228033	(RE145MG) 3" x 50', Bright Gold	$95.98 H
228035	(RE150MS) 1/4" x 50', Metallic Silver	$13.98 H
228037	(RE151MS) 1/2" x 50', Metallic Silver	$22.98 H
228039	(RE152MS) 3/4" x 50', Metallic Silver	$29.98 H
228041	(RE153MS) 1" x 50', Metallic Silver	$37.98 H
228043	(RE154MS) 2" x 50', Metallic Silver	$67.98 H
228045	(RE155MS) 3" x 50', Metallic Silver	$95.98 H
228047	(RE170MC) 1/4" x 50', Metallic Charcoal	$13.98 H
228049	(RE171MC) 1/2" x 50', Metallic Charcoal	$22.98 H
228051	(RE172MC) 3/4" x 50', Metallic Charcoal	$29.98 H
228053	(RE173MC) 1" x 50', Metallic Charcoal	$37.98 H
228055	(RE174MC) 2" x 50', Metallic Charcoal	$67.98 H
228057	(RE175MC) 3" x 50', Metallic Charcoal	$95.98 H
228059	(RE190MR) 1/4" x 50', Metallic Dark Royal Blue	$13.98 H
228061	(RE191MR) 1/2" x 50', Metallic Dark Royal Blue	$22.98 H
228063	(RE192MR) 3/4" x 50', Metallic Dark Royal Blue	$29.98 H
228065	(RE193MR) 1" x 50', Metallic Dark Royal Blue	$37.98 H
228067	(RE194MR) 2" x 50', Metallic Dark Royal Blue	$67.98 H
228069	(RE195MR) 3" x 50', Metallic Dark Royal Blue	$95.98 H
228071	(RE20BL) 1/4" x 50', Black	$8.98 H
228073	(RE21BL) 1/2" x 50', Black	$14.98 H
228075	(RE22BL) 3/4" x 50', Black	$18.98 H

Order No.	Mfg. No. / Description	Price
228077	(RE23BL) 1" x 50', Black	$19.98 H
228079	(RE24BL) 2" x 50', Black	$39.98 H
228081	(RE25BL) 3" x 50', Black	$59.98 H
228083	(RE30BR) 1/4" x 50', Chocolate Brown	$9.98 H
228085	(RE31BR) 1/2" x 50', Chocolate Brown	$12.98 H
228087	(RE32BR) 3/4" x 50', Chocolate Brown	$15.98 H
228089	(RE33BR) 1" x 50', Chocolate Brown	$17.98 H
228091	(RE34BR) 2" x 50', Chocolate Brown	$35.98 H
228093	(RE35BR) 3" x 50', Chocolate Brown	$51.98 H
228095	(RE40DR) 1/4" x 50', Dark Red Boat	$9.98 H
228097	(RE41DR) 1/2" x 50', Dark Red Boat	$14.98 H
228099	(RE42DR) 3/4" x 50', Dark Red Boat	$18.98 H
228101	(RE43DR) 1" x 50', Dark Red Boat	$19.98 H
228102	(RE44DR) 2" x 50', Dark Red Boat	$39.98 H
228105	(RE45DR) 3" x 50', Dark Red Boat	$59.98 H
228107	(RE60BD) 1/4" x 50', Burgundy	$9.98 H
228109	(RE61BD) 1/2" x 50', Burgundy	$12.98 H
228111	(RE62BD) 3/4" x 50', Burgundy	$15.98 H
228113	(RE63BD) 1" x 50', Burgundy	$19.98 H
228114	(RE64BD) 2" x 50', Burgundy	$39.98 H
228117	(RE65BD) 3" x 50', Burgundy	$51.98 H
228119	(RE70SB) 1/4" x 50', Sapphire Blue	$9.98 H
228121	(RE71SB) 1/2" x 50', Sapphire Blue	$14.98 H
228123	(RE72SB) 3/4" x 50', Sapphire Blue	$18.98 H
228125	(RE73SB) 1" x 50', Sapphire Blue	$19.98 H
228127	(RE74SB) 2" x 50', Sapphire Blue	$39.98 H
228129	(RE75SB) 3" x 50', Sapphire Blue	$59.98 H
228131	(RE80FG) 1/4" x 50', Forest Green	$9.98 H
228133	(RE81FG) 1/2" x 50', Forest Green	$14.98 H
228135	(RE82FG) 3/4" x 50', Forest Green	$18.98 H
228137	(RE83FG) 1" x 50', Forest Green	$19.98 H
228139	(RE84FG) 2" x 50', Forest Green	$39.98 H
228141	(RE85FG) 3" x 50', Forest Green	$51.98 H

©2014 Donovan Marine, Inc.

Lifesafe Marine Grade Boat Striping Tape Center

LIFESAFE

- Display size: 14-1/2" W x 48" H x 5" D.
- Merchandiser display wire rack, POP sign, label holder, and pre-printed labels with each full display.
- 11 colors per display - 28 SKU's per display:
  - RE21BL Black Boatstripe Tape 1/2" x 50 ft.
  - RE22BL Black Boatstripe Tape 3/4" x 50 ft.
  - RE23BL Black Boatstripe Tape 1" x 50 ft.
  - RE24BL Black Boatstripe Tape 2" x 50 ft.
  - RE41DR Dark Red Boatstripe Tape 1/2" x 50 ft.
  - RE42DR Dark Red Boatstripe Tape 3/4" x 50 ft.
  - RE43DR Dark Red Boatstripe Tape 1" x 50 ft.
  - RE44DR Dark Red Boatstripe Tape 2" x 50 ft.
  - RE81FG Forest Green Boatstripe Tape 1/2" x 50 ft.
  - RE82FG Forest Green Boatstripe Tape 3/4" x 50 ft.
  - RE83FG Forest Green Boatstripe Tape 1" x 50 ft.
  - RE84FG Forest Green Boatstripe Tape 2" x 50 ft.
  - RE154MS Metallic Silver Boatstripe Tape 2" x 50 ft.
  - RE153MS Metallic Silver Boatstripe Tape 1" x 50 ft.
  - RE143MG Metallic Gold Boatstripe Tape 1" x 50 ft.
  - RE144MG Metallic Gold Boatstripe Tape 2" x 50 ft.
  - RE74SB Sapphire Blue Boatstripe Tape 2" x 50 ft.
  - RE73SB Sapphire Blue Boatstripe Tape 1" x 50 ft.
  - RE193MR Metallic Dark Royal Blue Boatstripe Tape 1" x 50 ft.
  - RE194MR Metallic Dark Royal Blue Boatstripe Tape 2" x 50 ft.
  - RE174MC Metallic Charcoal Boatstripe Tape 2" x 50 ft.
  - RE173MC Metallic Charcoal Boatstripe Tape 1" x 50 ft.
  - RE63BD Burgundy Boatstripe Tape 1" x 50 ft.
  - RE64BD Burgundy Boatstripe Tape 2" x 50 ft.
  - RE34BR Chocolate Brown Boatstripe Tape 2" x 50 ft.
  - RE33BR Chocolate Brown Boatstripe Tape 1" x 50 ft.
  - RE13WH White Boatstripe Tape 1" x 50 ft.
  - RE14WH White Boatstripe Tape 2" x 50 ft.

Order No.	Mfg. No. / Description	Price
228466	(SK314428) POP Display	$855.98 H

Intertape Blue Fine Line Masking Tape

ANCHOR



- Medium/high temperature fine line masking tape.
- Extremely tough yet conformable backing and ultra-high holding power ensure excellent adhesion to the most difficult surfaces.
- PVC backing and highly cured adhesive guarantee extra-sharp paint lines without leaving residue.
- Operating temperature range 40° F to 280° F (4.4° C to 138° C).
- Translucent blue for easy application.
- Tough and conformable.
- Waterproof
- Solvent resistant.
- Repositionable.
- Clean cutting, recyclable core.

Order No.	Mfg. No. / Description	Price
812334	(FM35.3) 3mmx33M	$6.98 G
812336	(FM35.6) 6mmx33M	$7.98 G
812338	(FM35.9) 9mmx33M	$9.98 G

Intertape Orange Mask Marine Masking Tape

ANCHOR



- Innovative high performance masking tape designed specifically for the marine composites industry.
- Highly conformable and flexible.
- Tear, moisture and solvent resistant.
- UV resistant up to 72 hours.
- Great for bottom painting or in-mold masking.

Order No.	Mfg. No. / Description	Price
812304	1"	$7.98 G
812316	2"	$12.98 G

Lifesafe Powerboat Tape Center

LIFESAFE

- Display size: 14-1/2" W x 48" H x 5" D.
- 11 different items.
- Merchandiser display wire rack, POP sign, label holder, and pre-printed labels with each full display.
- Total # of packs per display - 46 pieces:
  - Boat cover bimini bandage - Size: 3" x 15', # Packs/Display: 6 packs
  - White rigging tape w/adhesive - Size: 3/4" x 108', # Packs/Display: 4 packs
  - White anti-chafing tape white - Size: 1" x 25', # Packs/Display: 4 packs
  - Super seal tape - Size: 1" x 16', # Packs/Display: 4 packs
  - White rigging tape self-bonding - Size: 1" x 15', # Packs/Display: 4 packs
  - Black soft textured vinyl tape - Size: 2" x 15', # Packs/Display: 2 packs
  - Gray soft textured vinyl tape - Size: 2" x 15', # Packs/Display: 2 packs
  - White soft textured vinyl tape - Size: 2" x 15', # Packs/Display: 2 packs
  - Black soft textured vinyl strips - Size: 6" x 21", # Packs/Display: 8 packs
  - Weather seal - Size: 1/8"x 3/8"x 10', # Packs/Display: 6 packs
  - 11 black extra-thick hatch tape - Size: 1/4"x 3/4"x 7', # Packs/Display: 4 packs

Order No.	Mfg. No. / Description	Price
228498	(SK3170) POP Display	$522.98 H

Lifesafe Power/Sail Tape Center

LIFESAFE

- Display size: 14-1/2" W x 48" H x 5" D.
- 12 different items.
- Merchandiser display wire rack, POP sign, label holder, and pre-printed.
- Total # of packs per display - 50 pieces:
  - Sail patch tape - Size: 3" x 15', # Packs/Display: 3 packs
  - Boat cover bimini bandage - Size: 3" x 15', # Packs/Display: 3 packs
  - White rigging tape w/adhesive - Size: 3/4" x 108', # Packs/Display: 4 packs
  - Black anti-slip safety grit tape - Size: 2" x 15', # Packs/Display: 2 packs
  - Gray soft textured vinyl tape - Size: 2" x 15', # Packs/Display: 2 packs
  - Red/silver highly reflective tape - Size: 2" x 10', # Packs/Display: 3 packs
  - White SOS silicone marine tape - Size: 1" x 10', # Packs/Display: 2 packs
  - Super seal tape - Size: 1" x 16', # Packs/Display: 4 packs
  - Vinyl foam hatch tape - Size: 1/8" x 3/4" x 7', # Packs/Display: 4 packs
  - Black soft textured vinyl strips - Size: 6" x 21", # Packs/Display: 8 packs
  - White butyl caulking tape - Size: 3/4"x 1/8"x 20', # Packs/Display: 3 packs
  - White soft textured vinyl strips - Size: 4" x 9", # Packs/Display: 12 packs

Order No.	Mfg. No. / Description	Price
228500	(SK3172) POP Display	$639.98 H

Intertape Blue Mask Marine Masking Tape

ANCHOR



- For use in hull, exterior, deck and cabin applications requiring UV resistance.
- Smooth backing for superior paint lines.
- Clean, easy removal even after exposure to sunlight for 14 days.
- Ideal for outdoor masking.

Order No.	Mfg. No. / Description	Price
812328	(PT14-36) 1"	$6.98 G
812330	(PT14-38) 2"	$10.98 G

3M Scotch® Solvent Resistant Masking Tape - 2040



- Delivers excellent, conformable adhesion with high holding power.
- A strong backing reduces tearing.
- Use with most solvent-based and lacquer coatings to produce an excellent tape line.
- Note: Not for extended outdoor use.

Order No.	Mfg. No. / Description	Price
855190	(02991) 3/4" x 60 yds., 48 Rolls Per Case	$5.98 H
855203	(02992) 1" x 60 yds., 36 Rolls Per Case	$7.98 H
855215	(02993) 1-1/2" x 60 yds., 24 Rolls Per Case	$11.98 H
855239	(04365) 2" x 60 yds., 24 Rolls Per Case	$16.98 H

3M Scotch® Performance Masking Tape - 233 +



- Highly conformable, provides the best adhesive transfer resistance, hugs curves, contours and provides outstanding paint lines.
- Goes on quickly and easily, sticks at a touch and stays put.
- Perfectly balanced to give outstanding masking results.

Order No.	Mfg. No. / Description	Price
855179	(26334) 3/4" x 60 yds., 48 Rolls Per Case	$7.98 H
855178	(26336) 1" x 60 yds., 24 Rolls Per Case	$8.98 H
855177	(26338) 1-1/2" x 60 yds., 16 Rolls Per Case	$12.98 H
855140	(26340) 2" x 60 yds., 12 Rolls Per Case	$16.98 H

3M Highland™ Masking Tape - 2727



- An automotive refinish masking tape designed with balanced construction for consistent unwind, conformability and easy tear.

Order No.	Mfg. No. / Description	Price
855320	(06544) .94" x 60 yds., 24 Rolls Per Case	$11.98 H
855322	(06543) 1.89" x 60 yds., 24 Rolls Per Case	$17.98 H

3M Scotch® Fine Line Tape - 218



- Polypropylene film with special processed backing that allows taping over freshly painted acrylic lacquer or enamel surfaces sooner and with less chance of imprint damage.
- Provides finest color separation line possible in multi-color striping jobs.
- Note: Not for extended outdoor use.

Order No.	Mfg. No. / Description	Price
855330	(06301) 1/4" x 60 yds., 12 Rolls Per Case	$24.98 H
855227	(04698) 1/2" x 60 yds., 72 Rolls Per Case, Bulk	$20.98 H
855378	(04699) 3/4" x 60 yds., 48 Rolls Per Case, Bulk	$24.98 H
855380	(04700) 1" x 60 yds., 36 Rolls Per Case, Bulk	$27.98 H

3M Silver Duct Tape - 3939



- The all-around holding, splicing, masking, patching, sealing and seaming tape.
- Polyethylene coated cloth backing with rubber adhesive.
- High tack, conformability, strength and easy tear.

Order No.	Mfg. No. / Description	Price
855582	(06975) 2" x 60 yds., 24 Rolls Per Case	$18.98 H

3M Scotch® Long-Mask Masking Tape - 2090 - Bright Blue Color



- This tape removes cleanly without adhesive transfer or surface damage for up to 14 days, even in direct sunlight.
- It is a medium adhesion tape that is ideal for painted walls and trim, woodwork, glass and metal.

Order No.	Mfg. No. / Description	Price
855481	(06817) 3/4" x 60 yds., 48 Rolls Per Case	$5.98 H
855493	(06818) 1" x 60 yds., 36 Rolls Per Case	$6.98 H
855506	(06819) 1-1/2" x 60 yds., 24 Rolls Per Case	$10.98 H
855518	(06820) 2" x 60 yds., 24 Rolls Per Case	$12.98 H

3M Scotch® Masking Tape - 2050



- This tape can be removed cleanly for up to 3 days.
- It features medium-high adhesion and is ideal for window, door and wall trim and for masking cabinets, carpet, and vinyl flooring.

Order No.	Mfg. No. / Description	Price
855126	(05617) 3/4" x 60 yds., 48 Rolls Per Case	$4.99 H
855138	(05618) 1" x 60 yds., 36 Rolls Per Case	$4.97 H
855164	(05620) 2" x 60 yds., 24 Rolls Per Case	$8.98 H


3M Scotch® Brand Safe-Release Painters Masking Tape - 2080



- This tape removes cleanly without adhesive transfer or surface damage for up to 60 days - even in direct sunlight.
- It is a low-medium adhesion tape that is ideal for smooth, freshly painted surfaces, striping, vinyl coated wallpaper and glass.

Order No.	Mfg. No. / Description	Price
855520	(79748) 1" x 60 yds., 36 Rolls Per Case	$11.98 H
855532	(79750) 2" x 60 yds., 24 Rolls Per Case	$19.98 H

3M Scotch® Plastic Tape - 471



- A blue vinyl plastic tape that is highly conformable and is excellent for masking off areas for detailed boat and boot stripe painting.
- Also excellent for masking over rivets or aluminum boats.

Order No.	Mfg. No. / Description	Price
855405	(03120) 3/4" x 36 yds., 48 Rolls Per Case	$23.98 H
855406	(03121) 1" x 36 yds., 36 Rolls Per Case	$26.98 H

3M Scotch® Transparent Box Sealing Tape - 3750



- Strong conformable film backing and hot melt synthetic rubber-resin adhesive system provides a consistent uniform seal.
- Resists center seam splitting, assures reliable closures.
- Seals out moisture, dust and dirt.

Order No.	Mfg. No. / Description	Price
855657	(91765) 1.89" x 60 yds., 36 Rolls Per Case	$9.98 H

Polyfilm Rolls - Clear

Order No.	Mfg. No. / Description	Price
440747	(410C) 10' x 100', 4 Mil	$52.98 I
440759	(220C) 20' x 200', 2 Mil	$124.98 I
440761	(420C) 20' x 100', 4 Mil	$109.98 I
440773	(620C) 40' x 200', 4 Mil	$414.98 I

©2014 Donovan Marine, Inc.

Lifesafe Scrim Tac Sail Emergency Repair Tape



- An essential on board emergency repair tape.
- Designed to allow for quick emergency repairs by removing protective liner to expose aggressive quick stick UV Resistant acrylic adhesive supported by an extremely strong scrim reinforced carrier.
- Formulated to withstand extreme conditions while maintaining suppleness and impermeability.
- Adheres to most materials used in the manufacturing of sails.
- To achieve maximum repair benefits, laminate the ScrimTac Tape both top and bottom on the area of sail being repaired.

Order No.	Mfg. No. / Description	Price
228211	(RE1163) 2" x 10 yds.	$25.98 H

Lifesafe Self Bonding Rigging Tape



- Self Amalgamating Tapes.
- No adhesive tape with protective release liner which bonds to itself and not fittings.
- Ideal for rigging screws, turn buckles, and for emergency repairs.

Order No.	Mfg. No. / Description	Price
228267	(RE3867) White, 1" x 15'	$15.98 H

Lifesafe Sail Patch Repair Tape



- Super clear U.V. stabilized.
- Excellent resistance to tearing in any direction, very aggressive adhesive, works on damp sails.
- Transparent color suitable for any sail.
- Tape is light weight and flexible.

Order No.	Mfg. No. / Description	Price
228243	(RE3843) 3" x 15'	$19.98 H

Lifesafe Anti-Slip Safety Grit Tape



- Durable in wet or dry conditions.
- Pre-cut, self-adhesive strips are easy to use, simply peel and stick.
- Improves footing on metal trailer frames during cleaning, maintenance and boat launching.

Order No.	Mfg. No. / Description	Price
228233	(RE36029) Black, 2" x 15'	$19.98 H

Incom Mfg Soft Textured Vinyl Traction Tape



- Non skid.
- Self-adhesive.
- 2 x 15' roll.

Order No.	Mfg. No. / Description	Price
228329	(RE3954) Gray	$24.98 H

Lifesafe Super Seal Emergency Repair Tape



- Emergency repairs, stops leaks, forms solid rubber wrap.
- Strips clean, leaves no messy adhesive or residue.
- Holds 100 psi at 220° F.
- Works wet, dry, greasy or dirty.
- Shrinks about 3% to form an airtight, waterproof seal.

Order No.	Mfg. No. / Description	Price
228270	(RE3869) 1" X 16'	$13.98 H

Lifesafe Boat Cover Reinforcing and Repair Tape



- An ideal way to prolong the life of a boat cover.
- Adds strength and tear-resistance along seams, stress points, creases and corners.
- Resists stretching, wrinkling and tearing.
- Use it as extra padding on stress points around windshields or trolling motors.
- Also great for bimini tops, sails, canvas awning, and pool covers.

Order No.	Mfg. No. / Description	Price
228203	(RE1136) 8-3/4" x 10'	$49.98 H

Lifesafe Mastboot Tape



- MastBoot installs without un-stepping the mast.
- It protects against moisture by bonding itself into a solid piece of rubber.
- It conforms to irregular surfaces and leaves no sticky residue.

Order No.	Mfg. No. / Description	Price
228297	(RE3940) 4" x 40"	$22.98 H

Lifesafe Traction Strips (Non-Skid)


228273


228285

- Soft textured vinyl traction tape.
- Provides traction when boarding the boat or stepping on a trailer.

Order No.	Mfg. No. / Description	Price
228273	(RE3897WH) White, 4" x 9'	$10.98 H
228285	(RE3904BL) Black, 6" x 21'	$9.98 H
228328	(RE3953) Black, 2" x 15'	$21.98 H
228330	(RE3955) White, 2" x 15'	$34.98 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering & Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

3M Scotch® Weather Resistant Masking Tape - 225



- The silver colored coating on the backing of this crepe paper tape reflects ultraviolet light to provide weather resistant for up to a month's time.
- Prevents slivering and adhesive transfer during unmasking.
- Silver.
- 48 rolls per case.

Order No.	Mfg. No. / Description	Price
855277	(02828) 3/4" x 60 yds.	$38.98 H

eGear Duct Tape



- Each roll 2" wide x 71" long.
- 2 rolls per pack.
- Weight: .7 oz.

Order No.	Mfg. No. / Description	Price
586410	(26-403-502)	$2.98 Q

3M Hand-Masker™ Pre-Taped Plastic Drop Cloth



- A convenient, pre-taped plastic film which unfolds to cover and protect various surfaces while painting.
- Pre-folded high density plastic drop cloth pre-taped with 3M 2090 Long-Mask tape.

Order No.	Mfg. No. / Description	Price
855900	(06696) 24" x 30 yds.	$12.98 H
855901	(06697) 35" x 25 yds.	$17.98 H

Intertape Hand Masking Film



- Premium hand masking film designed for the marine and composites industry.
- Durable film resists tearing; requires less tape.
- Film and tape are applied simultaneously.
- Solvent resistant.
- Designed to work with multiple hand dispensers.
- Great for bottom painting or in-mold masking.

Order No.	Mfg. No. / Description	Price
812364	(HMF-24) 24" x 180'	$10.98 G
812366	(HMF-48) 48" x 180'	$17.98 G
812369	(HMF-72) 72" x 90'	$13.98 G
812378	(HMF-99) 99" x 90'	$16.98 G

Masking Paper



- 36" wide x 400'

Order No.	Mfg. No. / Description	Price
440800	(140736)	$49.98 I

3M All-Weather Corrosion Protection Tape



- ScotchrapT 50 and 51 tapes are tough, polyvinyl chloride based tapes with special high tack adhesives formulated to resist corrosion of metal piping systems above and below ground, fittings and joints on all mill-coated pipe and electrical conduit systems.

Order No.	Mfg. No. / Description	Price
005238	(054007-42807) 2" x 100'	$39.98 B

3M Utility Grade Masking Paper - Green



- This masking paper is designed for non-critical masking applications or when paint is applied by brush or roller.
- This paper is not generally recommended for spray painting applications.
- 12 rolls per case.
- 18" x 180'.

Order No.	Mfg. No. / Description	Price
855772	(06904)	$8.98 H

3M Marine Hand Masker™ Kit M3000 Kit



- Kit consists of:
  (1) 3M Hand Masker Dispenser M3000
  (1) Tack down dispenser 06787
  (1) 12 inch blade 06802.

Order No.	Mfg. No. / Description	Price
855850	(06788)	$117.98 H

3M Hand-Masker™ Pre-Folded Masking Film



- Pre-folded, high-density, nonporous film for paint masking and paint overspray protection.
- Flake resistant for multiple coat use.
- May be used with lacquers.
- 12 rolls per case.

Order No.	Mfg. No. / Description	Price
855859	(06845) 24" x 180', MF-24	$12.98 H
855873	(06848) 48" x 180', MF-48	$23.98 H
855897	(77406) 72" x 90', MF-72	$16.98 H
855899	(77407) 99" x 90', MF-99	$27.98 H

3M Marine Scotchblok™ Masking Paper

- It is tightly bonded, specially coated and manufactured specifically for automotive aftermarket applications.
- It is designed to be used with 3M masking tapes and 3M masking equipment.
- 12 rolls per case.

Order No.	Mfg. No. / Description	Price
855784	(06732) 12" x 180'	$27.98 H

©2014 Donovan Marine, Inc.

Camco Powerboat Stands



- Offers the highest quality construction for dependable support.
- Bases are constructed of a solid, cold-rolled steel tubing.
- Stackable design helps save space.
- Color code sticker helps match the base with corresponding size swivel top.

Order No.	Mfg. No. / Description	Price
480710	(40824C) 18" - 25"	$107.98 E
480711	(40824) Stand Only 18" - 25"	$53.98 E
480731	(40834) Stand Only 23" - 37"	$85.98 E
480705	(40823C) 25" - 38"	$119.98 E
480706	(40823) Stand Only 25" - 38"	$59.98 E
480701	(40822) Stand Only 28" - 46"	$60.98 E
480700	(40822C) 28" - 46"	$127.98 E
480726	(40833) Stand Only 35" - 52"	$88.98 E
480695	(40820C) 41" - 58"	$143.98 E
480696	(40820) Stand Only 41" - 58"	$75.98 E
480721	(40832) Stand Only 46" - 65"	$97.98 E
480716	(40831) Stand Only 64" - 81"	$120.98 E

Camco Boat Stand Swivel Tops



- Constructed of a threaded, hollow, zinc-plated steel rod; our Swivel Tops are lightweight and easy to haul without sacrificing weight-load capacity.
- They also feature rounded hardware rather than straight-edged which helps to prevent cutting and scraping hands.
- Thick plywood head provides better rot resistance and cushion.

Order No.	Mfg. No. / Description	Price
480735	(40840) 27-1/2"	$67.98 E
480736	(40841) 22-1/2"	$60.98 E
480737	(40842) 14-1/2"	$56.98 E

Camco Swivel Top Replacement Heads



- Features rounded hardware rather than straight-edged which helps to prevent cutting and scraping hands.
- Thick plywood head provides better rot resistance and cushion.

Order No.	Mfg. No. / Description	Price
480748	(40845) Yellow, For 480735	$36.98 E
480749	(40846) Green, For 480736	$36.98 E
480750	(40847) Burgundy, For 480737	$36.98 E

Camco Sailboat Stands



- Offers the highest quality construction for dependable support.
- Bases are constructed of a solid, cold-rolled steel tubing.
- Nestable design helps save space.
- Color code sticker helps match the base with corresponding size swivel top.

Order No.	Mfg. No. / Description	Price
480715	(40831C) 64" - 81"	$186.98 E
480720	(40832C) 48" - 65"	$165.98 E
480725	(40833C) 35" - 52"	$155.98 E
480730	(40834C) 23" - 37"	$145.98 E

Camco Boat Stand Vee Tops



- Constructed of a threaded, hollow, zinc-plated steel rod; our Vee Tops are lightweight and easy to haul without sacrificing weight-load capacity.
- They also feature rounded hardware rather than straight-edged which helps to prevent cutting and scraping hands.
- Designed specifically for front hull support on sailboats and some larger deep keel powerboats.

Order No.	Mfg. No. / Description	Price
480740	(40850) 27-1/2"	$67.98 E
480742	(40851) 22-1/2"	$60.98 E
480744	(40852) 14-1/2"	$56.98 E

Camco Stabilizer Boat Stand Pads



- Designed to keep stands from sinking into soft ground, gravel or dirt.
- Interlocking design for convenient storage and a built-in handle for ease of use.
- Solidly constructed of durable polypropylene with UV inhibitors and an eggcrate design which aids water drainage.

Order No.	Mfg. No. / Description	Price
480745	(44592) 24 Per Pack	$65.98 E

Camco Mfg Keel Stand Bases & Top

- Use Camco keel stands instead of conventional wood blocking.
- Use one keel stand for each 10,000 pounds of boat weight.
- A minimum of two keel stands is recommended.

Order No.	Mfg. No. / Description	Price
480670	(40800) 15" - 23"	$74.98 E
480675	(40801) 23" - 30"	$120.98 E
480680	(40802) Top 14"	$70.98 E

Hostar Marine Boat Stand



- Tripod design maximizes stand strength, ensures stability on uneven yard surfaces.
- Continuous base prevents legs from spreading...helps prevent sinking into gravel or asphalt paving.
- Heavy-duty angle iron construction won't twist or bend.
- Choice of durable painted finish, or tough hot-dipped galvanizing for years of maintenance-free use.
- Lightweight, zinc-coated screw with handle (rated at 12,500 lbs.) for little maintenance, easier handling and longer life.
- 12"x12" finished plywood pads protect hull without slipping.
- HOSTAR's unique adjustable keel stands are designed to support the boat's weight.
- Can be used alone or combined with wood blocking under the keel.
- Stackable.

Power Boat Stands

Order No.	Mfg. No. / Description	Price
202605	(PBS3P) 40" - 56" H	$131.98 F
202629	(PBS2P) 29" - 45" H	$107.98 F
202631	(PBS1P) 23" - 34" H	$104.98 F
202643	(PBS0P) 18" - 26" H	$104.98 F

Sail Boat Stands

Order No.	Mfg. No. / Description	Price
202718	(SBS2P) 29" - 45" H	$129.98 F
202730	(SBS3P) 40" - 56" H	$138.98 F
202733	(SBS4P) 50" - 66" H	$141.98 F
202744	(SBS5P) 64" - 80" H	$144.98 F
202756	(SBS6P) 76" - 92" H	$165.98 F

- Blocking Wood for Boat Stand

Order No.	Mfg. No. / Description	Price
202819	(B8) 8" x 8" x 22"	$26.98 F

Hostar Marine Boat Stand Top



Order No.	Mfg. No. / Description	Price
202504	(VHEAD) V-head	$58.98 F

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering & Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Sold in Boxes of 5 Cards Only! Priced by the Card

Marpac Phillips Pan Sheet Metal Screws



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5200	4 x 1/2	6	$1.89 G
7-5205	6 x 1/2	8	$2.19 G
7-5210	6 x 3/4	8	$1.89 G
7-5215	8 x 1/2	7	$2.19 G
7-5220	8 x 3/4	7	$1.89 G
7-5225	8 x 1	6	$1.89 G
7-5230	8 x 1-1/2	5	$2.19 G
7-5235	10 x 1/2	6	$2.19 G
7-5240	10 x 3/4	6	$2.19 G
7-5245	10 x 1	5	$2.19 G
7-5250	10 x 1-1/2	4	$2.19 G
7-5255	12 x 1	4	$3.09 G
7-5260	12 x 1-1/2	3	$3.09 G
7-5261	12 x 2	3	$3.09 G
7-5265	14 x 1	3	$2.19 G

Marpac Phillips Oval Sheet Metal Screws



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5270	6 x 1/2	8	$2.19 G
7-5275	6 x 3/4	8	$1.89 G
7-5280	6 x 1	7	$1.89 G
7-5284	8 x 1/2	4	$1.89 G
7-5285	8 x 3/4	7	$1.89 G
7-5290	8 x 1	6	$1.89 G
7-5295	8 x 1-1/4	6	$1.89 G
7-5300	8 x 1-1/2	5	$2.19 G
7-5305	10 x 3/4	6	$2.19 G
7-5310	10 x 1	5	$2.19 G
7-5315	10 x 1-1/4	5	$2.19 G
7-5320	10 x 1-1/2	4	$2.19 G
7-5325	10 x 2	4	$2.19 G
7-5330	12 x 1	4	$2.69 G
7-5335	12 x 1-1/2	3	$2.69 G
7-5340	12 x 2	3	$2.69 G
7-5345	14 x 1-1/2	3	$2.69 G
7-5350	14 x 2	2	$2.69 G
7-5355	14 x 2-1/2	2	$2.69 G

Marpac Flat Washers



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5450	#6	50	$1.89 G
7-5455	#8	50	$1.89 G
7-5460	#10	25	$1.89 G
7-5465	1/4"	15	$1.89 G

Marpac Phillips Oval Machine Screws with Nut



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5360	6-32 x 1	6	$2.19 G
7-5365	8-32 x 1	5	$2.19 G
7-5370	8-32 x 1-1/2	4	$2.19 G
7-5375	10-24 x 1	4	$2.69 G
7-5380	10-24 x 1-1/2	4	$2.49 G
7-5385	10-24 x 2	3	$2.69 G
7-5387	10-24 x 3	2	$3.29 G
7-5390	1/4-20 x 1	3	$2.69 G
7-5395	1/4-20 x 1-1/2	2	$2.69 G
7-5400	1/4-20 x 2	2	$2.69 G
7-5405	1/4-20 x 3	2	$2.69 G
7-5407	1/4-20 x 4	2	$5.79 G

Marpac Hex Head Cap Screws



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5770	1/4-20 x 1	3	$3.99 G
7-5575	1/4-20 x 1-1/2	2	$3.99 G
7-5580	1/4-20 x 2	2	$3.99 G
7-5585	1/4-20 x 2-1/2	2	$3.09 G
7-5590	1/4-20 x 3	2	$3.09 G

Marpac Phillips Pan Machine Screws with Nut



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5410	8-32 x 1	6	$1.89 G
7-5415	8-32 x 1-1/2	5	$2.19 G
7-5420	10-24 x 1	5	$2.69 G
7-5425	10-24 x 1-1/2	4	$2.49 G
7-5430	10-24 x 2	4	$2.69 G
7-5435	1/4-20 x 1-1/2	3	$3.09 G
7-5440	1/4-20 x 2	3	$3.09 G
7-5445	1/4-20 x 3	2	$3.09 G
7-5447	1/4-20 x 4	2	$5.99 G

Marpac Lock Washers



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5470	#6	40	$1.89 G
7-5475	#8	40	$1.89 G
7-5480	#10	25	$1.89 G
7-5485	1/4"	15	$1.89 G

Marpac Wing Nuts



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5545	8-32	4	$3.09 G
7-5550	10-24	4	$3.09 G
7-5555	1/4-20	3	$3.09 G

Marpac Finished Hex Nuts



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5510	6-32	18	$1.89 G
7-5515	8-32	15	$2.19 G
7-5520	10-24	12	$2.49 G
7-5525	1/4-20	10	$2.69 G

Marpac Well Nuts



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5560	1/4-20 x 5/8"	3	$3.29 G
7-5565	1/4-20 x 1"	2	$3.29 G
7-5566	10-24 x 3/4"	3	$5.49 G

Marpac Nylon Lock Nuts



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5530	8-32	4	$2.49 G
7-5535	10-24	4	$2.49 G
7-5540	1/4-20	3	$2.49 G

Marpac Finishing Washers



- Stainless steel.

Order No.	Description	Pieces Per Card	Price
7-5490	#6	20	$1.89 G
7-5495	#8	18	$1.89 G
7-5500	#10	15	$1.89 G
7-5505	1/4"	7	$2.19 G

Lock Washers



- Stainless steel.
- Sold in packs of 100.

Order No.	Description	Price
730956	#6	$3.60 F
730968	#8	$4.16 F
730970	#10	$4.85 F
730982	1/4"	$7.98 F
730994	5/16"	$10.98 F
731009	3/8"	$18.98 F
731011	1/2"	$24.98 F

Finishing Washers



- Stainless steel.
- Sold in packs of 100.

Order No.	Description	Price
731023	#6	$5.98 F
731035	#8	$6.98 F
731047	#10	$8.98 F
731048	#12	$13.98 F
731058	1/4"	$14.98 F

Lag Bolts



- Sold in boxes of 25 only.

Order No.	Description	Price
731213	1/4" x 4"	$42.98 F

Stainless Steel Cotter Pins



Order No.	Description		Price
731302	1/8" x 1"	100 Per Box	$23.98 F
731314	1/8" x 1-1/2"	100 Per Box	$30.98 F
731316	1/8" x 2"	100 Per Box	$32.98 F
731338	5/32" x 1-1/2"	100 Per Box	$49.98 F
731364	3/16" x 2"	100 Per Box	$83.98 F
731403	1/4" x 3"	Sold Each	$1.94 F

Handi-Man Marine Cotter Pin/Ring Kit



Kit contains:
(20) 1/6 x 1 Cotter Pin
(6) 3/32 x 2 Cotter Pin
(8) 1/8 x 2 Cotter Pin
(20) 7/16 Cotter Ring
(20) 5/8 Cotter Ring
(8) 3/4 Cotter Ring

Order No.	Mfg. No.	Price
731590	(HP104)	$29.98 I

Fender Washers



- Stainless steel.
- Sold in packs of 100.

Order No.	Description	Price
730906	3/16" x 1" OD	$19.98 F
730918	1/4" x 1" OD	$22.98 F
730920	1/4" x 1-1/4" OD	$29.98 F
730932	5/16" x 1-1/2" OD	$44.98 F
730944	1/2" x 2" OD	$33.98 F

Standard Hex Nuts



- Stainless steel.
- Sold in packs of 100 unless otherwise noted.

Order No.	Description	Price
730300	6-32	$7.98 F
730312	8-32	$7.98 F
730324	10-24	$7.98 F
730336	1/4"-20	$13.98 F
730348	5/16"-18	$22.98 F
730350	3/8"-16	$21.98 F
730363	1/2"-13 (50 Per Pack)	$24.98 F

Heavy Hex Nuts



- Stainless steel.
- American (Coarse) Thread.
- Sizes by cut thread ID not shaft size.
- Sold each.

Order No.	Description	Price
730704	5/8"-11	$2.43 F
771510	3/4"-10	$3.98 B
730742	1-1/8"-7	$16.98 F
730754	1-1/4"-7	$22.98 F

Flat Washers



- Stainless steel.
- Sold in packs of 100 unless otherwise noted.

Order No.	Description	Price
730805	#6	$4.49 F
730817	#8	$4.41 F
730829	#10	$4.57 F
730831	1/4"	$5.98 F
730843	5/16"	$8.98 F
730855	3/8"	$13.98 F
730868	1/2" (50 Per Pack)	$15.98 F
730878	5/8" (50 Per Pack)	$29.98 F

Nylon Lock Nuts



- Stainless steel.
- Sold in packs of 100 unless otherwise noted.

Order No.	Description	Price
730401	6-32	$9.98 F
730413	8-32	$13.98 F
730425	10-24	$13.98 F
730437	1/4"-20	$20.98 F
730449	5/16"-18	$19.98 F
730451	3/8"-16	$23.98 F
730464	1/2"-13 (50 Per Pack)	$55.98 F

Hex Head Screw

- Stainless steel, heavy duty.

Order No.	Description	Price
771522	3/4" - 10 x 3-3/4"	$8.98 B

Marpac Cotter Pins



- Sold in Boxes of 5 Bags Only! Priced by the Card.
- Stainless steel.

Order No.	Description		Price
7-5005	1/16 x 1/2	24 Pieces Per Package	$2.69 G
7-5010	1/16 x 3/4	18 Pieces Per Package	$2.69 G
7-5015	1/16 x 1	18 Pieces Per Package	$2.69 G
7-5020	1/16 x 1-1/2	10 Pieces Per Package	$2.69 G
7-5035	3/32 x 3/4	8 Pieces Per Package	$2.69 G
7-5040	3/32 x 1	8 Pieces Per Package	$2.69 G
7-5045	3/32 x 1-1/2	6 Pieces Per Package	$2.69 G
7-5055	1/8 x 3/4	7 Pieces Per Package	$2.69 G
7-5060	1/8 x 1	6 Pieces Per Package	$2.69 G
7-5065	1/8 x 1-1/4	4 Pieces Per Package	$2.69 G
7-5070	1/8 x 1-1/2	4 Pieces Per Package	$2.69 G
7-5075	1/8 x 1-3/4	4 Pieces Per Package	$2.69 G
7-5080	1/8 x 2	3 Pieces Per Package	$2.69 G
7-5085	1/8 x 2-1/2	3 Pieces Per Package	$2.69 G
7-5090	5/32 x 1-1/2	3 Pieces Per Package	$2.69 G
7-5095	5/32 x 2	3 Pieces Per Package	$2.69 G
7-5100	5/32 x 2-1/2	2 Pieces Per Package	$2.69 G

Order No.	Description	Price
7-5000	Assorted, 8 Per Display Pack	$4.39 G

©2014 Donovan Marine, Inc.

Philips Head Self-Tapping Screws - Pan Head



- Stainless steel.
- Sold in boxes of 100 only.

Order No.	Description	Price
727012	#4 x 1/2"	$6.98 F
727025	#4 x 3/4"	$7.98 L
727030	#4 x 1"	$6.98 L
727033	#6 x 3/8"	$7.98 L
727036	#6 x 1/2"	$7.98 L
727040	#6 x 5/8"	$7.98 L
727050	#6 x 3/4"	$7.98 L
727062	#6 x 1"	$9.98 L
728068	#6 x 1-1/4"	$11.98 L
727101	#8 x 1/2"	$9.98 L
727114	#8 x 5/8"	$10.98 L
727125	#8 x 3/4"	$10.98 L
727137	#8 x 1"	$11.98 L
727149	#8 x 1-1/4"	$13.98 L
727151	#8 x 1-1/2"	$16.98 L
727175	#10 x 1/2"	$11.98 L
727184	#10 x 5/8"	$12.98 L
727199	#10 x 3/4"	$15.98 L
727202	#10 x 1"	$15.98 L
727214	#10 x 1-1/4"	$19.98 L
727223	#10 x 1-1/2"	$21.98 L
727238	#10 x 2"	$27.98 L
727252	#12 x 3/4"	$23.98 L
727264	#12 x 1"	$28.98 L
727276	#12 x 1-1/4"	$28.98 L
727288	#12 x 1-1/2"	$30.98 L
727290	#12 x 2"	$43.98 L
727327	#14 x 3/4"	$33.98 L
727339	#14 x 1"	$38.98 L
727341	#14 x 1-1/4"	$44.98 L
727353	#14 x 1-1/2"	$48.98 L
727365	#14 x 2"	$65.98 L
727377	#14 x 2-1/2"	$74.98 L

Philips Head Self-Tapping Screws - Oval Head



- Stainless steel.
- Sold in boxes of 100 only.

Order No.	Description	Price
727517	#4 x 1/2"	$6.98 F
727529	#4 x 3/4"	$7.98 L
727530	#4 x 1"	$8.98 L
727531	#6 x 1/2"	$7.98 L
727539	#6 x 5/8"	$7.98 L
727555	#6 x 3/4"	$7.98 L
727567	#6 x 1"	$9.98 L
727590	#6 x 1-1/2"	$13.98 L
727606	#8 x 1/2"	$9.98 L
727611	#8 x 5/8"	$10.98 L
727620	#8 x 3/4"	$10.98 L
727632	#8 x 1"	$11.98 L
727644	#8 x 1-1/4"	$13.98 L
727656	#8 x 1-1/2"	$16.98 L
727660	#8 x 2"	$24.98 L
727670	#10 x 1/2"	$13.98 L
727680	#10 x 5/8"	$14.98 L
727694	#10 x 3/4"	$13.98 L
727707	#10 x 1"	$15.98 L
727719	#10 x 1-1/4"	$19.98 L
727721	#10 x 1-1/2"	$21.98 L
727733	#10 x 2"	$27.98 L
727738	#10 x 3"	$44.98 L
727757	#12 x 3/4"	$23.98 L
727769	#12 x 1"	$28.98 L
727770	#12 x 1-1/4"	$28.98 L
727783	#12 x 1-1/2"	$30.98 L
727795	#12 x 2"	$43.98 L
727800	#12 x 2-1/2"	$53.98 L
727808	#12 x 3"	$71.98 L
727820	#14 x 3/4"	$33.98 L
727834	#14 x 1"	$38.98 L
727846	#14 x 1-1/4"	$44.98 L
727858	#14 x 1-1/2"	$48.98 L
727860	#14 x 2"	$65.98 L
727872	#14 x 2-1/2"	$74.98 L
727884	#14 x 3"	$90.98 L

Philips Head Self-Tapping Screws - Flat Head



- Stainless steel.
- Sold in boxes of 100 only.

Order No.	Description	Price
728014	#4 x 1/2"	$6.98 L
728019	#4 x 3/4"	$7.98 L
728024	#4 x 1"	$8.98 L
728038	#6 x 1/2"	$7.98 L
728045	#6 x 5/8"	$7.98 L
728053	#6 x 3/4"	$7.98 L
728064	#6 x 1"	$9.98 L
728070	#6 x 1-1/4"	$11.98 L
728075	#6 x 1-1/2"	$13.98 L
728103	#8 x 1/2"	$9.98 L
728109	#8 x 5/8"	$10.98 L
728127	#8 x 3/4"	$10.98 L
728139	#8 x 1"	$11.98 L
728141	#8 x 1-1/4"	$13.98 L
728153	#8 x 1-1/2"	$16.98 L
728164	#8 x 2"	$24.98 L
728177	#10 x 1/2"	$13.98 L
728180	#10 x 5/8"	$14.98 L
728191	#10 x 3/4"	$13.98 L
728204	#10 x 1"	$15.98 L
728216	#10 x 1-1/4"	$19.98 L
728228	#10 x 1-1/2"	$21.98 L
728235	#10 x 2"	$27.98 L
728239	#10 x 2-1/2"	$39.98 L
728241	#10 x 3"	$44.98 L
728245	#12 x 3/4"	$23.98 L
728258	#12 x 1"	$28.98 L
728266	#12 x 1-1/4"	$28.98 L
728278	#12 x 1-1/2"	$30.98 L
728280	#12 x 2"	$43.98 L
728285	#12 x 2-1/2"	$53.98 L
728289	#12 x 3"	$71.98 L
728329	#14 x 1"	$38.98 L
728331	#14 x 1-1/4"	$44.98 L
728343	#14 x 1-1/2"	$48.98 L
728355	#14 x 2"	$65.98 L
728365	#14 x 2-1/2"	$74.98 L
728370	#14 x 3"	$90.98 L

Square Drive Self-Tapping Screws - Oval Head



- Stainless steel.

Order No.	Description	Price
7-2955	6 x 1/2"	$16.98 I
7-2957	6 x 3/4"	$22.98 I
7-2958	6 x 1"	$22.98 I
7-2960	8 x 3/4"	$27.98 I
7-2962	8 x 1-1/4"	$36.98 I
7-2965	10 x 3/4"	$34.98 I
7-2966	10 x 1"	$38.98 I
7-2968	10 x 1-1/2"	$48.98 I

Square Drive Self-Tapping Screws - Pan Head



- Stainless steel.

Order No.	Description	Price
7-2975	6 x 1/2"	$15.98 I
7-2977	6 x 3/4"	$23.98 I
7-2978	8 x 1/2"	$23.98 I
7-2980	8 x 3/4"	$27.98 I
7-2981	8 x 1"	$34.98 I
7-2982	10 x 1/2"	$28.98 I
7-2985	10 x 3/4"	$36.98 I
7-2986	10 x 1"	$39.98 I
7-2988	10 x 1-1/2"	$52.98 I

Philips Head Machine Screws - Pan Head



- Stainless steel.
- Sold in boxes of 100 only.

Order No.	Description	Price
729523	6-32 x 3/4"	$9.98 L
729535	6-32 x 1"	$11.98 L
729559	6-32 x 1-1/2"	$16.98 L
729561	8-32 x 1/2"	$11.98 L
729563	8-32 x 3/4"	$13.98 L
729597	8-32 x 1"	$15.98 L
729612	8-32 x 1-1/2"	$21.98 L
729615	8-32 x 2"	$30.98 L
729650	10-24 x 3/4"	$17.98 L
729662	10-24 x 1"	$21.98 L
729686	10-24 x 1-1/2"	$30.98 L
729698	10-24 x 2"	$32.98 L
729725	1/4-20 x 3/4"	$33.98 L
729737	1/4-20 x 1"	$33.98 L
729749	1/4-20 x 1-1/2"	$50.98 L
729751	1/4-20 x 2"	$63.98 L
729775	1/4-20 x 3"	$88.98 L

Philips Head Machine Screws - Oval Head



- Stainless steel.
- Sold in boxes of 100 only.

Order No.	Description	Price
728521	6-32 x 3/4"	$9.98 L
728533	6-32 x 1"	$11.98 L
728557	6-32 x 1-1/2"	$16.98 L
728560	8-32 x 1/2"	$10.98 L
728585	8-32 x 3/4"	$13.98 L
728595	8-32 x 1"	$15.98 L
728610	8-32 x 1-1/2"	$21.98 L
728622	8-32 x 2"	$30.98 L
728646	10-24 x 3/4"	$17.98 L
728658	10-24 x 1"	$19.98 L
728672	10-24 x 1-1/2"	$30.98 L
728684	10-24 x 2"	$32.98 L
728711	1/4-20 x 3/4"	$33.98 L
728723	1/4-20 x 1"	$33.98 L
728735	1/4-20 x 1-1/2"	$50.98 L
728747	1/4-20 x 2"	$63.98 L
728761	1/4-20 x 3"	$88.98 L

Philips Head Machine Screws - Flat Head



- Stainless steel.
- Sold in boxes of 100 only.

Order No.	Description	Price
729028	6-32 x 3/4"	$9.98 L
729030	6-32 x 1"	$11.98 L
729053	6-32 x 1-1/2"	$16.98 L
729078	8-32 x 1/2"	$11.98 L
729080	8-32 x 3/4"	$13.98 L
729092	8-32 x 1"	$15.98 L
729117	8-32 x 1-1/2"	$21.98 L
729129	8-32 x 2"	$30.98 L
729155	10-24 x 3/4"	$20.98 L
729167	10-24 x 1"	$19.98 L
729181	10-24 x 1-1/2"	$30.98 L
729193	10-24 x 2"	$32.98 L
729220	1/4-20 x 3/4"	$14.98 L
729232	1/4-20 x 1"	$36.98 L
729244	1/4-20 x 1-1/2"	$50.98 L
729256	1/4-20 x 2"	$63.98 L
729270	1/4-20 x 3"	$89.98 L

Hex Head Bolts



- Stainless steel.
- Sold in boxes of 100, 50 or 25 as noted.

Order No.	Description		Price
730007	1/4"-20 x 1"	100	$25.98 L
730019	1/4"-20 x 1-1/2"	100	$32.98 L
730021	1/4"-20 x 2"	100	$42.98 L
730033	1/4"-20 x 2-1/2"	100	$51.98 L
730044	1/4"-20 x 3"	100	$58.98 L
730046	1/4"-20 x 4"	100	$36.98 L
730057	5/16" x 1"	50	$20.98 L
730071	5/16" x 1-1/2"	50	$23.98 L
730083	5/16" x 2"	50	$30.98 L
730095	5/16" x 2-1/2"	50	$42.98 L
730108	5/16" x 3"	50	$47.98 L
730110	3/8" x 1"	50	$27.98 L
730122	3/8" x 1-1/2"	50	$36.98LL
730134	3/8" x 2"	50	$48.98 L
730137	3/8" x 2-1/2"	50	$60.98 L
730146	3/8" x 3"	50	$70.98 L
730148	3/8" x 3-1/2"	50	$81.98 L
730158	3/8" x 4"	50	$100.98 L
730161	1/2" x 1"	25	$28.98 L
730173	1/2" x 1-1/2"	25	$35.98 L
730185	1/2" x 2"	25	$43.98 L
730197	1/2" x 2-1/2"	25	$54.98 L
730209	1/2" x 3"	25	$64.98 L
730211	1/2" x 3-1/2"	25	$72.98 L
730223	1/2" x 4"	25	$80.98 L
730247	1/2" x 6"	25	$108.98 L

Handi-Man Marine Boaters Fix-It Kit



- Most popular items needed for a quick repair.
- Kit includes: Fasteners, fuses, canvas, vinyl tape, washers, cable ties, nuts and more.

Order No.	Mfg. No. / Description	Price
731550	(WMMK8) Boaters Fix-It Kit	$59.98 I

Handi-Man Marine Self-Tapping Screw Kit - Oval Head



- Stainless steel.
- Kit includes:
  (24) 6 x 1
  (18) 8 x
  (8) 8 x 1-1/4
  (10) 10 x 1-1/2
  (8) 12 x 2

Order No.	Mfg. No. / Description	Price
731585	(HP102) Self-Tapping Screw Kit - Oval Head	$29.98 I

Handi-Man Marine Machine Screw Kit - Pan Head



- Stainless steel.
- Kit includes:
  (6) 1/4 20 x 1 Machine Screw
  (6) 1/4 20 x 1-1/2 Machine Screw
  (6) 1/4 20 x 2 Machine Screw
  (18) #1/4 Finishing Washer
  (18) 1/4 20 Hex Nut

Order No.	Mfg. No. / Description	Price
731595	(HP106) Machine Screw Kit - Pan Head	$29.98 I

©2014 Donovan Marine, Inc.

Permatex High Temperature Thread Sealant



- OEM specified.
- Locks and seals threaded fittings.
- Resists leakage, vibration loosening, moisture, hydraulic fluids and diesel fuels.
- Lubricates threads for easy assembly and disassembly.
- Won't shred or wear like Teflon tape.
- Parts may be repositioned up to 4 hours after application.

Order No.	Mfg. No. / Description	Price
545054	(59214) 6 ml Tube	$5.98 H

Permatex Medium Strength Threadlocker - Blue



- OEM specified.
- All-purpose, medium strength threadlocker.
- Ideal for all nut and bolt applications 1/4"-1" (6mm to 25mm)
- Protects threads from corrosion.
- Eliminates need for stocking expensive lock nuts and lock washers.
- Locks and seals while preventing parts loosening due to vibration.

Order No.	Mfg. No. / Description	Price
545028	(24200) 6 ml Tube	$6.98 H

Permatex High Strength Threadlocker - Red



- OEM specified.
- High strength threadlocker for heavy duty applications.
- Especially well-suited for permanently locking studs and press fits.
- Adds 3,000 PSI holding power on slip and press fit assemblies.
- Replaces set screws and snap rings.
- Locks against vibration loosening.
- Requires extra effort or special tools for removal.

Order No.	Mfg. No. / Description	Price
545030	(27100) 6 ml Tube	$6.98 H

Permatex Anti-Seize Lubricant



- A highly refined blend of aluminum, copper and graphite lubricants.
- Use during assembly to prevent galling, corrosion and seizing and to assure easier disassembly.
- Temperature range: -60° F to 1600° F.
- Salt, corrosion and moisture resistant.

Order No.	Mfg. No. / Description	Price
545105	(80078) 8 oz. Brush-Top Bottle	$10.98 H
545131	(81343) 1 oz. Carded Tube	$4.98 H

Marpac Stainless Steel Cotter Pin Display



- Display includes:
  (5) 7-5005 - 1/16 x 1/2
  (5) 7-5040 - 3/32 x 1
  (5) 7-5070 - 1/8 x 1-1/2
  (5) 7-5010 - 1/16 x 3/4
  (5) 7-5045 - 3/32 x 1-1/2
  (5) 7-5075 - 1/8 x 1-3/4
  (5) 7-5015 - 1/16 x 1
  (5) 7-5050 - 3/32 x 2
  (5) 7-5080 - 1/8 x 2
  (5) 7-5020 - 1/16 x 1-1/2
  (5) 7-5055 - 1/8 x 3/4
  (5) 7-5085 - 1/8 x 2-1/2
  (5) 7-5025 - 1/16 x 2
  (5) 7-5060 - 1/8 x 1
  (5) 7-5090 - 5/32 x 1-1/2
  (5) 7-5030 - 3/32 x 5/8
  (5) 7-5065 - 1/8 x 1-1/4
  (5) 7-5095 - 5/32 x 2
  (5) 3/32 x 3/4
  (5) 7-5100 - 5/32 x 2-1/2

Order No.	Description	Price
7-3002	Marpac Stainless Steel Cotter Pin Display	$310.98 G

Marpac Canvas Fastener Display



- Display includes:
  (5) 7-6175 - 1/4 Barrel and Socket
  (10) 7-6178 - 11/64 Barrel and Socket
  (5) 7-6181 - Stud Eyelet
  (5) 7-6184 - #8-15 SMS Wood Screw Stud
  (10) 7-6187 - #8-15 SMS Wood Screw Stud
  (5) 7-6193 - #7 x 5/8" Wood Screw Stud
  (10) 7-6190 - #7 x 3/8" Wood Screw Stud
  (5) 7-6196 - #10-32 x 3/8" M/S Stud
  (5) 7-6199 - Twist Stud Two Hole
  (5) 7-6202 - Double Prong Twist
  (5) 7-6205 - Eyelet and Washer

Order No.	Description	Price
7-3014	Marpac Canvas Fastener Display	$598.98 G

Marpac 80 Item Fastener Display



- Display includes:

(5) 7-5200 - 4. x 1/2 Phillips Pan SMS
(5) 7-5205 - 6 x 1/2 Phillips Pan SMS
(5) 7-5210 - 6 x 3/4 Phillips Pan SMS
(5) 7-5215 - 8 x 1/2 Phillips Pan SMS
(5) 7-5220 - 8 x 3/4 Phillips Pan SMS
(5) 7-5225 - 8 x 1 Phillips Pan SMS
(5) 7-5230 - 8 x 1-1/2 Phillips Pan SMS
(5) 7-5235 - 10 x 1/2 Phillips Pan SMS
(5) 7-5240 - 10 x 3/4 Phillips Pan SMS
(5) 7-5245 - 10 x 1 Phillips Pan SMS
(5) 7-5250 - 10 x 1-1/2 Phillips Pan SMS
(5) 7-5255 - 12 x 1 Phillips Pan SMS
(5) 7-5260 - 12 x 1-1/2 Phillips Pan SMS
(5) 7-5265 - 14 x 1 Phillips Pan SMS
(5) 7-5270 - 6 x 1/2 Phillips Oval SMS
(5) 7-5275 - 6 x 3/4 Phillips Oval SMS
(5) 7-5280 - 6 x 1 Phillips Oval SMS
(5) 7-5285 - 8 x 3/4 Phillips Oval SMS
(5) 7-5290 - 8 x 1 Phillips Oval SMS
(5) 7-5295 - 8 x 1-1/4 Phillips Oval SMS
(5) 7-5300 - 8 x 1-1/2 Phillips Oval SMS
(5) 7-5305 - 10 x 3/4 Phillips Oval SMS
(5) 7-5310 - 10 x 1 Phillips Oval SMS
(5) 7-5315 - 10 x 1-1/4 Phillips Oval SMS
(5) 7-5320 - 10 x 1-1/2 Phillips Oval SMS
(5) 7-5325 - 10 x 2 Phillips Oval SMS
(5) 7-5330 - 12 x 1 Phillips Oval SMS
(5) 7-5335 - 12 x 1-1/2 Phillips Oval SMS
(5) 7-5340 - 12 x 2 Phillips Oval SMS
(5) 7-5345 - 14 x 1-1/2 Phillips Oval SMS
(5) 7-5350 - 14 x 2 Phillips Oval SMS
(5) 7-5355 - 14 x 2-1/2 Phillips Oval SMS
(5) 7-5360 - 6-32 x 1 Phillips Oval M/S
(5) 7-5365 - 8-32 x 1 Phillips Oval M/S
(5) 7-5370 - 8-32 x 1-1/2 Phillips Oval M/S
(5) 7-5375 - 10-24 x 1 Phillips Oval M/S
(5) 7-5380 - 10-24 x 1-1/2 Phillips Oval M/S
(5) 7-5385 - 10-24 x 2 Phillips Oval M/S
(5) 7-5390 - 1/4-20 x 1 Phillips Oval M/S
(5) 7-5395 - 1/4-20 x 1-1/2 Phillips Oval M/S
(5) 7-5400 - 1/4-20 x 2 Phillips Oval M/S
(5) 7-5405 - 1/4-20 x 3 Phillips Oval M/S
(5) 7-5410 - 8-32 x 1 Phillips Pan M/S
(5) 7-5415 - 8-32 x 1-1/2 Phillips Pan M/S
(5) 7-5420 - 10-24 x 1 Phillips Pan M/S
(5) 7-5425 - 10-24 x 1-1/2 Phillips Pan M/S
(5) 7-5430 - 10-24 x 2 Phillips Pan M/S
(5) 7-5435 - 1/4-20 x 1-1/2 Phillips Pan M/S
(5) 7-5440 - 1/4-20 x 2 Phillips Pan M/S
(5) 7-5445 - 1/4-20 x 3 Phillips Pan M/S
(5) 7-5450 - #6 Flat Washers
(5) 7-5455 - #8 Flat Washers
(5) 7-5460 - #10 Flat Washers
(5) 7-5465 - 1/4 Flat Washers
(5) 7-5470 - #6 Lock Washers
(5) 7-5475 - #8 Lock Washers
(5) 7-5480 - #10 Lock Washers
(5) 7-5485 - 1/4 Lock Washers
(5) 7-5490 - #8 Finishing Washers
(5) 7-5495 - #8 Finishing Washers
(5) 7-5500 - #10 Finishing Washers
(5) 7-5505 - 1/4 Finishing Washers
(5) 7-5510 - #8-32 Finished Hex Nut
(5) 7-5515 - #8-32 Finished Hex Nut
(5) 7-5520 - #10-24 Finished Hex Nut
(5) 7-5525 - #1/4-20 Finished Hex Nut
(5) 7-5530 - #8-32 Nylon Lock Nut
(5) 7-5535 - #10-24 Nylon Lock Nut
(5) 7-5540 - #1/4-20 Nylon Lock Nut
(5) 7-5545 - 8-32 Wing Nut
(5) 7-5550 - 10-24 Wing Nut
(5) 7-5555 - 1/4-20 Wing Nut
(5) 7-5560 - 1/4 x 5/8 Well Nut
(5) 7-5565 - 1/4 x 1 Wing Nut
(5) 7-5570 - 1/4-20 x 1 Hex Hd C/S
(5) 7-5575 - 1/4-20 x 1-1/2 Hex Hd C/S
(5) 7-5580 - 1/4-20 x 2 Hex Hd C/S
(5) 7-5585 - 1/4-20 x 2-1/2 Hex Hd C/S
(5) 7-5590 - 1/4-20 x 3 Hex Hd C/S
(5) 7-5595 - License Plate Bolts

Order No.	Description	Price
7-3009	Marpac 80 Item Fastener Display	$1,289.98 M

Marpac "Dot" Type Fastener Installation Tool



- Easy to use.
- Complete instructions included.

Order No.	Description	Price
7-6211		$21.98 H

Handi-Man Marine Boat Cover Repair Kit



- Includes canvas tool, snap extenders, screw studs & more.
- 24 pieces.

Order No.	Mfg No.	Price
731555	(561014)	$24.98 I

Marpac Barrel and Socket



- Sold 6 sets per bag.

Order No.	Description	Price
7-6178	11/64	$5.99 G
7-6175	1/4	$5.99 G

Marpac Stud Eyelet



- Sold 6 sets per bag.

Order No.	Description	Price
7-6181	Stud Eyelet	$11.98 G

S & J Stud for Canvas



- Sold 100 per package.

Order No.	Mfg. No. / Description	Price
543353	(560618)	$7.98 G

S & J Socket & Button



- Sold 100 per package.

Order No.	Mfg. No. / Description	Price
543315	(560588) Socket	$16.98 G
543290	(560578) Button, Nickel Plated Brass	$23.98 G

©2014 Donovan Marine, Inc.

S & J Stud #8 Wood Screw



- Sold 2 per bag.

Order No.	Mfg. No. / Description	Price
385686	(560041)	$5.98 I

Marpac Eyelet and Washer



- Sold 4 sets per bag.

Order No.	Description	Price
7-6205	Eyelet and Washer	$11.98 H

Marpac Snap Caps



- Cap your screws with molded plastic caps.
- Sold 10 per bag.

Fits Screw Sizes #6 and #8.

Order No.	Description	Price
7-6050	White	$3.29 G
7-6055	Black	$3.29 G

Fits Screw Sizes #10 and #12.

Order No.	Description	Price
7-6060	White	$3.29 G
7-6065	Black	$3.29 G

Fasteners - Detent Type "D"



- One-hand release - just a quick pull.
- Spring-loaded balls are stacked in, exerting sufficient pressure to eliminate accidental release.

Order No.	Diameter	Grip	Price
242773	3/16"	1"	$8.98 G
242797	3/16"	2"	$7.98 G
242824	1/4"	1"	$8.98 G
242836	1/4"	1-1/2"	$9.98 G
242848	1/4"	2"	$9.98 G
242874	5/16"	1-1/2"	$11.98 G
242886	5/16"	2"	$12.98 G
242901	3/8"	2"	$13.98 G

Marpac Twist Stud Screw



- Sold 2 per bag.

Order No.	Description	Price
7-6208	#10-32 x 3/8"	$11.98 H

Wood Screw Studs



Order No.	Mfg. No. / Description	Price
542770	(560128) #8-15 SMS, 100 Per Package	$65.98 I
7-6190	#7 x 3/8", 6 Per Bag	$12.98 G

Handi-Man Marine Extend-A-Snap



- Avoid shrinkage of canvas covers.
- With the extend-a-snaps, gain 3/4" of an inch per side of the cover.
- These snaps let you stretch your boat cover to reach those hard-to-get-snaps.

Order No.	Mfg. No. / Description	Price
543292	(560261) 4 Per Pack	$9.98 G
543293	(560261-CLIP) Clip Strip	$93.98 G
543294	(560268) 100 Per Box	$142.98 G

Stainless Steel All Threaded Rod





Sample: Lifting Eye Assembly

- Length 3'.

Order No.	Mfg. No. / Description	Price
731479	10-24	$7.98 L
731481	1/4-20	$8.98 L
731483	5/16-18	$13.98 L
731485	3/8-16	$18.98 L
731487	1/2-13	$35.98 L
731489	5/8-11	$37.98 L
731491	3/4-10	$93.98 L

Marpac Twist Stud Two Hole



- Sold 2 per bag.

Order No.	Description	Price
7-6199	Twist Stud Two Hole	$5.99 G

Marpac Phillips Machine Screw Stud



- Stainless steel.
- Sold 5 per bag.

Order No.	Description	Price
7-6196	#10-32 x 3/8"	$5.99 G

Taylor Made Turn Latch



- A simple twist latch for securing walk-thru windshields or other hatch openings.
- Black thermoplastic complete with self tap screws.
- Sold 2 per pack.

Order No.	Mfg. No.	Price
722606	(1162)	$6.98 G

Boatmates Utility Hook



- Super Suction hook holds lines, leaders, clothing, towels, or a wet bathing suit.
- Stick it up when you need it, stow it away when you don't.

Order No.	Mfg. No. / Description	Price
500971	(2100-2) White	$9.98 F

3M Dual Lock Reclosable Fastener Systems



- Polypropylene reclosable fastener.
- Ideal for mounting or attaching weighty objects to surfaces.
- Acrylic adhesive performs well up to 200° F.
- Closure is 5 times stronger than hook & loop.
- Mini pack.
- 1" x 5 yds.

Order No.	Mfg. No. / Description	Price
886688	(06463) Clear	$219.98 H
886690	(06484) Black	$195.98 H

For Trailers Over 80" Wide

Marpac L.E.D. Waterproof Trailer Light Kit - Trailers Over 80" Wide



- Limited LED lifetime warranty - if LED fails, we'll replace it.
- Brighter than standard conventional bulbs.
- Uses 90% less energy.
- 100% sealed, never replace a bulb.
- LED's rated at 100,000 hours (that's 48 years at 40 hours per week).
- Kit includes: 2 LED low profile universal-mount tail lights with red side markers/reflectors, license plate bracket, 25' wiring harness and stainless steel hardware.

Order No.	Description	Price
7-0012	LED Waterproof Trailer Light Kit	$77.98 G

Anderson Marine L.E.D. Over 80" Wide Rear Trailer Light Kit



- Submersible rear lighting kit for all trailers 80" wide and over.
- Includes 856/856L LED tail lights plus license bracket, mounting hardware and installation instructions.
- Provides rear lighting and reflectors. Front clearance/side marker lights, front side reflectors and rear identification lights are necessary to meet all DOT requirements.
- Replacement harness available separately.

Order No.	Mfg. No. / Description	Price
223938	(V947) Rear Trailer Light Kit	$80.98 F

Boater Sports L.E.D. Square Tail Light Kit



- Kits contains: Two multi-function tail lights (RH and LH), license plate bracket, 25' wishbone trailer harness, 48" trunk connector, frame clips, heat shrink connectors and stainless steel hardware.
- Marine grade wires, stainless steel hardware, low amp draw for longer battery life and impact resistant lenses.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-59333	(59333) Complete Kit	$89.95 H
1-59332	(59332) Right Side Tail Light Only	$33.90 H
1-59334	(59334) Left Side Tail Light Only	$39.95 H

Anderson Marine L.E.D. Over 80" Wide Combination Tail Light



- Combination LED stop, turn and tail light.
- Super bright LED optics - no bulbs to break or burn out.
- 100,000-hour-rated life.
- Fully sealed, submersible construction.
- Potted circuitry protects against moisture, corrosion and vibration.
- Lower amp draw than incandescent lights.
- Designed to directly replace 456-series incandescent lights.
- M856L roadside light includes license light.
- Integral, dedicated side marker diode.
- Exceeds all DOT rear lighting and rear lighting and reflex requirements for trailers 80" wide and over.

Order No.	Mfg. No. / Description	Price
223910	(V856) Without License Light	$27.98 F
223912	(V856L) With License Light	$35.98 F

Boater Sports L.E.D. Low Profile Tail Light Kit



- Kits contains: Two multi-function tail lights (RH and LH), license plate bracket, 25' wishbone trailer harness, 48" trunk connector and stainless steel hardware.
- Marine grade wires, stainless steel hardware, low amp draw for longer battery life and impact resistant lenses.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-59336	(59336) Complete Kit	$89.95 H
1-59342	(59342) Right Side Tail Light Only	$27.95 H
1-59344	(59344) Left Side Tail Light Only	$34.95 H

Optronics L.E.D. Waterproof Over 80" Trailer Light Kit - Aero Pro



- Includes: (2) LED universal mount tail lights with red side markers/reflectors, (2) seated amber side markers, license bracket, 25' wiring harness and hardware.

Order No.	Mfg. No. / Description	Price
522815	(TLL-36RK) LED Waterproof Trailer Light Kit	$116.98 Q

Optronics L.E.D. Waterproof Trailer Light Kit



- Includes: (2) LED universal mount tail lights with red side markers/reflectors, license bracket, 25' wiring harness and hardware.

Order No.	Mfg. No. / Description	Price
522820	(TLL-56RK) LED Waterproof Trailer Light Kit	$104.98 F

Optronics L.E.D. Waterproof Over 80" Tail Lights - Low Profile



- Single universal mount profile.

Order No.	Mfg. No. / Description	Price
522806	(STL-16RS) Right	$36.98 Q
522808	(STL-17RS) Left with Illuminator	$39.98 Q

Optronics L.E.D. Low Profile Trailer Light Kit



- Low profile, waterproof LED
- Includes driver and passenger side tail lights and mounting hardware.

Order No.	Mfg. No. / Description	Price
522825	(TLL-160RK) LED Low Profile Trailer Light Kit	$59.98 Q

©2014 Donovan Marine, Inc.

Boater Sports Over 80" Tail Light Kit



- Submersible multi-function light kit includes right and left taillights, 25' wishbone wiring harness, 48" trunk connector, license plate bracket and mounting hardware.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-59303	(59303) Complete Kit	$44.95 H
1-59298	(59298) Right Side Tail Light Only	$13.25 H
1-59299	(59299) Left Side Tail Light Only	$13.70 H

Optronics Submersible Over 80" Tail Lights



- Two submersible stud mount tail lights with mounting hardware.

Order No.	Mfg. No. / Description	Price
523020	(TL-60RK) Submersible Tail Lights Only	$19.98 Q

Anderson Marine Submersible Rear Lighting Kit



- Over 80" submersible rear lighting kit for all trailers.
- Kit provides all rear legal lighting and reflectors for trailers over 80" wide.
- Includes one each of our 452/452L tail light, 25' trailer harness, 48" trunk connector, license bracket, mounting hardware, and installation instructions.
- E440-15 lens kit contains one each, 440-15, 55-15R, and 55-15A.
- Front side marker/clearance lights, side reflectors, and rear identification lights are necessary to meet all DOT requirements.

Order No.	Mfg. No. / Description	Price
223884	(V544) Rear Lighting Kit	$42.98 H

Boater Sports Low Profile Tail Light Kit



- Trailer light submersible low profile kit.
- Submersible multi-function light kit includes right and left taillights, 25' wishbone wiring harness, 48" trunk connector, license plate bracket and mounting hardware.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-59306	(59306) Complete Kit	$49.95 H
1-59304	(59304) Right Side Tail Light Only	$13.85 H
1-59305	(59305) Left Side Tail Light Only	$14.40 H

Optronics Submersible Over 80" Trailer Light Kit



- Includes: (2) Stud-mount tail lights with red side markers/reflectors, license bracket, 25' wiring harness and hardware.

Order No.	Mfg. No. / Description	Price
523010	(TL-6RK) Submersible Trailer Light Kit	$34.98 Q

Optronics Submersible Over 80" Tail Lights



- 7 function right or 8 function left.
- Left light has a license plate illuminator.

Order No.	Mfg. No. / Description	Price
522929	(ST-5RS) Left, 8 Function Tail Light	$11.98 Q
522917	(ST-4RS) Right, 7 Function Tail Light	$11.98 Q
522905	(A-8R) Replacement Lens with Gasket	$5.98 Q

Wesbar Submersible Over 80" Tail Light



- Ideal for boat and PWC trailers over 80" wide.
- Gasketed lenses protect bulbs and contacts using "bell jar" principle when the trailer is submerged.
- These lights meet DOT 180 requirements for trailers over 80" wide when properly mounted.
- Left light includes a license plate illuminator.

Order No.	Mfg. No. / Description	Price
684680	(003024) Left, 8 Function Tail Light	$17.98 R
685137	(403335) Replacement Lens, Square Tail Light	$2.98 R
219596	(1157) Replacement Bulb, Tail Light	$0.98 I

Anderson Marine Submersible Combination Tail Light



- Over-80" submersible combination tail light.
- Includes the following functions: Stop, turn, tail, rear clearance, rear reflex, side marker, side reflex, and license light ("L" suffix only).
- Features gaskets on both rear and side lenses.
- Grounds through mounting studs.
- Mounts on 2" centers and includes mounting hardware.

Order No.	Mfg. No. / Description	Price
223497	(E452) Right, Without License Light	$13.98 H
223499	(E452L) Left, With License Light	$12.98 H

Optronics Submersible Over 80" Trailer Light Kit - Low Profile



- Includes: (2) Universal mount tail lights with red side marker lights, (2) sealed amber side markers, (2) amber reflectors, license plate bracket, 25' wire harness and hardware.

Order No.	Mfg. No. / Description	Price
522954	(TL-16RK) Low Profile Trailer Light Kit	$49.98 Q

Wesbar Waterproof Over 80" Trailer Light Kit



- Kit comes complete with two low profile tail lights, 25' trailer wiring harness cable with molded 4-way plug, 4' four wire car wiring harness cable with molded 4-way plug and license plate bracket.

Order No.	Mfg. No. / Description	Price
685053	(407540) Trailer Light Kit	$137.98 R

Optronics Waterproof Over 80" Tail Light - Low Profile



- Features a sealed lamp capsule that protects the bulb and electrical contact from damage by water and corrosion.
- Includes license illuminator.

Order No.	Mfg. No. / Description	Price
522970	(ST-36RS) Passenger's Side 7 Function	$14.98 Q
522972	(ST-37RS) Driver's Side 8 Function	$14.98 Q

Optronics Submersible Over 80" Tail Lights



- ST-56RS is 7-function: stop, turn, tail, rear reflex, side marker, rear clearance and side reflex.
- 8-function ST-57RS is same as ST-56RS plus license illuminator.
- Features snap-on, replaceable lens and easy to change replaceable bulb.
- Shock proof socket guarantees long bulb life.
- All-weather molded plastic housing and durable lens protect against corrosion.

Order No.	Mfg. No. / Description	Price
684763	(ST-57RS) Left, 8 Function Tail Light	$11.98 Q
684775	(ST-56RS) Right, 7 Function Tail Light	$10.98 Q

Wesbar Waterproof Over 80" Tail Lights - Wrap-Around



- A sealed capsule protects bulbs from corrosion and thermoshock failure and creates a reliable waterproof design.
- These lights meet DOT 108 requirements for trailers over 80" wide when properly mounted.
- Left light includes a built-in license plate illuminator.
- Overall dimensions: 8" L x 3-1/4" H x 3-3/8" D.

Order No.	Mfg. No. / Description	Price
685226	(003372) Replacement Lens, Left	$6.98 R
685051	(403348) Replacement Sealed Bulb Capsule	$12.98 R

Anderson Marine Channel Cat™ Submersible Combination Tail Light



- Low-profile, Over 80" submersible combination tail light.
- Includes the following functions: stop, turn, tail, rear clearance, rear reflex, side marker, side reflex, and license light ("L" suffix only).
- Housing slides out for easy maintenance and bulb replacement while maintaining gasket seal.
- Grounds through separate lead wire.
- Mounts on slide-on 2" centers and includes mounting hardware.

Order No.	Mfg. No. / Description	Price
223523	(E546) Kit	$41.98 H
223503	(E456) Right, Curbside	$18.98 H
223505	(E456L) Left, Roadside	$18.98 H

Wesbar Waterproof Over 80" Low Profile Tail Light Kit



- The kit comes complete with two tail lights, two sealed amber surface mount clearance/side marker lights with reflex lens, 25' trailer wiring harness cable with molded four prong plug, 4' four wire car wiring harness cable with molded 4-way plug plus license plate bracket.

Order No.	Mfg. No. / Description	Price
684444	(007509) Tail Light Kit	$62.98 G

Anderson Marine Channel Cat™ Submersible Rear Lighting Kit



- Over 80" submersible rear lighting kit for all trailers.
- Kit provides all rear legal lighting and reflectors for trailers over 80" wide.
- Includes one each of our low profile 456/456L tail light, 25' trailer harness, 48" trunk connector, license bracket, mounting hardware, and installation instructions.
- Front side marker/clearance lights, side reflectors, and identification bar light are necessary to meet DOT requirements.

Order No.	Mfg. No. / Description	Price
223887	(V547) Rear Lighting Kit	$53.98 H

Optronics Waterproof Over 80" Tail Lights - Low Profile



- Features a sealed lamp capsule that protects the bulb and electrical contact from damage by water and corrosion.
- 7 function right or 8 function left.
- Left light has a built-in license plate illuminator.

Order No.	Mfg. No. / Description	Price
522967	(ST-17RS) Left, 8 Function Tail Light	$7.98 F
522955	(ST-16RS) Right, 7 Function Tail Light	$9.98 F

Wesbar Waterproof Over 80" Tail Lights - Low Profile



685051



- Featuring a reliable waterproof design, these lights have a bulb replaceable capsule that protects the bulbs from corrosion and thermal shock but still alows for easy access for bulb replacement.
- These lights meet DOT 108 requirements for trailers over 80" wide when properly mounted.
- Overall dimensions: 8" L x 2-7/8" H x 2-3/4" D.

Order No.	Mfg. No. / Description	Price
684743	(403026) Left, 8 Function Tail Light	$13.98 R
684755	(403076) Right, 7 Function Tail Light	$13.98 R
685315	(403336) Replacement Lens Set, Tail and Side	$10.98 R
685051	(403348) Replacement Sealed Bulb Capsule	$12.98 R

©2014 Donovan Marine, Inc.

For Trailers Under 80" Wide

Marpac L.E.D. Waterproof Trailer Light Kit - Trailers Under 80" Wide



- Limited LED lifetime warranty - if LED fails, we'll replace it.
- Brighter than standard conventional bulbs.
- Uses 90% less energy.
- 100% sealed, never replace a bulb.
- LED's rated at 100,000 hours (that's 48 years at 40 hours per week).
- Kit includes: 2 LED stud-mount tail lights with red side markers/reflectors, license plate bracket, 25' wiring harness and plated hardware.

Order No.	Description	Price
7-0011	L.E.D. Waterproof Trailer Light Kit	$70.98 G

Anderson Marine L.E.D. Rear Trailer Light Kit



- Submersible LED rear lighting kit for trailers under 80" wide.
- Includes 840/840L LED tail lights plus license bracket, mounting hardware and installation instructions.
- Front side marker lights and side reflectors are necessary to meet DOT requirements.
- Replacement harness available separately.

Order No.	Mfg. No. / Description	Price
223932	(V941) L.E.D. Rear Trailer Light Kit	$79.98 F

Anderson Marine L.E.D. Stop, Turn and Tail Light



- Combination LED stop, turn and tail light.
- Super bright LED optics - no bulbs to break or burn out.
- 100,000-hour-rated life.
- Fully sealed, submersible construction.
- Potted circuity protects against moisture, corrosion, and vibration.
- Lower amp draw than incandescent lights.
- Designed to directly replace 440-series incandescent lights.
- M840L roadside light includes license light.
- Integral, dedicated side marker diode.
- Exceeds all DOT rear lighting and reflex requirements for trailers less than 80" wide.

Order No.	Mfg. No. / Description	Price
223892	(V840) Right, Without License Light	$21.98 F
223897	(V840L) Left, With License Light	$22.98 F

Optronics Submersible Under 80" Trailer Light Kit



- Includes: (2) Stud-mount tail lights with red side markers/reflectors, license bracket, 25' wire harness and hardware.

Order No.	Mfg. No. / Description	Price
522951	(TL-9RK) Submersible Trailer Light Kit	$29.98 Q

Anderson Marine L.E.D. Under 80" Wide Rear Trailer Light Kit



- Submersible LED rear lighting kit provides all legally-required lighting and reflectors for trailers under 80" wide.
- Includes one each of our 840/840L LED tail lights, two amber LED front side marker lights with reflex, 20' trailer harness, 48" trunk connector, license bracket, mounting hardware, and installation instructions.

Order No.	Mfg. No. / Description	Price
223923	(V940) Rear Trailer Light Kit	$86.98 F

Optronics L.E.D. Waterproof Tail Lights



- Single stud mount tail light.

Order No.	Mfg. No. / Description	Price
522787	(STL-6RS) Right	$36.98 Q
522789	(STL-7RS) Left	$39.98 Q
522910	(AL-6R) Replacement Lens	$5.98 Q
522906	(A-9R) Side Lens with Gasket	$2.98 Q

Marpac Submersible Under 80" Trailer Light Kit



- Meets all SAE/DOT specifications for under 80" wide trailers when properly installed.
- Includes: Tail lights, wiring harness, license plate bracket, mounting hardware and complete instructions.

Order No.	Description	Price
7-0013	Submersible Trailer Light Kit	$31.98 G

Boater Sports Under 80" Tail Light Kit



- Trailer tail light kit for use on trailers under 80" wide.
- Submersible multi-function light kit includes right and left taillights, 25' wishbone wiring harness, 48" trunk connector, license plate bracket and mounting hardware.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-59300	(59300) Complete Kit	$39.99 H
1-59301	(59301) Right Side Tail Light Only	$8.25 H
1-59302	(59302) Left Side Tail Light Only	$8.75 H

Wesbar Economy Trailer Light Kit



- Contains: Left and right lights, plastic license plate bracket, 20' wishbone trailer harness, 4' trunk connector, hardware and complete wiring instructions.

Order No.	Mfg. No. / Description	Price
407500	(23TR9932) Trailer Light Kit	$35.98 G

Anderson Marine Trailer Light Kit



- Under 80" light kit for small trailers.
- Kit provides all legal lighting and reflectors for trailers under 80" wide.
- Includes one each of the 440/400L tail lights, two 114A side marker lights, 20' trailer harness, 48" trunk connector, license bracket, mounting hardware, and installation instructions.

Order No.	Mfg. No. / Description	Price
223881	(V540)	$40.98 H


Optronics Under 80" Tail Lights



- ST-6RS is 6 function: stop, turn, tail, rear reflex, side marker, and side reflex.
- 7-function ST-7RS is same as ST-6RS plus license illuminator.
- Mounts on 2" centers.
- Features screw-on, replaceable lens and easy to change replaceable bulb.
- Shock proof socket guarantees long bulb life.
- All-weather molded plastic housing and durable lens protect against corrosion.
- Includes gasket for weather tight seal.

Order No.	Mfg. No. / Description	Price
684678	(ST-7RS) Left, 7 Function Tail Light	$9.98 Q
684666	(ST-6RS) Right, 6 Function Tail Light	$9.98 Q
522905	(A-8R) Replacement Lens with Gasket	$5.98 Q
685163	(2423287) Replacement Lens, Red Side Marker	$2.98 R

Anderson Marine Combination Tail Lights



- Under 80" combination tail light. Includes the following functions: Stop, turn, tail, rear reflex, side marker, side reflex, and license light ("L" suffix only).
- Mounts on 2" centers and includes mounting hardware.
- Grounds through 1/4" mounting studs.
- E440-15 lens kit contains one each: 440-15, 55-15R and 55-15A.

Order No.	Mfg. No. / Description	Price
223486	(E440) Right, Without License Light	$8.98 H
223491	(E440L) Left, With License Light	$8.98 H
223489	(E440-15) Stop and Tail Lens	$5.98 H

Wesbar Submersible Under 80" Tail Light Kit



- This kit comes complete with two pre-wired tail lights, 25' trailer wiring harness cable with molded four prong plug, 4' four wire car wiring harness cable with molded 4-way plug plus license plate bracket.

Order No.	Mfg. No. / Description	Price
684896	(2527511) Tail Light Kit	$45.98 R

Optronics Economy Trailer Light Kit



- Includes: (2) Stud mount Plug-N-Go tail lights with red side marker reflectors, license plate bracket, 25' wire harness and hardware.

Order No.	Mfg. No. / Description	Price
522950	(TL-8RK) Economy Trailer Light Kit	$27.98 Q

Optronics Economy Tail Lights



- Single stud mount Plug-N-Go tail light.

Order No.	Mfg. No. / Description	Price
522943	(ST-9RS) Left, 7 Function Tail Light	$8.98 Q
522931	(ST-8RS) Right, 6 Function Tail Light	$8.98 Q
522905	(A-8R) Replacement Lens with Gasket	$5.98 Q
522906	(A-9R) Side Lens with Gasket	$2.98 Q

Anderson Marine Submersible Combination Tail Lights



- Under 80" submersible combination tail light. Includes the following functions: Stop, turn, tail, rear reflex, side marker, side reflex, and license light ("L" suffix only).
- Features gaskets on both rear and side lenses with brown and yellow or green lead wires.
- Mounts on 2" centers and includes mounting hardware.
- Grounds through 1/4" mounting studs.
- E440-15 lens kit contains one each: 440-15, 55-15R and 55-15A.

Order No.	Mfg. No. / Description	Price
223493	(E441) Right, Without License Light	$12.98 H
223495	(E441L) Left, With License Light	$12.98 H

©2014 Donovan Marine, Inc.

L.E.D. Trailer Lights

Tough Guy L.E.D. 6" Oval Trailer Light Set



- LED Advantage trailer lights are brighter than standard conventional bulbs but use 90% less energy.
- LED Advantage trailer lights are 100% maintenance free.
- Limited LED Lifetime Warranty: if the LED fails, we'll replace it.

Order No.	Description	Price
7-0068	LED 6" Oval Trailer Light Set	$39.98 G

Anderson Marine Piranha® L.E.D. Oval Economy Stop, Turn & Tail Lights



- Submersible oval economy LED stop, turn and tail light.
- 8-diodes; 9-16 volt operating range.
- Meets FMVSS 108 lighting requirements.
- Available in both grommet mount (420R-5) or flange mount (423R-5).
- Hard-wired for reliability.
- Kits include light and grommet.

Order No.	Mfg. No. / Description	Price
223872	(V420KR-5) Red Kit	$21.98 H
223870	(V420KCR-5) Grommet Mount with Clear Lens Kit	$24.98 H

Optronics L.E.D. Waterproof Trailer Light Kit



- Includes: (2) Each clear lens LED stop/turn/tail lights, grommets and plugs for quick and easy retrofit.

Order No.	Mfg. No. / Description	Price
522810	(TLL-22RK) LED Waterproof Trailer Light Kit	$52.98 Q

Boater Sports L.E.D. Oval Tail Light



- Sealed LED Oval Tail Light with plug and grommet.
- Easy to install.
- Clam pack for display.

Order No.	Mfg. No. / Description	Price
1-59362	(59362)	$21.99 H
1-59309	(59309) Grommet Only	$2.99 G

Piranha® L.E.D. Surface Mount Oval Stop, Turn & Tail Light with Chrome Bezel



- 10-diodes, LED oval stop, turn and tail light designed for horizontal installation.
- Meets FMVSS 108 requirements in horizontal, vertical or any 360 degree position.
- 9-32 volt operating range.
- Hardwired design with stripped leads eliminates the need for separate plug and reduces connection points.
- Surface mounting for quick and versatile installation.
- Decorative snap-on chrome bezel is included.

Order No.	Mfg. No. / Description	Price
223875	(V423XR-4) 12 volt Red Kit with Bezel	$23.98 H

Optronics L.E.D. Oval Sealed Stop, Turn and Tail Lights



- (10 Super Diodes) - 6" polycarbonate housing/lens with rubber grommet and standard 3-pin pigtail.
- Sold each.

Order No.	Mfg. No. / Description	Price
522791	(STL-72RK) Left or Right	$29.98 Q
522792	(STL-72RS) Module Only	$27.98 Q

Standard Trailer Lights

Wesbar Red Stop, Turn and Tail Light



- Hermetically sealed lens-to-base seals out corrosion.
- Structurally immune to extreme heat and cold.
- Includes rubber grommet and standard pigtail.
- 6-1/2" x 2-1/4" x 2-3/8" depth.
- Cutout: 6-3/4" x 2-1/2".

Order No.	Mfg. No. / Description	Price
684922	(403080) Oval Tail Light with Grommet	$14.98 R
665110	(413560) Tite Light Oval Flush, Bulk	$11.98 G
665123	(413561) Module Only	$12.98 G
684327	(403087) Clear Backup Light	$11.98 G

Anderson Marine Oval Stop, Turn and Tail Light



- Sealed, oval stop, turn, and tail light may be used on both curbside and roadside of vehicle or trailer.
- Legal in either horizontal or vertical position for both U.S. and ECE applications.
- Polycarbonate lens is welded to housing to form single unit.
- Requires mounting grommet and 3-wire plug to complete installation.
- Kits include light, grommet, and right-angle plug.
- 12 volt lamps designed with dual-filament, 2.1/.59 amp, 32/3 cp bulb.

Order No.	Mfg. No. / Description	Price
223483	(E421KR) Red Kit	$12.98 H
223484	(E421R) Red	$9.98 H

Boater Sports Oval Tail Light



- Sealed Oval Tail Light Kit with grommet and plug.
- Easy to install.
- Clam pack.

Order No.	Mfg. No. / Description	Price
1-59307	(59307) Oval Tail Light with Grommet and Plug	$9.15 H
1-59308	(59308) Oval Tail Light Module Only	$6.39 H
1-59309	(59309) Grommet Only	$2.99 G

Optronics Red Stop, Turn and Tail Light



- Oval sealed flush mount.
- 6" long polycarbonate housing/lens with rubber grommet and standard 3-pin pigtail.

Order No.	Mfg. No. / Description	Price
522993	(ST-70RK) Red	$10.98 Q
523008	(ST-70RS) Single-Sealed Replacement Unit	$7.98 Q

L.E.D. Clearance Lights

Tough Guy L.E.D. Marker Clearance Lights



- LED Advantage trailer lights are brighter than standard conventional bulbs but use 90% less energy.
- LED Advantage trailer lights are 100% maintenance free.
- Limited LED Lifetime Warranty: if the LED fails, we'll replace it.
- Meets the requirements of SAE/DOT/FMVSS/CMVSS standards when properly installed.
- Simple install-run the black wire to power, the base is self grounding.

Order No.	Description	Price
7-0070	Amber	$7.98 G
7-0071	Red	$7.98 G

Optronics L.E.D. Mini Marker/Clearance Lights



- Waterproof LED Mini Marker/Clearance Lights.
- Surface mount with 2-Wire design.
- Chrome bezel.
- Lifetime LED warranty.

Order No.	Mfg. No. / Description	Price
522896	(MCL-13ATRS) Amber	$11.98 Q
522898	(MCL-13RTRS) Red	$11.98 Q

Anderson Marine Piranha® L.E.D. Slim-Line Clearance & Side Marker Lights



- Sealed, 2-diode LED light that functions as clearance or side marker light.
- Operates from 8-16 volts.
- Hard-wired with separate lead and ground wires for mounting to all surfaces.
- Mounts on 1-15/16" centers.
- Pack kits (V168XA &V168XR) include chrome bezel.
- 100,000-hour rated life.

Order No.	Mfg. No. / Description	Price
223633	(V168A) Amber	$7.98 H
223637	(V168R) Red	$7.98 H
223641	(V168XA) Amber Kit	$8.98 H
223651	(V168XR) Red Kit	$8.98 H

Optronics L.E.D. Clearance and Side Marker Lights



- Sealed, waterproof.
- Plug and chrome base included.

Order No.	Mfg. No. / Description	Price
522882	(MCL-91AK) Amber	$10.98 Q
522884	(MCL-91RK) Red	$10.98 Q

Optronics L.E.D. Clearance and Side Marker Lights - Stud Mount



- Sealed, waterproof.
- Stainless steel base.

Order No.	Mfg. No. / Description	Price
522892	(MCL-95AS) Amber	$10.98 Q
522894	(MCL-95RS) Red	$10.98 Q

Anderson Marine Piranha® L.E.D. Clearance/Side Marker Lights



- Sealed, 2-diode LED light that function as clearance or side marker light.
- Operates from 9-16 volts.
- Features 2-wire, hard-wired design.
- Ground wire includes #10 ring terminal.
- Mounts on 3" centers.
- B169-18 mounting gasket included.
- One-piece housing sealed with epoxy eliminates weld joints.
- Low cost LED alternative to traditional incandescent 154-series lights.

Order No.	Mfg. No. / Description	Price
223663	(V169KA) Amber	$9.98 H
223667	(V169KR) Red	$9.98 H

Anderson Marine L.E.D. Clearance/Side Marker Lights



- 2 diode LED clearance/side marker light.
- Lens is welded to housing to form a single rugged unit.
- Kits include 153 LED light, 150-095 mounting bracket and plug.
- DOT legal when mounted horizontally with up to 32 degree tilt back.

Order No.	Mfg. No. / Description	Price
223623	(V153KA) Amber Kit, 2-Diode	$9.98 H
223630	(V153KR) Red Kit, 2-Diode	$9.98 H

©2014 Donovan Marine, Inc.

Boater Sports L.E.D. Clearance Lights



- Screw mount base with waterproof side marker light.
- Sealed, impact resistant.

Order No.	Mfg. No. / Description	Price
1-59318	(59318) Amber	$9.25 H
1-59319	(59319) Red	$9.25 H

Anderson Marine Piranha® L.E.D. Oval Clearance/Side Marker Lights w/Reflex



- 6-diode, LED oval light perfect for light and medium duty applications.
- Functions as a clearance or side maker light with built-in reflector optics.
- Eliminating the need for separate reflector.
- Mounts on industry standard 3" centers.
- Includes both lead and ground wire for mounting to all surfaces.

Order No.	Mfg. No. / Description	Price
223821	(V180A) Amber	$9.98 H
223827	(V180R) Red	$9.98 H

Anderson Marine L.E.D. Clearance Lights



- Sealed, 2-diode clear mini LED marker light.
- Multi-volt design is compatible with both 12 and 24 volt systems.
- Hard-wired with separate lead and ground wire.
- Lead wires are terminated with .180 bullets.
- Meets DOT requirements for clearance/side marker lights.

Order No.	Mfg. No. / Description	Price
223644	(V168XCA) Amber	$10.98 H
223649	(V168XCR) Red	$10.98 H

Boater Sports L.E.D. Round Recessed Trailer Light



- 4" Round recessed trailer light.
- Bright and easy to mount.

Order No.	Mfg. No. / Description	Price
1-59361	(59361)	$20.35 G

Anderson Marine 2" L.E.D. Clearance/Side Marker Lights



- 2" round, sealed LED light provides clearance, side marker or identification light function.
- New hard-wired design eliminates the need for plug.
- #10 ring terminal on ground wire; hot wire is blunt cut.
- 146-18 grommet included.

Order No.	Mfg. No. / Description	Price
223811	(V174KA) Amber	$12.98 C
223813	(V174KR) Red	$12.98 C

Boater Sports L.E.D. Clearance Lights



- Submersible LED Clearance Light.
- 100% Waterproof!
- Stainless steel hardware.
- Clam pack.

Order No.	Mfg. No. / Description		Price
1-59310	(59310) Amber	Ear Mount	$5.79 H
1-59311	(59311) Red	Ear Mount	$5.79 H
1-59312	(59312) Amber	Stud Mount	$8.75 H
1-59313	(59313) Red	Stud Mount	$8.75 H

Anderson Marine Piranha® L.E.D. Clearance/Side Marker Lights w/Reflex



- Sealed, 2-diode LED light that functions as clearance or side marker light.
- Operates from 9-16 volts.
- Features 2-wire, hard-wired design.
- Ground wire includes #10 ring terminal.

Order No.	Mfg. No. / Description	Price
223671	(V170A) Amber	$8.98 H
223679	(V170R) Red	$8.98 H

Anderson Marine L.E.D. Clearance Light



- 9-32 volt operating range.
- 100,000-hour-rated life.
- Meets FMVSS 108 & ECE requirements.
- Sealed circuit board w/hard-wired design enhances reliability.
- Bracket included.

Order No.	Mfg. No. / Description	Price
223625	(V153KC-MV) White	$19.98 H

Anderson Marine Piranha® L.E.D. Clearance/Side Marker Lights



- Bright Piranha 1-diode LED.
- Black rubber grommet included standard.
- Grommet fits 3/4" hole.
- Hard wired design prevents lamp-plug failures and cannot corrode.
- Meets Federal requirements for clearance, side marker and ID lights.
- 8-16 volt operating range.

Order No.	Mfg. No. / Description	Price
223783	(V171A) Amber	$10.98 H
223791	(V171R) Red	$10.98 H
223789	(V171C) White	$9.98 H

Anderson Marine L.E.D. Auxiliary Light Kit



- Patented auxiliary warning light affixes to lower unit of any outboard or stern drive motor while in any trim position.
- Features LED lighting and built-in electronics for auxiliary tail and stop functions.
- Kits include LED light with 12 flat four-way harness, mounting bracket with nylon retainer strap, 10 trailer interface harness, wire connectors and mounting hardware.
- Universal connection for any standard trailer wiring configuration.

Order No.	Mfg. No. / Description	Price
223842	(V315K) LED Auxiliary Light Kit	$6.98 H

Anderson Marine 2-1/2" L.E.D. Clearance/Side Marker Light



- 2-1/2" round, sealed LED light provides clearance, side marker or identification light function.
- New hard-wired design eliminates the need for plug.
- #10 ring terminal on ground wire; hot wire is blunt cut.
- 142-18 grommet included.

Order No.	Mfg. No. / Description	Price
223803	(V172KA) Amber	$13.98 H
223805	(V172KR) Red	$13.98 H

Standard Trailer Lights

Optronics Mini Clearance and Side Marker Lights



- Snap-on lens.
- Durable black plastic base with external mounting holes.
- Running-board light kit contains six lights, mounting hardware, connectors and easy-to-follow instructions.

Order No.	Mfg. No. / Description	Price
223784	(MC-11RS) Red	$2.98 G
223785	(MC-11AS) Amber	$2.98 G

Optronics Sealed Clearance and Side Marker Lights



- Single sealed light mounts on stylish chrome base.

Order No.	Mfg. No. / Description	Price
522878	(MC-91AS) Amber	$4.98 Q
522880	(MC-91RS) Red	$4.98 Q

Optronics Clearance and Side Marker Lights



- Screw-in lens.
- Self-grounding ear mount.

Order No.	Mfg. No. / Description	Price
522850	(MC-35AS) Amber	$5.98 Q
522852	(MC-35RS) Red	$5.98 Q

Wesbar Clearance and Side Market Light



- Featuring reflex lens and quick connect wiring installation.
- Black ear-mount base.
- Dimensions: 3-1/8" x 2-3/8" x 1".

Order No.	Mfg. No. / Description	Price
604822	(203133) Red	$6.98 G


Optronics Sealed Clearance and Side Marker Lights



- Sealed marker/clearance light mounts on self-grounding black base.

Order No.	Mfg. No. / Description	Price
684856	(MC-92RS) Red	$4.98 Q
684868	(MC-92AS) Amber	$4.98 Q
684820	(203396) Red Clearance Light Module Only	$3.98 Q
684832	(203395) Amber Clearance Light Module Only	$3.98 Q

Optronics Clearance and Side Marker Lights



- Single sealed light attached to stainless steel, stud-mount base.

Order No.	Mfg. No. / Description	Price
522888	(MC-95RS) Red	$3.98 G
522889	(MC-95AS) Amber	$3.98 G

Optronics Clearance and Side Marker Lights



- Screw-in lens.
- Stud-mount.

Order No.	Mfg. No. / Description	Price
522854	(MC-36AS) Amber	$4.98 Q
522866	(MC-36RS) Red	$4.98 Q

Wesbar Clearance and Side Market Light



- Sonically-sealed waterproof clearance/side marker lights with break-resistant polycarbonate lens.
- Features a pre-installed 15" pigtail.
- Meets FMVSS/CMVSS 108 requirements for clearance/marker lights when properly mounted.
- Ear: 3-5/16" x 1-5/16" x 1".

Order No.	Mfg. No. / Description	Price
604823	(203286) Red	$8.98 G

©2014 Donovan Marine, Inc.

Wesbar Waterproof Clearance and Side Marker Lights



- Sonically-sealed waterproof with break resistant polycarbonate lens.
- Features a pre-installed 15" pigtail.
- Dimensions: 2-1/8" x 1-1/8" x 1-1/16".

Order No.	Mfg. No. / Description	Price
684882	(203233) Amber	$8.98 R
684894	(203234) Red	$8.98 R

Anderson Marine Clearance and Side Marker Light with Reflex



- Includes amber side marker and side reflex for use as an under-80" front side marker and side reflex light.
- Surface mounts on 3" centers and grounds through the mounting hardware.
- Single wire for electrical connection.
- Features our patented VIBAR socket, and 15,000-hour long-life bulb.

Order No.	Mfg. No. / Description	Price
223454	(E108WA) Amber	$3.98 H

Anderson Marine Clearance and Side Marker Lights with Reflex



- Functions as side marker or clearance light with reflex.
- 147 series grounds through mounting stud with 24" single wire for electrical connection.
- Lens is welded to housing to for single unit.

Order No.	Mfg. No. / Description	Price
223463	(E147A) Amber	$9.98 H
223465	(E147R) Red	$9.98 H

Optronics Sealed Clearance and Side Marker Lights



- Lens and housing sonic welded into a single unit for maximum service and protection.
- Requires a 2" mounting grommet and 142-49 plug to complete installation.
- Diameter 2".

Order No.	Mfg. No. / Description	Price
223782	(MC-53AS) Light Only, Amber	$4.98 H
223788	(MC-53RS) Light Only, Red	$4.98 H

Optronics Beehive Clearance and Marker Light



- Heavy duty black enamel steel housing and mounting bracket.

Order No.	Mfg. No. / Description	Price
223750	(MC-21RS) Red	$4.98 H

Wesbar Clearance and Side Marker Light with Reflex Lens



- Stud mount clearance/side marker light with reflex lens and 18" wire lead.
- Includes a tapered base for easy installation.
- Size is 2-3/4" x 2" x 1".

Order No.	Mfg. No. / Description	Price
684809	(203117) Amber, 18" Pigtail	$6.98 G

Anderson Marine Clearance and Side Marker Lights with Reflex



- PC-rated, stud-mount light functions as side marker or clearance light when properly mounted.
- Mounting stud serves as ground when mounted to metallic surface.
- Unit has single wire for electrical connection.
- Two separate ports for grounding to non-metallic surfaces (ground wire not provided).
- Features 15,000 hour long-life bulb.
- Stainless steel socket resists corrosion.

Order No.	Mfg. No. / Description	Price
223456	(E114A) Amber	$4.94 H
223458	(E114R) Red	$4.94 H

Anderson Marine Clearance and Side Marker Light



- Functions as side marker or clearance light.
- Lens is welded to housing to form single unit.
- Mounting stud serves as ground when mounted to metallic surface.
- Comes with a single 24" lead wire.

Order No.	Mfg. No. / Description	Price
223481	(E151A) Amber	$9.98 H
223482	(E151R) Red	$10.98 H


Anderson Marine Clearance and Side Marker Light



- Lens is welded to housing to form a single unit.
- Functions as side marker or clearance light and may be used as a combination clearance and side marker when properly mounted.
- Features 15,00-hour, long life bulb and female terminals.
- Mounting bracket and electrical accessories for details.
- Includes light, 150-102 bracket, lead wire and screws. 2636 kit includes light, 150-102 plug.

Order No.	Mfg. No. / Description	Price
223468	(E150A) Amber	$5.98 H
223469	(E150BKA) Amber	$7.98 H
223471	(E150BKR) Red Kit with Black Bracket	$7.98 H
223473	(E150KA) Amber Kit	$8.98 H
223475	(E150KR) Red Kit	$8.98 H
223477	(E150R) Red	$6.98 H


Optronics Sealed Clearance and Side Marker Lights



- Lexan lens, with built-in reflector optics, and housing sonically sealed in a single unit.
- Requires a 2-1/2" mounting grommet and 142-49 plug to complete installation.
- Diameter 2-1/2".

Order No.	Mfg. No. / Description	Price
223702	(MC-57RS) Light Only, Red	$5.98 H
223762	(MC-57AS) Light Only, Amber	$4.98 H

Anderson Marine Rectangular Quick-Mount Reflectors



- 3-1/8" x 1-3/8" stick-on reflector with adhesive back for quick and permanent mounting.
- Contains two reflectors per Viz Pack.

Order No.	Mfg. No. / Description	Price
223507	(E483A) Amber	$3.86 H
223509	(E483R) Red	$3.86 H

Tough Guy L.E.D. Waterproof ID Light Bar



- LED Advantage trailer lights are brighter than standard conventional bulbs but use 90% less energy.
- LED Advantage trailer lights are 100% maintenance free.
- Limited LED Lifetime Warranty: if the LED fails, we'll replace it.
- Designed for trailers over 80" wide.
- Includes three single diode sealed lights mounted on a durable, corrosion proof black base and mounting hardware.
- Meets the requirements of SAE/DOT/FMVSS/CMVSS standards when properly installed installation.

Order No.	Description	Price
7-0072	LED Waterproof ID Light Bar	$19.98 G

Anderson Marine L.E.D. Identification Light Bar



- Sealed, 6-diode LED light that functions as a identification light.
- Operates from 9-16 volts.
- Features 2-wire, hard-wire design.
- Ground wire includes #10 ring terminal.
- One-piece housing sealed with epoxy eliminates moisture intrusion.
- Comes with mounting gasket.

Order No.	Mfg. No. / Description	Price
223661	(V169-3R) LED ID Light Bar, Red	$23.98 H


Boater Sports Reflectors



- DOT approved stick-on reflectors.

Order No.	Mfg. No. / Description		Price
1-59320	(59320) Amber	Dimensions: 1-1/2" x 3"	$1.80 H
1-59323	(59323) Red	Dimensions: 1-1/2" x 3"	$1.80 H
1-59321	(59321) Amber	Dimensions: 3" Round	$2.69 H
1-59322	(59322) Red	Dimensions: 3" Round	$2.69 H

Optronics Rectangular Reflectors



- Acrylic rectangular reflectors for surface mount.
- Self-adhesive.
- Sold per pair.

Order No.	Mfg. No. / Description	Price
685199	(RE-10RK) Red	$3.98 Q
685203	(RE-10AK) Amber	$3.98 Q

Boater Sports L.E.D. Light Bar



- Submersible 3 LED identification light bar for over 80" trailers.
- Durable, corrosion proof base.
- Dimensions: 17" x 1.75" x 1.5".
- 12 volt.

Order No.	Mfg. No. / Description	Price
1-59352	(59352)	$19.55 G

Boater Sports L.E.D. Light Bar - Dual Mount



- Submersible LED indicator bar.
- Pivoting.
- Dual mount.
- 100% Waterproof!
- Stainless steel hardware included.

Order No.	Mfg. No. / Description	Price
1-59351	(59351)	$29.49 H

Optronics L.E.D. Waterproof ID Light Bar



- Plastic polycarbonate.
- 3 sealed marker lights mounted on tough polycarbonated plastic bar.
- Prewired for easy installation.

Order No.	Mfg. No. / Description	Price
522886	(MCL-93RK) LED Waterproof ID Light Bar	$25.98 F

©2014 Donovan Marine, Inc.

Optronics Waterproof ID Light Bar



- Three fully waterproof lamps are fastened on 6" center to this stainless steel bar.
- The unit comes pre-wired with a 60" lead and can be mounted in protected areas because of its low profile.
- The watertight lights are molded in durable polycarbonate.
- Red waterproof modules.
- Dimensions: 14-1/4" x 1-1/8" x 1".

Order No.	Mfg. No. / Description	Price
684969	(MC-93RK) Waterproof ID Light Bar	$15.98 Q

Anderson Marine Submersible Light Bar



- Submersible identification bar light for over 80" applications.
- Black polycarbonate bar is corrosion-proof with three 150 sealed lights attached.
- 150 Lights snap on/off for easy service.
- Mounts on 16" centers.
- Includes three-plug harness with two lead wires.
- 6" ground wire with ring terminal and 50" hot wire.

Order No.	Mfg. No. / Description	Price
223467	(E150-3) ID Light Bar, Red	$14.98 H

T-H Marine Trailer Backing Light



- Molded polycarbonate light.
- The bright 21 candlepower bulb gives ample lighting for safe trailer backing.
- The unit mounts as simply as a thru hull fitting and wires directly into the trailer wire harness for power.
- Head diameter is 1-7/8" and requires a 1-3/8" hole.

Order No.	Mfg. No. / Description	Price
640612	(TBL-1)	$22.98 H

Optronics Waterproof ID Light Bar



- Red.
- Three piece identification light bar with stainless steel base.

Order No.	Mfg. No. / Description	Price
522890	(MC-97RK) Waterproof ID Light Bar	$13.98 F

Optronics Three Piece ID Light Bar



- ID light bar with three MC-11 series lights on a white metal base.
- 50" lead wire.
- Mounts on 14-3/8" centers.
- Features snap-on, replaceable lens and easy to change replaceable bulb.

Order No.	Mfg. No. / Description	Price
223748	(MC-99RK) Three Piece ID Light Bar, Red	$9.98 H

Anderson Marine Submersible Light Bar



- Submersible identification bar light for over-80" applications.
- Stainless steel bar is corrosion-resistant with three sealed lights.
- Pre-wired with 60" lead wire; grounds through mounting hardware.
- Mounts on 8-1/2" centers.

Order No.	Mfg. No. / Description	Price
223479	(E151-3RL) ID Light Bar, Red	$14.98 H

Wesbar 4' Plan-O-Gram Incandescent/Electrical

Wesbar



- Plan-o-gram Includes:
  (2) 03131 Clearance Marker Lamp with Reflector, Amber
  (2) 203133 Clearance Marker Lamp with Reflector, Red
  (2) 203111 Clearance Marker Light, Amber
  (2) 203113 Clearance Marker Light, Red
  (2) 203292 Sealed Clearance Marker Lamp, Amber
  (2) 203293 Sealed Clearance Marker Lamp, Red
  (2) 003148 Clearance Marker Lamp Amber with Reflex Reflector, PC Rated
  (2) 403348 Sealed Bulb Replacement Tail Lamp Capsule
  (2) 403080 Sealed Oval Tail Lamp Kit
  (2) 203309 Waterproof ID Bar, Chrome, Red
  (2) 003211 Black Plastic License Plate Bracket
  (2) 203395 Sealed Clearance Marker Lamp Module Snap-Lock, Amber
  (2) 203396 Sealed Clearance Marker Lamp Module Snap-Lock, Red
  (2) 203233 Waterproof Clearance Marker Lamp, Stud Mount, Amber
  (2) 203234 Waterproof Clearance Marker Lamp, Stud Mount, Red
  (2) 203294 Sealed Clearance Marker Lamp, Amber
  (2) 203295 Sealed Clearance Marker Lamp, Red
  (2) 707254 Double Ended 4-Way 2 ft.
  (2) 707255 Double Ended 5-Way 2 ft.
  (2) 2523024 Submersible Over 80" Tail Light, Roadside
  (2) 2523074 Submersible Over 80" Tail Light, Curbside
  (2) 403025 Submersible Over 80" Tail Light, Roadside
  (2) 403075 Submersible Over 80" Tail Light, Curbside
  (2) 403087 Sealed Oval Lamp Module, Clear
  (2) 403085 Sealed Oval Tail Lamp Module, Red
  (2) 707250 7-Way to 5-Way Adapter
  (2) 767940 Adapter - 7-Way Blade to 5-Way Flat
  (2) 767941 4-Way Tester with L.E.D.
  (2) 767942 5-Way Tester with L.E.D. and Dust Cap
  (2) 2523023 Submersible Under 80" Tail Lamp, Roadside
  (2) 2523073 Submersible Under 80" Tail Lamp, Curbside
  (2) 403026 Waterproof Over 80" Low Profile Tail Lamp, Roadside
  (2) 403076 Waterproof Over 80" Low Profile Tail Lamp, Curbside
  (2) 707261 25' 4-Flat Wishbone Wire Harness Kit
  (2) 707270 4-Way Trunk/Trailer Connector Kit, 66"
  (2) 707272 4-Way Trunk Connector 6' with 6' Ground
  (2) 707286 4-Way Trailer Connector, 18" Wishbone
  (2) 707275 4-Way Trunk Connector, 4' with 18" Ground
  (2) 2527511 Submersible, Under 80" Trailer Light Kit
  (1) 007509 Waterproof Low Profile Trailer Light Kit
  (1) 707105 25' 5-Flat Wishbone Wire Harness Kit
  (2) 707273 5-Way Trunk Connector, 6' with 4' Ground
  (2) 707283 5-Way Trunk Connector 4' with 4' Ground

Order No.	Mfg. No. / Description	Price
685950	(54311-001)	$1,092.98 G

Wesbar L.E.D. 2' Plan-O-Gram

Wesbar




- Plan-o-gram Includes:
  (2) 401565 L.E.D. Waterproof Marker/Clearance Lamp, Stud Mount, Amber
  (2) 401566 L.E.D. Waterproof Marker/Clearance Lamp, Stud Mount, Red
  (2) 54201-001 L.E.D. Clearance Light Amber with Chrome Bezel (47-106853 & 47-106020)
  (2) 54201-002 L.E.D. Clearance Light Red with Chrome Bezel (47-107047 & 47-106020)
  (2) 54005 L.E.D. 6" Oval Courtesy Light Clear with Grommet with Pigtail
  (2) 42-106858 L.E.D. Light Bar with Red Lens
  (2) 401580 L.E.D. Waterproof Marker/Clearance Lamp, Amber
  (2) 401581 L.E.D. Waterproof Marker/Clearance Lamp, Red
  (2) 401576 L.E.D. Waterproof Marker/Clearance Lamp, 2" Round Grommet Mount, Amber
  (2) 401577 L.E.D. Waterproof Marker/Clearance Lamp, 2" Round Grommet Mount, Red
  (2) 401578 L.E.D. Waterproof Marker/Clearance Lamp, 2-1/2" Round Grommet Mount, Amber
  (2) 401579 L.E.D. Waterproof Marker/Clearance Lamp, 2-1/2" Round Grommet Mount, Red
  (2) 407535 L.E.D. Waterproof Stop, Turn and Tail lamp, Roadside
  (2) 407530 L.E.D. Waterproof Stop, Turn and Tail lamp, Curbside
  (2) 281595 L.E.D. Wrap-Around 8-Function, Roadside
  (2) 281594 L.E.D. Wrap-Around 7-Function. Curbside
  (2) 54006 L.E.D. 6" Oval Tail Light Red with Grommet with Pigtail
  (2) 54004 L.E.D. 6" Oval Tail Light Red with Chrome Trim Snap Ring
  (2) 407555 L.E.D. Waterproof STL-80 Stop, Turn, and Tail Lamp, Roadside
  (2) 407550 L.E.D. Waterproof STL-80 Stop, Turn, and Tail Lamp, Curbside
  (2) 401567 L.E.D. Waterproof ID Light Bar
  (2) 407540 L.E.D. Waterproof Low Profile Trailer Light Kit
  (2) 407560 L.E.D. Waterproof STL-80 Trailer Light Kit
  (2) 287512 L.E.D. Submersible Under 80" Trailer Light Kit

Order No.	Mfg. No. / Description	Price
685951	(54311-002)	$1,561.98 G

©2014 Donovan Marine, Inc.

6-Way Round Pin Connector Wiring Diagram


6-Way Molded Trailer/ Sealed Car Connector & Cable



TRAILER END
As viewed from front face of 6-way connector with molded on cable.

CAR END
As viewed from front face of 6-way connector with sealed cable.

6-Way Zinc Die-Cast Connector



TRAILER END
As viewed from core back side where wires are attached with screws.


CAR END
As viewed from core back side where wires are attached with screws.

6-Way Wiring Index


Wire Color & Gauge	Molded Trailer/Sealed Car Connector Terminal	Zinc Die-Cast Connector Terminal
White / 10/14 gauge	Common Ground	GD - Common Ground
Blue / 10/14 gauge	Electric Brake	S - Electric Brake
Green / 14 gauge	Right Stop & Turn	TM - Tail & License
Red / 10/14 gauge	Auxiliary	LT - Left Stop & Turn
Brown / 14 gauge	Tail & License	RT - Right Stop & Turn
Yellow / 14 gauge	Left Stop & Turn	A - Auxiliary

4-Way Round Pin / Flat Connector Wiring Diagram

4-Way Round Pin Connector




TRAILER END
As viewed from core back side where wires are attached with screws.




CAR END
As viewed from core back side where wires are attached with screws.

4-Way Flat Pin Connector

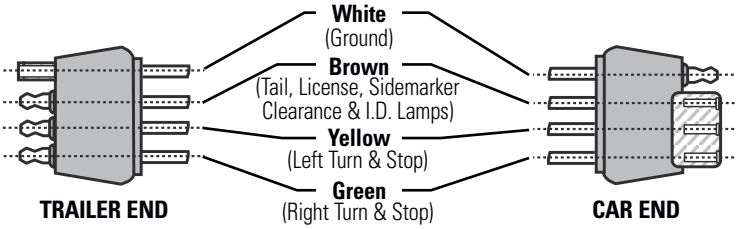

5-Way Flat Connector Wiring Diagram


5-Way Flat Pin Connector

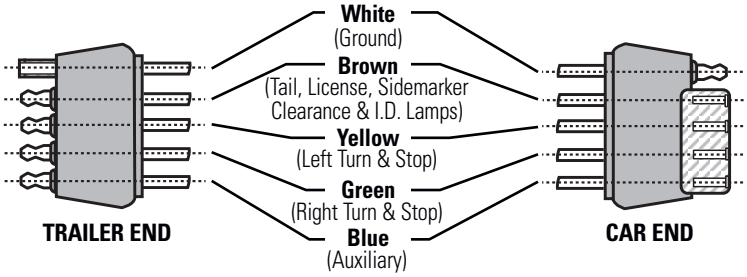

Technical information is current as of the printing of this catalog. Contact technical service for periodic updates.

7-Way RV Blade Connector Wiring Diagram


7-Way Molded Trailer/ Sealed Car Connector & Cable

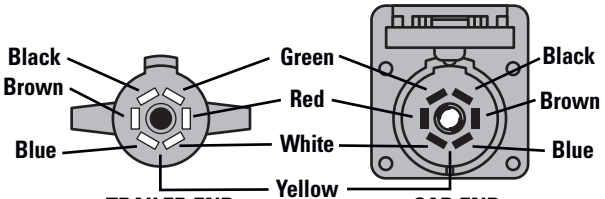

TRAILER END
As viewed from front face of 7-way connector with molded on cable.

CAR END
As viewed from front face of 7-way connector with sealed cable.

7-Way Thermo-Plastic/ Metal Connector



TRAILER END
As viewed from core back side where wires are attached with screws.

CAR END
As viewed from core back side where wires are attached with screws.


7-Way Wiring Index

Wire Color & Gauge	Molded Trailer/Sealed Car Connector Terminal	Thermo-Plastic/Metal Connector Terminal
White / 10 gauge	Common Ground	#1 Common Ground
Blue / 12 gauge	Electric Brake	#2 Electric Brake
Green / 14 gauge	Tail & License	#3 Tail & License
Black / 10 gauge	Battery Charge	#4 Battery Charge
Red / 14 gauge	Left Stop & Turn	#5 Left Stop & Turn
Brown / 14 gauge	Right Stop & Turn	#6 Right Stop & Turn
Yellow / 14 gauge	Center Auxiliary	#7 Center Auxiliary

7-Way Molded Trailer Connectors

Pin Clocking


RV - Gauge 2/10, 1/12, 4/14



TRAILER END
As viewed from front face of 7-way connector with molded on cable.

Wire Color, Gauge & Function
White / 10 gauge / Common Ground
Blue / 12 gauge / Electric Brake
Green / 14 gauge / Tail & License
Black / 10 gauge / Battery Charge
Red / 14 gauge / Left Stop & Turn
Brown / 14 gauge / Right Stop & Turn
Yellow / 14 gauge / Center Auxiliary


Heavy Duty Trailer - Gauge 2/10, 1/12, 4/14



TRAILER END
As viewed from front face of 7-way connector with molded on cable.

Wire Color & Gauge
White / 10 gauge
Blue / 12 gauge
Green / 14 gauge
Black / 10 gauge
Red / 14 gauge
Brown / 14 gauge
Yellow / 14 gauge

Cold Weather - Gauge 3/10, 4/14



TRAILER END
As viewed from front face of 7-way connector with molded on cable.

Wire Color & Gauge
White / 10 gauge
Blue / 14 gauge
Green / 14 gauge
Black / 10 gauge
Red / 10 gauge
Brown / 14 gauge
Yellow / 14 gauge

NOTE: 7-Way Heavy Duty and Cold Weather trailer wiring diagrams represent wire location and color but are NOT supplied to represent any wire or color functions. Please contact your trailer manufacturer for further details.

Technical information is current as of the printing of this catalog. Contact technical service for periodic updates.

©2014 Donovan Marine, Inc.

Optronics Mini License Light



- Chrome plated.

Order No.	Mfg. No. / Description	Price
223874	(LP-31CS)	$4.98 H

Optronics Rust Proof License Plate Bracket



- Angled license plate bracket, made of rust proof black polymer.
- For use with stud mount license lights.

Order No.	Mfg. No. / Description	Price
685098	(LP-10S)	$3.98 Q

Marpac License Plate Nuts and Bolts



- Stainless steel.
- Sold in boxes of 5 cards only. Priced by the card. 4 pieces per card.

Order No.	Description	Price
7-5595	1/4-20 x 5/8"	$2.19 G

Marpac 7-Round to 5-Way Trailer Adapters





- These one piece adapters go from a 7-round blade socket (vehicle) to a 5-flat plug (trailer).

Order No.	Description	Price
7-0507		$10.98 G
7-0527	Length 16"	$12.98 G

Marpac 7-Round to 4-Way Trailer Adapter



- Adapts a 7-round blade socket (vehicle) to a 4-flat plug (trailer).

Order No.	Description	Price
7-0506	7-Round to 4-Way	$9.98 G

Boater Sports Trailer Wire Adapters



- Trailer wire connector provides a secure connection between your trailer and tow vehicle.
- Black plastic construction prevents rusting, enhances appearance and makes plug removal a snap.

Order No.	Mfg. No. / Description	Price
1-59394	(59394) 7-Round to 4-Flat	$6.45 H
1-59395	(59395) 7-Round to 5-Flat	$8.49 H

Boater Sports License Plate Bracket





- Standard license plate bracket.
- 2" hole centers.

Order No.	Mfg. No. / Description	Price
1-59101	(59101) Galvanized	$5.95 H
1-59102	(59102) Black Polyethylene	$1.25 H

Optronics Steel License Plate Bracket



Order No.	Mfg. No. / Description	Price
223800	(LP-15S)	$3.98 H

Optronics Medium Strength Frame Clips



- Sold 10 pieces per pack.
- Frame clips can be used to hide or keep wires and wire harness in place and away from potential damage.

Order No.	Mfg. No. / Description	Price
223975	(A-12FC) Clips	$3.98 H

Boater Sports Trailer Wire Adapters with Lead





- 7-round to 5-flat trailer wire adapter provides a secure connection between your trailer and tow vehicle.
- Black plastic construction prevents rusting, enhances appearance and makes plug removal a snap.

Order No.	Mfg. No. / Description	Price
1-59396	(59396) Short Lead	$13.79 H
1-59397	(59397) 18" Lead	$14.65 H

Optronics 5-Flat to 7-Round Adapter



- Coil cord, poly bag.

Order No.	Mfg. No. / Description	Price
522915	(A57CCBP) Adapter	$31.98 Q

Wesbar 6-Way Round to 4-Way Flat



- Converts 6-way round pin connector to 4-way flat connector.
- Easily adapts tow vehicle connector to trailer connector.
- Full length plug shell ensures positive latching.
- Features non-corrosive nylon shell.

Order No.	Mfg. No. / Description	Price
222818	(707281)	$13.98 G

Anderson Marine 7-Way to 4-Way Harness Adapter



- Converts 7-Way Round blade connector to 4-Way Flat pin connector.
- Adapts tow vehicle connector to trailer connector.
- Full-length plug shell ensures positive latching.
- Features non-corrosive nylon shell.

Order No.	Mfg. No. / Description	Price
223517	(E5414) 7-Way to 4-Way	$10.98 H

Marpac 4-Pole Trailer Test Plug with Cap



- LED's glow to show working circuits.
- Checks brake, tail and turn lights.

Order No.	Description	Price
7-0503	4-Pole Trailer Test Plug	

Boater Sports Trailer Circuit Tester



- Eliminates wiring problems.
- Plug into your 4-way flat plug to test.
- LED lights show if the tail lights, turn signals and brake lights are working.

Order No.	Mfg. No. / Description	Price
1-59390	(59390)	$2.95 H

Boater Sports 4-Way Trailer Wiring Harnesses



- Color-coded 4-way wire connectors.
- Male trailer connector has 12" lead and female trunk connector has 48" lead.

Order No.	Mfg. No. / Description	Price
1-59376	(59376) Male, 12" Long	$3.55 H
1-59377	(59377) Female, 48" Long	$5.90 H

Wesbar 7-Way Blade to 4-Way Flat



- Converts 7-way round blade connector to 4-way flat connector.
- Easily adapts tow vehicle connector to trailer connector.
- Full length plug shell ensures positive latching.
- Features non-corrosive nylon shell.

Order No.	Mfg. No. / Description	Price
222819	(707282) 7-Way to 4-Way	$15.98 G

Anderson Marine 7-Way to 5-Way Harness Adapter



- Converts 7-Way Round blade connector to 5-Way Flat pin connector.
- Simply plug adapter into tow vehicle connector and plug in trailer connector.
- Adapts tow vehicle connector to trailer connector.
- Full length plug shell ensures positive latching.
- Features non-corrosive nylon shell.

Order No.	Mfg. No. / Description	Price
223518	(E5415) 7-Way to 5-Way	$7.98 H


Boater Sports Trailer Circuit Tester - In-Line



- In-line circuit tester stays connected.
- Eliminates wiring problems.
- Plug into your 4-way flat plug to test.
- LED lights show if the tail lights, turn signals and brake lights are working.

Order No.	Mfg. No. / Description	Price
1-59391	(59391)	$4.95 H

Marpac 4-Way Flat Trailer/Car Wiring Harnesses

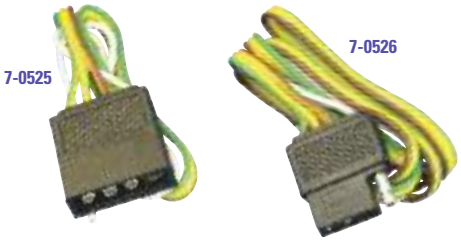

- Color coded wire indexed connector molded to the wire, eliminating possibility of corrosion and shorting due to moisture.

Order No.	Description	Price
7-0525	Male Plug with 1' Wire	$3.98 G
7-0526	Female Plug with 4' Wire	$4.98 G

Wesbar 4-Way Wiring Harness Connectors



- Flat, 4-way trailer connectors.
- All connectors have an 18" ground wire.
- Conforms to all applicable SAE, NMMA and TMA standards.

Order No.	Mfg. No. / Description	Price
685327	(707275) 4' Trunk Connector	$6.98 R
685339	(707285) 18" Trailer Connector, Wunside	$6.98 R
685450	(707286) 18" Trailer Connector, Wishbone	$6.98 R
685388	(707254) 2' Extension Harness, 4-Way to 4-Way	$8.98 R

©2014 Donovan Marine, Inc.

Marpac 5-Way Flat Trailer/Car Wiring Harnesses



- Color coded wire indexed connector molded to the wire, eliminating possibility of corrosion and shorting due to moisture.

Order No.	Description	Price
7-0504	Male Plug with 1' Wire	$5.98 G
7-0505	Female Plug with 4' Wire	$6.98 G

Wesbar 5-Way Wiring Harness Connectors





- Flat, 5-way trailer connectors.
- Conforms to all applicable SAE, NMMA and TMA standards.

Order No.	Mfg. No. / Description	Price
685366	(707273) 6' Trunk Connector with 6' Ground	$9.98 R
685342	(707283) 4' Trailer Connector with 4' Ground	$11.98 R
685389	(707255) 2' Extension Harness, 5-Way to 5-Way	$9.98 R

Boater Sports Trailer Extension Harnesses



- Color-coded 4-way and 5-way extension harness.
- Includes male and female ends.
- Use as an extension or cut to length for wired connectors.

Order No.	Mfg. No. / Description	Price
1-59379	(59379) 4-Way, 12" Long	$5.15 H
1-59380	(59380) 4-Way, 24" Long	$6.15 H
1-59378	(59378) 4-Way, 60" Long	$8.49 H
1-59385	(59385) 5-Way, 12" Long	$5.60 H
1-59386	(59385) 5-Way, 24" Long	$6.99 H

Boater Sports Trailer Wiring Kit



- Designed for the do-it-yourselfer, these trailer wiring kits are easy to install.
- Color-coded 4-way wires.

Order No.	Mfg. No. / Description	Price
1-59372	(59372)	$24.95 H

Optronics 4-Way "Wishbone" Trailer Wiring Kit



Order No.	Mfg. No. / Description	Price
685529	(A-25WH) 25' Long	$18.98 Q

Boater Sports 5-Way Trailer Wiring Harnesses



- Color-coded 5-way wire connectors.
- Male trailer connector has 12" lead and female trunk connector has 48" lead.

Order No.	Mfg. No. / Description	Price
1-59383	(59383) Male, 12" Long	$4.25 H
1-59384	(59384) Female, 48" Long	$7.45 H

Anderson Marine Split Trailer Harness Kits



- 25', split, five conductor harness.
- Designed to split at trailer tongue and run down each side of frame.
- Includes trunk connector.
- Color-coded wire meets SAE J1128 specifications.

Order No.	Mfg. No. / Description	Price
223521	(E5425Y) Four Conductor	$21.98 H
223525	(E5525Y) Five Conductor	$23.98 H

Anderson Marine Trailer/Trunk Extension Harnesses



- 30" harness extension.
- Each configuration has trailer connector on one end and trunk connector on other.
- Perfect of those times when an extension is needed between the tow vehicle and trailer.

Order No.	Mfg. No. / Description	Price
223514	(E5401) 4-Way	$12.98 H
223515	(E5402) 5-Way	$13.98 H

Optronics 5-Way "Wishbone" Trailer Wiring Kit



Order No.	Mfg. No. / Description	Price
523295	(A-255WH) 25' Long	$19.98 Q

Wesbar Trunk and Trailer Wiring Components







Order No.	Mfg. No. / Description	Price
685359	(707250) 7-Way Round to 5-Way Flat, 18" Wire	$22.98 R
685330	(702405) 5-Way 18" Trailer Connector, Wunside	$7.98 R
685541	(707105) 5-Way 25" Harness Kit, Complete	$35.98 R

Tough Guy Trailer Winches



- Corrosion resistant zinc coating.
- Two-way ratchet with neutral.
- Winch strap with hook included.
- Smooth turning grip.

Order No.	Description	Price
7-1597	600 lbs., 3 to 1 Gear Ratio, 12' Strap	$24.98 G
7-1589	1,000 lbs., 4 to 1 Gear Ratio, 12' Strap	$26.98 G
7-1591	1,400 lbs., 4 to 1 Gear Ratio, 12' Strap	$31.98 G
7-1592	1,800 lbs., 5 to 1 Gear Ratio, 2" x 15' Strap	$43.98 G

Tough Guy Dual Gear Trailer Winch



- 2,000 lbs maximum capacity.
- 4 to 1 gear ratio.
- Dual drive gears for uniform torque with better stability and more power.
- Two-way ratchet with neutral.
- Corrosion resistant zinc coating.
- 2" x 20' winch strap with hook included.
- Smooth turning grip.

Order No.	Description	Price
7-1594	Dual Gear Trailer Winch	$54.98 G

Tough Guy Trailer Winch



- Attractive Black EDC2 Coating acts as a shield against corrosion.
- EDC2 Is not a paint, it is a coating bonded to the metal.
- Two-way ratchet.
- 12' winch strap with hook included.
- Smooth turning comfort grip handle for better grip and less slip.
- Strap included.

Order No.	Description	Price
7-1610	600 lbs., 3 to 1 Gear Ratio	$23.98 G

Marpac Comfort Grip Winch Handle



- Zinc plating offers maximum corrosion resistance.
- Ergonomic comfort grip included.
- Universal design fits most winches.

Order No.	Description	Price
7-1600	Comfort Grip Winch Handle	$9.98 G

Tough Guy 2-Speed Trailer Winch with Brake



- 2,500 lbs maximum capacity.
- Dual speeds with 5 to 1 & 12 to 1 gear ratio.
- Hand brake included for safety.
- Heavy duty construction.
- Two-way ratchet with neutral.
- Corrosion resistant coating.
- 2.5" x 20" winch strap with hook included
- Smooth turning grip.

Order No.	Description	Price
7-1596	Dual Speed Trailer Winch with Brake	$99.98 G

Greenfield SKYWinch



- The revolutionary SKYWinch is the opposite of traditional winches and eliminates the hassles and dangers of trailering.
- Simply leave a bow-line attached to the boat and walk it to the trailer without wading in. Then just place rope into SKYWinch, pull tight, and start cranking.
- The Patented wheel grips the rope and easily pulls most lighter-weight boats under 18'.
- The crank arm will not spin backwards until released with trigger for controlled payout.
- Accepts ropes to 1/2" diameter and fits most standard trailers with included mounting bracket and hardware.
- For best results, use with 1/2" solid-braid rope with break-strength rating that exceeds boat weight.

Order No.	Mfg. No. / Description	Price
656900	(SKYWINCH)	$74.98 F

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Boater Sports EDC "Silver" Trailer Winches



- Comfortable Power Grip for smooth operation.
- EDC Silver coating for superior corrosion resistance.
- Offered with or without winch strap.
- One piece solid gear construction for dependability.

Order No.	Mfg. No. / Description			Price
1-59230	(59230) 600 lbs.	3:1	No Strap	$28.99 H
1-59960	(59960) 1,000 lbs.	3:1	No Strap	$37.95 H
1-59961	(59961) 1,000 lbs.	3:1	With Strap	$47.75 H
1-59235	(59235) 1,200 lbs.	4:1	No Strap	$35.95 H
1-59962	(59962) 1,200 lbs.	4:1	With Strap	$49.99 H
1-59963	(59963) 1,400 lbs.	4:1	No Strap	$39.95 H
1-59964	(59964) 1,400 lbs.	4:1	With Strap	$49.99 H
1-59965	(59965) 1,600 lbs.	4:1	No Strap	$42.90 H
1-59966	(59966) 1,600 lbs.	4:1	With Strap	$55.95 H
1-59967	(59967) 1,800 lbs.	5:1	No Strap	$46.35 H
1-59968	(59968) 1,800 lbs.	5:1	With Strap	$56.75 H

Boater Sports Replacement Winch Handle



- Easy-grip handle is designed to fit your hand.
- Strong zinc-plated steel shaft for corrosion resistance and torque handling ability.

Order No.	Mfg. No. / Description	Price
1-59229	(59229) 8-3/4" Long	$10.95 H

Fulton Single Speed Trailer Winches



685610

- Fulton winches feature efficient gear ratios, full-length drum bearings, oil-impregnated shaft bushings, and a "Comfort Grip" handle for ease of cranking.
- All gears are high-carbon steel for superb strength and long-term durability.
- Stamped carbon steel frames provide rigidity for gear alignment and longer cycle life.
- Zinc finishes provide excellent corrosion resistance in all environments.
- Designed for use with rope or strap.

Order No.	Mfg. No. / Description	Price
685595	(T600 0101) 600 lbs	$38.98 G
685600	(T900 0101) 900 lbs	$39.98 G
685605	(T1100 0101) 1,100 lbs	$44.98 G
685610	(XLT14ZB101) 1,400 lbs. with 20' Strap	$105.98 G
685615	(T1602 0101) 1,600 lbs	$68.98 G
685616	(T1500Z0101) 1,500 lbs. with 20' Strap	$63.98 G
685623	(T1801 0101) 1,800 lbs.	$73.98 G
685631	(K2550 0101) 2,500 lbs. with Brake	$307.98 G

Boater Sports Dual Gear/Dual Drive Winches



- Heavy duty 2,000 lb. two gear, dual drive winch, gives even load distribution and eliminates frame torque.
- 4.1:1 gear ratio to handle your load requirements.
- EDC Silver Coating for superior corrosion resistance.
- Comfortable Power Grip handle.

Order No.	Mfg. No. / Description		Price
1-59969	(59969) 2,000 lbs.	No Strap	$49.99 H
1-59970	(59970) 2,000 lbs.	With Strap	$63.95 H

Boater Sports Brake Winch - 2-Speed



- Heavy duty, 2,500 lb. capacity, brake winch.
- Brake holds for constant load descent.
- 5:1 gear ratio for faster operation or/and 12:1 gear ratio for maximum power.
- EDC Silver Coating for superior corrosion resistance.

Order No.	Mfg. No. / Description		Price
1-59971	(59971) 2,500 lbs.	No Strap	$99.95 Q

Fulton F2® Trailer Winch



- 1,600 lb. capacity.
- Two piece corrosion resistant aluminum frame.
- One piece corrosion resistant aluminum handle.
- Dual gear drum operates smoothly.
- Left or Right handed handle attachment.
- 2-position handle adjusts from 6" to 7".
- Models available with or without 20' strap.

Order No.	Mfg. No. / Description	Price
685925	(FW16000101) With 20' Strap, Single Speed	$118.98 G

Fulton F2® Trailer Winch



- 2,000 lb. capacity.
- One piece corrosion resistant aluminum frame.
- One piece corrosion resistant aluminum handle.
- Dual gear drum operates smoothly.
- Center drive enclosed ratchet system.
- User-friendly pull-turn knob to engage ratchet plunger pin.
- Left or Right handed handle attachment.
- 4-position handle adjusts from 6" to 9".
- Includes 20' strap with hook.

Order No.	Mfg. No. / Description	Price
685930	(FW20000101) With 20' Strap, Single Speed	$158.98 G

Fulton F2® Trailer Winch



- 3,200 lb. capacity.
- One piece corrosion resistant aluminum frame.
- One piece corrosion resistant aluminum handle.
- Dual gear drum operates smoothly.
- Center drive enclosed ratchet.
- Self-engaging one-handed system shifts from high to low speed.
- User-friendly pull-turn knob to engage ratchet plunger pin.
- 4-position handle adjusts from 6" to 9".
- Includes: Strap guide and 20' heavy duty strap with hook.

Order No.	Mfg. No. / Description	Price
685935	(FW32000101) With 20' Strap, 2 Speed	$213.98 G

Fulton Winch Handles



- Fits T-series and K-series winches.

Order No.	Mfg. No. / Description	Price
685636	(6302P01) 8" Offset	$17.98 G
685640	(6312P01) 7" Offset	$17.98 G
685645	(5868P01) 6" Offset	$16.98 G

Marpac Heavy Duty Winch Strap



- 10,000 lbs. breaking strength.

Order No.	Description	Price
7-2113	25' Long	$34.98 G

Marpac Winch Straps with Loop End



- 2" heavy duty polyester webbing.
- Includes: Forged steel snap hook.
- 4,000 lbs. breaking strength.

Order No.	Description	Price
7-2110	Length 20'	$11.98 G
7-2111	Length 30'	$11.98 G

Fulton Winch Strap with Hook



- 2,600 lb. maximum working load.

Order No.	Mfg. No. / Description	Price
685908	(WS20 0700) 2" x 20'	$17.98 I

Shelby Hand Winches



- Made of high-carbon steel.
- Meet or exceed SAE standard J1853.
- Cold forged steel one-piece pinion gear and shaft is used on models rated up to a 1,400 lb. capacity. All other models have broached pinion shafts that securely engage the pinion gears.
- All gears are heat-treated 1050 high carbon steel to provide longer life.
- Frames are embossed for extra strength.
- All winch reels feature bolt holes for use with winch straps.

Single speed winches.

Order No.	Mfg. No. / Description	Price
610205	(5403H6) 600 lbs., Gear Ratio 3.1:1, 6" Handle	$29.98 G
610229	(5403) 900 lbs., Gear Ratio 3.1:1, 7" Handle	$33.98 G
610255	(5405) 1,400 lbs., Gear Ratio 4.1:1	$47.98 G

Single speed winches with 20' strap.

Order No.	Mfg. No. / Description	Price
610243	(5404-81Z) 1,200 lbs. Gear Ratio 4.1:1	$50.98 E
610335	(5405S20) 1,400 lbs., Gear Ratio 4.1:1	$61.98 G

Two speed winch, narrow.

Order No.	Mfg. No. / Description	Price
610320	(5470NR) 2,800 lbs., Gear Ratio 5.1:1/14:7:1	$124.98 G

Shelby Replacement Winch Handle



- 8" Dog leg.
- Fits: Shelby 5407, 5408 and 5417 Winches.

Order No.	Mfg. No. / Description	Price
610344	(0854-11Z) Diameter 5/8"	$10.98 G

Boater Sports Winch Straps



- Wide polyester webbing.
- Heavy duty plated safety hook.
- Cables are heavy duty.
- Breaking strength 4,500 lbs.

Order No.	Mfg. No. / Description	Price
1-59816	(59816) 2" x 15' Strap	$11.99 H
1-59818	(59818) 2" x 20' Strap	$12.95 H
1-59819	(59819) 2" x 25' Strap	$15.95 H

Boater Sports PWC Winch Strap



- PWC winch strap made of high impact polyester webbing.
- Heavy duty hook.
- 12' long with 1" x 18" loop.

Order No.	Mfg. No. / Description	Price
1-59815	(59815) 2" x 12' Strap, Breaking Strength 4,500 lbs.	$10.95 H

©2014 Donovan Marine, Inc.

Marpac Trailer Winch Cables



- Galvanized steel 7 x 19 aircraft cable is made to handle the heavy loads.
- Each cable is fitted with a heavy duty galvanized latch hook, pull proof loop and a fastener end for replacement use on electric winches.
- Also great for hand crank winches.

Order No.	Description	Price
7-1845	3/16" x 25'	$18.98 G
7-1846	7/32" x 25'	$22.98 G
7-1847	7/32" x 50'	$29.98 G

Marpac Heavy Duty Snap Trailer Hook



- Malleable iron.
- 5,000 lbs. breaking strength.
- Length overall 4".
- Spring snap closure.

Order No.	Description	Price
7-0287	Eye 2-1/4"	$6.98 G

Fast Eye Safety Snap Trailer Hook



- Length overall 4-1/8".
- Opening 11/16".
- Eye 3/4".
- Galvanized drop forged steel with stainless steel spring.

Order No.	Description	Price
541082	(2311)	$8.98 Q

Boater Sports Trailer Safety Chain and Cables



- Zinc plated, welded link chain with keeper S-hooks.
- Vinyl coated, pre-coiled safety cables with S-hooks.

Order No.	Mfg. No. / Description		Price
1-59106	(59106) Class 2, 2,000 lbs.	1/4"	$12.75 H
1-59108	(59108) Class 3, 5,000 lbs.	5/16"	$23.39 H

Trac Day Runner Electric Trailer Winch



- Handles boats up to 7,000 lbs. on rolling trailer bunks.
- Lengths up to 20 ft.
- Maximum pulling power: Single line 2,500 lbs., double line 5,000 lbs.
- Line speed: 6' per minute under load.
- Cable: 30'.
- Light: Yes.

Order No.	Mfg. No. / Description	Price
554267	(T10124) 12 volt	$207.98 G

Tie Down Winch Cable



- Galvanized steel 7 x 19 aircraft cable is made to handle the heavy loads.
- Each cable is fitted with a heavy duty galvanized latch hook, pull proof loop and a fastener end for replacement use on electric winches.
- Also great for hand crank winches.

Order No.	Description	Price
657063	(59390) 3/16" x 50'	$37.98 I

Marpac Snap Trailer Hook



- Malleable iron.
- 2,300 lbs. breaking strength.
- Length overall 3-1/2".

Order No.	Description	Price
7-0288	Eye 2"	$5.98 G

Tough Guy Bow Safety Chain



- Includes: S-hook on one end.

Order No.	Description	Price
7-1852	3/16" x 12 links	$5.98 G

Trac Small Craft Electric Trailer Winch



- Handles boats up to 5,000 lbs. on rolling trailer bunks.
- Lengths up to 18 ft.
- Maximum pulling power: Single line 2,000 lbs., double line 4,000 lbs.
- Line speed: 6' per minute under load.
- Cable: 30'.
- Light: Yes.

Order No.	Mfg. No. / Description	Price
554255	(T10121) 12 volt	$177.98 G

Trac Lite Cruiser Electric Trailer Winch



- Handles boats up to 9,900 lbs. on rolling trailer bunks.
- Lengths up to 24 ft.
- Maximum pulling power: Single line 3,500 lbs., double line 9,900 lbs.
- Line speed: 6' per minute under load.
- Strap: 20'.
- Light: Yes.

Order No.	Mfg. No. / Description	Price
554279	(T10129) 12 volt	$249.98 G

Superwinch EX1 Electric Winch



- Handsaver.
- On the motor switching.
- 1,000 lbs.
- 5/32" x 25' wire rope.
- Power in and power out.
- Battery cables with terminals.

Order No.	Mfg. No. / Description	Price
638607	(1110) 12 volt	$514.98 G

Superwinch X1 Electric Winch



- On the motor switching.
- Handsaver.
- 2,000 lbs.
- 3/16" x 25' wire rope.
- Power in and power out.
- Battery cables with terminals.

Order No.	Mfg. No. / Description	Price
638633	(1101) 12 volt	$633.98 G

Superwinch X2 Electric Winch



- 3,000 lbs.
- 7/32" x 40' rope.
- On the motor switching.
- Wire rope tensioner.
- Power in and power out.
- Hawse fairlead and handsaver.
- Battery cables with terminals.

Order No.	Mfg. No. / Description	Price
638669	(1201) 12 volt	$864.98 G

Superwinch X3D Electric Winch



- Power in and power out.
- Winch mounted switch.
- Wire rope tensioner.
- Handsaver.
- Battery cables with terminals.
- 4,000 lbs.
- 7/32" x 50' wire rope.

Order No.	Mfg. No. / Description	Price
638695	(1321) 12 volt	$712.98 G

Superwinch X3 Electric Winch



- Power in and power out.
- Battery cables with terminals.
- Wire rope tensioner.
- Hawse fairlead and handsaver.
- Handheld remote switch with 12' cord.
- 7/32" x 50' wire rope.
- Line speed 3.5' per minute at maximum working load of 4,000 lbs.

Order No.	Mfg. No. / Description	Price
638710	(1301) 12 volt	$1,075.98 G

Superwinch SAC10000 Electric Winch



- Power in and power out.
- Wire rope tensioning plate.
- 6' control pendant.
- Handsaver.
- Full load mechanical and dynamic brake.
- Hawse or roller fairlead.
- Line speed 9.2' per minute at maximum working load of 1,000 lbs.
- .6 hp motor.
- 1,000 lbs.
- 3/16" x 50' wire rope.

Order No.	Mfg. No. / Description	Price
638746	(1002) 115V AC 50/60 hz.	$914.98 G

Superwinch AC1000 Electric Winch



- Power in and out.
- 6' control pendant.
- Handsaver.
- Wire rope tensioning plate.
- Line speed 13' per minute at maximum working load of 1,000 lbs.
- .6 hp motor. 115V AC 50/60 hz.
- 1,000 lbs.
- 5/32" x 45' wire rope.
- Note: Not intended for overhead hoisting applications.

Order No.	Mfg. No. / Description	Price
638835	(1401)	$869.98 G

Superwinch S5000 Electric Winch



- Power load in and out.
- Mechanical and dynamic brake.
- Full-metal gear-train.
- Commercial grade integrally mounted sealed contactor.
- Freespooling clutch for fast wire rope payout.
- Durable handheld remote switch on 30' lead.
- Roller fairlead.
- 5,000 lbs.
- 1/4" x 50' wire rope.

Order No.	Mfg. No. / Description	Price
638797	(1450200) 12 volt	$1,008.98 F

Superwinch Pulley Block



- 8,000 lbs. pulley block.
- For EX1, X1, X2, X3, X3D, AC1000 SAC1000, S2500 and S3500 electric winches.

Order No.	Mfg. No. / Description	Price
639178	(2227A) Pulley Block	$58.98 I

Superwinch "SuperMount" System

- Winch + Cradle + Receiver = System.
- The portable front and rear mounting solution.
- Fits 6,000 and 9,000 lb. winches.
- Front and rear mountable.
- Black powdercoat finish.
- Includes steel hitch pins.

Order No.	Mfg. No. / Description	Price
638967	(2050)	$429.98 G

©2014 Donovan Marine, Inc.

Superwinch Solenoid

SUPERWINCH

Order No.	Mfg. No. / Description	Price
638900	(2237) Solenoid	$44.98 I

Superwinch Dash Mount Remote Controls

SUPERWINCH



- 10' wiring harness.
- Allows winch to be operated from remote location utilizing stock switch.

Order No.	Mfg. No. / Description	Price
638861	(1501A) For EX1, X1 and X2 Kit	$73.98 I
639065	(90-22971) For EX1 and X2 Kit, No Wiring	$16.98 I
639116	(1591) 3 Position Rotary Switch	$98.98 I

Boater Sports L.E.D. Indicator Guide Lights



- Attaches to trailer or guide-on posts for loading and unloading.
- Springs help prevent breakage.
- 24" Long.

Order No.	Mfg. No. / Description	Price
1-59350	(59350)	$39.79 H

Tie Down Pontoon High Impact Guide On



- Ideal for larger pontoon boats.
- These guides are designed for rough water loading where high impact guides are required.
- Hot dip galvanized for long life with covers made from high impact non-marking molded PVC.
- Designed to be mounted between the pontoons.
- Made of 2-1/2" square, 13-gauge steel tubing.
- All mounting hardware included.
- Mounts to trailer cross members up to 2" wide by 2" high.

Order No.	Mfg. No. / Description	Price
578320	(86467) Guide On	$124.98 I

Tie Down Floating Boat Guide On's



- When the trailer is submerged, the PVC guide rises upward adding an additional 12" sight with adjustable viewing sight of 24-36 overall height.
- Bright orange end caps on these PVC guides give you a brighter target when loading your pontoon boat.
- The guide posts are designed to be mounted between the pontoons.
- Made of 1-1/2" square, 16-gauge steel galvanized tubing and covered by 2x 20 PVC pipe.
- Guide posts extend fully into the PVC tube for additional strength.
- Kit fits cross members 2" x 2", 2" x 3" and 2" x 4".
- All mounting hardware included.

Order No.	Mfg. No. / Description	Price
578325	(86468) Pontoon Boats	$140.98 F

Superwinch Circuit Breaker

SUPERWINCH

Order No.	Mfg. No. / Description	Price
639091	(90-22873)	$28.98 I

Superwinch Switch and Harness Assemblies

SUPERWINCH



- With circuit breakers to fit all Superwinches.
- Allows permanent installation in trailering vehicle.

Order No.	Mfg. No. / Description	Price
638962	(1522) Harness Assembly for X1 Electric Winch	$112.98 I
638924	(1519A) Replacement Switch for EX1, X1 and X2	$101.98 I

Tie Down Pontoon Guide On



- Bright orange end caps on these PVC guides give you a brighter target when loading your pontoon boat.
- The guide posts are designed to be mounted between the pontoons.
- Made of 1-1/2" square, 16-gauge steel tubing and covered by 2" x 20" PVC pipe.
- Hot dip galvanized guide posts extend fully into the PVC tube for additional strength.
- Mounts to trailer cross members up to 2" wide by 2" high.
- All mounting hardware included.

Order No.	Mfg. No. / Description	Price
578300	(86465) Guide On	$91.98 I

Tie Down Boat Guide On



- Adapts to all tube and channel trailer frames.
- Hot dip galvanized for lasting protection.
- Heavy duty steel component parts.
- Heavy duty 4' x 2-3/8" PVC guide tubes, 16" of adjustment.
- Attractively packaged in a two color display box.
- All hardware included.

Order No.	Mfg. No. / Description	Price
578290	(86105) Guide On	$93.98 I

Tie Down Low Ride Guide On



- Ideal for jon boats, bass boats and personal watercraft.
- The guide posts are hot dip galvanized for long life with covers made from high impact non-marking molded PVC.
- Made of 1-1/2" square, 16-gauge steel tubing and covered with wrap around protective PVC molded covers.
- Mounts to trailer cross members 2" x 2" and 2" x 3" frames.
- All mounting hardware included.

Order No.	Mfg. No. / Description	Price
578310	(86466) Guide On	$93.98 I

Tie Down Heavy Duty Guide On Post



- 48" high PVC pipe guides your boat on safely and gives you visual aid when backing an empty trailer.
- The non-mar PVC pipe is braced inside with metal tubing going 20" up into the tube, adding strength and impact resistance.
- All hardware is included, and is hot dip galvanized for corrosion protection.

Order No.	Mfg. No. / Description	Price
578192	(86103) Guide On Post	$88.98 I

Tie Down Bunk Board Guide On



- Guide on your boat safely in high winds or strong currents.
- The marine grade carpet protects it from scratches and dings.
- All hardware is hot dip galvanized for corrosion protection, and fits frames up to 4-1/4" in size, length 2'.
- Sold in pairs with all hardware included.

Order No.	Mfg. No. / Description	Price
578200	(86123) 21" Above, 13" Side Movement	$135.98 I
578206	(86124) 19" Above, 11" Side Movement	$179.98 I

Tie Down Bunk Board Carpet



- All weather carpet is designed to replace worn and frayed bunks on your trailer.
- The marine grade carpet will not rot or mildew.
- Each roll measures 11" x 12'.

Order No.	Mfg. No. / Description	Price
578366	(86137) Black	$25.98 I

Marykate Liquid Rollers - Trailer Bunk Boards Lubricant



- Makes the loading and unloading of boats easy.
- Dramatically reduces friction to make bunk boards as slick as rollers.
- Long-lasting, non-greasy, non-staining formula.
- Repels road dirt and grime.

Order No.	Mfg. No. / Description	Price
216404	(MK6810) 16 oz.	$11.98 G

Tie Down Roller Guide



- Hot dip galvanized steel construction.
- Heavy duty 2" roller with end caps.
- Roller angle adjusts to angle of hull.
- One-piece adjustable clamp with U-bolt.
- Fits all channel and tube frames up to 5".
- Has 16" of adjustment.

Order No.	Mfg. No. / Description	Price
578154	(86106) Sold in pairs	$124.98 I

Tie Down Bunk Slicks



- Bolts directly onto carpeted bunk boards.
- Fits 2 x 6 or 2 x 4 standard bunk boards.
- Slide on or off with less effort.

Order No.	Mfg. No. / Description	Price
578205	(86164) 3" x 16", 10 Pieces	$57.98 I
578367	(86170) 1-3/4" x 17", 8 Pieces	$31.98 K

Boater Sports Trailer Bunk Padding



- Protect your boat from damage and scratches.
- Easy to cut and custom fit.
- Static free and is made for minimal water retention.

Order No.	Mfg. No. / Description	Price
1-59110	(59110) 8" W x 12' L	$12.95 H
1-59111	(59111) 12" W x 12' L	$19.95 H

Star Brite Trailer Spa - Boat Trailer Washdown System



- The easiest, most effective way to rinse trailers after launching.
- Regular fresh water rinses will greatly extend life of springs and brakes.
- Can be customized to rinse specific areas and parts of trailer.
- Includes: 32 fl. oz. Salt Off with PTEF and Applicator (94000).
- Includes: All parts needed to install system on up to a triple-axle trailer.

Order No.	Mfg. No. / Description	Price
624795	(77550) Trailer Spa	$79.98 G

©2014 Donovan Marine, Inc.

Tough Guy Swing-Up PWC Trailer Jack



- 300 lb. capacity jack for use on trailer tongues up to 3" x 5".
- Provides 15" of ground clearance.
- Zinc plated for corrosion resistance.
- Zinc plated hardware included.
- Easy swing-up operation.
- Ideal for PWC, Snowmobile and Utility trailers.

Order No.	Description	Price
7-1584	Swing-Up PWC Trailer Jack	$29.98 G

Tough Guy Swing-Up Trailer Jack



- 1,000 lb. capacity jack for use on trailer tongues up to 3" x 5".
- 10" of vertical travel provides up to 21" of lift.
- Easy swing-up operation.
- Feel secure with locking pin for added strength and support.
- Hardware kit included.

Order No.	Description	Price
7-1585	Swing-Up Trailer Jack	$35.98 G

Tough Guy Swing-Up Trailer Jack



- 1,500 lb. capacity jack for use on trailer tongues up to 3" x 5".
- Easy swing-up operation.
- Fell secure with locking pin for added strength and support.
- Smooth turning grip.
- Hardware kit included.

Order No.	Description	Price
7-1598	Swing-Up Trailer Jack	$60.98 G

Tough Guy Premier Swing-Up Trailer Jack



- 8" diameter x 4" wide wheel rolls over rough ground.
- 2,000 lb. capacity jack for use on trailer tongues up to 3" x 5".
- 14" of vertical travel provides up to 25" of lift.
- Dichromate armored for maximum corrosion protection.
- Salt water tested.
- Easy swing-up operation.
- Feel secure with dual locking pins.

Order No.	Description	Price
7-1599	Swing-Up Trailer Jack	$90.98 Q

Boater Sports Swing-Away PWC Jack Stand



- Swing-away jack has an 500# capacity zinc coated for years of dependable use.
- Designed for light duty utility trailers or PWC trailers.
- No handle.

Order No.	Mfg. No. / Description	Price
1-59957	(59957)	$37.95 H

Boater Sports Swing-Up Trailer Jack



- Built tough for maximum performance and durability.
- EDC Silver coating provides supreme corrosion resistance against all elements.
- The power handle provides excellent grip and stays smooth turning using the built-in grease fitting.
- Hardened steel gears are squared to prevent stripping.
- Easily swing to up or down position with double pin locking mechanism.
- Mag wheel for easy mobility.
- 1,000 lb. capacity.
- Lift: 25", travel: 10".
- Color box.

Order No.	Mfg. No. / Description	Price
1-59952	(59952)	$42.95 R

Boater Sports Swing-Up Trailer Jacks



- Built tough for maximum performance and durability.
- EDC Silver coating provides supreme corrosion resistance against all elements.
- The power handle provides excellent grip and stays smooth turning using the built-in grease fitting.
- Hardened steel gears are squared to prevent stripping.
- Easily swing to up or down position with double pin locking mechanism.
- Mag wheel for easy mobility.

Order No.	Mfg. No. / Description	Price
1-59827	(59827) 1,200 lb.	$62.95 R
1-59955	(59955) 1,500 lb., Lift: 29", Travel: 15", EDC Coated	$79.95 R

Pro Series Retaining Ring Swivel Jack



- 1,000 lb. capacity (TW/GTW).
- Designed for use with marine and utility trailers.
- Fits up to 3" x 5" trailer frame.
- Clear zinc finish.
- Bolt-on.
- Includes all necessary mounting hardware.
- 6" wheel.

Order No.	Mfg. No. / Description	Price
685576	(EJ10000101) 1,000 lbs.	$41.98 G

Fulton F2® Jacks



- Includes: Handle hold-up and wheel wedge features, and bolt-on mounting hardware for 3" x 3" and 3" x 4" frames.
- Maintenance free.
- Corrosion resistant coatings cover internal and external components - will hold up in harsh environments.
- Ergonomic design - crank, release pin and integrated wheel wedge are made of strong, engineered plastic for a comfortable touch.
- Sealed and lubricated one-piece gearbox.
- Fits up to 5" tongues.
- Handle hold-up secures handle to jack tube when in stowed position.
- 10" Travel.
- Limited lifetime warranty.

Order No.	Mfg. No. / Description	Price
685922	(1413040134) Wide Track, 1,600 lb., Wide Wheel	$197.98 G
685920	(1413020134) Twin Track, 1,600 lb., Dual Wheel	$197.98 G

Shelby "Offset Swivel Design" Swivel Jack



- Jack tube welded full length to bracket.
- Significant strength and side load capacity.
- Precision bushing: little rattle, smooth swivel.
- Thicker load plate.
- Comfort grip handle.
- No pinching, no snagging.
- Larger, 1/2" pull pin.
- Fits 3 to 5 inch tongues.
- Shelby zinc with super sealer. Excellent rust protection.
- 10" of travel.
- Rated at 1,500 lbs. capacity.

Order No.	Mfg. No. / Description	Price
610148	(5874A8-81)	$163.98 E

Trac Electric Trailer Jack



- Includes: 12 volt power cord with standard 4-flat trailer wire plug that connects directly into your vehicle's trailer light plug.
- Installs on your trailer frame with U-bolts.
- Raise and lower your trailer coupler with the press of a button.
- Pull pin and swivel to stow.
- Internal cord storage.
- Metal parts are protected with breakthrough Dacromet anti-corrosion coating.
- Manual crank stows on housing and is always ready for easy use when power is not available.
- Maximum lifting capacity: 1,500 lbs.

Order No.	Mfg. No. / Description	Price
554281	(T10143)	$188.98 G

Shelby Diamond Series Caster Wheels



- Stronger interior design to decrease chances of wheel creeping under load.
- Higher tensile strength.

Order No.	Mfg. No. / Description	Price
610534	(2224-93) 6", 1,000 lbs.	$8.98 G
610536	(0047-93) 8", 1,500 lbs.	$27.98 Q

Fulton Bolt-Thru Swivel Mount Jacks



- The Fulton brand bolt-thru swivel mounts (U.S. PAT. 6,302,381) use 3-D formed heavy-gauge steel stampings and a proprietary bushing material for a mount with minimal deflection and maximum support.
- All mounts fit up to a 3" x 5" trailer frame.
- Strong proprietary bushing materials.
- Stable formed heavy-gauge steel construction.
- Dependable design.

Order No.	Mfg. No. / Description	Price
685570	(XP10 0101) 1,000 lbs. (TW/GTW) With 6" Wheel	$74.98 G
685580	(XP15 0101) 1,500 lbs. (TW/GTW) 10" Travel, 8" Poly Wheel	$106.98 G
685581	(0933323S00) Wheel Service Kit	$21.98 G

Fulton Dual Wheel Bolt-Thru Swivel Mount Jack



- The Fulton brand bolt thru swivel mounts (U.S. PAT. 6,302,381) use 3-D formed heavy-gauge steel stampings and a proprietary bushing material for a mount with minimal deflection and maximum support.
- All mounts fit up to a 3" x 5" trailer frame.
- Strong proprietary bushing materials.
- Stable formed heavy-gauge steel construction.
- Dependable design.
- 12" Travel.

Order No.	Mfg. No. / Description	Price
685585	(XPD15L0101) 1,500 lbs. (TW/GTW), 6" Dual Wheel	$127.98 G

Boater Sports EZ-Lift Trailer Lift



- Lift and holds boat and camper trailers and other single axle vehicles with wheels from 8" to 16".
- Two ton capacity.
- All aluminum construction.
- Built-in trailer mounting holes.

Order No.	Mfg. No. / Description	Price
1-59185	(59185)	$58.40 H

Boater Sports Trailer Jack Wheel



- Nylon wheel only.
- Fits standard trailer jacks.
- 2" Thick x 6" diameter.

Order No.	Mfg. No. / Description	Price
1-59204	(59204)	$7.89 H

©2014 Donovan Marine, Inc.

Boater Sports Wheel Stop



- Lower your jack wheel into the wheel stop to prevent the tongue from moving.
- Always block your tires.

Order No.	Mfg. No. / Description	Price
1-59202	(59202)	$4.89 H

Fulton F2 Jack - Footplate



- Heavy duty articulating footplate - 7" diameter cast footplate provides superior stability. Unique ball and socket connection between jack and footplate allows for whatever articulation is required to accommodate uneven surfaces.
- 13" of swivel mount height adjustment.
- Handle hold-up secures handle to jack tube when in stowed position
- Available in bolt-on versions for 4" and 5" frames and weld-on versions for up to 5" frames.
- Limited lifetime warranty.

Order No.	Mfg. No. / Description	Price
685923	(1413230134) 2,000 lbs., 10" Travel	$246.98 G

Boater Sports A-Frame Utility Jack



- Universal fit A-frame jack.
- Heavy duty.
- 23" of lift with 14-3/4" of travel.
- EDC Coated.
- 2,000 lb.
- Wheel or foot plate sold separately.

Order No.	Mfg. No. / Description	Price
1-59210	(59210)	$35.95 G

Shelby A-Frame Jack



- A-frame mount tongue jack, fits all A-frame couplers.
- Comfort grip handle and detachable caster wheel.
- Shelby's Super Sealer Zinc finish provides the highest resistance to corrosion.
- 15" of travel.
- Rated at 2,000 lb. capacity.
- Jack is zinc plated, not black.

Order No.	Mfg. No. / Description	Price
334122	(5792) A-Frame Jack	$91.98 H

Tough Guy Premier Heavy Duty Square Tube Jack



- Huge 2,500 lb. capacity jack for use on trailer tongues up to 3" x 5".
- 13" of vertical travel provides up to 31" of lift.
- Zinc plated for corrosion resistance.
- Zinc plated hardware kit included.
- Easy adjustments with quick release thumb pin.
- Continued smooth operation when lubricated using convenient grease fitting.

Order No.	Description	Price
7-1588	Square Tube Jack	$98.98 G

Fulton Drop Leg Jack



- Heavy duty square.
- Strong proprietary bushing materials.
- Stable formed heavy-gauge steel construction.
- Dependable design.
- 3.8" x 7.5" footplate.
- Bolt-on, mounting hardware for up to 5" frame included.
- 28" travel includes drop leg.

Order No.	Mfg. No. / Description	Price
685590	(HD25000101) 2,500 lbs. (TW/GTW)	$119.98 G

Bulldog™ A-Frame Jack



- Smooth, comfortable, ergonomic design.
- Dependable vertical and side load capacity.
- Proven reliability for long term use at rated loads.
- Precision fitted parts for extra stability.
- Grey painted outer and inner tubes.
- Topwind, 15" travel, 8.4" bracket to ground retracted, weld-on/bolt-on, 2,000 lbs. lift capacity.

Order No.	Mfg. No. / Description	Price
685550	(155022) 2,000 lbs. (TW/GTW)	$43.98 G

Boater Sports Foot Plate



- EDC Coated.
- For Universal fit A-frame jack.

Order No.	Mfg. No. / Description	Price
1-59206	(59206)	$5.25 H

Boater Sports Trailer Couplers



- Quick locking, trigger style trailer coupler.
- Corrosion resistant.
- For use with straight tongue-style trailers.

Order No.	Mfg. No. / Description	Price
1-59073	(59073) Class 2, 2" Ball x 2" Channel	$19.99 H
1-59080	(59080) Class 2, 2" Ball x 3" Channel	$19.99 H

Shelby Trailer Coupler - Posi-Lock



- Class I.
- Die-formed from heavy gauge steel for durability and strength.
- Zinc plated with an attractive silver finish.
- The quick-locking handle/underjaw design and the trigger action mechanism clamps or releases the ball for fast, easy hookups.
- For added strength and security, all couplers feature a heat-treated load plate.
- The handle latch locks into this load plate and cannot unlatch by itself.
- A handle hole is provided to accommodate a coupler security lock or a coupler locking pin to further secure the handle in the locked position.

DMI #	MFG #	Ball Size	Tongue Load	Gross Load	Channel Size	Price
610469	(5131)	1-7/8"	200 lbs.	2,000 lbs.	3"	$17.98 G

Marpac Trailer Balls



- Chrome plated steel.
- Includes lock washer and nut.
- V5 compliant.
- Independently tested to SAE J684 specs.
- Includes lock washer and nut.

Order No.	Description	Price
7-0150	Ball Diameter 1-7/8", Shaft 3/4" x 1-1/2"	$9.98 G
7-0145	Ball Diameter 1-7/8", Shaft 3/4" x 2-3/8"	$9.98 G
7-0147	Ball Diameter 1-7/8", Shaft 1" x 2-1/8"	$9.98 G
7-0146	Ball Diameter 2", Shaft 3/4" x 2-3/8"	$9.98 G
7-0148	Ball Diameter 2", Shaft 1" x 1-1/8"	$9.98 G
7-0152	Ball Diameter 2-5/16", Shaft 1" x 2"	$12.98 G
7-0153	Ball Diameter 2-5/16", Shaft 1-1/4" x 2-1/2"	$14.98 G

Fulton Fas -Lok® Couplers



- Stamped, straight channel.
- Zinc finish.
- Limited 5 year warranty.

Order No.	Mfg. No. / Description	Price
685650	(11250 0101) Class I, 2,000 lbs. (TW/GTW), Ball Size 1-7/8", 2-1/2" Tongue Mount Width	$22.98 G
685566	(11300 0101) Class I, 2,000 lbs. (TW/GTW), Ball Size 1-7/8", 3" Tongue Mount Width	$22.98 G
685569	(22300 0101) Class II, 3,500 lbs. (TW/GTW), 2" Ball, 3" Channel	$24.98 G
685573	(34300 0301) Class III, 5,000 lbs. (TW/GTW), 2" Ball, 3" Channel	$31.98 G

Boater Sports Trailer Dolly



- Large tires cushion the load and provide smooth maneuverability.
- Supports up to 300 lbs. for easy handling of utility, boat, cargo, jet ski and other small trailers.

Order No.	Mfg. No. / Description	Price
1-59091	(59091)	$99.95 Q

Boater Sports Standard Trailer Balls



- Chrome plated, solid steel machined ball includes nut, and lock washer.

Order No.	Mfg. No. / Description	Price
1-59002	(59002) 2" Ball, 3/4" x 2" Shank	$10.99 H
1-59008	(59008) 2" Ball, 1" x 2" Shank	$10.99 H

Marpac Complete Towing Kit



- 2" powder coated drop ball mount.
- Handles trailers up to 6,000 lbs.
- Includes: 2" trailer ball rated at 6,000 lbs. (1" shaft diameter).
- Max tongue weight up to 600 lbs.
- Use with 2" x 2" receiver.
- Includes 5/8" hitch pin.
- Help keep the tow vehicle cleaner with the convenient storage case.

Order No.	Description	Price
7-1869	(TR10900) Towing Kit	$33.98 F

©2014 Donovan Marine, Inc.

Camco Adjustable Utility Ball Mount



- Ideal for those who have more than one trailer or tow vehicle.
- Fits all 2" x 2" receivers.
- Powder coat baked on finish.
- Grade 5 bolts supplied.
- Rated for trailer weights up to 5,000 lbs and tongue weights up to 500 lbs.
- Shank hole 1" for ball.

Order No.	Mfg. No. / Description	Price
357632	(48271) 16" L, 8-1/2" Drop, 7-1/4" Lift	$84.98 G

Shelby Ball Mount



- Class III Ball Mounts have a gross load rating up to 5,000 lbs. and a tongue load rating up to 500 lbs.
- Designed for use with any under-car receiver that has a 2" I.D. opening.

Order No.	Mfg. No. / Description	Price
357629	(7100-25) 4" Drop	$34.98 I

Tie Down Hitch Cable



- Self-coiling hitch cables.
- Uses durable galvanized aircraft cable construction.
- Exceed SAE J684 standards for trailer coupling and automotive type hitches.
- Plus, they are NMMA Certified. Black vinyl jacketed.
- Each pair of 36" long cables with S-hooks are skin packed.

Order No.	Mfg. No. / Description	Price
579613	(59537) Class 2, 3, 500#	$24.98 I

Tough Guy Trailer Safety Chains



- Zinc plated.
- Contains: S-hooks on both ends.

Order No.	Description	Price
7-1850	Class 2, 3/16" x 28 Links, 31" Length	$15.98 G
7-1851	Class 3, 1/4" x 26 Links, 31" Length	$20.98 G

Tie Down Trailer Safety Chain



- Zinc plated.
- Contains S-hooks on both ends.
- Class 4, 5/16" x 26 links, 40-3/4" length.

Order No.	Mfg. No. / Description	Price
333574	(81204)	$41.98 I

Reese Towing Starter Kit



- Class III Standard Towing Starter Kit.
- Point of purchase retail display.
- Two kits per display box.
- Fits 2" square receiver tube opening.
- Includes pin and clip.
- Black powder coat finish over e-coat.
- Kit includes: Quick-loading 2" square ball mount, 6,000 lbs. GTW, 1" ball hole, 8-1/2" length, 3/4" rise, 2" drop and 2" chrome hitch ball with pin and clip.

Order No.	Mfg. No. / Description	Price
685905	(83563-002) Towing Starter Kit	$59.98 I

Camco Reversible Ball Mounts



- All ball mount shank holes are 1".
- Powder coat baked on finish.
- Fits 2" x 2" receiver.

Order No.	Mfg. No. / Description	Price
357627	(48314) 8" L, 2" Drop, 3/4" Lift	$19.98 E
357628	(48304) 10-1/2" L, 3-1/4" Drop, 2" Lift	$21.98 E
357630	(48300) 11" L, 7" Drop, 5-3/4" Lift	$48.98 G

Draw Tite Quick-Loading Ball Mount



- Featuring a revolutionary tapered shank design, easy-load ball mounts provide an easy connection to the receiver.
- Angle cut design.
- Fits 2" square receiver tube opening.
- Black powder coat finish over e-coat.
- 7,500 lbs. GTW, 1" ball hole, 9" length, 2-3/4" rise, 4" drop.

Order No.	Mfg. No. / Description	Price
685565	(40344) 4" Drop	$71.98 I

Tie Down Trailer Safety Chain



- Black vinyl jacketed.
- Durable galvanized aircraft cable construction.
- Exceed SAE J684 standards for trailer coupling and automotive type hitches.
- NMMA certified.
- Replace noisy chains with self-coiling hitch cable.

Order No.	Mfg. No. / Description	Price
579620	(59541) 36" Long	$29.98 I

Tough Guy Coupler Locking Pin



- Steel, electrogalvanized.

Order No.	Description	Price
7-0895	Length 3", 1/4"	$2.98 F

Tough Guy Hitch Pin



- 5/8" hitch pin fits Class III and Class IV hitches.
- Hairpin cotter won't vibrate free.
- Zinc plated for corrosion resistance.

Order No.	Description	Price
7-1868	Hitch Pin	$5.98 G

Tough Guy Locking Receiver Pin



- Safety and security, helps prevent thefts.
- 5/8" hitch pin fits Class III and Class IV hitches.
- Fits 1/4" trigger style couplers.
- Chrome plated for corrosion resistance.
- Key slot has cover to protect lock mechanism.

Order No.	Description	Price
7-1867	Locking Receiver Pin	$12.98 G

Bulldog™ Easy Access Adjustable Coupler Lock



- Includes dust cap.
- Side key entry, sliding dust cap, lock housing rotates 360°.

Order No.	Mfg. No. / Description	Price
685586	(580410)	$22.98 I

Bulldog™ Lifelong® Combo Lock



- Chrome combo lock set, 5/8" Dogbone receiver and coupler, for class III and IV.
- Stronger break resistance.
- Dual self-locking design.
- High security square key design.
- Includes dust cap.

Order No.	Mfg. No. / Description	Price
685902	(580404) Lifelong Combo Lock	$42.98 I

Boater Sports Snapper Pins



- 1/4" diameter steel shaft pin, 1-3/4" shaft length, 1-1/2" clearance.
- Serves a variety of different uses.

Order No.	Mfg. No. / Description	Price
1-59400	(59400) Square	$1.99 H
1-59401	(59401) Round	$1.59 H

Boater Sports Trailer Receiver Pin with Clip



- 5/8" trailer receiver pin with clip.
- Zinc plated steel construction.

Order No.	Mfg. No. / Description	Price
1-59416	(59416)	$6.79 H

Boater Sports Receiver Hitch Lock



- Stainless steel receiver hitch lock pin.
- Lock and pin type lock with 2 keys.
- 5/8".

Order No.	Mfg. No. / Description	Price
1-59404	(59404)	$14.15 H

Tough Guy Hitchlock Trailer Coupler Lock



- Solid cast, heat treated for toughness.
- Helps prevent trailer theft.
- Will not corrode, rust or clog.
- Fits all Fas-Lok and other standard couplers.

Order No.	Description	Price
7-0899	Hitchlock	$9.98 G

Boater Sports 2-Piece Coupler Lock Screw Set



- Screw type trailer coupler lock.
- Solid construction.
- Two keys included.
- Heat treated.
- Will not corrode or rust.

Order No.	Mfg. No. / Description	Price
1-59402	(59402)	$9.95 H

©2014 Donovan Marine, Inc.

Tough Guy Hitch Lock



- Safety and security, helps prevent thefts.
- Fits Class III and Class IV hitches (2" x 2"), 5/8" pin diameter.
- Chrome plated for corrosion resistance.
- Key slot has cover to protect lock mechanism.

Order No.	Description	Price
7-1866	Hitch Lock	$12.98 G

Shelby Coupler Locks



- Chrome plated coupler lock for 1/4" pin diameter couplers.
- Covered key slot for protection, turn key to unlock - no unscrewing required.

Order No.	Mfg. No. / Description	Price
688000	(7580-93) 1/2" Opening	$14.98 I
688004	(7582-93) 2-1/2" Opening	$16.98 I
688006	(7583-93) 3-3/8" Opening	$18.98 I

Attwood Steel Tie Down Anchor Point Kit



- 2" long with 1" diameter eye.
- Diameter 3/8".
- Includes: (2) Eye bolts, (4) washers and (4) nuts.

Order No.	Mfg. No. / Description	Price
241036	(10890-3) Tie Down Anchor Point Kit	$5.98 Q

Tough Guy Receiver and Coupler Lock Set



- Safety and security, helps prevent thefts.
- Keyed alike for convenience, one key for both locks.
- Chrome plated for corrosion resistance.
- Key slot has cover to protect lock mechanism.
- Receiver lock fits Class III and Class IV hitches (2" x 2"), 5/8" pin diameter.
- Coupler lock fits 1/4" trigger style couplers.

Order No.	Description	Price
7-1865	Lock Set	$26.98 G

Fulton Gorilla Guard Trailer Coupler Lock



- Maximum protection for unattended trailers.
- Easy to use, push-button lock.
- Heavy duty cast construction with die-cast steel barrel keys.
- Fits most couplers.

Order No.	Mfg. No. / Description	Price
357586	(TP17-0103) 1-7/8" Couplers	$37.98 I

Fulton Universal Trailer Coupler Lock



- Durable cast body.
- Fits all 1-7/8", 2" and 2-5/16" couplers.

Order No.	Mfg. No. / Description	Price
357113	(UTL-1000)	$27.98 I

O'Neill Manufacturing/Rod Saver Personalized Tie Downs

Secure your future with Rod Saver and Donovan Marine.

- O'Neill Manufacturing, Inc. and Donovan Marine offers two of O'Neill's most popular tie downs with your dealership name embroidered on the buckle wrap.
- Choose from the Paddle Buckle or Quick Release over-the-center style buckles.

Information Needed:

Monogram Name (20 letters or less):

_____

Letter Style #:

_____

Thread Color:
Choose from: Red, Dark Blue, Light Blue, White, Yellow, Green, Chartreuse Green and Tan.

Letter Style Choices:

Style #	Description	Example
1	Block	ABCDEFGHIJKLMNOPQRTSUVWXYZabcdefghijklmnopqrstuvw
2	Sea Breeze	
3	Old Style	ABCDEFGHIJKLMNOPQRTSUVWXYZabcdefghijkl
4	Script	
5	Flares	ABCDEFGHIJKLMNOPQRTSUVWXYZabcdefghijklmnopq
6	Chancery	
7	Hobo	ABCDEFGHIJKLMNOPQRTSUVWXYZabcdefghijklmnopqrst
8	Old English	
9	Serif3	ABCDEFGHIJKLMNOPQRTSUVWXYZabcdefghijklmno



Quick Release





Paddle Buckle

Order No.	Mfg. No. / Description	Price
_____	(2PB2) Paddle Buckle, 2" x 2" Pair	Call for Price
_____	(2PB4) Paddle Buckle, 2" x 4" Pair	Call for Price
_____	(QRTD2) Quick Release, 2" x 2" Pair	Call for Price
_____	(QRTD4) Quick Release, 2" x 4" Pair	Call for Price

Star Brite Custom Embroidered Transom Tie Downs



Special Order Only **Minimum Order 25 Pair**

- Thread color choices: Red, blue, white, yellow, gold, teal, and neon green.
- No additional charge for standard or script type lettering.
- No more than 13 characters per line, imprint area 2" x 3", three imprint line available.
- Custom digitized logos available.

Order No.	Mfg. No. / Description	Price
S/O	(60070) 2" x 2' Transom Tie Down, Bulk	Price on Request
S/O	(60062) 2" x 3' Transom Tie Down, Bulk	Price on Request
S/O	(60072) 2" x 4' Transom Tie Down, Bulk	Price on Request
S/O	(60079) 2" x 5' Transom Tie Down, Bulk	Price on Request

Tough Guy Gunwale Tie Downs with J Hook Ends



- Buckle locks securely, is easy to adjust.
- Corrosion resistant J hooks.
- Heavy duty 2" wide webbing.
- Made in USA.

Order No.	Description	Price
7-2100	Length 10'	$9.98 G
7-2101	Length 12'	$10.98 G
7-2102	Length 14'	$11.98 G
7-2103	Length 16'	$12.98 G
7-2104	Length 18'	$13.98 G
7-2105	Length 20'	$13.98 G

Tough Guy Ratchet Tie Down



- Heavy duty webbing.
- Easy-adjust ratchet.
- Coated "S" hooks.
- 1" x 14'.
- Made in USA.

Order No.	Description	Price
7-2136	Length 14'	$14.98 G

Boater Sports Ratchet Gunwale Tie Down Strap



- Heavy duty ratchet tie down strap.
- Fully adjustable.
- Quick release buckle.
- High impact polyester webbing.
- Coated J-hooks.
- 3,000 lb. break strength.
- 2" wide.

Order No.	Mfg. No. / Description	Price
1-59802	(59802) Length 14'	$12.95 H

Tough Guy Gunwale Tie Downs with J Hook Ends



- Buckle locks securely, is easy to adjust.
- Corrosion resistant J hooks.
- Heavy duty 2" wide webbing.
- Made in USA.

Order No.	Description	Price
7-2120	Length 8'	$13.98 G
7-2121	Length 10'	$13.98 G
7-2122	Length 12'	$14.98 G
7-2123	Length 14'	$15.98 G
7-2124	Length 16'	$16.98 G
7-2125	Length 18'	$17.98 G
7-2126	Length 20'	$18.98 G

Tough Guy Deluxe Gunwale Tie Downs



- Premium stainless steel buckle and hooks.
- Durable 2" polyester webbing.
- Built tough for years of service.
- Made in USA.

Order No.	Description	Price
7-1631	Length 13'	$18.98 G
7-1632	Length 16'	$22.98 G

Tough Guy Transom Tie Downs



- Can be quickly adjusted.
- Protective pad.
- Sold in pairs.
- Made in USA.

Order No.	Description	Price
7-2130	Length 2', 2" Wide	$18.98 G
7-2131	Length 4', 2" Wide	$20.98 G
7-2133	Length 3-1/2", 1" Wide, Adjustable	$21.98 G

Tough Guy Heavy Duty Retractable Transom Tie-Down



- The safe and easy way to secure a boat to the trailer.
- Unique ratcheting action has two-step release to prevent accidental release.
- Mounting hardware included.
- Made in USA.

Order No.	Description	Price
7-2140	Length 40"	$89.98 G

©2014 Donovan Marine, Inc.

Tie Down Super Lube Hub Kits



- Pre-greased and assembled.
- Easily accessible grease channel with grease fitting.
- Rubber expansion access cap allows grease to expand and contract.
- Dust cap reservoir.
- Completely sealed grease reservoir chamber permits maximum lubrication.
- Kits include: Bearings, seals, dust cap, cotter key and lug nuts.

Order No.	Mfg. No. / Description	Price
657683	(81015) 4 Stud, 2 Each 1" Bearings	$62.98 G
657695	(81020) 4 Stud, 2 Each 1-1/16" Bearings	$62.98 G
657722	(81035) 5 Stud, 2 Each 1" Bearings	$62.98 G
657734	(81040) 5 Stud, 2 Each 1-1/16" Bearings	$62.98 G
657746	(81045) 5 Stud, 1 Each 1-1/16" and 1-3/8" Bearings	$72.98 G

Marpac Hub Kits





- Includes: Hub, (2 each) bearings, 1/2" lug nuts, (1 each) grease seal, (1 each) cotter key and (1 each) dust cap.

Order No.	Description	Price
7-0710	4 Stud Hub 1250#, 1" Bearings, 4 Lug Nuts	$37.98 G
7-0711	5 Stud Hub 1250#, 1" Bearings, 5 Lug Nuts	$34.98 H
7-0712	5 Stud Hub 1350#, 1-1/16" Bearings, 5 Lug Nuts	$34.98 H
7-0713	5 Stud Hub 1750#, 1-1/16" and 1-3/8" Bearings, 5 Lug Nuts	$39.98 H

Boater Sports Bearing Kits



- One pair of bearings with races.
- One grease seal and one cotter pin per bearing.
- One set of bearings per hub.

Order No.	Mfg. No. / Description	Price
1-59032	(59032) Spindle Outside Dia.: 1", Outer Hub: 1.980, Outer and Inner Bearing #L44643, Outer and Inner Cup #LM44610	$13.95 H
1-59033	(59033) Spindle Outside Dia.: 1-1/16", Outer Hub: 1.980, Outer and Inner Bearing #L44649, Outer and Inner Cup #L44610	$15.95 H
1-59034	(59034) Spindle Outside Dia.: 1-3/8" x 1-1/16", Outer Hub: 1.980, Outer and Inner Bearing #L44649, Outer Cup #L44610, Inner Cup #L68111	$15.95 H

Bearing Buddy Spindle Seals



- Spindle Seal is for use with Bearing Buddy on trailers with brakes or as replacement seals.
- The Spindle Seal System eliminates excessive grease leakage caused by rough sealing surfaces, which will quickly destroy any seal.
- With the Spindle Seal System, high-quality neoprene seals ride on a smooth stainless steel surface constantly greased by the action of Bearing Buddy, which prolongs the life of the seals.

Order No.	Mfg. No. / Description	Price
231592	(60001) Sold Per Pair On Clam Shell Card	$19.98 Q

Tie Down GalvX Coated Wheel Hub Kits



- Replacement wheel hub kit.
- All kits include: Bearings, seals, dust cap, cotter key, and lug nuts or bolts.
- Bearings and hub cavity 100% pre-greased.
- Grease seal and bearings are pre-assembled.

Order No.	Mfg. No. / Description	Price
657646	(81083) 5 Stud, 2 Each 1" Bearings	$51.98 G
657657	(81088) 5 Stud, 2 Each 1-1/16" Bearings	$51.98 G
657669	(81093) 5 Stud, 1 Each 1-1/16" and 1-3/8" Bearings	$57.98 G

Tie Down Hub Kits



- 100,000 mile or 6 year limited warranty.
- "No Touch" lubrication system.
- No maintenance/service for lower operating costs.
- No need for periodic re-greasing or inspection.
- Reusable dust cap is threaded for easy removal should the need occur.

Order No.	Mfg. No. / Description	Price
657640	(81016) 5 Stud, 1250# PNTVT, 1" with Lug Nuts	$72.98 G
657641	(81017) 5 Stud, 1350# PNTVT, 1-1/16" with Lug Nuts	$72.98 G
657642	(81022) 5 Stud, 1750# PNTVT, 1-3/8" and 1-1/16" with Lug Nuts	$91.98 G

Tough Guy Wheel Bearing Kits



- Precision tapered roller bearings.
- Each kit includes: (2) Cones, (2) cups, seal and cotter pin.
- Dust cap shown sold separately.

Order No.	Description	Price
7-0952	Spindle: 3/4", Outer Hub: 1.781	$12.98 G
7-0953	Spindle: 1", Outer Hub: 1.980	$11.98 G
7-0954	Spindle: 1-1/16", Outer Hub: 1.980	$11.98 G
7-0956	Spindle: 1-1/4", Outer Hub: 2.328	$13.98 G
7-0959	Spindle: 1-1/16" x 3/4", Outer Hub: 1.781	$12.98 G
7-0957	Spindle: 1-1/4" x 3/4", Outer Hub: 1.781	$14.98 G
7-0958	Spindle: 1-3/8" x 1-1/16", Outer Hub: 1.980, Race OD 2.361	$12.98 G
7-0955	Spindle: 1-3/8" x 1-1/16" with Special Cup, Outer Hub: 1.980, Race OD 2.328	$12.98 G

Marpac Replacement Bearing Seals



- Sold 2 per card.

Order No.	Description	Price
7-1861	Lip Seal 1" for 3/4"	$4.98 G
7-1860	Lip Seal 1-1/4" for 1" and 1-1/16"	$4.99 G
7-1862	Lip Seal 1-1/2" for 1-1/4"	$4.98 G
7-1863	Lip Seal 1-3/4" for 1-3/8"	$4.98 G

Boater Sports Spring-Loaded Bearing Protectors



- Steel spring keeps hub grease under pressure, guarding against water seepage and failure.
- Grease fitting in cap.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-59038	(59038) 1.980"	$18.49 H
1-59040	(59040) 2.328"	$22.99 H

Bearing Buddy® - Stainless Steel



- Prevents wheel bearing failure by keeping water and dirt out of hubs.
- (Insert decimal point after first digit in model No. for hub I.D. size).

Order No.	Mfg. No. / Description	Price
231605	(41204) 1781SS	$28.98 Q
231617	(42304) 1938SS	$32.98 Q
231629	(42604) 1968SS	$32.98 Q
231631	(42104) 1980SS	$28.98 H
231634	(43104) 2328SS	$39.98 H

Bearing Buddy® - Chrome Plated

Order No.	Mfg. No. / Description	Price
231630	(42102) Fits 1.980" Bore Hole Diameter, 1980	$23.98 H

Tie Down Dust Cap



Order No.	Mfg. No. / Description	Price
661333	(81167) Dust Cap, 1.98"	$4.16 I

Bearing Buddy® Bras



- Keeps grease off trailer wheels.
- Trailer owners sometimes overfill axle hubs with grease.
- The Bearing Buddy's automatic pressure relief feature will allow the excess grease to escape.
- While trailering, this grease can be thrown onto wheels.
- This product fits over the Bearing Buddy to eliminate this condition.

Order No.	Mfg. No. / Description	Price
231528	(17B) Fits 1781, 1810	$3.39 H
231530	(19B) Fits 1938, 1968, 1980, 2047, 2080	$3.39 H
231531	(23B) Fits 2328, 2441, 2717, 2562, 2240	$3.39 H

Bearing Buddy® with Auto Check - Stainless Steel - 1980A-SS



- Works like the regular Bearing Buddy, but has new exclusive Auto Check visual lubricant level and pressure indicator.
- When the hub is full of grease, the blue Auto Check ring rests about 1/8" outward from the steel retaining ring.
- A spring loaded piston behind the Auto Check ring pushes against the grease which generates pressure inside the hub to keep water out, thus offering the bearing protection.

Order No.	Mfg. No. / Description	Price
231643	(42204) Fits 1.980" Bore Hole Diameter	$29.98 H

Boater Sports Lube Cap



- Protection against damage from water and dirt entering the wheel bearings.
- Automatically maintains the correct internal pressure.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-59061	(59061) 1.980"	$9.25 H

Tie Down Super Lube Dust Cap



Order No.	Mfg. No. / Description	Price
578369	(81168)	$11.98 I
578370	(81174) Rubber Grommets for Super Lube Caps	$4.16 I

Boater Sports Bearing Protector Caps



- Helps to protect your bearings against damage from water and dirt entering the wheel bearings.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-59029	(59029) 1.781"	$3.65 H
1-59030	(59030) 1.980"	$4.15 H
1-59031	(59031) 2.328"	$4.65 H

Boater Sports Lube Grommet



- Rubber grommet for use with bearing protectors.
- Sold in pairs.

Order No.	Mfg. No. / Description	Price
1-59062	(59062) 1.980"	$4.35 H

©2014 Donovan Marine, Inc.

Aqua Lube Wheel Bearing and Chassis Grease



- High demand lubricant will not melt at temperatures exceeding 800° F.
- It will not pound out and is completely waterproof, even against salt water.

Order No.	Mfg. No. / Description	Price
299001	(AL0035) 5 Gallon Pail	$291.98 I
299010	(AL1450) 14.5 oz. Cartridge	$11.98 I
299014	(AL1624) 16 oz. Tub	$14.98 I
299012	(AL3336) 3 Pack of 3 oz. Cartridge	$14.98 I

Star Brite Wheel Bearing Grease





- Superior rust and corrosion protection from salt water, salt air and atmospheric chemicals.
- Special water-insoluble formula is highly resistant to wash-out.
- Recommended for corrosive marine applications trailer wheel bearings, water pumps, hinges, pins, winches and anchor chain reels.

Order No.	Mfg. No. / Description	Price
451725	(26003) 3 oz. Cartridge, 2 Pack	$10.98 G
451726	(26014) 14 oz. Cartridge	$7.98 G
451738	(26016) 1 lb. Tub	$8.98 G

Star Brite Grease Gun





- Heavy duty all steel construction for dependable, long service life.

Order No.	Mfg. No. / Description	Price
451500	(28703) For Use with 3 oz. Cartridges	$28.98 G
451598	(28714) For Use with 14 oz. Cartridges	$21.98 G

Standard Duty Pistol Action Grease Gun



- Compact size; ideal for use in tight areas.
- Can be used one-handed.
- Accepts 14 oz. refill cartridges.
- Corrosion-resistant finish.
- Fits standard zerk fittings.
- Quality construction for years of reliable service.

Order No.	Mfg. No. / Description	Price
451599	(28724) Grease Gun	$24.98 G

Star Brite 18" Extension Hose for Grease Gun



- Ideal for lubricating hard-to-reach fittings.
- Works with most grease guns.
- Rated for up to 4,500 psi.
- Flexible to work at odd angles.

Order No.	Mfg. No. / Description	Price
451601	(28810) Extension Hose	$10.98 G

Star Brite Pro Star Ultra Hi-Performance Wheel Bearing Grease



- High-tech formulation significantly outperforms traditional greases in every way.
- Provides unsurpassed protection against wear, corrosion and heat.
- Extremely resistant to water washout, a leading cause of bearing failure.
- Unique environmentally-responsible formula is bio-renewable and biodegradable.
- Also ideal for lubricating winches, windlasses, hinges and other moving parts.

Order No.	Mfg. No. / Description	Price
451740	(26103) 3 oz. Cartridge, 2 Pack	$13.98 G
451742	(26114) 14 oz. Cartridge	$11.98 G
451744	(26116) 16 oz.	$12.98 G

Sierra Premium Marine Bearing Grease



- Premium lithium formulation for optimum corrosion protection in freshwater and saltwater applications.
- Ideal for marine trailer wheel bearing, universal joints, steering system cables and outdrive pivot joints.
- Strong surface adhesion, advanced corrosion inhibitors and metal deactivators work together to battle component degradation and oxidation during storage or use in destructive marine environments.

Order No.	Mfg. No. / Description	Price
451524	(18-9700-4) 3 oz. Cartridge, 4 Pack	$20.98 H
451714	(18-9710-0) 10 oz. Tube	$8.00 F

Standard Duty Lever Action Grease Gun



- Lever action for maximum pressure per stroke.
- Ideal for all marine, auto and home lubrication tasks.
- Accepts 14 oz. refill cartridges.
- Corrosion-resistant finish.
- Fits standard zerk fittings.
- Quality construction for years of reliable service.
- For use with 14 oz. cartridges.

Order No.	Mfg. No. / Description	Price
451501	(28704) Grease Gun	$18.98 G

Sierra Easy Luber



- Ideal for quick and easy lube jobs using squeeze tubes.
- Compact size, perfect for under seat and tackle box storage.
- Use with all 10 oz. gear lube tubes.

Order No.	Mfg. No. / Description	Price
451574	(18-9785) Easy Luber	$24.98 G

Star Brite Extension Hose for 14 oz. Grease Gun



- This flexible nozzle will fit most grease guns on the market.
- Made especially for gun 28714 and 28703.

Order No.	Mfg. No. / Description	Price
451600	(28800) Extension Hose	$10.98 G

Tie Down Brake Kits





- Donovan has a complete line of brakes and brake accessories by Tie Down Engineering.
- Tie Down's complete brake sytems make replacement or upgrades as easy as 1, 2, 3.
  1. Disconnect brake lines, remove tire/wheel and old brakes.
  2. Install new brakes, replace tire/wheel, reconnect or replace brake lines and bleed lines.
  3. Check/modify actuator or replace with a new actuator.

- Kit includes: (2) 10" brake assembly, (1) solenoid lock out, (1) brake line kit (2-3/16" x 12" 3000 psi lines) and (1) actuator.

Order No.	Mfg. No. / Description	Price
333497	Bearing Size 1-3/8" x 1-1/16"	$1,025.98 I

- Kit includes: (2) 12" brake assembly, (1) solenoid lock out, (1) brake line kit (2-3/16" x 12" 3000 psi lines) and (1) actuator.

Order No.	Mfg. No. / Description	Price
333501	Bearing Size 1-3/4" x 1-1/4"	$1,181.98 I

- Kit includes: (2) 10" brake assembly, (1) solenoid lock out and (1) brake line kit (2-3/16" x 12" 3000 psi lines).

Order No.	Mfg. No. / Description	Price
333499	Bearing Size 1-3/8" x 1-1/16"	$767.98 I

- Kit includes: (2) 12" brake assembly, (1) solenoid lock out and (1) brake line kit (2-3/16" x 12" 3000 psi lines).

Order No.	Mfg. No. / Description	Price
333503	Bearing Size 1-3/4" x 1-1/4"	$923.98 I

Tie Down Galvanized 10" Disc Brake Assembly



- Bi-metal Piston: Combines a stainless steel outer piston with an aluminum inner sleeve to shed braking heat fast. The stainless steel outer piston will not rust or corrode.
- Oversize Rubber Boot: 50% thicker by design to provide a positive and faster piston withdrawal.
- Rotating Swivel Connector: Swivel brake line connector allows for convenient brake line placement.
- Stainless Steel Caliper Pins with Oil Impregnated Bronze Bushings: Allows caliper to float freely and ensures proper alignment during installation and will not rust or corrode.
- Vented Caliper Housing: Improves heat dissipation and decreases pad wear.
- One Piece Stainless Steel Bleeder Valve with Teflon Coating: Will not corrode and allows for easier bleeding of the brake system.
- Square O-ring with Slant Edge: Helps retract pistons away from the rotor when fluid pressure is released. Provides better protection from contamination of brake fluid.

Order No.	Mfg. No. / Description	Price
657322	(82091) Galvanized (Bearing Size 1-3/8" x 1-1/16")	$239.98 G

Tie Down 12" Disc Brake Assembly



- Bi-metal Piston: Combines a stainless steel outer piston with an aluminum inner sleeve to shed braking heat fast. The stainless steel outer piston will not rust or corrode.
- Oversize Rubber Boot: 50% thicker by design to provide a positive and faster piston withdrawal.
- Rotating Swivel Connector: Swivel brake line connector allows for convenient brake line placement.
- Stainless Steel Caliper Pins with Oil Impregnated Bronze Bushings: Allows caliper to float freely and ensures proper alignment during installation and will not rust or corrode.
- Vented Caliper Housing: Improves heat dissipation and decreases pad wear.
- One Piece Stainless Steel Bleeder Valve with Teflon Coating: Will not corrode and allows for easier bleeding of the brake system.
- Square O-ring with Slant Edge: Helps retract pistons away from the rotor when fluid pressure is released. Provides better protection from contamination of brake fluid.

Order No.	Mfg. No. / Description	Price
657325	(82092) E-Coated (Bearing Size 1-3/4" x 1-1/4")	$311.98 G

Tie Down Disc Brake Assemblies



- Floating pads with metal backing plate.
- Vented caliper housing.
- Grade 413 aluminum.
- Semi metallic pads.
- Pressure equalizing port.
- Four point mounting bracket.
- One piece brass bleeder valves.
- Stainless steel shoulder pins and lock nuts.
- New sliding pins with oil impregnated bronze bushings.
- Hollow pistons.
- "Square" style O-rings.
- Factory preinstalled stainless steel pins.
- Each box is for one wheel,includes mounting bracket.

Order No.	Mfg. No. / Description	Price
657102	(81101) 10" Disc Brake Assembly, 1-3/8" x 1-1/16"	$229.98 I
657126	(81104) 12" Disc Brake Assembly, 1-3/4" x 1-1/4"	$383.98 I

Tie Down Eliminator 10" Disc Brake Kit



- "Integral" one piece style vented rotor and aluminum caliper with automotive quality brake pads.
- Vented rotor with GalvX finish.
- Dual brass bleeder valves.
- Stainless guide pins.
- Distinctive 380 aluminum caliper with E-coat finish.
- Galvanized heavy duty mounting bracket included.
- Bi-metal piston with stainless steel piston cup.
- Aluminum caliper with raised ribs dissipates heat up to 5 times faster than normal cast iron calipers.

Order No.	Mfg. No. / Description	Price
657104	(82099) 10" Disc Brake Kit	$203.98 I

©2014 Donovan Marine, Inc.

Tie Down 10" Galvanized Drum Brake Kit



- Absolutely, Positively the MOST Corrosion Resistant Drum Brake PERIOD!
- The GalvX system is composed of inorganic polymers which bond metallic zinc flakes to the metal surface.
- Aluminum wheel cylinder.
- Stainless steel springs.
- Brake pads are bonded and riveted with bronze rivets to backing plate.
- Superior saltwater performance over standard drum brakes.

Order No.	Mfg. No. / Description	Price
657320	(81097) 10" Galvanized Drum Brake Kit	$228.98 G

Tie Down 10" Drum Brake Hub



- Painted brake drum hubs for greater corrosion resistance.
- Drum hub only, with cups and studs.

Order No.	Mfg. No. / Description	Price
657310	(81004) 10" Drum Brake Hub	$89.98 G

Tie Down Axle Brake Line Kits



- Add disc or drum brakes to your trailer.
- All hardware included, you supply the actuator and brakes.

Order No.	Mfg. No. / Description	Price
657106	(80326) Single Axle Brake Line Kit, 20"	$89.98 I
657108	(80328) Tandem Axle Brake Line Kit, 20"	$155.98 I

Tie Down Flexible Brake Line Kit



- Two 1/8" x 24" flexible 3,000 psi. brake lines are ideal for disc brake installation requirements.
- Connects from brake caliper to female end of brake line or can be connected to existing steel lines with adapters included in the kit.
- Flexible line connection required on G4 disc brakes.

Order No.	Mfg. No. / Description	Price
657227	(81099) Flexible Brake Line Kit	$72.98 G

Tie Down Disc Brake Actuators



- No longer will you be required to "pump" the dampener first before bleeding the brakes. All TDE actuators now have a pre-loaded dampener.
- The coupler in the closed (tow) latch position will auto-latch onto the hitch ball when set on top of the hitch ball, with minimal weight. Incorrect latching and/or forgetting to properly close the latch mechanism is the #1 reason for trailer separation from the tow vehicle.
- Solenoid Plumbing Built Into The Master Cylinder- eliminates: removal of entire solenoid for servicing, detachment of brake hose, detachment of the actuator cover, detachment of actuator unit from trailer tongue.
- Larger Fill Cap On Master Cylinder-Common filler cap easier to maintain spare parts. Easy to remove, easier to add brake fluid.
- Standard Length Actuator Cover-covers the solenoid (when used) similar to the previous "3/4 extended" model.
- Cast steel ball clamp.
- Safety pin that locks the ball clamp, not the latch handle.
- Aluminum master cylinder.
- Coiled E-stop cable, PVC coated.
- Grease fittings on roller pins.

Order No.	Mfg. No. / Description	Price
657300	(82400) Model 660 Disc Brake Actuator, 6,600 lb. Capacity	$254.98 G
657301	(82401) Model 660 Drum Brake Actuator, 6,600 lb. Capacity	$213.98 G
657304	(86165) Model 66 Brake Actuator	$179.98 G

Tie Down Reverse Lock Out Solenoid



- Unlike drum brakes, disc brakes generate full braking power in reverse.
- If your actuator does not have a reverse lock out lever or switch, a reverse lockout solenoid should be installed at the actuator before installation of disc brakes.
- Can be used on drum brakes as well.

Order No.	Mfg. No. / Description	Price
657203	(81103) Reverse Lock Out Solenoid	$88.98 G

Penray Non-Chlorinated Brake Cleaner



- Low V.O.C. formula.
- Quickly and effectively dissolves and removes grease, oil, brake fluid and other contaminants from brakes, C.V. joints and clutch components.
- Degreases instantly, leaves no residue.
- Helps stop brake squealing and can improve braking performance.

Order No.	Mfg. No. / Description	Price
604320	(4620) Brake Cleaner	$7.98 Q



Stainless Steel Disc Brakes "G5" Design

- Precision bearings, seals, and Lucas Grease factory installed
- Factory pre-installed stainless steel slider pins
- Stainless Steel rotor with venting holes for faster cooling
- 5 on 4-1/2" bolt pattern, 2 kits required per axle


10" Disc Brake Assembly, GalvX Hub	Part #657322
12" Disc Brake Assembly, GalvX Hub	Part #657325

Eliminator Vented Disc Brakes

- Lifetime ceramic pads with stainless steel backing plates
- Aluminum caliper with raised ribs dissipates heat up to 5 times faster than cast iron calipers
- Precision bearings, seal, and Lucas Grease Installed

10" "Integral" Style Vented Rotor Disc Brake Assembly Part #657104



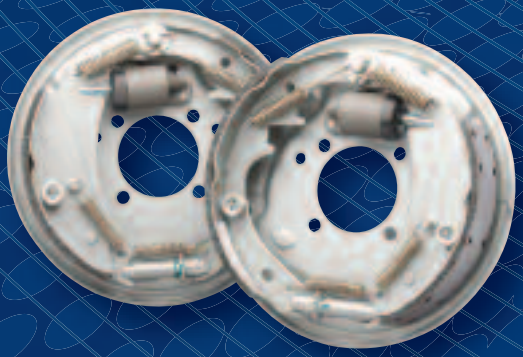

Hydraulic Drum Brakes

- Aluminum wheel cylinder
- Stainless steel springs
- GalvX coating offers superior saltwater performance over standard drum brakes

10" GalvX Drum Brake Assembly, L & R Part #657320

Drum Hubs

Hubs are designed to work with hydraulic or electric drum brakes. Painted brake drum hubs for greater corrosion resistance.

10" Brake Drum Hub Only - cups and studs installed
Part #657310





Brake Line Kits

Add disc or drum brakes to your trailer. All hardware included, you supply the actuator and brakes. The "Add On" Axle Kit must be used with the Single Axle Kit. The Tandem Axle Kit combines both Single Axle and "Add On" Kits into one package.

Single Axle Brake Line Kit	Part #657106
"Add On" Axle Brake Line Kit	Part #Z047141
Tandem Axle Brake Line Kit	Part #657108

Complete Brake Kits

Brake Kits come with everything needed to replace trailer brake systems and will keep you in compliance with state requirements.

Eliminator Vented Rotor Disc Brakes: The best choice for inland trailers traveling steep grades or over long hauls.
Each kit includes: New Model 660/800 disc brake actuator with back flow style solenoid installed, a pair vented rotor disc brakes and a brake line kit.

10" Vented Rotor Brake Installation Kit
Part #333497

12" Vented Rotor Brake Installation Kit
Part #333501



State Towing Laws, Did you know?

Your trailer may require a brake system. Minimum trailer weights which require brakes varies from state to state. The list below shows the Gross Weight of Trailer (GWT) requiring brakes. If your trailer weighs more than the state requirement, you will need to upgrade your trailer.

State	GWT in labs.	State	GWT in labs.	State	GWT in lbs.
Alabama	3,000	Kentucky	NS	North Dakota	All
Alaska	5,000	Louisiana	3,000	Ohio	2,000
Arizona	3,000	Maine	3,000	Oklahoma	3,000
Arkansas	1,500	Maryland	3,000	Oregon	NS
California	1,500	Massachusetts	10,000	Pennsylvania	All
Colorado	3,000	Michigan	3,000	Rhode Island	4,000
Connecticut	3,000	Minnesota	3,000	South Carolina	3,000
Delaware	All	Mississippi	2,000	South Dakota	3,000
District of Columbia	3,000	Missouri	NS	Tennessee	3,000
Florida	3,000	Montana	3,000	Texas	4,500
Georgia	3,000	Nebraska	3,000	Utah	All
Hawaii	3,000	Nevada	1,500	Vermont	3,000
Idaho	1,500	New Hampshire	3,000	Virginia	3,000
Illinois	3,000	New Jersey	3,000	Washington	3,000
Indiana	3,000	New Mexico	3,000	West Virginia	3,000
Iowa	3,000	New York	1,000	Wisconsin	3,000
Kansas	All	North Carolina	4,000	Wyoming	All

"NS" indicates not specified.

The state tow law data is provided by the American Automobile Association. Visit drivinglaws.aaa.com for requirements and updates.

Tie Down Trailer Axle Spindles



- Includes: Nut, washer and cotter pin.

Order No.	Mfg. No. / Description	Price
580111	(80055) 1-1/4" x 7", Bng. Surface: 1"	$17.98 I
580123	(80060) 1-1/4" x 7", Bng. Surface: 1-1/16"	$19.98 I
580147	(80235) 1-3/4" x 8-1/4", Bng. Surface: 1-1/16" x 1-3/8"	$24.98 I
580159	(80325) 2" x 8-1/4", Bng. Surface: 1-1/16" x 1-3/8"	$28.98 I
580173	(81169) Nut, Washer, Cotter Pin Kit	$5.98 I

Trailer Springs



Slipper Spring – Flat End



Slipper Spring – Radius End



Double Eye Spring

* The capacities given are for reference, only. The actual capacity is dependent on the spring mounting (center clamp) and service requirements.

DMI #	MFG #	# Leaf Springs	Length	Capacity	Price
Slipper Spring – Flat End					
667898	(UNA-267)	3	24-1/2"	750 lbs.	$39.98 I
667886	(UNA-043)	4	24-1/2"	1,000 lbs.	$49.98 I
667901	(UNA-013)	2	25-1/8"	467 lbs.	$29.98 I
667913	(UNA-014)	3	25-1/8"	713 lbs.	$32.98 I
667925	(UNA-015)	4	25-1/8"	935 lbs.	$37.98 I
667937	(UNA-016)	5	25-1/8"	1,184 lbs.	$62.98 I
667949	(UNA-017)	6	25-1/8"	1,415 lbs.	$69.98 I
668028	(UNA-038)	2	30"	880 lbs.	$45.98 I
668030	(UNA-039)	3	30"	1,430 lbs.	$57.98 I
668054	(UNA-040)	4	30"	1,837 lbs.	$69.98 I
Slipper Spring – Radius End					
667874	(UNA-034)	3	32"	800 lbs.*	$49.98 I
668131	(UNA-024)	4	32"	1,100 lbs.*	$64.98 I
668155	(UNA-029)	5	32"	1,400 lbs.*	$89.98 I
Double Eye Spring					
668206	(UNA-219)	3	25-1/4"	1,250 lbs.*	$44.98 I
668220	(UNA-212)	4	25-1/4"	1,625 lbs.*	$59.98 I
668207	(UNA-220)	3	25-1/4"	1,750 lbs.*	$55.98 I
668205	(UNA-218)	4	25-1/4"	2,200 lbs.*	$59.98 I

Marpac Lug Nuts and Lug Bolts



7-1853



7-1855

- Sold 5 per card.

Order No.	Description	Price
7-1855	Lug Bolts 1/2"	$5.98 G
7-1853	Lug Nuts 1/2"	$5.98 G

Tie Down Axle Tie Plate Kits



576554



576530

- Kits include: (4) U-bolts, (2) five hole tie plates and (8) lock nuts.

Order No.	Mfg. No. / Description	Price
576504	(81175) Fits 1.90" Round Axle	$24.98 I
576516	(81180) Fits 2-3/8" Round Axle	$28.98 I
576530	(81185) Fits 2" Square Axle	$35.98 I
576554	(81186) Universal Axle Tie Plate	$10.98 I

Tie Down Rear Spring Hanger



- Solid steel hangers can be used on rear slipper springs 1-3/4" to 2" wide.
- 5,200 to 8,000 pound capacity for medium duty axles.
- 1/4" stock.

Order No.	Mfg. No.	Price
578181	(86275)	$5.98 I

Tie Down Front Spring Hanger



- Solid steel stock hangers for use on slipper and double eye springs that are mounted on 1,000 - 3,500 lbs. capacity, medium duty axles.
- Predrilled for 9/16" bolt.

Order No.	Mfg. No.	Price
578166	(86274)	$5.98 I


Tie Down Shackle Link



- Steel shackle links are used to mount double eye springs.
- Suitable for medium duty axles, 1,000 - 3,500 lbs. capacity.
- Predrilled for 9/16" bolt.

Order No.	Mfg. No.	Price
578194	(86276)	$4.10 I

Spring Bushings



Order No.	Mfg. No.	Price
667850	(MPE-182)	$3.96 I
667862	(MPE-224)	$3.86 I

Chrome Lug Nuts

Order No.	Description	Price
506337	1/2"	$2.98 G

©2014 Donovan Marine, Inc.

Chrome Plated Directional Rim with Rivets



- Rim is chrome plated steel.
- 14" 5 hole.
- Rim mounted with Bias Ply (D) or Goodyear Radial (R) Tire.

Order No.	Description	Price
506342	Chrome Plated Mod Rim with ST205/75D14 C, 5H	$159.98 F

Silver Directional Rim with Rivets



- Rim is silver with rivets.
- 5 hole.
- Rim mounted with Bias Ply (D) or Goodyear Radial (R) Tire.

Order No.	Description	Price
506350	Silver Directional Rim with 175/80D13 C, 5H	$113.98 F

Custom Spoke Rim, White with Red and Blue Pin Stripes



- This rim is off-white with red and blue pin stripes.
- 5 hole.
- Rim mounted with Bias Ply (D) Tire.

Order No.	Description	Price
506354	Spoke Rim with ST205/75D14 C, 5H	$143.98 F

Camco Wheel Chock



- Chocks keep your trailer in place so you can re-hitch with confidence.
- Solidly constructed of durable hard plastic with UV inhibitors.

Order No.	Mfg. No. / Description	Price
357079	(44472) Wheel Chock	$6.98 F

Tie Down Plastic Fender



- Upgrade with these high impact polyethylene fenders.
- Plastic fenders are UV protected.
- Designed for normal and low profile tires.
- Small fenders fit 8" to 12" wheels.
- Large fenders fit 13", 14", and 15" wheels on single or multiple axle setups.

Order No.	Mfg. No. / Description	Price
657110	(17026) Small White, 7-3/4" Width, 21" Length, 5" Height	$17.98 I

Custom Mod Rims, White with Red and Blue Pin Stripes



- 5 hole.
- Rim mounted with Bias Ply (D) Tire.

Order No.	Description	Price
506340	Mod Rim with ST175/80D13 B, 5H	$112.98 F
506338	Mod Rim with ST205/75D14 C, 5H	$124.98 F

Plain White Rims with Tire Assemblies



- These rims are white, available as a rim only or with tire mounted, Bias Ply (D).
- 4 Hole or 5 Hole and various load ranges.

Order No.	Description	Price
506348	Plain White Rim with 20.5X8-10 C, 4H	$109.98 F
506344	Plain White Rim with 20.5X8-10 B, 5H	$97.98 F
506351	Plain White Rim with 20.5X8-10 C, 5H	$106.98 F


Tough Guy High Speed Balanced Galvanized Tire and Rim



- Balanced to enhance the towing experience.
- Less potential for vibration for a smoother towing experience.
- Reduces potential for tread damage from excess vibration.
- Industry standard 5 hole pattern galvanized rim.
- ST205/75D-14 load range C tire, maximum load 1,760 lbs. (800 Kg) at 50 psi.

Order No.	Mfg. No. / Description	Price
7-2155	(205/75D14GLV)	$150.98 G

Tough Guy Camouflage Rim



- 14" x 6".
- Industry standard 5 hole pattern.

Order No.	Mfg. No. / Description	Price
7-2160	(14X6X5CAMO)	$59.98 G

Tie Down Fender Bracket



- 14" step brackets, galvanized for large plastic fenders
- Metal fender brackets for 8" and 12" fenders are available in flush mount and offset, two brackets used per fender.
- The plastic fender brackets mount flush, two required for each fender.

Order No.	Mfg. No. / Description	Price
657115	(44141) 2 Per Package	$13.98 I

Trailer Tire Assemblies


505048


505192


505202


505632


506266


506141

We stock only the finest quality tire assemblies, yet economically priced.
Painted rims are white.

Order No.	Size	Radial	Class	# of Lug	Load (lbs.)	Price
Painted Assemblies						
505012	4.80 x 8	-	B	4	590	$46.98 F
505024	4.80 x 8	-	B	5	590	$50.98 F
505036	5.70 x 8	-	B	4	715	$60.98 F
505048	5.70 x 8	-	B	5	715	$60.98 F
505062	4.80 x 12	-	B	4	780	$64.98 F
505074	4.80 x 12	-	B	5	780	$64.98 F
505086	5.30 x 12	-	B	4	840	$80.98 F
505098	5.30 x 12	-	B	5	840	$72.98 F
505125	ST175/80D x 13	-	B	4	1,065	$114.98 F
505137	ST175/80D x 13	-	B	5	1,065	$114.98 F
506348	20.5 x 8 x 10	-	C	4	1,105	$109.98 F
505166	20.5 x 8 x D5P	-	D	5	1,330	$103.98 F
505195	215/75R14	Yes	R	5	-	$185.98 F
505362	225/75R14	Yes	R	6	-	$252.98 G
Galvanized Assemblies						
505202	4.80 x 8	-	B	4	590	$46.98 F
505214	4.80 x 8	-	B	5	590	$46.98 F
505240	4.80 x 12	-	B	4	780	$72.98 F
505252	4.80 x 12	-	B	5	780	$72.98 F
505264	5.30 x 12	-	B	4	840	$85.98 F
505276	5.30 x 12	-	B	5	840	$75.98 F
505288	ST175/80D x 13	-	B	4	1,065	$102.98 F
505303	ST175/80D x 13	-	C	5	1,315	$113.98 F
505308	175/80D x 13	-	D	5	-	$117.98 F
505339	ST205/75D x 14	-	C	5	1,760	$145.98 F
505341	ST205/75D x 15	-	B	5	1,385	$171.98 F
505350	205/75D14	-	C	5	-	$148.98 F
505355	215/75D14	-	D	5	-	$152.98 F
505193	215/75R14	Yes	R	5	-	$194.98 F
505358	225/75D15	-	D	-	-	$184.98 F
505360	225/75R14	Yes	R	-	-	$239.98 G
505400	225/75D x 15	-	D	6	2,540	$184.98 F
505457	20.5 x 8 x 10	-	D	5	1,330	$118.98 F
Galvanized Radial Assemblies						
505192	205/75R14	Yes	C	5	-	$193.98 F
Chrome Assembly						
505194	ST205/75D x 14RWL	Yes	C	5	1,760	$262.98 G

Trailer Rims Only

Order No.	Size	# of Lug	Price
Painted Rim			
506103	8 x 3-3/4	5	$12.98 G
506139	13 x 4-1/2	4	$38.98 F
506141	13 x 4-1/2	5	$38.98 F
Galvanized Rim			
506228	8 x 3-3/4	5	$18.98 G
506331	10 x 6	5	$35.98 F
506230	12 x 4	4	$36.98 F
506242	12 x 4	5	$37.98 F
506254	13 x 4-1/2	4	$49.98 F
506266	13 x 4-1/2	5	$49.98 F
506305	14 x 6	5	$38.98 F
506329	15 x 6	5	$56.98 F

Trailer Tires Only

Order No.	Size	# of Lug	Price
505606	4.80 x 8	B	$35.98 F
506349	20.5 x 5 x 8-10	C	$66.98 F
505620	4.80 x 12	B	$49.98 F
505632	5.30 x 12	C	$48.98 F
505656	ST175/80D x 13	C	$74.98 F
506333	570 x 8	B	$49.98 F
506347	ST205/75D x 14	C	$95.98 F
505670	225/75D15	D	$122.98 F

©2014 Donovan Marine, Inc.

Boater Sports Offset Spare Tire Carrier



- Heavy duty galvanized steel construction.
- Fits up to 15" tire, 4 or 5 lug.
- Fits trailer frames up to 3" wide x 4" height.
- Offset 4-1/2" x 5" rise from frame.

Order No.	Mfg. No. / Description	Price
1-59105	(59105)	$29.95 Q

Tie Down Spare Tire and Hub Carrier



- Heavy duty steel carrier mounts, both spare hub and spare tire.
- Includes 5 stud pre-greased hub with 1-1/16" and 1-3/8" bearings.
- Fits all trailer frames up to 3" wide and 4" high.
- Security holes for optional cable and lock.

Order No.	Mfg. No. / Description	Price
578281	(86079) Spare Tire and Hub Carrier	$106.98 I

Tie Down High Mount Spare Tire Carrier



- Hot dip galvanized.
- Accommodates 4, 5 and 6 lug wheels.
- Fits trailer frames 3" wide by 4" high.
- Heavy duty steel tubing.

Order No.	Mfg. No. / Description	Price
578293	(86101)	$37.98 I

Tie Down Spare Tire Carrier



- Hot dip galvanized.
- Adjustable bolt circle fits both 4 lug and 5 lug wheels.
- Offset height raises tire and provides ground clearance.
- Fits all trailer tongues up to 3" wide by 4" high.
- Extra heavy duty welded steel construction.
- Security holes for optional cable and lock.

Order No.	Mfg. No. / Description	Price
578306	(86098) Spare Tire Carrier	$33.98 I

Tie Down Spare Tire Carrier



- Adjustable bolt circle fits both 4 lug and 5 lug wheels.
- Fits all trailer frames up to 6" high.
- Heavy duty welded steel construction.

Order No.	Mfg. No. / Description	Price
578283	(86069)	$55.98 I

Fulton Hi-Mount Spare Tire Carrier



- Heavy-duty, welded and reinforced steel plate construction.
- Zinc-plated to resist corrosion.
- Adjustable bolt circle to fit both 4 and 5 lug wheels.
- Fits all trailer tongues up to 3" wide by 4" high.
- Includes zinc-plated mounting hardware and instructions.
- Security locking hole to lock wheel and bracket to trailer using a security cable and lock (cable and lock sold separately).

Order No.	Mfg. No. / Description	Price
685558	(STC1000101)	$45.98 I

Boater Sports Spare Tire Carriers



- Heavy 7/16" U-bolt secures tire on tongue or frame up to 3" wide.
- Suitable for 4 or 5 hole rims.
- Will fit 8" through 14" and most 15" wheels.
- Adjustable threaded brackets holds padlock for extra security

Order No.	Mfg. No. / Description	Price
1-59100	(59100) With Lock	$22.25 H
1-59103	(59103) With Lock Brackets	$13.25 H
1-59104	(59100) With Nut, No Lock	$10.59 H

Attwood U-Bolt Style Tire Carrier



- Mounts tire on tongue or trailer frame.
- Fits 4 or 5 lug hole rims.
- The frame must be between 2" x 2" square to 3-1/2" x 4" rectangular in size.
- Extra long 8-1/2" shaft fits 8" to 15" tires.
- Solid, zinc plated steel square bend U-bolt with bracket.
- Note: Does not include padlock.

Order No.	Mfg. No. / Description	Price
333613	(11090-3)	$10.98 R

Fulton Spare Tire Carrier



- Conveniently secure your spare tire to your trailer frame using the Fulton ETCHL spare tire mount.
- Heavy duty 1/2" diameter zinc plated steel construction designed to fit 8", 9", 12", 13", 14" and 15" wheels with 4 or 5 lug rims.
- Includes locking levers, and lock with two keys, to secure wheel to frame.

Order No.	Mfg. No. / Description	Price
333625	(ETCHL)	$27.98 G

Boater Sports Spare Tire Lock



- Secure your spare tire with this heavy duty lock.
- Designed specifically to hold non-operating spare tires to your vehicle, RV or boat, this lock offers added protection from theft and the elements thanks to a EDC Coated, die-cast body.

Order No.	Mfg. No. / Description	Price
1-59418	(59418)	$13.35 H

Fulton Spare Tire Lock



- Fits over wheel studs (up to 9/16" diameter) to deter theft.
- Removable plug allows longer wheel studs to protrude through cap and locking tab provides positive locking feature to help prevent lock from turning.

Order No.	Mfg. No. / Description	Price
357571	(STL-0603)	$22.98 G


Tough Guy Wobble Roller



- Made from a non-marring poly blend with UV inhibitors.
- Won't mark up the hull with ugly black streaks.

Order No.	Description	Price
7-1575	Width 4"	$13.98 F

Tough Guy V-Bow Stop



- Made from a non-marring poly blend with UV inhibitors.
- Won't mark up the hull with ugly black streaks.

Order No.	Description	Price
7-1565	3"	$10.98 G

Tough Guy Self-Centering Keel Roller



- Molded grooves center boat as it moves forward for easier loading.
- Made from a non-marring poly blend with UV inhibitors.
- Replaces any 12" roller with 5/8" shaft.

Order No.	Description	Price
7-1583	Length 12"	$27.98 F

Tough Guy Spool Rollers



- Made from a non-marring poly blend with UV inhibitors.
- Won't mark up the hull with ugly black streaks.

Order No.	Description	Price
7-1570	Length 4"	$8.98 F
7-1571	Length 5"	$9.98 F

Tough Guy Bow Stop Rollers



- Made from a non-marring poly blend with UV inhibitors.
- Won't mark up the hull with ugly black streaks.

Order No.	Description	Price
7-1566	Width 3"	$6.98 F
7-1567	Width 4"	$8.98 F

Tough Guy Bell Stop Assemblies



- Made from a non-marring poly blend with UV inhibitors.
- Won't mark up the hull with ugly black streaks.

Order No.	Description	Price
7-1560	Width 3"	$16.98 F
7-1561	Width 4"	$20.98 F

Tough Guy Keel Rollers



- Made from a non-marring poly blend with UV inhibitors.
- Won't mark up the hull with ugly black streaks.

Order No.	Description	Price
7-1580	Length 8"	$21.98 F
7-1581	Length 10"	$24.98 F
7-1582	Length 12"	$25.98 F

Boater Sports Super Poly 3-Piece Bow Rollers



- Non-marring, molded polymer blend.

Order No.	Mfg. No. / Description	Price
1-59618	(59618) 3" x 1/2" Shaft	$16.55 H
1-59620	(59620) 4" x 1/2" Shaft	$21.25 H

Boater Sports Bow Rollers



- Non-marring, molded polymer blend.

Order No.	Mfg. No. / Description	Price
1-59606	(59606) 3" x 1/2" Shaft	$8.45 H
1-59604	(59604) 4" x 1/2" Shaft	$8.45 H

Boater Sports Spool Rollers



- Non-marring, molded polymer blend.

Order No.	Mfg. No. / Description	Price
1-59608	(59608) 4" x 5/8" Shaft	$9.45 H
1-59612	(59612) 5" x 5/8" Shaft	$12.55 H

Boater Sports Keel Rollers



- Non-marring, molded polymer blend.

Order No.	Mfg. No. / Description	Price
1-59622	(59622) 8" x 5/8" Shaft	$21.96 H
1-59624	(59624) 10" x 5/8" Shaft	$28.90 H
1-59628	(59628) 12" x 5/8" Shaft	$32.75 H

Boater Sports Wobbler Rollers - 4"



- Non-marring, molded polymer blend.

Order No.	Mfg. No. / Description	Price
1-59614	(59614) 3/4" Shaft	$13.35 H
1-59616	(59616) 1" Shaft	$13.35 H
1-59467	(59467) Keepers, 2 Pair	$2.75 H

Boater Sports Bow Stop - 3"



- Non-marring, molded polymer blend.

Order No.	Mfg. No. / Description	Price
1-59610	(59610) Length 3"	$10.65 H

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Tough Guy Bow Rollers



- Shaft diameter 5/8".
- Maximum roller OD 3-1/2".
- Handles the added weight of heavier boats by properly fitting the curvature of the keel.
- Allows for easier launching and loading of the boat.
- Black rubber with steel sleeve & nylon bushings.

Order No.	Description	Price
7-1870	Length 8"	$12.98 F
7-1871	Length 10"	$15.98 F
7-1872	Length 12"	$17.98 F

Tough Guy Bow Guards



- Attaching to the trailer's winch stand, these bow guards act as a stop to protect the boat's bow.
- Gray rubber.
- V-block.

Order No.	Description	Price
7-1878	Base 2" x 2", 3" H, Width 4-1/4"	$4.98 F
7-1880	Base 4" x 4", 4" H, Width 6-1/2"	$12.98 F
7-1879	Base 4" x 3", 3-3/4" H, Width 6-1/2"	$14.98 F

Tough Guy Side Guide Roller



- Helps center boat in non-drive-on applications.
- Prevents boat from damaging trailer fenders and light brackets.
- A spoke-type plastic bushing which spans the full length of the roller, which absorb impacts thus reducing damage during launching and loading.
- Gray rubber.

Order No.	Description	Price
7-1883	2-1/2" OD, Shaft Diameter 5/8", Length 12"	$13.98 F

Tough Guy Bow Rollers



- Normally used on the trailer winch stand, this roller acts as a bow stop for the boat.
- Shaft diameter 1/2".
- Length 3".
- Maximum roller OD 3".

Order No.	Description	Price
7-1877	Black Rubber	$3.98 F
7-1876	Gray Rubber	$4.98 F

Tough Guy "Wobble" Rollers



- Designed to wobble back and forth automatically adjusting to the contours of the boat hull.
- Black rubber.
- 4-1/4" OD, 7/8" ID.

Order No.	Description	Price
7-1881	Width 4-1/4", Smooth with Steel Washer	$14.98 F
7-1882	Width 3", Treads with Steel Sleeve	$14.98 F

Tough Guy Spool Type Rollers



- Designed especially to support the keel of lighter boats.
- Rollers are furnished with friction reducing nylon bushings or plastic sleeve "bushings" for easier boat loading.
- Maximum roller OD 3".
- Black rubber with plastic sleeve.

Order No.	Description	Price
7-1874	Length 4", Shaft Diameter 5/8"	$4.98 F
7-1873	Length 5", Shaft Diameter 1/2"	$5.98 F
7-1875	Length 5", Shaft Diameter 5/8"	$5.98 F

Boater Sports Bow Guards



- Durable black rubber bow guard for standard duty use.
- Uses 59528 end cap

Order No.	Mfg. No. / Description	Price
1-59508	(59508) 4" x 1/2" Shaft	$4.59 H
1-59509	(59509) 4" x 5/8" Shaft	$5.12 H
1-59510	(59510) 5" x 1/2" Shaft	$6.45 H
1-59512	(59512) 5" x 5/8" Shaft	$4.96 H

Boater Sports Shaft Spool/Bow Roller End Cap



- Durable black rubber end cap for standard duty use.

Order No.	Mfg. No. / Description	Price
1-59522	(59522) 3.5" x 5/8"	$3.15 H
1-59523	(59523) 2" x 1/2"	$1.55 H
1-59524	(59524) 2.5" x 5/8"	$2.25 H
1-59528	(59528) 3" x 1/2"	$2.25 H

Boater Sports Straight Guide Rollers



- Durable black rubber guide roller for standard duty use.
- 59514 uses 59523 end cap.
- 59525 uses 59524 end cap.

Order No.	Mfg. No. / Description	Price
1-59514	(59514) 9" L x 2" Dia. x 1/2" Shaft	$8.95 H
1-59525	(59525) 12" L x 2.5" Dia. x 5/8" Shaft	$13.65 H

Boater Sports Bow Rollers - V-Shape



- Durable black rubber bow roller for standard duty use.

Order No.	Mfg. No. / Description	Price
1-59506	(59506) 3" Roller	$3.39 H
1-59507	(59507) 4" Roller	$5.55 H

Boater Sports Deep V Keel Rollers



- Durable black rubber keel roller for standard duty use.
- Uses 59522 end cap.

Order No.	Mfg. No. / Description	Price
1-59516	(59516) 8" x 5/8" Shaft	$15.25 H
1-59518	(59518) 10" x 5/8" Shaft	$20.49 H
1-59520	(59520) 12" x 5/8" Shaft	$24.79 H

Boater Sports Bow Guards - V-Block



- Durable black rubber v-block for standard duty use.

Order No.	Mfg. No. / Description	Price
1-59500	(59500) 2" x 2" x 3" H, 4.5" L	$3.49 H
1-59502	(59502) 3" x 3" x 4" H, 6.5" L	$4.45 H
1-59504	(59504) 4" x 4" x 5" H, 8.5" L	$13.70 H

Stoltz Super Rollers

- Stoltz Super Rollers are made to replace ordinary rubber rollers that often need frequent replacement.
- Made of polyurethane, they have nothing in them that will mark or discolor the boat.
- These rollers are extremely cut and abrasion resistant.
- They do not "flat spot" after long storage periods.
- There is no bushing to pop out.
- These rollers are unaffected by grease, oil, gasoline, exhaust fumes, salt, etc.

Stoltz Bow Stop Roller



- Hole size 1/2".

Order No.	Mfg. No. / Description	Price
341336	(RP-33) Width 3"	$12.98 I

Stoltz Ultimate Bell Stops



- Hole size 1/2".
- Includes installation hardware.

Order No.	Mfg. No. / Description	Price
341545	(ULT-3) Width 3"	$49.98 I
341569	(ULT-4) Width 4"	$51.98 I

Stoltz Keel Rollers



- Hole size 5/8".

Order No.	Mfg. No. / Description	Price
341367	(RP-4) Length 4"	$12.98 I
341381	(RP-5) Length 5"	$16.98 I
341393	(RP-504) Length 5-1/4"	$18.98 I
341418	(RP-7) Length 7"	$26.98 I
341420	(RP-8) Length 8"	$33.98 I
341432	(RP-10) Length 10"	$37.98 I
341444	(RP-12) Length 12"	$42.98 I
341482	(RP-18) Length 18"	$56.98 I

Marpac Roller Shafts



- Galvanized.
- Two pal nuts included with each shaft.

Order No.	Description	Price
7-1835	Length 5-1/4", 1/2" OD	$4.99 G
7-1836	Length 6-1/4", 1/2" OD	$5.98 G
7-1837	Length 5-1/4", 5/8" OD	$5.98 G
7-1838	Length 6-1/4", 5/8" OD	$6.98 G
7-1839	Length 9-1/4", 5/8" OD	$7.98 G
7-1840	Length 11-1/4", 5/8" OD	$8.98 G
7-1841	Length 13-1/4", 5/8" OD	$7.98 G

Stoltz End Cap



Order No.	Mfg. No. / Description	Price
341341	(RP-325) Width 3"	$4.98 I

Stoltz 2" x 4" Diameter Roller



Order No.	Mfg. No. / Description	Price
341355	(RP-42) Hole size 1/2"	$14.98 I

Stoltz Straight Roller



- Hole size 5/8".

Order No.	Mfg. No. / Description	Price
341507	(RP-212) 12" x 2-1/2"	$33.98 I

Stoltz V Bow Stops



- Hole size 1/2".

Order No.	Mfg. No. / Description	Price
341331	(RP-3) 3"	$13.98 I
341343	(RP-404) 4"	$18.98 I

Tie Down Pal Nuts



- Sold 4 per pack.

Order No.	Mfg. No. / Description	Price
576958	(86305) 1/2" OD	$4.16 I
576960	(86310) 5/8" OD	$5.98 I

©2014 Donovan Marine, Inc.

Marpac Bolster Brackets - Packaged



7-1825



- Heavy 11 gauge hot dipped galvanized steel.
- Slotted for vertical adjustment and feature nonslip dimples to avoid movement and increase load capacity.
- Sold 2 per package with swivel brackets.

Order No.	Description	Price
7-1820	Length 8", Slot Length 2-3/4"	$11.98 G
7-1821	Length 10", Slot Length 3-3/4"	$13.98 G
7-1822	Length 12", Slot Length 4-3/4"	$16.98 Q
7-1825	Angle Bracket - Pair	$4.19 G

Boater Sports Bunk Bracket



- Galvanized.
- Holds 2" bunks.
- Slotted for easy adjustment.

Order No.	Mfg. No. / Description	Price
1-59562	(59562) 9-1/2" Bracket	$5.69 H

Tie Down Bunk Bracket



- Heavy 11 gauge hot dip galvanized steel brackets mount 2" bunks on edge.
- Slotted for vertical adjustment to standard or deep-V hulls.
- Slot length 4-1/2".

Order No.	Mfg. No. / Description	Price
577102	(86149) Bracket Length 8"	$7.98 I

Marpac Panel Brackets - Bulk



- Heavy 11 gauge hot dipped galvanized steel.
- Brackets are one piece and designed to support keel rollers.
- Slots accept 7/16" or 1/2" diameter bolts and provide vertical roller adjustment.

Order No.	Description	Price
7-1829	For 4" Roller	$9.98 G
7-1830	For 5" Roller	$10.98 G
7-1831	For 8" Roller	$14.98 G
7-1832	For 10" Roller	$16.98 G
7-1833	For 12" Roller	$16.98 G

Boater Sports Swivel Bolster Brackets



- Galvanized bolster brackets with a swivel top to set your bunk or bolster boards at the proper angle.

Order No.	Mfg. No. / Description	Price
1-59570	(59570) 8" Bracket	$7.75 H
1-59571	(59571) 10" Bracket	$8.75 H
1-59572	(59572) 12" Bracket	$10.25 H
1-59574	(59574) Swivel Bracket Only	$2.25 H

Marpac Bunk Brackets



- Heavy 11 gauge hot dipped galvanized steel mount 2" bunks on edge.
- Slotted for vertical adjustment to standard or deep-V hulls.
- Sold per pair.

Order No.	Description	Price
7-1815	Length 9-1/2"	$14.98 G
7-1816	Length 12-5/8"	$16.98 G

Tie Down Split Bracket



- Heavy duty, zinc plated steel.
- Split panel bracket accommodates any roller length.
- Slots provide vertical adjustment and accept 1/2" or 5/8" shafts.
- Slot length 5".
- Sold per pair.

Order No.	Mfg. No. / Description	Price
487581	(81235) Height 7-1/4"	$19.98 G

Tie Down Hex Head Bolt - Packaged



- Grade 5 zinc plated steel.
- Used for mounting brackets, couplers and winch stands.
- Package contains: (4) Bolts, (4) washers and (4) nyloc nuts.

Order No.	Mfg. No. / Description	Price
580577	(86257) 1/2" x 3-1/2"	$11.98 I

Tie Down Fluted Shackle Bolts



- For use with spring hanger brackets.
- Fluting prevents the bolt from turning, which can wear hanger brackets.
- Grade 5 steel.
- 9/16" x 3" bolts with nuts.

Order No.	Mfg. No. / Description	Price
578368	(86250) Sold 2 Per Pack	$9.98 I

Marpac Pyramid Washers



- Zinc plated.
- Star shaped washers.
- Ideal for use with U-bolts in heavy duty applications.
- Sold 6 per display pack.

Order No.	Description	Price
7-1856	7/16"	$12.98 G
7-1857	3/8"	$14.98 G

Marpac Galvanized U-Bolts



- Galvanized.
- Includes: Washers and nuts.
- Sold per pair.

Order No.	Description	Price
7-1802	1/2" x 2-1/8" W x 4" L	$8.98 G
7-1804	1/2" x 3-1/8" W x 3" L	$8.98 G
7-1806	1/2" x 3-1/8" W x 4" L	$8.98 G
7-1808	1/2" x 4-1/8" W x 3" L	$8.98 G

Boater Sports Outboard Motor Lock



- Secures O/B motor to transom.
- Coated steel tube locks over the screws blocking access.
- Includes pad lock that fits inside tube.
- Keyed.

Order No.	Mfg. No. / Description	Price
1-52612	(52612)	$18.40 H

T-H Marine Steer-Stop Steering Lock



- Stops outboards equipped with hydraulic steering from "wandering" when trailering.
- Units clip onto hydraulic steering rams on either side of outboard to keep engine straight and prevent damage to motor supports.
- Cord keeps units together when stowed and aids removal.

Order No.	Mfg. No. / Description	Price
640945	(SS-1)	$17.98 H

Marpac Galvanized U-Bolts



- Galvanized.
- Includes: Washers and nuts.
- Sold per pair.

Order No.	Description	Price
7-1794	3/8" x 1.56" x 2.63"	$4.99 G
7-1776	3/8" x 3.06" x 2.38"	$6.98 G
7-1772	3/8" x 3.06" x 4.5"	$7.98 G
7-1762	7/16" x 2.5" x 5.25"	$8.98 G
7-1764	1/2" x 2.06" x 4.31"	$8.98 G
7-1792	1/2" x 2.06" x 4.81"	$7.98 G
7-1768	1/2" x 2.06" x 5.31"	$7.98 G
7-1788	1/2" x 2.06" x 5.5"	$8.98 G
7-1759	1/2" x 3.06" x 4.31"	$9.98 G
7-1774	1/2" x 3.06" x 5.31"	$11.98 G
7-1789	1/2" x 3.06" x 6.31"	$8.98 G

Marpac Stainless Steel U-Bolts



- Type 304 stainless steel.
- Includes: (2) Stainless steel washers and (2) lock nuts.

Order No.	Description	Price
7-1603	2-1/8" W x 4" L	$17.98 G
7-1605	3-1/8" W x 4" L	$17.98 G
7-1607	4-1/8" W x 4" L	$18.98 G

Fulton Outboard Motor Lock



- Fits most outboard motors secured to transom by clamp screws (except certain Chrysler Models).
- Long lasting, black powder-coat finish provides years of protection against rust and corrosion.
- Heavy gauge steel body for maximum strength.
- Foam filler insert reduces noise and vibration.

Order No.	Mfg. No. / Description	Price
357562	(OML-0127)	$37.98 G

Attwood Swivl-Eze Lock N' Stow™



- Locks the outboard motor in the forward position while trailering, greatly reducing the damaging effects of road shock.
- Does not "tie" engine's lower-unit to trailer, eliminating excessive pressure on hydraulic seals and scuff marks.
- Small compact mount can be easily stored in just about any boat compartment.
- Constructed of black powder-coated steel with stainless steel pins.
- Fits: Mercury engines 135 OptiMax, 150 OptiMax, 175 OptiMax, 75HP - 200HP EFI.

Order No.	Mfg. No. / Description	Price
587564	(10108) Lock N' Stow	$94.98 F

- Fits: Mercury engines 200 OptiMax, 255 OptiMax, 225 HP EFI, 250HP EFI.

Order No.	Mfg. No. / Description	Price
587562	(10107) Lock N' Stow	$99.98 Q

©2014 Donovan Marine, Inc.

Marpac Motor Support Bracket



- Bolt-on or over-the-roller universal mount.
- Adjustable from 21" - 31".
- Indestructible polypropylene pads.
- Powder coated cast aluminum head and mounts are lightweight, durable and corrosion resistant.
- Easy-to-handle lightweight aluminum tubing will not rust.
- All stainless steel hardware and fasteners eliminate corrosion.
- EPDM rubber strap and stainless hooks included.

Order No.	Description	Price
7-0386	Motor Support Bracket	$44.98 G
7-0387	Spare Bracket Kit	$12.98 G

Springfield Marine Guardian Motor Support Combo Kit



- High strength aluminum, protects leading edge of motor's lower unit and reduces wear on steering mechanism.
- Can be used as "over the roller or bolt on".
- Adjust: 25" to 37".

Order No.	Mfg. No. / Description	Price
550225	(1780240) Over the Roller or Bolt On Option	$71.98 H

Attwood Swivl-Eze Transom Savers - Adjustable



- Designed to support the cantilevered weight of the motor and stabilize engine and steering mechanism when trailering.
- Clear anodized tube with pro-adjustable head with replaceable rubber pads.

Order No.	Mfg. No. / Description	Price
587773	(SP-4000-ADJ-RB) Bolt, 24" - 36", Skin Pack	$64.98 R
587785	(SP-4000-ADJ) Roller, 24" - 36", Skin Pack	$55.98 G
587786	(4000-ADJ) Roller, 24" - 36", Bulk	$46.98 F
587709	(424-ADJ) Roller, 32" - 44", Bulk	$59.98 Q
587760	(436-ADJ) Roller, 44" - 56", Bulk	$62.98 Q
587710	(SP-416) Replacement Toggle	$10.98 Q

Boater Sports Transom Saver - Rocker Style



- Rocker style transom saver with cast aluminum head and rubber pads.
- Easily adjusts from 34" - 46".
- Over the roller & bolt-on brackets.
- 10" Motor strap and 5" trailer strap included.

Order No.	Mfg. No. / Description	Price
1-59120	(59120)	$55.95 Q

Boater Sports Transom Saver - Dual Mount



- Comes with over the roller and bolt-on brackets for mounting to trailer.
- Made of coated steel.
- Basic adjustable: 32" - 40".
- 10" Rubber strap included.

Order No.	Mfg. No. / Description	Price
1-59118	(59118)	$29.95 R


Springfield Marine Guardian Economy Motor Support Combo



- High strength aluminum, protects leading edge of motor's lower unit and reduces wear on steering mechanism.
- Can be used as "over the roller or bolt on".
- Adjust: 20" to 31.25".

Order No.	Mfg. No. / Description	Price
550230	(1780242) Option of Bolt On or Over the Roller	$66.98 H

Attwood Swivl-Eze Transom Savers - Adjustable

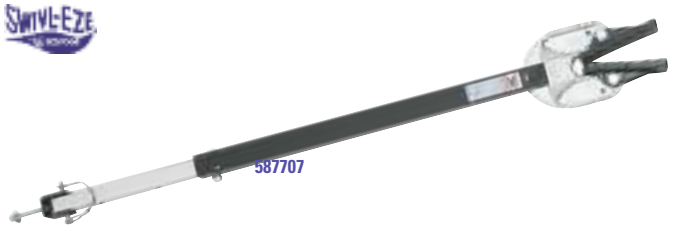

- Black coated tube with deluxe head with composite heads.

Order No.	Mfg. No. / Description	Price
587707	(SP-400-RB) Bolt, 23" - 35", Skin Pack	$43.98 G
587708	(SP-400-RB) Roller, 23" - 35", Skin Pack	$48.98 R

T-H Marine Adjustable Motor Support



- Adjustable in length from 27-1/2" to 39-1/2" long.
- Covers a wide range of boat/engine combinations from outboard with offset transoms and jacking plates to inboard/outboard units.
- The aluminum adjustable tubing has a heavy wall thickness for strength.
- The end of motor supports are molded of black high impact plastic for both superior strength and good looks.

Order No.	Mfg. No. / Description	Price
641123	(AMS-1) Adjustable Motor Support	$47.98 H

T-H Marine Motor Stik - Outboard Motor Support



- Fits over trim rams.
- Supports your outboard while trailering.
- Most outboards 150 hp and up.
- Takes the pressure off of hydraulic system.
- Strong aluminum tubing with molded ends.
- Safe for salt or fresh water.

Order No.	Mfg. No. / Description	Price
640664	(MSS-1) Motor Stik	$40.98 G

Attwood Swivl-Eze Angle Adjustable Reach Transom Saver



- Adjusts from 30" to 60".
- Unique angle adjustments (patent pending) from 0° to 36° with 12° increments.
- Innovative design fits most trailers.
- Heavy duty molded rubber pads to prevent scratching on the lower unit.
- Steel construction with corrosion resistant black finish on tubes.

Order No.	Mfg. No. / Description	Price
512030	(460-ADJ) Transom Saver	$99.98 G

©2014 Donovan Marine, Inc.

eGear Knife Sharpener

eGear



- Pocket-size knife sharpener with carabiner clip.
- Two stage sharpening: Fine ceramic and coarse carbide.
- Case: Hard plastic.
- Dimensions: 2.25 x 1.5 x 1.
- Weight: 1 oz.

Order No.	Mfg. No. / Description	Price
586398	(26310365A40) Orange, 40 Count	$239.98 H

eGear 8" Para Bracelets

eGear



- Wear it anytime, anywhere.

Order No.	Mfg. No. / Description	Price
586440	(26190295BA24) Assorted Colors, 24 Count	$191.98 H

eGear Para Zipper Pulls

eGear



- Great for jackets, keychains or ditchbags.

Order No.	Mfg. No. / Description	Price
586446	(26190FOBBA50) Assorted Colors, 50 Count	$249.98 H

eGear Waterproof Notebook

eGear



- Durable waterproof, tear-proof notebook.
- Handy survival essentials checklist on back.
- Great for keeping logs in wet environments.
- Pocket-sized to fit anywhere.
- Pencil included.
- Dimensions: 3" x 5".
- Weight: 2.6 oz.
- 50 page count.

Order No.	Mfg. No. / Description	Price
586457	(26-310-116) Waterproof Notebook	$4.98 Q



Omega Polar Fleece Coat

OMEGA



- For the fisherman looking for style, comfort and value.
- Roomy pocket to keep fishing necessities close at hand.
- Lightweight, durable foam contours to your body and wont hinder your mobility.
- D-ring attachment for small accessories.

Order No.	Mfg. No. / Description	Price
594336	(45001-S) Blue, Small	$48.98 F
594338	(45001-M) Blue, Medium	$48.98 F
594340	(45001-L) Blue, Large	$48.98 F
594342	(45001-XL) Blue, X Large	$48.98 F
594344	(45001-2X) Blue, XX Large	$48.98 F
594346	(45001-3X) Blue, XXX Large	$48.98 F

Omega Newport Jacket

OMEGA



- Breathable coated rip stop polyester.
- Waterproof, concealed waterproof hood.
- Tape sealed to remain 100% waterproof.
- 2 front storage and hand warmer pockets.

Order No.	Mfg. No. / Description	Price
594350	(45101-S) Small, Blue	$110.98 F
594352	(45101-M) Medium, Blue	$110.98 F
594354	(45101-L) Large, Blue	$110.98 F
594356	(45101-XL) X Large, Blue	$110.98 F
594358	(45101-2X) XX Large, Blue	$110.98 F
594360	(45101-3X) XXX Large, Blue	$110.98 F
594364	(45102-S) Small, Red	$110.98 F
594366	(45102-M) Medium, Red	$110.98 F
594368	(45102-L) Large, Red	$110.98 F
594370	(45102-XL) X Large, Red	$110.98 F
594372	(45102-2X) XX Large, Red	$110.98 F
594374	(45102-3X) XXX Large, Red	$110.98 F

Davis Instruments Vantage Vue Weather Station



- The Vantage Vue® weather station combines legendary Davis accuracy and rugged durability into a compact station that's easy to set up and use. Vantage Vue includes a sleek but tough outdoor sensor array and distinctive LCD console. Its unique Weather Center function provides additional information on each weather variable. Multiple features affordably priced. The Vantage Vue's compact outdoor sensor array measures current weather conditions, including inside/outside temperature, humidity, barometric pressure, wind speed and direction, dew point, and rainfall. Sets up in minutes and starts sending data wirelessly to the indoor console. You'll also get weather forecast icons, moon phase, sunrise/sunset times, graphing of weather trends, alarms and more. The innovative Weather Center button displays additional data for today and over the last 25 days. The fully-integrated, corrosion-proof sensor suite was subjected to cyclic corrosion tests simulating extreme marine weather environments. Sealed electronics provide protection against the elements. Vantage Vue withstands freezing winters, high winds, and blistering sun. Vantage Vue is perfect for marinas, vacation homes, gardens, schools, universities, businesses, firefighting and emergency response teams.

Order No.	Mfg. No. / Description	Price
322030	(6250) Vantage Vue Weather Station	$499.98 E

FEATURES:

- Displays indoor and outdoor conditions. Temperature and humidity, barometric pressure, wind speed, wind direction, rainfall and more.
- Reliable data transmission. Frequency-hopping spread spectrum radio. Radio compatible with Vantage Pro2.
- Quick and easy installation. Mounting hardware kit included.
- Durability in extreme conditions. Corrosion-resistant cover on sensor suite; radiation shield on temperature/humidity sensor prevents false readings from radiated and reflected heat.
- Bubble level allows more accurate installation and better data collection
- Easy-to-read display. Backlit LCD screen measures 3" x 4-3/8". Glow-in-the-dark keypad for night viewing, and domed buttons for better feel.
- Graphs. 50 on-screen graphs for comparing current and past weather.
- Alarms. 22 alarms to warn of dangers such as high winds, possible flooding, and high heat.
- Forecast icons let you know to expect sun, partly cloudy, clouds, rain or snow. Optional WeatherLink® data logger and software offer extensive weather analysis and data storage. PC, Mac and Internet versions available.
- Wireless frequency-hopping spread spectrum radio offers transmission up to 1000 ft. (300 m) - three times farther than the competition. Optional repeaters extend the range even more.
- Updates every 2.5 seconds - up to ten times faster than the competition.
- Outside Temperature readings from -40° to 150° F (-40° to 65° C). Inside temperature readings from 32° to 140° F (0° to 60° C).
- Wind Speed as low as 2 mph (3 km/h) and as high as 180 mph (290 km/h).
- Wind Direction in compass points or degrees.
- Rain Collector measures rainfall with 0.01" resolution or 0.2 mm resolution with metric version.
- Barometer's five-position trend arrow shows whether barometric pressure is rising, falling or stable.
- Relative Humidity, inside and outside, given in 0 - 100% range, ±3% accuracy.
- Variable display options. See updated variables every 10 seconds for heat index and wind chill to get a better "feel" for the outside environment.
- Solar Powered. Lithium battery provides backup when needed.
- Compact Console. Size 8" x 8" x 4". Weighs only 1.8 lbs. Integrated Sensor Suite. Size 18-1/4" x 7-1/4" x 15-1/4". Weighs 5.4 lbs.
- Vantage Vue mounts on top of poles 1" to 1-3/4" in diameter. Pole sold separately. Tripod also available.
- Davis has made the Vantage Vue radio compatible with our flagship Vantage Pro2 stations, so you can mix or match most components.

Ritchie Feather Vane Race 1



- High Stability - won't overreact, minimal flutter.
- Carbon fiber construction to withstand the rigors of high performance racing.
- Low Friction Bearing - the heart of Race 1Ultralight - less than 10g all up.
- Ultra-Sensitive - the 0.3 mm carbon feather responds reliably to the lightest of airs, you pick up the shifts before the competition.
- 3mm shaft - fits standard burgee clip, dedicated feather vane socket included.
- Vane Length: 8". Height: 12.99".

Order No.	Mfg. No. / Description	Price
573605	(FVR-1) Masthead Mount Wind Indicator	$45.98 F

©2014 Donovan Marine, Inc.

Davis Instruments Vantage Pro2 Weather Station



- Vantage Pro2 Cabled Weather Station is professional and rugged.
- It offers the ultimate in versatility and options for the professional weather observer and the serious weather enthusiast.
- A wide range of options and sensors.
- You'll get your own local forecast, highs and lows, totals or averages, and graphs for virtually all weather variables over the past 24 days, months or years all without using a PC.
- Fast updates every 2.5 seconds (10x faster than the competition).
- Vantage Pro2 is also an excellent choice for emergency professionals, farmers, schools, researchers, municipalities and others to monitor wind and moisture conditions, irrigation requirements, and potential flooding.
- It can be customized with a range of add-on options, such as solar and UV radiation sensors, and soil moisture stations.
- Cabled model is perfect for economical installation or for field installation using our Complete System Shelter.
- Includes console with AC-power adapter and 100' (30 m) cable.
- No solar power.
- Vantage Pro2 features:
- Rainfall measured in 0.01 or 0.2 mm increments.
- Temperature, both inside and outside, currently and for each of the last 24 hours.
- Humidity, both inside and outside, currently and for each of the last 24 hours.
- Wind Speed in 1 mph, 1 knot, 1 km/hr, or 0.1 m/s resolution. Anemometer can be installed separately from rain collector for highest accuracy.
- Wind Direction, both current and dominant, shown on compass rose with 16 points.
- Barometric Pressure given by a five-position trend arrow.
- Current and Historical Data, such as highs and lows, may be viewed for up to 24 days, months or years.
- Forecast displayed in icons for sun, partly cloudy, clouds, rain or snow. 12-hour icon forecast plus 2448 hour ticker tape forecast at bottom of screen.
- Moon Phases in eight stages, from new to full to new.
- Time and Date always on view. Also displays time of sunrise, sunset, time and date of highs and lows.
- Ticker Tape Display provides expanded forecast details and additional information on current conditions.
- Graphing Function shows last 24 hours, days or months of readings or highs and lows. View over 80 graphs, including additional analyses of temperature, rain rate, wind and barometric pressure. Optional WeatherLink software allows even greater analysis.
- Alarms may be set for more than 70 functions.
- Vantage Pro2 - Our most popular station.

Order No.	Mfg. No. / Description	Price
322026	(6152C) Precision Weather Instrument	$504.98 E

Davis Instruments Windex 10.Sport



- Windex 10.Sport is the perfect wind vane for small boats and dinghies.
- Sapphire suspension bearing, 10 vane (25 cm) and adjustable tacking arms with tabs.
- Vane and tabs feature reflectors for high visibility day and night.
- Includes glass reinforced polycarbonate J-Base for side, top or front of mast mounting on most dinghies, smaller boats and sport boats.
- Stands just 9.25" tall and weighs 1.2 ounces.
- Use the Davis Windex 15 for larger boats and racers or cruisers.

Order No.	Mfg. No. / Description	Price
323465	(3120) 10 Windex Wind Vane	$40.98 E

Davis Instruments Windex 15



- The Windex 15 is the choice for most sailors worldwide.
- Suitable for larger boats and racers to well over 100'.
- The 15" vane can be through bolted or tapped into the masthead.
- The mounting socket has a 5/16-18 thread.
- The entire unit weighs only 3.9 ounces.
- Sapphire suspension system and reflector tabs on the bottom surfaces make Windex 15 highly sensitive and visible even at night!
- Features spike above vane to keep birds off your mast.
- Can be equipped with Windex Light.

Order No.	Mfg. No. / Description	Price
323467	(3150) 15 Windex Wind Vane	$61.98 E

Davis Parallel Rules



- The instrument is completely transparent and has a clear optical finish to aid in your charting.
- Each 15" long blade has been individually milled to assure an accurate instrument at any price.

Order No.	Mfg. No. / Description	Price
321825	(061) Parallel Rules	$26.98 I

Davis Charting Kit



- A choice selection of navigational tools for cruisers and racers as well.
- Includes: One-Arm Protractor, Course Plotter, Protractor Triangle, Parallel Rules, Professional Dividers, a pencil and instruction booklet.
- All are conveniently organized in a heavy gauge plastic carrying case.

Order No.	Mfg. No. / Description	Price
321996	(083) Charting Kit	$69.98 I

Meopta MeoPro® 32mm Series Binoculars



- Extremely wide field of view of 433 ft.
- Lower magnification offers increased depth of field and increased stability.
- Excellent choice for birding, nature watching or hunting in dense forest terrain or nautical adventures where a stable view is desired.
- MeoBright™ - A proprietary ion-assisted lens multi-coating applied to all air-to-glass optical surfaces, delivers an industry leading 99.8% light transmission per lens surface.
- 100% guaranteed waterproof, submersible and are fully protected against humidity, rain and snow.
- Fogproof - purged and sealed with inert Nitrogen gas to provide 100% guaranteed fogproof performance.
- Focus and Diopter Control - Oversized central focus wheel delivers precise, accurate focus acquisition. Central diopter control is easy to adjust and accommodates +/- 3 D.
- Eyepiece design reduces distortion and delivers a wide, sharp field of view. Multi-position twist-up eyecups accommodate all users.
- Beautifully sculpted rubber armor is comfortable to hold for extended periods and protects internal components from shock.

Order No.	Mfg. No. / Description	Price
580100	(523460) 6.5x32	$428.98 D

Meopta MeoPix® iScoping Adapter



- The MeoPix iScoping adapter is a revolutionary new tool for anyone wanting to capture long range photos and videos.
- The MeoPix iScoping adapter slips over the binocular eyepiece - cradling an iPhone® 4/4s in perfect alignment to the optic - allowing the iPhone® to capture amazing long distance photos and videos.

Order No.	Mfg. No. / Description	Price
580115	(540810) iScoping Adapter	$85.98 D

Steiner 7 x 50 Marine Binoculars

STEINER



- Features fully multi-coated optics for excellent low light performance with a peak light transmission of over 90%.
- Black rubber armoring provides a sure grip even when wet.
- Long 22mm eye relief for full field of view with eyeglass or sunglasses.
- Waterproof and shockproof.
- Nitrogen pressurized.

Order No.	Mfg. No. / Description	Price
548238	(575) 7 x 50 Marine Binoculars	$440.98 F

Meopta MeoPro® 42mm Series Binoculars



- Wide field of view of 350 ft.
- Excellent choice for an all-around birding, nature watching or hunting binocular.
- MeoBright™ - A proprietary ion-assisted lens multi-coating applied to all air-to-glass optical surfaces, delivers an industry leading 99.8% light transmission per lens surface.
- 100% guaranteed waterproof, submersible and are fully protected against humidity, rain and snow.
- All binoculars are purged and sealed with inert Nitrogen gas to provide 100% guaranteed fog-proof performance.
- Focus and Diopter Control - Oversized central focus wheel delivers precise, accurate focus acquisition. Central diopter control is easy to adjust and accommodates +/- 3 D.
- Eyepiece design reduces distortion and delivers a wide, sharp field of view. Multi-position twist-up eyecups accommodate all users.
- Beautifully sculpted rubber armor is comfortable to hold for extended periods and protects internal components from shock.

Order No.	Mfg. No. / Description	Price
580105	(523470) 8x42	$642.98 D
580110	(523480) 10x42	$713.98 D

Meopta Quick Release Tripod Adapter



- The Quick Release tripod adapter is a unique, innovative accessory that allows mounting or removal of a binocular from a tripod with the push of a button.

Order No.	Mfg. No. / Description	Price
580120	(501300) Quick Release Tripod Adapter	$244.99 S

Steiner 7 x 50 Observer - Compass Binoculars

STEINER



- Tough, dependable marine optics.
- Includes a range finding reticle for distance determination, and electronic compass illumination for bearings in darkness.
- Equipped with Steiner's Sports Auto-Focus system, everything is in focus from 20 yards to infinity once set for your eyes.
- The Observers are guaranteed waterproof and shockproof to stand up to harsh marine use.
- Included are a web strap, rain and spray guard for the eyepieces and attached objective lens caps.

Order No.	Mfg. No. / Description	Price
548240	(685) 7 x 50 Compass Binoculars	$794.98 F

©2014 Donovan Marine, Inc.

Weems & Plath Brass Endurance 125 Quartz Clock



- Precision German movement.
- Dial 4-7/8".
- Base 6".
- Depth 1-5/8".
- AA battery operated.

Order No.	Mfg. No. / Description	Price
281650	(530500) Quartz Clock	$156.98 F

Weems & Plath Anniversary 8-Day Wind Ship's Bell Clock



- Dial: 5 1/4".
- Base: 7".
- Depth: 3-1/2".
- Weight: 8 lbs. 2 oz.
- The Anniversary Collection 8-Day Wind Ship's Bell Clock resonates with the rich sound of the traditional ships bell cycle, ringing every half hour.
- The ship bell clock is equipped with handcrafted German Hermle 11-jewel, key wound movement with bell silencer and created from solid forged brass that is hand polished and flawlessly lacquered.
- The distinctive dial of the ship bell clock is intricately etched to create a subtle but rich pattern.

Order No.	Mfg. No. / Description	Price
281660	(100275) 6"	$1,170.98 Q

Davis Instruments Key Buoy Key Ring



- When keys fall in the water, Key Buoy pops open and air tube inflates automatically.
- Tube carries keys to the surface for easy retrieval.
- Rises to the surface as fast as 60 seconds.
- Key Buoy maintains buoyancy on the surface of the water for over an hour.
- Air tube is 14" long when inflated.
- Suitable for items weighing up to 2.8 oz., such as key sets, small tools, or deck plate key.
- Key Buoy can easily lift the Davis Universal Deck Plate Key, which weighs 2.2 oz.
- Suitable for single use only.
- Activator is sodium bicarbonate and tartaric acid, a mild irritant.
- Not a toy.
- Prevent contact with eyes and skin; avoid inhalation.
- Activated product should be promptly disposed.
- Recyclable.
- Unit size: 2.4" x 1.6" x 0.6".
- Weight: 1.1 oz.
- Recyclable PP plastic shell and PE plastic tube.
- Sold worldwide.
- Patented.

Order No.	Mfg. No. / Description	Price
322419	(530) Never Lose Keys in the Water Again!	$7.98 E

Weems & Plath Brass Endurance 125 Barometer



- Dial 4-7/8".
- Base 6".
- Depth 1-5/8".
- Inch and millibar scales.
- Temperature compensated, aneroid movement.
- Our standard barometer movements are calibrated for altitudes to 3,500' above sea level.

Order No.	Mfg. No. / Description	Price
281651	(530700) Barometer	$161.98 F

Weems & Plath Anniversary Barometer



- Dial: 5-1/4".
- Base: 7".
- Depth: 3-1/2".
- Weight: 7 lbs. 2.5 oz.
- Highly reliable and accurate double diaphragm German aneroid movement.
- Displays both of the barometric scales; inches of mercury and millibars.
- Movement is temperature compensated and calibrated for altitudes up to 3500 feet above sea level.

Order No.	Mfg. No. / Description	Price
281664	(100775) 6"	$840.98 Q

Davis Quez Away Travelers' Wristbands



- A non-drug aid for people on the go.
- The unpleasant effects of winding roads, rough seas, bumpy flights, rocking trains and spinning Ferris wheels can ruin a trip or outing.
- Queaz-Away wristbands exert gentle pressure on points of each wrist, easing the miserable effects of travel.
- Made of tough, long-lasting, washable materials.
- Safe and easy to use.

Order No.	Mfg. No. / Description	Price
499818	(400) Quez Away	$11.98 E

Marpac Number and Letter Kits



- Contains: 4 of each number and letter - plus 16 dashes!
- 3" tall block style.
- Ideal for boat registration and identification numbers.
- Great for adding vessel names to life ring buoys.

Order No.	Description	Price
7-0780	Number and Letter Kit, White	$9.98 G
7-0782	Number and Letter Kit, Black	$9.98 G

- Black self-aligning.
- Pressure sensitive mylar.
- Meets Coast Guard requirements.
- Priced and sold in packs of 10 only.

7-0786	A	$5.98 F	7-0804	S	$5.98 F
7-0787	B	$5.98 F	7-0805	T	$5.98 F
7-0788	C	$5.98 F	7-0806	U	$5.98 F
7-0789	D	$5.98 F	7-0807	V	$5.98 F
7-0790	E	$5.98 F	7-0808	W	$5.98 F
7-0791	F	$5.98 F	7-0809	X	$6.98 Q
7-0792	G	$5.98 F	7-0810	Y	$5.98 F
7-0793	H	$5.98 F	7-0811	Z	$5.98 F
7-0794	I	$5.98 F	7-0812	1	$5.98 F
7-0795	J	$5.98 F	7-0813	2	$5.98 F
7-0796	K	$5.98 F	7-0814	3	$5.98 F
7-0797	L	$5.98 F	7-0815	4	$5.98 F
7-0798	M	$5.98 F	7-0816	5	$5.98 F
7-0799	N	$5.98 F	7-0817	6	$5.98 F
7-0800	O	$5.98 F	7-0818	7	$5.98 F
7-0801	P	$5.98 F	7-0819	8	$5.98 F
7-0802	Q	$5.98 F	7-0820	9	$5.98 F
7-0803	R	$5.98 F	7-0800	0	$5.98 F

Transfer Monogram 3" Gothic Style Letters



- Pressure sensitive letters.
- Meets all requirements for registration numbers in most states.
- Style M-2 white letters on black background.
- Sold in packs of 10 only.

658748	A	$7.98 I	658938	T	$7.98 I
658750	B	$7.98 I	658940	U	$7.98 I
658762	C	$7.98 I	658952	V	$7.98 I
658774	D	$7.98 I	658964	W	$7.98 I
658786	E	$7.98 I	658976	X	$7.98 I
658801	G	$7.98 I	658988	Y	$7.98 I
658813	H	$7.98 I	658990	Z	$7.98 I
658825	I	$7.98 I	658661	1	$7.98 I
658837	J	$7.98 I	658673	2	$7.98 I
658849	K	$7.98 I	658685	3	$7.98 I
658851	L	$7.98 I	658697	4	$7.98 I
658863	M	$7.98 I	658700	5	$7.98 I
658875	N	$7.98 I	658712	6	$7.98 I
658887	O	$7.98 I	658724	7	$7.98 I
658899	P	$7.98 I	658736	8	$7.98 I
658914	R	$7.98 I	658738	9	$7.98 I
658926	S	$7.98 I	658887	0	$7.98 I

Hardline Products 3" Individual Boat Registration Letters and Numbers



- 3" letters and numbers available in black.
- Meets all U.S. Coast Guard Requirements.
- Easy application. Just peel and apply. Sticks to any surface.
- Popular font matches industry standard.
- Packaged 10 per bag.

255958	(17335) 0	$5.98 F	256126	(17308) I	$5.98 F
255960	(17326) 1	$5.98 F	256138	(17309) J	$5.98 F
255972	(17327) 2	$5.98 F	256140	(17310) K	$5.98 F
255984	(17328) 3	$5.98 F	256152	(17311) L	$5.98 F
255996	(17329) 4	$5.98 F	256164	(17312) M	$5.98 F
256001	(17330) 5	$5.98 F	256176	(17313) N	$5.98 F
256013	(17331) 6 & 9	$5.98 F	256190	(17315) P	$5.98 F
256025	(17332) 7	$5.98 F	256215	(17317) R	$5.98 F
256037	(17333) 8	$5.98 F	256227	(17318) S	$5.98 F
256049	(17300) A	$5.98 F	256239	(17319) T	$5.98 F
256051	(17301) B	$5.98 F	256241	(17320) U	$5.98 F
256063	(17302) C	$5.98 F	256253	(17321) V	$5.98 F
256075	(17303) D	$5.98 F	256265	(17322) W	$5.98 F
256087	(17304) E	$5.98 F	256277	(17323) X	$5.98 F
256099	(17305) F	$5.98 F	256289	(17324) Y	$5.98 F
256102	(17306) G	$5.98 F	256291	(17325) Z	$5.98 F
256114	(17307) H	$5.98 F			

Hardline Products Boat Registration Letters and Numbers Kit



- Complete sets of registration letters and numbers for boat or PWC.
- 3-1/4" size factory-matched colors from the manufacturer.
- These number kits resist fuel, fading and scratches.
- They are UV Coated for protection from the sun and meet US Coast Guard guidelines.
- Kits include: 4 sets of the letters A-Z and 0-9, for a total of 146 decals.
- 100 mph tested.

Series 320: Solid color block font with a drop shadow.

Order No.	Mfg. No. / Description	Price
257505	(BLKSI320) Black with Silver Outline	$18.98 F
257515	(BRBLK320) Brown with Black Outline	$18.98 F
257525	(CHBLK320) Chrome with Black Outline	$22.98 F
257535	(REBLK320) Red with Black Outline	$18.98 F
257550	(SIBLK320) Silver with Black Outline	$18.98 F

- 3" size factory-matched kits includes 4 sets of the letters A-Z and 0-9, for a total of 146 decals.

Series 200: Outline color shades into body color for that custom airbrushed look.



Order No.	Mfg. No. / Description	Price
659273	(REBKG200) Red with Black Fade Outline	$24.98 F
659275	(TEBKG200) Teal with Black Fade Outline	$24.98 F
659277	(BLBKG200) Blue with Black Fade Outline	$24.98 F
257500	(BLBKG200) Blue Metallic with Black Fade Outline	$18.98 F
257510	(BRBKG200) Brown with Black Fade Outline	$18.98 F
257520	(CHBKG200) Chrome with Black Fade Outline	$22.98 F
257530	(REBKG200) Red with Black Fade Outline	$18.98 F
257540	(RUBKG200) Burgundy with Black Fade Outline	$18.98 F
257545	(SIBKG200) Silver with Black Fade Outline	$18.98 F
257555	(TEBKG200) Forest Green with Black Fade Outline	$18.98 F
257560	(WHBKG200) White with Black Fade Outline	$18.98 F
257565	(YEBKG200) Yellow with Black Fade Outline	$18.98 F

©2014 Donovan Marine, Inc.

Hardline Products P.O.P. Displays



POP Display #6

- Slatwall or pegboard.
- Includes 2 each of Sticker-On! and Sticker-Off!
- Includes: 20 Factory Matched Registration Kits (2 each of our top ten best sellers).

Order No.	Mfg. No. / Description	Price
257605	(POP#6) 22' x 24" Wire Display	$475.98 F

POP Display #5

- Complete single letter and number center.
- Includes quantity: 10 each of A-Z, 0-9 in both black and white.
- Total of 720 decals.
- Attractive and space efficient.

Order No.	Mfg. No. / Description	Price
257600	(POP#5) 32" x 24" Wall Display	$342.98 F

Hardline Products Sticker-On! Sticker-Off!



Sticker On!

- Makes putting on stickers easy and bubble free.
- Just spray and slide your decals into position.
- Works on any decal.

Sticker Off!

- Safely removes old decal adhesive left behind when you peel off stickers.
- Works on any adhesive.

Order No.	Mfg. No. / Description	Price
257300	(964) Sticker On! 2 oz. Bottle	$6.98 F
257305	(965) Sticker Off! 2 oz. Bottle	$6.98 F

Injury Decal and Plaque



659373



255952

- Meets federal requirements on commercial vessels.
- Black on white background with adhesive backing.

Order No.	Mfg. No. / Description	Price
659373	(659373) Decal Dimensions: 7-1/4" x 4-5/8"	$4.56 F
255952	(P-230) Plaque, Dimensions: 8-5/8" x 5-7/8"	$14.98 Q

Drug Decal and Plaque



659372



255949

- Meets federal requirements on commercial vessels.
- Easy to apply. • Adhesive backing.

Order No.	Mfg. No. / Description	Price
659372	(659372) Decal Dimensions: 8" x 5"	$4.56 F
255949	(P-229) Plaque, Dimensions: 6-3/4" x 4"	$11.98 Q

Hardline Products Key Floats



- Vinyl dipped key floats.
- The largest made 3-5/8" wide.
- Choose from Pre-printed or Custom with your dealership logo. (see order form).
- Sold in cases of 20 each.

Order No.	Mfg. No. / Description	Price
257310	(BKF) Blue Key Float	$2.75 F
257325	(RFK) Red Key Float	$2.75 F
257340	(WKF) White Key Float	$2.75 F
257355	(YKF) Yellow Key Float	$2.75 F
257315	(BKF-BK) Blue "Boat Keys"	$2.75 F
257330	(RFK-BK) Red "Boat Keys"	$2.75 F
257345	(WKF-BK) White "Boat Keys"	$2.75 F
257360	(YKF-BK) Yellow "Boat Keys"	$2.75 F
257320	(BFK-GIS) Blue "Get In Sit"	$2.75 F
257335	(RKF-GIS) Red "Get In Sit"	$2.75 F
257350	(WKF-GIS) White "Get In Sit"	$2.75 F
257365	(YFK-GIS) Yellow "Get In Sit"	$2.75 F
257370	(CS-01) Display Clip Strip (24 Pieces)	$72.98 F
257375	(X-25) Display Box (50 Pieces)	$142.98 F

Super Soft® Key Chains Assortment



- Vinyl-coated, soft and they float.
- 24 count display.
- Oval key chain.

Order No.	Mfg. No. / Description	Price
710132	(5492500) Yellow Only	$82.98 G
710133	(5492600) Assorted Colors	$82.98 G

Engraving Oil Discharge Plaque



- Adhesive backing.
- Black background.
- Meets federal standards.
- Required on all boats 26' and over with enclosed engine compartment.

Order No.	Mfg. No. / Description	Price
255946	(P-204) Dimensions: 5" x 8"	$10.98 Q

Pollution Prevention Plaque



- Meets federal standards.
- Required on all boats 26' to display overboard discharge laws.
- Adhesive backing.

Order No.	Mfg. No. / Description	Price
255948	(P-227) Dimensions: 9-1/4" x 4-1/2"	$11.98 Q

Custom Key Float Program

Dealer name_____ Dealer number_____ SHOW_____

Phone_____ Fax_____ Date_____

Dealer email address for proof_____

Art on File? yes_____ no_____ $50 new art one time charge.
Art work must be supplied on disk or emailed in high resolution jpeg, eps or tiff format only. Custom order key float 250 pcs. minimum.

1 side____
2 sides_____additional $.10
$20 color change if differnt ink color from 1st side.

HARDLINE products
677 Cochran Steet
Simi Valley, CA 93065
805-581-4700 phone
805-581-0022 fax
sales@hardlineproducts.com

If dealer does not have logo or artwork they can choose from 3 differnt font styles below. (Circle one)
Pick float color and ink color. Choices are RKF, WKF, BKF, YKF,
Live Area is 3/4" X 2" approx.

A. B. C.

.75" | 2"

Holiday Marina 800-555-1212

Holiday Marina 800-555-1212

Holiday Marina 800-555-1212

Custom

Dealer art on file Copy for Key Float 250 pcs. min for custom key float

ORDER NUMBER	Key Float COLOR	Ink COLOR	Descript	SUG. DEALER	Qty.
RKF	red	na	blank	$1.64	
RKF-BK	red	white	boat keys	$1.64	
RKF-GIS	red	white	get in sit..	$1.64	
WKF	white	na	custom	$1.64	
WKF-BK	white	blue	boat keys	$1.64	
WKF-GIS	white	blue	get in sit..	$1.64	
BKF	blue	na	blank	$1.64	
BKF-BK	blue	white	boat keys	$1.64	
BKF-GIS	blue	white	get in sit..	$1.64	
YKF	yellow	na	blank	$1.64	
YKF-BK	yellow	black	boat keys	$1.64	
YKF-GIS	yellow	black	get in sit..	$1.64	
LL-12	yellow	green	bass	$1.64	
L-12	yellow	blue	ski grl.	$1.64	
M-12	yellow	black	marlin	$1.64	
AN-12	yellow	black	anchor	$1.64	
SD-12	yellow	black	scuba	$1.64	
CS-01	24pcs mixed	mixed	clip strip	$42.13	
X-24	24pcs mixed	bass & ski girl	pop box	$42.13	

All artwork must be submitted ready to print as is. We will make our best attempt to center the image on the key float unless otherwise indicated.
We only accept High resolution AI, EPS and PDF files. We need your file to have been created in Adobe Illustrator (or another drawing program) and saved as an EPS or AI or JPEG file. All fonts must be saved as "Outlines". Files created in Photoshop or taken off the internet (rasterized) will print with jagged edges on all sides of the graphics. If we do not have a vector file (made from shapes) we will have to regenerate the artworkat a $60 fee.All files must be one color setup.
No dropshadows, outlines or fades. If your artwork is wrong and you sign off on the proof then your Key float will print wrong. What you submit is what we print.

Subtotal_____

Discount_____

Shipping_____

Total_____

©2014 Donovan Marine, Inc.

Marpac Peg Board Hooks



- .148 diameter.
- Sold 25 hooks per pack.

Order No.	Description	Price
7-0549	2"	$8.98 G
7-0548	4"	$14.98 G
7-0546	6"	$17.98 G
7-0547	8"	$19.98 G

Guest Oscillating Cabin Fan



- Designed for a really comfortable addition to cabin and galley.
- Keeps the air moving when it's hot or humid.
- Oscillates 120° horizontally or can be operated from a stationary position.
- Also features vertical adjustment and may be mounted vertically or horizontally.
- Highly efficient compact 12 volt motor is very quiet and draws only 1.2 amps.
- Three transparent blades and 7-1/2" vinyl coated guard.

Order No.	Mfg. No. / Description	Price
379049	(900) Oscillating Cabin Fan	$144.98 I

Marpac Marine Cabin Fan



- Weatherproof vinyl coated fan guard.
- Easy installation.
- Fixed or 90° "sweep" motion.
- 8 preset fan positions with adjustable tilt.

Order No.	Description	Price
7-0117	12 volt	$27.98 G

KS Marine Keelshield® Kevlar® Keel Protector



- Just Prep, Peel and Stick - No Down Time!
- KeelShield® brand keel protectors provide the strongest most durable protection for your boat or personal watercraft's hull.
- Protects the keel from abrasion, scratches and scars from concrete ramps, rocky shores, beaching, launching, loading and submerged objects.
- Made from 100% urethane polymers with Dupont™ Kevlar® aramid fibers, which is lightweight, extraordinarily strong, and has five times the strength of steel on an equal-weight basis.
- Kevlar KeelShield bonds to the hulls of fiberglass and most aluminum boats with premier 3M adhesive system.
- You want the #1 keel protector than look for the KeelShield Gator.
- Made with pride in the USA.
- Lifetime warranty.

Order No.	Mfg. No. / Description	Price
482036	(KSKEV8BLK) 8' Kevlar (Black)	$398.98 G

Header Card Kit



- Keep things organized with these attractive header cards.
- Signs included for:

Accessories	Engine Care	Lights	Safety
Boat Care	Fishing	Mooring	Seats
Electrical	Fuel	Promotion	Trailer
Electronics	Hardware	Pumps	Water Sports

Order No.	Description	Price
101100	Header Card Kit	$85.98 B

Hupp Deluxe Heater



- Twin-fan heater draws cold air in from the rear of the heater; discharges warm air out the front.
- 3/4" pipe thread core connections provide choice of side or bottom water hose hookup.
- 33,000 btu/hr output.
- 340 CFM air capacity.
- 12 volt.

Order No.	Mfg. No. / Description	Price
397655	(9000-12)	$709.98 I
397665	(62005) 12 volt Motor Only	$112.98 F

Keelshield Keel Protector



- Just Prep, Peel and Stick - No Down Time!
- KeelShield brand keel protectors provide the strongest most durable protection for your hull.
- Protects your keel from abrasion, scratches and scars from concrete ramps, rocky shores, beaching, launching, loading and submerged objects.
- Made of DOW Urethane Polymers and the best 3M adhesive system available.
- Works on fiberglass, most aluminum and most personal watercraft.
- You want the #1 keel protector than look for the KeelShield Gator.
- Made with pride in the USA.
- Lifetime warranty.

Order No.	Mfg. No. / Description	Price
482013	(KS-5BLK) Black, Length 5'	$155.98 Q
482014	(KS-5LGY) Light Gray, Length 5'	$155.98 Q
482016	(KS-5WHT) White, Length 5'	$155.98 Q
402019	(KS-6BLK) Black, Length 6'	$173.98 Q
482018	(KS-6LGY) Light Gray, Length 6'	$173.98 Q
482020	(KS-6WHT) White, Length 6'	$173.98 Q
482022	(KS-7BLK) Black, Length 7'	$201.98 Q
482026	(KS-7LGY) Light Gray, Length 7'	$201.98 Q
482028	(KS-7WHT) White, Length 7'	$201.98 Q
482030	(KS-8BLK) Black, Length 8'	$230.98 Q
482034	(KS-8WHT) White, Length 8'	$230.98 Q

Imtra Coastal Series Standard Pendulum Wiper Arms



- Adjustable pendulum arms in two sizes from 12-24" with adjustable tip.
- Constructed of 306 stainless steel and UV-stable synthetics.
- Easy snap-in blade connection.
- Fit most motors with .54" shaft diameter.
- Accept standard wiper blades only.

Order No.	Mfg. No. / Description	Price
679416	(RC538718) Adjustable from 13.5" to 18.5"	$51.98 I
679417	(RC538724) Adjustable from 19" to 24"	$65.98 I

Imtra Roca Wiper Motors



- Provides a totally self-contained oscillating shaft requiring no external linkage.
- All parts are corrosion resistant.
- 55 to 65 strokes per minute.
- They have a 5/8" diameter stainless steel mounting stud, 2" or 3" in length.
- Wipe angle is adjustable to 85°, 100°, 110° or 120°.
- Order motor, arm and blade separately.

Order No.	Mfg. No. / Description	Price
679413	(RC524991) 12 volt, 2" Stud	$179.98 I
679451	(RC524992) 24 volt, 2" Stud	$179.98 I
679425	(RC525891) 12 volt, 3" Stud	$198.98 I

Imtra Exalto Type I Motors



- Has a slot-type angle adjustment system allowing for the ideal wiper sweep from 40 - 90 degrees.
- 23Nm wiper motor.
- Maximum arm: 29-1/2"; maximum blade: 31-1/2".

Order No.	Mfg. No. / Description	Price
679656	(EX2167.30) 12 volt, 3/4" Bulkhead Thickness	$849.98 I
679670	(EX2168.30) 24 volt, 3/4" Bulkhead Thickness	$881.98 I

Imtra Exalto Heavy Duty Stainless Steel Wiper Blades



- Slightly lower profile than our standard blades, these heavy duty models are an ideal choice for applications that require a little more pressure on the glass.
- Durable stainless upper bridges with high-impact polymer lower bridges for optimal blade/glass contact.

Order No.	Mfg. No. / Description	Price
679683	(EX216122) 27.6"	$135.98 I
679685	(EX216123) 29.5"	$152.98 I
679687	(EX216124) 31.5"	$169.98 I

Imtra Wiper Washing Systems - Solenoid Valves



- Solenoid valves are a simple way to use your ship's pressure water supply as a source for wiper washing fluid.
- The solenoids are operated by a separate switch (usually a function of the wiper switch or panel).
- 1/4".

Order No.	Mfg. No. / Description	Price
679706	(EX-SV1/4-12V) 12 volt	$185.98 I
679709	(EX-SV1/4-24V) 24 volt	$185.98 I

Imtra Roca Wiper Blades



- Designed to fit Roca wiper arms, as well as AFI/Marinco and Ongaro arms.
- Powder-coated steel with durable rubber insert.
- Includes: Assorted mounting clips suitable for other attachment methods.

Order No.	Mfg. No. / Description	Price
679418	(RC520912) 12"	$12.98 I
679419	(RC520914) 14"	$14.98 I
679420	(RC520918) 18"	$18.98 I
679421	(RC520922) 22"	$23.98 I

Wiper Adjustable Arms

Order No.	Mfg. No. / Description	Price
679502	(LE 721156) Adjustable Arm	$57.98 I
679505	(LE 581022-1) Adjustable H/D Arm, 11" to 15"	$59.98 I
679506	(LE 581022-2) Adjustable H/D Arm, 15" to 19"	$52.98 I
679653	(RC520160) Small Parts Kit for WWF Wiper	$6.98 F

Wiper Arm Blades

- Use with 679502 adjustable arms.

Order No.	Mfg. No. / Description	Price
679487	(BD 721020-12) 12" Blade	$32.98 I
679499	(BD 721020-14) 14" Blade	$36.98 I

- Use with 679505 or 679506 adjustable arms.

Order No.	Mfg. No. / Description	Price
679510	(BD 721011-14) 14" H/D Blade	$15.98 I
679515	(BD 721011-18) 18" H/D Blade	$16.98 I
679520	(BD 721011-22) 22" H/D Blade	$19.98 I

Imtra Exalto Type 1 Pantograph Arms



- For blades from 11.8" to 31.5".
- All 316 stainlesss steel components with brass attachment heads.
- All arms include adjustable spring mechanism in drive gallery.

Order No.	Mfg. No. / Description	Price
679675	(EX2136AS) Adjustable from 17.7" to 23.6"	$579.98 I
679676	(EX2139AS) Adjustable from 23.6" to 29.5"	$595.98 I

Imtra Combination Switches



- Individual switches for a single wiper motor that offer low speed, high speed and variable intermittent operation.
- Push-button for wiper washing.

Order No.	Mfg. No. / Description	Price
679414	(EX2158) 12 volt	$129.98 I
679415	(EX2159) 24 volt	$141.98 I

Trico Air Pressure Windshield Wiper Power Units



- 90° stroke, automatically parks on left side.
- Low air consumption, oil impregnated bronze bushings, molded piston packing for greater air seal and maximum power.

Order No.	Mfg. No. / Description	Price
662797	(FPDP-60L) 60° Sweep	$385.98 I
662812	(FPDP-80L) 80° Sweep	$385.98 I
662824	(FPDP-90L) 90° Sweep	$385.98 I

©2014 Donovan Marine, Inc.

Trico Model JF-1043 Plate and Bushing Assemblies



Order No.	Mfg. No. / Description	Price
662735	(JF-1043-2J) Stud Length 5/8"	$62.98 I
662747	(JF-1043-6J) Stud Length 1-7/8"	$62.98 I
662711	(JF-1043-12J) Stud Length 3-1/4"	$62.98 I

Trico 73 Series Adjustable Wiper Arm



- A silver finish and feature an adjustable saddle and arm length.
- Includes adjustable saddle to hold blade, cap nut, washer and knurled driver for attachment to flat taper shaft.

Order No.	Mfg. No. / Description	Price
662709	(44-05) Adjustable from 14" to 18"	$66.98 I

A.F.I. Waterproof Standard Wiper Kits - AFI-500



- Windshield frame mount installation.
- Adjustable right or left self-parking.
- Maximum current draw: 2 amps.
- 12 volt.
- Kit includes: Waterproof wiper motor, 6-3/4" to 10-1/2" deluxe adjustable stainless steel arm and 11" deluxe stainless steel curved blade.
- For external use in open cockpit boats.
- Waterproof housing made of UV stabilized, high temperature, high impact thermoplastic.
- Motor has a 2-1/2" shaft length, with a 1/2" shaft diameter.

Order No.	Mfg. No. / Description	Price
215144	(30004) 80° Sweep	$192.98 F
215168	(30005) 110° Sweep	$192.98 F

eGear Assorted Shape Carabiners



- Durable carabiners in 6 cool shapes and colors.

Order No.	Mfg. No. / Description	Price
586394	(26310CRBA100) 100 Count, Assorted Colors	$199.98 H

Trico Model JF-1376 Flat Taper Shafts



Order No.	Mfg. No. / Description	Price
662874	(JF-1376-76K) Length 5-7/16"	$47.98 I
662886	(JF-1376-107K) Length 6-11/16"	$52.98 I
662850	(JF-1376-12K) Length 8-7/16"	$47.98 I
662862	(SP4080) Shaft Kit	$73.98 F

Trico 61 Series Blades for Flat Windshields



- Adapter included.

Order No.	Mfg. No. / Description	Price
662898	(61-180) 18"	$15.98 I
662901	(61-210) 21"	$21.98 I

Trico Air Pressure Wiper Control for FPDP Motor

Order No.	Mfg. No. / Description	Price
662925	(75470-2NS) 1/4" Fittings	$155.98 Q

Marpac Padlocks



- Includes: 2 nickel plated brass keys.
- Solid brass body and shackle.

Order No.	Description	Price
7-0020	1-1/4"	$6.98 G
7-0022	1-1/2"	$7.98 G
7-0024	2"	$12.98 G

Marpac Safety Snaps



- Stainless steel.

Order No.	Description	Price
7-0284	Length Overall 2-1/2", Gauge OD 1/4"	$4.98 G
7-0285	Length Overall 3-1/8", Gauge OD 5/16"	$5.98 G
7-0286	Length Overall 4", Gauge OD 3/8"	$10.98 G
7-0290	Length Overall 4-3/4", Gauge OD 7/16"	$22.98 G

Stainless Steel Imported Snaps



- Sold in bulk.

Order No.	Mfg. No. / Description	Price
238217	(3771) Overall 2-1/2" L, Gauge OD 1/4"	$3.98 F
238229	(3773) Overall 3-1/8" L, Gauge OD 5/16"	$5.98 F
238231	(3774) Overall 4" L, Gauge OD 3/8"	$8.98 F
238243	(3775) Overall 4-3/4" L, Gauge OD 7/16"	$12.98 F

Marpac Fast Eye Snap Hooks



- Solid bronze.

Order No.	Description	Price
7-0278	3/8"	$4.45 G
7-0279	5/8"	$4.04 G
7-0685	11/16"	$9.98 G
7-1350	3/4"	$7.98 G

Solid Bronze Imported Fast Eye Snap Hooks



- Sold in bulk.

Order No.	Mfg. No.	Overall	Opening	Eye ID	Price
238267	(249-0)	2-1/8"	3/8"	3/8"	$1.98 G
238279	(249-1)	2-7/8"	5/8"	5/8"	$3.98 G
238281	(249-2)	3-1/4"	11/16"	3/4"	$4.98 G
238293	(249-3)	3-7/8"	3/4"	7/8"	$6.98 G

Perko Swivel Eye Bolt Snap



- Chrome plated zinc, interlocking tongue.

Order No.	Mfg.No. / Description	Price
531574	(1289 DPO CHR) 5/8" Eye, 3" Long, Locking Catch	$11.98 R

Marpac Snap Hook



- Malleable iron.
- 2,300 lbs. breaking strength.

Order No.	Description	Price
7-0288	Length 3-1/2", Eye 2"	$5.98 G

Fast Eye Safety Snap Hook



- Galvanized drop forged steel with stainless steel spring.

Order No.	Mfg. No.	Overall	Opening	Eye ID	Price
541082	(2311)	4-1/8"	11/16"	3/4"	$8.98 Q

Marpac Swivel Eye Snap Hooks



- Solid bronze.

Order No.	Description	Price
7-0280	5/8"	$6.98 G
7-0281	3/4"	$7.98 G
7-0282	7/8"	$7.98 G

Solid Bronze Imported Swivel Eye Snap Hooks



- Sold in bulk.

Order No.	Mfg. No.	Overall	Opening	Eye ID	Price
238306	(251-1)	3-1/4"	5/8"	5/8"	$4.98 G
238318	(251-2)	3-3/4"	3/4"	3/4"	$5.98 G
238320	(251-3)	4-1/2"	3/4"	7/8"	$7.98 Q

Sea-Dog Line Swivel Eye Boat Snap



- Die cast chrome plated.

Order No.	Mfg. No. / Description	Price
721770	(148131-1) 3-1/4" L	$3.97 Q

Marpac Heavy Duty Snap Hook



- Malleable iron with spring snap closure.
- 5,000 lbs. breaking strength.

Order No.	Description	Price
7-0287	Length 4", Eye 2-1/4"	$6.98 G

Marpac Utility Snap Hook



- Forged zinc plated steel.
- 1,000 lbs. breaking strength.

Order No.	Overall	Dia.	Opening	Eye ID	Price
7-0289	4-1/2"	3/4"	1"	2-1/2"	$2.98 G

©2014 Donovan Marine, Inc.

Marpac Swivel Eye Bolt Snap Hooks



- Solid bronze.

Order No.	Description	Price
7-1360	Length 3/4"	$7.98 G
7-1362	Length 1"	$5.98 G

Marpac Double End Bolt Snap Hook



- Solid bronze.
- Sold 2 per card.

Order No.	Description	Price
7-1355	Length Overall 4-3/4", 1/2" Opening	$9.98 G

Solid Bronze Imported Swivel Eye Bolt Snap Hooks



- Sold in bulk.

Order No.	Mfg. No.	Overall	Eye ID	Price
238154	(225)	3-1/4"	3/4"	$3.98 G
238166	(225)	3-1/2"	1"	$4.98 G
238178	(225)	4-3/4"	1-1/4"	$7.98 G

Imported Double End Bolt Snap Hook



- Solid bronze.
- Sold in bulk.

Order No.	Mfg. No. / Description	Price
238142	(163) Length Overall 4-3/4" with 1/2" Opening	$4.98 I

Pelican Release Hook



- Burnished bronze.

Order No.	Mfg. No.	Overall	Eye ID	Price
691041	(189780)	4"	1/2" x 3/8"	$14.98 F

Groco Full-Flow Flanged Safety Seacocks

GROCO



- Handle has square hole that accepts standard ratchet; helps access hard-to-reach valves, or ease actuation of hard-tooperate valves.
- Side port has a Quick-Release plug for emergency bilge pumping, and a Service Adaptor for routine winterization and maintenance.
- Full pipe-size flow.
- Serviceable while installed.
- Stainless steel ball and stem.
- Base has bonding attachment.
- PTFE seats and seals.
- Two driver ports permit handle relocation.
- Service adaptor included.

Order No.	Mfg. No. / Description	Price
S/O	(SBV-1250) Bottom Port 1-1/4" NPS, Top Port 1-1/4 NPT	POR
S/O	(SBV-1500) Bottom Port 1-1/2" NPS, Top Port 1-1/2 NPT	POR
S/O	(SBV-2000) Bottom Port 2" NPS, Top Port 2 NPT	POR
S/O	(SBV-2500) Bottom Port 2-1/2" NPS, Top Port 2-1/2 NPT	POR
S/O	(SBV-3000) Bottom Port 3" NPS, Top Port 3 NPT	POR

Groco SE Series - Large Engine Water Strainers

GROCO



373939



373934

- For high power engines with 4", 5" or 6" intake.
- Low restriction for maximum cooling water flow.
- No inside tie rods.
- Cover unscrews for easy filter basket cleaning.
- O-rings seal all mating surfaces.
- Improved cylindrical filter basket.
- Bronze castings.
- Lucite sight glass.
- Stainless steel filter basket.

Model SE Series.

- Cylinder diameter 13".
- Cylinder height 18.4".

Order No.	Mfg. No. / Description	Price
373934	(SE-4000) 4" NPT	$7,227.98 I

Model SEF Series.

- Cylinder diameter 16.5".
- Cylinder height 18.3".
- Mounting bolts: 3/4.

Order No.	Mfg. No. / Description	Price
373939	(SEF-4000) 4" Flange	$8,276.98 Q
S/O	(SEF-5000) 5" Flange	POR
S/O	(SEF-6000) 6" Flange	POR

Accessories.

Order No.	Mfg. No. / Description	Price
373950	Repair Kit	$46.98 F
373951	(SE-4001A) Cap	$649.98 F
373959	(SE-4003-1) Stainless Steel Basket	$1,149.98 I

Groco Full-Flow Flanged Ball-Type Seacocks

GROCO



- Tri-flange base and mount hole pattern provide easy retrofit when replacing most popular brands.
- Patented selectable handle rotation.
- Handle has square hole to accept standard ratchet, to help reach valves in hard-to-reach locations and ease actuation of difficult to operate valves.
- Full pipe-size flow.
- Stainless steel ball and stem.
- PTFE seats and seals.
- Serviceable while installed.
- Drain plug on both sides.
- Base has bonding attachment.

Order No.	Mfg. No. / Description	Price
S/O	(BV-750) Bottom Conn. 3/4" NPS, Top Conn. 3/4 NPT	POR
S/O	(BV-1000) Bottom Conn. 1" NPS, Top Conn. 1 NPT	POR
S/O	(BV-1250) Bottom Conn. 1-1/4" NPS, Top Conn. 1-1/4 NPT	POR
S/O	(BV-1500) Bottom Conn. 1-1/2" NPS, Top Conn. 1-1/2 NPT	POR
S/O	(BV-2000) Bottom Conn. 2" NPS, Top Conn. 2 NPT	POR
S/O	(BV-2500) Bottom Conn. 2-1/2" NPS, Top Conn. 2-1/2 NPT	POR
S/O	(BV-3000) Bottom Conn. 3" NPS, Top Conn. 3 NPT	POR
S/O	(BV-4000) Bottom Conn. 4" NPS, Top Conn. 4 NPT	POR
S/O	(BV-5000) Bottom Conn. 5" NPS, Top Conn. 5 NPT	POR

Groco VD-S Series Vertical Duplex Water Strainers

GROCO



- When engines or other connected equipment must run continuously, filterbasket cleaning is made possible by the dual strainer design.
- An integral valve located between the strainers directs the flow to one filter chamber or the other.
- The in-use filter continues to protect your equipment while the filter not in use may be serviced.
- #304 stainless steel filter baskets are standard.

Order No.	Mfg. No. / Description	Price
S/O	(VD-1250-S) 1-1/4" NPT, 12" H x 13" W x 6.75" D	POR
S/O	(VD-1500-S) 1-1/2" NPT, 14.5" H x 16" W x 8" D	POR
374152	(VD-2000-S) 2" NPT, 16.5" H x 16" W x 8" D	$3,260.98 Q
S/O	(VD-2500-S) 2-1/2" NPT, 17.5" H x 17.5" W x 8" D	POR

Groco BS Series - Bilge Strainers

GROCO



- Use for preventing large debris in the bilge area from entering bilge pumps.
- Ideal for use with GROCO SBV-Pseries Safety Seacock with side port.
- Threaded NPT for use with straight or 90° pipe to hose adaptors.

Order No.	Mfg. No. / Description	Dimensions	Height	Price
S/O	(BS-750) 3/4" NPT	1.88" x 2.13"	2"	POR
S/O	(BS-1000) 1" NPT	1.88" x 2.13"	2"	POR
S/O	(BS-1250) 1-1/4" NPT	3.4" x 3.63"	2"	POR
S/O	(BS-1500) 1-1/2" NPT	3.4" x 3.63"	2"	POR
S/O	(BS-2000) 2" NPT	5.25" x 3.63"	2"	POR
S/O	(BS-2500) 2-1/2" NPT	5.25" x 3.63"	2"	POR
S/O	(BS-3000) 3" NPT	5.25" x 3.63"	2"	POR

©2014 Donovan Marine, Inc.

Groco PTH - Straight Standard Flow Bronze Fittings

GROCO



Order No.	Mfg. No. / Description	Price
S/O	(PTH-4000) 4 NPT, Hose 4" ID	POR
S/O	(PTH-5000) 5 NPT, Hose 5" ID	POR

Fire Hoses



- Single jacket, high grade, UL accepted fire hose.
- Length 50'.

Order No.	Mfg. No. / Description	Price
380218	IPT, 1-1/2"	$189.98 F
380220	NST, 1-1/2"	$189.98 F
339819	IPT to NST Brass Adapter	$27.98 F

Akron Omega™ Monitor

AKRON



- Brass construction.
- Full 3" waterway.
- 360° horizontal and 150° vertical travel.
- Cast-in turning vanes for more efficient flow.
- Height 17".
- Width 11-1/2".
- Inlet 3" FL.
- Outlet 2-1/2".
- Flow: 1,250 GPM.
- Weight 72 lbs.

Shown with Discharge Pipe and Tip (Not Included)

Order No.	Mfg. No. / Description	Price
588539	(3526)	$2,548.98 F
588542	(489) Tip	$432.98 F

Akron Foam Nozzle with Pickup Tube

AKRON



- Combination Akrolite and Pyrolite.
- Preset at 6% easily changed to 1/2%, 1% or 3%.
- Expansion rate up to 14:1.
- Pressure rated at 100 PSI.
- Inlet 1-1/2".
- Length 38".
- Flow at 100 PSI: 95 GPM
- Weight 6 lbs.

Order No.	Mfg. No. / Description	Price
588523	(3951) Foam Nozzle	$1,431.98 F

Spray Nozzle



- Zinc Alloy spray nozzle with insulated handle.
- Soft grip and front thread protector.
- 5-1/2".

Order No.	Mfg. No. / Description	Price
485638	(30-600) Spray Nozzle	$17.98 F

Groco PTHC - 90° Standard Flow Bronze Fittings

GROCO



Order No.	Mfg. No. / Description	Price
S/O	(PTHC-4000) 4 NPT, Hose 4" ID	POR
S/O	(PTHC-5000) 5 NPT, Hose 5" ID	POR

Guardian Hump Hose Rack



- This hose rack allow lined hose to be neatly and conveniently racked away from the work area.
- Size hose: 1-1/4" or 1-1/2".
- Dimensions: 29-3/4" D x 20-7/8" H x 4-1/8" W.

Order No.	Mfg. No. / Description	Price
380307	(1420-1)	$182.98 F
249011	(1420-16) SS	$678.98 F

Akron Leader Line Wye

AKRON



- Brass construction.
- Designed for heavy duty use.
- Length 7-1/2".
- Width 5-1/4".
- Female inlet 2-1/2".
- (2) Male outlet 1-1/2".

Order No.	Mfg. No. / Description	Price
588537	(2681)	$676.98 F

Angle Valve



- Plain brass.
- 1-1/2" angle VLV.
- 300 PSI.

Order No.	Mfg. No. / Description	Price
380333	(170-1521MNST) Female IPT x Male NST	$126.98 F
380341	(5515 NST) Cap with Chain	$19.98 F

Akron Marine Brass In-Line Eductor

AKRON



- 90 GPM.
- Operating Pressure 200 PSI.
- Set at 6% pickup rate, easily changed to 3%.
- Includes: Foam shutoff valve and 60" pickup hose.
- Length 9-1/2".
- Female inlet 1-1/2".
- Male outlet 1-1/2".

Order No.	Mfg. No. / Description	Price
588528	(2328)	$1,170.98 F

Groco TH Series - Bronze Thru-Hull Fittings

GROCO



Order No.	Mfg. No. / Description	Price
S/O	(TH-4000-W) Pipe 4" NPS	POR
S/O	(TH-5000-W) Pipe 5" NPS	POR

Guardian Common Spanner



- Used for tightening 1-1/2" connections on fire hose.

Order No.	Mfg. No. / Description	Price
380282	(876-15)	$16.98 M

Guardian Universal Spanner

- Used for tightening 1-1/2" connections on fire hose.

Order No.	Mfg. No. / Description	Price
380294	(874-4)	$23.98 F

Akron Spanner Wrench

AKRON



- The all-purpose wrench for 3/4" to 3" rocker lug and pin lug couplings.
- Features a belt hook eye, hammer head and a gas cock shutoff.
- Akrolite construction.

Order No.	Mfg. No. / Description	Price
587088	(10) Length: 11-1/2"	$45.98 F

Akron Coast Guard Nozzles with Fog Tip

AKRON



588559

- Combination fog and straight stream nozzles for shipboard fire fighting.
- Required equipment for all commercial vessels under US registry.
- Fog flow at 100 PSI: 55 GPM.
- Length 10-1/4".
- Inlet 1-1/2".
- USCG Approval #162.027/09/0.

Order No.	Mfg. No. / Description	Price
587090	(2032) IPT	$980.98 Q
587103	(2032) NST	$980.98 Q
588559	(2033) With Chain	$191.98 F
588561	(7-06-254) 6" Chain	$7.98 F

- Fog flow at 100 PSI: 106 GPM.
- Length 11-1/2".
- Inlet 2-1/2".
- USCG Approval #162.027/10/0.

Order No.	Mfg. No. / Description	Price
587108	NST (2046)	$1,178.98 Q

Akron Coast Guard Shipboard Vari-Nozzles



- Brass construction.
- A combination fog and straight stream nozzle designed for more efficiency with AFFF or water on-board ships.
- Low friction ball and dual seats for smooth operation.
- Molded teeth.
- Rubber-like bumper and handle.
- Constant gallonage in fog and straight stream patterns.
- Flush without shutting down.
- Flow at 100 PSI: 95 GPM.
- Length 8-5/8".
- Inlet 1-1/2".
- Pistol grip.
- USCG Approval #162.027/15/0.

Order No.	Mfg. No. / Description	Price
588515	(3020) With Pistol Grip	$994.98 Q



- Without pistol grip.
- USCG Approval #162.027/16/0.

Order No.	Mfg. No. / Description	Price
588518	(3022NST)	$911.98 Q

Brooks Firefighting Hood



- Nomex/Lenzing firefighting hood with comfort.
- Plus liner.

Order No.	Mfg. No. / Description	Price
264117	(1027492) Hood	$56.98 F

Fire Fighting Gloves



- Supple all-leather construction.
- Four layer Kevlar knit wrist and extra-long pull-patch.
- Full sock-type liner of comfortable flame resistant SEF material.
- 2" leather cuff.
- Meets FED, CAL-OSHA specifications.

Order No.	Mfg. No. / Description	Price
318217	(101)	$132.98 F

Lifeline - 100' Stainless Steel with Bronze Snaps

Order No.	Mfg. No. / Description	Price
248536	100' Lifeline	$105.98 F

Fire Hose Nozzles - Polycarbonate



- High impact polycarbonate nozzle.
- Ideal for locations where brass theft is a concern.
- 1-1/2".

Order No.	Mfg. No. / Description	Price
264111	(E15IPT) IPT	$36.98 F
264113	(E15NST) NST	$36.98 F

Akron Horizontal Tool Bracket



- Heavy duty bracket with covered jaws.
- Designed for horizontal mounting to hold objects up to 1-3/4" diameter.
- Ideal for holding axes, applicators, booster nozzles or smaller tools.
- Length 4-1/8".

Order No.	Mfg. No. / Description	Price
588547	(40) Tool Bracket	$77.98 F

Perko Fig. 325 Fire Axe Bracket



- Stainless steel.
- For 6" blade width.
- Socket screw size: 10 R.H.
- Bracket screw size: 6.

Order No.	Mfg. No. / Description	Price
537386	(325 000 STS)	$26.98 Q

Brooks "H" Back Suspenders



- Fully adjustable.
- Red.

Order No.	Mfg. No. / Description	Price
264119	(1022081RED)	$45.98 F

Akron Applicator with Fog Head



- Applicators with stainless steel tubing to Coast Guard specifications.
- Improved head and end connectors for increased strength and durability.
- Includes: Style 1034 fog head.
- Flow at 100 PSI: 54.
- Length 4'.
- Inlet 1-1/2".
- 60° bend.
- USCG Approval #162.027/09/0.

Order No.	Mfg. No. / Description	Price
588535	(2415) Applicator	$421.98 F

Fire Axes



- Curved handle painted red.
- Handle length 36".

Order No.	Mfg. No. / Description	Price
465636	(8306) 4.5 lbs.	$123.98 I
303141	(8312) 6 lbs.	$91.98 F

Datrex Hatchet with Lanyard



- USCG Approved hatchet with lanyard for use in lifeboats.

Order No.	Mfg. No. / Description	Price
320789	(BB0072M)	$28.98 F

Fire Hose Nozzles - Brass



- Plain cast brass nozzle.
- Dimensions: 1-1/2" x 10" x 1/2".
- Couplings 1-1/2".

Order No.	Mfg. No. / Description	Price
380244	IPT	$72.98 M
380256	NST	$72.98 M

MSA 660C Metro Fire Helmet



- Durable, painted fiberglass composite.
- Non-corroding, high-temperature resistant, faceshield/goggle hardware.
- Rugged, high-temperature edge will not melt or drip.
- 4" standard faceshield.
- Headband liner: Economy flannel.
- Color: Yellow.
- Simple rear ratchet height adjustment to fit all head sizes.
- Headband (6-3/8" to 8-3/8") fits a wide variety of head sizes.
- Tube-lock system absorbs the shock of an impact.
- Earlaps: Yellow Nomex. Chinstrap: Nomex with quick release.
- Trim type: Scotchlite. Trim color: Lime/Yellow. Trim shape: Tetrabar.

Order No.	Mfg. No. / Description	Price
284529	(257111311000)	$374.98 F

©2014 Donovan Marine, Inc.

Viking 5M System Firefighter Apparel





- Offers the optimal blend of dependable protection and user comfort.
- All stress points are bar-tacked for extra strength.
- Jacket sleeves and Pant cuffs are reinforced with high quality, FR treated, water-repellent leather for increased garment service life.
- All Reflective Trim consists of NFPA approved 3M Scotchlite Reflective Material.
- All critical seams are double stitched.
- All lower hems are reinforced with reflective trim.

Order No.	Mfg. No. / Description	Price
284517	(35MS332) Large, Fits Chest Sizes: 43"-46"	$1,721.98 F
284518	(35MS332) X Large, Fits Chest Sizes: 47"-50"	$1,721.98 F
284519	(35MS332) XX Large, Fits Chest Sizes: 51"-54"	$1,740.98 F

Viking Fire Boots



- Upper: Flame/heat-resisting rubber.
- Construction: Vulcanized rubber/shoe fit engineered.
- Outsole: Flame/heat resisting white "traction lug".
- Insole: Removable superknit covered polyurethane.
- Lining: 3.5mm polyester needled felt with heel reinforcement.
- Midsole: Stainless steel puncture resisting bottom plate.
- Shank: Steel triple ladder shank.
- Special features: Meets both NFPA requirements. UL Certified. Blood borne pathogen compliant. ASTM F 2413-05 M/I/75/C/75 oversized steel toe. Electrical hazard. Double reinforced pull loops. Cushioned shin guard. Light-reflecting instep and heel patches.

Order No.	Mfg. No. / Description	Price
235151	(8076003) Size: 9M	$428.98 F
232152	(8076003) Size: 10M	$428.98 F
232153	(8076003) Size: 12M	$428.98 F
232154	(8076003) Size: 13M	$428.98 F

Pelican Big Ed™ 3700 Flashlight

PELICAN



- The unbreakable ABS body resists chemicals, water, and corrosion.
- Rubber side grips prevent slipping and the push button switch on the side is easy to operate.
- For hands-free use, a heavy duty stainless steel clip is built in.
- Uses a hi-intensity Xenon lamp.
- A back-up emergency lamp is housed behind the reflector.
- Uses (4) C Cell Batteries (Not included).

Order No.	Mfg. No. / Description	Price
511275	(3700) 3700 Flashlight	$179.98 Q

MSA AirHawk® II Air Mask

MSA





- A pressure-demand apparatus designed to maintain a slight positive air pressure inside the facepiece during inhalation and exhalation.
- Built from six major components: Facepiece, carrier and harness assembly, cylinder, first-stage regulator, mask-mounted regulator and End-of-Service- Time Indicator (EOSTI).
- Facepiece: Ultra Elite, medium Hycar, rubber head harness.
- Harness: Nylon with chest strap.
- Cylinder: Aluminum - 30 minutes.

Order No.	Mfg. No. / Description	Price
773235	(10095801)	$2,472.98 D
773247	(492435) Carrying Case	$314.98 D
773259	(809872) Spare Aluminum Cylinder	$791.98 D

- This storage unit can be mounted with screws on rescue or fire vehicles or any permanent surface.
- The spring clips permit the wearer to strap on the apparatus unassisted.
- By stepping forward, the wearer snaps out of the bracket.

Order No.	Mfg. No. / Description	Price
773239	(39851) Walkaway Mounting Bracket	$278.98 D

Complete Line of SCBA's Available Call for Pricing

Jim-Buoy Life Ring Racks - Commercial Quality

CAL-JUNE



- Features heavy duty, welded stainless steel construction throughout for a lifetime of maintenance-free use.
- Pre-drilled holes for stanchion and life line mounting, as well as cabin wall installations.
- Stainless steel U-bolts and nuts for stanchion and life line mounting. (Not included.)

Order No.	Mfg. No. / Description	Price
266418	(1123-24) Diameter 24"	$92.98 F
266420	(1123-30) Diameter 30"	$121.98 F
266456	(1123-X) Sold 4 U-bolts Per Card	$10.98 G

Marpac Life Ring Brackets

MARPAC



- Heavy duty, commercial grade.
- Fits ring buoys 30" in diameter.
- Designed for commercial duty with heavy duty welds.
- Pre-drilled holes for simplified mounting.

Order No.	Mfg. No. / Description	Price
5-0010	Aluminum	$88.98 G
5-0015	Stainless Steel	$129.98 G

Marpac Ring Buoy Bracket

MARPAC



- Stainless steel.
- Predrilled.
- Width 3/4".


Order No.	Mfg. No. / Description	Price
7-0097	Ring Buoy Bracket	$13.98 G

Please Note: Some products on this page can not be shipped via UPS

Special Handling May Apply

Jim-Buoy Day Mark Signals - Black

CAL-JUNE



UPSable

267775 267787 267799

- All units manufactured from heavy duty vinyl coated nylon fabric with stainless steel or galvanized framing.
- Fully collapsible when stored.
- Simplicity of design offers rapid and rigid display when required.

Order No.	Mfg. No. / Description	Price
267775	(1900) Ball Shape, Diameter 24"	$113.98 F
267787	(1901) Cone Shape, Diameter 24" x 24"	$67.98 H
267799	(1902) Diamond Shape, Diameter 24" x 48"	$101.98 R

Datrex Sea Dye Marker

DATREX



- Dye weight: 3.5 oz.
- Minimum solubility: 85%.
- Dimensions of pack: 5" x 6-1/8".
- Sea dye marker meeting the MIL standard 17980D.

UPSable

Order No.	Mfg. No. / Description	Price
436318	(DX1517M) Yellow/Green	$30.98 I

Orion Commercial Vessel Signal Kit

ORION



- Contains: (3) Parachute flares, (6) Red handheld flares, (3) Floating orange smoke signal, (1) Heavy duty, waterproof, dry box - high visibility orange polypropylene is corrosion resistant and floats.
- Meets USCG Regulations for Ocean Vessels traveling in the ocean more than 50 miles from coastline.

Order No.	Mfg. No. / Description	Price
519148	(821)	$498.98 E

Orion Alert/Locate Signal Kit

ORION



- Contains: (3) Parachute flares, (6) Red handheld flares, (3) Orange smoke signals and (1) Heavy duty, waterproof, dry box - high visibility orange polypropylene is corrosion resistant.
- Meets USCG Regulations for Ocean Vessels traveling 3 - 50 miles from coastline or Great Lakes Vessels traveling more than 3 miles from coastline.

Order No.	Mfg. No. / Description	Price
519136	(820)	$325.98 F

Datrex IKAROS Red Parachute Rockets

DATREX



- For long range distress signalling on ships, lifeboats and life rafts.
- 350 meters flare ejection altitude, 30,000 candela, 40 seconds burning time.
- Meets SOLAS requirements.
- USCG Approvals #160.036/12/0 and #160.136/2/0.
- Comes packed in watertight flare box.

Order No.	Mfg. No. / Description	Price
320800	Complete Kit with 12 Flares	$989.98 I
320802	Complete Kit with 6 Flares	$421.98 I

Revere Red Hand Flare

REVERE



- Burns for 60 seconds at a minimum of 15,000 candela.
- Designed to withstand the toughest of marine environments, hand-held flares are long range distress signals.
- Encased in a steel tube for safety to eliminate damage from burning ashes.
- Fitted with an integral pull, twist and strike firing mechanism.

Order No.	Mfg. No. / Description	Price
497013	(52800)	$26.98 I

Datrex Polar Mk4 Hand-Held Red Flares

DATREX



- For short range distress signalling on ships, lifeboats and life rafts.
- 15,000 candela.
- USCG Approved.
- Meets SOLAS requirements.

Order No.	Mfg. No. / Description	Price
436370	Sold 6 Per Case (NH341501/1)	$26.98 I
436371	Sold Each (NH341501/1)	$56.98 I

Revere Para Red Rocket

REVERE



- Long range parachute distress signal.
- For day and night use.
- Burns for 40 seconds at 30,000 candela at a height of 984 ft.
- Visible up to 30 miles.
- Approved to latest USCG and SOLAS specifications.

Order No.	Mfg. No. / Description	Price
497025	(50570)	$84.98 I

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.
Comm.

©2014 Donovan Marine, Inc.

Jim-Buoy Life Ring Buoys

CAL-JUNE



- Nylon vinyl skin.
- Urethane foam core.
- USCG Approved.

White Life Ring Buoys with beckets

Order No.	Mfg. No. / Description	Price
266002	(JB-19) Diameter 19"	$77.98 H
266038	(JBW-20) Diameter 20"	$85.98 H
266052	(JBW-24) Diameter 24"	$94.98 H
266076	(JBW-30) Diameter 30"	$109.98 H

Orange Life Ring Buoys without beckets

Order No.	Mfg. No. / Description	Price
266090	(JBO-X-20) Diameter 20"	$87.98 H
266153	(JBO-X-24) Diameter 24"	$90.98 H
266165	(JBO-X-30) Diameter 30"	$108.98 H

Orange Life Ring Buoys with retro-reflective tape

Order No.	Mfg. No. / Description	Price
266191	(JBO-X-24T) Diameter 24"	$116.98 H
266216	(JBO-X-30T) Diameter 30"	$123.98 H
266305	(JBSO-30T) Diameter 30" SOLAS Approved	$100.98 H

Billy Pugh Containerized Fast Throw Lines



- Keeps rope from tangling on deployment.
- Maintains the strength of the rope as the rope is protected from UVdegradation inside the PVC container.

Order No.	Mfg. No. / Description	Price
484555	(CFTL-1) 1/4" x 100'	$129.00 B
484557	(CFTL-2) 1/4" x 150'	$146.00 B
484559	(CFTL-3) 3/8" x 100'	$203.00 B
484561	(CFTL-4) 3/8" x 150'	$233.00 B

Jim-Buoy Hard Shell Ring Buoy

CAL-JUNE

- Orange, rock-hard, cross linked polyethylene outer shell.
- Molded-in rope holes for easy rope replacement.
- Black 3/8" polypropylene rope UV resistant.
- SOLAS and USCG Approvals #160.050/155/0 and #160.150/11/0.
- Diameter 30".

Order No.	Mfg. No. / Description	Price
266242	(HSO-30)	$97.98 H

Billy Pugh Ring Buoy Release Mechanism (Cages Only)



- Galvanized metal.
- Meets USCG requirements 46 CFR 94-43-10(c) 33.40-5, 75.43-10, 108.515.
- Dimensions: 36" x 31" x 10-1/2".
- Sold 2 cages per set.

Order No.	Mfg. No. / Description	Price
484547	(RBRM-1)	$2,287.00 B

Billy Pugh Life Ring Buoy



- Molded of high impact polyethylene.
- Color will not dent or peel.
- Rigged with black poly-propylene rope term-inated with hand splice.
- USCG Approved throwable device for all vessels.
- USCG Approval #160.050/120/1.
- Polyurethane foam buoyant material provides a minimum buoyant force of 32 lbs.
- SOLAS Approved with tape.

Order No.	Mfg. No. / Description	Price
484460	(A301SOLAS)	$87.50 D

Datrex Life Ring Buoys

DATREX



- Molded from high impact linear low-density polyethylene.
- The encircling rope is replaceable.

Liferingbuoy

- 24" orange buoy with retro-reflective tape for installation on commercial fishing vessels, yachts and other boats that are not required to carry the 30" buoys.
- USCG and Canadian Coast Guard Approved.

Order No.	Mfg. No. / Description	Price
436423	(DX024RD)	$106.98 I

Deckbuoy

- 30" orange buoy with retro-reflective tape.
- Used onboard commercial vessels, offshore installations and larger yachts.
- USCG, Canadian Coast Guard and BV/MED Approved.

Order No.	Mfg. No. / Description	Price
436426	(DX0325D)	$107.98 I

Bridgebuoy

- 30" orange buoy with retro-reflective tape.
- For use with MOB-signals and a quick release ring buoy bracket.
- USCG, Canadian Coast Guard and BV/MED Approved.

Order No.	Mfg. No. / Description	Price
436430	(DX0340D)	$125.98 I

Billy Pugh Rescue Ring



- Flexible flotation device that closes around victim when pulled.
- Diameter 30".

Order No.	Mfg. No. / Description	Price
484464	(RR-30) 30" Diameter	$679.00 B

Datrex IKAROS Line - Complete Linethrower

DATREX



- Range 300 metres in calm weather.
- Line: .16", white, floating, 517 lbs. line strength.
- USCG requires (2) Buoyant Heads 436128 (CI3463P) per vessel.
- For use as pilot line for cables and ropes in rescue operations at sea.
- Use between vessels, from ship to shore or for rescuing people.
- A robust construction consisting of waterproof plastic container, incorporating an integral handle and trigger mechanism, with a solid fuel rocket and 300 m of line.
- Global Approvals: USCG, CA-DOT, BV/MED/SOLAS.

Order No.	Mfg. No. / Description	Price
436105	(CI3461P) 13.4" x 9.1"	$699.98 F
436116	(CI3462P) Repl. Rocket with Integral Igniter	$346.98 F
436128	(CI3463P) Buoyant Head	$120.98 F

Bridger Line Throwing Gun



- It is a custom made 45/70 caliber gun capable of throwing a line from 300' to 750' or more.
- Kit includes: Wooden box with solid brass hardware, (10) solid brass projectiles, (4) 600' nylon shot lines, (1) Aero metal line canister, (3) rewinding spindles, (25) blank cartridges - heavy load, (1) can gun oil, (1) cleaning rod, (1) cleaning brush, (1) package patches and (1) set plastic instructions.
- USCG Approval #160.031/6/3.
- Dimensions: 34" L X 12" W X 8" H.

Order No.	Mfg. No. / Description	Price
502674	Line Throwing Gun	$2404.98 B
502686	45/70 Blank Cartridges	$96.98 C
502690	Brass Projectile	$21.98 C
502695	Cleaning Patches, 40 Per Pack	$4.06 C
502698	(SL600T) 600' Nylon Shot Line	$68.98 B

Billy Pugh Wind Sock



- International orange nylon.
- Dimensions: 18" diameter x 60" L x 9" diameter.

Order No.	Mfg. No. / Description	Price
484523	(WS-18)	$115.00 B
484535	(WS-18B) Bracket	$106.00 B

Datrex Emergency Drinking Water - Overwrap



- Purified water for immediate use.
- 1.5 liter overwrap package.
- 12 liters per case.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
436412	(DX100EW)	$10.98 C

Datrex Food Ration



- High energy value/ready to eat.
- Non thirst provoking.
- All natural ingredients. No preservatives.
- Superior coconut flavor.
- 5 year shelf life.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
436419	(DX2400F)	$11.98 C

Datrex H20R Hydrostatic Release Unit for Life Rafts



- Designed for life rafts from 6 up to 150 persons.
- Release depth: 1.5 - 4.0 metres.
- Two year disposable.
- USCG and SOLAS Approved.

Order No.	Mfg. No. / Description	Price
436471	(HA2000H)	$148.98 C

Billy Pugh Stokes Wire Stretcher



- Stokes steel litter with straps.
- Dimensions: 83" L x 25" W x 9" D.
- App. weight: 28 lbs.

Order No.	Mfg. No. / Description	Price
484634	(S-1) Litter Only	$431.00 B
484636	(PU-B) Pick Up Bridle	$207.00 B
484648	(FC-S1) Flotation Collar	$472.00 B

Jim-Buoy Horseshoe Buoy



- USCG Approved.
- Standard model.
- A tough, yellow vinyl coated nylon cover with heavy duty zipper over closed-cell plastic core.
- Will not rot or mildew.
- Stainless steel hardware throughout.
- Bracket not included.

Order No.	Mfg. No. / Description	Price
266444	(920) Horseshoe Buoy	$108.98 E

Stearns Ring Buoy Rope with Bag



- Length 90'.

Order No.	Mfg. No. / Description	Price
630504	(I023ORG-00-000)	$59.98 F

Datrex Jackknife with Can Opener and Lanyard



- For use in lifeboats and life rafts.
- USCG Approved.
- Includes lanyard.

Order No.	Mfg. No. / Description	Price
320790	(DX1510M)	$28.98 F


Orion Life Raft First Aid Kit



- Designed to fit inflatable life rafts.
- Packed in a waterproof, reusable pouch.
- All the contents are individually boxed and sealed in waterproof bags.
- Contains: 14 items, 108 pieces.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436421	(50-180)	$68.98 G

Datrex Anti-Seasickness Tablets



- For use in lifeboats and life rafts.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436394	(DX1500M)	$3.40 C

Life Saving Signal Card

Order No.	Mfg. No. / Description	Price
851041	(DCA01020)	$12.98 C

Throwable Emergency Rescue Inflatable



- Can be thrown accurately 100 feet or further.
- Automatically inflates in seconds when immersed in water providing rapid emergency flotation.
- Offers 35 lb. of buoyancy - twice the flotation of a typical life jacket.
- Easy to repack and reuse - insert a new bobbin and screw in the replacement handle containing the CO2 cylinder.
- Stored in a waterproof bag.
- Compact and weighs less than 1 lb. - it is easily stowed and is accessible when needed.
- Extremely easy to use - anyone who can throw a stick can use it.

Order No.	Mfg. No. / Description	Price
350659	(MRD100) Throwable Rescue Inflatable	$233.98 D

Datrex Signal Mirror



- For use in lifeboats and life rafts.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436445	(DX1502M)	$19.98 C

Datrex Fishing Kit



- For use in lifeboats and life rafts.
- USCG Approved.

Order No.	Mfg. No. / Description	Price
436433	(DX1514M)	$46.98 C

Datrex Bailer with Lanyard



- For use in lifeboats and life rafts.

Order No.	Mfg. No. / Description	Price
851015	(BN0088M)	$13.98 C

Survival Instructions

Order No.	Mfg. No. / Description	Price
851053	(DRZ2447)	$6.98 C

"Davit Launched Instructions" Label - Vinyl

Order No.	Mfg. No. / Description	Price
851279	(DRZ6221)	$32.98 B

©2014 Donovan Marine, Inc.

Survitec Type V Work Vest

SURVITEC SURVIVAL PRODUCTS



- Durable 200 denier polyester covering resists UV deterioration draws heat and sweat away from worker.
- SOLAS-grade reflective tape.
- Two encircling belts with snag-resistant buckles.
- USCG Approved Type V provides 17-1/2 lbs. flotation buoyancy, CFR 160.053 compliant.
- Universal sized work vest approved for chest ranges 32" to 54".

Order No.	Mfg. No. / Description	Price
586202	(290EFRT)	$70.98 I

Taylortec Welding Ready Work Vest



- USCG approval no. 160.053/95/0.
- 17.5 lbs minimum buoyancy (78 newtons).
- This vest uses flame resistant webbing, thread, fabric and stainless steel hardware.
- Up to size 6XL, reflective tape, and custom silk screen stenciling.

Order No.	Mfg. No. / Description	Price
645701	(WV-9-C)	$66.98 I

Survitec Type I Commercial Vests

SURVITEC SURVIVAL PRODUCTS



- Yoke-style flotation device.
- 22 lb. of buoyancy.
- 110 square inches of SOLAS-grade reflective tape.
- Reversible design for quick donning.
- Stackable for easy storage.
- Light loop and whistle attachment.
- USCG Approved Type I.

Order No.	Mfg. No. / Description	Price
586012	(160RT) Over 90 lbs.	$67.98 I
586013	(161RT) Under 90 lbs.	$67.98 I
586000	(160RT-4PK) Adult, Over 90 lbs., 4-Pack	$158.98 F

Imperial Deluxe Ferry Boat PFD

IMPERIAL



- USCG/SOLAS Type I PFD designed to turn an unconscious person face-up.
- Foldable and stackage for easy storage.
- Ideal for cruise ships.
- Minimum 39 lbs of buoyancy.
- Fitted with a buddy line and a whistle.
- USCG and USCG SOLAS.

Order No.	Mfg. No. / Description	Price
586208	(230RT) Deluxe Ferry Boat PFD	$90.98 F

Survitec Adult Vinyl Dip Work Vest

SURVITEC SURVIVAL PRODUCTS



- Rugged and durable vinyl-dipped work vest.
- Flotation foam retains buoyancy even when punctured.
- Acrylic layer sealant over PVC coating resists deterioration.
- Large opening on back panel accommodates most brands of fall protection harnesses.
- 17-1/2 lbs. of buoyancy.
- Two encircling belts with snag resistant buckles.
- Arnacell flotation foam.
- USCG Approved Type V Work Vest for 32" to 54" chest size range, CFR 160.053 compliant and CFR 1926.106 (OSHA) compliant.

Order No.	Mfg. No. / Description	Price
585957	(280RT)	$54.98 F

Stearns Pockets for Force II™ Life Vest

STEARNS



- Set of two removable pockets to fit most models of vinyl dip work vests.
- Made from tough 600D polyester with reflective tape.
- Front pocket made to hold a knife, snacks, etc.
- Large back pockets to accommodate radio and battery equipment, etc.

Order No.	Mfg. No. / Description	Price
630518	(I223PKT-00-000)	$36.98 F

Survitec Type I Commercial Vest

SURVITEC SURVIVAL PRODUCTS



- Reversible design allows for long life and metal hardware is strongest in the industry.
- CFR 160.055 compliant.
- Weather resistant 200 denier polyester shell withstands UV deterioration better than nylon.
- Heavy duty stainless steel hardware.
- Light loop and whistle attachment over shoulder.
- 126 square inches of SOLAS-grade reflective tape.
- PE foam provides 24 pound buoyancy.
- Adult, Over 90 lbs.

Order No.	Mfg. No. / Description	Price
585996	(198RT)	$76.98 I

Life Jacket Box

- Large, orange.
- 25 Man.

Order No.	Mfg. No. / Description	Price
760579	(102-2)	$888.98 F

Mustang Survival Inflatable Work Vest



- Approvals: USCG Type V / Work Vest USCG Type II.
- Provides 35 lb of buoyancy when inflated.
- 1F auto hydrostatic inflator technology protects against inadvertent inflation.
- 5-year maintenance-free inflator with status indicator window.
- Durable PU-coated nylon shell offers improved puncture and abrasion resistance.
- Custom-molded inflator cover reduces wear and protects inflator cap.
- SecureZip closure features recessed zipper to protect teeth from oil, grease and other contaminants.
- Retro-reflective SOLAS Tape on front & back outer shell.
- Strobe light holder, safety whistle and additional SOLAS reflective tape visible when inflated.
- Includes back-up oral inflation tube.
- Universal Adult [16 yrs + / 80 lb +] with chest size 30" - 52".

Order No.	Mfg. No. / Description	Price
350609	(MD3188)	$391.98 F

Stearns Force II™ Life Vest

STEARNS



- Rugged work vest for all-around industrial use.
- Aquafoam flotation foam retains buoyancy even when punctured.
- Delrin snap hooks and D-rings.
- Coated with strong, durable, easy to clean PVC.
- Opening on back to accommodate most brands of fall protection harnesses.
- Two encircling belts with snag resistant buckles.
- Uses 3M Scotchlite Reflective Material SOLAS - grade 3150-A PS with adhesive backing on panels.
- Self-extinguishing under ASTM1692-74.
- 17-1/2 lbs. of buoyancy.
- USCG Approved Type V.

Order No.	Mfg. No. / Description	Price
630517	(I223ORG-00-000)	$57.98 F

Stearns SOLAS Adult Life Jacket



- Provides a minimum of 34 lbs of buoyancy.
- Heavy duty hardware with an attached SOLAS whistle.
- Light storage pocket.
- Lifting loop.
- Buddy line.
- Complies with LSA Code 2003 Ed, MSC. 200(80), and MED.
- Made in China.

Order No.	Mfg. No. / Description	Price
630522	(2000008504)	$94.98 F

Stearns Work Master™ Life Vest

STEARNS



- Soft, comfortable closed-cell foam and encircling body belt with snag resistant buckle for quick adjustment.
- Now with belt tunnel to reduce snag hazard.
- Hinged back panel.
- Heavy duty nylon shell.
- Marine mesh inner lining for breathability.
- Flotation collar for added protection.
- 62 sq. in. of 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- 17-1/2 lbs. of buoyancy.
- USCG Approved Type III/V Work Vest.

Order No.	Mfg. No. / Description	Price
630512	(I222-ORG-00-000) Adult, Chest Size 30" - 52"	$88.98 F

Stearns The Versatile™ Life Vests

STEARNS



- Tough nylon shell with seven piece foam design for all-day comfort.
- Four roomy pockets with full hook and loop closures and a rustproof Vislon zipper.
- Multiple foam inserts for exceptional flexibility and freedom.
- Quick-adjust side tabs for secure fit.
- Features 3M Scotchlite Reflective Material SOLAS - grade 6755 for high visibility eyelets for attaching lights, badge, etc.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630613	(I465-ORG-03-000) Medium	$105.98 F
630625	(I465-ORG-04-000) Large	$105.98 F
630637	(I465-ORG-05-000) X Large	$105.98 F
630649	(I465-ORG-06-000) XX Large	$109.98 F
630648	(I465-ORG-07-000) XXX Large	$109.98 F

Stearns First Mate™ Life Vest

STEARNS



- Four-pocket style flotation vest.
- Constructed of soft comfortable flotation foam for all-day wear.
- Adjustable side tabs for a quick contoured fit.
- Hook and loop closure on pockets.
- Sturdy D-rings.
- Strong Vislon zipper.
- Features 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630555	(I422-ORG-08-000) XXXX Large	$100.98 F

Mustang Survival Industrial Mesh Vest



- Designed with large arm holes for broad mobility and mesh shoulders for cooling and comfort.
- The large front pocket with Velcro closure is great for storing supplies and materials, and the 32 square inches of SOLAS reflective tape across the front and back of the vest offers high visibility.
- Strength rated to 50 mph.

Order No.	Mfg. No. / Description	Price
350670	(MV1254) Small/Medium, Orange	$80.98 F
350671	(MV1254) Large/X Large, Orange	$80.98 F
350672	(MV1254) XX Large/XXX Large, Orange	$80.98 F

Stearns Work Zone Gear™ Life Vests

STEARNS



- Designed with soft, lightweight mesh on the upper half of the vest.
- Tough nylon oxford outer shell.
- Two encircling body straps with zipper front.
- Two pockets with hook and loop closure.
- Lightweight durable Crosstech floatation foam.
- D-rings for attaching gear.
- Features 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630562	(I424-ORG-03-000) Medium	$66.98 F
630574	(I424-ORG-04-000) Large	$66.98 F
630586	(I424-ORG-05-000) X Large	$66.98 F
630598	(I424-ORG-06-000) XX Large	$66.98 F
630600	(I424-ORG-07-000) XXX Large	$66.98 F

Stearns Deck Hand II™ Life Vests

STEARNS



- Heavy duty flotation vest.
- 10 flotation panels for a contoured fit.
- Has rustproof Vislon zipper and heavy duty encircling body belt.
- Chest pocket with Velcro closure.
- Side adjustments.
- Tough nylon outer shell with marine mesh inner lining.
- 62 sq. in. of 3M Scotchlite Reflective Material SOLAS - grade 6755 on panels.
- Minimum 15-1/2 lbs. of buoyancy.
- USCG Approved Type III.

Order No.	Mfg. No. / Description	Price
630524	(I416-ORG-03-000) Medium	$65.98 F

Mustang Survival Industrial Mesh Vest



- Designed with large arm holes for broad mobility and mesh shoulders for cooling and comfort.
- The large front pocket with Velcro closure is great for storing supplies and materials, and the 32 square inches of SOLAS reflective tape across the front and back of the vest offers high visibility.
- Strength rated to 50 mph.

Order No.	Mfg. No. / Description	Price
350670	(MV1254) Small/Medium, Orange	$80.98 F
350671	(MV1254) Large/X Large, Orange	$80.98 F
350672	(MV1254) XX Large/XXX Large, Orange	$80.98 F

Survitec Mesh Industrial Vests

SURVITEC SURVIVAL PRODUCTS



- Lightweight and durable mesh on the upper half and body contoured fabric covered foam panels on lower half.
- Design allows for eas of movement.
- Includes: A durable YKK #10 zipper, reflective tape stripping, (2) side adjustments, (2) front gusseted pockets, (2) lash tabs and D-ring for gear attachment.
- USCG Approved Type III Flotation Vest, CFR 160.064 compliant.

Order No.	Mfg. No. / Description	Price
585971	(2210) Large/X Large, 40" - 50" Chest	$61.98 F
585983	(2210) XX Large/XXX Large, 50" - 60" Chest	$61.98 F

©2014 Donovan Marine, Inc.

Stearns Immersion Suits

STEARNS

- Cold Water Immersion Suit - Type SUSCG / MED / SOLAS Approved.
- When lives are at stake more maritime professionals worldwide rely on the Stearns I590 Cold Water Immersion Suit than any other immersion suit brand.
- Made with 5mm stretchable flame retardant neoprene the Stearns I590 provides quality anti-hypothermia protection.
- All sizes provide a generous fit for easy donning.
- Each suit comes in its own color coded storage bag.
- USCG Approved and complies with SOLAS 74/96 and European MED.
- Also available in model I590-MED without inflatable head support which is European MED Approved and complies with SOLAS 74/96.

Order No.	Mfg. No. / Description	Price
630654	(2000008113) Adult	$534.98 F
630656	(2000008114) Oversized Adult	$579.98 F

Imperial Immersion Suits



- Donovan offers a full service station to pressure test and inspect suits. Suits must be in serviceable condition at all times. The pressure test can reveal leaks that can not be seen with the naked eye. A well maintained suit increases your chance of survival, lasts longer and saves you time and money. An experienced service technician can find seemingly minor defects that can cause major problems.
- The High Rider Ring. It is made of neoprene and attached by zippers making it easy for you to replace yourself. Most other suits have air bladders (high rider rings) that must be brought into a certified station to be replaced.
- Features: Three Fingered Mitt to Keep Your Fingers Warmer, Two Zipper Tab Pulls On Zipper, Wide Legs to Allow Quick Donning, Toe Valves That Purge Water Very Fast, Face Seal is Soft and Flexible, Back Straps Keep the Ring in Place, Suits Are True to Size, Sturdy Carrying Bag with Two Handles.

Order No.	Mfg. No. / Description	Price
400313	(80-1409-J) Jumbo	$387.98 C

U.S.C.G. Approved - International Approval Chart/Model Numbers

Ship's Registry	Approval	Adult	Jumbo	Intermed.	Child
U.S.A.	U.S.C.G. #160.171/2/0	1409-A			
U.S.A.	U.S.C.G. #160.171/3/0		1409-J		
U.S.A.	U.S.C.G. #160.171/21/0			1409-0	
U.S.A.	U.S.C.G. #160.171/4/0				1409-C

Features Included: High-rider ring and storage bag.

Size	Height Range M	FT/IN	Weight Range KG	LBS
Adult	1.5 to 1.9	5' 4" to 6' 3"	50 to 150	110 to 330
Intermediate	1.47 to 1.77	4' 10" to 5' 10"	Up to 81	Up to 180
Jumbo	Over 1.9	Over 6' 3"	Over 150	Over 300
Child	Up to 1.5	Up to 59"	Up to 50	Up to 110

Stearns Thermal Protective Aid

STEARNS



- Designed for hypothermia protection during prolonged exposure in life rafts or lifeboats.
- Waterproof polymer coated fabric has very low thermal conductivity to reduce heat loss in cold, wet conditions.
- Attached sleeves.
- 62 sq in of reflective material, taped seams for strength, extra-large sizing to fit over all clothing.
- USCG approved, complies with SOLAS 74/83.

Order No.	Mfg. No. / Description	Price
436469	(ITP10RG-00-000) Thermal Protective Aid	$96.98 F

Stearns Flotation Jacket

STEARNS



- Features: Concealed hood, storm cuffs and sealed seams to keep out wind and water.
- Comfortable Suisse Aire foam for flotation and insulation.
- Two way zipper with storm flap handwarmer and cargo pockets.
- Mid thigh for foul weather protection.
- Available in sizes: Small to XXX Large.
- Color: International Orange, Navy, Orange/Navy.
- USCG Approved Type III.

Special Order - Allow 2 Weeks for Delivery

Stearns Bomber Style Flotation Jacket

STEARNS



- Cut waist-length for freedom of movement.
- Soft Suisse Aire foam with a coated nylon shell.
- Four pockets, sleeve utility pocket and inside chest pocket.
- Rib knit waistband and wrist bands.
- Internal adjustable belt.
- SOLAS grade reflective tape.
- USCG Approved Type III.

Special Order - Allow 2 Weeks for Delivery

Omega Float Coat

OMEGA



- Long jacket for warmth and dryness.
- Waterproof polyester prevents leaks and keeps wearer dry.
- Neoprene adjustable cuffs.
- Detachable hood.
- Reflexive material for visibility.
- 2 exterior pockets.
- Type III USCG Approved.

Order No.	Mfg. No. / Description	Price
594302	(41800-S) Small, Orange	$298.98 F
594304	(41800-M) Medium, Orange	$298.98 F
594306	(41800-L) Large, Orange	$298.98 F
594308	(41800-XL) X Large, Orange	$298.98 F
594310	(41800-2X) XX Large, Orange	$298.98 F
594312	(41800-3X) XXX Large, Orange	$298.98 F
594316	(41803-S) Small, Yellow	$298.98 F
594318	(41803-M) Medium, Yellow	$298.98 F
594320	(41803-L) Large, Yellow	$298.98 F
594322	(41803-XL) X Large, Yellow	$298.98 F
594324	(41803-2X) XX Large, Yellow	$298.98 F
594326	(41803-3X) XXX Large, Yellow	$298.98 F

Stearns Driflex Nylon Rain Suits

STEARNS



- Constructed of heavy duty .30mm PVC/polyester.
- High-wear areas of elbows and knees are reinforced to ensure durability.
- Jacket features snap front, corduroy lined collar, vented back and underarm air vents.
- Dual-entry pockets.
- Pants have elastic waist, snap fly and snap adjustable leg openings.

Order No.	Mfg. No. / Description	Price
630663	(2000004076) Medium Yellow	$49.98 F
630675	(2000004077) Large Yellow	$49.98 F
630687	(2000004078) X Large Yellow	$49.98 F
630699	(2000004079) XX Large Yellow	$49.98 F

Jim-Buoy Life Floats

CAL-JUNE



- Tough resilient vinyl surface - easily boarded, comfortable in the water - no hard surfaces.
- Lightweight yet easily exceed the most severe USCG tests.
- Ease of handling is one of our most valued features.
- No exposed metal hardware - all beckets secured inside the float body.
- Double webbing, sunlight or weather never reaches the supporting beckets.
- Solid closed-cell plastic throughout; bullet holes would have only minimal effect on buoyancy.
- Will not rot or mildew.
- Manufactured under the strict supervision of the USCG.
- International Orange.
- Shipped by motor freight only.

Order No.	Mfg. No. / Description	Price
266686	(1206) 6 Man Life Boat with Tape	$1,484.98 H
266698	(1208) 8 Man Life Boat with Tape	$1,563.98 H
266701	(1210) 10 Man Life Boat with Tape	$1,797.98 H
266711	(1212) 12 Man Life Boat with Tape	$1,953.98 H
266725	(1215) 15 Man Life Boat with Tape	$2,438.98 H
266749	(1222) 22 Man Life Boat with Tape	$2,969.98 H

MFG #	Person	Length	Width	Diameter	Weight
1206	6	50-1/2"	36-1/2"	8-1/2"	23 lbs.
1208	8	51"	37"	9"	25 lbs.
1210	10	63"	37"	9"	30 lbs.
1212	12	78"	37"	9"	38 lbs.
1215	15	64"	48"	12-1/2"	50 lbs.
1222	22	100"	48"	12-1/2"	70 lbs.

- Fiberglass wrapped model - Incorporates a glass reinforced surface into the regular vinyl surface and produces and almost impenetrable skin yet remains slight resilient.

Order No.	Mfg. No. / Description	Price
266963	(1222GRS) Life Float	$3,360.98 H


Jim-Buoy Vinyl Repair Kit

CAL-JUNE

- Complete with patches, solvent and brush.

Order No.	Mfg. No. / Description	Price
267840	(500) Vinyl Repair Kit	$43.98 H

The Roe Float



- Completely repairable.
- Hard outer shell is reinforced with 2 layers of fiberglass cloth and fiberglass resin.
- Made with closed cell polyurethene inner core that will not absorb water.
- UV protected ropes, net and webbing.
- USCG and The American Bureau of Shipping Approved.

Order No.	Mfg. No. / Description	Price
851940	4 Person Life Float, 26#	$792.98 C
851952	6 Person Life Float, 34#	$1,142.98 C
851964	12 Person Life Float, 55#	$1,561.98 C
851976	15 Person Life Float, 63#	$1,637.98 C
851988	25 Person Life Float, 111#	$2,512.98 C

Billy Pugh Life Floats



- After many years of service in the field, this float can be rebuilt to like new condition.
- Hard outer shell.
- Urethane inner core.
- Black polypropylene life and pendant lines.
- Nylon platform netting and baskets.
- Mildew, rot and sunlight resistant.
- Weather resistant platform.
- Sealed shell.
- Maintenance free.
- Rigging can be replaced in the field.

Order No.	Mfg. No. / Description	Price
484410	(LF-6) Person Capacity: 6	$1,036.98 D
484422	(LF-12) Person Capacity: 12	$1,424.98 D

Jim-Buoy Float-Free Link, Painter Cage

CAL-JUNE

UPSable



- Each unit contains: (1) Stainless steel cage, 100' of black 5/16"polypropylene rope and wire link.
- All wire links are tagged to identify the raft size it is legal for.
- Rope ends are tagged as to their use.

Order No.	Mfg. No. / Description	Price
267841	(501-SM) 6 - 10 Man	$150.98 H
267842	(501-MD) 11 - 20 Man	$150.98 H
267843	(501-LR) 21 or More Man	$150.98 H

- Replacement link only.

Order No.	Mfg. No. / Description	Price
267850	Small	$31.98 F
267852	Medium	$31.98 F
267851	Large	$31.98 F

Jim-Buoy Float-Free Link, Painter Cage

CAL-JUNE

UPSable



- Fits any stack of four rafts or any stack which equals a capacity of 21 or more man.
- For example: A 12 man size raft and two 6 man size rafts would equal 24 man size and would require only one unit for the three rafts.
- Each unit contains: (1) Stainless steel cage, 100' of black 7/16" polypropylene rope and wire link.

Order No.	Mfg. No. / Description	Price
267845	(504) Painter Cage	$163.98 H

Billy Pugh Life Float Painter



- Keep your painter lines out of the sun and free from fouling.
- Meets USCG.
- 150' nylon line.

Order No.	Mfg. No. / Description	Price
484573	(LFP-150) 1/4"	$151.98 B
484585	(LFP-150) 1/2"	$284.98 B

Billy Pugh Life Float Launchers



- Provides an easy, quick method for launching life floats.
- Manufactured from aluminum (also available in galvanized steel) with stainless steel release handle and attachment hardware.

Order No.	Mfg. No. / Description	Price
484597	(LFL-6A) 6 Man	$1,408.00 B
484600	(LFL-12A) 12 Man	$1,663.00 B

©2014 Donovan Marine, Inc.

Billy Pugh Products





Scramble Nets.

- Spreader bars from oak or steel.
- Specify type of rope and mesh size.
- Made to order.

All Weather Swing Rope.

Safety Pipe Hooks.

- Features a spring-loaded jaw to hold hook securely in place after crewman has attached hook to pipe casing.
- This eliminates the need to hold hook to pipe casing while slack is being taken out of the cable sling.
- Various sizes available.

Billy Pugh Personnel Work Baskets



- This lightweight basket is designed for those jobs not requiring steel OSHA Man Basket specification.
- This basket is collapsible, flexible but very strong.
- The bottom is fitted with canvas to keep tools or other small objects from falling out.
- Pick-up ring: 7/8" x 5-1/2", with 4 legs - each made of 1" polypropylene.
- Each rope has a tensile strength of 12,600 lbs.
- Top ring: 1-1/2" x 43" diameter aluminum.
- Overall basket height: 14'.
- Basket weight: 90 lbs.

Order No.	Mfg. No. / Description	Price
484499	(PWB-2) 1 - 2 Persons	$2,450.00 B
484501	(PWB-4) 3 - 4 Persons	$2,593.00 B

Billy Pugh Personnel Net - For Rougher Seas



- API specification 2C Third Edition, March 1983, Section 5.4 (d). S.W.L. R2500LGS with design factor of 10.
- Lifting ring - 7/8" forged steel.
- Hand spliced eyes (no swages).
- Safety load line.
- Stabilizer unit covered with plastic impregnated fabric netting lines 3/4" 9950 lbs. test each.
- Top ring 30" padded.
- Bottom ring overall dimensions 72" with padding.
- Padding is shock absorbing, synthetic floatation material.
- 9 feet from bottom to top ring.
- Four entrances to net.
- Bottom of net - 5 rubber chafe pads.
- ABS equipment type approval program.

Order No.	Mfg. No. / Description	Price
484509	(X-871) Overall Vertical Length 33'	$3,078.00 B

The Commercial Jason's Cradle® MOB Recovery Units



- Simply fixed to the deck or rail to enable deployment within seconds.
- Can be easily rolled up for stowage.
- Deployment of the Cradle forms a non-collapsible scoop.
- The casualty is guided into the cradle head first.
- A Strop and/or Hauling lines are pulled to close the loop.
- 316 marine grade stainless steel link components. Stainless steel fasteners used throughout.
- SOLAS Approved.
- Stowage diameter: 420mm.
- Includes: Clips, strop, hauling lines and stowage.

Order No.	Mfg. No. / Description	Price
429476	(1MC-JCSTD05E) 2.5m to 3m Freeboard	$5,950.98 B
429488	(1MC-JCSTD04C) 1.5m to 2m Freeboard	$4,565.98 B

Billy Pugh Cargo Basket



- Heavy cargo can be moved into basket in collapsed position reducing potential for lifting associated injuries.
- Inner canvas prevents smaller objects from rolling out.
- Rounded/padded design reduces potential for damage to boats.
- Floor is treated steel pipe.
- 5/8" galvanized lifting cables frame and 3/4" treated plywood bottom.
- Overall basket height: 10'. Diameter 6'. Side extension 3'. Collapsed height 1'. Weight 300 lbs.
- Safe working load 3,500 lbs.
- Cable pick-up slings.

Order No.	Mfg. No. / Description	Price
484511	(X-8CB) Cargo Basket	$4,546.00 B

Billy Pugh Stokes Wire Stretcher



- Stokes steel litter with straps.
- Dimensions: 83" L x 25" W x 9" D.
- App. weight: 28 lbs.

Order No.	Mfg. No. / Description	Price
484634	(S-1) Litter Only	$431.00 B
484636	(PU-B) Pick Up Bridle	$207.00 B
484648	(FC-S1) Flotation Collar	$472.00 B

Billy Pugh Flexible Ladder



- Oakwood rungs - 2" x 2" x 18".
- Non-skid surface.
- Painted International Orange.
- Ropes - 3/4" double braid nylon.
- Ropes are urethane dipped to better resist fire and chemical exposure.
- Dipping rope also adds durability and ultra-violet protection.
- 600# SWL per rung.

Order No.	Mfg. No. / Description	Price
484632	(WRN-18-14) Flexible Ladder	Price on Request

Using A Jason's Cradle® Floating Stretcher

- When used as a floating stretcher, the Jason's Cradle is equipped with flotation tubes and strops, which can be adjusted to prevent snatching from a pitching vessel.
- A rescue swimmer can be lowered into the water to retrieve an unconscious casualty.
- Both rescuer and casualty can be recoved on the same stretcher at the same time.
- The stretcher can be operated from a Davit Crane or block and tackle.
- Length 1940 mm.

Order No.	Mfg. No. / Description	Price
429464	(1MC-JCSTR011)	$4,549.98 B

MSA FP Diamond™ Shock-Absorbing Lanyard



- Teflon-coated, durable polyester sheath for increased abrasion and UV resistance.
- Keeps fall arrest forces forces below 900 lbs.
- Single leg configuration.
- Highly visible deployment tag.
- Comfortable, lightweight pouchless design.
- OSHA and ANSI Approved. CSA Certified.

Order No.	Mfg. No. / Description	Price
773297	(10023932) Length 6'	$72.98 C

MSA EVOTECH™ Full-Body Harness



- Leg strap design keeps leg straps in place. Web finials
- Variable width sub-pelvic webbing provides 50% more surface area.
- Dual-color webbing - red pattern on outside, black on inside.
- Web management system provides means of storing excess webbing.
- Qwik-Fit buckle hardware on chest and leg straps.
- 3-position back D-ring allows users to determine optimal lanyard connection position.
- RFID enabled - RFID chip provides easy means of tracking and inspecting product.
- NanoSphere coating on webbing repels dirt, grease, moisture, etc.
- Reflective piping increases visibility in low-light environments.
- OSHA and ANSI Approved.

Order No.	Mfg. No. / Description	Price
773278	(AEVVVVOA1112212) Full Body Harness	$181.98 C

MSA FP Pro™ Harness




- Provides comfortable protection due to its super lightweight features and durable webbing.
- Vest styles with back D-ring.
- Color-contrasting thigh and torso straps simplify donning.
- Bright red polyester webbing for high visibility.
- OSHA and ANSI Approved. CSA Certified.

Order No.	Mfg. No. / Description	Price
773273	(415947)	$83.98 C

©2014 Donovan Marine, Inc.

Apollo Pilot Ladders

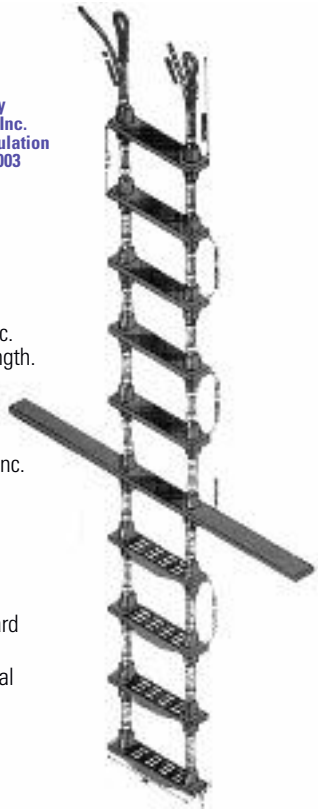

Pilot Ladder Classified by Underwriters Laboratories, Inc. In accordance with USCG Regulation Title 46 Chapter 1 Part 163.003

Adonic I Pilot Ladder.

- Approved by the USCG with in the #163.003/19/0.
- Meets and exceeds SOLAS standards.
- Tested by Underwriters Laboratories, Inc. with a drop test of 150 ft. maximum length.
- Each step tested 2,000 lbs.
- The steps and spreaders are International Orange molded polyurethane made by Rubber Millers, Inc.
- Rope suspension members are polyprodacron white outer jacket an orange inner core for safety.
- Clamp - 6063 alloy aluminum.
- Replacement steps are designed to be replaced quickly and easily right on board the vessel.
- No need to unstring the ladder or special tools required.
- All pilot ladders are sold by the foot.

Adonic II Pilot Ladder.

- Approved by the USCG with in the #163.003/12/0 and meets SOLAS 1974, Chapter V, Regulation 17.
- The steps and spreaders are made of wood (Oak) and have diamond shaped grooves, a non skid grit surface and painted a bright marine orange.
- Clamp - 6063 alloy aluminum.
- Rope suspension members - Synflex 3/4" ply plus.
- Tested to 2,000 lbs.

Apollo Embarkation Ladders



Adonic I Embarkation Ladder

Adonic II Embarkation Ladder

Embarkation-Debarkation Equivalent to Chain Ladder Classified by Underwriters Laboratories, Inc. In accordance with USCG Regulation Title 46 Chapter 1 Part 160.017

Adonic I Embarkation Ladder Equivalent to Chain.

- Approved by the USCG with in the #160.017/61/0.
- Meets and exceeds SOLAS standards.
- Tested by Underwriters Laboratories, Inc. with a drop test of 150 ft. maximum length.
- Each step tested 2,000 lbs.
- The steps are International Orange molded polyurethane made by Rubber Millers, Inc.
- Rope suspension members are polyprodacron white outer jacket an orange inner core for safety.
- Clamp - 6063 alloy aluminum.
- Replacement steps are designed to be replaced quickly and easily right on board the vessel.
- No need to unstring the ladder or special tools required.
- All embarkation ladders are sold by the foot.

Adonic II Embarkation/Debarkation Equivalent to Chain Ladder.

- Approved by the USCG with in the #160.017/58/0 and meets SOLAS 1974, Chapter V, Regulation 17.
- The steps are made of wood (Oak) and have diamond shaped grooves, a non skid grit surface and painted a bright marine orange.
- 4-1/2" wide, 1-3/16" thick, 20" long.
- Clamp - 6063 alloy aluminum.
- Rope suspension members - Synflex poly plus.
- Tested to 2,000 lbs.

Zodiac Modular Inflatable Life Rafts



- Constructed of high strength, durable PVC coated nylon fabric.
- All rafts are U.S. Coast Guard approval #160.151 and manufactured in accordance with the current SOLAS Convention.

This Life Raft Conforms to:

- 1983 Chapter III Amendments to SOLAS 1974, Regulation 39.
- U.K. Merchant Shipping Act (L.S.A.) 1986 Schedule 4, Part 1.
- U.K. Fishing Vessels (Safety Provisions) Rules 1975, Rule 85.

Approved in Accordance with SOLAS by the Following Maritime Authorities:

- D.O. Tp (U.K.)
- Marina Mercante (SPAIN)
- Statens Skibstilsyn (DENMARK)
- Dot (CANADA)
- Marine Marchande (FRANCE)
- R.I.N.A. (ITALY)
- Scheepvaartinspectie (SWEDEN)
- U.S.C.G. (U.S.A.)

USCG – SOLAS Range (Pack A) – Complete with:


Rescue quoit and 98 ft. of line • Floating knife • Bailer • Sea anchor and 98 ft. of line • Paddle • Sponge • Repair kit • Pump • Survival instruction cards • Immediate action cards • Heliograph • Whistle • Torch • Spare batteries and bulb • Fishing kit • Hand flares • Rocket parachute flares • Smoke signal • Signal card • Food • Water • Tin opener • Drinking vessel • First aid kit • Anti-sickness tablets • Seasickness bags • Protective aid.

USCG – SOLAS Range (Pack B) – Complete with:

Rescue quoit and 98 ft. of line • Floating knife • Bailer • Sea anchor and 98 ft. of line • Paddle • Sponge • Repair kit • Pump • Survival instruction cards • Immediate action cards • Heliograph • Whistle • Torch • Spare batteries and bulb • Hand flares • Rocket parachute flares • Smoke signal • Signal card • First aid kit • Anti-sickness tablets • Seasickness bags • Protective aid.

Special Handling May Apply

Life Raft USCG/SOLAS Range - 4 Persons - Pack A




- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458500	Pack A	$3,916.98 B

Raft Dimensions	Pack A
Inside Dimensions	1,500 x 1,500
Outside Dimensions	2,000 x 2,000
Total Volume	667 dm^3
Required Volume	576 dm^3
Interior Area	225 dm^2
Required Area	223, 2 dm^2
Weight	69 kg
Drop Height	36 m
Container Dimensions	
Length	1,160 (3' 9-1/2")
Diameter	530 (1' 9")
Weight	72 kg (158 lbs.)

Special Handling May Apply

Life Raft USCG/SOLAS Range - 8 Persons - Pack A or Pack B




- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458516	Pack A	$4,360.98 B
458592	Pack B	$4,286.98 B

Raft Dimensions	Pack A	Pack B
Inside Dimensions	2,215 x 1,915	2,215 x 1,915
Outside Dimensions	2,865 x 2,479	2,865 x 2,479
Total Volume	925 dm^3	925 dm^3
Required Volume	768 dm^3	768 dm^3
Interior Area	313 dm^2	313 dm^2
Required Area	297, 6 dm^2	297, 6 dm^2
Weight	79 kg	60 kg
Drop Height	36 m	36 m
Container Dimensions		
Length	1,160 (3' 9-1/2")	1,160 (3' 9-1/2")
Diameter	530 (1' 9")	530 (1' 9")
Weight	70 kg (174 lbs.)	60 kg (132, 2 lbs.)

Special Handling May Apply

Life Raft USCG/SOLAS Range - 6 Persons - Pack A or Pack B




- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458504	Pack A	$4,138.98 B
458580	Pack B	$4,064.98 B

Raft Dimensions	Pack A	Pack B
Inside Dimensions	1,500 x 1,500	1,500 x 1,500
Outside Dimensions	2,000 x 2,000	2,000 x 2,000
Total Volume	667 dm^3	667 dm^3
Required Volume	576 dm^3	576 dm^3
Interior Area	225 dm^2	225 dm^2
Required Area	223, 2 dm^2	223, 2 dm^2
Weight	69 kg	53 kg
Drop Height	36 m	36 m
Container Dimensions		
Length	1,160 (3' 9-1/2")	1,160 (3' 9-1/2")
Diameter	530 (1' 9")	530 (1' 9")
Weight	72 kg (158 lbs.)	50 kg (123, 3 lbs.)

Special Handling May Apply

Life Raft USCG/SOLAS Range - 10 Persons - Pack A or Pack B

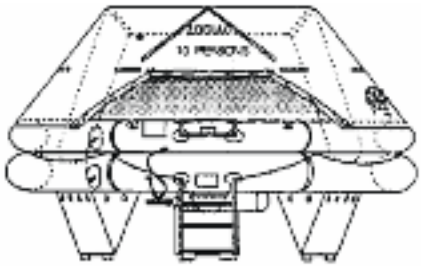

- Raft includes hydrostatic release and deck mounting cradle.


Order No.	Description	Price
458528	Pack A	$4,877.98 B
458605	Pack B	$4,768.98 B

Raft Dimensions	Pack A	Pack B
Inside Dimensions	2,434 x 2,110	2,434 x 2,110
Outside Dimensions	3,106 x 2,692	3,106 x 2,692
Total Volume	1,108 dm^3	1,108 dm^3
Required Volume	960 dm^3	960 dm^3
Interior Area	386 dm^2	386 dm^2
Required Area	372 dm^2	372 dm^2
Weight	96 kg	66 kg
Drop Height	36 m	36 m
Container Dimensions		
Length	1,275 (4' 2")	1,160 (3' 9-1/2")
Diameter	585 (1' 11")	530 (1' 9")
Weight	103 kg (226, 8 lbs.)	73 kg (160, 8 lbs.)

Special Handling May Apply

©2014 Donovan Marine, Inc.

Life Raft USCG/SOLAS Range - 12 Persons - Pack A

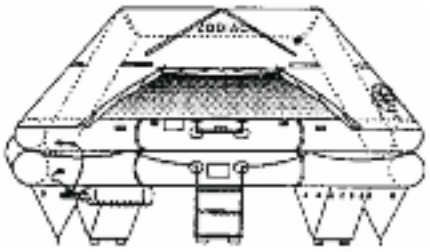

- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458529	Pack A	$5,172.98 B

Raft Dimensions	Pack A
Inside Dimensions	2,964 x 2,740
Outside Dimensions	3,676 x 3,398
Total Volume	1,772 dm^3
Required Volume	1,536 dm^3
Interior Area	616, 5 dm^2
Required Area	595, 2 dm^2
Weight	135 kg
Drop Height	36 m
Container Dimensions	
Length	1,275 (4' 2")
Diameter	615 (2' 1/4")
Weight	119 kg (262.1 lbs.)

Special Handling May Apply

Life Raft USCG/SOLAS Range - 20 Persons - Pack A or Pack B




- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458542	Pack A	$6,282.98 B
458629	Pack B	$6,171.98 B

Raft Dimensions	Pack A	Pack B
Inside Dimensions	3,290 x 3,020	3,290 x 3,020
Outside Dimensions	4,050 x 3,722	4,050 x 3,722
Total Volume	2,229 dm^3	2,229 dm^3
Required Volume	1,920 dm^3	1,920 dm^3
Interior Area	749 dm^2	749 dm^2
Required Area	744 dm^2	744 dm^2
Weight	155 kg	106 kg
Drop Height	36 m	36 m
Container Dimensions		
Length	1,275 (4' 2")	1,275 (4' 2")
Diameter	735 (2' 5")	615 (2' 1/4")
Weight	161 kg (254, 6 lbs.)	112 kg (246, 6 lbs.)

Special Handling May Apply

Life Raft USCG/SOLAS Range - 16 Persons - Pack A or Pack B

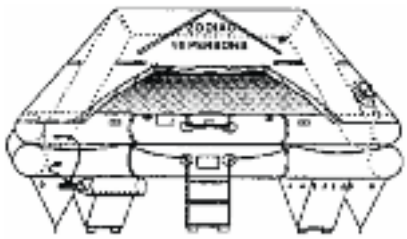


- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458530	Pack A	$5,764.98 B
458617	Pack B	$5,653.98 B

Raft Dimensions	Pack A	Pack B
Inside Dimensions	2,964 x 2,740	2,964 x 2,740
Outside Dimensions	3,676 x 3,398	3,676 x 3,398
Total Volume	1,772 dm^3	1,772 dm^3
Required Volume	1,536 dm^3	1,536 dm^3
Interior Area	616, 5 dm^2	616, 5 dm^2
Required Area	595, 2 dm^2	595, 2 dm^2
Weight	135 kg	95 kg
Drop Height	36 m	36 m
Container Dimensions		
Length	1,275 (4' 2")	1,160 (3' 9-1/2")
Diameter	615 (2' 1/4")	585 (1' 11")
Weight	134 kg (295, 1 lbs.)	94 kg (207 lbs.)

Special Handling May Apply

Life Raft USCG/SOLAS Range - 25 Persons and 25 Persons Davit Launched - Pack A or Pack B

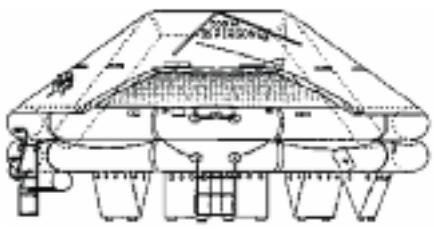

- Raft includes hydrostatic release and deck mounting cradle.

Order No.	Description	Price
458554	Pack A	$6,651.98 B
458631	Pack B	$6,541.98 B

Raft Dimensions	Pack A	Pack B
Inside Dimensions	3,520 x 3,720	3,520 x 3,720
Outside Dimensions	4,250 x 4,480	4,250 x 4,480
Total Volume	2,799 dm^3	2,799 dm^3
Required Volume	2,400 dm^3	2,400 dm^3
Interior Area	1,004, 6 dm^2	1,004, 6 dm^2
Required Area	930, 2 dm^2	930, 2 dm^2
Weight	198 kg	140 kg
Drop Height	36 m	36 m
Container Dimensions		
Length	1,450 (4' 9")	1,275 (4' 2")
Diameter	735 (2' 5")	735 (2' 5")
Weight	205 kg (451, 5 lbs.)	147 kg (323, 7 lbs.)

Special Handling May Apply

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.

New Wave Guardian™ Liferafts



Special Handling May Apply

- New Wave Guardian liferafts are renowned for their uncompromising quality and design sophistication.
- In addition to meeting the requirements of the International Convention of the Safety of Life at Sea (SOLAS) 1996, as amended, the Guardian is manufactured to NATO AQAP 1 quality standard.
- New Wave Guardian liferafts hold approvals from most major international marine authorities, including the United States Coast Guard and UK Department of Trade.
- These rafts come in a variety of sizes accommodating 4,6,8,10,12,16, 20 and 25 persons.
- Every raft comes packed in a weatherproof fiberglass container to keep the raft drier and better protected for longer service life.
- The container is secured to a galvanized steel deck-mounted stowage cradle with a hydrostatic release, allowing for both manual and automatic launching.
- Includes: Cradel and hydrostatic release.

Order No.	Description	Price
500071	6 Man, U.S.C.G. Approval #160.151/A121/0	$4,965.98 B
500073	8 Man, U.S.C.G. Approval #160.151/A122/0	$5,431.98 B
500075	16 Man, U.S.C.G. Approval #160.151/A125/0	$6,905.98 B
500078	20 Man, U.S.C.G. Approval #160.151/A126/0	$7,447.98 B
500081	25 Man, U.S.C.G. Approval #160.151/A130/0	$7,993.98 B

DBC USCG/SOLAS Seafort Inflatable Liferafts





Suitcase Container



Round Container

Special Handling May Apply

Call for Price and Availability

- Approved to SOLAS, USCG and CCG.
- Easily accessed inflatable boarding ramp.
- Heavy butyl fabric construction.
- Large Icelandic ballast pockets providing increased stability.
- Full and efficient product support throughout North America.
- 10 year fabric and seam warranty (subject to annul servicing by DBC approved service station).

Suitcase Container

Type	Equipment Pack	Dimensions	Weight Inc. Cradle
4 Person	Full Ocean/SOLAS 'A'	23" x 31" x 12" (58 x 79 x 30cm)	109 lbs. (49.4kg)
6 Person	SOLAS 'A'	23" x 31" x 15" (58 x 79 x 38cm)	142 lbs. (64.4kg)

Round Container

Type	Equipment Pack	Dimensions (Length x Dia.)	Weight Inc. Cradle
8 Person	SOLAS 'A'	42" x 23" (107 x 59cm)	185 lbs. (84.0kg)
10 Person	SOLAS 'A'	46" x 25" (117 x 64cm)	216 lbs. (98.0kg)
16 Person	SOLAS 'A'	50" x 27" (127 x 69cm)	317 lbs. (144.0kg)
25 Person	SOLAS 'A'	55" x 30" (140 x 76cm)	399 lbs. (181.5kg)
50 Person	SOLAS 'A'	74" x 39" (187 x 73cm)	650 lbs. (294.8kg)

Survitec Coastal Compact 4 Person with Valise

SURVITEC SURVIVAL PRODUCTS



Special Handling May Apply

- Ideal for coastal boaters, the Coastal Compact bridges the gap between the lifejacket and a full-feature liferaft - offering those travelling alone the smallest, lightest and most inexpensive raft available today.
- With double 200 lb. SuperRev ballast pockets, the Coastal Compact enhances stability in rough sea conditions.
- Its light weight allows for easy deployment and the compact size makes stowage easy in the smallest of spaces.
- Weighs only 16 lbs.
- Give a hard pull and the raft inflates automatically in less than 30 seconds with Coastal Compact's high-tech, self-contained CO2 inflation system.
- Includes: 20' Painterline, hand pump, sea anchor, raft knife, pressure relief valve, CO2 inflation system, USCG Approved water-activated locator light, 2 ballast bags and valise.
- Not recommended for offshore use.

Order No.	Description	Price
496386	(CCV4) 4-Person Coastal Compact	$1,249.98 B

©2014 Donovan Marine, Inc.

DBC Marine Inflatable Life Rafts

USCG/SOLAS Range – Pack A.

- Rafts include hydrostatic release and deck mounting cradle.
- Complete with: Rescue quoit and 98 ft. of line, Floating knife, Bailer, Sea anchor and 98 ft. of line, Paddle, Sponge, Repair kit, Pump, Survival instruction cards, Immediate action cards, Heliograph, Whistle, Torch, Spare batteries and bulb, Fishing kit, Hand flares, Rocket parachute flares, Smoke signal, Signal card, Food, Water, Tin opener, Drinking vessel, First aid kit, Anti-sickness tablets, Seasickness bags, Protective aid.

4 Person

- Inside Raft Dimensions 1,500 x 1,500.
- Outside Raft Dimensions 2,000 x 2,000.
- Container Dimensions: Length 1,160 (3' 9-1/2) Diameter 530 (1' 9).

Order No.	Mfg. No. / Description	Price
458500	(A/USCG 4 MAN) 4 Person	$3,916.98 B

6 Person

- Inside Raft Dimensions 1,500 x 1,500.
- Outside Raft Dimensions 2,000 x 2,000.
- Container Dimensions: Length 1,160 (3' 9-1/2) Diameter 530 (1' 9).

Order No.	Mfg. No. / Description	Price
458504	(A/USCG 6 MAN) 6 Person	$4,138.98 B

8 Person

- Inside Raft Dimensions 2,215 x 1,915.
- Outside Raft Dimensions 2,865 x 2,479.
- Container Dimensions: Length 1,160 (3' 9-1/2) Diameter 530 (1' 9).

Order No.	Mfg. No. / Description	Price
458516	(A/USCG 8 MAN) 8 Person	$4,360.98 B

10 Person

- Inside Raft Dimensions 2,434 x 2,110.
- Outside Raft Dimensions 3,106 x 2,692.
- Container Dimensions: Length 1,275 (4' 2) Diameter 585 (1' 11)

Order No.	Mfg. No. / Description	Price
458528	(A/USCG 10MAN) 10 Person	$4,877.98 B

12 Person

- Inside Raft Dimensions 2,964 x 2,740.
- Outside Raft Dimensions 3,676 x 3,398.
- Container Dimensions: Length 1,275 (4' 2) Diameter 615 (2' 1/4).

Order No.	Mfg. No. / Description	Price
458529	(A/USCG 12MAN) 12 Person	$5,172.98 B

16 Person

- Inside Raft Dimensions 2,964 x 2,740.
- Outside Raft Dimensions 3,676 x 3,398.
- Container Dimensions: Length 1,275 (4' 2) Diameter 615 (2' 1/4).

Order No.	Mfg. No. / Description	Price
458530	(A/USCG 16MAN) 16 Person	$5,764.98 B

20 Person

- Inside Raft Dimensions 3,290 x 3,020.
- Outside Raft Dimensions 4,050 x 3,722.
- Container Dimensions: Length 1,275 (4' 2) Diameter 735 (2' 5).

Order No.	Mfg. No. / Description	Price
458542	(A/USCG 20MAN) 20 Person	$6,282.98 B

25 Person

- Inside Raft Dimensions 3,520 x 3,720.
- Outside Raft Dimensions 4,250 x 4,480.
- Container Dimensions: Length 1,450 (4' 9) Diameter 735 (2' 5).

Order No.	Mfg. No. / Description	Price
458554	(A/USCG 25MAN) 25 Person	$6,651.98 B

USCG/SOLAS Range – Pack B.

- Rafts include hydrostatic release and deck mounting cradle.
- Complete with: Rescue quoit and 98 ft. of line, Floating knife, Bailer, Sea anchor and 98 ft. of line, Paddle, Sponge, Repair kit , Pump, Survival instruction cards, Immediate action cards, Heliograph, Whistle, Torch, Spare batteries and bulb, Hand flares, Rocket parachute flares, Smoke signal, Signal card, First aid kit, Antisickness tablets. Seasickness bags, Protective aid.

6 Person

- Inside Raft Dimensions 1,500 x 1,500.
- Outside Raft Dimensions 2,000 x 2,000.
- Container Dimensions: Length 1,160 (3' 9-1/2) Diameter 530 (1' 9).

Order No.	Mfg. No. / Description	Price
458580	(B/USCG 6 MAN) 6 Person	$4,064.98 B

8 Person

- Inside Raft Dimensions 2,215 x 1,915.
- Outside Raft Dimensions 2,865 x 2,479.
- Container Dimensions: Length 1,160 (3' 9-1/2) Diameter 530 (1' 9).

Order No.	Mfg. No. / Description	Price
458592	(B/USCG 8 MAN) 8 Person	$4,286.98 B

10 Person

- Inside Raft Dimensions 2,434 x 2,110.
- Outside Raft Dimensions 3,106 x 2,692.
- Container Dimensions: Length 1,275 (4' 2) Diameter 585 (1' 11).

Order No.	Mfg. No. / Description	Price
458605	(B/USCG 10MAN) 10 Person	$4,768.98 B

16 Person

- Inside Raft Dimensions 2,964 x 2,740.
- Outside Raft Dimensions 3,676 x 3,398.
- Container Dimensions: Length 1,160 (3' 9-1/2) Diameter 585 (1' 11).

Order No.	Mfg. No. / Description	Price
458617	(B/USCG 16MAN) 16 Person	$5,653.98 B

20 Person

- Inside Raft Dimensions 3,290 x 3,020.
- Outside Raft Dimensions 4,050 x 3,722.
- Container Dimensions: Length 1,275 (4' 2) Diameter 615 (2' 1/4).


Order No.	Mfg. No. / Description	Price
458629	(B/USCG 20MAN) 20 Person	$6,171.98 B

25 Person

- Inside Raft Dimensions 3,520 x 3,720.
- Outside Raft Dimensions 4,250 x 4,480.
- Container Dimensions: Length 1,275 (4' 2) Diameter 735 (2' 5).

Order No.	Mfg. No. / Description	Price
458631	(B/USCG 25MAN) 25 Person	$6,541.98 B

Zodiac Open Reversible Inflatable Liferafts

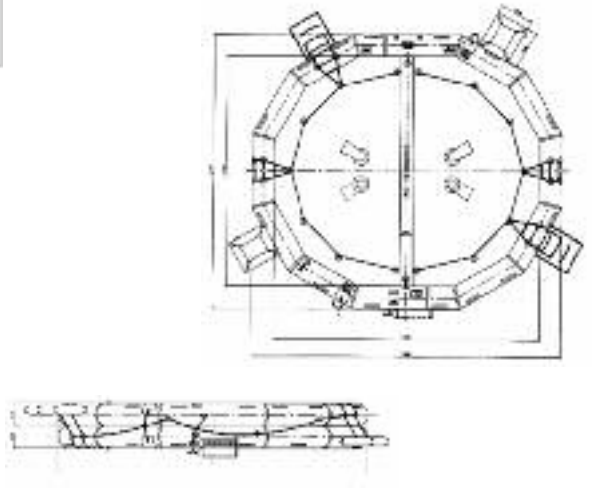

Order No.	Mfg. No. / Description	Price
458338	20 Man USCG Inflatable Platform	$5,032.98 B
458340	50 Man USCG Inflatable Platform	$7,315.98 B

Fast RSQ Aluminum Fast Rescue Boat



- Aluminum Fast Rescue Boat (Type FRSQ 600 A 250HP) complete with 250HP Steyr inboard diesel engine and Hamilton 213 water jet, suitable to accommodate 15 seated persons according to IMO/SOLAS. The equipment fully complies with the latest IMO/SOLAS requirements and LSA Code. The equipment will be certified by USCG and will include a USCG certificate.
- The Fast Rescue Boat is constructed of all seawater resistant aluminum (5083) and a 2-layer paint system suitable for the marine environment (Color: Orange RAL 2004).
- Foam fender included.
- Overall Dimensions: 6.18 m (20.28 ft) LOA x 2.11 m (6.92 ft) BOA x 0.40 m (1.31 ft) Draft.
- Speed: Approximately 30 knots with 3 persons.
- Fixed single point arrangement with offload release hook, type CAR-F 35.
- Excluding survival suits, SART, EPIRB, VHF Radio and complete fitted boat cover.

Order No.	Mfg. No. / Description	Price
514262	(FRSQ600A) Rescue Boat, Alumimum, USCGSOL	$97,693.98 B
514265	(FRSQ600A) Engine Package	$97,693.98 B

Ned-Deck USCG/SOLAS Approved Rescue Boat

Order No.	Mfg. No. / Description	Price
514104	(NDM440KIT) SOLAS Boat	$1,350.98 B

Zodiac RIBO 450 Rescue Boat



Order No.	Mfg. No. / Description	Price
458390	(RIB0450) RIBO 450 Rescue Boat	$19,401.98 B

Rast RSQ USCG/SOLAS Approved Rescue Boat



- Rigid rescue boat completely made of seawater-resistant aluminum.
- The influences of ultraviolet rays and seawater are totally negligible, which works out well to the life span of the boat.
- Its V-shaped hull construction guarantees an optimum planing and subsequent sailing speed with excellent stability characteristics.

Order No.	Mfg. No. / Description	Price
514112	(RSQ450A)	$24,354.98 B
514107	NDM 40 HP Engine Kit for NDM450	$8,577.98 B
514110	Engine, Evinrude, 25HPETEC	$6,020.98 B

Zodiac Rescue Boat Accessories

Order No.	Mfg. No. / Description	Price
458355	Boat Cover for H380 and RB4	$224.98 G
458356	4-Point Lifting Sling	$673.98 B
458346	Boat Cover for H472 and SR 4M	$261.98 G

©2014 Donovan Marine, Inc.

Ned-Deck Marine Hydraulic Pivoting Davit



- Application — Rescue Boat Handling.
- Execution — Single line wire rope.
- Safe Working Load (SWL) — 3,500 kg (7,716 lbs)
- Outreach — 4,014 mm (13.17 ft)
- List/Trim conditions — 20º/10º
- Pivoting — Hydraulically by means of accumulated power.
- Hoisting — Electrically (18 m/min)
- Hoisting (Emergency) — Manually by means of ratchet handle.
- Lowering — Gravity lowering.
- Power consumption — Winch motor 18,5 kW; Power pack 3,2 kW.
- Duty class — S2-10min
- Power supply — 480V/3ph/60Hz
- Anti-condensation heater — In both starter box and winch motor (230V/40W).
- Length Lowest Waterline — 10 m.
- Flag State — EC/MED + USCG


Order No.	Mfg. No. / Description	Price
514267	(PRHE35)	$98,538.98 B

- Hydraulic Pivoting Davit (Type PRHE 35) suitable to handle a FRSQ 600 A 250HP fast rescue boat having a total mass not exceeding 3.500 kg (7,716 lbs) with its full compliment of persons and equipment. The equipment fully complies with the latest IMO/SOLAS requirements and LSA code. The equipment is certified by Bureau Veritas (BV) in accordance with the European Council Directive 96/98 EC on Marine Equipment (M.E.D.), WheelMark. Also includes USCG certificate.
- The above davit includes shock absorber, 42V/450W converter mounted in the starter box for battery charger in fast rescue boat, 2-layer paint system suitable for the marine environment (Color: White RAL 9010) and boat front supports.

Ned-Deck Single Arm Hydraulic Slewing Davits

- Hydraulic slewing davit (Type SCH12-3.5R) suitable to handle a rescue boat type Rib 4 meter at a radius of 3.50 meters and a weight of max 1200 kilograms, including persons, fuel and SOLAS Inventory.
- Application: Resuce Boat Handling.
- Safe Working Load (SWL): 1200 kg.
- Fixed Radius: 3.50 m.
- List/Trim Conditions: 20°/10°.
- Slewing: Hydraulically be means of accumulated power.
- Hoisting: Electrically (18 m/min).
- Hoisting (Emergency): Manually by means of crank handle.
- Lowering: Gravity lowering.
- Power Consumption: Winch Motor 5,5 kW. Power Pack 3,2 kW.
- Duty Class: S2-10min.
- Power Supply: 440V/3ph/60Hz.
- Anti-Condensation Heater: In both starter box and winch motor (230V/40W).
- Complete with steel pedestal and hook.
- USCG/SOLAS Approved.



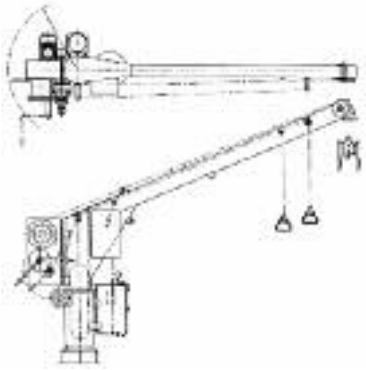

Order No.	Mfg. No. / Description	Price
514098	Slews Right	$51,360.98 B
514099	Auto Release Hook, SOLAS USCG Approval #160. 170\EC0062\11175BEC	$1,945.98 B
514096	Slews Left	$53,837.98 B

Ned-Deck Accessories

Order No.	Mfg. No. / Description	Price
514091	(SCH10-4-OR) DAVIT/PED,HOOK,CON,LH	$48,890.98 B
514101	(49PWR-CL) STERNLITE W/POLE	$25.98 I
514105	(RBCG) RELEASABLE BOAT CRDL GLV	$2,222.98 B
514106	(NDM HOSE) FUEL HOSE F/NDM440	$164.98 B
514113	(10100) BREATHER 3/4" F/WINCH	$71.98 B
514114	(KEY) KEY STARTER CAB LOCK	$95.98 B
514116	(10101) BREATHER HPU 3/8"	$73.98 B
514120	(20000) 7KW E-MOTOR 440VOLT	$1,895.98 B
514125	(20050) LIMIT SWITCH	$1,486.98 B
514129	(30207) HYDRAULIC PUMP	$4,301.98 B
514131	(37031) FLOW CONTROL VALVE	$282.98 B
514134	(37219) PRESS RELIEF VALVE 350 B	$858.98 B
514144	(39517) PRESSURE SWITCH 290 BAR	$460.98 B
514147	(39518) PRESSURE SWITCH 320 BAR	$460.98 B
514151	(39600) PRESSURE GAUGE 400 BAR	$204.98 B
514163	(40600) TRIPLINE - GREEN	$171.98 B
514166	(40601) TRIPLINE - RED	$171.98 B
514172	(90001) SERVICE SET A	$171.98 B
514175	(90002) SERVICE SET B	$1,169.98 B
514178	(90003) SERVICE SET C	$2,057.98 B
514181	(363210030) BRAKE SHOE 04-03 WINCH	$695.98 B
514184	(363210036TA) SPRING FOR BRAKE EXEC. A	$268.98 B
514189	(363210036TC) SPRING FOR BRAKE EXEC. C	$268.98 B
514192	(3P-100107EXD) U - RC SHEAVEHOUSE	$160.98 B
645742	(4ZT33) BUTTON HEAD/GREASE CPLER	$28.98 B
701766	(PRT086-2001) TOWING/PAINTER LINE	$83.98 B
771228	(350-0386) "A" FUEL HOSE 10'	$234.98 B

Palfinger Marine-und

Order No.	Mfg. No. / Description	Price
514080	(PK8501MA)	Price on Request



©2014 Donovan Marine, Inc.

Place Your Order with Donovan Today: 800.347.4464


DONOVAN MARINE
PALFINGER
• Heavy duty foldable cranes (PFM)
• Lifting capacity range – 33,069 lbs to 48,061 lbs
Please contact Donovan Marine for further assistance.
PFM. PALFINGER MARINE
HEAVY DUTY FOLDABLE
KNUCKLE BOOM CRANES.
Lifts extremely heavy loads up to 330.0 mt.
The heavy duty foldable knuckle boom range, PFM, was developed for the highly complex lifting of great loads from 7000 to 21800 kg. Their fields of application are large marine vessels i.e. work boats, navy or research ships. A combination of a telescopic boom and knuckle system makes this giant more flexible compared to common cranes in this field.
www.palfingermarine.com




©2014 Donovan Marine, Inc.

Place Your Order with Donovan Today: 800.347.4464


PKM. PALFINGER MARINE
KNUCKLE BOOM CRANES
Maneuverable and strong at the same time.
PALFINGER
DONOVAN MARINE
• Heavy duty knuckle boom cranes (PKM)
• Lifting capacity range – 4,630 lbs to 19,842 lbs
Please contact Donovan Marine for further assistance.
PALFINGER MARINE cranes from the PKM range are at home on working, passenger and marine vessels, yachts and docks. Their boom system means flexible outreach, their knuckle boom makes working at close range more comfortable. Operators enjoy the compact parking position, easy maintenance and flexible winch solutions.
www.palfingermarine.com

Commercial

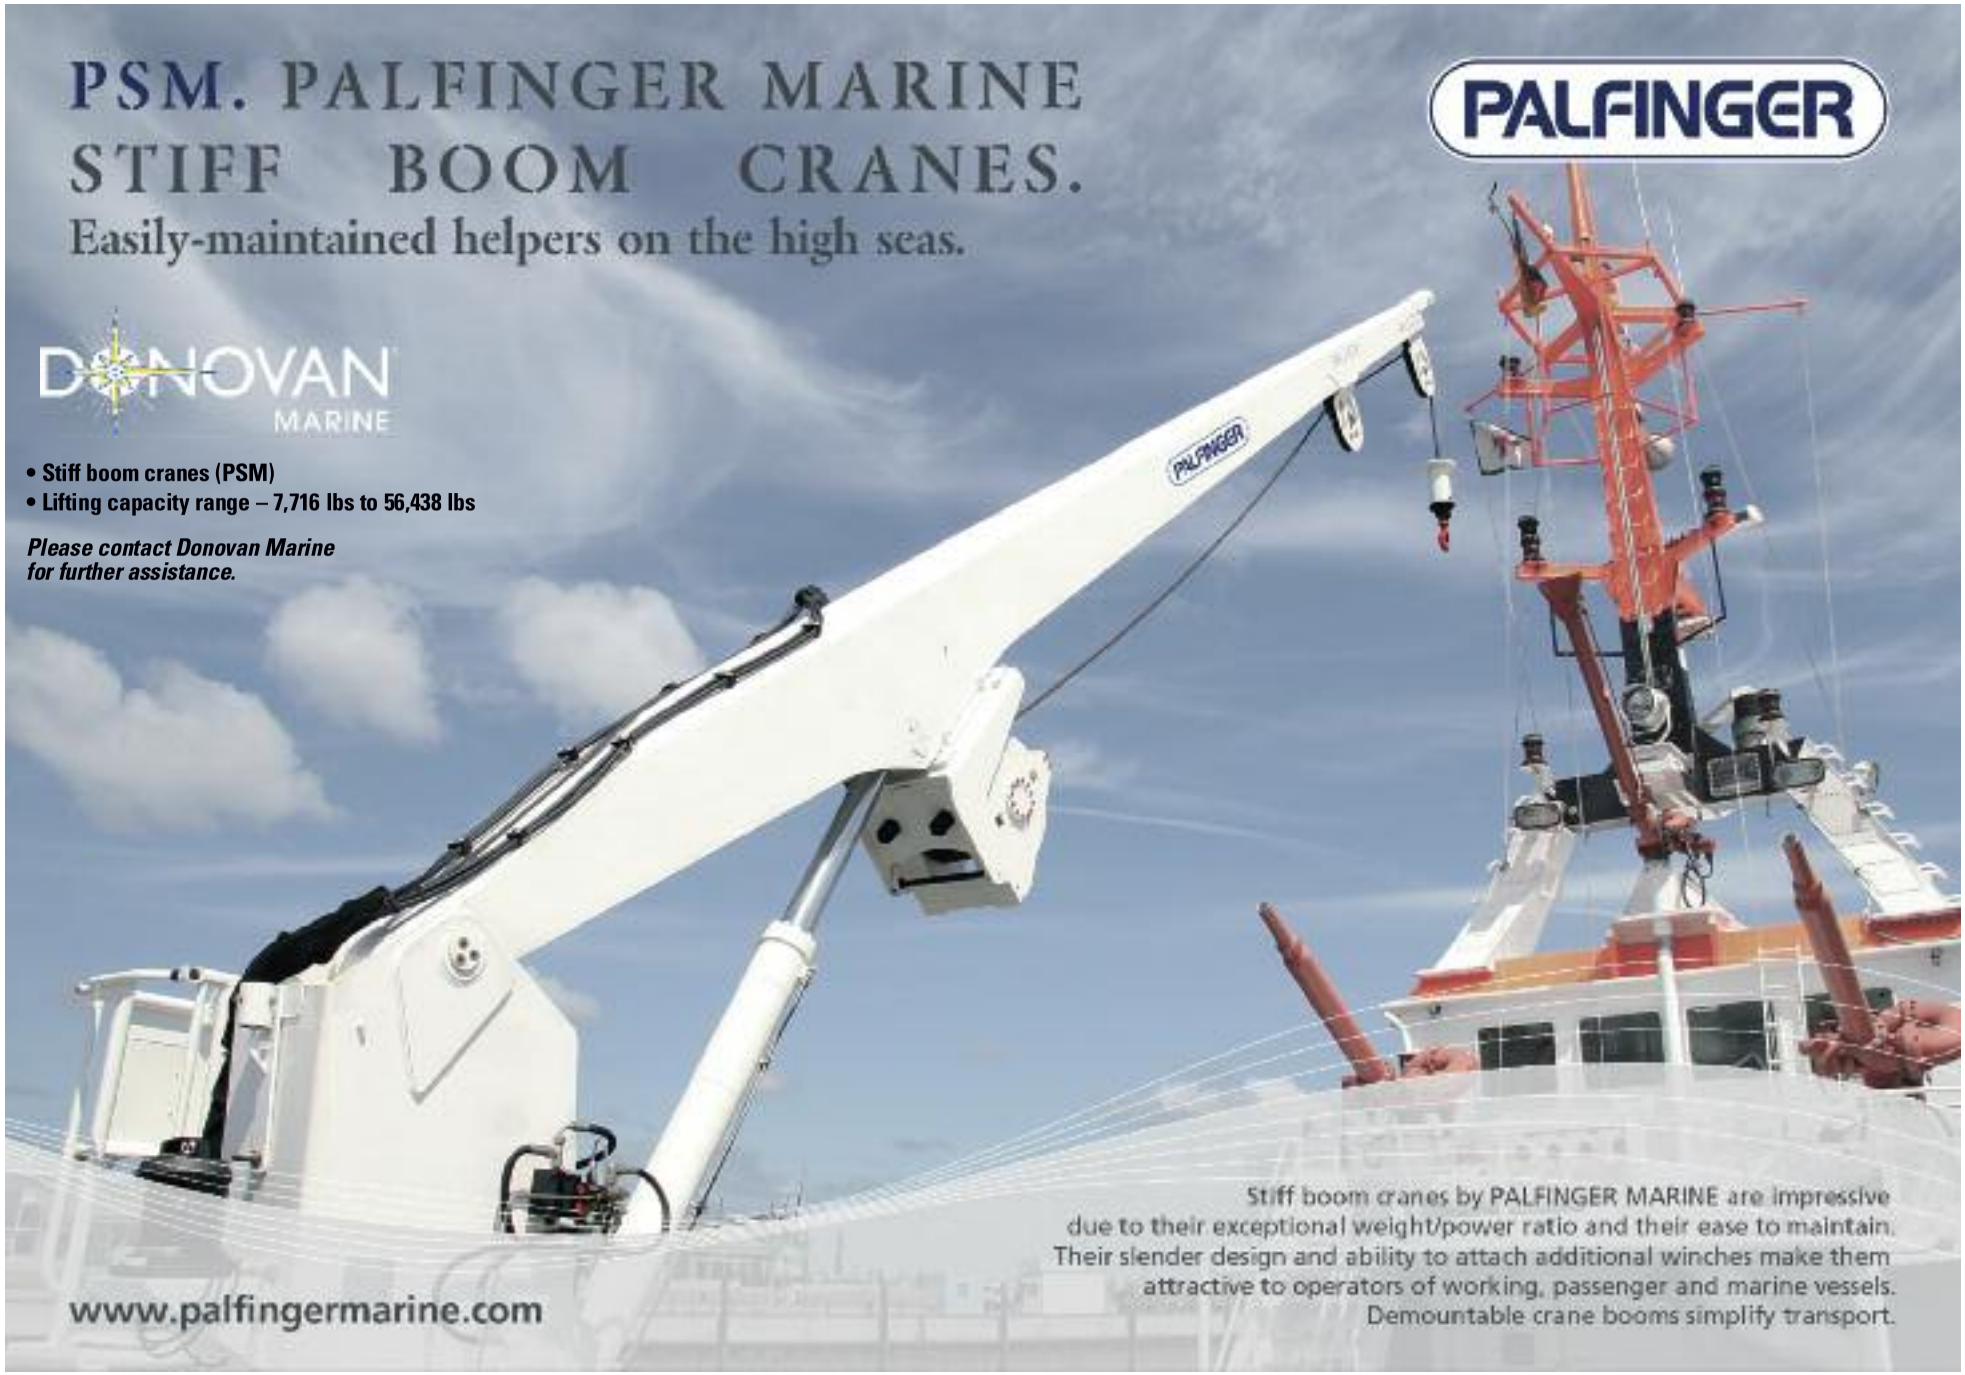

©2014 Donovan Marine, Inc.

Place Your Order with Donovan Today: ***800.347.4464***

Palfinger Marine
Marine Crane Specification Sheet

Question	Answer
Customer name	
Project name or idenification Number	
Bid Due Date:	
New construction or refurbishing project or Vessel Name/Hull Number	
Type of Crane : Knuckle Boom, Telescopic Boom, Stiff Boom	
Select Palfinger model required : PK,PSM,PTM,PKM or PFM	
Application(s) of crane: Marine, Drilling or Other	
Will crane be used in Fresh Water or saltwater applications	
Lifting capacity … kg or Lbs at max outreach … m or ft	
Sea-state – YES / NO (If NO, Harbour conditions are used)	
Sea-state condition- See ABS sea state chart attached please select 0-9	
lifting speed … m/min or ft/min	
hoisting height … m/min or feet/min	
CT - constant tension – YES / NO	
Boat / RIB Handling – YES / NO	
during launching are people to be sitting in the boat – YES / NO	
If yes, estimated total weight of people and gear. Kg or Lbs	
quick release hook required – YES / NO	
Man riding application – YES / NO-if yes- (Harbor or offshore Operational conditions)	
lifting capacity … kg or Lbs at max outreach in m or ft	
lifting speed … m/min or ft per min	
hoisting height … m/or ft	
Power pack – YES / NO if yes please answer next question.	
voltage / frequency - 3x 400V / 50Hz or 60 cycle (state Voltage)	
ex-proof – YES / NO If yes please answer next question	
exact grade of ex-proof execution zone (0…2) Temp (T1--T6) Class I---III	
CE - Declaration of conformity – YES / NO	
Average ambient operating temperature with 24 hour period	
Operating Design temperature of vessel or drilling rig	
Class certificate – GL, LRS, ABS, DNV, BVor other	
Man riding basket–YES / NO- if yes please advise if DNV or other approval is required	
Type of controls: Local , remote, Radio with cable or full radio control.	
If any special rules or Regulations which need consideration Yes / No	
If awarded what would be the projected start date	
Required Delivery time … weeks	
Completed by	
Date	

Perko Fig. 309 All-Round Lights



- Plain cast bronze anchor or signal light.
- For use on vessels 20 meters to 50 meters in length.
- Base is tapped for 1/2" pipe.
- 2 mile visibility.
- Overall height 6-1/2".
- Complete with double contact electrical socket.
- Bulbs not included.

Order No.	Mfg. No. / Description	Price
524822	(309 A00 PLB) White	$243.98 I
524834	(309 RA0 PLB) Red	$243.98 I

Spare Bulbs

528387	(374 001 CLR) 12 Volt, 30 Watt	$50.98 I
528399	(374 002 CLR) 24 Volt, 30 Watt	$50.98 I
528402	(374 003 CLR) 32 Volt, 30 Watt	$50.98 I
528414	(374 004 CLR) 120 Volt, 30 Watt	$58.98 I

Perko Fig. 108 All-Round Lights



- Black plastic with festoon type electrical socket.
- Base is tapped for 1/2" pipe or can be removed for surface mounting with #10 fasteners.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Overall height 6", base OD 3-1/8".
- For 12 or 32 volt systems.
- Bulbs not included.
- *Note: White light has grey tinted lens.

Order No.	Mfg. No. / Description	Price
527828	(108 000 BLK) White*	$107.98 I
527830	(108 G00 BLK) Green	$107.98 I
527842	(108 R00 BLK) Red	$107.98 I
541638	(70 DP1 CLR) Bulbs, 12 Volt, 2 Per Pack	$14.98 R
541640	(70 DP2 CLR) Bulbs, 32 Volt, 2 Per Pack	$14.98 R

Perko Fig. 106 Spare Globes



- Spare globes for Perko Figs. 108, 112 and 309 All-Round Lights.

Order No.	Mfg. No. / Description	Price
529000	(106 000 WHT) White	$61.98 E
529012	(106 000 GRN) Green	$61.98 E
529024	(106 000 YLW) Yellow	$61.98 E
529036	(106 000 RED) Red	$61.98 E

Perko White All-Round Lights



527880



527854

- Cast bronze.
- Medium screw base type electrical socket.
- 2 mile visibility.
- For use on power driven vessels under 20 meters in length.
- Uses #8 fasteners.

- Overall height 8-3/4", base OD 3-1/8".
- Requires 15W frosted medium screw bulb.
- Bulb not included.

Order No.	Mfg. No. / Description	Price
527854	(112 B00 PLB) White	$315.98 I

- Base is tapped for 1/2" pipe.
- Overall height 6-1/2".
- Requires frosted medium screw bulb.
- Bulbs not included.

Order No.	Mfg. No. / Description	Price
527880	(309 B00 PLB) White, Requires 15W Bulb	$225.98 I
527892	(309 RB0 PLB) Red, Requires 25W Bulb	$225.98 I
527905	(309 GB0 PLB) Green, Requires 25W Bulb	$225.98 I

- Spare medium screw base socket.

Order No.	Mfg. No. / Description	Price
529620	(226)	$17.98 I

Perko Fig. 248 Spare Globe



- Fits most small Perko All-Round Lights and other lights with screw-on globes.
- Dimensions: 2" OD.
- 1-11/16" ID.
- Height 2-1/2".

Order No.	Mfg. No. / Description	Price
536031	(248 DP0 CLR) Clear	$13.98 R

©2014 Donovan Marine, Inc.

Perko Fig. 170 Navigation Lights


533271


533269


533270

- Black plastic with soft black vinyl mounting gasket.
- For use on sail or power driven vessels under 20 meters in length.
- Overall height 3-5/8", width 4-1/8".
- Overall projection 4-3/4".
- Uses #10 fasteners.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
533270	(170 BSD DP1) Green Side, 2 Mile, 112-1/2° Visibility	$36.98 R
533271	(170 BP0 DP1) Red Side, 2 Mile, 112-1/2° Visibility	$36.98 R
533269	(170 BM0 DP1) White Masthead , 2 Mile, 225° Visibility	$36.98 R
533272	(170 BSN DP1) White Stern, 3 Mile, 135° Visibility	$36.98 R

- Spare 12 volt bulb for: 533272 (170 BSN DP1).

Order No.	Mfg. No. / Description	Price
541530	(69 DP0 CLR) 2 Per Pack	$15.98 R

- Spare 12 volt bulb for: 533270 (170 BSD DP1), 533271 (170 BP0 DP1) and 533269 (170 BM0 DP1).

Order No.	Mfg. No. / Description	Price
541638	2 Per Pack (70 DP1 CLR)	$14.98 R

Perko Figs. 109, 110 and 111 Navigation Lights


527690


527715

- Black plastic.
- For use on sail or power driven vessels under 20 meters in length.
- Overall height 5-1/4".
- Lens height 4-1/4".
- Uses #10 fasteners.
- For 12 or 32 volt bulbs.
- Bulbs not included.

Order No.	Mfg. No. / Description	Price
527690	(109 R00 BLK) Red Side, 2 Mile, 112-1/2° Visibility	$117.98 I
527703	(109 G00 BLK) Green Side, 2 Mile, 112-1/2° Visibility	$117.98 I
527715	(110 000 BLK) White Masthead , 3 Mile, 225° Visibility	$117.98 I
527727	(111 000 BLK) White Stern, 2 Mile, 135° Visibility	$117.98 I
527739	(111 M00 BLK) Yellow Towing, 2 Mile, 135° Visibility	$117.98 I

- Spare bulbs.

Order No.	Mfg. No. / Description	Price
541638	(70 DP1 CLR) 12 volt, 2 Per Pack	$14.98 R
541640	(70 DP2 CLR) 32 volt, 2 Per Pack	$14.98 R

Perko Figs. 1127, 1128, 1129 and 1130 Navigation Lights


525937


525913


525901

- Black plastic.
- For use on vessels 20 meters to 50 meters in length.
- Complete with pre-wired double contact socket and 3' of 16/3-SO cable.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 7-1/2".
- Lens height 4-1/2".
- Uses 1/4 fasteners.
- Use Perko Fig. 374 bulbs.
- Bulbs not included.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
525901	(1127 GA0 BLK) Green Side, 2 Mile, 112-1/2° Visibility	$242.98 I
525913	(1127 RA0 BLK) Red Side, 2 Mile, 112-1/2° Visibility	$242.98 I
525937	(1128 A00 BLK) White Masthead , 5 Mile, 225° Visibility	$242.98 I
525951	(1129 A00 BLK) White Stern*, 2 Mile, 135° Visibility	$242.98 I
525963	(1129 MA0 BLK) Yellow Towing, 2 Mile, 135° Visibility	$242.98 I
525987	(1130 A00 BLK) White All-Round*, 2 Mile, 360° Visibility	$242.98 I
525999	(1130 GA0 BLK) Green All-Round, 2 Mile, 360° Visibility	$242.98 I
526105	(1130 RA0 BLK) Red All-Round, 2 Mile, 360° Visibility	$242.98 I

Perko Fig. 200 Navigation Lights


535840


535646

- Black plastic.
- For use on sail or power driven vessels under 20 meters in length.
- Base mount with #10 fasteners or use 535840 (222 DP BLK) pipe mounting bracket.
- Overall height 4-7/8".
- Base OD 3-5/16".
- Lens height 2-3/4".
- Use Perko Fig. 375 12 volt bulb of proper wattage.
- 12 volt bulb included.

Order No.	Mfg. No. / Description	Price
535640	(200 SDB DP1) Green Side, 2 Mile, 112-1/2° Visibility	$121.98 Q
535641	(200 PB0 DP1) Red Side, 2 Mile, 112-1/2° Visibility	$121.98 Q
535645	(200 MB0 DP1) White Masthead , 3 Mile, 225° Visibility	$121.98 Q
535646	(200 SNB DP1) White Stern, 2 Mile, 135° Visibility	$121.98 Q
535652	(200 SWB DP1) White All-Round, 2 Mile, 360° Visibility	$121.98 Q

- Spare 12 volt bulb for: 535646 (200 SNB DP1) & 535652 (200 SWB DP1).

Order No.	Mfg. No. / Description	Price
528503	(375 12V 10W) 10 Watt	$52.98 I

- Spare 12 volt bulb for: 535640 (200 SDB DP1), 535641 (200 PB0 DP1), 535645 (200 MB0 DP1) & 535651 (200 SRB DP1).

Order No.	Mfg. No. / Description	Price
528515	(375 12V 25W) 25 Watt	$57.98 I

- Pipe mounting bracket for use on all 200 series base mount lights in order to mount on 1/2" pipe.
- Black plastic.
- Complete with screws and soft black mounting gasket for mounting bracket to light.
- Overall OD 3-5/16".

Order No.	Mfg. No. / Description	Price
535840	(222 DP0 BLK)	$17.98 R

Perko Spare Lens and Accessories

- Fits 1127 Series

Order No.	Mfg. No. / Description	Price
535419	(249 000 RED) Spare Red Lens	$144.98 F
535421	(249 000 GRN) Spare Green Lens	$144.98 F
535433	(249 000 GRY) Spare Gray Lens	$144.98 F
529466	(134) Spare Double Contact Socket	$37.98 F
529860	(1105 000 BLK) Spare Access Cap with Chain	$48.98 I
529872	(1119) Spare O-Ring for Cap	$8.98 F

Perko Fig. 374 Double Contact Bayonet Bulbs



- Clear Type T-8. C-8.
- Filament, length 1-3/8".
- Sold each. Standard pack 50.

Order No.	Mfg. No. / Description	Price
528387	(374 001 CLR) 12 volt, 30 Watt	$50.98 I
528399	(374 002 CLR) 24 volt, 30 Watt	$50.98 I
528402	(374 003 CLR) 32 volt, 30 Watt	$50.98 I
528414	(374 004 CLR) 120 volt, 30 Watt	$58.98 I

Perko Figs. 1364, 1365, 1366, 1367 and 1368 Double Lens Navigation Lights


523399


523351

- Lightweight but durable fiber-filled polycarbonate black plastic.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (2) 3' lengths of 16/3-SO cable through watertight terminal tubes.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 17-1/4".
- Lens height 6-3/4".
- Uses 3/8" mounting bolt.
- 24, 120 and 220 volt options.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Bulbs not included.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523351	(1364 GE0 BLK) Green Side, 3 Mile, 112-1/2° Visibility	$571.98 Q
523363	(1364 RE0 BLK) Red Side, 3 Mile, 112-1/2° Visibility	$571.98 Q
523375	(1365 E00 BLK) White Masthead , 6 Mile, 225° Visibility	$571.98 Q
523387	(1366 E00 BLK) White Stern*, 3 Mile, 135° Visibility	$571.98 Q
523399	(1366 ME0 BLK) Yellow Towing, 3 Mile, 135° Visibility	$571.98 Q
523402	(1367 E00 BLK) White All-Round*, 3 Mile, 360° Visibility	$548.98 Q
523414	(1368 GE0 BLK) Green All-Round, 3 Mile, 360° Visibility	$548.98 Q
523426	(1368 RE0 BLK) Red All-Round, 3 Mile, 360° Visibility	$548.98 Q

- **Important Bulb Data:**
  To comply with the UL Standard 1104, these lights must be used with the following Perko Catalog Numbers: 24 volt use - 528289 (342 024 CLR) bulb, 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required and 220 volt use 528292 (342 220 CLR) bulb.

Perko Fig. 342 Medium Prefocus Bulbs



- Clear.
- 120 volt bulbs for 1150 Series and other navigation lights.
- Sold each. Standard pack 25.

Order No.	Mfg. No. / Description	Price
528250	(342 001 CLR) 15 Watt	$44.98 F
528262	(342 002 CLR) 25 Watt	$44.98 F
528274	(342 003 CLR) 40 Watt	$44.98 F
528286	(342 004 CLR) 60 Watt	$44.98 F
528289	(342 024 CLR) 55 Watt, 24 volt	$53.98 F
528298	(342 RS4 CLR) 60 Watt, For Rough Service	$61.98 F
528292	(342 220 CLR) 65 Watt, 220 volt	$57.98 F

©2014 Donovan Marine, Inc.

Perko Figs. 1369, 1370, 1372, 1373 and 1374 Single Lens Navigation Lights



523490 523452 523440

- Lightweight but durable fiber-filled polycarbonate black plastic.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (1) 3' length of 16/3-SO cable through watertight terminal tube.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 9-1/4".
- Lens height 6-3/4".
- Uses 3/8 mounting bolt.
- 24, 120 and 220 volt options.
- Use Perko Fig. 342 Medium Prefous Bulbs.
- Bulbs not included.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523438	(1372 GE0 BLK) Green Side, 3 Mile, 112-1/2° Visibility	$426.98 Q
523440	(1372 RE0 BLK) Red Side, 3 Mile, 112-1/2° Visibility	$426.98 Q
523452	(1373 E00 BLK) White Masthead , 6 Mile, 225° Visibility	$426.98 Q
523464	(1374 E00 BLK) White Stern*, 3 Mile, 135° Visibility	$426.98 Q
523476	(1374 ME0 BLK) Yellow Towing, 3 Mile, 135° Visibility	$426.98 Q
523488	(1369 E00 BLK) White All-Round*, 3 Mile, 360° Visibility	$410.98 Q
523490	(1370 RE0 BLK) Red All-Round, 3 Mile, 360° Visibility	$410.98 Q

- **Important Bulb Data:**

To comply with the UL Standard 1104, these lights must be used with the following Perko Catalog Numbers: 24 volt use - 528289 (342 024 CLR) bulb, 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required and 220 volt use 528292 (342 220 CLR) bulb.

Perko Spare Lens and Accessories

- Fits 1160 & 1170 Series

Order No.	Mfg. No. / Description	Price
528807	(261 001 CLR) Spare White Lens	$177.98 F
528818	(261 001 GRN) Spare Green Lens	$177.98 F
528820	(261 001 YLW) Spare Yellow Lens	$177.98 F
528832	(261 001 RED) Spare Red Lens	$177.98 F
529808	(1133) Spare Lens Retaining Clip	$27.98 F
529810	(1143) Spare Lens Gasket	$13.98 F
529860	(1105 000 BLK) Spare Access Cap, O-Ring and Retainer	$48.98 I
529872	(1119) Spare O-Ring for Cap	$8.98 F
529404	(347) Spare Medium Prefocus Socket	$69.98 F
529428	(303) Spare Dual Medium Prefocus Socket	$263.98 F

Perko Figs. 1169, 1170, 1172, 1173 and 1174 Single Lens Navigation Lights



523856 523818 523806

- Heavy duty cast bronze.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (1) 3' length of 16/3-SO cable through a watertight terminal tube.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 9-1/4".
- Lens height 6-3/4".
- Uses 3/8 mounting bolt.
- 120 volt only.
- Bulbs not included.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523806	(1172 GE0 PLB) Green Side, 3 Mile, 112-1/2° Visibility	$804.98 Q
523818	(1172 RE0 PLB) Red Side, 3 Mile, 112-1/2° Visibility	$804.98 Q
523832	(1173 E00 PLB) White Masthead , 6 Mile, 225° Visibility	$804.98 Q
523856	(1174 E00 PLB) White Stern*, 3 Mile, 135° Visibility	$804.98 Q
523868	(1174 ME0 PLB) Yellow Towing, 3 Mile, 135° Visibility	$804.98 Q
523882	(1169 E00 PLB) White All-Round*, 3 Mile, 360° Visibility	$773.98 Q
523919	(1170 RE0 PLB) Red All-Round, 3 Mile, 360° Visibility	$773.98 Q

- **Important Bulb Data:**

To comply with the UL Standard 1104, the lights listed on this page must be used with the following Perko Catalog Numbers: 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required.

Kerger Marine Signaling Lantern - 12 Volt, 60 Watts



- MKV Signaling Lantern fulfills the requirements of the International Convention for the Safety of Life at Sea.
- This convention states that all ships over 150 tons (gross tonnage), when engaged on International voyages, shall have on board an efficient daylight signaling lamp, which shall not be solely dependent upon the ship's main source of electrical power.
- Battery and bulb not included.

Order No.	Mfg. No. / Description	Price
233712	(108006) Signaling Lantern	$45.98 D

Perko Figs. 1164, 1165, 1166, 1167 and 1168 Double Lens Navigation Lights



523577



523503

- Heavy duty cast bronze.
- For use on vessels over 20 meters in length.
- Pre-wired medium prefocus socket.
- Includes: (2) 3' length of 16/3-SO cable through a watertight terminal tubes.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Overall height 17-1/4".
- Lens height 6-3/4".
- Uses 3/8 mounting bolt.
- 120 volt only.
- Bulbs not included.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- Rough service bulbs are available.

*White lights have grey tinted lens.

Order No.	Mfg. No. / Description	Price
523503	(1164 GE0 PLB) Green Side, 3 Mile, 112-1/2° Visibility	$1,234.98 Q
523515	(1164 RE0 PLB) Red Side, 3 Mile, 112-1/2° Visibility	$1,234.98 Q
523541	(1165 E00 PLB) White Masthead , 6 Mile, 225° Visibility	$1,234.98 Q
523565	(1166 E00 PLB) White Stern*, 3 Mile, 135° Visibility	$1,234.98 Q
523577	(1166 ME0 PLB) Yellow Towing, 3 Mile, 135° Visibility	$1,234.98 Q
523591	(1167 E00 PLB) White All-Round*, 3 Mile, 360° Visibility	$1,215.98 Q
523630	(1168 RE0 PLB) Red All-Round, 3 Mile, 360° Visibility	$1,215.98 Q
523628	(1168 GE0 PLB) Green All-Round, 3 Mile, 360° Visibility	$1,215.98 Q

- **Important Bulb Data:**
  To comply with the UL Standard 1104, the lights listed on this page must be used with the following Perko Catalog Numbers: 120 volt use 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required.

Perko Fig. 1129 Panama Canal Blue Steering Light



- Black plastic.
- Pre-wired double contact socket with 3' of 16/3-SJO cable.
- Overall height 7-1/2. Lens height 4-1/4.
- Visibility arc 135°. 12, 24, 32 or 120 volt options.
- Bulb not included.
- To comply with Panama Canal Requirements this light must use a Perko Fig. 374 bulb.
- Sold each per display box.

Order No.	Mfg. No. / Description	Price
525975	(1129 BA0 BLK) Steering Light	$401.98 I
529466	(134) Spare Double Contact Socket	$37.98 F
529860	(1105 000 BLK) Spare Access Cap with Chain	$48.98 I
529872	(1119) Spare O-Ring for Cap	$8.98 F

Perko Figs. 1150, 1151 and 1152 Navigation Lights



524682



524668

- Sheet metal, preprimed galvanized steel.
- Medium prefocus socket.
- Watertight terminal tube for 16/3-SO cable.
- Watertight access cap for rebulbing and cleaning.
- UL Standard 1104, 72 COLREGS and US inland rules.
- Uses 1/4" fasteners.
- 120 volt only.
- Bulbs not included.
- Use Perko Fig. 342 Medium Prefocus Bulbs.
- For use on vessels 20 meters to 50 meters in length.
- Overall height 11-1/2".
- Lens height 6-3/4".

Order No.	Mfg. No. / Description	Price
524656	(1150 GE1 GAL) Green Side, 2 Mile, 112-1/2° Visibility	$604.98 Q
524668	(1150 RE1 GAL) Red Side, 2 Mile, 112-1/2° Visibility	$604.98 Q
524682	(1151 E01 GAL) White Masthead , 5 Mile, 225° Visibility	$604.98 Q
524707	(1152 E01 GAL) White Stern, 2 Mile, 135° Visibility	$604.98 Q
524719	(1152 ME1 GAL) Yellow Towing, 2 Mile, 135° Visibility	$604.98 Q

- For use on vessels over 20 meters in length.
- Overall height 13-1/2".
- Lens height 7-1/2".

Order No.	Mfg. No. / Description	Price
524353	(1150 GE2 GAL) Green Side, 3 Mile, 112-1/2° Visibility	$764.98 Q
524366	(1150 RE2 GAL) Red Side, 3 Mile, 112-1/2° Visibility	$764.98 Q

Perko Fig. 1111 Flashing Yellow Light



- Sheet metal, preprimed galvanized steel.
- For use on vessels of any length.
- Medium prefocus socket.
- Watertight terminal tube for 16/3-SO cable.
- 2 mile visibility.
- Overall height 11-1/2", lens height 6-3/4".
- Visibility arc 225°.
- Flashes per minute: 50 - 70.
- 120 volt only.
- Bulb not included.
- To comply with Federal Requirements this light must use: 528286 (342 004 CLR) bulb or 528298 (342 RS4 CLR) bulb when a "Rough Service" bulb is required.
- Designed to meet Federal Requirements for Flashing Yellow 180° - 225° light for barges, canal boats, etc., that are being pushed ahead or towed along side of a tug boat. Refer to U.S. Inland Navigation Rules for details.

Order No.	Mfg. No. / Description	Price
524771	(1111 ME1 GAL)	$797.98 I
529909	(133) Spare Flasher Unit	$225.98 F

Julian A. McDermott Anchor Light



- Range: 1 nautical miles.
- Mount: Magnetic, Stand-alone.
- Light Source: High-powered LEDs.
- Material: High-Impact polycarbonate.
- Battery Life: 3 months, 6 months available.
- Weight: 4 lbs.

Order No.	Mfg. No. / Description	Price
453201	(ANCHOR-RR-DL) Yellow	$99.98 C
453213	(ANCHOR-RR-DL) Red	$121.98 C

©2014 Donovan Marine, Inc.

Pauluhn Lighting Pendant Mount Incandescent Fixture



- Cast copper free aluminum.
- Compact, one piece pendant mount design.
- Lamp holder: Medium base, high temperature PBT.
- Nickel plated copper screw shell.
- Clear glass globe.
- Length 8-3/4".
- 3/4" IPS.
- UL Marine and USCG Approved.
- 6" globe.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
686470	(767A) Incandescent Fixture, A-19, 100 watt lamp	$164.98 C

Pauluhn Lighting Wall Mount Incandescent Fixture



- Cast copper free aluminum.
- Lamp holder: Medium base, high temperature PBT.
- Nickel plated copper screw shell.
- Clear glass globe.
- Length 11".
- UL Marine and USCG Approved.
- 6" globe.
- Note: Bulb not included.

Order No.	Mfg. No. / Description	Price
686381	(707A) Incandescent Fixture, A-19, 100 watt lamp	$199.98 C

Hubbell Non-Metallic Vaportight Incandescent Fixture


398203



- Ceiling mount.
- UV resistant, gray, glass filled thermoplasticpolyester box, mounting adapters and globe guards.
- Excellent temperature operating range of -40° F (-40° C) to +150° C.
- Heat resistant glass globe withstands thermal shock.
- High strength protective globe guard.
- UL listed including UL 1571 and UL 595.
- Accepts up to 150 watt type A incandescent bulb.
- Note: Bulb not included.
- Includes: Fixture, mounting box, guard and heat resistant glass globe.

Order No.	Mfg. No. / Description	Price
398102	(NVX15GHGA) Ceiling Mount	$167.98 G
398203	(NVBA) Wall Mount Bracket	$43.98 G
398215	(NVGA) Replacement Guard	$53.98 G

Phoenix Non-Metallic Vaporproof Incandescent Fixtures



- Engineering-grade non-metallic, glass reinforced thermoplastic construction.
- Clear glass globe.
- UL listed.
- Meets standard 844 hazardous location Class I, Division 2.
- Meets standard 595 (Marine outside type).
- Meets standard 1570/1571 Wet location.
- USCG Approved.
- Accepts incandescent lamps up to 150 watts.
- Note: Bulb not included.
- 120/240 volt.

Order No.	Mfg. No. / Description	Price
603800	Ceiling Mount (VPCINC120GLC)	$148.98 I
603808	Wall Mount (VPWINC120GLC)	$191.98 I

6" Plastic Globes for Deck Light



- Prism, flat top cylinder.

Order No.	Mfg. No. / Description	Price
253411	(518) Clear	$20.98 F
253423	(518) Amber	$21.98 F



- Smooth, round top cylinder.

Order No.	Mfg. No. / Description	Price
686278	(507) Clear	$20.98 C
686280	(507) Amber	$21.98 C

Pauluhn Replacement 6" Guards

Order No.	Mfg. No. / Description	Price
686230	(INX1036A) Aluminum	$52.98 C
686242	(INX1036B) Brass	$74.98 C

Pauluhn 6" Glass Globes

Order No.	Mfg. No. / Description	Price
686266	(COAC60) Clear	$13.98 C
686329	(COAC62) Red	$60.98 C
686331	(COAC63) Green	$50.98 C
686343	(COAC65) Amber	$38.98 C

Pauluhn Medium Screw Replacement Bakelite Sockets

- Four hole model fits current Pauluhn lights.
- Three hole model fits old Pauluhn and some old Perko lights.

Order No.	Mfg. No. / Description	Price
686367	(INX4000) Four Hole	$24.98 C
537918	(INX4001) Three Hole	$24.98 C

McDermott Masthead Light



- Single head.
- For use on vessels from 20 to 50 meters in length.
- Lamp life up to 30,000 hours.
- Vibration proof.
- Weight 5 lbs.
- Height 10".

Order No.	Mfg. No. / Description	Price
454699	(TB5-MAST-GL35) Masthead Light Led 120 volt	$479.98 C
454698	(TB5LEDMAST12) Masthead Light Led 120 volt	$522.98 C

McDermott Marker Lights



- The McDermott BZLED Series Marker Lights are typically used as obstruction, loading, bridge and marker lights.
- They are UL listed 8N10, Class 1.
- Division 2.
- Group D for use in hazardous locations.
- Typical lamp life is 5 years.
- Uses one 6 volt spring type battery.
- Minimum visiblity 1 mile.

Order No.	Mfg. No. / Description	Price
453504	(BZLED6L6V04) Blue Light, No Magnetic	$155.98 B
453516	(BZLED6L6V04) Blue Light, Magnetic	$177.98 B
453528	(BZLED6L6V04) Red Light, Magnetic	$177.98 B
453530	(BZLED6L6V04) White Light, Magnetic	$177.98 B
453580	(BZBRACKET) Bracket for 453896	$14.98 B
453592	(BZBRACKETBOL) Bolt for 453900 Bracket	$2.98 B

McDermott Upgrade Heads Only



- Lens, LEDs and O-rings.
- Low voltage battery indicator.
- Virtually unbreakable Lexan lens.
- Built-in screens.
- Range: 3 miles.
- Lamp life: 3 - 5 years.

Order No.	Mfg. No. / Description	Price
453136	(BGLED-HEAD-FL) Amber	$265.98 C
453112	(BGLED-HEAD-STAR) Starboard	$265.98 C
453100	(BGLED-HEAD-PORT) Port	$265.98 C
453124	(BGLED-HEAD-STERN) Stern	$298.98 C

McDermott Tophat Marine Light



- Multi-purpose light with unlimited navigation applications.
- Autonomy - 10 nights without sun.
- Built in daylight switch - off at dawn, on at dusk.
- Charges even under cloudy conditions.
- Patented optics for maximum output.
- 100,000 hour life span.
- Meets IALA and U.S.C.G. COLREGS.

Order No.	Mfg. No. / Description	Price
453251	(TOPHAT-MAG-SW) Tophat Marine Light	$241.98 B

McDermott L.E.D. Certified Tugboat Navigation Lights



- For use on vessels from 20 to 50 meters in length.
- Certified to 72 COLREGS for inland/international.
- Meets UL1604 requirements for a range of 2 miles.
- Visibility 2 miles.
- 1 year warranty.
- 2 year guarantee.
- Tired of constantly replacing lamps!
- Eliminate Labor and Cost of Old Type Incandescent Lamps.
- 120 Volt

Order No.	Mfg. No. / Description	Price
454669	(TB2-STAR)	$339.98 C
454671	(TB2-PORT)	$339.98 C
454683	(TB2-STERN)	$339.98 C
454687	(TB2-266-TOW) Amber, 120V AC	$339.98 C

McDermott L.E.D. Certified Tugboat All-Around 360° Lights



454695


454697

- For use on vessels from 20 to 50 meters in length.
- Certified to 72 COLREGS for inland/international.
- Meets UL1604 requirements for a range of 2 miles.
- Visibility 2 miles.
- 1 year warranty.
- 2 year guarantee.
- Tired of constantly replacing lamps!
- Eliminate labor and cost of old type incandescent lamps.
- 120 volt

Order No.	Mfg. No. / Description	Price
454695	(TB2-RED)	$327.98 C
454697	(TB2-WHITE)	$327.98 C

McDermott "Tophat" Series Solar Marker Lights

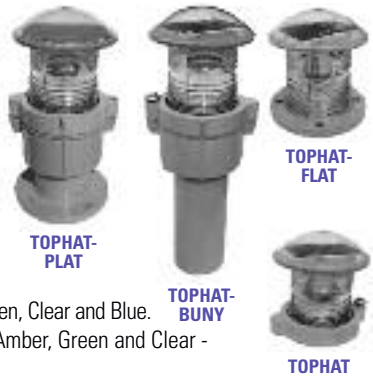

- Self-contained solar powered marker lights.
- Lamp assembly guaranteed for 3 years.
- Housing: Polycarbonate.
- Lens: Polycarbonate.
- Batteries: Rechargeable.
- Range: 1-1/2 miles.
- Colors available: Red, Amber, Green, Clear and Blue.
- *Flashrates available: For Red, Amber, Green and Clear - 10, 15, 24 and 30 FPM.
- For Red and Amber - 60 FPM. *Depending on your location.

Platform mount (TOPHAT-PLAT).
- This is a stand alone for flat mounting on docks, etc.

Mounts to any flat surface (TOPHAT-FLAT).
- Flat mount on restricted space such as on a float buoy.

Replacement tops for old buoy lights (TOPHAT).
- This unit replaces tops on our standard incandescent dry battery types.

Fits directly into 4" buoy pipes (TOPHAT-BUNY).
- For mounting directly into a buoy 4" schedule 40 pipe.

©2014 Donovan Marine, Inc.

McDermott Barge L.E.D. Navigation Lights



- Operates 6 nights on standard dry batteries.
- Operates 2 weeks on Alkaline spring batteries.
- Built-in screen.
- Polycarboante case & handle.
- Shuts off in daylight.
- Uses rechargeable or dry batteries.
- Lamp life: 3 - 6 years.
- All lights certified by USCG Approved laboratory.
- Meets all USCG Regulations for Navigation Lights.
- Kit includes: (1) Port, (1) starboard, (1) Amber and (3) separate chargers.

Order No.	Mfg. No. / Description	Price
452716	(BGLED888-KIT-FL-SEPCHG-PEEP) Barge Light Kit with Peep Light Lead	$1,610.98 C
452805	(BGLED888-KIT) Peep Barge Light Kit, No Battery	$1,198.98 C
452703	(BGLED888-PORT-MAG-PE) Port	POR
452829	(BGLED888-PORT-MAG-PE) Port, Explosion Proof	$366.98 C
452742	(BGLED888-STAR-MAG-PE) Starboard	$425.98 C
452831	(BGLED888-STAR-MAG-PE) Starboard, Explosion Proof	$366.98 C
452754	(BGLED888-STERN-MAG-PE) Stern	$458.98 C
452843	(BGLED888-STERN-MAG-PE) Stern, Explosion Proof	$366.98 C
452956	(BGLED888-FL-MAG-PEEP) Barge Light, Explosion Proof	$433.98 C
452867	(BGLED888-FL-MAG-PEEP) Barge Light, Explosion Proof	$366.98 C
452918	(BGLED888-STAR-MAG-PE) Starboard, Explosion Proof	$433.98 C
452906	(BGLED888-PORT-MAG-PE) Port, Explosion Proof	$433.98 C
452778	(BGLED888-FL-MAG-PEEP) Barge Light, Amber with Peep Light Lead, Batteries Included	$481.98 C
452754	(BGLED888-KIT-STERN) Stern Kit, Explosion Proof	458.98 C
452893	(BGLED888-KIT-FL-NOBATTEX) Barge Light Kit	$1,300.98 C
453782	(BP650L) Rechargeable Battery for 888 Series Barge Light	$37.98 C
453845	(BGACHG121888) Separate Charger	$127.98 C
453870	(BGLECONPLATE) Battery Plate for 888 Light	$32.98 C

McDermott Barge L.E.D. Navigation Lights



- Magnetic mount.
- High impact case.
- Unbreakable lens.
- Built-in carry handle.
- Operates 10 nights on rechargeable battery.
- Certified by USCG, meets all USCG Regulations for 3 mile lights.
- Light kit includes: (1) port, (1) starboard, (1) amber and a multicharger.

Order No.	Mfg. No. / Description	Price
452487	(BGLED-CASE-KIT-FL) Light Kit	$2,221.98 C
452552	(BGLED-CASE-FL-MAG-PE) Amber	$587.98 C
452538	(BGLED-CASE-STERN-MAG-PE) Stern	$654.98 C
452526	(BGLED-CASE-STAR-MAG-PE) Starboard	$609.98 C
452514	(BGLED-CASE-PORT-MAG-PE) Port	$609.98 C
454126	(BGLT-CHG-3) Multicharger	$411.98 C

McDermott Accessories

Order No.	Mfg. No. / Description	Price
452471	(BGLEDCASEKIT)	$2,167.98 C
452665	(BGLEDCASESOL)	$722.98 C
452730	(BGLED888PORT)	$425.98 C
452791	(BGLEDCASEKIT)	$1,100.98 C
453262	(TOPHATMAGRS)	$253.98 B
453471	(BZLED6L6V04)	$142.98 B
453473	(BZLED6L6V04)	$142.98 B
454912	(TBFLD50WLED)	$233.98 C
454919	(TBFLD80WLED)	$444.98 C
454924	(TBFLD100WLED)	$555.98 C
454936	(TBFLD200WLED)	$1,001.98 C
454152	(BGBP1265) Rechargable Battery for Navigation Lights	$49.98 C

McDermott Solar L.E.D. Barge Navigation Lights



- Self-contained solar powered.
- No more recharging navigation lights.
- Magnetic mount.
- High impact polycarboante case.
- Unbreakable lens.
- Built-in carry handle.
- Lamp life: 4 years (steady).
- Meets all USCG Regulations for 3 mile lights.
- Kit includes: (1) Port, (1) starboard and (1) amber.

Order No.	Mfg. No. / Description	Price
452615	(BGLED-SOL-KIT-FL-MAG-5W) Light Kit	$2,266.98 C
452641	(BGLED-SOL-STERN-MAG-PE) Stern	$722.98 C
452639	(BGLED-SOL-STAR-MAG-PE) Starboard	$722.98 C
452627	(BGLED-SOL-PORT-MAG-PE) Port	$722.98 C

Barge Lights

Order No.	Mfg. No. / Description	Price
273209	(98-16200) Amber	$54.98 B
273211	(98-16603) Clear	$54.98 B
273223	(98-16604) Red	$54.98 B
273235	(9816605) Green	$54.98 B

L.E.D. Barge Lights with Magnets

Order No.	Mfg. No. / Description	Price
273247	(98-23420LM) Amber	$769.98 B
273259	(98-23804LM) Red	$617.98 B
273261	(98-23805LM) Green	$611.98 B

McDermott Portable L.E.D. Floodlights



- Battery powered.
- High-impact polycarbonate.
- With 150 lb. magnetic pull base and clevis head.
- Ideal for welding or painting.
- No more running an AC line cord for floodlights and also not having to stop to change burned out light bulbs.
- Battery life: 32 hours on standard alkaline.
- Light output: Over 2,000 candlepower.
- Lamp life: 20,000 hours.

Order No.	Mfg. No. / Description	Price
453693	(BGBZ-FLOOD-20.5) 20.5"	$387.98 B
453706	(BGBZ-FLOOD-26.5) 26.5"	$387.98 B

Archway LED Barge Light with Magnets

Order No.	Mfg. No. / Description	Price
273259	(98-23804LM) Red	$617.98 B

Reva Intl. LTD

Order No.	Mfg. No. / Description	Price
436510	(214-72025C)	$31.98 F
436522	(214-72025G)	$31.98 F


JDS Safety Lights Solar Barge Navigation Lights

- Autonomy -12 nights without sun, Solar Panel Monocrystalline: 4v 0.5w.
- 125,000 hour life span.
- Meets IALA, and U.S.C.G. COLREGS.
- Material: Poly Carbonate, Battery: Aluminum Iron Phophate Battery AA300MAH, Luminous Mode: Constant Type/Varying Type, Light Source: Super luminosity LED, LED Quality: 6 LED in the middle, 1 LED super bright, Waterproof Grade: IP>67, Visibility: 3 Kilometers.

Order No.	Mfg. No. / Description	Product Size	Price
454811	(381520) Constant White	115, 139 mm	$257.98 E
454815	(38152B) Blinking White	115, 139 mm	$257.98 E
454819	(381521) Constant Yellow	115, 139 mm	$257.98 E

McDermott Replacement Parts

Order No.	Mfg. No. / Description	Price
454138	(BGCH3-4) Transformer for Triple Charger	POR
454380	(BGCBFL) Complete Lamp Assembly, Lamp and Socket	$54.98 B
454314	(BGCH3-5-S) Charger Module for Charger Station	$58.98 B
453605	(BGCMPEEP) Control Module for Flashing with Peep Light Extension	$87.98 B
453617	(BGCMPE) Control Module Red/Green/Clear with Photoelectric Control	$76.98 B
453629	(BGCMFLPE) Control Module for Flashing Amber Only with Photoelectric Control	$77.98 B
454405	(BGINGREEN) Green Insert Filter for Starboard Lights	$21.98 B
454429	(BGCBSTAR) Complete Lamp Assembly for Starboard Lights	$65.98 B
454431	(BGCBPORT) Complete Lamp Assembly for Port Lights	$65.98 B
454458	(BGLENSBASE) Black Base for Mounting Lens on Barge Light	$23.98 B
454491	(BGLESTERN) Clear Lens with Internal Screen for Stern Light	$53.98 B
454530	(BGPE) Metal Cased Photocell Element	$21.98 B
454607	(BGMAGAS) Magnet Assembly	$24.98 B
454542	(BGSW) Toggle Switch for Barge Lights	$10.98 B
454556	(BGCASE) Case Only	$123.98 B
454568	(BGCANNON) Cannon Plug with 10" Cable	$26.98 B
454619	(BGCPRM) 6" Wire with Polarized Plug	$7.98 B
454631	(BGCPWM) 6" Wire with Rubber Polarized Plug	$7.98 B
453767	(BGBP12180) Battery for L.E.D. Solas Lights	$110.98 B
452499	(BGLEDCASEKIT) FLPEEP Barge Light	$2,340.98 C
219460	(89) Replacement 12 volt Bulb, .58 amps	$0.98 I

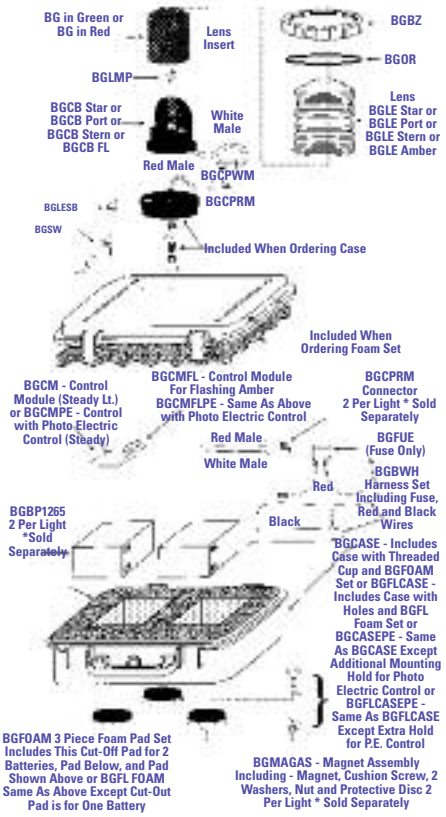


McDermott Platform Lights



- For use on barges where the 12V DC is provided from an external source, such as a battery pack.
- This allows for extended periods between recharging.
- These lights are also used to mark obstruction markers, navigation aids and dock lights.
- The high-impact, faderesistant, polycarbonate lens and watertight locking O-ring collar are designed to withstand years of marine service.
- Four 3/8" holes in the base allow for easy mounting to any flat surface.
- Meets all USCG Regulations.

Order No.	Mfg. No. / Description	Price
454125	(BGLT-89-STERN-PLAT-PE) Stern White Light	$254.98 C

McDermott Anchor Lights



- Expendable white anchor light designed for use on barges.
- Unbreakable screwon lens for easy bulb replacement.
- Unit straps on top of any 6 volt spring terminal battery (NEDA-908).
- Runs all night on one battery and can be reused or left behind during fleeting operations.
- Compact size, several will fit in a coat pocket.
- 1 mile visibility.
- Meets all USCG Regulations.

Order No.	Mfg. No. / Description	Price
453162	(BGANCLT-503-266-SP) Clear Lens	$29.98 C
453174	(BGANCLT-503-266-SP) Red Lens	$37.98 C

McDermott Peep Lights



- The Peep Light is a small, inexpensive, cylindrical blue light that attaches to the front mast of a barge using a velcro strap.
- The unit draws its power from a standard marine battery.
- 25' Lead.

Order No.	Mfg. No. / Description	Price
453302	(PEEP-LIGHT-25FT-1408-CANNON)	$89.98 C
453314	Peep Light for L.E.D. Barge Light	$137.98 C

McDermott DriftLight



- A uniquely designed all LED light for marking fish gillnets or lobster traps.
- Also used as a 1 mile anchor light.
- Waterproof, polycarbonate black case.
- Flash - 30 flashes per minute, range - 1 mile, steady mode - anchor light.
- Built in day off switch.
- Snap on mount bracket.
- Uses (4) AA batteries.
- Will operate every night for 4 weeks on (4) AA batteries.
- Includes: Snap out pole adaptor.

Order No.	Mfg. No. / Description	Price
454649	(DRIFTLIGHT-P-W) White	$91.98 F

DriftLight kit.

- This kit includes: 454649 DriftLight - white and 4' pole with float collar.

Order No.	Mfg. No. / Description	Price
454653	(DRIFTLIGHT-POL) White	$154.98 F

©2014 Donovan Marine, Inc.

Perko 800 Series Solar-Ray® Searchlights

- Heavy gauge brass and cast bronze.
- White Perko • Kote finish.
- 12, 24, 32 or 120 volts.
- All models feature: Halo deflectors, parabolic glass mirror reflectors for maximum light output and ventilation covers for quick dissipation of heat to help prolong bulb life.
- Hinged front doors have quick release stainless steel latches.
- Weatherproof construction interior finished in flat black.
- Lower vent cover on 12" and 14" sizes.
- Slide-lock focusing device behind lower vent.
- Heavy duty yoke mounting.
- Standard pedestal base diameter: 7".
- 10" lights are standard with 2-pin prefocus socket.
- 12" and 14" lights are standard with medium prefocus socket.
- Bulbs are not included and must be ordered separately.

Special Handling May Apply

Perko Fig. 885 Wheel or Lever/Gear Control Solar-Ray® Searchlights



527247 527208

- Wheel Control Assemblies. Turn upper wheel for horizontal position. Turn lower wheel for vertical position. Distance between wheels: 2". Maximum ceiling thickness: 3".
- Lever/Gear Control Assemblies. Aim handle for horizontal position. Twist handle for vertical position. Maximum ceiling thickness: 3-1/2".
- Order head and wheel or lever/gear control assemblies separately.

Order No.	Mfg. No. / Description	Price
526876	(885 0P1 WHT) 10" Head Assembly	$1,151.98 F
526888	(885 0P2 WHT) 12" Head Assembly	$1,502.98 F
526890	(885 0P3 WHT) 14" Head Assembly	$2,084.98 F
527208	(852 000) Wheel Control Assembly, 7-1/2" L	$377.98 F
527211	(852 0A0) Wheel Control Assembly, 14-1/2" L	$435.98 F
527223	(852 0B0) Wheel Control Assembly, 21-1/2" L	$487.98 F
527234	(852 0C0) Wheel Control Assembly, 28-1/2" L	$552.98 F
527247	(969 0C0) Lever/Gear Assembly, 29-1/2" L	$1,232.98 F

Perko Fig. 883 Deck Control Solar-Ray® Searchlights



- Equipped with handles on the rear cover for positioning.
- These searchlights cannot be fitted with controls.

Order No.	Mfg. No. / Description	Price
526802	(883 0P1 WHT) 10", Height Overall 20-1/8"	$1,380.98 F
526814	(883 0P2 WHT) 12", Height Overall 22-1/8"	$1,634.98 F
530433	(883 000 99A) Catch Kit	$58.98 F

Perko Spare Sockets for 800 Series Solar-Ray® Searchlights

Order No.	Mfg. No. / Description	Price
530458	(894) Medium Screw Socket, Code B	$25.98 F
530469	(895) Medium Prefocus Socket, Code E	$189.98 F
530471	(897) Mogul Screw Socket, Code D	$43.98 F
530483	(899) 2-Pin Prefocus Socket, Codes F, G, H & I	$46.98 F

Perko Fig. 884 Lever Control Solar-Ray® Searchlights



527108

- Aim handle for horizontal position.
- Move handle up and down for vertical position.
- Maximum ceiling thickness: 4-1/2".
- Order head and lever control assemblies separately.

Order No.	Mfg. No. / Description	Price
526838	(884 0P1 WHT) 10" Head Assembly	$1,208.98 F
526840	(884 0P2 WHT) 12" Head Assembly	$1,574.98 F
526852	(884 0P3 WHT) 14" Head Assembly	$2,088.98 F
527108	(851 000) Lever Control Assembly, 8-1/2" L	$317.98 F
527119	(851 0A0) Lever Control Assembly, 15-1/2" L	$377.98 F
527121	(851 0B0) Lever Control Assembly, 22-1/2" L	$435.98 F
527132	(851 0C0) Lever Control Assembly, 29-1/2" L	$487.98 F

Perko Spare Parts for Fig. 851 Lever Control Assemblies

Order No.	Mfg. No. / Description	Price
530015	(21) Ceiling Lock	$109.98 F
530027	(22) Lock Knob	$28.98 F
530053	(25) Upper Bushing	$25.98 F
530077	(27) O-Ring Seal	$18.98 F
530089	(28) Lower Bushing	$25.98 F
530091	(29) Handle Shaft	$32.98 F
530104	(30) Handle	$32.98 F
530116	(31) Fulcrum Collar	$31.98 F
530128	(32) Fulcrum Bar	$28.98 F
530142	(55) Fork Seal Bushing	$25.98 F
530154	(56) Base Seal	$29.98 F

See next page for spare sockets, parts and bulbs for Perko 800 Series Solar-Ray® Searchlights

Perko Spare Parts for 800 Series Solar-Ray® Searchlights

Order No.	Mfg. No. / Description	Price
543202	(890 001) Spare Reflector for 10" Searchlights	$817.98 D
543214	(890 002) Spare Reflector for 12" Searchlights	$868.98 D
543226	(890 003) Spare Reflector for 14" Searchlights	$1,906.98 D
530178	(910) Spare Retaining Clips	$57.98 F

Bulb & Socket Information for Perko 800 Series Solar-Ray® Searchlights

- Bulbs are not included in lights.
- To give good results, the bulb and reflector must be perfectly compatible; therefore be sure to specify the stock number of the bulb desired.
- Peak candlepower is exceedingly sensitive to many factors, (i.e. a light source out of focus by 1/32 inch, under-voltage of only 4% or differences between bulb manufactures) which can cause reduction of range of up to 20%.

Incandescent Bulb Recommendations

DMI #	MFG #	Voltage	Wattage	Socket Type	Socket Code Letter	For Searchlight Size	Rated* Life Hours	Mfg. Bulb Code
	806	32	500	Medium Screw	B	10", 12", 14"	50	DLT
219887	807	120	500	Medium Prefocus	E	10", 12", 14", 19"	25	CZX/DAB
	809	120	750	Medium Prefocus	E	12", 14", 19"	25	DPJ
	837	120	750	Medium Prefocus	E	12", 14", 19"	200	DDY
	810	120	1,000	Medium Prefocus	E	12", 14", 19"	25	DRS
	811	120	1,000	Mogul Screw	D	12", 14"	50	DRW
219989	860	230	1,000	Medium Prefocus	E	12", 14", 19"	50	DWK

"Quartz" Tungsten Halogen Bulb Recommendations

DMI #	MFG #	Voltage	Wattage	Socket Type	Socket Code Letter	For Searchlight Size	Rated* Life Hours	Mfg. Bulb Code
220070	816	12	100	2-Pin Prefocus	F	10", 12", 14"	50	FDT
	836	24	150	2-Pin Prefocus	G	10", 12", 14"	50	DZE/FDS
219825	844	120	500	Medium Prefocus	E	10", 12", 14", 19"	500	BTM
220020	820	120	600	2-Pin Prefocus	I	10", 12", 14"	75	DYS
219837	845	120	750	Medium Prefocus	E	12", 14", 19"	200	BTP
219851	839	120	900	2-Pin Prefocus	K	12", 14"	75	BVA
219849	846	120	1,000	Medium Prefocus	E	12", 14", 19"	200	BTR

- Electric bulbs are not returnable unless the fault is ours.


*Note: These are the "Rated Average Laboratory Life in Hours" of the Bulb Manufacturer. No guarantee to the time indicated.

Electric Socket and Support Stand Assemblies

- Perko Solar-Ray Searchlights include a socket and support stand based on the bulb or socket information given when ordering.
- The following chart makes it possible for distributors or dealers to order and stock different styles of these assemblies separately for field conversion, thereby covering a large variety of voltage and candlepower requirements with a minimum of inventory. (Donovan numbers are bold).



Medium Screw Code B



2-Pin Prefocus Code K



Mogul Screw Code D



Mogul Prefocus Code L and M



2-Pin Prefocus Code F, G, H and I



Medium Prefocus Code E

Order No.	Mfg. No. / Description	Price
530332	(0873 001) For 10" Searchlights	**$195.98** F
530344	(0873 002) For 12" Searchlights	**$195.98** F
530356	(0873 003) For 14" Searchlights	**$195.98** F
530421	(0879 001) 2-Pin Prefocus for 10" Searchlights	**$159.98** F

Socket Type	Socket Code	For 10" Searchlights	Height Stand	For 12" Searchlights	Height Stand	For 14" Searchlights	Height Stand
Medium Screw	B	872 001	1-1/4"	872 002	2-1/4"	872 003	3-1/4"
Medium Prefocus	E	**530332** (873 001)	1-5/16"	**530344** (873 002)	1-15/16"	**530356** (873 003)	2-15/16"
Mogul Screw	D			874 002	7/16"	874 003	1-1/4"
2-Pin Prefocus (12 volt)	F	875 001	3-1/2"	875 002	4-1/2"	875 003	5-1/2"
2-Pin Prefocus (24 volt)	G	876 001	3-1/4"	876 002	4-1/4"	876 003	5-1/4"
2-Pin Prefocus (32 volt)	H	878 001	3-1/4"	878 002	4-1/4"	878 003	5-1/4"
2-Pin Prefocus (600 watt)	I	**530421** (879 001)	3-1/8"	879 002	4-1/8"	879 003	5-1/8"
2-Pin Prefocus (900 watt)	K			880 002	3-13/16"	880 003	4-13/16"

©2014 Donovan Marine, Inc.

Perko Distant Electric Control Solar-Ray Searchlight - 887 Series



Special Handling May Apply

- All aluminum with White Perko
- Kote finish.
- Searchlight head assembly comes with Distant Electric Control Base.
- For 12, 24 and 120 volt.
- Remote electric.
- Joystick type controller with variable speed control for both horizontal and vertical positioning.
- Nominal drum diameter: 14".
- Length Drum: 17".

Call for Prices and Availability

Suez Canal Searchlight - 2,000W/3,000W Halogen

Special Handling May Apply



- The searchlight is made of seawater resistant aluminum finished in white corrocoat polyester.
- It is gas tight, pressure tested and equipped with a safety valve.
- A 1/4" rubber hose may be connected to the escape valve transferring hot air to a gas-free zone.
- The searchlight drum weighs only 37 kg which simplifies installation.
- When not in use, it can easily be removed to a bow in a storage room by one person.
- Handles for lifting are provided for this purpose.
- A protection cover can also be attached to the front glass to prevent damages.

Manufactured by Norselight

Price On Request

Perko 19" Solar-Ray® Searchlight - 1900 Series





526650



526674

Special Handling May Apply

- These are designed and built with the commercial user in mind where maximum size and brilliance counts.
- These units are constructed of marine aluminum with heavy duty castings and heavy gauge reinforced bodies for extra durability.
- White Perko • Kote finish.
- Features: Halo deflectors, parabolic glass mirror reflectors and ventilation covers to extend bulb life.
- Hinged front doors have quick release stainless steel latches to provide easy access for bulb replacement.
- Solar-Ray searchlight includes a socket, support stand based on the bulb or socket information given when ordering.
- The chart below makes it possible to make your decision.

Order No.	Mfg. No. / Description	Price
526600	(1902 004 WHT) Searchlight Head Only	$2,548.98 F
526650	(1921 000 WHT) 70" Lever/Gear Control Only	$1,679.98 F
526674	(1922 000 WHT) 70" Wheel Control Only	$1,673.98 F
543238	(890 004) Spare Reflector	$2,821.98 D
530229	(905) Spare Pinion Gear	$148.98 F

Socket Type	Socket Code	Socket & Stand Fig. #	Height Stand
Medium Screw	B	872 004	5-3/4"
Medium Prefocus	E	873 004	5-7/16"
Mogul Prefocus (1,500 watt)	L	1930 004	3-5/8"
Mogul Prefocus (1,000 & 2,000 watt)	M	1931 004	3-1/8"
2-Pin Prefocus (900 watt)	K	880 004	7-5/16"

The Carlisle & Finch Co. 500 Watt Xenon Arc Searchlights



Manual Control.

- Drum-size nominal 15".
- 45 Million beam candlepower.
- Nominal 1 degree beam collimation.
- Remote electric beam-size focus (1 to 15 degrees).
- External manual beam-size focus knob (provides back-up if focus motor fails).
- Precision electroformed deep-dish reflector made of bullet-resistant nickel with polished rhodium finish.
- Rugged marine aluminum and stainless steel construction. (Optional brass with sparkling chrome finish for yachts).
- Voltages: 115VAC.
- Aiming: Remote levergear or local handle.
- Safety power cut-off switches on searchlight door and power supply.
- Scratch-resistant and salt-resistant powder coat finish.
- Long-life warranted xenon lamp.
- Sealed weatherproof drum.
- Exceeds 385 degree horizontal rotation (with unique sliding stop design).

Remote Electric Control units have all the features listed above and also the following.

- "Proportional-Speed" joystick provides aiming and speed control with single-hand.
- Motorized rugged cast base with horizontal and vertical clutch assemblies and ball bearings contained in stainless steel races.
- Exceeds 385 degrees horizontal rotation (with unique sliding stop design).
- Fast speed searches at 30 degrees per second.
- Single station or multiple stations.
- Indoor and outdoor weatherproof control stations.
- Optional anti-icing heater circuitry in base, rack and trunnions.
- Optional digital azimuth indicator.
- Optional manual back-up (in case of motor failure).

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
275304	(X9396LG-RF) Head Only	$7,773.00 A
275328	(4441X-RF) Control Station	$300.00 A
275405	(4198PS-1) Power Supply	$2,695.00 A

How to Order Searchlights

- Specify size searchlight, type control, type base, type drum, type finish, type lampholder, and give code word or catalog number.
- Give ordering code and volts of lamp.
- Specify length of control (measured from bottom of base to centerline of lever or upper wheel) if other than the standard dimensions shown on the dimension drawings.
- Specify pedestal height (measured from bottom of base to centerline of drum) if different from the standard 48 inches.
- Example: 12" searchlights, lever control, standard base, vented drum, enamel finish, medium prefocus lampholder, code RECITE-E2. Special length control 22" base to centerline lever. Two lamps code 54889-0 120 volts.
- To designate the specific lampholder desired add one of the following suffixes to the code word or catalog number:
- Medium Screw Lampholder –1
- Medium Prefocus Lampholder –2
- Mogul Screw Lampholder –3
- Mogul Bipost Lampholder –4
- 2-Pin Prefocus Lampholder –5

The Carlisle & Finch Co. 1.0kw and 2.5kw Xenon Arc Searchlights



Manual Control.

- Drum-size nominal 19".
- 80 Million (1.0kw) and 150 (2.5kw) beam candlepower.
- Nominal 1-degree beam spread collimation.
- Remote electric beam-size focus (1 to 15 degrees).
- External manual beam-size focus knob (provides back-up if focus motor fails).
- Precision electroformed deep-dish reflector made of bullet-resistant nickel with polished rhodium finish.
- Rugged marine aluminum and stainless steel construction.
- Voltages: 3-phrase 208/240 VAC, 380 VAC, 480 VAC or 575 VAC.
- Aiming: Remote lever-gear or local handle.
- Searchlight door interlock switch shuts off power to system.
- Scratch-resistant and salt-resistant powder coat finish.
- Long-life warranted xenon lamp.
- Sealed weatherproof drum.
- Exceeds 385 degree horizontal rotation (with unique sliding-stop design).

Remote Electric Control units have all the features listed above and also the following.

- Motorized rugged cast base with horizontal and vertical clutch.
- Assemblies and ball bearings contained in stainless steel races.
- Exceeds 380 degrees horizontal rotation.
- 8-position joystick provides simultaneous vertical and horizontal movement.
- Speed control dial changes beam speed from 0 to 27 degrees per second.
- Single station or multiple stations.
- Indoor and outdoor weatherproof control stations.
- Optional anti-icing heater circuitry in base, rack and trunnions.
- Optional digital azimuth indicator.
- Optional manual back-up (in case of motor failure).

Special Handling May Apply


Order No.	Mfg. No. / Description	Price
275417	(XE9664LG-RF) Head Only	$10,236.50 A
275431	(9754X-RF) Control Station	$370.00 A
275429	(5275PS2-1) Power Supply	$4,525.00 A

Accessories and Parts

Description	10" Scht. Part #	12" Scht. Part #	15" Scht. Part #
Cover, Protective	SL3322A	SL3322A	SL3322B
Cover Glass	SL62	SL102	SL1085
Gasket, Base, DMC	SL3318B	SL3318B	SL3318B
Gasket, Base, High	SL3318B	SL3318B	SL3318B
Gasket, Base, Pedestal	SL3318C	SL3318C	SL3318C
Gasket, Base, Standard	SL3318A	SL3318B	SL3318B
Lampholder, Med. Pref. (273918)	SL1250C	SL1250C	SL1250C
Lampholder, Med. Screw	SL1087-1	SL1087-1	SL1087-1
Lampholder, Mogul Bipost			FE132X
Lampholder, Mogul Screw (274302)		SL96X	SL96X
Lampholder, 2-Pin Pref. (273526)	8704	8704	8704
Reflector	SL1083A (273831)	SL107 (273829)	CL14 (273843)

©2014 Donovan Marine, Inc.

The Carlisle & Finch Co. 19" Incandescent Halogen Searchlights

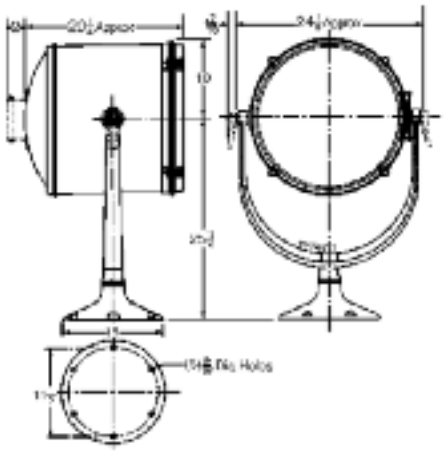



- Beam characteristics of 19" incandescent searchlights with various lamps.

Price On Request

Special Handling May Apply

Lamp Data / Beam Characteristics

Watts	Volts	Bulb Size	Base	Filament	Service	Average Hours Life	Code	Peak Beam Candlepower	Horizontal Spread	Vertical Spread
750	120	T20	Medium Prefocus	C13D	Projection	25	DPJ	4,260,000	3.5°	3.6°
1,000	120	T20	Mogul Bipost	C13D	Projection	25	DRE	4,200,000	4.5°	4.2°
1,000	120	T20	Mogul Prefocus	C13D	Projection	25	DSB	4,410,000	4.5°	4.2°
1,000	120	T20	Mogul Screw	C13D	Projection	25	DRW	4,410,000	4.5°	4.2°
1,000	120	G40	Mogul Screw	C13D	Sptit	25	1M/1M/G40/1	3,200,000	4.4°	5.4°
1,000	120		3 Contact	C13	Flood	25		475,000	15°	15°
1,000	120	T20	Medium Prefocus	C13D	Projection	200	1M/T20P/SP	2,680,000	5°	5°
1,000	120	T20	Medium Prefocus	C13D	Projection	25	DRS	4,410,000	4°	4.3°
1,000	120	T20	Mogul Bipost	C13	Aero	500	1M/T20BP	2,381,000	5.4°	5.4°
1,000	120	T20	Mogul Prefocus	C13	Aero	500	1M/20P/AB	1,750,000	5.4°	5.4°
1,000	120	T20	Mogul Prefocus	C13	Projection	50	DPW	2,700,000	5.6°	5.2°
1,000	120	T20	Mogul Screw	C13	Aero	500	1M/T20AB	1,750,000	5.4°	5.4°
1,000	120	T20	Mogul Screw	C13	Projection	50	DPT	2,700,000	5.6°	5.2°
1,000	120	T20	Medium Prefocus	C13	Projection	50	DRC	2,700,000	3.3°	5.2°
1,500	120	T20	Mogul Bipost	C13D	Projection	25	DTS	4,750,000	4.4°	4.5°
1,500	120	T20	Mogul Prefocus	C13D	Projection	25	DTJ	4,750,000	4.4°	4.5°
1,500	120	G40	Mogul Prefocus	C5	Sptit	200	1500G40/15	1,750,000	10°	7°
1,500	120	G40	Mogul Screw	C5	Sptit	200	1500G40/10	1,750,000	10°	7°
2,000	120	G48	Mogul Bipost	C13	Sptit	200	2M/G48/17	2,750,000	7.4°	6.5°

The Carlisle & Finch Co. 10", 12" and 15" All Brass Incandescent Halogen Searchlights

Special Handling May Apply

- Searchlight lamp data.

DMI #	Ref.	Code	watts	volts	Bulb Size	Base	Description	Filament	Average Hrs. Life	10" Scht.	12" Scht.	15" Scht.
220070	21.5	FDT	100	12	T4	2-Pin Prefocus	Tungsten Halogen	C6	50	765,000	1,170,000	1,750,000
	23.01	FDS	150	24	T4	2-Pin Prefocus	Tungsten Halogen	C6	500	935,000	1,380,000	2,030,000
	35	CRX	300	32	T12	Medium Screw	Projection	C13	50	417,000	705,000	1,110,000
219825	46.5	BTM	500	120	T6	Medium Prefocus	Tungsten Halogen	C13D	100	950,000	1,160,000	2,080,000
219887	47	CZX	500	120	T10	Medium Prefocus	Projection	C13D	25	900,000	1,170,000	
	49	DLY	500	32	T20	Medium Prefocus	Projection	C13	50	630,000	750,000	
528806	50	DLT	500	32	T20	Medium Screw	Projection	C13	50	630,000	750,000	
	51	DMX	500	120	T20	Medium Prefocus	Projection	C13	50	475,000	780,000	
	52	DMS	500	120	T20	Medium Screw	Projection	C13	50	475,000	780,000	
220020	53.8	DYS	600	120	G7	2-Pin Prefocus	Tungsten Halogen	CC6	75	**781,000	1,130,000	1,840,000
219899	54.6	DCX	750	120	T20	Medium Screw	Tungsten Halogen	C13D	500	Not Used	1,520,000	2,820,000
	58	DPJ	750	120	T20	Medium Prefocus	Projection	C13D	25	Not Used	1,360,000	3,280,000

- Lamps below to be used in vented drums only.

DMI #	Ref.	Code	watts	volts	Bulb Size	Base	Description	Filament	Average Hrs. Life	10" Scht.	12" Scht.	15" Scht.
219849	68.06	BTR	1,000	120	T7	Medium Prefocus	Tungsten Halogen	C13D	200	Not Used	1,520,000	2,820,000
	70	DRS	1,000	120	T20	Medium Prefocus	Projection	C13D	25	Not Used	1,650,000	3,280,000
	80	DRW	1,000	120	T20	Medium Screw	Projection	C13D	25	Not Used	1,650,000	3,130,000


* These lamp manufacturer's figures are relative only. Individual lamps may vary considerably.
** Intermittent duty only (one hour or less).

The Carlisle & Finch Co. Searchlight Selection Table

Type Control	Type Base	Type Drum	Enamel Finish (Scht. Code Word)	Polished Finish (Scht. Code Word)	Chromium Finish (Scht. Code Word)	Net Wt.	Shipping Wt.
10 Inch							
Local	Standard	Non Vented	RAIN-E	RAIN	CRAIN	15 lbs.	21 lbs.
Local	High	Non Vented	ROSE-E	ROSE	CROSE	22 lbs.	28 lbs.
Local	Pedestal	Non Vented	RAJAH-E	RAJAH	CRAJAH	29 lbs.	59 lbs.
Lever	Standard	Non Vented	REDAN-E	REDAN	CREDAN	19 lbs.	25 lbs.
Lever	High	Non Vented	REFORM-E	REFORM	CREFORM	27 lbs.	33 lbs.
Lever	Pedestal	Non Vented	10SL1624XE	10SL1624X	10SL1624XC	34 lbs.	55 lbs.
Lever-Gear	Standard	Non Vented	10SL8425E	10SL8425P	10SL8425C	22 lbs.	28 lbs.
Lever-Gear	High	Non Vented	10SL8426E	10SL8426P	10SL8426C	30 lbs.	36 lbs.
Lever-Gear	Pedestal	Non Vented	10SL8427E	10SL8427P	10SL8427P	37 lbs.	58 lbs.
Wheel	Standard	Non Vented	RANK-E	RANK	CRANK	19 lbs.	25 lbs.
Wheel	High	Non Vented	ROPE-E	ROPE	CROPE	27 lbs.	33 lbs.
Wheel	Pedestal	Non Vented	10SL1620XE	10SL1620X	10SL1620XC	37 lbs.	55 lbs.
DMC	Standard	Non Vented	10SL200E	10SL200P	10SL200C	32 lbs.	53 lbs.
12 Inch							
Local	Standard	Non Vented	RAKE-E	RAKE	CRAKE	22 lbs.	31 lbs.
		Vented	RATE-E	RATE	CRATE	22 lbs.	31 lbs.
Local	High	Non Vented	ROME-E	ROME	CROME	27 lbs.	36 lbs.
		Vented	RUN-E	RUN	CRUN	27 lbs.	36 lbs.
Local	Pedestal	Non Vented	RETARD-E	RETARD	CRETARD	34 lbs.	64 lbs.
		Vented	12SL1648XE	12SL1648X	12SL1648XC	34 lbs.	64 lbs.
Lever	Standard	Non Vented	REDEEM-E	REDEEM	CREDEEM	26 lbs.	35 lbs.
		Vented	RECITE-E	RECITE	CRECITE	26 lbs.	35 lbs.
Lever	High	Non Vented	REFUGE-E	REFUGE	CREFUGE	32 lbs.	41 lbs.
		Vented	RESIN-E	RESIN	CRESIN	32 lbs.	41 lbs.
Lever	Pedestal	Non Vented	12SL1625XE	12SL1625X	12SL1625XC	39 lbs.	60 lbs.
		Vented	12SL1650XE	12SL1650X	12SL1650XC	39 lbs.	60 lbs.
Lever-Gear	Standard	Non Vented	12SL8186E	12SL8186P	12SL8186C	29 lbs.	38 lbs.
		Vented	12SL8186VE	12SL8186VP	12SL8186VC	29 lbs.	38 lbs.
Lever-Gear	High	Non Vented	12SL8410E	12SL8410P	12SL8410C	35 lbs.	44 lbs.
		Vented	12SL8410VE	12SL8410VP	12SL8410VC	35 lbs.	44 lbs.
Lever-Gear	Pedestal	Non Vented	12SL8428E	12SL8428P	12SL8428C	42 lbs.	63 lbs.
		Vented	12SL8428VE	12SL8428VP	12SL8428VC	42 lbs.	63 lbs.
Wheel	Standard	Non Vented	RASP-E	RASP	CRASP	26 lbs.	35 lbs.
		Vented	REAR-E	REAR	CREAR	26 lbs.	35 lbs.
Wheel	High	Non Vented	RUSE-E	RUSE	CRUSE	32 lbs.	41 lbs.
		Vented	RIPE-E	RIPE	CRIPE	32 lbs.	41 lbs.
Wheel	Pedestal	Non Vented	12SL1621XE	12SL1621X	12SL1621XC	39 lbs.	60 lbs.
		Vented	12SL1649XE	12SL1649X	12SL1649XC	39 lbs.	60 lbs.
DMC	Standard	Non Vented	12SL201E	12SL201P	12SL201C	37 lbs.	58 lbs.
		Vented	12SL203E	12SL203P	12SL203C	37 lbs.	58 lbs.
15 Inch							
Local	Standard	Non Vented	REDGUM-E	REDGUM	CREDGUM	39 lbs.	51 lbs.
		Vented	REDGUM-VE	REDGUM-V	CREDGUM-V	39 lbs.	51 lbs.
Local	High	Non Vented	REEL-E	REEL	CREEL	44 lbs.	56 lbs.
		Vented	REEL-VE	REEL-V	CREEL-V	44 lbs.	56 lbs.
Local	Pedestal	Non Vented	RONTY-E	RONTY	CRONTY	50 lbs.	80 lbs.
		Vented	RONTY-VE	RONTY-V	CRONTY-V	50 lbs.	80 lbs.
Lever	Standard	Non Vented	RADIAL-E	RADIAL	CRADIAL	43 lbs.	55 lbs.
		Vented	RADIAL-VE	RADIAL-V	CRADIAL-V	43 lbs.	55 lbs.
Lever	High	Non Vented	RAINBOW-E	RAINBOW	CRAINBOW	49 lbs.	61 lbs.
		Vented	RAINBOW-VE	RAINBOW-V	CRAINBOW-V	49 lbs.	61 lbs.
Lever	Pedestal	Non Vented	15SL1626XE	15SL1626X	15SL1626XC	56 lbs.	77 lbs.
		Vented	15SL1626XVE	15SL1626XV	15SL1626XVC	56 lbs.	77 lbs.
Lever-Gear	Standard	Non Vented	15SL8184E	15SL8184P	15SL8184C	46 lbs.	58 lbs.
		Vented	15SL8184VE	15SL8184VP	15SL8184VC	46 lbs.	58 lbs.
Lever-Gear	High	Non Vented	15SL8408E	15SL8408P	15SL8408C	52 lbs.	64 lbs.
		Vented	15SL8408VE	15SL8408VP	15SL8408VC	52 lbs.	64 lbs.
Lever-Gear	Pedestal	Non Vented	15SL8429E	15SL8429P	15SL8429C	59 lbs.	80 lbs.
		Vented	15SL8429VE	15SL8429VP	15SL8429VC	59 lbs.	80 lbs.
Wheel	Standard	Non Vented	RACKET-E	RACKET	CRACKET	43 lbs.	55 lbs.
		Vented	RACKET-VE	RACKET-V	CRACKET-V	43 lbs.	55 lbs.
Wheel	High	Non Vented	RABBIT-E	RABBIT	CRABBIT	49 lbs.	61 lbs.
		Vented	RABBIT-VE	RABBIT-V	CRABBIT-V	49 lbs.	61 lbs.
Wheel	Pedestal	Non Vented	15SL1622XE	15SL1622X	15SL1622XC	56 lbs.	77 lbs.
		Vented	15SL1622XVE	15SL1622XV	15SL1622XVC	56 lbs.	77 lbs.
DMC	Standard	Non Vented	15SL202E	15SL202	15SL202C	54 lbs.	75 lbs.
		Vented	15SL202VE	15SL202V	15SL202VC	54 lbs.	75 lbs.


©2014 Donovan Marine, Inc.

The Carlisle & Finch Co. 10", 12" and 15" All Brass Incandescent Halogen Searchlights

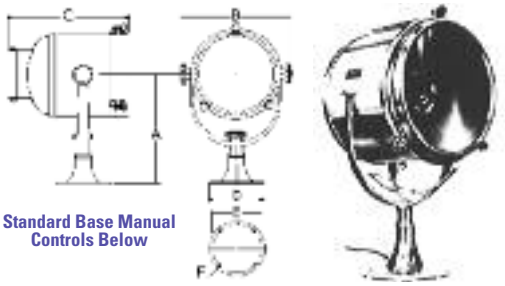

Standard Base Manual Controls Below

Size	A	B	C	D	E	F
10"	12-3/4"	11"	10"	6-3/8"	5-3/8"	11/32"
12"	15-15/16"	13-1/2"	13-1/4"	8-1/4"	7-3/8"	13/32"
15"	19-7/8"	16-3/4"	14-7/8"	8-1/4"	7-3/8"	13/32"

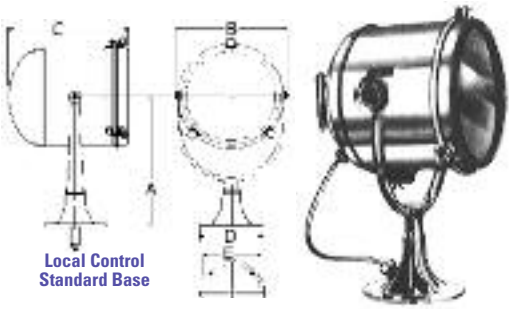


Local Control Standard Base

Size	A	B	C	D	E	F
10"	12-3/4"	13-1/8"	12"	6-3/8"	5-3/8"	11/32"
12"	15-15/16"	15-5/8"	15-1/2"	8-1/4"	7-3/8"	13/32"
15"	19-7/8"	18-7/8"	16-7/8"	8-1/4"	7-3/8"	13/32"




Size	G
10"	11-3/8"
12"	10-7/8"
15"	10-7/8"

Lever Control



Size	G
10"	11-3/8"
12"	10-7/8"
15"	10-7/8"


Lever-Gear Control





Size	G
10"	9-1/2"
12"	9"
15"	9"

Wheel Control



Other Products • Price On Request

10, 12, 15 inch Distant Electric Control • 19 inch Incandescent Searchlights • 24 inch Searchlights • Xenon Searchlights • Carbon Arc Searchlights • Searchlight Power Supplies • Signaling Searchlights • Marine Floodlights • Navy Searchlights/Navigation Lights • Lighthouse Beacons

The Carlisle & Finch Co. 10" Searchlight with 2-Pin Prefocus Socket

• Painted finish.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274489	(REDAN-E-5) Lever Control, 18" Longer than Standard	$1,787.00 D
274542	(RANK-E-5) Wheel Control, 12" Longer than Standard	$1,763.00 D

• Spare Parts for 10" Searchlight

Order No.	Mfg. No. / Description	Price
273831	(SL1083A) Reflector, Diameter 9"	$213.98 B

The Carlisle & Finch Co. 15" Searchlight with Medium Prefocus Socket

• Painted finish, vented drum.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274655	(RACKET-VE-2) Wheel Control, 24" Longer than Standard	$2,956.00 D

• Spare Parts for 15" Searchlight

Order No.	Mfg. No. / Description	Price
273843	(CL14) Reflector, Diameter 14-3/16"	$519.98 B

Spare Common Parts for 10", 12" and 15" Searchlights

Order No.	Mfg. No. / Description	Price
274047	(K5482) Pinion Gear f/Wheel Control	$30.00 A
273969	(SL1937) Reflector Mnt. Clips, 4 Per Light	$4.30 A
273526	(8704) 2-Pin Prefocus Socket Only	$31.00 A
273918	(SL1250C) Med. Prefocus Socket Only	$62.00 A
274302	(SL96X) Mogul Screw Socket Only	$61.00 A

The Carlisle & Finch Co. 12" Searchlight with Medium Prefocus Socket

• Painted finish, vented drum.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
274631	(RECITE-E-2) Lever Control, 18" Longer than Standard	$2,387.00 D
274605	(REAR-E-2) Wheel Control, 24" Longer than Standard	$2,411.00 D
274592	(REAR-E-2) Wheel Control, 6" Longer than Standard	$2,339.00 D

• Spare Parts for 12" Searchlight

Order No.	Mfg. No. / Description	Price
273690	(9865XV) Med. Prefocus Socket with Mounting Stand	$207.00 A
273829	(SL107) Reflector, Diameter 10-15/16"	$271.98 B

The Carlisle & Finch Co. 19" Searchlight with Medium Prefocus Socket

Special Handling May Apply

• Painted brass and stainless steel drum.

Order No.	Mfg. No. / Description	Price
274782	(19SL3794DX) Lever Control, 48" Longer than Standard	$3,573.00 B
274681	(REDCOAT-D) Wheel Control, 48" Longer than Standard	$3,303.00 B

• Spare Parts for 19" Searchlight

Order No.	Mfg. No. / Description	Price
273754	(KEF217) Pinion Gear, Wheel/Lever Gear Control	$41.00 A
273766	(CL19) Reflector, Diameter 18-1/8"	$711.98 B
273970	(SL1461/1455) Reflector Clamp Assembly 19"	$13.98 A

The Carlisle & Finch Co. 12" Searchlights - Distant Electric Control (DEC)

Special Handling May Apply



- Rugged drive unit is housed in watertight corrosion resistant marine aluminum or brass base as specified.
- Slip clutches allow manual override at all times, a convenience when relamping.
- A small heater on drive unit keeps temperature in base housing above ambient to minimize condensation on and in motors.
- Powerful motors in weatherproof base direct the penetrating beam with finger-tip ease from any distance.
- Automatic brakes provide instant start and instant stop with no overtravel.
- Complete flexibility in mounting.
- Searchlight can be controlled from many separate locations.
- Motors operate on 110-125 volts, 50-60 hz (cycles).
- Drum, door, and yoke, etc., constructed of solid brass.
- Base is brass.
- Drum/door and yoke is white enamel.
- Rugged joystick switch controls both motions.
- No limit to distance between searchlight and joystick.
- Second, third, fourth, or more joysticks can be added at any time.
- Just five control conductors and a ground conductor required between searchlight and joystick.
- Either way, one standard unit is used.
- No interlocks required.
- Corrosion resistant and oiltight, the joystick can be mounted almost anywhere.
- Uses medium prefocus lampholder.
- Vented.

Order No.	Mfg. No. / Description	Price
274908	(125BEV-2) Includes: 12" Brass Control	$3,885.00 B
	Available in 10", 12" and 15"	POR

The Carlisle & Finch Co. Accessories and Parts

Order No.	Mfg. No. / Description	Price
273971	(SL1461)	POR
273972	(SL1455)	POR
273981	(SL3455XA)	POR
274050	(K4729-1)	POR
274934	(X9398-RF-NO)	POR
274958	(8672XS)	POR
274959	(4799X-RFS)	POR
275435	(X9398-RF)	POR
275438	(4198PSDE-1)	POR
275441	(C4-1M-1)	POR

The Carlisle & Finch Co. Standard Base Lever - Gear Control Search Light

- Horizontal rotation in excess of 360 deg. but limited by positive mechanical stops to prevent mechanical damage to cable by excessive rotation.

Order No.	Mfg. No. / Description	Price
274779	(19SL3794DX)	$3,483.00 B

©2014 Donovan Marine, Inc.

Franklin Submersible Bilge Pumps





Total Head in Feet


Capacities in U.S. GPM	5'	10'	15'	20'	25	30'	Shut-Off Head (ft.)
ESP33	44	33	13	0			17.5
ESP50			61	51	36	2	17.5

- Rugged cast iron motor housing dissipates heat away from rugged corrosion resistant, molded polypropylene pump body.
- 1/3 HP or 1/2 HP, 115 volt with stainless steel shaft, in "oil free" chamber with thermal overload protection.
- CSA approved.
- Impeller: 5 vane reinforced polypropylene, handles 1/2" (1/3 HP) 3/4" (1/2 HP) spherical solids.
- Seal: Mechanical type in oil filled chamber with ceramic and carbon faces.
- Discharge: 1-1/2 NPT.
- Reducer bushing for 1-1/4" discharge included with 1/3 HP model.

Order No.	Mfg. No. / Description	Price
496213	(ESP33AV) 1/3 Horsepower with 10' Cord	$275.98 Q
446216	(ESP50AV) 1/2 Horsepower with 20' Cord	$426.98 Q

Franklin BSGF Series Self-Priming Engine Driven Pumps





- Briggs & Stratton Engines.
- Cast iron casing.
- 2" suction and discharge.
- Priming and drain plugs.
- 3/4" garden hose size.
- Impeller: 4 vane, semi open, gray cast iron with blind hole for engine shaft protection.
- Self lubricating mechanical seal.
- Carbon ceramic faces, viton bellows to resist chemicals.
- Base is rugged stamped steel for easy mounting.

Order No.	Mfg. No. / Description	Price
496148	(BSGF-8) 3.5 Horsepower, 64 lbs.	$887.98 Q

Franklin Submersible Sewage Pump




- Motor, pump housing and impeller are cast iron class 30.
- Power cord sealed at motor housing.
- Two vanes solids handling non-clog impeller.
- Seal is mechanical carbon/ceramic type 6, 5/8 rotary.
- Motor shaft is 416 stainless steel.
- Oil filled chamber with automatic overload protection, double ball bearing.
- Capacitor start designed for hi-torque and are thermally protected with automatic reset.
- Manual.
- Discharge 2 NPT. 1/2 HP. 115 volts. PH 1.

Total Head in Feet

RPM	5'	10'	15'	20'	25'	30'	35'	Shut-Off Head (ft.)
Capacities in U.S. GPM								
1,750	155	120	83	52	14			27

Order No.	Mfg. No. / Description	Price
496225	(WS51M)	$634.98 Q
496218	(MF-10) Float Switch	$40.98 F

Franklin BSDF Series Self-Priming Engine Driven Pump

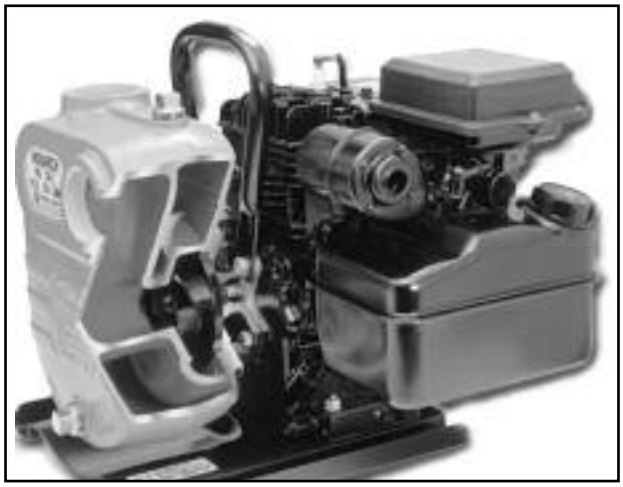

- General purpose pumps designed for liquid transfer and contractor dewatering using a semi open impeller.
- The impeller is threaded to the engine crankshaft, eliminating the need for a stub shaft.
- An internationally known Lombardini diesel engine, cast iron; 2" or 3" suction and discharge.
- Three lare vent openings are designed to ensure all liquid escapes and does not enter the engine in the event of a catastrophic seal failure even when the pump is operating at maximum flow and pressure.
- 3/4" garden hose size priing and drain plugs.
- The impeller is 4 vane, semi-open gray cast iron, with "Blind Hole" for engine shaft protection.
- If lubricating mechanical seal, carbon-ceramic faces, Viton bellows to resist most agricultural chemicals and liquid fertilizers.

Order No.	Mfg. No. / Description	Price
496157	(BSDF-10LRF) 6.8 HP, Man. St. Diesel, 2" Roll Bar	$5,784.98 Q

Franklin Companion Flanges - CF Series

Order No.	Mfg. No. / Description	Price
496315	(613090) Fits CF - 1.125A, 1-1/4" Disc Flange	$79.98 B
496317	(613110) Fits CF - 1.5A, 1-1/2" Disc Flange	$79.98 B

Franklin BSE Series Self-Priming Centrifugal Pumps



Total Dynamic Head in Feet Capacities in U.S. GPM

Model #	RPM	HP	20'	30'	40'	50'	60'	70'	80'
BSE-S50	3450	1/2	55	46	32	10	0	-	-
BSE-S75	3450	3/4	65	50	35	10	0	-	-
BSE-S100	3450	1	80	70	60	42	20	-	-
BSE-S150	3450	1-1/2	102	78	55	35	8	0	-
BSE-S200	3450	2	126	103	80	58	32	10	0
BSEF-300	3450	3	138	130	120	100	79	55	25
BSEF-500	3450	5	265	235	205	165	120	75	20
BSEF-750	3450	7-1/2	290	270	245	215	170	120	70

- The BSE Series provides a cast iron impeller and standard buna shaft seal for water pumping.
- These pumps have a large rugged cast iron casing for fast self-priming.

1/60/115/230V.

Order No.	Mfg. No. / Description	Price
496101	(BSE-S75) 3/4 HP, 1-1/4 NPT Suct./Disch., 42 lbs.	$724.98 Q
496112	(BSE-S100) 1 HP, 1-1/4 NPT Suct./Disch., 46 lbs.	$805.98 Q
496124	(BSE-S150) 1-1/2 HP, 2 NPT Suct./Disch., 52 lbs.	$922.98 Q

208/230/460V. Baldor Motor.

Order No.	Mfg. No. / Description	Price
496141	(BSE-300-3) 3 HP, 2 NPT, 3 Phase, 77 lbs.	$1,410.98 Q

230V.

Order No.	Mfg. No. / Description	Price
496135	(BSE-S200) 2 HP, 2 NPT Suct./Disch., 60 lbs.	$1,034.98 Q

Franklin Submersible Grinder Pump

- Construction - Motor and pump housing is cast iron. 1-1/4 NPT discharge.
- Cord - Power cord sealed at motor housing. 20'. 14/3 SJTW.
- Impeller - Ductile iron, recessed, semi open with pump out vanes for mechanical seal protection.
- Cutter - High chrome steel two blade cutter with hardness of 55 - 58 Rockwell C.
- Stationary cutter ring can be revered for extended service, replaceable without dismantling pump.
- Seal - Hard Silicone Carbide seal faces, NBR elastomer for long life abrasion resistance.
- Shaft - Corrosion resistant 410 stainless steel shaft.
- Motor - 2 HP. Single phase. 230 volt. 15 FLA, capacitor start oil filled motor with automatic thermal overload and upper and lower ball bearing construction.
- No special panel required.
- Can be used with regular piggy back style float switch.
- Rated for 2 HP 1/230V, for ease of maintenance.
- Fasteners - 304 stainless steel.

Order No.	Mfg. No. / Description	Price
496249	(620265) WS200GM	$1,019.98 E

Franklin BSEF Series Self-Priming Centrifugal Pumps

- The BSEF Series features the same cast iron construction, with a viton shaft seal and down sized impeller to handle heavier chemical pumping applications.
- 3 phase.
- These pumps have a large rugged cast iron casing for fast self-priming.

3/60/230/460V.

Order No.	Mfg. No. / Description	Price
496162	(92934030) 3 HP, 2 NPT Suct./Disch., 77 lbs.	$1,429.98 Q
496174	(92934050) 5 HP, 3 NPT Suct./Disch., 148 lbs.	$2,041.98 Q

Franklin Fire Pump

Order No.	Mfg. No. / Description	Price
496264	(614299) 9 HP, Diesel	$4,823.98 E

Cent. Pump

Order No.	Mfg. No. / Description	Price
355649	(93190311) 15 HP, 3 PH	$3,769.98 Q

Frannklin Accessories

Order No.	Mfg. No. / Description	Price
496415	(193930) Gasket for BSE-S150, BSE-S200, BSE-300-3	$16.98 B
496427	(305463133) Gasket for BSE-S75, BSE-S100	$8.98 B
496441	(240316) Seal 5/8" Viton, 1-2 HP	$38.98 B

Franklin B50S Self-Priming Utility Transfer Pump

Total Head in Feet

20'	25'	30'	35'	40'	45'
Capacities in U.S. GPM					
45	39	31	24	16	8



- The Red Lion F50S self priming utility/transfer pump is ideal for a wide variety of general purpose applications such as pumping out flooded basements, livestock watering, flood irrigation and general dewatering.
- 1/2 HP, 115 volt motor with 8' power cord.
- Rugged cast iron pump casing.
- Cast iron impeller.
- Self-priming to 25 feet.
- 1-1/4" suction and discharge with hose adaptor.
- Flow rates to 45 gallons per minute.

Order No.	Mfg. No. / Description	Price
496202	(621814 B50S)	$686.98 Q

Franklin Submersible Pumps

- 2" discharge
- Stainless steel shell housing, suction strainer and motor shaft.
- Double mechanical seals.
- Thermal overload protection.
- 115 volt.

Order No.	Mfg. No. / Description	Price
496215	(629241FS750) 1 HP, 80 Gallons Per Minute	$815.98 Q

International Shore Connection - Brass



- Shore connection is a 7" OD flange threaded with 2-1/2" hose thread to match thread on docks.
- Flange drilled to ASA Standard.
- Supplied with bolts, nuts, washers and gaskets.

Order No.	Mfg. No. / Description	Price
324018	(337-2521)	$258.98 E

International Ship Connection - Brass



- 7" OD flange threaded with 2-1/2" female hose thread.
- Flange slotted rather than drilled.
- Can be used with non standard flanges.
- Supplied with bolts, nuts, washersand gaskets.

Order No.	Mfg. No. / Description	Price
324006	(336-S)	$252.98 E

©2014 Donovan Marine, Inc.

Franklin Fire Pump Systems





- The Monarch NSGF Series of self priming engine driven pumps are primarily designed for irrigation and sprayer applications, including ag-chemicals and liquid fertilizers.
- It is constructed with a rugged self priming cast iron casing, cast iron impeller, Viton and stainless steel mechanical seal and is available with either Briggs & Stratton or Honda engines.
- Consist of: NSGF-8 Monarch 8 HP Pump, capable of 85 GPM, 60 PSI, 50' 1-1/2 UL Approved fire hose, and fire nozzle capable of straight stream and spray pattern.

Order No.	Mfg. No. / Description	Price
496247	Complete Pump System	$205.98 E

- Consist of: NSDF-8 Monarch (9 HP Lombardi Engine) Pump, capable of 85 GPM, 60 PSI, 50' 1-1/2 UL Approved fire hose, and fire nozzle capable of straight stream and spray pattern.

Order No.	Mfg. No. / Description	Price
496248	Complete Pump System	$204.98 E

Franklin Water Pressure System



- The MJS Series of jet pumps feature a suction up to 25 ft.
- Built from cast iron and specially treated with an anti-rust primer coating.
- 1-1/4 NPT suction and 1" discharge.
- Pressure gauge 0 - 100.
- Pressure switch is preset at 30-50 PSI.
- 115/230V.
- Pump complete with 8.5 gallon horizontal pressure tank and foot value.
- Includes all pump to tank fittings.

Order No.	Mfg. No. / Description	Price
496195	(MJS50/SR25S) Water Pressure System	$793.98 G

Model No.	Motor HP	Total Suction Lift (ft.)	Pump Capacity in U.S. GPM Discharge Pressure in PSI 20	25	30	35	40	45	50	55	60	Maximum Pressure (PSI)
MJS-50	1/2	5	12.8	12.5	12.3	12.1	11.2	9.5	6.9	4.3	2.0	64.2
MJS-50	1/2	10	11.5	11.3	11.0	10.8	10.4	8.5	6.0	3.4	1.0	62.0
MJS-50	1/2	15	9.8	9.7	9.6	9.5	9.4	7.3	4.7	2.2	-	59.9
MJS-50	1/2	20	8.3	8.1	7.8	7.7	7.6	5.7	3.5	1.0	-	57.7
MJS-50	1/2	25	5.6	5.55	5.5	5.4	5.3	4.1	2.3	0.2	-	55.5

Franklin Water Pressure Systems




Order No.	Mfg. No. / Description	Price
496192	(MJSHP) Freshwater System Pump, 1/2 HP, Complete w/Tank	$801.98 G
496193	(MJSHP) Freshwater System Pump, 3/4 HP, Complete w/Tank	$916.98 G
496197	40 Gallon - 3/4 HP Fresh Water Pump System	$1,168.98 G
496199	40 Gallon - 1 HP Fresh Water Pump System	$1,162.98 G
496186	(MJSHP-50) High Pressure Pump Only, 1/2 HP	$418.98 Q
496201	(MJS-75) Standard Pressure Pump Only, 3/4 HP	$591.98 Q
496194	(MJS-100) Standard Pressure Pump Only, 1 HP	$553.98 Q
496187	(604052) Base Plate	$49.98 Q
496188	(604050) Base Plate for Pump System	$31.98 Q
496190	Replacement Tank for MJSHP Pump System	$289.98 Q
496287	(24236) Impeller	$56.98 B
496302	(305446943) Seal Plate	$37.98 B
496338	(224310) Pressure Switch	$36.98 F
496191	(604459) Pressure Tank	$555.98 Q

- The MJS Series of jet pumps feature a suction up to 25 ft.
- Built from cast iron and specially treated with an anti-rust primer coating.
- 1-1/4 NPT suction and 1" discharge.
- Pressure switch is preset at 30-50 PSI.
- Pressure gauge 0-100.
- 115/230V.

Model No.	Motor HP	Lift (ft.)	Pump Capacity in U.S. GPM 20	25	30	35	40	45	50	55	60	Total Suction Discharge Pressure in PSI 65	70	75	80	Maximum Pressure (PSI)
MJS-75	3/4	5	16.2	16.0	15.8	15.6	15.4	12.1	8.7	5.7	2.9	-	-	-	-	65.0
MJS-75	3/4	10	14.3	14.0	13.7	13.5	13.2	10.6	7.6	4.6	1.6	-	-	-	-	62.8
MJS-75	3/4	15	12.1	11.7	11.3	11.0	10.6	9.3	6.3	3.2	0.2	-	-	-	-	60.6
MJS-75	3/4	20	9.9	9.6	9.3	9.0	8.7	7.8	4.8	1.9	-	-	-	-	-	58.5
MJS-75	3/4	25	7.2	7.1	7.0	6.9	6.8	6.7	3.5	0.6	-	-	-	-	-	56.3
MJSHP-50	1/2	5	8.8	8.9	8.6	8.4	8.3	8.1	7.4	6.0	4.7	3.4	2.2	1.2	0.15	80.6
MJSHP-50	1/2	10	7.8	7.7	7.55	7.4	7.25	7.2	6.6	5.4	4.15	2.8	1.8	0.7	-	78.5
MJSHP-50	1/2	15	6.5	6.4	6.3	6.2	6.1	6.0	5.3	4.8	3.6	2.3	1.3	0.3	-	76.3
MJSHP-50	1/2	20	5.3	5.2	5.1	4.9	4.8	4.7	4.6	4.1	2.9	1.7	0.7	-	-	74.1
MJSHP-50	1/2	25	3.7	3.65	3.6	3.55	3.5	3.5	3.45	2.4	2.3	1.3	0.3	-	-	71.9
MJC-100	1 (Shallow)	5	20.2	20.1	19.9	19.5	16.7	13.9	11.1	8.3	5.6	-	-	-	-	71.0
MJC-100	1 (Shallow)	15	14.5	14.3	14.1	13.8	13.6	11.4	8.7	6.0	3.3	-	-	-	-	66.7
MJC-100	1 (Shallow)	25	9.1	8.9	8.8	8.7	8.6	8.5	6.0	3.6	1.2	-	-	-	-	62.1
MJC-100	1 (Deep)	20	-	12.8	10.5	8.7	7.3	6.6	5.2	4.4	3.6	-	-	-	-	87.0
MJC-100	1 (Deep)	50	-	8.4	7.2	6.0	5.0	4.2	3.4	2.6	1.9	-	-	-	-	74.0
MJC-100	1 (Deep)	90	-	4.3	3.4	2.7	1.9	1.8	0.7	-	-	-	-	-	-	56.7

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.

Globe Drivesaver



- Absorbs vibrations and shock-reduces noise-prevents electrolysis-acts as a circuit breaker to protect your transmission and engine from extreme shock and torque.
- The Drivesaver provides a flexible, nonmetallic barrier between your transmission and propeller shaft.
- Includes: Bushing kits where necessary.

Order No.	Mfg. No.	Flange Dia.	Bolt Circle	Pilot Dia.	Coupling Dia.	Price
369040	(504)	5"	4-1/4"	2-1/2"	6"	$545.98 I
369036	(4756)	4-3/4"	3-7/8"	2-1/2"	6"	$680.98 I
369030	(7256)	7-1/4"	6"	3-3/4"	8-3/8"	$751.98 I
369042	(5756)	5-3/4"	4-3/4"	3"	6-13/16"	$652.98 I

Zinc Teardrop Anodes



- With galvanized steel mounting strap (ZTS).
- Dimensions: 1-1/4" x 3" x 9".
- 6 lbs.

Order No.	Mfg. No. / Description	Price
323600	(TRC-TD6) Teardrop Anodes	$15.98 C

PVC Coated Magnesium Launch Anodes



- With cast-in galvanized steel mounting straps.

Order No.	Mfg. No. / Description	Price
323852	3" x 9", 2.5 lbs.	$35.98 C
323864	5" x 10", 5 lbs.	$65.98 C

Zinc Plate Anode



- With galvanized steel mounting strap (ZSS).
- Dimensions: 1-1/4" x 3" x 12".
- 12 lbs.

Order No.	Mfg. No. / Description	Price
323838	(TRC-12/M12) Zinc Plate Anode	$37.98 C

Zinc Plate Anodes

- Contains two cast-in cored holes on 6" centers.
- Conform to the latest modification of MIL-A-18001.
- Dimensions: 1-1/4" x 6" x 12".

Order No.	Mfg. No. / Description	Price
323843	(GA23C) 23.5 lbs.	$73.98 C


Zinc Plate Anode



- With two galvanized steel mounting straps (ZHS).
- Dimensions: 1-1/4" x 6" x 12".
- 23.5 lbs.

Order No.	Mfg. No. / Description	Price
323840	(TRC-23/M24)	$68.98 C
323876	(ZSC-12 3X12X1-1/4) With 2 Bolt Holes, No Strap	$55.98 C

PVC Coated Magnesium Anode



- With two cast-in galvanized steel mounting straps.
- Dimensions: 2" x 9" x 18".
- 24 lbs.

Order No.	Mfg. No. / Description	Price
323903	(TRC-24-W) Magnesium Anode	$214.98 C

Johnson Rubber Co. Stuffing Boxes





- Solid Bronze for Heavy Duty Commercial Marine Service
- Johnson Stuffing Boxes are heavy duty units fitted with a water inlet for stern-tube bearing lubrication.
- Mounting flange incorporate a pilot ring which intrudes into the shaft housing to exert necessary compression on the bearing staves to lock them in position.
- An inflatable air seal allows gland to be serviced which vessel is afloat.
- Units available for water lubrication or combination water-grease lubrication.
- Inflatable air seal design allows gland servicing while ship is afloat.

Special Order Only

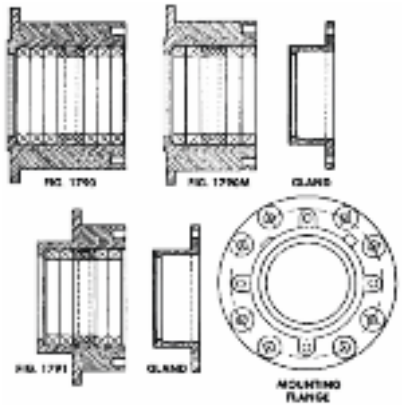


Fig. 1786 I.R. Air, Water and Grease Comb.

Fig. 1787 I.R. Air-Grease

Fig. 1788 I.R. Air-Water

Fig. 1789 Water Only

Replacement Rubber Ring



- All sizes supplied with grease lantern ring.
- Packing is not included as standard equipment.
- An additional charge will be made when packing is specified.
- Mounting flange holes are drilled standard unless otherwise specified.
- Bronze stuffing boxes sizes 2-1/2" through 6-1/4" can be supplied with integral steel mounting flange for bulkhead welding at 20% additional charge.
- When ordering specify steel flange.

Order No.	Mfg. No. / Description	Price
427840	(1790M-0278) Brass, 2-7/8"	$450.00 B

ALUMINUM BOX		BRONZE BOX		
Fig. 1789 Price Each	Fig. 1790 Price Each	Fig. 1790 Price Each	Fig. 1790M Price Each	Fig. 1791 Price Each

Keel Cooler Anodes

- For size 1/2", 3/4", 1" Single Stem and 1-1/4" and 1-1/2" Double Stem 4 tube 1 - 1-1/8" fluted.

Order No.	Mfg. No. / Description	Price
338165	(Z-1) Cooler Anodes	$11.98 H

- For size 1-1/4" and 1-1/2", 1" Single Stem and 2-1/2" Double Stem 4 tube 1-1/2 turbo tube.

Order No.	Mfg. No. / Description	Price
338167	(Z-2) Cooler Anodes	$14.98 H

- For size 2", 2-1/2", 3", 4" Single Stem and 3" and 4" Double Stem.

Order No.	Mfg. No. / Description	Price
338169	(Z-3) Cooler Anodes	$28.98 H

©2014 Donovan Marine, Inc.

DONOVAN MARINE


NVT [noise vibration techniek]


THERMAL- ACOUSTIC-VIBRATION CONTROL

NVT– FIBERGLASS HULLBOARD

Description


Shipboard Thermal/Acoustic Insulation to meet MIL-I-742 or USCG 164.109 (Non Combustible). Various facings and composite configurations fabricated from fiberglass hullboard are used for Shipboard hulls, bulkheads, overheads, stiffeners, beams, and ductwork where non-combustible and cost effective solution is required

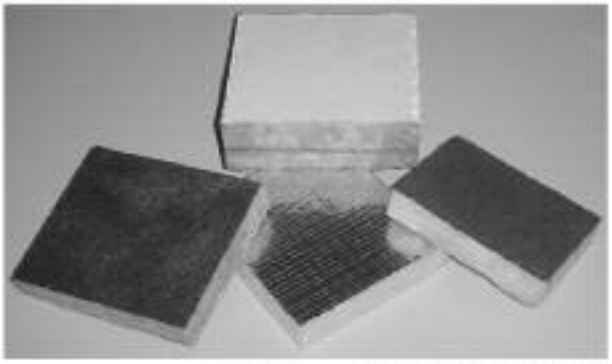




Key Selling Points

- Fiberglass Hullboard-Plain per MIL-I-742, Ty. II, ASTM C 1139 (replaces. MIL -I-22023D) and USCG No. 164.109/46/0.
- Fiberglass Hullboard faced with fiberglass cloth per MIL-C-20079, Ty. I, Cl. 2. Finished product meets MIL-I-742, Ty. I and USCG 164.112
- Fiberglass Hullboard with 2-mil aluminum foil facing. Meets USCG 164.109 and 164.112/061/0
- Fiberglass Hullboard , grooved/ slotted and faced with perforated fiberglass cloth per MIL-C-20079, Ty. I, Cl. 2.
- Fiberglass Hullboard laminated to high-density waffle board, faced with perforated fiberglass cloth per MIL-C-20079, Ty. I, Cl. 2. Finished product meets MIL-A-23054.
- Fiberglass Hullboard faced with White Reinforced Mylar. Finished product meets MIL-I-22023, Ty. III and USCG 164.109 and 164.112

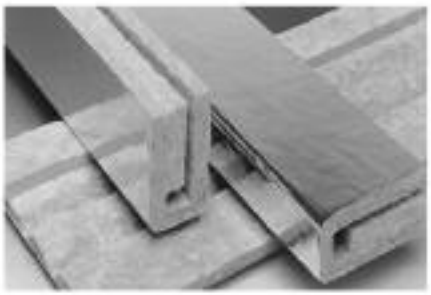

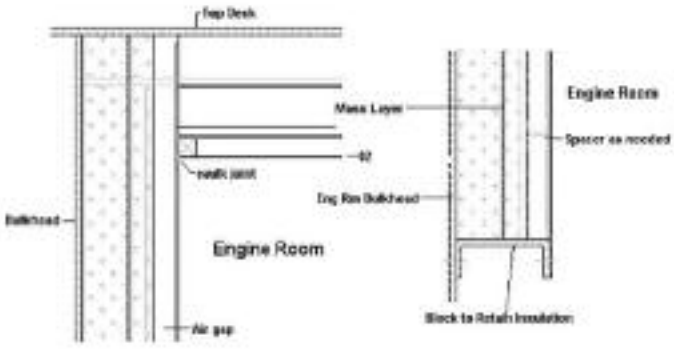

DONOVAN MARINE

NVT [noise vibration techniek]

THERMAL- ACOUSTIC-VIBRATION CONTROL


POLYIMIDE FOAM

Description

POLYIMIDE FOAM Thermal Acoustic insulation provides shipbuilders lower installed cost, and vessel owners lower life cycle costs due to the ease of installation and proven long life span in service.

POLYIMIDE FOAM is inherently fire resistant, halogen free and produces virtually no toxic products of combustion when exposed to open flames.

Installing POLYIMIDE FOAM increases productivity and is more cost effective than conventional insulations. It is easily cut and handled and there are fewer mechanical fasteners required than with fibrous materials.

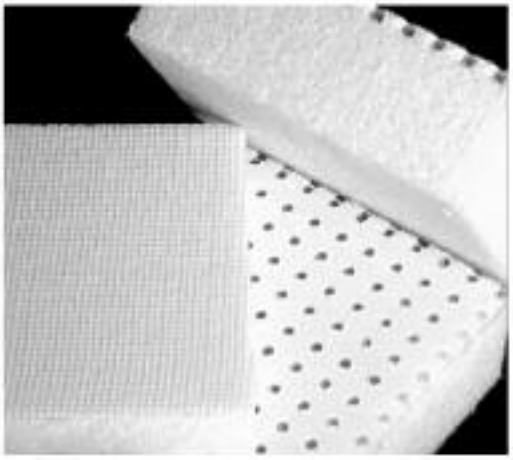



Specifications per DOD-I-24688

Density kg/m^3 (lb/ft^3) per ASTM D 3574, Test A.	10.24 (.64)
Thermal Conductivity W/(m-K) (BTU-in/hr-ft$^{2\circ}$F) per ASTM C 518 @ 24°C (75°F)	.046 (.32)
Fire Resistance	
1/4 Scale Fire Test per Appendix DOD-I-24688	PASS
Specific Optical Smoke Density	
Flaming	<5
Non Flaming per ASTM E 662	<5

PF-PL	Plain polyimide foam to Ty 1
PF-CF	Navy Cloth faced to Ty 2, Class 1
PF-GA	Grooved & Perforated CF to Ty 2, Class 2
PF-WM	PF-PL faced per Mil-I-22023 Ty 3
PF-AM	PF-PL faced with aluminized Mylar
PF-WPA	PF-PL faced with white corrugated and perforated aluminum sheathing

Sound Absorption Coefficient per ASTM C-423 Type A

	Frequency (Hz)						
Material	125	250	500	1000	2000	4000	NRC
PF-PL 1/2"	.04	.07	.20	.40	.35	.55	.50
PF-PL 1"	.06	.20	.45	.85	.65	.65	.75
PF-PL 2"	.15	.40	.75	.75	.75	.70	.80
PF-GA 1/2"	.05	.15	.35	.50	.60	.60	.75
PF-GA 1"	.07	.25	.70	.90	.75	.70	.75
PF-GA 2"	.25	.70	.90	.85	.75	.75	.75

©2014 Donovan Marine, Inc.

DONOVAN MARINE

NVT [noise vibration technick]

THERMAL- ACOUSTIC-VIBRATION CONTROL


Millennium Metal - Micro-perforated Metal Lining Sheet

Description


Millennium Metal is a micro perforated aluminum sheet that provides ideal airflow resistance to optimally absorb sound. Low Frequency Absorption can be "Tuned" by increasing the trapped air space behind it.



Absorption is further enhanced by adding **NoViTec** Melamine Foam into the air cavity which resists the coupled volume resonances common in the low frequency region

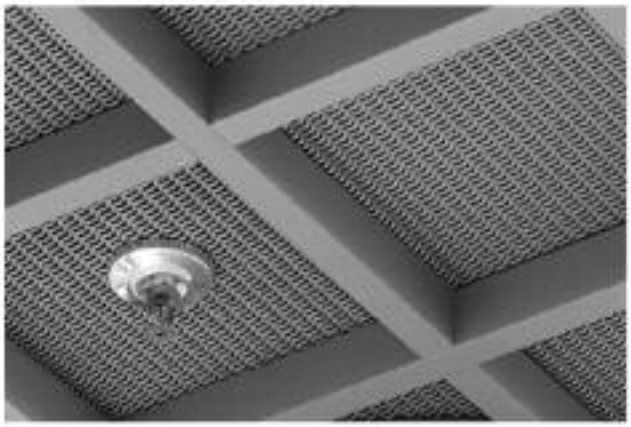

Millennium Metal , in combination with a honeycomb core and **NoVi-Comp** composite panel outer skin creates a superior lightweight rigid acoustical panel which can be used to make unframed acoustical enclosures with excellent absorption and sound transmission properties

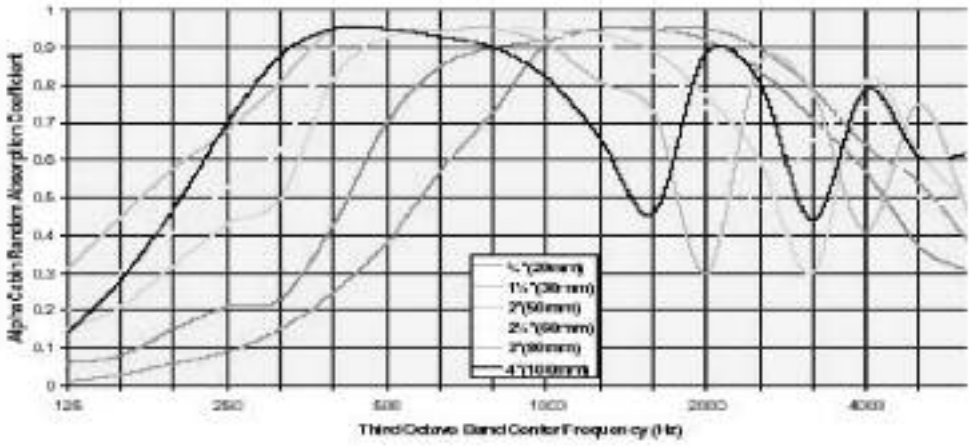

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.

DONOVAN MARINE

NVT [noise vibration techniek]

THERMAL- ACOUSTIC-VIBRATION CONTROL

VCE IsoFlex IM-Series Vibration Isolators

Description




Rectangular Type isolators for *thrust* mounting applications of

Main Engines
Generator Sets,
Pumps and Compressors

Key Selling Points

- Sizing and design for standard OEM and OEM replacement
- Very robust construction features stiffened top metal, oversize bearing plates and Fail-Safe rebound control
- Highest quality and volume of natural rubber provides superior damping and isolation with minimal compression set

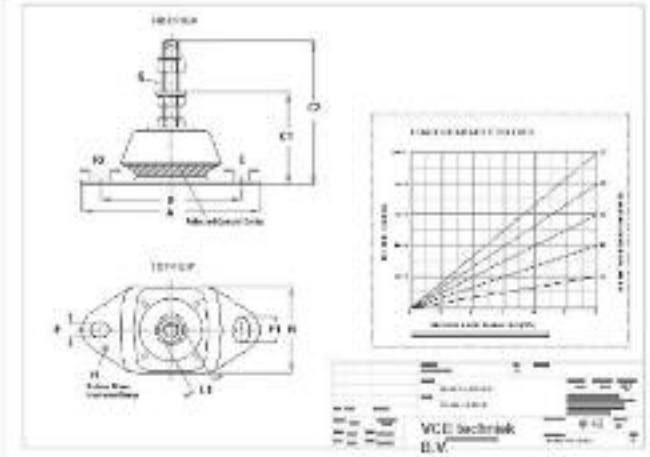


Sizes:

IM-130 - Max Load 130 Kgs
IM-350 - Max Load 350 Kgs
IM-600 - Max Load 600 Kgs
IM 1000—Max Load 1000 Kgs

Rubber Hardness: 35, 45, 55, 65, 75 Shore-A

Adjuster Studs: Standard and Fine Tune
12mm, 16mm, 18mm 25mm

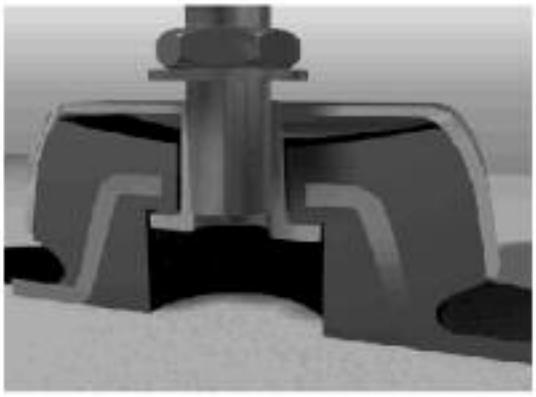


Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.

DONOVAN MARINE

NVT [noise vibration techniek]

THERMAL- ACOUSTIC-VIBRATION CONTROL



NH/Armaflex®

Engineered for New and Existing Pipework in Shipboard Use

Description

NH/Armaflex is a non-halogen flexible elastomeric thermal insulation, gray in color, supplied as tubing in nominal wall thicknesses of 1/2", 3/4", and 1" in sizes from 3/8" through 8" IPS. Sheets are supplied 36"x 48" in thicknesses of 1/2", 3/4", 1", and 1-1/2" (special order).

NH/Armaflex was specially developed by Armacell to minimize the density of smoke and eliminate corrosive acid gases from combustion. NH/Armaflex will not carry a progressive flame, and is formulated without chlorine, bromines, or PVC.


1


2


3


4


5

Features	Benefits
• Nonhalogen formulation	• No measurable chlorines, bromines, or PVC in smoke to harm personnel or sensitive electronic equipment • Eliminates corrosive gases from smoke • Excellent solution for austenitic, stainless steel and other systems
• Closed-cell structure	• Excellent protection against water intrusion • No supplemental vapor retarder required
• Installs in same manner as AP Armaflex insulations (MIL-P-15280J)	• Easy to apply; no lagging required. Preferred in shipyards around the USA
• Flexible at low temperatures	• Durability
• Gray color	• Carbon black-free • Mercury-free • Can be used with all approved Naval laggings and coatings • Color consistent with maritime applications

Specification Approvals

Armacell technical personnel are proud to have worked in conjunction with the US Navy and Electric Boat Corp. to develop the EB 4013 specification and to ensure dependable performance.

- Electric Boat Corporation Specification EB 4013 Antisweat and Refrigerant Insulation Systems (Sheets and Tubes)
- International Maritime Organization (IMO) SOLAS Requirements
- United States Coast Guard Requirements*
- NH Armaflex is currently specified for use on US Navy vessels.
- UL-V-O and HF-1 File Number E55796
- ASTM C534 Type 1 (Tubular) Grade 3, Type II (Sheet) Grade 3
- ASTM C795
- Nuclear Regulatory Commission Regulatory Guide 1.36

Duracooler™

by DURAMAX® MARINE

Quality 90/10 Cupro-Nickel.

Rectangular tubing, resistant to salt, water corrosion and sea growth.


Superior heat transfer. Compact, one piece.

Through-hull type fittings.

Available in a wide range of models and different tubing sizes.

Engineered for fast, economical, simplified installation.

Custom sized to your engine specifications and operational requirements.

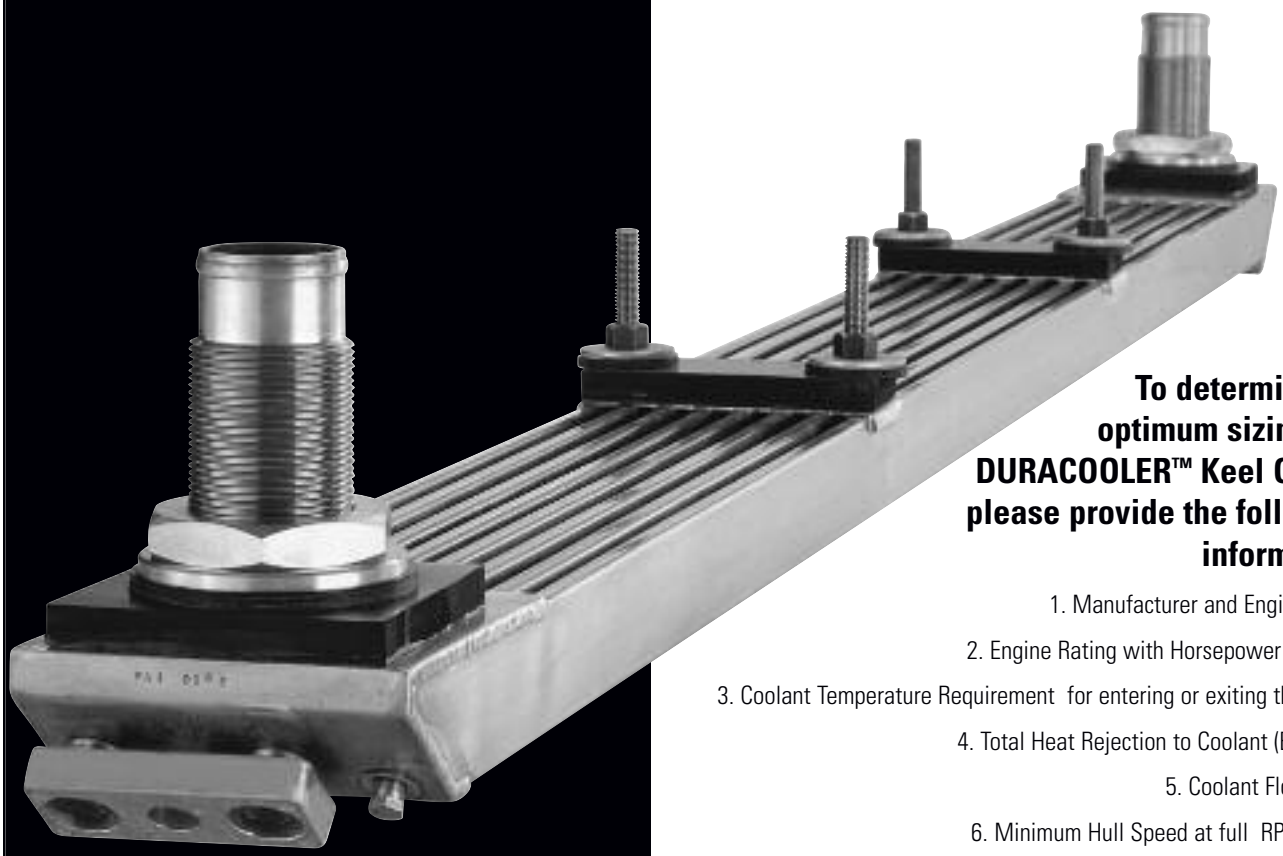

To determine the optimum sizing of a DURACOOLER™ Keel Cooler, please provide the following information:

1. Manufacturer and Engine Model
2. Engine Rating with Horsepower and RPM
3. Coolant Temperature Requirement for entering or exiting the engine
4. Total Heat Rejection to Coolant (BTU/min.)
5. Coolant Flow (GPM)
6. Minimum Hull Speed at full RPM (knots)
7. Maximum Ambient Seawater Temperature
8. Will Anti-Freeze Be Used
9. Dry or Wet Manifolds

©2014 Donovan Marine, Inc.

DuraCooler - New Flanged- Mount Design

Looks like other keel coolers - look closer!

In the commercial marine industry you need every competitive advantage you can get. That's why we've developed the DuraCooler - one of the most innovative keel coolers on the market today. Sure DuraCooler looks like other keel coolers, but look a little closer. DuraCooler's unique streamlined header design enhances internal coolant and external seawater flow while reducing system pressure drop. the new design also provides optimum heat transfer efficiency in a smooth tube design, resulting in smaller keel cooler units and a reduction in cooling system costs. Onrepower, replacement or retrofits, this increased cooling capacity within the same installation footprint provides the vessel owner an additional cooling safety factor.

No more through hulls for keel cooler installations

Now the streamlined DuraCooler design is available in a flanged-mount connection design. The new flanged-mounted connection is obtained by means of a cupronickel flange afixed to the top of the DuraCooler header and a mild ASTM steel flange, supplied with the cooler. Weld a schedule 80 steel pipe to the steel flange supplied with the DuraCooler unit, and bolt the cupronickel flange to the steel flange using the supplied hardware. Extend the pipe through the hull and fillet weld the pipe to the hull on both sides. Rest easy knowing that you no longer have a through hull penetration with this design.


No more special tools

With the standard nozzle and nut keel cooler attachment method, it can be difficult to access the nut inside the hull. Additionally, with this design you do not have to fabricate a special mounting nut wrench. It is not longer necessary. All standard flanged-mount hardware is located outside the vessel where it is easier to access. Use tools found in a typical toolbox.

Perfect for double hull designs

So you are designing or building a vessel with a double hull. Standard through hull keel cooler nozzles may not be long enough to penetrate both hulls. The flanged-mount design is ideal.



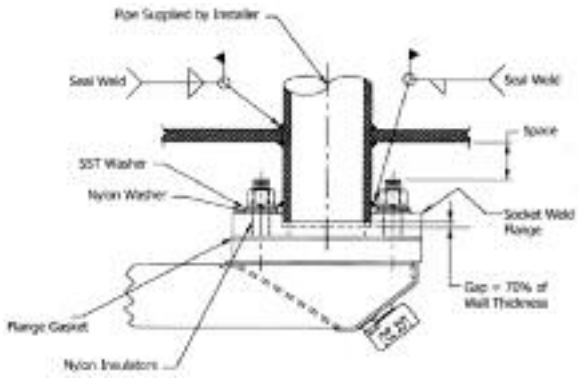

Features/Benefits

- **No through-hull connections** - If a flanged mounted DuraCooler is knocked off the vessel, you won't need to worry about flooding the vessel.
- **No need to fabricate special tools for installation** which will save time and money on installation costs.
- **Space savings inside hull** - If the area inside the hull is tight or equipment makes the internal nut on the through hull fitting inaccessible, the flanged-mount design is ideal
- **Eliminates the need for a cofferdam or seachest** which will save time and money on installation costs.
- **Keel cooler research and development program** - We test actual DuraCoolers and competitive keel coolers under various operating conditions. This data is used to create more accurate recommendations.
- **Simplified Installation** when mounting hardware cannot be easily accessed from the interior of the vessel or for double hull installations.
- **Streamlined header design** allows for less internal pressure drop of coolant flowing through the keel cooler. External water travels more quickly to tubes increasing the heat transfer efficiency to the cooler.

Duramax Marine Keel Coolers

- 90/10 cupro-nickel tubing is resistant to waterflow erosion and serves as an antifoulant.
- Compact, one-piece design makes installation simple.
- Streamlined header design reduces pressure drop in water flowing through the cooler.
- External water travels more quickly to tubes increasing the heat transfer efficiency of the cooler.
- Custom-sized for your engine specifications and operational requirements.
- Available with through-hull type fittings or non-through-hull flanges.
- PATENT PENDING.

Order No.	Mfg. No. / Description	Price
473215	(DC-416144)	$8,822.98 C
473227	(SC-41690-57)	$7,326.98 C
473241	(DC-41696)	$7,792.98 C

Duramax Marine Cooler Tube Sleeve Seals

- The rubber sleeve seals in this tongue and groove system have a raised beading which compresses to form a seal for watertight integrity.

Order No.	Mfg. No. / Description	Price
472794	(801602503)	$7.98 E

Keel Cooler Anodes

- Fits DuraCooler style keel coolers.

Order No.	Mfg. No. / Description	Price
348157	(8200281AK) Kit 1274S	$187.98 D
348208	(8200119AK) Kit 2624S	$225.98 D
348210	(8200108AK) Kit 2874S	$282.98 D
348346	(8200116AK) Kit 1874S	$261.98 D

Sen Dure Products Engine/Transmission Oil Coolers

- 2 copper tubes have standard 3/8 NPTF.

Order No.	Mfg. No. / Description	Price
605000	(RD209AA05) 1 Hose Bib	$177.98 I
605001	(RD209EE05) 1-1/4 Hose Bib	$177.98 I

Information for Sizing Duracooler Engine Keel Cooler

Duracooler™

Donovan Representative: _____

Customer: _____ Customer Number: _____

Contact: _____

Phone Number: _____ Fax Number: _____

Name of Vessel/Hull #: _____ Cooler Installation: New _____ or Retrofit ____

Hull Dimensions: Length: _____ft. Beam: _____ ft. Draft: _____ft.

*Minimum speed at which full HP will be developed: _____ knots.

*Expected maximum ambient sea water temperature: _____ deg. F.

Use of Vessel: _____ (Push boat, crewboat, OSV, trawler, tug, etc.)

Main engines: Quantity: _____, *Manufacturer: _____, *Model: _____

*HP: , _____*RPM: , _____*Exhaust: Wet _____ or Dry _____, *Turbocharger (Y/N): _____

*Specify tier of engine: _____

Location of cooler(s): _____ (bottom or side of hull)

Single or double pass cooler preferred: _____

Manufacturer of gear (if gear is to be cooled): _____ Model: _____

Reduction: ____ /1, If Reintjes gear provide water pump flow ____ GPM

Other engines to be cooled:

Generator:

*Manufacturer: _____, *Model: _____, *RPM :, _____ *KW: _____

*Specify tier of engine: _____

Bow Thruster:

*Manufacturer: _____, *Model: _____, *HP: _____, *RPM: _____

*Specify tier of engine: _____

Stern Thruster:

*Manufacturer: _____, *Model: _____, *HP: _____, *RPM: _____

*Specify tier of engine: _____

Compressor or other special application:

Application: _____

*Manufacturer: _____, *Model: _____, *HP: _____, *RPM: _____

Comments:

©2014 Donovan Marine, Inc.

D1600 Series Gridcoolers - Single Pass

- Fernstrum GRIDCOOLER keel coolers are the smallest, most efficient keel coolers available.
- The rectangular tube design is more efficient and durable than grooved round tubing.
- 100% parts inspection process and rigorous testing procedures insure that all GRIDCOOLER keel coolers are built with the same exacting standards.


Order No.	Mfg. No. / Description	Price
347942	(D1684) Keel Cooler	POR
347950	(D16120) Gridcooler	POR

Gridcooler Nuts

Order No.	Mfg. No. / Description	Price
328268	(1885) 3" Pipe Size	$61.98 B
328370	(1908) 3-1/2" Pipe Size	$72.98 B

Johnson Duramax Commercial Bumpers

Special Handling May Apply






Order No.	Mfg. No.	Color	Base Width (W)	Height (H)	Wall Thickness (WT)	Wt./ft.	Length	Price/ft.
428006	(DB-50)	Black	2-1/8"	2"	7/16"	1.3 lbs.	20'	$10.98 F
428020	(DB-75)	Black	3-1/8"	2-7/8"	11/16"	2.8 lbs.	20'	$20.98 F
428056	(DB-100)	Black	4-1/4"	3-7/8"	3/4"	4.6 lbs.	20'	$38.98 F

Johnson Duramax Commercial Bumpers

Special Handling May Apply






DMI #	MFG #	Color	Base Width (W)	Outside Dia. (D)	Base Thickness (BT)	Wall Thickness (WT)	Wt./ft.	Length	Price
428119	(DB-503)	Black	2-1/2"	3"	17/32"	5/8"	2.5 lbs.	20'	$24.98 F
428157	(DB-504)	Black	3-3/4"	4-1/4"	25/32"	3/4"	3.2 lbs.	20'	$31.98 F

Johnson Duramax Commercial Bumpers


Special Handling May Apply



DMI #	MFG #	Single – Steel Plate Thickness (A)	Width (B)	L (C)	Rubber Base Width (D)	Surface Width (E)	Approx. Weight Per Unit	Price
428575	(DB-1408)	3/4"	10"	36"	8"	7"	90 lbs.	$209.98 B
428563	(DB-1409)	1/2"	10"	36"	8"	7"	65 lbs.	$189.98 B
428551	(DB-1410)	1/4"	10"	36"	8"	7"	50 lbs.	$176.98 B
428614	(DB-1508)	3/4"	13-1/2"	36"	11-1/4"	10-1/4"	130 lbs.	$336.98 B
428602	(DB-1509)	1/2"	13-1/2"	36"	11-1/4"	10-1/4"	90 lbs.	$299.98 B

Johnson Duramax Modular Bumper

Special Handling May Apply




DMI #	MFG #	Single – Steel Plate Thickness (A)	Width (B)	L (C)	Rubber Base Width (D)	Surface Width (E)	Approx. Weight Per Unit	Price
428804	(DB-1909)	1/2"	10"	35-1/2"	8"	7"	53 lbs.	$209.98 B

SLM M Series Gypsy Winch

SUPERIOR LIDGERWOOD MUNDY

- Single and double heads available.
- 6" Head diameter currently available.
- 1,300 lbs. @ 20 FPM.
- Specialty motors (50 Hz, explosion proof) are available.
- Controls can be built to your specifications.
- All electrical configurations available.
- Standard marine duty paint system applied. Custom paint available upon request.

Order No.	Mfg. No. / Description	Price
399914	(A010/06/151) Double Gypsy Winch	$10,281.98 C

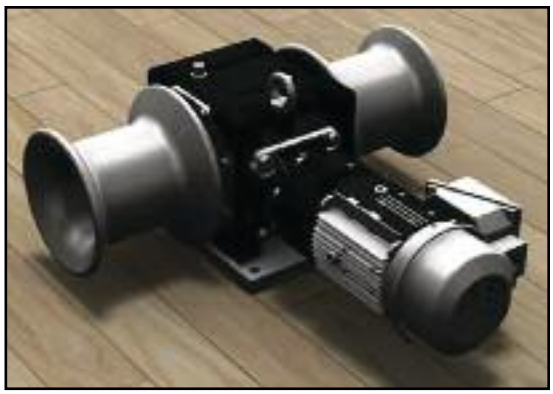


W.W. Patterson Ten Models From 20 to 75 Ton Shock Load Capacity

PATTERSON

Electric Winch Specifications


*MFG #	Shock Load Capacity	Maximum Pull	Maximum Speed	Rated Line Pull	Manual Ratios	Base	Drum Dim.	Weight Diameter	Electric Motors
WWP20E-3-6L/R	40,000 lbs.	16,000 lbs.	14 fpm	5,200 lbs.	20:1 298:1	35" x 15"	8-5/8"	800 lbs.	3 HP, 3 Phase 60 Hz, 230/460V
WWP20EX-3-6L/R	40,000 lbs.	12,000 lbs.	19 fpm	3,800 lbs.	20:1 220:1	35" x 15"	8-5/8"	800 lbs.	3HP, 3 Phase 60 Hz, 230/460V
WWP30E-3-10L/R	60,000 lbs.	15,000 lbs.	13 fpm	5,400 lbs.	20:1 380:1	35" x 19"	10"	950 lbs.	3HP, 3 Phase 60 Hz, 230/460V
WWP30E-5-10L/R	60,000 lbs.	20,000 lbs.	17 fpm	6,600 lbs.	20:1 280:1	35" x 19"	10"	950 lbs.	5HP, 3 Phase 60 Hz, 230/460V
WWP40E-5-14L/R	80,000 lbs.	24,000 lbs.	15 fpm	8,000 lbs.	16:1 325:1	37" x 25"	10"	1,300 lbs.	5HP, 3 Phase 60 Hz, 230/460V
WWP40E-7.5-14L/R	80,000 lbs.	25,000 lbs.	22 fpm	8,400 lbs.	16:1 222:1	37" x 25"	10"	1,300 lbs.	7.5HP, 3 Phase 60 Hz, 230/460V
WWP65E-7.5-14L/R	130,000 lbs.	36,000 lbs.	16 fpm	11,000 lbs.	24:1 422:1	40" x 25"	14"	2,000 lbs.	7.5HP, 3 Phase 60 Hz, 230/460V
WWP65E-10-14L/R	130,000 lbs.	30,000 lbs.	26 fpm	9,800 lbs.	24:1 264:1	40" x 25"	14"	2,000 lbs.	10HP, 3 Phase 60 Hz, 230/460V
WWP75E-10-10L/R	150,000 lbs.	36,000 lbs.	22 fpm	12,000 lbs.	20:1 215:1	45" x 22"	16"	2,500 lbs.	10HP, 3 Phase 60 Hz, 230/460V



Left Hand Unit, Rear View

Electric Winch Drum Capacities and Winch/Workboat Sizing

MFG #	Drum Capacities and Maximum Recommended Wire Rope Dia.	For Use on Workboats with Max. Horsepower of:
WWP20E-3-6L/R	100' of 3/4"	Up to 800
WWP20EX-3-6L/R	100' of 3/4"	Up to 800
WWP30E-3-10L/R	65' of 7/8"	800 to 1,300
WWP30E-5-10L/R	65' of 7/8"	800 to 1,300
WWP40E-5-14L/R	100' of 1"	1,300 to 5,600
WWP40E-7.5-14L/R	100' of 1"	1,300 to 5,600
WWP65E-7.5-14L/R	100' of 1"	1,300 to 5,600
WWP65E-10-14L/R	150' of 1-1/8"	5,600 to 10,000
WWP75E-10-10L/R	150' of 1-1/8" & 125' of 1-1/4"	5,600 to 10,000

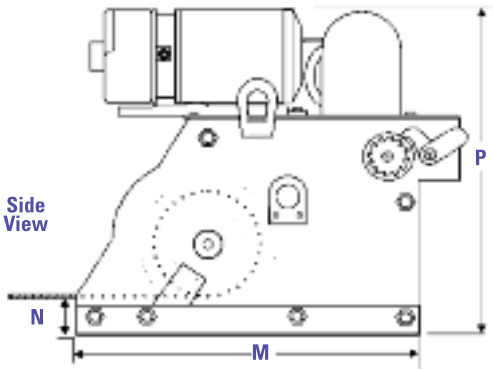

Electric Winch Dimensions

MFG #	L	M	N	P	Q
WWP20E-3-6L/R	15"	35"	5-1/2"	32-3/4"	5-13/16"
WWP20EX-3-6L/R	15"	35"	5-1/2"	32-3/4"	5-13/16"
WWP30E-3-10L/R	19"	35"	4-7/8"	32-3/4"	8-13/16"
WWP30E-5-10L/R	19"	35"	4-7/8"	34-1/4"	8-13/16"
WWP40E-5-14L/R	24-1/2"	37"	4"	38-1/2"	9-3/16"
WWP40E-7.5-14L/R	24-1/2"	37"	4"	40-3/4"	9-3/16"
WWP65E-7.5-14L/R	25-3/4"	40"	5-1/2"	48"	10-3/4"
WWP65E-10-14L/R	25-3/4"	40"	5-1/2"	48"	10-3/4"
WWP75E-10-10L/R	22-1/4"	45"	8-1/4"	52"	8"

208 Volt, Galvanized, 7.5 HP

Order No.	Mfg. No. / Description	Price
528162	(WWP40E-75-14L) Left Hand, 40 Ton	$21,900 B
528163	(WWP40E-75-14R) Right Hand, 40 Ton	$21,900 B

230/460 Volt, Painted, 5 HP

Order No.	Mfg. No. / Description	Price
528160	(WWP40E-5-14L) Left Hand, 40 Ton	$14,200 B
528161	(WWP40E-5-14R) Right Hand, 40 Ton	$14,200 B
528135	(WWP30E-5-10L) Left Hand, 30 Ton	$12,880 B
528138	(WWP30E-5-10R) Right Hand, 30 Ton	$12,880 B

*Special winches available

Special Handling May Apply

Winches

Order No.	Mfg. No. / Description	Price
528125	(WWP20E-3-6L)	$11,000 B
528127	(WWP20E-3-6R)	$11,000 B
528149	(WWP40E514N-L)	$14,200 B
528174	(WWP40E7.514L)	$18,125 B
528176	(WWP40E7.514R)	$18,125 B
528182	(WWP65E7.514L)	$20,780 B
528184	(WWP65E7.514R)	$20,780 B

©2014 Donovan Marine, Inc.

W.W. Patterson - Our Completely Redesigned Line Means Safer, More Efficient, OSHA – Compliant Winches

PATTERSON

Series – 50B Features:

1. Full-size rope guard surrounds gearing; prevents fouling wire rope.
2. Complete operating instructions on gear shroud.
3. "Second to none" rope-securement method lays first coil snugly against drum flange; promotes better spooling.
4. Pull-up ratchet and extension bar provide ultrahigh tension.
5. All new brake-lock design keeps our famous safety-release feature, but now friction-disc replacement is fast and simple.
6. Hinged gear should protects gearing, yet allows easy access for lubrication.
7. Ratchet lock and cam assembly makes release under high tension easiest an safest of all.
8. High gear ratio makes tightening easier.
9. Lubrication is simplified with grease fittings at all friction points.
10. Dished handwheel with spinner speeds slack take-up.
11. Angle foot-mounts with bolt-down holes available.

Order No.	Mfg. No. / Description	Price
528210	(WWP20M-6) 20 Ton, Painted, Left, 6L	$6,200 B
528220	(WWP40M-11) 40 Ton, Painted, Left, 12L	$8,400 B
528221	(WWP40M-11) 40 Ton, Painted, Right, 12L	$8,400 B


Left Hand Unit




Rear View



Front View



Manual Operations





Pull-up
With ratchet eccentric lever **A** in vertical position, pull up load with handwheel. Ratchet dog **B** will override, holding load at all points. When load is tight, lock clutch-type brake **C**.

Release
Pull ratchet eccentric lever **A** out to horizontal position. This drops dog out of engagement while load is held by brake. Lift out dog **B**, then control release with vise handle **D**.

Manual Winch Dimensions

MFG #	L	M	N	Q
WWP20M-6	15"	27-3/4"	33-1/2"	6"
WWP20M-6	15"	27-3/4"	37-1/2"	5-1/2"
WWP40M-11	21-1/2"	29"	43"	6-3/4"
WWP40M-11	25-3/4"	39"	49"	10-1/2"

Special Handling May Apply

Manual Winch Specifications

MFG #	Shock Load Capacity	Drum Diameter & Length	Handwheel Diameter	Deck to Bare Drum	Drum Capacities and Max. Recommended Wire Rope Diameters	Typical Line Tension with 100 lbs. Effort on Handwheel	Typical Max. Tension by One Man	Weight
WWP20M-6	40,000 lbs.	8-5/8" x 7"	28"	5-3/4"	100' of 3/4"	5,000 lbs.	9,000 lbs.	600 lbs.
WWP20M-6	60,000 lbs.	10-3/4" x 6"	36"	3-3/4"	60' of 7/8"	5,400 lbs.	12,000 lbs.	700 lbs.
WWP40M-11	80,000 lbs.	10-3/4" x 11"	42"	4"	70' of 1"	5,400 lbs.	14,000 lbs.	950 lbs.
WWP40M-11	130,000 lbs.	14" x 14"	48"	5-1/4"	150' of 1-1/8"	7,000 lbs.	17,000 lbs.	1,800 lbs.


Electric Winches Features:


- NEMA 4 Dings Brake.
- Thermostatically protected motor.
- Machined alloy gearing.
- Electric self-adjusting, spring-loaded brake.
- Mechanical locking dog for emergency use in case of electric brake failure.
- Heavy-duty roller chain and sprockets.
- Heavy-duty roller bearings and high-strength phosphor bronze bearings.
- 230/460V-3 Phase-60Hz NEMA Design D motors.
- 208V or other special motors available.
- Bolted keeper plate allows fast, easy shaft removal.
- Rope and gear guards protect wire rope and enclose the gearing.

208 Volt, Painted, 5 HP

Order No.	Mfg. No. / Description	Price
528145	(WP40E-514) 40 Ton, Right	$14,200 B
528146	(WP40E-514) 40 Ton, Left	$14,200 B

Wintech Spur-Gear "Handi-Winch®" Series

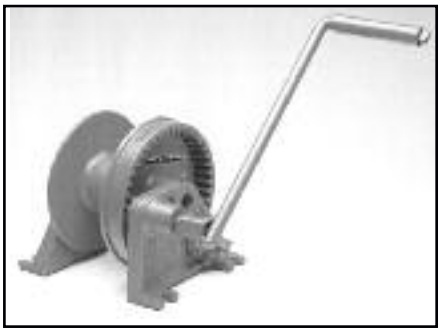

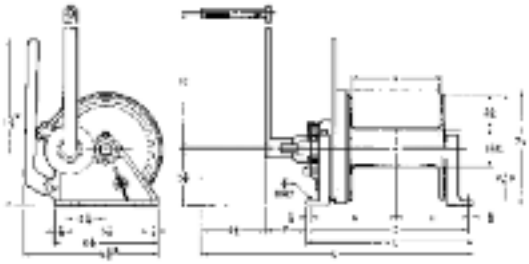


1/2 Ton with Brake


- 1/2 US Ton winching capacity.
- Designed to offer a portable hand winch for light lifting, lowering, holding, moving or securing rated loads.
- Cast steel drum.
- Ductile iron frame.
- Cast bronze spur gear pinion.
- Spring operated load holding dogs.
- Single direction on models equipped with lowering brakes.
- Two drum widths: 3 or 6 inches.
- Suitable for marine environment.
- Gear ratio: 5.25:1.
- Drum capacities: 1/8" at 367'. 3/16" at 151'. 1/4" at 89'. 5/16" at 54'.
- Note: Not recommended for power applications.

Order No.	Mfg. No. / Description	Price
752041	(AM3B) 1/2 Ton with Brake	$574.98 B

Order No.	Model #	A	B	C	D	E
752041	AM3B	3"	4-7/32"	3-9/32"	7-1/2"	8-1/4"
Special	BM6B	1 Ton Capacity with Brake				

Wintech Spur-Gear Series

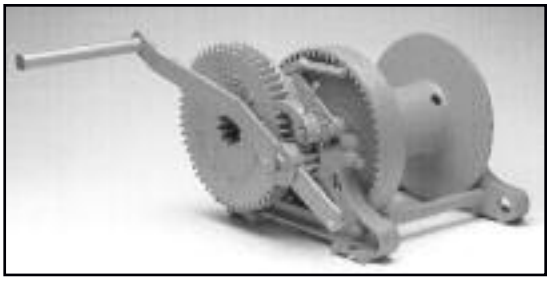

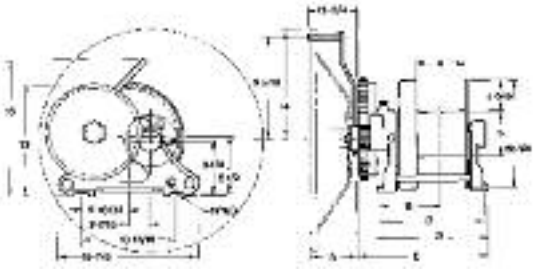

5 Ton with Brake

- 5 US Ton winching capacity.
- All steel hand winches are designed for marine duty and industrial use.
- Cast steel drums and ring gear.
- Steel load bearing components, cast steel frames.
- Replaceable bronze bushings.
- One piece fully adjustable 14" long steel operating handle with pinion.
- Spring loaded holding dog with release handle.
- Hand operated, adjustable holding brake.
- Easy free spooling.
- Two speed gear change offers fast cable take up and easier winching.
- Gear ratio: 4:1/24:1.
- Drum capacities: 3/8" at 358'. 7/16" at 284'. 1/2" at 220'. 5/8" at 123'.
- Note: Not recommended for power operation.

Order No.	Mfg. No. / Description	Price
752091	(HM8) Winch with Hand Crank	$1,634.98 B
752097	(HM8W) Winch with Wheel Crank	$2,006.98 B
752095	(HM8W140014) Winch w/Pedestal & Wheel Crank	$2,358.98 B

Order No.	Model #	A	B	C	D	E	Price
752091	HM8	8"	7-7/8"	13-7/8"	15-3/8"	17-3/4"	$1,634.98 B
752095	HM8W	8"	7-7/8"	13-7/8"	15-3/8"	17-3/4"	$2,358.98 B
752093	LM6	6"	2 Ton Capacity with Brake				$1,167.98 B

Wintech Standard Upright Barge Winches



Special Handling May Apply

- Electric powered 40 US Ton holding capacity.
- Designed to protect operator profits by speeding up tow makeup and breakdown.
- Down time and maintenance are kept to a minimum due to design simplicity and use of superior material.
- Fully reversing crane and hoist duty motors that are totally enclosed.
- Control from pilot house or deck.
- Drum guard prevents slack cable from fouling gears.
- Hand wheel for operaton in the event of power loss.
- Rated pull capacity: 6,400 lbs.
- Stall pull capacity: 17,500 lbs.
- Hand pull capacity: 20,000 lbs.
- Electric brake holding: 55,000 lbs.
- Dog holding: 50,000 lbs.
- Line speed - no load: 35 fpm. Line speed - rated pull: 31 fpm.
- 7.5 HP.
- Phase cycle, volts: 230/460-3-60.
- Drum diameter 10".

Order No.	Mfg. No. / Description	Price
752027	(341L-RC-B9-1) Left Hand	$11,305 B
752039	(341R-RC-B9-1) Right Hand	$11,305 B

©2014 Donovan Marine, Inc.


Wintech Low-Profile Barge Winches



- Built to last, this low profile manualy powered single speed barge winch keeps the cable low on the "bitts" and the deck.
- Addtional tightening power from ratchet lever bar.
- Quick release holding dog, automatically disengages when not in use.
- Spinner knob on hand wheel for fast slack line take-up.
- Steel gear guard provides operator protection; prevents slack cable from fouling gears.
- Foot brakes control and prevent overrunning and birdnesting of wire rope.
- Gear ratio: 14:1.
- Drum diameter 10-3/4".

Order No.	Mfg. No. / Description	Price
752018	(20HL) 20 Ton-Left Hand	POR
752022	(20HR) 20 Ton-Right Hand	POR
752003	(B25HL-9-10) 40 Ton-Left Hand	POR
752015	(B25HR-9-10) 40 Ton-Right Hand	POR

Special Handling May Apply

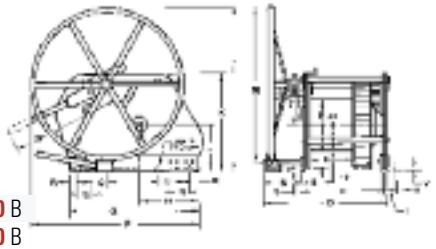

Order No.	N	P	Q	R	S	T	U	V	W	X	Y	Price
752003	9-3/8"	37-1/2"	4"	3"	1"	2-1/8"	1"	1/2"	53-1/2"	13/16"	10"	$5660 B
752015	9-3/8"	37-1/2"	4"	3"	1"	2-1/8"	1"	1/2"	53-1/2"	13/16"	10"	$5660 B

Order No.	Model	A	B	C	D	E	F	G	H	J	K	L	M	
752018	20 Ton – Left Hand													POR
752022	20 Ton – Right Hand													POR
752003	40 Ton – Right Hand	9"	7-3/8"	17-7/8"	27-7/8"	10-3/4"	3-5/8"	28"	12-1/4"	21"	21"	34-1/2"	32"	
752015	40 Ton – Left Hand	9"	7-3/8"	17-7/8"	27-7/8"	10-3/4"	3-5/8"	28"	12-1/4"	21"	21"	34-1/2"	32"	

Winch Specification Sheet

Type of Winch:

Towing Tugger Anchor Fishing Other

Winch Performance Requirements:

Max. Line Pull _____ lbs. @ Line Speed of _____

Min. Line Pull _____ lbs. @ Line Speed of _____

Point on Drum where max. Line Pull occurs: Bare Drum Mid Drum Full Drum

Brake: Failsafe/Automatic Manual

Clutch: Yes No

Cable Requirements:

Cable Diameter: _____ Cable Length: _____

Cable Type: _____ Min. Bending Dia.: _____

Winch Power Requirements:

Winch Drive: Electric Hydraulic Other

If Electric, what is the power supplied: _____

Certifications:

What certification, if any, is required:

ABS Lloyd's DNV USCG Other

Any additional information:

_____


_____

_____

_____

_____

Flush T-Handle Watertight Hatch Assembly



Special Handling May Apply


18" Clear Opening – 63 lbs.

Order No.	Piece No.	Name	Material
310526 310540	1	Cover Assembly Galv. Cover Only	Mild Steel
310514 310541	2	Mounting Ring Galv. Ring Only	Mild Steel
312405	3	Strong Back	Mild Steel
312002	4	Tee Handle	Stainless Steel
312037	5	Nut	Brass
312102	6	Gasket	Neoprene O-ring
312051	7	Washer	Neoprene Flat
312025	8	Washer	Brass

Order No.	Mfg. No. / Description	Price
310514	(01210-203A) T/HNDL DECK RING 18"	$104.98 C
310526	(04210-101A) T/HNDL COVER 18"	$235.98 C
310538	(01210-101A) Finish, Painted Steel	$282.98 C
310540	(04210-101B) T/HNDL COVER 18" GALV	$255.98 C
310541	(01210-203B) 18" RING ONLY GALV	$135.98 C
310539	(01210-101B) Finish, Galvanized	$344.98 C
312002	(01210-201A) T HANDLE SS	$36.98 C
312025	(01210-804A) BRONZE WASHER T/HANDLE	$6.98 C
312037	(01210-803A) BRONZE NUT T/HANDLE	$28.98 C
312051	(01210-701A) GASKET T/HANDLE	$4.98 C
312102	(01210-702A) 430 HATCH "O" RING 18"	$22.98 C
312114	(01220-701A) HATCH GASKET HTB-24"	$24.98 C
312405	(01210-202A) STRONG BACK GALV 18"	$29.98 C
312431	(01220-202A) STRONG BACK GALV 24"	$38.98 C

Similar to Nabrico Part No. DF-430-18.

Flush, Watertight Single Bolt Manholes

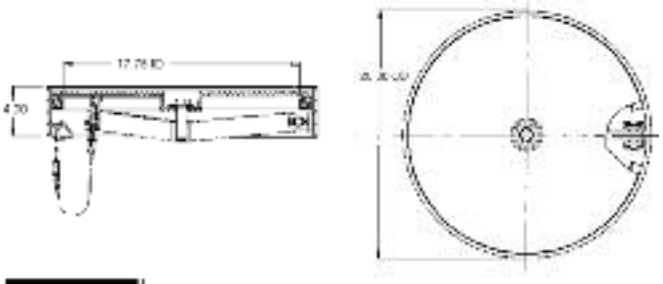

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
310590	20" Flush, Watertight Single Bolt Manhole	$269.98 C

Clear Opening: 17-3/4". Outside dimension: 20".
Similar to Centex Drawing #301-20.


Order No.	Mfg. No. / Description	Price
312417	20" Strong Back for Single Bolt Manhole	$29.98 C

Order No.	Mfg. No. / Description	Price
310603	22" Flush, Watertight Single Bolt Manhole	$292.98 C

Clear Opening: 19-3/4". Outside dimension: 22".
Similar to Centex Drawing #301-22.

Order No.	Mfg. No. / Description	Price
312429	22" Strong Back for Single Bolt Manhole	$31.98 C

Flush T-Handle Watertight Hatch Assembly



Special Handling May Apply


24" Clear Opening – 100 lbs.

Order No.	Piece No.	Name	Material
	1	Cover Assembly	Mild Steel
	2	Mounting Ring	Mild Steel
312431	3	Strong Back	Mild Steel
312002	4	Tee Handle	Stainless Steel
312037	5	Nut	Brass
312114	6	Gasket	Neoprene O-ring
312051	7	Washer	Neoprene Flat
312025	8	Washer	Brass

Order No.	Mfg. No. / Description	Price
310564	(01220-101A) Finish, Painted Steel	$481.98 C

Similar to Nabrico Part No. DF-430-24.

Raised, Watertight Hatch Assembly

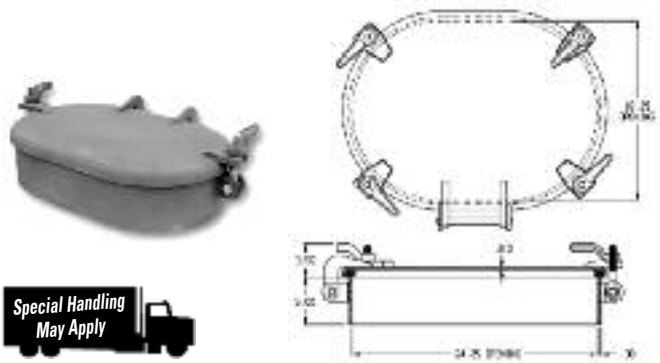

Special Handling May Apply

4 Dog Raised Hatch - 18" x 24" ROT

Order No.	Piece No.	Name	Material
	1	Cover	Mild Steel
	2	Coaming	Mild Steel
	3	Gasket	Neoprene
312203	4	Tumble Bolt	Bronze
312227	5	Dog Handle	Malleable Iron
312102	6	"O" Ring	

Order No.	Mfg. No. / Description	Price
310906	(HDB-1824-5) 18" x 24"	$402.98 C

Similar to Nabrico Part No. DF-464-5 and Centex Drawing 208.

Tumble Bolt/Parts - Manganese Bronze



Order No.	Mfg. No. / Description	Price
312125	(03800-110A) Eye Bolt and Bell Nut Assembly	$24.98 C
312203	(DB10774) Eye Bolt, 5-1/4" x 3/4"	$23.98 C
312227	(DB17744) Handle	$27.98 C
312241	(DB17876) Wing Nut, 3/4" Thread	$51.98 C
312342	(03800-205A) Eye Bolt, 1/2" x 6"	$19.98 C
312354	(03800-206A) Wing Nut, 1/2" Thread	$13.98 C
685885	Full Nut, Shaft Size 1-3/4", 1-1/4" x 7" Thread	$36.98 B
685886	Jam Nut, Shaft Size 1-3/4", 1-1/4" x 7" Thread	$24.98 C
685887	Full Nut, Shaft Size 2", 1-1/2" x 6" Thread	$68.98 C
685888	Jam Nut, Shaft Size 2", 1-1/2" x 6" Thread	$45.98 C

©2014 Donovan Marine, Inc.

Replacement Gasket for Manholes

Order No.	Description	Price
312152	20" Manholes	$30.98 C
312164	22" Manholes	$26.98 C

Hardware Kit for Single Bolt Manholes

Order No.	Description	Price
312253	Hardware Kit	$26.98 C

Quick Acting Watertight Round Scuttle

Order No.	Description	Price
577988	(DWG402)	$1028.98 B

Marpac T-Handle Flush Hatch





Order No.	Description	Price
5-0538	18" - Painted	$273.98 C
5-0539	18" - Galvanized	$332.98 C

T-Handle Flush Hatches

Special Handling May Apply

Order No.	Description	Price
5-0538	18", Painted	$273.98 C
5-0539	18", Galvanized	$332.98 C

Raised Hatch Gasket

Order No.	Description	Price
380203	Fits 15" x 23" Raised Hatch	$49.98 B

Raised Hatches 15" x 23"

Order No.	Description	Price
5-0730	Multi-bolt, Painted	$346.98 C
5-0732	S/S & Bronze	$420.98 C

Universal Motion Components Flame Screen

- For use with UMC-144-5 series Raised Ullage Hatch.

Order No.	Mfg. No. / Description	Price
303216	(01242-203A) 7-3/4" Diameter	$38.98 C
303278	(01243-202A) 11" Diameter	$59.98 C

Raised, Watertight Hatch Assembly


Special Handling May Apply

Dimensions: 15" x 23" x 5"

Order No.	Piece No.	Name	Material
	1	Cover	Mild Steel
	2	Coaming	Mild Steel
312140	3	"O" Ring	Neoprene
312203	4	Tumble Bolt	Bronze
312227	5	Dog Handle	Malleable Iron
	6	Locking Hasp	Mild Steel

Order No.	Mfg. No. / Description	Price
310893	(HDB-1523-5) 15" x 23"	$326.98 C

Similar to Nabrico Part No. DF-174-5 and Centex Drawing 208.

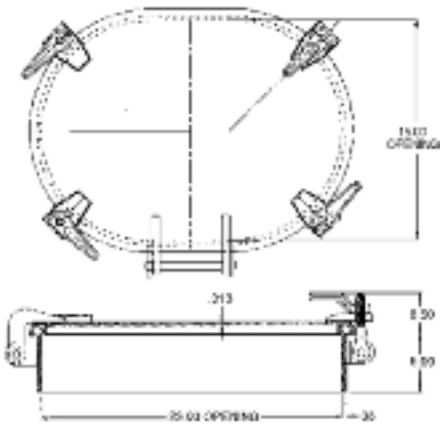

Raised, Watertight Hatch Assembly




Special Handling May Apply

4 Dog Hatch - 19" ROT


Order No.	Piece No.	Name	Material	Price
	1	Cover Assembly	Mild Steel	
	2	Coaming Assembly	Mild Steel	
312140	3	"O" Ring	Neoprene	$28.98 C
312203	4	Tumble Bolt	Bronze	$23.98 C
312227	5	Dog Handle	Malleable Iron	$27.98 C
	6	Locking Hasp	Mild Steel	

Order No.	Mfg. No. / Description	Price
310855	(HDB-20R)	$333.98 C

Similar to Nabrico Part No. DF-343-5 and Centex Drawing 404.

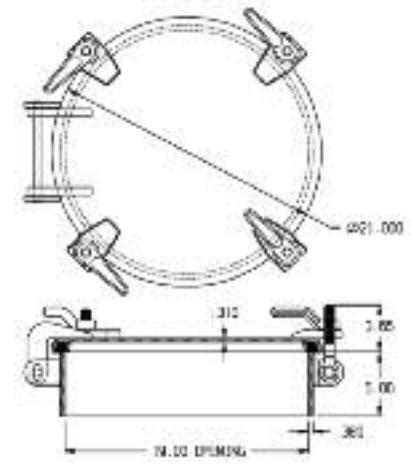

Flush, Watertight Hatch

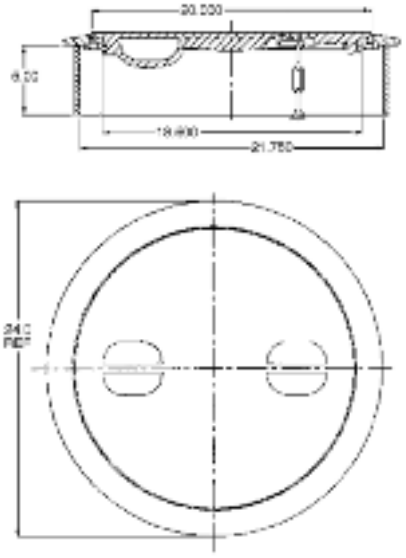

Special Handling May Apply

18" Twist Lock

Order No.	Mfg. No. / Description	Price
S/O	(HTL-18-5) With 5" Coaming*, Twist Lock	POR


Similar to Nabrico Part No. DF-474-5. *May be mounted flush or raised.

Bomar Flush Watertight Cast Aluminum Hatches

- Cast Almag with stainless steel handle.
- Watertight to 30 ft. head.
- 4 dog sealing system.
- Optional steel mounting ring.
- Designed to meet requirements of US Coast Guard, ABS, LLoyds of London and British Dept. of Trade.

Order No.	Mfg. No. / Description	Price
259715	(C424-5R) 24"	$1,398.98 C

Raised, Bolted Plate Manhole

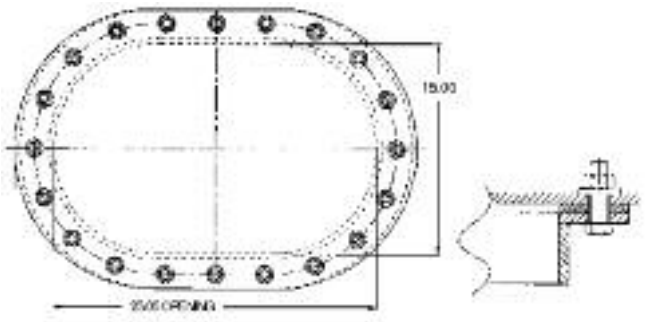


Special Handling May Apply

- Clear Opening

Order No.	Description	Price
310730	15" x 23"	$365.98 C

Similar to Nabrico Part No. DF-501 and Centex Drawing 302.

Clean Out Hatch Assemblies

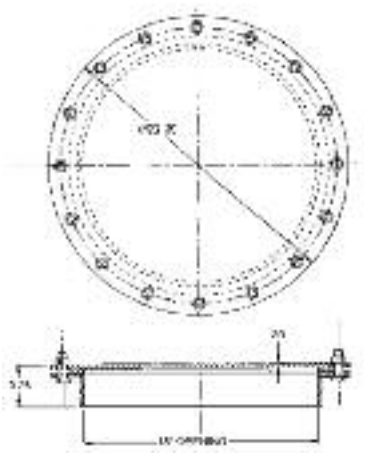

Piece No.	Name	Material
1	Cover Plate	Mild Steel
2	Coaming	Steel
3	Ring Gasket	Neoprene
4	5/8 Bolt	Steel
5	5/8 Nuts	Brass

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
310716	(08450-101A) 18"	$346.98 C

Similar to Nabrico Part No. DF-154-18 and Centex Drawing 308.


Oval Single Bolt Manhole

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
577907	Clear Opening, 15" x 23"	$799.98 B

Similar to Centex Drawing 307.

Watertight Manhole Cover, Flush Multi-bolt

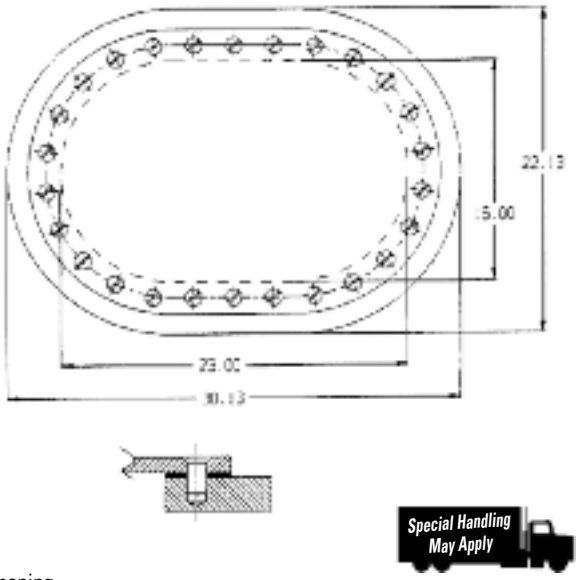

Special Handling May Apply


- Clear Opening

Order No.	Description	Price
310627	15" x 23"	$596.98 C

Similar to Centex Drawing 303.

©2014 Donovan Marine, Inc.

Watertight Manhole Cover, Flush Multi-bolt

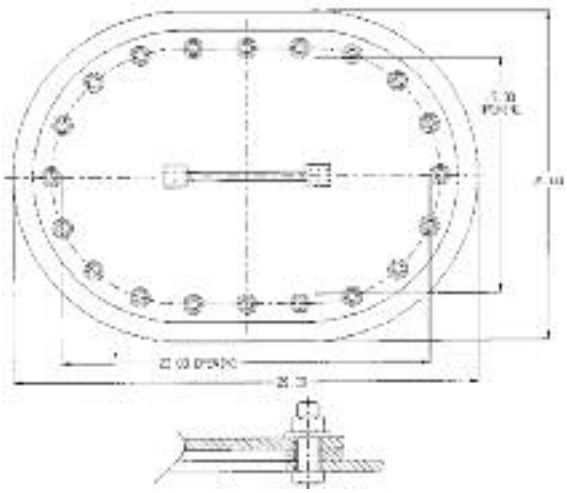

Special Handling May Apply

- Clear Opening

Order No.	Description	Price
310653	15" x 23"	$374.98 C
310665	18" x 24"	$469.98 C

Similar to Centex Drawing 300.

Baier Hatches



Hinged Hatches with Built-in T-handle



Round Lift-Out Hatch

- All Baier Hatches use the patented strongback system of securing the hatch cover to the deck.
- It is superior to other more complicated hatch closure systems because it is simple (only three moving parts), it is stronger, it is more reliably watertight, and it is more easily serviced (parts are readily available and replaced in the field).
- Each hatch has an underside escape turning bar for safety.
- An underside turning wheel is optional.
- The deck ring is available in galvanized mild steel (for welding into steel decks), or cast aluminum (for welding into aluminum decks or bolting to fiberglass or wood decks).

Baier Round Lift-Out Hatch.

- This is available in 14", 16", 18", 20" and 24" clear opening.
- Available in cast aluminum or galvanized steel (Model BFHR).

Baier Hinged Hatches with Built-in T-handle.

- These are flush mounted and designed for quick release with a grab handle.
- The hinges are recessed to prevent tripping.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
243458	15" x 24", Aluminum Hatch with Aluminum Ring	$796.98 C
243460	15" x 24", Aluminum Hatch with Steel Ring	$796.98 C

Marpac Raised Multi-bolt Manhole





- Clear opening 15" x 23".
- Similar to Centex drawing 302 or Nabrico part number DF-501.

Order No.	Description	Price
5-0730	Painted, Bronze Hardware	$346.98 C
5-0732	Painted, Stainless Steel & Bronze Hardware	$420.98 C

Baier Marine Co., Inc.

Order No.	Mfg. No. / Description	Price
243436	(BFHR20) S/S STEEL HATCH ASSY RND	$727.98 C

Baier Square Flush Hatches with Built-in T-Handle



243470



243465

Special Handling May Apply

- The 24" x 24" square Baier Flush Hatch with a built in T-Handle is available with a lift-out cover or a hinged cover.
- All Baier Hatches use the patented strongback system of securing the hatch cover to the deck.
- It is superior to other more complicated hatch closure systems because it is simple (only three moving parts), it is stronger, it is more reliably watertight, and it is more easily serviced (parts are eadily available and replaced in the field).
- Each hatch has an underside escape turning bar for safety.
- An underside turning wheel is optional.
- The Cover is available in cast aluminum.
- The deck ring is available in galvanized mild steel (for welding into steel decks), or cast aluminum (for welding into aluminum decks or bolting to fiberglass or wood decks).
- Coamings are optional.
- Clear opening: 24" x 24".
- Cover diameter: 26" x 26".
- Deck cut out: 26-1/2" x 26-1/2".

Order No.	Mfg. No. / Description	Price
243465	24" x 24" Alumimum Hatch with Ring	$1,198.98 C
243466	24" x 24" Alumimum Hatch with Steel Ring	$1,326.98 C
243470	24" x 24" Alumimum Hatch with Ring, Hinged	$1,248.98 C

Baier Lift-Out Flush Hatches with Built-in T-Handle




- These are available in 20" round and 15" x 24" oval shapes.
- Each hatch has an underside escape turning bar for safety.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
243410	15" x 24" Aluminum Hatch with Aluminum Ring	$716.98 C
243422	15" x 24" Aluminum Hatch with Steel Ring	$716.98 C
243434	20" Aluminum Hatch with Aluminum Ring	$716.98 C
243446	20" Aluminum Hatch with Steel Ring	$716.98 C
243484	Cover Gasket for All Hatches	$55.98 C

Baier Lift-Out Dogged Type Hatches with Built-in T-Handle

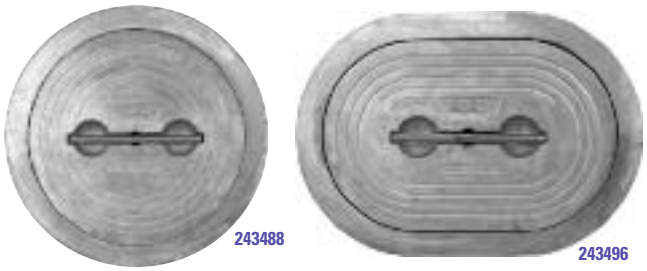


- Aluminum Hatches are Lightweight but strong.
- Multi-Dog "Cam Lock" positive engagement locking system.
- All weather seal, drop in replacement for all standard 20" and 15" x 24" deck rings.

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
243488	20" Quick Acting, Aluminum with Steel Ring	$716.98 C
243493	20" Quick Acting, Aluminum with Alumimum Ring	$716.98 C
243496	15" x 24" Quick Acting, Aluminum with Steel Ring	$716.98 C
243498	15" x 24" Quick Acting, Aluminum with Alumimum Ring	$716.98 C

Replacement Hinge and Spring Assembly for Centex #202

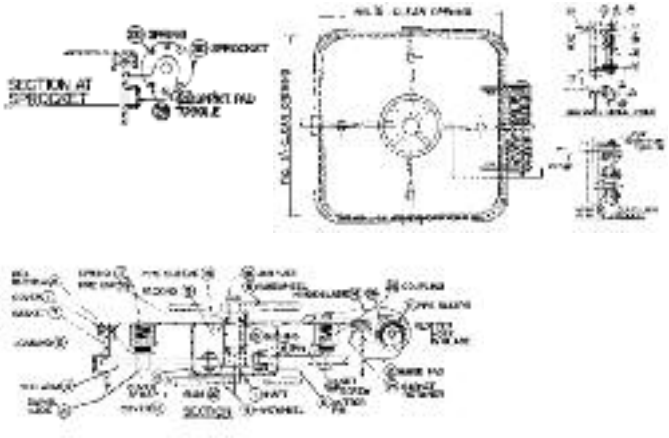

Order No.	Mfg. No. / Description	Price
279352	(HR202) Replace Hing & Spring Assembly	$833.98 B

Complete Hatch Assembly

Order No.	Mfg. No. / Description	Price
577986	(DOG2022) 24" x 24" x 24" ABS Steel	$3,307.98 B
577902	(DWG201) 36" X 36" WATERTIGHT DR 6"C	$1,402.98 B


Replacement Door Gaskets

Order No.	Mfg. No. / Description	Price
427903	Size: 3/4" x 1", 100' Lengths Only	$6.98 B
427941	Size: 3/4" x 1-1/4", 100' Lengths Only	$7.98 B

Replacement Accessories

Order No.	Mfg. No. / Description	Price
279340	Replacement Door Hinge Pin Kit	$26.98 B
279358	Replacement Shim for Watertight Door Dog	$3.98 B
279364	Replacement Nylon Door Dog Bushing	$7.98 B

Commercial Watertight Doors - All Steel




Special Handling May Apply

- 4 Dog.
- Standard grade.
- Similar to Centex Drawing 101.

Order No.	Description	Price
312859	26 x 54, RH	$1,622.98 B
312861	26 x 54, LH	$1,622.98 B
312873	26 x 60, RH	$1,746.98 B
312885	26 x 60, LHa	$1,746.98 B
312897	30 x 60, RH	$1,915.98 B
312900	30 x 60, LH	$1,915.98 B

Commercial Quick Acting Watertight Doors - All Steel




Special Handling May Apply

- 6 Dog.
- ABS grade.
- Similar to Centex Drawing 104.

Order No.	Description	Price
313255	26 x 60, RH	$2,100.98 C
313267	26 x 60, LH	$2,139.98 C
313279	30 x 60, RH	$2,214.98 C
313281	30 x 60, LH	$2,214.98 C
313293	30 x 66, RH	$2,377.98 C
313306	30 x 66, LH	$2,377.98 C
313318	30 x 72, RH	$2,412.98 C
313320	30 x 72, LH	$2,412.98 C

Commercial Watertight Doors - All Steel



Special Handling May Apply

- 6 Dog.
- ABS grade.
- Similar to Centex Drawing 102.

Order No.	Description	Price
313128	26 x 60, RH	$1,749.98 C
313130	26 x 60, LH	$1,749.98 C
313180	30 x 60, RH	$1,811.98 C
313192	30 x 60, LH	$1,811.98 C
313205	30 x 66, RH	$1,966.98 C
313217	30 x 66, LH	$1,966.98 C
313229	30 x 72, RH	$2,113.98 C
313231	30 x 72, LH	$2,113.98 C

©2014 Donovan Marine, Inc.

Door Dogs for Steel and Aluminum Doors



Order No.	Description	Price
313510	Steel, Left Hand	$79.98 C
313522	Steel, Right Hand	$79.98 C

Steel Handwheels for Steel Doors



Order No.	Description	Price
313700	12", Clockwise	$55.98 C
313712	12", Counter Clockwise	$55.98 C
313748	15-1/2", Clockwise	$53.98 C
313750	15-1/2", Counter Clockwise	$53.98 C

Diamond Sea Glaze Locks

Order No.	Mfg. No. / Description	Price
327603	(5312R-E) Trioving Lock, Old RH	$443.98 B
327604	(5312L-E) Trioving Lock, Old LH	$443.98 B
327605	(5312L-R) Trioving Lock, New LH	$443.98 B
327609	(5312R-R) Trioving Lock, New RH	$443.98 B
327610	(HWLS8900834) Latch Bolt Spring	$13.98 B


Marpac Door Handle Assembly




Order No.	Description	Price
5-0030	Aluminum, Left Hand	$93.98 C
5-0031	Aluminum, Right Hand	$93.98 C
5-0040	316 Stainless Steel, Left Hand	$136.98 C
5-0041	316 Stainless Steel, Right Hand	$136.98 C
5-0045	Stainless Steel & Steel, Left Hand	$95.98 C
5-0046	Stainless Steel & Steel, Right Hand	$95.98 C

Diamond/Sea Glaze Doors

Diamond/Sea Glaze Doors are available in bolt-in or weld-in style frames with radiused or mitred corners.

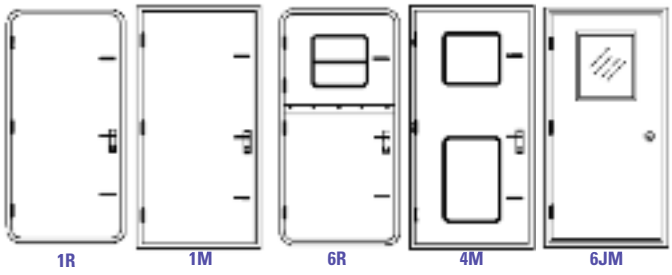

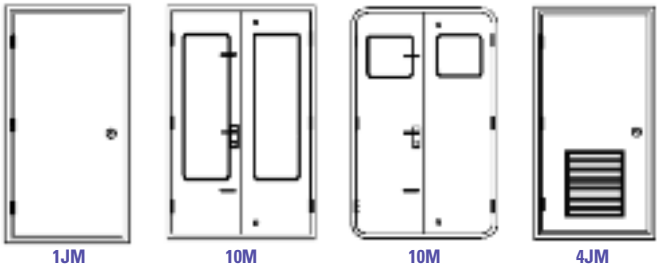

Many other models available specify size and handage.

Aluminum frames - skin, mill finish, anodized powder coat or wet paint Single panel, dutch style, french and sliding doors.

Door windows available (several styles).

Call for prices and availability.

Diamond Sea Glaze Window Fixed Tempered


Order No.	Mfg. No. / Description	Price
327601	(DSGD15) 57.25 x 26.95	$784.98 B


Diamond Sea Glaze Window Horizontal Slider

Order No.	Mfg. No. / Description	Price
327600	(WD-D15) 58.13 x 27.3	$1,217.98 B

Diamond/Sea Glaze – Quality Closures Fabricated to a Wide Variety of Shapes and Sizes

Medium Duty Windows - D5, D5/10, D15 Series


D15 Vert. Slider


D15 Slider


D5 Fixed

- A durable 1/4" glass slider with either 1/4" or 3/8" glass fixed window.
- Excellent for both motor and sailing vessels.
- Cost efficient.
- Available in 3 different radii (2-1/2", 3" and 3-1/2") and/or mitered corners.

Heavy Duty Windows - 200F, 400 Series, 150 and 350 Hinged


200 Fixed



400 Slider



350-2 Panel Hinged

- True offshore windows capable of taking glass to 3/4" (including sliding thermopane sealed units).
- Windows can be either bolted-in or welded.
- Available in 3" radius or mitered corners.

Heavy Duty Weathertight Doors - 200 and 250 Series


R250 Solid


M250 Dutch


M250 French


M250 Angled

- Strong hinged doors meeting CSI specifications for strength and magnitude.
- Available in channel or welded construction with either radius or mitered corners.


Wynne Sliding Window


- Heavy duty satin finish.
- Anodized or black painted aluminum frame construction.
- 7/32"laminated 1/4", 3/8" or 1/2" tempered safety glass.
- Clear or tinted glass.
- Vinyl weather seals.
- 3' Radius corners only.
- Positive locking handle, riveted in place.
- Available in any size or shape.
- Horizontal or vertical sliding.
- With or without stationary screen.
- Clamp ring mounting for 1/8" thru 2-1/2" walls.
- All stainless steel hardware.
- 5/8" flange.

Order No.	Mfg. No. / Description	Price
327589	(310) 44 W x 32 H	$694.98 B

Commercial Duty Windows - 106 Series


106 Fixed



106 Slider



106 Hinged

- A heavier series of extrusions able to take up to 1/2" glass in the fixed and 3/8" in the sliding window.
- Unique design features glass in its own aluminum reinforced vent for higher durability and security.
- Available in 3" radius and/or mitered corners.

Commercial Duty Weathertight Doors - 150 Series



R150 Solid



R150 Dutch


M150 French

- An excellent double aluminum skin channel construction hinged door series for high traffic areas such as: Pilot/wheel house, galley, cabin/staterooms, engine room or main deck areas.
- A cost efficient door for both commercial and yacht applications.

Sliding Weathertight Doors - 300 Series


300 OXXO


300XX


300X

- Both frame and door panels are welded construction to fit customers' openings.
- Angled and/or multi opening panels available.
- Mitered corners only.

Diamond Sea Windows

Order No.	Mfg. No. / Description	Price
327658	(WD-106T) WINDOW,AL,HINGED,28X23"	$1,254.98 B
327660	(R250) 36X73 CO ALUM W/LGT LH	$2,318.98 B
327673	(R250) 36X73 CO ALUM W/LGT RH	$2,176.98 B
327685	(R250) 36X73 CO ALUM W/LGT LH	$2,176.98 B
327695	(R250) 30X71 CO ALUM W/LGT LH	$2,189.98 B
327701	(R250) 24X71 CO ALUM W/LGT LH	$2,120.98 B
327713	(R250) 24X71 CO ALUM W/LGT RH	$2,120.98 B
855950	(440T002) MARINE WINDOW BUTYL TAPE	$35.98 I

©2014 Donovan Marine, Inc.

Order Summary Sheet

Please Fill Out And Attach With Order Cover Sheet To Patterns. Retain A Copy For Your Own Records.

Letter Number of Template	Type: Series	Block Size	Glazing Specifications: Type Thickness and Tint	Corner Radius or Mitre	Wall Thickness	Comments: Shutters, Screens, Etc.

Customer: _____

Address: _____

_____

_____

Phone/Fax: _____

Number of Windows: _____

Number of Doors: _____

Number of Hatches: _____

Paint Color: _____

Date: _____ Del. Date: _____

Ship-Via: _____

Crate Type: _____

Comments: _____

S/G DIAMOND/SEA-GLAZE

Provide As Much Information As Possible

Drawing: _____

Cut & Mark: _____

Bending: _____

Checking: _____

Assembly: _____

Trimming: _____


Glazing: _____


Crating: _____

Doors: _____


Mitering: _____


Gastight and Weathertight Door with Two Dogs

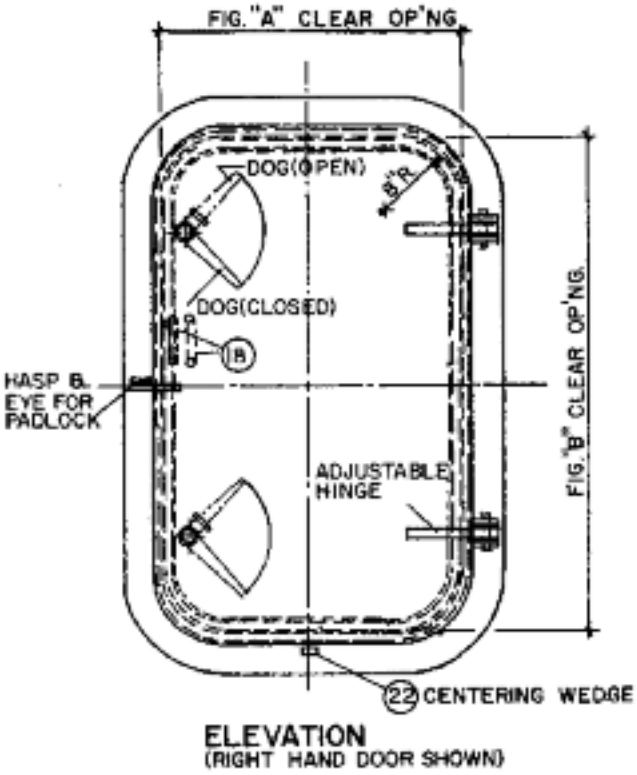

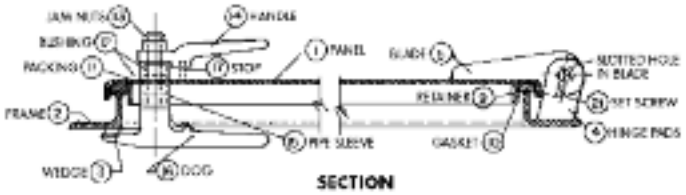









Drawing Number 100

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	12	Delrin
2	Do.	13	Mild Steel
3	Do.	14	Frg. Steel
4	Do.	15	Mild Steel
5	Do.	16	Frg. Steel
6	Brass	17	Mild Steel
7	Do.	18	Do.
8	Do.	19	Do.
9	Mild Steel	20	Do.
10	Neoprene	21	Steel
11	Graphite	22	Do.

Watertight Door with Four Dogs

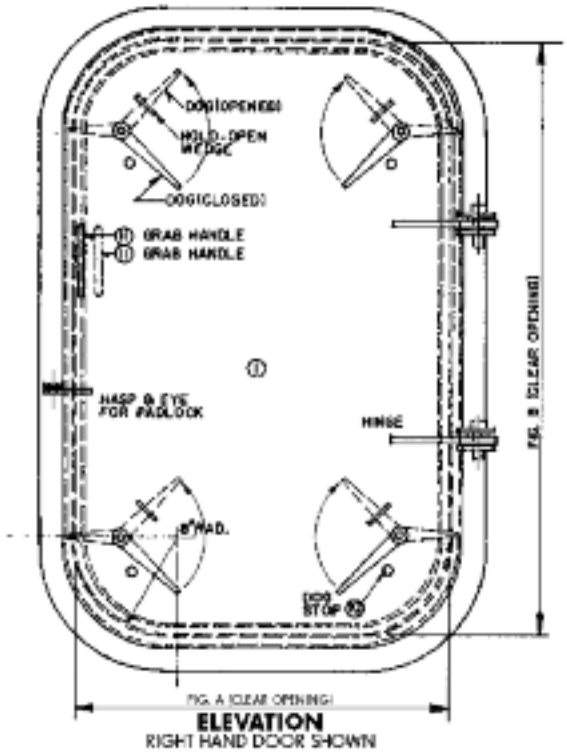

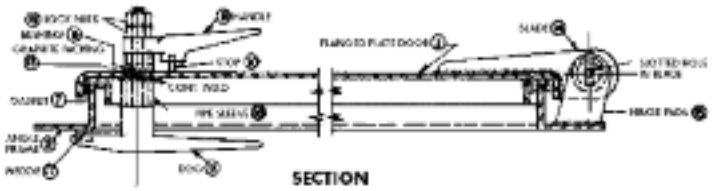








Drawing Number 101


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	11	Mild Steel
2	Mild Steel	12	Mild Steel
3	Brass	13	Graphite
4	Brass	14	Mild Steel
5	Brass	15	Mild Steel
6	Delrin	16	Mild Steel
7	Neoprene	17	Mild Steel
8	Frg. Steel	18	Mild Steel
9	Frg. Steel	19	Mild Steel
10	Mild Steel		

©2014 Donovan Marine, Inc.


Watertight Door with Six Dogs

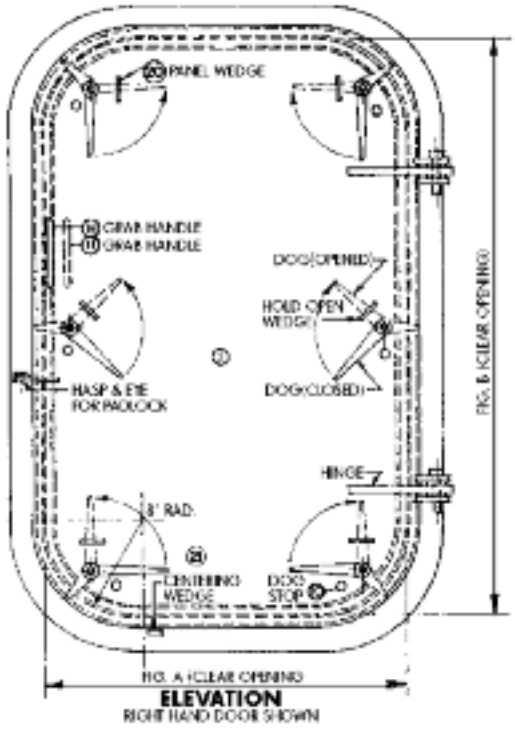

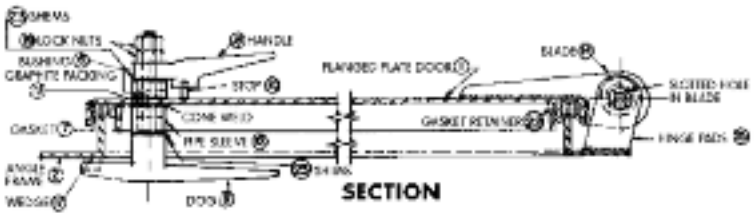









Drawing Number 102

Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Graphite
2	Mild Steel	14	Mild Steel
3	Brass	15	Mild Steel
4	Brass	16	Mild Steel
5	Brass	17	Mild Steel
6	Delrin	18	Mild Steel
7	Neoprene.	19	Mild Steel
8	Frg. Steel	20	Mild Steel
9	Frg. Steel	21	Mild Steel
10	Mild Steel	22	Mild Steel
11	Mild Steel	23	Brass
12	Mild Steel		

Watertight Square Door with Six Dogs

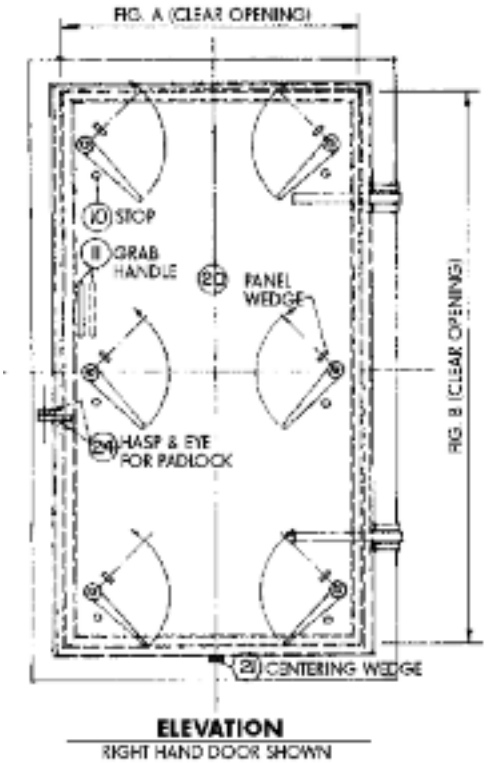

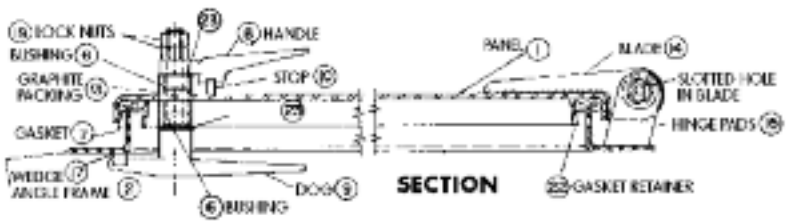









Drawing Number 103

Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Graphite
2	Mild Steel	14	Mild Steel
3	Brass	15	Mild Steel
4	Brass	16	Mild Steel
5	Mild Steel	17	Mild Steel
6	Delrin	18	Mild Steel
7	Neoprene.	19	Mild Steel
8	Frg. Steel	20	Mild Steel
9	Frg. Steel	21	Mild Steel
10	Mild Steel	22	Mild Steel
11	Mild Steel	23	Brass
12	Mild Steel	24	Mild Steel


Quick Acting Watertight Door

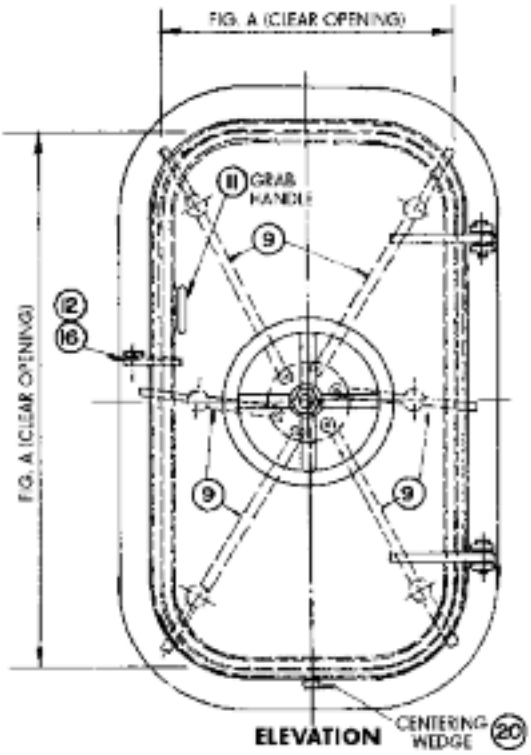

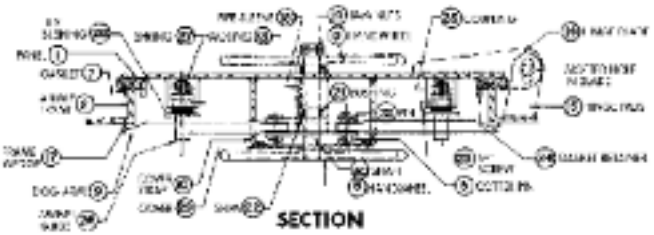









Drawing Number 104


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	17	Mild Steel
2	Mild Steel	18	Mild Steel
3	Brass	19	Mild Steel
4	Brass	20	Mild Steel
5	Brass	21	Delrin
6	Mild Steel	22	Brass
7	Neoprene	23	Mild Steel
8	Mild Steel	24	Mild Steel
9	Mild Steel	25	Mild Steel
10	Mild Steel	26	Brass
11	Mild Steel	27	Mild Steel
12	Mild Steel	28	Mild Steel
13	Graphite	29	Mild Steel
14	Mild Steel	30	C.F. Steel
15	Mild Steel	31	Mild Steel
16	Mild Steel		


Watertight Dutch Door with Six Dogs

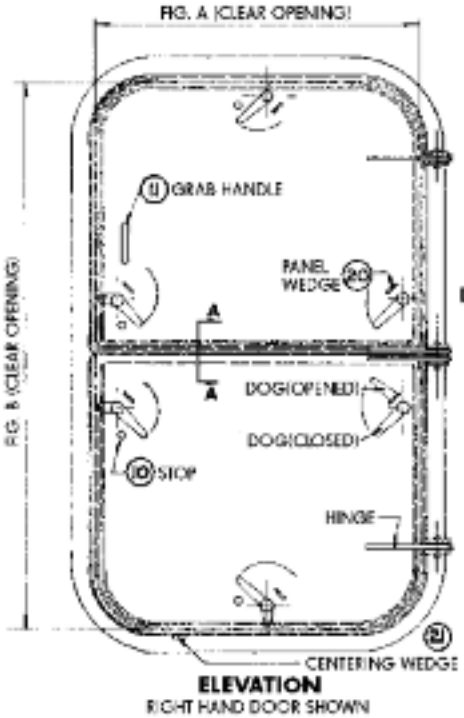

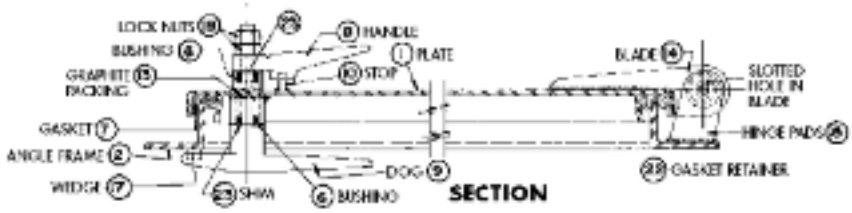







Drawing Number 105


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Graphite
2	Mild Steel	14	Mild Steel
3	Brass	15	Mild Steel
4	Brass	16	Mild Steel
5	Mild Steel	17	Mild Steel
6	Delrin	18	Mild Steel
7	Neoprene	19	Mild Steel
8	Frg. Steel	20	Mild Steel
9	Frg. Steel	21	Mild Steel
10	Mild Steel	22	Mild Steel
11	Mild Steel	23	Brass
12	Mild Steel		

Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.


Watertight Door with Six Dogs

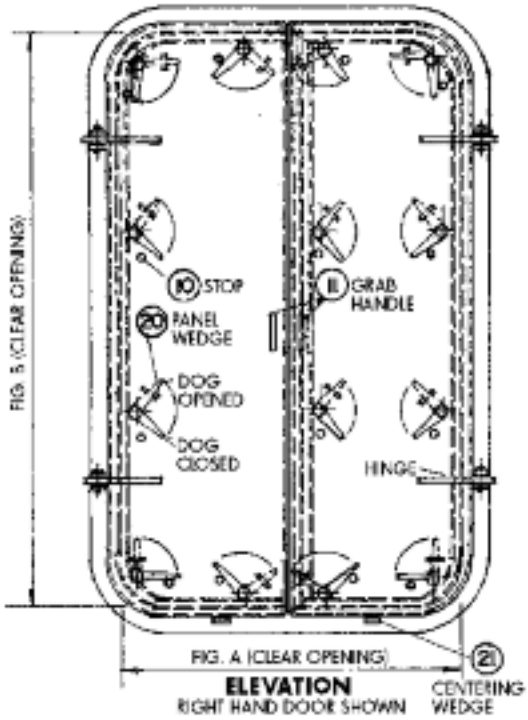

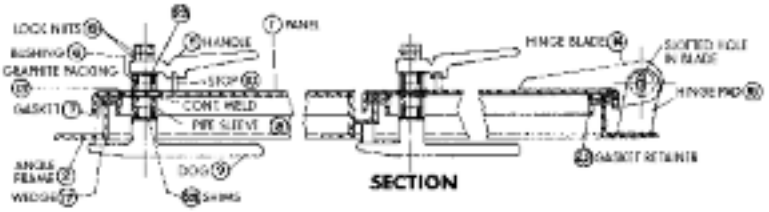









Drawing Number 106


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Graphite
2	Mild Steel	14	Mild Steel
3	Brass	15	Mild Steel
4	Brass	16	Mild Steel
5	Mild Steel	17	Mild Steel
6	Delrin	18	Mild Steel
7	Neoprene	19	Mild Steel
8	Frg. Steel	20	Mild Steel
9	Frg. Steel	21	Mild Steel
10	Mild Steel	22	Mild Steel
11	Mild Steel	23	Brass
12	Mild Steel		


Watertight Door - Personal and Equipment

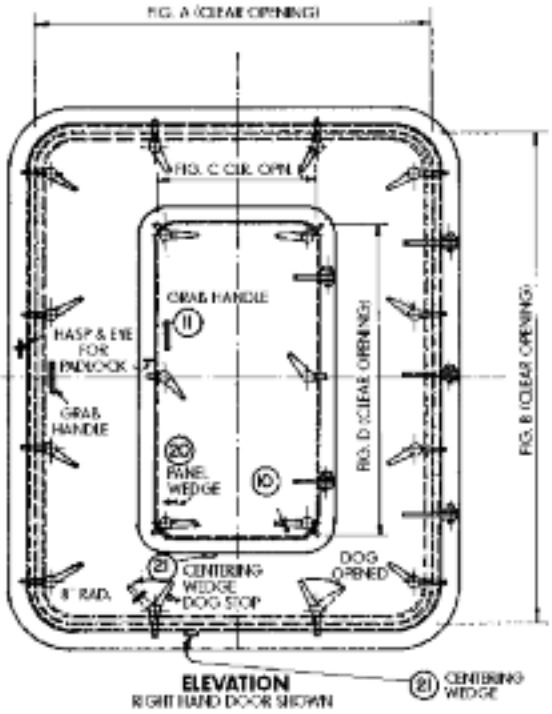

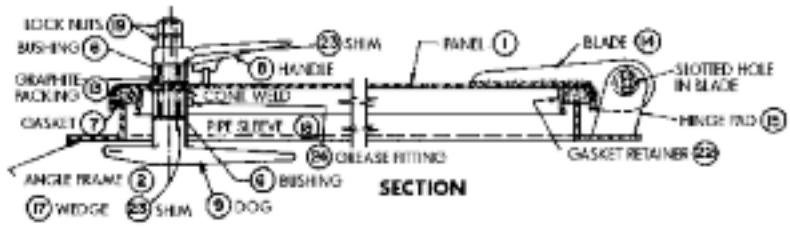









Drawing Number 107

Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Graphite
2	Mild Steel	14	Mild Steel
3	Brass	15	Mild Steel
4	Stainless	16	Mild Steel
5	Stainless	17	Frg. Steel
6	Delrin	18	Mild Steel
7	Neoprene	19	Mild Steel
8	Frg. Steel	20	Mild Steel
9	Frg. Steel	21	Mild Steel
10	Mild Steel	22	Mild Steel
11	Mild Steel	23	Stainless
12	Mild Steel	24	Plated Steel


Non-tight Door

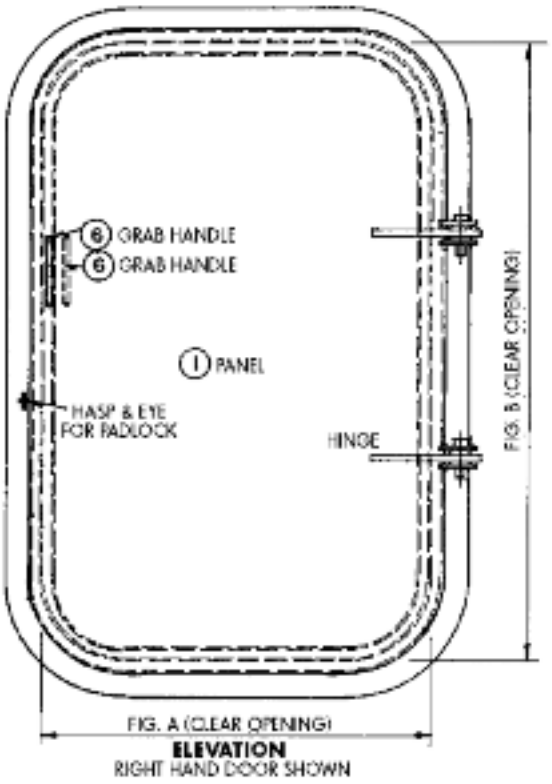











Drawing Number 108

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	6	Mild Steel
2	Mild Steel	7	Mild Steel
3	Brass	8	Mild Steel
4	Stainless	9	Mild Steel
5	Stainless	10	Mild Steel

Quick Acting Lever Type Door

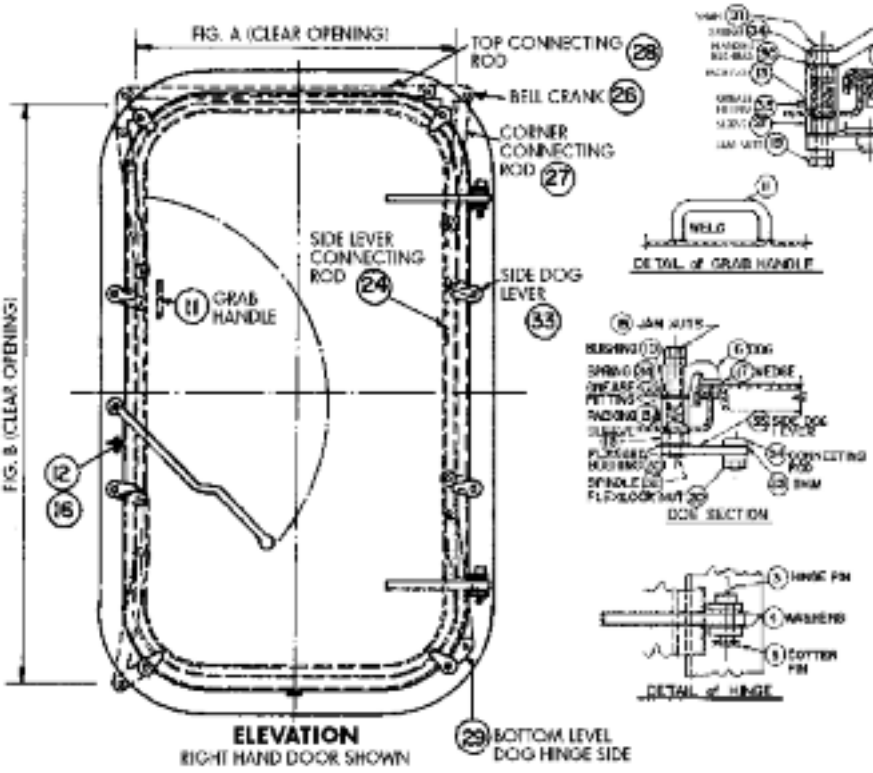




Drawing Number 109


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	19	Mild Steel
2	Mild Steel	20	Mild Steel
3	Brass	21	Mild Steel
4	Stainless	22	Mild Steel
5	Stainless	23	Stainless
6	Frg. Steel	24	Mild Steel
7	Neoprene	25	Mild Steel
8	Frg. Steel	26	Mild Steel
9	Frg. Steel	27	Mild Steel
10	Oilite Bronze	28	Mild Steel
11	Mild Steel	29	Mild Steel
12	Mild Steel	30	Oilite Bronze
13	Graphite	31	Cold Finish
14	Mild Steel	32	Cold Finish
15	Mild Steel	33	Mild Steel
16	Mild Steel	34	Stainless
17	Stainless	35	Plated Steel
18	Mild Steel		


©2014 Donovan Marine, Inc.


Watertight Hatch with Drop Bolts



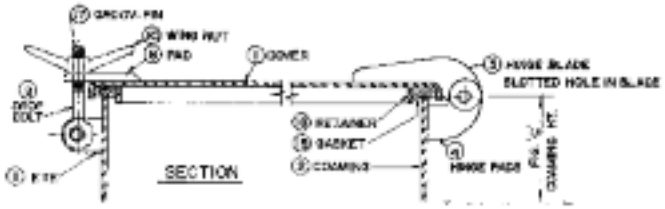

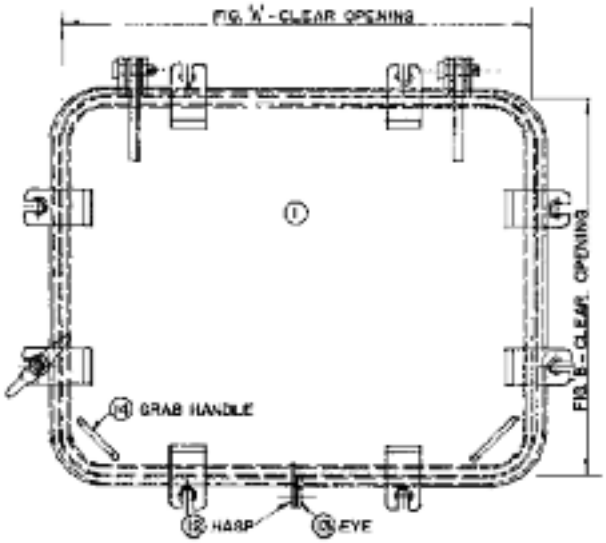






Custom Built Item - Specify Size


Drawing Number 200


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	10	Bronze
2	Mild Steel	11	Mild Steel
3	Mild Steel	12	Mild Steel
4	Mild Steel	13	Mild Steel
5	Brass	14	Mild Steel
6	Brass	15	Neoprene
7	Brass	16	Mild Steel
8	Mild Steel	17	Stainless
9	Bronze	18	Brass

Watertight Hatch

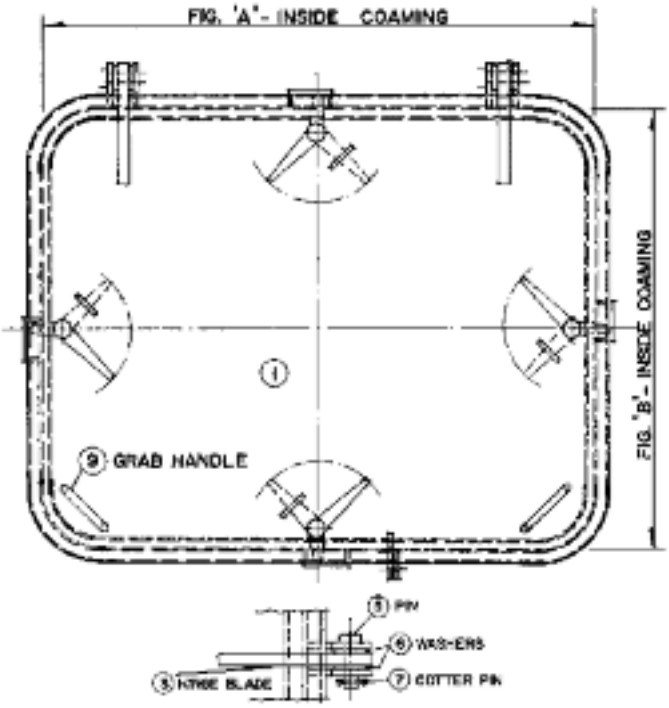








Custom Built Item - Specify Size


Drawing Number 201

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	12	Frg. Steel
2	Mild Steel	13	Frg. Steel
3	Mild Steel	14	Steel
4	Mild Steel	15	Steel
5	Brass	16	Steel
6	Brass	17	Steel
7	Brass	18	Delrin
8	Neoprene	19	Graphite
9	Steel	20	Mild Steel
10	Mild Steel		
11	Mild Steel		

Spring Balance Quick Acting Watertight Hatch

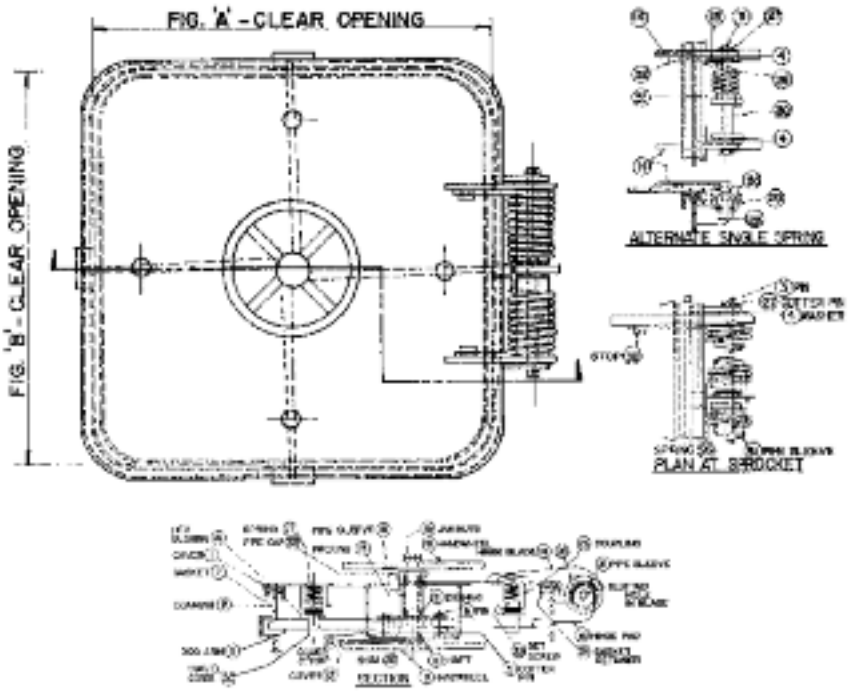



Custom Built Item - Specify Size

Drawing Number 202


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	18	Mild Steel
2	Mild Steel	19	Mild Steel
3	Cold Finish	20	Brass
4	Brass	21	Delrin
5	Brass	22	Brass
6	Brass	23	Steel
7	Neoprene	24	Mild Steel
8	Mild Steel	25	Mild Steel
9	Mild Steel	26	Spring Steel
10	Mild Steel	27	Brass
11	Cold Finish	28	Mild Steel
12	Mild Steel	29	Mild Steel
13	Graphite	30	Mild Steel
14	Mild Steel	31	Mild Steel
15	Mild Steel	32	Mild Steel
16	Mild Steel	33	Mild Steel
17	Spring Steel		


Replacement Hinge and Spring Assembly for Centex #202

Order No.	Mfg. No. / Description	Price
279352	(HR202)	POR

Quick Acting Watertight Hatch

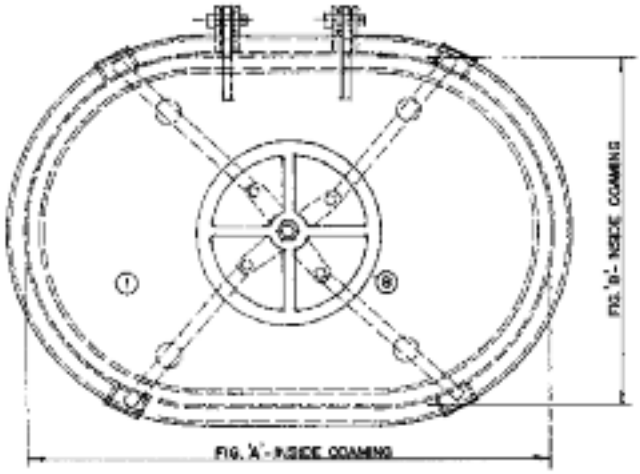



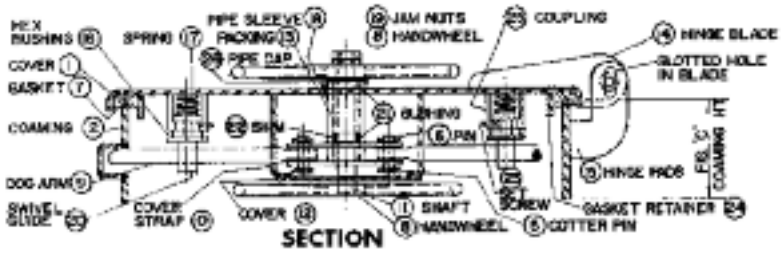

Custom Built Item - Specify Size


Drawing Number 203

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	14	Mild Steel
2	Mild Steel	15	Mild Steel
3	Brass	16	Mild Steel
4	Brass	17	Spring Steel
5	Brass	18	Mild Steel
6	Brass	19	Mild Steel
7	Neoprene	20	Brass
8	Mild Steel	21	Delrin
9	Mild Steel	22	Brass
10	Mild Steel	23	Steel
11	Cold Finish	24	Mild Steel
12	Mild Steel	25	Mild Steel
13	Graphite	26	Mild Steel

©2014 Donovan Marine, Inc.

Quick Acting Oval Watertight Hatch

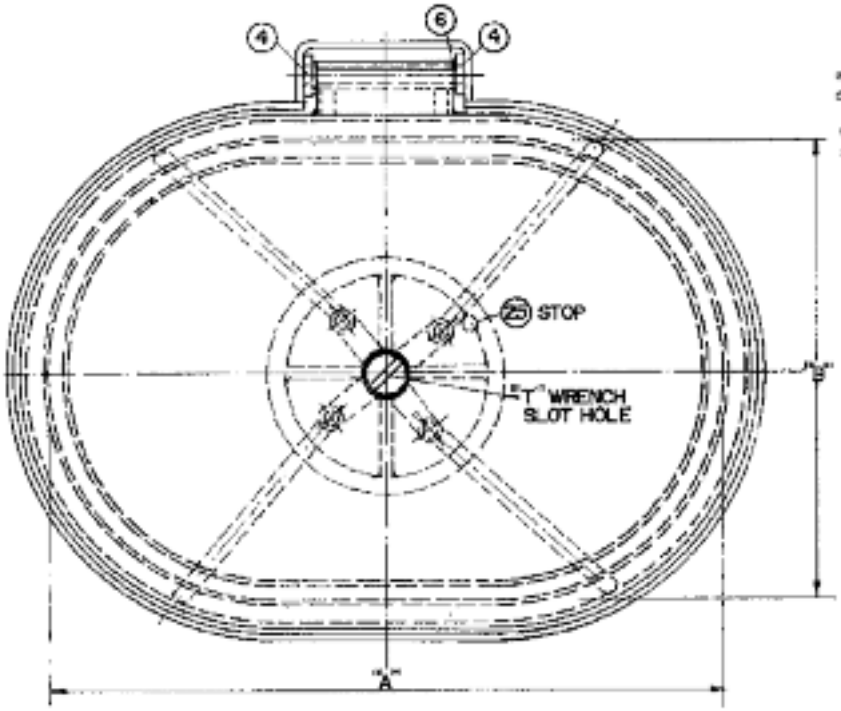




Custom Built Item - Specify Size


Drawing Number 204

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	15	Delrin
2	Mild Steel	16	Graphite
3	Mild Steel	17	Mild Steel
4	Mild Steel	18	Brass
5	Cold Finish	19	Mild Steel
6	Brass	20	Mild Steel
7	Neoprene	21	Brass
8	Mild Steel	22	Mild Steel
9	Mild Steel	23	Brass
10	Mild Steel	24	Mild Steel
11	Mild Steel	25	Mild Steel
12	Brass	26	Spring Steel
13	Brass	27	Mild Steel
14	Mild Steel		

Quick Acting Watertight Flush Hatch

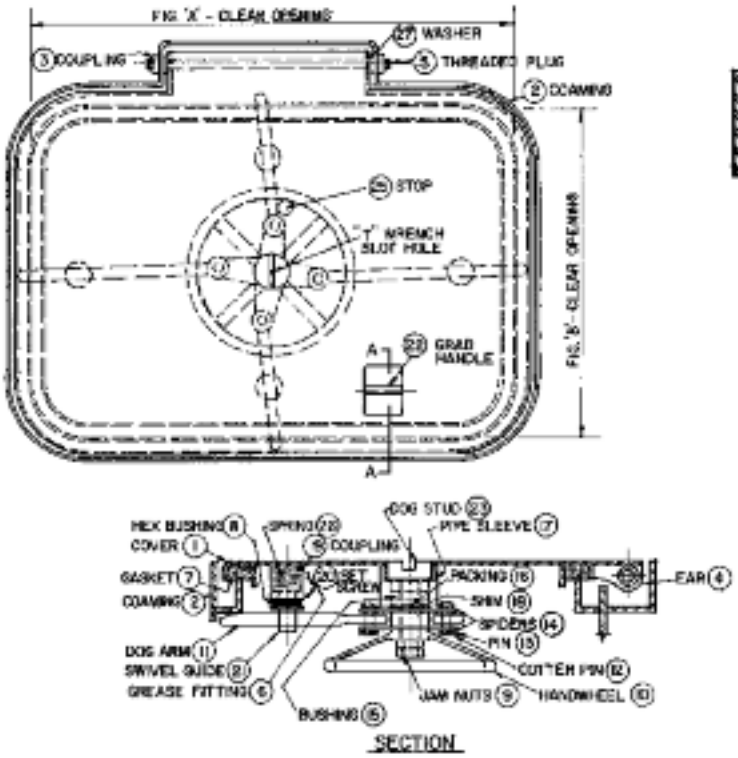

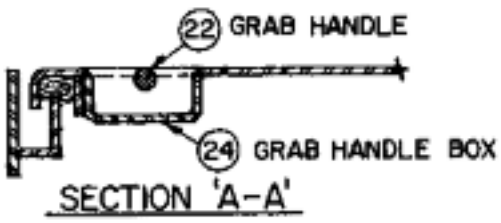


Custom Built Item - Specify Size

Drawing Number 205

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	15	Delrin
2	Mild Steel	16	Graphite
3	Mild Steel	17	Cold Finish
4	Mild Steel	18	Stainless
5	Mild Steel	19	Mild Steel
6	Cold Finish	20	Mild Steel
7	Neoprene	21	Brass
8	Mild Steel	22	Mild Steel
9	Mild Steel	23	Brass
10	Aluminum	24	Mild Steel
11	Cold Finish	25	Mild Steel
12	Stainless	26	Spring Steel
13	Brass	27	Stainless
14	Mild Steel		

Watertight Hatch with Drop Bolts

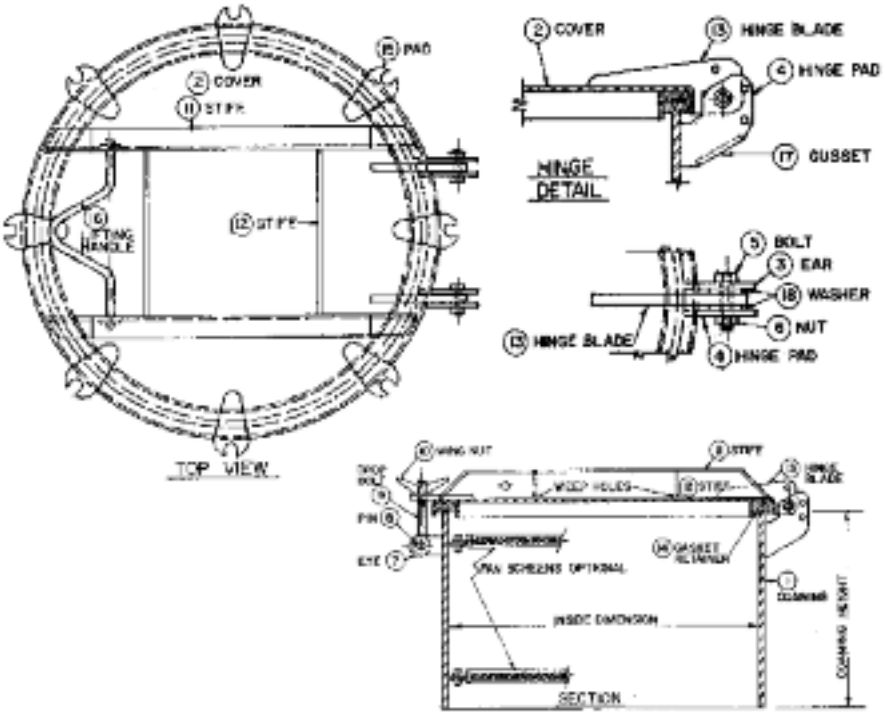


Custom Built Item - Specify Size


Drawing Number 206

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	10	Brass
2	Mild Steel	11	Mild Steel
3	Mild Steel	12	Mild Steel
4	Mild Steel	13	Mild Steel
5	Stainless	14	Neoprene
6	Stainless	15	Mild Steel
7	Mild Steel	16	Cold Finish
8	Brass	17	Mild Steel
9	Brass	18	Stainless

Spring Balance Rectangular or Square Dog Hatch

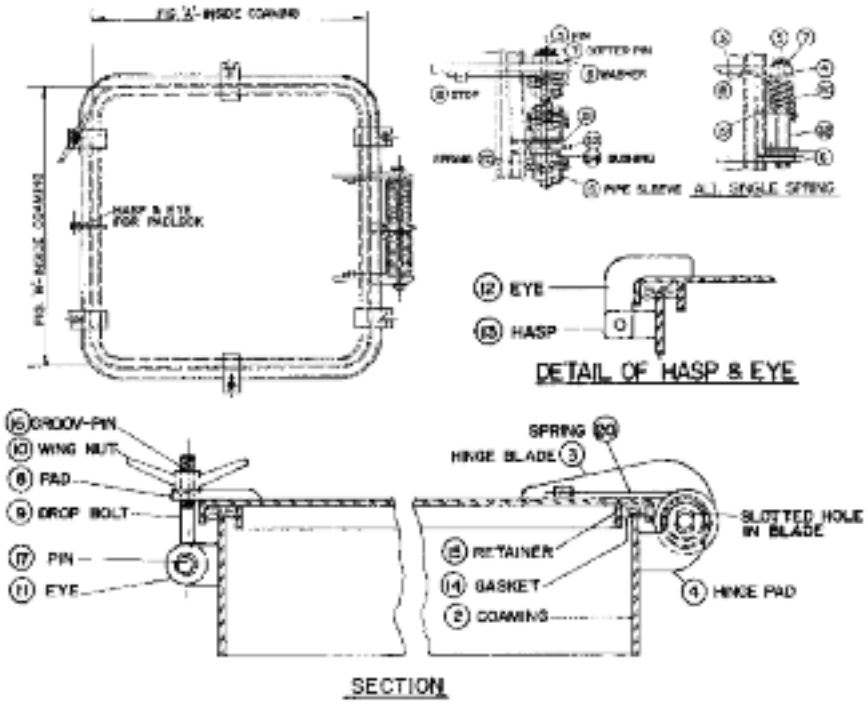



Custom Built Item - Specify Size


Drawing Number 207


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Mild Steel
2	Mild Steel	14	Neoprene
3	Mild Steel	15	Mild Steel
4	Mild Steel	16	Stainless
5	Cold Finish	17	Brass
6	Brass	18	Mild Steel
7	Brass	19	Mild Steel
8	Mild Steel	20	Spring Steel
9	Manganese Brz.	21	Mild Steel
10	Manganese Brz.	22	Mild Steel
11	Mild Steel	23	Mild Steel
12	Mild Steel	24	Brass

©2014 Donovan Marine, Inc.

Watertight Hatch with Drop Bolts

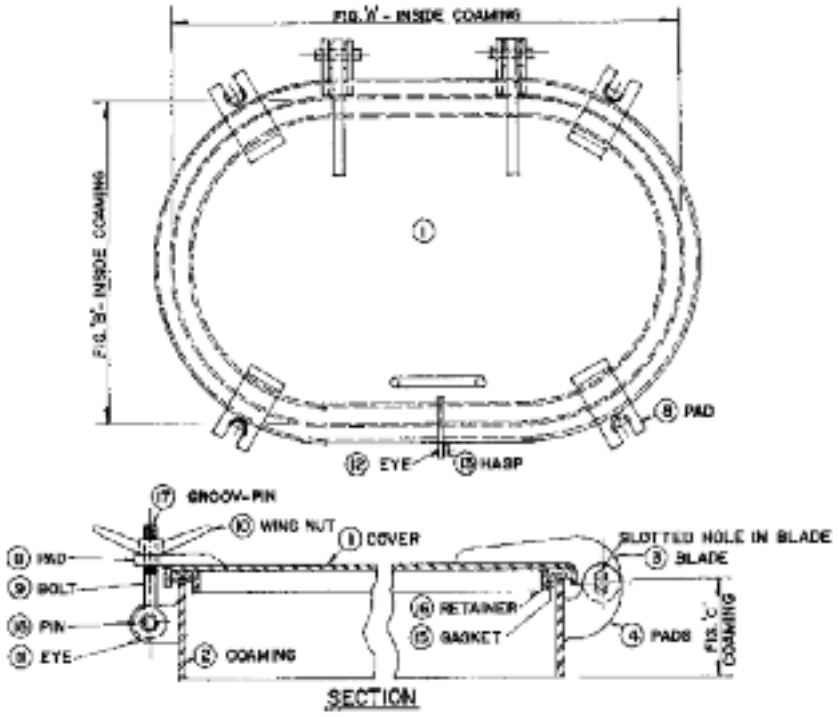




Custom Built Item - Specify Size


Drawing Number 208


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	10	Manganese Brz.
2	Mild Steel	11	Steel
3	Mild Steel	12	Mild Steel
4	Mild Steel	13	Mild Steel
5	Brass	14	Steel
6	Brass	15	Neoprene
7	Brass	16	Mild Steel
8	Mild Steel	17	Stainless
9	Manganese Brz.	18	Brass

Watertight Hatch with Dogs

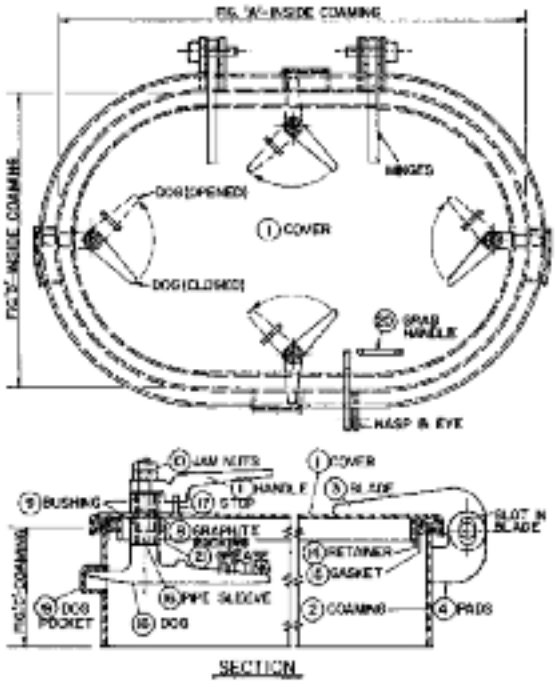








Custom Built Item - Specify Size

Drawing Number 209

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	12	Mild Steel
2	Mild Steel	13	Mild Steel
3	Mild Steel	14	Mild Steel
4	Mild Steel	15	Neoprene
5	Brass	16	Mild Steel
6	Stainless	17	Mild Steel
7	Stainless	18	Frg. Steel
8	Graphite	19	Mild Steel
9	Delrin	20	Mild Steel
10	Mild Steel	21	Plated
11	Frg. Steel		

Oil Cargo Hatch

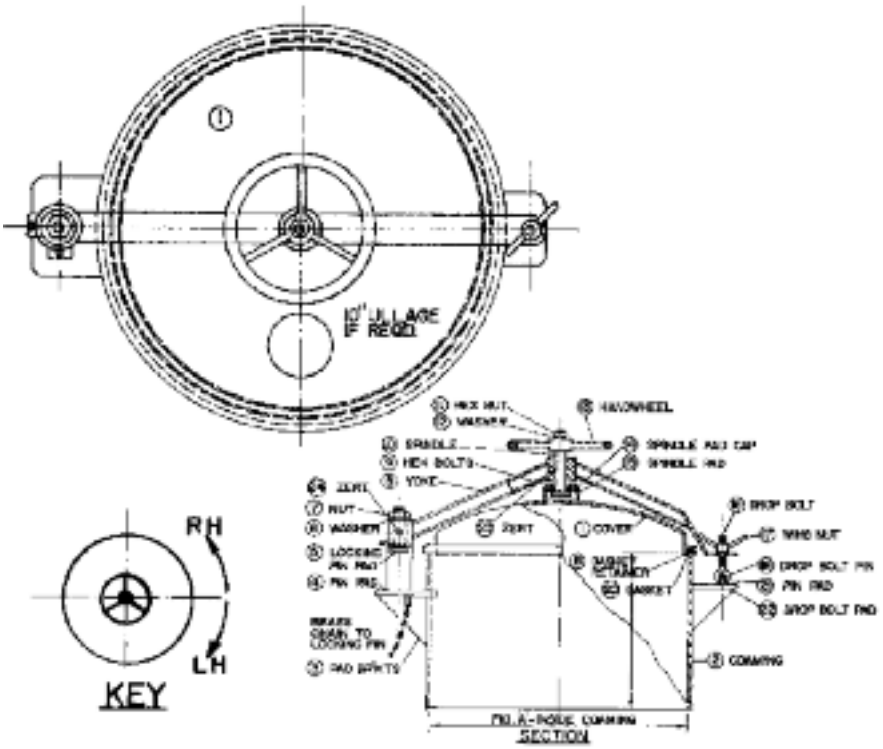


Custom Built Item - Specify Size


Drawing Number 210

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	13	Mild Steel
2	Mild Steel	14	Mild Steel
3	Mild Steel	15	Mild Steel
4	Mild Steel	16	Manganese Brz.
5	Mild Steel	17	Manganese Brz.
6	Brass	18	Brass
7	Steel	19	Mild Steel
8	Mild Steel	20	Neoprene
9	Steel	21	Mild Steel
10	Brass	22	Mild Steel
11	Steel	23	Steel
12	Brass	24	Steel

Watertight Flush Hatch

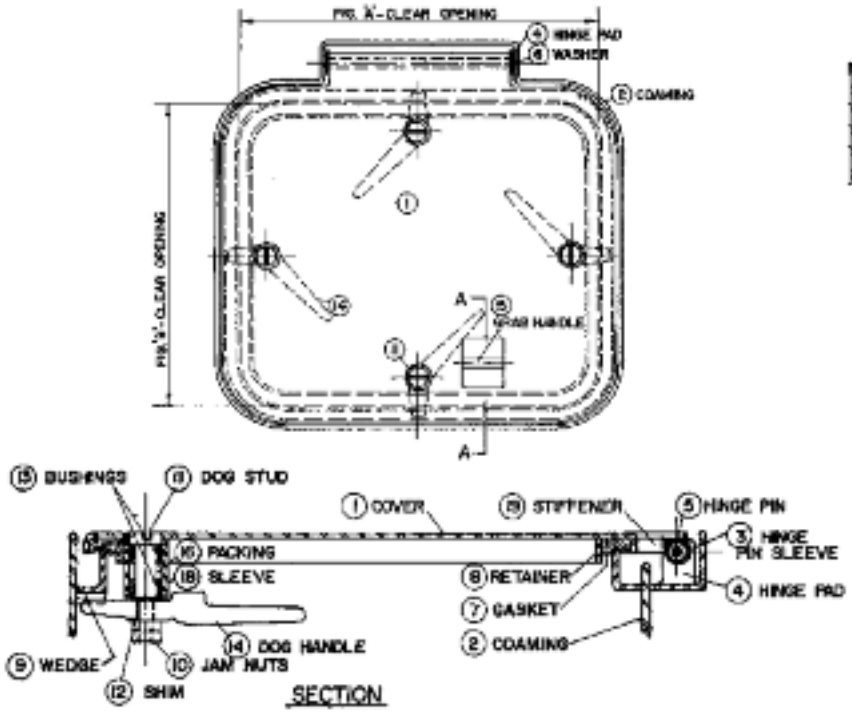



Custom Built Item - Specify Size


Drawing Number 211


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	11	Manganese Brz
2	Mild Steel	12	Brass
3	Mild Steel	13	Delrin
4	Mild Steel	14	Mild Steel
5	Cold Finish	15	Mild Steel
6	Brass	16	Graphite
7	Neoprene	17	Mile Steel
8	Mild Steel	18	Mild Steel
9	Mild Steel	19	Mild Steel
10	Steel		

©2014 Donovan Marine, Inc.

Watertight Flush Oval Hatch

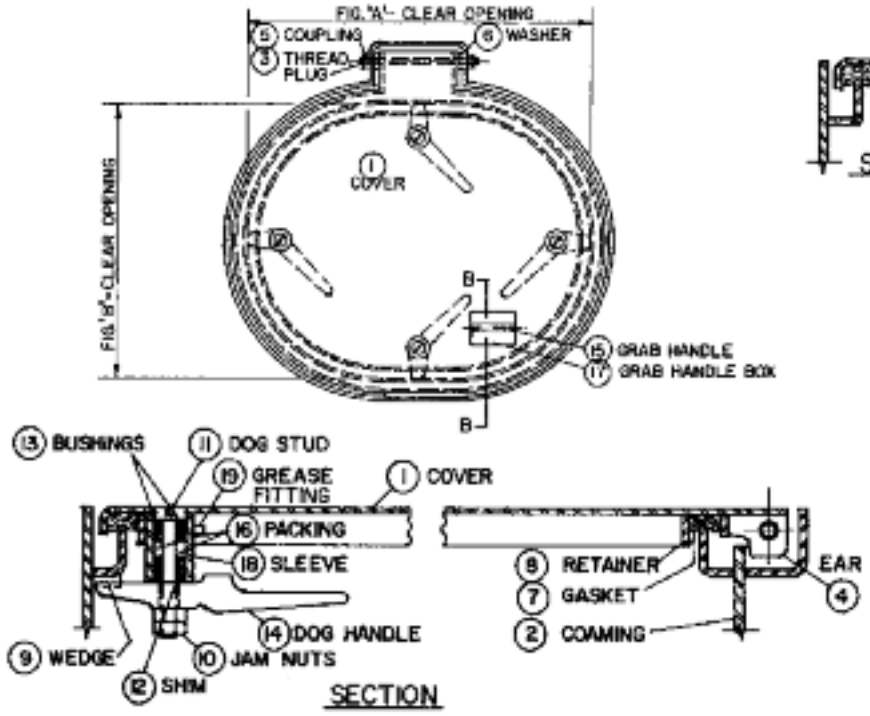




Custom Built Item - Specify Size

Drawing Number 212

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	11	Brass
2	Mild Steel	12	Stainless
3	Mild Steel	13	Delrin
4	Mild Steel	14	Manganese Brz.
5	Mild Steel	15	Mild Steel
6	Stainless	16	Graphite
7	Neoprene	17	Mild Steel
8	Mild Steel	18	Cold Finish
9	Frg. Steel	19	Plated
10	Steel		

Watertight Flush Hatch with Spring Balanced Cover

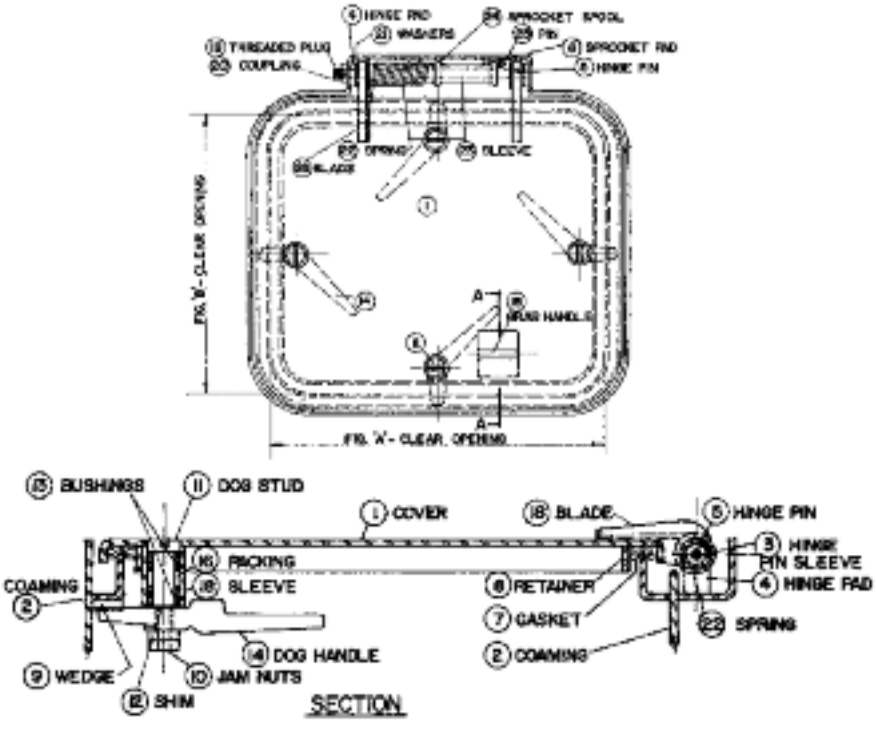




Custom Built Item - Specify Size

Drawing Number 213

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	14	Mild Steel
2	Mild Steel	15	Mild Steel
3	Mild Steel	16	Graphite
4	Mild Steel	17	Mild Steel
5	Cold Finish	18	Mild Steel
6	Mild Steel	19	Mild Steel
7	Neoprene	20	Steel
8	Mild Steel	21	Brass
9	Mild Steel	22	Spring Steel
10	Steel	23	Mild Steel
11	Manganese Brz.	24	Mild Steel
12	Brass	25	Mild Steel
13	Delrin	26	Mild Steel

Watertight Hatch - Spring Balanced

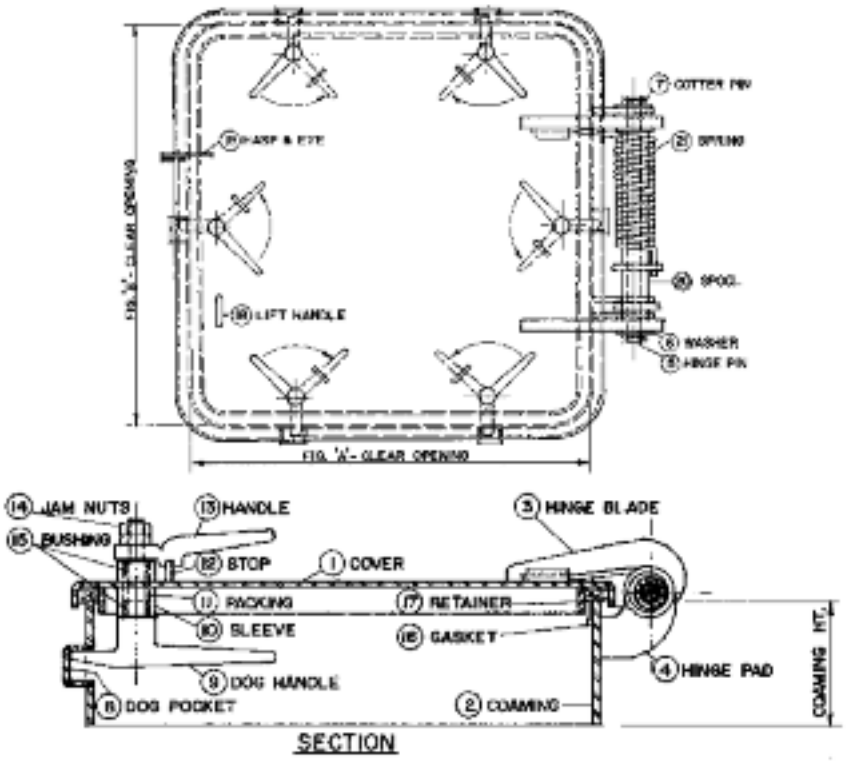


Custom Built Item - Specify Size


Drawing Number 214

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	12	Mild Steel
2	Mild Steel	13	Frg. Steel
3	Mild Steel	14	Steel
4	Mild Steel	15	Delrin
5	Cold Finish	16	Neoprene
6	Brass	17	Mild Steel
7	Brass	18	Mild Steel
8	Mild Steel	19	Mild Steel
9	Frg. Steel	20	Mild Steel
10	Mild Steel	21	Spring Steel
11	Graphite		

Spring Balanced, Quick Acting Watertight Oval Hatch

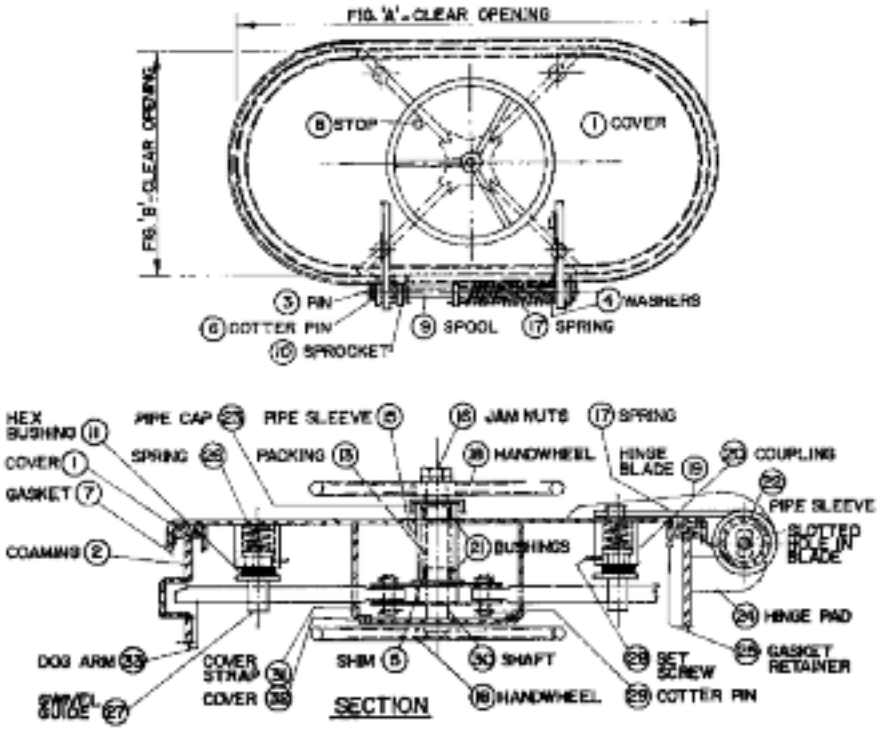




Drawing Number 215

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	18	Mild Steel
2	Mild Steel	19	Mild Steel
3	Cold Finish	20	Steel
4	Brass	21	Delrin
5	Brass	22	Steel
6	Steel	23	Steel
7	Neoprene	24	Mild Steel
8	Mild Steel	25	Mild Steel
9	Mild Steel	26	Spring Steel
10	Mild Steel	27	Brass
11	Steel	28	Steel
12	Mild Steel	29	Steel
13	Graphite	30	Cold Finish
14	Mild Steel	31	Mild Steel
15	Steel	32	Mild Steel
16	Steel	33	Mild Steel
17	Spring Steel		

©2014 Donovan Marine, Inc.

Flushed Raised Oval Hatch

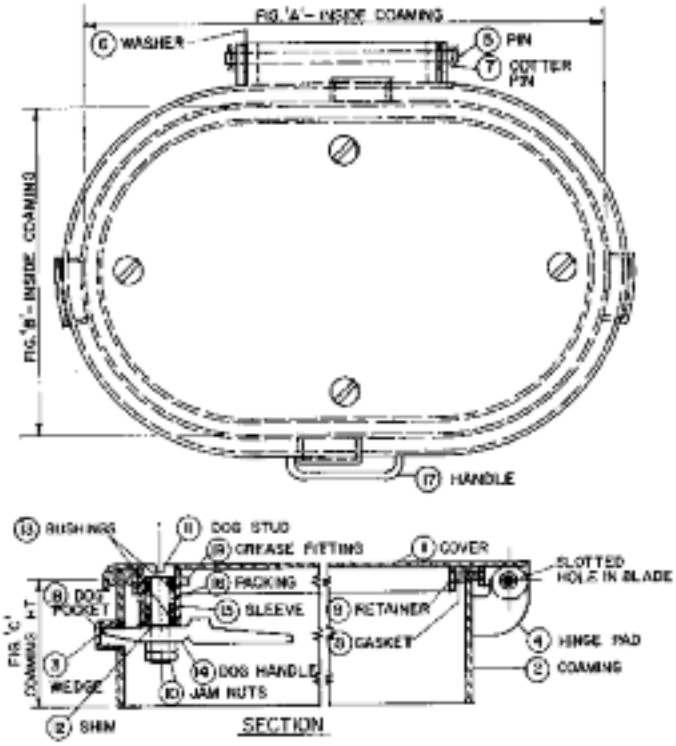


Custom Built Item - Specify Size


Drawing Number 216

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	11	Brass
2	Mild Steel	12	Stainless
3	Frg. Steel	13	Delrin
4	Mild Steel	14	Manganese Brz.
5	Cold Finish	15	Cold Finish
6	Stainless	16	Graphite
7	Stainless	17	Mild Steel
8	Neoprene	18	Mild Steel
9	Mild Steel	19	Plated
10	Steel		

Watertight Flush Hatch with Spring Balanced Cover and Recessed Spring

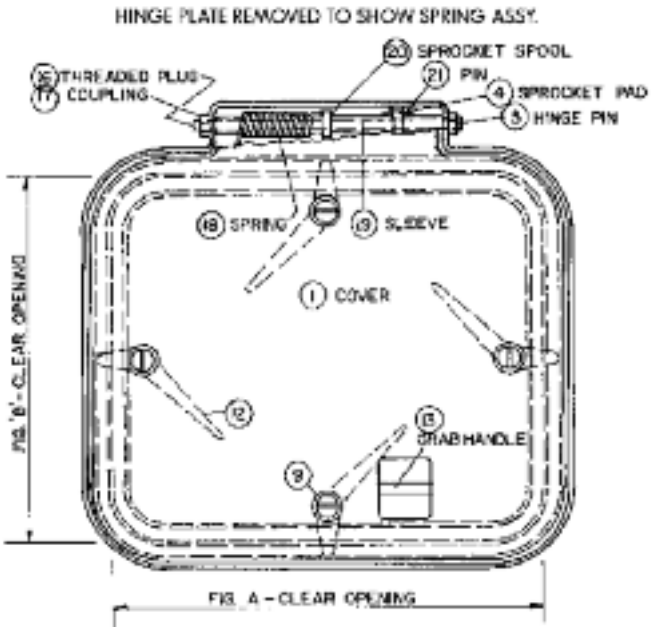




Custom Built Item - Specify Size

Drawing Number 217

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	12	Manganese Brz.
2	Mild Steel	13	Mild Steel
3	Cold Finish	14	Graphite
4	Mild Steel	15	Mild Steel
5	Neoprene	16	Mild Steel
6	Mild Steel	17	Cold Finish
7	Frg. Steel	18	Spring Steel
8	Steel	19	Mild Steel
9	Brass	20	Mild Steel
10	Stainless	21	Mild Steel
11	Delrin	22	Plated

Ullage Hatch

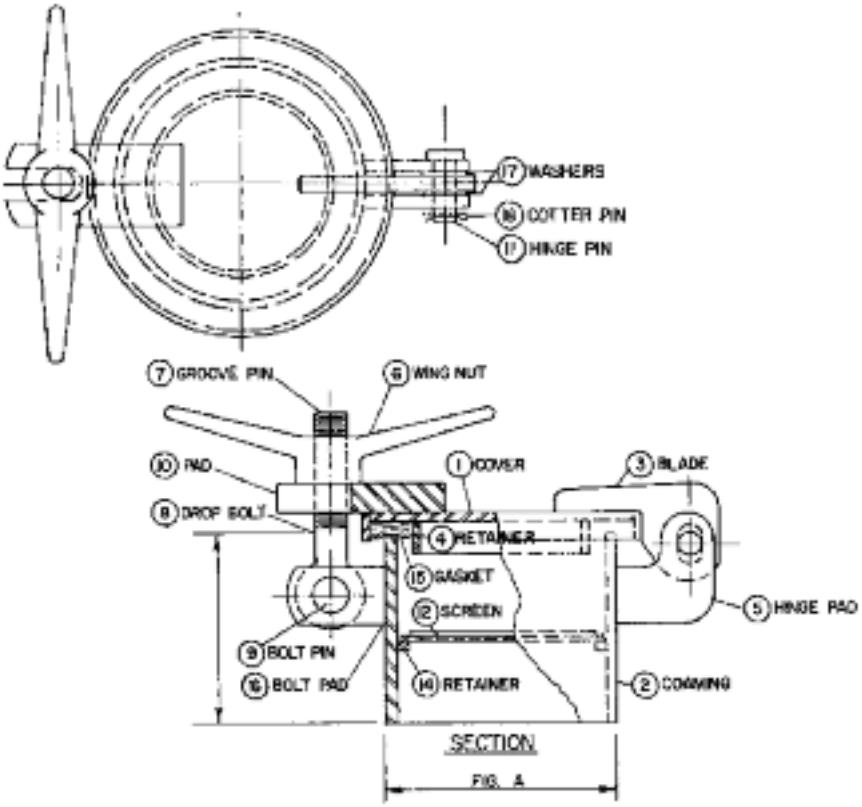


Custom Built Item - Specify Size

Drawing Number 218

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	10	Mild Steel
2	Mild Steel	11	Brass
3	Mild Steel	12	Brass
4	Steel	13	Brass
5	Mild Steel	14	Mild Steel
6	Bronze	15	Neoprene
7	Stainless	16	Mild Steel
8	Bronze	17	Stainless
9	Brass	18	Stainless

Quick Acting Watertight Flush Hatch with Recessed Spring

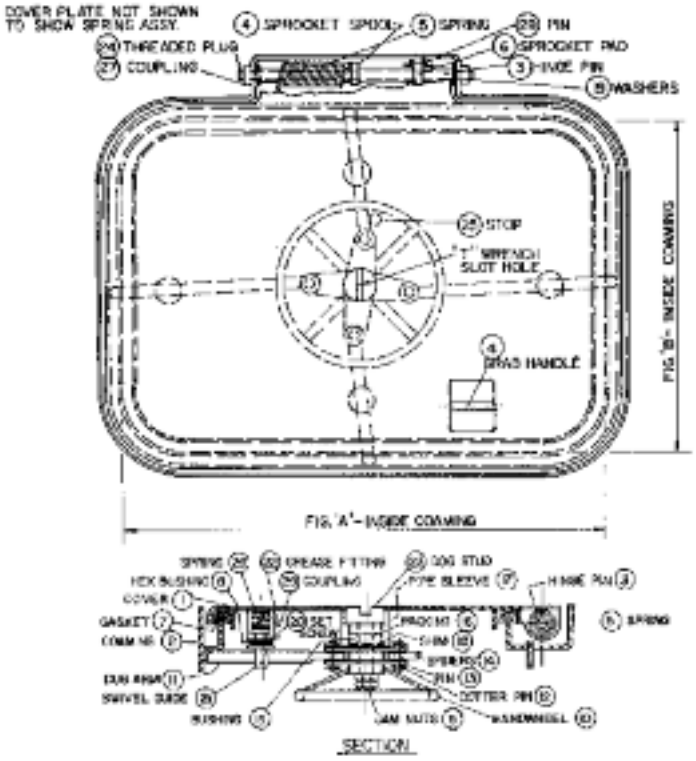

Custom Built Item - Specify Size


Drawing Number 219

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	16	Graphite
2	Mild Steel	17	Cold Finish
3	Cold Finish	18	Stainless
4	Mild Steel	19	Stainless
5	Spring Steel	20	Mild Steel
6	Mild Steel	21	Brass
7	Neoprene	22	Plated
8	Mild Steel	23	Brass
9	Steel	24	Mild Steel
10	Aluminum	25	Mild Steel
11	Cold Finish	26	Spring Steel
12	Stainless	27	Mild Steel
13	Brass	28	Mild Steel
14	Mild Steel	29	Mild Steel
15	Delrin		

©2014 Donovan Marine, Inc.

Ullage Hatch

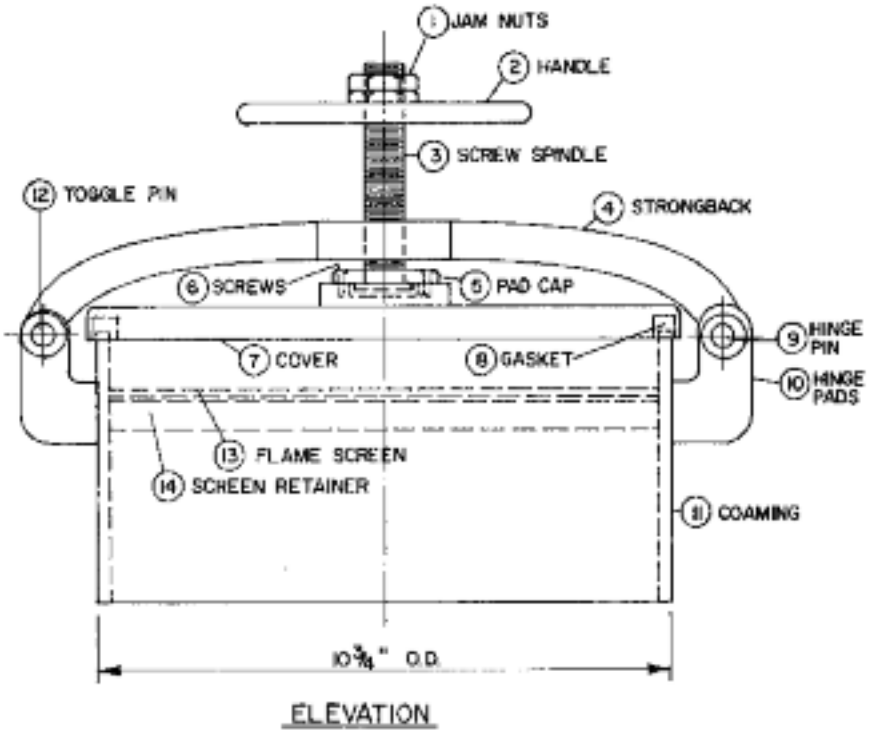


Custom Built Item - Specify Size


Drawing Number 220

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Steel	8	Neoprene
2	Brass	9	Brass
3	Brass	10	Mild Steel
4	Brass	11	Mild Steel
5	Brass	12	Brass
6	Steel	13	Brass
7	Brass	14	Mild Steel

Watertight Rectangular Hatch

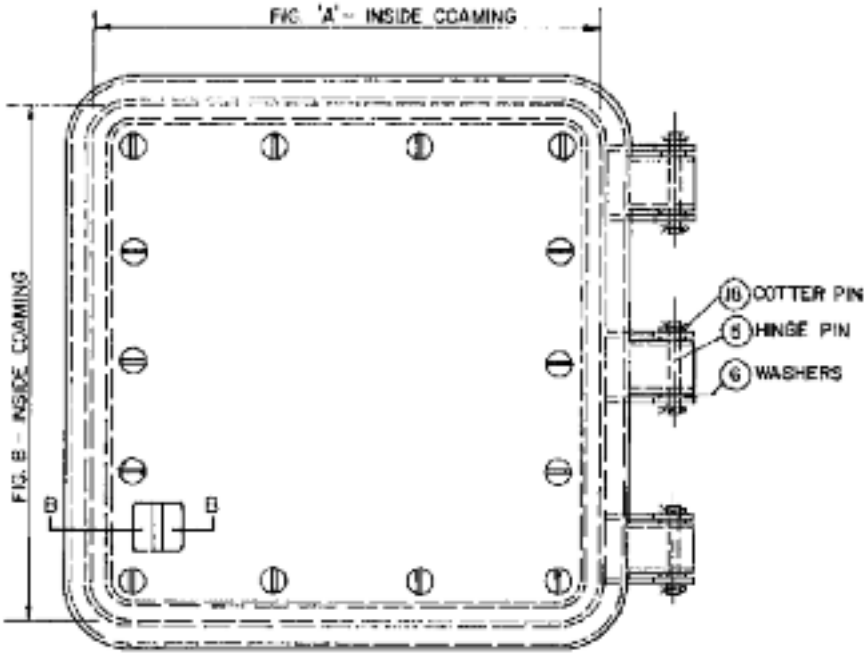




Custom Built Item - Specify Size


Drawing Number 221

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Steel	11	Stainless
2	Steel	12	Delrin
3	Steel	13	Manganese Brz.
4	Steel	14	Steel
5	Cold Finish	15	Graphite
6	Stainless	16	Steel
7	Neoprene	17	Steel
8	Steel	18	Stainless
9	Steel	19	Plated
10	Brass		

Watertight Manhole Cover

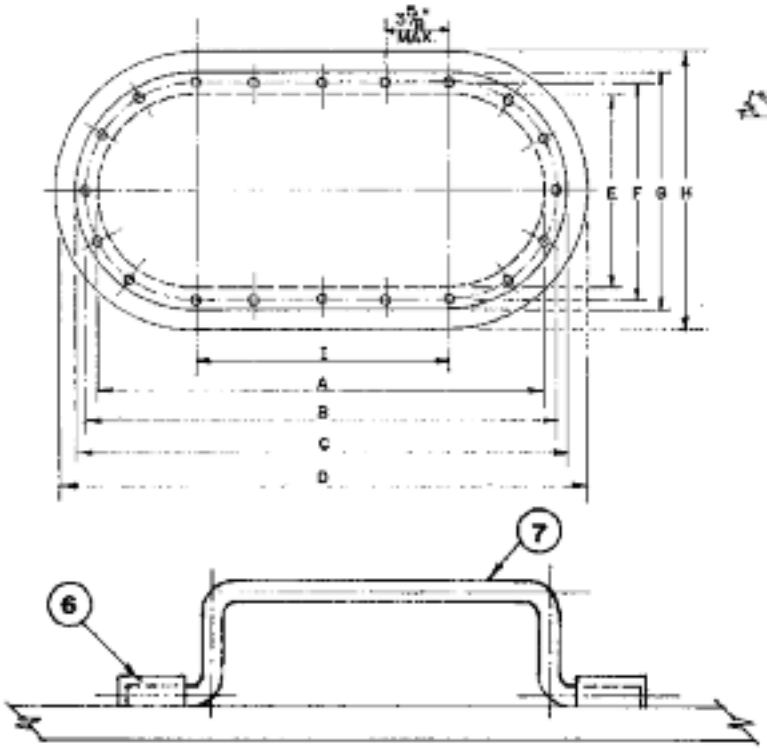

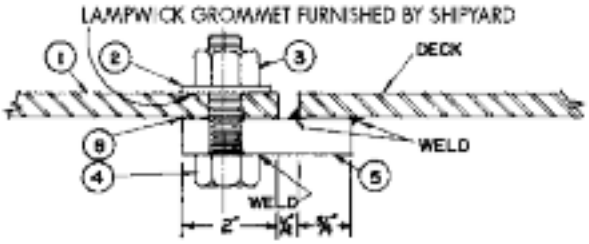

Custom Built Item - Specify Size

Drawing Number 300


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Steel	5	Steel
2	Plated Steel	6	Steel
3	Brass	7	Steel
4	Steel	8	Neoprene


Dimension Schedule

Clear Opening	A	B	C	D	E	F	G	H	I
15" x 23"	23"	24-1/4"	27"	29"	15"	16-1/4"	19"	21"	8"
18" x 24"	24"	25-1/4"	28"	30"	18"	19-1/4"	22"	24"	6"

Single Bolt Manhole

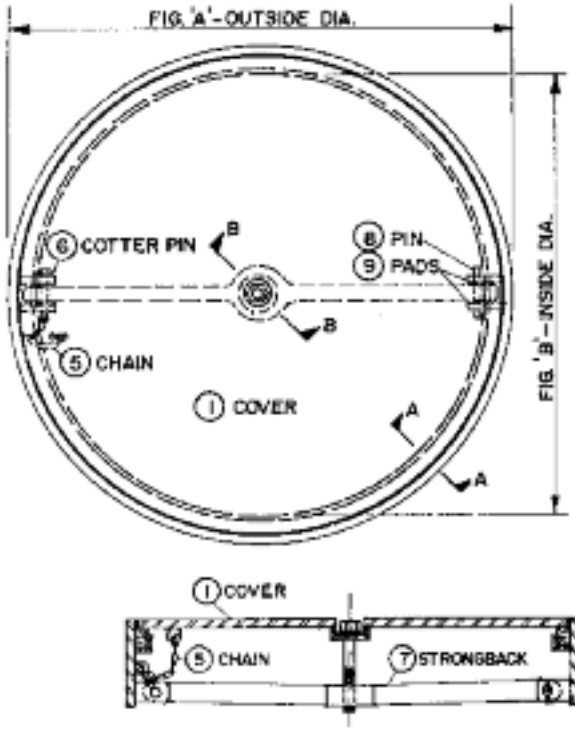

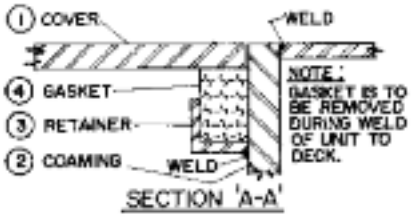



Custom Built Item - Specify Size

Drawing Number 301


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	7	Mild Steel
2	Mild Steel	8	Cold Finish
3	Mild Steel	9	Mild Steel
4	Neoprene	10	Brass
5	Steel	11	Neoprene
6	Steel	12	Stainless

Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.

Raised Bolted Plate Manhole

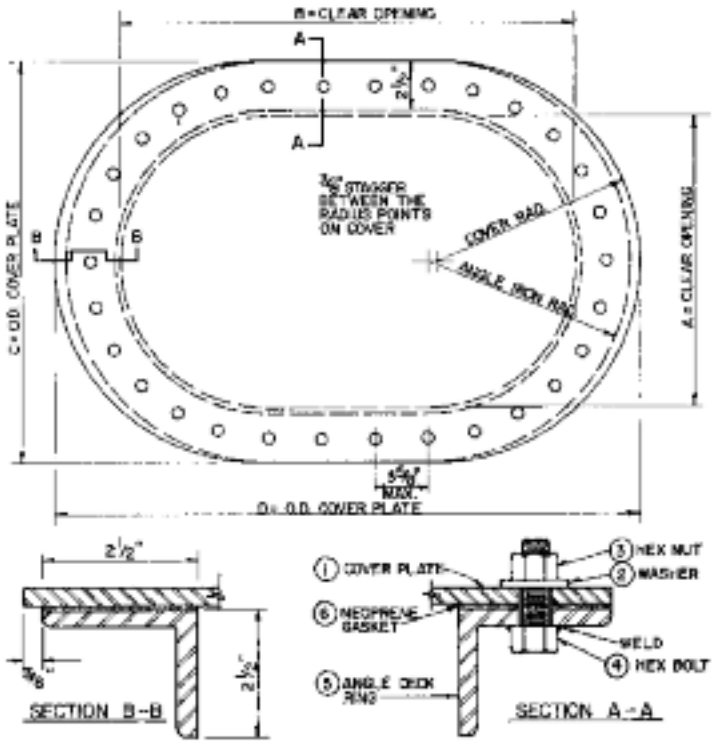

Custom Built Item - Specify Size

Drawing Number 302


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Steel	4	Plated Steel
2	Plated Steel	5	Steel
3	Plated Steel	6	Neoprene

Dimension Schedule

Clear Opening	A	B	C	D
15" x 23"	15"	23"	20"	28-3/4"
16" x 23"	16"	23"	21"	28-3/4"
18" x 24"	18"	24"	23"	29-3/4"

Flush Bolted Plated Manhole

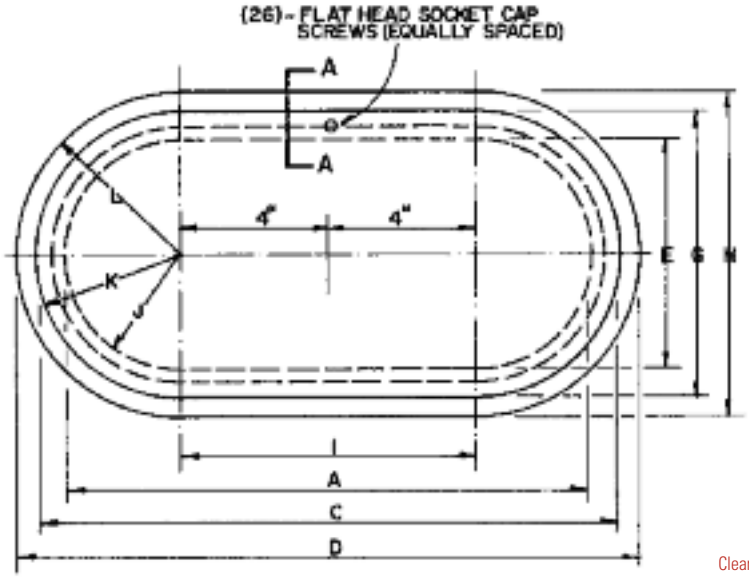

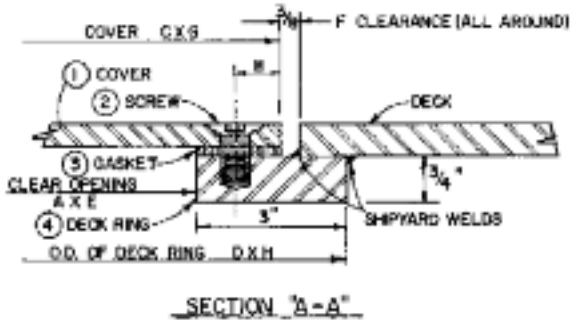

Custom Built Item - Specify Size

Drawing Number 303


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Steel	3	Neoprene
2	Stainless	4	Steel

Dimension Schedule

Clear Opening	A	B	C	D	E	F	G	H	I	J	K	L
15" x 23"	15"	1-1/8"	27"	29"	15"	3/8"	19"	21"	8"	7-1/2"	9-1/2"	10-1/2"

Covered Bolted Plate Manhole

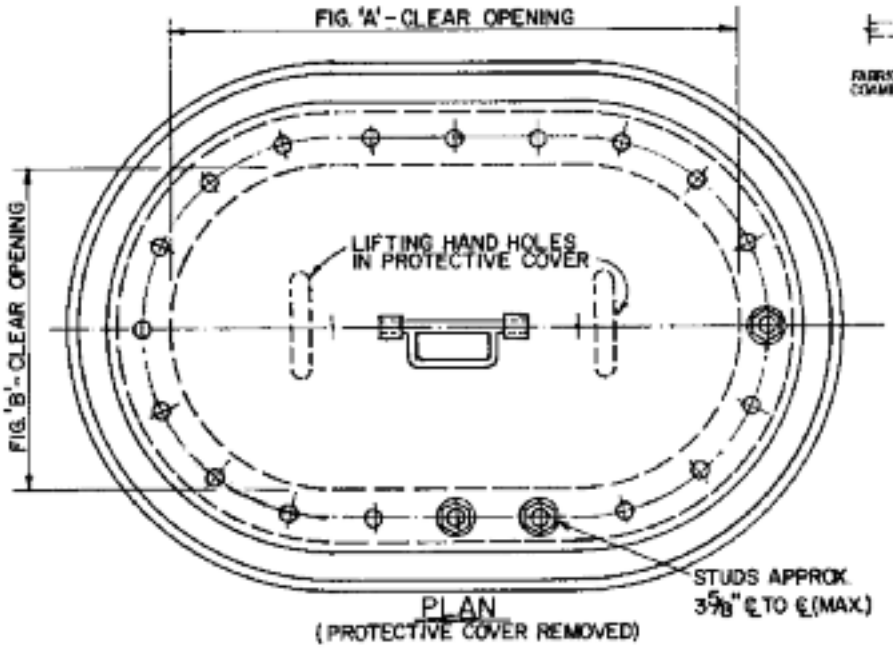

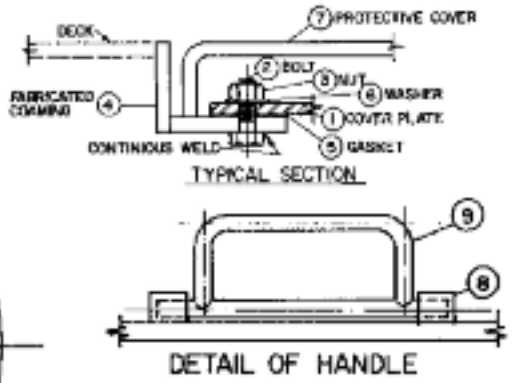


Custom Built Item - Specify Size


Drawing Number 304


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	6	Plated
2	Mild Steel	7	Mild Steel
3	Brass	8	Mild Steel
4	Mild Steel	9	Mild Steel
5	Neoprene		

Single Bolt Manhole with Fold Down Handle





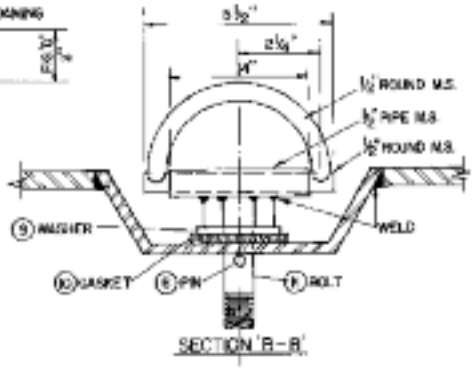

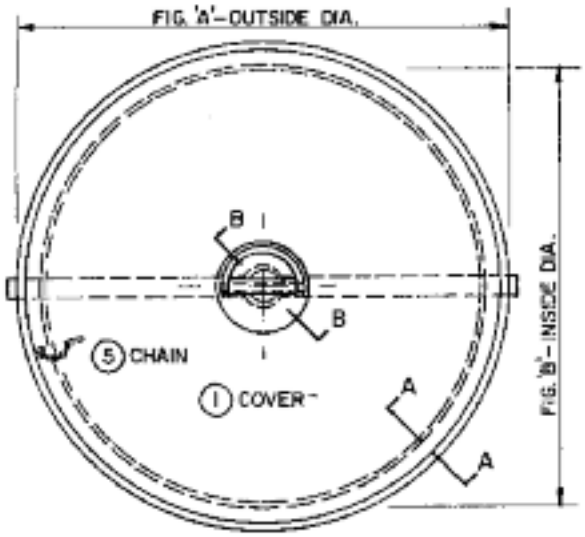

Custom Built Item - Specify Size


Drawing Number 305


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Mild Steel	7	Mild Steel
2	Mild Steel	8	Mild Steel
3	Mild Steel	9	Stainless
4	Neoprene	10	Neoprene
5	Steel	11	Stainless
6	Stainless		

©2014 Donovan Marine, Inc.

Watertight Manhole Cover





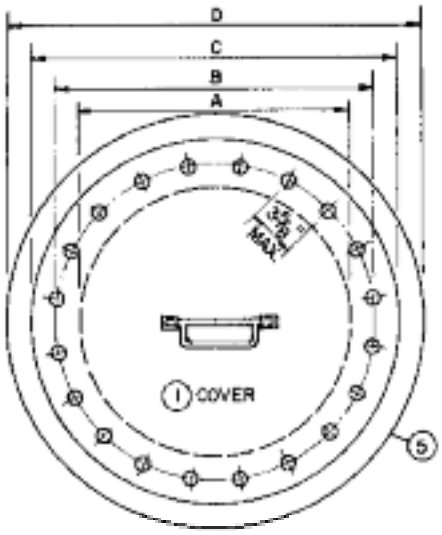

Custom Built Item - Specify Size

Drawing Number 306


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Steel	5	Steel
2	Plated Steel	6	Steel
3	Brass	7	Steel
4	Steel	8	Neoprene

Dimension Schedule


Clear Opening	A	B	C	D
18"	18"	19-3/4"	22"	22"
20"	20"	21-3/4"	24"	26"
22"	22"	23-3/4"	26"	28"
24"	24"	25-3/4"	28"	30"
26"	26"	27-3/4"	30"	32"

Oval Single Bolt Manhole







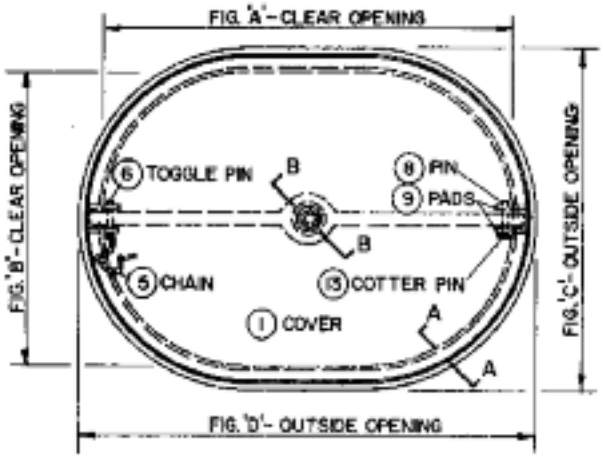

Custom Built Item - Specify Size

Drawing Number 307


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	8	Steel
2	Mild Steel	9	Mild Steel
3	Mild Steel	10	Stainless
4	Neoprene	11	Neoprene
5	Steel	12	Stainless
6	Steel	13	Stainless
7	Mild Steel		

Dimension Schedule

Clear Opening	A	B	C	D
15" x 23"	15"	23"	17-1/4"	25-1/4"
16" x 23"	16"	23"	18-1/4"	25-1/4"
18" x 24"	18"	24"	20-1/4"	26-1/4"

Round Raised Bolted Manhole

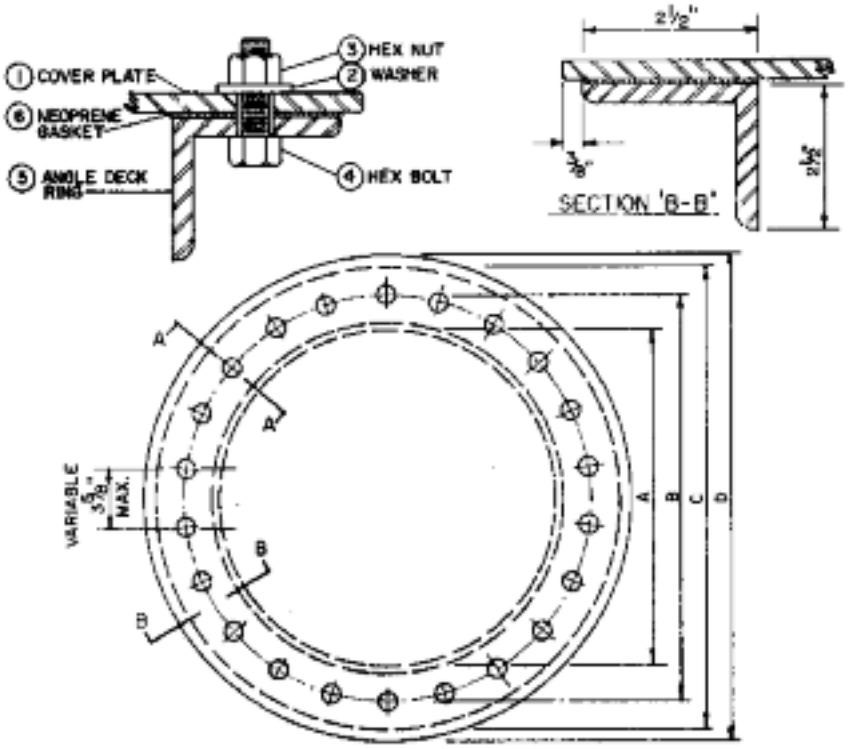

Custom Built Item - Specify Size

Drawing Number 308


Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Steel	4	Mild Steel
2	Plated Steel	5	Steel
3	Plated Steel	6	Neoprene

Dimension Schedule

No. Bolts	Clear Opening	A	B	C	D
22	18"	18"	20-3/4"	23"	23-3/4"
22	20"	20"	22-3/4"	25"	25-3/4"
22	22"	22"	24-3/4"	27"	27-3/4"
22	24"	24"	26-3/4"	29"	29-3/4"

Bolted Plate Manhole with Studs

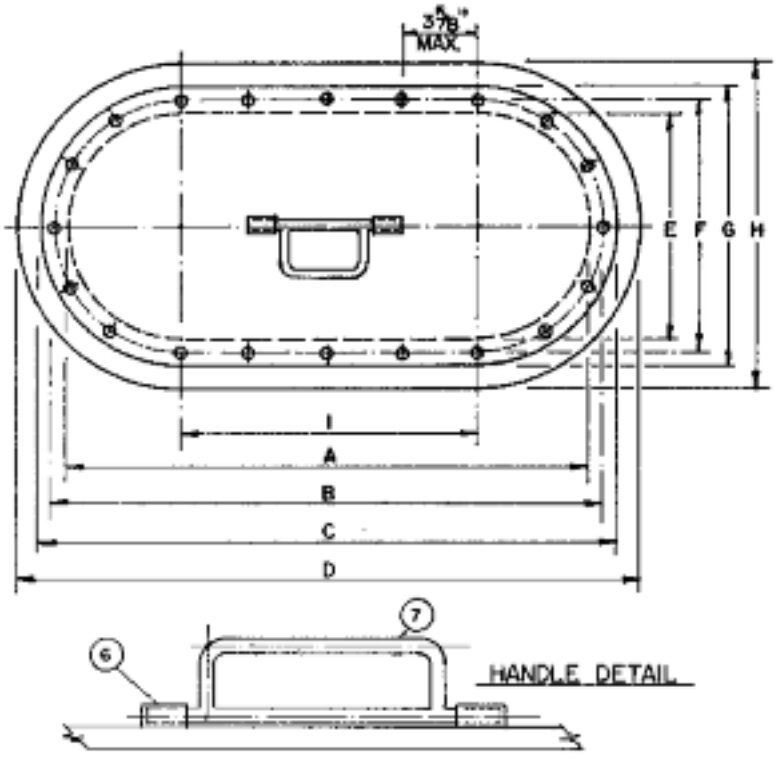

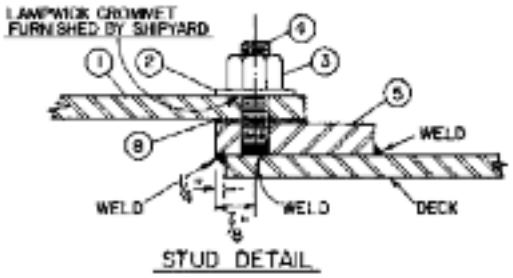

Custom Built Item - Specify Size

Drawing Number 309

Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Steel	5	Steel
2	Plated Steel	6	Steel
3	Plated Steel	7	Steel
4	Mild Steel	8	Neoprene


Dimension Schedule

Clear Opening	A	B	C	D	E	F	G	H	I
15" x 23"	23"	23-3/4"	26-1/2"	29"	15"	16-3/4"	18-1/2"	21"	8"
18" x 24"	24"	25-1/4"	27-1/2"	30"	18"	19-1/4"	21-1/2"	24"	6"

©2014 Donovan Marine, Inc.

Flush Bolted Plate Manhole

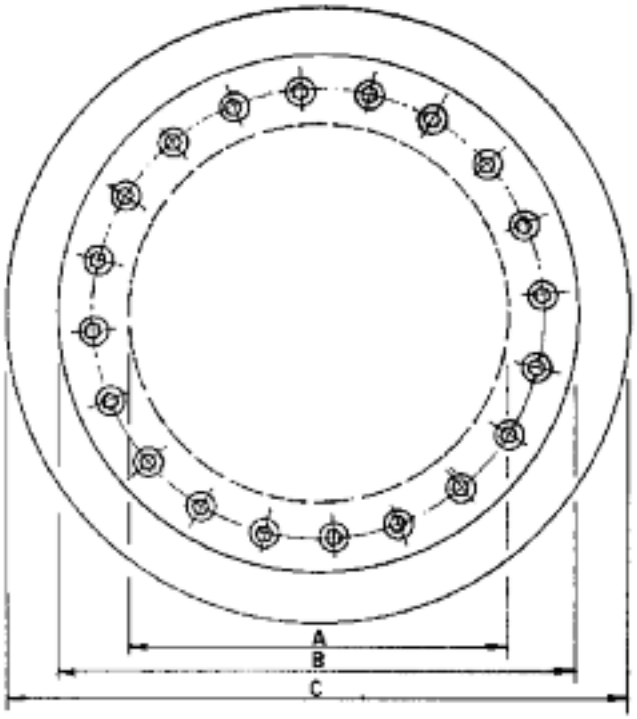

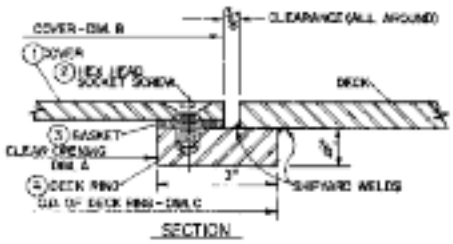

Custom Built Item - Specify Size

Drawing Number 310


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Steel	3	Neoprene
2	Stainless	4	Steel

Dimension Schedule

Clear Opening	A	B	C
18"	18"	21"	24"
20"	20"	24"	26"
22"	22"	26"	28"
24"	24"	28"	30"

Quick Acting Watertight Scuttle with Spring Balanced Cover

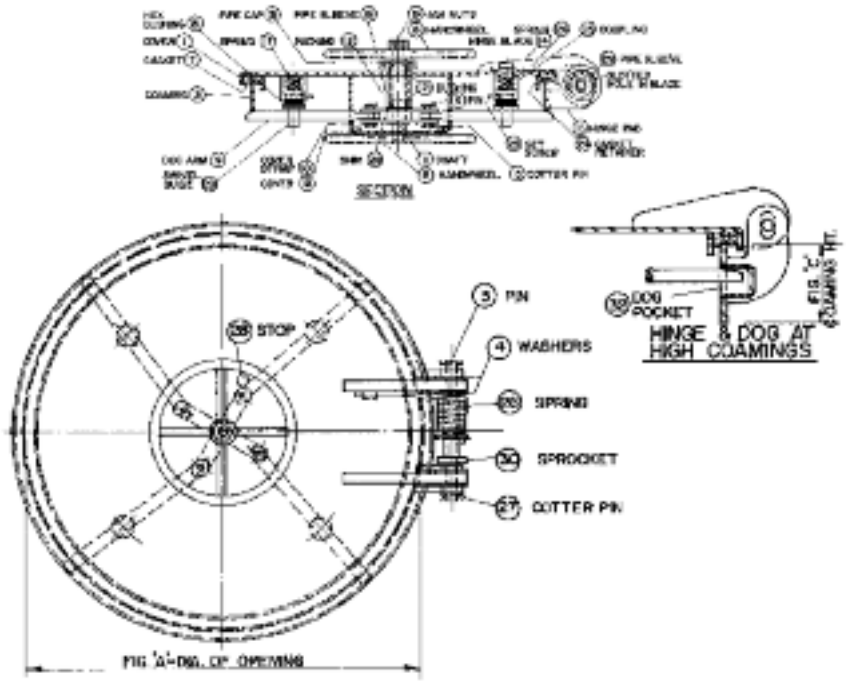


Custom Built Item - Specify Size

Drawing Number 400

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	17	Spring Steel
2	Mild Steel	18	Steel
3	Cold Finish	19	Steel
4	Brass	20	Brass
5	Mild Steel	21	Delrin
6	Cold Finish	22	Brass
7	Neoprene	23	Steel
8	Mild Steel	24	Mild Steel
9	Mild Steel	25	Steel
10	Mild Steel	26	Spring Steel
11	Cold Finish	27	Mild Steel
12	Mild Steel	28	Mild Steel
13	Graphite	29	Mild Steel
14	Mild Steel	30	Mild Steel
15	Mild Steel	31	Steel
16	Mild Steel	32	Mild Steel

Flush Quick Acting Watertight Round Scuttle

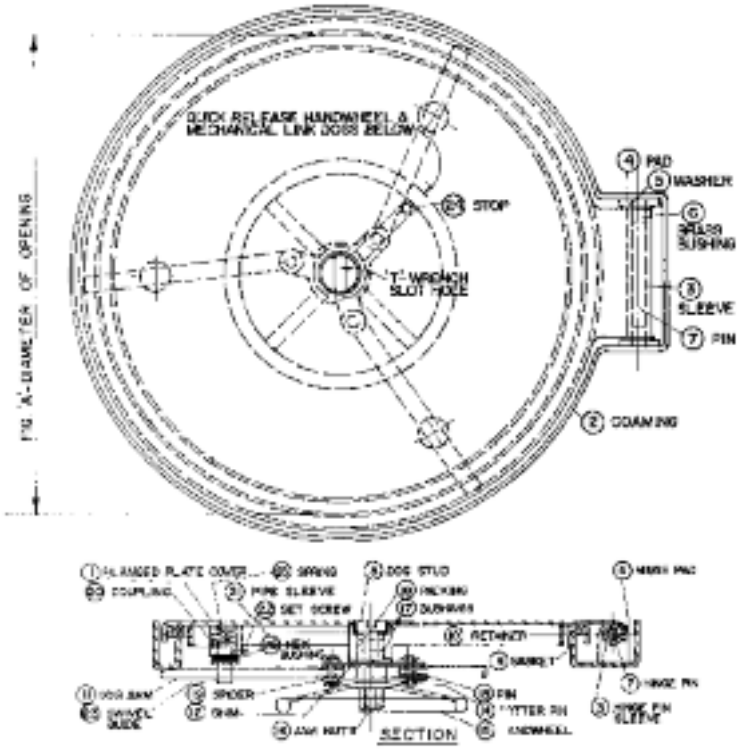


Custom Built Item - Specify Size

Drawing Number 401

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	14	Mild Steel
2	Mild Steel	15	Mild Steel
3	Mild Steel	16	Mild Steel
4	Mild Steel	17	Delrin
5	Brass	18	Graphite
6	Brass	19	Mild Steel
7	Cold Finish	20	Mild Steel
8	Mild Steel	21	Mild Steel
9	Neoprene	22	Mild Steel
10	Mild Steel	23	Brass
11	Mild Steel	24	Mild Steel
12	Brass	25	Spring Steel
13	Cold Finish	26	Mild Steel

Quick Acting Watertight Round Scuttle with Three Dogs

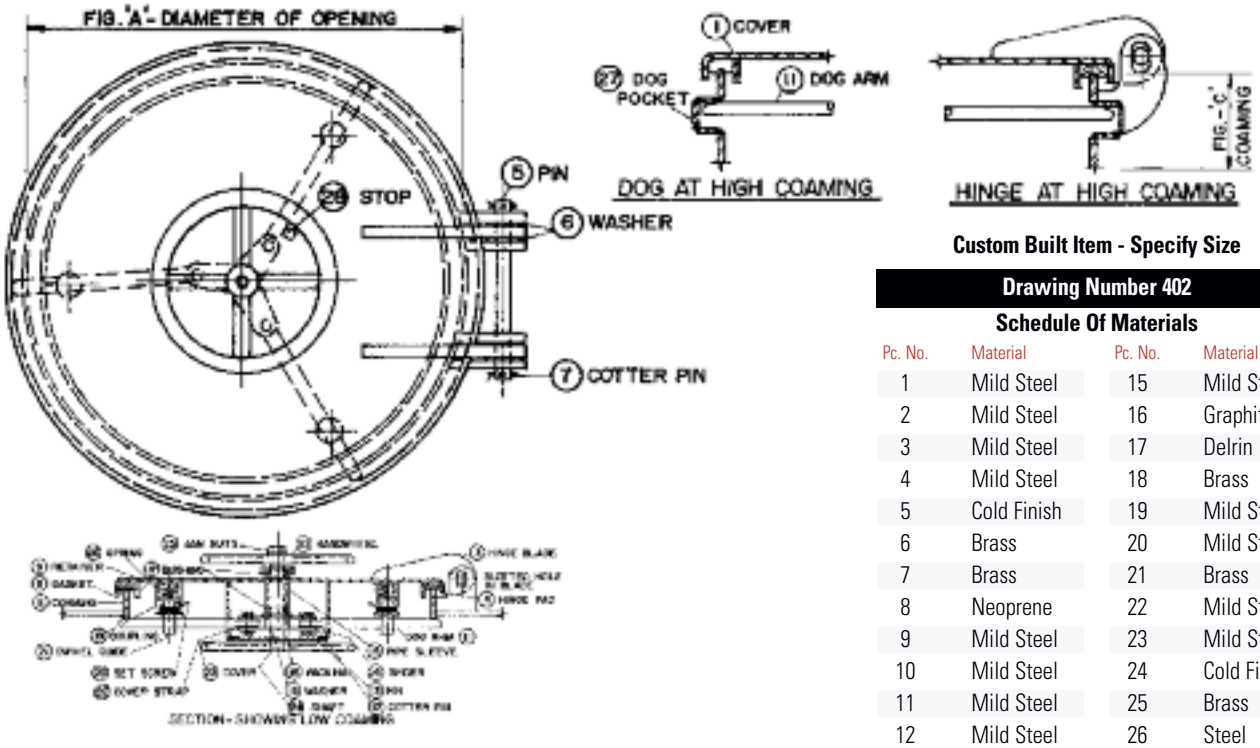

Custom Built Item - Specify Size


Drawing Number 402


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	15	Mild Steel
2	Mild Steel	16	Graphite
3	Mild Steel	17	Delrin
4	Mild Steel	18	Brass
5	Cold Finish	19	Mild Steel
6	Brass	20	Mild Steel
7	Brass	21	Brass
8	Neoprene	22	Mild Steel
9	Mild Steel	23	Mild Steel
10	Mild Steel	24	Cold Finish
11	Mild Steel	25	Brass
12	Mild Steel	26	Steel
13	Cold Finish	27	Mild Steel
14	Mild Steel	28	Mild Steel

©2014 Donovan Marine, Inc.

Quick Acting Watertight Flush Scuttle

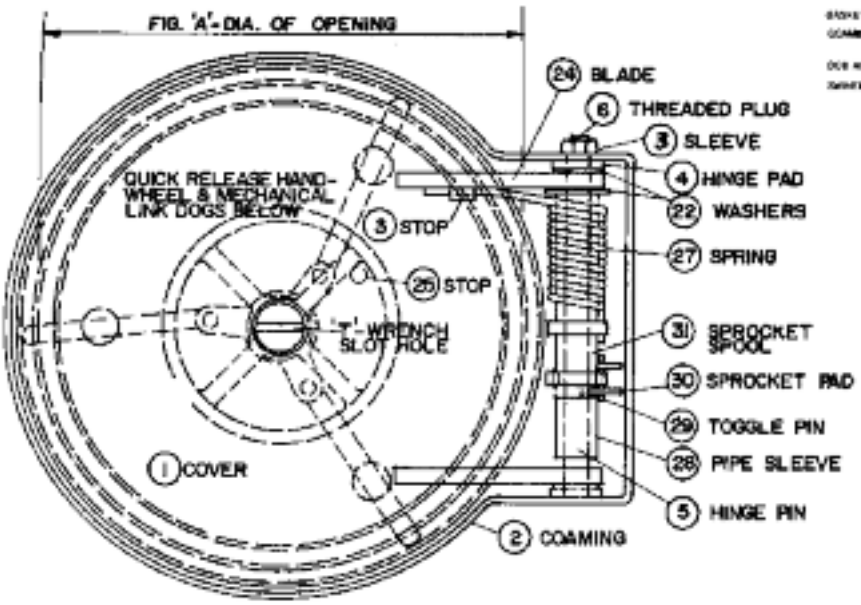




Custom Built Item - Specify Size


Drawing Number 403

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	17	Mild Steel
2	Mild Steel	18	Brass
3	Mild Steel	19	Mild Steel
4	Mild Steel	20	Mild Steel
5	Cold Finish	21	Brass
6	Steel	22	Brass
7	Neoprene	23	Brass
8	Mild Steel	24	Mild Steel
9	Mild Steel	25	Mild Steel
10	Mild Steel	26	Spring Steel
11	Mild Steel	27	Mild Steel
12	Brass	28	Mild Steel
13	Cold Finish	29	Mild Steel
14	Mild Steel	30	Mild Steel
15	Delrin	31	Mild Steel
16	Graphite		

Watertight Scuttle with Drop Bolts

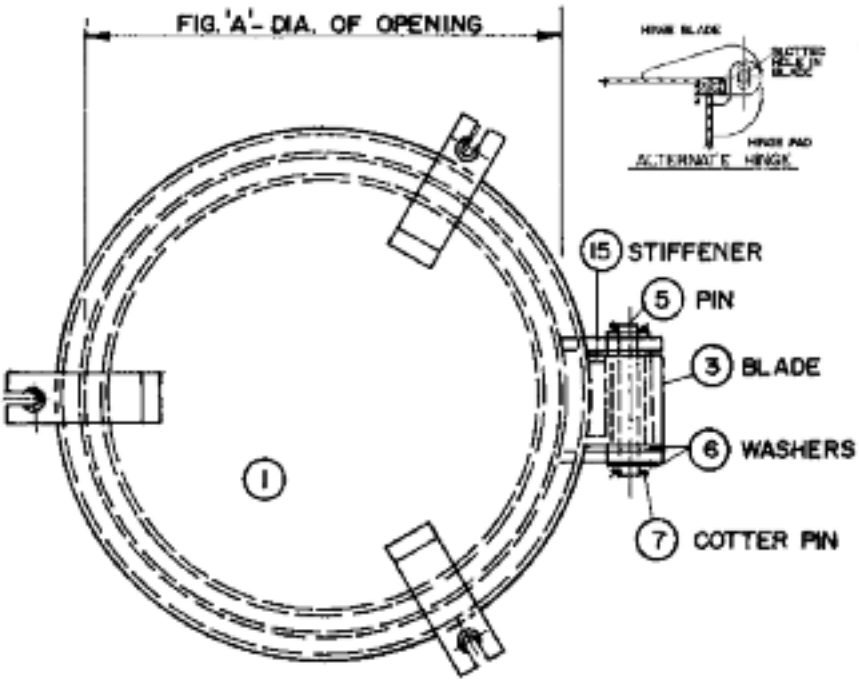

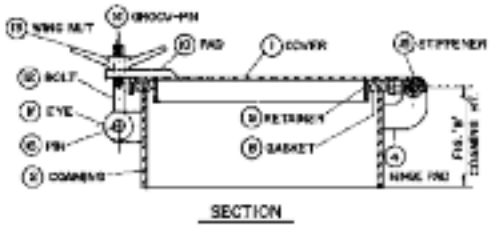


Custom Built Item - Specify Size


Drawing Number 404

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	9	Mild Steel
2	Mild Steel	10	Mild Steel
3	Mild Steel	11	Mild Steel
4	Mild Steel	12	Bronze
5	Cold Finish	13	Bronze
6	Brass	14	Stainless
7	Brass	15	Mild Steel
8	Neoprene	16	Brass

Watertight Scuttle with Dogs

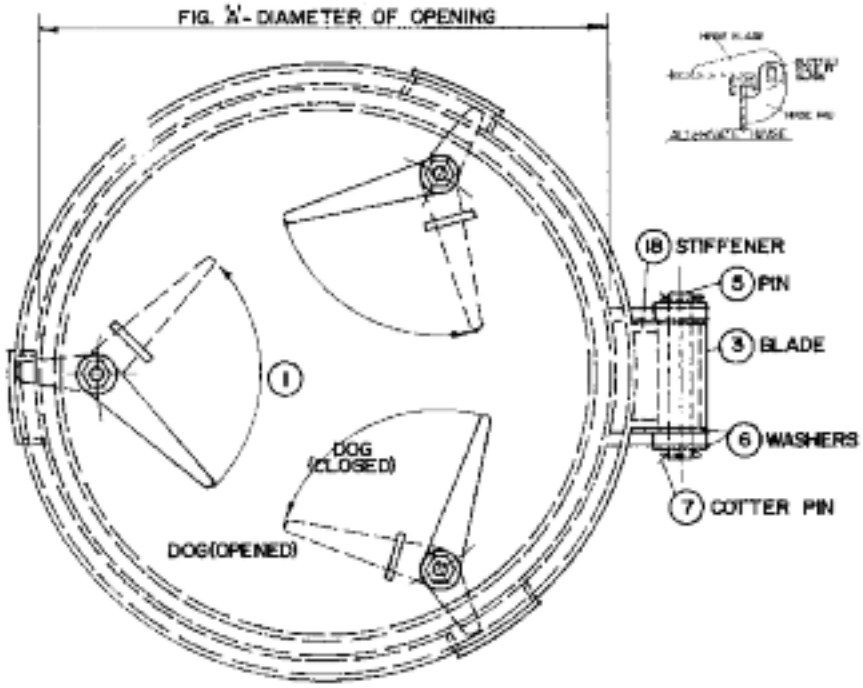




Custom Built Item - Specify Size


Drawing Number 405

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	10	Mild Steel
2	Mild Steel	11	Graphite
3	Mild Steel	12	Delrin
4	Mild Steel	13	Steel
5	Cold Finish	14	Mild Steel
6	Brass	15	Mild Steel
7	Brass	16	Mild Steel
8	Neoprene	17	Mild Steel
9	Mild Steel	18	Mild Steel

Watertight Scuttle Operate Below Only

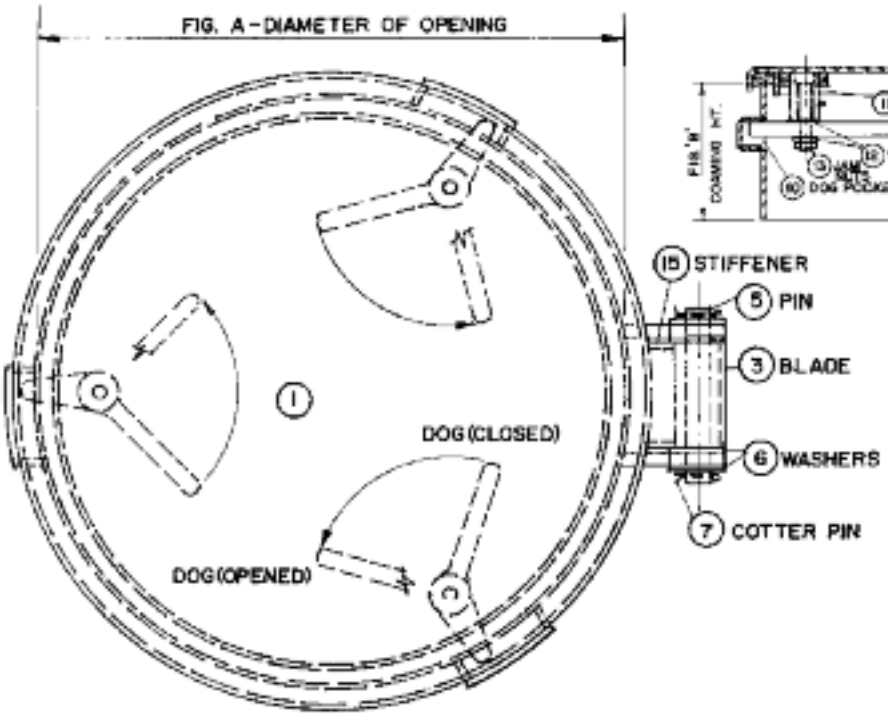

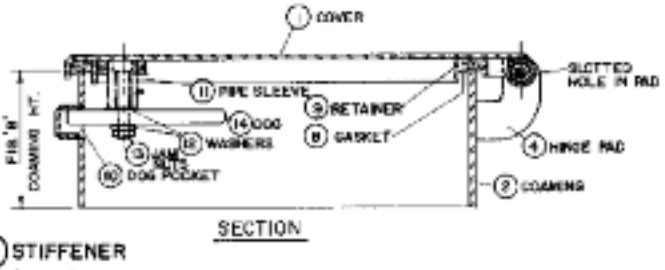

Custom Built Item - Specify Size


Drawing Number 406


Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	9	Mild Steel
2	Mild Steel	10	Mild Steel
3	Mild Steel	11	Mild Steel
4	Mild Steel	12	Brass
5	Cold Finish	13	Mild Steel
6	Brass	14	Manganese Brz.
7	Brass	15	Mild Steel
8	Neoprene		

©2014 Donovan Marine, Inc.

Watertight Flush Scuttle

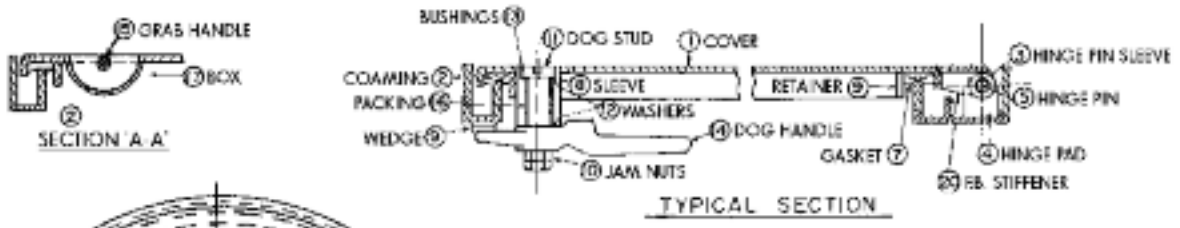

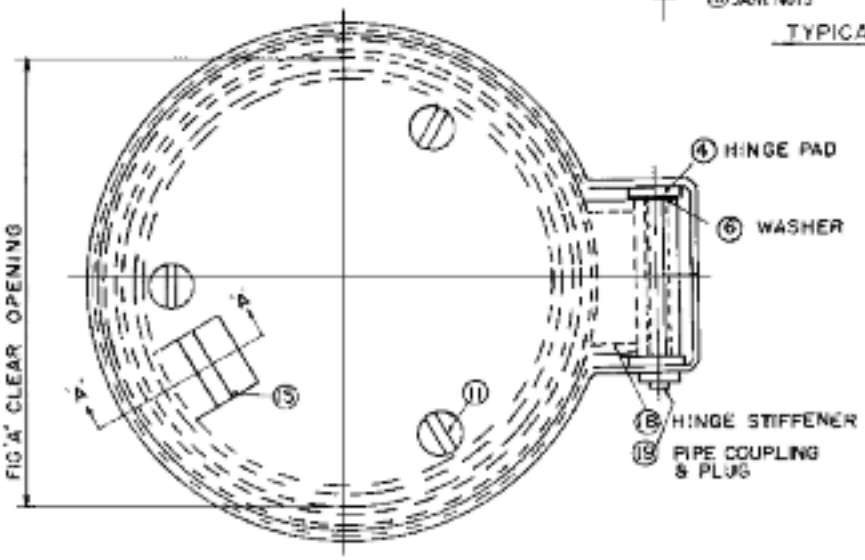


Custom Built Item - Specify Size


Drawing Number 407

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Mild Steel	11	Manganese Brz.
2	Mild Steel	12	Brass
3	Mild Steel	13	Delrin
4	Mild Steel	14	Mild Steel
5	Cold Finish	15	Mild Steel
6	Brass	16	Graphite
7	Neoprene	17	Mild Steel
8	Mild Steel	18	Mild Steel
9	Mild Steel	19	Mild Steel
10	Mild Steel	20	Mild Steel

Watertight Raised Scuttle Flush Cover

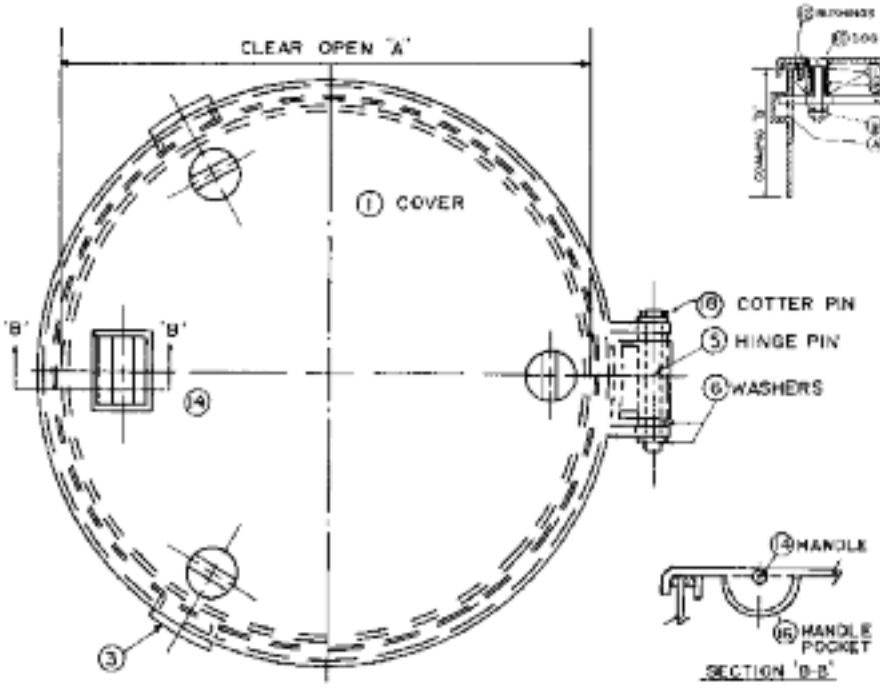



Custom Built Item - Specify Size


Drawing Number 408

Schedule Of Materials

Pc. No.	Material	Pc. No.	Material
1	Steel	10	Bronze
2	Steel	11	Brass
3	Steel	12	Delrin
4	Steel	13	Steel
5	Cold Finish	14	Steel
6	Brass	15	Graphite
7	Neoprene	16	Steel
8	Steel	17	Steel
9	Steel	18	Steel

Plain Fixed Light



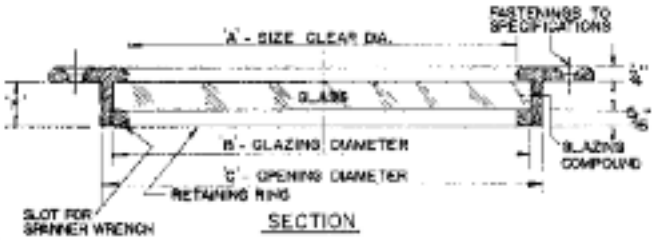


Custom Built Item - Specify Size


Drawing Number 500

Dimension Schedule

A	B	C	D	E	F
10"	10-1/2"	11-1/16"	13-1/4"	12-1/4"	1-1/16"
12"	12-1/2"	13"	15-3/16"	14-3/16"	1-1/4"
16"	16-1/2"	17"	19-1/2"	18-1/2"	1-3/8"

Reversed Fixed Light

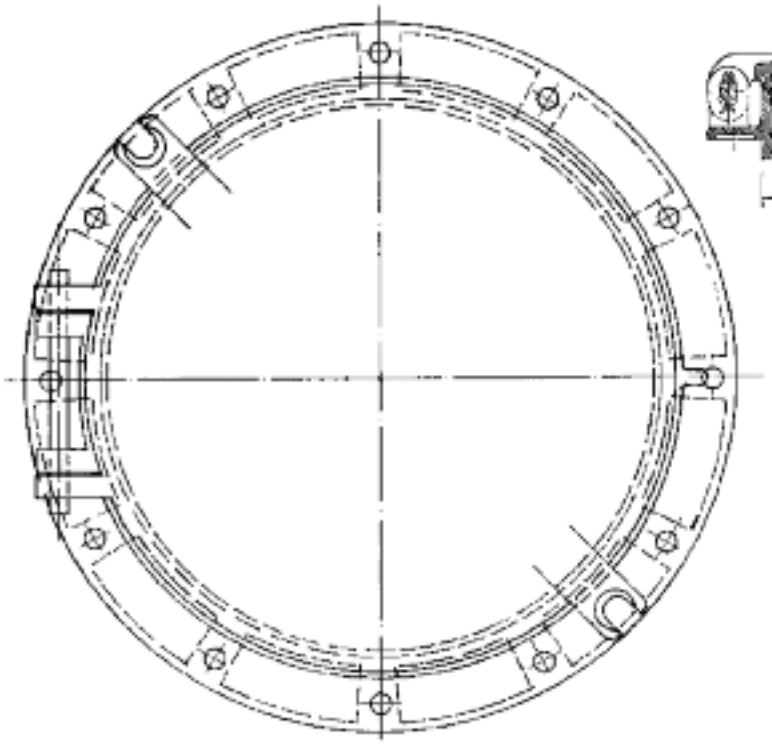

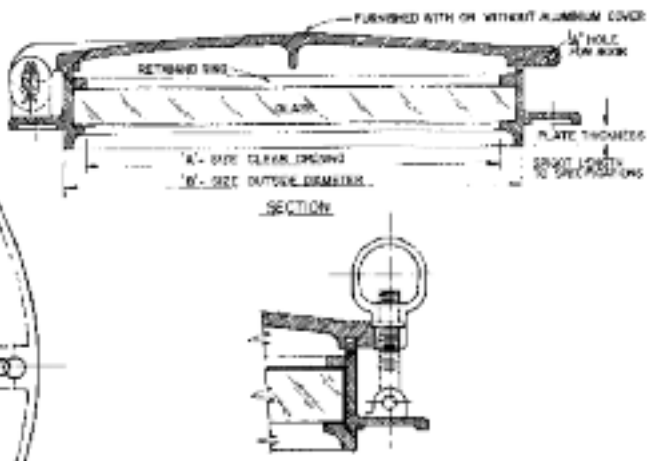


Custom Built Item - Specify Size


Drawing Number 600

A Size Clr. Op.	Spigot Max. Lt.	B Size O.S. Dia.	Ovall Dia.	Bolt Hole
10"	0-1/2"	11"	13-5/8"	5/16"
12"	0-1/2"	13-1/8"	15-7/8"	3/8"
16"	0-1/2"	17-1/4"	20-3/8"	1/2"

©2014 Donovan Marine, Inc.

Steel Back Portlight – Weld In

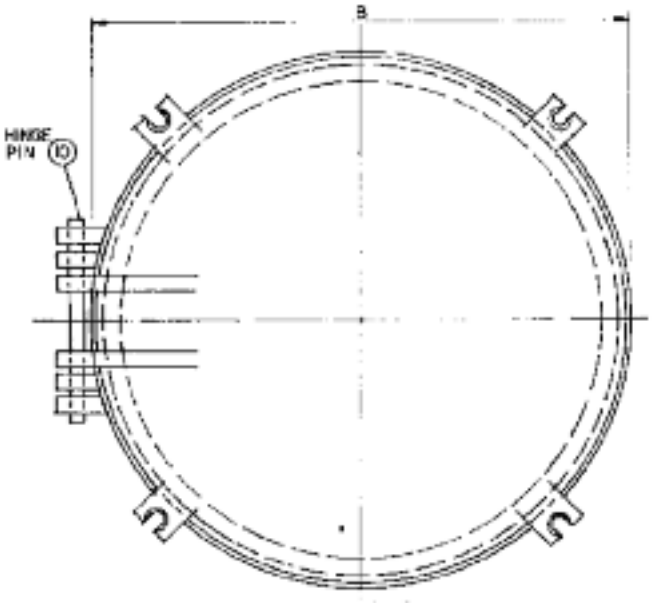

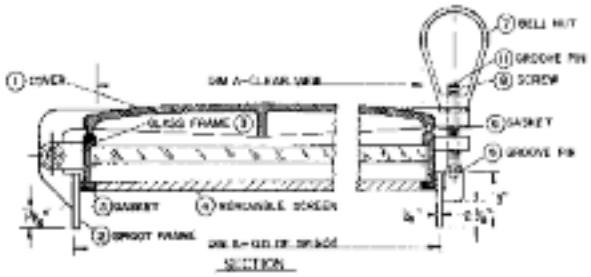

Custom Built Item - Specify Size

Drawing Number 700

Schedule Of Materials


Pc. No.	Material	Pc. No.	Material
1	Aluminum	7	Brass
2	Steel	8	Brass
3	Brass	9	Stainless
4	Brass	10	Brass
5	Neoprene	11	Stainless
6	Neoprene		

Dimension Schedule

Size	12	14	16	18
A	12"	14"	26"	18"
B	23-1/2"	15-1/2"	17-1/2"	19-1/2"

Portlight - Bolt On



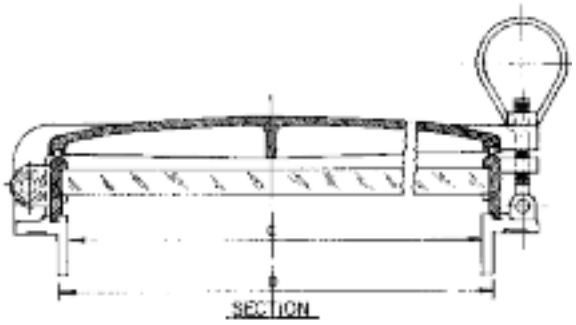


Custom Built Item - Specify Size

Drawing Number 800

Dimension Schedule

Size	10	12	14	16	18
A	14-1/4"	16"	18"	20-3/8"	22-3/4"
B	12-3/4"	14-3/4"	17"	18-7/8"	21-1/8"
C	10"	12"	14"	16"	18"
D	10-3/8"	12-3/8"	14-3/8"	16-1/2"	18-1/2"
E	1/2"	1/2"	1/2"	1/2"	1/2"


Button Chocks

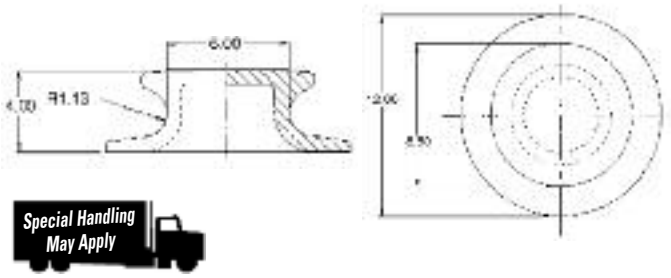

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
309751	(BC-6) 6", 53 lbs., DF-192	$111.98 C
309763	(BC-8) 8", 75 lbs., DF-473	$213.98 C
309787	(BC-10) 10", 136 lbs., DF-185	$354.98 C


Closed Chocks

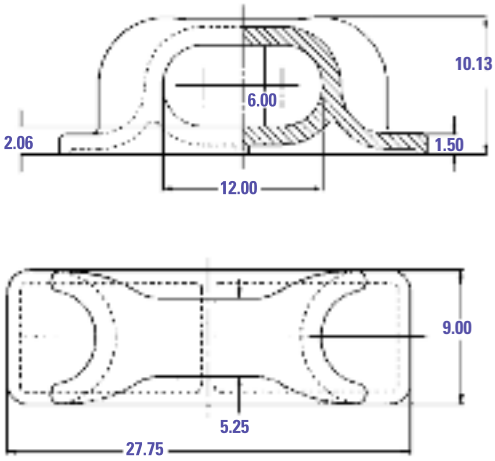

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
310273	(CC-9) 9", DF-480	$422.98 C
310297	(CC-12) 12", DF-490	$1,060.98 C
310312	(CC-14) 14"	$1,403.98 C


Open Chocks

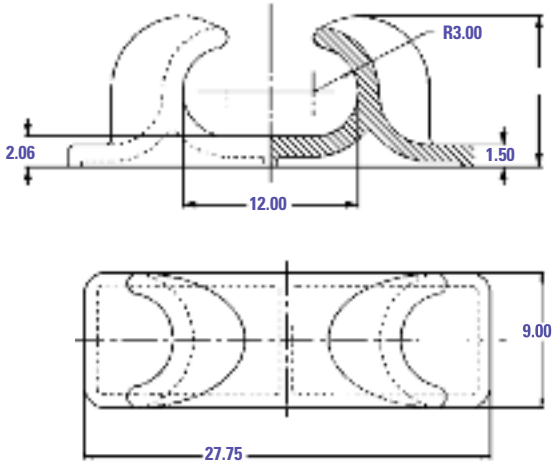

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
310259	(OC-09) 9", DF-485	$406.98 C
310261	(OC-12) 12", DF-489	$936.98 C


Panama Chocks

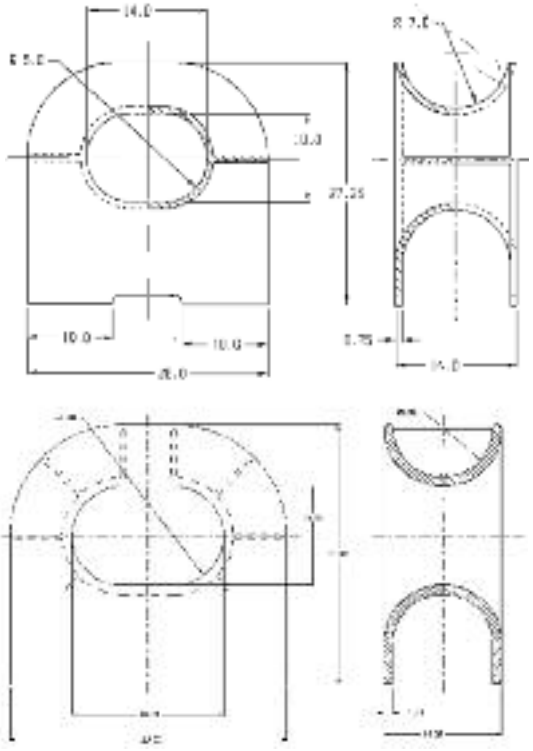

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
310401	(PC-1014) 10" x 14" Panama Chock	$779.98 C
310415	(PC-1218) 12" x 18" Panama Chock	$1,226.98 C

Mooring Eyes

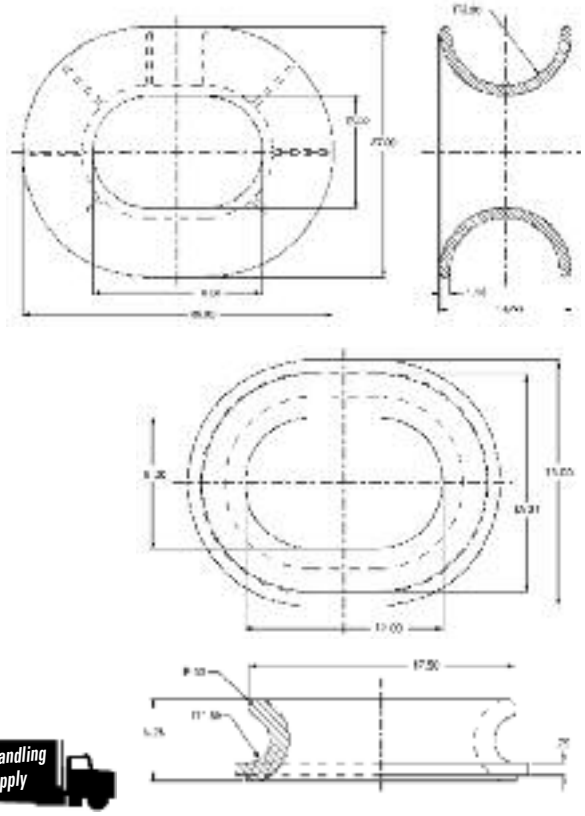


Special Handling May Apply

Order No.	Mfg. No. / Description	Price
310348	(ME0812) 8" x 12", Steel, DF-528	$319.98 C
310358	(ME1218) 12" x 18"	$946.98 C

©2014 Donovan Marine, Inc.


Barge Kevels - Open Base - Cast Steel

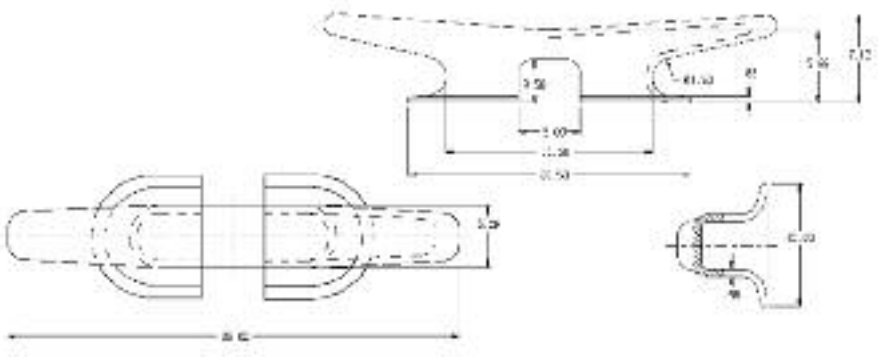

Special Handling May Apply

Order No.	Similar to Nabrico Part #	A	B	C	D	E	F	G	H	I	J	K	Weight	Price
309994	N/A	12"												$38.98 C
310007	DF-518	18"		4-1/2"	5-1/2"	6"			2-1/8"	3-1/8"			25 lbs.	$99.98 C
310033	DF-48A	36"	5"	22-1/2"	5"	3-1/2"	1-1/2"	5/8"	5-7/8"	7-1/8"	9/16"	5"	91 lbs.	$227.98 C
310045	DF-36A	42"	6"	25-1/2"	7-1/2"	3-1/4"	1-1/2"	5/8"	6-1/2"	7-1/2"	9/16"	5-1/2"	117 lbs.	$322.98 C
310057	DF-159A	48"	6-1/2"	27"	8"	5"	1-1/2"	5/8"	8-3/4"	10"	9/16"	5-3/4"	166 lbs.	$454.98 C


Kevel Chock - Cast Steel

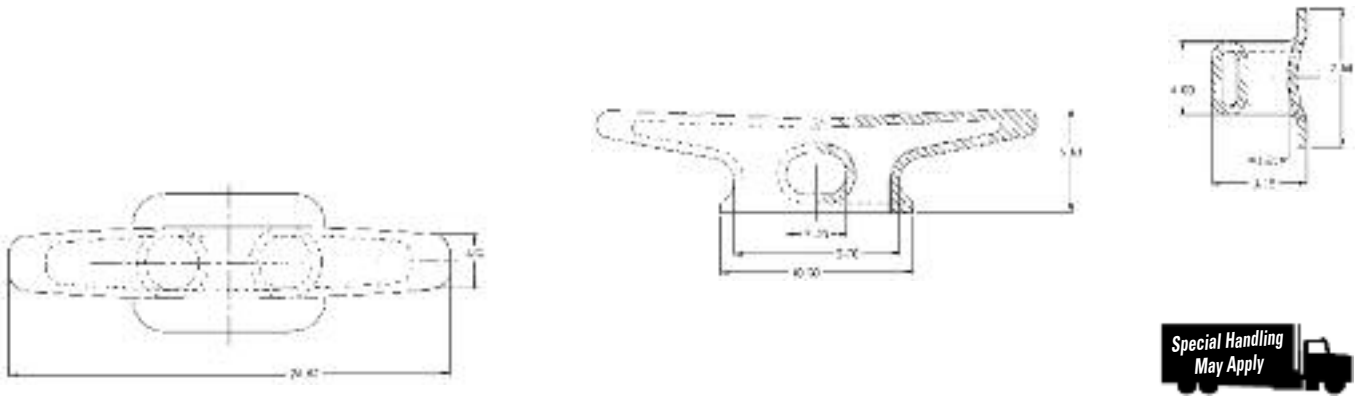

Special Handling May Apply

Order No.	Similar to Nabrico Part #	A	B	C	D	E	F	G	H	I	J	K	Weight	Price
310083	DF-30	24"	3-1/4"	9"	10-1/2"	5-5/8"	1/2"	3"	4"	7-1/2"	5-1/8"	2-1/4"	50 lbs.	$146.98 C
310095		30"	6-7/8"	14"	20-1/4"	7"		3-1/4"		9-1/2"	5-5/8"			$218.98 C
310108	DF-482	36"	8-1/4"	17"	23-1/2"	8"	9/16"	4"	5"	11"	6-3/4"	3-1/4"	98 lbs.	$309.98 C
310110	DF-483	42"	9-5/8"	20"	26-3/4"	9"	5/8"	4-3/4"	6"	12-1/2"	7-7/8"	4-1/8"	160 lbs.	$435.98 C
310122	DF-484	48"	11"	23"	30"	10"	3/4"	5-1/2"	7"	14"	9"	5"	220 lbs.	$569.98 C


Single Bitt

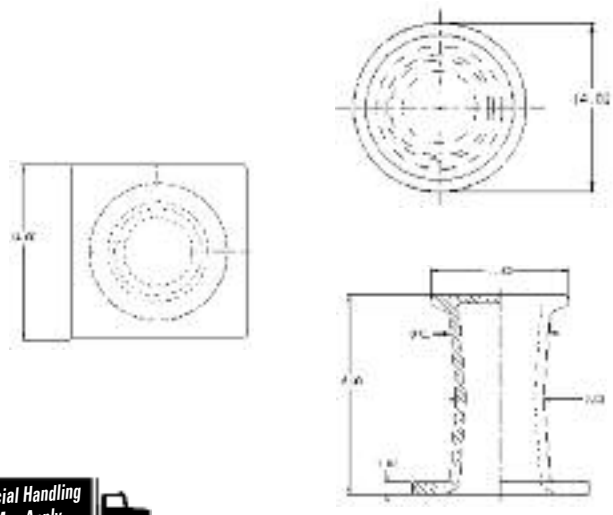

Special Handling May Apply

Order No.	Similar to Nabrico Similar to	Dia.	Base	Height	Weight	Price
310158	DF-SB10	10"	14" x 14"	18"	190 lbs.	$479.98 C

Corner Barge Castings - 49 lbs.

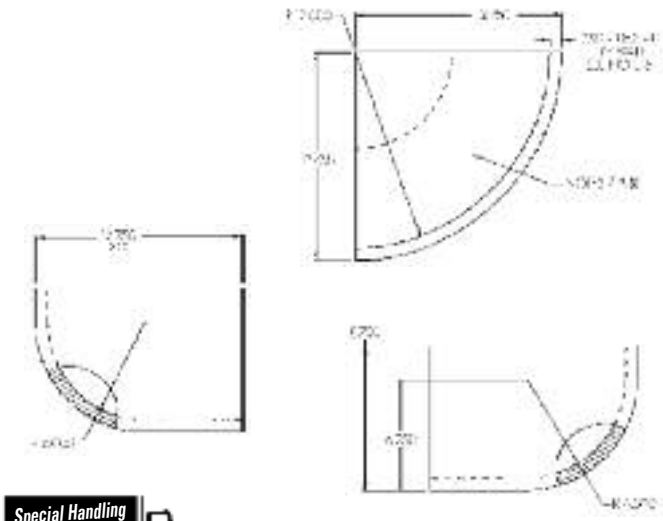


Special Handling May Apply

Special Order	Left Hand	POR
Special Order	Right Hand	POR

Double Bitts


POR

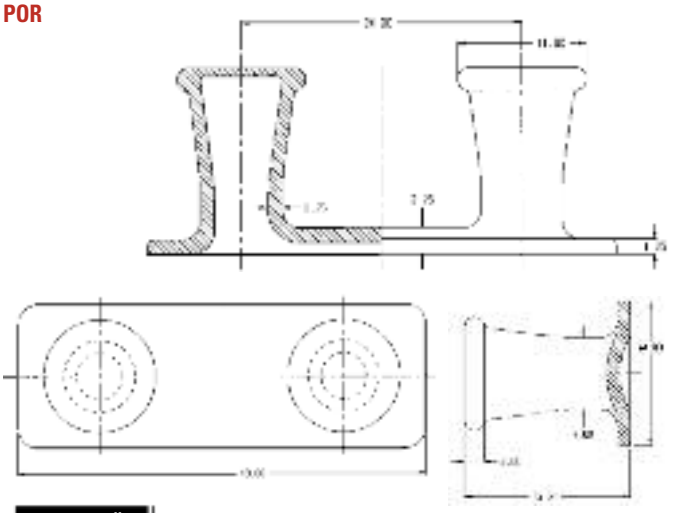

Special Handling May Apply

Order No.	Similar to Nabrico Part No.	Dia.	Base	Height	Weight	Price
310209	DF-2	8"	40" x 14"	16"	330 lbs.	$746.98 C
310210	DF-40	10"	45" x 15"	18"	545 lbs.	$1,308.98 C
310220	DF-491	12"	60" x 18"	22"	1,176 lbs.	$2,435.98 C
310233	DB-14	14"	66" x 21"	29.75"		$3,555.98 C

Roller Chock

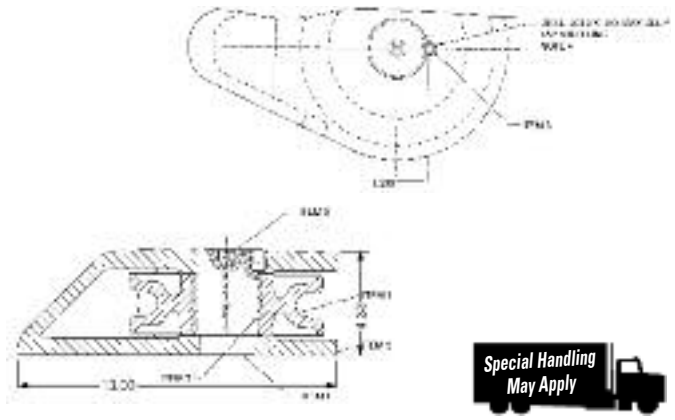

Special Handling May Apply

Order No.	Mfg. No. / Description	Price
309575	(08830-101A) DF-927	$304.98 C

Kolor Kut Water Finding Paste



- It is golden brown in color and turns brilliant red upon contact with water.
- This product will gauge water content in all petroleums and hydrocarbons as well as sulfuric acid, nitric acid, hydrochloric acid, ammonia, soap solutions, salt and other chloride solutions.

Order No.	Mfg. No. / Description	Price
441612	Water Finding Paste, 3 oz.	$6.98 F


Kolor Kut Gas Gauging Paste

Order No.	Mfg. No. / Description	Price
441614	Gas Gauging Paste, 2.25 oz.	$6.98 F


30 x 30 Stainless Steel Mesh Screen

Order No.	Mfg. No. / Description	Price
303189	30" x 30"	$87.98 F


Roller Buttons - Free-Rolling




309586



309561



309573



309559

Special Handling May Apply

- These are the finest high-load carrying, free-rolling roller buttons that have ever been designed and are manufactured in sizes to suit the needs of boats, seagoing tugs and ships.
- Precision machined parts have working parts coated with an extremely hard coating – 70 Rockwell C-Scale – which is corrosion resistant.
- The buttons will not freeze up as most do, because they are closed at the top.
- The air pocket formed on the inside, makes it practically impossible for water to enter the working parts.
- Before shipment, the roller buttons are completely lubricated and should need only occasional attention after installation and use.

Order No.	Mfg. No. / Description	Price
309559	(RB-11) Diameter 11", Maximum Wire 3/4"	$572.98 C
309561	(RB-12) Diameter 12-1/2", Maximum Wire 1"	$762.98 C
309586	(1048) Diameter 13-1/2", Maximum Wire 1-1/4"	$1,227.98 C
309573	(RB-15) Diameter 15.15", Maximum Wire 1-1/4"	$1,155.98 C

Double Duty Gauging Tapes


USTAPE



- Features half inch wide heavy gauge steel blade.
- Graduated in feet, inches and eights.
- Chrome plated on one edge, matte black finish on other edge, for measuring dark and light oils.
- Stainless steel reel.

Order No.	Mfg. No. / Description	Price
507129	(58814) Length 25'	$129.98 F
507131	(58820) Length 50'	$156.98 F
507117	(58899) 20 oz. Plumb Bob	$48.98 F

©2014 Donovan Marine, Inc.

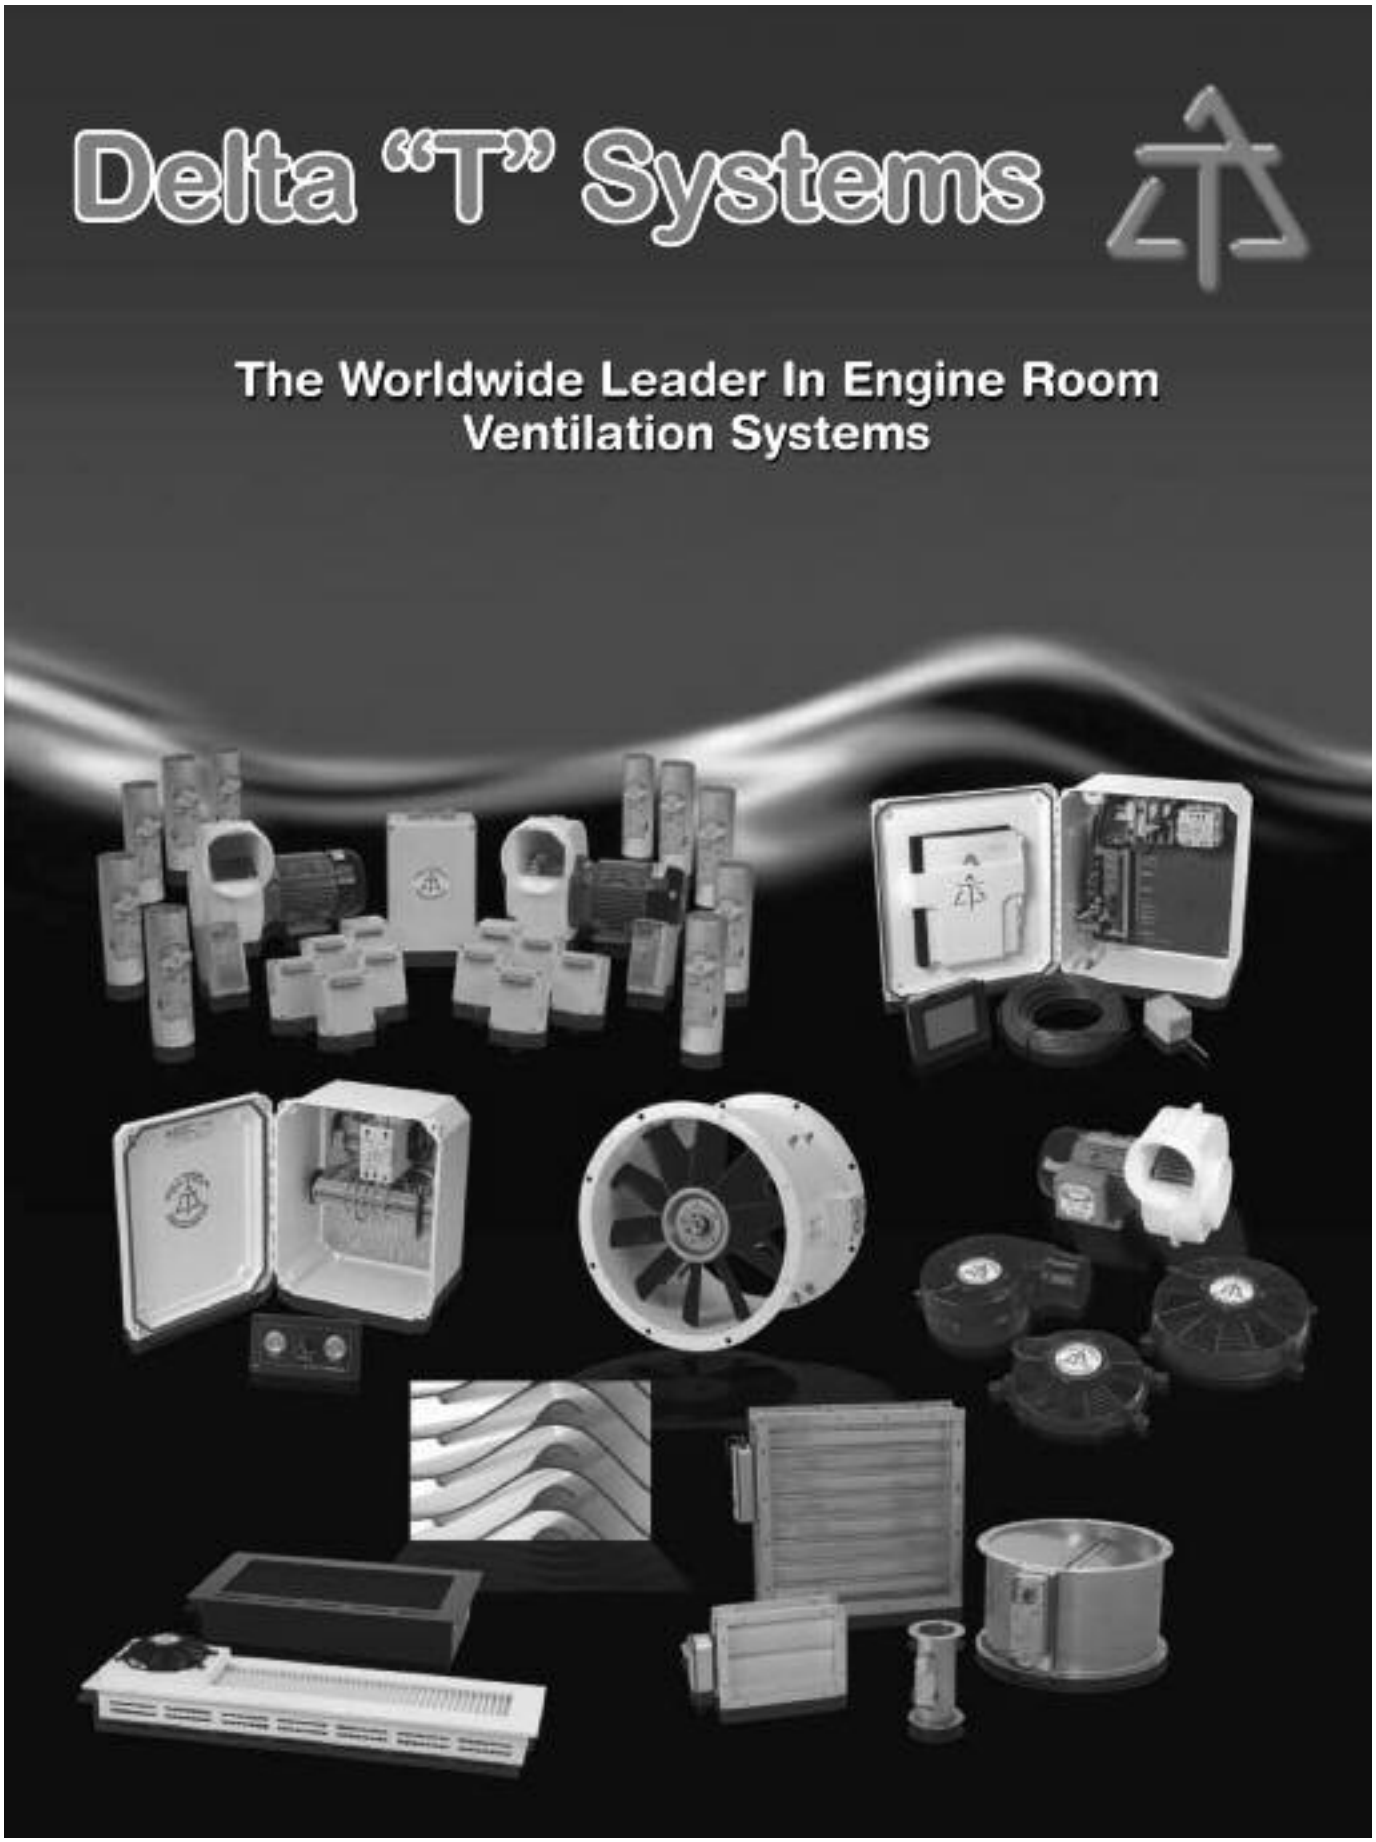
Delta "T" Systems
The Worldwide Leader In Engine Room
Ventilation Systems

Delta "T" Systems

Delta "T" Systems engineers and manufactures a full line of marine engine room ventilation components and systems for virtually any application.






Fans & Blowers

- -All Sizes, Types and Applications
- -Any CFM Range
- -High Efficiency
- -Ultra-High Flow Rates and Static Pressures




Moisture Eliminators

- -97 Percent Efficiency
- -Custom Sizes and Designs
- -Marine Grade Materials

Fire Dampers

- -Any Size or Type
- -Round or Rectangular
- -Fire Rated Dampers A-0 to A-60




Control Systems

- -Full Range of Ventilation Control Systems
- -Manual or Fully Automatic
- -A/C and D/C Systems




Other Product Lines

- -Weather Closures
- -Multiple Space Ventilation System
- -Grill Vents and Louvers
- -Fan Guards
- -System Engineering Capabilities






Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.

Inverted Vent Check Valves



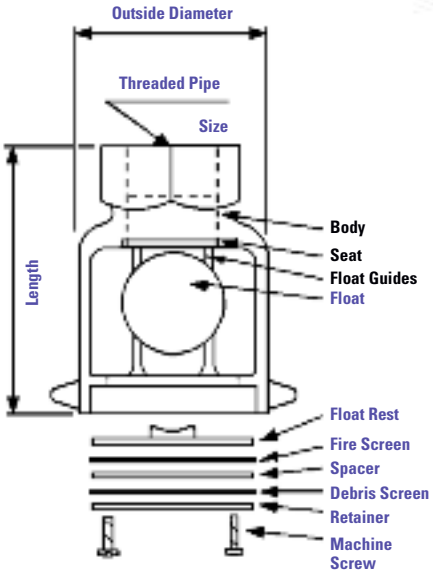

- Approved for installation aboard USCG inspected vessels.
- Heavy cast construction, with weighted heavy gauge ball float.
- Available in bronze, zinc/coated steel and aluminum.
- Venting improves the efficiency of loading and unloading cargo by eliminating dangerous pressure or vacuum buildup.
- Inverted Vent Check Valves add a measure of security, preventing deck wash, deck fire and debris from traveling through the vent.

- Size 2", OD 4-1/8", Overall Length 6", Shipping Weight 8 lbs.

Order No.	Mfg. No. / Description	Price
257267	(20ACV200) Aluminum	$251.98 Q
257332	(53ICV200) Zinc/Coated	$247.98 Q
257419	(00BCV200) Bronze	$442.98 Q

- Size 2-1/2", OD 4-7/8", Overall Length 7", Shipping Weight 13 lbs.

Order No.	Mfg. No. / Description	Price
257421	(00BCV250) Bronze	$565.98 Q

- Size 3", OD 5-1/2", Overall Length 8-3/8", Shipping Weight 19 lbs.

Order No.	Mfg. No. / Description	Price
257281	(20ACV300) Aluminum	$329.98 Q
257356	(53ICV300) Zinc/Coated	$329.98 Q
257433	(00BCV300) Bronze	$810.98 Q

- Size 4", OD 7-1/8", Overall Length 9-1/2", Shipping Weight 31 lbs.

Order No.	Mfg. No. / Description	Price
257293	(20ACV400) Aluminum	$499.98 Q
257368	(53ICV400) Zinc/Coated	$473.98 Q
257445	(00BCV400) Bronze	$1,158.98 Q

Delta "T" Systems Blowers

Order No.	Mfg. No. / Description	Price
436710	(500-312363) Blower 11" 4BL 1HP 220	$627.98 C
436790	(500-324183) Blower 24" 6BL 5HP 60	$1,386.98 C
436810	(500-328183) Blower 28" 6BL 7.5HP 60	$1,686.98 C
436830	(500-330183) Blower 30" 4BL 10HP 60	$1,863.98 C
436832	(500-436000) Blower 36" 15HP 230-460/60/3	POR

Delta "T" Systems Lil' Champ 4" Ignition Protected DC Blowers

- Flow rates to 350 CFM.
- Performs well even under static pressure loads.
- High-impact marine grade plastic housing.
- Internally mounted motor for compact design.
- Sealed D/C direct-drive motor.
- Dynamically balanced armatures for quiet vibration-free operation.
- Includes universal powder coated bracket for a wide variety of mounting options.
- Optional intake hose adaptor available (part No. 505-201251).

Order No.	Mfg. No. / Description	Price
436558	(500-3041211P) 12 volt	$336.98 Q
436560	(500-3042421P) 24 volt	$334.98 Q
436563	(505-201251) Bracket	$48.98 Q

Delta "T" Systems Small A/C Axial Fans

- High volume flow rates from 600 CFM to 1100 CFM.
- Whisper quiet operation.
- Cast aluminum housing.

Order No.	Mfg. No. / Description	Price
436585	(500-208281/1) 8", 115 volt	$587.98 Q
436590	(500-211115) 11", 115 volt	$773.98 Q
436595	(500-211230) 11", 230 volt	$927.98 Q
436620	(510-IG08) Fan Guard for 436585	$69.98 Q
436625	(510-IG11) Fan Guard for 436590 and 436595	$84.98 Q

Delta "T" Systems Ignition Protected Marine Axial Fans

- High flow rates to 737 CFM.
- Ignition proof application.
- Flanged glass-filled nylon shroud.
- May be configured as a "pusher" or a "puller" fan.
- Sealed direct-drive D/C motor with O-ring seals and stainless steel shaft.
- Dynamically balanced armatures for quiet vibration-free operation.

Order No.	Mfg. No. / Description	Price
436565	(500-309121IP) 9", 12 volt	$256.98 Q
436570	(500-309241IP) 9", 24 volt	$256.98 Q
436575	(500-311122IP) 11", 12 volt	$374.98 Q
436580	(500-311242IP) 11", 24 volt	$374.98 Q

Delta "T" Systems A/C Inline Duct Fans

- Prewired and supplied with a mounting bracket for easy installation.
- Approved for wet locations.
- Suitable for airstream temperatures up to 140° F.
- Easy connection using external wiring box with waterproof gasket.
- Flow rates from 122 CFM to 649 CFM.
- Available in 4" to 10" duct diameters.
- 100% speed controllable.

Order No.	Mfg. No. / Description	Price
436605	(500-804XL) 4", 115 volt	$486.98 Q
436612	(500-805XL) 5", 115 volt	$494.98 Q
436615	(500-806XL) 6", 120 volt	$671.98 Q
436618	(500-805XL2) 5", 230 volt	$593.98 Q


Delta "T" Systems Fan Accessories

Order No.	Mfg. No. / Description	Price
436630	(600WC15) Fan Speed Control for 115/1/60	$59.98 Q
436635	(600WC25) Fan Speed Control for 230/1/60	$76.98 Q
436640	(600DCT-1-24) Control System for 24V 2/4 Fans	$1,087.98 Q

Cincinnati Exhaust Fans

Direct Drive Tube Axial Fans From 12" to 48" Diameter.
Includes Housing and Prop. Guards and Motors are Sold Separately.

Fan Size	Motor HP	A	B	C	D
12"	All	12"	13-1/8"	14-1/2"	20"
15"	All	15"	16-1/8"	17-1/2"	20"
18"	All	18"	19-1/8"	20-1/2"	20"
24"	3/4-3	24"	25-13/16"	27-1/4"	21"
30"	All	30"	31-3/4"	33-1/4"	22"
34"	All	34"	35-11/16"	37-1/4"	26"
36"	All	36"	37-7/8"	39-1/4"	28"
42"	All	42"	43-9/16"	45-1/4"	29"
48"	3-7-1/2	47-3/4"	49-5/8"	51"	31"
48"	10 & 15	47-3/4"	49-5/8"	51"	31"





Fan Size	Prop No.	Motor HP	Fan RPM	1/8" SP		1/4" SP		3/8" SP		1/2" SP		5/8" SP		3/4" SP	7/8" SP	1" SP		1-1/8" SP			
				CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP	CFM	BHP
12"	12-6-24	1/2	3450	2031	.40	1971	.40	1912	.41	1828	.44	1739	.46	1616	.48	1442	.50				
	12-4-30	3/4	3450	2449	.58	2368	.59	2286	.60	2196	.63	2102	.67	2008	.70	1886	.72	1764	.73		
15"	15-6-25	1/3	1750	2028	.17	1851	.18	1587	.20												
	15-6-36	1/3	1750	2369	.21	2147	.23	1794	.25												
	15-6-43	1/2	1750	2870	.48	2640	.49	2330	.49	1962	.39										
	15-6-25	1-1/2	3450	4200	1.22	4130	1.24	4061	1.25	3991	1.26	3922	1.28	3827	1.31	3728	1.35	3628	1.39	3529	1.43
	15-4-30	1-1/2	3450	4619	1.34	4505	1.38	4391	1.42	4277	1.46	4152	1.46	4025	1.46	3898	1.46	3769	1.46	3591	1.43
	15-6-36	2	3450	4967	1.55	4864	1.58	4762	1.61	4660	1.64	4558	1.67	4456	1.70	4331	1.75	4203	1.80	4075	1.85
18"	18-4-22A	1/3	1750	3205	.28	2906	.30	2505	.32												
	18-6-25	1/2	1750	3427	.27	3190	.31	2935	.34	2571	.40										
	18-6-35	1/2	1750	3937	.37	3648	.40	3316	.45	2779	.46										
	18-6-36	3/4	1750	4536	.65	4256	.68	3926	.70												
	18-6-43	1	1750	4977	.76	4747	.78	4457	.82	4130	.87	3705	.88								
24"	24-4-16A	3/4	1750	4870	.53	4560	.53	4015	.55	3280	.56	2515	.56	1880	.56						
	24-4-20A	1	1750	6854	.91	6331	.95	5785	.97	5233	1.02										
	24-6-31	1-1/2	1750	7345	1.12	6805	1.12	5950	1.12	4795	1.07	3300	1.09	2000	1.28						
	24-4-33	2	1750	9178	1.54	8729	1.63	8275	1.69	7821	1.74	7169	1.78	6425	1.78						
	24-6-41	3	1750	10314	2.30	9976	2.36	9637	2.43	9221	2.52	8793	2.62	8246	2.70	7601	2.75				
30"	30-6-22	3/4	1150	8037	.57	6749	.61	3672	.55												
	30-4-41	2	1150	12059	1.51	11241	1.55	10232	1.61	8616	1.71										
	30-7-40	3	1150	12633	1.91	12050	2.00	11257	2.12	10240	2.23										
	30-4-20A	2	1750	12483	1.68	11792	1.71	10974	1.76	10113	1.82	9188	1.89								
	30-6-22	3	1750	13192	1.88	12468	1.98	11700	2.10	10907	2.20	9907	2.12								
	30-4-41	7-1/2	1750	19014	5.24	18511	5.30	18008	5.36	17505	5.42	16863	5.50	16199	5.59	15534	5.67	14550	5.84	13488	6.00
	30-7-40	10	1750	19729	6.54	19346	6.68	18963	6.82	18579	6.96	18194	7.10	17646	7.29	17099	7.49	16552	7.68	15827	7.84
34"	34-6-29	1	1150	11916	1.09	10349	1.14														
	34-6-26	3	1150	15524	1.99	14623	2.09	13628	2.19	12323	2.26	10277	2.12								
	34-6-29	5	1750	19166	3.73	18377	3.81	17478	3.90	16464	3.99	15058	3.99								
	34-6-26	10	1750	24383	6.79	23808	6.95	23234	7.10	22659	7.26	22018	7.41	21364	7.57	20711	7.73	19961	7.86	19008	7.94
36"	36-6-25	1-1/2	1150	13814	1.42	12093	1.47														
	36-6-26	3	1150	18275	2.44	17312	2.58	16353	2.68	15198	2.77	13857	2.80	11818	2.70						
	36-6-25	5	1750	22329	4.85	21358	4.98	20344	5.08	19199	5.16	17924	5.19								
	36-6-26	10	1750	28522	8.28	27982	8.52	27388	8.75	26752	8.98	26104	9.15	25447	9.30	24852	9.47	24280	9.65	23375	9.73
42"	42-6-26	2	850	18525	1.78	16724	1.86	14196	1.86												
	42-6-26	5	1150	26890	4.03	25559	4.20	24210	4.35	22724	4.43	21058	4.48								
48"	48-6-19	2	850	20791	1.61	18327	1.72	15731	1.79	11495	1.78										
	48-6-30	5	850	27881	2.88	26156	3.10	24358	3.36	22027	3.56	18566	3.75	13018	3.95						
	48-6-19	5	1150	29574	3.78	27840	4.01	26032	4.17	24119	4.30	22236	4.41	20044	4.47						
	48-6-30	10	1150	38681	6.81	37518	7.21	36237	7.48	34932	7.84	33608	8.18	32137	8.46	30377	8.74	28246	9.02	25615	9.30

Specifications for Tube Axial Fans.

- Propellers shall be statically balanced to assure smooth operation. Propeller shall be spark-resistant cast aluminum.
- All fan drums shall be 12 gauge on sizes 12" to 30" and 10 gauge on sizes 34" to 48".
- Drum flanges shall be rolled as an integral part of the drum on sizes 12" to 42".
- Drum flanges on 48" fans shall be 1-1/2" angle iron rings welded to drum.
- Drum seam shall be continuosly welded.

©2014 Donovan Marine, Inc.

Cincinnati Exhaust Fans

Single Phase Motors Available by Special Order

- All Baldor motors are 3 PH 208/230/460 60H.
- Fans to 18" can be shipped UPS.
- 24" and over must go motor freight.



Order No.	Cin. #	Description	RPM	Frame	Price	Order No.	Baldor #	Price
300854	(12-4-30)	3/4 HP Frame/Prop	3450	56	$455.98 C	473479	(M3541)	$471.98 B
300842	(12-6-24)	1/2 HP Frame/Prop	3450	56	$374.98 C	473465	(M3537)	$427.98 B
	15-4-30	1-1/2 HP Frame/Prop	3450	56	POR		M3550	POR
	15-6-25	1/3 HP Frame/Prop	1750	56	POR		M3534	POR
	15-6-25	1-1/2 HP Frame/Prop	3450	56	POR		M3550	POR
	15-6-36	1/3 HP Frame/Prop	1750	56	POR		M3534	POR
300878	(15-6-36)	2 HP Frame/Prop	3450	56	$468.98 C	473484	(M3555)	$676.98 B
	(15-6-43)	1/2 HP Frame/Prop	1750	56	POR		(M3538)	POR
	18-4-22A	1/3 HP Frame/Prop	1750	56	POR		M3534	POR
	18-6-25	1/2 HP Frame/Prop	1750	56	POR	473480	(M3542)	$492.98 B
300892	(18-6-43)	1 HP Frame/Prop	1750	56	$631.98 C	473482	(M3546)	$511.98 B
300990	24-4-16A	3/4 HP Frame/Prop	1750	56	$599.98 C	473480	(M3542)	$492.98 B
	24-4-20A	1 HP Frame/Prop	1750	56	POR	473482	(M3546)	$511.98 B
	24-4-33	2 HP Frame/Prop	1750	145T	POR		M3558	POR
	24-6-31	1-1/2 HP Frame/Prop	1750	56	POR		M3554	POR
300993	24-6-41	3 HP Frame/Prop	1750	182T	$826.98 C	473493	(M3611T)	$990.98 B
	(30-4-20A)	2 HP Frame/Prop	1750	145T	$1187.98 C		M3558T	POR
	(30-4-41)	2 HP Frame/Prop	1150	184T	POR		M3614T	POR
301095	30-4-41	7.5 HP Frame/Prop	1750	213T	POR	473490	(M3710T)	$1564.98 B
	30-6-22	3/4 HP Frame/Prop	1150	143T	POR		M3543T	POR
	(30-6-22)	3 HP Frame/Prop	1750	182T	POR	473493	(M3611T)	$990.98 B
	30-7-40	3 HP Frame/Prop	1150	213T	POR		M3704T	POR
	30-7-40	10 HP Frame/Prop	1750	215T	POR		M3774T	POR
	34-6-26	3 HP Frame/Prop	1150	213T	POR		M3704T	POR
	34-6-26	10 HP Frame/Prop	1750	215T	POR		(M3774T)	POR
	34-6-29	1 HP Frame/Prop	1150	145T	POR		M3556T	POR
	34-6-29	5 HP Frame/Prop	1750	184T	POR		M3615T	POR
	34-6-25	1-1/2 HP Frame/Prop	1150	182T	POR		M3667T	POR
	34-6-25	5 HP Frame/Prop	1750	184T	POR		M3615T	POR
	34-6-26	3 HP Frame/Prop	1150	213T	POR		M3704T	POR
	34-6-26	10 HP Frame/Prop	1750	215T	POR		M3714T	POR
	42-6-26	2 HP Frame/Prop	850	213T	POR		M3702T	POR
	42-6-26	5 HP Frame/Prop	1150	215T	POR		M3768T	POR
	48-6-19	2 HP Frame/Prop	850	213T	POR		M3702T	POR
	48-6-19	3 HP Frame/Prop	1150	213T	POR		M3704T	POR
	48-6-30	5 HP Frame/Prop	850	254T	POR		M2280T	POR
	48-6-30	10 HP Frame/Prop	1150	256T	POR		M2332T	POR

Blower Guard

Order No.	Description	Price
301591	12" Guard	$131.98 C
301604	15" Guard	$131.98 C
301616	18" Guard	$133.98 C
301628	24" Guard	$137.98 C
301630	30" Guard	$141.98 C

Single Phase Motors Available by Special Order

Baldor Motors


- 3 HP, 3450 RPM, 3 PH, 60 HZ, 56/56H, 3528M, TEFC

Order No.	Mfg. No. / Description	Price
473485	(M3559) 208/230/460V	$785.98 B

Prop Only List

Order No.	Mfg. No. / Description	Price
301541	(18-6-43) 6 Blade, 18", 43 Pitch, 7/8"-143FR	$384.98 C
301552	(12-6-2024) 6 Blade, 12", 24 Pitch, 1/2"	$160.98 C

Buell Strombos Air Horns



- Constructed entirely of brass & bronze with hand spun brass bells and a stainless steel diaphragm.
- Chrome plated.
- Air consumption: 15 CFM @ 100 PSI. 1/8 NPT inlet.

Order No.	Mfg. No. / Description	Price
265365	(1061) Length 10"	$288.98 I
265377	(1062) Length 12"	$292.98 I
265389	(1063) Length 15"	$295.98 I
265391	(1064) Length 18"	$298.98 I

Kahlenberg Model S Heavy Duty Marine Air Horns



- Manufactured of cast bronze and spun brass.
- Regular, without valve.
- Fundamental frequency: 266 Hz.
- Sound pressure level over 132 dB.
- For use on vessels less than 75 meters in length.

Order No.	Mfg. No. / Description	Price
430431	(S1) Diaphragm 5"	$792.98 C
430443	(S2) Diaphragm 6-3/8"	$1,023.98 C

Buell Horn Duplex Bracket



- Brass construction with chrome finish.
- Combine Buell single note horns with a horn bracket to produce a distinctive, powerful signal.
- A mounting kit includes: Gaskets, stainless steel mounting screws, loc washers and tube fitting.

Order No.	Mfg. No. / Description	Price
265428	(1085) Duplex Bracket	$87.98 F

Buell Accessories for Buell Strombos Air Horns

Order No.	Mfg. No. / Description	Price
265404	(1068) Gasket	$1.98 F
265416	(1069) Diaphragm	$4.98 F

Buell Manual Air Valve



- 1/8 NPT

Order No.	Mfg. No. / Description	Price
265454	(2040) Brass Body	$54.98 F

Kahlenberg Manual Electric Valve



- Electric Valve, 3/8 NPT.

Order No.	Mfg. No. / Description	Price
430271	(V-150AL)	$481.98 C

Kahlenberg Manual Valves

Order No.	Mfg. No. / Description	Price
430291	(V-11) 1/4" NPT	$163.98 C
430304	(V-12) 3/8" NPT	$185.98 C
430316	(V-13) 1/2" NPT	$205.98 C

Buell Self-Powered Horn



- Brass with heavy chrome plate for saltwater use.
- Delivers deep-toned signal from 22" band instrument bell.
- Operating handle may be rigged for remote control with line from cabin or cockpit.
- A stand-by signal in power failures.

Order No.	Mfg. No. / Description	Price
265531	(5400)	$515.98 G

Kahlenberg Zero Series Air Horns



- Brass finish.
- All horn castings are of accurately machined bronze, while horn projectors are spun brass.
- Fundamental frequency: 322 Hz.
- Sound pressure level over 122.9 dB.
- For use on vessels less than 20 meters in length.

Order No.	Mfg. No. / Description	Price
430402	(S-OA) Length 17"	$431.98 I
430405	(SV-OA) Length 20"	$431.98 I
430417	(PO26-64) Bracket	$74.98 I

Kahlenberg At Will Manual Control Switch



- Push button.
- Console mount, interior.
- Maximum: 500 volts @ 2 amps.
- Type: Momentary N.O. poles circuit: SPST, 10A rated contacts.

Order No.	Mfg. No. / Description	Price
430285	(WPB-19220)	$90.98 B

Kahlenberg Pneumatic Switch

Order No.	Mfg. No. / Description	Price
430289	(V-100)	$167.98 C

Kahlenberg Whistle Control



- Fully enclosed, flush mount electronic device which provides for the automatic control of the ship's whistle.
- Besides serving as a fog signal timer for sounding codes in restricted visiability, it performs maneuvering codes, danger code, general alarm and incorporates an "at-will" push button.
- Start/stop automatic function.

Order No.	Mfg. No. / Description	Price
430484	(M-511C) 110 volt	$1,918.98 B

Kahlenberg Spare Diaphragms

Order No.	Mfg. No. / Description	Price
430330	(P28-5) 5"	$48.98 C
430342	(P28-6) 6-3/8"	$61.98 C

Buell Air Compressor - Moderate Duty



- Oil-less air compressor mount in any position and have no outside moving parts.
- The automatic pressure switch maintains air pressure levels.
- 125 PSI, 18 amps, 1.1 CFM. 8.5" L x 4" W x 7" H, 12 volt.

Order No.	Mfg. No. / Description	Price
265534	(5440)	$648.98 G

Kahlenberg Model D Heavy Duty Marine Air Horns



- Manufactured of cast bronzeand spun brass.
- Fundamental frequency: 266 Hz and 212 Hz.
- Sound pressure level over 132 dB.
- For use on vessels less than 75 meters in length.
- Diaphragm 6-3/8".

Order No.	Mfg. No. / Description	Price
430380	(D2) Without Valve	$1,930.98 C
430392	(D2-CVL) Manual/Electric Comb.	$3,590.98 C

Kahlenberg Push Button Switch



- Cast bronze waterproof.
- Suitable for At Will Control of solenoid operated whistle valves wherever electrical whistle control is used.
- Tapped one way for 1/2" conduit connection.

Order No.	Mfg. No. / Description	Price
430280	(M-132) 3 Contact	$304.98 B

Buell Air Tank



- Made of steel, welded construction with a gray paint finish.
- Includes: Fitted steel straps and brass tubing fittings for easy mounting.

Order No.	Mfg. No. / Description	Price
265505	(2242) 6" x 25", 3 Gallon	$143.98 Q

Buell Electric Solenoid Valve



- For remote control of air horns.
- 1/4 NPT ports and molded coil.
- Intermittent duty - not rated for continuous duty.

Order No.	Mfg. No. / Description	Price
265466	(42076) 12 volt	$74.98 F

Kahlenberg Electric Solenoid Valves



Order No.	Mfg. No. / Description	Price
430269	(V-150B) 3/8" NPT, 110 volt	$339.98 C
430276	(V-151B) 1/2" NPT, 110 volt	$339.98 C

©2014 Donovan Marine, Inc.

Federal Signal Vibratone Bells



- Vibratone heavy duty bell product line utilizes a modular approach to combine gongs and mechanisms allowing for greater flexibility and selection.
- Each larger gong produces a different tone and a higher dB output.
- UL and CUL listed, CSA certified and FM approved.

Order No.	Mfg. No. / Description	Price
327898	(500-240-1) 240VAC, .04 amps, Vibrating Mechanism	$162.98 E
327901	(600-012-1) 12VDC, .8 amps, Vibrating Mechanism	$262.98 E
327925	(600-250-1) 250VDC, .03 amps, Vibrating Mechanism	$217.98 E
327937	(A-4) 4" Gong, 98 dB @ 10'	$41.98 E
327949	(A-6) 6" Gong, 100 dB @ 10'	$98.98 E
327975	(WB) Weatherproof Box, 4-3/8" sq. x 2" deep	$52.98 E

Federal Signal Explosion-Proof Vibrating Horns



- Constructed for safe use in hazardous environments.
- Corrosion resistant horns with stainless steel diaphragms.
- UL listed and CUL listed for Class I, Divison I, Groups C and D, Class II, Divison I< Groups E, F and G; Class III.
- CSA certified.

Order No.	Mfg. No. / Description	Price
327759	(41X024-1) Vibrating Horn	$1,419.98 E

Federal Signal Warning Horns



- Produce a very loud horn tone by the electromechanical vibration of a diaphragrm.
- Capable of reproducing coded blasts or sustained tone.
- It is excellent for general alarm, start and dismissal, coded paging and process control signaling in areas of high ambient noise levels.
- Vibratone mounting options provide for surface, flush or semi flush mounting on walls, panels, in cabinets, on 4" square outlet boxes or in concrete and deep wall constructions.
- UL listed, CUL listed, CSA certified and FM approved.

Order No.	Mfg. No. / Description	Price
327836	(350-240-30) 240VAC, 50/60 Hz, .09 amps, 100 dB @ 10'	$193.98 E
327862	(450-125-30) 125VDC, .05 amps, 99 dB @ 10'	$217.98 E
327874	(450-250-30) 240VDC, .03 amps, 99 dB @ 10'	$217.98 E

Federal Signal Strobe Light

- The Visalert is a three dimensional, triangular warning light designed to be mated with the model 350 Vibratone horn.
- It can also be used as a stand alone device.
- The Visalert can be flush or surface mounted on the 350 horn.
- UL listed, CSA certified for indoor/outdoor use.
- Flash rate: 80 per minute.
- 120 volt, 50/60 Hz, .06 amps, 108,000 candlepower.

Order No.	Mfg. No. / Description	Price
327963	(VALS-120R) Dome color: Red	$218.98 E

Milwaukee Stringer Bead Twist - Wheel Wire Brush



- This "Mini" stringer bead brush is unexcelled for stringer bead weld cleaning and other applications where a narrow (3/16") brush face is necessary to achieve the work.
- Widely used in nuclear power plant construction where piping, tubing and fittings are joined.
- Wire size .020, trim length 3/4", face width 3/16", arbor hole 5/8 - 11.

Order No.	Mfg. No. / Description	Price
221147	(82186) Diameter 4"	$26.98 F

Desmond Swirl-Off

Grinder Not Included



- Removes deposits from virtually any hard surface.
- Versatile.
- Portable.
- Stainless steel one piece housing.
- Attaches to most sanders, grinders, drills, polishers
- Built in safety guard.
- Operates under water.
- Environmentally safe no chemicals or solvents.
- Fits 5/8" - 11 shaft.
- No lubrication or maintenance required.

Order No.	Mfg. No. / Description	Price
324121	(50600) 6"	$196.98 F
324119	(50611) Replacement	$41.98 F

Standard Twist Carbon Steel Wire Brush - Single Row



- Made with crimped tempered wire these brushes provide fast cutting action for the removal of light encrustations of scale, rust, paint or weld spatter.
- Designed for use on portable power tools.
- Arbor hole 5/8 - 11.

Order No.	Mfg. No. / Description	Price
221123	(82523) Diameter 4", Trim Length 1-3/8"	$42.98 F
221135	(82531) Diameter 6", Trim Length 1-1/2"	$85.98 F

Milwaukee Knot Style Wire Brush



- Carbon steel wire.
- 12,500 RPM MSFS.
- Use these rugged brushes for cleaning welds and for operating in tight places such as corners, angle welds and T-connections.
- This style is especially suited for pipe bevel cleaning.
- Diameter 2-3/4", wire size .020, trim length 7/8", arbor hole 5/8 - 11.

Order No.	Mfg. No. / Description	Price
221111	(82220) Wire Brush	$27.98 F

Full Cable Twist Carbon and S/S Wire - Single Row



- Each individual knot contains the same number of top-quality, high carbon tempered steel or 302 stainless steel wires that give the wheel precise balance and long life.
- Highly suited for use in the welding and steel fabrication industries.
- These brushes are used in surface preparation prior to welding and brazing, and for removing weld scale and spatter after the welding operation.
- Diameter 6".
- Approx. face width 1/2", trim length 1-1/4".
- 10,000 RPM MSFS.
- Arbor hole 5/8 - 11.

Order No.	Mfg. No. / Description	Price
221159	(82478) Wire Brush	$41.98 F

Shoe Handle Brush - Carbon Steel Wire



- Block size 10-1/4" x 1-1/8".
- Brush length 5".
- Rows of wire: 4 x 16.

Order No.	Mfg. No. / Description	Price
221161	(20507) Steel Brush	$3.98 F

Top Cow Hide Leather Wing Thumb Unlined Drive Gloves



Order No.	Mfg. No. / Description	Price
412108	(Y10) Large	$16.98 Q
412109	(Y10) X Large	$16.98 Q
412110	(410) Medium	$16.98 Q

Island Trading Plastic Dot Gloves



- Mens 10 oz. cotton canvas.
- Knit wrist.

Order No.	Mfg. No. / Description	Price
412116	(PD2050)	$12.98 Q

Island Trading PVC Chemcial Gloves



- Mens 10" PVC coated, smooth finish, cotton interlock lined.
- Color: Black.

Order No.	Mfg. No. / Description	Price
412101	(810RB) 10"	$8.98 Q

- Mens 14" PVC coated, sandy finish, cotton interlock lined.
- Color: Black.

Order No.	Mfg. No. / Description	Price
412104	(314SS) 14"	$9.98 Q

Island Trading Brown Jersey Glove

Order No.	Mfg. No. / Description	Price
412128	(4538/B9MENS)	$4.98 Q

Island Trading Leather Glove

Order No.	Mfg. No. / Description	Price
412120	(RR3) Lined, Green	$9.98 Q

Viking Leather / Kevlar Gloves

Order No.	Mfg. No. / Description	Price
318229	(1027426) X Large	$132.98 F

Island Trading Leather Palm Gloves



- Select shoulder leather.
- 2-1/2" rubberized safety cuff.
- Size: Large.

Order No.	Mfg. No. / Description	Price
412107	(2100B) Large	$9.98 Q


- Premium select shoulder leather, white canvas back.
- 2-1/2" rubberized safety cuff.
- Size: X Large.

Order No.	Mfg. No. / Description	Price
412112	(3100BG) X Large	$9.98 Q

- Glove liner, cotton.
- Mens.

Order No.	Mfg. No. / Description	Price
412114	(2049ST) Glove Liner	$2.98 Q

Texas Pneumatic Needle Scaler



- Peening of welded joints.
- Cleaning castings.
- Cleaning welding slag.
- Removing barnacles.
- The model TX-1B needle scaler is a convertible tool used as a chisel scaler or a needle scaler depending on the application. Needle scaler can be easily converted to a chisel scaler by replacing needle attachment with chisel.
- Tool applications: De-rusting and cleaning of metals.
- Removing paint, rust and dirt.
- Chipping stone, concrete and brick.
- Needle scalers adjust to any surface contour automatically.

Order No.	Mfg. No. / Description	Price
645816	(TX-1B) Pneumatic Needle Scaler	$332.98 F

Texas Pneumatic TX1B Needle Scaler Repair Kit

- Kit includes:
  - 3 (TX-00044) Needle Spring
  - 1 (TX-00045) Needle Driver
  - 1 (TX-00046) Needle Holder
  - 1 (TX-00078) Throttle Valve Spring
  - 2 (TX-00126) Valve Block Dowel Pin
  - 2 (TX-00196) Flutter Valve
  - 1 (TX-00207) Throttle Valve Cap
  - 1 (TX-00373) Plunger
  - 2 (TX-00519) 5" x .125 Needle Set (19)
  - 3 (TX-00527) Retainer Buffer
  - 3 (TX-00554) Retainer Clip
  - 1 (TX-00636) Throttle Valve Cap Gasket
  - 1 (TX-00782) Throttle Valve
  - 1 (TX-00848) Throttle Lever Pin
  - 1 (TX-00956) Retainer

Order No.	Mfg. No. / Description	Price
645818	(TX1BNSRK) Needle Scaler Repair Kit	$134.98 B

Texas Pneumatic Needle Scaler Replacement Parts

Order No.	Mfg. No. / Description	Price
645828	(TX-00024) 7" Needles, 19 Required	$1.10 F
645830	(TX-00044) Needle Spring	$4.31 B
645834	(TX-00049) 7" Flat Chisel	$15.98 F
645842	(TX-00078) Throttle Valve Spring	$2.11 B

Binks Washdown Gun



- Clean engines and other machinery.
- Gun has a brass body with a ten inch nozzle/tube length.
- Flexible tubing is attached to the gun handle with a hose clamp for vsiphoning solvent from container.
- 1/4" NPS(m) air inlet.
- Requires 14 CFM air at 50 PSI.
- Working CFM can range from 8-1/2 to 18-1/2 CFM and from 40 to 100 PSI.

Order No.	Mfg. No. / Description	Price
527196	(140B) Washdown Gun	$205.98 C

Aurand K-Series Deck Crawler

AURAND



- Has a 5" wide cutting area.
- Because of it's lightweight (9 lbs.) it is ideal for use on vertical and hard to reach areas.
- 115V.
- 2.6 amp.
- 1/8 hp or pneumatic.

Order No.	Mfg. No. / Description	Price
243319	(K7-1)	$684.98 B
243369	(674) Spare Cutters, Set of 2	$60.98 B

Aurand M-Series Deck Crawlers

AURAND



- Has an 8"" wide cutting area.
- Due to it's additional horsepower and weight, this sturdier, more aggressive tool is normally used on horizontal surfaces.

Order No.	Mfg. No. / Description	Price
243333	(M5-1) 115V	$979.98 B
243345	(MP6) Pnuematic	$1,188.98 B
243357	(90M-M) Cutter Bundles, Set of 2	$125.98 B


©2014 Donovan Marine, Inc.

Tru-Pitch™ Commercial Propeller



- This style is the finest and best known of all-purpose propellers.
- Efficiency and smoothness is assured by Federal's exclusive Tru-Pitch process.
- This style incorporates semielliptical shape, constant pitch and ogival blade sections in the design…a result of years of experience.
- Available in Federal-B and Nibral alloys, left and right hand rotation, in 8" to 96" diameters.
- Stainless Steel available 8" to 40" diameters.
- H-D Heavy Duty, is similar in design to T-P, but its considerably heavier blade edges are engineered to meet more severe conditions.
- Heavy, round edges resist abrasion and blade fracture.
- Durable…extremely rugged. In the same metals and sizes as T-P.
- Three-blade only – right or left hand.

Equi-Quad® Commercial Propeller



- Four blades for exceptional smoothness.
- Designed for: Any normal cruiser where three-blade propellers have been used.
- Number of Blades: 4.
- Owners of pleasure cruisers who have never experienced the exceptional smoothness and fine performance of Equi-Quad will often be amazed.
- The four-blade design gives extreme smoothness, plus the speed and "dig" of a three-blade prop.
- Maneuverability is superb. Equi-Quad is available in most pitch requirements from 17" thru 44" diameter.
- It is offered as standard in our Federal-B alloy and is optional in Nibral or Stainless Steel.
- It comes with the special offset and rake pitch originally incorporated in our Equi-Poise and with a tapered hub for improved hydrodynamic performance.
- It is strongly constructed and then balanced for reduced vibration.
- Order in the same diameter as the correct three-blade size, but allow for 1" less pitch to maintain same engine loading.
- Our engineers will assist on receipt of hull and engine details.

Donovan Marine
Propeller Repairs, Service and Sales Up To 150" Diameter

Amelia, LA • 985-631-9411

Anchor Supply Propeller Bore Reducer Bushings



- Tough nylon bushing with brass stepdown key quickly and easily reduce propeller bore to fit smaller diameter shafts.
- All tapers are SAE Marine Standard.

Order No.	Mfg. No. / Description	Price
222656	1-1/8" to 1"	$28.98 F
222668	1-1/4" to 1"	$28.98 F
222670	1-1/4" to 1-1/8"	$29.98 F
222682	1-3/8" to 1-1/4"	$30.98 F
222694	1-1/2" to 1-1/4"	$35.98 F
222707	1-1/2" to 1-3/8"	$35.98 F
222719	1-3/4" to 1-1/2"	$54.98 F
222721	2" to 1-1/2"	$57.98 F
222733	2" to 1-3/4"	$57.98 F
222740	2-1/4" to 2"	$86.98 F
222745	2-1/2" to 2"	$88.98 F
222757	2-1/2" to 2-1/4"	$88.98 F

Equi-Poise® Commercial Propeller



- Our most popular prop.
- Designed for: Inboard cruise boats of average power. Runabouts of average power.
- Number of Blades: 3.
- For outstanding speed and brilliant performance, choose Federal Equi-Poise.
- Designed by Federal's naval architects, Equi-Poise is a standard of the worldwide propeller industry and is still built to original patent specifications.
- Choose from two alloys: Our well-recognized Federal-B alloy for good strength or Nibral (a combination of nickel, bronze and aluminum) for additional strength.

Hawboldt Industries Hi-Trail: 4 Blade Propellers



- It is used for both pleasure and commerical vessels, combining blade area, moderate skew and blade thickness distribution.
- This design has produced a smooth, quiet propeller that is one of the most popular models today.
- The propellers are finished to Hawboldt standard thickness with anti-singing edge or to customer's special requests.
- Diameters available up to 44 inches in 3, 4 and 5 blade.

Special Handling May Apply

Bronze.

Order No.	Mfg. No. / Description	Price
394807	36 x 36, Right Hand, 3" Bore	$5,538.98 B
394813	36 x 36, Left Hand, 3-1/2" Bore	$5,538.98 B
394825	36 x 36, Right Hand, 3-1/2" Bore	$5,538.98 B
394863	39 x 39, Right Hand, 3-1/2" Bore	$6,544.98 B
394875	40 x 34, Left Hand, 3-1/2" Bore	$6,544.98 B
394887	40 x 34, Right Hand, 3-1/2" Bore	$6,544.98 B
394894	40 x 36, Left Hand, 3-1/2" Bore	$7,616.98 B
394896	40 x 36, Right Hand, 3-1/2" Bore	$7,616.98 B
394899	42 x 36, Left Hand, 3-1/2" Bore	$7,634.98 B
394902	42 x 36, Right Hand, 3-1/2" Bore	$7,634.98 B
394914	44 x 40, Left Hand, 3-1/2" Bore	$8,044.98 B
394926	44 x 40, Right Hand, 3-1/2" Bore	$8,044.98 B
394938	44 x 42, Left Hand, 3-1/2" Bore	$8,044.98 B
394940	44 x 42, Right Hand, 3-1/2" Bore	$8,044.98 B

Nibral.

Order No.	Mfg. No. / Description	Price
394828	36 x 36, Left Hand, 3-1/2" Bore	$6,680.98 B

Hawboldt Industries Hi-Trail: 4 Blade Propellers

Order No.	Mfg. No. / Description	Price
394665	28" x 30", 3 Blade, 2.25" Bore, KW	$1,588.98 D
394666	28" x 30", 3 Blade, 2.25" Bore, KW	$1,588.98 D
394558	18" x 23.5", 4 Blade, 1.5" Bore, Right Hand	$975.98 D
394572	20" x 23.5", 4 Blade, 1.75" Bore, Right Hand	$1,311.98 D
394661	28" x 30", 4 Blade, 2.5" Bore, Left Hand	$1,555.98 D
394705	40" x 36", 4 Blade, 3.5" Bore, Right Hand	$4,875.98 D
394706	40" x 36", 4 Blade, 3.5" Bore, Left Hand	$4,875.98 D
394697	31" x 34.5", 5 Blade, 2.5" Bore, Left Hand	$5,654.98 D
394700	31" x 34.5", 5 Blade, 2.5" Bore, Right Hand	$5,654.98 D

Federal Dynaquad Bronze Propeller

Order No.	Mfg. No. / Description	Price
343513	18" x 24", Left Hand	$611.98 B
343525	18" x 24", Right Hand	$611.98 B
344010	28" x 28", 3 Blade, Right Hand	$2,573.98 F
344022	28" x 29", 4 Blade, Right Hand	$2,278.98 B
344034	28" x 28", 3 Blade, Left Hand	$2,573.98 F
344046	28" x 30", 3 Blade, Right Hand	$2,573.98 F
344058	28" x 30", 3 Blade, Left Hand	$2,573.98 F

AGM Industries Inc

Order No.	Mfg. No. / Description	Price
003107	(L2HS1000 HK) AC347 WSHR,L2HS1000	$0.98 B

Alpha Associates, Inc.

Order No.	Mfg. No. / Description	Price
003016	(RWMSEAMTAPE) 2-RO RE-INF WH MYLR2X150	$63.98 B

Armacell, LLC

Order No.	Mfg. No. / Description	Price
003169	(NHT05812) NHPC 1/2-3/8 IPS x 72L	$2.12 B
003208	(NHT11012) NHPC 1/2-1-1/2 IPS x 72L	$3.20 B
003210	(NHT20012) NHPC 1/2-2 IPS x 72L	$4.29 B
003222	(NHT21012) NHPC 1/2-2-1/2 IPS x 72L	$4.29 B
003234	(NHT30012) NHPC 1/2-3 IPS x 72L	$4.31 B
003258	(NHT40012) NHPC 1/2-4 IPS x 72L	$6.98 B
003359	(NHT21034) NHPC 3/4-2-1/2 IPS x 72L	$6.98 B
003361	(NHT30034) NHPC 3/4-3 IPS x 72L	$7.98 B
003373	(NHT41834) NHPC 3/4-3-1/2 IPS x 72L	$8.98 B
003385	(NHT40034) NHPC 3/4-4 IPS x 72L	$9.98 B

Basalt Specialty Products

Order No.	Mfg. No. / Description	Price
003020	(MIL-I-16411) 15oz MAT 1" x 60" x 45 LF	$336.98 B
003021	(MILC20079-2") SEAM TAPE, FG, 2" x 150 LF	$12.98 B
003023	(MILC20079-4") SEAM TAPE, FG, 4" x 150 LF	$24.98 B

BFG Marine Mfg

Order No.	Mfg. No. / Description	Price
279345	(VCW3064) Handwheel, ST, 6" x 3/4 Square	$133.98 B

Bosch Rexroth Corporation

Order No.	Mfg. No. / Description	Price
565755	(9510390011)	$480.98 D

Cen-Tex Marine Fabr. Inc

Order No.	Mfg. No. / Description	Price
577948		POR

Certainteed Industrial Group

Order No.	Mfg. No. / Description	Price
003038	(UMPN6630 FF) 30X600X1200 PLAIN FACE	$222.98 B

Consolidated Electrical Dist.

Order No.	Mfg. No. / Description	Price
686405	(707BF) Bulkhead 100W BR Flush Mount	POR
686412	(814AS) Step LT 40W AL SF Louver	POR

CRC Chemicals

Order No.	Mfg. No. / Description	Price
216653	(MK4600) Super ABS Detail Cloth	$12.98 G

DBC Marine Safety Systems

Order No.	Mfg. No. / Description	Price
308010	(1007965) Red Cap F/ID Tube	$6.98 B
458643	(16X3)	$3,777.98

Foster Products Corporation

Order No.	Mfg. No. / Description	Price
003501	(8040LLL99002) ADHESIVE MIL-A-3316 5-GL	$139.98 B

G B & G

Order No.	Mfg. No. / Description	Price
380206	(5/8" WASHER) Gauge Glass Washer	$3.98 F

Genesis Yachtline

Order No.	Mfg. No. / Description	Price
377502	(FLH) Fit Lock, 2 Piece, Male & Female, Hard	$7.98 B
377514	(FLS) Fit Lock, 2 Piece, Male & Female, Soft	$7.98 B

Gilmour Mfg

Order No.	Mfg. No. / Description	Price
284442	(2P) 2 Gallon Compressed Air Spray	$37.98 I

Gulf Tool Company Of LA. Inc.

Order No.	Mfg. No. / Description	Price
542095	(6") Barge Gasket 6"	$4.98 F
542097	(8") Barge Gasket 8"	$5.98 F

Gyro Chemical & Equipment Co

Order No.	Mfg. No. / Description	Price
517215	(BIOC-5) Biocide Pail (5 Gallon)	POR

IIG (Industrial Insulation Group)

Order No.	Mfg. No. / Description	Price
003602	(CALSIL P/C) MIL-I-2781 2.5" x 3" x 3'	$63.98 B
003614	(CALSIL P/C) MIL-I-2781 4" x 3" x 3'	$80.98 B
003626	(CALSIL P/C) MIL-I-2781 5" x 3" x 3'	$87.98 B
003638	(CALSIL P/C) MIL-I-2781 8" x 3" x 3'	$117.98 B
003652	(CALSIL P/C) MIL-I-2781 3" x 3" x 3'	$63.98 B
003676	(CALSIL P/C) MIL-I-2781 .5" x 1" x 3'	$16.98 B
003688	(CALSIL P/C) MIL-I-2781 .5" x 2" x 3'	$28.98 B
003690	(CALSIL P/C) MIL-I-2781 .75" x 1" x 3'	$17.98 B
003739	(CALSIL BLOCK) MIL-I-2819CL2 1-1/2 x 6 x 18	$7.98 B
003741	(CALSIL P/C) MIL-I-2781 1.5" x 1" x 3'	$17.98 B
003753	(CALSIL P/C) MIL-I-2781 1.5" x 2" x 3'	$34.98 B
003789	(CALSIL BLOCK) MIL-I-2819CL2 2 x 6 x 18	$8.98 B
003791	(CALSIL P/C) MIL-I-2781 2.5" x 1" x 3'	$20.98 B
003804	(CALSIL P/C) MIL-I-2781 2.5" x 1.5" x 3'	$28.98 B
003816	(CALSIL P/C) MIL-I-2781 2.5" x 2" x 3'	$44.98 B
003828	(CALSIL P/C) MIL-I-2781 3" x 1.5" x 3'	$29.98 B
003830	(CALSIL P/C) MIL-I-2781 3" x 2" x 3'	$43.98 B
003842	(CALSIL P/C) MIL-I-2781 4" x 2" x 3'	$50.98 B
003854	(CALSIL P/C) MIL-I-2781 4" x 1" x 3'	$28.98 B
003866	(CALSIL P/C) MIL-I-2781 4" x 1.5" x 3'	$32.98 B
003880	(CALSIL P/C) MIL-I-2781 6" x 2" x 3'	$61.98 B
003892	(CALSIL P/C) MIL-I-2781 8" x 2" x 3'	$74.98 B
003905	(CALSIL P/C) MIL-I-2781 8" x 2.5" x 3'	$94.98 B
003917	(CALSIL P/C) MIL-I-2781 22" x 4" x 3'	$371.98 B
003929	(CALSIL P/C) MIL-I-2781 1.5" x 2.5" x 3'	$39.98 B
003931	(CALSIL P/C) MIL-I-2781 1" x 2.5" x 3'	$36.98 B
003943	(CALSIL P/C) MIL-I-2781 1" x 1.5" x 3'	$19.98 B
003955	(CALSIL P/C) MIL-I-2781 .5" x 1.5" x 3'	$18.98 B
003967	(CALSIL P/C) MIL-I-2781 .5" x 2.5" x 3'	$35.98 B
003979	(CALSIL P/C) MIL-I-2781 10" x 4" x 3'	$230.98 B
003981	(CALSIL P/C) MIL-I-2781 1.5" x 1.5" x 3'	$23.98 B
003993	(CALSIL P/C) MIL-I-2781 1.25" x1.5" x 3'	$20.98 B
004010	(CALSIL P/C) MIL-I-2781 2" x 3" x 3'	$53.98 B
004034	(CALSIL P/C) MIL-I-2781 2.5" x 1.5" x 3'	$28.98 B
004046	(CALSIL P/C) MIL-I-2781 3" x 1.5" x 3'	$29.98 B
004058	(CALSIL P/C) MIL-I-2781 .75" x 1.5" x 3'	$18.98 B
004060	(CALSIL P/C) MIL-I-2781 4.5" x 1.5" x 3'	$36.98 B
004084	(CALSIL P/C) MIL-I-2781 6" x 1.5" x 3'	$39.98 B

©2014 Donovan Marine, Inc.

Johns Manville International

Order No.	Mfg. No. / Description	Price
004301	(M-LOK600X100) MIL-I-22344 6 IPS X 1THK	$4.98 B
004325	(M-LOK050X150) MIL-I-22344 1/2 IPS X1.5T	$3.98 B
004337	(M-LOK075X050) MIL-I-22344 3/4 IPS X1/2W	$2.98 B
004349	(M-LOK075X100) MIL-I-22344 3/4 IPS X1THK	$2.98 B
004351	(M-LOK000X100) MIL-I-22344 10 IPS X1THK	$6.98 B
004363	(M-LOK000X200) MIL-I-22344 10 IPS X2THK	$12.98 B
004375	(M-LOK100X100) MIL-I-22344 1 IPS X 1THK	$2.98 B
004387	(M-LOK100X150) MIL-I-22344 1 IPS X1.5TK	$3.98 B
004399	(M-LOK200X200) MIL-I-22344 12 IPS X2THK	$13.98 B
004402	(M-LOK125X100) MIL-I-22344 1.25 ID X1THK	$2.98 B
004414	(M-LOK150X050) MIL-I-22344 1-1/2X1/2THK	$2.98 B
004426	(M-LOK150X100) MIL-I-22344 1.5 IPS X1THK	$2.98 B
004438	(M-LOK600X200) MIL-I-22344 16 IPS X2THK	$16.98 B
004440	(M-LOK200X050) MIL-I-22344 2 IPS X1/2THK	$4.24 B
004452	(M-LOK200X100) MIL-I-22344 2 IPS X 1THK	$2.98 B
004464	(M-LOK200X150) MIL-I-22344 2 IPS X1.5THK	$3.98 B
004476	(M-LOK200X200) MIL-I-22344 2 IPS X 2THK	$5.98 B
004488	(MCRLT3205728) MIL-I-22344 3 IPS X1/2THK	$2.98 B
004490	(M-LOK250X150) MIL-I-22344 2.5 IPS X1.5T	$4.98 B
004503	(M-LOK300X100) MIL-I-22344 3 IPS X 1THK	$3.98 B
004515	(M-LOK300X150) MIL-I-22344 3 IPS X1.5TK	$4.98 B
004527	(M-LOK300X200) MIL-I-22344 3 IPS X 2THK	$6.98 B
004539	(M-LOK350X100) MIL-I-22344 3.5 IPS X1THK	$3.98 B
004541	(M-LOK350X150) MIL-I-22344 3.5 IPS X1.5T	$4.98 B
004553	(M-LOK400X100) MIL-I-22344 4 IPS X 1THK	$3.98 B
004565	(M-LOK400X200) MIL-I-22344 4 IPS X 2THK	$6.98 B
004577	(M-LOK500X100) MIL-I-22344 5 IPS X 1THK	$4.98 B
004589	(M-LOK500X200) MIL-I-22344 5 IPS X 2THK	$7.98 B
004591	(M-LOK600X150) MIL-I-22344 6 IPS X1.5THK	$5.98 B
004604	(M-LOK600X200) MIL-I-22344 6 IPS X 2THK	$7.98 B
004616	(M-LOK800X100) MIL-I-22344 8 IPS X 1THK	$6.98 B
004628	(M-LOK800X200) MIL-I-22344 8 IPS X 2THK	$9.98 B
004630	(MCRO-LOK-ASJ) 100X150 FIBERGLASS	$5.98 B
004642	(MCRO-LOK-ASJ) 125X150 FIBERGLASS	$7.98 B
004666	(MICRO-LOK-SL) 150X100 INSL SLV THRM	$6.98 B
004678	(M-LOK-LOK-SL) 050X100 INSL SLV THRM	$4.98 B

M&C Specialties Co.

Order No.	Mfg. No. / Description	Price
005000	(HT-200BLK) .50 x 36" x 50' SILICONE	$2,709.98 B

ME Industries LLC

Order No.	Mfg. No. / Description	Price
004945	(MIL-I-742TY1) INSL BLKT 1"X2'X3' BX/20	$224.98
004957	(MIL-I-742TY1) INSL BLKT 2"X2'X3' BX/10	$167.98

Microtherm, Inc

Order No.	Mfg. No. / Description	Price
005514	(C1000ADHESIV) 1-7 KG MICROTHERM ADH	$36.98 B
005517	(SEAL KIT) MICROTHERM SEAL KIT	$129.98 B
005519	(SEAMTAPE 9) SEAM TAPE FG 90MMX50M RO	$105.98 B

Murphy-Frank W. Mfg

Order No.	Mfg. No. / Description	Price
772299	(10702016)	$38.98 H
772400	(65010061)	$20.98 H
772649	(15000238)	$54.98 H
772654	(05703163)	$51.98 H

Nelson A. Taylor Co.

Order No.	Mfg. No. / Description	Price
224557	(83560)	$963.98 G

Perforated Metals Plus

Order No.	Mfg. No. / Description	Price
004965	(5052-H32) ALUM PERF SH 040X4X8	$101.98 B

Pinnacle Marine Services

Order No.	Mfg. No. / Description	Price
455487	(403A856) 12 volt Globe Motor Aseembly	$195.98 B

R W Fernstrum & Co

Order No.	Mfg. No. / Description	Price
328256	(1276) Screw	$3.98 B

Rittiner Equipment Co., Inc.

Order No.	Mfg. No. / Description	Price
573231	(BG014I) 14' Gauge Stick	$31.98 F

Rockwool A/S

Order No.	Mfg. No. / Description	Price
003512	(FB100PL 8PK) FIREBATT100 25MMX24"X48"	$69.98 B
003515	(FB100PL-6PK) FIREBATT100 40MMX24"X48"	$83.98 B
003520	(FB100PL 4PK) FIREBATT100 60MMX24"X48"	$83.98 B
003525	(FB100FF 8PK) FB100 FOIL 25MMX24"X48"	$98.98 B
003530	(FB100FF 6PK) FB100 FOIL 40MMX24"X48"	$106.98 B
003545	(85002010001) FOIL 25X600X1000MM 10PK	$90.98 B
003554	(96502010001) FOIL 60X600X1000MM 4PK	$80.98 B
003565	(18800010007) SLAB60 75X600X1000MM 6PK	$63.98 B

Tecnimpianti Spa

Order No.	Mfg. No. / Description	Price
645725	(KEY) Key F/Fiberglass Enc Box	$46.98 B
645735	(NHRB1-2 CART) Filter Cartridge Only	$22.98 B
645741	(3KM49) New Limit Switch-Crank	$253.98 B
645757	(TD422-01Y) Limit Switch (Old Style)	$564.98 B
645765	(3XJ14) New Limit Switch-Hook	$221.98 B

Western Branch Metals Prop Hardware

Order No.	Mfg. No. / Description	Price
017586	(AQ17-175) Bar Stock 1.750"	$11.98 B
017598	(AQ17-200) Bar Stock 2.000"	$11.98 B
017625	(AQ17-250) Bar Stock 2.500"	$11.98 B
017637	(AQ17-300) Bar Stock 3.000"	$11.98 B
017687	(AQ17-400) Bar Stock 4.000"	$11.98 B
019340	(AQ19-113) Bar Stock 1.800"	$12.98 B
019352	(AQ19-125) Bar Stock 1.250"	$12.98 B
019364	(AQ19-138) Bar Stock 1.375"	$12.98 B
019376	(AQ19-150) Bar Stock 1.500"	$12.98 B
019388	(AQ19-175) Bar Stock 1.750"	$12.98 B
022018	(AQ22-075) Bar Stock 0.750"	$18.98 B
022020	(AQ22-088) Bar Stock 0.875"	$18.98 B
022032	(AQ22-100) Bar Stock 1.000"	$18.98 E
022044	(AQ22-133) Bar Stock 1.125"	$23.98 E
022056	(AQ22-125) Bar Stock 1.250"	$18.98 E
022068	(AQ22-138) Bar Stock 1.375"	$18.98 E
022070	(AQ22-150) Bar Stock 1.500"	$18.98 E
022082	(AQ22-175) Bar Stock 1.750"	$18.98 E
022107	(AQ22-225) Bar Stock 2.250"	$18.98 E
022119	(AQ22-250) Bar Stock 2.500"	$18.98 E
022121	(AQ22-275) Bar Stock 2.750"	$18.98 B
022133	(AQ22-300) Bar Stock 3.000"	$18.98 B
022157	(AQ22-400) Bar Stock 4.000"	$18.98 B

Order No.	Mfg. No. / Description	Price
091025	(BRASS) Keystock 3/16"	$1.98 B
091037	(BRASS) Keystock 1/4"	$1.98 B
091049	(BRASS) Keystock 5/16"	$1.98 B
091051	(BRASS) Keystock 3/8"	$1.98 B
091063	(BRASS) Keystock 7/16"	$1.98 B
091075	(BRASS) Keystock 1/2"	$2.98 B
091087	(BRASS) Keystock 9/16"	$2.98 B
091099	(BRASS) Keystock 5/8"	$3.98 B
091102	(BRASS) Keystock 3/4"	$3.98 B
091114	(BRASS) Keystock 7/8"	$3.98 B
091126	(BRASS) Keystock 1"	$3.98 B
091239	(304 S/S) Keystock 3/16"	$1.98 B
091241	(304 S/S) Keystock 1/4"	$1.98 B
091253	(304 S/S) Keystock 5/16"	$1.98 B
091265	(304 S/S) Keystock 3/8"	$1.98 B
091277	(304 S/S) Keystock 7/16"	$2.98 B
091289	(304 S/S) Keystock 1/2"	$1.98 B
091291	(304 S/S) Keystock 9/16"	$2.98 B
091304	(304 S/S) Keystock 5/8"	$4.98 B
091316	(304 S/S) Keystock 3/4"	$4.98 B
091328	(304 S/S) Keystock 7/8"	$4.98 B
091330	(304 S/S) Keystock 1"	$4.98 B

Commercial Close Out Specials


Order No.	Part #	Description	Quantity	Price
428121	DB440	10" - BLK "D" BORE FAN NOSE	2	$603.98 F
428133	DB440	12" - BLK "D" BORE FAN NOSE	2	$724.98 F
427840	1790M0278	2 7/8" STUFF BOX,F,BRASS	6	$450 B
472768	801993706	6' COOLER TUBE	13	$87.98 E
300885	DDF186MOT	BLOWER 18",6BL,1HP TEFC	3	$939.98 C
301205	DF42426	BLOWER,42"4BL,26PIT1 1/8	1	$1,586.98 C
301656	271COMP27	HOUSING,COMP,GALV	1	$589.98 C
203151	15601	120VAC WHISTLE CONT,AUTO CNSLE	2	$1,149.98 C
279370	CHET SPL	Steel Bold On Hatch, 16" x 24"	1	$961.98 B
279375	DWG305	Single Bolt Manhole with Fold Down Handle, 20" Round	1	$582.98 B
279377	DWG211	Watertight Flush Hatch, Oval, 26" x 26"	1	$2,156.98 B
279381	305	Single Bolt Manhole with Fold Down Handle, 21" Round	1	$433.98 B
577860	DWG102RH	Watertight Door, 26" x 63", 6 Dog	1	$1,365.98 B
577945	QAWT	#205 24"X24" FLUSH HATCH,ABS	1	$2,446.98 C
301656	27-1COMP	Housing, Comp, Galvanized	1	$589.98 C
279313	F654-1	D-Ring, 41 Ton	1	$37.98 C
506367	SS304-11	Wire Mesh, Uncrimped, .011"	1	$7.98 B
662595	CEDAR	Cedar Shingles, Bundle	1	$62.98 F
309766		Button Chocks, 8.5", DF129	1	$91.98 B
310252	04200-301A	Double Bitt, 8" with Horn	1	$498.98 C

All New • All Items Subject to Prior Sale • Price Upon Request

©2014 Donovan Marine, Inc.

Wesmar Bow Thrusters



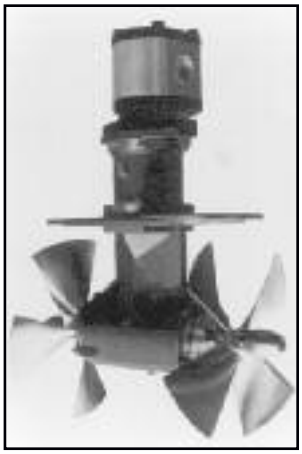

Special Order **POR**

Single Prop/Dual Prop Counter Roating.
Wesmar Performance - Turn 360 Degrees in Place.

- Wesmar Bow Thrusters make close quarters maneuvering a simple task.
- You can turn you boat a full 360 degrees in its own length, control the hazards of crowded harbors, tight docking slips, and extreme weather knowing your Wesmar bow thrusters will allow you to maneuver skillfully and quickly, avoiding damaged hulls, mangled ladders, and crumpled docks.

28 Thruster Models.

- Hydraulic and Electric Models.
- Double Thrust Counter Rotating.
- Single Prop.
- For Pleasure Boat Applications.
- For Commercial Applications.
- For Boats 38 to 200 feet.

Wesmar Stainless Steel Dual Prop Thrusters

Order No.	Mfg. No. / Description	Price
685618	(V2-20NS) 20"	$22,216.98 B
685620	(V2-24) 24"	POR

Wesmar Stabilizers



Special Order **POR**

Electronic Gyro Delivers.
Lightning Speed Reaction for Exceptional Performance.

- The Wesmar stabilization system uses an easily mounted electronic gyro sensor that sends information about roll velocity and acceleration directly to Wesmar's proportional hydraulic system, which reacts instantaneously to rotate the fins.
- When a desired lift is achieved to counteract the rolling force of a wave, Wesmar's closed proportional hydraulic system instantly interacts with the gyro to correct the rolling.
- The airfoil fin design constantly adjusts vessel motion.
- One fin is angled to induce upward force while the other creates downward force.
- This coordinated response stabilizes the vessel.

Advantages of the Wesmar Electronic Gyro System Over a Hydraulic Gyro:

- No hydraulic hoses to the gyro compared to as many as 6 additional hoses on competitive hydraulic gyros.
- No Moving Parts.
- No Adjustments.
- No Maintenance.
- No Service.
- No Horizon Adjustment.
- Easy to Install.
- No Haul-Our Required.

Wesmar Commercial Bow Thrusters

Order No.	Mfg. No. / Description	Price
685630	(KAPLANRH) 20", Right Hand	$2,979.98 B
685635	(KAPLANLH) 20", Left Hand	$2,979.98 B

Wesmar Specification Sheet

Bow Thruster _____ Stern Thruster _____ Stabilizer _____ Hydraulics _____

Date _____

Name _____ Boat Name _____

Address _____ State _____

Phone _____ Fax _____

Email _____

Builder _____ Contact _____ Phone _____

Vessel Type _____ Hull No. _____

Length _____ Beam _____ Draft _____

Weight _____ GM (Metecentric height) _____

Weight Short Tons _____ Beam at Water Line _____

Full Speed (knots) _____ Cruise Speed _____

Slowest speed in knots at which full stabilization is required: _____

Main Engine Manufacture (s) _____ Model _____

Single engine _____ Twin engine _____ Other _____

Idle Speed _____ Full Speed _____ HP _____

Genset Manufacture _____ KW _____ RPM _____

Transmission Manufacture _____ Model _____

#of control stations _____ Location _____

Thruster Drive: 12V DC _____ 24V DC _____ AC _____ Hydraulic _____ Other _____

Hydraulic System Information:

Hydraulic: Crane _____ Capstan _____ Windlass _____ Other _____

Hydraulic Motor Mounting location (s) _____

Mounting flange: 2 Bolt _____ 4 Bolt _____ SAE Flange Code _____

Shaft type: Keyed _____ Splined _____ SAE Shaft Code _____

Rotation: Clockwise _____ Counter Clockwise _____

Electric clutch: Yes _____ No _____

AC System Information:

Single Phase _____ Three Phase _____

Genset capacity _____

AC Motor voltage _____

Number of control stations _____

Fun & Flotation
Anchor & Dock
Safety
Electronics
Trolling Motors
Lighting
Electrical
Topside Acc.
Cockpit & Deck
Instruments
Steering, Controls
Perform
Fuel System
Engine & Parts
Engine Care
Propellers
Seating & Pedestals
Tops & Covers
Pumps
Cleaning & Care
Paint & Paint Acc.
Hardware, Fasteners
Trailering
Misc.

Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.

Better Products, Larger Inventory, and More Brands to Choose from. with Better Prices, Expert Product Support, and Great Versatility.

All Systems are Custom Made to Your Specifications. Please Call for Quote!

Steering Systems
- Electro-hydraulic, orbitrol, manual, mechanical over hydraulic (The Skipper Original).
- Built to ABS and USCG specifications, DP interface available.

Manual Steering
- Compact systems for pleasure & work boats with patented helm units & corrosion resistant cylinders.

Hydraulic Powerpaks
- For bowthrusters, deck machinery, and auxiliary equipment.

Engine Alarm and Monitoring Systems
- PLC based, custom designed for your application, conversions and or new construction.

Component Sales
- Expansive inventory of steering and hydraulic components and rudder instrumentation, coupled with a nation-wide supplier network.

Custom Designs and Projects
- The Skipper Team offers hydraulic, electrical, and mechanical engineering, certified marine electricians, skilled machinists, & a naval architect.
- All of our system drawings are in Autocad format.

Field Service
- Full service for field repair, start-ups, warranty work, installations and retro-fits of your steering, hydraulic or electrical system, old and new.

Engine Control Systems
- Mathers and Rexroth electronic, ABS and DP interface approved designs.

Bowthrusters
- Wesmar, custom designed hydraulic or Baldor electric drives.

Anchor Windlasses
- Custom design and retro-fit conversions, electric, and hydraulic.

Capstans
- Electric/Hydraulic drives, custom units and conversions.

Deck Winches
- Hydraulic/Electric conversions for your brand and model.

Nav Light Panels
- J-Box custom design.

Fire Alarm Systems
- Fire-Lite brand or integrated into our Skipper engine alarm system.

General Alarm Systems
- Pre-packaged, ready to install.

Conversions-Retrofits
- Contact Skipper for updates and conversions to your existing steering and deck machinery

Electro-Hydraulic Power Unit



- C-Face electric motors for easy alignment and convenient service access.
- Quiet, efficient Vickers vane pumps.
- Soft shift directional valves - featuring new, longer life "Wet Armature" solenoids
- Fabricated steel reservoir, baffled for system integrity, sized for maximum fluid cooling.
- Easy access reservoir service covers.
- Low level alarm sensors.

Engine Alarm and Monitoring Systems



- Programmable logic control (PLC) based.
- "Fair-Safe" normal closed circuits (AS standard)
- Charger and battery back-up power supply, 24V DC.
- Flush mount or enclosed fully annunciated panels.
- Full remote and summary panels.
- Murphy Swichgage, Telcor, Nason and Fenwall brand sensors.
- High quality engine room sirens and strobe and lights.
- Pre-wired system junction boxes.

Mechanical/Hydraulic Control Valve Assembly



- Ideal for pushboats.
- Full follow up control - low maintenance, long life.
- Back pressure rated hydraulic directional control valve, to enable in-series steering and flanking - no "power beyond" required
- Smooth, easy metering characteristics.

Workboat Style Wheelhouse Hardware



- Dual stacked steering levers: 12"L, 18"L & 24"L
- Compatible with mechanical or electro-hydraulic steering systems.
- Appealing appearance, durable stainless construction with comfortable mahogany grips.
- Black, anodized aluminum dural escutcheon plates with integral roller bearings

Rudder Angle Indicator



- Suitable for console mounting: completely watertight.
- Furnished with supply voltage regulator and Skipper power supply.
- Offers easy series parallel hook-up for multiple stations.

Feedback Unit



- Heavy duty marine construction, watertight for above deck mounting.
- Dual potentionmeters for integral back-up or mulitple function capability.
- Dual limit switches for independant system integrity

Hydraulic Steering Cylinders



- Stainless steel chrome plated piston rods for long, corrosion resistant service.
- Skipper's unique 'Sure-Lock' rodeye, clamps to cylinder rod and features corrosion resistant bronze pin bushings.
- Skipper unique locking heel pin-fabricated from marine grade stainless steel.

Amplifier




- Adjustable gain control - eliminates hunting, affords maximum sensitivity.
- All solid state construction.
- Integral AC-DC voltage rectifier.

Skipper Control Panel




- Fully illuminated, suitable for console mounting.
- Mechanically switched and mode selectors.
- Low level, overload and power failure alarms-all audio-visual.
- Pre-wired terminal strip for easy installation and service.

Vertical Capstans



- Custom designed for use with various hydraulic systems.
- Profiled aluminum cathead with direct, plug-in hydraulic motor.
- Aluminum deck mounting fing.

Bowthrusters



- Full line Wesmar distributor.
- Wesmar's unique dual, counter rotationg 4 blade props.
- Available with customized hydrostatic or Baldor frequency and vector drives - for all brands of bowthrusters, and all available with DP interface.

Steering and Controls Data Sheet

Please Provide As Much Information As Possible

Company Name: _____

Phone Number:_____Contact:_____

Hull Dimensions: Length _____Beam _____Draft _____

Hull Type (check one): Displacement_____Planning _____

Weight _____Max. Speed (knots) _____

Use of Vessel: _____

(Sportfisherman, Tug Boat, Shrimper, etc.)

Engine(s): Quantity _____Horsepower (each) _____

Reduction Gear Ratio: :

Propeller Shaft: Diameter: _____Length: _____

Propeller(s) Size: Diameter: _____X Pitch: _____

Number of Blades _____


Number of Steering Stations: _____

Rudder(s) Size: Length _____X Height _____

Shaft Diameter_____Counter Balance _____

Number of Rudders: _____

Maximum Rudder Angle: _____°

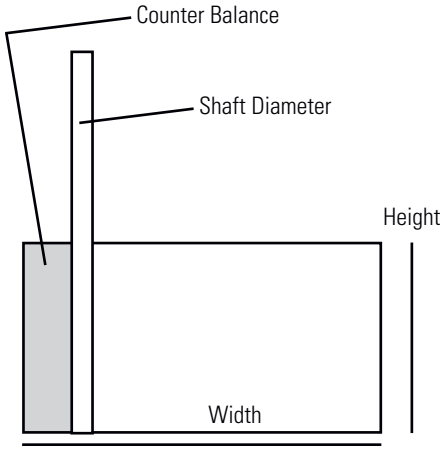

Special Notes:

_____

_____

_____

Place Your Order with Donovan Today: ***800.347.4464***

©2014 Donovan Marine, Inc.

Star brite

STAR TRON®

CURES & PREVENTS ETHANOL FUEL PROBLEMS

MAXIMIZE

POWER • PERFORMANCE • FUEL ECONOMY

- Stabilizes Fuel For Up To 2 Years; Engines Start Easy & Without Smoky Exhaust
- Provides Maximum Performance, Even from Ethanol-Blended Fuel
- Removes and Prevents Gum, Carbon and Varnish Deposits
- Keeps Fuel Injectors and Carburetors Clean
- Helps Prevent Phase Separation



RECOMMENDED FOR USE IN ALL
OUTBOARD & INBOARD ENGINES



SCAN FOR INFO


OTHER RECOMMENDED USES

All logos, registered trademarks and names are the sole and exclusive property of the respective companies indicated above. This product is not connected with or sponsored by any of the named companies.



WWW.STARTRON.COM

FOLLOW US ON

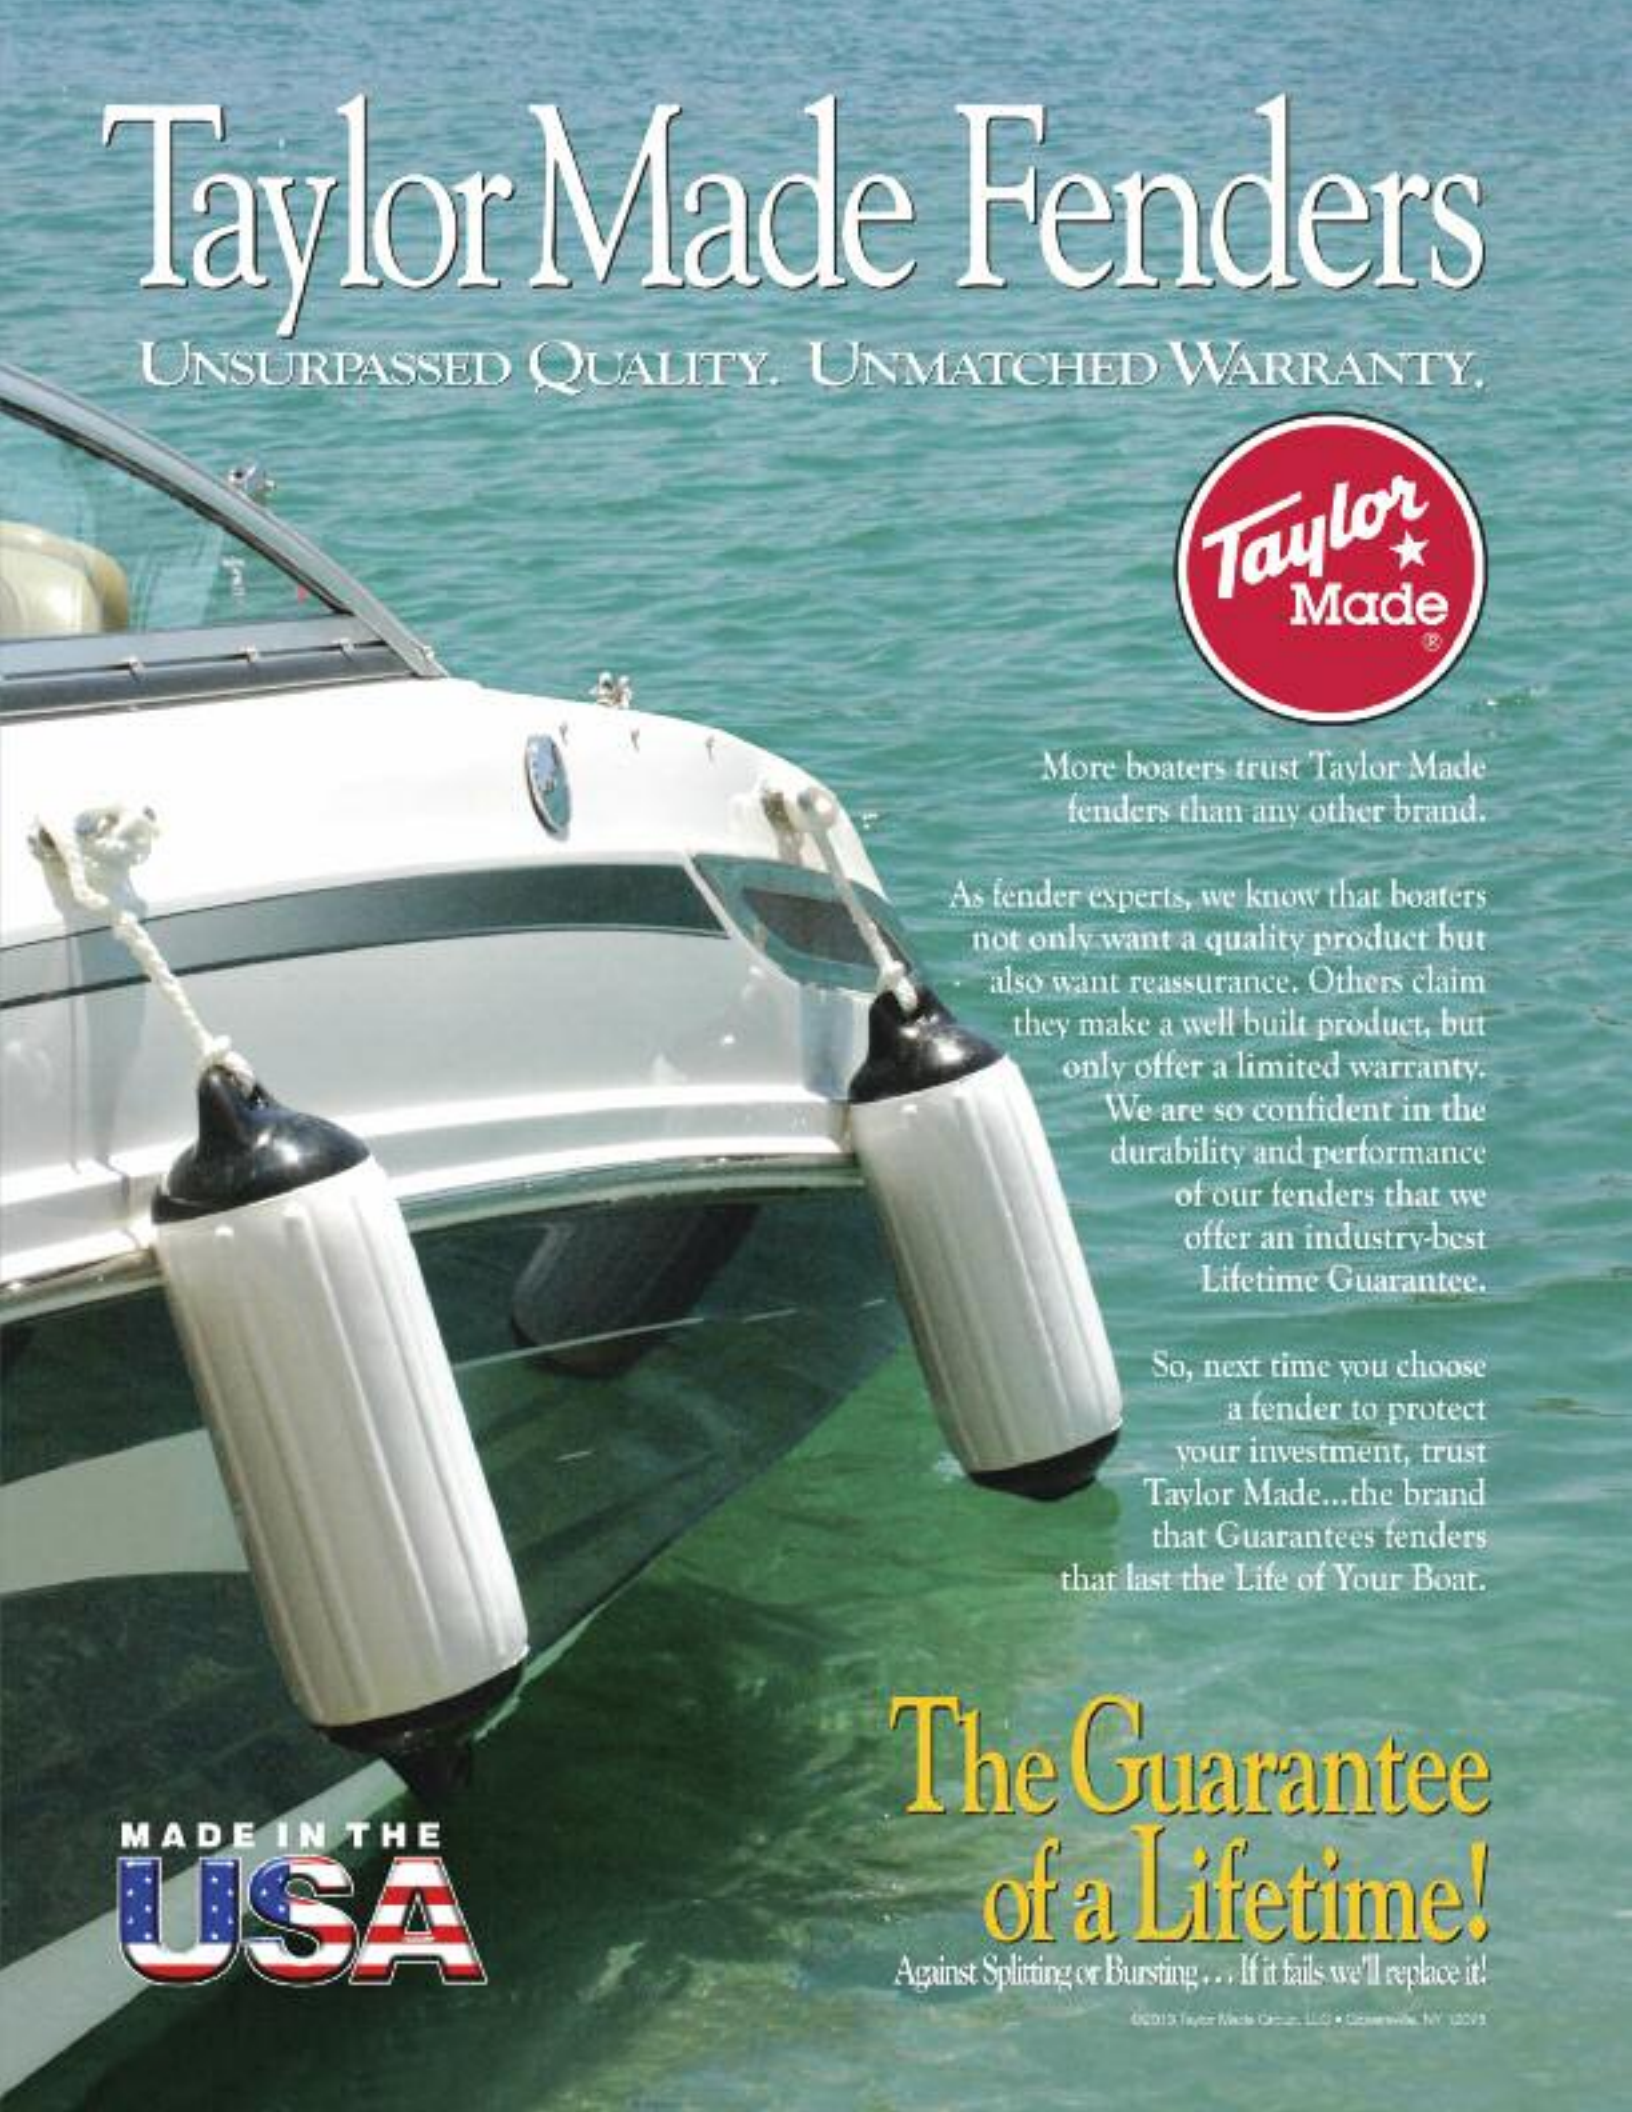
Taylor Made Fenders
UNSURPASSED QUALITY. UNMATCHED WARRANTY.
Taylor Made
More boaters trust Taylor Made fenders than any other brand.
As fender experts, we know that boaters not only want a quality product but also want reassurance. Others claim they make a well built product, but only offer a limited warranty. We are so confident in the durability and performance of our fenders that we offer an industry-best Lifetime Guarantee.
So, next time you choose a fender to protect your investment, trust Taylor Made...the brand that Guarantees fenders that last the Life of Your Boat.
MADE IN THE USA
The Guarantee of a Lifetime!
Against Splitting or Bursting . . . If it fails we'll replace it!